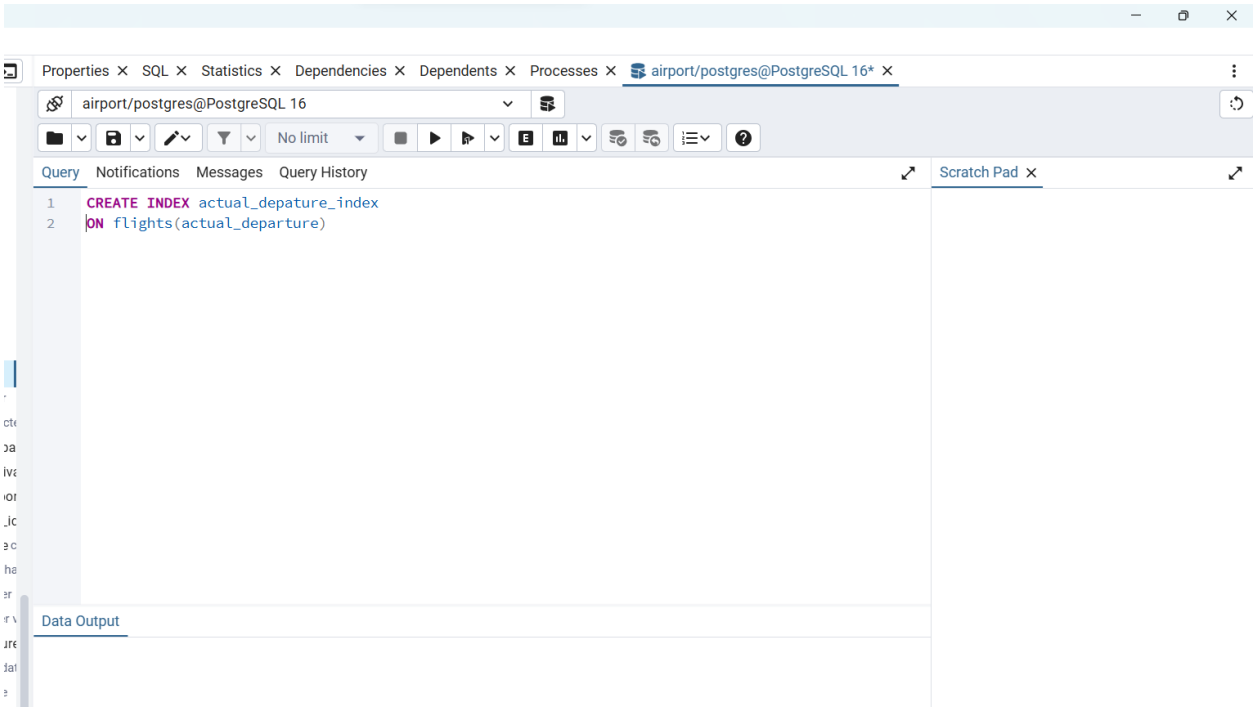
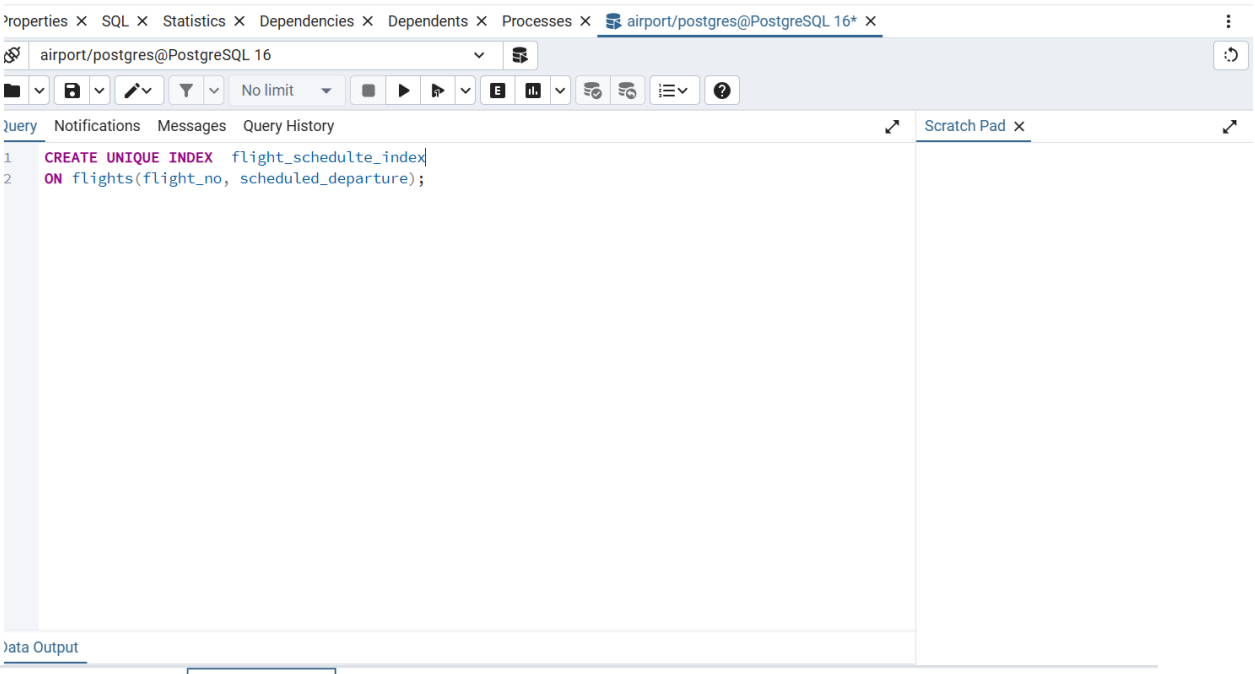
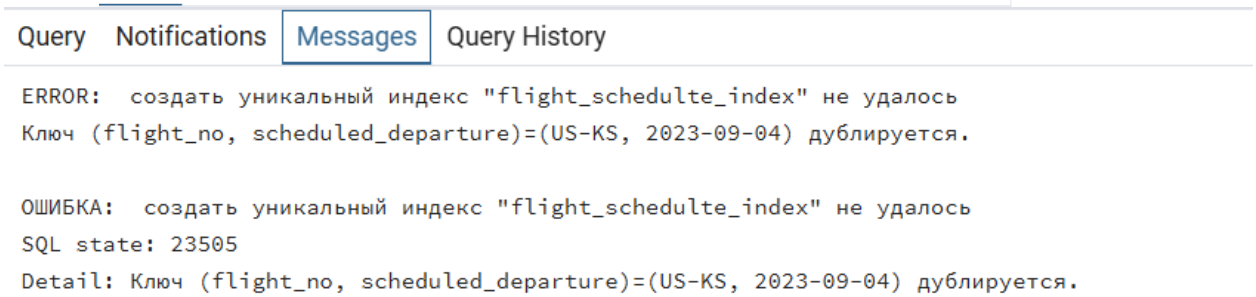
TASK1

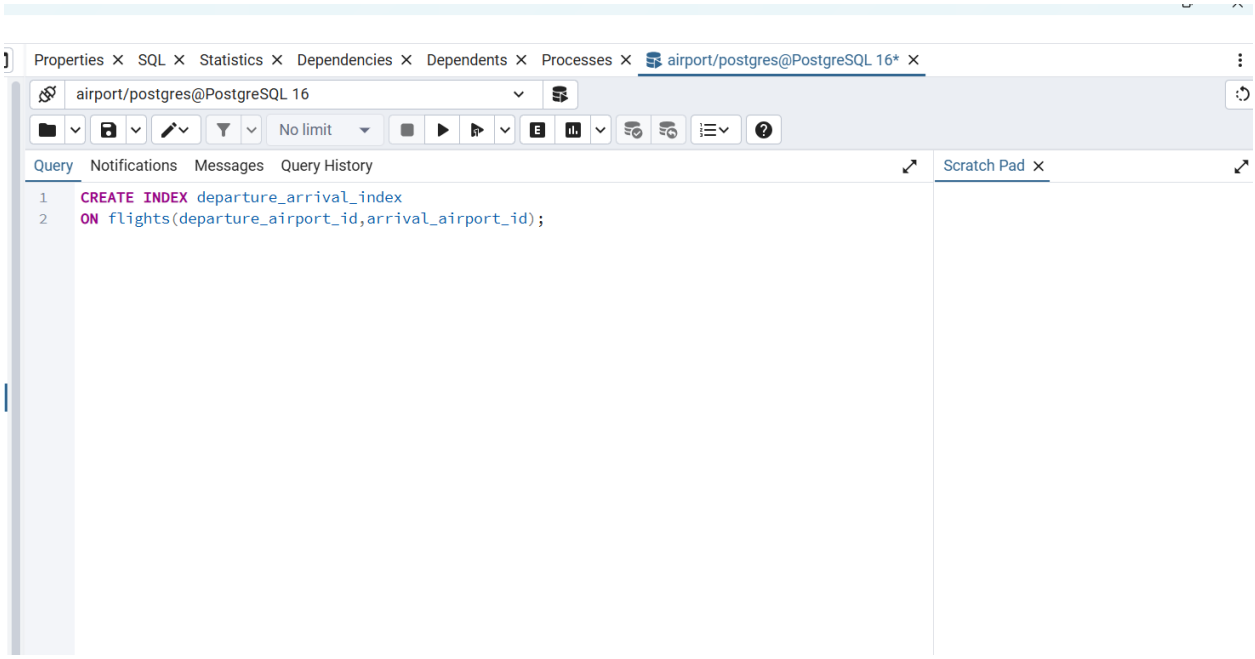


TASK2

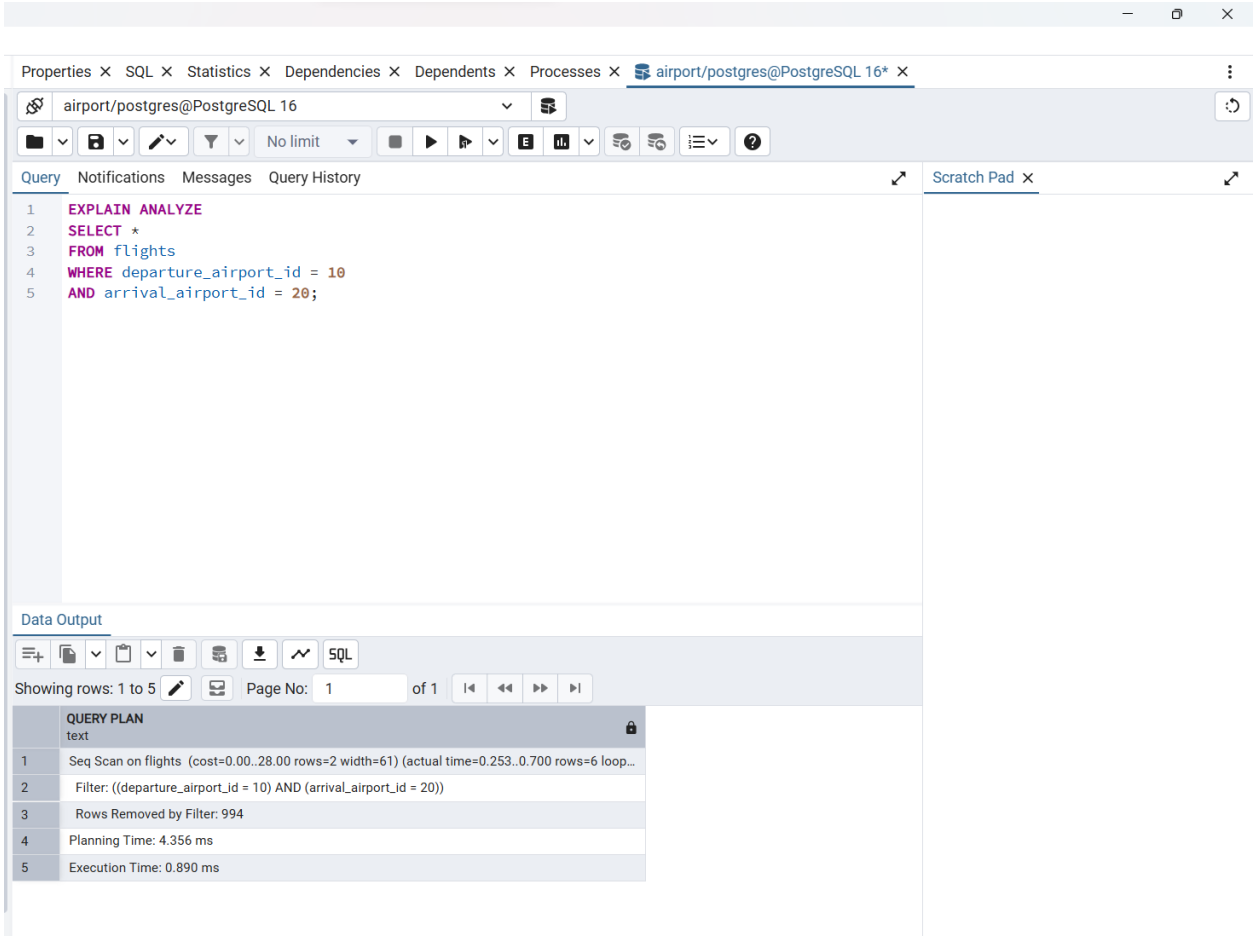




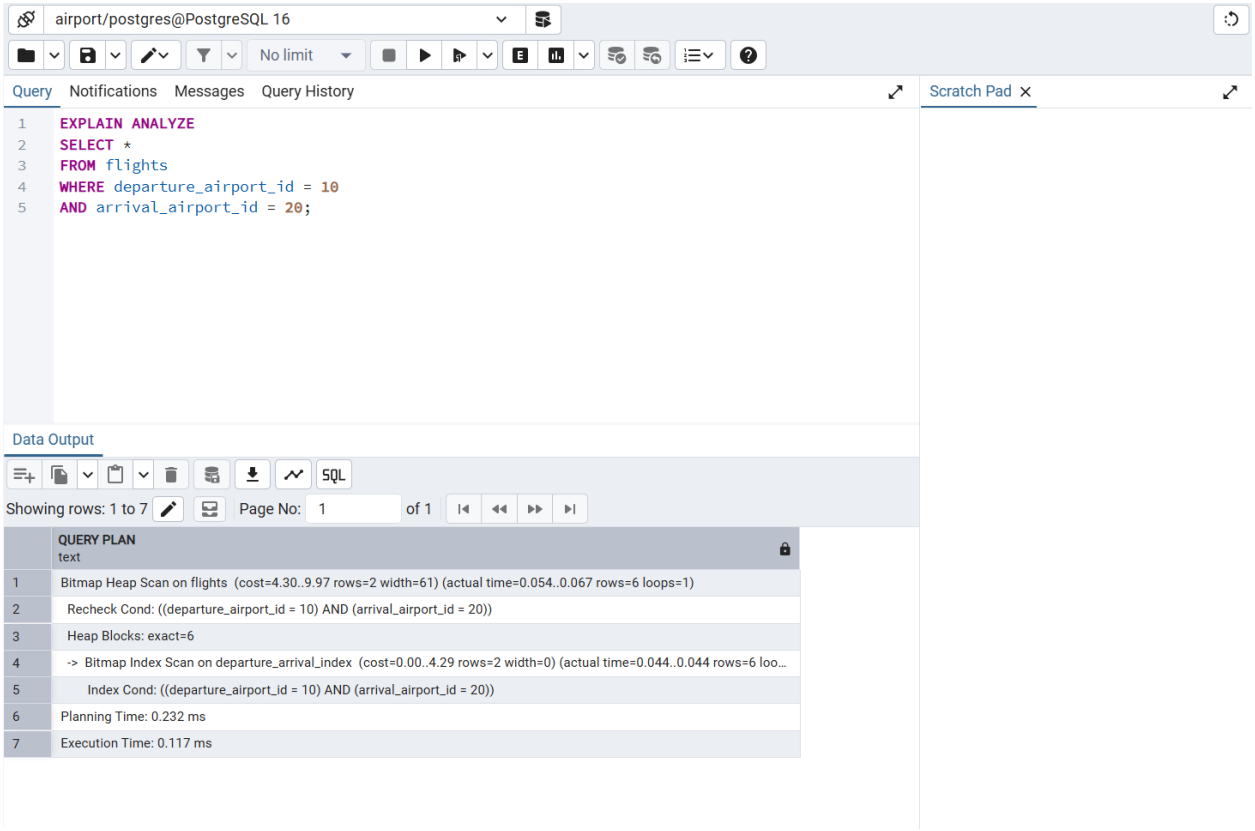
TASK3


Properties
SQL
Statistics
Dependencies
Dependents
Processes
airport/postgres@PostgreSQL 16*
airport/postgres@PostgreSQL 16
No limit
Query
Notifications
Messages
Query History
Scratch Pad
1 CREATE INDEX departure_arrival_index
2 ON flights(departure_airport_id,arrival_airport_id);

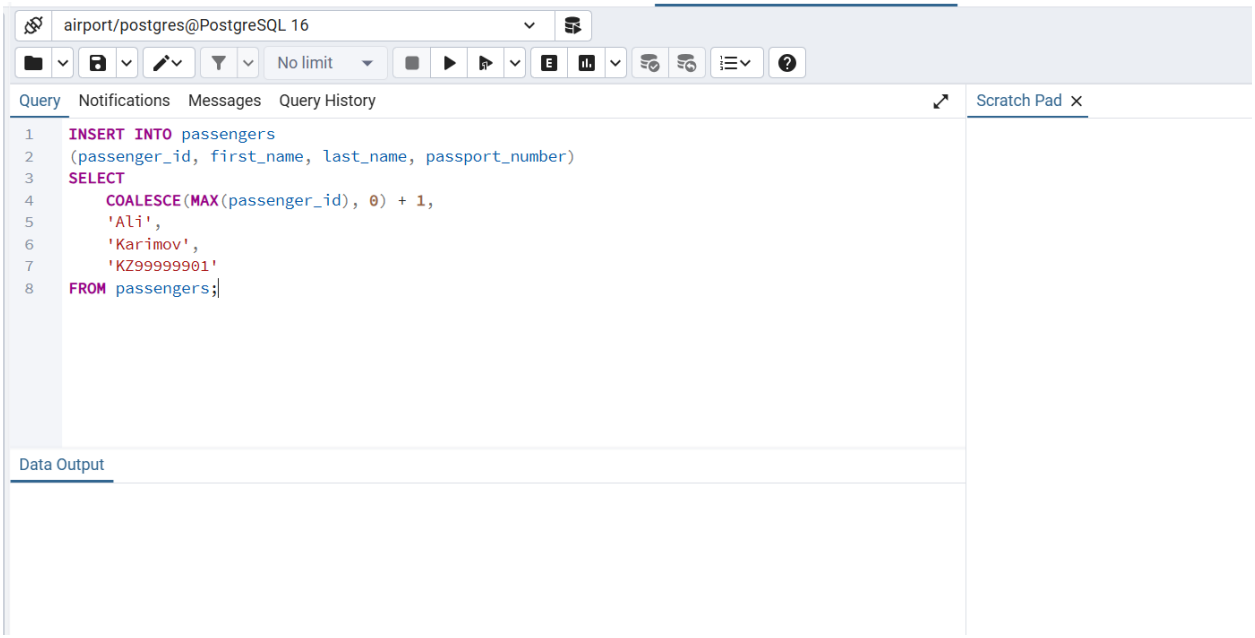
TASK 4

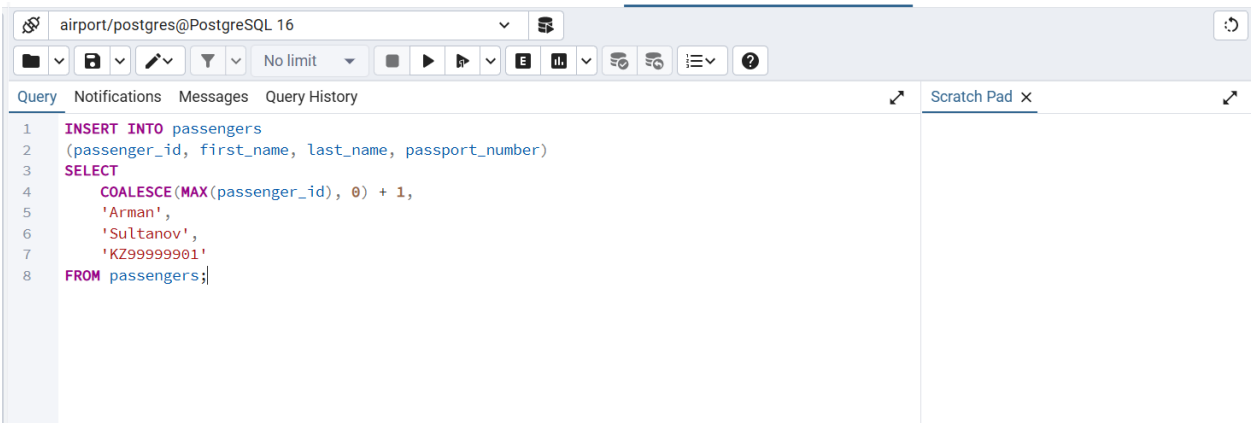

Properties
SQL
Statistics
Dependencies
Dependents
Processes
airport/postgres@PostgreSQL 16*
airport/postgres@PostgreSQL 16
No limit
Query
Notifications
Messages
Query History
Scratch Pad
1 EXPLAIN ANALYZE
2 SELECT *
3 FROM flights
4 WHERE departure_airport_id = 10
5 AND arrival_airport_id = 20;
Data Output
SQL
Showing rows: 1 to 5
Page No: 1
of 1
QUERY PLAN
text
1 Seq Scan on flights (cost=0.00..28.00 rows=2 width=61) (actual time=0.253..0.700 rows=6 loop...
2 Filter: ((departure_airport_id = 10) AND (arrival_airport_id = 20))
3 Rows Removed by Filter: 994
4 Planning Time: 4.356 ms
5 Execution Time: 0.890 ms

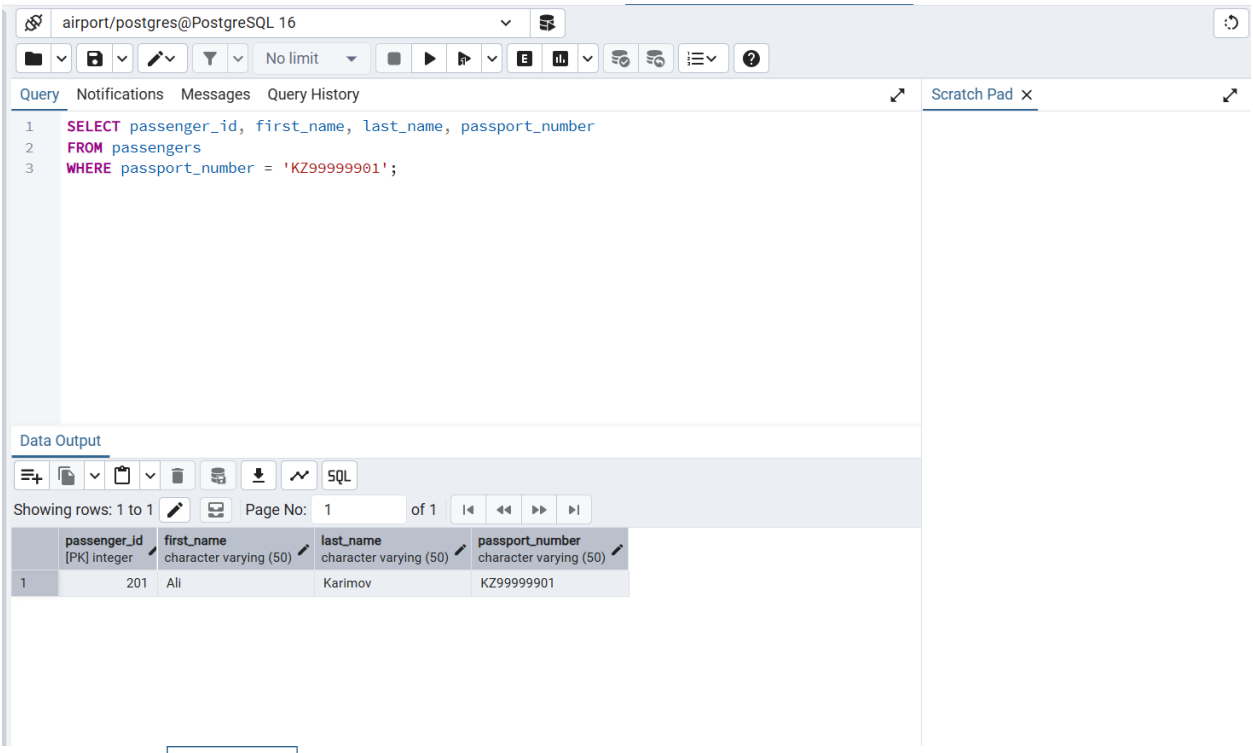
TASK 5

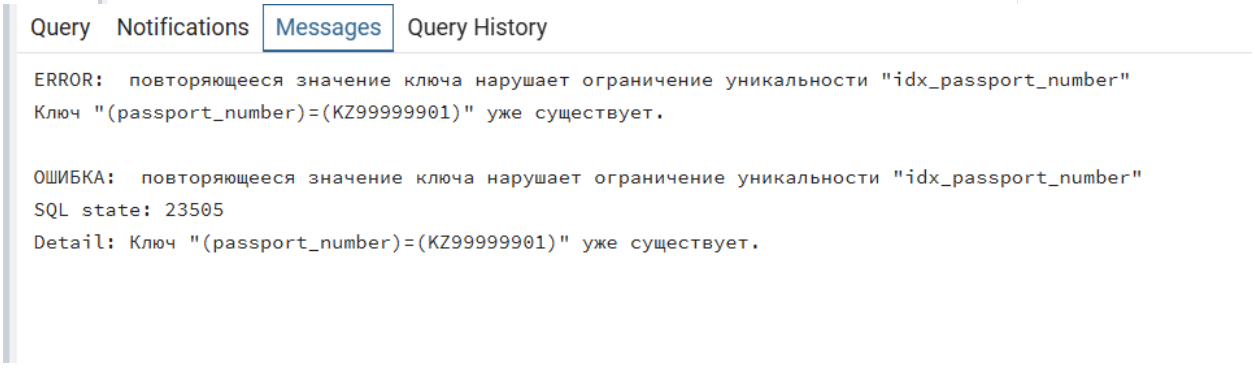

airport/postgres@PostgreSQL 16
No limit
Query
Notifications
Messages
Query History
Scratch Pad
EXPLAIN ANALYZE
SELECT *
FROM flights
WHERE departure_airport_id = 10
AND arrival_airport_id = 20;
Data Output
SQL
Showing rows: 1 to 7
Page No: 1
of 1
QUERY PLAN
text
Bitmap Heap Scan on flights (cost=4.30..9.97 rows=2 width=61) (actual time=0.054..0.067 rows=6 loops=1)
Recheck Cond: ((departure_airport_id = 10) AND (arrival_airport_id = 20))
Heap Blocks: exact=6
-> Bitmap Index Scan on departure_arrival_index (cost=0.00..4.29 rows=2 width=0) (actual time=0.044..0.044 rows=6 loo...
Index Cond: ((departure_airport_id = 10) AND (arrival_airport_id = 20))
Planning Time: 0.232 ms
Execution Time: 0.117 ms

TASK 6

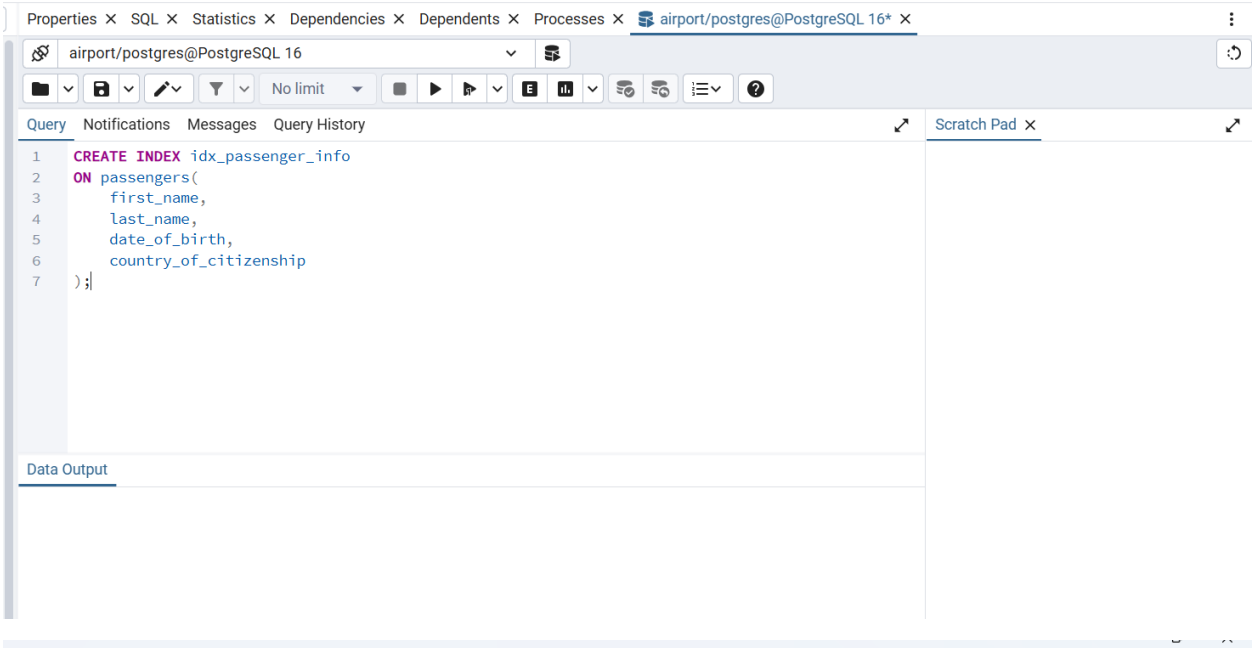

airport/postgres@PostgreSQL 16
No limit
Query
Notifications
Messages
Query History
Scratch Pad
INSERT INTO passengers
(passenger_id, first_name, last_name, passport_number)
SELECT
COALESCE(MAX(passenger_id), 0) + 1,
'Ali',
'Karimov',
'KZ99999901'
FROM passengers;
Data Output

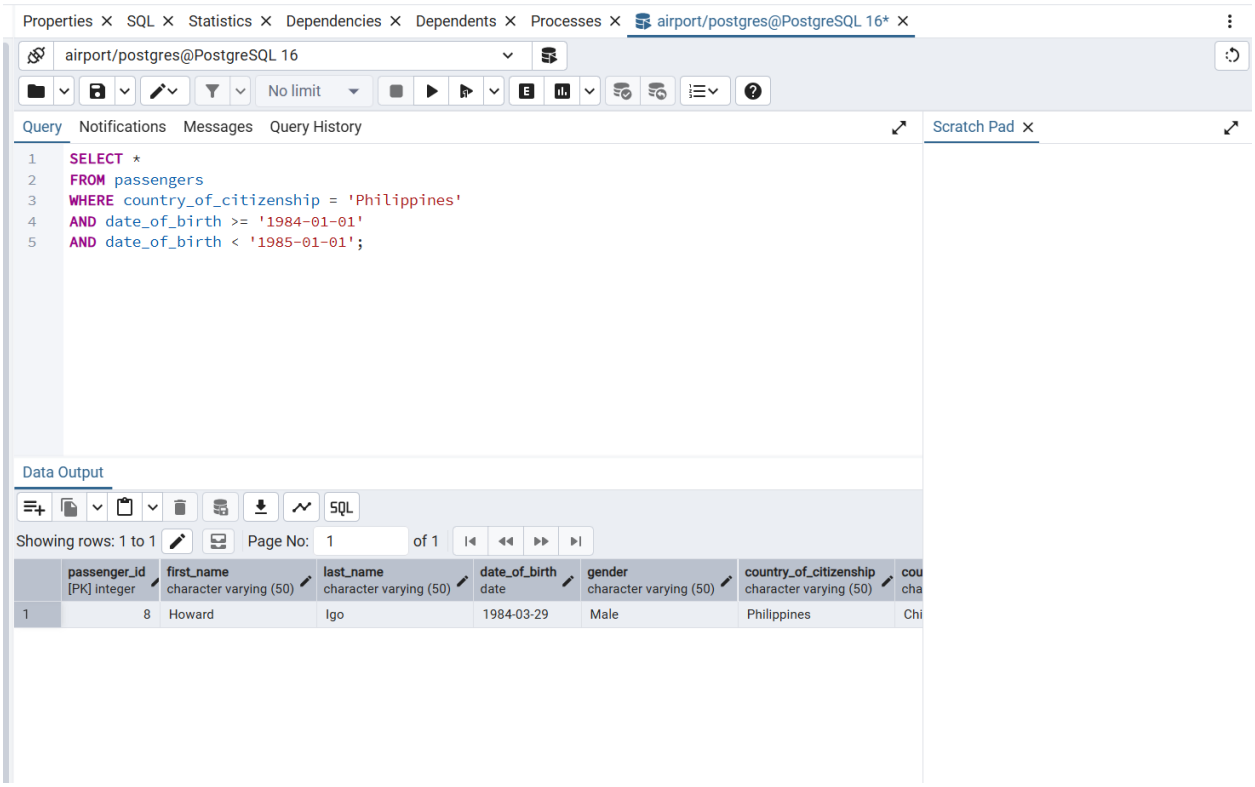

airport/postgres@PostgreSQL 16
No limit
Query
Notifications
Messages
Query History
Scratch Pad
INSERT INTO passengers
(passenger_id, first_name, last_name, passport_number)
SELECT
COALESCE(MAX(passenger_id), 0) + 1,
'Arman',
'Sultanov',
'KZ99999901'
FROM passengers;

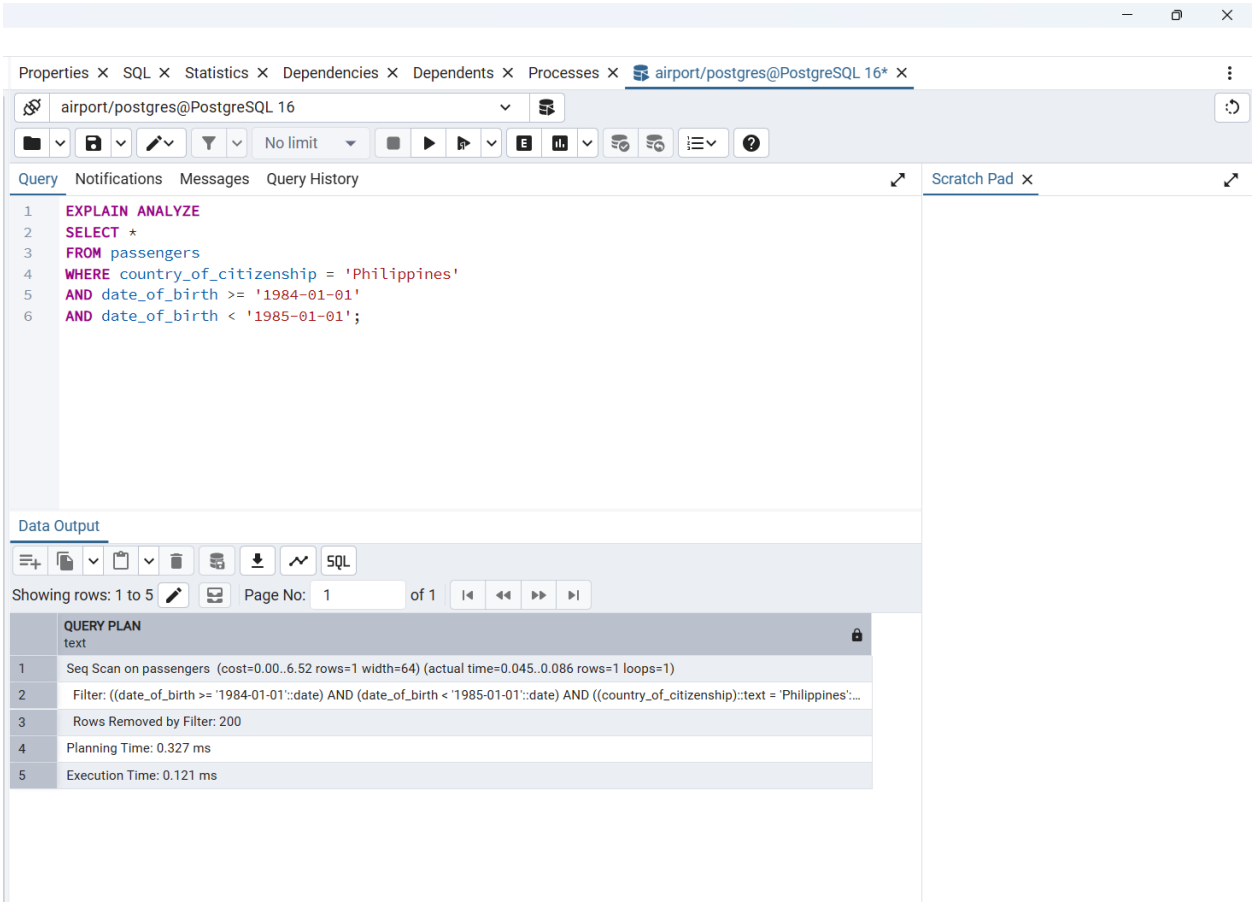

airport/postgres@PostgreSQL 16
No limit
Query
Notifications
Messages
Query History
Scratch Pad
SELECT passenger_id, first_name, last_name, passport_number
FROM passengers
WHERE passport_number = 'KZ99999901';
Data Output
SQL
Showing rows: 1 to 1
Page No: 1
of 1
passenger_id [PK] integer
first_name character varying (50)
last_name character varying (50)
passport_number character varying (50)
1
201
Ali
Karimov
KZ99999901


Query
Notifications
Messages
Query History
ERROR: повторяющееся значение ключа нарушает ограничение уникальности "idx_passport_number"
Ключ "(passport_number)=(KZ99999901)" уже существует.
ОШИБКА: повторяющееся значение ключа нарушает ограничение уникальности "idx_passport_number"
SQL state: 23505
Detail: Ключ "(passport_number)=(KZ99999901)" уже существует.

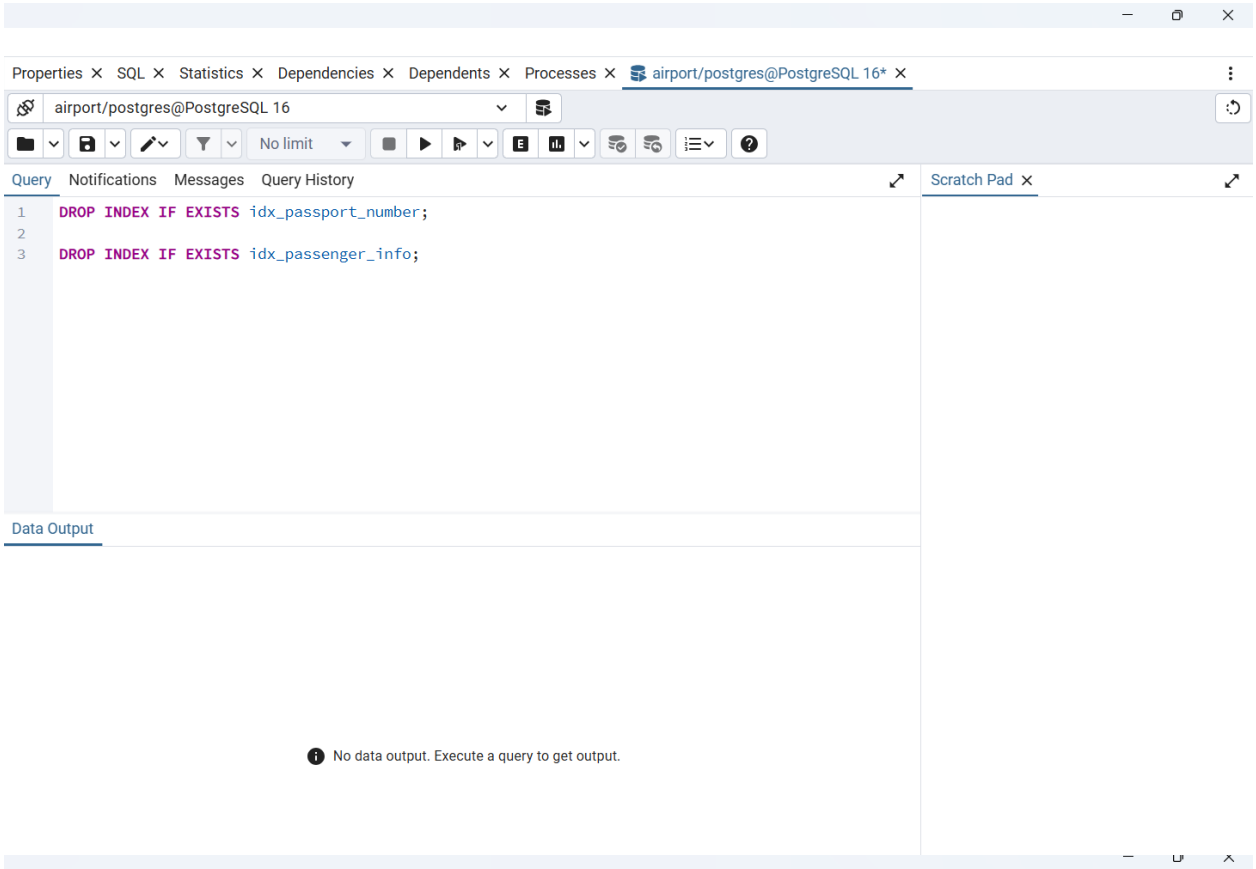
TASK 7

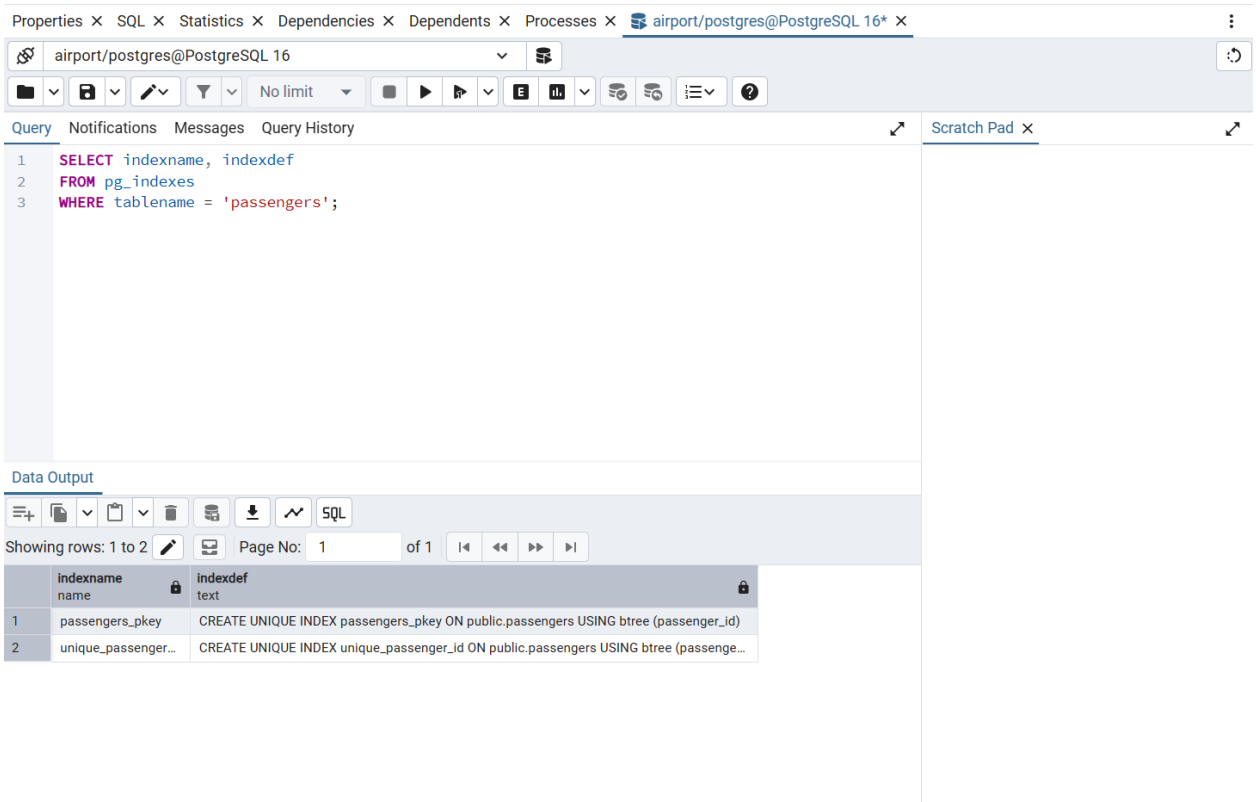

Properties
SQL
Statistics
Dependencies
Dependents
Processes
airport/postgres@PostgreSQL 16*
airport/postgres@PostgreSQL 16
No limit
Query
Notifications
Messages
Query History
Scratch Pad
CREATE INDEX idx_passenger_info
ON passengers(
first_name,
last_name,
date_of_birth,
country_of_citizenship
);
Data Output


Properties
SQL
Statistics
Dependencies
Dependents
Processes
airport/postgres@PostgreSQL 16*
airport/postgres@PostgreSQL 16
No limit
Query
Notifications
Messages
Query History
Scratch Pad
SELECT *
FROM passengers
WHERE country_of_citizenship = 'Philippines'
AND date_of_birth >= '1984-01-01'
AND date_of_birth < '1985-01-01';
Data Output
SQL
Showing rows: 1 to 1
Page No: 1
of 1
passenger_id [PK] integer
first_name character varying (50)
last_name character varying (50)
date_of_birth date
gender character varying (50)
country_of_citizenship character varying (50)
1
8
Howard
Igo
1984-03-29
Male
Philippines

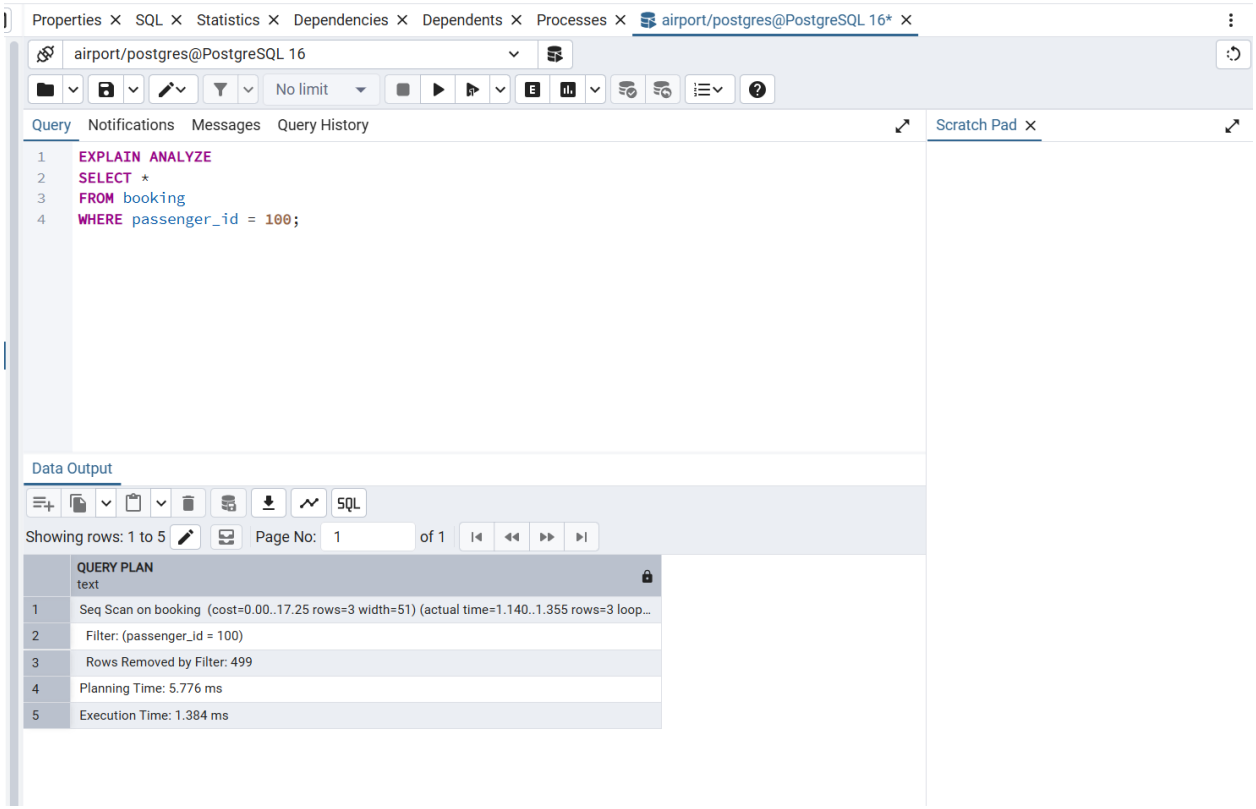

Properties
SQL
Statistics
Dependencies
Dependents
Processes
airport/postgres@PostgreSQL 16*
airport/postgres@PostgreSQL 16
No limit
Query
Notifications
Messages
Query History
Scratch Pad
EXPLAIN ANALYZE
SELECT *
FROM passengers
WHERE country_of_citizenship = 'Philippines'
AND date_of_birth >= '1984-01-01'
AND date_of_birth < '1985-01-01';
Data Output
SQL
Showing rows: 1 to 5
Page No: 1
of 1
QUERY PLAN
text
1 Seq Scan on passengers (cost=0.00..6.52 rows=1 width=64) (actual time=0.045..0.086 rows=1 loops=1)
2 Filter: ((date_of_birth >= '1984-01-01'::date) AND (date_of_birth < '1985-01-01'::date) AND ((country_of_citizenship)::text = 'Philippines':...
3 Rows Removed by Filter: 200
4 Planning Time: 0.327 ms
5 Execution Time: 0.121 ms

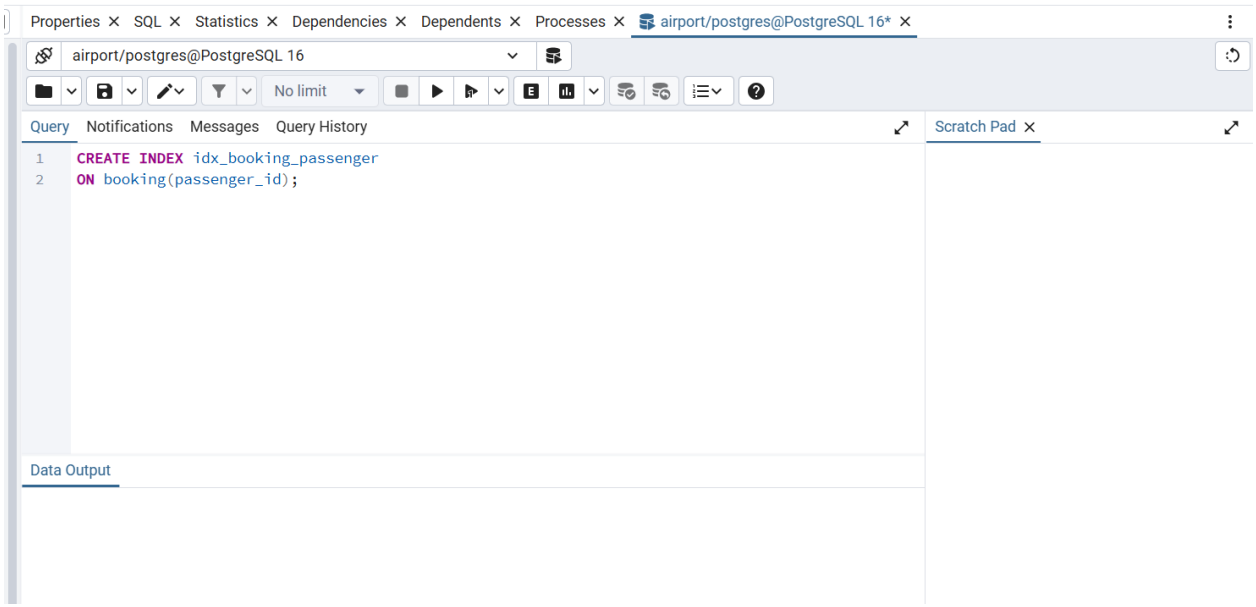
TASK 8

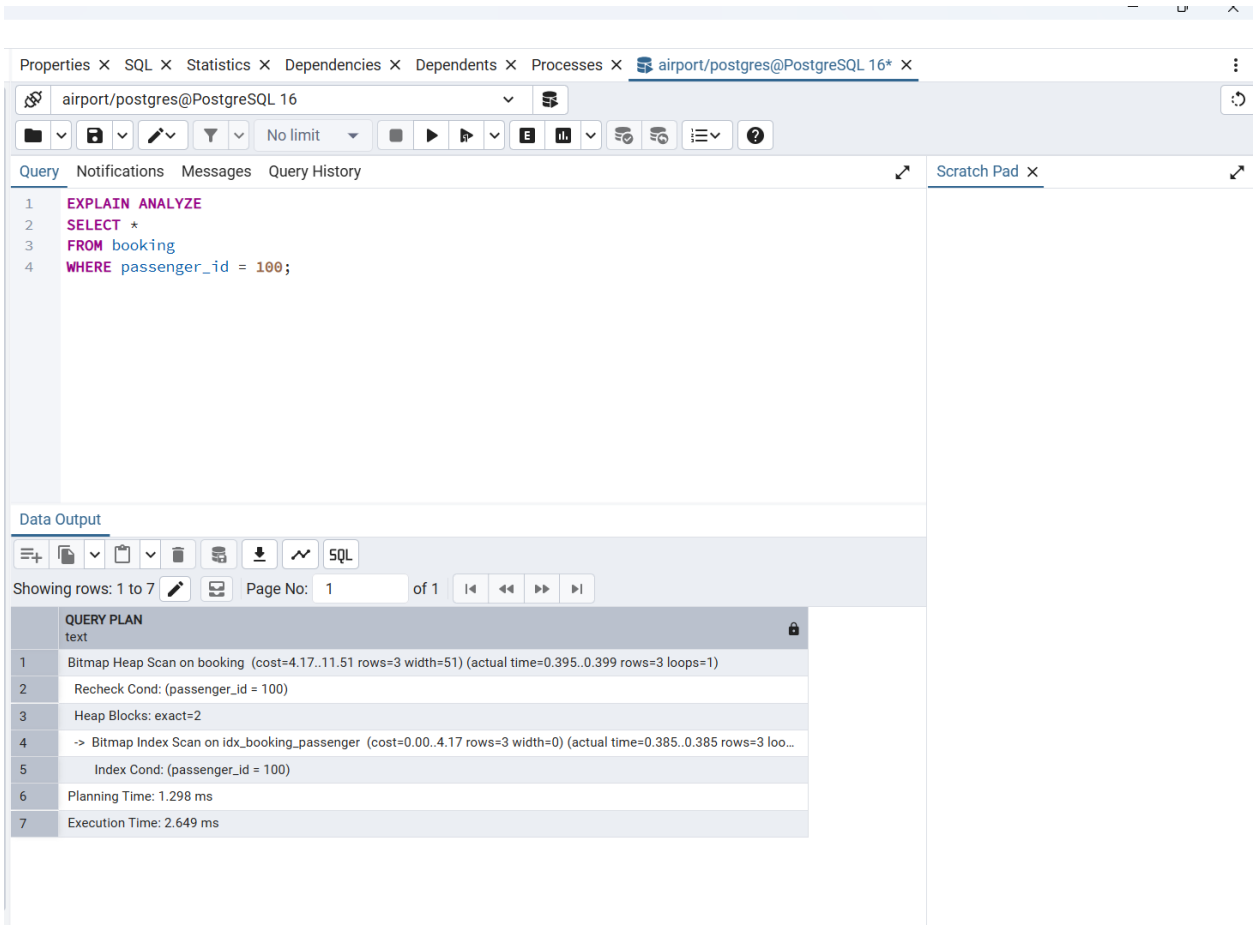

Properties
SQL
Statistics
Dependencies
Dependents
Processes
airport/postgres@PostgreSQL 16*
airport/postgres@PostgreSQL 16
No limit
Query
Notifications
Messages
Query History
Scratch Pad
1 DROP INDEX IF EXISTS idx_passport_number;
2
3 DROP INDEX IF EXISTS idx_passenger_info;
Data Output
No data output. Execute a query to get output.


Properties
SQL
Statistics
Dependencies
Dependents
Processes
airport/postgres@PostgreSQL 16*
airport/postgres@PostgreSQL 16
No limit
Query
Notifications
Messages
Query History
Scratch Pad
1 SELECT indexname, indexdef
2 FROM pg_indexes
3 WHERE tablename = 'passengers';
Data Output
Showing rows: 1 to 2
Page No: 1
of 1
indexname name
indexdef text
1 passengers_pkey CREATE UNIQUE INDEX passengers_pkey ON public.passengers USING btree (passenger_id)
2 unique_passenger... CREATE UNIQUE INDEX unique_passenger_id ON public.passengers USING btree (passenge...

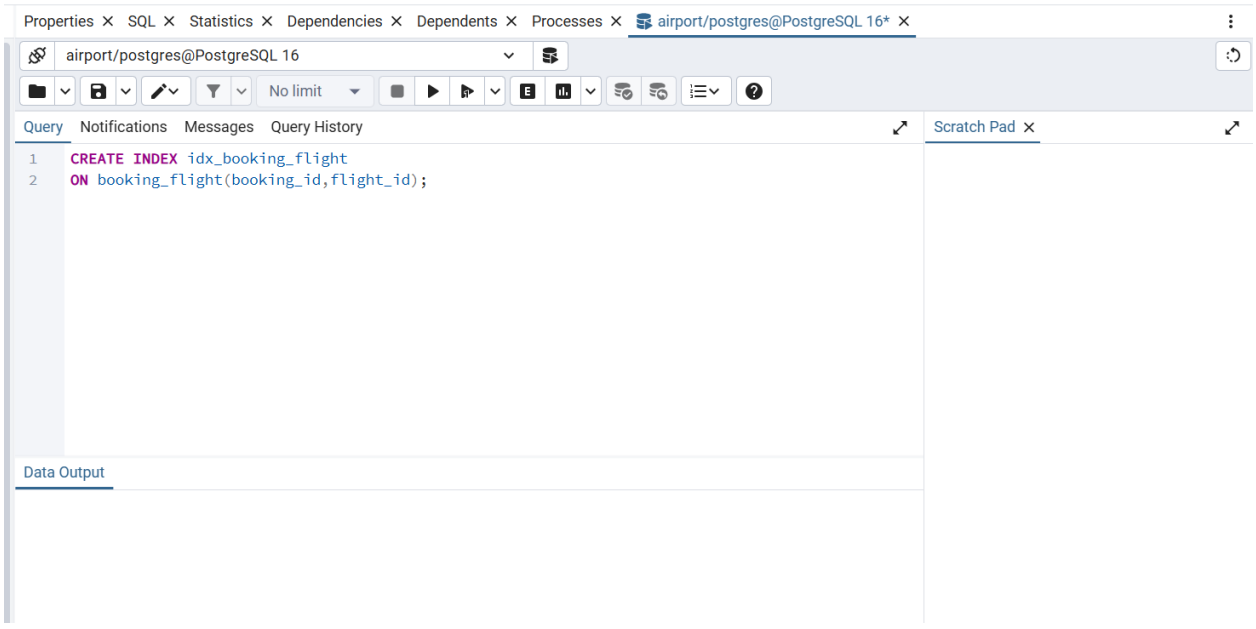
TASK 9

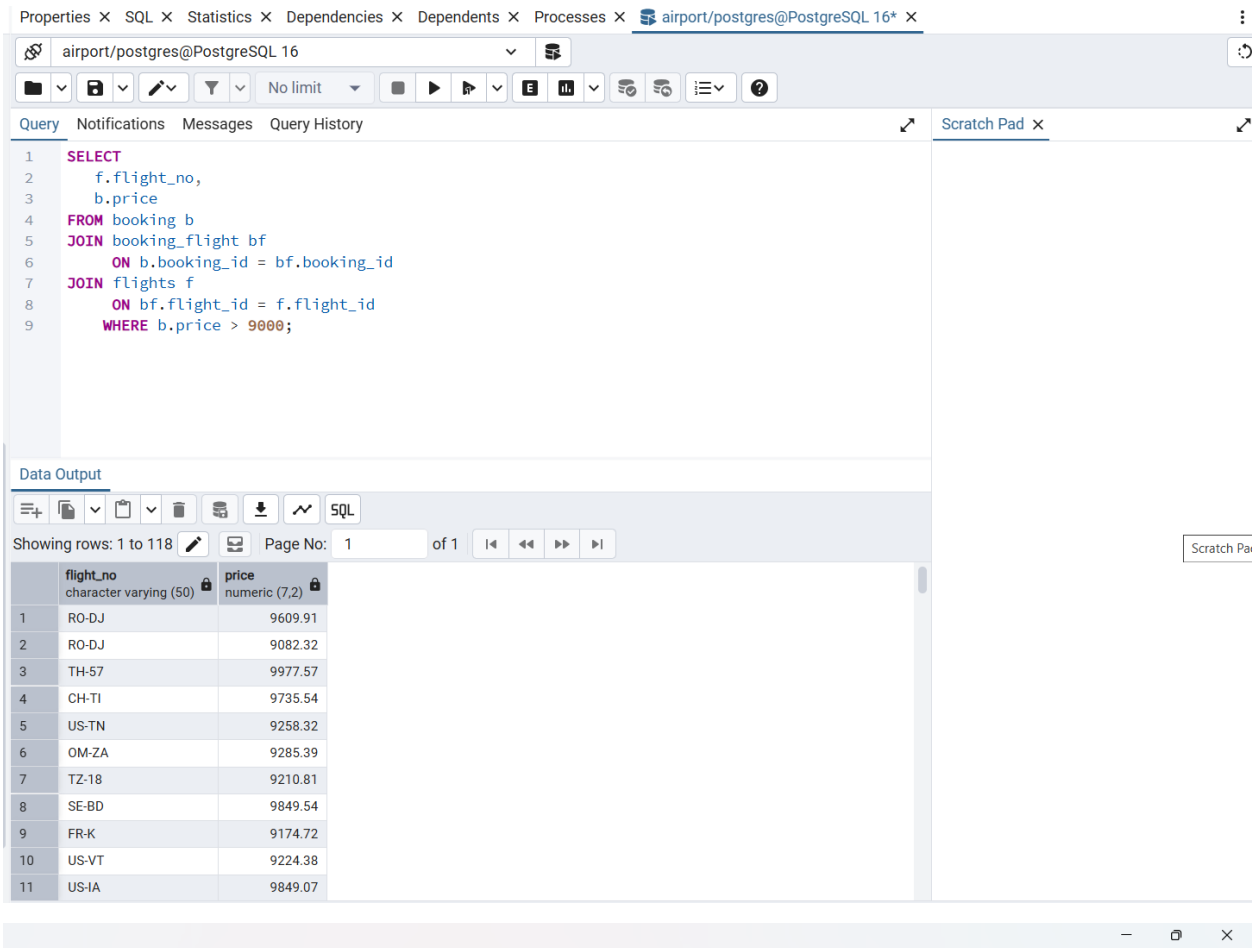

Properties
SQL
Statistics
Dependencies
Dependents
Processes
airport/postgres@PostgreSQL 16*
airport/postgres@PostgreSQL 16
No limit
Query
Notifications
Messages
Query History
Scratch Pad
1 EXPLAIN ANALYZE
2 SELECT *
3 FROM booking
4 WHERE passenger_id = 100;
Data Output
SQL
Showing rows: 1 to 5
Page No: 1
of 1
QUERY PLAN
text
1 Seq Scan on booking (cost=0.00..17.25 rows=3 width=51) (actual time=1.140..1.355 rows=3 loop...
2 Filter: (passenger_id = 100)
3 Rows Removed by Filter: 499
4 Planning Time: 5.776 ms
5 Execution Time: 1.384 ms

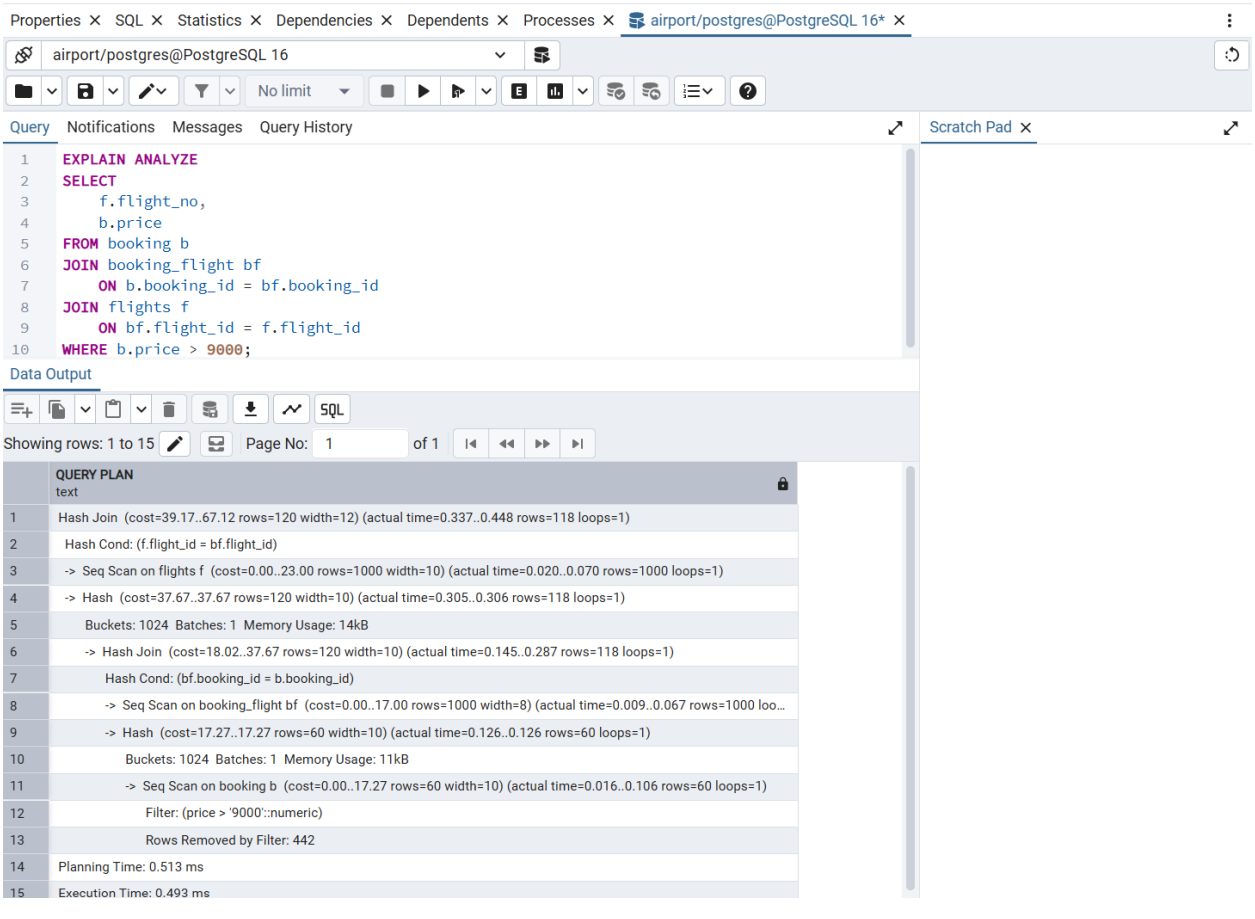

Properties
SQL
Statistics
Dependencies
Dependents
Processes
airport/postgres@PostgreSQL 16*
airport/postgres@PostgreSQL 16
No limit
Query
Notifications
Messages
Query History
Scratch Pad
1 CREATE INDEX idx_booking_passenger
2 ON booking(passenger_id);
Data Output


Properties
SQL
Statistics
Dependencies
Dependents
Processes
airport/postgres@PostgreSQL 16*
airport/postgres@PostgreSQL 16
No limit
Query
Notifications
Messages
Query History
Scratch Pad
1 EXPLAIN ANALYZE
2 SELECT *
3 FROM booking
4 WHERE passenger_id = 100;
Data Output
SQL
Showing rows: 1 to 7
Page No: 1
of 1
QUERY PLAN
text
1 Bitmap Heap Scan on booking (cost=4.17..11.51 rows=3 width=51) (actual time=0.395..0.399 rows=3 loops=1)
2 Recheck Cond: (passenger_id = 100)
3 Heap Blocks: exact=2
4 -> Bitmap Index Scan on idx_booking_passenger (cost=0.00..4.17 rows=3 width=0) (actual time=0.385..0.385 rows=3 loo...
5 Index Cond: (passenger_id = 100)
6 Planning Time: 1.298 ms
7 Execution Time: 2.649 ms

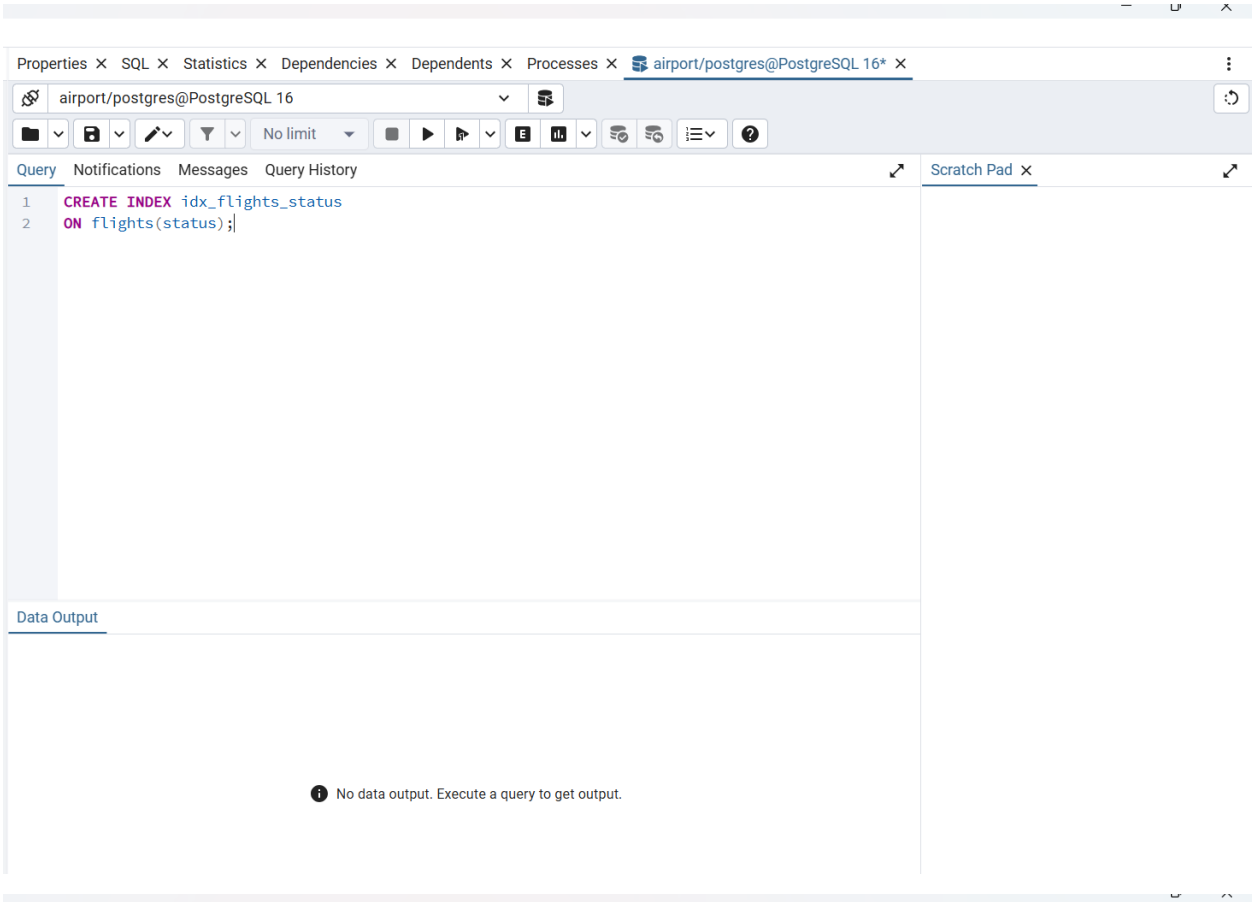
TASK 10

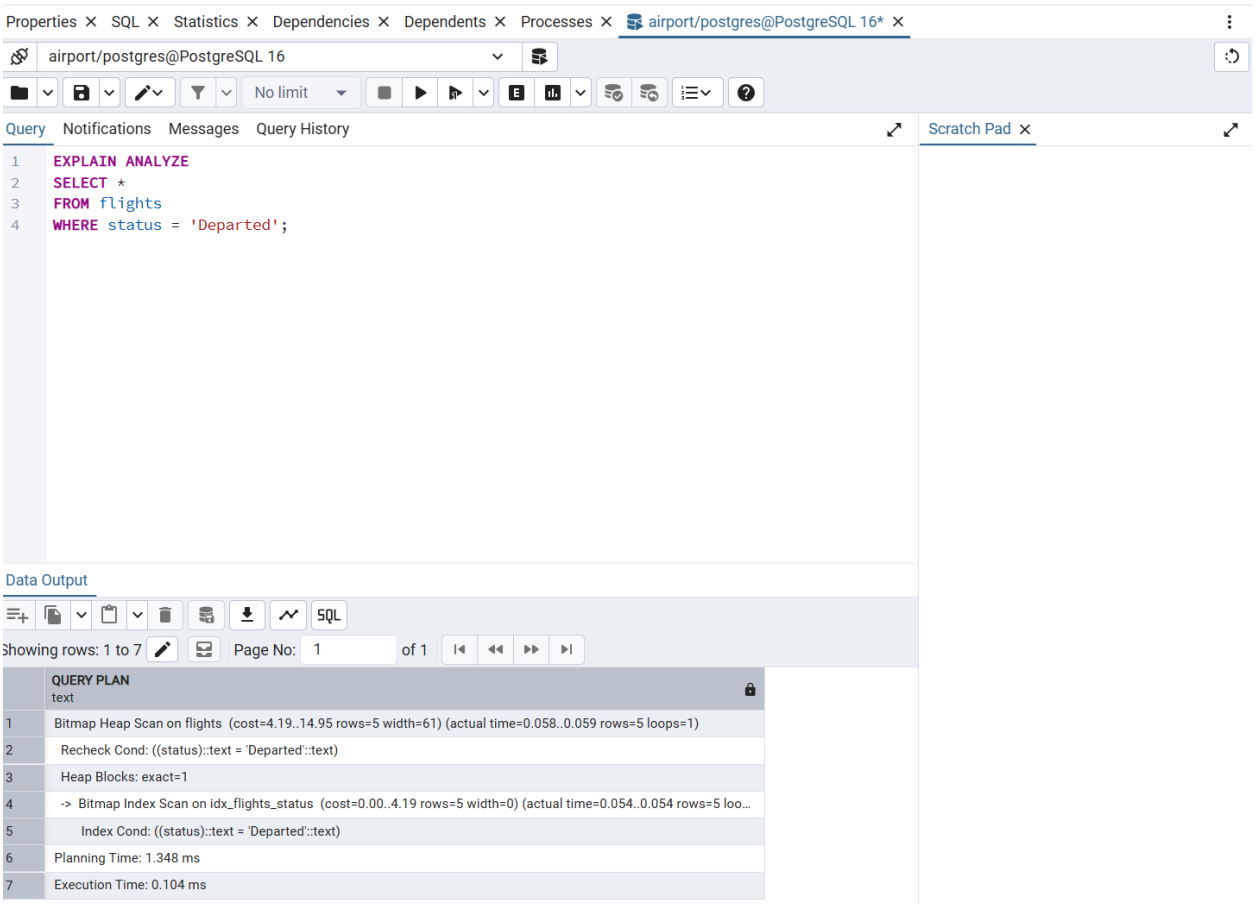

Properties
SQL
Statistics
Dependencies
Dependents
Processes
airport/postgres@PostgreSQL 16*
airport/postgres@PostgreSQL 16
No limit
Query
Notifications
Messages
Query History
Scratch Pad
1 CREATE INDEX idx_booking_flight
2 ON booking_flight(booking_id,flight_id);
Data Output

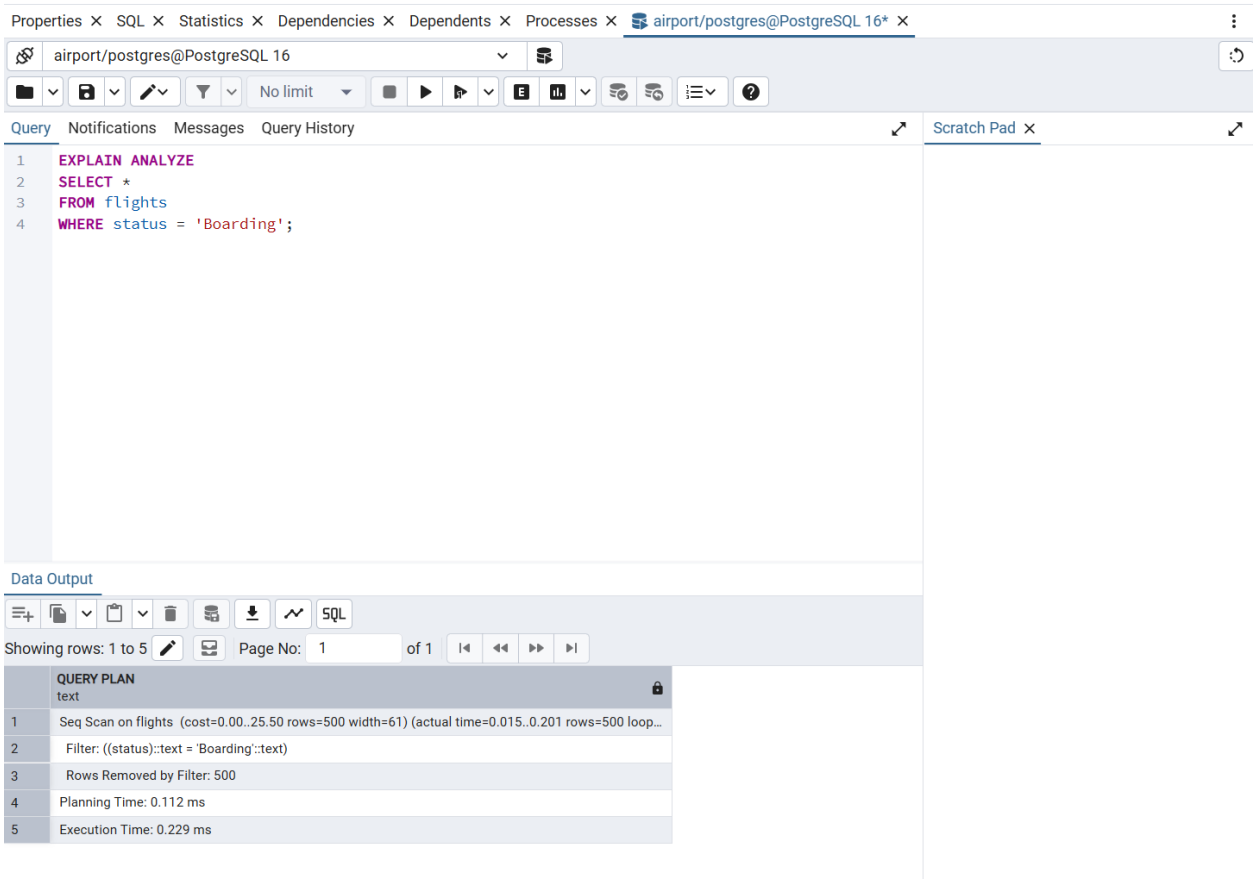

Properties
SQL
Statistics
Dependencies
Dependents
Processes
airport/postgres@PostgreSQL 16*
airport/postgres@PostgreSQL 16
No limit
Query
Notifications
Messages
Query History
Scratch Pad
SELECT
f.flight_no,
b.price
FROM booking b
JOIN booking_flight bf
ON b.booking_id = bf.booking_id
JOIN flights f
ON bf.flight_id = f.flight_id
WHERE b.price > 9000;
Data Output
SQL
Showing rows: 1 to 118
Page No: 1
of 1
flight_no character varying (50)
price numeric (7,2)
1 RO-DJ 9609.91
2 RO-DJ 9082.32
3 TH-57 9977.57
4 CH-TI 9735.54
5 US-TN 9258.32
6 OM-ZA 9285.39
7 TZ-18 9210.81
8 SE-BD 9849.54
9 FR-K 9174.72
10 US-VT 9224.38
11 US-IA 9849.07

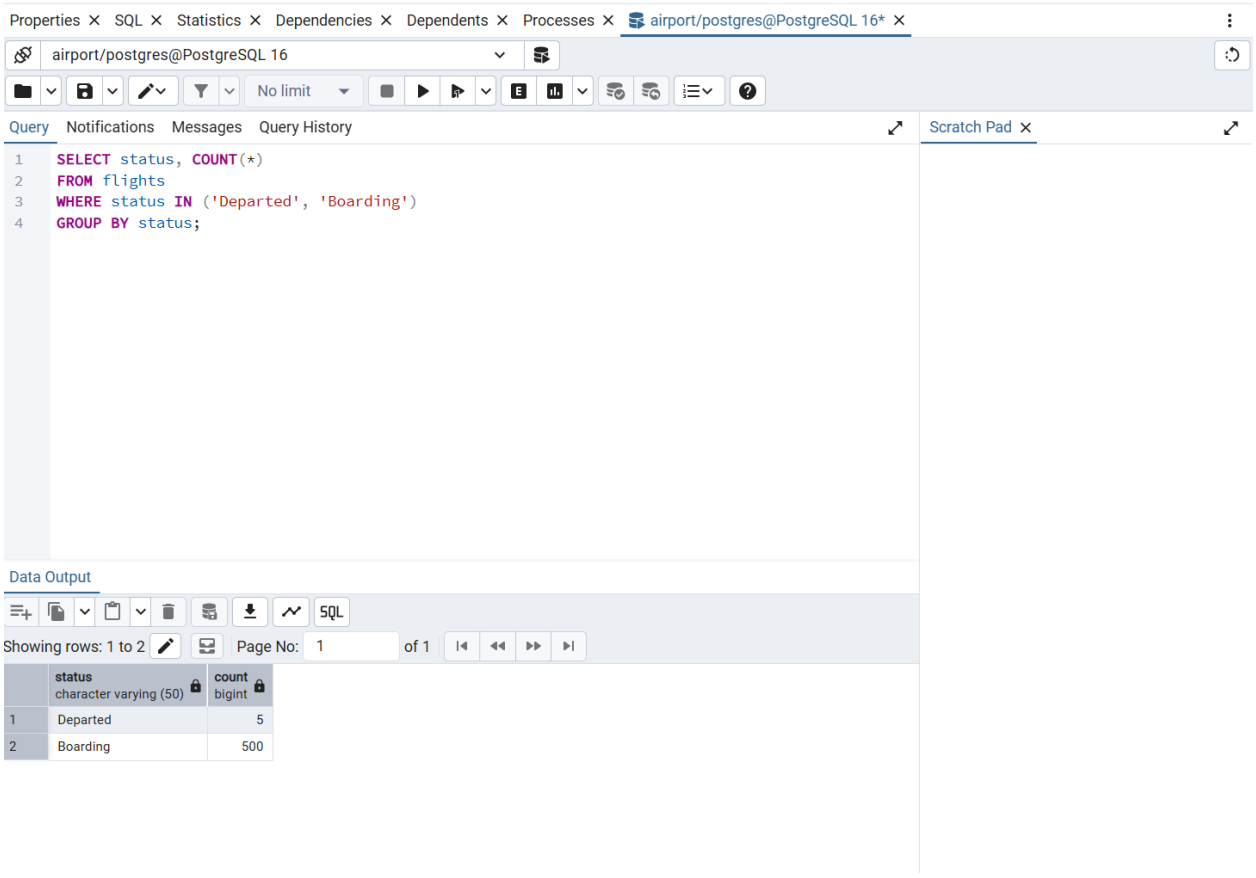

Properties
SQL
Statistics
Dependencies
Dependents
Processes
airport/postgres@PostgreSQL 16*
airport/postgres@PostgreSQL 16
No limit
Query
Notifications
Messages
Query History
Scratch Pad
EXPLAIN ANALYZE
SELECT
f.flight_no,
b.price
FROM booking b
JOIN booking_flight bf
ON b.booking_id = bf.booking_id
JOIN flights f
ON bf.flight_id = f.flight_id
WHERE b.price > 9000;
Data Output
SQL
Showing rows: 1 to 15
Page No: 1
of 1
QUERY PLAN text
1 Hash Join (cost=39.17..67.12 rows=120 width=12) (actual time=0.337..0.448 rows=118 loops=1)
2 Hash Cond: (f.flight_id = bf.flight_id)
3 -> Seq Scan on flights f (cost=0.00..23.00 rows=1000 width=10) (actual time=0.020..0.070 rows=1000 loops=1)
4 -> Hash (cost=37.67..37.67 rows=120 width=10) (actual time=0.305..0.306 rows=118 loops=1)
5 Buckets: 1024 Batches: 1 Memory Usage: 14kB
6 -> Hash Join (cost=18.02..37.67 rows=120 width=10) (actual time=0.145..0.287 rows=118 loops=1)
7 Hash Cond: (bf.booking_id = b.booking_id)
8 -> Seq Scan on booking_flight bf (cost=0.00..17.00 rows=1000 width=8) (actual time=0.009..0.067 rows=1000 loo...
9 -> Hash (cost=17.27..17.27 rows=60 width=10) (actual time=0.126..0.126 rows=60 loops=1)
10 Buckets: 1024 Batches: 1 Memory Usage: 11kB
11 -> Seq Scan on booking b (cost=0.00..17.27 rows=60 width=10) (actual time=0.016..0.106 rows=60 loops=1)
12 Filter: (price > '9000'::numeric)
13 Rows Removed by Filter: 442
14 Planning Time: 0.513 ms
15 Execution Time: 0.493 ms

TASK 11


Properties
SQL
Statistics
Dependencies
Dependents
Processes
airport/postgres@PostgreSQL 16*
airport/postgres@PostgreSQL 16
No limit
Query
Notifications
Messages
Query History
Scratch Pad
1 CREATE INDEX idx_flights_status
2 ON flights(status);
Data Output
No data output. Execute a query to get output.


Properties
SQL
Statistics
Dependencies
Dependents
Processes
airport/postgres@PostgreSQL 16*
airport/postgres@PostgreSQL 16
No limit
Query
Notifications
Messages
Query History
Scratch Pad
1 EXPLAIN ANALYZE
2 SELECT *
3 FROM flights
4 WHERE status = 'Departed';
Data Output
SQL
Showing rows: 1 to 7
Page No: 1
of 1
QUERY PLAN
text
1 Bitmap Heap Scan on flights (cost=4.19..14.95 rows=5 width=61) (actual time=0.058..0.059 rows=5 loops=1)
2 Recheck Cond: ((status)::text = 'Departed'::text)
3 Heap Blocks: exact=1
4 -> Bitmap Index Scan on idx_flights_status (cost=0.00..4.19 rows=5 width=0) (actual time=0.054..0.054 rows=5 loo...
5 Index Cond: ((status)::text = 'Departed'::text)
6 Planning Time: 1.348 ms
7 Execution Time: 0.104 ms


Properties
SQL
Statistics
Dependencies
Dependents
Processes
airport/postgres@PostgreSQL 16*
airport/postgres@PostgreSQL 16
No limit
Query
Notifications
Messages
Query History
Scratch Pad
EXPLAIN ANALYZE
SELECT *
FROM flights
WHERE status = 'Boarding';
Data Output
SQL
Showing rows: 1 to 5
Page No: 1
of 1
QUERY PLAN
text
1 Seq Scan on flights (cost=0.00..25.50 rows=500 width=61) (actual time=0.015..0.201 rows=500 loop...
2 Filter: ((status)::text = 'Boarding'::text)
3 Rows Removed by Filter: 500
4 Planning Time: 0.112 ms
5 Execution Time: 0.229 ms


Properties
SQL
Statistics
Dependencies
Dependents
Processes
airport/postgres@PostgreSQL 16*
airport/postgres@PostgreSQL 16
No limit
Query
Notifications
Messages
Query History
Scratch Pad
SELECT status, COUNT(*)
FROM flights
WHERE status IN ('Departed', 'Boarding')
GROUP BY status;
Data Output
SQL
Showing rows: 1 to 2
Page No: 1
of 1
status
character varying (50)
count
bigint
1 Departed 5
2 Boarding 500

TASK 12

Properties × SQL × Statistics × Dependencies × Dependents × Processes × airport/postgres@PostgreSQL 16* ×

airport/postgres@PostgreSQL 16

No limit

Query Notifications Messages Query History

Scratch Pad ×

```
1  CREATE INDEX idx_baggage_weight
2  ON baggage(weight_in_kg);
```

Data Output

Properties × SQL × Statistics × Dependencies × Dependents × Processes × airport/postgres@PostgreSQL 16* ×

airport/postgres@PostgreSQL 16

No limit

Query Notifications Messages Query History

Scratch Pad ×

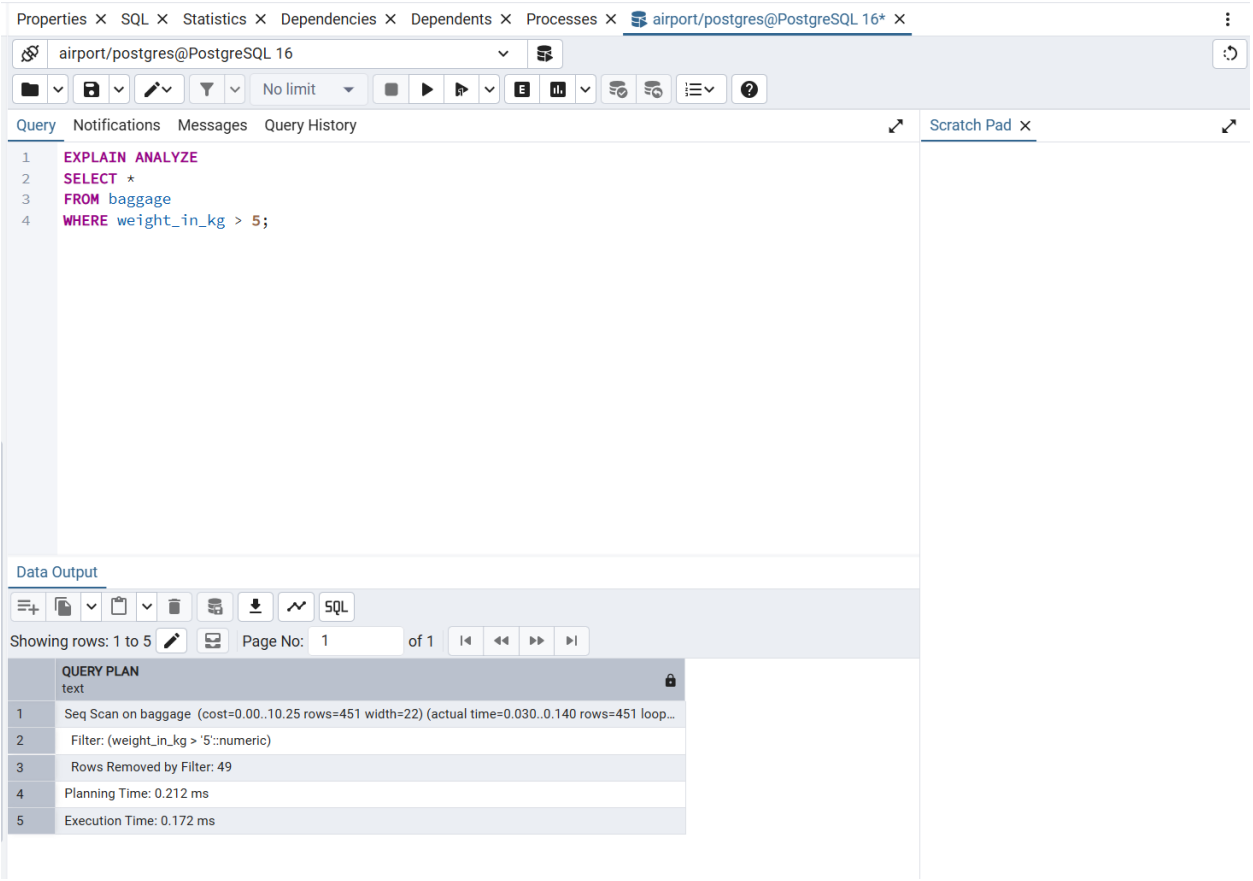
```
1  EXPLAIN ANALYZE
2  SELECT *
3  FROM baggage
4  WHERE weight_in_kg > 49;
```

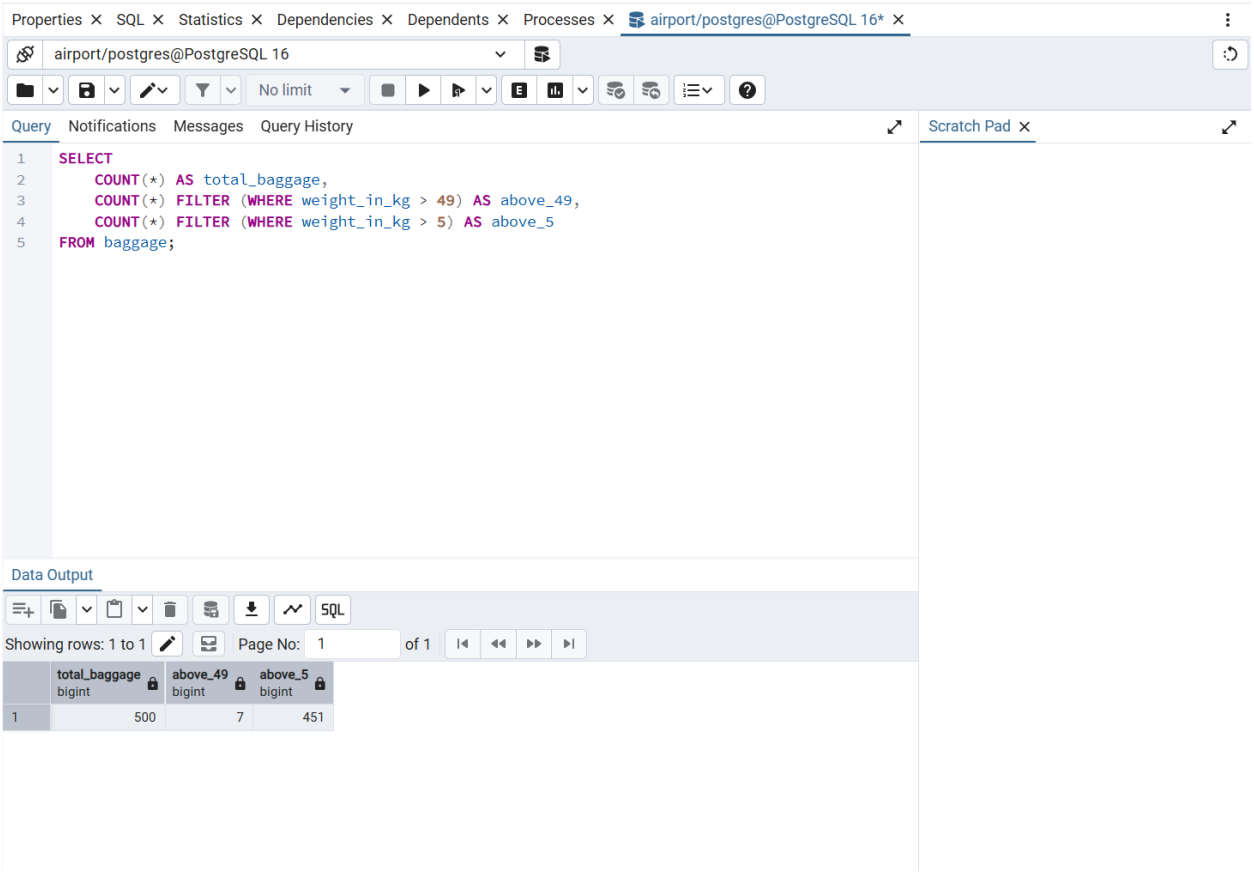
Data Output

SQL

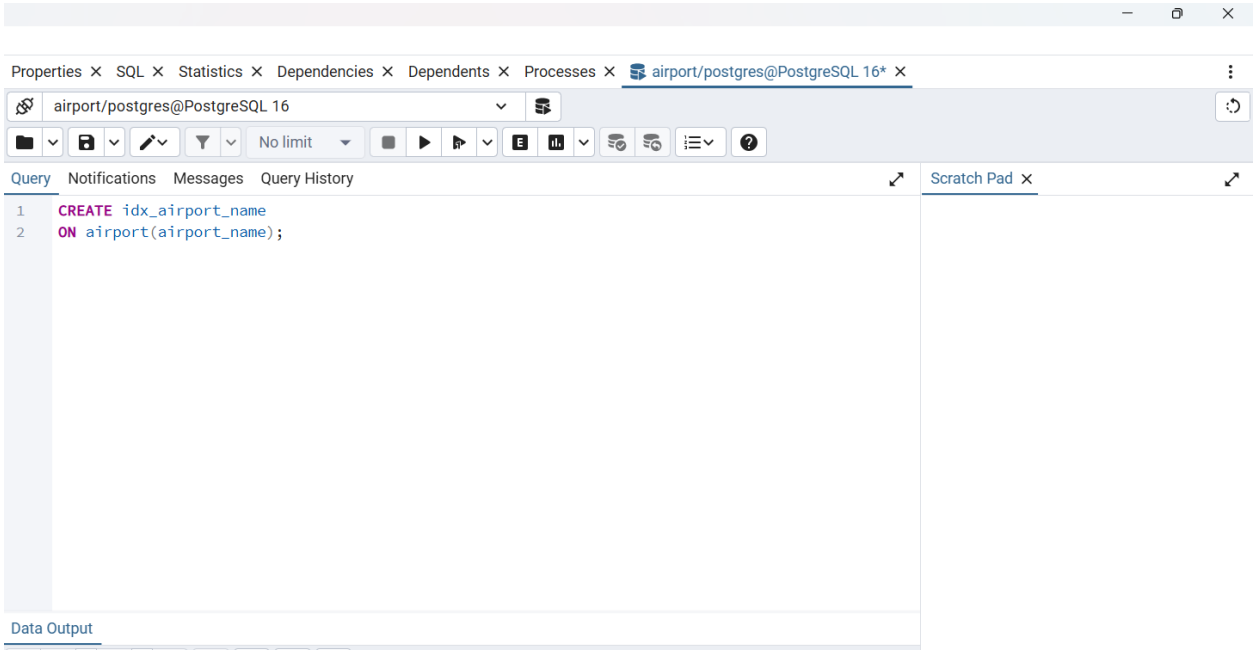
Showing rows: 1 to 7 Page No: 1 of 1

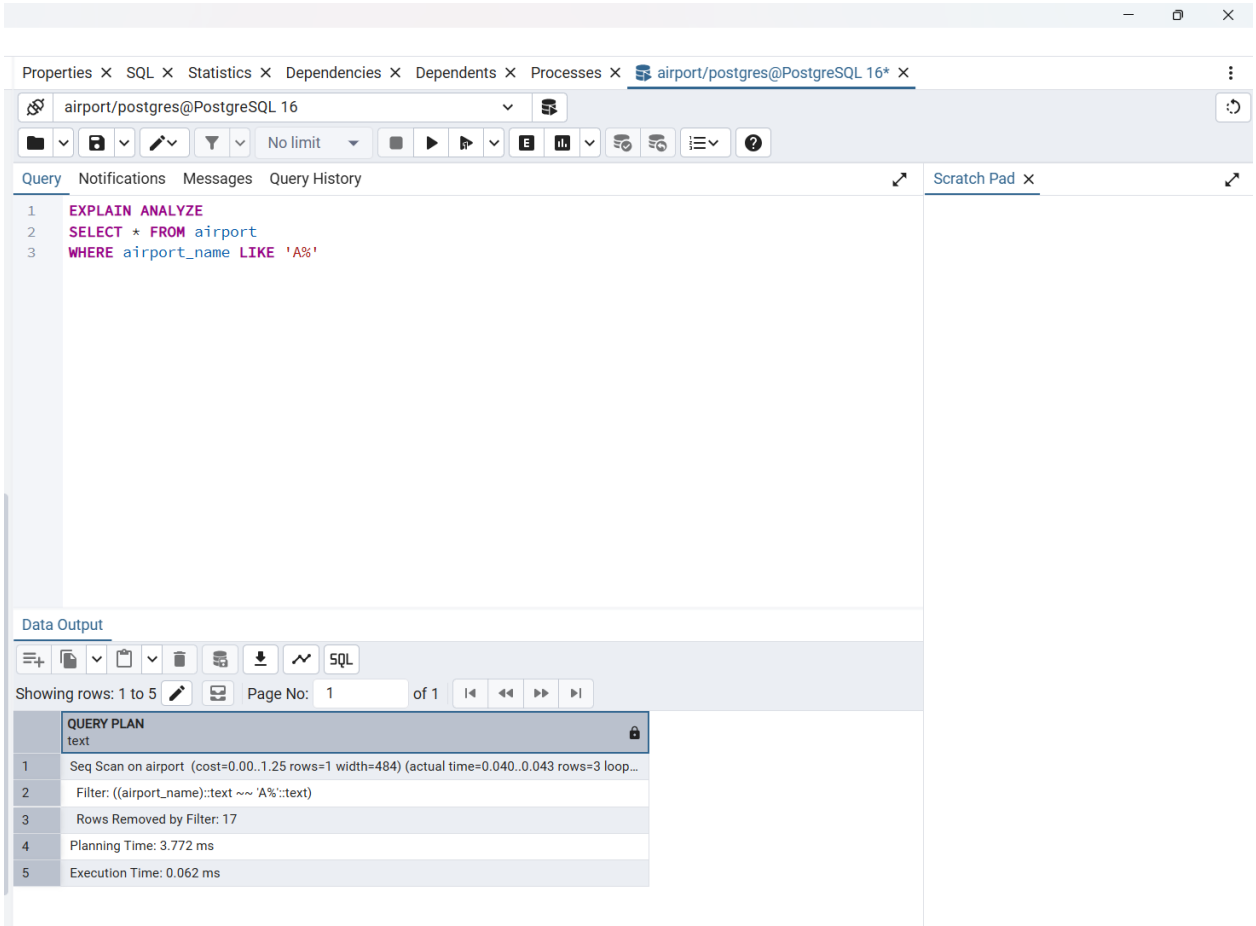
	QUERY PLAN text
1	Bitmap Heap Scan on baggage (cost=4.31..8.37 rows=5 width=22) (actual time=0.017..0.022 rows=7 loops=1)
2	Recheck Cond: (weight_in_kg > '49'::numeric)
3	Heap Blocks: exact=4
4	-> Bitmap Index Scan on idx_baggage_weight (cost=0.00..4.31 rows=5 width=0) (actual time=0.010..0.010 rows=7 loo…
5	Index Cond: (weight_in_kg > '49'::numeric)
6	Planning Time: 6.449 ms
7	Execution Time: 0.060 ms

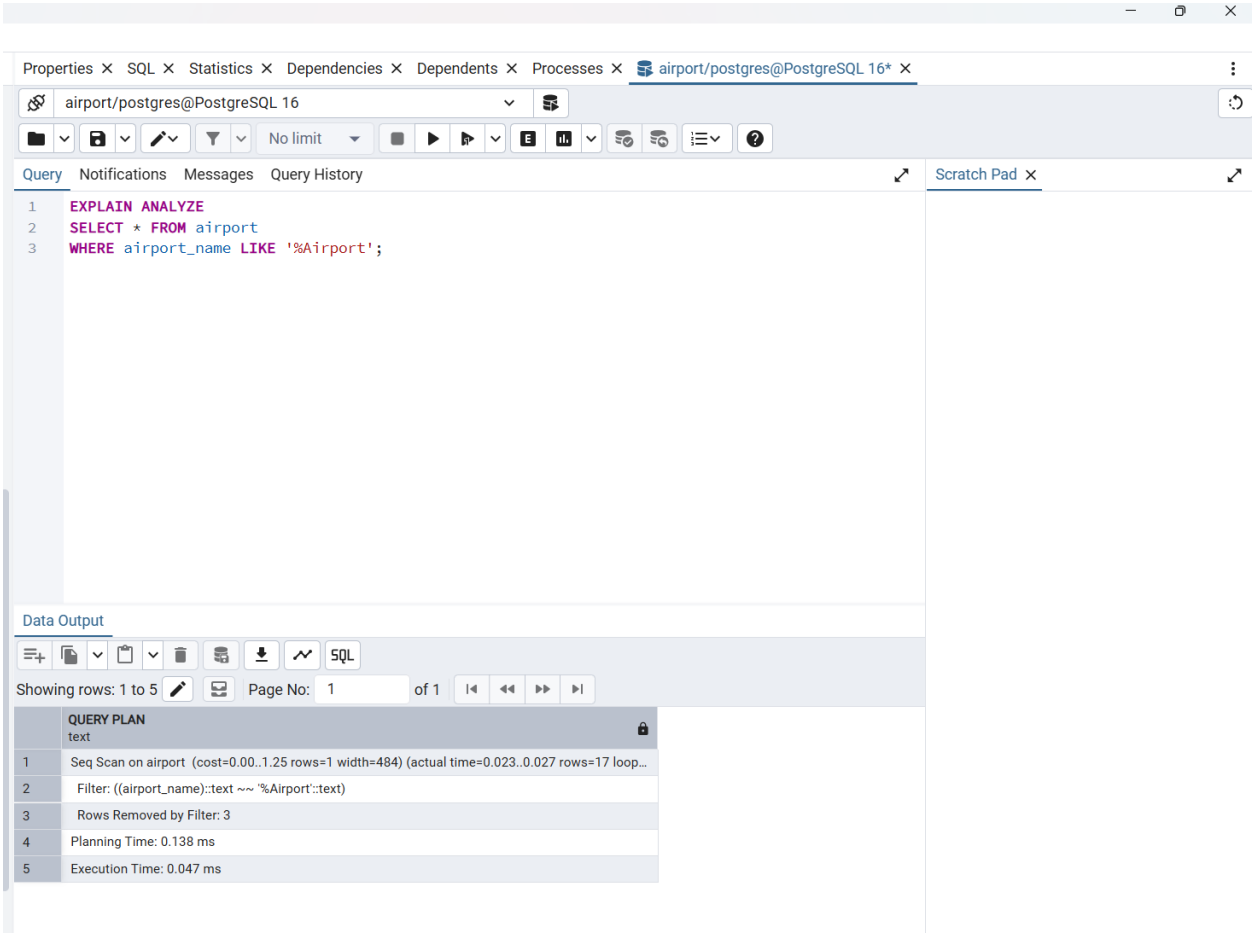

Properties SQL Statistics Dependencies Dependents Processes airport/postgres@PostgreSQL 16*
airport/postgres@PostgreSQL 16
No limit
Query Notifications Messages Query History
Scratch Pad
EXPLAIN ANALYZE
SELECT *
FROM baggage
WHERE weight_in_kg > 5;
Data Output
Showing rows: 1 to 5
Page No: 1 of 1
QUERY PLAN text
Seq Scan on baggage (cost=0.00..10.25 rows=451 width=22) (actual time=0.030..0.140 rows=451 loop...
Filter: (weight_in_kg > '5'::numeric)
Rows Removed by Filter: 49
Planning Time: 0.212 ms
Execution Time: 0.172 ms


Properties SQL Statistics Dependencies Dependents Processes airport/postgres@PostgreSQL 16*
airport/postgres@PostgreSQL 16
No limit
Query Notifications Messages Query History
Scratch Pad
SELECT
COUNT(*) AS total_baggage,
COUNT(*) FILTER (WHERE weight_in_kg > 49) AS above_49,
COUNT(*) FILTER (WHERE weight_in_kg > 5) AS above_5
FROM baggage;
Data Output
Showing rows: 1 to 1
Page No: 1 of 1
total_baggage bigint
above_49 bigint
above_5 bigint
1 500 7 451

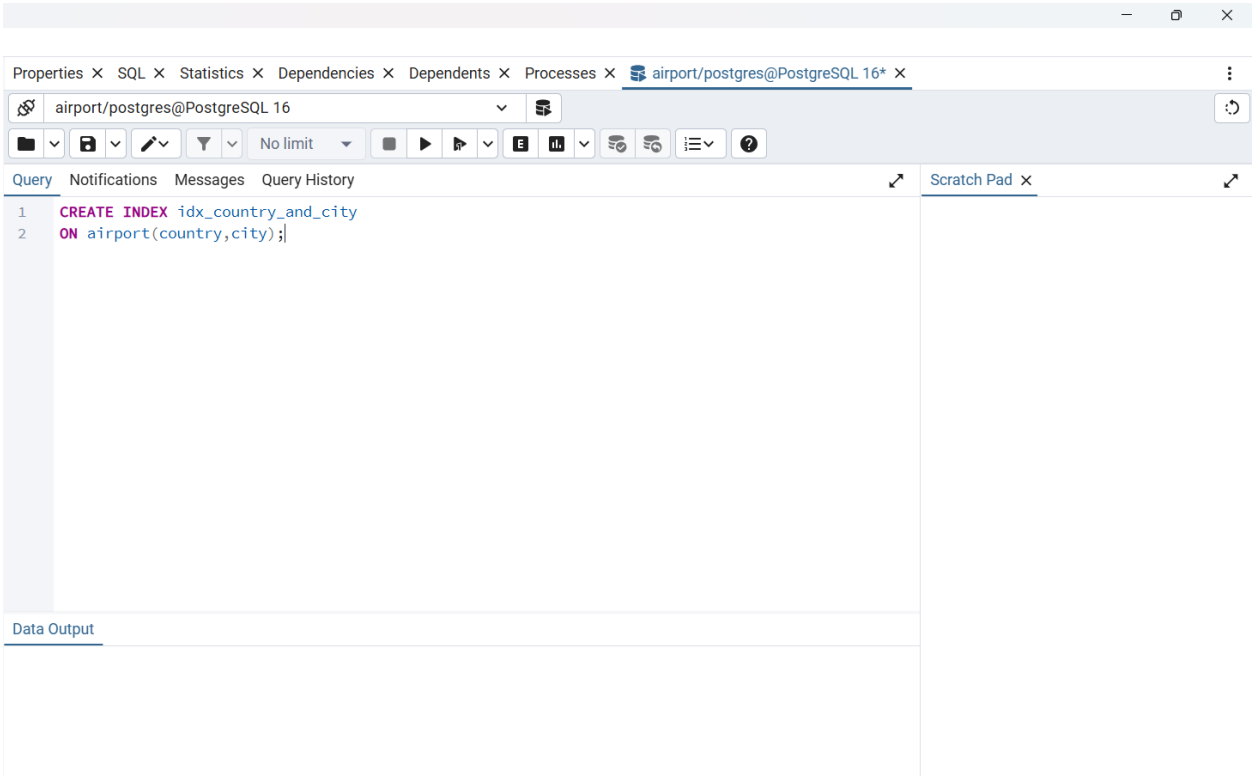
TASK 13

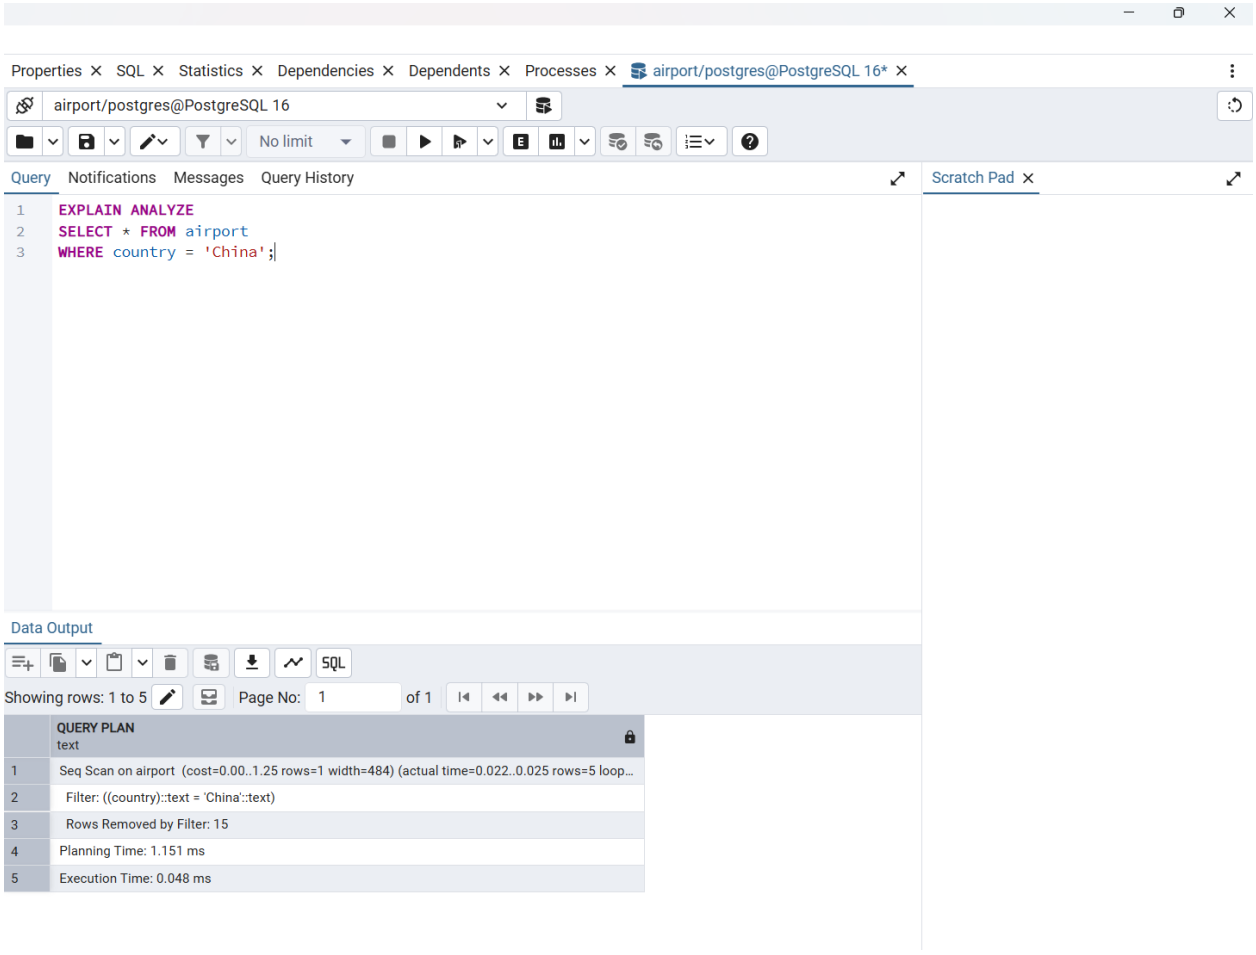

Properties
SQL
Statistics
Dependencies
Dependents
Processes
airport/postgres@PostgreSQL 16*
airport/postgres@PostgreSQL 16
No limit
Query
Notifications
Messages
Query History
Scratch Pad
1 CREATE idx_airport_name
2 ON airport(airport_name);
Data Output

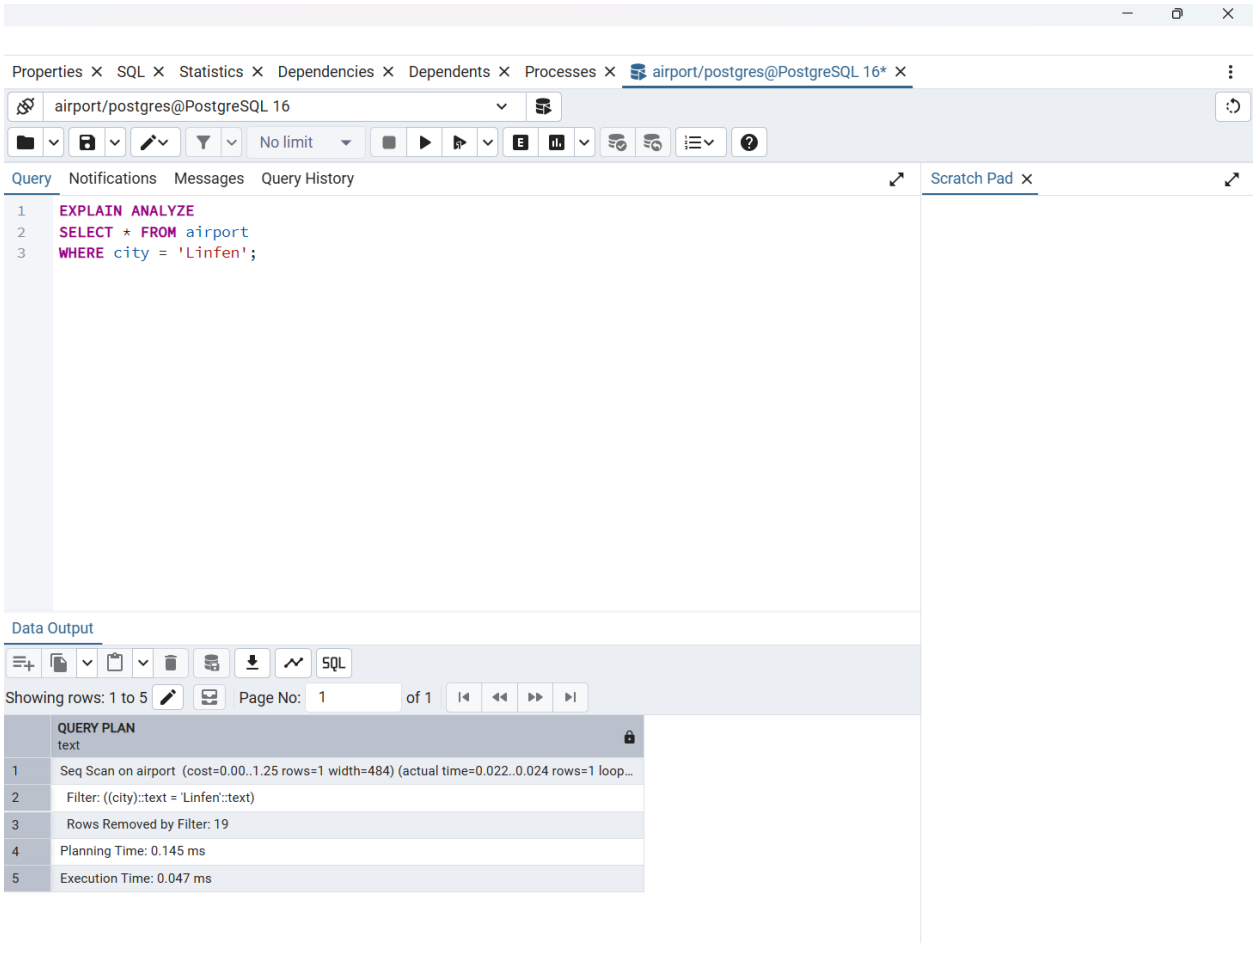

Properties
SQL
Statistics
Dependencies
Dependents
Processes
airport/postgres@PostgreSQL 16*
airport/postgres@PostgreSQL 16
No limit
Query
Notifications
Messages
Query History
Scratch Pad
1 EXPLAIN ANALYZE
2 SELECT * FROM airport
3 WHERE airport_name LIKE 'A%'
Data Output
SQL
Showing rows: 1 to 5
Page No: 1
of 1
QUERY PLAN
text
1 Seq Scan on airport (cost=0.00..1.25 rows=1 width=484) (actual time=0.040..0.043 rows=3 loop...
2 Filter: ((airport_name)::text ~~ 'A%'::text)
3 Rows Removed by Filter: 17
4 Planning Time: 3.772 ms
5 Execution Time: 0.062 ms

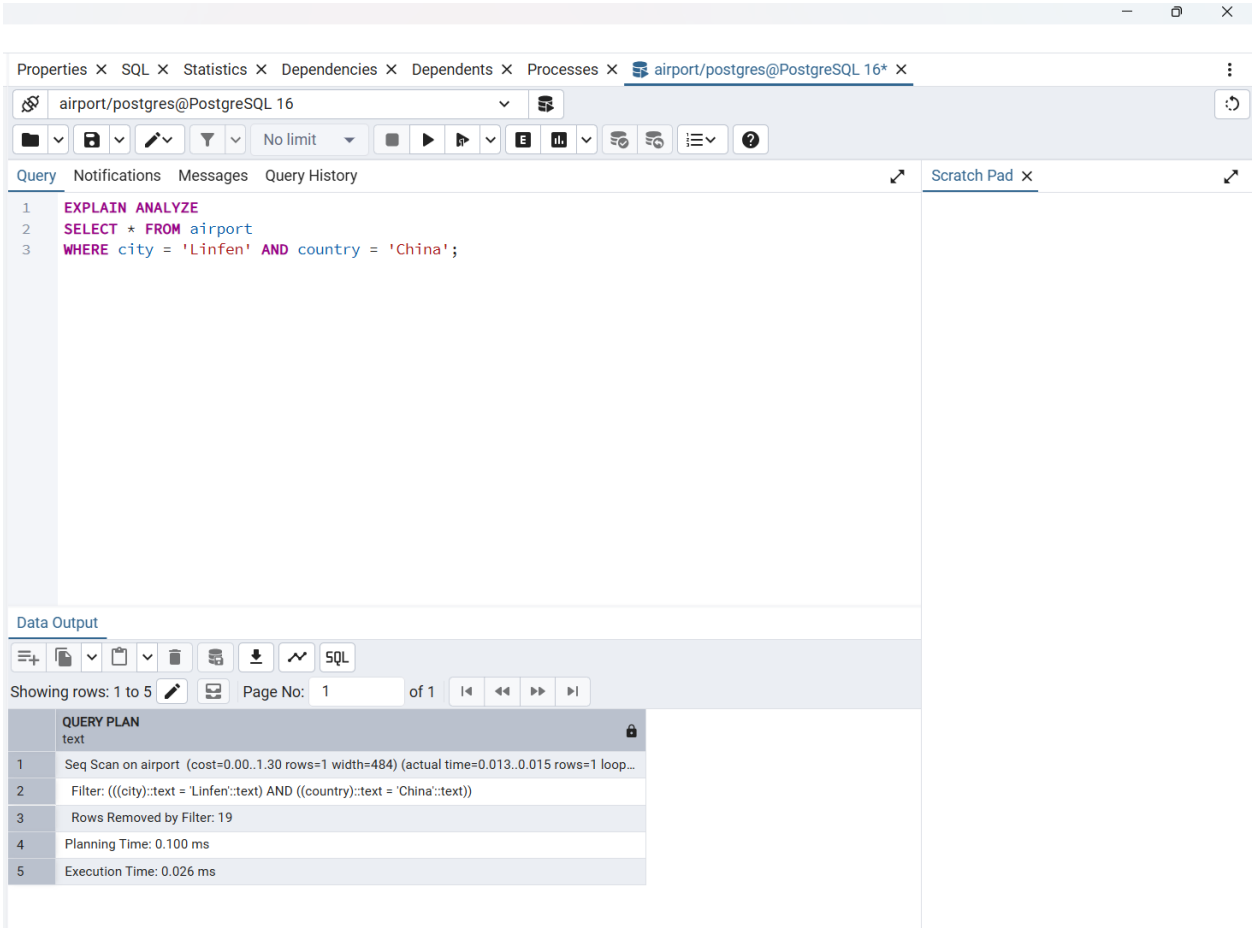

Properties SQL Statistics Dependencies Dependents Processes airport/postgres@PostgreSQL 16*
airport/postgres@PostgreSQL 16
No limit
Query Notifications Messages Query History
Scratch Pad
1 EXPLAIN ANALYZE
2 SELECT * FROM airport
3 WHERE airport_name LIKE '%Airport';
Data Output
Showing rows: 1 to 5
Page No: 1 of 1
QUERY PLAN
text
1 Seq Scan on airport (cost=0.00..1.25 rows=1 width=484) (actual time=0.023..0.027 rows=17 loop...
2 Filter: ((airport_name)::text ~~ '%Airport'::text)
3 Rows Removed by Filter: 3
4 Planning Time: 0.138 ms
5 Execution Time: 0.047 ms

TASK 14

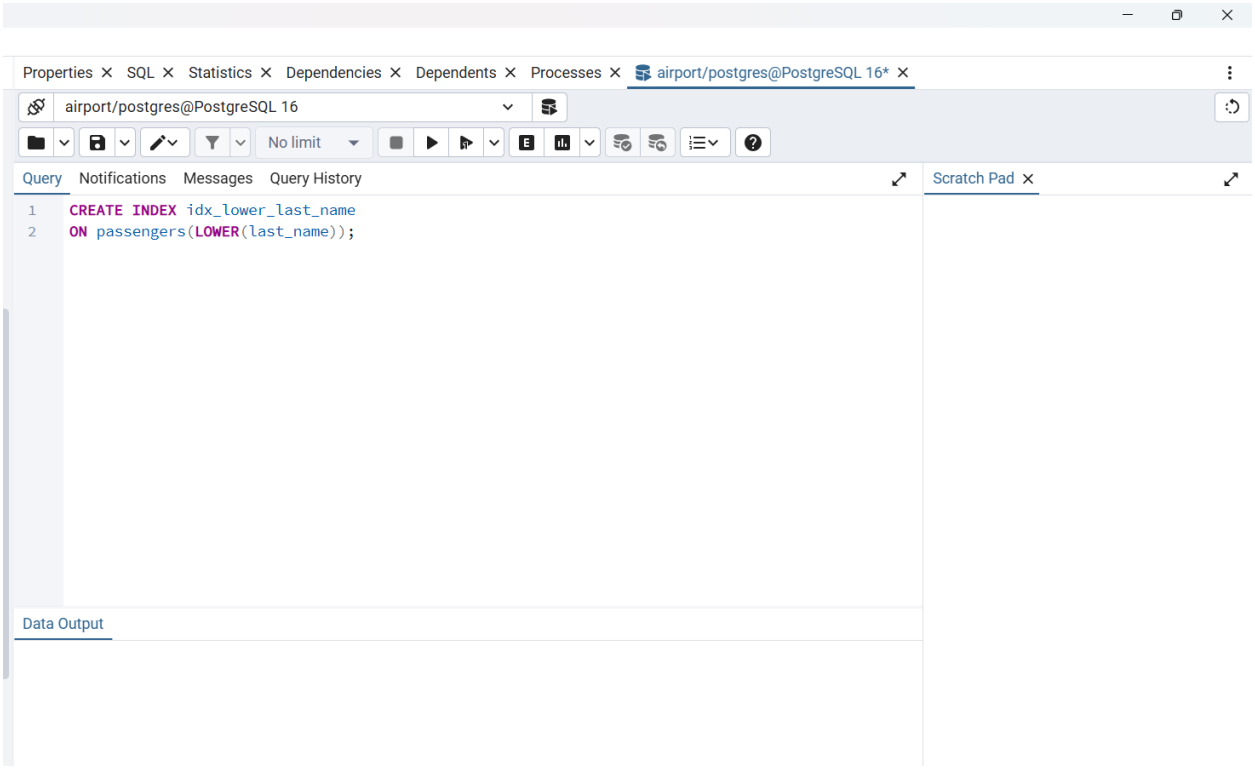

Properties SQL Statistics Dependencies Dependents Processes airport/postgres@PostgreSQL 16*
airport/postgres@PostgreSQL 16
No limit
Query Notifications Messages Query History
Scratch Pad
1 CREATE INDEX idx_country_and_city
2 ON airport(country,city);
Data Output

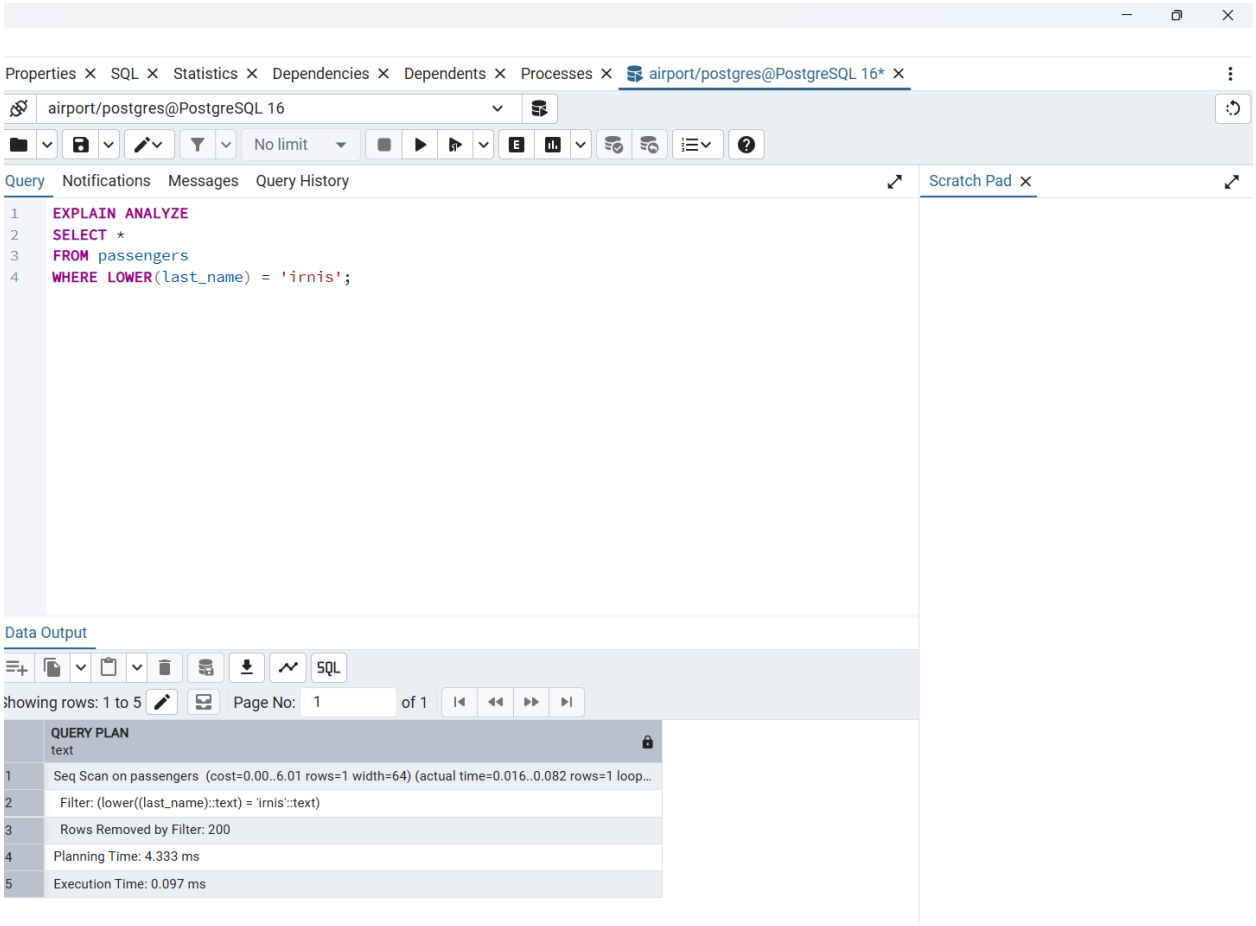

Properties
SQL
Statistics
Dependencies
Dependents
Processes
airport/postgres@PostgreSQL 16*
airport/postgres@PostgreSQL 16
No limit
Query
Notifications
Messages
Query History
Scratch Pad
1 EXPLAIN ANALYZE
2 SELECT * FROM airport
3 WHERE country = 'China';
Data Output
SQL
Showing rows: 1 to 5
Page No: 1
of 1
QUERY PLAN
text
1 Seq Scan on airport (cost=0.00..1.25 rows=1 width=484) (actual time=0.022..0.025 rows=5 loop...
2 Filter: ((country)::text = 'China'::text)
3 Rows Removed by Filter: 15
4 Planning Time: 1.151 ms
5 Execution Time: 0.048 ms

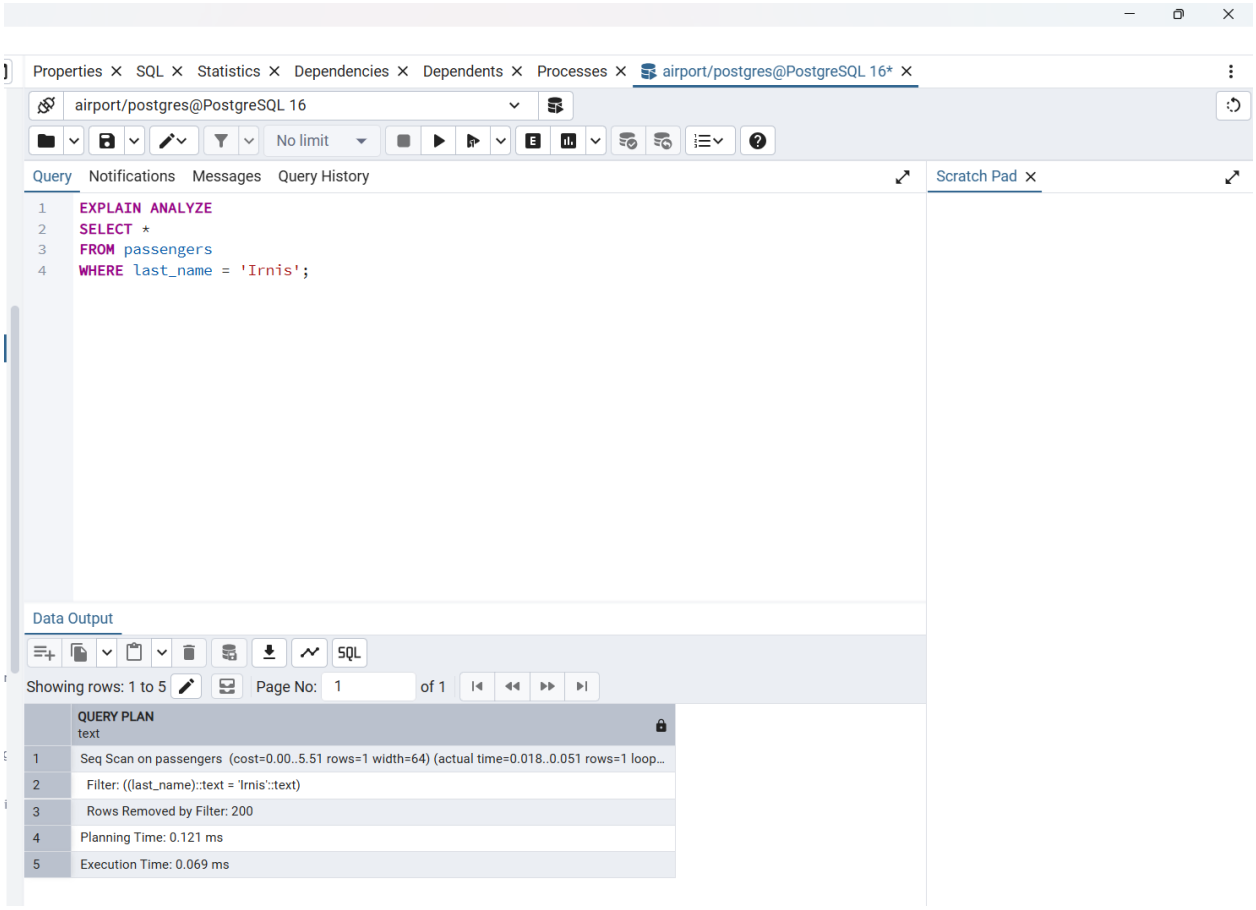

Properties
SQL
Statistics
Dependencies
Dependents
Processes
airport/postgres@PostgreSQL 16*
airport/postgres@PostgreSQL 16
No limit
Query
Notifications
Messages
Query History
Scratch Pad
1 EXPLAIN ANALYZE
2 SELECT * FROM airport
3 WHERE city = 'Linfen';
Data Output
SQL
Showing rows: 1 to 5
Page No: 1
of 1
QUERY PLAN
text
1 Seq Scan on airport (cost=0.00..1.25 rows=1 width=484) (actual time=0.022..0.024 rows=1 loop...
2 Filter: ((city)::text = 'Linfen'::text)
3 Rows Removed by Filter: 19
4 Planning Time: 0.145 ms
5 Execution Time: 0.047 ms


Properties SQL Statistics Dependencies Dependents Processes airport/postgres@PostgreSQL 16*
airport/postgres@PostgreSQL 16
No limit
Query Notifications Messages Query History
Scratch Pad
1 EXPLAIN ANALYZE
2 SELECT * FROM airport
3 WHERE city = 'Linfen' AND country = 'China';
Data Output
SQL
Showing rows: 1 to 5
Page No: 1 of 1
QUERY PLAN
text
1 Seq Scan on airport (cost=0.00..1.30 rows=1 width=484) (actual time=0.013..0.015 rows=1 loop...
2 Filter: (((city)::text = 'Linfen'::text) AND ((country)::text = 'China'::text))
3 Rows Removed by Filter: 19
4 Planning Time: 0.100 ms
5 Execution Time: 0.026 ms

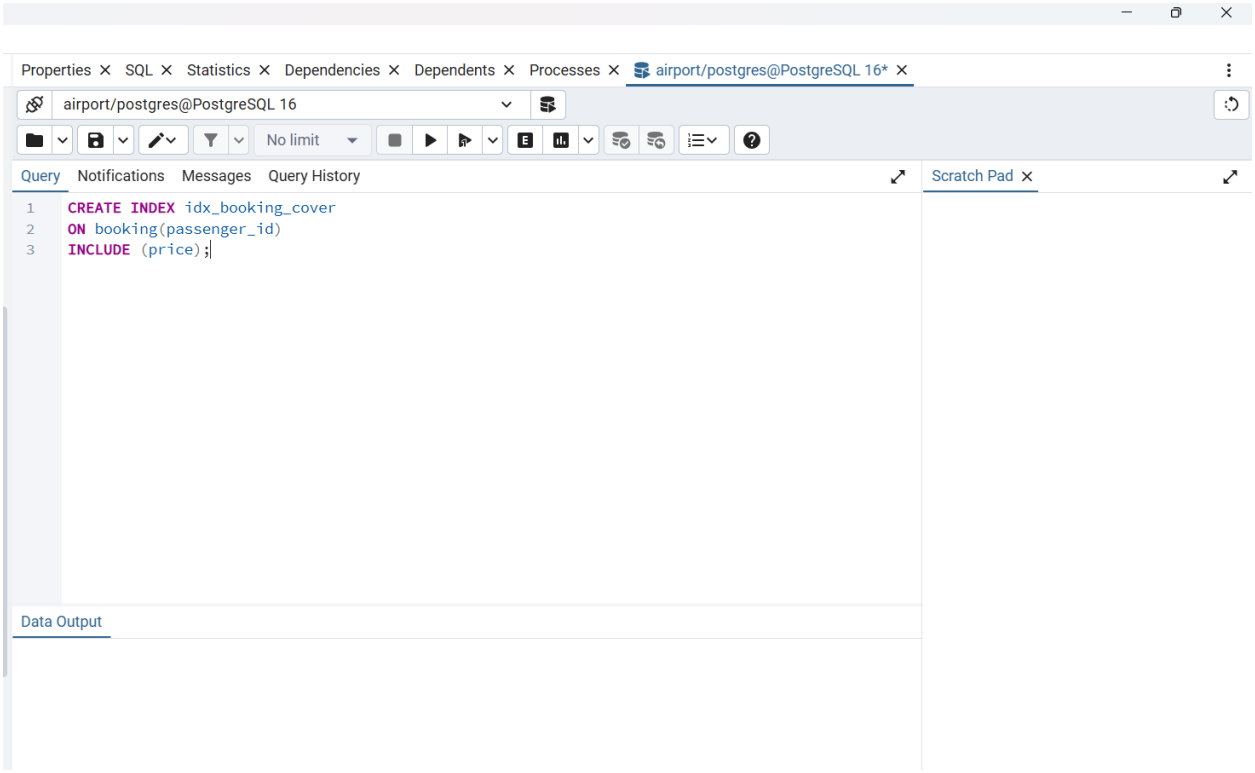
TASK 15

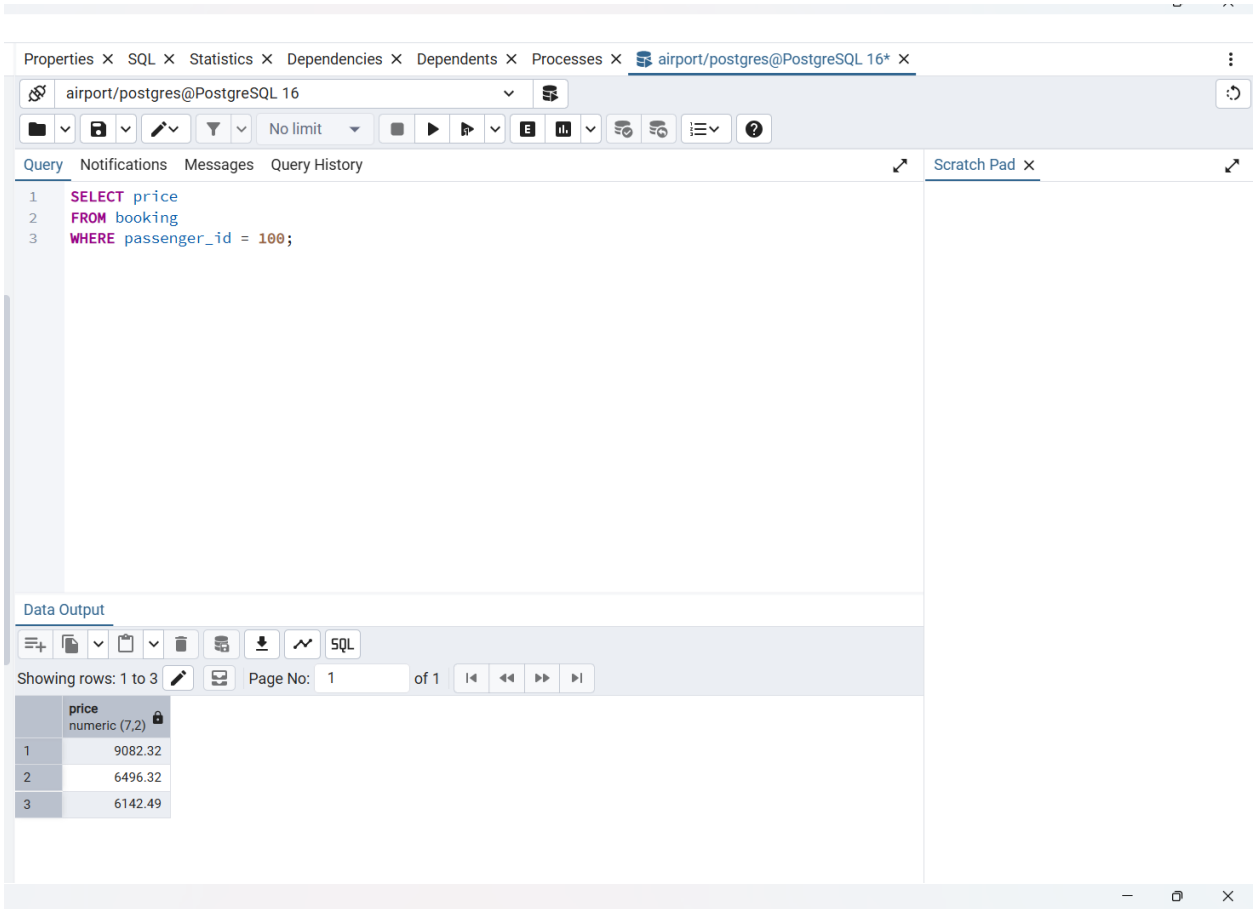

Properties SQL Statistics Dependencies Dependents Processes airport/postgres@PostgreSQL 16*
airport/postgres@PostgreSQL 16
No limit
Query Notifications Messages Query History
Scratch Pad
1 CREATE INDEX idx_lower_last_name
2 ON passengers(LOWER(last_name));
Data Output

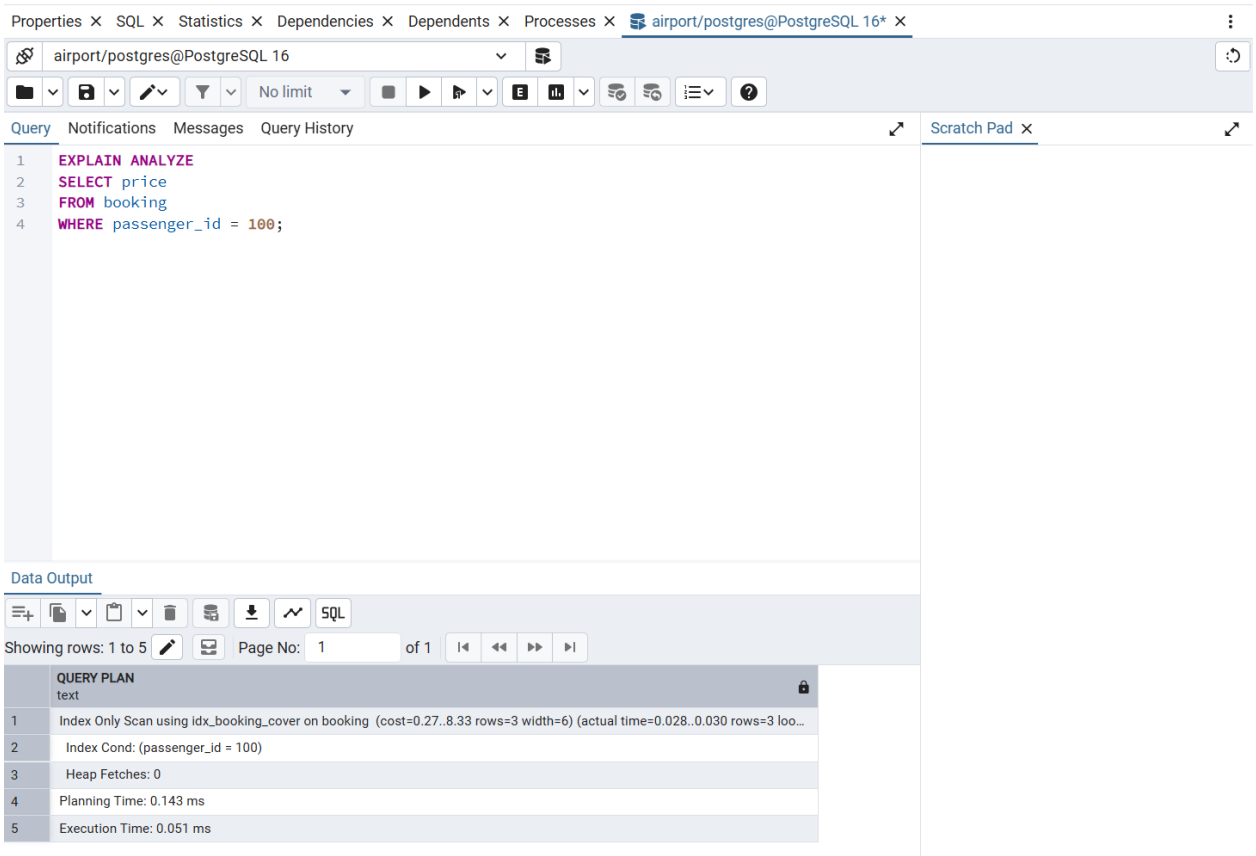

Properties SQL Statistics Dependencies Dependents Processes airport/postgres@PostgreSQL 16*
airport/postgres@PostgreSQL 16
No limit
Query Notifications Messages Query History
Scratch Pad
1 EXPLAIN ANALYZE
2 SELECT *
3 FROM passengers
4 WHERE LOWER(last_name) = 'irnis';
Data Output
Showing rows: 1 to 5 Page No: 1 of 1
QUERY PLAN
text
1 Seq Scan on passengers (cost=0.00..6.01 rows=1 width=64) (actual time=0.016..0.082 rows=1 loop...
2 Filter: (lower((last_name)::text) = 'irnis'::text)
3 Rows Removed by Filter: 200
4 Planning Time: 4.333 ms
5 Execution Time: 0.097 ms


Properties SQL Statistics Dependencies Dependents Processes airport/postgres@PostgreSQL 16*
airport/postgres@PostgreSQL 16
No limit
Query Notifications Messages Query History
Scratch Pad
1 EXPLAIN ANALYZE
2 SELECT *
3 FROM passengers
4 WHERE last_name = 'Irnis';
Data Output
Showing rows: 1 to 5 Page No: 1 of 1
QUERY PLAN
text
1 Seq Scan on passengers (cost=0.00..5.51 rows=1 width=64) (actual time=0.018..0.051 rows=1 loop...
2 Filter: ((last_name)::text = 'Irnis'::text)
3 Rows Removed by Filter: 200
4 Planning Time: 0.121 ms
5 Execution Time: 0.069 ms

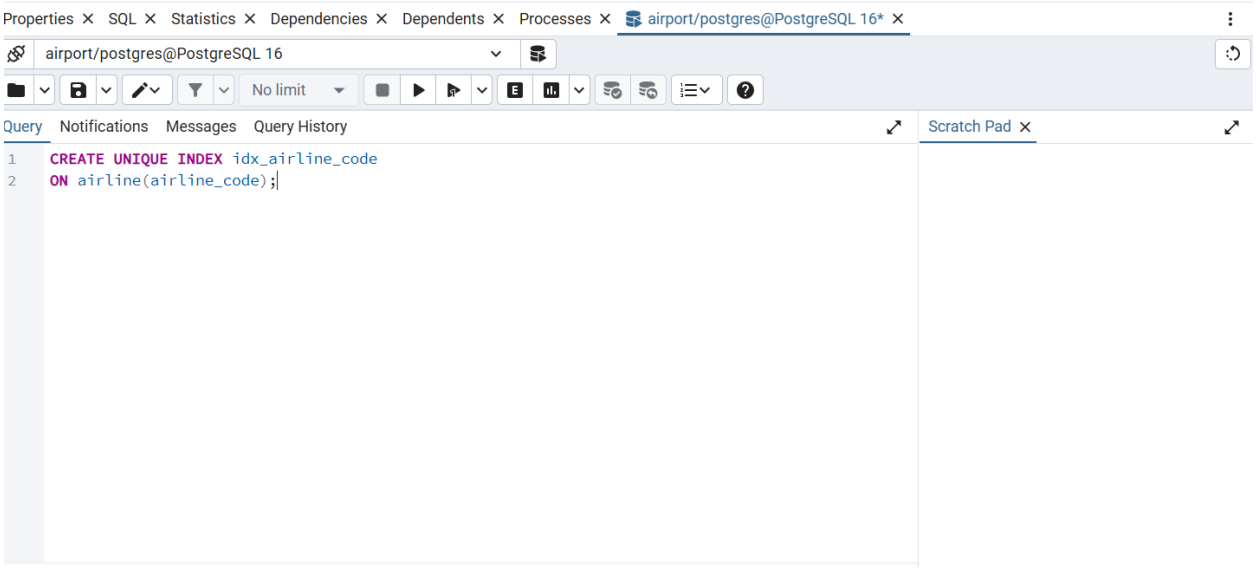
TASK 16

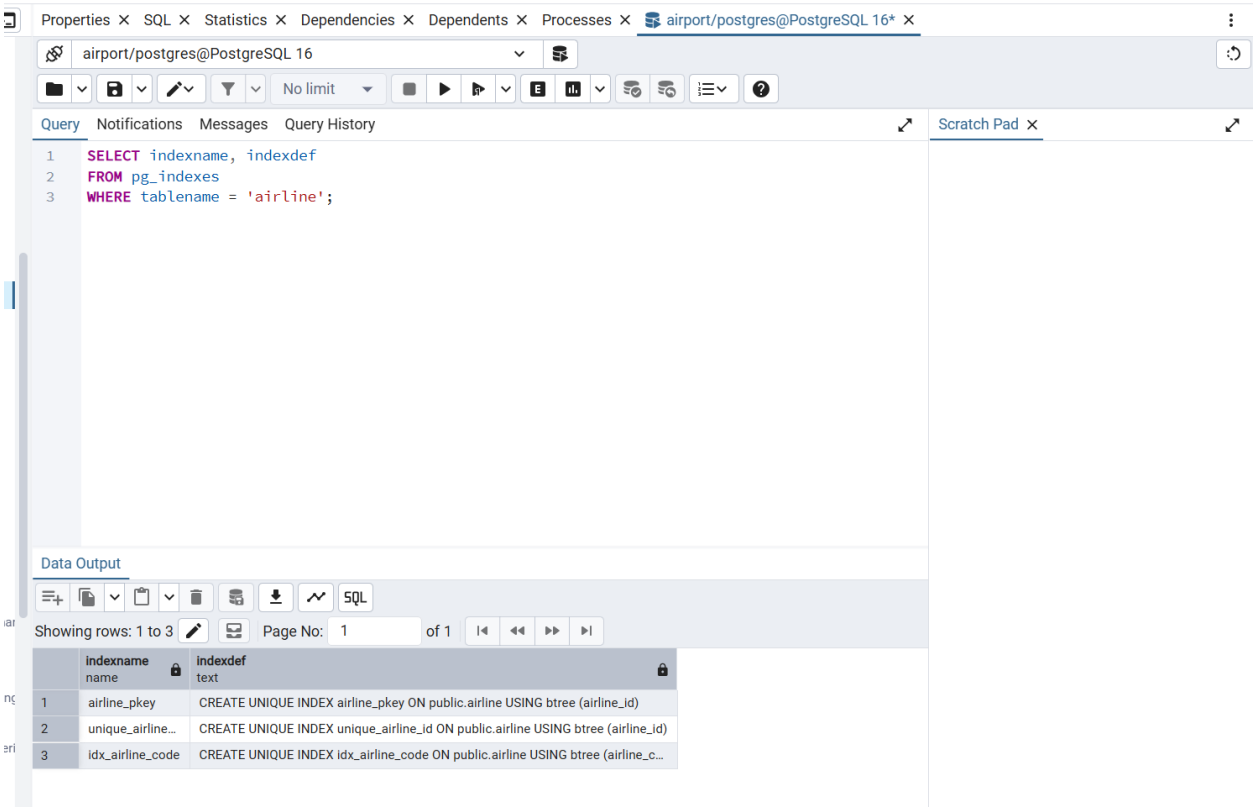

Properties
SQL
Statistics
Dependencies
Dependents
Processes
airport/postgres@PostgreSQL 16*
airport/postgres@PostgreSQL 16
No limit
Query
Notifications
Messages
Query History
Scratch Pad
1 CREATE INDEX idx_booking_cover
2 ON booking(passenger_id)
3 INCLUDE (price);
Data Output


Properties SQL Statistics Dependencies Dependents Processes airport/postgres@PostgreSQL 16*
airport/postgres@PostgreSQL 16
No limit
Query Notifications Messages Query History
Scratch Pad
1 SELECT price
2 FROM booking
3 WHERE passenger_id = 100;
Data Output
Showing rows: 1 to 3
Page No: 1 of 1
price numeric (7,2)
1 9082.32
2 6496.32
3 6142.49


Properties SQL Statistics Dependencies Dependents Processes airport/postgres@PostgreSQL 16*
airport/postgres@PostgreSQL 16
No limit
Query Notifications Messages Query History
Scratch Pad
1 EXPLAIN ANALYZE
2 SELECT price
3 FROM booking
4 WHERE passenger_id = 100;
Data Output
Showing rows: 1 to 5
Page No: 1 of 1
QUERY PLAN text
1 Index Only Scan using idx_booking_cover on booking (cost=0.27..8.33 rows=3 width=6) (actual time=0.028..0.030 rows=3 loo...
2 Index Cond: (passenger_id = 100)
3 Heap Fetches: 0
4 Planning Time: 0.143 ms
5 Execution Time: 0.051 ms

TASK 17


Properties
SQL
Statistics
Dependencies
Dependents
Processes
airport/postgres@PostgreSQL 16*
airport/postgres@PostgreSQL 16
No limit
Query
Notifications
Messages
Query History
Scratch Pad
1 CREATE UNIQUE INDEX idx_airline_code
2 ON airline(airline_code);


Properties
SQL
Statistics
Dependencies
Dependents
Processes
airport/postgres@PostgreSQL 16*
airport/postgres@PostgreSQL 16
No limit
Query
Notifications
Messages
Query History
Scratch Pad
1 SELECT indexname, indexdef
2 FROM pg_indexes
3 WHERE tablename = 'airline';
Data Output
SQL
Showing rows: 1 to 3
Page No: 1
of 1
indexname name
indexdef text
1 airline_pkey CREATE UNIQUE INDEX airline_pkey ON public.airline USING btree (airline_id)
2 unique_airline... CREATE UNIQUE INDEX unique_airline_id ON public.airline USING btree (airline_id)
3 idx_airline_code CREATE UNIQUE INDEX idx_airline_code ON public.airline USING btree (airline_c...