

Service layer — the architecture's load-bearing wall

The pattern

View = parse request + permission gate + call ONE service + redirect. Service = `config/<app>/services/...` — ALL multi-row writes, atomic, explicit. Model = data + tiny read helpers. NO signals (ADR-0001).

Single-writer discipline (ADR-0002) — and why CI enforces it

Truth table	Sole writer	CI gate
WorkerStageTask/Contribution	worker_task_service	[4/4]
AddaSettlement(+Item)	adda_settlement_service	[4b/4]
StageWorkAssignment	allocation_service + adda_settlement_service	[4c/4]
WorkerLedgerEntry	ledger_service	rule 5
*History	history_service	rule 5

Grep-based gates in `scripts/check.sh` — discipline as a failing build, not a code-review hope. Ek darwaza per table matlab: har guard (double-credit, recovery≤remaining, era checks) us darwaze pe baith ke SAB ko cover karta hai.


Chokepoint = convergence point

C-TM lock: manual report ho ya future barcode scan — production truth WSC mein SIRF worker_task_service se ghusta hai. Naya capture path? Usi function ko call karo. Bypass = settlement unverifiable numbers pe paise dega.

What breaks if a view writes directly

Atomicity gone (partial writes on error), guards skipped, history events missing, gates red. Isi liye rule 4 absolute hai.

Service connection map (kaun kisko call karta hai)

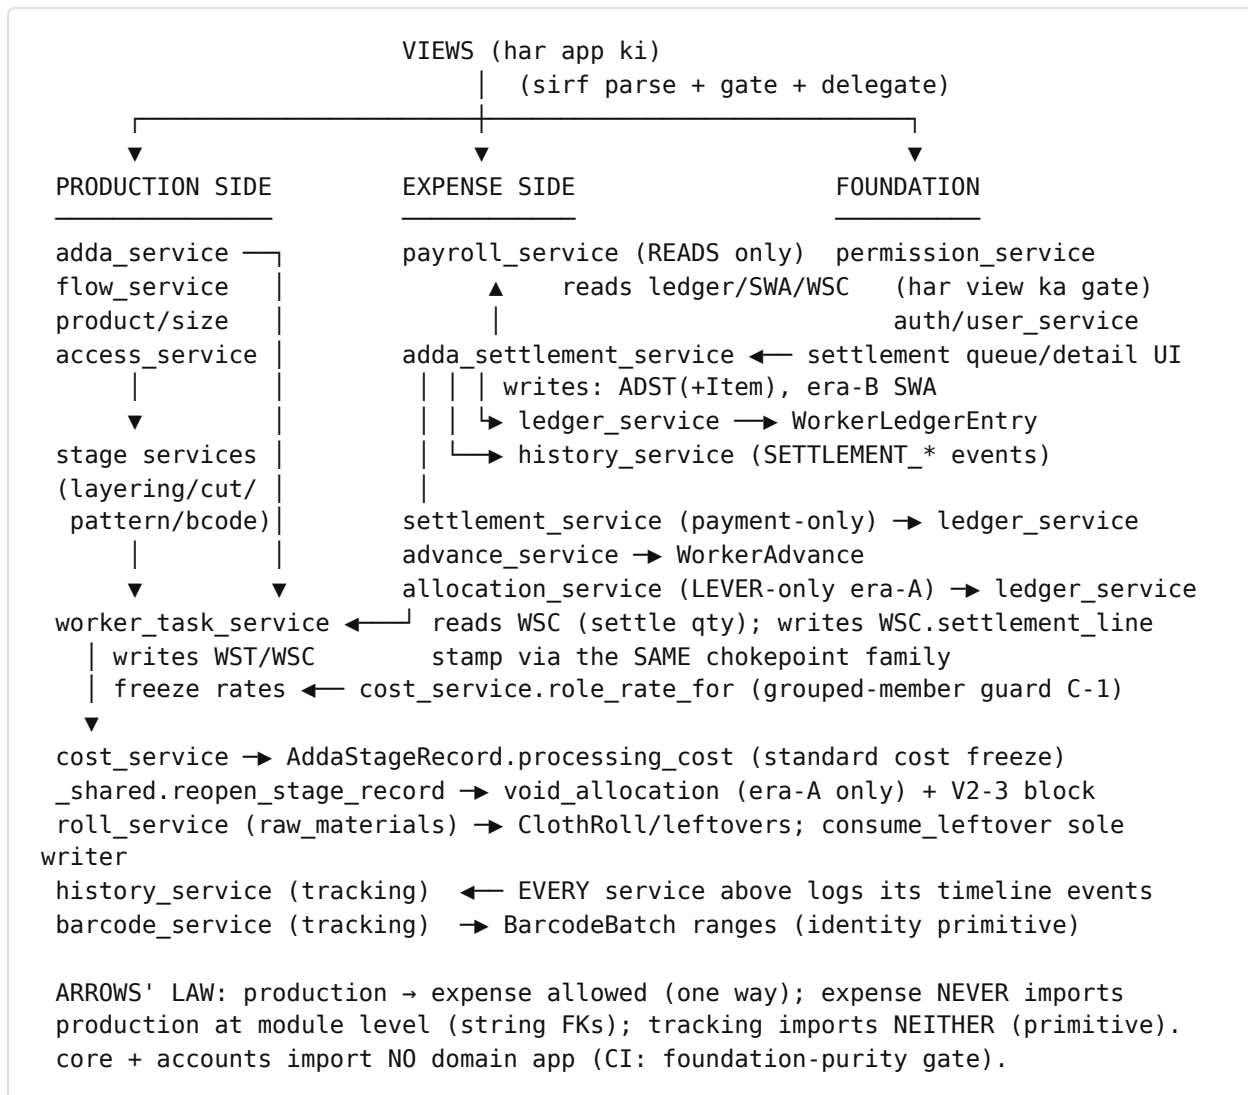

Padhne ka tareeka: koi bhi paisa-flow neeche ledger_service pe hi khatam hota hai; koi bhi kaam-flow worker_task_service se hi guzarta hai; har event ka zikr history_service karta hai. Yeh teen “funnels” hi poora system hai.