



INTRODUCTION TO

Linux: *A Beginner's* Guide

*A practical field guide to the
command line, files, and flow.*

LINUX 101


OPEN SOURCE / UNIX ROOTS / CLI

Umesh Kumbharkar

2026 EDITION

INTRODUCTION TO LINUX

Linux is a free, open-source operating system that originated as a project by Linus Torvalds in 1991. It is based on the foundations of UNIX, which was developed in the 1970s by Dennis Ritchie, who also created the C programming language. Linux was inspired by MINIX, an educational operating system developed by Andrew Tanenbaum for computer networking studies.

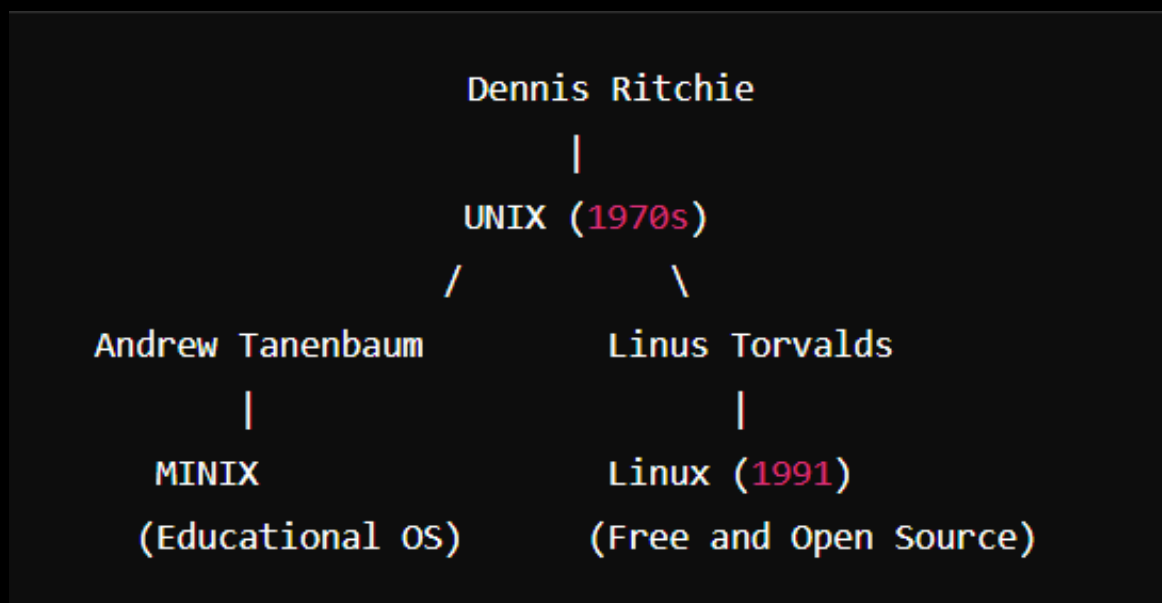

KEY FEATURES OF LINUX

1. **Multiple Versions:** Linux has a variety of distributions (also called "distros") catering to different needs. Popular examples include:
 - **Red Hat:** Popular for enterprise and servers.
 - **Fedora:** A community-driven and cutting-edge version of Red Hat.
 - **Ubuntu:** User-friendly and great for beginners.
 - **Debian:** Stable and secure for servers and desktops.
 - **Kali Linux:** Preferred by cybersecurity professionals.
 - **CentOS:** Enterprise-class, free version of Red Hat.
 - **Amazon OS:** Used in cloud environments like AWS.
2. **Free and Open Source:** Linux is freely available for anyone to use, modify, and distribute.
3. **Security:** Known for its secure architecture, Linux often relies on command-line interfaces (CLI) that give users and administrators granular control over the system.

2. mkdir

- **Full Form:** Make Directory
- **Use:** The mkdir command is used to create new directories (folders). It functions similarly to how you would create folders in a graphical file system, such as in Windows.
- **Example:** mkdir new_directory

This command will create a new folder named new_directory in the current working directory.

```
_/m/'  
[ec2-user@ip-172-31-38-46 ~]$ sudo su  
[root@ip-172-31-38-46 ec2-user]# mkdir Linux  
[root@ip-172-31-38-46 ec2-user]#
```

3. ls

- **Full Form:** List
- **Use:** Lists the contents of a directory.
- **Example:** ls

```
_/m/'  
[ec2-user@ip-172-31-38-46 ~]$ sudo su  
[root@ip-172-31-38-46 ec2-user]# mkdir Linux  
[root@ip-172-31-38-46 ec2-user]# ls  
Linux  
[root@ip-172-31-38-46 ec2-user]#
```

4. cat (concatenate)

- **Full Form:** Concatenate
- **Use:** Used for displaying content, combining files, and redirecting output.
 - cat >: Redirects the output to a file, creating the file.
 - cat >>: Make changes in the file without overwriting the previous content.
 - cat f1 f2 > F3: Concatenates multiple files (f1, f2) and writes the result to a third file (F3).

- **Example:**

cat > file.name (creates the file)

```
[ec2-user@ip-172-31-38-46 ~]$ sudo su
[root@ip-172-31-38-46 ec2-user]# mkdir Linux
[root@ip-172-31-38-46 ec2-user]# ls
Linux
[root@ip-172-31-38-46 ec2-user]# cat > f1
Welcome to Linux
[root@ip-172-31-38-46 ec2-user]# cat f1
Welcome to Linux
[root@ip-172-31-38-46 ec2-user]# ls
Linux f1
[root@ip-172-31-38-46 ec2-user]#
```

cat > f1 : This command creates a new file named f1. After running the command, you can immediately start typing text into the file. To finish and save the content, press Ctrl + D, which signals the end of input and closes the file.

cat f1 : this command enables you to see the contents of the file, the text stored in that file.

cat >> file.name

Concatenates multiple files (e.g., f1 and f2) and writes their combined content to a third file (f3).

```
[root@ip-172-31-38-46 ec2-user]# cat > f2
We are just learning some linux commands
[root@ip-172-31-38-46 ec2-user]# cat f2
We are just learning some linux commands
[root@ip-172-31-38-46 ec2-user]# cat >> f2
Some basic commands
[root@ip-172-31-38-46 ec2-user]# cat f2
We are just learning some linux commands
Some basic commands
[root@ip-172-31-38-46 ec2-user]#
```

5

cat f1 f2 > F3 (concatenates files f1 and f2, writes to F3)

```
[root@ip-172-31-38-46 ec2-user]# cat f1 f2 > f3
[root@ip-172-31-38-46 ec2-user]# cat f3
Welcome to Linux
We are just learning some linux commands
Some basic commands
[root@ip-172-31-38-46 ec2-user]#
```

5. stat

- **Full Form: Status**
- **Use:** The stat command shows the status of a file or directory. It provides detailed information such as file permissions, ownership, size, and timestamps related to the file.

```
[root@ip-172-31-38-46 ec2-user]# stat f1
  File: f1
  Size: 17          Blocks: 8          IO Block: 4096   regular file
Device: 10301h/66305d Inode: 8542058      Links: 1
Access: (0644/-rw-r--r--)  Uid: (  0/   root)   Gid: (  0/   root)
Context: unconfined_u:object_r:user_home_t:s0
Access: 2024-12-05 08:09:23.469920490 +0000
Modify: 2024-12-05 08:09:30.419926920 +0000
Change: 2024-12-05 08:09:30.419926920 +0000
 Birth: 2024-12-05 08:09:23.469920490 +0000
```

6. touch

- **Full Form: Touch**
- **Use:** Creates an empty file or updates the timestamp of an existing file.
 - touch .f4: Creates a hidden file (file names starting with a dot are hidden in Linux).
- **Example:**
touch file.name (creates an empty file)

```
[root@ip-172-31-38-46 ec2-user]# touch f4 f5
[root@ip-172-31-38-46 ec2-user]# ls
Linux f1 f2 f3 f4 f5
```

```
[root@ip-172-31-38-46 ec2-user]# cat f4
[root@ip-172-31-38-46 ec2-user]#
```

File is empty so nothing is being displayed

`touch .f4` (creates a hidden file)

```
[root@ip-172-31-38-46 ec2-user]# touch .f6
[root@ip-172-31-38-46 ec2-user]# ls
Linux f1 f2 f3 f4 f5
```

Hidden files are not displayed with regular files

`touch -a file.name` (changes the access time of the file created)

```
[root@ip-172-31-38-46 ec2-user]# stat f1
  File: f1
  Size: 17          Blocks: 8          IO Block: 4096   regular file
Device: 10301h/66305d  Inode: 8542058      Links: 1
Access: (0644/-rw-r--r--)  Uid: (  0/   root)  Gid: (  0/   root)
Context: unconfined_u:object_r:user_home_t:s0
Access: 2024-12-05 08:09:23.469920490 +0000
Modify: 2024-12-05 08:09:30.419926920 +0000
Change: 2024-12-05 08:09:30.419926920 +0000
 Birth: 2024-12-05 08:09:23.469920490 +0000
[root@ip-172-31-38-46 ec2-user]# touch -a f1
[root@ip-172-31-38-46 ec2-user]# stat f1
  File: f1
  Size: 17          Blocks: 8          IO Block: 4096   regular file
Device: 10301h/66305d  Inode: 8542058      Links: 1
Access: (0644/-rw-r--r--)  Uid: (  0/   root)  Gid: (  0/   root)
Context: unconfined_u:object_r:user_home_t:s0
Access: 2024-12-05 08:53:52.271061598 +0000
Modify: 2024-12-05 08:09:30.419926920 +0000
Change: 2024-12-05 08:53:52.271061598 +0000
 Birth: 2024-12-05 08:09:23.469920490 +0000
```

Here, first we saw the status of `f1` by using `stat f1` and then we changed the access time of the file by using `touch -a f1` and after that we again saw the status of `f1` using `stat f1`

7

`touch -m file.name` (changes the modify time of the file created)

```
[root@ip-172-31-38-46 ec2-user]# stat f1
  File: f1
  Size: 17          Blocks: 8          IO Block: 4096   regular file
Device: 10301h/66305d Inode: 8542058      Links: 1
Access: (0644/-rw-r--r--)  Uid: (   0/   root)   Gid: (   0/   root)
Context: unconfined_u:object_r:user_home_t:s0
Access: 2024-12-05 08:53:52.271061598 +0000
Modify: 2024-12-05 08:09:30.419926920 +0000
Change: 2024-12-05 08:53:52.271061598 +0000
 Birth: 2024-12-05 08:09:23.469920490 +0000
[root@ip-172-31-38-46 ec2-user]# touch -m f1
[root@ip-172-31-38-46 ec2-user]# stat f1
  File: f1
  Size: 17          Blocks: 8          IO Block: 4096   regular file
Device: 10301h/66305d Inode: 8542058      Links: 1
Access: (0644/-rw-r--r--)  Uid: (   0/   root)   Gid: (   0/   root)
Context: unconfined_u:object_r:user_home_t:s0
Access: 2024-12-05 08:53:52.271061598 +0000
Modify: 2024-12-05 09:08:16.771373945 +0000
Change: 2024-12-05 09:08:16.771373945 +0000
 Birth: 2024-12-05 08:09:23.469920490 +0000
```

Here, first we saw the status of `f1` by using `stat f1` and then we changed the modify time of the file by using `touch -m f1` and after that we again saw the status of `f1` using `stat f1`

7. `ls -a`

- **Full Form:** List (All)
- **Use:** Lists all files in the current directory, including hidden files (those starting with a dot, such as `.f6`). It even shows files that are normally hidden.
- **Example:**

`ls -a`

```
[root@ip-172-31-38-46 ec2-user]# ls -a
.  ..  .bash_logout  .bash_profile  .bashrc  .f6  .ssh  Linux  f1  f2  f3  f4  f5
[root@ip-172-31-38-46 ec2-user]#
```

This command will display all files, including hidden files like `.f6`.

8. Clear

- **Full Form:** Clear Screen
- **Use:** Clears the terminal screen.
- **Example:** clear

```
[ec2-user@ip-172-31-38-46 ~]$ sudo su
[root@ip-172-31-38-46 ec2-user]# mkdir Linux
[root@ip-172-31-38-46 ec2-user]# ls
Linux
[root@ip-172-31-38-46 ec2-user]# cat > f1
Welcome to Linux
[root@ip-172-31-38-46 ec2-user]# cat f1
Welcome to Linux
[root@ip-172-31-38-46 ec2-user]# ls
Linux f1
[root@ip-172-31-38-46 ec2-user]# cat > f2
We are just learning some linux commands
[root@ip-172-31-38-46 ec2-user]# cat f2
We are just learning some linux commands
[root@ip-172-31-38-46 ec2-user]# cat >> f2
Some basic commands
[root@ip-172-31-38-46 ec2-user]# cat f2
We are just learning some linux commands
Some basic commands
[root@ip-172-31-38-46 ec2-user]# cat f1 f2 > f3
[root@ip-172-31-38-46 ec2-user]# cat f3
Welcome to Linux
We are just learning some linux commands
Some basic commands
[root@ip-172-31-38-46 ec2-user]# touch f4 f5
[root@ip-172-31-38-46 ec2-user]# ls
Linux f1 f2 f3 f4 f5
[root@ip-172-31-38-46 ec2-user]# touch .f6
[root@ip-172-31-38-46 ec2-user]# ls
Linux f1 f2 f3 f4 f5
[root@ip-172-31-38-46 ec2-user]#
[root@ip-172-31-38-46 ec2-user]# cat f4
[root@ip-172-31-38-46 ec2-user]# ls -a
.  ..  .bash_logout  .bash_profile  .bashrc  .f6  .ssh  Linux  f1  f2  f3  f4  f5
[root@ip-172-31-38-46 ec2-user]# clear
```

```
[root@ip-172-31-38-46 ec2-user]#
```

This does not clear all your commands, just pushes them up so you can write new commands.

9. tac

- **Full Form:** Concatenate and Reverse
- **Use:** Displays the contents of a file in reverse order (lines from bottom to top).
- **Example:** `tac file.name`

```
[root@ip-172-31-38-46 ec2-user]# cat f2  
We are just learning some linux commands  
Some basic commands  
[root@ip-172-31-38-46 ec2-user]# tac f2  
Some basic commands  
We are just learning some linux commands  
[root@ip-172-31-38-46 ec2-user]#
```

10. rev

- **Full Form:** Reverse
- **Use:** Reverses the characters of each line in a file or input.
- **Example:** `rev file.name`

```
[root@ip-172-31-38-46 ec2-user]# cat f1  
Welcome to Linux  
[root@ip-172-31-38-46 ec2-user]# tac f1 | rev  
xuniL ot emocleW  
[root@ip-172-31-38-46 ec2-user]#
```

Looks just like a mirror image

11. ls -l

- **Full Form:** List (Long Format)
- **Use:** Lists files and directories in a detailed (long) format, showing file permissions, ownership, size, and modification date. Additionally, it distinguishes between files and directories by prefixing directories with `dr`, making it easier to identify which entries are directories and which are regular files.
- **Example:** `ls -l`
This command will list all files and directories in the current directory, displaying detailed information for each entry. Directories will be marked with `dr` at the beginning of the line, while regular files will not have this prefix.

```
[root@ip-172-31-38-46 ec2-user]# ls -l
total 12
drwxr-xr-x. 2 root root 6 Dec 5 08:02 Linux
-rw-r--r--. 1 root root 17 Dec 5 09:08 f1
-rw-r--r--. 1 root root 61 Dec 5 08:17 f2
-rw-r--r--. 1 root root 78 Dec 5 08:22 f3
-rw-r--r--. 1 root root 0 Dec 5 08:26 f4
-rw-r--r--. 1 root root 0 Dec 5 08:26 f5
```

12. rmdir

- **Full Form:** Remove Directory
- **Use:** Removes an empty directory.
- **Example:** `rmdir directory.name`

```
[root@ip-172-31-38-46 ec2-user]# mkdir AWS
[root@ip-172-31-38-46 ec2-user]# ls
AWS Linux f1 f2 f3 f4 f5
[root@ip-172-31-38-46 ec2-user]# rmdir AWS
[root@ip-172-31-38-46 ec2-user]# ls
Linux f1 f2 f3 f4 f5
```

Here, we created a new directory named **AWS** by mistake, so to remove it we used `rmdir AWS` which removed the directory.

Note: `rmdir` only removes directories which are empty i.e. they do not contain any files in it, it will not remove directories which have files present in it.

13. cd

- **Full Form:** Change Directory
- **Use:** The cd command is used to change the current working directory in the terminal. It allows you to navigate through the directory structure of your file system.
 - cd ..: This command moves the user one level up in the directory hierarchy (i.e., it navigates to the parent directory of the current directory).
 - cd (without arguments): Takes you directly to your home directory.
- **Example:**
 - cd /home/user/documents
This command will navigate to the document's directory inside /home/user/.

```
[root@ip-172-31-38-46 ec2-user]# mkdir Cloud
[root@ip-172-31-38-46 ec2-user]# cd Cloud
[root@ip-172-31-38-46 Cloud]# cat > Cloud1
Hello, welcome to Cloud
[root@ip-172-31-38-46 Cloud]# cat Cloud1
Hello, welcome to Cloud
[root@ip-172-31-38-46 Cloud]# ls
Cloud1
```

Here the directory was **ec2-user** by using **cd Cloud** we changed the directory from **ec2 user** to **Cloud** that means we went from **ec2 user folder** to **Cloud folder**

- cd ..
If you are in the /home/user/documents directory, this command will take you to /home/user/, the parent directory.

```
[root@ip-172-31-38-46 Cloud]# cat > Cloud1
Hello, welcome to Cloud
[root@ip-172-31-38-46 Cloud]# cat Cloud1
Hello, welcome to Cloud
[root@ip-172-31-38-46 Cloud]# ls
Cloud1
[root@ip-172-31-38-46 Cloud]# cd ..
[root@ip-172-31-38-46 ec2-user]# ls
```

Here the directory was **Cloud** by using **cd ..** we changed the directory from **Cloud** to **ec2 user** that means we went from **Cloud folder** to **ec2 user folder**

14. rm -rf

- **Full Form:** Remove (Recursive and Force)
- **Use:** Recursively removes a directory and its contents (files and subdirectories) without asking for confirmation. It can delete directories even if they contain files or other directories.
- **Example:**
rm -rf directory.name
This command will remove the directory.name directory and everything inside it, even if it contains files or subdirectories.

```
[root@ip-172-31-38-46 ec2-user]# mkdir Cloud
[root@ip-172-31-38-46 ec2-user]# cd Cloud
[root@ip-172-31-38-46 Cloud]# cat > Cloud1
Hello, welcome to Cloud
[root@ip-172-31-38-46 Cloud]# cat Cloud1
Hello, welcome to Cloud
[root@ip-172-31-38-46 Cloud]# ls
Cloud1
[root@ip-172-31-38-46 Cloud]# cd ..
[root@ip-172-31-38-46 ec2-user]# ls
Cloud  DevOps  File  Linux  f1  f2  f3  f4  f5
[root@ip-172-31-38-46 ec2-user]# rm -rf Cloud
[root@ip-172-31-38-46 ec2-user]# ls
DevOps  File  Linux  f1  f2  f3  f4  f5
```

First, we created a directory named **Cloud**. Then, to change into the directory, we used the **cd Cloud** command. Once inside the directory, we created a file named **Cloud1** and entered some content. After that, we wanted to go back to the previous directory, which was **ec2-user**, so we used the **cd ..** command. Once in the **ec2-user** directory, we used the **ls** command to list all the directories, where we could see the **Cloud** directory. To remove the **Cloud** directory along with its **files and content**, we used the **rm -rf Cloud** command, which **forcefully removed the directory and everything** inside it.

15. rm filename

- **Full Form:** Remove File
- **Use:** Removes a specified file.
- **Example:**
rm file.name (removes the file file.name)

```
[root@ip-172-31-38-46 ec2-user]# ls
DevOps Linux f1 f2 f3 f4 f5
[root@ip-172-31-38-46 ec2-user]# rm f5
rm: remove regular empty file 'f5'? yes
[root@ip-172-31-38-46 ec2-user]# ls
DevOps Linux f1 f2 f3 f4
```

Here we removed an empty file, we can also remove a file that has content in it using the same command.

16. top

- **Full Form:** Task Manager (Top)
- **Use:** Displays a dynamic real-time view of system processes and resource usage.
- **Example:** top

MiB Mem : 904.9 total, 487.6 free, 188.3 used, 229.0 buff/cache											
MiB Swap: 0.0 total, 0.0 free, 0.0 used. 586.5 avail Mem											
PID	USER	PR	NI	VIRT	RES	SHR	S	%CPU	%MEM	TIME+	COMMAND
1	root	20	0	171256	17060	10584	S	0.0	1.8	0:01.34	systemd
2	root	20	0	0	0	0	S	0.0	0.0	0:00.00	kthreadd
3	root	0	-20	0	0	0	I	0.0	0.0	0:00.00	rcu_gp
4	root	0	-20	0	0	0	I	0.0	0.0	0:00.00	rcu_par_gp
5	root	0	-20	0	0	0	I	0.0	0.0	0:00.00	slub_flushwq
6	root	0	-20	0	0	0	I	0.0	0.0	0:00.00	netns
8	root	0	-20	0	0	0	I	0.0	0.0	0:00.00	kworker/0:0H-events_highpri
10	root	0	-20	0	0	0	I	0.0	0.0	0:00.00	mm_percpu_wq
11	root	20	0	0	0	0	I	0.0	0.0	0:00.00	rcu_tasks_kthread
12	root	20	0	0	0	0	I	0.0	0.0	0:00.00	rcu_tasks_rude_kthread
13	root	20	0	0	0	0	I	0.0	0.0	0:00.00	rcu_tasks_trace_kthread
14	root	20	0	0	0	0	S	0.0	0.0	0:00.09	ksoftirqd/0
15	root	20	0	0	0	0	I	0.0	0.0	0:00.15	rcu_preempt
16	root	rt	0	0	0	0	S	0.0	0.0	0:00.03	migration/0
18	root	20	0	0	0	0	S	0.0	0.0	0:00.00	cpuhp/0
19	root	20	0	0	0	0	S	0.0	0.0	0:00.00	cpuhp/1
20	root	rt	0	0	0	0	S	0.0	0.0	0:00.07	migration/1
21	root	20	0	0	0	0	S	0.0	0.0	0:00.09	ksoftirqd/1
23	root	0	-20	0	0	0	I	0.0	0.0	0:00.00	kworker/1:0H-events_highpri
26	root	20	0	0	0	0	S	0.0	0.0	0:00.00	kdevtmpfs
27	root	0	-20	0	0	0	I	0.0	0.0	0:00.00	inet_frag_wq

- **Exit Command:** To exit the top command, press q.

```
[root@ip-172-31-38-46 ec2-user]#
```

17. pwd

- **Full Form:** Print Working Directory
- **Use:** Displays the current working directory (path).
- **Example:** pwd

```
[root@ip-172-31-38-46 ec2-user]# pwd  
/home/ec2-user  
[root@ip-172-31-38-46 ec2-user]#
```

18. vi

- **Full Form:** Visual Editor

Use: vi is a powerful text editor in the terminal, used to create or modify text files. It operates in different modes:

- **Normal mode:** This is the default mode where you can move the cursor, delete text, copy, and paste.
- **Insert mode:** This mode allows you to insert and edit text. You can enter this mode by pressing i (for insert) in normal mode.
- **Command mode:** This mode allows you to execute commands such as saving, quitting, and searching. You can switch to command mode by pressing Esc from insert mode.
- **Exit command:** To exit the vi editor, press Shift + :, followed by q! to quit without saving, or wq to save and quit.

- **Example:** To start editing a file,

run: vi file.name


```
[root@ip-172-31-38-46 ec2-user]# vi f4
```


19. nano

- **Full Form:** Nano Text Editor
- **Use:** nano is a user-friendly, command-line text editor that allows you to create and edit text files directly in the terminal. It is especially useful for beginners due to its intuitive interface and easy-to-follow commands.
 - To open or create a file in nano, simply type `nano file.name` and press Enter.
 - Once inside the editor, you can write and edit content as needed.
 - To exit the editor, press `Ctrl + X`. If you've made changes, it will ask if you want to save the changes.
 - Press `Shift + Y` to confirm saving the changes, and then press Enter to finalize and return to the command line.
 - To view the content you've written, use the `cat file.name` command.
- **Example:**
 - To open or create a file, run: `nano file.name`


```
[root@ip-172-31-38-46 ec2-user]# nano f4
```

- Write your desired content inside the file.

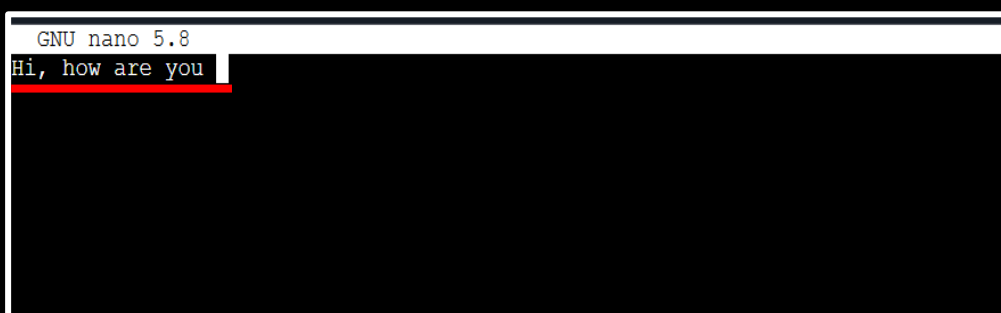

```
GNU nano 5.8
Hi, how are you
```

- When you're finished, press `Ctrl + X` to exit.

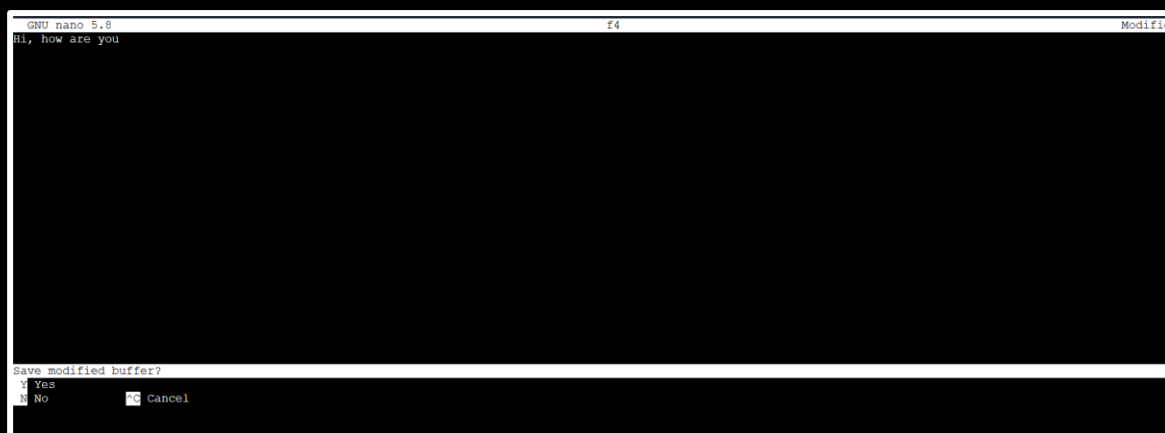

```
GNU nano 5.8 f4
Hi, how are you

Save modified buffer?
Y Yes
N No  Ctrl+C Cancel
```

- If prompted to save, press Shift + Y to confirm, then press Enter to finalize.

```
[root@ip-172-31-38-46 ec2-user]# nano f4  
[root@ip-172-31-38-46 ec2-user]#
```

- To view the content of the file, run: cat file.name

```
[root@ip-172-31-38-46 ec2-user]# cat f4  
Hi, how are you
```

20. history

- **Full Form:** History
- **Use:** Displays a list of previously executed commands in the terminal. This allows users to review or reuse commands that have been run earlier.
 - To clear the command history, use `history -c`, which removes all previously recorded commands from the session's history.
- **Example:** `history`
This command will display the history of commands entered in the current terminal session.

```
[root@ip-172-31-38-46 ec2-user]# history
 1  mkdir Linux
 2  ls
 3  cat > f1
 4  cat f1
 5  ls
 6  cat > f2
 7  cat f2
 8  cat >> f2
 9  cat f2
10  cat f1 f2 > f3
11  cat f3
12  touch f4 f5
13  ls
14  touch .f6
15  ls
16  cat f4
17  ls -a
18  clear
19  cat f2
20  tac f2
21  cat f1
22  tac f1 |rev
23  stat f1
24  touch -a f1
```

```
25 stat f1
26 stat -a
27 stat -a f1
28 stat f1
29 touch -m f1
30 stat f1
31 ls -l
32 mkdir AWS
33 ls
34 rmdir AWS
35 ls
36 mkdir DevOps
37 ls
38 cat > File
39 cat File
40 rm -rf DevOps
41 ls
42 cat File
43 rm -r DevOps
44 mkdir DevOps
45 cd DevOps
46 cat > DevOpsfile
47 cat DevOpsfile
48 ls
49 rm -rf DevOps
50 ls
51 cd..
52 cd ..
53 mkdir Cloud
54 cd Cloud
55 cat > Cloud1
56 cat Cloud1
57 ls
58 cd ..
```

```
43  rm -r DevOps
44  mkdir DevOps
45  cd DevOps
46  cat > DevOpsfile
47  cat DevOpsfile
48  ls
49  rm -rf DevOps
50  ls
51  cd..
52  cd ..
53  mkdir Cloud
54  cd Cloud
55  cat > Cloud1
56  cat Cloud1
57  ls
58  cd ..
59  ls
60  rm -rf Cloud
61  ls
62  rm File
63  ls
64  ls
65  cat f5
66  ls
67  rm f5
68  ls
69  top
70  pwd
71  vi
72  vi
73  vi f4
74  nano f4
75  cat f4
76  history
[root@ip-172-31-38-46 ec2-user]#
```

21

history -c

This will clear the command history, effectively removing all previously executed commands from the history list.

```
[root@ip-172-31-38-46 ec2-user]# history -c
[root@ip-172-31-38-46 ec2-user]# history
  1  history
[root@ip-172-31-38-46 ec2-user]#
```