


# Java Annotations

## What is Annotation?

- It is kind of adding **META DATA** to the java code.
- Means, its usage is **OPTIONAL**.
- We can use this meta data information at **runtime** and can add certain logic in our code if wanted.
- How to Read Meta data information? Using **Reflection** as discussed in previous video.
- Annotations can be applied at anywhere like Classes, Methods, Interface, fields, parameters etc.

## Example:

```
public interface Bird {  
    public boolean fly();  
}  
  
Annotation (denoted using @)  
↓  
public class Eagle implements Bird{  
    → @Override  
    public boolean fly() {  
        return true;  
    }  
}
```

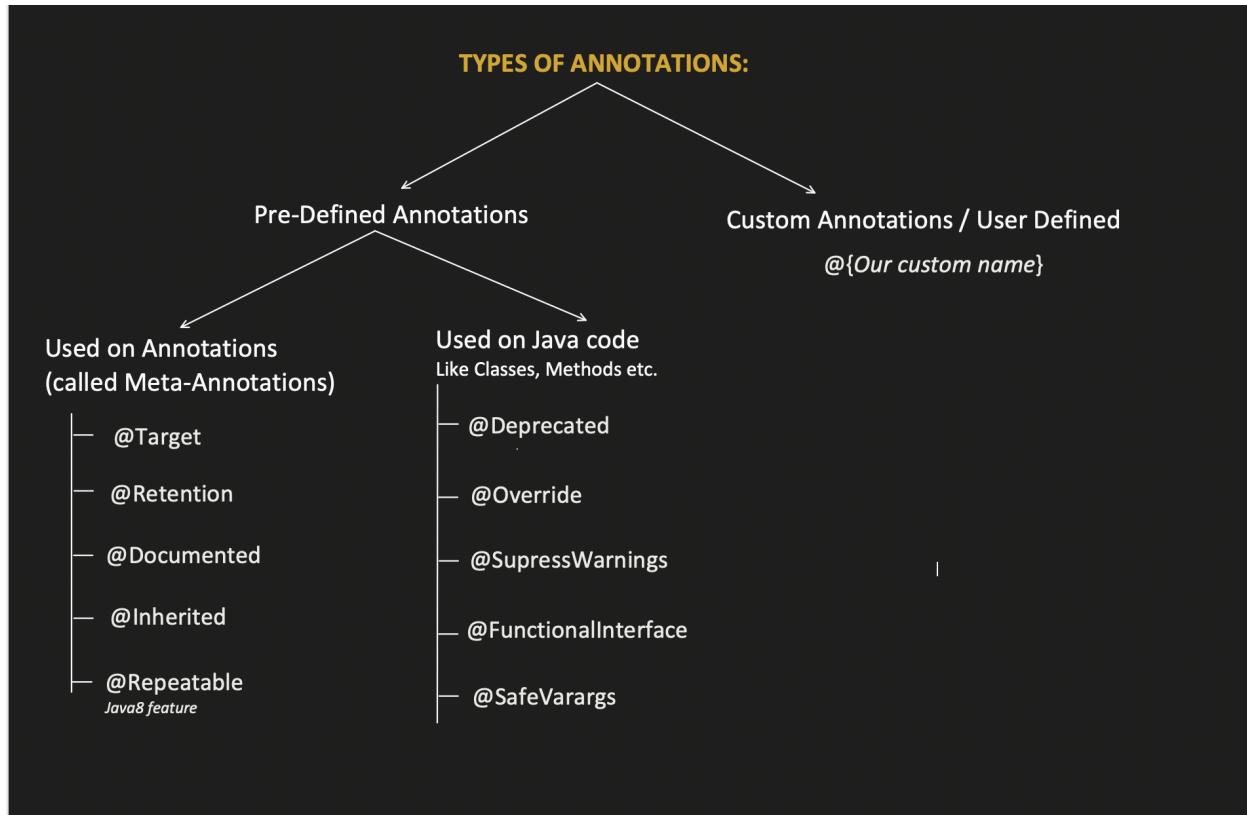


**Annotations used on Java Code:**

-----

**@Deprecated:**


- Usage of Deprecated Class or Method or fields, shows you compile time **WARNING**.
- Deprecation means, no further improvement is happening on this and use new alternative method or field instead.
- Can be used over: **Constructor, Field, Local Variable, Method, Package, Parameter, Type(class, interface, enum)**



```

public class Mobile {
    @Deprecated
    public void dummyMethod() {
        //do something
    }
}


```

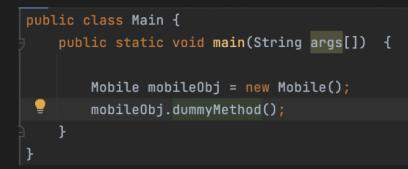

```

public class Main {
    public static void main(String args[]) {
        Mobile mobileObj = new Mobile();
        mobileObj.dummyMethod();
    }
}

```

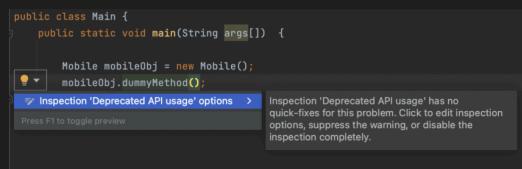

```

public class Main {
    public static void main(String args[]) {
        Mobile mobileObj = new Mobile();
        mobileObj.dummyMethod();
    }
}

Inspection 'Deprecated API usage' options >
Press F1 to toggle preview

```

Inspection 'Deprecated API usage' has no quick-fixes for this problem. Click to edit inspection options, suppress the warning, or disable the inspection completely.

**@Override:**

- During Compile time, it will check that the method should be Overridden.
- And throws compile time error, if it do not match with the parent method.
- Can be used over: **METHODS**.

```
public interface Bird {  
    public boolean fly();  
}  
  
↓  
  
public class Eagle implements Bird{  
    @Override  
    public boolean fly1() {  
        return true;  
    }  
}
```

**@SuppressWarnings:**

- It will tell compiler to **IGNORE** any compile time **WARNING**.
- Use it safely, could led to **Run time exception** if, any valid warning is IGNORED
- Can be used over: **Field, Method, Parameter, Constructor, Local Variable, Type** (Class or interface or enum)

```
public class Mobile {  
    @Deprecated  
    public void dummyMethod(){  
        //do something  
    }  
}
```

```
public class Main {  
    public static void main(String args[]){  
    }  
    public void unusedMethod(){  
    }  
}
```

```
public class Main {  
    public static void main(String args[]){  
        Mobile mobileObj = new Mobile();  
        mobileObj.dummyMethod();  
    }  
}
```

```
@SuppressWarnings("unused")  
public class Main {  
    public static void main(String args[]){  
    }  
    public void unusedMethod(){  
    }  
}
```

```
public class Main {  
    @SuppressWarnings("deprecation")  
    public static void main(String args[]){  
        Mobile mobileObj = new Mobile();  
        mobileObj.dummyMethod();  
    }  
}
```

OR

```
@SuppressWarnings("deprecation")  
public class Main {  
    public static void main(String args[]){  
        Mobile mobileObj = new Mobile();  
        mobileObj.dummyMethod();  
    }  
}
```

OR

```
public class Main {  
    @SuppressWarnings("all")  
    public static void main(String args[]){  
        Mobile mobileObj = new Mobile();  
        mobileObj.dummyMethod();  
    }  
}
```

**@FunctionalInterface:**

- *Restrict Interface to have only 1 abstract method.*
- Throws Compilation error, if more than 1 abstract method found.
- Can be used over: **Type** (Class or interface or enum)

```
@FunctionalInterface
public interface Bird {
    public boolean fly();
    public void eat();
}
```

**@SafeVarargs:**

- Used to suppress "Heap pollution warning"
- Used over methods and Constructors which has **Variable Arguments as parameter**.
- Method should be either static or final (i.e. methods which can not be overridden)
- In **Java9**, we can also use it on private methods too.

#### What is Heap Pollution?

Object of One Type (Example String), storing the reference of another type Object (Example Integer)

```
public class Log {
    public static void printLogValues(List<Integer>... logNumbersList){
        Object[] objectList = logNumbersList;
        List<String> stringValuesList = new ArrayList<>();
        stringValuesList.add("Hello");
        objectList[0] = stringValuesList;
    }
}
```

```
public class Log {
    public static void printLogValues(List<Integer>... logNumbersList){
        Object[] objectList = logNumbersList;
        List<String> stringValuesList = new ArrayList<>();
        stringValuesList.add("Hello");
        objectList[0] = stringValuesList;
    }
}
```

Possible heap pollution from parameterized vararg type

```
public class Log {
    @SafeVarargs
    public static void printLogValues(List<Integer>... logNumbersList){
        Object[] objectList = logNumbersList;
        List<String> stringValuesList = new ArrayList<>();
        stringValuesList.add("Hello");
        objectList[0] = stringValuesList;
    }
}
```

#### Annotations used over Another Annotations (META-ANNOTATIONS):

##### @Target:

- This meta-annotation will restrict, where to use the annotation.  
Either at method or Constructor or fields etc..

```
@Target(ElementType.METHOD)
public @interface Override {}

@Target({ElementType.CONSTRUCTOR, ElementType.METHOD})
public @interface SafeVarargs {}
```

##### Element Type:

TYPE  
FIELD,  
METHOD,  
PARAMETER,  
CONSTRUCTOR,  
LOCAL\_VARIABLE,  
ANNOTATION\_TYPE,  
PACKAGE,  
TYPE\_PARAMETER ( allow you to apply on generic types <T> )  
TYPE\_USE (Java 8 feature, allow you to use annotation at all places where Type you can declare (like List< @annotation String>

##### @Retention:

- This meta-annotation tells, how Annotation will be stored in java.

**RetentionPolicy.SOURCE:** Annotations will be discarded by the compiler itself and it will not be recorded in .class file

**RetentionPolicy.CLASS:** Annotations will be recorded in .class file but will be ignore by JVM at run time.

**RetentionPolicy.RUNTIME:** Annotations will be recorded in .class file + available during run time.  
Usage of reflection can be done.

**Example:**

```
@Target(ElementType.METHOD)
@Retention(RetentionPolicy.SOURCE)
public @Interface Override {
}
```

→

```
public class Eagle implements Bird {
    public Eagle() {
    }

    @Override
    public void fly() {
        return;
    }
}
```

**Example:**

```
@Target(ElementType.TYPE)
@Retention(RetentionPolicy.RUNTIME)
public @Interface MyCustomAnnotationWithInherited {
}
```

→

```
public class Eagle implements Bird {
    public Eagle() {
    }

    @MyCustomAnnotationWithInherited
    public void fly() {
    }
}
```

**Example:**

```
@Target(ElementType.TYPE)
public @Interface MyCustomAnnotationWithInherited {
}
```

→

```
@MyCustomAnnotationWithInherited
public class TestClass {
}
```

**Output:**

```
@MyCustomAnnotationWithInherited()
```

**Output:**

```
Process Finished with exit code 0
```

**Output:**

```
null
```

**Output:**

```
Process finished with exit code 0
```

**@Documented:**

- By default, Annotations are ignored when Java Documentation is generated.
- With this meta-annotation even Annotations will come in Java Docs.

**NOT DOCUMENTED:**

```
@Target(ElementType.METHOD)
@Retention(RetentionPolicy.SOURCE)
public @Interface Override {
}
```

→

```
public class Eagle implements Bird{
    @Override
    public void fly() {
        return;
    }
}
```

**Class Eagle**

java.lang.Object  
Eagle

All Implemented Interfaces:  
Bird

**Constructor Summary**

**Eagle()**

**Method Summary**

All Methods	Instance Methods	Concrete Methods
Modifier and Type		Method and Description
void		<code>fly()</code>

Methods inherited from class java.lang.Object

`clone(), equals(), finalize(), getClass(), hashCode(), notify(), notifyAll(), toString(), wait(), wait(), wait()`

**Constructor Detail**

**Eagle**

`public Eagle()`

**Method Detail**

**fly**

`public void fly()`

Specified by:  
`fly` in interface `Bird`

```

@Documented
@Retention(RetentionPolicy.RUNTIME)
@Target(ElementType.CONSTRUCTOR, ElementType.METHOD)
public @interface SafeVarargs {}
```

**Class Log**  
java.lang.Object  
Log

**Constructor Summary**

**Constructors**  
Constructor and Description  
Log()

**Method Summary**

All Methods	Static Methods	Concrete Methods
Modifier and Type	Method and Description	
static void	printLogValues(java.util.List<java.lang.Integer>... logNumbersList)	

**Methods inherited from class java.lang.Object**

clone, equals, finalize, getClass, hashCode, notify, notifyAll, toString, wait, wait, wait

**Constructor Detail**

**Log**  
public Log()

**Method Detail**

**printLogValues**  
#SafeVarargs  
public static void printLogValues(java.util.List<java.lang.Integer>... logNumbersList)

**@Inherited:**

- By default, Annotations applied on parent class are not available to child classes.
- But it is after this meta-annotation.
- This Meta-annotation has no effect, if annotation is used other than a class.

```

@Inherited
@Target(ElementType.TYPE)
@Retention(RetentionPolicy.RUNTIME)
public @interface MyCustomAnnotationWithInherited {}
```

```

@MyCustomAnnotationWithInherited
public class ParentClass {}
```

```

@Target(ElementType.TYPE)
@Retention(RetentionPolicy.RUNTIME)
public @interface MyCustomAnnotationWithInherited {}
```

```

@MyCustomAnnotationWithInherited
public class ParentClass {}
```

```

public class ChildClass extends ParentClass{}
```

```

public class Main {
    public static void main(String[] args) {
        System.out.println(new ChildClass().getClass().getAnnotation(MyCustomAnnotationWithInherited.class));
    }
}
```

```

public class ChildClass extends ParentClass{}
```

```

public class Main {
    public static void main(String[] args) {
        System.out.println(new ChildClass().getClass().getAnnotation(MyCustomAnnotationWithInherited.class));
    }
}
```

**Output:**

```

@MyCustomAnnotationWithInherited()
Process finished with exit code 0
```

**Output:**

```

null
Process finished with exit code 0
```

**@Repeatable:**

- Allow us to use the same annotation more than 1 at same place.

We can not do this before JAVA8:

```

@Deprecated
@Deprecated
public class Eagle{
    public void fly() {
    }
}

```

```

@Target(ElementType.TYPE)
@Retention(RetentionPolicy.RUNTIME)
public @interface Category {
    String name();
}

```

```

@Category(name = "Bird")
@Category(name = "LivingThing")
public class Eagle{
    public void fly() {
    }
}

```

We need to use **@Repeatable Meta-annotation**

```

@Repeatable(Categories.class)
@interface Category {
    String name();
}

```

```

@Retention(RetentionPolicy.RUNTIME)
@interface Categories {
    Category[] value();
}

```

```

@Category(name = "Bird")
@Category(name = "LivingThing")
@Category(name = "carnivorous")
public class Eagle{
    public void fly() {
    }
}

```

```
public class Main {  
    public static void main(String[] args) {  
        Category[] categoryAnnotationArray = new Eagle().getClass().getAnnotationsByType(Category.class);  
        for(Category annotation: categoryAnnotationArray){  
            System.out.println(annotation.name());  
        }  
    }  
}
```

**Output:**

```
Bird  
LivingThing  
carnivorous  
  
Process finished with exit code 0
```

#### User Defined or Custom Annotations:

---

- We can create our own ANNOTATION using keyword "*@interface*"

#### Creating an Annotation with empty body:

```
public @interface MyCustomAnnotation {  
}
```

```
@MyCustomAnnotation  
public class Eagle{  
    public void fly() {  
    }  
}
```

#### **Creating an Annotation with method (its more like a field):**

- No parameter, no body.
- Return type is restricted to Primitive, Class, String, enums, annotations and array of these types.

```
public @interface MyCustomAnnotation {  
  
    String name();  
}
```

```
@MyCustomAnnotation(name = "testing")  
public class Eagle{  
    public void fly() {  
    }  
}
```

#### **Creating an Annotation with an element with Default values:**

- Default value can not be null

```
public @interface MyCustomAnnotation {  
  
    String name() default "hello";  
}
```

```
@MyCustomAnnotation  
public class Eagle{  
    public void fly() {  
    }  
}
```