The first op-opcode: the operator that moves the whole word, and is itself unmoved

ROTAT — every node moves, one thing does not

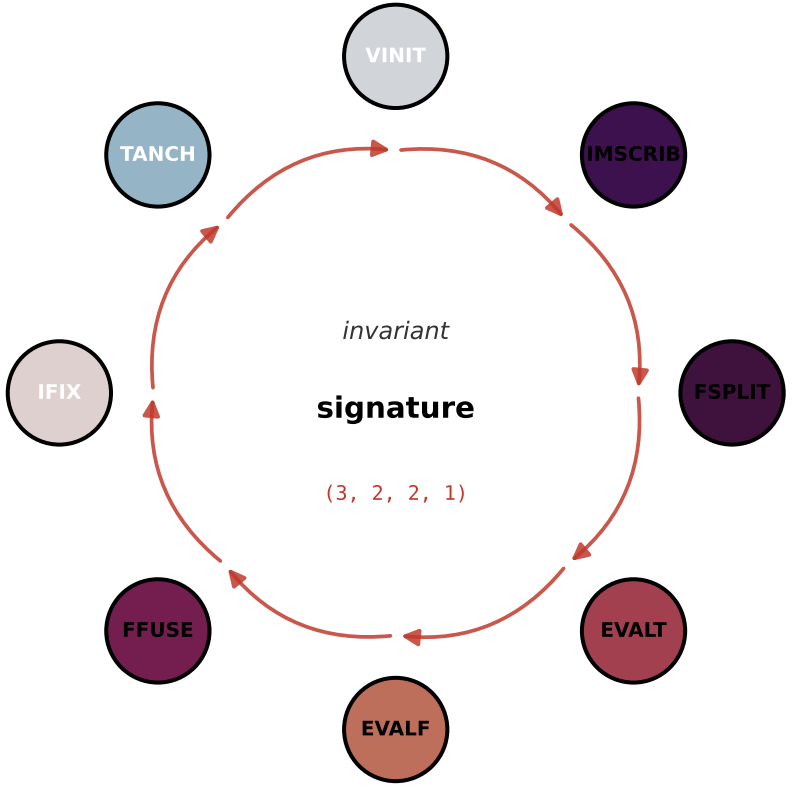

the multiset ROTAT turns everything around, and never itself touches

the ROTAT orbit — 8 rotations, one fingerprint

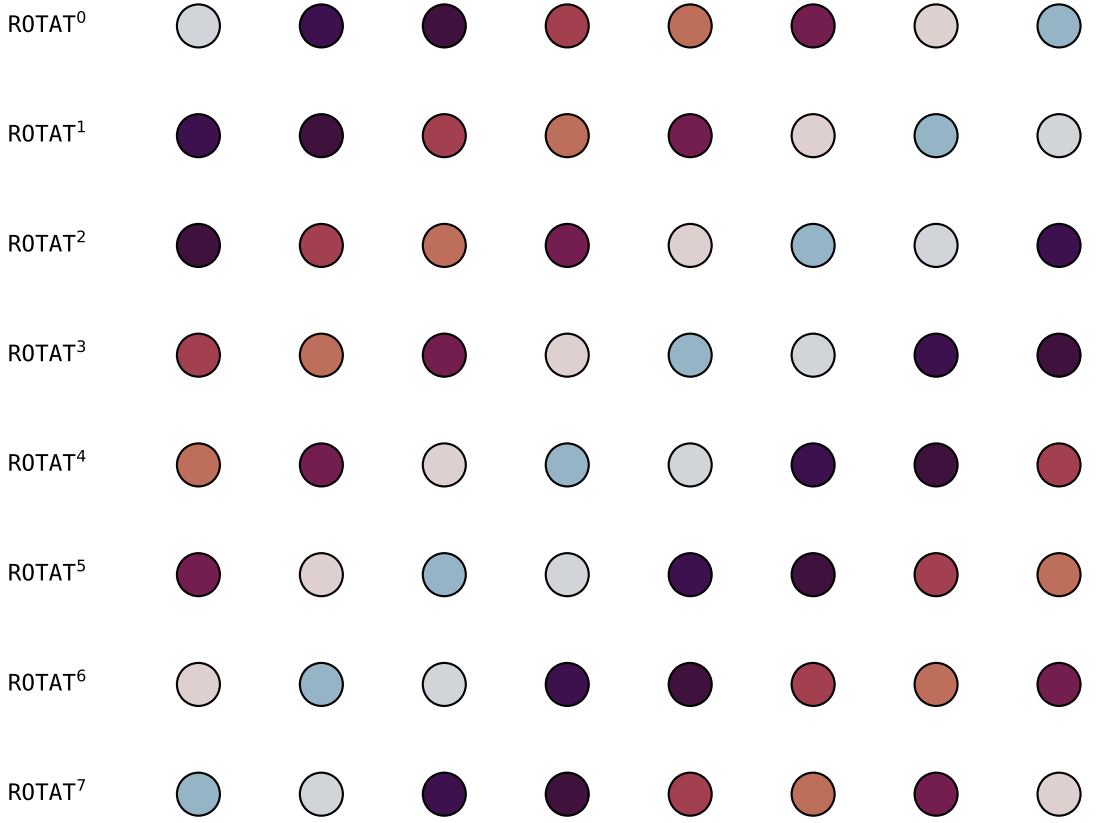

all share signature ⇒ same class; ROTAT^8 = identity