



Pipes



K-Fiber Pipe PP-R SDR 17

„K-Fiber Pipe PP-R“ SDR 17 — S 8 (20° C/1,0 MPa — 60° C/0,6 MPa), length 4 meter

Code	D	DN	Di	S min.	Pack.	Weight (kg/m)	Water capacity (l/m)
AQ117PF90	90	65	79,20	5,4	8	1,46	4,93
AQ117PF110	110	80	96,80	6,6	4	2,16	7,36
AQ117PF125	125	100	110,20	7,4	4	2,77	9,54
AQ117PF160	160	125	141,00	9,5	4	4,52	15,61
AQ117PF200	200	160	176,20	11,9	4	7,05	24,38

AQ117PF250	250	200	220,40	14,8	4	10,90	38,15
AQ117PF315	315	250	277,60	18,7	4	17,26	60,52
AQ117PF355	355	300	312,80	21,1	4	21,83	76,85
AQ117PF400	400	-	352,60	23,7	4	27,61	97,65
AQ117PF450	450	400	396,60	26,7	4	34,16	123,54
AQ117PF500	500	450	440,60	29,7	4	42,07	152,47
AQ117PF560	560	-	493,60	33,2	4	52,51	191,36
AQ117PF630	630	500	555,20	37,4	4	66,34	242,10

ORDER

Another categories




PIPES







TRANSITION FITTINGS

certification

We are ISO certified



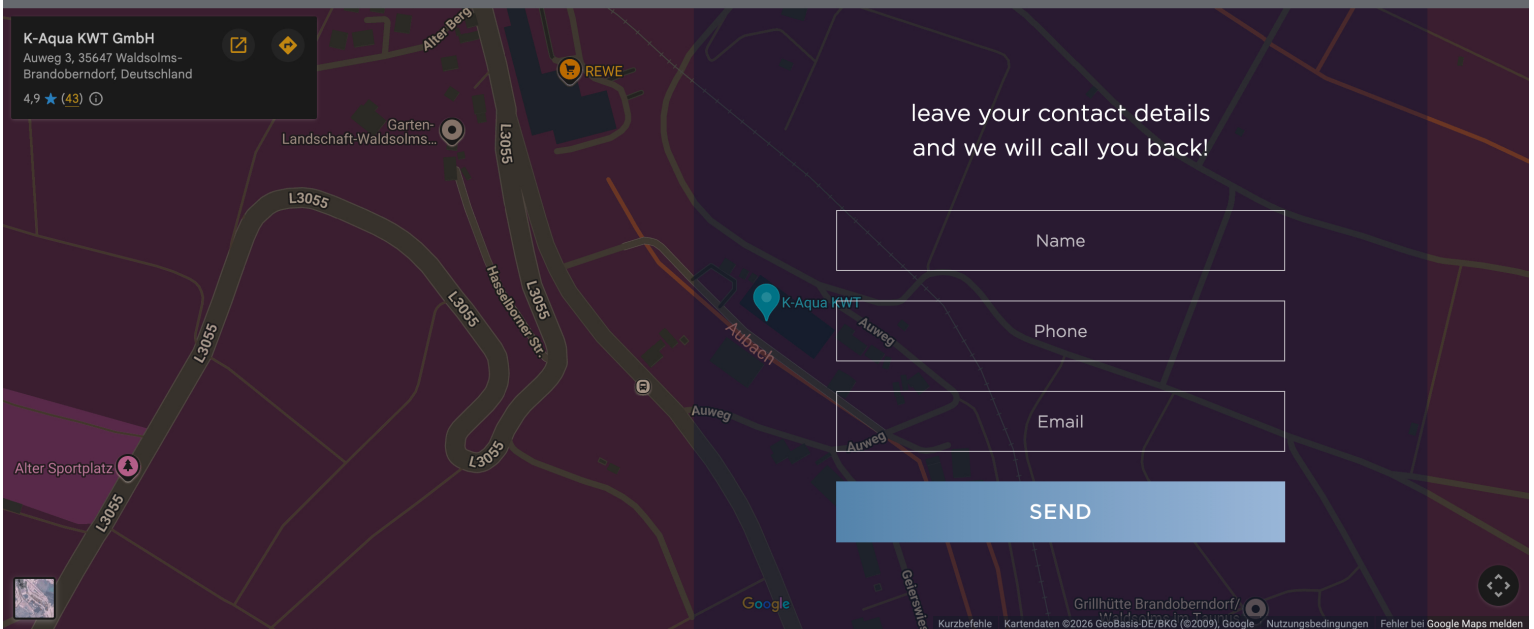

Privacy policy

🕒 Open: Working days 07:00 - 16:00