

Affiliate Lead API

Base URL: `https://r2r.theclaimsystem.co.uk/api/v1`

Overview

This API performs identity verification and credit file lookup for affiliate-submitted leads. It supports two flows:

1. **Direct verification** — identity is verified immediately and a funding stream is returned.
2. **OTP challenge** — verification triggers a one-time passcode challenge that must be resolved via a second request.

All requests and responses use `application/json`.

Endpoints

1. Submit Lead for Verification

```
POST /affiliate/{affiliate_id}
```

Verifies a lead's identity against credit bureau(s). On success, the lead is created in the system and a funding stream is returned. If the bureau requires additional verification, an OTP challenge is issued.

Path Parameters

Parameter	Type	Description
<code>affiliate_id</code>	string (UUID)	The unique slug identifying the affiliate endpoint.

Request Body

Field	Type	Required	Description
first_name	string	Yes	Lead's first name.
last_name	string	Yes	Lead's last name.
email	string	Yes	Valid email address.
phone	string	Yes	Phone number. Non-numeric characters are stripped before submission.
date_of_birth	string	Yes	Date of birth in YYYY-MM-DD format.
title	string	No	Salutation (e.g. Mr, Mrs, Ms, Dr). Defaults to a system fallback if not matched.
addresses	array	Yes	Array of address objects. The first entry is used as the current address. See Address Object .
signature	string	Yes	Base64-encoded image data URI of the lead's signature (e.g. data:image/png;base64,...).
session_id	string	Yes	Device/session identifier from the frontend.
client_ip	string	Yes	IP address of the lead's device.
user_agent	string	Yes	User-agent string from the lead's browser.
reference	string	No	Your own external reference for this lead. Stored against the record.

Address Object

Field	Type	Required	Description
buildingNumber	string	No	Building number. Used as the primary address line if present.
buildingName	string	No	Building name. Used if buildingNumber is absent.
line1	string	No	Fallback address line 1.
thoroughfare	string	Yes	Street name.
townOrCity	string	Yes	Town or city.

Field	Type	Required	Description
postcode	string	Yes	Full UK postcode.

Responses

Verification successful

The lead has been created and assigned to a funding stream.

```
{
  "client": "SUCCESS",
  "message": "SUCCESS"
}
```

No funding stream matched

The lead was created but no eligible funding stream was found. The lead is not payable, but will show in the CRM.

```
{
  "client": "SUCCESS",
  "message": "NO_STREAM"
}
```

OTP challenge required

The bureau requires the lead to verify via OTP before proceeding. Store the `challenge_id` and re-submit via the [OTP endpoint](#).

```
{
  "message": "Please validate via OTP.",
  "challenge_id": "abc123-verification-id",
  "status": "CHALLENGE"
}
```

Credit file not found

The lead is unable to progress due to a KYC failure from the details provided. It will not transfer into the CRM.

```
{
  "message": "Unable to locate credit file at this time."
}
```

Validation failed

```
{
  "message": "Validation failed.",
  "errors": {
    "email": "Invalid email.",
    "date_of_birth": "Invalid DOB.",
    "addresses.0.postcode": "Required."
  }
}
```

Duplicate detected

A lead with matching details already exists in the system.

```
{
  "message": "Duplicate detected."
}
```

2. Submit OTP Verification

```
POST /affiliate/{affiliate_id}/otp
```

Resolves a pending OTP challenge. Include all original lead fields plus the `challenge_id` returned from the initial request and the `otp_code` entered by the lead.

Request Body

All fields from the [Submit Lead](#) request, plus:

Field	Type	Required	Description
<code>challenge_id</code>	string	Yes	The <code>challenge_id</code> returned in the OTP challenge response.
<code>otp_code</code>	string	Yes	The one-time passcode entered by the lead.

Responses

On success, responses follow the same schema as [Submit Lead](#). On failure:

OTP verification failed

```
{
  "message": "OTP verification failed."
}
```

3. Check for Duplicate Client

```
POST /search
```

Checks whether a client already exists in the system based on their personal and address details. Call this **before** submitting to the verification endpoint to avoid running an unnecessary credit check against a duplicate lead.

Request Body

Field	Type	Required	Description
nameFirst	string	Yes	Lead's first name.
nameLast	string	Yes	Lead's last name.
emailAddress	string	Yes	Lead's email address.
mobile	string	Yes	Lead's mobile number.
addressLine1	string	Yes	First line of address (house name or number).
addressLine2	string	Yes	Second line of address (town or city).
addressPostcode	string	Yes	Lead's postcode.

Example Request

```
POST /api/v1/search
Content-Type: application/json

{
  "nameFirst": "Jane",
  "nameLast": "Smith",
  "emailAddress": "jane.smith@example.com",
  "mobile": "07700900123",
  "addressLine1": "12 High Street",
  "addressLine2": "Manchester",
  "addressPostcode": "M1 1AA"
```

```
}
```

Responses

No duplicate found

It is safe to proceed with verification.

```
{  
  "duplicatesNotFound": true  
}
```

Duplicate detected

A client with matching details already exists. Do not proceed to the credit check.

```
{  
  "duplicatesNotFound": false  
}
```

Example Request

```
POST /api/v1/affiliate/f47ac10b-58cc-4372-a567-0e02b2c3d479  
Content-Type: application/json
```


```
{  
  "first_name": "Jane",  
  "last_name": "Smith",  
  "email": "jane.smith@example.com",  
  "phone": "07700900123",  
  "date_of_birth": "1985-06-15",  
  "title": "Mrs",  
  "session_id": "sess_abc123",  
}
```

```

"client_ip": "1.2.3.4",
"user_agent": "Mozilla/5.0 (Windows NT 10.0; Win64; x64) ...",
"reference": "YOUR-REF-001",
"signature": "data:image/png;base64,iVBORw0KGgo...",
"addresses": [
  {
    "buildingNumber": "12",
    "thoroughfare": "High Street",
    "townOrCity": "Manchester",
    "postcode": "M1 1AA"
  }
]
}

```

Typical Flow

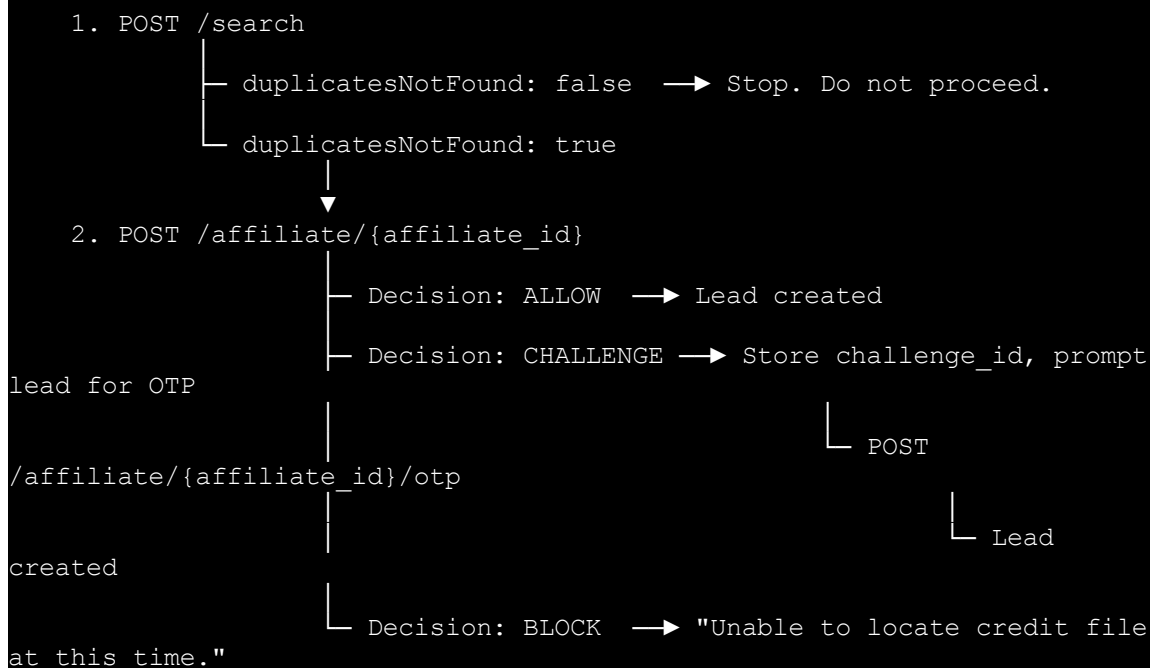

Test Mode

Test mode allows you to simulate the three possible verification outcomes without triggering a real credit bureau lookup. It is intended for integration testing only and **must not be used in production**.

To activate test mode, include the following fields in any request:

Field	Type	Required	Description
<code>test_mode</code>	boolean	Yes	Must be <code>true</code> .
<code>test_mode_type</code>	string	No	Controls the simulated outcome. See below. Defaults to <code>"allow"</code> .

The `signature` field is **not required** when `test_mode` is `true`.

Test Mode Types

<code>test_mode_type</code>	Simulated outcome	Response
<code>"allow"</code> (default)	Verification passes immediately	<code>{ "client": "SUCCESS", "message": "SUCCESS" }</code>
<code>"block"</code>	Credit file cannot be located	<code>{ "message": "Unable to locate credit file at this time." }</code>
<code>"challenge"</code>	OTP challenge is issued	<code>{ "message": "Please validate via OTP.", "challenge_id": "test_challenge_id", "status": "CHALLENGE" }</code>

Test Mode OTP

When testing the OTP flow, use `challenge_id: "test_challenge_id"` (returned by the `"challenge"` test mode) and submit to the `/otp` endpoint.

OTP code	Result
123456	Verification passes — returns <code>{ "client": "SUCCESS", "message": "SUCCESS", "fundingStream": "Test Stream" }</code>
Any other	Fails — returns <code>{ "message": "OTP verification failed." }</code>

Example Test Request

```
POST /api/v1/affiliate/f47ac10b-58cc-4372-a567-0e02b2c3d479
Content-Type: application/json

{
  "test_mode": true,
  "test_mode_type": "challenge",
  "first_name": "Test",
  "last_name": "User",
  "email": "test@example.com",
  "phone": "07700900000",
  "date_of_birth": "1990-01-01",
  "session_id": "test_session",
  "client_ip": "127.0.0.1",
  "user_agent": "TestAgent/1.0",
  "addresses": [
    {
      "buildingNumber": "1",
      "thoroughfare": "Test Street",
      "townOrCity": "London",
      "postcode": "SW1A 1AA"
    }
  ]
}
```

Followed by:

```
POST /api/v1/affiliate/f47ac10b-58cc-4372-a567-0e02b2c3d479/otp
Content-Type: application/json

{
  "test_mode": true,
```

```
"challenge_id": "test_challenge_id",
"otp_code": "123456",
"first_name": "Test",
"last_name": "User",
"email": "test@example.com",
"phone": "07700900000",
"date_of_birth": "1990-01-01",
"session_id": "test_session",
"client_ip": "127.0.0.1",
"user_agent": "TestAgent/1.0",
"addresses": [
  {
    "buildingNumber": "1",
    "thoroughfare": "Test Street",
    "townOrCity": "London",
    "postcode": "SW1A 1AA"
  }
]
```