(a) $R[\mathscr{C}]$: a heap enters beside the input, and only access to it counts

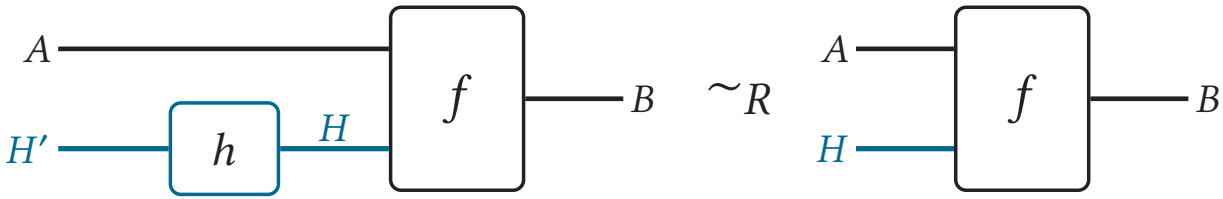

normal form: $A \to A \oplus H$, then f;
$R[\text{Unitary}] \simeq \text{Isometry}$

(b) $L[\mathscr{C}]$: garbage leaves beside the output, and its contents do not count

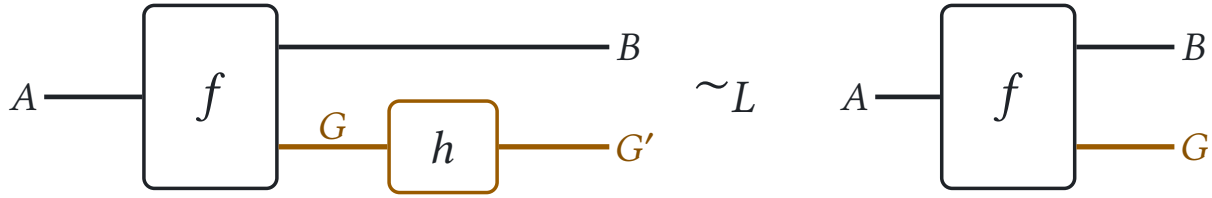

normal form: f, then $B \otimes G \to B$;
$L[R[\text{Unitary}]] \simeq \text{CPTP}$