

CryptoLogin Documentation

Adrian Bedard

Jonathan Bedard

May 19, 2016

Contents

I CryptoLogin Library	2
1 Introduction	3
1.1 Unit Testing	3
1.2 Namespace login	3
2 File Index	4
2.1 File List	4
3 File Documentation	5
3.1 createUserForm.cpp File Reference	5
3.1.1 Detailed Description	5
3.2 createUserForm.h File Reference	5
3.3 cryptoLogin.h File Reference	6
3.3.1 Detailed Description	6
3.4 cryptoLoginLog.h File Reference	6
3.4.1 Detailed Description	7
3.5 keyGenerationPopUp.cpp File Reference	7
3.5.1 Detailed Description	7
3.6 keyGenerationPopUp.h File Reference	7
3.6.1 Detailed Description	8
3.7 listUsersForm.cpp File Reference	8
3.8 listUsersForm.h File Reference	8
3.9 loginMain.cpp File Reference	8
3.9.1 Detailed Description	8
3.10 loginMain.h File Reference	9
3.10.1 Detailed Description	9
3.11 loginMetaData.cpp File Reference	9
3.12 loginMetaData.h File Reference	9
3.12.1 Detailed Description	10
3.13 manageKeysForm.cpp File Reference	10
3.14 manageKeysForm.h File Reference	10
4 Class Index	11
4.1 Class List	11

5	Namespace Documentation	12
5.1	login Namespace Reference	12
5.1.1	Function Documentation	13
5.1.2	Variable Documentation	13
6	Class Documentation	14
6.1	login::createUser Class Reference	14
6.1.1	Constructor & Destructor Documentation	15
6.1.2	Member Function Documentation	15
6.1.3	Member Data Documentation	15
6.2	login::keyBankForm Class Reference	16
6.2.1	Constructor & Destructor Documentation	16
6.2.2	Member Function Documentation	16
6.2.3	Member Data Documentation	16
6.3	login::listUsers Class Reference	17
6.3.1	Detailed Description	18
6.3.2	Constructor & Destructor Documentation	18
6.3.3	Member Function Documentation	18
6.3.4	Friends And Related Function Documentation	19
6.3.5	Member Data Documentation	19
6.4	login::loginMetaData Class Reference	19
6.4.1	Detailed Description	21
6.4.2	Constructor & Destructor Documentation	21
6.4.3	Member Function Documentation	21
6.4.4	Member Data Documentation	23
6.5	login::mainLogin< nextForm > Class Template Reference	24
6.5.1	Detailed Description	25
6.5.2	Constructor & Destructor Documentation	25
6.5.3	Member Function Documentation	26
6.5.4	Member Data Documentation	26
6.6	login::publicKeyTypeFrame Class Reference	28
6.6.1	Constructor & Destructor Documentation	29
6.6.2	Member Function Documentation	29
6.6.3	Member Data Documentation	29
6.7	login::pulblicKeyPopUp Class Reference	29
6.7.1	Detailed Description	30
6.7.2	Constructor & Destructor Documentation	30
6.7.3	Member Function Documentation	31
6.7.4	Member Data Documentation	31
6.8	login::userFrame Class Reference	31
6.8.1	Detailed Description	32
6.8.2	Constructor & Destructor Documentation	32
6.8.3	Member Function Documentation	33
6.8.4	Member Data Documentation	33
6.9	login::userLoadingPopUp Class Reference	34
6.9.1	Detailed Description	35
6.9.2	Constructor & Destructor Documentation	35
6.9.3	Member Function Documentation	35
6.9.4	Member Data Documentation	36

6.10 login::userNode Struct Reference	36
6.10.1 Detailed Description	37
6.10.2 Constructor & Destructor Documentation	37
6.10.3 Member Function Documentation	37
6.10.4 Member Data Documentation	38
6.11 login::userSettingsForm Class Reference	39
6.11.1 Constructor & Destructor Documentation	40
6.11.2 Member Function Documentation	40
6.11.3 Friends And Related Function Documentation	40
6.11.4 Member Data Documentation	40
II Datastructures Library	41
7 Introduction	42
7.1 Unit Testing	42
7.2 Namespace os	42
8 File Index	43
8.1 File List	43
9 File Documentation	45
9.1 Datastructures.h File Reference	45
9.1.1 Detailed Description	45
9.2 abstractSorting.h File Reference	45
9.2.1 Detailed Description	46
9.3 ads.h File Reference	46
9.3.1 Detailed Description	47
9.4 asyncAVL.h File Reference	47
9.4.1 Detailed Description	47
9.5 AVL.h File Reference	48
9.5.1 Detailed Description	48
9.6 eventDriver.h File Reference	48
9.6.1 Detailed Description	49
9.7 eventDriver.cpp File Reference	49
9.7.1 Detailed Description	49
9.8 list.h File Reference	49
9.8.1 Detailed Description	50
9.9 matrix.h File Reference	50
9.9.1 Detailed Description	53
9.9.2 Function Documentation	54
9.10 osLogger.h File Reference	63
9.10.1 Detailed Description	64
9.11 osLogger.cpp File Reference	64
9.11.1 Detailed Description	64
9.12 osVectors.h File Reference	64
9.12.1 Detailed Description	66
9.13 set.h File Reference	66
9.13.1 Detailed Description	66
9.14 smartPointer.h File Reference	67

9.14.1 Detailed Description	70
9.14.2 Function Documentation	70
9.15 staticConstantPrinter.h File Reference	74
9.15.1 Detailed Description	74
9.16 staticConstantPrinter.cpp File Reference	75
9.16.1 Detailed Description	75
10 Class Index	76
10.1 Class List	76
11 Namespace Documentation	78
11.1 os Namespace Reference	78
11.1.1 Typedef Documentation	81
11.1.2 Enumeration Type Documentation	83
11.1.3 Function Documentation	84
11.1.4 Variable Documentation	89
12 Class Documentation	90
12.1 os::adnode< dataType > Class Template Reference	90
12.1.1 Detailed Description	91
12.1.2 Constructor & Destructor Documentation	91
12.1.3 Member Function Documentation	91
12.1.4 Member Data Documentation	93
12.2 os::ads< dataType > Class Template Reference	93
12.2.1 Detailed Description	94
12.2.2 Constructor & Destructor Documentation	94
12.2.3 Member Function Documentation	94
12.2.4 Member Data Documentation	97
12.3 os::asyncAVLNode< dataType > Class Template Reference	97
12.3.1 Detailed Description	99
12.3.2 Constructor & Destructor Documentation	99
12.3.3 Member Function Documentation	99
12.3.4 Friends And Related Function Documentation	102
12.3.5 Member Data Documentation	102
12.4 os::asyncAVLTree< dataType > Class Template Reference	103
12.4.1 Detailed Description	105
12.4.2 Constructor & Destructor Documentation	105
12.4.3 Member Function Documentation	105
12.4.4 Friends And Related Function Documentation	110
12.4.5 Member Data Documentation	111
12.5 os::AVLNode< dataType > Class Template Reference	111
12.5.1 Detailed Description	112
12.5.2 Constructor & Destructor Documentation	113
12.5.3 Member Function Documentation	113
12.5.4 Friends And Related Function Documentation	116
12.5.5 Member Data Documentation	116
12.6 os::AVLTree< dataType > Class Template Reference	117
12.6.1 Detailed Description	118
12.6.2 Constructor & Destructor Documentation	118
12.6.3 Member Function Documentation	119

12.6.4	Member Data Documentation	124
12.7	os::constantPrinter Class Reference	124
12.7.1	Detailed Description	125
12.7.2	Constructor & Destructor Documentation	125
12.7.3	Member Function Documentation	125
12.7.4	Member Data Documentation	128
12.8	os::eventReceiver< senderType > Class Template Reference	128
12.8.1	Detailed Description	129
12.8.2	Constructor & Destructor Documentation	129
12.8.3	Member Function Documentation	129
12.8.4	Friends And Related Function Documentation	130
12.8.5	Member Data Documentation	130
12.9	os::eventSender< receiverType > Class Template Reference	131
12.9.1	Detailed Description	132
12.9.2	Constructor & Destructor Documentation	132
12.9.3	Member Function Documentation	132
12.9.4	Friends And Related Function Documentation	133
12.9.5	Member Data Documentation	133
12.10	os::indirectMatrix< dataType > Class Template Reference	133
12.10.1	Detailed Description	135
12.10.2	Constructor & Destructor Documentation	135
12.10.3	Member Function Documentation	136
12.10.4	Friends And Related Function Documentation	139
12.10.5	Member Data Documentation	139
12.11	os::matrix< dataType > Class Template Reference	139
12.11.1	Detailed Description	140
12.11.2	Constructor & Destructor Documentation	141
12.11.3	Member Function Documentation	142
12.11.4	Friends And Related Function Documentation	144
12.11.5	Member Data Documentation	144
12.12	os::ptrComp Class Reference	145
12.12.1	Detailed Description	145
12.12.2	Constructor & Destructor Documentation	146
12.12.3	Member Function Documentation	146
12.13	os::smart_ptr< dataType > Class Template Reference	146
12.13.1	Detailed Description	148
12.13.2	Constructor & Destructor Documentation	148
12.13.3	Member Function Documentation	151
12.13.4	Member Data Documentation	156
12.14	os::smartSet< dataType > Class Template Reference	157
12.14.1	Detailed Description	158
12.14.2	Constructor & Destructor Documentation	158
12.14.3	Member Function Documentation	159
12.14.4	Member Data Documentation	161
12.15	os::unsortedList< dataType > Class Template Reference	161
12.15.1	Detailed Description	162
12.15.2	Constructor & Destructor Documentation	162
12.15.3	Member Function Documentation	163
12.15.4	Member Data Documentation	165

12.16	6s::unsortedListNode< dataType > Class Template Reference	165
12.16.1	Detailed Description	166
12.16.2	Constructor & Destructor Documentation	166
12.16.3	Member Function Documentation	166
12.16.4	Friends And Related Function Documentation	167
12.16.5	Member Data Documentation	167
12.17	6s::vector2d< dataType > Class Template Reference	168
12.17.1	Detailed Description	170
12.17.2	Constructor & Destructor Documentation	170
12.17.3	Member Function Documentation	170
12.17.4	Member Data Documentation	178
12.18	6s::vector3d< dataType > Class Template Reference	178
12.18.1	Detailed Description	181
12.18.2	Constructor & Destructor Documentation	181
12.18.3	Member Function Documentation	182
12.18.4	Member Data Documentation	191
III	Unit Test Library	192
13	Introduction	193
13.1	Namespace test	193
13.2	Datastructures Testing	193
14	File Index	194
14.1	File List	194
15	File Documentation	195
15.1	DatastructuresTest.h File Reference	195
15.1.1	Detailed Description	195
15.2	DatastructuresTest.cpp File Reference	195
15.2.1	Detailed Description	195
15.3	masterTestHolder.h File Reference	196
15.3.1	Detailed Description	196
15.4	masterTestHolder.cpp File Reference	196
15.4.1	Detailed Description	196
15.5	singleTest.h File Reference	197
15.5.1	Detailed Description	197
15.6	singleTest.cpp File Reference	197
15.6.1	Detailed Description	198
15.7	TestSuite.h File Reference	198
15.7.1	Detailed Description	198
15.8	TestSuite.cpp File Reference	198
15.8.1	Detailed Description	198
15.9	UnitTest.h File Reference	199
15.9.1	Detailed Description	199
15.10	UnitTest.cpp File Reference	199
15.10.1	Detailed Description	199
15.11	UnitTestLog.h File Reference	200
15.12	UnitTestExceptions.h File Reference	200

15.12.1Detailed Description	201
16 Class Index	202
16.1 Class List	202
17 Namespace Documentation	203
17.1 test Namespace Reference	203
17.1.1 Typedef Documentation	204
17.1.2 Function Documentation	204
17.1.3 Variable Documentation	205
18 Class Documentation	206
18.1 test::generalTestException Class Reference	206
18.1.1 Detailed Description	207
18.1.2 Constructor & Destructor Documentation	207
18.1.3 Member Function Documentation	207
18.1.4 Member Data Documentation	208
18.2 test::libraryTests Class Reference	208
18.2.1 Detailed Description	209
18.2.2 Constructor & Destructor Documentation	210
18.2.3 Member Function Documentation	211
18.2.4 Member Data Documentation	214
18.3 test::masterTestHolder Class Reference	215
18.3.1 Detailed Description	216
18.3.2 Constructor & Destructor Documentation	216
18.3.3 Member Function Documentation	216
18.3.4 Member Data Documentation	218
18.4 test::nullFunctionException Class Reference	218
18.4.1 Detailed Description	218
18.4.2 Constructor & Destructor Documentation	219
18.5 test::singleFunctionTest Class Reference	219
18.5.1 Detailed Description	220
18.5.2 Constructor & Destructor Documentation	220
18.5.3 Member Function Documentation	220
18.5.4 Member Data Documentation	220
18.6 test::singleTest Class Reference	220
18.6.1 Detailed Description	221
18.6.2 Constructor & Destructor Documentation	221
18.6.3 Member Function Documentation	222
18.6.4 Member Data Documentation	223
18.7 test::testSuite Class Reference	223
18.7.1 Constructor & Destructor Documentation	224
18.7.2 Member Function Documentation	225
18.7.3 Member Data Documentation	229
18.8 test::unknownException Class Reference	229
18.8.1 Detailed Description	229
18.8.2 Constructor & Destructor Documentation	230

IV osMechanics Library	231
19 Introduction	232
19.1 Namespace	232
20 File Index	233
20.1 File List	233
21 File Documentation	235
21.1 logger.cpp File Reference	235
21.1.1 Detailed Description	235
21.1.2 Function Documentation	235
21.1.3 Variable Documentation	235
21.2 logger.h File Reference	236
21.2.1 Detailed Description	236
21.3 multiLock.cpp File Reference	236
21.3.1 Detailed Description	237
21.4 multiLock.h File Reference	237
21.4.1 Detailed Description	237
21.5 osFunctions.cpp File Reference	237
21.6 osFunctions.cpp File Reference	237
21.6.1 Function Documentation	238
21.6.2 Variable Documentation	238
21.7 osFunctions.cpp File Reference	238
21.8 osFunctions.h File Reference	238
21.9 osFunctions.h File Reference	239
21.9.1 Variable Documentation	240
21.10 osFunctions.h File Reference	240
21.11 osMechanics.h File Reference	240
21.11.1 Detailed Description	240
21.12 osMechanicsTest.cpp File Reference	241
21.12.1 Detailed Description	241
21.13 osMechanicsTest.h File Reference	241
21.13.1 Detailed Description	241
21.14 osThreads.cpp File Reference	241
21.14.1 Detailed Description	242
21.14.2 Function Documentation	242
21.14.3 Variable Documentation	242
21.15 osThreads.h File Reference	242
21.15.1 Detailed Description	243
21.16 safeQueue.h File Reference	243
21.16.1 Detailed Description	243
21.17 savableClass.cpp File Reference	243
21.17.1 Detailed Description	244
21.18 savableClass.h File Reference	244
21.18.1 Detailed Description	244
21.19 Serial.h File Reference	245
21.20 Serial.h File Reference	245
21.21 Serial.h File Reference	245
21.22 serialThread.cpp File Reference	245

21.22.1Detailed Description	245
21.22.2Function Documentation	245
21.23SerialThread.h File Reference	245
21.23.1Detailed Description	246
21.24SocketFrame.cpp File Reference	246
21.24.1Detailed Description	246
21.24.2Function Documentation	247
21.24.3Variable Documentation	247
21.25SocketFrame.h File Reference	247
21.25.1Detailed Description	247
21.26SpinLock.cpp File Reference	247
21.27SpinLock.cpp File Reference	247
21.28SpinLock.cpp File Reference	247
21.29SpinLock.h File Reference	247
21.30SpinLock.h File Reference	248
21.31SpinLock.h File Reference	248
21.32ThreadDistribution.cpp File Reference	248
21.32.1Detailed Description	248
21.32.2Function Documentation	248
21.33ThreadDistribution.h File Reference	248
21.33.1Detailed Description	249
21.34USBAccess.cpp File Reference	249
21.34.1Detailed Description	249
21.35USBAccess.h File Reference	249
21.35.1Detailed Description	250
21.36XMLParser.cpp File Reference	250
21.36.1Detailed Description	250
21.37XMLParser.h File Reference	250
21.37.1Detailed Description	251
21.38XMLTest.cpp File Reference	251
21.38.1Detailed Description	252
21.39XMLTest.h File Reference	252
21.39.1Detailed Description	252
22 Class Index	253
22.1 Class List	253
23 Namespace Documentation	255
23.1 os Namespace Reference	255
23.1.1 Typedef Documentation	258
23.1.2 Function Documentation	258
23.1.3 Variable Documentation	262
24 Class Documentation	263
24.1 os::executorThread Class Reference	263
24.1.1 Detailed Description	264
24.1.2 Constructor & Destructor Documentation	264
24.1.3 Member Function Documentation	264
24.1.4 Member Data Documentation	264
24.2 os::IPAddress Class Reference	265

24.2.1	Detailed Description	265
24.2.2	Constructor & Destructor Documentation	265
24.2.3	Member Function Documentation	266
24.2.4	Member Data Documentation	266
24.3	os::LineLogger Class Reference	267
24.3.1	Constructor & Destructor Documentation	268
24.3.2	Member Function Documentation	268
24.3.3	Member Data Documentation	269
24.4	os::LineSaver Class Reference	269
24.4.1	Constructor & Destructor Documentation	270
24.4.2	Member Function Documentation	270
24.4.3	Friends And Related Function Documentation	270
24.4.4	Member Data Documentation	270
24.5	os::LineSaverListener Class Reference	271
24.5.1	Constructor & Destructor Documentation	271
24.5.2	Member Function Documentation	271
24.5.3	Friends And Related Function Documentation	272
24.5.4	Member Data Documentation	272
24.6	os::Log Class Reference	272
24.6.1	Constructor & Destructor Documentation	273
24.6.2	Member Function Documentation	273
24.6.3	Member Data Documentation	274
24.7	os::LogDirectedStream Class Reference	275
24.7.1	Constructor & Destructor Documentation	276
24.7.2	Member Function Documentation	276
24.7.3	Member Data Documentation	276
24.8	os::logLine Struct Reference	276
24.8.1	Constructor & Destructor Documentation	276
24.8.2	Member Data Documentation	276
24.9	os::LogSaver Class Reference	277
24.9.1	Constructor & Destructor Documentation	277
24.9.2	Member Function Documentation	277
24.9.3	Member Data Documentation	278
24.10	os::logStatusHolder Class Reference	278
24.10.1	Constructor & Destructor Documentation	279
24.10.2	Member Function Documentation	279
24.10.3	Friends And Related Function Documentation	279
24.10.4	Member Data Documentation	279
24.11	os::logStatusListener Class Reference	280
24.11.1	Constructor & Destructor Documentation	280
24.11.2	Member Function Documentation	280
24.11.3	Friends And Related Function Documentation	281
24.11.4	Member Data Documentation	281
24.12	os::LogStreamListener Class Reference	281
24.12.1	Constructor & Destructor Documentation	281
24.12.2	Member Function Documentation	281
24.13	os::multiLock Class Reference	282
24.13.1	Detailed Description	283
24.13.2	Constructor & Destructor Documentation	283

24.13.3	Member Function Documentation	283
24.13.4	Member Data Documentation	284
24.14	os::myIPAddress Class Reference	285
24.14.1	Detailed Description	285
24.14.2	Constructor & Destructor Documentation	286
24.14.3	Member Function Documentation	286
24.14.4	Member Data Documentation	287
24.15	os::safeQueue< dataType > Class Template Reference	287
24.15.1	Detailed Description	288
24.15.2	Constructor & Destructor Documentation	288
24.15.3	Member Function Documentation	288
24.15.4	Member Data Documentation	289
24.16	os::savable Class Reference	289
24.16.1	Detailed Description	291
24.16.2	Constructor & Destructor Documentation	291
24.16.3	Member Function Documentation	291
24.16.4	Member Data Documentation	294
24.17	os::savingGroup Class Reference	294
24.17.1	Detailed Description	295
24.17.2	Constructor & Destructor Documentation	295
24.17.3	Member Function Documentation	295
24.17.4	Friends And Related Function Documentation	296
24.17.5	Member Data Documentation	296
24.18	os::Serial Class Reference	296
24.18.1	Detailed Description	297
24.18.2	Constructor & Destructor Documentation	297
24.18.3	Member Function Documentation	297
24.18.4	Member Data Documentation	298
24.19	os::serialThread Class Reference	298
24.19.1	Detailed Description	299
24.19.2	Constructor & Destructor Documentation	300
24.19.3	Member Function Documentation	300
24.19.4	Member Data Documentation	300
24.20	os::singleAction Class Reference	301
24.20.1	Detailed Description	302
24.20.2	Constructor & Destructor Documentation	302
24.20.3	Member Function Documentation	302
24.20.4	Member Data Documentation	303
24.21	os::socketTracker Class Reference	303
24.21.1	Detailed Description	304
24.21.2	Constructor & Destructor Documentation	304
24.21.3	Member Function Documentation	304
24.21.4	Friends And Related Function Documentation	304
24.21.5	Member Data Documentation	304
24.22	os::socketUser Class Reference	305
24.22.1	Detailed Description	305
24.22.2	Constructor & Destructor Documentation	305
24.22.3	Member Function Documentation	305
24.23	os::spinLock Class Reference	305

24.23.1Detailed Description	306
24.23.2Constructor & Destructor Documentation	306
24.23.3Member Function Documentation	306
24.23.4Member Data Documentation	306
24.24os::threadActor Class Reference	307
24.24.1Detailed Description	307
24.24.2Constructor & Destructor Documentation	308
24.24.3Member Function Documentation	308
24.24.4Friends And Related Function Documentation	308
24.24.5Member Data Documentation	308
24.25os::threadDistributor Class Reference	309
24.25.1Detailed Description	309
24.25.2Constructor & Destructor Documentation	310
24.25.3Member Function Documentation	310
24.25.4Friends And Related Function Documentation	310
24.25.5Member Data Documentation	310
24.26os::threadHolder Class Reference	311
24.26.1Constructor & Destructor Documentation	312
24.26.2Member Function Documentation	312
24.26.3Member Data Documentation	313
24.27os::threadTracker Class Reference	313
24.27.1Detailed Description	315
24.27.2Constructor & Destructor Documentation	315
24.27.3Member Function Documentation	315
24.27.4Member Data Documentation	316
24.28os::UDPAVLNode Struct Reference	317
24.28.1Detailed Description	317
24.28.2Constructor & Destructor Documentation	317
24.28.3Member Function Documentation	317
24.28.4Member Data Documentation	317
24.29os::UDPCClient Class Reference	317
24.29.1Detailed Description	319
24.29.2Constructor & Destructor Documentation	319
24.29.3Member Function Documentation	319
24.29.4Member Data Documentation	320
24.30os::UDPPacket Class Reference	321
24.30.1Detailed Description	322
24.30.2Constructor & Destructor Documentation	322
24.30.3Member Function Documentation	322
24.30.4Member Data Documentation	323
24.31os::UDPServer Class Reference	324
24.31.1Detailed Description	325
24.31.2Constructor & Destructor Documentation	325
24.31.3Member Function Documentation	325
24.31.4Member Data Documentation	326
24.32os::UDPSocket Class Reference	327
24.32.1Detailed Description	328
24.32.2Constructor & Destructor Documentation	329
24.32.3Member Function Documentation	329

24.32.4Member Data Documentation	330
24.33usb::USBFile Class Reference	330
24.33.1Constructor & Destructor Documentation	330
24.33.2Member Function Documentation	330
24.34usb::USBNode Class Reference	330
24.34.1Detailed Description	331
24.34.2Constructor & Destructor Documentation	331
24.34.3Member Function Documentation	331
24.34.4Member Data Documentation	331
24.35usb::XML_Node Class Reference	331
24.35.1Detailed Description	332
24.35.2Constructor & Destructor Documentation	333
24.35.3Member Function Documentation	333
24.35.4Member Data Documentation	334
 V CryptoGateway Library	 335
25 Introduction	336
25.1 Namespace	336
 26 File Index	 337
26.1 File List	337
 27 File Documentation	 340
27.1 binaryEncryption.cpp File Reference	340
27.1.1 Detailed Description	340
27.2 binaryEncryption.h File Reference	340
27.2.1 Detailed Description	341
27.3 c_BaseTen.c File Reference	341
27.3.1 Detailed Description	341
27.4 c_BaseTen.h File Reference	341
27.4.1 Detailed Description	342
27.4.2 Function Documentation	342
27.5 c_cryptoTesting.cpp File Reference	345
27.5.1 Detailed Description	345
27.6 c_cryptoTesting.h File Reference	345
27.6.1 Detailed Description	345
27.7 c_numberDefinitions.c File Reference	346
27.7.1 Detailed Description	346
27.8 c_numberDefinitions.h File Reference	346
27.8.1 Detailed Description	347
27.8.2 Typedef Documentation	347
27.8.3 Function Documentation	349
27.9 cryptoCConstants.h File Reference	350
27.9.1 Detailed Description	351
27.9.2 Variable Documentation	351
27.10cryptoCHheaders.h File Reference	351
27.10.1Detailed Description	351
27.11cryptoConstants.cpp File Reference	352

27.11.1Detailed Description	352
27.12cryptoConstants.h File Reference	352
27.12.1Detailed Description	352
27.13cryptoCSource.cpp File Reference	352
27.13.1Detailed Description	353
27.14cryptoError.cpp File Reference	353
27.14.1Detailed Description	353
27.15cryptoError.h File Reference	353
27.15.1Detailed Description	355
27.16cryptoFileTest.cpp File Reference	355
27.16.1Detailed Description	355
27.17cryptoFileTest.h File Reference	355
27.17.1Detailed Description	356
27.18CryptoGateway.h File Reference	356
27.18.1Detailed Description	356
27.19cryptoHash.cpp File Reference	356
27.19.1Detailed Description	357
27.20cryptoHash.h File Reference	357
27.20.1Detailed Description	358
27.21cryptoLogging.cpp File Reference	358
27.21.1Detailed Description	358
27.22cryptoLogging.h File Reference	359
27.23cryptoNumber.cpp File Reference	359
27.23.1Detailed Description	359
27.24cryptoNumber.h File Reference	359
27.24.1Detailed Description	360
27.25cryptoNumberTest.cpp File Reference	360
27.25.1Detailed Description	360
27.26cryptoPublicKey.cpp File Reference	361
27.26.1Detailed Description	361
27.27cryptoPublicKey.h File Reference	361
27.27.1Detailed Description	362
27.28cryptoTest.cpp File Reference	362
27.28.1Detailed Description	362
27.29cryptoTest.h File Reference	362
27.29.1Detailed Description	363
27.30gateway.cpp File Reference	363
27.30.1Detailed Description	363
27.31gateway.h File Reference	363
27.31.1Detailed Description	364
27.32gatewayTest.cpp File Reference	364
27.32.1Detailed Description	364
27.33gatewayTest.h File Reference	364
27.33.1Detailed Description	365
27.34hashTest.cpp File Reference	365
27.34.1Detailed Description	365
27.35hashTest.h File Reference	365
27.35.1Detailed Description	365
27.36hexConversion.cpp File Reference	366

27.36.1Detailed Description	366
27.37hexConversion.h File Reference	366
27.37.1Detailed Description	366
27.38keyBank.cpp File Reference	367
27.38.1Detailed Description	367
27.39keyBank.h File Reference	367
27.39.1Detailed Description	368
27.40message.cpp File Reference	368
27.40.1Detailed Description	368
27.41message.h File Reference	368
27.41.1Detailed Description	369
27.42publicKeyPackage.cpp File Reference	369
27.42.1Detailed Description	369
27.43publicKeyPackage.h File Reference	369
27.43.1Detailed Description	370
27.44publicKeyTest.h File Reference	370
27.44.1Detailed Description	370
27.45RC4_Hash.cpp File Reference	370
27.46RC4_Hash.h File Reference	370
27.47staticTestKeys.cpp File Reference	371
27.47.1Detailed Description	371
27.48staticTestKeys.h File Reference	371
27.48.1Detailed Description	371
27.49streamCipher.cpp File Reference	371
27.50streamCipher.h File Reference	371
27.50.1Variable Documentation	372
27.51streamPackage.cpp File Reference	372
27.51.1Detailed Description	372
27.52streamPackage.h File Reference	372
27.52.1Detailed Description	372
27.53streamTest.cpp File Reference	373
27.53.1Detailed Description	373
27.54streamTest.h File Reference	373
27.54.1Detailed Description	373
27.55testKeyGeneration.cpp File Reference	374
27.56testKeyGeneration.h File Reference	374
27.56.1Detailed Description	374
27.57user.cpp File Reference	374
27.57.1Detailed Description	374
27.58user.h File Reference	375
27.58.1Detailed Description	375
27.59XMLEncryption.cpp File Reference	375
27.59.1Detailed Description	375
27.60XMLEncryption.h File Reference	376
27.60.1Detailed Description	376
28 Class Index	378
28.1 Class List	378

29 Namespace Documentation	381
29.1 crypto Namespace Reference	381
29.1.1 Typedef Documentation	385
29.1.2 Function Documentation	385
29.1.3 Variable Documentation	388
30 Class Documentation	390
30.1 crypto::actionOnFileClosed Class Reference	390
30.1.1 Detailed Description	390
30.1.2 Constructor & Destructor Documentation	390
30.1.3 Member Function Documentation	391
30.2 crypto::actionOnFileError Class Reference	391
30.2.1 Detailed Description	392
30.2.2 Constructor & Destructor Documentation	392
30.2.3 Member Function Documentation	392
30.3 crypto::avlKeyBank Class Reference	392
30.3.1 Detailed Description	394
30.3.2 Constructor & Destructor Documentation	394
30.3.3 Member Function Documentation	394
30.3.4 Member Data Documentation	397
30.4 crypto::binaryDecryptor Class Reference	398
30.4.1 Detailed Description	399
30.4.2 Constructor & Destructor Documentation	400
30.4.3 Member Function Documentation	401
30.4.4 Member Data Documentation	403
30.5 crypto::binaryEncryptor Class Reference	404
30.5.1 Detailed Description	405
30.5.2 Constructor & Destructor Documentation	405
30.5.3 Member Function Documentation	407
30.5.4 Member Data Documentation	409
30.6 crypto::bufferLargeError Class Reference	410
30.6.1 Detailed Description	410
30.6.2 Constructor & Destructor Documentation	410
30.6.3 Member Function Documentation	411
30.7 crypto::bufferSmallError Class Reference	411
30.7.1 Detailed Description	411
30.7.2 Constructor & Destructor Documentation	412
30.7.3 Member Function Documentation	412
30.8 crypto::customError Class Reference	412
30.8.1 Detailed Description	413
30.8.2 Constructor & Destructor Documentation	413
30.8.3 Member Function Documentation	413
30.8.4 Member Data Documentation	414
30.9 crypto::error Class Reference	414
30.9.1 Detailed Description	416
30.9.2 Constructor & Destructor Documentation	416
30.9.3 Member Function Documentation	416
30.9.4 Member Data Documentation	417
30.10 crypto::errorListener Class Reference	418

30.10.1Detailed Description	418
30.10.2Constructor & Destructor Documentation	419
30.10.3Member Function Documentation	419
30.10.4Friends And Related Function Documentation	419
30.10.5Member Data Documentation	419
30.11crypto::errorSender Class Reference	419
30.11.1Detailed Description	421
30.11.2Constructor & Destructor Documentation	421
30.11.3Member Function Documentation	421
30.11.4Friends And Related Function Documentation	422
30.11.5Member Data Documentation	423
30.12crypto::fileFormatError Class Reference	423
30.12.1Detailed Description	424
30.12.2Constructor & Destructor Documentation	424
30.12.3Member Function Documentation	424
30.13crypto::fileOpenError Class Reference	424
30.13.1Detailed Description	425
30.13.2Constructor & Destructor Documentation	425
30.13.3Member Function Documentation	425
30.14crypto::gateway Class Reference	425
30.14.1Detailed Description	430
30.14.2Constructor & Destructor Documentation	430
30.14.3Member Function Documentation	430
30.14.4Member Data Documentation	435
30.15crypto::gatewaySettings Class Reference	440
30.15.1Detailed Description	442
30.15.2Constructor & Destructor Documentation	442
30.15.3Member Function Documentation	443
30.15.4Member Data Documentation	447
30.16crypto::hash Class Reference	449
30.16.1Detailed Description	450
30.16.2Constructor & Destructor Documentation	450
30.16.3Member Function Documentation	451
30.16.4Member Data Documentation	454
30.17crypto::hashCompareError Class Reference	455
30.17.1Detailed Description	455
30.17.2Constructor & Destructor Documentation	455
30.17.3Member Function Documentation	455
30.18crypto::hashGenerationError Class Reference	456
30.18.1Detailed Description	456
30.18.2Constructor & Destructor Documentation	456
30.18.3Member Function Documentation	457
30.19crypto::illegalAlgorithmBind Class Reference	457
30.19.1Detailed Description	458
30.19.2Constructor & Destructor Documentation	458
30.19.3Member Function Documentation	458
30.19.4Member Data Documentation	459
30.20crypto::insertionFailed Class Reference	459
30.20.1Detailed Description	459

30.20.2	Constructor & Destructor Documentation	459
30.20.3	Member Function Documentation	459
30.21	crypto::integer Class Reference	460
30.21.1	Detailed Description	462
30.21.2	Constructor & Destructor Documentation	462
30.21.3	Member Function Documentation	463
30.22	crypto::keyBank Class Reference	469
30.22.1	Detailed Description	471
30.22.2	Constructor & Destructor Documentation	471
30.22.3	Member Function Documentation	472
30.22.4	Friends And Related Function Documentation	476
30.22.5	Member Data Documentation	476
30.23	crypto::keyChangeReceiver Class Reference	477
30.23.1	Detailed Description	478
30.23.2	Constructor & Destructor Documentation	478
30.23.3	Member Function Documentation	478
30.23.4	Friends And Related Function Documentation	479
30.24	crypto::keyChangeSender Class Reference	479
30.24.1	Detailed Description	480
30.24.2	Constructor & Destructor Documentation	480
30.24.3	Member Function Documentation	480
30.25	crypto::keyMissing Class Reference	481
30.25.1	Detailed Description	481
30.25.2	Constructor & Destructor Documentation	482
30.25.3	Member Function Documentation	482
30.26	crypto::masterMismatch Class Reference	482
30.26.1	Detailed Description	483
30.26.2	Constructor & Destructor Documentation	483
30.26.3	Member Function Documentation	483
30.27	crypto::message Class Reference	483
30.27.1	Detailed Description	485
30.27.2	Constructor & Destructor Documentation	485
30.27.3	Member Function Documentation	486
30.27.4	Friends And Related Function Documentation	487
30.27.5	Member Data Documentation	488
30.28	crypto::nodeGroup Class Reference	489
30.28.1	Detailed Description	491
30.28.2	Constructor & Destructor Documentation	491
30.28.3	Member Function Documentation	492
30.28.4	Friends And Related Function Documentation	495
30.28.5	Member Data Documentation	495
30.29	crypto::nodeKeyReference Class Reference	496
30.29.1	Detailed Description	497
30.29.2	Constructor & Destructor Documentation	497
30.29.3	Member Function Documentation	498
30.29.4	Friends And Related Function Documentation	500
30.29.5	Member Data Documentation	501
30.30	crypto::nodeNameReference Class Reference	501
30.30.1	Detailed Description	503

30.30.2	Constructor & Destructor Documentation	503
30.30.3	Member Function Documentation	503
30.30.4	Friends And Related Function Documentation	506
30.30.5	Member Data Documentation	506
30.31	crypto::NULLDataError Class Reference	507
30.31.1	Detailed Description	507
30.31.2	Constructor & Destructor Documentation	507
30.31.3	Member Function Documentation	507
30.32	crypto::NULLMaster Class Reference	508
30.32.1	Detailed Description	508
30.32.2	Constructor & Destructor Documentation	508
30.32.3	Member Function Documentation	509
30.33	crypto::NULLPublicKey Class Reference	509
30.33.1	Detailed Description	509
30.33.2	Constructor & Destructor Documentation	510
30.33.3	Member Function Documentation	510
30.34	crypto::number Class Reference	510
30.34.1	Detailed Description	513
30.34.2	Constructor & Destructor Documentation	514
30.34.3	Member Function Documentation	515
30.34.4	Member Data Documentation	527
30.35	numberType Struct Reference	527
30.35.1	Detailed Description	528
30.35.2	Member Data Documentation	528
30.36	crypto::passwordLargeError Class Reference	529
30.36.1	Detailed Description	530
30.36.2	Constructor & Destructor Documentation	530
30.36.3	Member Function Documentation	530
30.37	crypto::passwordSmallError Class Reference	531
30.37.1	Detailed Description	531
30.37.2	Constructor & Destructor Documentation	531
30.37.3	Member Function Documentation	531
30.38	crypto::publicKey Class Reference	532
30.38.1	Detailed Description	536
30.38.2	Constructor & Destructor Documentation	536
30.38.3	Member Function Documentation	538
30.38.4	Member Data Documentation	550
30.39	crypto::publicKeyPackage< pkType > Class Template Reference	552
30.39.1	Constructor & Destructor Documentation	553
30.39.2	Member Function Documentation	553
30.40	crypto::publicKeyPackageFrame Class Reference	554
30.40.1	Constructor & Destructor Documentation	555
30.40.2	Member Function Documentation	555
30.40.3	Member Data Documentation	557
30.41	crypto::publicKeySizeWrong Class Reference	557
30.41.1	Detailed Description	557
30.41.2	Constructor & Destructor Documentation	558
30.41.3	Member Function Documentation	558
30.42	crypto::publicKeyTypeBank Class Reference	558

30.42.1	Constructor & Destructor Documentation	559
30.42.2	Member Function Documentation	559
30.42.3	Member Data Documentation	559
30.43	crypto::publicRSA Class Reference	559
30.43.1	Detailed Description	562
30.43.2	Constructor & Destructor Documentation	562
30.43.3	Member Function Documentation	564
30.43.4	Friends And Related Function Documentation	569
30.43.5	Member Data Documentation	570
30.44	crypto::rc4Hash Class Reference	570
30.44.1	Detailed Description	571
30.44.2	Constructor & Destructor Documentation	571
30.44.3	Member Function Documentation	572
30.45	crypto::RCFour Class Reference	575
30.45.1	Constructor & Destructor Documentation	576
30.45.2	Member Function Documentation	576
30.45.3	Member Data Documentation	576
30.46	crypto::RSAKeyGenerator Class Reference	576
30.46.1	Detailed Description	577
30.46.2	Constructor & Destructor Documentation	577
30.46.3	Member Function Documentation	577
30.46.4	Member Data Documentation	578
30.47	crypto::streamCipher Class Reference	578
30.47.1	Constructor & Destructor Documentation	578
30.47.2	Member Function Documentation	578
30.48	crypto::streamDecrypter Class Reference	579
30.48.1	Constructor & Destructor Documentation	579
30.48.2	Member Function Documentation	579
30.48.3	Member Data Documentation	579
30.49	crypto::streamEncrypter Class Reference	579
30.49.1	Constructor & Destructor Documentation	580
30.49.2	Member Function Documentation	580
30.49.3	Member Data Documentation	580
30.50	crypto::streamPackage< streamType, hashType > Class Template Reference	580
30.50.1	Constructor & Destructor Documentation	581
30.50.2	Member Function Documentation	581
30.51	crypto::streamPackageFrame Class Reference	582
30.51.1	Constructor & Destructor Documentation	583
30.51.2	Member Function Documentation	583
30.51.3	Member Data Documentation	584
30.52	crypto::streamPackageTypeBank Class Reference	584
30.52.1	Constructor & Destructor Documentation	584
30.52.2	Member Function Documentation	584
30.52.3	Member Data Documentation	585
30.53	crypto::streamPacket Class Reference	585
30.53.1	Constructor & Destructor Documentation	585
30.53.2	Member Function Documentation	585
30.53.3	Member Data Documentation	585
30.54	crypto::stringTooLarge Class Reference	586

30.54.1Detailed Description	586
30.54.2Constructor & Destructor Documentation	586
30.54.3Member Function Documentation	586
30.55crypto::unknownErrorType Class Reference	587
30.55.1Detailed Description	587
30.55.2Constructor & Destructor Documentation	588
30.55.3Member Function Documentation	588
30.56crypto::user Class Reference	588
30.56.1Detailed Description	591
30.56.2Constructor & Destructor Documentation	591
30.56.3Member Function Documentation	591
30.56.4Member Data Documentation	600
30.57crypto::xorHash Class Reference	601
30.57.1Detailed Description	602
30.57.2Constructor & Destructor Documentation	602
30.57.3Member Function Documentation	603
 VI glGraphics Library	 606
 31 Introduction	 607
31.1 Namespace	607
 32 File Index	 608
32.1 File List	608
 33 File Documentation	 610
33.1 freeglut.h File Reference	610
33.2 freeglut.h File Reference	610
33.2.1 Detailed Description	610
33.3 freeglut_ext.h File Reference	610
33.4 freeglut_ext.h File Reference	610
33.4.1 Detailed Description	610
33.5 freeglut_std.h File Reference	611
33.6 freeglut_std.h File Reference	611
33.6.1 Detailed Description	611
33.7 glCheckbox.cpp File Reference	611
33.8 glCheckbox.h File Reference	611
33.9 glColors.cpp File Reference	611
33.10glColors.h File Reference	612
33.11glContainers.cpp File Reference	612
33.12glContainers.h File Reference	612
33.13glForm.cpp File Reference	613
33.13.1Function Documentation	613
33.13.2Variable Documentation	613
33.14glForm.h File Reference	613
33.15glFrame.cpp File Reference	614
33.16glFrame.h File Reference	614
33.17glInput.cpp File Reference	615
33.17.1Variable Documentation	615

33.18	glInput.h File Reference	615
33.19	glLabel.cpp File Reference	616
33.20	glLabel.h File Reference	616
33.21	glLibrary.h File Reference	617
33.22	glLogging.cpp File Reference	617
33.23	glLogging.h File Reference	617
33.24	glOSFunctions.cpp File Reference	617
33.25	glOSFunctions.cpp File Reference	617
	33.25.1Detailed Description	617
33.26	glOSFunctions.cpp File Reference	618
	33.26.1Detailed Description	618
33.27	glOSFunctions.h File Reference	618
33.28	glOSFunctions.h File Reference	618
	33.28.1Detailed Description	619
33.29	glOSFunctions.h File Reference	619
	33.29.1Detailed Description	619
33.30	glPopUp.cpp File Reference	620
33.31	glPopUp.h File Reference	620
33.32	glTest.cpp File Reference	620
	33.32.1Detailed Description	620
33.33	glTest.h File Reference	620
	33.33.1Detailed Description	620
33.34	glTestingFrame.cpp File Reference	621
	33.34.1Detailed Description	621
33.35	glTestingFrame.h File Reference	621
	33.35.1Detailed Description	622
33.36	glTextbox.cpp File Reference	622
33.37	glTextbox.h File Reference	622
33.38	glut.h File Reference	623
33.39	glut_w.h File Reference	623
33.40	image_DXT.cpp File Reference	623
33.41	image_DXT.h File Reference	623
33.42	image_helper.cpp File Reference	624
33.43	image_helper.h File Reference	625
33.44	osGraphics.h File Reference	625
33.45	osGraphics.h File Reference	625
	33.45.1Detailed Description	625
	33.45.2Function Documentation	626
33.46	osGraphics.h File Reference	626
	33.46.1Detailed Description	626
33.47	SOIL.cpp File Reference	626
	33.47.1Detailed Description	626
33.48	SOIL.h File Reference	627
	33.48.1Detailed Description	627
33.49	stb_image_aug.cpp File Reference	627
	33.49.1Detailed Description	627
33.50	stb_image_aug.h File Reference	627
	33.50.1Detailed Description	628
33.51	stbi_DDS_aug.h File Reference	628

33.51.1Detailed Description	628
33.52stbi_DDS_aug_c.h File Reference	628
33.53textureManager.cpp File Reference	628
33.53.1Variable Documentation	629
33.54textureManager.h File Reference	629
34 Class Index	630
34.1 Class List	630
35 Namespace Documentation	632
35.1 gl Namespace Reference	632
35.1.1 Typedef Documentation	636
35.1.2 Enumeration Type Documentation	636
35.1.3 Function Documentation	638
35.1.4 Variable Documentation	640
35.2 gl::col Namespace Reference	642
35.2.1 Variable Documentation	642
35.3 test Namespace Reference	643
35.3.1 Function Documentation	644
35.4 test::macro Namespace Reference	644
35.4.1 Function Documentation	644
36 Class Documentation	646
36.1 gl::activeDisplayArrowButton Class Reference	646
36.1.1 Constructor & Destructor Documentation	647
36.1.2 Member Function Documentation	647
36.1.3 Member Data Documentation	647
36.2 gl::activeDisplayButton Class Reference	647
36.2.1 Constructor & Destructor Documentation	648
36.2.2 Member Function Documentation	648
36.2.3 Member Data Documentation	649
36.3 gl::arrowButton Class Reference	649
36.3.1 Constructor & Destructor Documentation	651
36.3.2 Member Function Documentation	651
36.3.3 Member Data Documentation	652
36.4 gl::barGroup Class Reference	652
36.4.1 Constructor & Destructor Documentation	654
36.4.2 Member Function Documentation	654
36.4.3 Friends And Related Function Documentation	655
36.4.4 Member Data Documentation	655
36.5 gl::baseUIDriver Class Reference	655
36.5.1 Constructor & Destructor Documentation	656
36.5.2 Member Function Documentation	656
36.5.3 Friends And Related Function Documentation	657
36.5.4 Member Data Documentation	657
36.6 gl::box Class Reference	657
36.6.1 Constructor & Destructor Documentation	658
36.6.2 Member Function Documentation	658
36.6.3 Member Data Documentation	659
36.7 gl::button Class Reference	659

36.7.1	Constructor & Destructor Documentation	660
36.7.2	Member Function Documentation	660
36.7.3	Member Data Documentation	661
36.8	gl::checkbox Class Reference	661
36.8.1	Constructor & Destructor Documentation	663
36.8.2	Member Function Documentation	663
36.8.3	Member Data Documentation	664
36.9	test::checkboxForm Class Reference	664
36.9.1	Constructor & Destructor Documentation	665
36.9.2	Member Data Documentation	665
36.10	gl::checkboxGroup Class Reference	665
36.10.1	Constructor & Destructor Documentation	667
36.10.2	Member Function Documentation	667
36.10.3	Member Data Documentation	668
36.11	gl::clickedFunction Class Reference	669
36.11.1	Constructor & Destructor Documentation	669
36.11.2	Member Function Documentation	669
36.11.3	Member Data Documentation	669
36.12	gl::clickedFunctionVoid Class Reference	670
36.12.1	Constructor & Destructor Documentation	670
36.12.2	Member Function Documentation	670
36.12.3	Member Data Documentation	670
36.13	gl::clickedListener Class Reference	670
36.13.1	Constructor & Destructor Documentation	671
36.13.2	Member Function Documentation	671
36.13.3	Friends And Related Function Documentation	672
36.13.4	Member Data Documentation	672
36.14	test::clickedTestListener Class Reference	672
36.14.1	Constructor & Destructor Documentation	672
36.14.2	Member Function Documentation	672
36.14.3	Member Data Documentation	673
36.15	gl::color Struct Reference	673
36.15.1	Constructor & Destructor Documentation	673
36.15.2	Member Function Documentation	673
36.15.3	Member Data Documentation	673
36.16	gl::DDS_header Struct Reference	674
36.16.1	Detailed Description	674
36.16.2	Member Data Documentation	674
36.17	gl::depressedFunction Class Reference	675
36.17.1	Constructor & Destructor Documentation	676
36.17.2	Member Function Documentation	676
36.17.3	Member Data Documentation	676
36.18	gl::depressedFunctionVoid Class Reference	676
36.18.1	Constructor & Destructor Documentation	677
36.18.2	Member Function Documentation	677
36.18.3	Member Data Documentation	677
36.19	gl::depressedListener Class Reference	677
36.19.1	Constructor & Destructor Documentation	678
36.19.2	Member Function Documentation	678

36.19.3	Friends And Related Function Documentation	678
36.19.4	Member Data Documentation	678
36.20	test::depressedTestListener Class Reference	678
36.20.1	Constructor & Destructor Documentation	679
36.20.2	Member Function Documentation	679
36.20.3	Member Data Documentation	679
36.21	gl::element Class Reference	679
36.21.1	Constructor & Destructor Documentation	682
36.21.2	Member Function Documentation	682
36.21.3	Friends And Related Function Documentation	687
36.21.4	Member Data Documentation	687
36.22	gl::enterFunction Class Reference	688
36.22.1	Constructor & Destructor Documentation	688
36.22.2	Member Function Documentation	689
36.22.3	Member Data Documentation	689
36.23	gl::enterFunctionVoid Class Reference	689
36.23.1	Constructor & Destructor Documentation	689
36.23.2	Member Function Documentation	689
36.23.3	Member Data Documentation	690
36.24	gl::enterListener Class Reference	690
36.24.1	Constructor & Destructor Documentation	690
36.24.2	Member Function Documentation	690
36.24.3	Friends And Related Function Documentation	690
36.24.4	Member Data Documentation	690
36.25	test::enterTestListener Class Reference	691
36.25.1	Constructor & Destructor Documentation	691
36.25.2	Member Function Documentation	691
36.25.3	Member Data Documentation	691
36.26	gl::entireFormScroll Class Reference	692
36.26.1	Constructor & Destructor Documentation	692
36.26.2	Member Function Documentation	692
36.27	gl::fileBar Class Reference	692
36.27.1	Constructor & Destructor Documentation	694
36.27.2	Member Function Documentation	694
36.27.3	Member Data Documentation	695
36.28	gl::font Class Reference	695
36.28.1	Constructor & Destructor Documentation	696
36.28.2	Member Function Documentation	696
36.28.3	Member Data Documentation	697
36.29	gl::form Class Reference	697
36.29.1	Constructor & Destructor Documentation	699
36.29.2	Member Function Documentation	699
36.29.3	Friends And Related Function Documentation	701
36.29.4	Member Data Documentation	701
36.30	gl::form3d Class Reference	702
36.30.1	Constructor & Destructor Documentation	703
36.30.2	Member Function Documentation	703
36.30.3	Member Data Documentation	703
36.31	gl::frame Class Reference	703

36.31.1	Constructor & Destructor Documentation	705
36.31.2	Member Function Documentation	705
36.31.3	Friends And Related Function Documentation	707
36.31.4	Member Data Documentation	707
36.32	Qgl::globalKeyListener Class Reference	708
36.32.1	Constructor & Destructor Documentation	708
36.32.2	Member Function Documentation	708
36.32.3	Friends And Related Function Documentation	708
36.32.4	Member Data Documentation	709
36.33	Qgl::globalMouseListener Class Reference	709
36.33.1	Constructor & Destructor Documentation	709
36.33.2	Member Function Documentation	709
36.33.3	Friends And Related Function Documentation	710
36.33.4	Member Data Documentation	710
36.34	Qgl::Helvetica Class Reference	710
36.34.1	Constructor & Destructor Documentation	710
36.34.2	Member Function Documentation	710
36.35	Qgl::imageElement Class Reference	710
36.35.1	Constructor & Destructor Documentation	711
36.35.2	Member Function Documentation	711
36.35.3	Member Data Documentation	711
36.36	Qgl::key Class Reference	711
36.36.1	Constructor & Destructor Documentation	712
36.36.2	Member Function Documentation	712
36.36.3	Member Data Documentation	712
36.37	Qgl::keyboard Class Reference	712
36.37.1	Constructor & Destructor Documentation	713
36.37.2	Member Function Documentation	713
36.37.3	Friends And Related Function Documentation	713
36.37.4	Member Data Documentation	713
36.38	Qgl::keyboardListener Class Reference	714
36.38.1	Constructor & Destructor Documentation	714
36.38.2	Member Function Documentation	714
36.38.3	Friends And Related Function Documentation	715
36.38.4	Member Data Documentation	715
36.39	Qgl::label Class Reference	715
36.39.1	Constructor & Destructor Documentation	716
36.39.2	Member Function Documentation	716
36.39.3	Member Data Documentation	717
36.40	Qgl::mouse Class Reference	718
36.40.1	Constructor & Destructor Documentation	718
36.40.2	Member Function Documentation	718
36.40.3	Friends And Related Function Documentation	719
36.40.4	Member Data Documentation	719
36.41	Qgl::mouseListener Class Reference	719
36.41.1	Constructor & Destructor Documentation	720
36.41.2	Member Function Documentation	720
36.41.3	Friends And Related Function Documentation	721
36.41.4	Member Data Documentation	721

36.42	gl::navForm Class Reference	721
36.42.1	Constructor & Destructor Documentation	722
36.42.2	Member Function Documentation	722
36.42.3	Member Data Documentation	722
36.43	gl::popUp Class Reference	722
36.43.1	Constructor & Destructor Documentation	724
36.43.2	Member Function Documentation	724
36.43.3	Member Data Documentation	725
36.44	gl::pressedFunction Class Reference	725
36.44.1	Constructor & Destructor Documentation	725
36.44.2	Member Function Documentation	725
36.44.3	Member Data Documentation	726
36.45	gl::pressedFunctionVoid Class Reference	726
36.45.1	Constructor & Destructor Documentation	726
36.45.2	Member Function Documentation	726
36.45.3	Member Data Documentation	726
36.46	gl::pressedListener Class Reference	727
36.46.1	Constructor & Destructor Documentation	727
36.46.2	Member Function Documentation	727
36.46.3	Friends And Related Function Documentation	727
36.46.4	Member Data Documentation	727
36.47	Test::pressedTestListener Class Reference	728
36.47.1	Constructor & Destructor Documentation	728
36.47.2	Member Function Documentation	728
36.47.3	Member Data Documentation	728
36.48	gl::resizedListener Class Reference	728
36.48.1	Constructor & Destructor Documentation	729
36.48.2	Member Function Documentation	729
36.48.3	Friends And Related Function Documentation	729
36.48.4	Member Data Documentation	729
36.49	Test::resizedTestListener Class Reference	729
36.49.1	Constructor & Destructor Documentation	730
36.49.2	Member Function Documentation	730
36.49.3	Member Data Documentation	730
36.50	gl::resizeFunction Class Reference	730
36.50.1	Constructor & Destructor Documentation	731
36.50.2	Member Function Documentation	731
36.50.3	Member Data Documentation	731
36.51	gl::resizeFunctionVoid Class Reference	731
36.51.1	Constructor & Destructor Documentation	732
36.51.2	Member Function Documentation	732
36.51.3	Member Data Documentation	732
36.52	gl::scrollArea Class Reference	732
36.52.1	Constructor & Destructor Documentation	733
36.52.2	Member Function Documentation	733
36.52.3	Member Data Documentation	733
36.53	gl::scrollbar Class Reference	734
36.53.1	Constructor & Destructor Documentation	735
36.53.2	Member Function Documentation	735

36.53.3	Friends And Related Function Documentation	736
36.53.4	Member Data Documentation	736
36.54	gl::singleButtonPopUp Class Reference	737
36.54.1	Constructor & Destructor Documentation	738
36.54.2	Member Function Documentation	738
36.54.3	Member Data Documentation	738
36.55	test::singleUIFunctionTest Class Reference	738
36.55.1	Constructor & Destructor Documentation	739
36.55.2	Member Function Documentation	739
36.55.3	Member Data Documentation	739
36.56	test::singleUITest Class Reference	739
36.56.1	Constructor & Destructor Documentation	739
36.56.2	Member Function Documentation	739
36.57	test::testForm Class Reference	739
36.57.1	Constructor & Destructor Documentation	741
36.57.2	Member Function Documentation	741
36.57.3	Member Data Documentation	741
36.58	gl::testingDriver Class Reference	741
36.58.1	Constructor & Destructor Documentation	742
36.58.2	Member Function Documentation	742
36.58.3	Member Data Documentation	743
36.59	gl::textbox Class Reference	743
36.59.1	Constructor & Destructor Documentation	745
36.59.2	Member Function Documentation	745
36.59.3	Member Data Documentation	747
36.60	test::textboxForm Class Reference	747
36.60.1	Constructor & Destructor Documentation	748
36.60.2	Member Data Documentation	748
36.61	gl::texture_data Struct Reference	748
36.61.1	Constructor & Destructor Documentation	749
36.61.2	Member Data Documentation	749
36.62	gl::textureManager Class Reference	749
36.62.1	Constructor & Destructor Documentation	750
36.62.2	Member Function Documentation	750
36.62.3	Member Data Documentation	750
36.63	gl::TimesMonoRomanStroke Class Reference	750
36.63.1	Constructor & Destructor Documentation	751
36.63.2	Member Function Documentation	751
36.64	gl::TimesRoman Class Reference	751
36.64.1	Constructor & Destructor Documentation	751
36.64.2	Member Function Documentation	751
36.65	gl::TimesRomanStroke Class Reference	752
36.65.1	Constructor & Destructor Documentation	752
36.65.2	Member Function Documentation	752
36.66	gl::UIDriver Class Reference	752
36.66.1	Constructor & Destructor Documentation	753
36.66.2	Member Function Documentation	753
36.66.3	Friends And Related Function Documentation	754
36.66.4	Member Data Documentation	754

36.67	test::UITestSuite Class Reference	754
36.67.1	Constructor & Destructor Documentation	754
36.67.2	Member Function Documentation	754
36.68	gl::wrappableBox Class Reference	754
36.68.1	Constructor & Destructor Documentation	755
36.68.2	Member Function Documentation	755

Part I

CryptoLogin Library

Chapter 1

Introduction

The CryptoLogin library contains a series of forms and support class used to open, manage and edit users. These forms utilize the Datastructures, osMechanics, CryptoGateway and glGraphics libraries.

1.1 Unit Testing

Currently, the CryptoLogin library is not tested. In the future, the CryptoLogin will leverage the testing functionality of the glGraphics library to preform basic testing on the forms through the headless testing interface in glGraphics.

1.2 Namespace login

This namespace contains forms used for both logging in and visualizing the basics of a user. Note that the initial entry form is a template class so that the login namespace can open any form when logging in. It is expected that the subsequent form will provide opportunities for the user to open some of the user editing forms provided by the login namespace.

Chapter 2

File Index

2.1 File List

Here is a list of all files with brief descriptions:

createUserForm.cpp	
Implements the user creation form	5
createUserForm.h	5
cryptoLogin.h	
All login header files	6
cryptoLoginLog.h	
Logging for login namespace	6
keyGenerationPopUp.cpp	
Key generation pop-up	7
keyGenerationPopUp.h	
Various crypto-graphic pop-ups	7
listUsersForm.cpp	8
listUsersForm.h	8
loginMain.cpp	
Miscellaneous implementation for login namespace	8
loginMain.h	
Entry login form	9
loginMetaData.cpp	9
loginMetaData.h	
Impliments login-form meta-data	9
manageKeysForm.cpp	10
manageKeysForm.h	10

Chapter 3

File Documentation

3.1 createUserForm.cpp File Reference

Implements the user creation form.

3.1.1 Detailed Description

Implements the user creation form.

Implements key management form.

Author

Jonathan Bedard

Date

4/21/2016

Bug None

Implements the user creation form. Consult **createUserForm.h** (p. 5) for details.

Author

Jonathan Bedard

Date

5/5/2016

Bug None

Implements the key management form, which can be accessed from the secure side side of the gateway

3.2 createUserForm.h File Reference

Classes

- class **login::createUser**

Namespaces

- **login**

3.3 cryptoLogin.h File Reference

All login header files.

3.3.1 Detailed Description

All login header files.

Author

Jonathan Bedard

Date

4/12/2016

Bug None

Includes all login header files to be used outside the library.

3.4 cryptoLoginLog.h File Reference

Logging for login namespace.

Namespaces

- **login**

Functions

- `std::ostream & login::loginout_func ()`
Standard out object for login namespace.
- `std::ostream & login::loginerr_func ()`
Standard error object for login namespace.

Variables

- `os::smart_ptr< std::ostream > login::loginout_ptr`
Standard out pointer for login namespace.
- `os::smart_ptr< std::ostream > login::loginerr_ptr`
Standard error pointer for login namespace.

3.4.1 Detailed Description

Logging for login namespace.

Author

Jonathan Bedard

Date

4/12/2016

Bug None

This file contains declarations which are used for logging within the login namespace.

3.5 keyGenerationPopUp.cpp File Reference

Key generation pop-up.

3.5.1 Detailed Description

Key generation pop-up.

Author

Jonathan Bedard

Date

5/8/2016

Bug None

Implements the key-generation pop-up which provides a UI while public keys are being generated.

3.6 keyGenerationPopUp.h File Reference

Various crypto-graphic pop-ups.

Classes

- class **login::publicKeyPopUp**
Used when generating keys.
- class **login::userLoadingPopUp**
Used when loading the user.

Namespaces

- **login**

3.6.1 Detailed Description

Various crypto-graphic pop-ups.

Author

Jonathan Bedard

Date

4/21/2016

Bug None

Provides two pop-up forms used by the CryptoLogin library. One is used when generating public keys and another is used when loading user data.

3.7 listUsersForm.cpp File Reference

3.8 listUsersForm.h File Reference

Classes

- class **login::userFrame**
Defines a user display frame This frame displays basic user data before a user is logged in. This data is defined from the login meta-data.
- class **login::listUsers**
*List-user form A navigation form listing all users associated with a particular **loginMetaData** (p. 19) class.*

Namespaces

- **login**

3.9 loginMain.cpp File Reference

Miscellaneous implementation for login namespace.

3.9.1 Detailed Description

Miscellaneous implementation for login namespace.

Author

Jonathan Bedard

Date

3/7/2016

Bug None

Implements a number of functions and objects used in the login namespaces. In particular, this file implements the logging structures for the login namespace.

3.10 loginMain.h File Reference

Entry login form.

Classes

- class **login::mainLogin**< **nextForm** >
Login form.

Namespaces

- **login**

3.10.1 Detailed Description

Entry login form.

Author

Jonathan Bedard

Date

4/20/2016

Bug None

Provides a template class for applications which would like to include a password to log in. Will allow the user to create new users and define public keys for those users as well.

3.11 loginMetaData.cpp File Reference

3.12 loginMetaData.h File Reference

Impliments login-form meta-data.

Classes

- struct **login::userNode**
User node.
- class **login::loginMetaData**
Login meta-data class.

Namespaces

- **login**

Variables

- `const char * login::META_FILE`
Meta-data file name.
- `const char * login::USERS_FOLDER`
Folder holding user data.

3.12.1 Detailed Description

Implements login-form meta-data.
Contains meta-data for login form.

Author

Jonathan Bedard

Date

4/18/2016

Bug None

Implements the login meta-data class. Consult **loginMetaData.h** (p. 9) for details.

Author

Jonathan Bedard

Date

4/13/2016

Bug None

Provides meta-data to the login form. This class has default states, so if a custom meta-data class is not passed to the login form, a default one will be created.

3.13 manageKeysForm.cpp File Reference

3.14 manageKeysForm.h File Reference

Classes

- class **login::publicKeyTypeFrame**
- class **login::userSettingsForm**
- class **login::keyBankForm**

Namespaces

- **login**

Chapter 4

Class Index

4.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

login::createUser	14
login::keyBankForm	16
login::listUsers	
List-user form A navigation form listing all users associated with a particular login	
MetaData (p. 19) class	17
login::loginMetaData	
Login meta-data class	19
login::mainLogin< nextForm >	
Login form	24
login::publicKeyTypeFrame	28
login::pulblicKeyPopUp	
Used when generating keys	29
login::userFrame	
Defines a user display frame This frame displays basic user data before a user is logged in. This data is defined from the login meta-data	31
login::userLoadingPopUp	
Used when loading the user	34
login::userNode	
User node	36
login::userSettingsForm	39

Chapter 5

Namespace Documentation

5.1 login Namespace Reference

Classes

- class **createUser**
- class **keyBankForm**
- class **listUsers**
*List-user form A navigation form listing all users associated with a particular **loginMetaData** (p. 19) class.*
- class **loginMetaData**
Login meta-data class.
- class **mainLogin**
Login form.
- class **publicKeyTypeFrame**
- class **pulblicKeyPopUp**
Used when generating keys.
- class **userFrame**
Defines a user display frame This frame displays basic user data before a user is logged in. This data is defined from the login meta-data.
- class **userLoadingPopUp**
Used when loading the user.
- struct **userNode**
User node.
- class **userSettingsForm**

Functions

- `std::ostream & loginout_func ()`
Standard out object for login namespace.
- `std::ostream & loginerr_func ()`
Standard error object for login namespace.

Variables

- `os::smart_ptr< std::ostream > loginout_ptr`
Standard out pointer for login namespace.
- `os::smart_ptr< std::ostream > loginerr_ptr`
Standard error pointer for login namespace.
- `const char * META_FILE`
Meta-data file name.
- `const char * USERS_FOLDER`
Folder holding user data.

5.1.1 Function Documentation

`std::ostream& login::loginerr_func ()`

Standard error object for login namespace.

#define statements allow the user to call this function with "login::loginerr." Logging is achieved by using "login::loginerr" as one would use "std::cerr."

`std::ostream& login::loginout_func ()`

Standard out object for login namespace.

#define statements allow the user to call this function with "login::loginout." Logging is achieved by using "login::loginout" as one would use "std::cout."

5.1.2 Variable Documentation

`os::smart_ptr<std::ostream> login::loginerr_ptr`

Standard error pointer for login namespace.

This `std::ostream` is used as standard error for the login namespace. This pointer can be swapped out to programmatically redirect standard error for the login namespace.

`os::smart_ptr<std::ostream> login::loginout_ptr`

Standard out pointer for login namespace.

This `std::ostream` is used as standard out for the login namespace. This pointer can be swapped out to programmatically redirect standard out for the login namespace.

`const char* login::META_FILE`

Meta-data file name.

`const char* login::USERS_FOLDER`


Folder holding user data.

Chapter 6

Class Documentation

6.1 login::createUser Class Reference

Inheritance diagram for login::createUser:

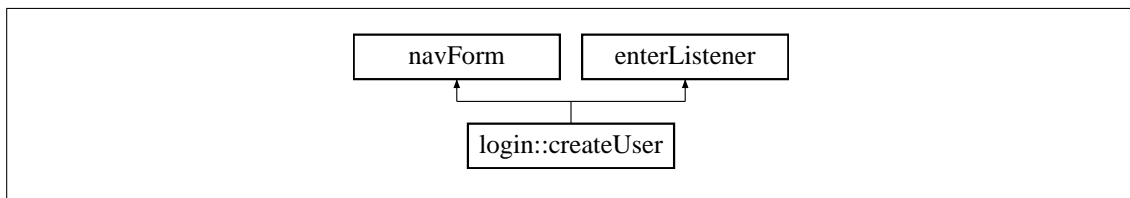

Public Member Functions

- **createUser** (gl::form *master, std::string baseTitle, **loginMetaData** &md)
- virtual **~createUser** ()
- void **updateIndicators** ()
- void **receivedClicked** (os::smart_ptr< element > elm)
- void **receivedEnter** (os::smart_ptr< element > elm)
- bool **keyUnpress** (const gl::key &_key)

Protected Member Functions

- void **update** ()

Private Attributes

- gl::label **lblUser**
- gl::textbox **tbxUser**
- gl::label **indUser**
- gl::label **lblPassword1**
- gl::textbox **tbxPassword1**
- gl::label **indPassword**

- gl::label **lblPassword2**
- gl::textbox **tbxPassword2**
- gl::activeDisplayButton **btnRSA128**
- gl::activeDisplayButton **btnRSA256**
- gl::activeDisplayButton **btnRSA512**
- gl::activeDisplayButton **btnCreate**
- gl::button **btnQuit**
- **loginMetaData** & **metaData**
- unsigned int **keyCreation**

6.1.1 Constructor & Destructor Documentation

login::createUser::createUser (gl::form * master, std::string baseTitle, **loginMetaData** & md)

virtual login::createUser::~~createUser () [inline], [virtual]

6.1.2 Member Function Documentation

bool login::createUser::keyUnpress (const gl::key & _key)

void login::createUser::receivedClicked (os::smart_ptr< element > elm)

void login::createUser::receivedEnter (os::smart_ptr< element > elm)

void login::createUser::update () [protected]

void login::createUser::updateIndicators ()

6.1.3 Member Data Documentation

gl::activeDisplayButton login::createUser::btnCreate [private]

gl::button login::createUser::btnQuit [private]

gl::activeDisplayButton login::createUser::btnRSA128 [private]

gl::activeDisplayButton login::createUser::btnRSA256 [private]

gl::activeDisplayButton login::createUser::btnRSA512 [private]

gl::label login::createUser::indPassword [private]

gl::label login::createUser::indUser [private]

unsigned int login::createUser::keyCreation [private]

gl::label login::createUser::lblPassword1 [private]

gl::label login::createUser::lblPassword2 [private]

gl::label login::createUser::lblUser [private]

loginMetaData& login::createUser::metaData [private]


gl::textbox login::createUser::tbxPassword1 [private]

gl::textbox login::createUser::tbxPassword2 [private]

gl::textbox login::createUser::tbxUser [private]

6.2 login::keyBankForm Class Reference

Inheritance diagram for login::keyBankForm:

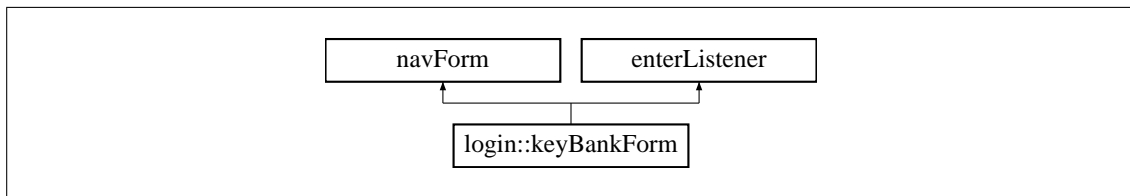

Public Member Functions

- **keyBankForm** (gl::form *master, os::smart_ptr< crypto::keyBank > kb)
- virtual **~keyBankForm** ()
- void **receivedClicked** (os::smart_ptr< element > elm)
- void **receivedEnter** (os::smart_ptr< element > elm)
- void **resize** ()

Protected Member Functions

- void **update** ()

Private Attributes

- os::smart_ptr< crypto::keyBank > **_keyBank**
- gl::scrollArea **scrArea**

6.2.1 Constructor & Destructor Documentation

login::keyBankForm::keyBankForm (gl::form * master, os::smart_ptr< crypto::keyBank > kb)

virtual login::keyBankForm::~keyBankForm () [inline], [virtual]

6.2.2 Member Function Documentation

void login::keyBankForm::receivedClicked (os::smart_ptr< element > elm)

void login::keyBankForm::receivedEnter (os::smart_ptr< element > elm)

void login::keyBankForm::resize ()

void login::keyBankForm::update () [protected]

6.2.3 Member Data Documentation


os::smart_ptr<crypto::keyBank> login::keyBankForm::_keyBank [private]

gl::scrollArea login::keyBankForm::scrArea [private]

6.3 login::listUsers Class Reference

List-user form A navigation form listing all users associated with a particular **loginMetaData** (p. 19) class.

Inheritance diagram for login::listUsers:

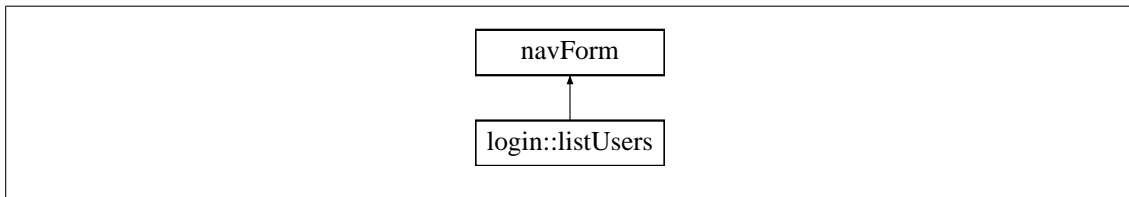

Public Member Functions

- **listUsers** (gl::form *master, std::string baseTitle, **loginMetaData** &metaDataPointer)
Form constructor.
- virtual **~listUsers** ()
Virtual destructor.

Protected Member Functions

- void **update** ()
Triggered each update cycle.

Private Member Functions

- void **refreshFromMeta** ()
Rebuild form from meta-data.

Private Attributes

- bool **needRefresh**
Indicates if meta-data needs to be refreshed.
- gl::scrollArea **scrArea**
Area holding user frames.
- **loginMetaData** & **metaData**
Meta-data defining users.
- os::smartSet< **userFrame** > **frameDisplay**
User frames to be displayed.

Friends

- class **userFrame**

Friendship with user-frame Since the user-frame defines button-press events, the user-frame must be able to modify the intrinsics of this form+.

6.3.1 Detailed Description

List-user form A navigation form listing all users associated with a particular **loginMetaData** (p. 19) class.

6.3.2 Constructor & Destructor Documentation

login::listUsers::listUsers (gl::form * master, std::string baseTitle, **loginMetaData** & metaDataPointer)

Form constructor.

Parameters

in	<i>master</i>	Previos form
in	<i>baseTitle</i>	Title of base application
in	<i>metaDataPointer</i>	Meta-data for user definition

virtual login::listUsers::~~listUsers () [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

6.3.3 Member Function Documentation

void login::listUsers::refreshFromMeta () [private]

Rebuild form from meta-data.

Returns

void

void login::listUsers::update () [protected]

Triggered each update cycle.

Returns

void

6.3.4 Friends And Related Function Documentation

friend class **userFrame** [friend]

Friendship with user-frame Since the user-frame defines button-press events, the user-frame must be able to modify the intrinsics of this form+.

6.3.5 Member Data Documentation

os::smartSet<**userFrame**> login::listUsers::frameDisplay [private]

User frames to be displayed.

loginMetaData& login::listUsers::metaData [private]

Meta-data defining users.

bool login::listUsers::needRefresh [private]

Indicates if meta-data needs to be refreshed.


gl::scrollArea login::listUsers::scrArea [private]

Area holding user frames.

6.4 login::loginMetaData Class Reference

Login meta-data class.

Inheritance diagram for login::loginMetaData:

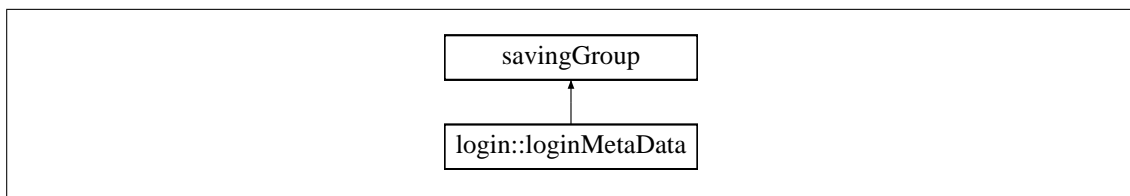

Public Member Functions

- **loginMetaData** (std::string svPath)
Meta-data constructor.
- **loginMetaData** (**loginMetaData** &cpy)
Meta-data copy constructor.
- virtual ~**loginMetaData** ()
Virtual destructor.
- void **load** ()
Loads meta-data from XML file.

- void **save** ()
Saves meta-data file.
- void **checkUserData** ()
Check user directories.
- os::smart_ptr< **userNode** > **findUser** (std::string usr)
Find user by name.
- os::smart_ptr< crypto::user > **createUser** (std::string usr, std::string pass) throw (std::string)
Create new user.
- os::smart_ptr< crypto::user > **openUser** (std::string usr, std::string pass) throw (std::string)
Logs a new user in.
- void **unbindUser** ()
Sets the current user to NULL.
- const std::string & **savePath** () const
Returns the save path.
- os::smart_ptr< crypto::user > **currentUser** ()
Returns the current user.

Public Attributes

- os::asyncAVLTree< **userNode** > **users**
List of current users Stores all users in a list to be logged into.
- std::string **defaultUsername**
Default username.
- std::string **defaultPassword**
Default password.
- bool **needsBinding**
*Data changed flag This flag is used by the UI to refresh when the **loginMetaData** (p. 19) changes.*
- os::multiLock **lock**
Read/write lock.

Private Member Functions

- os::smartXMLNode **generateSaveTree** ()
Generate a new save tree.

Private Attributes

- std::string **_savePath**
Path to save directory.
- os::smart_ptr< crypto::user > **_currentUser**
Pointer to the current user.

6.4.1 Detailed Description

Login meta-data class.

Contains supporting data for login interfaces.

6.4.2 Constructor & Destructor Documentation

`login::loginMetaData::loginMetaData (std::string svPath)`

Meta-data constructor.

Parameters

in	<i>svPath</i>	Save directory path
----	---------------	---------------------

`login::loginMetaData::loginMetaData (loginMetaData & cpy)`

Meta-data copy constructor.

Parameters

in	<i>cpy</i>	Meta-data to copy
----	------------	-------------------

`virtual login::loginMetaData::~loginMetaData () [inline], [virtual]`

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

6.4.3 Member Function Documentation

`void login::loginMetaData::checkUserData ()`

Check user directories.

Iterates through all folders in the user directory to see which users are actually available.

Returns

`void`

`os::smart_ptr<crypto::user> login::loginMetaData::createUser (std::string usr, std::string pass)
throw std::string)`

Create new user.

Parameters

in	<i>usr</i>	Target username
in	<i>pass</i>	Target password

Returns

Newly created user

```
os::smart_ptr<crypto::user> login::loginMetaData::currentUser ( ) [inline]
```

Returns the current user.

Returns

login::loginMetaData::_currentUser (p. 23)

```
os::smart_ptr<userNode> login::loginMetaData::findUser ( std::string usr )
```

Find user by name.

Parameters

in	<i>usr</i>	Name of user to be searched
----	------------	-----------------------------

Returns

User with the given name

```
os::smartXMLNode login::loginMetaData::generateSaveTree ( ) [private]
```

Generate a new save tree.

Returns

XML tree to be saved

```
void login::loginMetaData::load ( )
```

Loads meta-data from XML file.

Parses the XML tree and scans folders to populate the list of available users.

Returns

void

```
os::smart_ptr<crypto::user> login::loginMetaData::openUser ( std::string usr, std::string pass )  
throw std::string)
```

Logs a new user in.

Parameters

in	<i>usr</i>	Target username
in	<i>pass</i>	Target password

Returns

Opened user

`void login::loginMetaData::save ()`

Saves meta-data file.

Returns

`void`

`const std::string& login::loginMetaData::savePath () const [inline]`

Returns the save path.

Returns

`login::loginMetaData::_savePath` (p. 23)

`void login::loginMetaData::unbindUser () [inline]`

Sets the current user to NULL.

Returns

`void`

6.4.4 Member Data Documentation

`os::smart_ptr<crypto::user> login::loginMetaData::_currentUser [private]`

Pointer to the current user.

`std::string login::loginMetaData::_savePath [private]`

Path to save directory.

`std::string login::loginMetaData::defaultPassword`

Default password.

`std::string login::loginMetaData::defaultUsername`

Default username.

`os::multiLock login::loginMetaData::lock`

Read/write lock.

Allows for both reading and writing to occur asynchronously

`bool login::loginMetaData::needsBinding`

Data changed flag This flag is used by the UI to refresh when the **loginMetaData** (p. 19) changes.


os::asyncAVLTree<**userNode**> login::loginMetaData::users

List of current users Stores all users in a list to be logged into.

6.5 login::mainLogin< nextForm > Class Template Reference

Login form.

Inheritance diagram for login::mainLogin< nextForm >:

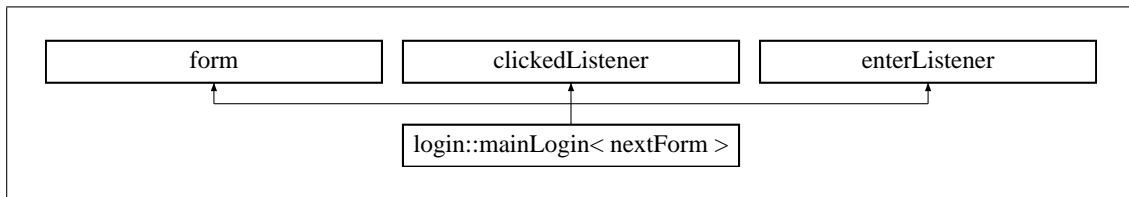

Public Member Functions

- **mainLogin** (int *argc, char **argv, std::string title, **loginMetaData** metaData)
New form constructor.
- virtual **~mainLogin** ()
Virtual destructor.
- void **openNextForm** ()
Attempts to open the next form.
- void **receivedClicked** (os::smart_ptr< element > elm)
Trigger on button click.
- void **receivedEnter** (os::smart_ptr< element > elm)
Trigger on enter event.

Protected Member Functions

- void **update** ()
Triggered every cycle.

Private Attributes

- **loginMetaData _metaData**
Login meta-data.
- bool **loggedIn**
Logged-in state.
- gl::label **lblTitle**
Title label.
- gl::label **lblUser**
User textbox label.
- gl::textbox **tbxUser**

- User textbox.*
- gl::label **lblPassword**
Password textbox label.
- gl::textbox **tbxPassword**
Password textbox.
- gl::button **btnLogin**
Login button.
- gl::button **btnNewUser**
New user button.
- gl::button **btnListUsers**
List users button.
- gl::button **btnExit**
Exit button.

6.5.1 Detailed Description

```
template<class nextForm>
class login::mainLogin< nextForm >
```

Login form.

A form which places the next form behind a login security wall. Defined as a template class so it can open any form after a successful login.

6.5.2 Constructor & Destructor Documentation

```
template<class nextForm > login::mainLogin< nextForm >::mainLogin ( int * argc, char ** argv,
std::string title, loginMetaData metaData ) [inline]
```

New form constructor.

The login form must be the launch point of any application which uses it.

Parameters

in	<i>argc</i>	Number of arguments to main
in	<i>argv</i>	String array of arguments to main
in	<i>title</i>	Title of form
in	<i>metaData</i>	Meta data defining login path

```
template<class nextForm > virtual login::mainLogin< nextForm >::~mainLogin ( ) [inline],
[virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

6.5.3 Member Function Documentation

```
template<class nextForm > void login::mainLogin< nextForm >::openNextForm ( ) [inline]
```

Attempts to open the next form.

Returns

void

```
template<class nextForm > void login::mainLogin< nextForm >::receivedClicked ( os::smart_ptr<
element > elm ) [inline]
```

Trigger on button click.

Parameters

in	<i>elm</i>	Element clicked
----	------------	-----------------

Returns

void

```
template<class nextForm > void login::mainLogin< nextForm >::receivedEnter ( os::smart_ptr<
element > elm ) [inline]
```

Trigger on enter event.

Parameters

in	<i>elm</i>	Element receiving enter
----	------------	-------------------------

Returns

void

```
template<class nextForm > void login::mainLogin< nextForm >::update ( ) [inline],
[protected]
```

Triggered every cycle.

Saves the meta-data if needed, binds the meta-data to the form if the flag has been tripped and opens the next form is valid.

Returns

void

6.5.4 Member Data Documentation

```
template<class nextForm > loginMetaData login::mainLogin< nextForm >::_metaData  
[private]
```

Login meta-data.

```
template<class nextForm > gl::button login::mainLogin< nextForm >::btnExit [private]
```

Exit button.

```
template<class nextForm > gl::button login::mainLogin< nextForm >::btnListUsers [private]
```

List users button.

```
template<class nextForm > gl::button login::mainLogin< nextForm >::btnLogin [private]
```

Login button.

```
template<class nextForm > gl::button login::mainLogin< nextForm >::btnNewUser [private]
```

New user button.

```
template<class nextForm > gl::label login::mainLogin< nextForm >::lblPassword [private]
```

Password textbox label.

```
template<class nextForm > gl::label login::mainLogin< nextForm >::lblTitle [private]
```

Title label.

```
template<class nextForm > gl::label login::mainLogin< nextForm >::lblUser [private]
```

User textbox label.

```
template<class nextForm > bool login::mainLogin< nextForm >::loggedIn [private]
```

Logged-in state.

```
template<class nextForm > gl::textbox login::mainLogin< nextForm >::tbxPassword [private]
```


Password textbox.

```
template<class nextForm > gl::textbox login::mainLogin< nextForm >::tbxUser [private]
```

User textbox.

6.6 login::publicKeyTypeFrame Class Reference

Inheritance diagram for login::publicKeyTypeFrame:

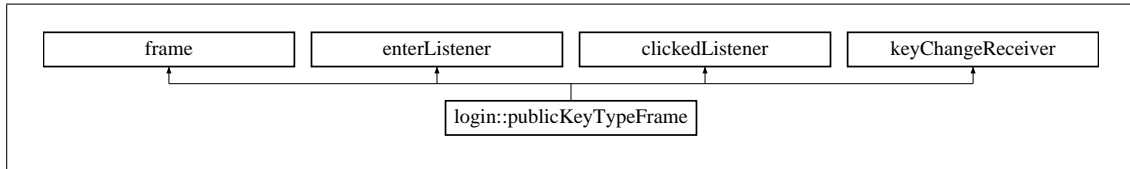

Public Member Functions

- **publicKeyTypeFrame** (os::smart_ptr< **userSettingsForm** > master, os::smart_ptr< crypto::user > usr, os::smart_ptr< crypto::publicKeyPackageFrame > pbkfrm)
- virtual ~**publicKeyTypeFrame** ()
- void **receivedClicked** (os::smart_ptr< element > elm)
- void **receivedEnter** (os::smart_ptr< element > elm)
- void **resize** ()

Public Attributes

- gl::element **elmDivider**
- gl::label **lblTitle**
- gl::button **btnExpand**
- gl::activeDisplayButton **btnGenerate**
- gl::button **btnSetDefault**

Protected Member Functions

- void **publicKeyChanged** (os::smart_ptr< crypto::publicKey > pbk)
- void **update** ()

Private Member Functions

- void **updateKeyList** ()

Private Attributes

- os::smart_ptr< **userSettingsForm** > **masterForm**
- os::smart_ptr< crypto::user > **_user**
- os::smart_ptr< crypto::publicKeyPackageFrame > **_pbkFrame**
- os::smart_ptr< crypto::publicKey > **_pbk**
- os::unsortedList< gl::label > **timestampList**
- os::unsortedList< gl::label > **keyList**
- bool **saveTrigger**
- bool **expanded**

6.6.1 Constructor & Destructor Documentation

```
login::publicKeyTypeFrame::publicKeyTypeFrame ( os::smart_ptr< userSettingsForm > master,  
os::smart_ptr< crypto::user > usr, os::smart_ptr< crypto::publicKeyPackageFrame > pbkfrm )
```

```
virtual login::publicKeyTypeFrame::~~publicKeyTypeFrame ( ) [inline], [virtual]
```

6.6.2 Member Function Documentation

```
void login::publicKeyTypeFrame::publicKeyChanged ( os::smart_ptr< crypto::publicKey > pbk )  
[protected]
```

```
void login::publicKeyTypeFrame::receivedClicked ( os::smart_ptr< element > elm )
```

```
void login::publicKeyTypeFrame::receivedEnter ( os::smart_ptr< element > elm )
```

```
void login::publicKeyTypeFrame::resize ( )
```

```
void login::publicKeyTypeFrame::update ( ) [protected]
```

```
void login::publicKeyTypeFrame::updateKeyList ( ) [private]
```

6.6.3 Member Data Documentation

```
os::smart_ptr<crypto::publicKey> login::publicKeyTypeFrame::_pbk [private]
```

```
os::smart_ptr<crypto::publicKeyPackageFrame> login::publicKeyTypeFrame::_pbkFrame  
[private]
```

```
os::smart_ptr<crypto::user> login::publicKeyTypeFrame::_user [private]
```

```
gl::button login::publicKeyTypeFrame::btnExpand
```

```
gl::activeDisplayButton login::publicKeyTypeFrame::btnGenerate
```

```
gl::button login::publicKeyTypeFrame::btnSetDefault
```

```
gl::element login::publicKeyTypeFrame::elmDivider
```

```
bool login::publicKeyTypeFrame::expanded [private]
```

```
os::unsortedList<gl::label> login::publicKeyTypeFrame::keyList [private]
```

```
gl::label login::publicKeyTypeFrame::lblTitle
```

```
os::smart_ptr<userSettingsForm> login::publicKeyTypeFrame::masterForm [private]
```


```
bool login::publicKeyTypeFrame::saveTrigger [private]
```

```
os::unsortedList<gl::label> login::publicKeyTypeFrame::timestampList [private]
```

6.7 login::publlicKeyPopUp Class Reference

Used when generating keys.

Inheritance diagram for login::publlicKeyPopUp:

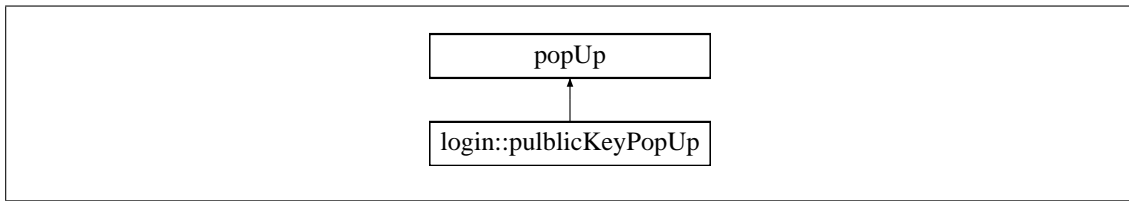

Public Member Functions

- **pulblicKeyPopUp** (os::smart_ptr< gl::form > prev, os::smart_ptr< crypto::user > usr)
Basic constructor.
- virtual ~**pulblicKeyPopUp** ()
Virtual destructor.
- void **update** ()
Triggered each update cycle.

Private Attributes

- gl::label **lblKeyGeneration**
Key generation label.
- os::smart_ptr< crypto::user > **_user**
User generating key.
- unsigned int **dotCount**
Dot counter.

6.7.1 Detailed Description

Used when generating keys.

When generating keys, the UI displays this form until the user can be accessed with a valid public key.

6.7.2 Constructor & Destructor Documentation

login::pulblicKeyPopUp::pulblicKeyPopUp (os::smart_ptr< gl::form > prev, os::smart_ptr< crypto::user > usr)

Basic constructor.

Parameters

in	<i>prev</i>	Previous form
in	<i>usr</i>	User generating key

```
virtual login::pulblicKeyPopUp::~~pulblicKeyPopUp ( ) [inline], [virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

6.7.3 Member Function Documentation

```
void login::pulblicKeyPopUp::update ( )
```

Triggered each update cycle.

Returns

void

6.7.4 Member Data Documentation

```
os::smart_ptr<crypto::user> login::pulblicKeyPopUp::_user [private]
```

User generating key.

```
unsigned int login::pulblicKeyPopUp::dotCount [private]
```

Dot counter.


```
gl::label login::pulblicKeyPopUp::lblKeyGeneration [private]
```

Key generation label.

6.8 login::userFrame Class Reference

Defines a user display frame This frame displays basic user data before a user is logged in. This data is defined from the login meta-data.

Inheritance diagram for login::userFrame:

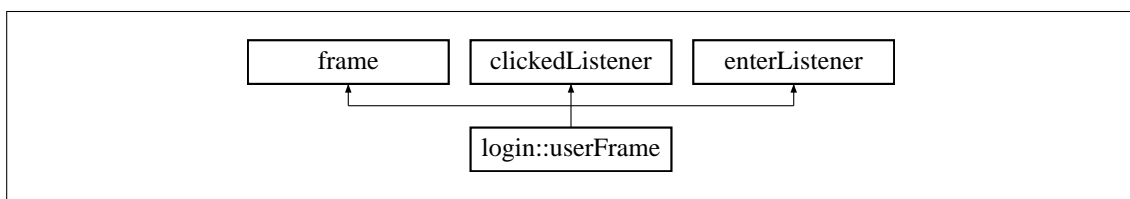

Public Member Functions

- **userFrame (listUsers &master, os::smart_ptr< userNode > usr)**

Constructor.

- **virtual ~userFrame ()**

Virtual destructor.

- void **receivedClicked** (os::smart_ptr< element > elm)
Trigger on button click.
- void **receivedEnter** (os::smart_ptr< element > elm)
Trigger on enter event.
- bool **operator==** (const **userFrame** &usr)
- bool **operator!=** (const **userFrame** &usr)
- bool **operator<** (const **userFrame** &usr)
- bool **operator>** (const **userFrame** &usr)
- bool **operator<=** (const **userFrame** &usr)
- bool **operator>=** (const **userFrame** &usr)

Private Attributes

- os::smart_ptr< **userNode** > **_user**
User-node to be displayed.
- **listUsers** * **mst**
Master-form.
- gl::label **lblUsername**
Label displaying user-name.
- gl::label **lblTimestamp**
Label displaying time-stamp.
- gl::label **lblPassword**
Label displaying password.
- gl::button **btnRemove**
Remove user button.
- gl::button **btnLoad**
Load user button.

6.8.1 Detailed Description

Defines a user display frame This frame displays basic user data before a user is logged in. This data is defined from the login meta-data.

6.8.2 Constructor & Destructor Documentation

login::userFrame::userFrame (**listUsers** & master, os::smart_ptr< **userNode** > usr)

Constructor.

Parameters

in	<i>master</i>	Master form
in	<i>usr</i>	User node to be displayed

virtual login::userFrame::~~userFrame () [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

6.8.3 Member Function Documentation

bool login::userFrame::operator!= (const **userFrame** & usr) [inline]

bool login::userFrame::operator< (const **userFrame** & usr) [inline]

bool login::userFrame::operator<= (const **userFrame** & usr) [inline]

bool login::userFrame::operator== (const **userFrame** & usr) [inline]

bool login::userFrame::operator> (const **userFrame** & usr) [inline]

bool login::userFrame::operator>= (const **userFrame** & usr) [inline]

void login::userFrame::receivedClicked (os::smart_ptr< element > elm)

Trigger on button click.

Parameters

in	<i>elm</i>	Element clicked
----	------------	-----------------

Returns

void

void login::userFrame::receivedEnter (os::smart_ptr< element > elm) [inline]

Trigger on enter event.

Note that in this element, there is no difference between an enter event and a clicked event.

Parameters

in	<i>elm</i>	Element receiving enter
----	------------	-------------------------

Returns

void

6.8.4 Member Data Documentation

os::smart_ptr<**userNode**> login::userFrame::_user [private]

User-node to be displayed.

gl::button login::userFrame::btnLoad [private]

Load user button.

gl::button login::userFrame::btnRemove [private]

Remove user button.

gl::label login::userFrame::lblPassword [private]

Label displaying password.

gl::label login::userFrame::lblTimestamp [private]

Label displaying time-stamp.

gl::label login::userFrame::lblUsername [private]

Label displaying user-name.


listUsers* login::userFrame::mst [private]

Master-form.

6.9 login::userLoadingPopUp Class Reference

Used when loading the user.

Inheritance diagram for login::userLoadingPopUp:

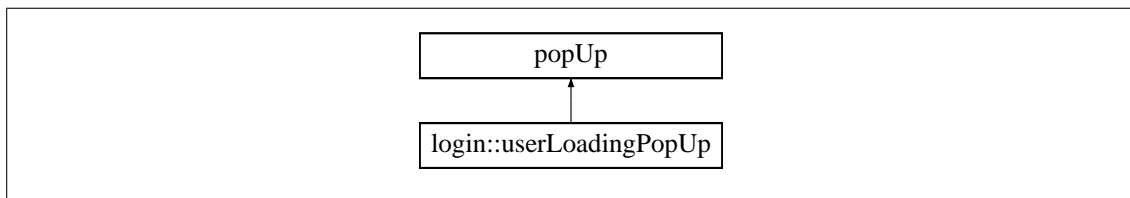

Public Member Functions

- **userLoadingPopUp** (os::smart_ptr< gl::form > prev, **loginMetaData** &met, std::string _username, std::string _password)
Basic constructor.
- virtual **~userLoadingPopUp** ()
Virtual destructor.
- void **update** ()
Triggered each update cycle.

Public Attributes

- `os::smart_ptr< loginMetaData > meta`
Meta-data opening a user.
- `std::string username`
Username string.
- `std::string password`
Password string.

Private Attributes

- `gl::label lblLoadingUser`
User loading label.
- `unsigned int dotCount`
Dot counter.

6.9.1 Detailed Description

Used when loading the user.

While the user is opening it's files, this is the UI which will display.

6.9.2 Constructor & Destructor Documentation

`login::userLoadingPopUp::userLoadingPopUp (os::smart_ptr< gl::form > prev, loginMetaData & met, std::string _username, std::string _password)`

Basic constructor.

Parameters

in	<i>prev</i>	Previous form
in	<i>met</i>	Meta-data loading user

`virtual login::userLoadingPopUp::~~userLoadingPopUp () [inline], [virtual]`

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

6.9.3 Member Function Documentation

`void login::userLoadingPopUp::update ()`

Triggered each update cycle.

Returns

void

6.9.4 Member Data Documentation

unsigned int login::userLoadingPopUp::dotCount [private]

Dot counter.

gl::label login::userLoadingPopUp::lblLoadingUser [private]

User loading label.

os::smart_ptr<**loginMetaData**> login::userLoadingPopUp::meta

Meta-data opening a user.

std::string login::userLoadingPopUp::password

Password string.

std::string login::userLoadingPopUp::username

Username string.

6.10 login::userNode Struct Reference

User node.

Public Member Functions

- **userNode** (std::string usr)
Construct user node.
- bool **operator==** (const **userNode** &usr)
== by username
- bool **operator!=** (const **userNode** &usr)
!= by username
- bool **operator<** (const **userNode** &usr)
!< by username
- bool **operator>** (const **userNode** &usr)
> by username
- bool **operator<=** (const **userNode** &usr)
<= by username
- bool **operator>=** (const **userNode** &usr)
>= by username

Public Attributes

- `std::string username`
Username string.
- `std::string password`
Password string.
- `bool userExists`
User exists flag.
- `uint64_t timestamp`
Last time user accessed.

6.10.1 Detailed Description

User node.

Used in the meta-data file. Stores all user-names and, if applicable, passwords associated with the user-names.

6.10.2 Constructor & Destructor Documentation

```
login::userNode::userNode ( std::string usr ) [inline]
```

Construct user node.

Note that the existance of a user-node does not gurantee the existance of a user. By default, it is assumed that such a user does not exists.

Parameters

in	usr	User-name
----	-----	-----------

6.10.3 Member Function Documentation

```
bool login::userNode::operator!= ( const userNode & usr ) [inline]
```

== by username

Returns

`username==usr.username`

```
bool login::userNode::operator< ( const userNode & usr ) [inline]
```

!= by username

Returns

`username!=usr.username`

```
bool login::userNode::operator<= ( const userNode & usr ) [inline]
```

<= by username

Returns

username<=usr.username

bool login::userNode::operator==(const **userNode** & usr) [inline]

== by username

Returns

username==usr.username

bool login::userNode::operator> (const **userNode** & usr) [inline]

by username

Returns

username<usr.username

bool login::userNode::operator>= (const **userNode** & usr) [inline]

>= by username

Returns

username>=usr.username

6.10.4 Member Data Documentation

std::string login::userNode::password

Password string.

If this is defined, then the password for the user in question is being stored in plain-text. This is insecure, but many use cases don't demand the security.

uint64_t login::userNode::timestamp

Last time user accessed.

bool login::userNode::userExists

User exists flag.


Set based on whether the user was found on disk.

std::string login::userNode::username

Username string.

6.11 login::userSettingsForm Class Reference

Inheritance diagram for login::userSettingsForm:

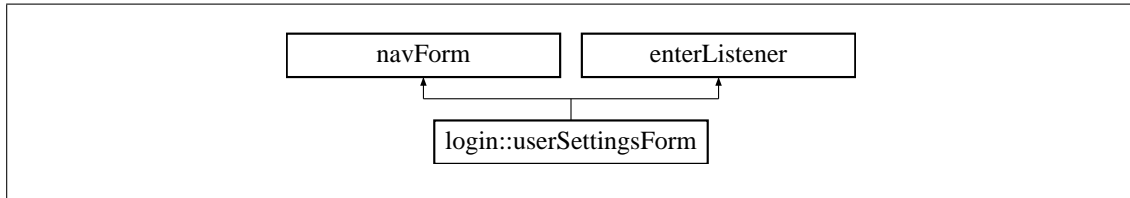

Public Member Functions

- **userSettingsForm** (gl::form *master, os::smart_ptr< crypto::user > ud)
- virtual **~userSettingsForm** ()
- void **receivedClicked** (os::smart_ptr< element > elm)
- void **receivedEnter** (os::smart_ptr< element > elm)
- void **resize** ()

Public Attributes

- gl::label **lblUsername**
- gl::checkboxGroup **chgStreamType**
- gl::checkboxGroup **chgHash**
- gl::label **lblPublicKeyTitle**
- gl::label **lblPublicKeyHashDescriptor**
- gl::label **lblPublicKeyHash**
- gl::label **lblPublicKeyDescriptor**
- gl::label **lblPublicKey**

Protected Member Functions

- void **update** ()

Private Member Functions

- void **refreshDefaultPublicKeys** ()

Private Attributes

- os::smart_ptr< crypto::user > **_userData**
- gl::scrollArea **scrArea**
- os::unsortedList< **publicKeyTypeFrame** > **frameList**

Friends

- class **publicKeyTypeFrame**

6.11.1 Constructor & Destructor Documentation

```
login::userSettingsForm::userSettingsForm ( gl::form * master, os::smart_ptr< crypto::user > ud )  
virtual login::userSettingsForm::~~userSettingsForm ( ) [inline], [virtual]
```

6.11.2 Member Function Documentation

```
void login::userSettingsForm::receivedClicked ( os::smart_ptr< element > elm )  
void login::userSettingsForm::receivedEnter ( os::smart_ptr< element > elm )  
void login::userSettingsForm::refreshDefaultPublicKeys ( ) [private]  
void login::userSettingsForm::resize ( )  
void login::userSettingsForm::update ( ) [protected]
```

6.11.3 Friends And Related Function Documentation

```
friend class publicKeyTypeFrame [friend]
```

6.11.4 Member Data Documentation

```
os::smart_ptr<crypto::user> login::userSettingsForm::_userData [private]  
gl::checkboxGroup login::userSettingsForm::chgHash  
gl::checkboxGroup login::userSettingsForm::chgStreamType  
os::unsortedList<publicKeyTypeFrame> login::userSettingsForm::frameList [private]  
gl::label login::userSettingsForm::lblPublicKey  
gl::label login::userSettingsForm::lblPublicKeyDescriptor  
gl::label login::userSettingsForm::lblPublicKeyHash  
gl::label login::userSettingsForm::lblPublicKeyHashDescriptor  
gl::label login::userSettingsForm::lblPublicKeyTitle  
gl::label login::userSettingsForm::lblUsername  
gl::scrollArea login::userSettingsForm::scrArea [private]
```

Part II

Datastructures Library

Chapter 7

Introduction

The Datastructures library contains a series of utility classes and template classes used for the organization and management of data. Most notably, this library allow dynamic memory management through the `smart_ptr` class and provides a flexible runtime data container in the `ads` (Abstract Data Structure) template and its children.

7.1 Unit Testing

The testing of the Datastructures library is preformed within the `UnitTest` library. Since the `UnitTest` library uses the functionality of the Datastructures library, the Datastructures library cannot be dependent on the `UnitTest` library as the `UnitTest` library is already dependent on the Datastructures library

7.2 Namespace `os`

Datastructures extends the `os` namespace. The `os` namespace is designed for tools, algorithms and data-structures used in programs of all types. Structures in this library do not implement operating system specific interfaces such as sockets and file I/O. The `osMechanics` library also extends the `os` namespace.

Chapter 8

File Index

8.1 File List

Here is a list of all files with brief descriptions:

abstractSorting.h	Template for sorting arrays	45
ads.h	Abstract datastructure interface	46
asyncAVL.h	Asynchronous AVL tree	47
AVL.h	AVL tree	48
Datastructures.h	Master Datastructures header file	45
eventDriver.cpp	Event driver implementation	49
eventDriver.h	Event sender and receiver	48
list.h	Doubly Linked List	49
matrix.h	Matrix templates	50
osLogger.cpp	Logging for os namespace, implementation	64
osLogger.h	Logging for os namespace	63
osVectors.h	Vector templates	64
set.h	Smart Set	66
smartPointer.h	Template declaration of os::smart_ptr (p. 146)	67
staticConstantPrinter.cpp	Constant printing support, implementation	75

staticConstantPrinter.h
Constant printing support 74

Chapter 9

File Documentation

9.1 Datastructures.h File Reference

Master Datastructures header file.

9.1.1 Detailed Description

Master Datastructures header file.

Author

Jonathan Bedard

Date

2/14/2016

Bug No known bugs.

All of the headers in the Datastructures library are held in this file. When using the Datastructures library, it is expected that this header is included instead of the individual required headers.

9.2 abstractSorting.h File Reference

Template for sorting arrays.

Namespaces

- **os**

Functions

- `template<class dataType >`
`int os::defaultCompareSort (const dataType &v1, const dataType &v2)`
Basic compare.

- `template<class dataType >`
`int os::pointerCompareSort (smart_ptr< dataType > ptr1, smart_ptr< dataType > ptr2)`
Raw pointer compare.
- `template<class dataType >`
`void os::quicksort (dataType *arr, unsigned int length, int(*sort_comparison)(const dataType &, const dataType &)=&defaultCompareSort)`
Template quick-sort.
- `template<class dataType >`
`void os::pointerQuicksort (smart_ptr< smart_ptr< dataType > > arr, unsigned int length, int(*sort_comparison)(smart_ptr< dataType >, smart_ptr< dataType >)=&pointerCompareSort)`
Template for quick-sort, pointer version.

9.2.1 Detailed Description

Template for sorting arrays.

Author

Jonathan Bedard

Date

2/15/2016

Bug No known bugs.

This file contains a template class definition of an AVL tree and its nodes. This tree has insertion, search and deletion of $O(\log(n))$ where n is the number of nodes in the tree. This tree is thread safe.

9.3 ads.h File Reference

Abstract datastructure interface.

Classes

- class **os::ptrComp**
Pointer compare interface.
- class **os::adnode< dataType >**
Abstract data-node.
- class **os::ads< dataType >**
Abstract datastructure.

Namespaces

- **os**

9.3.1 Detailed Description

Abstract datastructure interface.

Author

Jonathan Bedard

Date

5/9/2016

Bug No known bugs.

This file contains definitions of a set of class interfaces used by abstract datastructures and classes interfacing with abstract datastructures.

9.4 asyncAVL.h File Reference

Asynchronous AVL tree.

Classes

- class **os::asyncAVLNode**< **dataType** >
Node for usage in an asynchronous AVL tree.
- class **os::asyncAVLTree**< **dataType** >
Asynchronous balanced binary search tree.

Namespaces

- **os**

9.4.1 Detailed Description

Asynchronous AVL tree.

Author

Jonathan Bedard

Date

5/9/2016

Bug No known bugs.

This file contains a template class definition of an AVL tree and its nodes. This tree has insertion, search and deletion of $O(\log(n))$ where n is the number of nodes in the tree. This tree is thread safe.

9.5 AVL.h File Reference

AVL tree.

Classes

- class **os::AVLNode**< **dataType** >
Node for usage in an AVL tree.
- class **os::AVLTree**< **dataType** >
Balanced binary search tree.

Namespaces

- **os**

9.5.1 Detailed Description

AVL tree.

Author

Jonathan Bedard

Date

2/12/2016

Bug No known bugs.

This file contains a template class definition of an AVL tree and its nodes. This tree has insertion, search and deletion of $O(\log(n))$ where n is the number of nodes in the tree. This tree is not thread safe.

9.6 eventDriver.h File Reference

Event sender and receiver.

Classes

- class **os::eventSender**< **receiverType** >
Class which enables event sending.
- class **os::eventReceiver**< **senderType** >
Class which enables event receiving.

Namespaces

- **os**

Variables

- `std::recursive_mutex * os::eventLock`
Event processing mutex.

9.6.1 Detailed Description

Event sender and receiver.

Author

Jonathan Bedard

Date

5/9/2016

Bug No known bugs.

Both **os::eventReceiver** (p. 128) and **os::eventSender** (p. 131) are experimental classes and have not been tested or utilized.

9.7 eventDriver.cpp File Reference

Event driver implementation.

9.7.1 Detailed Description

Event driver implementation.

Author

Jonathan Bedard

Date

2/28/2016

Bug No known bugs.

This file implements **os::eventLock** (p. 89) for **os::eventSender** (p. 131) and **os::eventReceiver** (p. 128). These are experimental class and not yet used or tested

9.8 list.h File Reference

Doubly Linked List.

Classes

- class **os::unsortedListNode< dataType >**
Node for usage in a linked list.
- class **os::unsortedList< dataType >**
Unsorted linked list.

Namespaces

- **os**

9.8.1 Detailed Description

Doubly Linked List.

Author

Jonathan Bedard

Date

2/1/2016

Bug No known bugs.

This file contains a template class definition of a linked list and its nodes. This list has insertion, find and delete of $O(n)$. The linked list provided is doubly linked, allowing for forward and backward traversal. This list is not thread safe.

9.9 matrix.h File Reference

Matrix templates.

Classes

- class **os::matrix**< **dataType** >
Raw matrix.
- class **os::indirectMatrix**< **dataType** >
Indirect matrix.

Namespaces

- **os**

Functions

- template<class dataType >
bool **os::compareSize** (const matrix< dataType > &m1, const matrix< dataType > &m2)
Compares the size of two matrices.
- template<class dataType >
bool **os::compareSize** (const indirectMatrix< dataType > &m1, const matrix< dataType > &m2)
Compares the size of two matrices.
- template<class dataType >
bool **os::compareSize** (const matrix< dataType > &m1, const indirectMatrix< dataType > &m2)

Compares the size of two matrices.

- `template<class dataType >`
`bool os::compareSize (const indirectMatrix< dataType > &m1, const indirectMatrix< dataType > &m2)`

Compares the size of two matrices.

- `template<class dataType >`
`bool os::testCross (const matrix< dataType > &m1, const matrix< dataType > &m2)`

Tests if the cross-product is a legal operation.

- `template<class dataType >`
`bool os::testCross (const indirectMatrix< dataType > &m1, const matrix< dataType > &m2)`

Tests if the cross-product is a legal operation.

- `template<class dataType >`
`bool os::testCross (const matrix< dataType > &m1, const indirectMatrix< dataType > &m2)`

Tests if the cross-product is a legal operation.

- `template<class dataType >`
`bool os::testCross (const indirectMatrix< dataType > &m1, const indirectMatrix< dataType > &m2)`

Tests if the cross-product is a legal operation.

- `template<class dataType >`
`bool operator== (const os::matrix< dataType > &m1, const os::matrix< dataType > &m2)`

Test for equality.

- `template<class dataType >`
`bool operator== (const os::indirectMatrix< dataType > &m1, const os::matrix< dataType > &m2)`

Test for equality.

- `template<class dataType >`
`bool operator== (const os::matrix< dataType > &m1, const os::indirectMatrix< dataType > &m2)`

Test for equality.

- `template<class dataType >`
`bool operator== (const os::indirectMatrix< dataType > &m1, const os::indirectMatrix< dataType > &m2)`

Test for equality.

- `template<class dataType >`
`bool operator!= (const os::matrix< dataType > &m1, const os::matrix< dataType > &m2)`

Test for inequality.

- `template<class dataType >`
`bool operator!= (const os::indirectMatrix< dataType > &m1, const os::matrix< dataType > &m2)`

Test for inequality.

- `template<class dataType >`
`bool operator!= (const os::matrix< dataType > &m1, const os::indirectMatrix< dataType > &m2)`

Test for inequality.

- `template<class dataType >`
`bool operator!= (const os::indirectMatrix< dataType > &m1, const os::indirectMatrix< dataType > &m2)`
Test for inequality.
- `template<class dataType >`
`os::matrix< dataType > operator+ (const os::matrix< dataType > &m1, const os::matrix< dataType > &m2)`
Addition.
- `template<class dataType >`
`os::matrix< dataType > operator+ (const os::indirectMatrix< dataType > &m1, const os::matrix< dataType > &m2)`
Addition.
- `template<class dataType >`
`os::matrix< dataType > operator+ (const os::matrix< dataType > &m1, const os::indirectMatrix< dataType > &m2)`
Addition.
- `template<class dataType >`
`os::indirectMatrix< dataType > operator+ (const os::indirectMatrix< dataType > &m1, const os::indirectMatrix< dataType > &m2)`
Addition.
- `template<class dataType >`
`os::matrix< dataType > operator- (const os::matrix< dataType > &m1, const os::matrix< dataType > &m2)`
Subtraction.
- `template<class dataType >`
`os::matrix< dataType > operator- (const os::indirectMatrix< dataType > &m1, const os::matrix< dataType > &m2)`
Subtraction.
- `template<class dataType >`
`os::matrix< dataType > operator- (const os::matrix< dataType > &m1, const os::indirectMatrix< dataType > &m2)`
Subtraction.
- `template<class dataType >`
`os::indirectMatrix< dataType > operator- (const os::indirectMatrix< dataType > &m1, const os::indirectMatrix< dataType > &m2)`
Subtraction.
- `template<class dataType >`
`os::matrix< dataType > operator* (const os::matrix< dataType > &m1, const os::matrix< dataType > &m2)`
Cross-product.
- `template<class dataType >`
`os::matrix< dataType > operator* (const os::indirectMatrix< dataType > &m1, const os::matrix< dataType > &m2)`
Cross-product.

- `template<class dataType >`
`os::matrix< dataType > operator* (const os::matrix< dataType > &m1, const os::indirectMatrix< dataType > &m2)`
Cross-product.
- `template<class dataType >`
`os::indirectMatrix< dataType > operator* (const os::indirectMatrix< dataType > &m1, const os::indirectMatrix< dataType > &m2)`
Cross-product.
- `template<class dataType >`
`os::matrix< dataType > operator* (const dataType &d1, const os::matrix< dataType > &m1)`
Scalar multiplication.
- `template<class dataType >`
`os::matrix< dataType > operator* (const os::matrix< dataType > &m1, const dataType &d1)`
Scalar multiplication.
- `template<class dataType >`
`os::matrix< dataType > operator/ (const os::matrix< dataType > &m1, const dataType &d1)`
Scalar division.
- `template<class dataType >`
`os::indirectMatrix< dataType > operator* (const dataType &d1, const os::indirectMatrix< dataType > &m1)`
Scalar multiplication.
- `template<class dataType >`
`os::indirectMatrix< dataType > operator* (const os::indirectMatrix< dataType > &m1, const dataType &d1)`
Scalar multiplication.
- `template<class dataType >`
`os::indirectMatrix< dataType > operator/ (const os::indirectMatrix< dataType > &m1, const dataType &d1)`
Scalar division.
- `template<class dataType >`
`std::ostream & operator<< (std::ostream &os, const os::matrix< dataType > &dt)`
Prints out a matrix.
- `template<class dataType >`
`std::ostream & operator<< (std::ostream &os, const os::indirectMatrix< dataType > &dt)`
Prints out a matrix.

9.9.1 Detailed Description

Matrix templates.

Author

Jonathan Bedard

Date

2/2/2016

Bug No known bugs.

This file contains two template class definitions for matrices. One of these is an "indirect" matrix, meaning that the is an array of pointers, and the other is a direct matrix, meaning the matrix is an array of values.

9.9.2 Function Documentation

```
template<class dataType > bool operator!= ( const os::matrix< dataType > & m1, const os::matrix< dataType > & m2 )
```

Test for inequality.

Calls '==' and then inverts the result. Depends on the '!=' operator of dataType.

Parameters

in	<i>m1</i>	Raw matrix reference
in	<i>m2</i>	Raw matrix reference

Returns

False if exactly equivalent

```
template<class dataType > bool operator!= ( const os::indirectMatrix< dataType > & m1, const os::matrix< dataType > & m2 )
```

Test for inequality.

Calls '==' and then inverts the result. Depends on the '!=' operator of dataType.

Parameters

in	<i>m1</i>	Indirect matrix reference
in	<i>m2</i>	Raw matrix reference

Returns

False if exactly equivalent

```
template<class dataType > bool operator!= ( const os::matrix< dataType > & m1, const os::indirectMatrix< dataType > & m2 )
```

Test for inequality.

Calls '==' and then inverts the result. Depends on the '!=' operator of dataType.

Parameters

in	<i>m1</i>	Raw matrix reference
in	<i>m2</i>	Indirect matrix reference

Returns

False if exactly equivalent

```
template<class dataType > bool operator!= ( const os::indirectMatrix< dataType > & m1, const os::indirectMatrix< dataType > & m2 )
```

Test for inequality.

Calls '==' and then inverts the result. Depends on the '!=' operator of dataType.

Parameters

in	<i>m1</i>	Indirect matrix reference
in	<i>m2</i>	Indirect matrix reference

Returns

False if exactly equivalent

```
template<class dataType > os::matrix<dataType> operator* ( const os::matrix< dataType > & m1, const os::matrix< dataType > & m2 )
```

Cross-product.

Performs the cross-product. The cross- product is undefined if the width of m1 does not equal the height of m2. If the cross-product is undefined, a matrix of size (0,0) will be returned. Depends on the '*' and '+=' operator of the dataType.

Parameters

in	<i>m1</i>	Raw matrix reference
in	<i>m2</i>	Raw matrix reference

Returns

m1 x m2 (raw matrix)

```
template<class dataType > os::matrix<dataType> operator* ( const os::indirectMatrix< dataType > & m1, const os::matrix< dataType > & m2 )
```

Cross-product.

Performs the cross-product. The cross- product is undefined if the width of m1 does not equal the height of m2. If the cross-product is undefined, a matrix of size (0,0) will be returned. Depends on the '*' and '+=' operator of the dataType.

Parameters

in	<i>m1</i>	Indirect matrix reference
in	<i>m2</i>	Raw matrix reference

Returns

m1 x m2 (raw matrix)

```
template<class dataType > os::matrix<dataType> operator* ( const os::matrix< dataType > &
m1, const os::indirectMatrix< dataType > & m2 )
```

Cross-product.

Performs the cross-product. The cross-product is undefined if the width of m1 does not equal the height of m2. If the cross-product is undefined, a matrix of size (0,0) will be returned. Depends on the '*' and '+=' operator of the dataType.

Parameters

in	<i>m1</i>	Raw matrix reference
in	<i>m2</i>	Indirect matrix reference

Returns

m1 x m2 (raw matrix)

```
template<class dataType > os::indirectMatrix<dataType> operator* ( const os::indirectMatrix<
dataType > & m1, const os::indirectMatrix< dataType > & m2 )
```

Cross-product.

Performs the cross-product. The cross-product is undefined if the width of m1 does not equal the height of m2. If the cross-product is undefined, a matrix of size (0,0) will be returned. Depends on the '*' and '+=' operator of the dataType.

Parameters

in	<i>m1</i>	Indirect matrix reference
in	<i>m2</i>	Indirect matrix reference

Returns

m1 x m2 (indirect matrix)

```
template<class dataType > os::matrix<dataType> operator* ( const dataType & d1, const
os::matrix< dataType > & m1 )
```

Scalar multiplication.

Multiplies a matrix by a constant. This function depends on the '*' operator of the dataType.

Parameters

in	<i>d1</i>	Scalar data type
in	<i>m1</i>	Raw matrix reference

Returns

$d1 * m1$ (raw matrix)

```
template<class dataType > os::matrix<dataType> operator* ( const os::matrix< dataType > &
m1, const dataType & d1 )
```

Scalar multiplication.

Multiplies a matrix by a constant. This function depends on the '*' operator of the dataType.

Parameters

in	<i>m1</i>	Raw matrix reference
in	<i>d1</i>	Scalar data type

Returns

$d1 * m1$ (raw matrix)

```
template<class dataType > os::indirectMatrix<dataType> operator* ( const dataType & d1, const
os::indirectMatrix< dataType > & m1 )
```

Scalar multiplication.

Multiplies an indirect matrix by a constant. This function depends on the '*' operator of the dataType.

Parameters

in	<i>d1</i>	Scalar data type
in	<i>m1</i>	Indirect matrix reference

Returns

$d1 * m1$ (indirect matrix)

```
template<class dataType > os::indirectMatrix<dataType> operator* ( const os::indirectMatrix<
dataType > & m1, const dataType & d1 )
```

Scalar multiplication.

Multiplies an indirect matrix by a constant. This function depends on the '*' operator of the dataType.

Parameters

in	<i>m1</i>	Indirect matrix reference
in	<i>d1</i>	Scalar data type

Returns

$d1 * m1$ (indirect matrix)

```
template<class dataType > os::matrix<dataType> operator+ ( const os::matrix< dataType > & m1, const os::matrix< dataType > & m2 )
```

Addition.

Preforms matrix addition. Matrix addition is undefined if the two matrices are of different size. If the operation is undefined, a matrix of size (0,0) will be returned. Depends on the '+' operator of dataType.

Parameters

in	<i>m1</i>	Raw matrix reference
in	<i>m2</i>	Raw matrix reference

Returns

$m1 + m2$ (raw matrix)

```
template<class dataType > os::matrix<dataType> operator+ ( const os::indirectMatrix< dataType > & m1, const os::matrix< dataType > & m2 )
```

Addition.

Preforms matrix addition. Matrix addition is undefined if the two matrices are of different size. If the operation is undefined, a matrix of size (0,0) will be returned. Depends on the '+' operator of dataType.

Parameters

in	<i>m1</i>	Indirect matrix reference
in	<i>m2</i>	Raw matrix reference

Returns

$m1 + m2$ (raw matrix)

```
template<class dataType > os::matrix<dataType> operator+ ( const os::matrix< dataType > & m1, const os::indirectMatrix< dataType > & m2 )
```

Addition.

Preforms matrix addition. Matrix addition is undefined if the two matrices are of different size. If the operation is undefined, a matrix of size (0,0) will be returned. Depends on the '+' operator of dataType.

Parameters

in	<i>m1</i>	Raw matrix reference
in	<i>m2</i>	Indirect matrix reference

Returns

$m1 + m2$ (raw matrix)

```
template<class dataType > os::indirectMatrix<dataType> operator+ ( const os::indirectMatrix<
dataType > & m1, const os::indirectMatrix< dataType > & m2 )
```

Addition.

Preforms matrix addition. Matrix addition is undefined if the two matrices are of different size. If the operation is undefined, a matrix of size (0,0) will be returned. Depends on the '+' operator of dataType.

Parameters

in	<i>m1</i>	Indirect matrix reference
in	<i>m2</i>	Indirect matrix reference

Returns

$m1 + m2$ (indirect matrix)

```
template<class dataType > os::matrix<dataType> operator- ( const os::matrix< dataType > &
m1, const os::matrix< dataType > & m2 )
```

Subtraction.

Preforms matrix subtraction. Matrix subtraction is undefined if the two matrices are of different size. If the operation is undefined, a matrix of size (0,0) will be returned. Depends on the '-' operator of dataType.

Parameters

in	<i>m1</i>	Raw matrix reference
in	<i>m2</i>	Raw matrix reference

Returns

$m1 - m2$ (raw matrix)


```
template<class dataType > os::matrix<dataType> operator- ( const os::indirectMatrix< dataType  
> & m1, const os::matrix< dataType > & m2 )
```

Subtraction.

Preforms matrix subtraction. Matrix subtraction is undefined if the two matrices are of different size. If the operation is undefined, a matrix of size (0,0) will be returned. Depends on the '-' operator of dataType.

Parameters

in	<i>m1</i>	Indirect matrix reference
in	<i>m2</i>	Raw matrix reference

Returns

$m1 - m2$ (raw matrix)

```
template<class dataType > os::matrix<dataType> operator- ( const os::matrix< dataType > &  
m1, const os::indirectMatrix< dataType > & m2 )
```

Subtraction.

Preforms matrix subtraction. Matrix subtraction is undefined if the two matrices are of different size. If the operation is undefined, a matrix of size (0,0) will be returned. Depends on the '-' operator of dataType.

Parameters

in	<i>m1</i>	Raw matrix reference
in	<i>m2</i>	Indirect matrix reference

Returns

$m1 - m2$ (raw matrix)

```
template<class dataType > os::indirectMatrix<dataType> operator- ( const os::indirectMatrix<  
dataType > & m1, const os::indirectMatrix< dataType > & m2 )
```

Subtraction.

Preforms matrix subtraction. Matrix subtraction is undefined if the two matrices are of different size. If the operation is undefined, a matrix of size (0,0) will be returned. Depends on the '-' operator of dataType.

Parameters

in	<i>m1</i>	Indirect matrix reference
in	<i>m2</i>	Indirect matrix reference

Returns

$m1 - m2$ (indirect matrix)

```
template<class dataType > os::matrix<dataType> operator/ ( const os::matrix< dataType > &
m1, const dataType & d1 )
```

Scalar division.

Divides a matrix by a constant. This function depends on the '/' operator of the dataType. No zero check, as the dataType is not defined.

Parameters

in	<i>m1</i>	Raw matrix reference
in	<i>d1</i>	Scalar data type

Returns

$m1/d$ (raw matrix)

```
template<class dataType > os::indirectMatrix<dataType> operator/ ( const os::indirectMatrix<
dataType > & m1, const dataType & d1 )
```

Scalar division.

Divides an indirect matrix by a constant. This function depends on the '/' operator of the dataType. No zero check, as the dataType is not defined.

Parameters

in	<i>m1</i>	Raw matrix reference
in	<i>d1</i>	Scalar data type

Returns

$m1/d$ (raw matrix)

```
template<class dataType > std::ostream& operator<< ( std::ostream & os, const os::matrix<
dataType > & dt )
```

Prints out a matrix.

Prints out the entire matrix in the provided output stream. This matrix will be printed out in text form and requires the dataType of the matrix to define an ostream operator.

Parameters

	<i>[in/out]</i>	os std::ostream reference
in	<i>dt</i>	Raw matrix reference

Returns

`std::ostream os`

```
template<class dataType > std::ostream& operator<< ( std::ostream & os, const  
os::indirectMatrix< dataType > & dt )
```

Prints out a matrix.

Prints out the entire matrix in the provided output stream. This matrix will be printed out in text form and requires the dataType of the matrix to define an ostream operator.

Parameters

	<i>[in/out]</i>	os std::ostream reference
in	<i>dt</i>	Indirect matrix reference

Returns

`std::ostream os`

```
template<class dataType > bool operator== ( const os::matrix< dataType > & m1, const  
os::matrix< dataType > & m2 )
```

Test for equality.

Tests the two matrices for equal size and then tests each matrix element for equality as well. This function is dependent on the '!=' definition of the dataType.

Parameters

in	<i>m1</i>	Raw matrix reference
in	<i>m2</i>	Raw matrix reference

Returns

True if exactly equivalent

```
template<class dataType > bool operator== ( const os::indirectMatrix< dataType > & m1, const  
os::matrix< dataType > & m2 )
```

Test for equality.

Tests the two matrices for equal size and then tests each matrix element for equality as well. This function is dependent on the '!=' definition of the dataType.

Parameters

in	<i>m1</i>	Indirect matrix reference
in	<i>m2</i>	Raw matrix reference

Returns

True if exactly equivalent

```
template<class dataType > bool operator== ( const os::matrix< dataType > & m1, const os::indirectMatrix< dataType > & m2 )
```

Test for equality.

Tests the two matrices for equal size and then tests each matrix element for equality as well. This function is dependent on the '!=' definition of the dataType.

Parameters

in	<i>m1</i>	Raw matrix reference
in	<i>m2</i>	Indirect matrix reference

Returns

True if exactly equivalent

```
template<class dataType > bool operator== ( const os::indirectMatrix< dataType > & m1, const os::indirectMatrix< dataType > & m2 )
```

Test for equality.

Tests the two matrices for equal size and then tests each matrix element for equality as well. This function is dependent on the '!=' definition of the dataType.

Parameters

in	<i>m1</i>	Indirect matrix reference
in	<i>m2</i>	Indirect matrix reference

Returns

True if exactly equivalent

9.10 osLogger.h File Reference

Logging for os namespace.

Namespaces

- **os**

Functions

- std::ostream & **os::osout_func** ()
Standard out object for os namespace.

- `std::ostream & os::oserr_func ()`
Standard error object for os namespace.

Variables

- `smart_ptr< std::ostream > os::osout_ptr`
Standard out pointer for os namespace.
- `smart_ptr< std::ostream > os::oserr_ptr`
Standard error pointer for os namespace.

9.10.1 Detailed Description

Logging for os namespace.
Jonathan Bedard

Date

1/30/2016

Bug No known bugs.

This file contains declarations which are used for logging within the os namespace.

9.11 osLogger.cpp File Reference

Logging for os namespace, implementation.

9.11.1 Detailed Description

Logging for os namespace, implementation.
Jonathan Bedard

Date

2/15/2016

Bug No known bugs.

This file contains global functions and variables used for logging in the os namespace.

9.12 osVectors.h File Reference

Vector templates.

Classes

- class `os::vector2d< dataType >`
2-dimensional vector
- class `os::vector3d< dataType >`
3-dimensional vector

Namespaces

- **os**

Typedefs

- typedef vector2d< int8_t > **os::vector2d_8**
8 bit 2-d vector
- typedef vector2d< uint8_t > **os::vector2d_u8**
unsigned 8 bit 2-d vector
- typedef vector2d< int16_t > **os::vector2d_16**
16 bit 2-d vector
- typedef vector2d< uint16_t > **os::vector2d_u16**
unsigned 16 bit 2-d vector
- typedef vector2d< int32_t > **os::vector2d_32**
32 bit 2-d vector
- typedef vector2d< uint32_t > **os::vector2d_u32**
unsigned 32 bit 2-d vector
- typedef vector2d< int64_t > **os::vector2d_64**
64 bit 2-d vector
- typedef vector2d< uint64_t > **os::vector2d_u64**
unsigned 64 bit 2-d vector
- typedef vector2d< float > **os::vector2d_f**
float 2-d vector
- typedef vector2d< double > **os::vector2d_d**
double 2-d vector
- typedef vector3d< int8_t > **os::vector3d_8**
8 bit 3-d vector
- typedef vector3d< uint8_t > **os::vector3d_u8**
unsigned 8 bit 3-d vector
- typedef vector3d< int16_t > **os::vector3d_16**
16 bit 3-d vector
- typedef vector3d< uint16_t > **os::vector3d_u16**
unsigned 16 bit 3-d vector
- typedef vector3d< int32_t > **os::vector3d_32**
32 bit 3-d vector
- typedef vector3d< uint32_t > **os::vector3d_u32**
unsigned 32 bit 3-d vector
- typedef vector3d< int64_t > **os::vector3d_64**
64 bit 3-d vector
- typedef vector3d< uint64_t > **os::vector3d_u64**
unsigned 64 bit 3-d vector
- typedef vector3d< float > **os::vector3d_f**
float 3-d vector
- typedef vector3d< double > **os::vector3d_d**
double 3-d vector

9.12.1 Detailed Description

Vector templates.

Author

Jonathan Bedard

Date

3/12/2016

Bug No known bugs.

This file contains two template classes defining vector objects. Vectors can, in a broad sense, be used for any class which defines general mathematical operations. This particular file offers vector type definitions for all of the basic integer and floating point types.

9.13 set.h File Reference

Smart Set.

Classes

- class **os::smartSet**< **dataType** >
Smart set abstract data-structures.

Namespaces

- **os**

Enumerations

- enum **os::setTypes** { **os::def_set** =0, **os::small_set**, **os::sorted_set** }
Index of abstract data-structures.

9.13.1 Detailed Description

Smart Set.

Author

Jonathan Bedard

Date

2/12/2016

Bug No known bugs.

This file contains a template class defining a "smart set." A smart set wraps other forms of abstract data structures, allowing applications to define abstract data-structures by numbered indexes.

9.14 smartPointer.h File Reference

Template declaration of **os::smart_ptr** (p. 146).

Classes

- class **os::smart_ptr**< **dataType** >
Reference counted pointer.

Namespaces

- **os**

Typedefs

- typedef void(* **os::void_rec**) (void *)
Deletion function typedef.

Enumerations

- enum **os::smart_pointer_type** {
 os::null_type =0, **os::raw_type**, **os::shared_type**, **os::shared_type_array**,
 os::shared_type_dynamic_delete }
*Enumeration for types of **os::smart_ptr** (p. 146).*

Functions

- template<class targ , class src >
 smart_ptr< targ > **os::cast** (const **os::smart_ptr**< src > &conv)
 ***os::smart_ptr** (p. 146) cast function*
- template<class dataType >
 bool **operator==** (const **os::smart_ptr**< dataType > &c1, const **os::smart_ptr**< dataType > &c2)
- template<class dataType >
 bool **operator==** (const **os::smart_ptr**< dataType > &c1, const dataType *c2)
- template<class dataType >
 bool **operator==** (const dataType *c1, const **os::smart_ptr**< dataType > &c2)
- template<class dataType >
 bool **operator==** (const **os::smart_ptr**< dataType > &c1, const void *c2)
- template<class dataType >
 bool **operator==** (const void *c1, const **os::smart_ptr**< dataType > &c2)
- template<class dataType >
 bool **operator==** (const **os::smart_ptr**< dataType > &c1, const int c2)
- template<class dataType >
 bool **operator==** (const int c1, const **os::smart_ptr**< dataType > &c2)
- template<class dataType >
 bool **operator==** (const **os::smart_ptr**< dataType > &c1, const long c2)

- `template<class dataType >`
`bool operator== (const long c1, const os::smart_ptr< dataType > &c2)`
- `template<class dataType >`
`bool operator== (const os::smart_ptr< dataType > &c1, const unsigned long c2)`
- `template<class dataType >`
`bool operator== (const unsigned long c1, const os::smart_ptr< dataType > &c2)`
- `template<class dataType >`
`bool operator!= (const os::smart_ptr< dataType > &c1, const os::smart_ptr< dataType > &c2)`
- `template<class dataType >`
`bool operator!= (const os::smart_ptr< dataType > &c1, const dataType *c2)`
- `template<class dataType >`
`bool operator!= (const dataType *c1, const os::smart_ptr< dataType > &c2)`
- `template<class dataType >`
`bool operator!= (const os::smart_ptr< dataType > &c1, const void *c2)`
- `template<class dataType >`
`bool operator!= (const void *c1, const os::smart_ptr< dataType > &c2)`
- `template<class dataType >`
`bool operator!= (const os::smart_ptr< dataType > &c1, const int c2)`
- `template<class dataType >`
`bool operator!= (const int c1, const os::smart_ptr< dataType > &c2)`
- `template<class dataType >`
`bool operator!= (const os::smart_ptr< dataType > &c1, const long c2)`
- `template<class dataType >`
`bool operator!= (const long c1, const os::smart_ptr< dataType > &c2)`
- `template<class dataType >`
`bool operator!= (const os::smart_ptr< dataType > &c1, const unsigned long c2)`
- `template<class dataType >`
`bool operator!= (const unsigned long c1, const os::smart_ptr< dataType > &c2)`
- `template<class dataType >`
`bool operator< (const os::smart_ptr< dataType > &c1, const os::smart_ptr< dataType > &c2)`
- `template<class dataType >`
`bool operator< (const os::smart_ptr< dataType > &c1, const dataType *c2)`
- `template<class dataType >`
`bool operator< (const dataType *c1, const os::smart_ptr< dataType > &c2)`
- `template<class dataType >`
`bool operator< (const os::smart_ptr< dataType > &c1, const void *c2)`
- `template<class dataType >`
`bool operator< (const void *c1, const os::smart_ptr< dataType > &c2)`
- `template<class dataType >`
`bool operator< (const os::smart_ptr< dataType > &c1, const int c2)`
- `template<class dataType >`
`bool operator< (const int c1, const os::smart_ptr< dataType > &c2)`
- `template<class dataType >`
`bool operator< (const os::smart_ptr< dataType > &c1, const long c2)`
- `template<class dataType >`
`bool operator< (const long c1, const os::smart_ptr< dataType > &c2)`

- [illegible]

- `template<class dataType >`
`bool operator> (const unsigned long c1, const os::smart_ptr< dataType > &c2)`
- `template<class dataType >`
`bool operator>= (const os::smart_ptr< dataType > &c1, const os::smart_ptr< dataType > &c2)`
- `template<class dataType >`
`bool operator>= (const os::smart_ptr< dataType > &c1, const dataType *&c2)`
- `template<class dataType >`
`bool operator>= (const dataType *&c1, const os::smart_ptr< dataType > &c2)`
- `template<class dataType >`
`bool operator>= (const os::smart_ptr< dataType > &c1, const void *&c2)`
- `template<class dataType >`
`bool operator>= (const void *&c1, const os::smart_ptr< dataType > &c2)`
- `template<class dataType >`
`bool operator>= (const os::smart_ptr< dataType > &c1, const int c2)`
- `template<class dataType >`
`bool operator>= (const int c1, const os::smart_ptr< dataType > &c2)`
- `template<class dataType >`
`bool operator>= (const os::smart_ptr< dataType > &c1, const long c2)`
- `template<class dataType >`
`bool operator>= (const long c1, const os::smart_ptr< dataType > &c2)`
- `template<class dataType >`
`bool operator>= (const os::smart_ptr< dataType > &c1, const unsigned long c2)`
- `template<class dataType >`
`bool operator>= (const unsigned long c1, const os::smart_ptr< dataType > &c2)`

9.14.1 Detailed Description

Template declaration of **os::smart_ptr** (p. 146).

Author

Jonathan Bedard

Date

4/18/2016

Bug No known bugs.

This file contains a template declaration of **os::smart_ptr** (p. 146) and supporting constants and functions. Note that because **os::smart_ptr** (p. 146) is a template class, the implementation of **os::smart_ptr** (p. 146) occurs here as well.

9.14.2 Function Documentation

```
template<class dataType > bool operator!= ( const os::smart_ptr< dataType > & c1, const
os::smart_ptr< dataType > & c2 ) [inline]
```

```

template<class dataType > bool operator!= ( const os::smart_ptr< dataType > & c1, const
dataType * c2 ) [inline]

template<class dataType > bool operator!= ( const dataType * c1, const os::smart_ptr< dataType
> & c2 ) [inline]

template<class dataType > bool operator!= ( const os::smart_ptr< dataType > & c1, const void *
c2 ) [inline]

template<class dataType > bool operator!= ( const void * c1, const os::smart_ptr< dataType > &
c2 ) [inline]

template<class dataType > bool operator!= ( const os::smart_ptr< dataType > & c1, const int c2
) [inline]

template<class dataType > bool operator!= ( const int c1, const os::smart_ptr< dataType > & c2
) [inline]

template<class dataType > bool operator!= ( const os::smart_ptr< dataType > & c1, const long
c2 ) [inline]

template<class dataType > bool operator!= ( const long c1, const os::smart_ptr< dataType > &
c2 ) [inline]

template<class dataType > bool operator!= ( const os::smart_ptr< dataType > & c1, const
unsigned long c2 ) [inline]

template<class dataType > bool operator!= ( const unsigned long c1, const os::smart_ptr<
dataType > & c2 ) [inline]

template<class dataType > bool operator< ( const os::smart_ptr< dataType > & c1, const
os::smart_ptr< dataType > & c2 ) [inline]

template<class dataType > bool operator< ( const os::smart_ptr< dataType > & c1, const
dataType * c2 ) [inline]

template<class dataType > bool operator< ( const dataType * c1, const os::smart_ptr< dataType
> & c2 ) [inline]

template<class dataType > bool operator< ( const os::smart_ptr< dataType > & c1, const void *
c2 ) [inline]

template<class dataType > bool operator< ( const void * c1, const os::smart_ptr< dataType > &
c2 ) [inline]

template<class dataType > bool operator< ( const os::smart_ptr< dataType > & c1, const int c2 )
[inline]

template<class dataType > bool operator< ( const int c1, const os::smart_ptr< dataType > & c2 )
[inline]

template<class dataType > bool operator< ( const os::smart_ptr< dataType > & c1, const long c2
) [inline]

```

```

template<class dataType > bool operator< ( const long c1, const os::smart_ptr< dataType > & c2
) [inline]

template<class dataType > bool operator< ( const os::smart_ptr< dataType > & c1, const
unsigned long c2 ) [inline]

template<class dataType > bool operator< ( const unsigned long c1, const os::smart_ptr<
dataType > & c2 ) [inline]

template<class dataType > bool operator<= ( const os::smart_ptr< dataType > & c1, const
os::smart_ptr< dataType > & c2 ) [inline]

template<class dataType > bool operator<= ( const os::smart_ptr< dataType > & c1, const
dataType * c2 ) [inline]

template<class dataType > bool operator<= ( const dataType * c1, const os::smart_ptr<
dataType > & c2 ) [inline]

template<class dataType > bool operator<= ( const os::smart_ptr< dataType > & c1, const void *
c2 ) [inline]

template<class dataType > bool operator<= ( const void * c1, const os::smart_ptr< dataType > &
c2 ) [inline]

template<class dataType > bool operator<= ( const os::smart_ptr< dataType > & c1, const int c2
) [inline]

template<class dataType > bool operator<= ( const int c1, const os::smart_ptr< dataType > & c2
) [inline]

template<class dataType > bool operator<= ( const os::smart_ptr< dataType > & c1, const long
c2 ) [inline]

template<class dataType > bool operator<= ( const long c1, const os::smart_ptr< dataType > &
c2 ) [inline]

template<class dataType > bool operator<= ( const os::smart_ptr< dataType > & c1, const
unsigned long c2 ) [inline]

template<class dataType > bool operator<= ( const unsigned long c1, const os::smart_ptr<
dataType > & c2 ) [inline]

template<class dataType > bool operator== ( const os::smart_ptr< dataType > & c1, const
os::smart_ptr< dataType > & c2 ) [inline]

template<class dataType > bool operator== ( const os::smart_ptr< dataType > & c1, const
dataType * c2 ) [inline]

template<class dataType > bool operator== ( const dataType * c1, const os::smart_ptr<
dataType > & c2 ) [inline]

template<class dataType > bool operator== ( const os::smart_ptr< dataType > & c1, const void *
c2 ) [inline]

```

```

template<class dataType > bool operator== ( const void * c1, const os::smart_ptr< dataType > &
c2 ) [inline]

template<class dataType > bool operator== ( const os::smart_ptr< dataType > & c1, const int c2
) [inline]

template<class dataType > bool operator== ( const int c1, const os::smart_ptr< dataType > & c2
) [inline]

template<class dataType > bool operator== ( const os::smart_ptr< dataType > & c1, const long
c2 ) [inline]

template<class dataType > bool operator== ( const long c1, const os::smart_ptr< dataType > &
c2 ) [inline]

template<class dataType > bool operator== ( const os::smart_ptr< dataType > & c1, const
unsigned long c2 ) [inline]

template<class dataType > bool operator== ( const unsigned long c1, const os::smart_ptr<
dataType > & c2 ) [inline]

template<class dataType > bool operator> ( const os::smart_ptr< dataType > & c1, const
os::smart_ptr< dataType > & c2 ) [inline]

template<class dataType > bool operator> ( const os::smart_ptr< dataType > & c1, const
dataType *& c2 ) [inline]

template<class dataType > bool operator> ( const dataType *& c1, const os::smart_ptr<
dataType > & c2 ) [inline]

template<class dataType > bool operator> ( const os::smart_ptr< dataType > & c1, const void *
c2 ) [inline]

template<class dataType > bool operator> ( const void * c1, const os::smart_ptr< dataType > &
c2 ) [inline]

template<class dataType > bool operator> ( const os::smart_ptr< dataType > & c1, const int c2 )
[inline]

template<class dataType > bool operator> ( const int c1, const os::smart_ptr< dataType > & c2 )
[inline]

template<class dataType > bool operator> ( const os::smart_ptr< dataType > & c1, const long c2
) [inline]

template<class dataType > bool operator> ( const long c1, const os::smart_ptr< dataType > & c2
) [inline]

template<class dataType > bool operator> ( const os::smart_ptr< dataType > & c1, const
unsigned long c2 ) [inline]

template<class dataType > bool operator> ( const unsigned long c1, const os::smart_ptr<
dataType > & c2 ) [inline]

```

```

template<class dataType > bool operator>= ( const os::smart_ptr< dataType > & c1, const
os::smart_ptr< dataType > & c2 ) [inline]

template<class dataType > bool operator>= ( const os::smart_ptr< dataType > & c1, const
dataType *& c2 ) [inline]

template<class dataType > bool operator>= ( const dataType *& c1, const os::smart_ptr<
dataType > & c2 ) [inline]

template<class dataType > bool operator>= ( const os::smart_ptr< dataType > & c1, const void *
c2 ) [inline]

template<class dataType > bool operator>= ( const void * c1, const os::smart_ptr< dataType > &
c2 ) [inline]

template<class dataType > bool operator>= ( const os::smart_ptr< dataType > & c1, const int c2
) [inline]

template<class dataType > bool operator>= ( const int c1, const os::smart_ptr< dataType > & c2
) [inline]

template<class dataType > bool operator>= ( const os::smart_ptr< dataType > & c1, const long
c2 ) [inline]

template<class dataType > bool operator>= ( const long c1, const os::smart_ptr< dataType > &
c2 ) [inline]

template<class dataType > bool operator>= ( const os::smart_ptr< dataType > & c1, const
unsigned long c2 ) [inline]

template<class dataType > bool operator>= ( const unsigned long c1, const os::smart_ptr<
dataType > & c2 ) [inline]

```

9.15 staticConstantPrinter.h File Reference

Constant printing support.

Classes

- class **os::constantPrinter**
Prints constant arrays to files.

Namespaces

- **os**

9.15.1 Detailed Description

Constant printing support.

Author

Jonathan Bedard

Date

1/31/2016

Bug No known bugs.

This file contains a class which helps facilitate printing massive tables of constants. It outputs .h and .cpp files with configured arrays of constants.

9.16 staticConstantPrinter.cpp File Reference

Constant printing support, implementation.

9.16.1 Detailed Description

Constant printing support, implementation.

Author

Jonathan Bedard

Date

4/618/2016

Bug No known bugs.

This file implements **os::constantPrinter** (p. 124). Consult **staticConstantPrinter.h** (p. 74) for detailed documentation.

Chapter 10

Class Index

10.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

os::adnode< dataType >	Abstract data-node	90
os::ads< dataType >	Abstract datastructure	93
os::asyncAVLNode< dataType >	Node for usage in an asynchronous AVL tree	97
os::asyncAVLTree< dataType >	Asynchronous balanced binary search tree	103
os::AVLNode< dataType >	Node for usage in an AVL tree	111
os::AVLTree< dataType >	Balanced binary search tree	117
os::constantPrinter	Prints constant arrays to files	124
os::eventReceiver< senderType >	Class which enables event receiving	128
os::eventSender< receiverType >	Class which enables event sending	131
os::indirectMatrix< dataType >	Indirect matrix	133
os::matrix< dataType >	Raw matrix	139
os::ptrComp	Pointer compare interface	145
os::smart_ptr< dataType >	Reference counted pointer	146
os::smartSet< dataType >	Smart set abstract data-structures	157
os::unsortedList< dataType >	Unsorted linked list	161

os::unsortedListNode< dataType >	
Node for usage in a linked list	165
os::vector2d< dataType >	
2-dimensional vector	168
os::vector3d< dataType >	
3-dimensional vector	178

Chapter 11

Namespace Documentation

11.1 os Namespace Reference

Classes

- class **adnode**
Abstract data-node.
- class **ads**
Abstract datastructure.
- class **asyncAVLNode**
Node for usage in an asynchronous AVL tree.
- class **asyncAVLTree**
Asynchronous balanced binary search tree.
- class **AVLNode**
Node for usage in an AVL tree.
- class **AVLTree**
Balanced binary search tree.
- class **constantPrinter**
Prints constant arrays to files.
- class **eventReceiver**
Class which enables event receiving.
- class **eventSender**
Class which enables event sending.
- class **indirectMatrix**
Indirect matrix.
- class **matrix**
Raw matrix.
- class **ptrComp**
Pointer compare interface.
- class **smart_ptr**
Reference counted pointer.

- class **smartSet**
Smart set abstract data-structures.
- class **unsortedList**
Unsorted linked list.
- class **unsortedListNode**
Node for usage in a linked list.
- class **vector2d**
2-dimensional vector
- class **vector3d**
3-dimensional vector

Typedefs

- typedef **vector2d**< int8_t > **vector2d_8**
8 bit 2-d vector
- typedef **vector2d**< uint8_t > **vector2d_u8**
unsigned 8 bit 2-d vector
- typedef **vector2d**< int16_t > **vector2d_16**
16 bit 2-d vector
- typedef **vector2d**< uint16_t > **vector2d_u16**
unsigned 16 bit 2-d vector
- typedef **vector2d**< int32_t > **vector2d_32**
32 bit 2-d vector
- typedef **vector2d**< uint32_t > **vector2d_u32**
unsigned 32 bit 2-d vector
- typedef **vector2d**< int64_t > **vector2d_64**
64 bit 2-d vector
- typedef **vector2d**< uint64_t > **vector2d_u64**
unsigned 64 bit 2-d vector
- typedef **vector2d**< float > **vector2d_f**
float 2-d vector
- typedef **vector2d**< double > **vector2d_d**
double 2-d vector
- typedef **vector3d**< int8_t > **vector3d_8**
8 bit 3-d vector
- typedef **vector3d**< uint8_t > **vector3d_u8**
unsigned 8 bit 3-d vector
- typedef **vector3d**< int16_t > **vector3d_16**
16 bit 3-d vector
- typedef **vector3d**< uint16_t > **vector3d_u16**
unsigned 16 bit 3-d vector
- typedef **vector3d**< int32_t > **vector3d_32**
32 bit 3-d vector

- typedef **vector3d**< uint32_t > **vector3d_u32**
unsigned 32 bit 3-d vector
- typedef **vector3d**< int64_t > **vector3d_64**
64 bit 3-d vector
- typedef **vector3d**< uint64_t > **vector3d_u64**
unsigned 64 bit 3-d vector
- typedef **vector3d**< float > **vector3d_f**
float 3-d vector
- typedef **vector3d**< double > **vector3d_d**
double 3-d vector
- typedef void(* **void_rec**) (void *)
Deletion function typedef.

Enumerations

- enum **setTypes** { **def_set** =0, **small_set**, **sorted_set** }
Index of abstract data-structures.
- enum **smart_pointer_type** {
 null_type =0, **raw_type**, **shared_type**, **shared_type_array**,
 shared_type_dynamic_delete }
*Enumeration for types of **os::smart_ptr** (p. 146).*

Functions

- template<class dataType >
 int **defaultCompareSort** (const dataType &v1, const dataType &v2)
 Basic compare.
- template<class dataType >
 int **pointerCompareSort** (**smart_ptr**< dataType > ptr1, **smart_ptr**< dataType > ptr2)
 Raw pointer compare.
- template<class dataType >
 void **quicksort** (dataType *arr, unsigned int length, int(*sort_comparision)(const dataType &, const dataType &)=&**defaultCompareSort**)
 Template quick-sort.
- template<class dataType >
 void **pointerQuicksort** (**smart_ptr**< **smart_ptr**< dataType > > arr, unsigned int length, int(*sort_comparision)(**smart_ptr**< dataType >, **smart_ptr**< dataType >)=&**pointerCompareSort**)
 Template for quick-sort, pointer version.
- template<class dataType >
 bool **compareSize** (const **matrix**< dataType > &m1, const **matrix**< dataType > &m2)
 Compares the size of two matrices.
- template<class dataType >
 bool **compareSize** (const **indirectMatrix**< dataType > &m1, const **matrix**< dataType > &m2)
 Compares the size of two matrices.

- `template<class dataType >`
`bool compareSize (const matrix< dataType > &m1, const indirectMatrix< dataType > &m2)`
Compares the size of two matrices.
- `template<class dataType >`
`bool compareSize (const indirectMatrix< dataType > &m1, const indirectMatrix< dataType > &m2)`
Compares the size of two matrices.
- `template<class dataType >`
`bool testCross (const matrix< dataType > &m1, const matrix< dataType > &m2)`
Tests if the cross-product is a legal operation.
- `template<class dataType >`
`bool testCross (const indirectMatrix< dataType > &m1, const matrix< dataType > &m2)`
Tests if the cross-product is a legal operation.
- `template<class dataType >`
`bool testCross (const matrix< dataType > &m1, const indirectMatrix< dataType > &m2)`
Tests if the cross-product is a legal operation.
- `template<class dataType >`
`bool testCross (const indirectMatrix< dataType > &m1, const indirectMatrix< dataType > &m2)`
Tests if the cross-product is a legal operation.
- `std::ostream & osout_func ()`
Standard out object for os namespace.
- `std::ostream & oserr_func ()`
Standard error object for os namespace.
- `template<class targ , class src >`
`smart_ptr< targ > cast (const os::smart_ptr< src > &conv)`
***os::smart_ptr** (p. 146) cast function*

Variables

- `std::recursive_mutex * eventLock`
Event processing mutex.
- `smart_ptr< std::ostream > osout_ptr`
Standard out pointer for os namespace.
- `smart_ptr< std::ostream > oserr_ptr`
Standard error pointer for os namespace.

11.1.1 Typedef Documentation

`typedef vector2d<int16_t> os::vector2d_16`

16 bit 2-d vector

`typedef vector2d<int32_t> os::vector2d_32`

32 bit 2-d vector

typedef **vector2d**<int64_t> **os::vector2d_64**

64 bit 2-d vector

typedef **vector2d**<int8_t> **os::vector2d_8**

8 bit 2-d vector

typedef **vector2d**<double> **os::vector2d_d**

double 2-d vector

typedef **vector2d**<float> **os::vector2d_f**

float 2-d vector

typedef **vector2d**<uint16_t> **os::vector2d_u16**

unsigned 16 bit 2-d vector

typedef **vector2d**<uint32_t> **os::vector2d_u32**

unsigned 32 bit 2-d vector

typedef **vector2d**<uint64_t> **os::vector2d_u64**

unsigned 64 bit 2-d vector

typedef **vector2d**<uint8_t> **os::vector2d_u8**

unsigned 8 bit 2-d vector

typedef **vector3d**<int16_t> **os::vector3d_16**

16 bit 3-d vector

typedef **vector3d**<int32_t> **os::vector3d_32**

32 bit 3-d vector

typedef **vector3d**<int64_t> **os::vector3d_64**

64 bit 3-d vector

typedef **vector3d**<int8_t> **os::vector3d_8**

8 bit 3-d vector

typedef **vector3d**<double> **os::vector3d_d**

double 3-d vector

typedef **vector3d**<float> **os::vector3d_f**

float 3-d vector

typedef **vector3d**<uint16_t> **os::vector3d_u16**

unsigned 16 bit 3-d vector

typedef **vector3d**<uint32_t> **os::vector3d_u32**

unsigned 32 bit 3-d vector

typedef **vector3d**<uint64_t> **os::vector3d_u64**

unsigned 64 bit 3-d vector

typedef **vector3d**<uint8_t> **os::vector3d_u8**

unsigned 8 bit 3-d vector

typedef void(* os::void_rec) (void *)

Deletion function typedef.

The **os::void_rec** (p. 83) function pointer typedef is used by **os::smart_ptr** (p. 146) when it is of type **os::shared_type_dynamic_delete** (p. 84) to destroy non-standard pointers, usually when interfacing with C code.

Parameters

in,out	void*	designed for non-standard deletion.
--------	-------	-------------------------------------

Returns

void

11.1.2 Enumeration Type Documentation

enum **os::setTypes**

Index of abstract data-structures.

This enumeration contains a numbered reference to all of the available abstract data-structures.

Enumerator

def_set Default set enumeration. Currently defaults to a small set.

small_set Small memory burden set. The small set uses an unsorted linked list to store data.

sorted_set Sorted set. The sorted set uses an AVL tree to store data.

enum **os::smart_pointer_type**

Enumeration for types of **os::smart_ptr** (p. 146).

Defines types of **os::smart_ptr** (p. 146). These types are used to define the deletion behaviour of the pointer.

Enumerator

null_type No type. **os::null_type** (p. 84) pointers are the default type of **os::smart_ptr** (p. 146). Any **os::smart_ptr** (p. 146) of type **os::null_type** (p. 84) can be guaranteed to hold a N→ULL pointer.

raw_type Raw pointer. **os::raw_type** (p. 84) pointers are the default type of **os::smart_ptr** (p. 146) when instantiated with a standard pointer. Any **os::smart_ptr** (p. 146) of type **os::raw_type** (p. 84) is not responsible for the deletion of it's pointer and makes no guarantees as to the availability of it's pointer.

shared_type Reference counted pointer. **os::shared_type** (p. 84) pointers must be instantiated from an **os::smart_ptr** (p. 146) of this type or explicitly through **os::smart_ptr** (p. 146) constructor arguments. **os::shared_type** (p. 84) pointers will automatically delete the pointer contained within the object when the reference count of the **os::smart_ptr** (p. 146) reaches 0.

shared_type_array Reference counted array. Similar in usage and instantiation to **os::raw_type** (p. 84). **os::smart_ptr** (p. 146) of type **os::shared_type_array** (p. 84) are designed to be used with array and will run delete [] when the reference count reaches 0 instead of delete.

shared_type_dynamic_delete Reference pointer with non-standard deletion. Similar in usage and instantiation to **os::raw_type** (p. 84). **os::smart_ptr** (p. 146) of type **os::shared_type_dynamic_delete** (p. 84) are used when the deletion of a pointer is not contained within the object destructor. This is specifically designed for interface with C code not using "new" and "delete."

11.1.3 Function Documentation

```
template<class targ , class src > smart_ptr<targ> os::cast ( const os::smart_ptr< src > & conv )  
[inline]
```

os::smart_ptr (p. 146) cast function

Casts an **os::smart_ptr**<src> to and **os::smart_ptr**<targ>. This function is a template function, targ and src are the templates respectively. Note that the is an explicit cast and is not guranteed to be safe.

Parameters

in	conv	Reference to os::smart_ptr <src> to be converted
----	------	---

Returns

New **os::smart_ptr**<targ> constructed from the received **os::smart_ptr** (p. 146)

```
template<class dataType > bool os::compareSize ( const matrix< dataType > & m1, const matrix< dataType > & m2 )
```

Compares the size of two matrices.

Compares the size of two raw matrices. If both have the same width and the same height, they are considered to be the same size.

Parameters

in	<i>m1</i>	Raw matrix reference
in	<i>m2</i>	Raw matrix reference

Returns

True if the matrices are the same size

```
template<class dataType > bool os::compareSize ( const indirectMatrix< dataType > & m1, const matrix< dataType > & m2 )
```

Compares the size of two matrices.

Compares the size of an indirect matrix and a raw matrix in that order. If both have the same width and the same height, they are considered to be the same size.

Parameters

in	<i>m1</i>	Indirect matrix reference
in	<i>m2</i>	Raw matrix reference

Returns

True if the matrices are the same size

```
template<class dataType > bool os::compareSize ( const matrix< dataType > & m1, const indirectMatrix< dataType > & m2 )
```

Compares the size of two matrices.

Compares the size of a raw matrix and an indirect matrix in that order. If both have the same width and the same height, they are considered to be the same size.

Parameters

in	<i>m1</i>	Raw matrix reference
in	<i>m2</i>	Indirect matrix reference

Returns

True if the matrices are the same size

```
template<class dataType > bool os::compareSize ( const indirectMatrix< dataType > & m1, const indirectMatrix< dataType > & m2 )
```

Compares the size of two matrices.

Compares the size of two indirect matrices. If both have the same width and the same height, they are considered to be the same size.

Parameters

in	<i>m1</i>	Indirect matrix reference
in	<i>m2</i>	Indirect matrix reference

Returns

True if the matrices are the same size

```
template<class dataType > int os::defaultCompareSort ( const dataType & v1, const dataType & v2 )
```

Basic compare.

Acts as a default comparison function for sorting. This function compares the data as if it is in integer form.

Parameters

in	<i>v1</i>	Reference 1 to compare
in	<i>v2</i>	Reference 2 to compare

Returns

1 if greater than, -1 if less than, 0 if equal to

```
std::ostream& os::oserr_func ( )
```

Standard error object for os namespace.

#define statements allow the user to call this function with "os::oserr." Logging is achieved by using "os::oserr" as one would use "std::cerr."

```
std::ostream& os::osout_func ( )
```

Standard out object for os namespace.

#define statements allow the user to call this function with "os::osout." Logging is achieved by using "os::osout" as one would use "std::cout."

```
template<class dataType > int os::pointerCompareSort ( smart_ptr< dataType > ptr1, smart_ptr< dataType > ptr2 )
```

Raw pointer compare.

Acts as a default comparison function for pointer sorting. Compares the raw pointer values of the two arguments and returns the result.

Parameters

in	<i>ptr1</i>	Pointer 1 to compare
in	<i>ptr2</i>	Pointer 2 to compare

Returns

1 if greater than, -1 if less than, 0 if equal to

```
template<class dataType > void os::pointerQuicksort ( smart_ptr< smart_ptr< dataType > > arr,
unsigned int length, int(*)(smart_ptr< dataType >, smart_ptr< dataType >) sort_comparison =
&pointerCompareSort )
```

Template for quick-sort, pointer version.

Performs quick sort on the provided array of the given length where the array is of pointers to the data type instead of the data type.

Parameters

	<i>[in/out]</i>	array Set of data to be sorted
in	<i>length</i>	Length of array to be sorted
in	<i>sort_comparison</i>	Comparison function definition

Returns

void

```
template<class dataType > void os::quicksort ( dataType * arr, unsigned int length, int(*) (const
dataType &, const dataType &) sort_comparison = &defaultCompareSort )
```

Template quick-sort.

Performs quick sort on the provided array of the given length with the given comparison function. The default comparison function is one which uses the comparison operators

Parameters

	<i>[in/out]</i>	array Set of data to be sorted
in	<i>length</i>	Length of array to be sorted
in	<i>sort_comparison</i>	Comparison function definition

Returns

void

```
template<class dataType > bool os::testCross ( const matrix< dataType > & m1, const matrix<
dataType > & m2 )
```

Tests if the cross-product is a legal operation.

Compares the width of the first matrix versus the height of the second. If the two are equal, the cross-product is defined.

Parameters

in	<i>m1</i>	Raw matrix reference
in	<i>m2</i>	Raw matrix reference

Returns

True if the cross-product is defined

```
template<class dataType > bool os::testCross ( const indirectMatrix< dataType > & m1, const
matrix< dataType > & m2 )
```

Tests if the cross-product is a legal operation.

Compares the width of the first matrix versus the height of the second. If the two are equal, the cross-product is defined.

Parameters

in	<i>m1</i>	Indirect matrix reference
in	<i>m2</i>	Raw matrix reference

Returns

True if the cross-product is defined

```
template<class dataType > bool os::testCross ( const matrix< dataType > & m1, const
indirectMatrix< dataType > & m2 )
```

Tests if the cross-product is a legal operation.

Compares the width of the first matrix versus the height of the second. If the two are equal, the cross-product is defined.

Parameters

in	<i>m1</i>	Raw matrix reference
in	<i>m2</i>	Indirect matrix reference

Returns

True if the cross-product is defined

```
template<class dataType > bool os::testCross ( const indirectMatrix< dataType > & m1, const indirectMatrix< dataType > & m2 )
```

Tests if the cross-product is a legal operation.

Compares the width of the first matrix versus the height of the second. If the two are equal, the cross-product is defined.

Parameters

in	<i>m1</i>	Indirect matrix reference
in	<i>m2</i>	Indirect matrix reference

Returns

True if the cross-product is defined

11.1.4 Variable Documentation

```
std::recursive_mutex* os::eventLock
```

Event processing mutex.

Locks when events are being created, destroyed, bound or triggered. This allows events to be thread safe. The mutex is declared to be recursive to allow for nested event calls.

```
smart_ptr<std::ostream> os::oserr_ptr
```

Standard error pointer for os namespace.

This std::ostream is used as standard error for the os namespace. This pointer can be swapped out to programmatically redirect standard error for the os namespace.

```
smart_ptr<std::ostream> os::osout_ptr
```

Standard out pointer for os namespace.

This std::ostream is used as standard out for the os namespace. This pointer can be swapped out to programmatically redirect standard out for the os namespace.


Chapter 12

Class Documentation

12.1 os::adnode< dataType > Class Template Reference

Abstract data-node.

Inheritance diagram for os::adnode< dataType >:

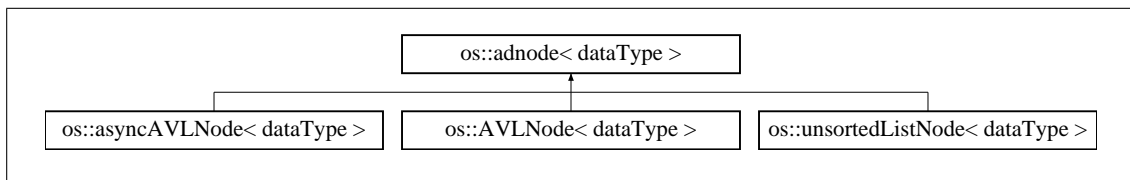

Public Member Functions

- **adnode** (**smart_ptr**< dataType > d)
Abstract data-node constructor.
- virtual **~adnode** ()
Virtual destructor.
- int **compare** (**smart_ptr**< **adnode**< dataType > > inp, bool rawComp=false)
Compares two abstract data-nodes.
- **smart_ptr**< dataType > & **getData** ()
Return a reference to the data pointer.
- **smart_ptr**< dataType > & **operator*** ()
Return a reference to the data pointer.
- virtual **smart_ptr**< **adnode**< dataType > > **getNext** ()
Find the next node.
- virtual **smart_ptr**< **adnode**< dataType > > **getPrev** ()
Find the previous node.

Protected Attributes

- **smart_ptr**< dataType > **data**

Data pointer.

12.1.1 Detailed Description

```
template<class dataType>
class os::adnode< dataType >
```

Abstract data-node.

A generalized node class used for linked lists, trees, queues and various other abstract data structures. Primarily, this structure is focused on providing access to the node data and allowing traversal of the data-structure.

12.1.2 Constructor & Destructor Documentation

```
template<class dataType> os::adnode< dataType >::adnode ( smart_ptr< dataType > d )
[inline]
```

Abstract data-node constructor.

An abstract data-node is meaningless without a pointer to it's dataType. The constructor requires this pointer to initialize the node.

Parameters

in	<i>d</i>	Data to be bound to the node
----	----------	------------------------------

```
template<class dataType> virtual os::adnode< dataType >::~adnode ( ) [inline], [virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

12.1.3 Member Function Documentation

```
template<class dataType> int os::adnode< dataType >::compare ( smart_ptr< adnode<
dataType > > inp, bool rawComp = false ) [inline]
```

Compares two abstract data-nodes.

Abstract data nodes use the comparison functions defined by their data pointers to determine their comparison

Parameters

in	<i>inp</i>	Data-node being compared with
----	------------	-------------------------------

Returns

1, 0, -1 (Greater than, equal to, less than)

```
template<class dataType> smart_ptr<dataType>& os::adnode< dataType >::getData ( )  
[inline]
```

Return a reference to the data pointer.

Returns

adnode<**dataType**>::data (p. 93)

```
template<class dataType> virtual smart_ptr<adnode<dataType> > os::adnode< dataType  
>::getNext ( ) [inline], [virtual]
```

Find the next node.

This functions attempts to search for the next node in the structure. By default, or if this node either cannot be found or does not exist, a NULL pointer is returned.

Returns

Pointer to the next node in the structure

Reimplemented in **os::asyncAVLNode**< **dataType** > (p. 100), **os::asyncAVLNode**< **senderType** > (p. 100), **os::asyncAVLNode**< **receiverType** > (p. 100), **os::AVLNode**< **dataType** > (p. 113), and **os::unsortedListNode**< **dataType** > (p. 166).

```
template<class dataType> virtual smart_ptr<adnode<dataType> > os::adnode< dataType  
>::getPrev ( ) [inline], [virtual]
```

Find the previous node.

This functions attempts to search for the previous node in the structure. By default, or if this node either cannot be found or does not exist, a NULL pointer is returned.

Returns

Pointer to the previous node in the structure

Reimplemented in **os::AVLNode**< **dataType** > (p. 114), **os::asyncAVLNode**< **dataType** > (p. 100), **os::asyncAVLNode**< **senderType** > (p. 100), **os::asyncAVLNode**< **receiverType** > (p. 100), and **os::unsortedListNode**< **dataType** > (p. 167).

```
template<class dataType> smart_ptr<dataType>& os::adnode< dataType >::operator* ( )  
[inline]
```

Return a reference to the data pointer.

Returns

adnode<**dataType**>::data (p. 93)

12.1.4 Member Data Documentation

template<class dataType> **smart_ptr**<dataType> **os::adnode**< dataType >::data [protected]


Data pointer.

A pointer to the data being held by the node. This is used to compare nodes as well.

12.2 os::ads< dataType > Class Template Reference

Abstract datastructure.

Inheritance diagram for os::ads< dataType >:

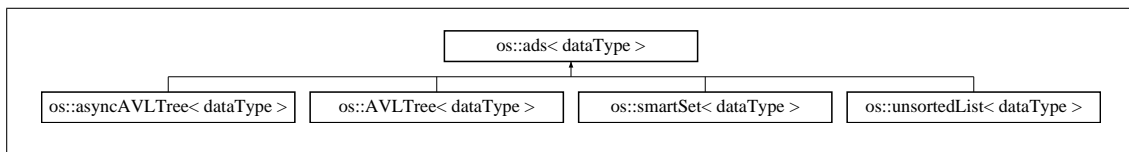

Public Member Functions

- **ads** ()
Default constructor.
- virtual **~ads** ()
Virtual destructor.
- virtual bool **insert** (**smart_ptr**< dataType > x)
Inserts a data pointer.
- virtual unsigned int **size** () const
Returns the number of elements in the datastructure.
- virtual **smart_ptr**< **adnode**< dataType > > **find** (**smart_ptr**< dataType > x)
Finds a matching node.
- virtual bool **findDelete** (**smart_ptr**< dataType > x)
Finds a matching node and removes it.
- virtual **smart_ptr**< **adnode**< dataType > > **getFirst** ()
Returns the first node.
- virtual **smart_ptr**< **adnode**< dataType > > **getLast** ()
Returns the last node.
- virtual bool **insert** (**smart_ptr**< **ads**< dataType > > x)
Inserts an entire datastructure.
- bool **rawInsert** (**smart_ptr**< dataType > x)
Inserts a data pointer.
- bool **rawCompare** () const
Return state of raw compare.
- void **setRawCompare** (bool rwcmp)
Set raw-compare.

Protected Attributes

- **bool _rawCompare**

Allows for raw compare data-structures.

12.2.1 Detailed Description

```
template<class dataType>
class os::ads< dataType >
```

Abstract datastructure.

A generalized datastructure class which acts as an interface for all datastructures classes. If not extended, the abstract datastructures class is useless.

12.2.2 Constructor & Destructor Documentation

```
template<class dataType> os::ads< dataType >::ads ( ) [inline]
```

Default constructor.

This constructor does nothing, as there are no objects to initialize.

```
template<class dataType> virtual os::ads< dataType >::~ads ( ) [inline], [virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

12.2.3 Member Function Documentation

```
template<class dataType> virtual smart_ptr<adnode<dataType> > os::ads< dataType >::find (
smart_ptr< dataType > x ) [inline], [virtual]
```

Finds a matching node.

Finds a pointer to an object of type "dataType" given a comparison pointer. This comparison function is defined by `os::adnode<dataType>::compare(smart_ptr<adnode<dataType> >)`. Each datastructure which inherits from this class will re-implement this function.

[in] x dataType pointer to be compared against

Returns

The found node if applicable, else NULL

Reimplemented in **os::AVLTree**< **dataType** > (p. 120), **os::asyncAVLTree**< **dataType** > (p. 107), **os::asyncAVLTree**< **senderType** > (p. 107), **os::asyncAVLTree**< **receiverType** > (p. 107), **os::unsortedList**< **dataType** > (p. 163), and **os::smartSet**< **dataType** > (p. 159).

```
template<class dataType> virtual bool os::ads< dataType >::findDelete ( smart_ptr< dataType > x ) [inline], [virtual]
```

Finds a matching node and removes it.

Finds a pointer to an object of type "dataType" given a comparison pointer. This comparison function is defined by **os::adnode**<dataType>::compare(**smart_ptr**<**adnode**<dataType> >). Each datastructure which inherits from this class will re-implement this function. After finding a node, it will be removed from the datastructure.

[in] x dataType pointer to be compared against

Returns

true if the node was found and deleted, else false

Reimplemented in **os::AVLTree**< **dataType** > (p. 121), **os::asyncAVLTree**< **dataType** > (p. 108), **os::asyncAVLTree**< **senderType** > (p. 108), **os::asyncAVLTree**< **receiverType** > (p. 108), **os::unsortedList**< **dataType** > (p. 163), and **os::smartSet**< **dataType** > (p. 159).

```
template<class dataType> virtual smart_ptr<adnode<dataType> > os::ads< dataType >::getFirst ( ) [inline], [virtual]
```

Returns the first node.

Each datastructure has a different definition of what defines "first." By default, this function returns NULL. Datastructures which inherit from this class must re-implement this function.

Returns

The first node, if it exists

Reimplemented in **os::asyncAVLTree**< **dataType** > (p. 109), **os::asyncAVLTree**< **senderType** > (p. 109), **os::asyncAVLTree**< **receiverType** > (p. 109), **os::AVLTree**< **dataType** > (p. 122), **os::unsortedList**< **dataType** > (p. 163), and **os::smartSet**< **dataType** > (p. 159).

```
template<class dataType> virtual smart_ptr<adnode<dataType> > os::ads< dataType >::getLast ( ) [inline], [virtual]
```

Returns the last node.

Each datastructure has a different definition of what defines "last." By default, this function returns NULL. Datastructures which inherit from this class must re-implement this function.

Returns

The last node, if it exists

Reimplemented in **os::asyncAVLTree**< **dataType** > (p. 109), **os::asyncAVLTree**< **senderType** > (p. 109), **os::asyncAVLTree**< **receiverType** > (p. 109), **os::AVLTree**< **dataType** > (p. 122), **os::unsortedList**< **dataType** > (p. 164), and **os::smartSet**< **dataType** > (p. 160).

```
template<class dataType> virtual bool os::ads< dataType >::insert ( smart_ptr< dataType > x ) [inline], [virtual]
```

Inserts a data pointer.

Inserts a pointer to an object of type "dataType." Each datastructure which inherits from this class will re-implement this function

[in] x dataType pointer to be inserted

Returns

true if successful, false if failed

Reimplemented in **os::AVLTree< dataType >** (p. 123), **os::asyncAVLTree< dataType >** (p. 110), **os::asyncAVLTree< senderType >** (p. 110), **os::asyncAVLTree< receiverType >** (p. 110), **os::unsortedList< dataType >** (p. 164), and **os::smartSet< dataType >** (p. 160).

```
template<class dataType> virtual bool os::ads< dataType >::insert ( smart_ptr< ads< dataType > > x ) [inline], [virtual]
```

Inserts an entire datastructure.

This function may be redefined to speed-up insertion. Currently, this function will be O(n * insertionTime) where n is the number of elements in x
[in] x datastructure of type dataType to be inserted

Returns

true if successful, false if failed

Reimplemented in **os::AVLTree< dataType >** (p. 123), **os::asyncAVLTree< dataType >** (p. 109), **os::asyncAVLTree< senderType >** (p. 109), **os::asyncAVLTree< receiverType >** (p. 109), **os::unsortedList< dataType >** (p. 164), and **os::smartSet< dataType >** (p. 160).

```
template<class dataType> bool os::ads< dataType >::rawCompare ( ) const [inline]
```

Return state of raw compare.

Returns

_rawCompare

```
template<class dataType> bool os::ads< dataType >::rawInsert ( smart_ptr< dataType > x ) [inline]
```

Inserts a data pointer.

Inserts a pointer to an object of type "dataType." This function disabiguates certain calls to insert.
[in] x dataType pointer to be inserted

Returns

true if successful, false if failed

```
template<class dataType> void os::ads< dataType >::setRawCompare ( bool rwcmp ) [inline]
```

Set raw-compare.

Parameters

in	<i>rwcmp</i>	Value of raw compare to set
-----------	--------------	-----------------------------

Returns

void

```
template<class dataType> virtual unsigned int os::ads< dataType >::size ( ) const [inline],  
[virtual]
```

Returns the number of elements in the datastructure.

This function must be re-implemented by all classes which inherit from this class. By default, this function returns 0.

Returns

number of elements as an unsigned integer

Reimplemented in **os::asyncAVLTree**< **dataType** > (p. 110), **os::asyncAVLTree**< **senderType** > (p. 110), **os::asyncAVLTree**< **receiverType** > (p. 110), **os::AVLTree**< **dataType** > (p. 123), **os::unsortedList**< **dataType** > (p. 164), and **os::smartSet**< **dataType** > (p. 161).

12.2.4 Member Data Documentation


```
template<class dataType> bool os::ads< dataType >::_rawCompare [protected]
```

Allows for raw compare data-structures.

12.3 os::asyncAVLNode< dataType > Class Template Reference

Node for usage in an asynchronous AVL tree.

Inheritance diagram for os::asyncAVLNode< dataType >:

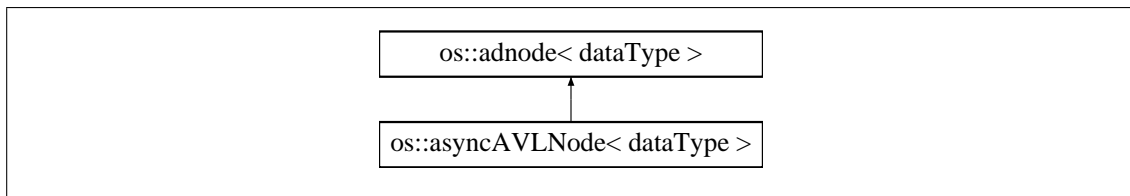

Public Member Functions

- **asyncAVLNode** (**smart_ptr**< **dataType** > d, **asyncAVLTree**< **dataType** > *master)
Abstract data-node constructor.
- virtual **~asyncAVLNode** ()
Virtual destructor.
- **smart_ptr**< **adnode**< **dataType** > > **getNext** ()
Find the next node.
- **smart_ptr**< **adnode**< **dataType** > > **getPrev** ()
Find the previous node.

Protected Member Functions

- **smart_ptr< asyncAVLNode< dataType > > getParent ()**
Returns the parent node.
- **smart_ptr< asyncAVLNode< dataType > > getChild (int x)**
Returns a child by index.
- **int getHeight () const**
Returns the height of the sub-tree.
- **void setHeight ()**
Sets the height of the sub-tree.
- **void setChild (smart_ptr< asyncAVLNode< dataType > > c, bool _rawCompare)**
Add a child to this node.
- **void setParent (smart_ptr< asyncAVLNode< dataType > > p, smart_ptr< asyncAVLNode< dataType > > self_pointer, bool _rawCompare)**
Sets the parent node.
- **void removeChild (smart_ptr< asyncAVLNode< dataType > > c, bool _rawCompare)**
Remove a child from this node.
- **void removeChild (int pos)**
Remove a child from this node.
- **void removeParent ()**
Remove the parent node.
- **void remove ()**
Remove all children and parents.

Protected Attributes

- **smart_ptr< asyncAVLNode< dataType > > parent**
Parent node one level up in the tree.
- **smart_ptr< asyncAVLNode< dataType > > child1**
Left child one level down in the tree.
- **smart_ptr< asyncAVLNode< dataType > > child2**
Right child one level down in the tree.
- **int height**
The height of the tree.
- **asyncAVLTree< dataType > * masterTree**
Reference to source tree.

Friends

- **class asyncAVLTree< dataType >**
AVL Tree must know details of node implementation.

12.3.1 Detailed Description

```
template<class dataType>
class os::asyncAVLNode< dataType >
```

Node for usage in an asynchronous AVL tree.

The AVL node class implements a number of functions unique to an AVL tree. This node has knowledge of the structure of the AVL tree through its parent and children.

12.3.2 Constructor & Destructor Documentation

```
template<class dataType> os::asyncAVLNode< dataType >::asyncAVLNode ( smart_ptr<
dataType > d, asyncAVLTree< dataType > * master ) [inline]
```

Abstract data-node constructor.

An AVL node is meaningless without a pointer to it's dataType. The constructor requires this pointer to initialize the node. Parent and children nodes are, by default, initialized to 0.

Parameters

in	<i>d</i>	Data to be bound to the node
----	----------	------------------------------

```
template<class dataType> virtual os::asyncAVLNode< dataType >::~asyncAVLNode ( )
[inline], [virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

12.3.3 Member Function Documentation

```
template<class dataType> smart_ptr<asyncAVLNode<dataType> > os::asyncAVLNode<
dataType >::getChild ( int x ) [inline], [protected]
```

Returns a child by index.

Returns child node by index. 0 indicates the left child, **asyncAVLNode**<dataType>::**child1** (p. 102). 1 indicates the right child, **asyncAVLNode**<dataType>::**child2** (p. 102). All other indices will return NULL.

Returns

os::asyncAVLNode<dataType>::**child1** (p. 102) for x==0, **asyncAVLNode**<dataType>::**child2** (p. 102) for x==1

```
template<class dataType> int os::asyncAVLNode< dataType >::getHeight ( ) const [inline],
[protected]
```

Returns the height of the sub-tree.

Returns

os::asyncAVLNode<dataType>::height (p. 103)

```
template<class dataType> smart_ptr<adnode<dataType> > os::asyncAVLNode< dataType>
>::getNext ( ) [virtual]
```

Find the next node.

This functions attempts to search for the next node in the structure. This trips the traverse flag of the current node and traverses the tree looking for the next node.

Returns

Pointer to the next node in the structure

Reimplemented from **os::adnode< dataType >** (p. 92).

```
template<class dataType> smart_ptr<asyncAVLNode<dataType> > os::asyncAVLNode<
dataType >::getParent ( ) [inline], [protected]
```

Returns the parent node.

Returns

os::asyncAVLNode<dataType>::parent (p. 103)

```
template<class dataType> smart_ptr<adnode<dataType> > os::asyncAVLNode< dataType>
>::getPrev ( ) [virtual]
```

Find the previous node.

This functions attempts to search for the previous node in the structure. This trips the traverse flag of the current node and traverses the tree looking for the previous node.

Returns

Pointer to the previous node in the structure

Reimplemented from **os::adnode< dataType >** (p. 92).

```
template<class dataType> void os::asyncAVLNode< dataType >::remove ( ) [inline],
[protected]
```

Remove all children and parents.

This function is important because nodes are of type **os::smart_ptr** (p. 146), since there are co-dependencies, failure to run this function on deletion of the tree will cause a memory leak.

Returns

void

```
template<class dataType> void os::asyncAVLNode< dataType >::removeChild ( smart_ptr<
asyncAVLNode< dataType > > c, bool_rawCompare ) [inline], [protected]
```

Remove a child from this node.

Checks **os::asyncAVLNode<dataType>::child1** (p. 102) and **os::asyncAVLNode<dataType>::child2** (p. 102) for equality with the the node received as a parameter.

Parameters

in	c	Node to be removed
----	---	--------------------

Returns

void

```
template<class dataType> void os::asyncAVLNode< dataType >::removeChild ( int pos )  
[inline], [protected]
```

Remove a child from this node.

Remove **os::asyncAVLNode**<dataType>::child1 (p. 102) if position is 0 and **os::asyncAVLNode**<dataType>::child2 (p. 102) if position is 1.

Parameters

in	pos	Node index to be removed
----	-----	--------------------------

Returns

void

```
template<class dataType> void os::asyncAVLNode< dataType >::removeParent ( ) [inline],  
[protected]
```

Remove the parent node.

Returns

void

```
template<class dataType> void os::asyncAVLNode< dataType >::setChild ( smart_ptr<  
asyncAVLNode< dataType > > c, bool _rawCompare ) [inline], [protected]
```

Add a child to this node.

Set **os::asyncAVLNode**<dataType>::child1 (p. 102) or **os::asyncAVLNode**<dataType>::child2 (p. 102) based on the comparison of the node to be inserted with the current node.

Parameters

in	c	Node to be inserted
----	---	---------------------

Returns

void

```
template<class dataType> void os::asyncAVLNode< dataType >::setHeight ( ) [inline],  
[protected]
```

Sets the height of the sub-tree.

Uses the height of the sub-tree of the node's children to calculate the height of the sub-tree of this node.

Returns

void

```
template<class dataType> void os::asyncAVLNode< dataType >::setParent ( smart_ptr<  
asyncAVLNode< dataType > > p, smart_ptr< asyncAVLNode< dataType > > self_pointer, bool  
_rawCompare ) [inline], [protected]
```

Sets the parent node.

Sets the parent node of the current node. This function requires a pointer to the current node for memory management.

Parameters

in	<i>p</i>	Parent node
in	<i>self_pointer</i>	Pointer to self, with memory management

Returns

void

12.3.4 Friends And Related Function Documentation

```
template<class dataType> friend class asyncAVLTree< dataType > [friend]
```

AVL Tree must know details of node implementation.

Since the AVL node implements many of the unique functions of the AVL tree, the tree must be aware of the private members of its nodes.

12.3.5 Member Data Documentation

```
template<class dataType> smart_ptr<asyncAVLNode<dataType> > os::asyncAVLNode<  
dataType >::child1 [protected]
```

Left child one level down in the tree.

```
template<class dataType> smart_ptr<asyncAVLNode<dataType> > os::asyncAVLNode<  
dataType >::child2 [protected]
```

Right child one level down in the tree.

```
template<class dataType> int os::asyncAVLNode< dataType >::height [protected]
```

The height of the tree.

This variable is kept to reduce computation time. It is dependent on the height of a node's children nodes. The **asyncAVLNode<dataType>::setHeight()** (p. 102) resets the height based on the height of the node's children.

```
template<class dataType> asyncAVLTree<dataType>* os::asyncAVLNode< dataType  
>::masterTree [protected]
```

Reference to source tree.

This reference to the source tree is used when incrementing or decrementing the node, locking the tree temporarily.


```
template<class dataType> smart_ptr<asyncAVLNode<dataType> > os::asyncAVLNode<  
dataType >::parent [protected]
```

Parent node one level up in the tree.

12.4 os::asyncAVLTree< dataType > Class Template Reference

Asynchronous balanced binary search tree.

Inheritance diagram for os::asyncAVLTree< dataType >:

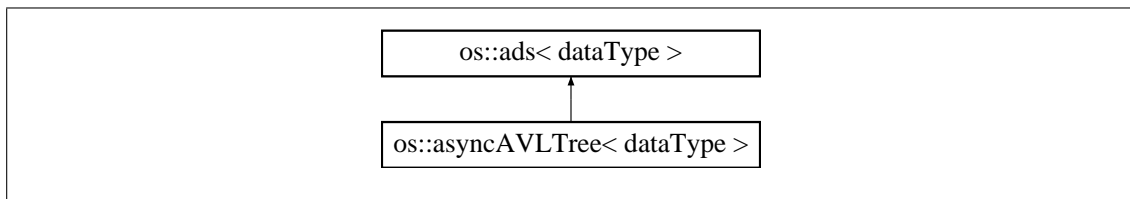

Public Member Functions

- **asyncAVLTree** ()
Default constructor.
- virtual **~asyncAVLTree** ()
Virtual destructor.
- bool **insert** (**smart_ptr**< **ads**< dataType > > x)
Inserts an os::ads<dataType>
- bool **insert** (**smart_ptr**< dataType > x)
Inserts a data node.
- **smart_ptr**< **asyncAVLNode**< dataType > > **getRoot** ()
Return the root of the tree.
- **smart_ptr**< **adnode**< dataType > > **find** (**smart_ptr**< dataType > x)
Finds a matching node.
- **smart_ptr**< **adnode**< dataType > > **find** (**smart_ptr**< **adnode**< dataType > > x)

Finds by adnode node.

- **smart_ptr< asyncAVLNode< dataType > > find (smart_ptr< asyncAVLNode< dataType > > x)**

Finds by asyncAVLNode (p. 97) node.

- **bool findDelete (smart_ptr< dataType > x)**

Finds and delete a matching node.

- **bool findDelete (long x)**

Finds and delete a matching node.

- **bool findDelete (smart_ptr< asyncAVLNode< dataType > > x)**

Finds and delete by node.

- **virtual unsigned int size () const**

Finds and delete a matching node.

- **smart_ptr< adnode< dataType > > getFirst ()**

Returns the first node.

- **smart_ptr< adnode< dataType > > getLast ()**

Returns the last node.

Protected Member Functions

- **bool balanceDelete (smart_ptr< asyncAVLNode< dataType > > x, bool _rawCompare)**

Removes a node and balances the tree.

- **bool checkBalance (smart_ptr< asyncAVLNode< dataType > > x)**

Checks if a sub-tree is balanced.

- **void balanceUp (smart_ptr< asyncAVLNode< dataType > > x)**

Balances this node and ancestor nodes.

- **bool balance (smart_ptr< asyncAVLNode< dataType > > x)**

Balances a single node.

- **bool singleRotation (smart_ptr< asyncAVLNode< dataType > > r, int dir)**

Rotates a node.

- **bool doubleRotation (smart_ptr< asyncAVLNode< dataType > > r, int dir)**

Double-rotate a node.

- **smart_ptr< asyncAVLNode< dataType > > findBottom (smart_ptr< asyncAVLNode< dataType > > x, int dir)**

Find first or last node in a tree.

Protected Attributes

- **smart_ptr< asyncAVLNode< dataType > > root**

Root node of the tree.

- **unsigned int numElements**

Number of elements in the tree.

- **std::mutex mtx**

Mutex to ensure synchronous access.

Friends

- class **asyncAVLNode**< **dataType** >
AVL Node must have access to mutex.

12.4.1 Detailed Description

```
template<class dataType>
class os::asyncAVLTree< dataType >
```

Asynchronous balanced binary search tree.

The AVL Tree rigorously balances a binary search tree. As a template class, it can hold any kind of **dataType** so long as the data type implements basic comparison functions.

12.4.2 Constructor & Destructor Documentation

```
template<class dataType> os::asyncAVLTree< dataType >::asyncAVLTree ( ) [inline]
```

Default constructor.

Sets the number of elements to 0 and the root to NULL.

```
template<class dataType> virtual os::asyncAVLTree< dataType >::~asyncAVLTree ( )
[inline], [virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. The AVL tree must explicitly force deletion through the **asyncAVLNode**<**dataType**>::**remove()** (p. 100) function.

12.4.3 Member Function Documentation

```
template<class dataType> bool os::asyncAVLTree< dataType >::balance ( smart_ptr<
asyncAVLNode< dataType > > x ) [inline], [protected]
```

Balances a single node.

Parameters

in	x	Node to be balanced
----	---	---------------------

Returns

true if the node is already balanced, else, false

```
template<class dataType> bool os::asyncAVLTree< dataType >::balanceDelete ( smart_ptr<
asyncAVLNode< dataType > > x, bool_rawCompare ) [inline], [protected]
```

Removes a node and balances the tree.

Must receive as an argument a node in the tree. This function removes the node from the tree and re-balances the tree.

Parameters

in	x	Node to be deleted
----	---	--------------------

Returns

true if successful, false if failed

```
template<class dataType> void os::asyncAVLTree< dataType >::balanceUp ( smart_ptr<  
asyncAVLNode< dataType > > x ) [inline], [protected]
```

Balances this node and ancestor nodes.

Balances the current node then orders it's parent node to be balanced as well. This process continues until a node has no parent (indicating the node is the root)

Parameters

in	x	Node to be balanced
----	---	---------------------

Returns

void

```
template<class dataType> bool os::asyncAVLTree< dataType >::checkBalance ( smart_ptr<  
asyncAVLNode< dataType > > x ) [inline], [protected]
```

Checks if a sub-tree is balanced.

Checks if the received node is balanced. This operation is inexpensive as it merely involves comparing the heights of the children nodes.

Parameters

in	x	Node to be checked
----	---	--------------------

Returns

true if balanced, false if not

```
template<class dataType> bool os::asyncAVLTree< dataType >::doubleRotation ( smart_ptr<  
asyncAVLNode< dataType > > r, int dir ) [inline], [protected]
```

Double-rotate a node.

Double-rotates a node based on the dir argument provided. Note that 0 and 1 are the only valid directions.

Parameters

in	x	Node to be rotated
in	dir	Direction node is to be rotated

Returns

true if successful, else, false

```
template<class dataType> smart_ptr<adnode<dataType> > os::asyncAVLTree< dataType  
>::find ( smart_ptr< dataType > x ) [inline], [virtual]
```

Finds a matching node.

Finds a pointer to an object of type "dataType" given a comparison pointer. This comparison function is defined by `os::adnode<dataType>::compare(smart_ptr<adnode<dataType> >)`. This function takes $O(\log(n))$ where n is the number of elements in the tree.

[in] x dataType pointer to be compared against

Returns

true if the node was found, else false

Reimplemented from `os::ads< dataType >` (p. 94).

```
template<class dataType> smart_ptr<adnode<dataType> > os::asyncAVLTree< dataType  
>::find ( smart_ptr< adnode< dataType > > x ) [inline]
```

Finds by adnode node.

Finds a pointer to an object of type "dataType" given a comparison pointer to a node. This comparison function is defined by `os::adnode<dataType>::compare(smart_ptr<adnode<dataType> >)`. This function takes $O(\log(n))$ where n is the number of elements in the tree and will re-balance the tree

[in] x `os::adnode<dataType>` pointer to be compared against

Returns

true if the node was found and deleted, else false

```
template<class dataType> smart_ptr<asyncAVLNode<dataType> > os::asyncAVLTree<  
dataType >::find ( smart_ptr< asyncAVLNode< dataType > > x ) [inline]
```

Finds by `asyncAVLNode` (p. 97) node.

Finds a pointer to an object of type "dataType" given a comparison pointer to a node. This comparison function is defined by `os::adnode<dataType>::compare(smart_ptr<adnode<dataType> >)`. This function takes $O(\log(n))$ where n is the number of elements in the tree and will re-balance the tree

[in] x `os::asyncAVLNode<dataType>` pointer to be compared against

Returns

true if the node was found and deleted, else false

```
template<class dataType> smart_ptr<asyncAVLNode<dataType> > os::asyncAVLTree<  
dataType >::findBottom ( smart_ptr< asyncAVLNode< dataType > > x, int dir ) [inline],  
[protected]
```

Find first or last node in a tree.

Finds the first or last node based on the dir argument provided. Note that 0 and 1 are the only valid directions.

Parameters

in	<i>x</i>	Starting node
in	<i>dir</i>	Direction node to search in

Returns

First or last node in sub-tree

```
template<class dataType> bool os::asyncAVLTree< dataType >::findDelete ( smart_ptr<
dataType > x ) [inline], [virtual]
```

Finds and delete a matching node.

Finds a pointer to an object of type "dataType" given a comparison pointer and removes it. This comparison function is defined by `os::adnode<dataType>::compare(smart_ptr<adnode<dataType>> >)`. This function takes $O(\log(n))$ where n is the number of elements in the tree and will re-balance the tree

[in] *x* dataType pointer to be compared against

Returns

true if the node was found and deleted, else false

Reimplemented from **os::ads**< **dataType** > (p. 95).

```
template<class dataType> bool os::asyncAVLTree< dataType >::findDelete ( long x ) [inline]
```

Finds and delete a matching node.

Finds a pointer to an object of type "dataType" given a comparison pointer and removes it. This comparison function is defined by `os::adnode<dataType>::compare(smart_ptr<adnode<dataType>> >)`. This function takes $O(\log(n))$ where n is the number of elements in the tree and will re-balance the tree

[in] *x* dataType pointer to be compared against

Returns

true if the node was found and deleted, else false

```
template<class dataType> bool os::asyncAVLTree< dataType >::findDelete ( smart_ptr<
asyncAVLNode< dataType > > x ) [inline]
```

Finds and delete by node.

Finds a pointer to an object of type "dataType" given a comparison pointer to a node and removes it. This comparison function is defined by `os::adnode<dataType>::compare(smart_ptr<adnode<dataType>> >)`. This function takes $O(\log(n))$ where n is the number of elements in the tree and will re-balance the tree

[in] *x* `os::asyncAVLNode<dataType>` pointer to be compared against

Returns

true if the node was found and deleted, else false

```
template<class dataType> smart_ptr<adnode<dataType> > os::asyncAVLTree< dataType
>::getFirst( ) [inline], [virtual]
```

Returns the first node.

For the AVL tree, the first node is defined as the child at index 1. Note that while an `os::adnode<dataType>` is returned, the true type of the pointer returned is `os::asyncAVLNode<dataType>`. This function is $O(\log(n))$.

Returns

The first node, if it exists

Reimplemented from `os::ads< dataType >` (p. 95).

```
template<class dataType> smart_ptr<adnode<dataType> > os::asyncAVLTree< dataType
>::getLast( ) [inline], [virtual]
```

Returns the last node.

For the AVL tree, the last node is defined as the child at index 0. Note that while an `os::adnode<dataType>` is returned, the true type of the pointer returned is `os::asyncAVLNode<dataType>`. This function is $O(\log(n))$.

Returns

The last node, if it exists

Reimplemented from `os::ads< dataType >` (p. 95).

```
template<class dataType> smart_ptr<asyncAVLNode<dataType> > os::asyncAVLTree<
dataType >::getRoot( ) [inline]
```

Return the root of the tree.

Returns

`os::asyncAVLTree<dataType>::root` (p. 111)

```
template<class dataType> bool os::asyncAVLTree< dataType >::insert( smart_ptr< ads<
dataType > > x ) [inline], [virtual]
```

Inserts an `os::ads<dataType>`

Inserts every element in a given abstract datastructure into this tree. Adopts the insertion function of `os::ads<dataType>`

[in] x pointer to `os::ads<dataType>`

Returns

true if successful, false if failed

Reimplemented from `os::ads< dataType >` (p. 96).

```
template<class dataType> bool os::asyncAVLTree< dataType >::insert ( smart_ptr< dataType >
x ) [inline], [virtual]
```

Inserts a data node.

Inserts a pointer to an object of type "dataType." This insertion will place the node into the binary tree and balance the tree. This function takes $O(\log(n))$ where n is the number of elements in the tree.

[in] x dataType pointer to be inserted

Returns

true if successful, false if failed

Reimplemented from **os::ads**< **dataType** > (p. 95).

```
template<class dataType> bool os::asyncAVLTree< dataType >::singleRotation ( smart_ptr<
asyncAVLNode< dataType > > r, int dir ) [inline], [protected]
```

Rotates a node.

Rotates a node based on the dir argument provided. Note that 0 and 1 are the only valid directions.

Parameters

in	x	Node to be rotated
in	dir	Direction node is to be rotated

Returns

true if successful, else, false

```
template<class dataType> virtual unsigned int os::asyncAVLTree< dataType >::size ( ) const
[inline], [virtual]
```

Finds and delete a matching node.

Returns

os::asyncAVLTree<**dataType**>::numElements (p. 111)

Reimplemented from **os::ads**< **dataType** > (p. 97).

12.4.4 Friends And Related Function Documentation

```
template<class dataType> friend class asyncAVLNode< dataType > [friend]
```

AVL Node must have access to mutex.

When the **AVLNode** (p. 111) finds the next element or finds the previous element, it must lock the mutex to prevent insertion and deletion into the tree.

12.4.5 Member Data Documentation

template<class dataType> std::mutex **os::asyncAVLTree**< dataType >::mtx [protected]

Mutex to ensure synchronous access.

template<class dataType> unsigned int **os::asyncAVLTree**< dataType >::numElements [protected]

Number of elements in the tree.


template<class dataType> **smart_ptr**<**asyncAVLNode**<dataType> > **os::asyncAVLTree**< dataType >::root [protected]

Root node of the tree.

12.5 os::AVLNode< dataType > Class Template Reference

Node for usage in an AVL tree.

Inheritance diagram for os::AVLNode< dataType >:

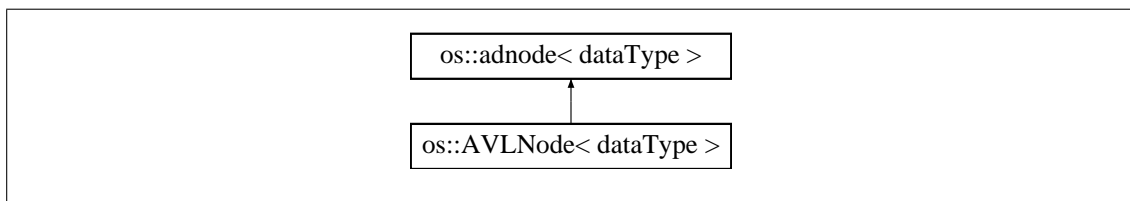

Public Member Functions

- **AVLNode** (**smart_ptr**< dataType > d)
Abstract data-node constructor.
- virtual **~AVLNode** ()
Virtual destructor.
- **smart_ptr**< **adnode**< dataType > > **getNext** ()
Find the next node.
- **smart_ptr**< **adnode**< dataType > > **getPrev** ()
Find the previous node.

Protected Member Functions

- **smart_ptr**< **AVLNode**< dataType > > **getParent** ()
Returns the parent node.
- **smart_ptr**< **AVLNode**< dataType > > **getChild** (int x)
Returns a child by index.
- int **getHeight** () const

- Returns the height of the sub-tree.*
- void **setHeight** ()
Sets the height of the sub-tree.
- void **setChild** (smart_ptr< AVLNode< dataType > > c)
Add a child to this node.
- void **setParent** (smart_ptr< AVLNode< dataType > > p, smart_ptr< AVLNode< dataType > > self_pointer)
Sets the parent node.
- void **removeChild** (smart_ptr< AVLNode< dataType > > c)
Remove a child from this node.
- void **removeChild** (int pos)
Remove a child from this node.
- void **removeParent** ()
Remove the parent node.
- void **remove** ()
Remove all children and parents.

Protected Attributes

- smart_ptr< AVLNode< dataType > > **parent**
Parent node one level up in the tree.
- smart_ptr< AVLNode< dataType > > **child1**
Left child one level down in the tree.
- smart_ptr< AVLNode< dataType > > **child2**
Right child one level down in the tree.
- int **height**
The height of the tree.

Friends

- class **AVLTree< dataType >**
AVL Tree must know details of node implementation.

12.5.1 Detailed Description

```
template<class dataType>
class os::AVLNode< dataType >
```

Node for usage in an AVL tree.

The AVL node class implements a number of functions unique to an AVL tree. This node has knowledge of the structure of the AVL tree through its parent and children.

12.5.2 Constructor & Destructor Documentation

```
template<class dataType > os::AVLNode< dataType >::AVLNode ( smart_ptr< dataType > d )  
[inline]
```

Abstract data-node constructor.

An AVL node is meaningless without a pointer to it's dataType. The constructor requires this pointer to initialize the node. Parent and children nodes are, by default, initialized to 0.

Parameters

in	<i>d</i>	Data to be bound to the node
----	----------	------------------------------

```
template<class dataType > virtual os::AVLNode< dataType >::~AVLNode ( ) [inline],  
[virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

12.5.3 Member Function Documentation

```
template<class dataType > smart_ptr<AVLNode<dataType> > os::AVLNode< dataType  
>::getChild ( int x ) [inline], [protected]
```

Returns a child by index.

Returns child node by index. 0 indicates the left child, **AVLNode**<dataType>::**child1** (p. 116). 1 indicates the right child, **AVLNode**<dataType>::**child2** (p. 116). All other indices will return NULL.

Returns

os::AVLNode<dataType>::**child1** (p. 116) for x==0, **AVLNode**<dataType>::**child2** (p. 116) for x==1

```
template<class dataType > int os::AVLNode< dataType >::getHeight ( ) const [inline],  
[protected]
```

Returns the height of the sub-tree.

Returns

os::AVLNode<dataType>::**height** (p. 116)

```
template<class dataType > smart_ptr<adnode<dataType> > os::AVLNode< dataType >::getNext  
( ) [inline], [virtual]
```

Find the next node.

This functions attempts to search for the next node in the structure. This trips the traverse flag of the current node and traverses the tree looking for the next node.

Returns

Pointer to the next node in the structure

Reimplemented from **os::adnode< dataType >** (p. 92).

```
template<class dataType > smart_ptr<AVLNode<dataType> > os::AVLNode< dataType  
>::getParent ( ) [inline], [protected]
```

Returns the parent node.

Returns

os::AVLNode<dataType>::parent (p. 116)

```
template<class dataType > smart_ptr<adnode<dataType> > os::AVLNode< dataType >::getPrev  
( ) [inline], [virtual]
```

Find the previous node.

This functions attempts to search for the previous node in the structure. This trips the traverse flag of the current node and traverses the tree looking for the previous node.

Returns

Pointer to the previous node in the structure

Reimplemented from **os::adnode< dataType >** (p. 92).

```
template<class dataType > void os::AVLNode< dataType >::remove ( ) [inline],  
[protected]
```

Remove all children and parents.

This function is important because nodes are of type **os::smart_ptr** (p. 146), since there are co-dependencies, failure to run this function on deletion of the tree will cause a memory leak.

Returns

void

```
template<class dataType > void os::AVLNode< dataType >::removeChild ( smart_ptr<  
AVLNode< dataType > > c ) [inline], [protected]
```

Remove a child from this node.

Checks **os::AVLNode<dataType>::child1** (p. 116) and **os::AVLNode<dataType>::child2** (p. 116) for equality with the the node received as a parameter.

Parameters

in	c	Node to be removed
----	---	--------------------

Returns

void

```
template<class dataType > void os::AVLNode< dataType >::removeChild ( int pos ) [inline],  
[protected]
```

Remove a child from this node.

Remove **os::AVLNode<dataType>::child1** (p. 116) if position is 0 and **os::AVLNode<dataType>::child2** (p. 116) if position is 1.

Parameters

in	pos	Node index to be removed
----	-----	--------------------------

Returns

void

```
template<class dataType > void os::AVLNode< dataType >::removeParent ( ) [inline],  
[protected]
```

Remove the parent node.

Returns

void

```
template<class dataType > void os::AVLNode< dataType >::setChild ( smart_ptr< AVLNode<  
dataType > > c ) [inline], [protected]
```

Add a child to this node.

Set **os::AVLNode<dataType>::child1** (p. 116) or **os::AVLNode<dataType>::child2** (p. 116) based on the comparison of the node to be inserted with the current node.

Parameters

in	c	Node to be inserted
----	---	---------------------

Returns

void

```
template<class dataType > void os::AVLNode< dataType >::setHeight ( ) [inline],  
[protected]
```

Sets the height of the sub-tree.

Uses the height of the sub-tree of the node's children to calculate the height of the sub-tree of this node.

Returns

void

```
template<class dataType > void os::AVLNode< dataType >::setParent ( smart_ptr< AVLNode<
dataType > > p, smart_ptr< AVLNode< dataType > > self_pointer ) [inline], [protected]
```

Sets the parent node.

Sets the parent node of the current node. This function requires a pointer to the current node for memory management.

Parameters

in	<i>p</i>	Parent node
in	<i>self_pointer</i>	Pointer to self, with memory management

Returns

void

12.5.4 Friends And Related Function Documentation

```
template<class dataType > friend class AVLTree< dataType > [friend]
```

AVL Tree must know details of node implementation.

Since the AVL node implements many of the unique functions of the AVL tree, the tree must be aware of the private members of it's nodes.

12.5.5 Member Data Documentation

```
template<class dataType > smart_ptr<AVLNode<dataType> > os::AVLNode< dataType
>::child1 [protected]
```

Left child one level down in the tree.

```
template<class dataType > smart_ptr<AVLNode<dataType> > os::AVLNode< dataType
>::child2 [protected]
```

Right child one level down in the tree.

```
template<class dataType > int os::AVLNode< dataType >::height [protected]
```

The height of the tree.

This variable is kept to reduce computation time. It is dependent on the height of a node's children nodes. The **AVLNode**<**dataType**>::setHeight() (p. 115) resets the height based on the height of the node's children.


```
template<class dataType > smart_ptr<AVLNode<dataType> > os::AVLNode< dataType
>::parent [protected]
```

Parent node one level up in the tree.

12.6 os::AVLTree< dataType > Class Template Reference

Balanced binary search tree.

Inheritance diagram for os::AVLTree< dataType >:

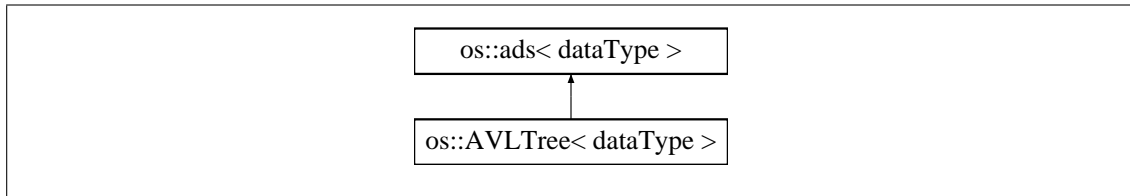

Public Member Functions

- **AVLTree ()**
Default constructor.
- **virtual ~AVLTree ()**
Virtual destructor.
- **bool insert (smart_ptr< ads< dataType > > x)**
Inserts an os::ads< dataType >
- **bool insert (smart_ptr< dataType > x)**
Inserts a data node.
- **smart_ptr< AVLNode< dataType > > getRoot ()**
Return the root of the tree.
- **smart_ptr< adnode< dataType > > find (smart_ptr< dataType > x)**
Finds a matching node.
- **smart_ptr< adnode< dataType > > find (smart_ptr< adnode< dataType > > x)**
Finds by adnode node.
- **smart_ptr< AVLNode< dataType > > find (smart_ptr< AVLNode< dataType > > x)**
Finds by AVLNode (p. 111) node.
- **bool findDelete (smart_ptr< dataType > x)**
Finds and delete a matching node.
- **bool findDelete (smart_ptr< AVLNode< dataType > > x)**
Finds and delete by node.
- **virtual unsigned int size () const**
Finds and delete a matching node.
- **smart_ptr< adnode< dataType > > getFirst ()**
Returns the first node.
- **smart_ptr< adnode< dataType > > getLast ()**
Returns the last node.

Protected Member Functions

- **bool balanceDelete (smart_ptr< AVLNode< dataType > > x)**
Removes a node and balances the tree.
- **bool checkBalance (smart_ptr< AVLNode< dataType > > x)**
Checks if a sub-tree is balanced.
- **void balanceUp (smart_ptr< AVLNode< dataType > > x)**
Balances this node and ancestor nodes.
- **bool balance (smart_ptr< AVLNode< dataType > > x)**
Balances a single node.
- **bool singleRotation (smart_ptr< AVLNode< dataType > > r, int dir)**
Rotates a node.
- **bool doubleRotation (smart_ptr< AVLNode< dataType > > r, int dir)**
Double-rotate a node.
- **smart_ptr< AVLNode< dataType > > findBottom (smart_ptr< AVLNode< dataType > > x, int dir)**
Find first or last node in a tree.

Protected Attributes

- **smart_ptr< AVLNode< dataType > > root**
Root node of the tree.
- **unsigned int numElements**
Number of elements in the tree.

12.6.1 Detailed Description

```
template<class dataType>
class os::AVLTree< dataType >
```

Balanced binary search tree.

The AVL Tree rigorously balances a binary search tree. As a template class, it can hold any kind of dataType so long as the data type implements basic comparison functions.

12.6.2 Constructor & Destructor Documentation

```
template<class dataType > os::AVLTree< dataType >::AVLTree ( ) [inline]
```

Default constructor.

Sets the number of elements to 0 and the root to NULL.

```
template<class dataType > virtual os::AVLTree< dataType >::~~AVLTree ( ) [inline],
[virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. The AVL tree must explicitly force deletion through the **AVLNode<dataType>::remove()** (p. 114) function.

12.6.3 Member Function Documentation

```
template<class dataType > bool os::AVLTree< dataType >::balance ( smart_ptr< AVLNode<
dataType > > x ) [inline], [protected]
```

Balances a single node.

Parameters

in	x	Node to be balanced
----	---	---------------------

Returns

true if the node is already balanced, else, false

```
template<class dataType > bool os::AVLTree< dataType >::balanceDelete ( smart_ptr<
AVLNode< dataType > > x ) [inline], [protected]
```

Removes a node and balances the tree.

Must receive as an argument a node in the tree. This function removes the node from the tree and re-balances the tree.

Parameters

in	x	Node to be deleted
----	---	--------------------

Returns

true if successful, false if failed

```
template<class dataType > void os::AVLTree< dataType >::balanceUp ( smart_ptr< AVLNode<
dataType > > x ) [inline], [protected]
```

Balances this node and ancestor nodes.

Balances the current node then orders its parent node to be balanced as well. This process continues until a node has no parent (indicating the node is the root)

Parameters

in	x	Node to be balanced
----	---	---------------------

Returns

void

```
template<class dataType > bool os::AVLTree< dataType >::checkBalance ( smart_ptr<
AVLNode< dataType > > x ) [inline], [protected]
```

Checks if a sub-tree is balanced.

Checks if the received node is balanced. This operation is inexpensive as it merely involves comparing the heights of the children nodes.

Parameters

in	x	Node to be checked
----	---	--------------------

Returns

true if balanced, false if not

```
template<class dataType > bool os::AVLTree< dataType >::doubleRotation ( smart_ptr<
AVLNode< dataType > > r, int dir ) [inline], [protected]
```

Double-rotate a node.

Double-rotates a node based on the dir argument provided. Note that 0 and 1 are the only valid directions.

Parameters

in	x	Node to be rotated
in	dir	Direction node is to be rotated

Returns

true if successful, else, false

```
template<class dataType > smart_ptr<adnode<dataType> > os::AVLTree< dataType >::find (
smart_ptr< dataType > x ) [inline], [virtual]
```

Finds a matching node.

Finds a pointer to an object of type "dataType" given a comparison pointer. This comparison function is defined by `os::adnode<dataType>::compare(smart_ptr<adnode<dataType> >)`. This function takes $O(\log(n))$ where n is the number of elements in the tree.

[in] x dataType pointer to be compared against

Returns

true if the node was found, else false

Reimplemented from `os::ads< dataType >` (p. 94).

```
template<class dataType > smart_ptr<adnode<dataType> > os::AVLTree< dataType >::find (
smart_ptr< adnode< dataType > > x ) [inline]
```

Finds by adnode node.

Finds a pointer to an object of type "dataType" given a comparison pointer to a node. This comparison function is defined by `os::adnode<dataType>::compare(smart_ptr<adnode<dataType> >)`. This function takes $O(\log(n))$ where n is the number of elements in the tree and will re-balance the tree

[in] x os::adnode<dataType> pointer to be compared against

Returns

true if the node was found and deleted, else false

```
template<class dataType > smart_ptr<AVLNode<dataType> > os::AVLTree< dataType >::find (
smart_ptr< AVLNode< dataType > > x ) [inline]
```

Finds by **AVLNode** (p. 111) node.

Finds a pointer to an object of type "dataType" given a comparison pointer to a node. This comparison function is defined by `os::adnode<dataType>::compare(smart_ptr<adnode<dataType> >)`. This function takes $O(\log(n))$ where n is the number of elements in the tree and will re-balance the tree

[in] `x os::AVLNode<dataType>` pointer to be compared against

Returns

true if the node was found and deleted, else false

```
template<class dataType > smart_ptr<AVLNode<dataType> > os::AVLTree< dataType
>::findBottom ( smart_ptr< AVLNode< dataType > > x, int dir ) [inline], [protected]
```

Find first or last node in a tree.

Finds the first or last node based on the `dir` argument provided. Note that 0 and 1 are the only valid directions.

Parameters

in	<i>x</i>	Starting node
in	<i>dir</i>	Direction node to search in

Returns

First or last node in sub-tree

```
template<class dataType > bool os::AVLTree< dataType >::findDelete ( smart_ptr< dataType > x
) [inline], [virtual]
```

Finds and delete a matching node.

Finds a pointer to an object of type "dataType" given a comparison pointer and removes it. This comparison function is defined by `os::adnode<dataType>::compare(smart_ptr<adnode<dataType> >)`. This function takes $O(\log(n))$ where n is the number of elements in the tree and will re-balance the tree

[in] `x dataType` pointer to be compared against

Returns

true if the node was found and deleted, else false

Reimplemented from **os::ads< dataType >** (p. 95).

```
template<class dataType > bool os::AVLTree< dataType >::findDelete ( smart_ptr< AVLNode<
dataType > > x ) [inline]
```

Finds and delete by node.

Finds a pointer to an object of type "dataType" given a comparison pointer to a node and removes it. This comparison function is defined by `os::adnode<dataType>::compare(smart_ptr<adnode<dataType> >)`. This function takes $O(\log(n))$ where n is the number of elements in the tree and will re-balance the tree

[in] x `os::AVLNode<dataType>` pointer to be compared against

Returns

true if the node was found and deleted, else false

```
template<class dataType > smart_ptr<adnode<dataType> > os::AVLTree< dataType >::getFirst (
) [inline], [virtual]
```

Returns the first node.

For the AVL tree, the first node is defined as the child at index 1. Note that while an `os::adnode<dataType>` is returned, the true type of the pointer returned is `os::AVLNode<dataType>`. This function is $O(\log(n))$.

Returns

The first node, if it exists

Reimplemented from `os::ads< dataType >` (p. 95).

```
template<class dataType > smart_ptr<adnode<dataType> > os::AVLTree< dataType >::getLast (
) [inline], [virtual]
```

Returns the last node.

For the AVL tree, the last node is defined as the child at index 0. Note that while an `os::adnode<dataType>` is returned, the true type of the pointer returned is `os::AVLNode<dataType>`. This function is $O(\log(n))$.

Returns

The last node, if it exists

Reimplemented from `os::ads< dataType >` (p. 95).

```
template<class dataType > smart_ptr<AVLNode<dataType> > os::AVLTree< dataType
>::getRoot ( ) [inline]
```

Return the root of the tree.

Returns

`os::AVLTree<dataType>::root` (p. 124)

```
template<class dataType > bool os::AVLTree< dataType >::insert ( smart_ptr< ads< dataType > > x ) [inline], [virtual]
```

Inserts an **os::ads**<dataType>

Inserts every element in a given abstract datastructure into this tree. Adopts the insertion function of **os::ads**<dataType>

[in] x pointer to **os::ads**<dataType>

Returns

true if successful, false if failed

Reimplemented from **os::ads**< **dataType** > (p. 96).

```
template<class dataType > bool os::AVLTree< dataType >::insert ( smart_ptr< dataType > x ) [inline], [virtual]
```

Inserts a data node.

Inserts a pointer to an object of type "dataType." This insertion will place the node into the binary tree and balance the tree. This function takes $O(\log(n))$ where n is the number of elements in the tree.

[in] x dataType pointer to be inserted

Returns

true if successful, false if failed

Reimplemented from **os::ads**< **dataType** > (p. 95).

```
template<class dataType > bool os::AVLTree< dataType >::singleRotation ( smart_ptr< AVLNode< dataType > > r, int dir ) [inline], [protected]
```

Rotates a node.

Rotates a node based on the dir argument provided. Note that 0 and 1 are the only valid directions.

Parameters

in	x	Node to be rotated
in	dir	Direction node is to be rotated

Returns

true if successful, else, false

```
template<class dataType > virtual unsigned int os::AVLTree< dataType >::size ( ) const [inline], [virtual]
```

Finds and delete a matching node.

Returns

os::AVLTree<dataType>::numElements (p. 124)

Reimplemented from **os::ads< dataType >** (p. 97).

12.6.4 Member Data Documentation

template<class dataType > unsigned int **os::AVLTree< dataType >::numElements** [protected]

Number of elements in the tree.

template<class dataType > **smart_ptr<AVLNode<dataType> > os::AVLTree< dataType >::root** [protected]

Root node of the tree.

12.7 os::constantPrinter Class Reference

Prints constant arrays to files.

Public Member Functions

- **constantPrinter** (std::string fileName, bool has_cpp=false)
Single constructor.
- virtual **~constantPrinter** ()
Virtual destructor.
- void **addInclude** (std::string includeName)
Add include file.
- void **addNamespace** (std::string namesp)
Add a namespace.
- void **removeNamespace** ()
Remove namespace.
- void **addComment** (std::string comment)
Insert a comment.
- bool **hasCPP** () const
Returns if the object is writing to a .cpp file.
- bool **good** () const
Checks file status.
- void **addArray** (std::string name, uint32_t *arr, unsigned int length)
Add a uin32_t array.*

Private Member Functions

- std::string **capitalize** (std::string str) const
Capitalizes the string argument.
- std::string **tabs** () const
Returns current tab depth.

Private Attributes

- `std::ofstream hFile`
Output file for the .h file.
- `std::ofstream cppFile`
Output file for the .cpp file.
- `bool _has_cpp`
Holds if the object is generating a .cpp.
- `unsigned int namespaceDepth`
Current namespace depth.

12.7.1 Detailed Description

Prints constant arrays to files.

This class outputs configured and populated constant arrays into .h and .cpp files, depending on the configuration. This class is meant to be used as a tool for automatically generating source code files.

12.7.2 Constructor & Destructor Documentation

```
os::constantPrinter::constantPrinter ( std::string fileName, bool has_cpp = false )
```

Single constructor.

Creates a file of "filename.h" and, if `has_cpp` is set to "true," "filename.cpp" with appropriate include guards and a comment indicating the source of the file.

Parameters

in	<i>fileName</i>	String representing the file name
in	<i>has_cpp</i>	Optional boolean defining if a .cpp will be written

```
virtual os::constantPrinter::~~constantPrinter ( ) [virtual]
```

Virtual destructor.

Closes all namespaces and `#ifdefs`, closes the .h file and .cpp if appropriate.

12.7.3 Member Function Documentation

```
void os::constantPrinter::addArray ( std::string name, uint32_t * arr, unsigned int length )
```

Add a `uint32_t*` array.

Added an unsigned 32 bit integer array to the .h and .cpp file. Note that this array will be declared as constant.

Parameters

in	<i>arr</i>	Array to be written to the files
----	------------	----------------------------------

Parameters

in	<i>length</i>	Length of the received array
----	---------------	------------------------------

Returns

void

```
void os::constantPrinter::addComment ( std::string comment )
```

Insert a comment.

Adds a comment. If the comment is a single line, `/*` will be used, otherwise, a standard multi-line comment format will be used.

Parameters

in	<i>comment</i>	Comment string to be added as a comment
----	----------------	---

Returns

void

```
void os::constantPrinter::addInclude ( std::string includeName )
```

Add include file.

Prints out `#include includeName` to the .h file. Since the .cpp file includes the .h file, it will include all of the .h file's includes

Parameters

in	<i>includeName</i>	Name of header file to be included
----	--------------------	------------------------------------

Returns

void

```
void os::constantPrinter::addNamespace ( std::string namesp )
```

Add a namespace.

Adds a new namespace. Namespaces nest, so this function increments **constantPrinter::namespaceDepth** (p. 128). Both the .h and .cpp file have this namespace added.

Parameters

in	<i>namesp</i>	Namespace added to the file
----	---------------	-----------------------------

Returns

void

```
std::string os::constantPrinter::capitalize ( std::string str ) const [private]
```

Capitalizes the string argument.

Primarily used for `#ifdef` and `#define` include guards, this function returns the string it is passed but with every single letter capitalized.

Parameters

in	str	String to be capitalized
----	-----	--------------------------

Returns

std::string with each letter capitalized

```
bool os::constantPrinter::good ( ) const [inline]
```

Checks file status.

Checks to ensure that both the .h and .cpp file can be written to. Will not consider the .cpp file if the .cpp file is not being written to.

Returns

file status

```
bool os::constantPrinter::hasCPP ( ) const [inline]
```

Returns if the object is writing to a .cpp file.

Returns

constantPrinter::_has_cpp (p. 128)

```
void os::constantPrinter::removeNamespace ( )
```

Remove namespace.

Ends the current namespace with a '}' in both the .h and .cpp file. Decrements **constantPrinter↵::namespaceDepth** (p. 128).

Returns

void

```
std::string os::constantPrinter::tabs ( ) const [private]
```

Returns current tab depth.

Again used to streamline large projects. This function returns an std::string with tab characters equal to the current number of nested namespaces.

Returns

std::string containing **os::constantPrinter::namespaceDepth** (p. 128) tabs

12.7.4 Member Data Documentation

bool os::constantPrinter::_has_cpp [private]

Holds if the object is generating a .cpp.

std::ofstream os::constantPrinter::cppFile [private]

Output file for the .cpp file.

std::ofstream os::constantPrinter::hFile [private]

Output file for the .h file.

unsigned int os::constantPrinter::namespaceDepth [private]


Current namespace depth.

In order to streamline large projects, arrays of constants should be placed inside namespaces. This variable allows for the creation and management of nested namespaces.

12.8 os::eventReceiver< senderType > Class Template Reference

Class which enables event receiving.

Inheritance diagram for os::eventReceiver< senderType >:

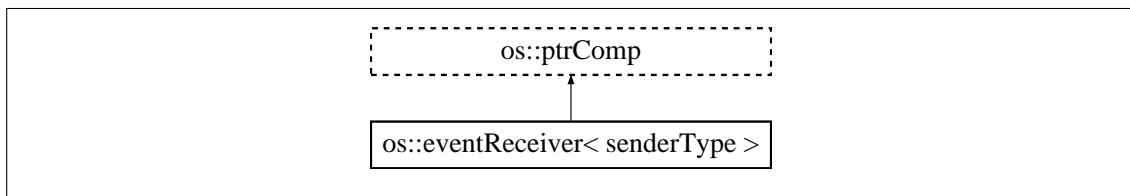

Public Member Functions

- **eventReceiver** ()
Default constructor.
- virtual **~eventReceiver** ()
Virtual destructor.
- void **pushSender** (**smart_ptr**< senderType > ptr)
Add a sender to the list.
- void **removeSender** (**smart_ptr**< senderType > ptr)
Remove sender from the sender list.

Private Member Functions

- virtual void **receiveEvent** (**smart_ptr**< senderType > src)
Receive event notification.

Private Attributes

- **asyncAVLTree**< senderType > **senders**
List of sender.

Friends

- template<typename receiverType >
class **eventSender**

12.8.1 Detailed Description

```
template<class senderType>  
class os::eventReceiver< senderType >
```

Class which enables event receiving.

Each receiver contains a list of senders. When the receiver is destroyed, it removes itself from all senders to which it is registered.

12.8.2 Constructor & Destructor Documentation

```
template<class senderType > os::eventReceiver< senderType >::eventReceiver ( ) [inline]
```

Default constructor.

The default constructor for the smart set configures the only data type in this class properly. No additional constructor arguments are required.

```
template<class senderType > virtual os::eventReceiver< senderType >::~eventReceiver ( )  
[virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

12.8.3 Member Function Documentation

```
template<class senderType > void os::eventReceiver< senderType >::pushSender ( smart_ptr<  
senderType > ptr )
```

Add a sender to the list.

Adds a sender of the sender type expected by this receiver type. Note that the sender type is expected to inherit from **os::eventSender** (p. 131).

Parameters

<i>ptr</i>	Sender to be added to the set
------------	-------------------------------

Returns

void

```
template<class senderType > virtual void os::eventReceiver< senderType >::receiveEvent (
smart_ptr< senderType > src ) [inline], [private], [virtual]
```

Receive event notification.

This function is meant to be reimplemented by all event receivers to do some action on the event.

Parameters

<i>src</i>	The source of the event
------------	-------------------------

Returns

void

```
template<class senderType > void os::eventReceiver< senderType >::removeSender (
smart_ptr< senderType > ptr )
```

Remove sender from the sender list.

Removes a sender from the sender list. Note that this also removes this receiver from the receiver list of the sender which it is passed.

Parameters

<i>ptr</i>	Sender to be removed to the set
------------	---------------------------------

Returns

void

12.8.4 Friends And Related Function Documentation

```
template<class senderType > template<typename receiverType > friend class eventSender
[friend]
```

The sender must be able to remove itself from the private senders list inside the event receiver. Additionally, the sender must be able to send an event to the receiver.

12.8.5 Member Data Documentation

```
template<class senderType > asyncAVLTree<senderType> os::eventReceiver< senderType  
>::senders [private]
```


List of sender.

When the receiver is destroyed, this list is used to remove itself from all its senders.

12.9 os::eventSender< receiverType > Class Template Reference

Class which enables event sending.

Inheritance diagram for os::eventSender< receiverType >:

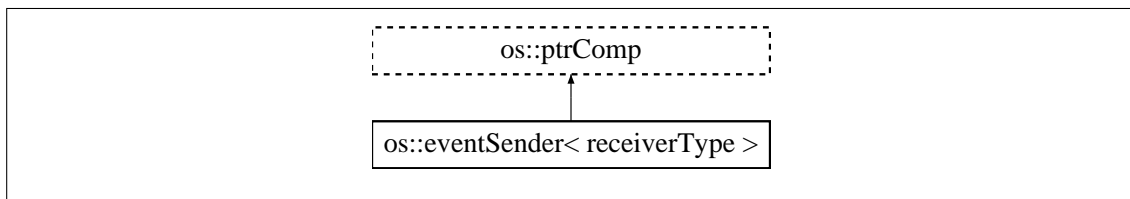

Public Member Functions

- **eventSender** ()
Default constructor.
- virtual **~eventSender** ()
Virtual destructor.
- void **pushReceivers** (**smart_ptr**< receiverType > ptr)
Add a receiver to the list.
- void **removeReceivers** (**smart_ptr**< receiverType > ptr)
Remove receiver from the receiver list.

Protected Member Functions

- virtual void **sendEvent** (**smart_ptr**< receiverType > ptr)
Receive event notification.
- void **triggerEvent** ()
Sends an event to all receivers.

Private Attributes

- **asyncAVLTree**< receiverType > **receivers**
List of receivers.

Friends

- template<typename senderType >
class **eventReceiver**

12.9.1 Detailed Description

```
template<class receiverType>
class os::eventSender< receiverType >
```

Class which enables event sending.

Each sender contains a list of receivers. When an event is triggered, the sender iterates through the list to send the event to all receivers.

12.9.2 Constructor & Destructor Documentation

```
template<class receiverType > os::eventSender< receiverType >::eventSender ( ) [inline]
```

Default constructor.

The default constructor for the smart set configures the only data type in this class properly. No additional constructor arguments are required.

```
template<class receiverType > virtual os::eventSender< receiverType >::~~eventSender ( )
[virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

12.9.3 Member Function Documentation

```
template<class receiverType > void os::eventSender< receiverType >::pushReceivers (
smart_ptr< receiverType > ptr )
```

Add a receiver to the list.

Adds a receiver of the receiver type expected by this sender type. Note that the receiver type is expected to inherit from **os::eventReceiver** (p. 128).

Parameters

<i>ptr</i>	Receiver to be added to the set
------------	---------------------------------

Returns

void

```
template<class receiverType > void os::eventSender< receiverType >::removeReceivers (
smart_ptr< receiverType > ptr )
```

Remove receiver from the receiver list.

Removes a receiver from the receiver list. Note that this also removes this sender from the sender list of the receiver which it is passed.

Parameters

<i>ptr</i>	Receiver to be removed to the set
------------	-----------------------------------

Returns

void

```
template<class receiverType > virtual void os::eventSender< receiverType >::sendEvent (
smart_ptr< receiverType > ptr ) [protected], [virtual]
```

Receive event notification.

This function can be re-implemented by event senders. This function allows some function other than "receiveEvent" to be sent by the event sender to an event receiver.

Parameters

<i>ptr</i>	The target of the event
------------	-------------------------

Returns

void

```
template<class receiverType > void os::eventSender< receiverType >::triggerEvent ( )
[protected]
```

Sends an event to all receivers.

Iterates through the set of receivers and sends an event to each one. This calls the **os::eventSender**<**receiverType**>::sendEvent (p. 133) function with each receiver as an argument.

Returns

void

12.9.4 Friends And Related Function Documentation

```
template<class receiverType > template<typename senderType > friend class eventReceiver
[friend]
```

The receiver must be able to remove itself from the private receivers list inside the event sender.

12.9.5 Member Data Documentation

```
template<class receiverType > asyncAVLTree<receiverType> os::eventSender< receiverType
>::receivers [private]
```

List of receivers.

This list is used to send events to all receivers. When the sender is destroyed, it must remove itself from all its receivers.

12.10 os::indirectMatrix< dataType > Class Template Reference

Indirect matrix.

Public Member Functions

- **indirectMatrix** (uint32_t w=0, uint32_t h=0)
Default constructor.
- **indirectMatrix** (const **matrix**< dataType > &m)
Copy constructor.
- **indirectMatrix** (const **indirectMatrix**< dataType > &m)
Copy constructor.
- **indirectMatrix** (const **smart_ptr**< dataType > d, uint32_t w, uint32_t h)
Data array constructor.
- **indirectMatrix** (**smart_ptr**< **smart_ptr**< dataType > > d, uint32_t w, uint32_t h)
Indirect data array constructor.
- virtual ~**indirectMatrix** ()
Virtual destructor.
- **indirectMatrix**< dataType > & **operator=** (const **matrix**< dataType > &m)
Equality constructor.
- **indirectMatrix**< dataType > & **operator=** (const **indirectMatrix**< dataType > &m)
Equality constructor.
- **smart_ptr**< dataType > & **get** (uint32_t w, uint32_t h)
Return pointer to a matrix element.
- const **smart_ptr**< dataType > & **constGet** (uint32_t w, uint32_t h) const
Return constant pointer to a matrix element.
- **smart_ptr**< dataType > & **operator()** (uint32_t w, uint32_t h)
Return pointer to a matrix element.
- **smart_ptr**< **smart_ptr**< dataType > > **getArray** ()
Return pointer to the pointer array.
- const **smart_ptr**< **smart_ptr**< dataType > > **getConstArray** () const
Return a constant pointer to the pointer array.
- uint32_t **getWidth** () const
Return width of matrix.
- uint32_t **getHeight** () const
Return height of matrix.

Private Attributes

- uint32_t **width**
Width of the matrix.
- uint32_t **height**
Height of the matrix.
- **smart_ptr**< **smart_ptr**< dataType > > **data**
Data array pointers.

Friends

- class **matrix**< **dataType** >

Raw matrix interacting with indirect matrix.

12.10.1 Detailed Description

```
template<class dataType>
class os::indirectMatrix< dataType >
```

Indirect matrix.

This matrix class contains an array to pointers of the data type. It can interact with `os::matrix<dataType>`.

12.10.2 Constructor & Destructor Documentation

```
template<class dataType> os::indirectMatrix< dataType >::indirectMatrix ( uint32_t w = 0,
uint32_t h = 0 )
```

Default constructor.

Constructs array of size $w \times h$ and sets all of the data to 0. If no width and height are provided, the data array is not initialized.

Parameters

in	<i>w</i>	Width of matrix, default 0
in	<i>h</i>	Height of matrix, default 0

```
template<class dataType> os::indirectMatrix< dataType >::indirectMatrix ( const matrix<
dataType > & m )
```

Copy constructor.

Constructs a new indirect matrix from the given raw matrix. The indirect matrix converts the array of object to an array of pointers.

Parameters

in	<i>m</i>	Indirect matrix to be copied
----	----------	------------------------------

```
template<class dataType> os::indirectMatrix< dataType >::indirectMatrix ( const
indirectMatrix< dataType > & m )
```

Copy constructor.

Constructs a new indirect matrix from the given indirect matrix. The two indirect matrices do not share data array, the new indirect matrix builds its own array.

Parameters

in	<i>m</i>	Indirect matrix to be copied
----	----------	------------------------------

```
template<class dataType> os::indirectMatrix< dataType >::indirectMatrix ( const smart_ptr<
dataType > d, uint32_t w, uint32_t h )
```

Data array constructor.

Constructs a new indirect matrix from an array of the correct data type. This constructor will build an new indirect array based on the specified size.

Parameters

in	<i>d</i>	Data array to be copied
in	<i>w</i>	Width of matrix
in	<i>d</i>	Height of matrix

```
template<class dataType> os::indirectMatrix< dataType >::indirectMatrix ( smart_ptr<
smart_ptr< dataType > > d, uint32_t w, uint32_t h )
```

Indirect data array constructor.

Constructs a new indirect matrix from an indirect array of the correct data type. This constructor will build an new indirect array based on the specified size.

Parameters

in	<i>d</i>	Indirect data array to be copied
in	<i>w</i>	Width of matrix
in	<i>d</i>	Height of matrix

```
template<class dataType> virtual os::indirectMatrix< dataType >::~indirectMatrix ( )
[inline], [virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

12.10.3 Member Function Documentation

```
template<class dataType> const smart_ptr<dataType>& os::indirectMatrix< dataType
>::constGet ( uint32_t w, uint32_t h ) const
```

Return constant pointer to a matrix element.

Uses a width and height position to index an element of the array. This function returns a constant reference, meaning changes cannot be made to the matrix.

Parameters

in	<i>w</i>	X position
in	<i>h</i>	Y position

Returns

Constant reference to matrix element pointer

```
template<class dataType> smart_ptr<dataType>& os::indirectMatrix< dataType >::get (
uint32_t w, uint32_t h )
```

Return pointer to a matrix element.

Uses a width and height position to index an element of the array. This function returns a reference, allowing for changes to be made to the matrix.

Parameters

in	<i>w</i>	X position
in	<i>h</i>	Y position

Returns

Modifiable reference to matrix element pointer

```
template<class dataType> smart_ptr<smart_ptr<dataType> > os::indirectMatrix< dataType
>::getArray ( ) [inline]
```

Return pointer to the pointer array.

The array which is returned allows for modification of the array. It is up to functions using this array to ensure the integrity of the indirect matrix.

Returns

os::indirectMatrix<dataType>::data (p. 139)

```
template<class dataType> const smart_ptr<smart_ptr<dataType> > os::indirectMatrix<
dataType >::getConstArray ( ) const [inline]
```

Return a constant pointer to the pointer array.

The array which is returned allows for access to the array. The provided array may not be modified.

Returns

os::indirectMatrix<dataType>::data (p. 139)

```
template<class dataType> uint32_t os::indirectMatrix< dataType >::getHeight ( ) const
[inline]
```

Return height of matrix.

Returns

indirectMatrix<dataType>::height (p. 139)

```
template<class dataType> uint32_t os::indirectMatrix< dataType >::getWidth (    ) const  
[inline]
```

Return width of matrix.

Returns

indirectMatrix<dataType>::width (p. 139)

```
template<class dataType> smart_ptr<dataType>& os::indirectMatrix< dataType >::operator() (   
uint32_t w, uint32_t h ) [inline]
```

Return pointer to a matrix element.

Uses a width and height position to index an element of the array. This function returns a reference, allowing for changes to be made to the matrix.

Parameters

in	w	X position
in	h	Y position

Returns

Modifiable reference to matrix element pointer

```
template<class dataType> indirectMatrix<dataType>& os::indirectMatrix< dataType >::operator=  
( const matrix< dataType > & m )
```

Equality constructor.

Re-constructs the indirect matrix from a raw matrix. Note that the two matrices do not share the same data array.

Parameters

in	m	Reference to matrix being copied
----	---	----------------------------------

Returns

Reference to self

```
template<class dataType> indirectMatrix<dataType>& os::indirectMatrix< dataType >::operator=  
( const indirectMatrix< dataType > & m )
```

Equality constructor.

Re-constructs the indirect matrix from another indirect matrix. Note that the two matrices do not share the same data array.

Parameters

in	m	Reference to matrix being copied
----	---	----------------------------------

Returns

Reference to self

12.10.4 Friends And Related Function Documentation

```
template<class dataType> friend class matrix< dataType > [friend]
```

Raw matrix interacting with indirect matrix.

The `os::matrix<dataType>` class must be able to access the size and data of the indirect matrix because and raw matrix can be constructed from an indirect matrix.

12.10.5 Member Data Documentation

```
template<class dataType> smart_ptr<smart_ptr<dataType> > os::indirectMatrix< dataType  
>::data [private]
```

Data array pointers.

For the indirect matrix class, this array contains pointers to all of the data used by the matrix in a block of size width*height.

```
template<class dataType> uint32_t os::indirectMatrix< dataType >::height [private]
```

Height of the matrix.

```
template<class dataType> uint32_t os::indirectMatrix< dataType >::width [private]
```

Width of the matrix.

12.11 os::matrix< dataType > Class Template Reference

Raw matrix.

Public Member Functions

- **matrix** (uint32_t w=0, uint32_t h=0)
Default constructor.
- **matrix** (const **matrix**< dataType > &m)
Copy constructor.
- **matrix** (const **indirectMatrix**< dataType > &m)
Copy constructor.
- **matrix** (const **smart_ptr**< dataType > d, uint32_t w, uint32_t h)
Data array constructor.

- **matrix (smart_ptr< smart_ptr< dataType > > d, uint32_t w, uint32_t h)**
Indirect data array constructor.
- **virtual ~matrix ()**
Virtual destructor.
- **matrix< dataType > & operator= (const matrix< dataType > &m)**
Equality constructor.
- **matrix< dataType > & operator= (const indirectMatrix< dataType > &m)**
Equality constructor.
- **dataType & get (uint32_t w, uint32_t h)**
Return matrix element.
- **const dataType & constGet (uint32_t w, uint32_t h) const**
Return constant matrix element.
- **dataType & operator() (uint32_t w, uint32_t h)**
Return matrix element.
- **smart_ptr< dataType > getArray ()**
Return pointer to the array.
- **const smart_ptr< dataType > getConstArray () const**
Return a constant pointer to the array.
- **uint32_t getWidth () const**
Return width of matrix.
- **uint32_t getHeight () const**
Return height of matrix.

Private Attributes

- **uint32_t width**
Width of the matrix.
- **uint32_t height**
Height of the matrix.
- **smart_ptr< dataType > data**
Data array.

Friends

- **class indirectMatrix< dataType >**
Indirect matrix interacting with raw matrix.

12.11.1 Detailed Description

```
template<class dataType>
class os::matrix< dataType >
```

Raw matrix.

This matrix class contains an array of the data type. It can interact with `os::indirectMatrix<dataType>`.

12.11.2 Constructor & Destructor Documentation

```
template<class dataType> os::matrix< dataType >::matrix ( uint32_t w = 0, uint32_t h = 0 )
```

Default constructor.

Constructs array of size w*h and sets all of the data to 0. If no width and height are provided, the data array is not initialized.

Parameters

in	<i>w</i>	Width of matrix, default 0
in	<i>h</i>	Height of matrix, default 0

```
template<class dataType> os::matrix< dataType >::matrix ( const matrix< dataType > & m )
```

Copy constructor.

Constructs a new raw matrix from the given raw matrix. The two matrices do not share the same data array.

Parameters

in	<i>m</i>	Matrix to be copied
----	----------	---------------------

```
template<class dataType> os::matrix< dataType >::matrix ( const indirectMatrix< dataType > & m )
```

Copy constructor.

Constructs a new raw matrix from the given indirect matrix. The raw matrix converts the array of pointers to an array of objects

Parameters

in	<i>m</i>	Indirect matrix to be copied
----	----------	------------------------------

```
template<class dataType> os::matrix< dataType >::matrix ( const smart_ptr< dataType > d, uint32_t w, uint32_t h )
```

Data array constructor.

Constructs a new raw matrix from an array of the correct data type. This constructor will build an new array based on the specified size.

Parameters

in	<i>d</i>	Data array to be copied
in	<i>w</i>	Width of matrix
in	<i>d</i>	Height of matrix

```
template<class dataType> os::matrix< dataType >::matrix ( smart_ptr< smart_ptr< dataType >  
> d, uint32_t w, uint32_t h )
```

Indirect data array constructor.

Constructs a new raw matrix from an indirect array of the correct data type. This constructor will build an new array based on the specified size.

Parameters

in	<i>d</i>	Indirect data array to be copied
in	<i>w</i>	Width of matrix
in	<i>h</i>	Height of matrix

```
template<class dataType> virtual os::matrix< dataType >::~matrix ( ) [inline], [virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

12.11.3 Member Function Documentation

```
template<class dataType> const dataType& os::matrix< dataType >::constGet ( uint32_t w,  
uint32_t h ) const
```

Return constant matrix element.

Uses a width and height position to index an element of the array. This function returns a constant reference, meaning changes cannot be made to the matrix.

Parameters

in	<i>w</i>	X position
in	<i>h</i>	Y position

Returns

Constant reference to matrix element

```
template<class dataType> dataType& os::matrix< dataType >::get ( uint32_t w, uint32_t h )
```

Return matrix element.

Uses a width and height position to index an element of the array. This function returns a reference, allowing for changes to be made to the matrix.

Parameters

in	<i>w</i>	X position
in	<i>h</i>	Y position

Returns

Modifiable reference to matrix element

```
template<class dataType> smart_ptr<dataType> os::matrix< dataType >::getArray ( )  
[inline]
```

Return pointer to the array.

The array which is returned allows for modification of the array. It is up to functions using this array to ensure the integrity of the matrix.

Returns

os::matrix<dataType>::data (p. 144)

```
template<class dataType> const smart_ptr<dataType> os::matrix< dataType >::getConstArray ( ) const [inline]
```

Return a constant pointer to the array.

The array which is returned allows for access to the array. The provided array may not be modified.

Returns

os::matrix<dataType>::data (p. 144)

```
template<class dataType> uint32_t os::matrix< dataType >::getHeight ( ) const [inline]
```

Return height of matrix.

Returns

matrix<dataType>::height (p. 145)

```
template<class dataType> uint32_t os::matrix< dataType >::getWidth ( ) const [inline]
```

Return width of matrix.

Returns

matrix<dataType>::width (p. 145)

```
template<class dataType> dataType& os::matrix< dataType >::operator() ( uint32_t w, uint32_t h ) [inline]
```

Return matrix element.

Uses a width and height position to index an element of the array. This function returns a reference, allowing for changes to be made to the matrix.

Parameters

in	w	X position
in	h	Y position

Returns

Modifiable reference to matrix element

```
template<class dataType> matrix<dataType>& os::matrix< dataType >::operator= ( const matrix< dataType > & m )
```

Equality constructor.

Re-constructs the raw matrix from another raw matrix. Note that the two matrices do not share the same data array.

Parameters

in	<i>m</i>	Reference to matrix being copied
----	----------	----------------------------------

Returns

Reference to self

```
template<class dataType> matrix<dataType>& os::matrix< dataType >::operator= ( const indirectMatrix< dataType > & m )
```

Equality constructor.

Re-constructs the raw matrix from an indirect matrix. Note that the two matrices do not share the same data array.

Parameters

in	<i>m</i>	Reference to matrix being copied
----	----------	----------------------------------

Returns

Reference to self

12.11.4 Friends And Related Function Documentation

```
template<class dataType> friend class indirectMatrix< dataType > [friend]
```

Indirect matrix interacting with raw matrix.

The `os::indirectMatrix<dataType>` class must be able to access the size and data of the raw matrix because an indirect matrix can be constructed from a raw matrix.

12.11.5 Member Data Documentation

```
template<class dataType> smart_ptr<dataType> os::matrix< dataType >::data [private]
```

Data array.

For the raw matrix class, this array contains all of the data used by the matrix in a block of size `width*height`.

```
template<class dataType> uint32_t os::matrix< dataType >::height [private]
```

Height of the matrix.


```
template<class dataType> uint32_t os::matrix< dataType >::width [private]
```

Width of the matrix.

12.12 os::ptrComp Class Reference

Pointer compare interface.

Inheritance diagram for os::ptrComp:

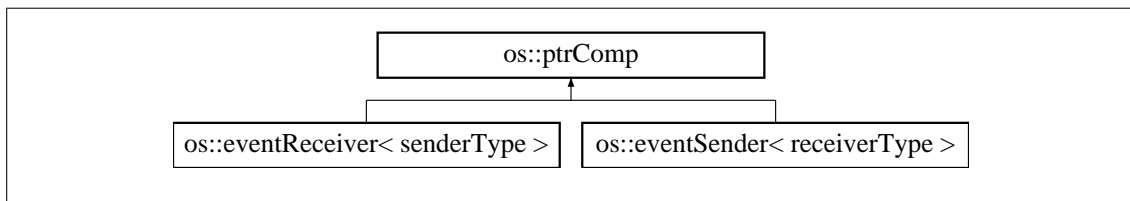

Public Member Functions

- virtual **~ptrComp** ()
Virtual destructor.
- virtual bool **operator==** (const **ptrComp** &l) const
Equality test.
- virtual bool **operator>** (const **ptrComp** &l) const
Greater than test.
- virtual bool **operator<** (const **ptrComp** &l) const
Less than test.
- virtual bool **operator>=** (const **ptrComp** &l) const
Greater than/equal to test.
- virtual bool **operator<=** (const **ptrComp** &l) const
Less than/equal to test.

12.12.1 Detailed Description

Pointer compare interface.

Allows a class which does not define comparison operators to be placed into an abstract data-structure by defining comparison to be address comparison.

12.12.2 Constructor & Destructor Documentation

virtual os::ptrComp::~~ptrComp () [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

12.12.3 Member Function Documentation

virtual bool os::ptrComp::operator< (const **ptrComp** & l) const [inline], [virtual]

Less than test.

virtual bool os::ptrComp::operator<= (const **ptrComp** & l) const [inline], [virtual]

Less than/equal to test.

virtual bool os::ptrComp::operator== (const **ptrComp** & l) const [inline], [virtual]

Equality test.

virtual bool os::ptrComp::operator> (const **ptrComp** & l) const [inline], [virtual]

Greater than test.

virtual bool os::ptrComp::operator>= (const **ptrComp** & l) const [inline], [virtual]

Greater than/equal to test.

12.13 os::smart_ptr< dataType > Class Template Reference

Reference counted pointer.

Public Member Functions

- **smart_ptr** ()
Default constructor.
- **smart_ptr** (const **smart_pointer_type** t, const std::atomic< unsigned long > *rc, const dataType *rp, const **void_rec** f)
Forced constructor.
- **smart_ptr** (const **smart_ptr**< dataType > &sp)
Copy constructor.
- **smart_ptr** (const dataType *rp, **smart_pointer_type** typ=**raw_type**)
Standard constructor.
- **smart_ptr** (const dataType *rp, const **void_rec** destructor)
Dynamic deletion constructor.
- virtual ~**smart_ptr** ()

- Virtual destructor.*
- **smart_ptr** (const int rp)
 - Integer constructor.*
- **smart_ptr** (const long rp)
 - Long constructor.*
- **smart_ptr** (const unsigned long rp)
 - Unsigned long constructor.*
- **smart_pointer_type getType ()** const
 - Return type.*
- dataType * **get ()**
 - Return data.*
- const dataType * **get ()** const
 - Return constant data.*
- const dataType * **constGet ()** const
 - Return constant data.*
- const std::atomic< unsigned long > * **getRefCount ()** const
 - Return constant reference count.*
- **void_rec getFunc ()** const
 - Return deletion function.*
- bool **operator!** () const
 - Inverted boolean conversion.*
- **operator bool** () const
 - Boolean conversion.*
- dataType & **operator*** ()
 - De-reference conversion.*
- const dataType & **operator*** () const
 - Constant de-reference conversion.*
- dataType * **operator->** ()
 - Pointer pass.*
- const dataType * **operator->** () const
 - Constant pointer pass.*
- dataType & **operator[]** (unsigned int i)
 - Array de-reference.*
- const dataType & **operator[]** (unsigned int i) const
 - Constant array de-reference.*
- **smart_ptr**< dataType > & **bind** (**smart_ptr**< dataType > sp)
 - Bind copy.*
- **smart_ptr**< dataType > & **bind** (const dataType *rp)
 - Bind raw copy.*
- **smart_ptr**< dataType > & **operator=** (const **smart_ptr**< dataType > source)
 - Equals copy.*
- **smart_ptr**< dataType > & **operator=** (const dataType *source)
 - Bind raw copy.*

- **smart_ptr< dataType > & operator=** (const int source)
Bind integer copy.
- **smart_ptr< dataType > & operator=** (const long source)
Bind long copy.
- **smart_ptr< dataType > & operator=** (const unsigned long source)
Bind unsigned long copy.
- int **compare** (const **smart_ptr< dataType > &c**) const
*Compare **os::smart_ptr** (p. 146).*
- int **compare** (const dataType *c) const
Compare raw pointers.
- int **compare** (const unsigned long c) const
Compare cast long.

Private Member Functions

- void **teardown** ()
Delete data.

Private Attributes

- **smart_pointer_type type**
Stores the type.
- std::atomic< unsigned long > * **ref_count**
Reference count.
- dataType * **raw_ptr**
Pointer to data.
- **void_rec func**
Non-standard deletion.

12.13.1 Detailed Description

```
template<class dataType>
class os::smart_ptr< dataType >
```

Reference counted pointer.

The **os::smart_ptr** (p. 146) template class allows for automatic memory management. **os::smart_ptr** (p. 146)'s have a type defined by **os::smart_pointer_type** (p. 84) which defines the copy and deletion behaviour of the object.

12.13.2 Constructor & Destructor Documentation

```
template<class dataType> os::smart_ptr< dataType >::smart_ptr ( ) [inline]
```

Default constructor.

Constructs an **os::smart_ptr** (p. 146) of type **os::null_type** (p. 84). All private data is set to 0 or NULL.

```
template<class dataType> os::smart_ptr< dataType >::smart_ptr ( const smart_pointer_type t,
const std::atomic< unsigned long > * rc, const dataType * rp, const void_rec f ) [inline]
```

Forced constructor.

Constructs an **os::smart_ptr** (p. 146) explicitly from each of the parameters provided. This constructor is primarily used for testing purposes.

Parameters

in	<i>t</i>	Type definition for the object
in,out	<i>rp</i>	Pointer to the reference count
in	<i>rp</i>	Raw pointer object is managing
in	<i>f</i>	Dynamic deletion function

```
template<class dataType> os::smart_ptr< dataType >::smart_ptr ( const smart_ptr< dataType >
& sp ) [inline]
```

Copy constructor.

Constructs an **os::smart_ptr** (p. 146) from an existing **os::smart_ptr** (p. 146). Will increment the reference count as defined by the received **os::smart_pointer_type** (p. 84).

Parameters

in,out	<i>sp</i>	Reference to data being copied
--------	-----------	--------------------------------

```
template<class dataType> os::smart_ptr< dataType >::smart_ptr ( const dataType * rp,
smart_pointer_type typ = raw_type ) [inline]
```

Standard constructor.

Constructs an **os::smart_ptr** (p. 146) from a raw pointer and a type. This is the most commonly used **os::smart_ptr** (p. 146) constructor, other than the copy constructor. Note that **os::shared_type_dynamic_delete** (p. 84) cannot be constructed through this method.

Parameters

in	<i>rp</i>	Raw pointer object is managing
in	<i>typ</i>	Defines reference count behaviour

```
template<class dataType> os::smart_ptr< dataType >::smart_ptr ( const dataType * rp, const
void_rec destructor ) [inline]
```

Dynamic deletion constructor.

Constructs an **os::smart_ptr** (p. 146) from a raw pointer and a destruction function. This constructor generates an **os::smart_ptr** (p. 146) of type **os::shared_type_dynamic_delete** (p. 84).

Parameters

in	<i>rp</i>	Raw pointer object is managing
in	<i>destructor</i>	Defines the function to be executed on destroy

```
template<class dataType> virtual os::smart_ptr< dataType >::~smart_ptr ( ) [inline],  
[virtual]
```

Virtual destructor.

Calls **os::smart_ptr**<**dataType**>::**teardown**() (p. 156) before destroying the object.

```
template<class dataType> os::smart_ptr< dataType >::smart_ptr ( const int rp ) [inline]
```

Integer constructor.

Constructs an **os::smart_ptr** (p. 146) from an integer. The assumption is that this integer is 0 (or NULL). This function is still legal if the integer is not NULL, this allows for casting, although such usage is discouraged.

Parameters

in	<i>rp</i>	Integer cast to raw pointer
----	-----------	-----------------------------

```
template<class dataType> os::smart_ptr< dataType >::smart_ptr ( const long rp ) [inline]
```

Long constructor.

Constructs an **os::smart_ptr** (p. 146) from an long. The assumption is that this long is 0 (or NULL). This function is still legal if the long is not NULL, this allows for casting, although such usage is discouraged.

Parameters

in	<i>rp</i>	Long cast to raw pointer
----	-----------	--------------------------

```
template<class dataType> os::smart_ptr< dataType >::smart_ptr ( const unsigned long rp )  
[inline]
```

Unsigned long constructor.

Constructs an **os::smart_ptr** (p. 146) from an unsigned long. The assumption is that this unsigned long is 0 (or NULL). This function is still legal if the unsigned long is not NULL, this allows for casting, although such usage is discouraged.

Parameters

in	<i>rp</i>	Unsigned long cast to raw pointer
----	-----------	-----------------------------------

12.13.3 Member Function Documentation

```
template<class dataType> smart_ptr<dataType>& os::smart_ptr< dataType >::bind (
smart_ptr< dataType > sp ) [inline]
```

Bind copy.

Binds to an **os::smart_ptr** (p. 146) from an existing **os::smart_ptr** (p. 146). Will increment the reference count as defined by the received **os::smart_pointer_type** (p. 84).

Parameters

in	sp	Reference to data being copied
----	----	--------------------------------

Returns

Reference to self

```
template<class dataType> smart_ptr<dataType>& os::smart_ptr< dataType >::bind ( const
dataType * rp ) [inline]
```

Bind raw copy.

Binds to an **os::smart_ptr** (p. 146) from a dataType pointer. This new **os::smart_ptr** (p. 146) will be of type **os::raw_type** (p. 84) unless the dataType pointer is NULL, then it will be of type **os::null_type** (p. 84).

Parameters

in	rp	Reference to dataType pointer
----	----	-------------------------------

Returns

Reference to self

```
template<class dataType> int os::smart_ptr< dataType >::compare ( const smart_ptr< dataType
> & c ) const [inline]
```

Compare **os::smart_ptr** (p. 146).

Compares two pointers to the same type by address and returns the result in the form of a 1,0 or -1. Note that the **os::smart_ptr<dataType>::type** (p. 157) of the objects does not factor into this comparison.

Parameters

in	c	os::smart_ptr <dataType>
----	---	---------------------------------

Returns

1, 0, -1 (Greater than, equal to, less than)

```
template<class dataType> int os::smart_ptr< dataType >::compare ( const dataType * c ) const
[inline]
```

Compare raw pointers.

Compares a **os::smart_ptr**<dataType> and a raw pointer of type dataType and returns the result in the form of a 1,0 or -1.

Parameters

in	c	Raw dataType pointer
----	---	----------------------

Returns

1, 0, -1 (Greater than, equal to, less than)

```
template<class dataType> int os::smart_ptr< dataType >::compare ( const unsigned long c )
const [inline]
```

Compare cast long.

Compares a **os::smart_ptr**<dataType> and an unsigned long, returning the result in the form of a 1,0 or -1.

Parameters

in	c	Unsigned long cast to dataType pointer
----	---	--

Returns

1, 0, -1 (Greater than, equal to, less than)

```
template<class dataType> const dataType* os::smart_ptr< dataType >::constGet ( ) const
[inline]
```

Return constant data.

Returns the constant dataType pointer of the **os::smart_ptr** (p. 146).

Returns

dataType* in constant form, **os::smart_ptr**<dataType>::raw_ptr (p. 156)

```
template<class dataType> dataType* os::smart_ptr< dataType >::get ( ) [inline]
```

Return data.

Returns the dataType pointer of the **os::smart_ptr** (p. 146).

Returns

dataType* in modifiable form, **os::smart_ptr**<dataType>::raw_ptr (p. 156)

```
template<class dataType> const dataType* os::smart_ptr< dataType >::get ( ) const [inline]
```

Return constant data.

Returns the constant dataType pointer of the **os::smart_ptr** (p. 146).

Returns

dataType* in constant form, **os::smart_ptr**<dataType>::raw_ptr (p. 156)

```
template<class dataType> void_rec os::smart_ptr< dataType >::getFunc ( ) const [inline]
```

Return deletion function.

Returns the deletion function if it exists. (Note that the deletion function only exists in **os::shared_type_dynamic_delete** (p. 84) mode)

Returns

os::void_rec (p. 83) **os::smart_ptr**<dataType>::func (p. 156)

```
template<class dataType> const std::atomic<unsigned long>* os::smart_ptr< dataType >::getRefCount ( ) const [inline]
```

Return constant reference count.

Returns a constant pointer of the reference count.

Returns

unsigned long* in constant form, **os::smart_ptr**<dataType>::ref_count (p. 157)

```
template<class dataType> smart_pointer_type os::smart_ptr< dataType >::getType ( ) const [inline]
```

Return type.

Returns the **os::smart_pointer_type** (p. 84) of the **os::smart_ptr** (p. 146).

Returns

os::smart_pointer_type (p. 84) **os::smart_ptr**<dataType>::type (p. 157)

```
template<class dataType> os::smart_ptr< dataType >::operator bool ( ) const [inline]
```

Boolean conversion.

Returns

os::smart_ptr<dataType>::raw_ptr (p. 156) cast to boolean

```
template<class dataType> bool os::smart_ptr< dataType >::operator! ( ) const [inline]
```

Inverted boolean conversion.

Returns

Inverse of **os::smart_ptr**<dataType>::raw_ptr (p. 156) cast to boolean

template<class dataType> dataType& **os::smart_ptr**< dataType >::operator* () [inline]

De-reference conversion.

Returns

dataType reference of **os::smart_ptr**<dataType>::raw_ptr (p. 156) de-referenced

template<class dataType> const dataType& **os::smart_ptr**< dataType >::operator* () const [inline]

Constant de-reference conversion.

Returns

Constant dataType reference of **os::smart_ptr**<dataType>::raw_ptr (p. 156) de-referenced

template<class dataType> dataType* **os::smart_ptr**< dataType >::operator-> () [inline]

Pointer pass.

Returns

os::smart_ptr<dataType>::raw_ptr (p. 156)

template<class dataType> const dataType* **os::smart_ptr**< dataType >::operator-> () const [inline]

Constant pointer pass.

Returns

Constant **os::smart_ptr**<dataType>::raw_ptr (p. 156)

template<class dataType> **smart_ptr**<dataType>& **os::smart_ptr**< dataType >::operator= (const **smart_ptr**< dataType > source) [inline]

Equals copy.

Calls **os::smart_ptr**<dataType>::bind (p. 151).

Parameters

in	source	Reference to data being copied
----	--------	--------------------------------

Returns

Reference to self

template<class dataType> **smart_ptr**<dataType>& **os::smart_ptr**< dataType >::operator= (const dataType * source) [inline]

Bind raw copy.

Calls **os::smart_ptr**<dataType>::bind (p. 151).

Parameters

in	source	Reference to dataType pointer
----	--------	-------------------------------

Returns

Reference to self

```
template<class dataType> smart_ptr<dataType>& os::smart_ptr< dataType >::operator= ( const  
int source ) [inline]
```

Bind integer copy.

Calls **os::smart_ptr<dataType>::bind** (p. 151) with the integer cast to a dataType pointer.

Parameters

in	source	Integer cast to raw pointer
----	--------	-----------------------------

Returns

Reference to self

```
template<class dataType> smart_ptr<dataType>& os::smart_ptr< dataType >::operator= ( const  
long source ) [inline]
```

Bind long copy.

Calls **os::smart_ptr<dataType>::bind** (p. 151) with the long cast to a dataType pointer.

Parameters

in	source	Long cast to raw pointer
----	--------	--------------------------

Returns

Reference to self

```
template<class dataType> smart_ptr<dataType>& os::smart_ptr< dataType >::operator= ( const  
unsigned long source ) [inline]
```

Bind unsigned long copy.

Calls **os::smart_ptr<dataType>::bind** (p. 151) with the unsigned long cast to a dataType pointer.

Parameters

in	source	Unsigned long cast to raw pointer
----	--------	-----------------------------------

Returns

Reference to self

```
template<class dataType> dataType& os::smart_ptr< dataType >::operator[] ( unsigned int i )  
[inline]
```

Array de-reference.

Returns

dataType reference of **os::smart_ptr**<dataType>::raw_ptr (p. 156) incremented i de-referenced

```
template<class dataType> const dataType& os::smart_ptr< dataType >::operator[] ( unsigned int  
i ) const [inline]
```

Constant array de-reference.

Returns

Constant dataType reference of **os::smart_ptr**<dataType>::raw_ptr (p. 156) incremented i de-referenced

```
template<class dataType> void os::smart_ptr< dataType >::teardown ( ) [inline], [private]
```

Delete data.

Tears down the **os::smart_ptr** (p. 146). Decrements the reference counter, if not of **os::raw_type** (p. 84) or **os::null_type** (p. 84), and delete **os::smart_ptr**<dataType>::raw_ptr (p. 156) if needed. Note that if **os::smart_ptr**<dataType>::raw_ptr (p. 156) is deleted, so is **os::smart_ptr**<dataType>::ref_count (p. 157).

Returns

void

12.13.4 Member Data Documentation

```
template<class dataType> void_rec os::smart_ptr< dataType >::func [private]
```

Non-standard deletion.

This is a pointer to a function used when the **os::smart_ptr** (p. 146) is of type **os::shared_type** or **os::dynamic_delete** (p. 84).

```
template<class dataType> dataType* os::smart_ptr< dataType >::raw_ptr [private]
```

Pointer to data.

The **os::smart_ptr**<dataType>::raw_ptr (p. 156) holds the pointer to the block of memory to be managed by the **os::smart_ptr** (p. 146). If this pointer is NULL, the **os::smart_ptr** (p. 146) is of type **os::null_type** (p. 84).

```
template<class dataType> std::atomic<unsigned long>* os::smart_ptr< dataType >::ref_count  
[private]
```

Reference count.

This pointer stores the current reference count of the **os::smart_ptr** (p. 146). Note that all **os::smart_ptr** (p. 146)'s which point to the same memory address with share the same reference counter. This counter is deleted with the pointer and if this counter is NULL, the **os::smart_ptr** (p. 146) is either of type **os::null_type** (p. 84) or **os::raw_type** (p. 84).

```
template<class dataType> smart_pointer_type os::smart_ptr< dataType >::type [private]
```


Stores the type.

Defines the type of the **os::smart_ptr** (p. 146). See **os::smart_pointer_type** (p. 84) for details on the available types.

12.14 os::smartSet< dataType > Class Template Reference

Smart set abstract data-structures.

Inheritance diagram for **os::smartSet< dataType >**:

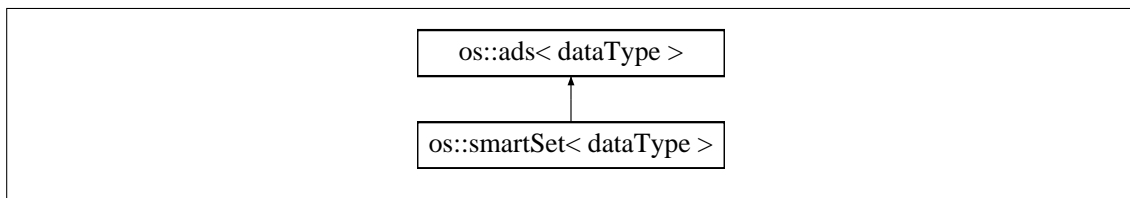

Public Member Functions

- **smartSet** (**setTypes** typ=**def_set**)
Default constructor.
- virtual ~**smartSet** ()
Virtual destructor.
- void **rebuild** (**setTypes** typ)
Set set type.
- **setTypes** **getType** () const
Return set type.
- bool **insert** (**smart_ptr**< **ads**< dataType > > x)
Inserts an os::ads<dataType>
- bool **insert** (**smart_ptr**< dataType > x)
Inserts a data node.
- **smart_ptr**< **adnode**< dataType > > **find** (**smart_ptr**< dataType > x)
Finds a matching node.
- bool **findDelete** (**smart_ptr**< dataType > x)
Finds and delete a matching node.

- unsigned int **size** () const
Returns the number of elements in the set.
- **smart_ptr**< **adnode**< dataType > > **getFirst** ()
Return the first element.
- **smart_ptr**< **adnode**< dataType > > **getLast** ()
Return the last element.

Private Member Functions

- void **build** (**setTypes** typ)

Private Attributes

- **setTypes** type
Stores the set type.
- **smart_ptr**< **ads**< dataType > > **current_struct**
Abstract data-structure storing data.

Additional Inherited Members

12.14.1 Detailed Description

```
template<class dataType>
class os::smartSet< dataType >
```

Smart set abstract data-structures.

Wraps other forms of abstract data structures, allowing applications to define abstract data-structures by numbered indexes.

12.14.2 Constructor & Destructor Documentation

```
template<class dataType > os::smartSet< dataType >::smartSet ( setTypes typ = def_set )
[inline]
```

Default constructor.

This constructor builds the smart set based on a set type. Will call **os::smartSet**<**dataType**>↵
::build (p. 159).

Parameters

in	typ	Set type, default is os::def_set (p. 83)
----	-----	---

```
template<class dataType > virtual os::smartSet< dataType >::~smartSet ( ) [inline],
[virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

12.14.3 Member Function Documentation

```
template<class dataType > void os::smartSet< dataType >::build ( setTypes typ ) [inline],  
[private]
```

```
template<class dataType > smart_ptr<adnode<dataType> > os::smartSet< dataType >::find ( smart_ptr< dataType > x ) [inline], [virtual]
```

Finds a matching node.

Finds a pointer to an object of type "dataType" given a comparison pointer. Adopts the find function of the abstract data-structure used for this set type. If no abstract data-structure exists, return false.

[in] x dataType pointer to be compared against

Returns

true if the node was found, else false

Reimplemented from **os::ads**< **dataType** > (p. 94).

```
template<class dataType > bool os::smartSet< dataType >::findDelete ( smart_ptr< dataType > x ) [inline], [virtual]
```

Finds and delete a matching node.

Finds a pointer to an object of type "dataType" given a comparison pointer and remove it. Adopts the findDelete function of the abstract data-structure used for this set type. If no abstract data-structure exists, return false.

[in] x dataType pointer to be compared against

Returns

true if the node was found, else false

Reimplemented from **os::ads**< **dataType** > (p. 95).

```
template<class dataType > smart_ptr<adnode<dataType> > os::smartSet< dataType >::getFirst ( ) [inline], [virtual]
```

Return the first element.

Adopts the getFirst function of the abstract data-structure used for this set type. If no abstract data-structure exists, return NULL.

Returns

os::smartSet<**dataType**>::current_struct (p. 161)->getFirst() (p. 159)

Reimplemented from **os::ads**< **dataType** > (p. 95).

```
template<class dataType > smart_ptr<adnode<dataType> > os::smartSet< dataType >::getLast  
( ) [inline], [virtual]
```

Return the last element.

Adopts the getLast function of the abstract data-structure used for this set type. If no abstract data-structure exists, return NULL.

Returns

os::smartSet<**dataType**>::**current_struct** (p. 161)->**getLast()** (p. 160)

Reimplemented from **os::ads**< **dataType** > (p. 95).

```
template<class dataType > setTypes os::smartSet< dataType >::getType ( ) const [inline]
```

Return set type.

Returns

os::smartSet<**dataType**>::**type** (p. 161)

```
template<class dataType > bool os::smartSet< dataType >::insert ( smart_ptr< ads< dataType >  
> x ) [inline], [virtual]
```

Inserts an **os::ads**<**dataType**>

Inserts every element in a given abstract datastructure into this tree. Adopts the insertion function of **os::ads**<**dataType**>

[in] x pointer to **os::ads**<**dataType**>

Returns

true if successful, false if failed

Reimplemented from **os::ads**< **dataType** > (p. 96).

```
template<class dataType > bool os::smartSet< dataType >::insert ( smart_ptr< dataType > x )  
[inline], [virtual]
```

Inserts a data node.

Adopts the insertion function of the abstract data-structure used for this set type. If no abstract data-structure exists, return false.

[in] x dataType pointer to be inserted

Returns

true if successful, false if failed

Reimplemented from **os::ads**< **dataType** > (p. 95).

```
template<class dataType > void os::smartSet< dataType >::rebuild ( setTypes typ ) [inline]
```

Set set type.

Sets the type of the set, rebuilding the set if the requested type and current type do not match.

Parameters

in	type	Set type
----	------	----------

Returns

void

```
template<class dataType > unsigned int os::smartSet< dataType >::size ( ) const [inline],  
[virtual]
```

Returns the number of elements in the set.

Adopts the size function of the abstract data-structure used for this set type. If no abstract data-structure exists, return 0.

Returns

os::smartSet<dataType>::current_struct (p. 161)->**size()** (p. 161)

Reimplemented from **os::ads< dataType >** (p. 97).

12.14.4 Member Data Documentation

```
template<class dataType > smart_ptr<ads<dataType> > os::smartSet< dataType  
>::current_struct [private]
```

Abstract data-structure storing data.


```
template<class dataType > setTypes os::smartSet< dataType >::type [private]
```

Stores the set type.

12.15 os::unsortedList< dataType > Class Template Reference

Unsorted linked list.

Inheritance diagram for **os::unsortedList< dataType >**:

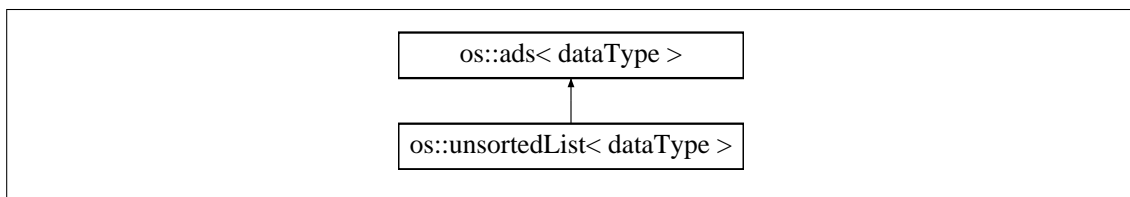

Public Member Functions

- **unsortedList ()**
Default constructor.
- virtual **~unsortedList ()**
Virtual destructor.
- bool **insert (smart_ptr< ads< dataType > > x)**
Inserts an os::ads<dataType>
- bool **insert (smart_ptr< dataType > x)**
Inserts a data node.
- virtual unsigned int **size () const**
Returns the number of elements in the list.
- **smart_ptr< adnode< dataType > > find (smart_ptr< dataType > x)**
Finds a matching node.
- bool **findDelete (smart_ptr< dataType > x)**
Finds and delete a matching node.
- **smart_ptr< adnode< dataType > > getFirst ()**
Return the head.
- **smart_ptr< adnode< dataType > > getLast ()**
Return the tail.

Private Attributes

- **smart_ptr< unsortedListNode< dataType > > head**
Head node.
- **smart_ptr< unsortedListNode< dataType > > tail**
Tail node.
- unsigned int **_size**
Number of elements in the list.

Additional Inherited Members

12.15.1 Detailed Description

```
template<class dataType>
class os::unsortedList< dataType >
```

Unsorted linked list.

The list defined by this class is searchable but unsorted. Insert checks to see if the element being inserted is already contained inside the list. Elements are inserted from the front of the list.

12.15.2 Constructor & Destructor Documentation

```
template<class dataType > os::unsortedList< dataType >::unsortedList ( ) [inline]
```

Default constructor.

Sets the number of elements to 0 and the head and tail to NULL.

```
template<class dataType > virtual os::unsortedList< dataType >::~unsortedList( ) [inline],  
[virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. The list must explicitly force deletion through setting all of the next and previous references of nodes to NULL.

12.15.3 Member Function Documentation

```
template<class dataType > smart_ptr<adnode<dataType> > os::unsortedList< dataType >::find  
( smart_ptr< dataType > x ) [inline], [virtual]
```

Finds a matching node.

Finds a pointer to an object of type "dataType" given a comparison pointer. This comparison function is defined by `os::adnode<dataType>::compare(smart_ptr<adnode<dataType> >)`. This function takes $O(n)$ where n is the number of elements in the list.

[in] x dataType pointer to be compared against

Returns

true if the node was found, else false

Reimplemented from `os::ads< dataType >` (p. 94).

```
template<class dataType > bool os::unsortedList< dataType >::findDelete ( smart_ptr< dataType  
> x ) [inline], [virtual]
```

Finds and delete a matching node.

Finds a pointer to an object of type "dataType" given a comparison pointer and removes it. This comparison function is defined by `os::adnode<dataType>::compare(smart_ptr<adnode<dataType> >)`. This function takes $O(n)$ where n is the number of elements in the list.

[in] x dataType pointer to be compared against

Returns

true if the node was found, else false

Reimplemented from `os::ads< dataType >` (p. 95).

```
template<class dataType > smart_ptr<adnode<dataType> > os::unsortedList< dataType  
>::getFirst ( ) [inline], [virtual]
```

Return the head.

This function is $O(1)$

Returns

`os::unsortedList<dataType>::head` (p. 165)

Reimplemented from `os::ads< dataType >` (p. 95).


```
template<class dataType > smart_ptr<adnode<dataType> > os::unsortedList< dataType  
>::getLast ( ) [inline], [virtual]
```

Return the tail.

This function is O(1).

Returns

os::unsortedList<dataType>::tail (p. 165)

Reimplemented from **os::ads**< dataType > (p. 95).

```
template<class dataType > bool os::unsortedList< dataType >::insert ( smart_ptr< ads<  
dataType > > x ) [inline], [virtual]
```

Inserts an **os::ads**<dataType>

Inserts every element in a given abstract datastructure into this tree. Adopts the insertion function of **os::ads**<dataType>

[in] x pointer to **os::ads**<dataType>

Returns

true if successful, false if failed

Reimplemented from **os::ads**< dataType > (p. 96).

```
template<class dataType > bool os::unsortedList< dataType >::insert ( smart_ptr< dataType > x  
) [inline], [virtual]
```

Inserts a data node.

Inserts a pointer to an object of type "dataType." This insertion will place the node into the list at the beginning. If the node already exists, it will not be inserted. This means that this function must first attempt to find the node being inserted. This function is O(n).

[in] x dataType pointer to be inserted

Returns

true if successful, false if failed

Reimplemented from **os::ads**< dataType > (p. 95).

```
template<class dataType > virtual unsigned int os::unsortedList< dataType >::size ( ) const  
[inline], [virtual]
```

Returns the number of elements in the list.

Returns

os::unsortedList<dataType>::numElements

Reimplemented from **os::ads**< dataType > (p. 97).

12.15.4 Member Data Documentation

template<class dataType > unsigned int **os::unsortedList**< dataType >::_size [private]

Number of elements in the list.

template<class dataType > **smart_ptr**<**unsortedListNode**<dataType> > **os::unsortedList**< dataType >::head [private]

Head node.

Contains a pointer to the head node in the list. If this node is NULL, the list is empty.

template<class dataType > **smart_ptr**<**unsortedListNode**<dataType> > **os::unsortedList**< dataType >::tail [private]


Tail node.

Contains a pointer to the tail node in the list. If this node is NULL, the list is empty.

12.16 os::unsortedListNode< dataType > Class Template Reference

Node for usage in a linked list.

Inheritance diagram for os::unsortedListNode< dataType >:

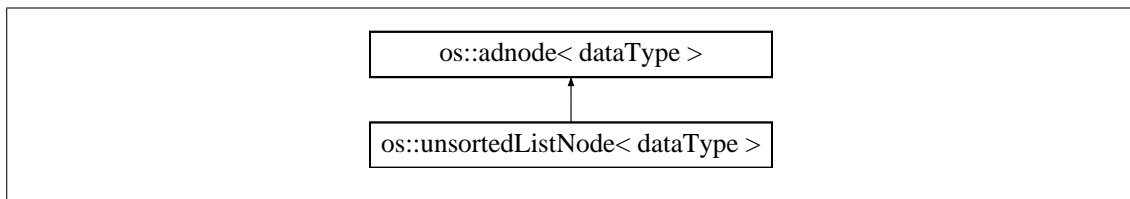

Public Member Functions

- **unsortedListNode** (**smart_ptr**< dataType > d)
Abstract data-node constructor.
- virtual **~unsortedListNode** ()
Virtual destructor.
- **smart_ptr**< **adnode**< dataType > > **getNext** ()
Return the next node.
- **smart_ptr**< **adnode**< dataType > > **getPrev** ()
Return the previous node.

Protected Member Functions

- void **remove** ()
Remove this node from the list.

Protected Attributes

- **smart_ptr< unsortedListNode< dataType > > prev**
Previous node.
- **smart_ptr< unsortedListNode< dataType > > next**
Next node.

Friends

- class **unsortedList< dataType >**
List aware of it's nodes.

12.16.1 Detailed Description

```
template<class dataType>
class os::unsortedListNode< dataType >
```

Node for usage in a linked list.

This class is a simple extension of the `os::adnode<dataType>` class. It holds the previous and next node inside of it as well as a pointer to its data. Note that the `os::unsortedList<dataType>` class implements the mechanics of the list.

12.16.2 Constructor & Destructor Documentation

```
template<class dataType > os::unsortedListNode< dataType >::unsortedListNode (
smart_ptr< dataType > d ) [inline]
```

Abstract data-node constructor.

A list node is meaningless without a pointer to it's `dataType`. The constructor requires this pointer to initialize the node. Next and previous nodes are, by default, initialized to zero.

Parameters

in	<i>d</i>	Data to be bound to the node
----	----------	------------------------------

```
template<class dataType > virtual os::unsortedListNode< dataType >::~unsortedListNode ( )
[inline], [virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

12.16.3 Member Function Documentation

```
template<class dataType > smart_ptr<adnode<dataType> > os::unsortedListNode< dataType
>::getNext ( ) [inline], [virtual]
```

Return the next node.

Note that **os::unsortedListNode<dataType>::next** (p. 167) is of type **os::unsortedListNode<dataType>**, but this function returns type of **os::adnode<dataType>**. **os::unsortedListNode<dataType>::next** (p. 167) must be case before returning.

Returns

os::unsortedListNode<dataType>::next (p. 167)

Reimplemented from **os::adnode< dataType >** (p. 92).

```
template<class dataType > smart_ptr<adnode<dataType> > os::unsortedListNode< dataType  
>::getPrev ( ) [inline], [virtual]
```

Return the previous node.

Note that **os::unsortedListNode<dataType>::prev** (p. 168) is of type **os::unsortedListNode<dataType>**, but this function returns type of **os::adnode<dataType>**. **os::unsortedListNode<dataType>::prev** (p. 168) must be case before returning.

Returns

os::unsortedListNode<dataType>::prev (p. 168)

Reimplemented from **os::adnode< dataType >** (p. 92).

```
template<class dataType > void os::unsortedListNode< dataType >::remove ( ) [inline],  
[protected]
```

Remove this node from the list.

Removes the references to this node from the next and previous node, if they exists. Sets the previous and next nodes to NULL.

Returns

void

12.16.4 Friends And Related Function Documentation

```
template<class dataType > friend class unsortedList< dataType > [friend]
```

List aware of it's nodes.

The unsorted list must be aware of the inner-workings of its nodes. Only the unsorted list is permitted to access the private members of this class.

12.16.5 Member Data Documentation

```
template<class dataType > smart_ptr<unsortedListNode<dataType> > os::unsortedListNode<  
dataType >::next [protected]
```

Next node.

Contains a pointer to the next node in the list. If this node is the tail of the list, the next node is NULL.

```
template<class dataType > smart_ptr<unsortedListNode<dataType> > os::unsortedListNode<
dataType >::prev [protected]
```

Previous node.

Contains a pointer to the previous node in the list. If this node is the head of the list, the previous node is NULL.

12.17 os::vector2d< dataType > Class Template Reference

2-dimensional vector

Public Member Functions

- **vector2d** ()
Default constructor.
- **vector2d** (dataType xv, dataType yv)
Value constructor.
- **vector2d** (const **vector2d**< dataType > &vec)
Copy constructor.
- **vector2d**< dataType > & **operator=** (const **vector2d**< dataType > &vec)
Equality constructor.
- **vector2d**< dataType > & **operator()** (const dataType &X, const dataType &Y)
Value setter.
- virtual ~**vector2d** ()
Virtual destructor s. Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.*
- dataType **length** () const
Return length of the vector.
- **vector2d**< dataType > & **scaleSelf** (dataType target=1)
Scales this vector.
- **vector2d**< dataType > **scale** (dataType target=1) const
Return a scaled vector.
- int **compare** (const **vector2d**< dataType > &vec) const
- bool **operator==** (const **vector2d**< dataType > &vec) const
Equality comparison operator.
- bool **operator!=** (const **vector2d**< dataType > &vec) const
Not-equals comparison operator.
- bool **operator<** (const **vector2d**< dataType > &vec) const
Less-than comparison operator.
- bool **operator<=** (const **vector2d**< dataType > &vec) const
Less-than or equals to comparison operator.
- bool **operator>** (const **vector2d**< dataType > &vec) const
Less-than comparison operator.
- bool **operator>=** (const **vector2d**< dataType > &vec) const

- **vector2d< dataType > & addSelf** (const **vector2d< dataType > &vec**)
Add vector to self.
- **vector2d< dataType > add** (const **vector2d< dataType > &vec**) const
Add two vectors.
- **vector2d< dataType > operator+** (const **vector2d< dataType > &vec**) const
Add two vectors.
- **vector2d< dataType > & operator+=** (const **vector2d< dataType > &vec**)
Add vector to self.
- **vector2d< dataType > & operator++** ()
Increment.
- **vector2d< dataType > operator++** (int dummy)
Increment.
- **vector2d< dataType > operator-** () const
Invert vector.
- **vector2d< dataType > & subtractSelf** (const **vector2d< dataType > &vec**)
Subtract vector from self.
- **vector2d< dataType > subtract** (const **vector2d< dataType > &vec**) const
Subtract two vectors.
- **vector2d< dataType > operator-** (const **vector2d< dataType > &vec**) const
Subtracts two vectors.
- **vector2d< dataType > & operator-=** (const **vector2d< dataType > &vec**)
Subtracts vector from self.
- **vector2d< dataType > & operator--** ()
Decrement.
- **vector2d< dataType > operator--** (int dummy)
Decrement.
- **dataType dotProduct** (const **vector2d< dataType > &vec**) const
Dot-product.
- **vector2d< dataType > rotate** (const **vector2d< dataType > &vec**) const
Rotates a point around 0, 0.
- **vector2d< dataType > rotateSelf** (const **vector2d< dataType > &vec**)
Rotates self around 0, 0.

Public Attributes

- **dataType x**
X axis vector component.
- **dataType y**
Y axis vector component.

12.17.1 Detailed Description

```
template<class dataType>
class os::vector2d< dataType >
```

2-dimensional vector

This template class contains the functions and operators needed to perform arithmetic on a 2 dimensional vector

12.17.2 Constructor & Destructor Documentation

```
template<class dataType> os::vector2d< dataType >::vector2d ( ) [inline]
```

Default constructor.

Constructs a 2 dimensional vector with x and y as 0.

```
template<class dataType> os::vector2d< dataType >::vector2d ( dataType xv, dataType yv )
[inline]
```

Value constructor.

Constructs a 2 dimensional vector with a x and a y value.

Parameters

in	xv	Value of x dimension
in	yv	Value of y dimension

```
template<class dataType> os::vector2d< dataType >::vector2d ( const vector2d< dataType > &
vec ) [inline]
```

Copy constructor.

Constructs a 2 dimensional vector from a 2 dimensional vector

Parameters

in	vec	Vector to be copied
----	-----	---------------------

```
template<class dataType> virtual os::vector2d< dataType >::~vector2d ( ) [inline],
[virtual]
```

Virtual destructor s* Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

12.17.3 Member Function Documentation

```
template<class dataType> vector2d<dataType> os::vector2d< dataType >::add ( const vector2d< dataType > & vec ) const [inline]
```

Add two vectors.

Adds the provided vector to the current vector and returns a new vector. This function is essentially the function version of the '+' operator.

Parameters

in	vec	Reference to vector to be added
----	-----	---------------------------------

Returns

Result of the vector addition

```
template<class dataType> vector2d<dataType>& os::vector2d< dataType >::addSelf ( const vector2d< dataType > & vec ) [inline]
```

Add vector to self.

Adds the provided vector to the current vector. This function is essentially the function version of the '+=' operator.

Parameters

in	vec	Reference to vector to be added
----	-----	---------------------------------

Returns

Reference to self

```
template<class dataType> int os::vector2d< dataType >::compare ( const vector2d< dataType > & vec ) const [inline]
```

Compares two vectors

This function compares two vectors for equality. It does not change either vector. This function returns 1 if this object is greater than the object reference received, 0 if the two are equal and -1 if the received reference is greater than the object.

Parameters

in	vec	Reference to object compared against
----	-----	--------------------------------------

Returns

1 if greater than, 0 if equal to, -1 if less than

```
template<class dataType> dataType os::vector2d< dataType >::dotProduct ( const vector2d<
dataType > & vec ) const [inline]
```

Dot-product.

Calculates the scalar dot-product. Note that this function does not return a vector, but rather, returns a scalar.

Parameters

in	vec	Reference to vector
----	-----	---------------------

Returns

Scalar dot product

```
template<class dataType> dataType os::vector2d< dataType >::length ( ) const [inline]
```

Return length of the vector.

Returns $\sqrt{x^2+y^2}$, or the length of the vector.

Returns

Length of the vector

```
template<class dataType> bool os::vector2d< dataType >::operator!= ( const vector2d<
dataType > & vec ) const [inline]
```

Not-equals comparison operator.

Parameters

in	vec	Reference to object compared against
----	-----	--------------------------------------

Returns

true if vectors are not equal

```
template<class dataType> vector2d<dataType>& os::vector2d< dataType >::operator() ( const
dataType & X, const dataType & Y ) [inline]
```

Value setter.

Sets the values of a 2 dimensional vector with a x and a y value.

Parameters

in	X	Value of x dimension
in	Y	Value of y dimension

Returns

Reference to this vector

```
template<class dataType> vector2d<dataType> os::vector2d< dataType >::operator+ ( const vector2d< dataType > & vec ) const [inline]
```

Add two vectors.

Parameters

in	vec	Reference to vector to be added
----	-----	---------------------------------

Returns

vector2d<dataType>::add(vec)

```
template<class dataType> vector2d<dataType>& os::vector2d< dataType >::operator++ ( ) [inline]
```

Increment.

Increments this vector by the unit vector of the same direction and then returns a reference to this vector.

Returns

Reference to self

```
template<class dataType> vector2d<dataType> os::vector2d< dataType >::operator++ ( int dummy ) [inline]
```

Increment.

Copies this vector then increments this vector by the unit vector of the same direction and then returns the original copy.

Parameters

in	<i>dummy</i>	Parameter required to define operator
----	--------------	---------------------------------------

Returns

Original copy

```
template<class dataType> vector2d<dataType>& os::vector2d< dataType >::operator+= ( const vector2d< dataType > & vec ) [inline]
```

Add vector to self.

Parameters

in	vec	Reference to vector to be added
----	-----	---------------------------------

Returns

`vector3d<dataType>::addSelf(vec)`

```
template<class dataType> vector2d<dataType> os::vector2d< dataType >::operator- ( ) const  
[inline]
```

Invert vector.

Constructs a new vector with an inverted x and inverted y.

Returns

Inverted vector

```
template<class dataType> vector2d<dataType> os::vector2d< dataType >::operator- ( const  
vector2d< dataType > & vec ) const [inline]
```

Subtracts two vectors.

Parameters

in	vec	Reference to vector to be subtracted
----	-----	--------------------------------------

Returns

`vector2d<dataType>::subtract(vec)`

```
template<class dataType> vector2d<dataType>& os::vector2d< dataType >::operator-- ( )  
[inline]
```

Decrement.

Decrements this vector by the unit vector of the same direction and then returns a reference to this vector.

Returns

Reference to self

```
template<class dataType> vector2d<dataType> os::vector2d< dataType >::operator-- ( int  
dummy ) [inline]
```

Decrement.

Copies this vector then decrements this vector by the unit vector of the same direction and then returns the original copy.

Parameters

in	dummy	Parameter required to define operator
----	-------	---------------------------------------

Returns

Original copy

```
template<class dataType> vector2d<dataType>& os::vector2d< dataType >::operator-= ( const vector2d< dataType > & vec ) [inline]
```

Subtracts vector from self.

Parameters

in	vec	Reference to vector to be subtracted
----	-----	--------------------------------------

Returns

vector3d<dataType>::subtractSelf(vec)

```
template<class dataType> bool os::vector2d< dataType >::operator< ( const vector2d< dataType > & vec ) const [inline]
```

Less-than comparison operator.

Parameters

in	vec	Reference to object compared against
----	-----	--------------------------------------

Returns

true if this is less than vec

```
template<class dataType> bool os::vector2d< dataType >::operator<= ( const vector2d< dataType > & vec ) const [inline]
```

Less-than or equals to comparison operator.

Parameters

in	vec	Reference to object compared against
----	-----	--------------------------------------

Returns

true if this is less than vec

```
template<class dataType> vector2d<dataType>& os::vector2d< dataType >::operator= ( const vector2d< dataType > & vec ) [inline]
```

Equality constructor.

Set the values of a 2 dimensional vector from a another 2 dimensional vector

Parameters

in	vec	Vector to be copied
----	-----	---------------------

Returns

Reference to this vector

```
template<class dataType> bool os::vector2d< dataType >::operator==( const vector2d<
dataType > & vec ) const [inline]
```

Equality comparison operator.

Parameters

in	vec	Reference to object compared against
----	-----	--------------------------------------

Returns

true if vectors are equal

```
template<class dataType> bool os::vector2d< dataType >::operator> ( const vector2d< dataType
> & vec ) const [inline]
```

Less-than comparison operator.

Parameters

in	vec	Reference to object compared against
----	-----	--------------------------------------

Returns

true if this is less than vec

```
template<class dataType> bool os::vector2d< dataType >::operator>= ( const vector2d<
dataType > & vec ) const [inline]
```

```
template<class dataType> vector2d<dataType> os::vector2d< dataType >::rotate ( const
vector2d< dataType > & vec ) const [inline]
```

Rotates a point around 0, 0.

Parameters

in	vec	Vector representing an angle
----	-----	------------------------------

Returns

Rotated point

```
template<class dataType> vector2d<dataType> os::vector2d< dataType >::rotateSelf ( const vector2d< dataType > & vec ) [inline]
```

Rotates self around 0, 0.

Parameters

in	vec	Vector representing an angle
----	-----	------------------------------

Returns

Rotated point

```
template<class dataType> vector2d<dataType> os::vector2d< dataType >::scale ( dataType target = 1 ) const [inline]
```

Return a scaled vector.

Returns a vector scaled to the given target length. This operation, by default, will scale to a distance of 1 (the unit vector)

Parameters

in	target	Vector length to be scaled to
----	--------	-------------------------------

Returns

The scaled vector

```
template<class dataType> vector2d<dataType>& os::vector2d< dataType >::scaleSelf ( dataType target = 1 ) [inline]
```

Scales this vector.

Scales this vector to the given target length. This operation, by default, will scale to a distance of 1 (the unit vector)

Parameters

in	target	Vector length to be scaled to
----	--------	-------------------------------

Returns

Reference to this

```
template<class dataType> vector2d<dataType> os::vector2d< dataType >::subtract ( const vector2d< dataType > & vec ) const [inline]
```

Subtract two vectors.

Subtracts the provided vector from the current vector and returns a new vector. This function is essentially the function version of the '-' operator.

Parameters

in	vec	Reference to vector to be subtracted
----	-----	--------------------------------------

Returns

Result of the vector subtraction

```
template<class dataType> vector2d<dataType>& os::vector2d< dataType >::subtractSelf ( const vector2d< dataType > & vec ) [inline]
```

Subtract vector from self.

Subtracts the provided vector from the current vector. This function is essentially the function version of the '-=' operator.

Parameters

in	vec	Reference to vector to be subtracted
----	-----	--------------------------------------

Returns

Reference to self

12.17.4 Member Data Documentation

```
template<class dataType> dataType os::vector2d< dataType >::x
```

X axis vector component.

```
template<class dataType> dataType os::vector2d< dataType >::y
```

Y axis vector component.

12.18 os::vector3d< dataType > Class Template Reference

3-dimensional vector

Public Member Functions

- **vector3d** ()
Default constructor.
- **vector3d** (dataType xv, dataType yv, dataType zv=0)
Value constructor.
- **vector3d** (const **vector3d**< dataType > &vec)
Copy constructor.
- **vector3d** (const **vector2d**< dataType > &vec)
Copy constructor.
- **vector3d**< dataType > & **operator=** (const **vector3d**< dataType > &vec)
Equality constructor.
- **vector3d**< dataType > & **operator()** (const dataType &X, const dataType &Y, const dataType &Z)
Value setter.
- virtual ~**vector3d** ()
Virtual destructor s. Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.*
- dataType **length** () const
Return length of the vector.
- **vector3d**< dataType > & **scaleSelf** (dataType target=1)
Scales this vector.
- **vector3d**< dataType > **scale** (dataType target=1) const
Return a scaled vector.
- int **compare** (const **vector3d** &vec) const
- bool **operator==** (const **vector3d**< dataType > &vec) const
Equality comparison operator.
- bool **operator!=** (const **vector3d**< dataType > &vec) const
Not-equals comparison operator.
- bool **operator<** (const **vector3d**< dataType > &vec) const
Less-than comparison operator.
- bool **operator<=** (const **vector3d**< dataType > &vec) const
Less-than or equal to comparison operator.
- bool **operator>** (const **vector3d**< dataType > &vec) const
Greater-than comparison operator.
- bool **operator>=** (const **vector3d**< dataType > &vec) const
Greater-than or equal to comparison operator.
- **vector3d**< dataType > & **addSelf** (const **vector3d**< dataType > &vec)
Add vector to self.
- **vector3d**< dataType > **add** (const **vector3d**< dataType > &vec) const
Add two vectors.
- **vector3d**< dataType > **operator+** (const **vector3d**< dataType > &vec) const
Add two vectors.
- **vector3d**< dataType > & **operator+=** (const **vector3d**< dataType > &vec)

- Add vector to self.*
- **vector3d**< dataType > & **operator++** ()
 - Increment.*
- **vector3d**< dataType > **operator++** (int dummy)
 - Increment.*
- **vector3d**< dataType > **operator-** () const
 - Invert vector.*
- **vector3d**< dataType > & **subtractSelf** (const **vector3d**< dataType > &vec)
 - Subtract vector from self.*
- **vector3d**< dataType > **subtract** (const **vector3d**< dataType > &vec) const
 - Subtract two vectors.*
- **vector3d**< dataType > **operator-** (const **vector3d**< dataType > &vec) const
 - Subtracts two vectors.*
- **vector3d**< dataType > & **operator-=** (const **vector3d**< dataType > &vec)
 - Subtracts vector from self.*
- **vector3d**< dataType > & **operator--** ()
 - Decrement.*
- **vector3d**< dataType > **operator--** (int dummy)
 - Decrement.*
- dataType **dotProduct** (const **vector3d**< dataType > &vec) const
 - Dot-product.*
- **vector3d**< dataType > **crossProduct** (const **vector3d**< dataType > &vec) const
 - Cross-product.*
- **vector3d**< dataType > & **crossSelf** (const **vector3d**< dataType > &vec)
 - Cross-product to self.*
- **vector3d**< dataType > & **operator*** (const **vector3d**< dataType > &vec) const
 - Cross-product.*
- **vector3d**< dataType > & **operator*=** (const **vector3d**< dataType > &vec)
 - Self cross-product.*

Public Attributes

- dataType **x**
 - X axis vector component.*
- dataType **y**
 - Y axis vector component.*
- dataType **z**
 - Z axis vector component.*

12.18.1 Detailed Description

```
template<class dataType>
class os::vector3d< dataType >
```

3-dimensional vector

This template class contains the functions and operators needed to perform arithmetic on a 3 dimensional vector

12.18.2 Constructor & Destructor Documentation

```
template<class dataType> os::vector3d< dataType >::vector3d ( ) [inline]
```

Default constructor.

Constructs a 3 dimensional vector with x, y and z as 0.

```
template<class dataType> os::vector3d< dataType >::vector3d ( dataType xv, dataType yv,
dataType zv = 0 ) [inline]
```

Value constructor.

Constructs a 3 dimensional vector with x, y and z values. Z, by default, is initialized as 0.

Parameters

in	xv	Value of x dimension
in	yv	Value of y dimension
in	zv	Value of z dimension

```
template<class dataType> os::vector3d< dataType >::vector3d ( const vector3d< dataType > &
vec ) [inline]
```

Copy constructor.

Constructs a 3 dimensional vector from another 3 dimensional vector

Parameters

in	vec	Vector to be copied
----	-----	---------------------

Returns

Reference to this vector

```
template<class dataType> os::vector3d< dataType >::vector3d ( const vector2d< dataType > &
vec ) [inline]
```

Copy constructor.

Constructs a 3 dimensional vector from a 2 dimensional vector

Parameters

in	vec	Vector to be copied
----	-----	---------------------

Returns

Reference to this vector

```
template<class dataType> virtual os::vector3d< dataType >::~vector3d ( ) [inline],  
[virtual]
```

Virtual destructor s* Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

12.18.3 Member Function Documentation

```
template<class dataType> vector3d<dataType> os::vector3d< dataType >::add ( const  
vector3d< dataType > & vec ) const [inline]
```

Add two vectors.

Adds the provided vector to the current vector and returns a new vector. This function is essentially the function version of the '+' operator.

Parameters

in	vec	Reference to vector to be added
----	-----	---------------------------------

Returns

Result of the vector addition

```
template<class dataType> vector3d<dataType>& os::vector3d< dataType >::addSelf ( const  
vector3d< dataType > & vec ) [inline]
```

Add vector to self.

Adds the provided vector to the current vector. This function is essentially the function version of the '+=' operator.

Parameters

in	vec	Reference to vector to be added
----	-----	---------------------------------

Returns

Reference to self

```
template<class dataType> int os::vector3d< dataType >::compare ( const vector3d< dataType > & vec ) const [inline]
```

Compares two vectors

This function compares two vectors for equality. It does not change either vector. This function returns 1 if this object is greater than the object reference received, 0 if the two are equal and -1 if the received reference is greater than the object.

Parameters

in	vec	Reference to object compared against
----	-----	--------------------------------------

Returns

1 if greater than, 0 if equal to, -1 if less than

```
template<class dataType> vector3d<dataType> os::vector3d< dataType >::crossProduct ( const vector3d< dataType > & vec ) const [inline]
```

Cross-product.

Perform the cross-product computation on this vector and the vector argument provided. Unlike the dot-product, the cross product returns a vector.

Parameters

in	vec	Reference to vector to be computed
----	-----	------------------------------------

Returns

Result of the cross-product

```
template<class dataType> vector3d<dataType>& os::vector3d< dataType >::crossSelf ( const vector3d< dataType > & vec ) [inline]
```

Cross-product to self.

Perform the cross-product computation on this vector and the vector argument provided. Binds the result to this and returns a reference to this vector.

Parameters

in	vec	Reference to vector to be computed
----	-----	------------------------------------

Returns

Reference to self

```
template<class dataType> dataType os::vector3d< dataType >::dotProduct ( const vector3d<
dataType > & vec ) const [inline]
```

Dot-product.

Calculates the scalar dot-product. Note that this function does not return a vector, but rather, returns a scalar.

Parameters

in	vec	Reference to vector
----	-----	---------------------

Returns

Scalar dot product

```
template<class dataType> dataType os::vector3d< dataType >::length ( ) const [inline]
```

Return length of the vector.

Returns $\sqrt{x^2+y^2+z^2}$, or the length of the vector.

Returns

Length of the vector

```
template<class dataType> bool os::vector3d< dataType >::operator!= ( const vector3d<
dataType > & vec ) const [inline]
```

Not-equals comparison operator.

Parameters

in	vec	Reference to object compared against
----	-----	--------------------------------------

Returns

true if vectors are not equal

```
template<class dataType> vector3d<dataType>& os::vector3d< dataType >::operator() ( const
dataType & X, const dataType & Y, const dataType & Z ) [inline]
```

Value setter.

Sets values of a 3 dimensional vector with x, y and z values.

Parameters

in	X	Value of x dimension
----	---	----------------------

Parameters

in	Y	Value of y dimension
in	Z	Value of z dimension

Returns

Reference to this vector

```
template<class dataType> vector3d<dataType> os::vector3d< dataType >::operator* ( const vector3d< dataType > & vec ) const [inline]
```

Cross-product.

Parameters

in	vec	Reference to vector to be computed with
----	-----	---

Returns

`vector3d<dataType>::crossProduct(vec)`

```
template<class dataType> vector3d<dataType>& os::vector3d< dataType >::operator*=( const vector3d< dataType > & vec ) [inline]
```

Self cross-product.

Parameters

in	vec	Reference to vector to be computed with
----	-----	---

Returns

`vector3d<dataType>::crossSelf(vec)`

```
template<class dataType> vector3d<dataType> os::vector3d< dataType >::operator+ ( const vector3d< dataType > & vec ) const [inline]
```

Add two vectors.

Parameters

in	vec	Reference to vector to be added
----	-----	---------------------------------

Returns

`vector3d<dataType>::add(vec)`

```
template<class dataType> vector3d<dataType>& os::vector3d< dataType >::operator++ ( )  
[inline]
```

Increment.

Increments this vector by the unit vector of the same direction and then returns a reference to this vector.

Returns

Reference to self

```
template<class dataType> vector3d<dataType> os::vector3d< dataType >::operator++ ( int  
dummy ) [inline]
```

Increment.

Copies this vector then increments this vector by the unit vector of the same direction and then returns the original copy.

Parameters

in	<i>dummy</i>	Parameter required to define operator
----	--------------	---------------------------------------

Returns

Original copy

```
template<class dataType> vector3d<dataType>& os::vector3d< dataType >::operator+= ( const  
vector3d< dataType > & vec ) [inline]
```

Add vector to self.

Parameters

in	<i>vec</i>	Reference to vector to be added
----	------------	---------------------------------

Returns

vector3d<dataType>::addSelf(vec)

```
template<class dataType> vector3d<dataType> os::vector3d< dataType >::operator- ( ) const  
[inline]
```

Invert vector.

Constructs a new vector with an inverted x, inverted y and inverted z.

Returns

Inverted vector

```
template<class dataType> vector3d<dataType> os::vector3d< dataType >::operator- ( const vector3d< dataType > & vec ) const [inline]
```

Subtracts two vectors.

Parameters

in	vec	Reference to vector to be subtracted
----	-----	--------------------------------------

Returns

vector3d<dataType>::subtract(vec)

```
template<class dataType> vector3d<dataType>& os::vector3d< dataType >::operator-- ( ) [inline]
```

Decrement.

Decrements this vector by the unit vector of the same direction and then returns a reference to this vector.

Returns

Reference to self

```
template<class dataType> vector3d<dataType> os::vector3d< dataType >::operator-- ( int dummy ) [inline]
```

Decrement.

Copies this vector then decrements this vector by the unit vector of the same direction and then returns the original copy.

Parameters

in	<i>dummy</i>	Parameter required to define operator
----	--------------	---------------------------------------

Returns

Original copy

```
template<class dataType> vector3d<dataType>& os::vector3d< dataType >::operator-= ( const vector3d< dataType > & vec ) [inline]
```

Subtracts vector from self.

Parameters

in	vec	Reference to vector to be subtracted
----	-----	--------------------------------------

Returns

vector3d<dataType>::subtractSelf(vec)

```
template<class dataType> bool os::vector3d< dataType >::operator< ( const vector3d< dataType  
> & vec ) const [inline]
```

Less-than comparison operator.

Parameters

in	vec	Reference to object compared against
----	-----	--------------------------------------

Returns

true if this is less than vec

```
template<class dataType> bool os::vector3d< dataType >::operator<= ( const vector3d<  
dataType > & vec ) const [inline]
```

Less-than or equal to comparison operator.

Parameters

in	vec	Reference to object compared against
----	-----	--------------------------------------

Returns

true if this is less than or equal to vec

```
template<class dataType> vector3d<dataType>& os::vector3d< dataType >::operator= ( const  
vector3d< dataType > & vec ) [inline]
```

Equality constructor.

Set the values of a 3 dimensional vector from a another 3 dimensional vector

Parameters

in	vec	Vector to be copied
----	-----	---------------------

Returns

Reference to this vector

```
template<class dataType> bool os::vector3d< dataType >::operator== ( const vector3d<  
dataType > & vec ) const [inline]
```

Equality comparison operator.

Parameters

in	vec	Reference to object compared against
----	-----	--------------------------------------

Returns

true if vectors are equal

```
template<class dataType> bool os::vector3d< dataType >::operator> ( const vector3d< dataType  
> & vec ) const [inline]
```

Greater-than comparison operator.

Parameters

in	vec	Reference to object compared against
----	-----	--------------------------------------

Returns

true if this is greater than vec

```
template<class dataType> bool os::vector3d< dataType >::operator>= ( const vector3d<  
dataType > & vec ) const [inline]
```

Greater-than or equal to comparison operator.

Parameters

in	vec	Reference to object compared against
----	-----	--------------------------------------

Returns

true if this is greater than or equal to vec

```
template<class dataType> vector3d<dataType> os::vector3d< dataType >::scale ( dataType  
target = 1 ) const [inline]
```

Return a scaled vector.

Returns a vector scaled to the given target length. This operation, by default, will scale to a distance of 1 (the unit vector)

Parameters

in	<i>target</i>	Vector length to be scaled to
----	---------------	-------------------------------

Returns

The scaled vector

```
template<class dataType> vector3d<dataType>& os::vector3d< dataType >::scaleSelf (
dataType target = 1 ) [inline]
```

Scales this vector.

Scales this vector to the given target length. This operation, by default, will scale to a distance of 1 (the unit vector)

Parameters

in	<i>target</i>	Vector length to be scaled to
----	---------------	-------------------------------

Returns

Reference to this

```
template<class dataType> vector3d<dataType> os::vector3d< dataType >::subtract ( const
vector3d< dataType > & vec ) const [inline]
```

Subtract two vectors.

Subtracts the provided vector to the current vector and returns a new vector. This function is essentially the function version of the '-' operator.

Parameters

in	<i>vec</i>	Reference to vector to be subtracted
----	------------	--------------------------------------

Returns

Result of the vector subtraction

```
template<class dataType> vector3d<dataType>& os::vector3d< dataType >::subtractSelf ( const
vector3d< dataType > & vec ) [inline]
```

Subtract vector from self.

Subtracts the provided vector from the current vector. This function is essentially the function version of the '-=' operator.

Parameters

in	<i>vec</i>	Reference to vector to be subtracted
----	------------	--------------------------------------

Returns

Reference to self

12.18.4 Member Data Documentation

template<class dataType> dataType **os::vector3d**< dataType >::x

X axis vector component.

template<class dataType> dataType **os::vector3d**< dataType >::y

Y axis vector component.

template<class dataType> dataType **os::vector3d**< dataType >::z

Z axis vector component.

Part III

Unit Test Library

Chapter 13

Introduction

The UnitTest library contains classes which preform automated unit tests while a project is under development. Utilizing C++ exceptions, the UnitTest library separates its test battery into libraries tested, suites in libraries and tests in suites. The UnitTest library iterates through instantiated libraries running every test suite in the library.

13.1 Namespace test

The test namespace is designed to hold all of the classes and functions related to unit testing. Classes and functions in the test namespace should not be included in the final release application. It is expected that libraries add to this namespace and place their own testing assets here. Note that the test namespace uses elements from the os namespace, all of these elements are defined in the Datastructures library.

13.2 Datastructures Testing

The Datastructures library is rigorously unit tested by the UnitTest library, and the Datastructures unit tests are automatically included in any system unit test unless specifically removed. The Datastructures UnitTests are particularly important because the Datastructures library serves as a base for memory management and data organization. These tests fall broadly into two categories: deterministic and random.

Deterministic tests preform the exact same test every iteration. Deterministic tests are used to ensure that specific functions and operators are returning expected data. Deterministic tests don't merely identify the existence of an error, but usually identify the precise nature of the error as well.

Random tests use a random number generator to preform a unique test with every iteration. This allows unit tests to, over time, catch edge cases with complex data structures. In contrast to deterministic tests, random testing will usually not identify the precise nature of the error.

Note that as a general rule, the implementation of tests is not documented. The location of test suites is documented, through both .h and .cpp files, but the classes and functions which make up these tests are not included.

Chapter 14

File Index

14.1 File List

Here is a list of all files with brief descriptions:

DatastructuresTest.cpp	
Datastructures library test implementation	195
DatastructuresTest.h	
Datastructures library test	195
defaultTestInit.cpp	
Default UnitTest initializer function	??
masterTestHolder.cpp	
Library tests, masterTestHolder singleton implementations	196
masterTestHolder.h	
Library tests, masterTestHolder singleton	196
singleTest.cpp	
Single test class implementation	197
singleTest.h	
Single test class	197
TestSuite.cpp	
Single test class	198
TestSuite.h	
Single test class	198
UnitTest.cpp	
Unit Test logging and global functions	199
UnitTest.h	
Unit Test header file	199
UnitTestExceptions.h	
Common exceptions thrown by unit tests	200
UnitTestLog.h	
.	200
UnitTestMain.cpp	
UnitTest entry point	??

Chapter 15

File Documentation

15.1 DatastructuresTest.h File Reference

Datastructures library test.

15.1.1 Detailed Description

Datastructures library test.

Author

Jonathan Bedard

Date

2/4/2016

Bug No known bugs.

Contains the declaration of the Datastructures library test. Note that this library test is automatically added to all Unit Test executables.

15.2 DatastructuresTest.cpp File Reference

Datastructures library test implementation.

15.2.1 Detailed Description

Datastructures library test implementation.

Author

Jonathan Bedard

Date

4/18/2016

Bug No known bugs.

Implements the Datastructures library test. These tests are designed to guarantee the functionality of each of the elements in the Datastructures library.

15.3 masterTestHolder.h File Reference

Library tests, masterTestHolder singleton.

Classes

- class **test::libraryTests**
Library test group.
- class **test::masterTestHolder**
Unit Test singleton.

Namespaces

- **test**

15.3.1 Detailed Description

Library tests, masterTestHolder singleton.

Jonathan Bedard

Date

4/11/2016

Bug No known bugs.

This file contains declarations for the library test base class and **test::masterTestHolder** (p. 215) singleton class. This file represents the top level of the Unit Test driver classes.

15.4 masterTestHolder.cpp File Reference

Library tests, masterTestHolder singleton implementations.

15.4.1 Detailed Description

Library tests, masterTestHolder singleton implementations.

Jonathan Bedard

Date

4/11/2016

Bug No known bugs.

This file contains implementations for the library test base class and **test::masterTestHolder** (p. 215) singleton class. Consult **masterTestHolder.h** (p. 196) for details.

15.5 singleTest.h File Reference

Single test class.

Classes

- class **test::singleTest**
Single unit test class.
- class **test::singleFunctionTest**
Single unit test from function.

Namespaces

- **test**

Typedefs

- typedef void(* **test::testFunction**) ()
Typedef for single test function.

15.5.1 Detailed Description

Single test class.

Jonathan Bedard

Date

2/6/2016

Bug No known bugs.

This file contains declarations for a single unit test. Unit tests can be defined as separate class or a simple test function.

15.6 singleTest.cpp File Reference

Single test class implementation.

15.6.1 Detailed Description

Single test class implementation.

Jonathan Bedard

Date

2/6/2016

Bug No known bugs.

This file contains implementation for a single unit test. Consult `singeTest.h` for details.

15.7 TestSuite.h File Reference

Single test class.

Classes

- class **test::testSuite**

Namespaces

- **test**

15.7.1 Detailed Description

Single test class.

Jonathan Bedard

Date

4/11/2016

Bug No known bugs.

This file contains declarations for a test suite. Test suites contain lists of unit tests.

15.8 TestSuite.cpp File Reference

Single test class.

15.8.1 Detailed Description

Single test class.

Jonathan Bedard

Date

2/12/2016

Bug No known bugs.

This file contains declarations for a test suite. Consult **testSuite.h** (p. 198) for details.

15.9 UnitTest.h File Reference

Unit Test header file.

Namespaces

- **test**

Functions

- void **test::startTests** ()
Print out header for Unit Tests.
- void **test::endTestsError** (os::smart_ptr< std::exception > except)
End tests in error.
- void **test::endTestsSuccess** ()
End tests successfully.
- void **test::testInit** (int argc=0, char **argv=NULL)
Test initialization.

15.9.1 Detailed Description

Unit Test header file.

Author

Jonathan Bedard

Date

4/2/2016

Bug No known bugs.

Packages all headers required for the UnitTest library and declares a number of global test functions used for initializing and ending a Unit Test battery.

15.10 UnitTest.cpp File Reference

Unit Test logging and global functions.

15.10.1 Detailed Description

Unit Test logging and global functions.

Author

Jonathan Bedard

Date

2/4/2016

Bug No known bugs.

Implements logging in the test namespace. Implements a number of global test functions used for initializing and ending a Unit Test battery.

15.11 UnitTestLog.h File Reference

Namespaces

- **test**

Functions

- `std::ostream & test::testout_func ()`
Standard out object for test namespace.
- `std::ostream & test::testerr_func ()`
Standard error object for test namespace.

Variables

- `os::smart_ptr< std::ostream > test::testout_ptr`
Standard out pointer for test namespace.
- `os::smart_ptr< std::ostream > test::testerr_ptr`
Standard error pointer for test namespace.

15.12 UnitTestExceptions.h File Reference

Common exceptions thrown by unit tests.

Classes

- class **test::generalTestException**
Base class for test exceptions.
- class **test::unknownException**
Unknown exception class.
- class **test::nullFunctionException**
NULL function exception class.

Namespaces

- **test**

15.12.1 Detailed Description

Common exceptions thrown by unit tests.

Jonathan Bedard

Date

2/19/2016

Bug No known bugs.

This file contains a number of common test exceptions used by unit tests. All of these classes extend `std::exception`.

Chapter 16

Class Index

16.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

test::generalTestException	
Base class for test exceptions	206
test::libraryTests	
Library test group	208
test::masterTestHolder	
Unit Test singleton	215
test::nullFunctionException	
NULL function exception class	218
test::singleFunctionTest	
Single unit test from function	219
test::singleTest	
Single unit test class	220
test::testSuite	223
test::unknownException	
Unknown exception class	229

Chapter 17

Namespace Documentation

17.1 test Namespace Reference

Classes

- class **generalTestException**
Base class for test exceptions.
- class **libraryTests**
Library test group.
- class **masterTestHolder**
Unit Test singleton.
- class **nullFunctionException**
NULL function exception class.
- class **singleFunctionTest**
Single unit test from function.
- class **singleTest**
Single unit test class.
- class **testSuite**
- class **unknownException**
Unknown exception class.

Typedefs

- typedef void(* **testFunction**) ()
Typedef for single test function.

Functions

- void **startTests** ()
Print out header for Unit Tests.
- void **endTestsError** (os::smart_ptr< std::exception > except)
End tests in error.

- void **endTestsSuccess** ()
End tests successfully.
- void **testInit** (int argc=0, char **argv=NULL)
Test initialization.
- std::ostream & **testout_func** ()
Standard out object for test namespace.
- std::ostream & **testerr_func** ()
Standard error object for test namespace.

Variables

- os::smart_ptr< std::ostream > **testout_ptr**
Standard out pointer for test namespace.
- os::smart_ptr< std::ostream > **testerr_ptr**
Standard error pointer for test namespace.

17.1.1 Typedef Documentation

typedef void(* test::testFunction) ()

Typedef for single test function.

This typedef defines what a single test function looks like. For simplicity, a single unit test can be defined by a function of this type instead of inheriting from **test::singleTest** (p. 220).

Returns

void

17.1.2 Function Documentation

void test::endTestsError (os::smart_ptr< std::exception > except)

End tests in error.

Prints out a global division block line of '=' characters, then the information provided in the exception passed to the function then another global division block

Parameters

in	except	Exception which caused the error
----	--------	----------------------------------

Returns

void

void test::endTestsSuccess ()

End tests successfully.

Prints out a global division block line of '=' characters, then the test results data provided by the **test::masterTestHolder** (p. 215) then another global division block

Returns

void

void test::startTests ()

Print out header for Unit Tests.

Prints out a global division block line of '=' characters, then 'Unit Test Battery' and then another global division block.

Returns

void

std::ostream& test::testerr_func ()

Standard error object for test namespace.

#define statements allow the user to call this function with "test::testerr." Logging is achieved by using "test::testerr" as one would use "std::cerr."

void test::testInit (int argc = 0, char ** argv = NULL)

Test initialization.

This function is re-implemented by each executable which uses the UnitTest library. This function is used to bind all of the library tests, except the Datastructures library test.

Returns

void

std::ostream& test::testout_func ()

Standard out object for test namespace.

#define statements allow the user to call this function with "test::testout." Logging is achieved by using "test::testout" as one would use "std::cout."

17.1.3 Variable Documentation

os::smart_ptr<std::ostream> test::testerr_ptr

Standard error pointer for test namespace.

This std::ostream is used as standard error for the test namespace. This pointer can be swapped out to programmatically redirect standard error for the test namespace.

os::smart_ptr<std::ostream> test::testout_ptr

Standard out pointer for test namespace.

This std::ostream is used as standard out for the test namespace. This pointer can be swapped out to programmatically redirect standard out for the test namespace.


Chapter 18

Class Documentation

18.1 test::generalTestException Class Reference

Base class for test exceptions.

Inheritance diagram for test::generalTestException:

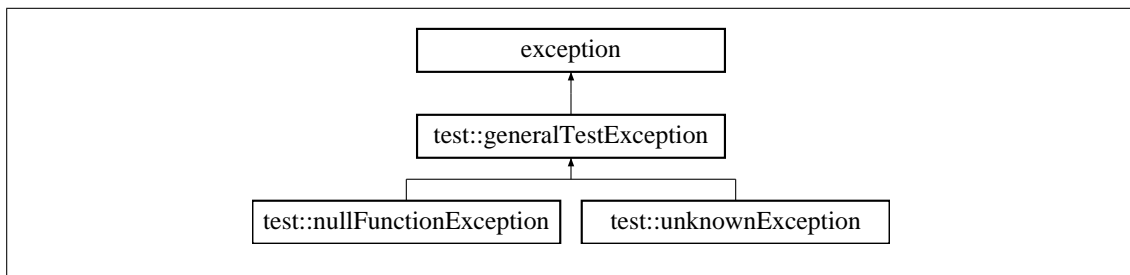

Public Member Functions

- **generalTestException** (std::string err, std::string loc)
Construct exception with error and location.
- virtual ~**generalTestException** () throw ()
Virtual destructor.
- virtual const char * **what** () const throw ()
std::exception overload
- const std::string & **getLocation** () const
Location description.
- const std::string & **getString** () const
Error description.

Private Attributes

- std::string **location**
The location where the error came from.

- `std::string _error`
A description of the error.
- `std::string total_error`
Combination of the error and location.

18.1.1 Detailed Description

Base class for test exceptions.

This class defines an exception which has a location. Because this class holds multiple `std::string` objects, the error description can be dynamically set.

18.1.2 Constructor & Destructor Documentation

`test::generalTestException::generalTestException (std::string err, std::string loc) [inline]`

Construct exception with error and location.

Constructs the exception with an error string and a location string. Also builds the **`test::generalTestException::total_error`** (p. 208) string for use by the "what()" function.

Parameters

in	<i>err</i>	Error string
in	<i>loc</i>	Location string

`virtual test::generalTestException::~~generalTestException () throw) [inline], [virtual]`

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

18.1.3 Member Function Documentation

`const std::string& test::generalTestException::getLocation () const [inline]`

Location description.

Returns

`test::generalTestException::location` (p. 208)

`const std::string& test::generalTestException::getString () const [inline]`

Error description.

Returns

`test::generalTestException::_error` (p. 208)

virtual const char* test::generalTestException::what () const throw) [inline], [virtual]

std::exception overload

Overloaded from std::exception. This function outputs the complete description, which contains both the error description and location description.

Returns

character pointer to the complete description

18.1.4 Member Data Documentation

std::string test::generalTestException::_error [private]

A description of the error.

std::string test::generalTestException::location [private]

The location where the error came from.

std::string test::generalTestException::total_error [private]

Combination of the error and location.

This string is constructed in the constructor so that "what()" can refer to a location in memory. This std::string is a combination of **test::generalTestException::_error** (p. 208) and **test::generalTestException::location** (p. 208).

18.2 test::libraryTests Class Reference

Library test group.

Public Member Functions

- **libraryTests** (std::string ln)
Library test constructor.
- virtual **~libraryTests** ()
Virtual destructor.
- void **runTests** () throw (os::smart_ptr<std::exception>)
Runs all of the test suites.
- virtual void **onSetup** ()
Runs on shutdown of the group.
- virtual void **onTeardown** ()
Runs on teardown of the group.
- void **logBegin** ()
Logs the beginning of a library test.
- bool **logEnd** (os::smart_ptr< std::exception > except=NULL)
Logs the end of a library test.

- int **getNumSuites** () const
Number of suites in the set.
- int **getNumSuccess** () const
Number of suites successfully completed.
- int **getNumRun** () const
Number of suites attempted to run.
- void **pushSuite** (os::smart_ptr< **testSuite** > suite)
Add suite to the set.
- void **removeSuite** (os::smart_ptr< **testSuite** > suite)
Remove suite from the set.
- bool **operator==** (const **libraryTests** <) const
Equality comparison.
- bool **operator!=** (const **libraryTests** <) const
Not-equals comparison.
- bool **operator>** (const **libraryTests** <) const
Greater-than comparison.
- bool **operator<** (const **libraryTests** <) const
Less-than comparison.
- bool **operator>=** (const **libraryTests** <) const
Greater-than or equal to comparison.
- bool **operator<=** (const **libraryTests** <) const
Less-than or equal to comparison.

Private Attributes

- std::string **libName**
Name of library to be tested.
- os::smartSet< **testSuite** > **suiteList**
Set of test suites.
- int **suitesCompleted**
Number of suites successfully completed.
- int **suitesRun**
Number of suites attempted to run.

18.2.1 Detailed Description

Library test group.

This class contains a set of test suites which are designed to a specific library. Each library must define it's own version of this class in-order to be tested.

18.2.2 Constructor & Destructor Documentation

`test::libraryTests::libraryTests (std::string ln)`

Library test constructor.

This constructor initializes the number of suites completed and number of suites run to 0, along with sets the name of library being tested.

Parameters

in	<i>In</i>	Name of library to be tested
-----------	-----------	------------------------------

```
virtual test::libraryTests::~~libraryTests ( ) [inline], [virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

18.2.3 Member Function Documentation

```
int test::libraryTests::getNumRun ( ) const [inline]
```

Number of suites attempted to run.

Returns

test::libraryTests::suitesRun (p. 215)

```
int test::libraryTests::getNumSuccess ( ) const [inline]
```

Number of suites successfully completed.

Returns

test::libraryTests::suitesCompleted (p. 215)

```
int test::libraryTests::getNumSuites ( ) const [inline]
```

Number of suites in the set.

Returns

test::libraryTests::suiteList.size()

```
void test::libraryTests::logBegin ( )
```

Logs the beginning of a library test.

Outputs the name of the library to be tested along with a line break made of '+' characters.

Returns

void

```
bool test::libraryTests::logEnd ( os::smart_ptr< std::exception > except = NULL )
```

Logs the end of a library test.

Outputs the number of suites run and how many of these suites were both successful and how many of these suites failed.

Returns

True if all suites successful, else false

virtual void test::libraryTests::onSetup () [inline], [virtual]

Runs on shutdown of the group.

Each library group calls this function as it starts up, allowing groups to define actions performed to setup the group.

Returns

void

virtual void test::libraryTests::onTeardown () [inline], [virtual]

Runs on teardown of the group.

Guaranteed to run even if the group itself fails. A custom tear-down for the group can re-implement this class.

Returns

void

bool test::libraryTests::operator!= (const **libraryTests** & lt) const [inline]

Not-equals comparison.

Compares two test::libraryTest based on the library name. If the two names are not-equal, the library tests are not-equal.

Parameters

in	lt	Reference to test::libraryTest to be compared against
----	----	---

Returns

this->libName!=lt.libName

bool test::libraryTests::operator< (const **libraryTests** & lt) const [inline]

Less-than comparison.

Compares two test::libraryTest based on the library name. If the name of this object is less than the name of the reference object, return true.

Parameters

in	lt	Reference to test::libraryTest to be compared against
----	----	---

Returns

this->libName<lt.libName

bool test::libraryTests::operator<= (const **libraryTests** & lt) const [inline]

Less-than or equal to comparison.

Compares two `test::libraryTest` based on the library name. If the name of this object is less than or equal to the name of the reference object, return true.

Parameters

<code>in</code>	<code>lt</code>	Reference to <code>test::libraryTest</code> to be compared against
-----------------	-----------------	--

Returns

`this->libName<=lt.libName`

```
bool test::libraryTests::operator==( const libraryTests & lt ) const [inline]
```

Equality comparison.

Compares two `test::libraryTest` based on the library name. If the two names are equal, the library tests are equal.

Parameters

<code>in</code>	<code>lt</code>	Reference to <code>test::libraryTest</code> to be compared against
-----------------	-----------------	--

Returns

`this->libName==lt.libName`

```
bool test::libraryTests::operator> ( const libraryTests & lt ) const [inline]
```

Greater-than comparison.

Compares two `test::libraryTest` based on the library name. If the name of this object is greater than the name of the reference object, return true.

Parameters

<code>in</code>	<code>lt</code>	Reference to <code>test::libraryTest</code> to be compared against
-----------------	-----------------	--

Returns

`this->libName>lt.libName`

```
bool test::libraryTests::operator>= ( const libraryTests & lt ) const [inline]
```

Greater-than or equal to comparison.

Compares two `test::libraryTest` based on the library name. If the name of this object is greater than or equal to the name of the reference object, return true.

Parameters

<code>in</code>	<code>lt</code>	Reference to <code>test::libraryTest</code> to be compared against
-----------------	-----------------	--

Returns

`this->libName>=lt.libName`

`void test::libraryTests::pushSuite (os::smart_ptr< testSuite > suite) [inline]`

Add suite to the set.

Adds a **test::testSuite** (p. 223) to the set of suites to be tested.

Parameters

<code>in</code>	<code>suite</code>	Test suite to be added to set
-----------------	--------------------	-------------------------------

Returns

`void`

`void test::libraryTests::removeSuite (os::smart_ptr< testSuite > suite) [inline]`

Remove suite from the set.

Removes a **test::testSuite** (p. 223) from the set of suites to be tested.

Parameters

<code>in</code>	<code>suite</code>	Test suite to be removed from the set
-----------------	--------------------	---------------------------------------

Returns

`void`

`void test::libraryTests::runTests () throw os::smart_ptr< std::exception >)`

Runs all of the test suites.

Runs all test suites bound to this class. Each suite should manage its own errors, but it is possible that this function will throw an error of type `os::smart_ptr<std::exception>`.

Returns

`void`

18.2.4 Member Data Documentation

`std::string test::libraryTests::libName [private]`

Name of library to be tested.

`os::smartSet<testSuite> test::libraryTests::suiteList [private]`

Set of test suites.

int test::libraryTests::suitesCompleted [private]

Number of suites successfully completed.

int test::libraryTests::suitesRun [private]

Number of suites attempted to run.

18.3 test::masterTestHolder Class Reference

Unit Test singleton.

Public Member Functions

- virtual **~masterTestHolder** ()
Virtual destructor.
- bool **runTests** () throw (os::smart_ptr<std::exception>)
Runs all of the library tests.
- int **getNumLibs** () const
Number of libraries in the set.
- int **getNumSuccess** () const
Number of libraries successfully completed.
- int **getNumRun** () const
Number of libraries attempted to run.
- void **pushLibrary** (os::smart_ptr< **libraryTests** > lib)
Add library to the set.
- void **removeLibrary** (os::smart_ptr< **libraryTests** > lib)
Remove library from the set.

Static Public Member Functions

- static os::smart_ptr< **masterTestHolder** > **singleton** ()
Singleton access.

Private Member Functions

- **masterTestHolder** ()
Private constructor.

Private Attributes

- `os::smartSet< libraryTests > libraryList`
Set of library tests.
- `int libsCompleted`
Number of libraries successfully completed.
- `int libsRun`
Number of libraries attempted to run.

18.3.1 Detailed Description

Unit Test singleton.

This class contains a set of library tests. Every library test must add itself to this class in-order to be tested. The `test::masterTestHolder::runTests()` (p. 217) function runs all of the library tests.

18.3.2 Constructor & Destructor Documentation

```
test::masterTestHolder::masterTestHolder ( ) [private]
```

Private constructor.

The `test::masterTestHolder` (p.215) class is a singleton class. This constructor initializes the number of libraries completed and number of libraries run to 0.

```
virtual test::masterTestHolder::~~masterTestHolder ( ) [inline], [virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

18.3.3 Member Function Documentation

```
int test::masterTestHolder::getNumLibs ( ) const [inline]
```

Number of libraries in the set.

Returns

```
test::masterTestHolder::libraryList.size()
```

```
int test::masterTestHolder::getNumRun ( ) const [inline]
```

Number of libraries attempted to run.

Returns

```
test::masterTestHolder::libsRun (p. 218)
```

int test::masterTestHolder::getNumSuccess () const [inline]

Number of libraries successfully completed.

Returns

test::masterTestHolder::libsCompleted (p. 218)

void test::masterTestHolder::pushLibrary (os::smart_ptr< **libraryTests** > lib) [inline]

Add library to the set.

Adds a **test::libraryTests** (p. 208) to the set of library tests to be tested.

Parameters

in	<i>lib</i>	Library test to be added to set
----	------------	---------------------------------

Returns

void

void test::masterTestHolder::removeLibrary (os::smart_ptr< **libraryTests** > lib) [inline]

Remove library from the set.

Removes a **test::libraryTests** (p. 208) from the set of library tests to be tested.

Parameters

in	<i>lib</i>	Library test to be removed from the set
----	------------	---

Returns

void

bool test::masterTestHolder::runTests () throw os::smart_ptr< std::exception >)

Runs all of the library tests.

Runs all library tests bound to this class. Each library should manage its own errors, but it is possible that this function will throw an error of type os::smart_ptr<std::exception>.

Returns

True if all the tests were successful, else, false

static os::smart_ptr<**masterTestHolder**> test::masterTestHolder::singleton () [static]

Singleton access.

This function constructs the single reference to the **test::masterTestHolder** (p.215) class if needed. Then, it returns a pointer to this single reference.

Returns

Singleton reference to **test::masterTestHolder** (p. 215)

18.3.4 Member Data Documentation

os::smartSet<**libraryTests**> test::masterTestHolder::libraryList [private]

Set of library tests.

int test::masterTestHolder::libsCompleted [private]

Number of libraries successfully completed.


int test::masterTestHolder::libsRun [private]

Number of libraries attempted to run.

18.4 test::nullFunctionException Class Reference

NULL function exception class.

Inheritance diagram for test::nullFunctionException:

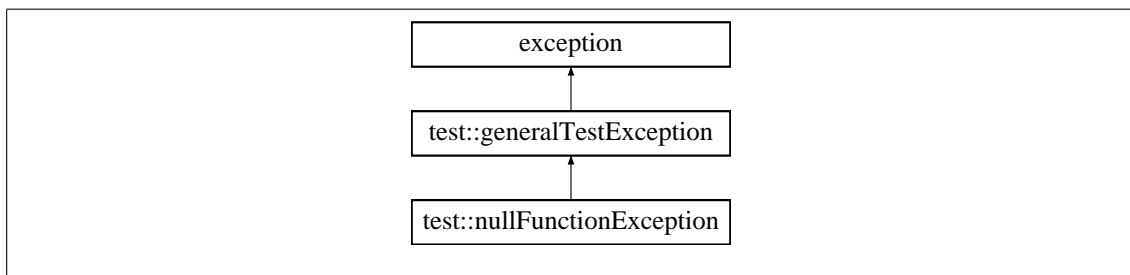

Public Member Functions

- **nullFunctionException** (std::string loc)
Construct exception with location.
- virtual ~**nullFunctionException** () throw ()
Virtual destructor.

18.4.1 Detailed Description

NULL function exception class.

This class defines the common exception case where a NULL function pointer is received.

18.4.2 Constructor & Destructor Documentation

`test::nullFunctionException::nullFunctionException (std::string loc) [inline]`

Construct exception with location.

Constructs a **test::generalTestException** (p. 206) with the provided location and the static string for a NULL function exception.

Parameters

in	loc	Location string
----	-----	-----------------

`virtual test::nullFunctionException::~~nullFunctionException () throw) [inline], [virtual]`


Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

18.5 test::singleFunctionTest Class Reference

Single unit test from function.

Inheritance diagram for test::singleFunctionTest:

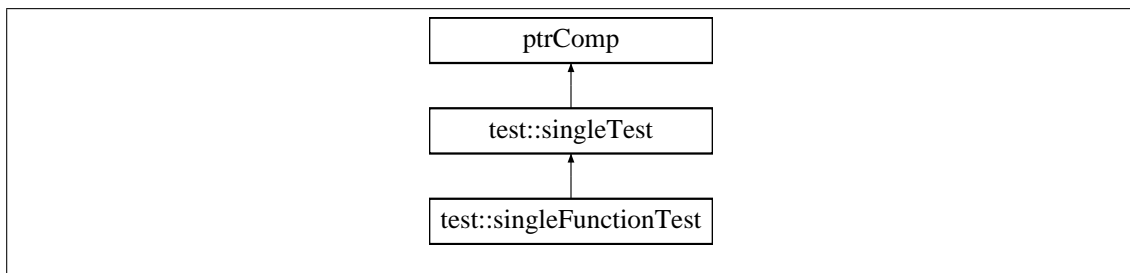

Public Member Functions

- **singleFunctionTest** (std::string tn, **testFunction** f)
Single unit test constructor.
- virtual **~singleFunctionTest** ()
Virtual destructor.
- void **test** () throw (os::smart_ptr<std::exception>)
Call unit test function.

Private Attributes

- **testFunction func**
Reference to unit test function.

18.5.1 Detailed Description

Single unit test from function.

This class allows a **test::singleTest** (p. 220) to be defined by a single test function.

18.5.2 Constructor & Destructor Documentation

test::singleFunctionTest::singleFunctionTest (std::string tn, **testFunction** f)

Single unit test constructor.

Parameters

in	<i>tn</i>	Name of unit test
in	<i>f</i>	Function which defines test

virtual test::singleFunctionTest::~~singleFunctionTest () [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

18.5.3 Member Function Documentation

void test::singleFunctionTest::test () throw os::smart_ptr< std::exception > [virtual]

Call unit test function.

Calls the function bound to this class in the constructor pointed to by **test::singleFunctionTest::func** (p. 220). If the function pointed to by the function pointer throws an exception, this function will throw the same exception.

Returns

void

Reimplemented from **test::singleTest** (p. 223).

18.5.4 Member Data Documentation


testFunction test::singleFunctionTest::func [private]

Reference to unit test function.

18.6 test::singleTest Class Reference

Single unit test class.

Inheritance diagram for test::singleTest:

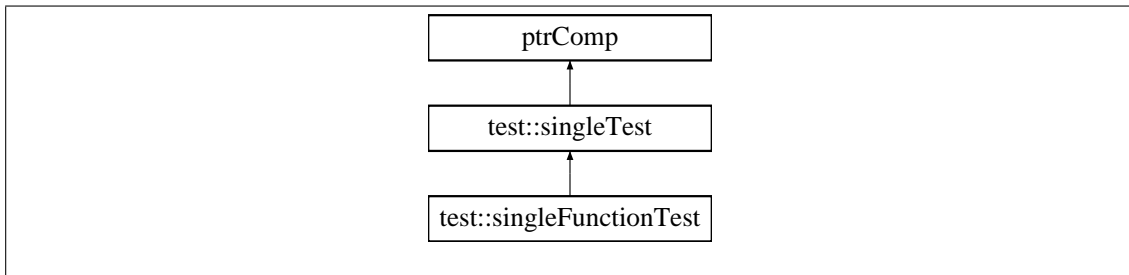

Public Member Functions

- **singleTest** (std::string tn)
Single unit test constructor.
- virtual ~**singleTest** ()
Virtual destructor.
- virtual void **setupTest** () throw (os::smart_ptr<std::exception>)
Preforms any test set-up.
- virtual void **test** () throw (os::smart_ptr<std::exception>)
Preforms core unit-test.
- virtual void **teardownTest** () throw (os::smart_ptr<std::exception>)
Preforms any test tear-down.
- void **logBegin** ()
Prints out the name of the test.
- bool **logEnd** (os::smart_ptr< std::exception > except=NULL)
Logs errors for test.

Private Attributes

- std::string **testName**
Name of unit test.

18.6.1 Detailed Description

Single unit test class.

This class acts as the base class for all unit tests. It inherits from the os::ptrComp class to allow it to be inserted into abstract data-structures.

18.6.2 Constructor & Destructor Documentation

test::singleTest::singleTest (std::string tn)

Single unit test constructor.

Parameters

in	tn	Name of unit test
----	----	-------------------

virtual test::singleTest::~~singleTest () [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

18.6.3 Member Function Documentation

void test::singleTest::logBegin ()

Prints out the name of the test.

Returns

void

bool test::singleTest::logEnd (os::smart_ptr< std::exception > except = NULL)

Logs errors for test.

If the passed exception is NULL, no logging is performed. Otherwise, the "what()" function of the exception is printed. This function return true if NULL is passed as the exception.

Parameters

in	<i>except</i>	Exception to be printed, NULL by default
----	---------------	--

Returns

True if except is NULL

virtual void test::singleTest::setupTest () throw os::smart_ptr< std::exception > [inline], [virtual]

Preforms any test set-up.

This function is designed to preform any set-up a test requires. This is especially useful if a class of tests require the same set-up routine. This function assumes that the **test::testSuite** (p. 223) will catch exceptions in this function if they are thrown.

Returns

void

virtual void test::singleTest::teardownTest () throw os::smart_ptr< std::exception > [inline], [virtual]

Preforms any test tear-down.

This function is designed to preform any tear-down a test requires. This is especially useful if a class of tests require the same tear-down routine. This function assumes that the **test::testSuite** (p. 223) will catch exceptions in this function if they are thrown.

Returns

void

virtual void test::singleTest::test () throw os::smart_ptr< std::exception > [virtual]

Performs core unit-test.

This function is designed to perform the actual unit test. This function assumes that the **test::testSuite** (p. 223) will catch exceptions in this function if they are thrown.

Returns

void

Reimplemented in **test::singleFunctionTest** (p. 220).

18.6.4 Member Data Documentation

std::string test::singleTest::testName [private]

Name of unit test.

18.7 test::testSuite Class Reference

Public Member Functions

- **testSuite** (std::string sn)
Test suite constructor.
- virtual **~testSuite** ()
Virtual destructor.
- void **runTests** () throw (os::smart_ptr<std::exception>)
Runs all of the tests.
- virtual void **onSetup** ()
Runs on shutdown.
- virtual void **onTeardown** ()
Runs on teardown of the suite.
- void **logBegin** ()
Logs the beginning of a suite test.
- bool **logEnd** (os::smart_ptr< std::exception > except=NULL)
Logs the end of a suite test.
- int **getNumTests** () const
Number of tests in the set.
- int **getNumSuccess** () const
Number of tests successfully completed.
- int **getNumRun** () const
Number of tests attempted to run.
- void **pushTest** (os::smart_ptr< **singleTest** > tst)

- *Add test to the set.*
- void **removeTest** (os::smart_ptr< **singleTest** > tst)
Remove test to the set.
- virtual void **pushTest** (std::string str, **testFunction** tst)
Add test to the set.
- bool **operator==** (const **testSuite** <) const
Equality comparison.
- bool **operator!=** (const **testSuite** <) const
Not-equals comparison.
- bool **operator>** (const **testSuite** <) const
Greater-than comparison.
- bool **operator<** (const **testSuite** <) const
Less-than comparison.
- bool **operator>=** (const **testSuite** <) const
Greater-than or equal to comparison.
- bool **operator<=** (const **testSuite** <) const
Less-than or equal to comparison.

Private Attributes

- std::string **suiteName**
Name of test suite.
- os::smartSet< **singleTest** > **testList**
Set of tests.
- int **testsCompleted**
Number of tests successfully completed.
- int **testsRun**
Number of tests attempted to run.

18.7.1 Constructor & Destructor Documentation

test::testSuite::testSuite (std::string sn)

Test suite constructor.

This constructor initializes the number of tests completed and number of tests run to 0, along with sets the name of suite being tested.

Parameters

in	sn	Name of suite to be tested
----	----	----------------------------

virtual test::testSuite::~~testSuite () [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

18.7.2 Member Function Documentation

```
int test::testSuite::getNumRun ( ) const [inline]
```

Number of tests attempted to run.

Returns

test::testSuite::testsRun (p. 229)

```
int test::testSuite::getNumSuccess ( ) const [inline]
```

Number of tests successfully completed.

Returns

test::testSuite::testsCompleted (p. 229)

```
int test::testSuite::getNumTests ( ) const [inline]
```

Number of tests in the set.

Returns

test::testSuite::testList.size()

```
void test::testSuite::logBegin ( )
```

Logs the beginning of a suite test.

Outputs the name of the suite to be tested along with a line break made of '-' characters.

Returns

void

```
bool test::testSuite::logEnd ( os::smart_ptr< std::exception > except = NULL )
```

Logs the end of a suite test.

Outputs the number of tests run and how many of these tests were both successful and how many of these tests failed.

Returns

True if all tests successful, else false

```
virtual void test::testSuite::onSetup ( ) [inline], [virtual]
```

Runs on shutdown.

Each suite calls this function as it starts up, allowing suites to define actions performed to setup the suite.

Returns

void

```
virtual void test::testSuite::onTeardown ( ) [inline], [virtual]
```

Runs on teardown of the suite.

Guaranteed to run even if the suite itself fails. A custom tear-down for the suite can re-implement this class.

Returns

void

```
bool test::testSuite::operator!= ( const testSuite & lt ) const [inline]
```

Not-equals comparison.

Compares two **test::testSuite** (p. 223) based on the library name. If the two names are not-equal, the suites are not-equal.

Parameters

in	lt	Reference to test::testSuite (p. 223) to be compared against
----	----	---

Returns

this->suiteName!=lt.suiteName

```
bool test::testSuite::operator< ( const testSuite & lt ) const [inline]
```

Less-than comparison.

Compares two **test::testSuite** (p. 223) based on the library name. If the name of this object is less than the name of the reference object, return true.

Parameters

in	lt	Reference to test::testSuite (p. 223) to be compared against
----	----	---

Returns

this->suiteName<lt.suiteName

```
bool test::testSuite::operator<= ( const testSuite & lt ) const [inline]
```

Less-than or equal to comparison.

Compares two **test::testSuite** (p. 223) based on the library name. If the name of this object is less than or equal to the name of the reference object, return true.

Parameters

in	lt	Reference to test::testSuite (p. 223) to be compared against
----	----	---

Returns

`this->suiteName<=lt.suiteName`

`bool test::testSuite::operator== (const testSuite & lt) const [inline]`

Equality comparison.

Compares two **test::testSuite** (p. 223) based on the suite name. If the two names are equal, the suites are equal.

Parameters

<code>in</code>	<code>lt</code>	Reference to test::testSuite (p. 223) to be compared against
-----------------	-----------------	---

Returns

`this->suiteName==lt.suiteName`

`bool test::testSuite::operator> (const testSuite & lt) const [inline]`

Greater-than comparison.

Compares two **test::testSuite** (p. 223) based on the library name. If the name of this object is greater than the name of the reference object, return true.

Parameters

<code>in</code>	<code>lt</code>	Reference to test::testSuite (p. 223) to be compared against
-----------------	-----------------	---

Returns

`this->suiteName>lt.suiteName`

`bool test::testSuite::operator>= (const testSuite & lt) const [inline]`

Greater-than or equal to comparison.

Compares two **test::testSuite** (p. 223) based on the library name. If the name of this object is greater than or equal to the name of the reference object, return true.

Parameters

<code>in</code>	<code>lt</code>	Reference to test::testSuite (p. 223) to be compared against
-----------------	-----------------	---

Returns

`this->suiteName>=lt.suiteName`

`void test::testSuite::pushTest (os::smart_ptr< singleTest > tst) [inline]`

Add test to the set.

Adds a **test::singleTest** (p. 220) to the set of tests to be tested.

Parameters

in	<i>tst</i>	Test to be added to set
----	------------	-------------------------

Returns

void

```
virtual void test::testSuite::pushTest ( std::string str, testFunction tst ) [inline], [virtual]
```

Add test to the set.

Adds a **test::testFunction** (p. 204) to the set of tests to be tested. Constructs a **test::singleTest** (p. 220) from a function and a test name

Parameters

in	<i>str</i>	Test name
in	<i>tst</i>	Function which defines test

Returns

void

```
void test::testSuite::removeTest ( os::smart_ptr< singleTest > tst ) [inline]
```

Remove test to the set.

Removes a **test::singleTest** (p. 220) from the set of tests to be tested.

Parameters

in	<i>tst</i>	Test to be removed from the set
----	------------	---------------------------------

Returns

void

```
void test::testSuite::runTests ( ) throw os::smart_ptr< std::exception >)
```

Runs all of the tests.

Runs all tests bound to this class. This function catches exceptions thrown by **test::singleTest** (p. 220) and logs the results.

Returns

void

18.7.3 Member Data Documentation

`std::string test::testSuite::suiteName [private]`

Name of test suite.

`os::smartSet<singleTest> test::testSuite::testList [private]`

Set of tests.

`int test::testSuite::testsCompleted [private]`

Number of tests successfully completed.


`int test::testSuite::testsRun [private]`

Number of tests attempted to run.

18.8 test::unknownException Class Reference

Unknown exception class.

Inheritance diagram for test::unknownException:

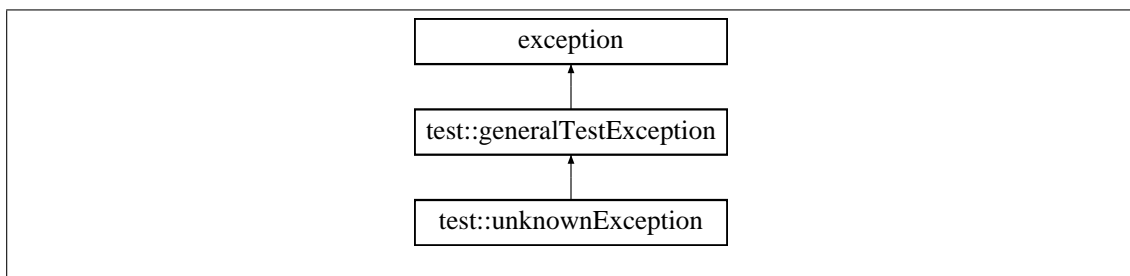

Public Member Functions

- **unknownException** (std::string loc)
Construct exception with location.
- virtual ~**unknownException** () throw ()
Virtual destructor.

18.8.1 Detailed Description

Unknown exception class.

This class defines the common exception case where the precise nature of the exception is unknown.

18.8.2 Constructor & Destructor Documentation

`test::unknownException::unknownException (std::string loc) [inline]`

Construct exception with location.

Constructs a **test::generalTestException** (p. 206) with the provided location and the static string for an unknown exception.

Parameters

<code>in</code>	<code>loc</code>	Location string
-----------------	------------------	-----------------

`virtual test::unknownException::~~unknownException () throw () [inline], [virtual]`

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

Part IV

osMechanics Library

Chapter 19

Introduction

The osMechanics library contains classes which are general tools for navigating file systems, thread management and logging. Some classes, particularly those dealing with threading, sockets and file access, differ from operating system to operating system. CMake should handle all operating system variances.

19.1 Namespace

osMechanics extends the os namespace. The os namespace is designed for tools, algorithms and data-structures used in programs of all types. Note that the Datastructures library also uses the os namespace.

Chapter 20

File Index

20.1 File List

Here is a list of all files with brief descriptions:

logger.cpp	
Logger implementation file	235
logger.h	
Logger header file	236
multiLock.cpp	
MultiLock implementation file	236
multiLock.h	
MultiLock header file	237
osFunctions.cpp	237
Unix/osFunctions.cpp	237
Windows/osFunctions.cpp	238
osFunctions.h	238
Unix/osFunctions.h	239
Windows/osFunctions.h	240
osMechanics.h	
OsMechanics header file	240
osMechanicsTest.cpp	
Test implimentaiton for osMechanics	241
osMechanicsTest.h	
OsMechanics tests	241
osThreads.cpp	
Threads implementation file	241
osThreads.h	
OsThreads header file	242
safeQueue.h	
Safe queue header file	243
savableClass.cpp	
Implementation of the generalized savable class	243
savableClass.h	
Defines a set of classes facilitating saving	244
Serial.h	245

Unix/Serial.h	245
Windows/Serial.h	245
serialThread.cpp	
SerialThread implementation file	245
serialThread.h	
Serial thread header file	245
socketFrame.cpp	
SocketFrame implementation file	246
socketFrame.h	
Socket frame header file	247
spinLock.cpp	247
Unix/spinLock.cpp	247
Windows/spinLock.cpp	247
spinLock.h	247
Unix/spinLock.h	248
Windows/spinLock.h	248
threadDistribution.cpp	
Thread distribution implementation file	248
threadDistribution.h	
Thread distribution header file	248
USBAccess.cpp	
USBAccess implementation file	249
USBAccess.h	
USBAccess header file	249
XMLParser.cpp	
XML parser implementation file	250
XMLParser.h	
XML Parser header file	250
XMLTest.cpp	
XML tests	251
XMLTest.h	
SML test header file	252

Chapter 21

File Documentation

21.1 logger.cpp File Reference

logger implementation file

Functions

- static void **loggerSavingThread** (void *ptr, smart_ptr< **threadHolder** > th)

Variables

- smart_ptr< **Log** > **_single_log**
- static bool **singleton_bool** = false

21.1.1 Detailed Description

logger implementation file

Jonathan Bedard

Date

4/23/2015

Bug No known bugs.

The implementation of our logging systems are in this file. The logger records various timing, operation, and debug information and places it in various files so that we can better analyze our own system's performance.

21.1.2 Function Documentation

static void loggerSavingThread (void * ptr, smart_ptr< **threadHolder** > th) [static]

21.1.3 Variable Documentation

smart_ptr<**Log**> _single_log


```
bool singleton_bool = false [static]
```

21.2 logger.h File Reference

logger header file

Classes

- class **os::logStatusHolder**
- class **os::logStatusListener**
- struct **os::logLine**
- class **os::LogStreamListener**
- class **os::LineLogger**
- class **os::LogSaver**
- class **os::LineSaver**
- class **os::LineSaverListener**
- class **os::Log**
- class **os::LogDirectedStream**

Namespaces

- **os**

Variables

- **logStatusHolder os::logStatus**
- **Log & os::logger** =*Log::singleton()

21.2.1 Detailed Description

logger header file

Jonathan Bedard

Date

4/23/2016

Bug No known bugs.

All of the headers in the Datastructures library are held in this file. When using the Datastructures library, it is expected that this header is included instead of the individual required headers.

21.3 multiLock.cpp File Reference

multiLock implementation file

21.3.1 Detailed Description

multiLock implementation file
Jonathan Bedard

Date

9/29/2015

Bug No known bugs.

This is the implementation of our multiLock. It is platform agnostic.

21.4 multiLock.h File Reference

multiLock header file

Classes

- class **os::multiLock**

os::multilock class definition Defines the os::multilock class. This class has 4 variables and 8 methods

Namespaces

- **os**

21.4.1 Detailed Description

multiLock header file
Jonathan Bedard

Date

1/30/2016

Bug No known bugs.

This is the multilock header we are using. It has reading and writing locks, allowing multiple users to read, but only one to write at any given time.

21.5 osFunctions.cpp File Reference

21.6 osFunctions.cpp File Reference

Functions

- static void **receiveThreadServerIPv4** (void *ptr, smart_ptr< **threadHolder** > th)
- static void **receiveThreadServerIPv6** (void *ptr, smart_ptr< **threadHolder** > th)

Variables

- static os::smart_ptr< **threadDistributor** > **ipthread** = NULL
- static std::string **local_path** = ""

21.6.1 Function Documentation

static void receiveThreadServerIPv4 (void * ptr, smart_ptr< **threadHolder** > th) [static]

static void receiveThreadServerIPv6 (void * ptr, smart_ptr< **threadHolder** > th) [static]

21.6.2 Variable Documentation

os::smart_ptr<**threadDistributor**> ipthread = NULL [static]

std::string local_path = "" [static]

21.7 osFunctions.cpp File Reference

21.8 osFunctions.h File Reference

Namespaces

- **os**

Functions

- uint16_t **os::to_comp_mode** (uint16_t i)
Changes bit order for compatibility Depending on the system at hand, bits may be in several different orders. This function swaps to compatibility mode.
- uint16_t **os::from_comp_mode** (uint16_t i)
Changes bit order for compatibility Depending on the system at hand, bits may be in several different orders. This function swaps from compatibility mode.
- uint32_t **os::to_comp_mode** (uint32_t i)
Changes bit order for compatibility Depending on the system at hand, bits may be in several different orders. This function swaps to compatibility mode.
- uint32_t **os::from_comp_mode** (uint32_t i)
Changes bit order for compatibility Depending on the system at hand, bits may be in several different orders. This function swaps from compatibility mode.
- uint64_t **os::to_comp_mode** (uint64_t i)
Changes bit order for compatibility Depending on the system at hand, bits may be in several different orders. This function swaps to compatibility mode.
- uint64_t **os::from_comp_mode** (uint64_t i)
Changes bit order for compatibility Depending on the system at hand, bits may be in several different orders. This function swaps from compatibility mode.
- uint64_t **os::getTimestamp** ()
Gets a timestamp Generates a time stamp from the time function.
- bool **os::testCreateFolder** (std::string n)

Test if a folder exists Checks if a given folder exists. If it does not exist, this function will create said folder.

- `std::string os::convertTimestamp (uint64_t stamp)`

Type conversion on timestamp Converts the timestamp from an integer into a string.

21.9 osFunctions.h File Reference

Classes

- class **os::IPAddress**

***os::IPAddress** (p. 265) class definition This is an IP Address class It has 2 variables and 10 methods*

- class **os::myIPAddress**

Holds a node's own IP address Every node needs it's own IP address. This class holds that value, as well as provide several functions for determining priorities.

- class **os::UDPPacket**
- class **os::UDPClient**
- struct **os::UDPAVLNode**
- class **os::UDPServer**

Namespaces

- **os**

Functions

- void **os::sleep** (int32_t x)

Sleep the thread for a certain amount of time This is a simple sleep function, it takes in a length of time to sleep and return nothing.

- void **os::startInternet** (bool multiThread=true)

Activates Internet Spawns an IP thread distributor, if one does not currently exist.

- void **os::closeInternet** ()

Deactivates Internet deletes the IP thread distributor and sets the thread pointer to null.

- `smart_ptr< threadDistributor > os::internetThreads ()`

Return IP thread distributor Gives the ipthread distributor to the caller.

- `int32_t os::cp_clock_gettime (int32_t X, struct timeval *tv)`

Gets time Returns the current time to the caller. This is designed to work across a range of platforms and format the time to a high precision.

- void **os::strcpy_s** (char *output, int32_t inlen, const char *input)

String copier Safely calls string copy.

- bool **os::is_directory** (std::string file)

Determines if a file is a directory Checks if a given file is a directory.

- bool **os::check_exists** (std::string name)

Checks if a given file exists Takes a file and checks if it exists. A directory is considered existing.

- `smart_ptr< std::string > os::list_files (std::string directory, uint32_t &len)`

Return contents of directory Creates an array of strings of all the names inside a given directory. This is not recursive.

- `std::string os::extract_name (std::string full_path)`
Extracts a given file Extracts a file or directory.
- `void os::delete_file (std::string path)`
Deletes a file Deletes the file or directory at the given path. This is a recursive delete.
- `void os::setLocalPath (int argc, char **argv)`
Sets local path Sets the local path given the received arguments.
- `std::string os::getLocalPath ()`
Returns local path.
- `static int32_t os::fopen_s (FILE **fp, const char *file_name, const char *typ)`
fopen_s for windows This is a file open function for windows so that we can more efficiently write multi platform code.

Variables

- `const uint32_t CLOCK_REALTIME =0`
- `const uint32_t CLOCK_MONOTONIC =1`
- `const uint32_t os::BUFLen =512`
- `const std::string os::DEFAULT_IP ="127.0.0.1"`
- `const uint32_t os::MY_MESSAGE_NOTIFICATION =1048`

21.9.1 Variable Documentation

`const uint32_t CLOCK_MONOTONIC =1`

`const uint32_t CLOCK_REALTIME =0`

21.10 osFunctions.h File Reference

21.11 osMechanics.h File Reference

osMechanics header file

21.11.1 Detailed Description

osMechanics header file

Jonathan Bedard

Date

2/24/2015

Bug No known bugs.

This file includes all of our headers, so that other libraries can easily include the osMechanics library with one include.

21.12 osMechanicsTest.cpp File Reference

Test implimentaiton for osMechanics.

21.12.1 Detailed Description

Test implimentaiton for osMechanics.

Author

Adrian Bedard

Date

4/12/2016

Bug No known bugs.

Binds all osMechanics test suites. These suites test the basic funcitonality of the osMechanics library. Projects which utilize osMechanics are suggested to bind the osMechanics library tests to their own test suite.

21.13 osMechanicsTest.h File Reference

osMechanics tests

21.13.1 Detailed Description

osMechanics tests

Jonathan Bedard

Date

4/11/2016

Bug No known bugs.

This is the test suite for the osMechanics library.

21.14 osThreads.cpp File Reference

threads implementation file

Functions

- void **temp_thread_call** (void *ptr_array, bool typ, std::string thread_info)
- void **wait_for_threads** ()

Variables

- static **spinLock** **globalThreadLock**
- static **threadTracker** * **static_ref** = NULL

21.14.1 Detailed Description

threads implementation file
Jonathan Bedard

Date

4/18/2016

Bug No known bugs.

This is the implementation of our multi threading system.

21.14.2 Function Documentation

void temp_thread_call (void * ptr_array, bool typ, std::string thread_info)
void wait_for_threads ()

21.14.3 Variable Documentation

spinLock globalThreadLock [static]
threadTracker* static_ref = NULL [static]

21.15 osThreads.h File Reference

osThreads header file

Classes

- class **os::threadHolder**
- class **os::threadTracker**

Monitors a range of threads This class holds a range of threadHolders. This includes both active and expired threads, ensuring the ability to operate on many threads in mass.

Namespaces

- **os**

Functions

- smart_ptr< std::thread > **os::spawnThread** (void(*func)(void *), void *ptr, std::string thread_info="")
- smart_ptr< std::thread > **os::spawnThread** (void(*func)(void *, smart_ptr< **threadHolder** >), void *ptr, std::string thread_info="")

21.15.1 Detailed Description

osThreads header file
Jonathan Bedard

Date

4/13/2016

Bug No known bugs.

This is the osThreads header we are using. This header allows us to use multithreading with our own types, pointers, and management

21.16 safeQueue.h File Reference

safe queue header file

Classes

- class **os::safeQueue**< **dataType** >

*This is the **safeQueue** (p. 287) class The **safeQueue** (p. 287) class is thread safe. It is a template class.*

Namespaces

- **os**

21.16.1 Detailed Description

safe queue header file
Jonathan Bedard

Date

11/9/2015

Bug No known bugs.

This is a thread safe queue, so we can multi thread safely.

21.17 savableClass.cpp File Reference

Implementation of the generalized savable class.

21.17.1 Detailed Description

Implementation of the generalized savable class.

Author

Jonathan Bedard

Date

4/12/2016

Bug None

Provides an implementation of the savable class, used to tie together multiple classes which need to be saved as a group.

21.18 savableClass.h File Reference

Defines a set of classes facilitating saving.

Classes

- class **os::savable**
Basic saving class.
- class **os::savingGroup**
Group of saving classes.

Namespaces

- **os**

21.18.1 Detailed Description

Defines a set of classes facilitating saving.

Author

Jonathan Bedard

Date

4/12/2016

Bug None

Provides a definition of user which has a user-name, password and associated bank of public keys.

21.19 Serial.h File Reference

21.20 Serial.h File Reference

Classes

- class **os::Serial**

*This is the **Serial** (p. 296) class. **Serial** (p. 296) objects allow us to abstract out most of the platform irregularities across multiple systems.*

Namespaces

- **os**

Variables

- const uint32_t **os::ARDUINO_WAIT_TIME** =2000

21.21 Serial.h File Reference

21.22 serialThread.cpp File Reference

serialThread implementation file

Functions

- static void **serialSearch** (void *ptr, smart_ptr< **threadHolder** > th)

21.22.1 Detailed Description

serialThread implementation file

Jonathan Bedard

Date

11/1/2015

Bug No known bugs.

These implementations allow us to create threads for monitoring serial communication

21.22.2 Function Documentation

static void serialSearch (void * ptr, smart_ptr< **threadHolder** > th) [static]

21.23 serialThread.h File Reference

serial thread header file

Classes

- class **os::serialThread**

Serial (p. 296) *communication thread* The is a serial class that runs as a thread. Thanks to this fact, we can run multiple serial communication threads as well as run a primary set of threads at once.

Namespaces

- **os**

21.23.1 Detailed Description

serial thread header file

Jonathan Bedard

Date

11/9/2015

Bug No known bugs.

This is a serial thread class. This class allows us to monitor multiple ports effectively simultaneously.

21.24 socketFrame.cpp File Reference

socketFrame implementation file

Functions

- void **close_all_sockets** ()

Variables

- static smart_ptr< **socketTracker** > **st_instance** = NULL

21.24.1 Detailed Description

socketFrame implementation file

Jonathan Bedard

Date

2/12/2016

Bug No known bugs.

This is the implementation of our socket user, UDP socket, and socket tracker. Socket communication is important for us, and this allows us to safely have reliable sockets.

21.24.2 Function Documentation

void close_all_sockets ()

21.24.3 Variable Documentation

smart_ptr<**socketTracker**> st_instance = NULL [static]

21.25 socketFrame.h File Reference

socket frame header file

Classes

- class **os::socketUser**
Socket user class This class allows us to manage sockets.
- class **os::UDPSocket**
***UDPSocket** (p. 327) class A class for UDPSockets, which in turn allows us to multi thread the packet send/receive functionality.*
- class **os::socketTracker**
***socketTracker** (p. 303) class Tracks all currently active sockets.*

Namespaces

- **os**

21.25.1 Detailed Description

socket frame header file

Jonathan Bedard

Date

4/12/2016

Bug No known bugs.

Generalized socket class.

21.26 spinLock.cpp File Reference

21.27 spinLock.cpp File Reference

21.28 spinLock.cpp File Reference

21.29 spinLock.h File Reference

21.30 spinLock.h File Reference

Classes

- class **os::spinLock**

Namespaces

- **os**

21.31 spinLock.h File Reference

21.32 threadDistribution.cpp File Reference

thread distribution implementation file

Functions

- static void **executor_thread_starter** (void *ptr, smart_ptr< **threadHolder** > th)

21.32.1 Detailed Description

thread distribution implementation file

Jonathan Bedard

Date

4/18/2015

Bug No known bugs.

These methods determine which thread will operate next.

21.32.2 Function Documentation

static void executor_thread_starter (void * ptr, smart_ptr< **threadHolder** > th) [static]

21.33 threadDistribution.h File Reference

thread distribution header file

Classes

- class **os::threadActor**
***threadActor** (p. 307) class This class holds information for determining which thread goes at a give time.*
- class **os::threadDistributor**
Distributes threads This class allows us to determine which thread should execute at any given time.

- class **os::executorThread**
executorThread (p. 263) class This class holds a thread which has multiple steps.
- class **os::singleAction**
single action class This class is for a thread with only one action.

Namespaces

- **os**

Functions

- float **os::getSysTime** ()
gets time Gets the current system time.

21.33.1 Detailed Description

thread distribution header file
Jonathan Bedard

Date

4/18/2015

Bug No known bugs.

This the thread distribution system.

21.34 USBAccess.cpp File Reference

USBAccess implementation file.

21.34.1 Detailed Description

USBAccess implementation file.
Jonathan Bedard

Date

11/3/2015

Bug No known bugs.

These are simple USB methods. They are unused in our larger project.

21.35 USBAccess.h File Reference

USBAccess header file.

Classes

- class **os::USBNode**
This class stores the location of a USB device.
- class **os::USBFile**

Namespaces

- **os**

21.35.1 Detailed Description

USBAccess header file.
Jonathan Bedard

Date

6/21/2015

Bug No known bugs.

This is a pair of simple classes for working with USB devices.

21.36 XMLParser.cpp File Reference

XML parser implementation file.

21.36.1 Detailed Description

XML parser implementation file.
Jonathan Bedard

Date

2/7/2015

Bug No known bugs.

Our XML parse is implemented in this file. We have several functions that allow us to easily convert XML data from file to program and vice versa.

21.37 XMLParser.h File Reference

XML Parser header file.

Classes

- class **os::XML_Node**
XML Node class The core node of our XML parsing.

Namespaces

- **os**
- **os::xml**

Typedefs

- typedef smart_ptr< XML_Node > **os::smartXMLNode**
- typedef smart_ptr< unsortedList< XML_Node > > **os::smartXMLNodeList**

Functions

- bool **os::XML_Output** (std::string path, **smartXMLNode** head)
outputs tree Outputs an XML tree into a file.
- **smartXMLNode os::XML_Input** (std::string path)
imports tree Imports an XML tree from a file.
- void **os::xml::insertTabs** (std::ofstream &f, int32_t x)
adds tabs Adds tabs.
- void **os::xml::writeNode** (std::ofstream &f, **smartXMLNode** node, int32_t depth)
writes nodes Writes all the nodes to a file. This function runs recursively.
- std::vector< std::string > **os::xml::readTillTag** (std::ifstream &f)
reads until next tag Reads a file until the next tag is found.
- std::string **os::xml::readThroughTag** (std::ifstream &f)
reads through the next tag Reads a file until a tag is found, including that tag.
- **smartXMLNode os::xml::parseNode** (std::ifstream &f)
parses a node Pulls a node from a file and returns it.
- bool **os::xml::compareTrees** (**smartXMLNode** n1, **smartXMLNode** n2)
compares trees Determines if two nodes are equivalent.

21.37.1 Detailed Description

XML Parser header file.

Jonathan Bedard

Date

2/7/2015

Bug No known bugs.

This is our XML Parser, so we can standardize use across systems.

21.38 XMLTest.cpp File Reference

XML tests.

21.38.1 Detailed Description

XML tests.

Jonathan Bedard

Date

2/29/2016

Bug No known bugs.

These are the tests for our XML classes.

21.39 XMLTest.h File Reference

SML test header file.

21.39.1 Detailed Description

SML test header file.

Jonathan Bedard

Date

4/12/2016

Bug No known bugs.

This is the test suite for the XML tests.

Chapter 22

Class Index

22.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

os::executorThread	
ExecutorThread class This class holds a thread which has multiple steps	263
os::IPAddress	
Os::IPAddress class definition This is an IP Address class It has 2 variables and 10 methods	265
os::LineLogger	267
os::LineSaver	269
os::LineSaverListener	271
os::Log	272
os::LogDirectedStream	275
os::logLine	276
os::LogSaver	277
os::logStatusHolder	278
os::logStatusListener	280
os::LogStreamListener	281
os::multiLock	
Os::multilock class definition Defines the os::multilock class. This class has 4 variables and 8 methods	282
os::myIPAddress	
Holds a node's own IP address Every node needs it's own IP address. This class holds that value, as well as provide several functions for determining priorities . .	285
os::safeQueue< dataType >	
This is the safeQueue (p. 287) class The safeQueue (p. 287) class is thread safe. It is a template class	287
os::savable	
Basic saving class	289
os::savingGroup	
Group of saving classes	294
os::Serial	
This is the Serial (p. 296) class. Serial (p. 296) objects allow us to abstract out most of the platform irregularities across multiple systems	296

os::serialThread	
Serial (p. 296) communication thread The is a serial class that runs as a thread. Thanks to this fact, we can run multiple serial communication threads as well as run a primary set of threads at once	298
os::singleAction	
Single action class This class is for a thread with only one action	301
os::socketTracker	
SocketTracker class Tracks all currently active sockets	303
os::socketUser	
Socket user class This class allows us to manage sockets	305
os::spinLock	305
os::threadActor	
ThreadActor class This class holds information for determining which thread goes at a give time	307
os::threadDistributor	
Distributes threads This class allows us to determine which thread should execute at any given time	309
os::threadHolder	311
os::threadTracker	
Monitors a range of threads This class holds a range of threadHolders. This includes both active and expired threads, ensuring the ability to operate on many threads in mass	313
os::UDPAVLNode	317
os::UDPCClient	317
os::UDPPacket	321
os::UDPServer	324
os::UDPSocket	
UDPSocket (p. 327) class A class for UDPSockets, which in turn allows us to multi thread the packet send/receive functionality	327
os::USBFile	330
os::USBNode	
This class stores the location of a USB device	330
os::XML_Node	
XML Node class The core node of our XML parsing	331

Chapter 23

Namespace Documentation

23.1 os Namespace Reference

Namespaces

- **xml**

Classes

- class **executorThread**
***executorThread** (p. 263) class This class holds a thread which has multiple steps.*
- class **IPAddress**
***os::IPAddress** (p. 265) class definition This is an IP Address class It has 2 variables and 10 methods*
- class **LineLogger**
- class **LineSaver**
- class **LineSaverListener**
- class **Log**
- class **LogDirectedStream**
- struct **logLine**
- class **LogSaver**
- class **logStatusHolder**
- class **logStatusListener**
- class **LogStreamListener**
- class **multiLock**
***os::multilock** class definition Defines the **os::multilock** class. This class has 4 variables and 8 methods*
- class **myIPAddress**
Holds a node's own IP address Every node needs it's own IP address. This class holds that value, as well as provide several functions for determining priorities.
- class **safeQueue**
*This is the **safeQueue** (p. 287) class The **safeQueue** (p. 287) class is thread safe. It is a template class.*
- class **savable**
Basic saving class.

- class **savingGroup**
Group of saving classes.
- class **Serial**
*This is the **Serial** (p. 296) class. **Serial** (p. 296) objects allow us to abstract out most of the platform irregularities across multiple systems.*
- class **serialThread**
***Serial** (p. 296) communication thread The is a serial class that runs as a thread. Thanks to this fact, we can run multiple serial communication threads as well as run a primary set of threads at once.*
- class **singleAction**
single action class This class is for a thread with only one action.
- class **socketTracker**
***socketTracker** (p. 303) class Tracks all currently active sockets.*
- class **socketUser**
Socket user class This class allows us to manage sockets.
- class **spinLock**
- class **threadActor**
***threadActor** (p. 307) class This class holds information for determining which thread goes at a give time.*
- class **threadDistributor**
Distributes threads This class allows us to determine which thread should execute at any given time.
- class **threadHolder**
- class **threadTracker**
Monitors a range of threads This class holds a range of threadHolders. This includes both active and expired threads, ensuring the ability to operate on many threads in mass.
- struct **UDPAVLNode**
- class **UDPCClient**
- class **UDPPacket**
- class **UDPServer**
- class **UDPSocket**
***UDPSocket** (p. 327) class A class for UDPSockets, which in turn allows us to multi thread the packet send/receive functionality.*
- class **USBFile**
- class **USBNode**
This class stores the location of a USB device.
- class **XML_Node**
XML Node class The core node of our XML parsing.

Typedefs

- typedef smart_ptr< **XML_Node** > **smartXMLNode**
- typedef smart_ptr< unorderedList< **XML_Node** > > **smartXMLNodeList**

Functions

- **uint16_t to_comp_mode** (uint16_t i)
Changes bit order for compatibility Depending on the system at hand, bits may be in several different orders. This function swaps to compatibility mode.
- **uint16_t from_comp_mode** (uint16_t i)
Changes bit order for compatibility Depending on the system at hand, bits may be in several different orders. This function swaps from compatibility mode.
- **uint32_t to_comp_mode** (uint32_t i)
Changes bit order for compatibility Depending on the system at hand, bits may be in several different orders. This function swaps to compatibility mode.
- **uint32_t from_comp_mode** (uint32_t i)
Changes bit order for compatibility Depending on the system at hand, bits may be in several different orders. This function swaps from compatibility mode.
- **uint64_t to_comp_mode** (uint64_t i)
Changes bit order for compatibility Depending on the system at hand, bits may be in several different orders. This function swaps to compatibility mode.
- **uint64_t from_comp_mode** (uint64_t i)
Changes bit order for compatibility Depending on the system at hand, bits may be in several different orders. This function swaps from compatibility mode.
- **uint64_t getTimestamp** ()
Gets a timestamp Generates a time stamp from the time function.
- **bool testCreateFolder** (std::string n)
Test if a folder exists Checks if a given folder exists. If it does not exist, this function will create said folder.
- **std::string convertTimestamp** (uint64_t stamp)
Type conversion on timestamp Converts the timestamp from an integer into a string.
- **smart_ptr< std::thread > spawnThread** (void(*func)(void *), void *ptr, std::string thread_info="")
- **smart_ptr< std::thread > spawnThread** (void(*func)(void *, smart_ptr< threadHolder >), void *ptr, std::string thread_info="")
- **float getSysTime** ()
gets time Gets the current system time.
- **bool XML_Output** (std::string path, **smartXMLNode** head)
outputs tree Outputs an XML tree into a file.
- **smartXMLNode XML_Input** (std::string path)
imports tree Imports an XML tree from a file.
- **void sleep** (int32_t x)
Sleep the thread for a certain amount of time This is a simple sleep function, it takes in a length of time to sleep and return nothing.
- **void startInternet** (bool multiThread=true)
Activates Internet Spawns an IP thread distributor, if one does not currently exist.
- **void closeInternet** ()
Deactivates Internet deletes the IP thread distributor and sets the thread pointer to null.
- **smart_ptr< threadDistributor > internetThreads** ()

- *Return IP thread distributor Gives the ipthread distributor to the caller.*
- **int32_t cp_clock_gettime** (int32_t X, struct timeval *tv)
Gets time Returns the current time to the caller. This is designed to work across a range of platforms and format the time to a high precision.
- **void strcpy_s** (char *output, int32_t inlen, const char *input)
String copier Safely calls string copy.
- **bool is_directory** (std::string file)
Determines if a file is a directory Checks if a given file is a directory.
- **bool check_exists** (std::string name)
Checks if a given file exists Takes a file and checks if it exists. A directory is considered existing.
- **smart_ptr< std::string > list_files** (std::string directory, uint32_t &len)
Return contents of directory Creates an array of strings of all the names inside a given directory. This is not recursive.
- **std::string extract_name** (std::string full_path)
Extracts a given file Extracts a file or directory.
- **void delete_file** (std::string path)
Deletes a file Deletes the file or directory at the given path. This is a recursive delete.
- **void setLocalPath** (int argc, char **argv)
Sets local path Sets the local path given the received arguments.
- **std::string getLocalPath** ()
Returns local path.
- **static int32_t fopen_s** (FILE **fp, const char *file_name, const char *typ)
fopen_s for windows This is a file open function for windows so that we can more efficiently write multi platform code.

Variables

- **logStatusHolder logStatus**
- **Log & logger = *Log::singleton()**
- **const uint32_t BUFLLEN = 512**
- **const std::string DEFAULT_IP = "127.0.0.1"**
- **const uint32_t MY_MESSAGE_NOTIFICATION = 1048**
- **const uint32_t ARDUINO_WAIT_TIME = 2000**

23.1.1 Typedef Documentation

typedef smart_ptr<XML_Node> os::smartXMLNode

typedef smart_ptr<unsortedList<XML_Node> > os::smartXMLNodeList

23.1.2 Function Documentation

bool os::check_exists (std::string name)

Checks if a given file exists Takes a file and checks if it exists. A directory is considered existing.

Returns

bool

`void os::closeInternet ()`

Deactivates Internet deletes the IP thread distributor and sets the thread pointer to null.

`std::string os::convertTimestamp (uint64_t stamp)`

Type conversion on timestamp Converts the timestamp from an integer into a string.

Returns

`std::string`

`int32_t os::cp_clock_gettime (int32_t X, struct timeval * tv)`

Gets time Returns the current time to the caller. This is designed to work across a range of platforms and format the time to a high precision.

Returns

`unit32_t`

`void os::delete_file (std::string path)`

Deletes a file Deletes the file or directory at the given path. This is a recursive delete.

`std::string os::extract_name (std::string full_path)`

Extracts a given file Extracts a file or directory.

Returns

`string`

`static int32_t os::fopen_s (FILE ** fp, const char * file_name, const char * typ) [static]`

`fopen_s` for windows This is a file open function for windows so that we can more efficiently write multi platform code.

Returns

`uint32_t`

`uint16_t os::from_comp_mode (uint16_t i)`

Changes bit order for compatibility Depending on the system at hand, bits may be in several different orders. This function swaps from compatibility mode.

Returns

`uint16_t`

`uint32_t os::from_comp_mode (uint32_t i)`

Changes bit order for compatibility Depending on the system at hand, bits may be in several different orders. This function swaps from compatibility mode.

Returns

`uint32_t`

`uint64_t os::from_comp_mode (uint64_t i)`

Changes bit order for compatibility Depending on the system at hand, bits may be in several different orders. This function swaps from compatibility mode.

Returns

`uint64_t`

`std::string os::getLocalPath ()`

Returns local path.

Returns

`string`

`float os::getSysTime ()`

gets time Gets the current system time.

Returns

`float`

`uint64_t os::getTimestamp ()`

Gets a timestamp Generates a time stamp from the time function.

Returns

`uint64_t`

`smart_ptr< threadDistributor > os::internetThreads ()`

Return IP thread distributor Gives the ipthread distributor to the caller.

Returns

`smart_ptr<threadDistributor>`

`bool os::is_directory (std::string file)`

Determines if a file is a directory Checks if a given file is a directory.

Returns

`bool`

`smart_ptr< std::string > os::list_files (std::string directory, uint32_t & len)`

Return contents of directory Creates an array of strings of all the names inside a given directory. This is not recursive.

Returns

`os::smart_ptr<string>`

`void os::setLocalPath (int argc, char ** argv)`

Sets local path Sets the local path given the received arguments.

`void os::sleep (int32_t x)`

Sleep the thread for a certain amount of time This is a simple sleep function, it takes in a length of time to sleep and return nothing.

`smart_ptr< std::thread > os::spawnThread (void(*)(void *) func, void * ptr, std::string thread_info = "")`

`smart_ptr< std::thread > os::spawnThread (void(*)(void *, smart_ptr< threadHolder >) func, void * ptr, std::string thread_info = "")`

`void os::startInternet (bool multiThread = true)`

Activates Internet Spawns an IP thread distributor, if one does not currently exist.

`void os::strcpy_s (char * output, int32_t inlen, const char * input)`

String copier Safely calls string copy.

`bool os::testCreateFolder (std::string n)`

Test if a folder exists Checks if a given folder exists. If it does not exist, this function will create said folder.

Returns

`bool`

`uint16_t os::to_comp_mode (uint16_t i)`

Changes bit order for compatibility Depending on the system at hand, bits may be in several different orders. This function swaps to compatibility mode.

Returns

`uint16_t`

`uint32_t os::to_comp_mode (uint32_t i)`

Changes bit order for compatibility Depending on the system at hand, bits may be in several different orders. This function swaps to compatibility mode.

Returns

`uint32_t`

`uint64_t os::to_comp_mode (uint64_t i)`

Changes bit order for compatibility Depending on the system at hand, bits may be in several different orders. This function swaps to compatibility mode.

Returns

`uint64_t`

`smartXMLNode os::XML_Input (std::string path)`

imports tree Imports an XML tree from a file.

Returns

`smart_ptr<XMLNode>`

`bool os::XML_Output (std::string path, smartXMLNode head)`

outputs tree Outputs an XML tree into a file.

Returns

`bool`

23.1.3 Variable Documentation

`const uint32_t os::ARDUINO_WAIT_TIME =2000`

`const uint32_t os::BUFLen =512`

`const std::string os::DEFAULT_IP ="127.0.0.1"`

`Log & os::logger =*Log::singleton()`

`logStatusHolder os::logStatus`

`const uint32_t os::MY_MESSAGE_NOTIFICATION =1048`

Chapter 24

Class Documentation

24.1 os::executorThread Class Reference

executorThread (p. 263) class This class holds a thread which has multiple steps.

Public Member Functions

- **executorThread** (uint32_t id, smart_ptr< **threadDistributor** > d)
- virtual ~**executorThread** ()
- bool **isRunning** () const
indicates running Indicates if a thread is currently running.
- uint32_t **getThreadID** () const
gives thread_id Gives the thread identifier to the caller.
- void **killThread** ()
kills thread Kills the thread associated with this executor.
- void **primary_thread_loop** (smart_ptr< **threadHolder** > th)
runs thread Runs the associated thread and manages others.

Private Attributes

- **spinLock killLock**
lock for killing threads Allows us to kill a thread without changing into it.
- uint32_t **thread_id**
thread identifier An identifier for the thread.
- volatile bool **active**
indicates readiness Indicates if a thread is ready to run.
- bool **running**
indicates running Indicates if a thread is currently running.
- smart_ptr< **threadDistributor** > **distro**
distributor Indicates the thread distributor for this executor thread.

24.1.1 Detailed Description

executorThread (p. 263) class This class holds a thread which has multiple steps.

24.1.2 Constructor & Destructor Documentation

`executorThread::executorThread (uint32_t id, smart_ptr< threadDistributor > d)`

`executorThread::~executorThread () [virtual]`

24.1.3 Member Function Documentation

`uint32_t os::executorThread::getThreadID () const [inline]`

gives thread_id Gives the thread identifier to the caller.

Returns

`uint32_t`

`bool os::executorThread::isRunning () const [inline]`

indicates running Indicates if a thread is currently running.

Returns

`bool`

`void executorThread::killThread ()`

kills thread Kills the thread associated with this executor.

`void executorThread::primary_thread_loop (smart_ptr< threadHolder > th)`

runs thread Runs the associated thread and manages others.

24.1.4 Member Data Documentation

`volatile bool os::executorThread::active [private]`

indicates readiness Indicates if a thread is ready to run.

`smart_ptr<threadDistributor> os::executorThread::distro [private]`

distributor Indicates the thread distributor for this executor thread.

`spinLock os::executorThread::killLock [private]`

lock for killing threads Allows us to kill a thread without changing into it.

`bool os::executorThread::running [private]`

indicates running Indicates if a thread is currently running.

uint32_t os::executorThread::thread_id [private]

thread identifier An identifier for the thread.

24.2 os::IPAddress Class Reference

os::IPAddress (p. 265) class definition This is an IP Address class It has 2 variables and 10 methods

Public Member Functions

- **IPAddress** ()
- **IPAddress** (std::string x)
- **IPAddress** (const **IPAddress** &x)
- **IPAddress** (smart_ptr< **IPAddress** > x)
- virtual ~**IPAddress** ()
- bool **isIPv6** () const
Return if an IPAddress is IPv6 returns the _isIPv6 boolean to the caller.
- char * **printAddress** ()
*Return IP Address Gives a pointer to the **IPAddress** (p. 265) to the caller.*
- const char * **getConstAddress** () const
*Return IP Address Gives a pointer to the **IPAddress** (p. 265) to the caller.*
- int32_t **compare** (const os::smart_ptr< **IPAddress** > comp) const
Compares IP Addresses Compares two IPAddresses and returns the difference.
- int32_t **compare** (const **IPAddress** *comp) const

Protected Attributes

- char **name** [80]
Actual data of IP address. The actual IP is a critical element, as it allows for the core communication. We allocate 80 bytes so that we have enough memory for both the IPv4 and IPv6 addresses.
- bool **_isIPv6**
Holds if an address is IPv6 An address has this flag for easy analysis of IPv6 and IPv4 status. Thanks to this, we can use one IP address class for both standards.

24.2.1 Detailed Description

os::IPAddress (p. 265) class definition This is an IP Address class It has 2 variables and 10 methods

24.2.2 Constructor & Destructor Documentation

IPAddress::IPAddress ()

IPAddress::IPAddress (std::string x)

IPAddress::IPAddress (const **IPAddress** & x)

IPAddress::IPAddress (smart_ptr< **IPAddress** > x)

IPAddress::~~IPAddress () [virtual]

24.2.3 Member Function Documentation

int32_t IPAddress::compare (const os::smart_ptr< **IPAddress** > comp) const

Compares IP Addresses Compares two IPAddresses and returns the difference.

Returns

int32_t

int32_t IPAddress::compare (const **IPAddress** * comp) const

const char* os::IPAddress::getConstAddress () const [inline]

Return IP Address Gives a pointer to the **IPAddress** (p. 265) to the caller.

Returns

char*

bool os::IPAddress::isIPv6 () const [inline]

Return if an IPAddress is IPv6 returns the _isIPv6 boolean to the caller.

Returns

bool

char* os::IPAddress::printAddress () [inline]

Return IP Address Gives a pointer to the **IPAddress** (p. 265) to the caller.

Returns

char*

24.2.4 Member Data Documentation

bool os::IPAddress::_isIPv6 [protected]


Holds if an address is IPv6 An address has this flag for easy analysis of IPv6 and IPv4 status. Thanks to this, we can use one IP address class for both standards.

char os::IPAddress::name[80] [protected]

Actual data of IP address. The actual IP is a critical element, as it allows for the core communication. We allocate 80 bytes so that we have enough memory for both the IPv4 and IPv6 addresses.

24.3 os::LineLogger Class Reference

Inheritance diagram for os::LineLogger:

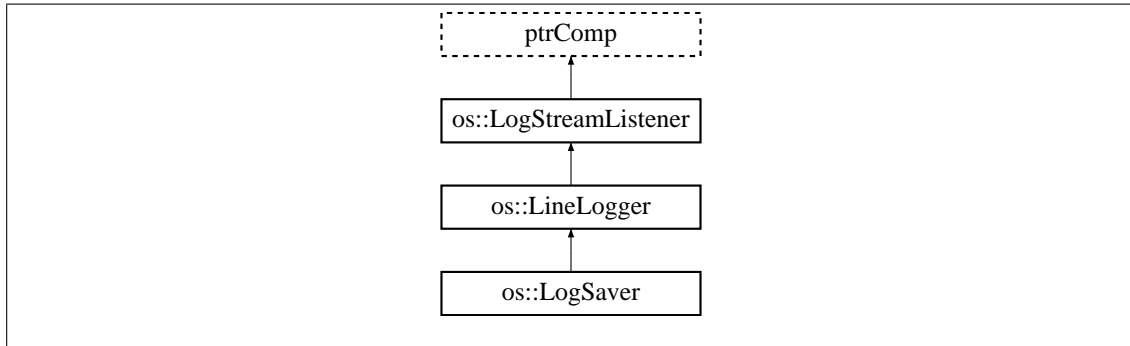

Public Member Functions

- **LineLogger** (smart_ptr< std::ostream > s)
- **LineLogger** (smart_ptr< std::ostream > s, std::string head)
- virtual ~**LineLogger** ()
- void **setLogTime** (bool lt)
- void **setPrintName** (bool pn)
- void **setIsOn** (bool io)
- bool **getLogTime** () const
- bool **getPrintName** () const
- bool **isOn** () const
- void **setSpecialCase** (bool isSpecial)
- bool **getSpecialCase** () const
- virtual void **logHeader** (uint64_t timestamp, **LogDirectedStream** &source)
- virtual void **logChar** (int32_t c)
- virtual void **log_endl** ()
- virtual void **log** (smart_ptr< **logLine** > line)
- virtual void **emergencyNewLine** (**LogDirectedStream** &source)
- virtual void **emergencyArrival** (**LogDirectedStream** &source, int32_t c)
- virtual void **stringArrival** (smart_ptr< **logLine** > line)

Protected Attributes

- bool **isSpecialCase**
- smart_ptr< std::ostream > **strm**
- bool **_isOn**
- bool **logTime**
- bool **printName**

24.3.1 Constructor & Destructor Documentation

LineLogger::LineLogger (smart_ptr< std::ostream > s)

LineLogger::LineLogger (smart_ptr< std::ostream > s, std::string head)

virtual os::LineLogger::~LineLogger () [inline], [virtual]

24.3.2 Member Function Documentation

void LineLogger::emergencyArrival (**LogDirectedStream** & source, int32_t c) [virtual]

Reimplemented from **os::LogStreamListener** (p. 282).

void LineLogger::emergencyNewLine (**LogDirectedStream** & source) [virtual]

Reimplemented from **os::LogStreamListener** (p. 282).

bool os::LineLogger::getLogTime () const [inline]

bool os::LineLogger::getPrintName () const [inline]

bool os::LineLogger::getSpecialCase () const [inline]

bool os::LineLogger::isOn () const [inline]

void LineLogger::log (smart_ptr< **logLine** > line) [virtual]

Reimplemented in **os::LogSaver** (p. 278).

void LineLogger::log_endl () [virtual]

Reimplemented in **os::LogSaver** (p. 278).

void LineLogger::logChar (int32_t c) [virtual]

Reimplemented in **os::LogSaver** (p. 278).

void LineLogger::logHeader (uint64_t timestamp, **LogDirectedStream** & source) [virtual]

Reimplemented in **os::LogSaver** (p. 278).

void os::LineLogger::setIsOn (bool io) [inline]

void os::LineLogger::setLogTime (bool lt) [inline]

void os::LineLogger::setPrintName (bool pn) [inline]

void os::LineLogger::setSpecialCase (bool isSpecial) [inline]

void LineLogger::stringArrival (smart_ptr< **logLine** > line) [virtual]


Reimplemented from **os::LogStreamListener** (p. 282).

24.3.3 Member Data Documentation

```
bool os::LineLogger::_isOn [protected]
bool os::LineLogger::isSpecialCase [protected]
bool os::LineLogger::logTime [protected]
bool os::LineLogger::printName [protected]
smart_ptr<std::ostream> os::LineLogger::strm [protected]
```

24.4 os::LineSaver Class Reference

Inheritance diagram for os::LineSaver:

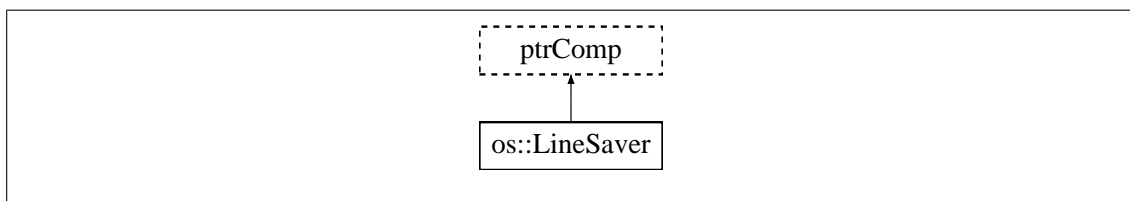

Public Member Functions

- **LineSaver** ()
- virtual **~LineSaver** ()
- void **setSize** (uint32_t s)
- uint32_t **getSize** () const
- uint32_t **getNumLines** () const
- void **addListener** (smart_ptr< **LineSaverListener** > l)
- void **removeListener** (smart_ptr< **LineSaverListener** > l)
- void **pushLine** (smart_ptr< **logLine** > line)
- smart_ptr< **logLine** > **popLine** (uint32_t x)
- void **setSpecialCase** (bool isSpecial)
- bool **getSpecialCase** () const

Private Member Functions

- void **priv_addListener** (smart_ptr< **LineSaverListener** > l)
- void **priv_removeListener** (smart_ptr< **LineSaverListener** > l)

Private Attributes

- bool **isSpecialCase**
- uint32_t **size**
- uint32_t **beginning_pos**
- uint32_t **next_pos**
- std::vector< smart_ptr< **logLine** > > **lineList**

- **os::spinLock lock**
- **smartSet< LineSaverListener > listener**

Friends

- **class LineSaverListener**

24.4.1 Constructor & Destructor Documentation

LineSaver::LineSaver ()

LineSaver::~LineSaver () [virtual]

24.4.2 Member Function Documentation

void LineSaver::addListener (smart_ptr< **LineSaverListener** > l)

uint32_t LineSaver::getNumLines () const

uint32_t os::LineSaver::getSize () const [inline]

bool os::LineSaver::getSpecialCase () const [inline]

smart_ptr< logLine > LineSaver::popLine (uint32_t x)

void LineSaver::priv_addListener (smart_ptr< **LineSaverListener** > l) [private]

void LineSaver::priv_removeListener (smart_ptr< **LineSaverListener** > l) [private]

void LineSaver::pushLine (smart_ptr< **logLine** > line)

void LineSaver::removeListener (smart_ptr< **LineSaverListener** > l)

void LineSaver::setSize (uint32_t s)

void os::LineSaver::setSpecialCase (bool isSpecial) [inline]

24.4.3 Friends And Related Function Documentation

friend class LineSaverListener [friend]

24.4.4 Member Data Documentation

uint32_t os::LineSaver::beginning_pos [private]

bool os::LineSaver::isSpecialCase [private]

std::vector<smart_ptr<logLine> > os::LineSaver::lineList [private]

smartSet<LineSaverListener> os::LineSaver::listener [private]


os::spinLock os::LineSaver::lock [private]

uint32_t os::LineSaver::next_pos [private]

uint32_t os::LineSaver::size [private]

24.5 os::LineSaverListener Class Reference

Inheritance diagram for os::LineSaverListener:

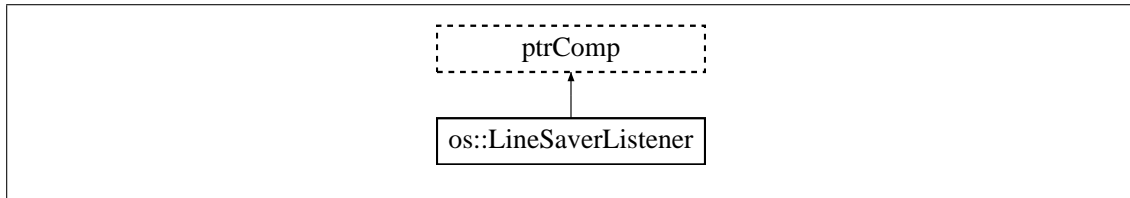

Public Member Functions

- virtual `~LineSaverListener` ()
- void `addSaver` (smart_ptr< **LineSaver** > l)
- void `removeSaver` (smart_ptr< **LineSaver** > l)

Protected Member Functions

- virtual void `receiveLine` (smart_ptr< **LineSaver** > source, smart_ptr< **logLine** > message)

Private Member Functions

- void `priv_addSaver` (smart_ptr< **LineSaver** > l)
- void `priv_removeSaver` (smart_ptr< **LineSaver** > l)

Private Attributes

- `os::spinLock` **lock**
- smartSet< **LineSaver** > **saver**

Friends

- class **LineSaver**

24.5.1 Constructor & Destructor Documentation

`LineSaverListener::~LineSaverListener` () [virtual]

24.5.2 Member Function Documentation

void `LineSaverListener::addSaver` (smart_ptr< **LineSaver** > l)

void `LineSaverListener::priv_addSaver` (smart_ptr< **LineSaver** > l) [private]

void `LineSaverListener::priv_removeSaver` (smart_ptr< **LineSaver** > l) [private]

virtual void `os::LineSaverListener::receiveLine` (smart_ptr< **LineSaver** > source, smart_ptr< **logLine** > message) [inline], [protected], [virtual]

```
void LineSaverListener::removeSaver ( smart_ptr< LineSaver > l )
```

24.5.3 Friends And Related Function Documentation

```
friend class LineSaver [friend]
```


24.5.4 Member Data Documentation

```
os::spinLock os::LineSaverListener::lock [private]
```

```
smartSet<LineSaver> os::LineSaverListener::saver [private]
```

24.6 os::Log Class Reference

Inheritance diagram for os::Log:

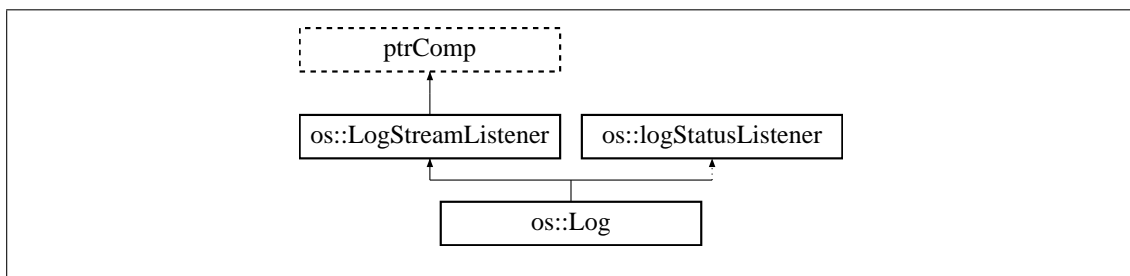

Public Member Functions

- virtual **~Log** ()
- void **pushFilePath** (std::string fp)
- void **startSavingThread** ()
- void **savingThread** (os::smart_ptr< **os::threadHolder** > th)
- std::string **getFilePath** () const
- bool **isSavingThreadActive** () const
- void **exitSaveThread** ()
- const **LineSaver** & **getMainStream** () const
- smart_ptr< **LineSaver** > **getMainStreamReference** ()
- void **setSaverSize** (uint32_t size)
- void **setSavelsOn** (bool ison)
- void **setSaveLogTime** (bool lt)
- void **setSaveLogName** (bool ln)
- void **setSTDIsOn** (bool ison)
- void **setSTDLogTime** (bool lt)
- void **setSTDLogName** (bool ln)
- void **setIsOn** (bool ison)
- void **setLogTime** (bool lt)
- void **setLogName** (bool ln)
- smart_ptr< **LogDirectedStream** > **newTargetStream** (std::string name, bool isError)
- smart_ptr< std::ostream > **castNewTargetStream** (std::string name, bool isError)

- smart_ptr< **LogDirectedStream** > **find** (std::string name)
- smart_ptr< std::ostream > **castFind** (std::string name)
- bool **deleteStream** (std::string name)
- virtual void **stringArrival** (smart_ptr< **logLine** > line)
- void **removeListener** (smart_ptr< **LogStreamListener** > lst)

Static Public Member Functions

- static smart_ptr< **Log** > **singleton** ()

Protected Member Functions

- void **receiveChanged** (smart_ptr< **logStatusHolder** > h)

Private Member Functions

- **Log** ()

Private Attributes

- AVLTree< **LogDirectedStream** > **streams**
- smart_ptr< **LineLogger** > **std_log**
- smart_ptr< **LineLogger** > **err_log**
- **spinLock** **mainStreamLock**
- **LineSaver** **mainStream**
- std::string **file_path**
- smart_ptr< **LogSaver** > **primary_save_file**
- smart_ptr< **LogSaver** > **std_save_file**
- smart_ptr< **LogSaver** > **err_save_file**
- **spinLock** **logSaverLock**
- bool **isSavingThread**
- bool **continue_saving**

24.6.1 Constructor & Destructor Documentation

Log::Log () [private]

Log::~~Log () [virtual]

24.6.2 Member Function Documentation

smart_ptr< std::ostream > Log::castFind (std::string name)

smart_ptr< std::ostream > Log::castNewTargetStream (std::string name, bool isError)

bool Log::deleteStream (std::string name)

void os::Log::exitSaveThread () [inline]

```

smart_ptr< LogDirectedStream > Log::find ( std::string name )
std::string os::Log::getFilePath ( ) const [inline]
const LineSaver& os::Log::getMainStream ( ) const [inline]
smart_ptr<LineSaver> os::Log::getMainStreamReference ( ) [inline]
bool os::Log::isSavingThreadActive ( ) const [inline]
smart_ptr< LogDirectedStream > Log::newTargetStream ( std::string name, bool isError )
void Log::pushFilePath ( std::string fp )
void Log::receiveChanged ( smart_ptr< logStatusHolder > h ) [protected], [virtual]
Reimplemented from os::logStatusListener (p. 281).

```

```

void Log::removeListener ( smart_ptr< LogStreamListener > lst )
void Log::savingThread ( os::smart_ptr< os::threadHolder > th )
void Log::setIsOn ( bool ison )
void Log::setLogName ( bool ln )
void Log::setLogTime ( bool lt )
void Log::setSavesOn ( bool ison )
void Log::setSaveLogName ( bool ln )
void Log::setSaveLogTime ( bool lt )
void Log::setSaverSize ( uint32_t size )
void Log::setSTDIsOn ( bool ison )
void Log::setSTDLogName ( bool ln )
void Log::setSTDLogTime ( bool lt )
smart_ptr< Log > Log::singleton ( ) [static]
void Log::startSavingThread ( )
void Log::stringArrival ( smart_ptr< logLine > line ) [virtual]
Reimplemented from os::LogStreamListener (p. 282).

```

24.6.3 Member Data Documentation

```

bool os::Log::continue_saving [private]
smart_ptr<LineLogger> os::Log::err_log [private]
smart_ptr<LogSaver> os::Log::err_save_file [private]

```


```

std::string os::Log::file_path [private]
bool os::Log::isSavingThread [private]
spinLock os::Log::logSaverLock [private]
LineSaver os::Log::mainStream [private]
spinLock os::Log::mainStreamLock [private]
smart_ptr<LogSaver> os::Log::primary_save_file [private]
smart_ptr<LineLogger> os::Log::std_log [private]
smart_ptr<LogSaver> os::Log::std_save_file [private]
AVLTree<LogDirectedStream> os::Log::streams [private]

```

24.7 os::LogDirectedStream Class Reference

Inheritance diagram for os::LogDirectedStream:

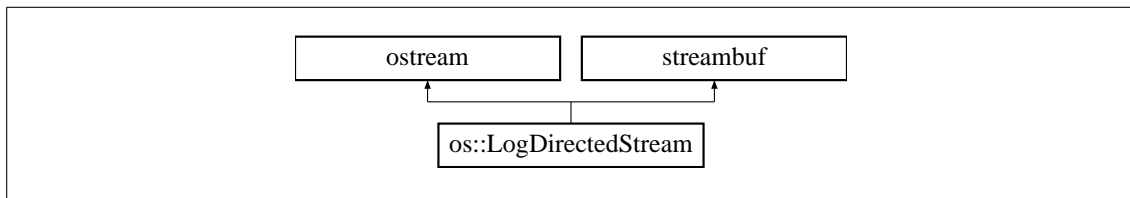

Public Member Functions

- **LogDirectedStream** (std::string n, bool ie)
- virtual ~**LogDirectedStream** ()
- virtual int32_t **overflow** (int32_t c)
- void **addListener** (smart_ptr< **LogStreamListener** > lst)
- void **removeListener** (smart_ptr< **LogStreamListener** > lst)
- std::string **getName** () const
- bool **isError** () const
- const **LineSaver** & **getLines** () const
- **LineSaver** & **modLines** ()
- const bool **operator==** (const **LogDirectedStream** &comp) const
- const bool **operator>** (const **LogDirectedStream** &comp) const

Private Attributes

- std::string **name**
- bool **_isError**
- **LineSaver** **saver**
- smartSet< **LogStreamListener** > **listeners**
- std::string **current_line**

24.7.1 Constructor & Destructor Documentation

```
LogDirectedStream::LogDirectedStream ( std::string n, bool ie )  
virtual os::LogDirectedStream::~~LogDirectedStream ( ) [inline], [virtual]
```

24.7.2 Member Function Documentation

```
void LogDirectedStream::addListener ( smart_ptr< LogStreamListener > lst )  
const LineSaver& os::LogDirectedStream::getLines ( ) const [inline]  
std::string os::LogDirectedStream::getName ( ) const [inline]  
bool os::LogDirectedStream::isError ( ) const [inline]  
LineSaver& os::LogDirectedStream::modLines ( ) [inline]  
const bool LogDirectedStream::operator== ( const LogDirectedStream & comp ) const  
const bool LogDirectedStream::operator> ( const LogDirectedStream & comp ) const  
int32_t LogDirectedStream::overflow ( int32_t c ) [virtual]  
void LogDirectedStream::removeListener ( smart_ptr< LogStreamListener > lst )
```

24.7.3 Member Data Documentation

```
bool os::LogDirectedStream::_isError [private]  
std::string os::LogDirectedStream::current_line [private]  
smartSet<LogStreamListener> os::LogDirectedStream::listeners [private]  
std::string os::LogDirectedStream::name [private]  
LineSaver os::LogDirectedStream::saver [private]
```

24.8 os::logLine Struct Reference

Public Member Functions

- virtual **~logLine** ()

Public Attributes

- smart_ptr< **LogDirectedStream** > **source**
- std::string **line**
- uint64_t **timestamp**

24.8.1 Constructor & Destructor Documentation

```
virtual os::logLine::~~logLine ( ) [inline], [virtual]
```

24.8.2 Member Data Documentation


std::string os::logLine::line

smart_ptr<**LogDirectedStream**> os::logLine::source

uint64_t os::logLine::timestamp

24.9 os::LogSaver Class Reference

Inheritance diagram for os::LogSaver:

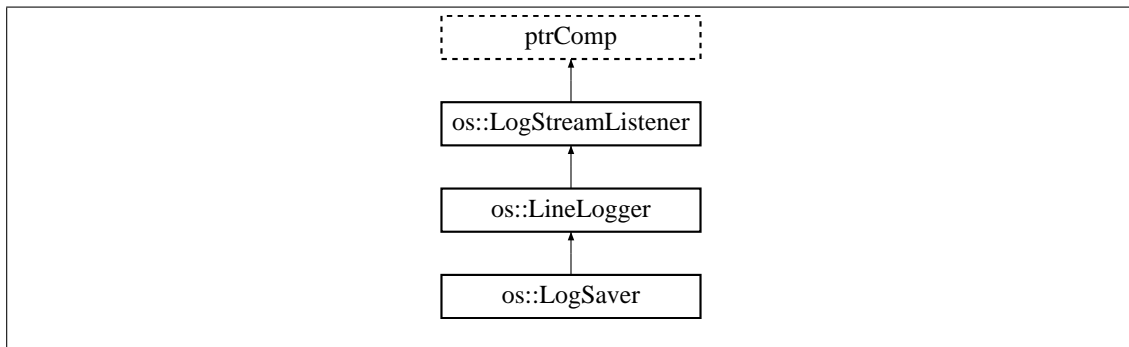

Public Member Functions

- **LogSaver** (std::string file)
- **LogSaver** (std::string file, std::string head)
- virtual ~**LogSaver** ()
- void **saveLog** ()
- virtual void **logHeader** (uint64_t timestamp, **LogDirectedStream** &source)
- virtual void **logChar** (int32_t c)
- virtual void **log_endl** ()
- virtual void **log** (smart_ptr< **logLine** > line)

Private Attributes

- **os::spinLock file_lock**
- std::queue< smart_ptr< **logLine** > > **lineQueue**

Additional Inherited Members

24.9.1 Constructor & Destructor Documentation

LogSaver::LogSaver (std::string file)

LogSaver::LogSaver (std::string file, std::string head)

LogSaver::~~LogSaver () [virtual]

24.9.2 Member Function Documentation

void LogSaver::log (smart_ptr< **logLine** > line) [virtual]

Reimplemented from **os::LineLogger** (p.268).

void LogSaver::log_endl () [virtual]

Reimplemented from **os::LineLogger** (p.268).

void LogSaver::logChar (int32_t c) [virtual]

Reimplemented from **os::LineLogger** (p.268).

void LogSaver::logHeader (uint64_t timestamp, **LogDirectedStream** & source) [virtual]

Reimplemented from **os::LineLogger** (p.268).

void LogSaver::saveLog ()


24.9.3 Member Data Documentation

os::spinLock os::LogSaver::file_lock [private]

std::queue<smart_ptr<**logLine**> > os::LogSaver::lineQueue [private]

24.10 os::logStatusHolder Class Reference

Inheritance diagram for os::logStatusHolder:

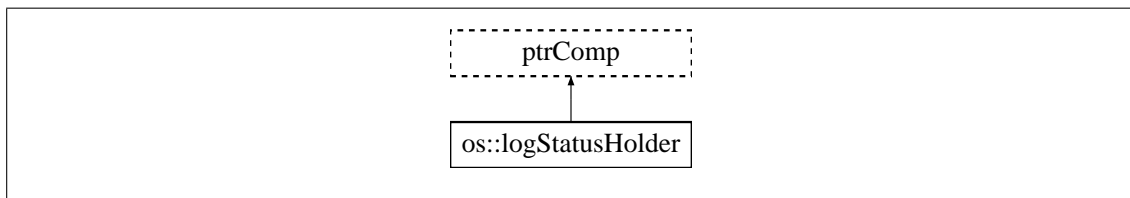

Public Member Functions

- **logStatusHolder** ()
- virtual ~**logStatusHolder** ()
- void **addListener** (smart_ptr< **logStatusListener** > l)
- void **removeListener** (smart_ptr< **logStatusListener** > l)
- void **setSTDStatus** (bool std)
- void **setERRStatus** (bool err)
- bool **getSTDStatus** () const
- bool **getERRStatus** () const

Private Member Functions

- void **triggerChange** ()
- void **priv_addListener** (smart_ptr< **logStatusListener** > l)
- void **priv_removeListener** (smart_ptr< **logStatusListener** > l)

Private Attributes

- bool **stdstatus**
- bool **errstatus**
- **spinLock** **lisLock**
- smartSet< **logStatusListener** > **listener**

Friends

- class **logStatusListener**

24.10.1 Constructor & Destructor Documentation

logStatusHolder::logStatusHolder ()

logStatusHolder::~~logStatusHolder () [virtual]

24.10.2 Member Function Documentation

void logStatusHolder::addListener (smart_ptr< **logStatusListener** > l)

bool os::logStatusHolder::getERRStatus () const [inline]

bool os::logStatusHolder::getSTDStatus () const [inline]

void logStatusHolder::priv_addListener (smart_ptr< **logStatusListener** > l) [private]

void logStatusHolder::priv_removeListener (smart_ptr< **logStatusListener** > l) [private]

void logStatusHolder::removeListener (smart_ptr< **logStatusListener** > l)

void logStatusHolder::setERRStatus (bool err)

void logStatusHolder::setSTDStatus (bool std)

void logStatusHolder::triggerChange () [private]

24.10.3 Friends And Related Function Documentation

friend class **logStatusListener** [friend]

24.10.4 Member Data Documentation

bool os::logStatusHolder::errstatus [private]


spinLock os::logStatusHolder::lisLock [private]

smartSet<**logStatusListener**> os::logStatusHolder::listener [private]

bool os::logStatusHolder::stdstatus [private]

24.11 os::logStatusListener Class Reference

Inheritance diagram for os::logStatusListener:

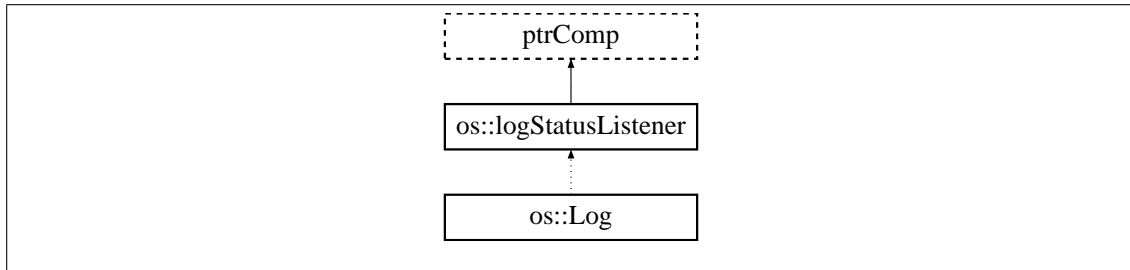

Public Member Functions

- virtual `~logStatusListener ()`
- void **addHolder** (smart_ptr< **logStatusHolder** > l)
- void **removeHolder** (smart_ptr< **logStatusHolder** > l)

Protected Member Functions

- virtual void **receiveChanged** (smart_ptr< **logStatusHolder** > h)

Private Member Functions

- void **priv_addHolder** (smart_ptr< **logStatusHolder** > l)
- void **priv_removeHolder** (smart_ptr< **logStatusHolder** > l)

Private Attributes

- **spinLock senLock**
- smartSet< **logStatusHolder** > **sender**

Friends

- class **logStatusHolder**

24.11.1 Constructor & Destructor Documentation

`logStatusListener::~logStatusListener () [virtual]`

24.11.2 Member Function Documentation

`void logStatusListener::addHolder (smart_ptr< logStatusHolder > l)`

```
void logStatusListener::priv_addHolder ( smart_ptr< logStatusHolder > l ) [private]
void logStatusListener::priv_removeHolder ( smart_ptr< logStatusHolder > l ) [private]
virtual void os::logStatusListener::receiveChanged ( smart_ptr< logStatusHolder > h )
[inline], [protected], [virtual]
```

Reimplemented in **os::Log** (p. 274).

```
void logStatusListener::removeHolder ( smart_ptr< logStatusHolder > l )
```

24.11.3 Friends And Related Function Documentation

```
friend class logStatusHolder [friend]
```


24.11.4 Member Data Documentation

```
smartSet<logStatusHolder> os::logStatusListener::sender [private]
```

```
spinLock os::logStatusListener::senLock [private]
```

24.12 os::LogStreamListener Class Reference

Inheritance diagram for os::LogStreamListener:

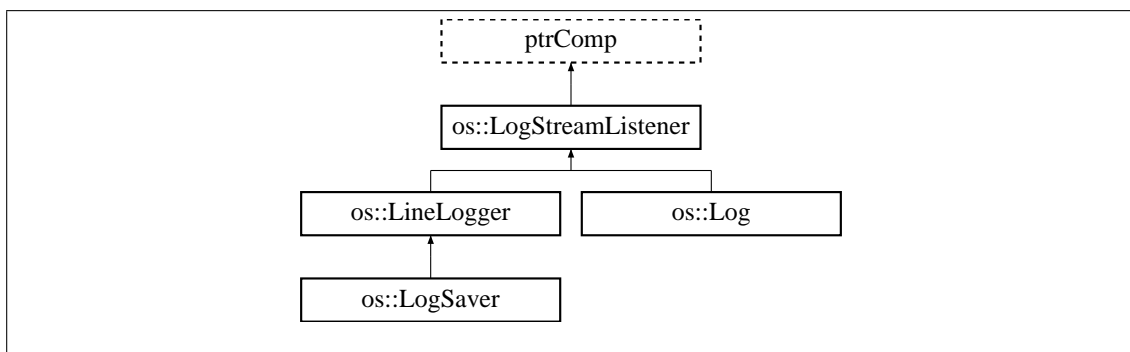

Public Member Functions

- virtual **~LogStreamListener** ()
- virtual void **emergencyNewLine** (**LogDirectedStream** &source)
- virtual void **emergencyArrival** (**LogDirectedStream** &source, int32_t c)
- virtual void **stringArrival** (smart_ptr< **logLine** > line)

24.12.1 Constructor & Destructor Documentation

```
virtual os::LogStreamListener::~~LogStreamListener ( ) [inline], [virtual]
```

24.12.2 Member Function Documentation

virtual void os::LogStreamListener::emergencyArrival (**LogDirectedStream** & source, int32_t c)
[inline], [virtual]

Reimplemented in **os::LineLogger** (p. 268).

virtual void os::LogStreamListener::emergencyNewLine (**LogDirectedStream** & source)
[inline], [virtual]

Reimplemented in **os::LineLogger** (p. 268).

virtual void os::LogStreamListener::stringArrival (smart_ptr< **logLine** > line) [inline],
[virtual]

Reimplemented in **os::Log** (p. 274), and **os::LineLogger** (p. 268).

24.13 os::multiLock Class Reference

os::multilock class definition Defines the os::multilock class. This class has 4 variables and 8 methods

Public Member Functions

- **multiLock** ()
multilock constructor This method constructs a multilock. We do not have a copy constructor or any custom constructors of any type.
- virtual ~**multiLock** ()
multilock destructor The destructor is virtual, so that if we decide to inherit for any reason, the multilock class will already be prepared.
- bool **isLocked** () const
returns _locked status This allows us to determine whether or not a multilock is being written to. This can be used both in general classes as well as in the multilock class as well.
- uint32_t **getCounter** () const
returns _counter The amount of readers is variable, so this method returns the amount of readers currently looking at the multilock. This method can be used both by those outside the multilock as well as by other multilock methods.
- void **increment** ()
allows someone to read When a user wants to read, they can call increment. This ensures that the multilock can be safely read. If the multilock cannot be read, increment waits until a read is available.
- void **decrement** ()
allows a thread to stop reading the multilock When a thread has finished reading, it calls decrement in order to return the multilock. This ensures that other threads can read the multilock
- void **lock** ()
allows a thread to write Only one thread can write at any given time. The lock method ensures that no one else is reading or writing, then acquires and writes.
- void **unlock** ()
allows other threads to write Once a thread has finished writing, it should call unlock so that other threads can read and write. The unlock method ends the period of writing for a thread.

Private Attributes

- **spinLock dLock**

spinlock The spinlock prevents a multilock from being modified by more than 1 thread at any given time. If more than 1 thread were to attempt to read for example, a miscount of the number of readers could permanently lock the multilock or allow for unsafe writing.

- **bool _locked**

locked boolean The _locked variable is to indicate whether or nor a multilock is being written. Should a multilock be actively written, it would be unsafe to read or have another thread attempt to read.

- **uint32_t _counter**

counter for readers The _counter represents how many threads are currently reading though whatever the multilock is protecting.

- **uint32_t _max**

most allowable readers Given that there may be a maximum amount of threads that should be reading something at any given time, the _max variable allows us to define how many readers a given multilock can have.

24.13.1 Detailed Description

os::multilock class definition Defines the os::multilock class. This class has 4 variables and 8 methods

24.13.2 Constructor & Destructor Documentation

multiLock::multiLock ()

multilock constructor This method constructs a multilock. We do not have a copy constructor or any custom constructors of any type.

multiLock::~~multiLock () [virtual]

multilock destructor The destructor is virtual, so that if we decide to inherit for any reason, the multilock class will already be prepared.

24.13.3 Member Function Documentation

void multiLock::decrement ()

allows a thread to stop reading the multilock When a thread has finished reading, it calls decrement in order to return the multilock. This ensures that other threads can read the multilock

Returns

void

uint32_t os::multiLock::getCounter () const [inline]

returns _counter The amount of readers is variable, so this method returns the amount of readers currently looking at the multilock. This method can be used both by those outside the multilock as well as by other multilock methods.

Returns

uint32_t

void multiLock::increment ()

allows someone to read When a user wants to read, they can call increment. This ensures that the multilock can be safely read. If the multilock cannot be read, increment waits until a read is available.

Returns

void

bool os::multiLock::isLocked () const [inline]

returns _locked status This allows us to determine whether or not a multilock is being written to. This can be used both in general classes as well as in the multilock class as well.

Returns

boolean

void multiLock::lock ()

allows a thread to write Only one thread can write at any given time. The lock method ensures that no one else is reading or writing, then acquires and writes.

Returns

void

void multiLock::unlock ()

allows other threads to write Once a thread has finished writing, it should call unlock so that other threads can read and write. The unlock method ends the period of writing for a thread.

Returns

void

24.13.4 Member Data Documentation

uint32_t os::multiLock::_counter [private]

counter for readers The _counter represents how many threads are currently reading though whatever the multilock is protecting.

bool os::multiLock::_locked [private]

locked boolean The _locked variable is to indicate whether or nor a multilock is being written. Should a multilock be actively written, it would be unsafe to read or have another thread attempt to read.

`uint32_t os::multiLock::_max [private]`

most allowable readers Given that there may be a maximum amount of threads that should be reading something at any given time, the `_max` variable allows us to define how many readers a given multilock can have.

`spinLock os::multiLock::dLock [private]`

spinlock The spinlock prevents a multilock from being modified by more than 1 thread at any given time. If more than 1 thread were to attempt to read for example, a miscount of the number of readers could permanently lock the multilock or allow for unsafe writing.

24.14 os::myIPAddress Class Reference

Holds a node's own IP address Every node needs it's own IP address. This class holds that value, as well as provide several functions for determining priorities.

Public Member Functions

- **myIPAddress ()**
- **virtual ~myIPAddress ()**
- **IPAddress getAddress ()**
- **char * getIPString ()**
- **IPAddress getIPv6Address ()**
- **IPAddress getIPv4Address ()**
- **bool isMe (const IPAddress &addr) const**
- **bool isV6Priority () const**
- **void setV6Priority (bool p)**

Private Member Functions

- **IPAddress resetAddress ()**

Private Attributes

- **IPAddress address**
- **IPAddress ip6Address**
- **IPAddress ip4Address**
- **clock_t last**
- **bool v6_prioriity**

24.14.1 Detailed Description

Holds a node's own IP address Every node needs it's own IP address. This class holds that value, as well as provide several functions for determining priorities.

24.14.2 Constructor & Destructor Documentation

`myIPAddress::myIPAddress ()`

`myIPAddress::~~myIPAddress () [virtual]`

24.14.3 Member Function Documentation

IPAddress `myIPAddress::getAddress ()`

brief returns address Updates the IP addresses if necessary and return the current IP address.

Returns

IPAddress (p. 265)

`char * myIPAddress::getIPString ()`

brief Returns IP address as a string Returns the IP address as a string.

Returns

`char*`

IPAddress `os::myIPAddress::getIPv4Address () [inline]`

brief gives IPv4 Returns the IPv4 address.

Returns

IPAddress (p. 265)

IPAddress `os::myIPAddress::getIPv6Address () [inline]`

brief gives IPv6 Returns the IPv6 address.

Returns

IPAddress (p. 265)

`bool myIPAddress::isMe (const IPAddress & addr) const`

brief is a given address mine Determines if a given address is the same as the address of this object.

Returns

`bool`

`bool os::myIPAddress::isV6Priority () const [inline]`

brief returns IPv6 priority Tells the caller if this object prioritizes IPv6.

Returns

`bool`

IPAddress myIPAddress::resetAddress () [private]

brief resets IP address Resets the IP addresses of the object.

Returns

IPAddress (p. 265)

void myIPAddress::setV6Priority (bool p)

brief sets IPv6 priority Sets IPv6 priority.

24.14.4 Member Data Documentation

IPAddress os::myIPAddress::address [private]

brief IP address A base IP address, can be either IPv4 or IPv6.

IPAddress os::myIPAddress::ip4Address [private]

brief IPv4 address The IPv4 address of the current object.

IPAddress os::myIPAddress::ip6Address [private]

brief IPv6 address The IPv6 address of the current object.

clock_t os::myIPAddress::last [private]

brief last time IP address updated Holds the last time the IP addresses were updated.

bool os::myIPAddress::v6_priority [private]

brief IP type priority Indicates if a node wants to prioritize IPv6.

24.15 os::safeQueue< dataType > Class Template Reference

This is the **safeQueue** (p.287) class The **safeQueue** (p.287) class is thread safe. It is a template class.

Public Member Functions

- **safeQueue** (int32_t s)
- **safeQueue** ()
- virtual ~**safeQueue** ()
- void **push** (smart_ptr< dataType > x)

Add a value to the queue This method pushes an element into the queue, assuming that space exists in the queue.

- smart_ptr< dataType > **pop** ()

Removes the head of the queue This method pops the head of the queue, if it exists. It also adjusts the queue so that the next element is available without moving every element in the queue.

- **bool empty ()**

Checks if the queue is empty. This method checks if any elements are in the queue.

Private Attributes

- **int32_t size**

Size of the queue We store the size of the queue. This integer holds that value.

- **smart_ptr< dataType > * array**

Elements in the queue We store all the elements for the queue in this vector.

- **int32_t start**

The start of the queue This stores the location of the start of the queue.

- **int32_t end**

The end of the queue This stores the end of the queue.

- **spinLock lock**

*Lock for threads This **spinLock** (p. 305) allows us to safely access the queue from multiple threads.*

24.15.1 Detailed Description

```
template<class dataType>
class os::safeQueue< dataType >
```

This is the **safeQueue** (p.287) class The **safeQueue** (p.287) class is thread safe. It is a template class.

24.15.2 Constructor & Destructor Documentation

```
template<class dataType> os::safeQueue< dataType >::safeQueue ( int32_t s ) [inline]
template<class dataType> os::safeQueue< dataType >::safeQueue ( ) [inline]
template<class dataType> virtual os::safeQueue< dataType >::~~safeQueue ( ) [inline],
[virtual]
```

24.15.3 Member Function Documentation

```
template<class dataType> bool os::safeQueue< dataType >::empty ( ) [inline]
```

Checks if the queue is empty. This method checks if any elements are in the queue.

Returns

bool

```
template<class dataType> smart_ptr<dataType> os::safeQueue< dataType >::pop ( )
[inline]
```

Removes the head of the queue This method pops the head of the queue, if it exists. It also adjusts the queue so that the next element is available without moving every element in the queue.

Returns

```
smart_ptr<dataType>
```

```
template<class dataType> void os::safeQueue< dataType >::push ( smart_ptr< dataType > x )
[inline]
```

Add a value to the queue This method pushes an element into the queue, assuming that space exists in the queue.

24.15.4 Member Data Documentation

```
template<class dataType> smart_ptr<dataType>* os::safeQueue< dataType >::array [private]
```

Elements in the queue We store all the elements for the queue in this vector.

```
template<class dataType> int32_t os::safeQueue< dataType >::end [private]
```

The end of the queue This stores the end of the queue.

```
template<class dataType> spinLock os::safeQueue< dataType >::lock [private]
```

Lock for threads This **spinLock** (p. 305) allows us to safely access the queue from multiple threads.

```
template<class dataType> int32_t os::safeQueue< dataType >::size [private]
```

Size of the queue We store the size of the queue. This integer holds that value.


```
template<class dataType> int32_t os::safeQueue< dataType >::start [private]
```

The start of the queue This stores the location of the start of the queue.

24.16 os::savable Class Reference

Basic saving class.

Inheritance diagram for os::savable:

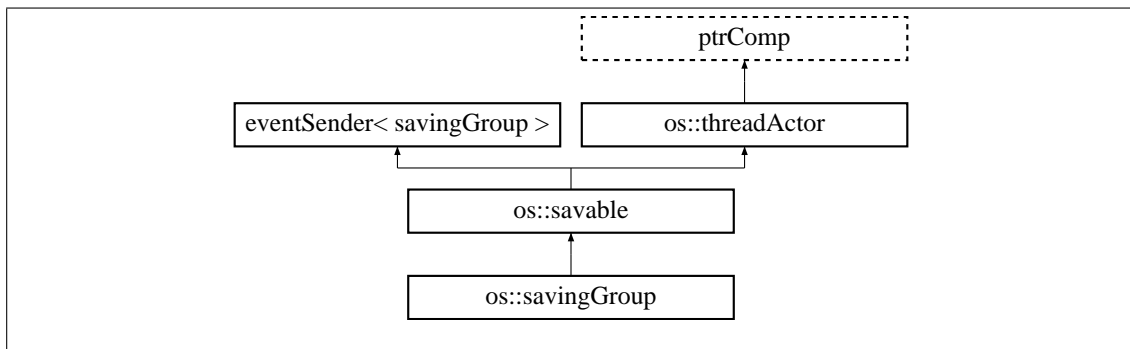

Public Member Functions

- **savable ()**
Default savable constructor.
- virtual **~savable ()**
Virtual destructor.
- void **markChanged ()**
Mark change in savable class.
- bool **needsSaving ()** const
Check if class needs to be saved.
- virtual void **save ()**
Saves the class.
- bool **hasError ()** const
Returns if this class has a logged error.
- const std::string & **getLastError ()** const
Returns the logged error.
- void **clearError ()**
Clears the logged error.
- void **perform_action ()**
Saves the class.
- virtual bool **singleCase ()** const
Indicates if a thread is a single function.
- virtual bool **action_ready ()**
Indicates if a function is available.

Static Public Member Functions

- static smart_ptr< **threadDistributor** > **getThread ()**
Access saving thread.
- static void **unbindThread ()**
Un-bind saving thread.
- static bool **setThread** (smart_ptr< **threadDistributor** > thr)
Set the saving thread-distributor.

Protected Member Functions

- void **finishedSaving** ()
*Reset **os::savable::_needsSaving** (p. 294).*
- void **errorSaving** (std::string err)
Logs error while saving.

Private Attributes

- bool **_needsSaving**
Holds if this class needs saving.
- std::string **lastError**
String representation of the last error.

24.16.1 Detailed Description

Basic saving class.

Class which defines itself as savable. A savable class alerts its listeners when it needs to be re-saved.

24.16.2 Constructor & Destructor Documentation

os::savable::savable ()

Default savable constructor.

virtual os::savable::~~savable () [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

24.16.3 Member Function Documentation

virtual bool os::savable::action_ready () [inline], [virtual]

Indicates if a function is available.

Returns

needsSaving

Reimplemented from **os::threadActor** (p. 308).

void os::savable::clearError ()

Clears the logged error.

Returns

void

`void os::savable::errorSaving (std::string err) [protected]`

Logs error while saving.

Sets the savable class into the error state, logging the given error.

Parameters

in	<i>err</i>	Error to be logged
----	------------	--------------------

Returns

`void`

`void os::savable::finishedSaving () [protected]`

Reset **`os::savable::_needsSaving`** (p. 294).

Called when a savable class has finished saving itself.

Returns

`void`

`const std::string& os::savable::getLastError () const [inline]`

Returns the logged error.

Returns

`os::savable::_lastError`

`static smart_ptr<threadDistributor> os::savable::getThread () [static]`

Access saving thread.

Returns a reference to the thread-distributor used to save files. This distributor is NULL unless explicitly set.

Returns

Saving thread-distributor

`bool os::savable::hasError () const [inline]`

Returns if this class has a logged error.

Returns

`os::savable::_lastError != ""`

void os::savable::markChanged ()

Mark change in savable class.

Slots this class for saving. Flips **os::savable::_needsSaving** (p. 294).

Returns

void

bool os::savable::needsSaving () const [inline]

Check if class needs to be saved.

Returns

os::savable::_needsSaving (p. 294)

void os::savable::perform_action () [inline], [virtual]

Saves the class.

Returns

void

Reimplemented from **os::threadActor** (p. 308).

virtual void os::savable::save () [inline], [virtual]

Saves the class.

This function must be re-implemented by classes which inherit from the savable class.

Returns

void

Reimplemented in **os::savingGroup** (p. 296).

static bool os::savable::setThread (smart_ptr< **threadDistributor** > thr) [static]

Set the saving thread-distributor.

Will not set the thread-distributor if the provided argument is NULL or the current saving thread-distributor is defined.

Returns

True if successful, else, False

virtual bool os::savable::singleCase () const [inline], [virtual]

Indicates if a thread is a single function.

Returns

true

Reimplemented from **os::threadActor** (p. 308).

```
static void os::savable::unbindThread ( ) [static]
```

Un-bind saving thread.

Sets the current saving thread to NULL. Assuming the saving distributor is not shared, this will delete the thread-distributor.

Returns

void

24.16.4 Member Data Documentation

```
bool os::savable::_needsSaving [private]
```

Holds if this class needs saving.


```
std::string os::savable::lastError [private]
```

String representation of the last error.

24.17 os::savingGroup Class Reference

Group of saving classes.

Inheritance diagram for os::savingGroup:

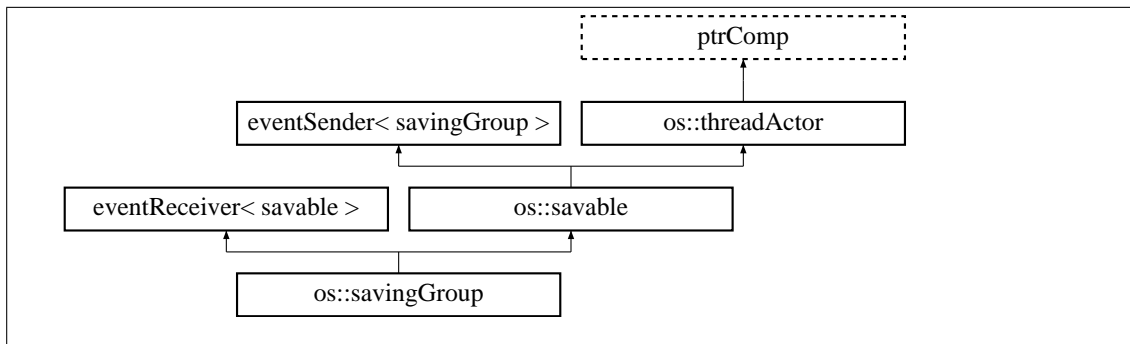

Public Member Functions

- **savingGroup ()**
*Default **savingGroup** (p. 294) constructor.*
- virtual **~savingGroup ()**
Virtual destructor.
- virtual void **save ()**
Saves the class.
- void **bindSavable** (smart_ptr< **savable** > sr)
Checks if a savable class needs to be queued.

Protected Member Functions

- void **receiveEvent** (smart_ptr< **savable** > sr)
Receives a change event.

Private Attributes

- **os::spinLock queueLock**
Mutex for save queue.
- **os::smart_ptr< os::unsortedList< savable > > saveQueue**
Queue of savable classes to be re-saved.

Friends

- class **eventSender**< **savingGroup** >
Friendship with event sender.

Additional Inherited Members

24.17.1 Detailed Description

Group of saving classes.

Class which defines listens for save triggers from a set of slave classes. Note that this class is itself savable.

24.17.2 Constructor & Destructor Documentation

os::savingGroup::savingGroup () [inline]

Default **savingGroup** (p. 294) constructor.

virtual os::savingGroup::~~savingGroup () [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

24.17.3 Member Function Documentation

void os::savingGroup::bindSavable (smart_ptr< **savable** > sr)

Checks if a savable class needs to be queued.

Binds a savable class to this receiver checking its current status to see if it needs to be queued for saving.

Parameters

in	sav	Savable node to be bound
----	-----	--------------------------

Returns

void

void os::savingGroup::receiveEvent (smart_ptr< **savable** > sr) [protected]

Receives a change event.

This function is triggered by a savable class to which this listener is registered to.

Parameters

in	sr	Pointer to savable class
----	----	--------------------------

Returns

void

virtual void os::savingGroup::save () [virtual]

Saves the class.

This function must be re-implemented by classes which inherit from the savable class.

Returns

void

Reimplemented from **os::savable** (p. 293).

24.17.4 Friends And Related Function Documentation

friend class eventSender< **savingGroup** > [friend]

Friendship with event sender.

The eventSender must be able to access the **savingGroup::receiveEvent** (p. 296) function.

24.17.5 Member Data Documentation

os::spinLock os::savingGroup::queueLock [private]

Mutex for save queue.

os::smart_ptr<os::unsortedList<**savable**> > os::savingGroup::saveQueue [private]

Queue of savable classes to be re-saved.

24.18 os::Serial Class Reference

This is the **Serial** (p. 296) class. **Serial** (p. 296) objects allow us to abstract out most of the platform irregularities across multiple systems.

Public Member Functions

- **Serial** (char *portName, bool t)
***Serial** (p. 296) constructor Initializes serial communication on a given COM port.*
- virtual **~Serial** ()
***Serial** (p. 296) destructor Closes a serial connection.*
- int **ReadData** (uint8_t *buffer, uint32_t nbChar)
Read from a serial port Read data in a buffer, if nbChar is greater than the maximum number of bytes available, it will return only the bytes available. The function return -1 when nothing could be read, the number of bytes actually read.
- bool **WriteData** (uint8_t *buffer, uint32_t nbChar)
*Write to a serial port Writes data from a buffer through the **Serial** (p. 296) connection. Returns true on success.*
- bool **IsConnected** ()
Check connection Checks on the status of the serial port.

Private Attributes

- uint32_t **hSerial**
Comm Handler Holds an unsigned integer, which is used for status information.
- bool **connected**
*Connection indicator A boolean which holds whether or not this **Serial** (p. 296) object is connected to a port.*
- bool **track**
*Variable for debugging Allows us to determine whether or not a particular **Serial** (p. 296) object needs to print out debugging information.*

24.18.1 Detailed Description

This is the **Serial** (p. 296) class. **Serial** (p. 296) objects allow us to abstract out most of the platform irregularities across multiple systems.

24.18.2 Constructor & Destructor Documentation

`Serial::Serial (char * portName, bool t)`

Serial (p. 296) constructor Initializes serial communication on a given COM port.

`Serial::~Serial () [virtual]`

Serial (p. 296) destructor Closes a serial connection.

24.18.3 Member Function Documentation

`bool Serial::IsConnected ()`

Check connection Checks on the status of the serial port.

Returns

bool

int32_t Serial::ReadData (uint8_t * buffer, uint32_t nbChar)

Read from a serial port Read data in a buffer, if nbChar is greater than the maximum number of bytes available, it will return only the bytes available. The function return -1 when nothing could be read, the number of bytes actually read.

Returns

int

bool Serial::WriteData (uint8_t * buffer, uint32_t nbChar)

Write to a serial port Writes data from a buffer through the **Serial** (p. 296) connection. Returns true on success.

Returns

bool

24.18.4 Member Data Documentation

bool os::Serial::connected [private]

Connection indicator A boolean which holds whether or not this **Serial** (p. 296) object is connected to a port.

uint32_t os::Serial::hSerial [private]

Comm Handler Holds an unsigned integer, which is used for status information.

bool os::Serial::track [private]

Variable for debugging Allows us to determine whether or not a particular **Serial** (p. 296) object needs to print out debugging information.

24.19 os::serialThread Class Reference

Serial (p. 296) communication thread The is a serial class that runs as a thread. Thanks to this fact, we can run multiple serial communication threads as well as run a primary set of threads at once.

Public Member Functions

- **serialThread** ()
- **serialThread** (bool track)
- virtual ~**serialThread** ()
- void **serialLoop** (os::smart_ptr< **os::threadHolder** > th)

connection management method This method monitors makes sure that active connections are still active.

- void **sendData** (uint8_t *x, uint32_t nb)
Sends data Sends data to a given location.
- int32_t **receiveData** (uint8_t *x, uint32_t nb)
receives data Gets data.

Private Member Functions

- void **build** (bool track)
Build serial thread This is a method that builds the serial thread and determines if said thread will have debugging statements.
- void **search** (os::smart_ptr< **os::threadHolder** > th)
Creates serial objects Goes through all possible ports and creates serial objects for those ports which need serial objects.
- void **listen** ()

Private Attributes

- **Serial * connection**
*The connection itself This is a pointer to the actual **Serial** (p. 296) object.*
- char * **conName**
Name for the connection Stores the name of this connection.
- std::string * **nameList**
Stores port names There is a set of possible names for ports. This pointer to string holds the names of various possible ports.
- int32_t **numNames**
The number of ports This stores the number of unique ports on a given platform.
- int32_t **resetTest**
Used to detect loss of connection. Stores the number of consecutive failures in sending data. If this variable increases beyond 10, the connection is deleted.
- bool **print**
Debug variable Used to activate debugging statements.
- bool **active**
Thread activity Holds if the current serial thread should be active.

24.19.1 Detailed Description

Serial (p. 296) communication thread The is a serial class that runs as a thread. Thanks to this fact, we can run multiple serial communication threads as well as run a primary set of threads at once.

24.19.2 Constructor & Destructor Documentation

`serialThread::serialThread ()`

`serialThread::serialThread (bool track)`

`serialThread::~~serialThread () [virtual]`

24.19.3 Member Function Documentation

`void serialThread::build (bool track) [private]`

Build serial thread This is a method that builds the serial thread and determines if said thread will have debugging statements.

`void os::serialThread::listen () [private]`

`int32_t serialThread::receiveData (uint8_t * x, uint32_t nb)`

receives data Gets data.

Returns

`int32_t`

`void serialThread::search (os::smart_ptr< os::threadHolder > th) [private]`

Creates serial objects Goes through all possible ports and creates serial objects for those ports which need serial objects.

`void serialThread::sendData (uint8_t * x, uint32_t nb)`

Sends data Sends data to a given location.

`void serialThread::serialLoop (os::smart_ptr< os::threadHolder > th)`

connection management method This method monitors makes sure that active connections are still active.

24.19.4 Member Data Documentation

`bool os::serialThread::active [private]`

Thread activity Holds if the current serial thread should be active.

`char* os::serialThread::conName [private]`

Name for the connection Stores the name of this connection.

`Serial* os::serialThread::connection [private]`

The connection itself This is a pointer to the actual **Serial** (p. 296) object.

`std::string* os::serialThread::nameList [private]`

Stores port names There is a set of possible names for ports. This pointer to string holds the names of various possible ports.

`int32_t os::serialThread::numNames [private]`

The number of ports This stores the number of unique ports on a given platform.

`bool os::serialThread::print [private]`

Debug variable Used to activate debugging statements.


`int32_t os::serialThread::resetTest [private]`

Used to detect loss of connection. Stores the number of consecutive failures in sending data. If this variable increases beyond 10, the connection is deleted.

24.20 os::singleAction Class Reference

single action class This class is for a thread with only one action.

Inheritance diagram for os::singleAction:

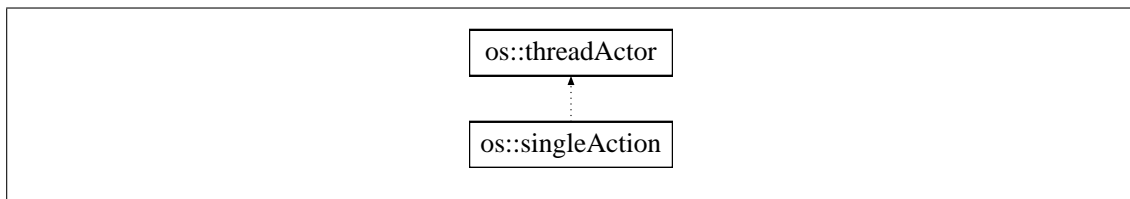

Public Member Functions

- **singleAction** (smart_ptr< **threadDistributor** > dist, void(*rf)(void *), void *rp)
- virtual ~**singleAction** ()
- virtual bool **singleCase** () const
*indicates singleCase Tells the caller that this **threadActor** (p. 307) has only one action*
- virtual bool **mustDelete** () const
*indicates deletion Tells the caller that this **threadActor** (p. 307) must be deleted.*
- virtual void **perform_action** ()
calls function Runs the function that was passed when this object was created.
- virtual bool **action_ready** ()
Indicates readiness Tells the caller that this function is ready to run.

Private Attributes

- `void(* recieveFunction)(void *)`
function to run This is a pointer to the function that will run when this thread is called.
- `void * recievePointer`
function parameters parameters for the thread that will be run.

Additional Inherited Members

24.20.1 Detailed Description

single action class This class is for a thread with only one action.

24.20.2 Constructor & Destructor Documentation

`singleAction::singleAction (smart_ptr< threadDistributor > dist, void(*)(void *) rf, void * rp)`

`virtual os::singleAction::~~singleAction () [inline], [virtual]`

24.20.3 Member Function Documentation

`virtual bool os::singleAction::action_ready () [inline], [virtual]`

Indicates readiness Tells the caller that this function is ready to run.

Returns

`bool`

Reimplemented from **os::threadActor** (p. 308).

`virtual bool os::singleAction::mustDelete () const [inline], [virtual]`

indicates deletion Tells the caller that this **threadActor** (p. 307) must be deleted.

Returns

`bool`

`void singleAction::perform_action () [virtual]`

calls function Runs the function that was passed when this object was created.

Reimplemented from **os::threadActor** (p. 308).

`virtual bool os::singleAction::singleCase () const [inline], [virtual]`

indicates singleCase Tells the caller that this **threadActor** (p. 307) has only one action

Returns

`bool`

Reimplemented from **os::threadActor** (p. 308).

24.20.4 Member Data Documentation

`void(* os::singleAction::recieveFunction) (void *)` [private]

function to run This is a pointer to the function that will run when this thread is called.

`void* os::singleAction::recievePointer` [private]

function parameters parameters for the thread that will be run.

24.21 os::socketTracker Class Reference

socketTracker (p. 303) class Tracks all currently active sockets.

Public Member Functions

- virtual **~socketTracker** ()
- `uint32_t getNumSockets` ()
*Gives the number of sockets Returns the number of sockets currently in the **socketTracker** (p. 303).*
- void **closeAll** ()
Close all sockets Closes all the sockets in the socketHolder.

Static Public Member Functions

- static `smart_ptr< socketTracker > singleton` ()
*Public constructor Creates a **socketTracker** (p. 303) if one does not exists. Returns the **socketTracker** (p. 303) if one does exist.*

Private Member Functions

- void **add** (`smart_ptr< socketUser > use`)
*Add a socket Adds a socket to the **socketTracker** (p. 303).*
- void **remove** (`smart_ptr< socketUser > use`)
*Remove a socket Removes a socket from the **socketTracker** (p. 303).*
- **socketTracker** ()

Private Attributes

- **spinLock userLock**
Lock for safety Ensures safety in multi threaded operation.
- `AVLTree< socketUser > users`
Holds sockets Holds all socket users.

Friends

- class **socketUser**

24.21.1 Detailed Description

socketTracker (p. 303) class Tracks all currently active sockets.

24.21.2 Constructor & Destructor Documentation

`socketTracker::socketTracker () [private]`

`socketTracker::~~socketTracker () [virtual]`

24.21.3 Member Function Documentation

`void socketTracker::add (smart_ptr< socketUser > use) [private]`

Add a socket Adds a socket to the **socketTracker** (p. 303).

`void socketTracker::closeAll ()`

Close all sockets Closes all the sockets in the socketHolder.

`uint32_t os::socketTracker::getNumSockets () [inline]`

Gives the number of sockets Returns the number of sockets currently in the **socketTracker** (p. 303).

Returns

`uint32_t`

`void socketTracker::remove (smart_ptr< socketUser > use) [private]`

Remove a socket Removes a socket from the **socketTracker** (p. 303).

`smart_ptr< socketTracker > socketTracker::singleton () [static]`

Public constructor Creates a **socketTracker** (p. 303) if one does not exists. Returns the **socketTracker** (p. 303) if one does exist.

Returns

`smart_ptr<socketTracker>`

24.21.4 Friends And Related Function Documentation

`friend class socketUser [friend]`

24.21.5 Member Data Documentation

`spinLock os::socketTracker::userLock [private]`

Lock for safety Ensures safety in multi threaded operation.


`AVLTree<socketUser> os::socketTracker::users [private]`

Holds sockets Holds all socket users.

24.22 os::socketUser Class Reference

Socket user class This class allows us to manage sockets.

Inheritance diagram for os::socketUser:

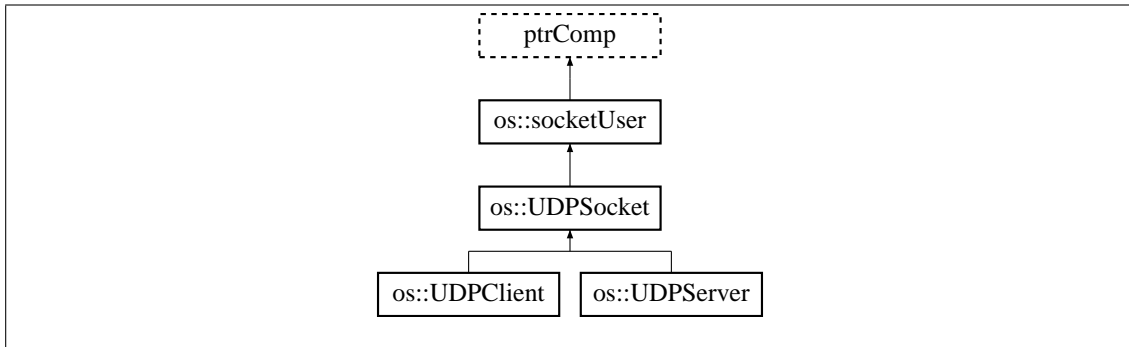

Public Member Functions

- **socketUser** ()
- virtual **~socketUser** ()
- virtual void **openSocket** ()
- virtual void **closeSocket** ()

24.22.1 Detailed Description

Socket user class This class allows us to manage sockets.

24.22.2 Constructor & Destructor Documentation

socketUser::socketUser ()

socketUser::~~socketUser () [virtual]

24.22.3 Member Function Documentation

virtual void os::socketUser::closeSocket () [inline], [virtual]

Reimplemented in **os::UDPServer** (p. 325), and **os::UDPClient** (p. 319).

virtual void os::socketUser::openSocket () [inline], [virtual]

Reimplemented in **os::UDPServer** (p. 326), and **os::UDPClient** (p. 320).

24.23 os::spinLock Class Reference

Public Member Functions

- **spinLock** ()

- virtual **~spinLock** ()
- void **acquire** ()
- void **release** ()
- bool **isTaken** ()

Private Attributes

- pthread_mutex_t **spinlock**
- bool **taken**

24.23.1 Detailed Description

brief **spinLock** (p. 305) class This is the **spinLock** (p. 305) class we are using. There is nothing particularly complex, but this wraps the available mutex into a cross platform lock. This class has different implementations across different platforms, but the same methods regardless of platform.

24.23.2 Constructor & Destructor Documentation

spinLock::spinLock ()

spinLock::~spinLock () [virtual]

24.23.3 Member Function Documentation

void spinLock::acquire ()

brief acquires lock This method allows a thread to acquire this **spinLock** (p. 305).

bool spinLock::isTaken ()

brief indicates lock status This method indicates if the lock is taken, without acquiring the lock.

Returns

bool

void spinLock::release ()

brief releases lock This method allows a thread to release this **spinLock** (p. 305).

24.23.4 Member Data Documentation

pthread_mutex_t os::spinLock::spinlock [private]

brief the base lock This is the base **spinLock** (p. 305). This is the element that changes most significantly across different platforms.


bool os::spinLock::taken [private]

brief taken This boolean indicates if the **spinLock** (p. 305) is currently taken.

24.24 os::threadActor Class Reference

threadActor (p. 307) class This class holds information for determining which thread goes at a give time.

Inheritance diagram for os::threadActor:

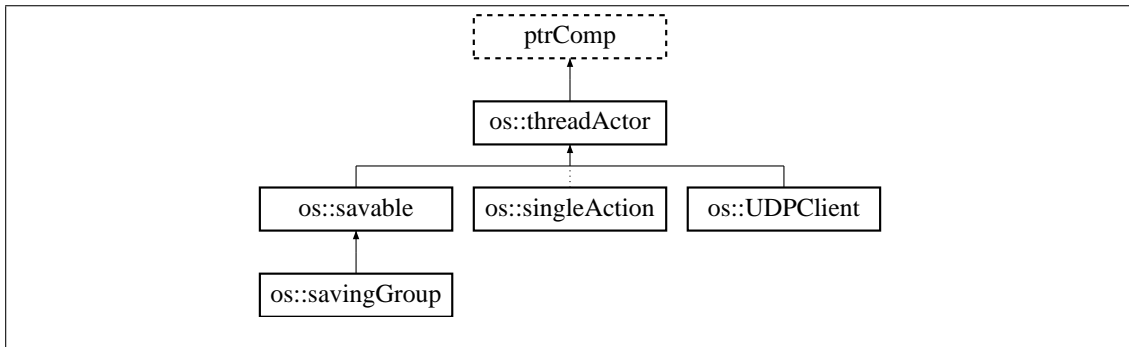

Public Member Functions

- **threadActor** ()
- virtual **~threadActor** ()
- void **pushDistributor** (smart_ptr< **threadDistributor** > dist)
*Adds actor Adds the actor to a given **threadDistributor** (p. 309).*
- void **removeDistributor** ()
Removes actor from distributor Removes the actor from it's current distributor.
- virtual bool **singleCase** () const
Indicates if a thread is a single function Indicates if thread is single function.//Access Functions bool isSpecialCase;.
- virtual void **perform_action** ()
calls thread action If a thread is a single action and has an associated function, that function will be called.
- virtual bool **action_ready** ()
Indicates if a function is available If the thread is ready to call its function, it will indicate that.

Private Attributes

- smart_ptr< **threadDistributor** > **distributor**
Distributor for actor This is the distributor for this actor.

Friends

- class **threadDistributor**

24.24.1 Detailed Description

threadActor (p. 307) class This class holds information for determining which thread goes at a give time.

24.24.2 Constructor & Destructor Documentation

`threadActor::threadActor ()`

`threadActor::~~threadActor () [virtual]`

24.24.3 Member Function Documentation

`virtual bool os::threadActor::action_ready () [inline], [virtual]`

Indicates if a function is available If the thread is ready to call its function, it will indicate that.

Returns

`bool`

Reimplemented in **os::UDPCClient** (p. 319), **os::singleAction** (p. 302), and **os::savable** (p. 291).

`virtual void os::threadActor::perform_action () [inline], [virtual]`

calls thread action If a thread is a single action and has an associated function, that function will be called.

Reimplemented in **os::UDPCClient** (p. 320), **os::singleAction** (p. 302), and **os::savable** (p. 293).

`void threadActor::pushDistributor (smart_ptr< threadDistributor > dist)`

Adds actor Adds the actor to a given **threadDistributor** (p. 309).

`void threadActor::removeDistributor ()`

Removes actor from distributor Removes the actor from it's current distributor.

`virtual bool os::threadActor::singleCase () const [inline], [virtual]`

Indicates if a thread is a single function Indicates if thread is single function.//Access Functions bool isSpecialCase;

```
uint32_t size;
uint32_t beginning_pos; uint32_t next_pos; std::vector<smart_ptr<logLine> > lineList;
friend class LineSaverListener (p. 271); os::spinLock (p. 305) lock; smartSet<LineSaverListener>
listener;
void priv_addListener(smart_ptr<LineSaverListener> l); void priv_removeListener(smart_ptr<↵
LineSaverListener> l);
@return bool
```

Reimplemented in **os::singleAction** (p. 302), and **os::savable** (p. 293).

24.24.4 Friends And Related Function Documentation

`friend class threadDistributor [friend]`

24.24.5 Member Data Documentation

`smart_ptr<threadDistributor> os::threadActor::distributor [private]`

Distributor for actor This is the distributor for this actor.

24.25 os::threadDistributor Class Reference

Distributes threads This class allows us to determine which thread should execute at any given time.

Public Member Functions

- **threadDistributor** ()
- **threadDistributor** (uint32_t nt)
- virtual **~threadDistributor** ()
- void **setNumThreads** (uint32_t nt)
sets thread count Sets the number of threads allowed in the distributor.
- uint32_t **getNumThreads** () const
gives thread count Give the number of threads in the exe_thread_list.
- smart_ptr< **threadActor** > **popNext** ()
Gives next element in the queue Removes the next element in the actor queue that is ready to operate.
- void **pushDone** (smart_ptr< **threadActor** > dn)
puts an actor onto the queue Places a thread actor onto the actor queue.

Private Member Functions

- void **addActor** (smart_ptr< **threadActor** > act)
Adds actor Adds an actor to the distributor.
- void **removeActor** (smart_ptr< **threadActor** > act)
Removes actor Removes an actor from the distributor. It will still be in the queue, but not the list.

Private Attributes

- **spinLock dataLock**
lock to ensure safe distribution This lock ensures we are operating safely.
- std::queue< smart_ptr< **threadActor** > > **actor_queue**
holds actors This is a queue of actors. This is for ordering.
- smartSet< **threadActor** > **actor_list**
holds actors This is a set of actors.
- std::vector< smart_ptr< **executorThread** > > **exe_thread_list**
holds executors for threads Holds executors for threads, also helps for ordering.

Friends

- class **threadActor**

24.25.1 Detailed Description

Distributes threads This class allows us to determine which thread should execute at any given time.

24.25.2 Constructor & Destructor Documentation

`threadDistributor::threadDistributor ()`

`threadDistributor::threadDistributor (uint32_t nt)`

`threadDistributor::~~threadDistributor () [virtual]`

24.25.3 Member Function Documentation

`void threadDistributor::addActor (smart_ptr< threadActor > act) [private]`

Adds actor Adds an actor to the distributor.

`uint32_t os::threadDistributor::getNumThreads () const [inline]`

gives thread count Give the number of threads in the `exe_thread_list`.

Returns

`uint32_t`

`smart_ptr< threadActor > threadDistributor::popNext ()`

Gives next element in the queue Removes the next element in the actor queue that is ready to operate.

Returns

`smart_ptr<threadActor>`

`void threadDistributor::pushDone (smart_ptr< threadActor > dn)`

puts an actor onto the queue Places a thread actor onto the actor queue.

`void threadDistributor::removeActor (smart_ptr< threadActor > act) [private]`

Removes actor Removes an actor from the distributor. It will still be in the queue, but not the list.

`void threadDistributor::setNumThreads (uint32_t nt)`

sets thread count Sets the number of threads allowed in the distributor.

24.25.4 Friends And Related Function Documentation

`friend class threadActor [friend]`

24.25.5 Member Data Documentation

`smartSet<threadActor> os::threadDistributor::actor_list [private]`

holds actors This is a set of actors.

`std::queue<smart_ptr<threadActor> > os::threadDistributor::actor_queue [private]`

holds actors This is a queue of actors. This is for ordering.

`spinLock os::threadDistributor::dataLock [private]`

lock to ensure safe distribution This lock ensures we are operating safely.

`std::vector<smart_ptr<executorThread> > os::threadDistributor::exe_thread_list [private]`

holds executors for threads Holds executors for threads, also helps for ordering.

24.26 os::threadHolder Class Reference

Public Member Functions

- **threadHolder** (smart_ptr< std::thread > tp, std::string ti="")
- virtual **~threadHolder** ()
- void **markFinished** ()
Indicates that a thread is finished Inside a threaded function, this method is called so that the thread handler knows the status of the thread it is monitoring.
- void **kill** ()
Notes the thread for killing This method tells the thread handler that the thread is ready to be killed.
- const bool **running** () const
Gives run status This method simply returns the status of the running boolean.
- const std::string & **threadInfo** () const
Gives _threadInfo variable Gives the thread information string to the calling object.
- const bool & **killed** ()
Gives _was_killed variable This gives the kill status of the thread back to the calling object.
- smart_ptr< std::thread > **thread** ()
Gives a smart pointer to the thread Gives a pointer to the thread for this particular threadHandler to the calling onject.
- const bool **operator==** (const **threadHolder** &th) const
- const bool **operator!=** (const **threadHolder** &th) const
- const bool **operator<=** (const **threadHolder** &th) const
- const bool **operator>=** (const **threadHolder** &th) const
- const bool **operator<** (const **threadHolder** &th) const
- const bool **operator>** (const **threadHolder** &th) const

Private Attributes

- std::string **_threadInfo**
Thread data Each thread holder gives a variety of relevant information. The _threadInfo string stores this information.
- smart_ptr< std::thread > **_thread_ptr**

Points at relevant thread Because the thread holder remains in the calling thread, this pointer allows us to know where exactly the thread actually is.

- **bool `_running`**

Indicates if a thread is operating This lets a thread check on the operation status of another thread.

- **bool `_was_killed`**

Gives status on a thread If a thread must be killed, this boolean indicates the status of the thread.

24.26.1 Constructor & Destructor Documentation

```
threadHolder::threadHolder ( smart_ptr< std::thread > tp, std::string ti = "" )
```

```
virtual os::threadHolder::~~threadHolder ( ) [inline], [virtual]
```

24.26.2 Member Function Documentation

```
void os::threadHolder::kill ( ) [inline]
```

Notes the thread for killing This method tells the thread handler that the thread is ready to be killed.

```
const bool& os::threadHolder::killed ( ) [inline]
```

Gives `_was_killed` variable This gives the kill status of the thread back to the calling object.

Returns

`os::threadHolder::_was_killed` (p. 313)

```
void os::threadHolder::markFinished ( ) [inline]
```

Indicates that a thread is finished Inside a threaded function, this method is called so that the thread handler knows the status of the thread it is monitoring.

```
const bool os::threadHolder::operator!= ( const threadHolder & th ) const [inline]
```

```
const bool os::threadHolder::operator< ( const threadHolder & th ) const [inline]
```

```
const bool os::threadHolder::operator<= ( const threadHolder & th ) const [inline]
```

```
const bool os::threadHolder::operator== ( const threadHolder & th ) const [inline]
```

```
const bool os::threadHolder::operator> ( const threadHolder & th ) const [inline]
```

```
const bool os::threadHolder::operator>= ( const threadHolder & th ) const [inline]
```

```
const bool os::threadHolder::running ( ) const [inline]
```

Gives run status This method simply returns the status of the running boolean.

Returns

`os::threadHolder::_running` (p. 313)

`smart_ptr<std::thread> os::threadHolder::thread () [inline]`

Gives a smart pointer to the thread Gives a pointer to the thread for this particular threadHandler to the calling onject.

Returns

os::threadHolder::_thread_ptr (p. 313)

`const std::string& os::threadHolder::threadInfo () const [inline]`

Gives _threadInfo variable Gives the thread information string to the calling object.

Returns

os::threadHolder::_threadInfo (p. 313)

24.26.3 Member Data Documentation

`bool os::threadHolder::_running [private]`

Indicates if a thread is operating This lets a thread check on the operation status of another thread.

`smart_ptr<std::thread> os::threadHolder::_thread_ptr [private]`

Points at relevant thread Because the thread holder remains in the calling thread, this pointer allows us to know where exactly the thread actually is.

`std::string os::threadHolder::_threadInfo [private]`

Thread data Each thread holder gives a variety of relevant information. The _threadInfo string stores this information.

`bool os::threadHolder::_was_killed [private]`

Gives status on a thread If a thread must be killed, this boolean indicates the status of the thread.

24.27 os::threadTracker Class Reference

Monitors a range of threads This class holds a range of threadHolders. This includes both active and expired threads, ensuring the ability to operate on many threads in mass.

Public Member Functions

- virtual **~threadTracker** ()
- uint32_t **killTime** () const

Gives kill time value This method returns the current killTime. killTime is the amount of time a thread can operate before it is automatically killed.

- void **setKillTime** (uint32_t kt)

*Sets killTime This method allows a user to set the killTime for a given **threadTracker** (p. 313).*

- bool **shutdown** ()
Kills all threads currently running When a program is ending, this method allows us to kill all threads. If a thread doesn't exit, this will throw an error.
- void **logShutdownFailures** ()
Logs shut-down failures.
- void **logThreads** ()
Logging method This method logs thread information into osout.
- void **errorLogThreads** ()
Logging method This method logs thread information into oserr.
- void **add** (smart_ptr< **threadHolder** > th)
Add a thread holder Adds a thread holder to the thread tracker. Will error out if the thread cannot be inserted.
- void **remove** (smart_ptr< **threadHolder** > th)
Remove a thread holder Removes a thread holder from the thread tracker. Will error out if the thread cannot be found.
- uint32_t **getNumThreads** () const
Gives the number of threads Returns the number of threads in the thread tracker.

Static Public Member Functions

- static smart_ptr< **threadTracker** > **singleton** ()
*Thread tracker creator Given that we only want one **threadTracker** (p. 313) at any given time, The singleton method checks if a **threadTracker** (p. 313) has already been made. If it has, it returns a pointer to the **threadTracker** (p. 313). If not, it creates a new **threadTracker** (p. 313) and returns the pointer.*

Private Member Functions

- void **checkKillList** ()
Removes expired threads When a thread expires, it is not automatically removed. This thread finds and deletes expired threads.
- **threadTracker** ()
- void **log** (smart_ptr< std::ostream > t)
*Logging method This allows the **threadTracker** (p. 313) to perform logging duties.*

Private Attributes

- AVLTree< **threadHolder** > **killList**
Tree of threads expired These threads have expired, but not yet deleted.
- AVLTree< **threadHolder** > **threadList**
Tree of threads running These threads are currently in operation.
- **spinLock** lock
*Safety **spinLock** (p. 305) This lock ensures that only one thread can update Trees at any given time.*
- uint32_t **_killTime**
Time before a thread expires Threads can only run so long before we must kill them. This variable allows us to vary how long a thread can run before we kill it.

24.27.1 Detailed Description

Monitors a range of threads This class holds a range of threadHolders. This includes both active and expired threads, ensuring the ability to operate on many threads in mass.

24.27.2 Constructor & Destructor Documentation

```
threadTracker::threadTracker ( ) [private]
```

```
virtual os::threadTracker::~~threadTracker ( ) [inline], [virtual]
```

24.27.3 Member Function Documentation

```
void threadTracker::add ( smart_ptr< threadHolder > th )
```

Add a thread holder Adds a thread holder to the thread tracker. Will error out if the thread cannot be inserted.

```
void threadTracker::checkKillList ( ) [private]
```

Removes expired threads When a thread expires, it is not automatically removes. This thread finds and deletes expired threads.

```
void threadTracker::errorLogThreads ( )
```

Logging method This method logs thread information into oserr.

```
uint32_t os::threadTracker::getNumThreads ( ) const [inline]
```

Gives the number of threads Returns the number of threads in the thread tracker.

Returns

uint32_t

```
uint32_t os::threadTracker::killTime ( ) const [inline]
```

Gives kill time value This method returns the current killTime. killTime is the amount of time a thread can operate before it is automatically killed.

Returns

uint32_t

```
void threadTracker::log ( smart_ptr< std::ostream > t ) [private]
```

Logging method This allows the **threadTracker** (p.313) to perform logging duties.

```
void threadTracker::logShutdownFailures ( )
```

Logs shut-down failures.


```
void threadTracker::logThreads ( )
```

Logging method This method logs thread information into osout.

```
void threadTracker::remove ( smart_ptr< threadHolder > th )
```

Remove a thread holder Removes a thread holder from the thread tracker. Will error out if the thread cannot be found.

```
void os::threadTracker::setKillTime ( uint32_t kt ) [inline]
```

Sets killTime This method allows a user to set the killTime for a given **threadTracker** (p. 313).

```
bool threadTracker::shutdown ( )
```

Kills all threads currently running When a program is ending, this method allows us to kill all threads. If a thread doesn't exit, this will throw an error.

```
smart_ptr< threadTracker > threadTracker::singleton ( ) [static]
```

Thread tracker creator Given that we only want one **threadTracker** (p. 313) at any given time, The singleton method checks if a **threadTracker** (p. 313) has already been made. If it has, it returns a pointer to the **threadTracker** (p. 313). If not, it creates a new **threadTracker** (p. 313) and returns the pointer.

Returns

```
smart_ptr<threadTracker>
```

24.27.4 Member Data Documentation

```
uint32_t os::threadTracker::_killTime [private]
```

Time before a thread expires Threads can only run so long before we must kill them. This variable allows us to vary how long a thread can run before we kill it.

```
AVLTree<threadHolder> os::threadTracker::killList [private]
```

Tree of threads expired These threads have expired, but not yet deleted.

```
spinLock os::threadTracker::lock [private]
```

Safety **spinLock** (p. 305) This lock ensures that only one thread can update Trees at any given time.

```
AVLTree<threadHolder> os::threadTracker::threadList [private]
```

Tree of threads running These threads are currently in operation.

24.28 os::UDPAVLNode Struct Reference

Public Member Functions

- virtual **~UDPAVLNode** ()
- const bool **operator==** (const **UDPAVLNode** &comp) const
- const bool **operator>** (const **UDPAVLNode** &comp) const

Public Attributes

- struct sockaddr_in **ipv4_addr**
- struct sockaddr_in6 **ipv6_addr**
- **IPAddress** **address**

24.28.1 Detailed Description

brief **UDPAVLNode** (p. 317) struct Node used by the UDP server for path rectifying.

24.28.2 Constructor & Destructor Documentation

virtual os::UDPAVLNode::~~UDPAVLNode () [inline], [virtual]

24.28.3 Member Function Documentation

const bool os::UDPAVLNode::operator== (const **UDPAVLNode** & comp) const [inline]

const bool os::UDPAVLNode::operator> (const **UDPAVLNode** & comp) const [inline]

24.28.4 Member Data Documentation

IPAddress os::UDPAVLNode::address

brief **IPAddress** (p. 265) of node IP address of the node.

struct sockaddr_in os::UDPAVLNode::ipv4_addr


brief IPv4 address IPv4 address of the node.

struct sockaddr_in6 os::UDPAVLNode::ipv6_addr

brief IPv6 address IPv6 address of the node.

24.29 os::UDPCClient Class Reference

Inheritance diagram for os::UDPCClient:

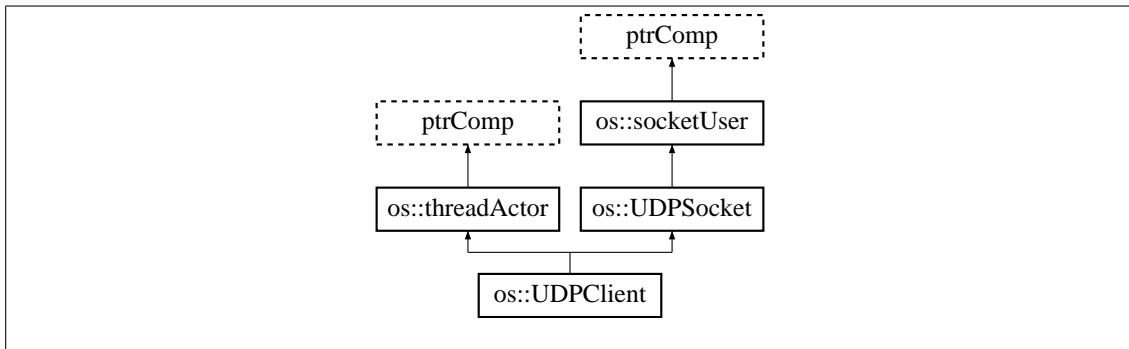

Public Member Functions

- **UDPClient** (int32_t v4_port, int32_t v6_port, const **IPAddress** &address)
- **UDPClient** (int32_t v4_port, int32_t v6_port, smart_ptr< **myIPAddress** > ip4_requires=NULL)
- virtual ~**UDPClient** ()
- void **openSocket** ()
- void **closeSocket** ()
- void **connect** ()
- void **disconnect** ()
- virtual void **perform_action** ()
- virtual bool **action_ready** ()
- bool **getActive** ()
- bool **getConnected** ()
- void **setReset** (float x)
- bool **send** (smart_ptr< **UDPPacket** > pck)

Private Attributes

- int32_t **intIPv4_Port**
- int32_t **intIPv6_Port**
- bool **active**
- volatile bool **connected**
- float **conTrack**
- float **resetVal**
- **spinLock** **safeDelete**
- os::smart_ptr< **myIPAddress** > **myIP**
- **IPAddress** **addr**
- struct sockaddr_in **ipv4_addr**
- struct sockaddr_in6 **ipv6_addr**
- int32_t **s**
- int32_t **slen**
- bool **broadcast**

Additional Inherited Members

24.29.1 Detailed Description

brief UDP Client class This is the class for the UDP Client. The client and server are independent classes.

24.29.2 Constructor & Destructor Documentation

UDPClient::UDPClient (int32_t v4_port, int32_t v6_port, const **IPAddress** & address)

UDPClient::UDPClient (int32_t v4_port, int32_t v6_port, smart_ptr< **myIPAddress** > ip4_requires = NULL)

UDPClient::~UDPClient () [virtual]

24.29.3 Member Function Documentation

bool UDPClient::action_ready () [virtual]

brief checks if a message is available. Checks if a message is available.

Returns

bool

Reimplemented from **os::threadActor** (p. 308).

void UDPClient::closeSocket () [virtual]

brief closes socket Closes the socket of the client.

Reimplemented from **os::socketUser** (p. 305).

void UDPClient::connect ()

brief begins connection Initiates the connection for this client.

void UDPClient::disconnect ()

brief forces disconnection Forcibly closes the connection.

bool UDPClient::getActive () [virtual]

brief gives activity status. Gives the active boolean to caller.

Returns

bool

Reimplemented from **os::UDPSocket** (p. 329).

bool UDPCient::getConnected () [virtual]

brief gives connection status Calculates if the client is currently connected.

Returns

bool

Reimplemented from **os::UDPSocket** (p. 329).

void UDPCient::openSocket () [virtual]

brief opens socket Opens the socket of the client.

Reimplemented from **os::socketUser** (p. 305).

void UDPCient::perform_action () [virtual]

brief receives a message Receives a message.

Reimplemented from **os::threadActor** (p. 308).

bool UDPCient::send (smart_ptr< **UDPPacket** > pck) [virtual]

brief sends data Attempts to send data. Will report on the success or failure of the transmission.

Returns

bool

Reimplemented from **os::UDPSocket** (p. 329).

void UDPCient::setReset (float x)

brief sets reset Sets the amount of time time allowed before the connection is considered dead.

24.29.4 Member Data Documentation

bool os::UDPCient::active [private]

brief indicates if active Indicates if this client is active.

IPAddress os::UDPCient::addr [private]

brief address of target Holds the IP address of the target device.

bool os::UDPCient::broadcast [private]

brief indicates broadcast mode Stores if the client is broadcasting.

volatile bool os::UDPCient::connected [private]

brief indicates if connected Indicates if this client is currently connected.

float os::UDPClient::conTrack [private]

brief holds time Holds the time for determining connection status.

int32_t os::UDPClient::intIPv4_Port [private]

brief port for IPv4 Holds the port for IPv4 transmissions.

int32_t os::UDPClient::intIPv6_Port [private]

brief port for IPv6 Holds the port for IPv6 transmissions.

struct sockaddr_in os::UDPClient::ipv4_addr [private]

brief IPv4 address of target Holds the IPv4 address of the target device.

struct sockaddr_in6 os::UDPClient::ipv6_addr [private]

brief IPv6 address of target Holds the IPv6 address of the target device.

os::smart_ptr<**myIPAddress**> os::UDPClient::myIP [private]

brief client's IP address Holds the client's own IP address

float os::UDPClient::resetVal [private]

brief holds timeout Holds the amount of time that must pass before a connection is considered inactive.

int32_t os::UDPClient::s [private]

brief socket Socket used in data transmission.

spinLock os::UDPClient::safeDelete [private]

brief lock for safety Ensures that the client can be safely multi threaded.

int32_t os::UDPClient::slen [private]

brief length of address of target socket This is the length of the address of the target socket.

24.30 os::UDPPacket Class Reference

Public Member Functions

- **UDPPacket** (uint8_t *input, const **IPAddress** &i, int32_t p)
- **UDPPacket** (uint8_t *output, int32_t l, int32_t t, const **IPAddress** &i, int32_t p)
- virtual ~**UDPPacket** ()
- int32_t **getLength** () const

- `int32_t` **getType** () const
- `uint8_t *` **getData** ()
- const `IPAddress` & **getAddress** () const
- `int32_t` **getPort** () const
- `os::smart_ptr< byte >` **sendData** () const

Private Attributes

- `IPAddress` **ip**
- bool **in_or_out**
- `int32_t` **port**
- `uint8_t *` **data**
- `uint16_t` **length**
- `uint8_t` **type**

24.30.1 Detailed Description

brief **UDPPacket** (p. 321) class This is the UDP Packet class, it can be sent and received.

24.30.2 Constructor & Destructor Documentation

`UDPPacket::UDPPacket (uint8_t * input, const IPAddress & i, int32_t p)`

brief receiving initializer Sets up a packet to be received.

`UDPPacket::UDPPacket (uint8_t * output, int32_t l, int32_t t, const IPAddress & i, int32_t p)`

brief sending initializer Sets up a packet to be sent.

`UDPPacket::~UDPPacket ()` [virtual]

24.30.3 Member Function Documentation

const `IPAddress` & `UDPPacket::getAddress` () const

brief gets IP address Returns the IP address of the packet.

Returns

`smart_ptr<IPAddress>`

`uint8_t *` `UDPPacket::getData` ()

brief gets data Returns the data from the packet.

Returns

`uint8_t*`

int32_t UDPPacket::getLength () const

brief gets length Returns the length of the packet.

Returns

int32_t

int32_t UDPPacket::getPort () const

brief gets port Returns the port of the packet.

Returns

int32_t

int32_t UDPPacket::getType () const

brief gets type Returns the type of the packet.

Returns

int32_t

os::smart_ptr< byte > UDPPacket::sendData () const

brief preps data for transmission Prepares the data for transmission. This packs the type, length, and data into a single variable.

Returns

uint8_t*

24.30.4 Member Data Documentation

uint8_t* os::UDPPacket::data [private]

brief packet contents Holds the information this packet is transmitting.

bool os::UDPPacket::in_or_out [private]

brief indicates direction of data flow This value is true if the packet is being received. This value is false if this packet is being received.

IPAddress os::UDPPacket::ip [private]

brief IP address of target The location of the target of this packet.

uint16_t os::UDPPacket::length [private]

brief length of transmitted data This holds the length of the data in the packet.

int32_t os::UDPPacket::port [private]


brief port for connection Holds the port for the packet.

uint8_t os::UDPPacket::type [private]

brief type of packet Stores the type of the packet.

24.31 os::UDPServer Class Reference

Inheritance diagram for os::UDPServer:

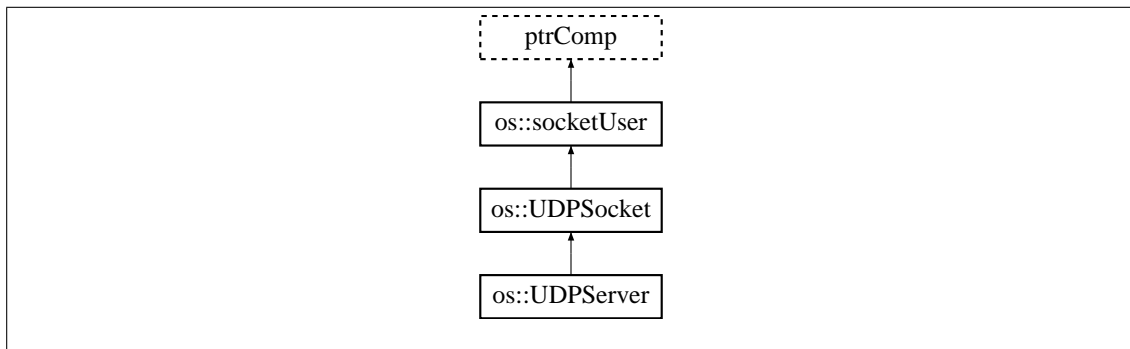

Public Member Functions

- **UDPServer** (int32_t v4_port, int32_t v6_port)
- virtual ~**UDPServer** ()
- void **openSocket** ()
- void **closeSocket** ()
- void **start** ()
- void **end** ()
- void **receiveLoopIPv4** (smart_ptr< **threadHolder** > th)
- void **receiveLoopIPv6** (smart_ptr< **threadHolder** > th)
- bool **getActive** ()
- bool **send** (smart_ptr< **UDPPacket** > pck)
- bool **getConnected** ()

Private Attributes

- int32_t **intIPv4_Port**
- int32_t **intIPv6_Port**
- bool **ip4_active**
- bool **ip6_active**
- volatile bool **connected**
- **spinLock** **safeDelete**
- AVLTree< **UDPAVLNode** > **ipAddressRef**

- **spinLock avlLock**
- struct sockaddr_in **ipv4_addr**
- struct sockaddr_in6 **ipv6_addr**
- int32_t **ip4_soc**
- int32_t **ip6_soc**
- socklen_t **ip4_len**
- socklen_t **ip6_len**

Additional Inherited Members

24.31.1 Detailed Description

brief **UDPServer** (p. 324) class This is the class for the server half of our socket connection.

24.31.2 Constructor & Destructor Documentation

UDPServer::UDPServer (int32_t v4_port, int32_t v6_port)

UDPServer::~~UDPServer () [virtual]

24.31.3 Member Function Documentation

void UDPServer::closeSocket () [virtual]

brief closes sockets Closes the server's sockets.

Reimplemented from **os::socketUser** (p. 305).

void UDPServer::end ()

brief shuts down the server Ends current connections and closes the active sockets.

bool UDPServer::getActive () [virtual]

brief gets active Returns the active status to the caller.

Returns

bool

Reimplemented from **os::UDPSocket** (p. 329).

bool UDPServer::getConnected () [virtual]

brief gets the connection status Gives the connection status to the caller.

Returns

bool

Reimplemented from **os::UDPSocket** (p. 329).

void UDPServer::openSocket () [virtual]

brief opens sockets Opens the server's sockets.

Reimplemented from **os::socketUser** (p. 305).

void UDPServer::receiveLoopIPv4 (smart_ptr< **threadHolder** > th)

brief receive loop for IPv4 This method is intended to run in it's own thread, where it will read in information. This method adds clients to the AVL tree of nodes. It also calls the received method method so that other threads know that new data has arrived.

void UDPServer::receiveLoopIPv6 (smart_ptr< **threadHolder** > th)

brief receive loop for IPv6 This method is intended to run in it's own thread, where it will read in information. This method adds clients to the AVL tree of nodes. It also calls the received method method so that other threads know that new data has arrived.

bool UDPServer::send (smart_ptr< **UDPPacket** > pck) [virtual]

brief sends a packet This method sends a provided **UDPPacket** (p. 321) to its target.

Returns

bool

Reimplemented from **os::UDPSocket** (p. 329).

void UDPServer::start ()

brief starts the server This method starts the server by creating the necessary sockets and starting the listening threads for IPv4 and IPv6 transmission.

24.31.4 Member Data Documentation

spinLock os::UDPServer::avlLock [private]

brief tree lock Allows us to access the tree of nodes while multi-threading.

volatile bool os::UDPServer::connected [private]

brief server connection status Indicates if the server is currently connected to a client.

int32_t os::UDPServer::intIPv4_Port [private]

brief IPv4 address of server This is the IPv4 address of the server. (This node).

int32_t os::UDPServer::intIPv6_Port [private]

brief IPv6 address of the server This is the IPv6 address of the server. (This node).

`bool os::UDPServer::ip4_active [private]`

brief IPv4 activity Indicates if the IPv4 address is currently active.

`socklen_t os::UDPServer::ip4_len [private]`

brief size of target socket This is the size of the target's IPv4 socket.

`int32_t os::UDPServer::ip4_soc [private]`

brief IPv4 socket Address of the IPv4 socket for this server.

`bool os::UDPServer::ip6_active [private]`

brief IPv6 activity Indicates if the IPv6 address is currently active.

`socklen_t os::UDPServer::ip6_len [private]`

brief size of target socket This is the size of the target's IPv6 socket.

`int32_t os::UDPServer::ip6_soc [private]`

brief IPv6 socket Address of the IPv6 socket for this server.

`AVLTree<UDPAVLNode> os::UDPServer::ipAddressRef [private]`

brief tree of nodes This is a tree of target nodes that this server knows of.

`struct sockaddr_in os::UDPServer::ipv4_addr [private]`

brief IPv4 address of target This is the IPv4 address of the current client of this server.

`struct sockaddr_in6 os::UDPServer::ipv6_addr [private]`

brief IPv6 address of target This is the IPv6 address of the current client of this server.


`spinLock os::UDPServer::safeDelete [private]`

brief deletion lock This lock allows us to safely delete things while multi-threading.

24.32 os::UDPSocket Class Reference

UDPSocket (p. 327) class A class for UDPSockets, which in turn allows us to multi thread the packet send/receive functionality.

Inheritance diagram for os::UDPSocket:

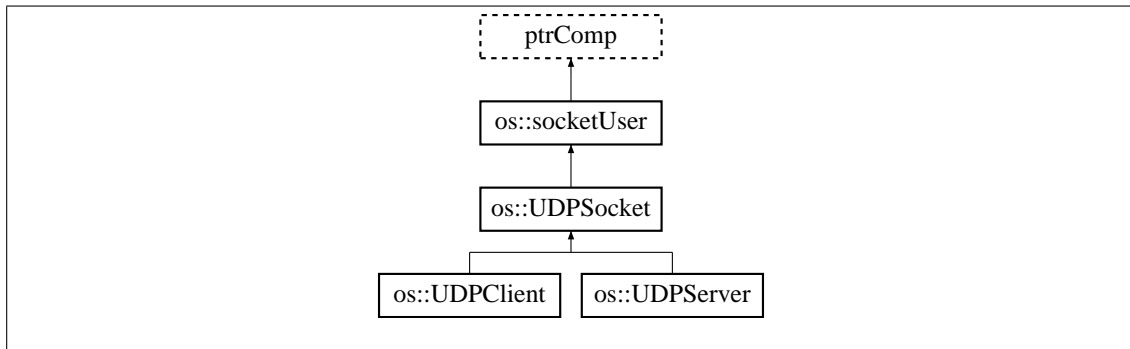

Public Member Functions

- **UDPSocket** ()
- virtual **~UDPSocket** ()
- virtual bool **getActive** ()
returns state of socket. Gives the status of the current socket.
- void **setReceiveEvent** (void(*func)(void *), void *ptr)
Sets receive functionality Determines what function and parameters will be activated when the receive event occurs.
- virtual bool **send** (smart_ptr< **UDPPacket** > pck)
*Send a **UDPPacket** (p. 321) Sends a **UDPPacket** (p. 321) and returns whether or not the packet was sent successfully.*
- virtual bool **getConnected** ()
Gives connection status Returns the status of the socket.
- bool **available** ()
Indicates if a packet can be received Lets the caller know if there are packets available to read.
- smart_ptr< **UDPPacket** > **receive** ()
Gives the next packet Gives the next packet in the queue.

Protected Attributes

- **safeQueue< UDPPacket > incomingPackets**
Incoming data A queue of incoming packets. This is thread safe so we can run things concurrently.
- **spinLock popLock**
Lock for popping. Ensures we can safely pop the packet queue.
- void(* **receiveFunction**)(void *)
Called on packet received Determines what function will be called when a packet is received.
- void * **receivePointer**
Parameters for receiveFunction Parameters for the called function.

24.32.1 Detailed Description

UDPSocket (p. 327) class A class for UDPSockets, which in turn allows us to multi thread the packet send/receive functionality.

24.32.2 Constructor & Destructor Documentation

UDPSocket::UDPSocket ()

UDPSocket::~~UDPSocket () [virtual]

24.32.3 Member Function Documentation

bool os::UDPSocket::available () [inline]

Indicates if a packet can be received Lets the caller know if there are packets available to read.

Returns

bool

virtual bool os::UDPSocket::getActive () [inline], [virtual]

returns state of socket. Gives the status of the current socket.

Returns

bool

Reimplemented in **os::UDPServer** (p. 325), and **os::UDPClient** (p. 319).

virtual bool os::UDPSocket::getConnected () [inline], [virtual]

Gives connection status Returns the status of the socket.

Returns

bool

Reimplemented in **os::UDPServer** (p. 325), and **os::UDPClient** (p. 320).

smart_ptr< **UDPPacket** > UDPSocket::receive ()

Gives the next packet Gives the next packet in the queue.

Returns

smart_ptr<UDPPacket>

virtual bool os::UDPSocket::send (smart_ptr< **UDPPacket** > pck) [inline], [virtual]

Send a **UDPPacket** (p. 321) Sends a **UDPPacket** (p. 321) and returns whether or not the packet was sent successfully.

Returns

bool

Reimplemented in **os::UDPServer** (p. 326), and **os::UDPClient** (p. 320).

`void UDPSocket::setReceiveEvent (void(*)(void *) func, void * ptr)`

Sets receive functionality Determines what function and parameters will be activated when the receive event occurs.

24.32.4 Member Data Documentation

safeQueue<UDPPacket> `os::UDPSocket::incomingPackets` [protected]

Incoming data A queue of incoming packets. This is thread safe so we can run things concurrently.

spinLock `os::UDPSocket::popLock` [protected]

Lock for popping. Ensures we can safely pop the packet queue.

`void(* os::UDPSocket::receiveFunction) (void *)` [protected]

Called on packet received Determines what function will be called when a packet is received.

`void* os::UDPSocket::receivePointer` [protected]

Parameters for receiveFunction Parameters for the called function.

24.33 os::USBFile Class Reference

Public Member Functions

- **USBFile** ()
- virtual **~USBFile** ()
- bool **isUSBDrive** ()
- **USBNode * getCurrentDrive** ()

24.33.1 Constructor & Destructor Documentation

`USBFile::USBFile ()`

`USBFile::~~USBFile ()` [virtual]

24.33.2 Member Function Documentation

USBNode * USBFile::getCurrentDrive ()

bool USBFile::isUSBDrive ()

24.34 os::USBNode Class Reference

This class stores the location of a USB device.

Public Member Functions

- **USBNode** (std::string p)
- std::string **getPath** ()

Getter for the path string. This is a simple getter, it returns a string.

Private Attributes

- std::string **path**

USB path This string holds the path to a USB device.

24.34.1 Detailed Description

This class stores the location of a USB device.

24.34.2 Constructor & Destructor Documentation

USBNode::USBNode (std::string p)

24.34.3 Member Function Documentation

std::string USBNode::getPath ()

Getter for the path string. This is a simple getter, it returns a string.

Returns

std::string::path

24.34.4 Member Data Documentation


std::string os::USBNode::path [private]

USB path This string holds the path to a USB device.

24.35 os::XML_Node Class Reference

XML Node class The core node of our XML parsing.

Inheritance diagram for os::XML_Node:

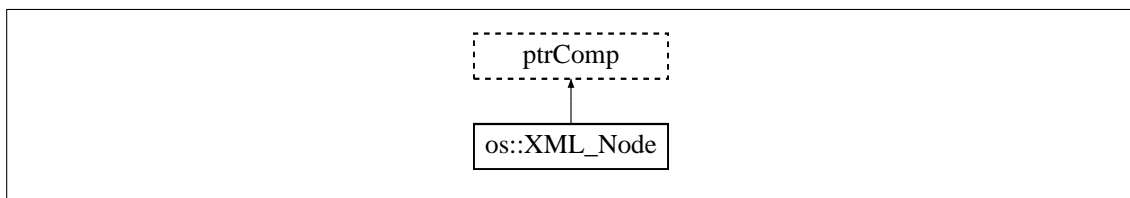

Public Member Functions

- **XML_Node** (std::string _id)
- virtual ~**XML_Node** ()
- void **setData** (std::string str)
sets data Sets the data element to a given string.
- **smartXMLNodeList findElement** (std::string _id)
finds node Returns the a list with each node that has the given identifier.
- void **deleteElement** (std::string _id)
removes element Removes all nodes with a given identifier and their children.
- void **addElement** (**smartXMLNode** node)
adds element Adds an element to the children of the current node.
- const std::string & **getID** () const
gets identifier Returns the identifier of a node.
- const std::string & **getData** () const
gets data Returns the data of a node.
- **smartXMLNodeList & getChildren** ()
returns children Returns the children of a node.
- const **smartXMLNodeList** **getChildren** () const
returns children Returns the children of a node.
- const std::vector< std::string > & **getDataList** () const
returns dataList Returns the dataLust of a node.
- std::vector< std::string > & **getDataList** ()
returns dataList Returns the dataLust of a node.

Private Attributes

- std::string **ID**
node identifier Identifies the node with a specific name.
- std::string **data**
Holds datum Holds one piece of data, assuming this node holds only one piece of data.
- **smartXMLNodeList children**
children of node The children of this node, as this system is structured as a tree.
- std::vector< std::string > **dataList**
Holds data Holds a list of data, assuming we have more than one piece of data to store in this node.

24.35.1 Detailed Description

XML Node class The core node of our XML parsing.

24.35.2 Constructor & Destructor Documentation

XML_Node::XML_Node (std::string _id)

virtual os::XML_Node::~~XML_Node () [inline], [virtual]

24.35.3 Member Function Documentation

void XML_Node::addElement (**smartXMLNode** node)

adds element Adds an element to the children of the current node.

void XML_Node::deleteElement (std::string _id)

removes element Removes all nodes with a given identifier and their children.

smartXMLNodeList XML_Node::findElement (std::string _id)

finds node Returns the a list with each node that has the given identifier.

Returns

smart_ptr<unsortedList<XMLNode> >

smartXMLNodeList& os::XML_Node::getChildren () [inline]

returns children Returns the children of a node.

Returns

smart_ptr<unsortedList<XMLNode> >&

const **smartXMLNodeList** os::XML_Node::getChildren () const [inline]

returns children Returns the children of a node.

Returns

const smart_ptr<unsortedList<XMLNode> >

const std::string& os::XML_Node::getData () const [inline]

gets data Returns the data of a node.

Returns

const std::string&

const std::vector<std::string>& os::XML_Node::getDataList () const [inline]

returns dataList Returns the dataLust of a node.

Returns

const std::vector<std::string>&

`std::vector<std::string>& os::XML_Node::getDataList () [inline]`

returns dataList Returns the dataLust of a node.

Returns

`std::vector<std::string>&`

`const std::string& os::XML_Node::getID () const [inline]`

gets identifier Returns the identifier of a node.

Returns

`const std::string&`

`void os::XML_Node::setData (std::string str) [inline]`

sets data Sets the data element to a given string.

24.35.4 Member Data Documentation

smartXMLNodeList `os::XML_Node::children [private]`

children of node The children of this node, as this system is structured as a tree.

`std::string os::XML_Node::data [private]`

Holds datum Holds one piece of data, assuming this node holds only one piece of data.

`std::vector<std::string> os::XML_Node::dataList [private]`

Holds data Holds a list of data, assuming we have more than one piece of data to store in this node.

`std::string os::XML_Node::ID [private]`

node identifier Identifies the node with a specific name.

Part V

CryptoGateway Library

Chapter 25

Introduction

The CryptoGateway library contains classes which handle cryptography. CryptoGateway is designed as an open source library, so much of the cryptography within the library is relatively simple. CryptoGateway is not meant to define cryptography to be used widely, rather, it is meant to provide a series of generalized hooks and interfaces which can be extended to various cryptographic algorithms.

25.1 Namespace

CryptoGateway uses the crypto namespace. The crypto namespace is designed for class, functions and constants related to cryptography. CryptoGateway depends on many of the tools defined in the os namespace. Additionally, the crypto namespace contains a series of nested namespaces which help to disambiguate constants.

Chapter 26

File Index

26.1 File List

Here is a list of all files with brief descriptions:

binaryEncryption.cpp	Implementation of binary encryption files	340
binaryEncryption.h	Definition of binary encryption files	340
c_BaseTen.c	Implementation of base-10 algorithms	341
c_BaseTen.h	Base-10 number functions	341
c_cryptoTesting.cpp	Implementation for C file testing	345
c_cryptoTesting.h	Header for C file testing	345
c_numberDefinitions.c	Implementation of basic number	346
c_numberDefinitions.h	Basic number declarations	346
cryptoCConstants.h	Extern declarations of C constants	350
cryptoCHeaders.h	Collected headers for C source code	351
cryptoConstants.cpp	Implementation of CryptoGateway constants	352
cryptoConstants.h	Extern definitions of CryptoGateway constants	352
cryptoCSource.cpp	Implementation of all C code	352
cryptoError.cpp	Implementation of error sender and listener	353
cryptoError.h	Declaration of cryptographic errors	353

cryptoFileTest.cpp	Implementation for cryptographic file testing	355
cryptoFileTest.h	Header for cryptographic file testing	355
CryptoGateway.h	Global include file	356
cryptoHash.cpp	Implementation of crypto hashing	356
cryptoHash.h	Declaration of crypto hashing	357
cryptoLogging.cpp	Logging for crypto namespace, implementation	358
cryptoLogging.h	359
cryptoNumber.cpp	Implements basic number types	359
cryptoNumber.h	Defines basic number types	359
cryptoNumberTest.cpp	Testing crypto::number (p. 510) and crypto::integer (p. 460)	360
cryptoPublicKey.cpp	Generalized and RSA public key implementation	361
cryptoPublicKey.h	Generalized and RSA public keys	361
cryptoTest.cpp	CryptoGateway library test constructor	362
cryptoTest.h	CryptoGateway library test header	362
gateway.cpp	Implements the gateway	363
gateway.h	Defines the gateway	363
gatewayTest.cpp	Implementation for end-to-end gateway testing	364
gatewayTest.h	Header for end-to-end gateway testing	364
hashTest.cpp	Implementation for hash tests	365
hashTest.h	Header for hash testing	365
hexConversion.cpp	Hex conversion implementation	366
hexConversion.h	Hex conversion header	366
keyBank.cpp	Implimentation for the AVL tree based key bank	367
keyBank.h	Header for the AVL tree based key bank	367
message.cpp	Crypto-Gateway message implementation	368

message.h	
Crypto-Gateway message	368
publicKeyPackage.cpp	
Implementation of public key bank	369
publicKeyPackage.h	
Declaration of public key bank	369
publicKeyTest.h	
Public Key tests	370
RC4_Hash.cpp	370
RC4_Hash.h	370
staticTestKeys.cpp	
Auto-generated	371
staticTestKeys.h	
Auto-generated	371
streamCipher.cpp	371
streamCipher.h	371
streamPackage.cpp	
Implementation of streaming bank	372
streamPackage.h	
Declaration of streaming bank	372
streamTest.cpp	
Implementation for stream tests	373
streamTest.h	
Header for stream testing	373
testKeyGeneration.cpp	374
testKeyGeneration.h	
Implementation of test key binding	374
user.cpp	
Implementation of the CryptoGateway user	374
user.h	
Definition of the CryptoGateway user	375
XMLEncryption.cpp	
Implementation of RC-4	375
XMLEncryption.h	
Defines basic stream ciphers	376

Chapter 27

File Documentation

27.1 binaryEncryption.cpp File Reference

Implementation of binary encryption files.

27.1.1 Detailed Description

Implementation of binary encryption files.

Author

Jonathan Bedard

Date

4/18/2016

Bug None

Implements the binary encryption files. Consult **binaryEncryption.h** (p. 340) for details on using these classes.

27.2 binaryEncryption.h File Reference

Definition of binary encryption files.

Classes

- class **crypto::binaryEncryptor**
Encrypted binary file output.
- class **crypto::binaryDecryptor**
Encrypted binary file output.

Namespaces

- **crypto**

27.2.1 Detailed Description

Definition of binary encryption files.

Author

Jonathan Bedard

Date

3/7/2016

Bug None

Provides an interface to dump and retrieve data from an encrypted binary file without concern as to the encryption algorithm used.

27.3 c_BaseTen.c File Reference

Implementation of base-10 algorithms.

27.3.1 Detailed Description

Implementation of base-10 algorithms.

Author

Jonathan Bedard

Date

2/12/2016

Bug No known bugs.

This file implements all of the basic functionality of a base-10 integer. All integer operations, both basic and otherwise, are implemented in this file.

27.4 c_BaseTen.h File Reference

Base-10 number functions.

Functions

- struct **numberType** * **buildBaseTenType** ()
Construct a base-10 number.
- int **base10Addition** (const uint32_t *src1, const uint32_t *src2, uint32_t *dest, uint16_t length)
Base-10 addition.
- int **base10Subtraction** (const uint32_t *src1, const uint32_t *src2, uint32_t *dest, uint16_t length)

Base-10 subtraction.

- int **base10Multiplication** (const uint32_t *src1, const uint32_t *src2, uint32_t *dest, uint16_t length)

Base-10 multiplication.

- int **base10Division** (const uint32_t *src1, const uint32_t *src2, uint32_t *dest, uint16_t length)

Base-10 division.

- int **base10Modulo** (const uint32_t *src1, const uint32_t *src2, uint32_t *dest, uint16_t length)

Base-10 modulo.

- int **base10Exponentiation** (const uint32_t *src1, const uint32_t *src2, uint32_t *dest, uint16_t length)

Base-10 exponentiation.

- int **base10ModuloExponentiation** (const uint32_t *src1, const uint32_t *src2, const uint32_t *src3, uint32_t *dest, uint16_t length)
- int **base10GCD** (const uint32_t *src1, const uint32_t *src2, uint32_t *dest, uint16_t length)
- int **base10ModInverse** (const uint32_t *src1, const uint32_t *src2, uint32_t *dest, uint16_t length)
- int **primeTest** (const uint32_t *src1, uint16_t test_iteration, uint16_t length)

27.4.1 Detailed Description

Base-10 number functions.

Author

Jonathan Bedard

Date

2/12/2016

Bug No known bugs.

Contains functions which define a base-10 integer. There functions are bound to a number type.

27.4.2 Function Documentation

int base10Addition (const uint32_t * src1, const uint32_t * src2, uint32_t * dest, uint16_t length)

Base-10 addition.

This function takes in two arrays which represent base-10 numbers, performs src1+src2 on the pair and then output the result to dest. Note that all three arrays must be the same size.

Parameters

in	src1	Argument 1
in	src2	Argument 2
out	dest	Output
in	length	Number of uint32_t in the arrays

Returns

1 if success, 0 if failed

```
int base10Division ( const uint32_t * src1, const uint32_t * src2, uint32_t * dest, uint16_t length )
```

Base-10 division.

This function takes in two arrays which represent base-10 numbers, preforms $src1/src2$ on the pair and then output the result to dest. Note that all three arrays must be the same size.

Parameters

in	<i>src1</i>	Argument 1
in	<i>src2</i>	Argument 2
out	<i>dest</i>	Output
in	<i>length</i>	Number of uint32_t in the arrays

Returns

1 if success, 0 if failed

```
int base10Exponentiation ( const uint32_t * src1, const uint32_t * src2, uint32_t * dest, uint16_t length )
```

Base-10 exponentiation.

This function takes in two arrays which represent base-10 numbers, preforms $src1+src2$ on the pair and then output the result to dest. Note that all three arrays must be the same size.

Parameters

in	<i>src1</i>	Argument 1
in	<i>src2</i>	Argument 2
out	<i>dest</i>	Output
in	<i>length</i>	Number of uint32_t in the arrays

Returns

1 if success, 0 if failed

```
int base10GCD ( const uint32_t * src1, const uint32_t * src2, uint32_t * dest, uint16_t length )
```

```
int base10ModInverse ( const uint32_t * src1, const uint32_t * src2, uint32_t * dest, uint16_t length )
```

```
int base10Modulo ( const uint32_t * src1, const uint32_t * src2, uint32_t * dest, uint16_t length )
```

Base-10 modulo.

This function takes in two arrays which represent base-10 numbers, preforms $src1src2$ on the pair and then output the result to dest. Note that all three arrays must be the same size.

Parameters

in	<i>src1</i>	Argument 1
in	<i>src2</i>	Argument 2
out	<i>dest</i>	Output
in	<i>length</i>	Number of uint32_t in the arrays

Returns

1 if success, 0 if failed

```
int base10ModuloExponentiation ( const uint32_t * src1, const uint32_t * src2, const uint32_t * src3, uint32_t * dest, uint16_t length )
```

```
int base10Multiplication ( const uint32_t * src1, const uint32_t * src2, uint32_t * dest, uint16_t length )
```

Base-10 multiplication.

This function takes in two arrays which represent base-10 numbers, performs $src1 * src2$ on the pair and then output the result to *dest*. Note that all three arrays must be the same size.

Parameters

in	<i>src1</i>	Argument 1
in	<i>src2</i>	Argument 2
out	<i>dest</i>	Output
in	<i>length</i>	Number of uint32_t in the arrays

Returns

1 if success, 0 if failed

```
int base10Subtraction ( const uint32_t * src1, const uint32_t * src2, uint32_t * dest, uint16_t length )
```

Base-10 subtraction.

This function takes in two arrays which represent base-10 numbers, performs $src1 - src2$ on the pair and then output the result to *dest*. Note that all three arrays must be the same size.

Parameters

in	<i>src1</i>	Argument 1
in	<i>src2</i>	Argument 2
out	<i>dest</i>	Output
in	<i>length</i>	Number of uint32_t in the arrays

Returns

1 if success, 0 if failed

struct **numberType*** buildBaseTenType ()

Construct a base-10 number.

This function will return a **numberType** (p. 527) pointer defining the function pointers for a base-10 number. Note that the resulting pointer points to a structure which is static to the **c_BaseTen.c** (p. 341) file.

Returns

Pointer to **numberType** (p. 527) of type base-10

int primeTest (const uint32_t * src1, uint16_t test_iteration, uint16_t length)

27.5 c_cryptoTesting.cpp File Reference

Implementation for C file testing.

27.5.1 Detailed Description

Implementation for C file testing.

Author

Jonathan Bedard

Date

2/12/2016

Bug No known bugs.

This file implements test suites which are testing raw C code. This file currently tests the Base-↵
Ten suite.

27.6 c_cryptoTesting.h File Reference

Header for C file testing.

27.6.1 Detailed Description

Header for C file testing.

Author

Jonathan Bedard

Date

2/12/2016

Bug No known bugs.

This header is meant for the test suites which are testing raw C code. This header currently contains the Base-Ten suite.

27.7 c_numberDefinitions.c File Reference

Implementation of basic number.

27.7.1 Detailed Description

Implementation of basic number.

Author

Jonathan Bedard

Date

2/12/2016

Bug No known bugs.

Most numerical operations must be defined by the specific number type, but a select few are generally applicable across all number types, these are implemented here.

27.8 c_numberDefinitions.h File Reference

Basic number declarations.

Classes

- struct **numberType**
Number type function structure.

Typedefs

- typedef int(* **operatorFunction**) (const uint32_t *, const uint32_t *, uint32_t *, uint16_t)
Operator function typedef.
- typedef int(* **tripleCalculation**) (const uint32_t *, const uint32_t *, const uint32_t *, uint32_t *, uint16_t)
Triple operator function typedef.
- typedef int(* **shiftFunction**) (const uint32_t *, uint16_t, uint32_t *, uint16_t)
Shift operator function typedef.
- typedef int(* **compareFunction**) (const uint32_t *, const uint32_t *, uint16_t)
Comparison function typedef.

Functions

- struct **numberType** * **buildNullNumberType** ()
Construct a NULL number.
- int **standardCompare** (const uint32_t *src1, const uint32_t *src2, uint16_t length)
Standard comparision.
- int **standardRightShift** (const uint32_t *src1, uint16_t src2, uint32_t *dest, uint16_t length)
Right shift.
- int **standardLeftShift** (const uint32_t *src1, uint16_t src2, uint32_t *dest, uint16_t length)
Left shift.

27.8.1 Detailed Description

Basic number declarations.

Author

Jonathan Bedard

Date

2/12/2016

Bug No known bugs.

Contains function typedefs used for various number operations and defines a few nearly universal numerical functions.

27.8.2 Typedef Documentation

typedef int(* compareFunction) (const uint32_t *, const uint32_t *, uint16_t)

Comparison function typedef.

This function typedef defines a function which takes in two arrays which represent numbers and then compares them.

Parameters

in	<i>uint32</i> _↔ <i>_t</i> *	Argument 1
in	<i>uint32</i> _↔ <i>_t</i> *	Argument 2
in	<i>uint16</i> _↔ <i>_t</i>	size

Returns

-1 if 1<2, 0 if 1==2, 1 if 1>2


```
typedef int(* operatorFunction) (const uint32_t *, const uint32_t *, uint32_t *, uint16_t)
```

Operator function typedef.

This function typedef defines a function which takes in two arrays which represent numbers, preform some operation on the pair and then output the result to a third array.

Parameters

in	<i>uint32_t</i> *	Argument 1
in	<i>uint32_t</i> *	Argument 2
out	<i>uint32_t</i> *	Output
in	<i>uint16_t</i>	size

Returns

1 if success, 0 if failed

```
typedef int(* shiftFunction) (const uint32_t *, uint16_t, uint32_t *, uint16_t)
```

Shift operator function typedef.

This function typedef defines a function which takes in an array representing a number, shifts it the provided number of bits and outputs the result into the second array.

Parameters

in	<i>uint32_t</i> *	Argument 1
in	<i>uint16_t</i>	Bits to shift
out	<i>uint32_t</i> *	Output
in	<i>uint16_t</i>	size

Returns

1 if success, 0 if failed

```
typedef int(* tripleCalculation) (const uint32_t *, const uint32_t *, const uint32_t *, uint32_t *,
uint16_t)
```

Triple operator function typedef.

This function typedef defines a function which takes in three arrays which represent numbers, preform some operation on the triple and then output the result to a fourth array.

Parameters

in	<i>uint32_t*</i>	Argument 1
in	<i>uint32_t*</i>	Argument 2
in	<i>uint32_t*</i>	Argument 3
out	<i>uint32_t*</i>	Output
in	<i>uint16_t</i>	size

Returns

1 if success, 0 if failed

27.8.3 Function Documentation

struct **numberType*** buildNullNumberType ()

Construct a NULL number.

This function will return a **numberType** (p. 527) pointer defining the function pointers for a NULL number. Note that the resulting pointer points to a structure which is static to the **c_numberDefinitions.c** (p. 346) file.

Returns

Pointer to **numberType** (p. 527) of type NULL

int standardCompare (const uint32_t * src1, const uint32_t * src2, uint16_t length)

Standard comparison.

This function takes in two arrays which represent numbers and then compares them.

Parameters

in	<i>src1</i>	Argument 1
in	<i>src2</i>	Argument 2
in	<i>length</i>	Number of uint32_t in the arrays

Returns

-1 if 1<2, 0 if 1==2, 1 if 1>2

int standardLeftShift (const uint32_t * src1, uint16_t src2, uint32_t * dest, uint16_t length)

Left shift.

Shifts the bits in `src1` in the left direction `src2` number of bits. Output the result in `dest`. Note that `dest` and `src1` should be the same size.

Parameters

in	<i>src1</i>	Argument 1
in	<i>src2</i>	Bits to shift
out	<i>dest</i>	Output
in	<i>length</i>	Number of <code>uint32_t</code> in the arrays

Returns

1 if success, 0 if failed

```
int standardRightShift ( const uint32_t * src1, uint16_t src2, uint32_t * dest, uint16_t length )
```

Right shift.

Shifts the bits in `src1` in the right direction `src2` number of bits. Output the result in `dest`. Note that `dest` and `src1` should be the same size.

Parameters

in	<i>src1</i>	Argument 1
in	<i>src2</i>	Bits to shift
out	<i>dest</i>	Output
in	<i>length</i>	Number of <code>uint32_t</code> in the arrays

Returns

1 if success, 0 if failed

27.9 cryptoCConstants.h File Reference

Extern declarations of C constants.

Variables

- const int **crypto_numbertype_default**
Default number ID.
- const int **crypto_numbertype_base10**
Base-10 number ID.
- const char * **crypto_numbername_default**
Default number marker.
- const char * **crypto_numbername_base10**
Base-10 number marker.

27.9.1 Detailed Description

Extern declarations of C constants.

Author

Jonathan Bedard

Date

2/12/2016

Bug No known bugs.

Declares a number of constants needed by both the C numerical algorithms and by C++ number classes.

27.9.2 Variable Documentation

`const char* crypto_numbername_base10`

Base-10 number marker.

This constant is "Base 10 Type". It represents a number of type base-10, or standard integer.

`const char* crypto_numbername_default`

Default number marker.

This constant is "NULL Type". It represents an untyped number.

`const int crypto_numbertype_base10`

Base-10 number ID.

This constant is 1. It represents a number of type base-10, or standard integer.

`const int crypto_numbertype_default`

Default number ID.

This constant is 0. It represents an untyped number.

27.10 cryptoCHheaders.h File Reference

Collected headers for C source code.

27.10.1 Detailed Description

Collected headers for C source code.

Author

Jonathan Bedard

Date

2/20/2016

Bug None

27.11 cryptoConstants.cpp File Reference

Implementation of CryptoGateway constants.

27.11.1 Detailed Description

Implementation of CryptoGateway constants.

Author

Jonathan Bedard

Date

3/19/2016

Bug None

Binds all of the scoped constants used by CryptoGateway. The nested namespaces ensure that there is no ambiguity as to the purpose and nature of the constants.

27.12 cryptoConstants.h File Reference

Extern definitions of CryptoGateway constants.

27.12.1 Detailed Description

Extern definitions of CryptoGateway constants.

Author

Jonathan Bedard

Date

3/19/2016

Bug None

Consult **cryptoConstants.cpp** (p. 352) for details. This file merely defines extern references to the global constants in **cryptoConstants.cpp** (p. 352).

27.13 cryptoCSource.cpp File Reference

Implementation of all C code.

27.13.1 Detailed Description

Implementation of all C code.

Author

Jonathan Bedard

Date

2/13/2016

Bug No known bugs.

This file includes all of the .c files needed for this library. It allows the CMake scripts for this project to be entirely C++ while still including raw C code.

27.14 cryptoError.cpp File Reference

Implementation of error sender and listener.

27.14.1 Detailed Description

Implementation of error sender and listener.

Author

Jonathan Bedard

Date

4/16/2016

Bug None

Implements the error sender and listeners. These classes allow for managing the throwing of **crypto::errorPointer** (p. 385). Consult **cryptoError.h** (p. 353) for details.

27.15 cryptoError.h File Reference

Declaration of cryptographic errors.

Classes

- class **crypto::error**
Sortable exception.
- class **crypto::passwordSmallError**
Symmetric key too small.
- class **crypto::passwordLargeError**
Symmetric key too big.

- class **crypto::bufferSmallError**
Buffer too small.
- class **crypto::bufferLargeError**
Buffer too large.
- class **crypto::insertionFailed**
ADS Insertion Failed.
- class **crypto::customError**
*Custom **crypto::error** (p. 414).*
- class **crypto::fileOpenError**
File open error.
- class **crypto::fileFormatError**
File format error.
- class **crypto::illegalAlgorithmBind**
Algorithm bound failure.
- class **crypto::hashCompareError**
Hash mis-match.
- class **crypto::hashGenerationError**
Hash generation error.
- class **crypto::actionOnFileError**
File error.
- class **crypto::actionOnFileClosed**
File closed error.
- class **crypto::publicKeySizeWrong**
Public-key size error.
- class **crypto::keyMissing**
Key missing error.
- class **crypto::NULLPublicKey**
NULL public-key error.
- class **crypto::NULLDataError**
NULL data error.
- class **crypto::NULLMaster**
NULL master error.
- class **crypto::masterMismatch**
Master mis-match.
- class **crypto::unknownErrorType**
Unknown error.
- class **crypto::stringTooLarge**
String size error.
- class **crypto::errorListener**
***crypto::error** (p. 414) listener*
- class **crypto::errorSender**
*Sends **crypto::error** (p. 414).*

Namespaces

- **crypto**

Typedefs

- `typedef os::smart_ptr< error > crypto::errorPointer`
*Smart pointer to **crypto::error** (p. 414).*

27.15.1 Detailed Description

Declaration of cryptographic errors.

Author

Jonathan Bedard

Date

4/1/2016

Bug None

Declares a number of errors for the CryptoGateway package. Also declares two classes to manage the sending and listening for the throwing of **crypto::errorPointer** (p. 385).

27.16 cryptoFileTest.cpp File Reference

Implementation for cryptographic file testing.

27.16.1 Detailed Description

Implementation for cryptographic file testing.

Author

Jonathan Bedard

Date

4/18/2016

Bug No known bugs.

This file implements a series of tests designed to confirm the stability of cryptographic save file and load file functions.

27.17 cryptoFileTest.h File Reference

Header for cryptographic file testing.

27.17.1 Detailed Description

Header for cryptographic file testing.

Author

Jonathan Bedard

Date

3/5/2016

Bug No known bugs.

This contains a number of test suites and supporting classes which are designed to test the functionality of saving and loading cryptographic files, both binary and EXML.

27.18 CryptoGateway.h File Reference

Global include file.

Namespaces

- **crypto**

Variables

- bool **crypto::global_logging**
Deprecated logging flag.

27.18.1 Detailed Description

Global include file.

Author

Jonathan Bedard

Date

4/16/2016

Bug None

This file contains all of the headers in the CryptoGateway library. Project which depend on the CryptoGateway library need only include this file.

27.19 cryptoHash.cpp File Reference

Implementation of crypto hashing.

27.19.1 Detailed Description

Implementation of crypto hashing.
Implementation of RC4 hash.

Author

Jonathan Bedard

Date

2/23/2016

Bug None

Implements basic hashing frameworks and the XOR hash. Note that the XOR hash is not cryptographically secure. Consult **cryptoHash.h** (p. 357) for details.

Author

Jonathan Bedard

Date

2/23/2016

Bug None

Implements the RC-4 hash algorithm. The RC-4 hashing algorithm is likely secure, but not proven secure. Consult the **RC4_Hash.h** (p. 370) for details.

27.20 cryptoHash.h File Reference

Declaration of crypto hashing.

Classes

- class **crypto::hash**
Base hash class.
- class **crypto::xorHash**
XOR hash class.

Namespaces

- **crypto**

Functions

- `std::ostream & crypto::operator<< (std::ostream &os, const hash &num)`
Output stream operator.
- `std::istream & crypto::operator>> (std::istream &is, hash &num)`
Input stream operator.
- `template<class hashClass >`
`hashClass crypto::hashData (uint16_t hashType, const unsigned char *data, uint32_t length)`
Hashes data with the specified algorithm.

27.20.1 Detailed Description

Declaration of crypto hashing.

Implementation of RC4 hash.

Author

Jonathan Bedard

Date

2/23/2016

Bug None

Declares base cryptographic hashing class and functions. All hash algorithms should extend this hash class.

Author

Jonathan Bedard

Date

2/23/2016

Bug None

Declares the RC-4 hash algorithm. The RC-4 hashing algorithm is likely secure, but not proven secure.

27.21 cryptoLogging.cpp File Reference

Logging for crypto namespace, implementation.

27.21.1 Detailed Description

Logging for crypto namespace, implementation.

Jonathan Bedard

Date

2/23/2016

Bug No known bugs.

This file contains global functions and variables used for logging in the crypto namespace.

27.22 cryptoLogging.h File Reference

Namespaces

- **crypto**

Functions

- `std::ostream & crypto::cryptoout_func ()`
Standard out object for crypto namespace.
- `std::ostream & crypto::cryptoerr_func ()`
Standard error object for crypto namespace.

Variables

- `os::smart_ptr< std::ostream > crypto::cryptoout_ptr`
Standard out pointer for crypto namespace.
- `os::smart_ptr< std::ostream > crypto::cryptoerr_ptr`
Standard error pointer for crypto namespace.

27.23 cryptoNumber.cpp File Reference

Implements basic number types.

27.23.1 Detailed Description

Implements basic number types.

Author

Jonathan Bedard

Date

4/3/2016

Bug No known bugs.

Implements basic large numbers and the more specific large integer. Consult **cryptoNumber.h** (p. 359) for details.

27.24 cryptoNumber.h File Reference

Defines basic number types.

Classes

- class **crypto::number**
Basic number definition.
- class **crypto::integer**
Integer number definition.

Namespaces

- **crypto**

Functions

- `std::ostream & crypto::operator<< (std::ostream &os, const number &num)`
Output stream operator.
- `std::istream & crypto::operator>> (std::istream &is, number &num)`
Input stream operator.

27.24.1 Detailed Description

Defines basic number types.

Author

Jonathan Bedard

Date

3/2/2016

Bug No known bugs.

Contains declarations of large numbers for usage inside the CryptoGateway. The two numbers defined in this file are the general structure for large numbers and a basic integer.

27.25 cryptoNumberTest.cpp File Reference

Testing **crypto::number** (p. 510) and **crypto::integer** (p. 460).

27.25.1 Detailed Description

Testing **crypto::number** (p. 510) and **crypto::integer** (p. 460).

Author

Jonathan Bedard

Date

4/18/2016

Bug No known bugs.

This file has a series of tests which confirm the functionality of **crypto::integer** (p. 460) and it's base class, **crypto::number** (p. 510).

27.26 cryptoPublicKey.cpp File Reference

Generalized and RSA public key implementation.

27.26.1 Detailed Description

Generalized and RSA public key implementation.

Author

Jonathan Bedard

Date

5/5/2016

Bug No known bugs.

Contains implementation of the generalized public key and the RSA public key. Consult **crypto↔PublicKey.h** (p. 361) for details.

27.27 cryptoPublicKey.h File Reference

Generalized and RSA public keys.

Classes

- class **crypto::keyChangeReceiver**
Interface for receiving key changes.
- class **crypto::keyChangeSender**
*Interface inherited by **publicKey** (p. 532).*
- class **crypto::publicKey**
Base public-key class.
- class **crypto::publicRSA**
RSA public-key encryption.
- class **crypto::RSAKeyGenerator**
Helper key generation class.

Namespaces

- **crypto**

27.27.1 Detailed Description

Generalized and RSA public keys.

Author

Jonathan Bedard

Date

5/9/2016

Bug No known bugs.

Contains declarations of the generalized public key and the RSA public key. These classes can both encrypt and decrypt public keys.

27.28 cryptoTest.cpp File Reference

CryptoGateway library test constructor.

27.28.1 Detailed Description

CryptoGateway library test constructor.

Author

Jonathan Bedard

Date

4/7/2016

Bug No known bugs.

Binds all test suites for the test::CryptoGatewayLibraryTest. This library test is called "CryptoGateway."

27.29 cryptoTest.h File Reference

CryptoGateway library test header.

27.29.1 Detailed Description

CryptoGateway library test header.

Author

Jonathan Bedard

Date

4/2/2016

Bug No known bugs.

Contains declarations need to bind the CryptoGateway test library to the unit test driver.

27.30 gateway.cpp File Reference

Implements the gateway.

27.30.1 Detailed Description

Implements the gateway.

Author

Jonathan Bedard

Date

5/9/2016

Bug No known bugs.

Implements the gateway defined in **gateway.h** (p. 363). Consult **gateway.h** (p. 363) for details.

27.31 gateway.h File Reference

Defines the gateway.

Classes

- class **crypto::gatewaySettings**
Holds settings for gateway encryption.
- class **crypto::gateway**
Security gateway.

Namespaces

- **crypto**

27.31.1 Detailed Description

Defines the gateway.

Author

Jonathan Bedard

Date

5/9/2016

Bug No known bugs.

This file contains the declaration for the gateway and the gateway settings. This header file is the culmination of the CryptoGateway library.

Note that due to development constraints, the gatewaySettings class is being pushed out in a frame-work form and is intended to contain a large set of algorithm definitions as well as an algorithm use agreement protocol.

27.32 gatewayTest.cpp File Reference

Implementation for end-to-end gateway testing.

27.32.1 Detailed Description

Implementation for end-to-end gateway testing.

Author

Jonathan Bedard

Date

4/26/2016

Bug No known bugs.

This file contains implementation of the key bank tests and the end-to-end gateway tests. These tests are not exhaustive, they test basic functionality of both structures.

27.33 gatewayTest.h File Reference

Header for end-to-end gateway testing.

27.33.1 Detailed Description

Header for end-to-end gateway testing.

Author

Jonathan Bedard

Date

3/20/2016

Bug No known bugs.

This header contains declarations of the key bank tests and the end-to-end gateway tests. These tests are not exhaustive, they test basic functionality of both structures.

27.34 hashTest.cpp File Reference

Implementation for hash tests.

27.34.1 Detailed Description

Implementation for hash tests.

Author

Jonathan Bedard

Date

4/18/2016

Bug No known bugs.

This file contains algorithm-specific cryptographic hash testing. These tests confirm that the respective hash algorithms are outputting their expected value.

27.35 hashTest.h File Reference

Header for hash testing.

27.35.1 Detailed Description

Header for hash testing.

Author

Jonathan Bedard

Date

4/18/2016

Bug No known bugs.

This file contains a number of template classes used to confirm the functionality of cryptographic hash algorithms.

27.36 hexConversion.cpp File Reference

Hex conversion implementation.

27.36.1 Detailed Description

Hex conversion implementation.

Author

Jonathan Bedard

Date

3/16/2016

Bug No known bugs.

Implements the set of hex conversion functions. Consult **hexConversion.h** (p. 366) for details.

27.37 hexConversion.h File Reference

Hex conversion header.

Namespaces

- **crypto**

Functions

- bool **crypto::isHexCharacter** (char c)
Check the character type.
- std::string **crypto::toHex** (unsigned char i)
Converts an 8 bit integer to a hex string.
- std::string **crypto::toHex** (uint32_t i)
Converts an 32 bit integer to a hex string.
- unsigned char **crypto::fromHex8** (const std::string &str)
Converts a hex string to an 8 bit integer.
- uint32_t **crypto::fromHex32** (const std::string &str)
Converts a hex string to an 32 bit integer.

27.37.1 Detailed Description

Hex conversion header.

Author

Jonathan Bedard

Date

3/16/2016

Bug No known bugs.

Contains a set of functions to convert integers and characters from a hex string and converts hex strings to integers and characters.

27.38 keyBank.cpp File Reference

Implimentation for the AVL tree based key bank.

27.38.1 Detailed Description

Implimentation for the AVL tree based key bank.

Author

Jonathan Bedard

Date

4/19/2016

Bug No known bugs.

This file contains the implimentation for the **crypto::avlKeyBank** (p. 392) and supporting classes. Consult **keyBank.h** (p. 367) for details.

27.39 keyBank.h File Reference

Header for the AVL tree based key bank.

Classes

- class **crypto::nodeGroup**
Node group.
- class **crypto::nodeNameReference**
Name storage node.
- class **crypto::nodeKeyReference**
Key storage node.
- class **crypto::keyBank**
Key bank interface.
- class **crypto::avlKeyBank**
AVL key bank.

Namespaces

- **crypto**

27.39.1 Detailed Description

Header for the AVL tree based key bank.

Author

Jonathan Bedard

Date

4/19/2016

Bug No known bugs.

This file contains declarations for the **crypto::avlKeyBank** (p. 392) and supporting classes. Note that the key-bank may later be implemented with more advanced datastructures.

27.40 message.cpp File Reference

Crypto-Gateway message implementation.

27.40.1 Detailed Description

Crypto-Gateway message implementation.

Author

Jonathan Bedard

Date

4/16/2016

Bug No known bugs.

Implements the message used by the crypto-gateway to pass encrypted data between machines.

27.41 message.h File Reference

Crypto-Gateway message.

Classes

- class **crypto::message**
Crypto-Gateway message.

Namespaces

- **crypto**

27.41.1 Detailed Description

Crypto-Gateway message.

Author

Jonathan Bedard

Date

4/16/2016

Bug No known bugs.

The message declared in this file acts as a message for the Crypto-Gateway. These messages are intended to be converted to machine-to-machine communication.

27.42 publicKeyPackage.cpp File Reference

Implementation of public key bank.

27.42.1 Detailed Description

Implementation of public key bank.

Author

Jonathan Bedard

Date

5/19/2016

Bug None

Implements a bank of public key types to be accessed at run-time. Essentially acts as a meta-object access bank.

27.43 publicKeyPackage.h File Reference

Declaration of public key bank.

Classes

- class **crypto::publicKeyPackageFrame**
- class **crypto::publicKeyPackage< pkType >**
- class **crypto::publicKeyTypeBank**

Namespaces

- **crypto**

27.43.1 Detailed Description

Declaration of public key bank.

Author

Jonathan Bedard

Date

5/19/2016

Bug None

Declares a bank of public keys as well as supporting classes. Acts as a meta-object construct for public-key algorithms.

27.44 publicKeyTest.h File Reference

Public Key tests.

27.44.1 Detailed Description

Public Key tests.

Author

Jonathan Bedard

Date

4/18/2016

Bug No known bugs.

Since the public key tests are defined by very simple tests, the template testing classes contained in this file are also defined in this file. There is no .cpp file paired with this particular header.

27.45 RC4_Hash.cpp File Reference

27.46 RC4_Hash.h File Reference

Classes

- class **crypto::rc4Hash**
RC-4 hash class.

Namespaces

- **crypto**

27.47 staticTestKeys.cpp File Reference

Auto-generated.

27.47.1 Detailed Description

Auto-generated.

Author

None

Bug None

27.48 staticTestKeys.h File Reference

Auto-generated.

27.48.1 Detailed Description

Auto-generated.

Author

None

Bug None

27.49 streamCipher.cpp File Reference

27.50 streamCipher.h File Reference

Classes

- class **crypto::streamCipher**
- class **crypto::RCFour**
- class **crypto::streamPacket**
- class **crypto::streamEncrypter**
- class **crypto::streamDecrypter**

Namespaces

- **crypto**

Variables

- bool **global_logging**

27.50.1 Variable Documentation

bool global_logging

27.51 streamPackage.cpp File Reference

Implementation of streaming bank.

27.51.1 Detailed Description

Implementation of streaming bank.

Author

Jonathan Bedard

Date

5/19/2016

Bug None

Implements a a bank of stream ciphers and hash algorithms to be accessed at run-time. Essentially acts as a meta-object access bank.

27.52 streamPackage.h File Reference

Declaration of streaming bank.

Classes

- class **crypto::streamPackageFrame**
- class **crypto::streamPackage< streamType, hashType >**
- class **crypto::streamPackageTypeBank**

Namespaces

- **crypto**

27.52.1 Detailed Description

Declaration of streaming bank.

Author

Jonathan Bedard

Date

5/19/2016

Bug None

Declares a bank of stream ciphers and hash algorithms along with supporting classes. Acts as a meta-object construct for public-key algorithms.

27.53 streamTest.cpp File Reference

Implementation for stream tests.

27.53.1 Detailed Description

Implementation for stream tests.

Author

Jonathan Bedard

Date

4/18/2016

Bug No known bugs.

This file contains algorithm-specific cryptographic stream testing. These tests confirm that the respective stream algorithms are outputting their expected value.

27.54 streamTest.h File Reference

Header for stream testing.

27.54.1 Detailed Description

Header for stream testing.

Author

Jonathan Bedard

Date

4/18/2016

Bug No known bugs.

This file contains a number of template classes used to confirm the functionality of cryptographic stream objects.

27.55 testKeyGeneration.cpp File Reference

27.56 testKeyGeneration.h File Reference

Implementation of test key binding.

27.56.1 Detailed Description

Implementation of test key binding.

Binds generated testing keys.

Author

Jonathan Bedard

Date

4/18/2016

Bug No known bugs.

Implements the binding of the static test keys to arrays in memory. Consult **testKeyGeneration.h** (p. 374) for details.

Author

Jonathan Bedard

Date

2/12/2016

Bug No known bugs.

Provides access to the keys generated and stored in **staticTestKeys.h** (p. 371) and **staticTestKeys.cpp** (p. 371). These keys are always copied into a raw array of `uint32_t`.

27.57 user.cpp File Reference

Implementation of the CryptoGateway user.

27.57.1 Detailed Description

Implementation of the CryptoGateway user.

Author

Jonathan Bedard

Date

4/26/2016

Bug None

Provides an implementation of user which has a user-name, password and associated bank of public keys. Consult **user.h** (p. 375) for details.

27.58 user.h File Reference

Definition of the CryptoGateway user.

Classes

- class **crypto::user**
Primary user class.

Namespaces

- **crypto**

27.58.1 Detailed Description

Definition of the CryptoGateway user.

Author

Jonathan Bedard

Date

4/26/2016

Bug None

Provides a definition of user which has a user-name, password and associated bank of public keys.

27.59 XMLEncryption.cpp File Reference

Implementation of RC-4.

27.59.1 Detailed Description

Implementation of RC-4.

Implements encrypted XML functions.

Author

Jonathan Bedard

Date

5/19/2016

Bug None

Implements the RC-4 stream cipher and more generally, a framework for all stream ciphers to use.

Author

Jonathan Bedard

Date

5/19/2016

Bug None

Implements functions to save and load XML trees in files locked with both a password and with public keys.

27.60 XMLEncryption.h File Reference

Defines basic stream ciphers.

Namespaces

- **crypto**

Functions

- bool **crypto::EXML_Output** (std::string path, os::smartXMLNode head, unsigned char *symKey, unsigned int passwordLength, os::smart_ptr< streamPackageFrame > spf=NULL)
- bool **crypto::EXML_Output** (std::string path, os::smartXMLNode head, std::string password, os::smart_ptr< streamPackageFrame > spf=NULL)
- bool **crypto::EXML_Output** (std::string path, os::smartXMLNode head, os::smart_ptr< publicKey > pbk, unsigned int lockType=file::PRIVATE_UNLOCK, os::smart_ptr< streamPackageFrame > spf=NULL)
- bool **crypto::EXML_Output** (std::string path, os::smartXMLNode head, os::smart_ptr< number > publicKey, unsigned int pkAlgo, unsigned int pkSize, os::smart_ptr< streamPackageFrame > spf=NULL)
- os::smartXMLNode **crypto::EXML_Input** (std::string path, unsigned char *symKey, unsigned int passwordLength)
- os::smartXMLNode **crypto::EXML_Input** (std::string path, std::string password)
- os::smartXMLNode **crypto::EXML_Input** (std::string path, os::smart_ptr< publicKey > pbk, os::smart_ptr< keyBank > kyBank, os::smart_ptr< nodeGroup > &author)
- os::smartXMLNode **crypto::EXML_Input** (std::string path, os::smart_ptr< publicKey > pbk)
- os::smartXMLNode **crypto::EXML_Input** (std::string path, os::smart_ptr< keyBank > kyBank)
- os::smartXMLNode **crypto::EXML_Input** (std::string path, os::smart_ptr< keyBank > kyBank, os::smart_ptr< nodeGroup > &author)

27.60.1 Detailed Description

Defines basic stream ciphers.

Provides structure to encrypt an XML save file.

Author

Jonathan Bedard

Date

5/19/2016

Bug None

Defines some basic stream ciphers and stream cipher tools for basic encryption.

Author

Jonathan Bedard

Date

5/19/2016

Bug None

Provides functions to save and load XML trees in encrypted files.

Chapter 28

Class Index

28.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

crypto::actionOnFileClosed	
File closed error	390
crypto::actionOnFileError	
File error	391
crypto::avlKeyBank	
AVL key back	392
crypto::binaryDecryptor	
Encrypted binary file output	398
crypto::binaryEncryptor	
Encrypted binary file output	404
crypto::bufferLargeError	
Buffer too large	410
crypto::bufferSmallError	
Buffer too small	411
crypto::customError	
Custom crypto::error (p. 414)	412
crypto::error	
Sortable exception	414
crypto::errorListener	
Crypto::error listener	418
crypto::errorSender	
Sends crypto::error (p. 414)	419
crypto::fileFormatError	
File format error	423
crypto::fileOpenError	
File open error	424
crypto::gateway	
Security gateway	425
crypto::gatewaySettings	
Holds settings for gateway encryption	440

crypto::hash	
Base hash class	449
crypto::hashCompareError	
Hash mis-match	455
crypto::hashGenerationError	
Hash generation error	456
crypto::illegalAlgorithmBind	
Algorithm bound failure	457
crypto::insertionFailed	
ADS Insertion Failed	459
crypto::integer	
Integer number definition	460
crypto::keyBank	
Key bank interface	469
crypto::keyChangeReceiver	
Interface for receiving key changes	477
crypto::keyChangeSender	
Interface inherited by publicKey (p. 532)	479
crypto::keyMissing	
Key missing error	481
crypto::masterMismatch	
Master mis-match	482
crypto::message	
Crypto-Gateway message	483
crypto::nodeGroup	
Node group	489
crypto::nodeKeyReference	
Key storage node	496
crypto::nodeNameReference	
Name storage node	501
crypto::NULLDataError	
NULL data error	507
crypto::NULLMaster	
NULL master error	508
crypto::NULLPublicKey	
NULL public-key error	509
crypto::number	
Basic number definition	510
numberType	
Number type function structure	527
crypto::passwordLargeError	
Symmetric key too big	529
crypto::passwordSmallError	
Symmetric key too small	531
crypto::publicKey	
Base public-key class	532
crypto::publicKeyPackage< pkType >	552
crypto::publicKeyPackageFrame	554

crypto::publicKeySizeWrong	
Public-key size error	557
crypto::publicKeyTypeBank	558
crypto::publicRSA	
RSA public-key encryption	559
crypto::rc4Hash	
RC-4 hash class	570
crypto::RCFour	575
crypto::RSAKeyGenerator	
Helper key generation class	576
crypto::streamCipher	578
crypto::streamDecrypter	579
crypto::streamEncrypter	579
crypto::streamPackage< streamType, hashType >	580
crypto::streamPackageFrame	582
crypto::streamPackageTypeBank	584
crypto::streamPacket	585
crypto::stringTooLarge	
String size error	586
crypto::unknownErrorType	
Unknown error	587
crypto::user	
Primary user class	588
crypto::xorHash	
XOR hash class	601

Chapter 29

Namespace Documentation

29.1 crypto Namespace Reference

Classes

- class **actionOnFileClosed**
File closed error.
- class **actionOnFileError**
File error.
- class **avlKeyBank**
AVL key bank.
- class **binaryDecryptor**
Encrypted binary file output.
- class **binaryEncryptor**
Encrypted binary file output.
- class **bufferLargeError**
Buffer too large.
- class **bufferSmallError**
Buffer too small.
- class **customError**
*Custom **crypto::error** (p. 414).*
- class **error**
Sortable exception.
- class **errorListener**
***crypto::error** (p. 414) listener*
- class **errorSender**
*Sends **crypto::error** (p. 414).*
- class **fileFormatError**
File format error.
- class **fileOpenError**
File open error.

- class **gateway**
Security gateway.
- class **gatewaySettings**
Holds settings for gateway encryption.
- class **hash**
Base hash class.
- class **hashCompareError**
Hash mis-match.
- class **hashGenerationError**
Hash generation error.
- class **illegalAlgorithmBind**
Algorithm bound failure.
- class **insertionFailed**
ADS Insertion Failed.
- class **integer**
Integer number definition.
- class **keyBank**
Key bank interface.
- class **keyChangeReceiver**
Interface for receiving key changes.
- class **keyChangeSender**
*Interface inherited by **publicKey** (p. 532).*
- class **keyMissing**
Key missing error.
- class **masterMismatch**
Master mis-match.
- class **message**
Crypto-Gateway message.
- class **nodeGroup**
Node group.
- class **nodeKeyReference**
Key storage node.
- class **nodeNameReference**
Name storage node.
- class **NULLDataError**
NULL data error.
- class **NULLMaster**
NULL master error.
- class **NULLPublicKey**
NULL public-key error.
- class **number**
Basic number definition.
- class **passwordLargeError**

- Symmetric key too big.*
- class **passwordSmallError**
- Symmetric key too small.*
- class **publicKey**
- Base public-key class.*
- class **publicKeyPackage**
- class **publicKeyPackageFrame**
- class **publicKeySizeWrong**
- Public-key size error.*
- class **publicKeyTypeBank**
- class **publicRSA**
- RSA public-key encryption.*
- class **rc4Hash**
- RC-4 hash class.*
- class **RCFour**
- class **RSAKeyGenerator**
- Helper key generation class.*
- class **streamCipher**
- class **streamDecrypter**
- class **streamEncrypter**
- class **streamPackage**
- class **streamPackageFrame**
- class **streamPackageTypeBank**
- class **streamPacket**
- class **stringTooLarge**
- String size error.*
- class **unknownErrorType**
- Unknown error.*
- class **user**
- Primary user class.*
- class **xorHash**
- XOR hash class.*

Typedefs

- typedef os::smart_ptr< **error** > **errorPointer**
- Smart pointer to **crypto::error** (p. 414).*

Functions

- `std::ostream & operator<< (std::ostream &os, const hash &num)`
Output stream operator.
- `std::istream & operator>> (std::istream &is, hash &num)`
Input stream operator.
- `template<class hashClass >`
`hashClass hashData (uint16_t hashType, const unsigned char *data, uint32_t length)`
Hashes data with the specified algorithm.
- `std::ostream & cryptoout_func ()`
Standard out object for crypto namespace.
- `std::ostream & cryptoerr_func ()`
Standard error object for crypto namespace.
- `std::ostream & operator<< (std::ostream &os, const number &num)`
Output stream operator.
- `std::istream & operator>> (std::istream &is, number &num)`
Input stream operator.
- `bool isHexCharacter (char c)`
Check the character type.
- `std::string toHex (unsigned char i)`
Converts an 8 bit integer to a hex string.
- `std::string toHex (uint32_t i)`
Converts an 32 bit integer to a hex string.
- `unsigned char fromHex8 (const std::string &str)`
Converts a hex string to an 8 bit integer.
- `uint32_t fromHex32 (const std::string &str)`
Converts a hex string to an 32 bit integer.
- `bool EXML_Output (std::string path, os::smartXMLNode head, unsigned char *symKey, unsigned int passwordLength, os::smart_ptr< streamPackageFrame > spf=NULL)`
- `bool EXML_Output (std::string path, os::smartXMLNode head, std::string password, os::smart_ptr< streamPackageFrame > spf=NULL)`
- `bool EXML_Output (std::string path, os::smartXMLNode head, os::smart_ptr< publicKey > pbk, unsigned int lockType=file::PRIVATE_UNLOCK, os::smart_ptr< streamPackageFrame > spf=NULL)`
- `bool EXML_Output (std::string path, os::smartXMLNode head, os::smart_ptr< number > publicKey, unsigned int pkAlgo, unsigned int pkSize, os::smart_ptr< streamPackageFrame > spf=NULL)`
- `os::smartXMLNode EXML_Input (std::string path, unsigned char *symKey, unsigned int passwordLength)`
- `os::smartXMLNode EXML_Input (std::string path, std::string password)`
- `os::smartXMLNode EXML_Input (std::string path, os::smart_ptr< publicKey > pbk, os::smart_ptr< keyBank > kyBank, os::smart_ptr< nodeGroup > &author)`
- `os::smartXMLNode EXML_Input (std::string path, os::smart_ptr< publicKey > pbk)`
- `os::smartXMLNode EXML_Input (std::string path, os::smart_ptr< keyBank > kyBank)`
- `os::smartXMLNode EXML_Input (std::string path, os::smart_ptr< keyBank > kyBank, os::smart_ptr< nodeGroup > &author)`

Variables

- bool **global_logging**
Deprecated logging flag.
- os::smart_ptr< std::ostream > **cryptoout_ptr**
Standard out pointer for crypto namespace.
- os::smart_ptr< std::ostream > **cryptoerr_ptr**
Standard error pointer for crypto namespace.

29.1.1 Typedef Documentation

typedef os::smart_ptr<**error**> **crypto::errorPointer**

Smart pointer to **crypto::error** (p. 414).

29.1.2 Function Documentation

std::ostream& crypto::cryptoerr_func ()

Standard error object for crypto namespace.

#define statements allow the user to call this function with "crypto::cryptoerr." Logging is achieved by using "crypto::cryptoerr" as one would use "std::cerr."

std::ostream& crypto::cryptoout_func ()

Standard out object for crypto namespace.

#define statements allow the user to call this function with "crypto::cryptoout." Logging is achieved by using "crypto::cryptoout" as one would use "std::cout."

os::smartXMLNode crypto::EXML_Input (std::string path, unsigned char * symKey, unsigned int passwordLength)

os::smartXMLNode crypto::EXML_Input (std::string path, std::string password)

os::smartXMLNode crypto::EXML_Input (std::string path, os::smart_ptr< **publicKey** > pbk, os::smart_ptr< **keyBank** > kyBank, os::smart_ptr< **nodeGroup** > & author)

os::smartXMLNode crypto::EXML_Input (std::string path, os::smart_ptr< **publicKey** > pbk)

os::smartXMLNode crypto::EXML_Input (std::string path, os::smart_ptr< **keyBank** > kyBank)

os::smartXMLNode crypto::EXML_Input (std::string path, os::smart_ptr< **keyBank** > kyBank, os::smart_ptr< **nodeGroup** > & author)

bool crypto::EXML_Output (std::string path, os::smartXMLNode head, unsigned char * symKey, unsigned int passwordLength, os::smart_ptr< **streamPackageFrame** > spf = NULL)

bool crypto::EXML_Output (std::string path, os::smartXMLNode head, std::string password, os::smart_ptr< **streamPackageFrame** > spf = NULL)

```
bool crypto::EXML_Output ( std::string path, os::smartXMLNode head, os::smart_ptr< publicKey > pbk, unsigned int lockType = file::PRIVATE_UNLOCK, os::smart_ptr< streamPackageFrame > spf = NULL )
```

```
bool crypto::EXML_Output ( std::string path, os::smartXMLNode head, os::smart_ptr< number > publicKey, unsigned int pkAlgo, unsigned int pkSize, os::smart_ptr< streamPackageFrame > spf = NULL )
```

```
uint32_t crypto::fromHex32 ( const std::string & str )
```

Converts a hex string to an 32 bit integer.

Parameters

in	<i>str</i>	Hex string to convert
----	------------	-----------------------

Returns

str converted to integer

```
unsigned char crypto::fromHex8 ( const std::string & str )
```

Converts a hex string to an 8 bit integer.

Parameters

in	<i>str</i>	Hex string to convert
----	------------	-----------------------

Returns

str converted to integer

```
template<class hashClass > hashClass crypto::hashData ( uint16_t hashType, const unsigned char * data, uint32_t length )
```

Hashes data with the specified algorithm.

Hashes the provided data array returning a hash of the specified algorithm. This is a template function, which calls the static hash function for the specified algorithm.

Parameters

in	<i>hashType</i>	Size of hash
in	<i>data</i>	Data array to be hashed
in	<i>length</i>	Length of data to be hashed

Returns

Hash for data array

bool crypto::isHexCharacter (char c)

Check the character type.

Checks if the character is a valid hex character. That is, 0-9 and A-F.

Parameters

in	c	Character to test
----	---	-------------------

Returns

true if a hex character, else, false

std::ostream& crypto::operator<< (std::ostream & os, const **number** & num)

Output stream operator.

Parameters

	[in/out]	os Output stream
in	num	Number to be output

Returns

reference to std::ostream& os

std::ostream& crypto::operator<< (std::ostream & os, const **hash** & num)

Output stream operator.

Outputs a hex version of the hash to the provided output stream. This output will look identical for two hashes which are equal but have different algorithms.

Parameters

	[in/out]	os Output stream
in	num	Hash to be printed return Reference to output stream

std::istream& crypto::operator>> (std::istream & is, **number** & num)

Input stream operator.

Parameters

	[in/out]	is Input stream
in	num	Number to set with the string

Returns

reference to std::istream& is

```
std::istream& crypto::operator>> ( std::istream & is, hash & num )
```

Input stream operator.

Inputs a hex version of the hash from the provided output stream. This function must receive a constructed hash, although it will rebuild the provided hash with the stream data.

Parameters

	<i>[in/out]</i>	is Input stream
in	<i>num</i>	Hash to be created return Reference to input stream

```
std::string crypto::toHex ( unsigned char i )
```

Converts an 8 bit integer to a hex string.

Parameters

in	<i>i</i>	Integer to convert
-----------	----------	--------------------

Returns

i converted to hex string

```
std::string crypto::toHex ( uint32_t i )
```

Converts an 32 bit integer to a hex string.

Parameters

in	<i>i</i>	Integer to convert
-----------	----------	--------------------

Returns

i converted to hex string

29.1.3 Variable Documentation

```
os::smart_ptr<std::ostream> crypto::cryptoerr_ptr
```

Standard error pointer for crypto namespace.

This std::ostream is used as standard error for the crypto namespace. This pointer can be swapped out to programmatically redirect standard error for the crypto namespace.

`os::smart_ptr<std::ostream> crypto::cryptoout_ptr`

Standard out pointer for crypto namespace.

This `std::ostream` is used as standard out for the crypto namespace. This pointer can be swapped out to programmatically redirect standard out for the crypto namespace.

`bool crypto::global_logging`

Deprecated logging flag.

Old logging flag. Deprecated in the new CryptoGateway files. This has been replaced by the logging system outlined in this file.


Chapter 30

Class Documentation

30.1 crypto::actionOnFileClosed Class Reference

File closed error.

Inheritance diagram for crypto::actionOnFileClosed:

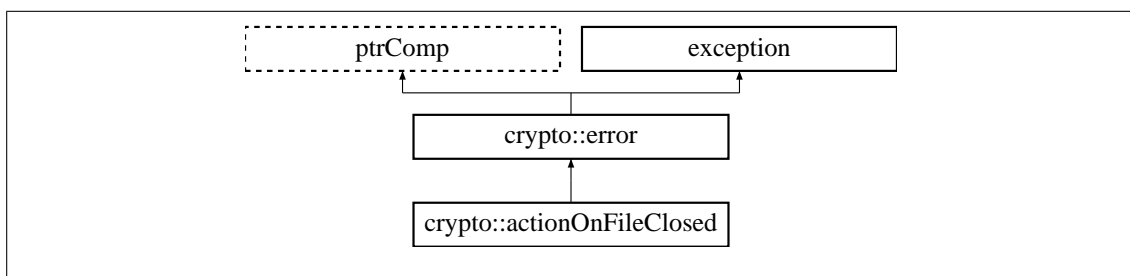

Public Member Functions

- virtual **~actionOnFileClosed** () throw ()
Virtual destructor.
- std::string **errorTitle** () const
Short error descriptor Returns "Action on File Closed".
- std::string **errorDescription** () const
Long error descriptor Returns "Cannot preform action on a file in the closed state".

30.1.1 Detailed Description

File closed error.

Thrown when an action is attempted on a file which is already closed.

30.1.2 Constructor & Destructor Documentation

virtual crypto::actionOnFileClosed::~~actionOnFileClosed () throw) [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.1.3 Member Function Documentation

std::string crypto::actionOnFileClosed::errorDescription () const [inline], [virtual]

Long error descriptor Returns "Cannot preform action on a file in the closed state".

Returns

Error description std::string

Reimplemented from **crypto::error** (p. 416).

std::string crypto::actionOnFileClosed::errorTitle () const [inline], [virtual]

Short error descriptor Returns "Action on File Closed".

Returns


Error title std::string

Reimplemented from **crypto::error** (p. 417).

30.2 crypto::actionOnFileError Class Reference

File error.

Inheritance diagram for crypto::actionOnFileError:

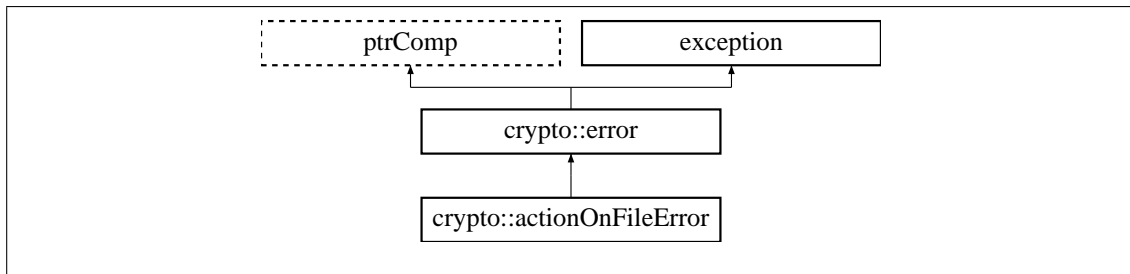

Public Member Functions

- virtual ~**actionOnFileError** () throw ()
Virtual destructor.
- std::string **errorTitle** () const
Short error descriptor Returns "Action on File Error".
- std::string **errorDescription** () const
Long error descriptor Returns "Cannot preform action on a file in the error state".

30.2.1 Detailed Description

File error.

Thrown when an action is attempted on a file in the error state.

30.2.2 Constructor & Destructor Documentation

```
virtual crypto::actionOnFileError::~~actionOnFileError ( ) throw ( ) [inline], [virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.2.3 Member Function Documentation

```
std::string crypto::actionOnFileError::errorDescription ( ) const [inline], [virtual]
```

Long error descriptor Returns "Cannot preform action on a file in the error state".

Returns

Error description std::string

Reimplemented from **crypto::error** (p. 416).

```
std::string crypto::actionOnFileError::errorTitle ( ) const [inline], [virtual]
```

Short error descriptor Returns "Action on File Error".

Returns


Error title std::string

Reimplemented from **crypto::error** (p. 417).

30.3 crypto::avlKeyBank Class Reference

AVL key back.

Inheritance diagram for crypto::avlKeyBank:

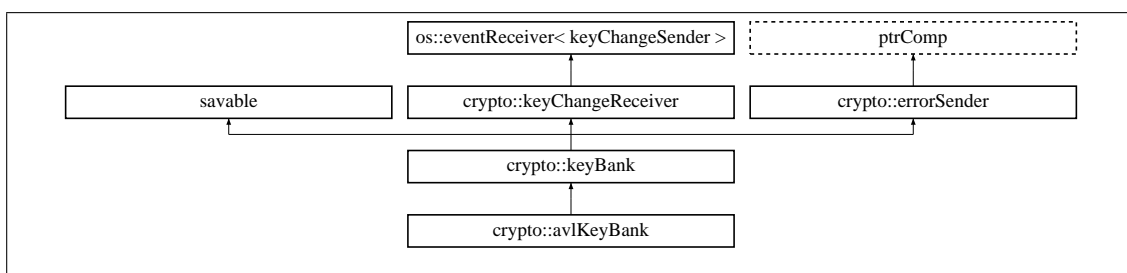

Public Member Functions

- **avlKeyBank** (std::string **savePath**="", const unsigned char *key=NULL, unsigned int keyLen=0, os::smart_ptr< **streamPackageFrame** > strmPck=NULL)
Construct with save path.
- **avlKeyBank** (std::string **savePath**, os::smart_ptr< **publicKey** > pubKey, os::smart_ptr< **streamPackageFrame** > strmPck=NULL)
Construct with save path and public key.
- virtual ~**avlKeyBank** ()
Virtual destructor.
- void **save** ()
Saves bank to file.
- os::smart_ptr< **nodeGroup** > **addPair** (std::string groupName, std::string name, os::smart_ptr< **number** > key, uint16_t algoID, uint16_t keySize)
Adds authenticated node to bank.
- os::smart_ptr< **nodeGroup** > **find** (os::smart_ptr< **nodeNameReference** > name)
Find by group name reference.
- os::smart_ptr< **nodeGroup** > **find** (os::smart_ptr< **nodeKeyReference** > key)
Find by group key reference.
- os::smart_ptr< **nodeGroup** > **find** (std::string groupName, std::string name)
Find by group name and name.
- os::smart_ptr< **nodeGroup** > **find** (os::smart_ptr< **number** > key, uint16_t algoID, uint16_t keySize)
Find by key information.

Protected Member Functions

- void **pushNewNode** (os::smart_ptr< **nodeNameReference** > name)
Add name node.
- void **pushNewNode** (os::smart_ptr< **nodeKeyReference** > key)
Add key node.
- void **load** ()
Loads bank from file.

Private Attributes

- os::asyncAVLTree< **nodeNameReference** > **nameTree**
List of all names associated with this node.
- os::asyncAVLTree< **nodeKeyReference** > **keyTree**
List of all keys associated with this node.
- os::asyncAVLTree< **nodeGroup** > **nodeBank**
List of all node groups.

Additional Inherited Members

30.3.1 Detailed Description

AVL key bank.

The AVL key bank stores keys in a series of AVL trees. All keys in the bank are loaded into memory when the file is loaded, meaning that there is a limited number of keys that can be practically managed through an AVL key bank.

30.3.2 Constructor & Destructor Documentation

```
crypto::avlKeyBank::avlKeyBank ( std::string savePath = "", const unsigned char * key = NULL,  
unsigned int keyLen = 0, os::smart_ptr< streamPackageFrame > strmPck = NULL )
```

Construct with save path.

Initializes the key bank and loads the the bank from a file.

Parameters

in	<i>savePath</i>	Path to save file, empty by default
in	<i>key</i>	Symetric key
in	<i>keyLen</i>	Length of symetric key
in	<i>strmPck</i>	Definition of algorithms used

```
crypto::avlKeyBank::avlKeyBank ( std::string savePath, os::smart_ptr< publicKey > pubKey,  
os::smart_ptr< streamPackageFrame > strmPck = NULL )
```

Construct with save path and public key.

Initializes the key bank and loads the the bank from a file.

Parameters

in	<i>savePath</i>	Path to save file
in	<i>pubKey</i>	Public key
in	<i>strmPck</i>	Definition of algorithms used

```
virtual crypto::avlKeyBank::~~avlKeyBank ( ) [inline], [virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.3.3 Member Function Documentation

```
os::smart_ptr<nodeGroup> crypto::avlKeyBank::addPair ( std::string groupName, std::string
name, os::smart_ptr< number > key, uint16_t algoID, uint16_t keySize ) [virtual]
```

Adds authenticated node to bank.

Note that if a node has not be authenticated, adding it to the bank will cause a potential security vulnerability. Nodes should be authenticated before being added to the bank.

Parameters

in	<i>groupName</i>	Name of the node's group
in	<i>name</i>	Name of the node
in	<i>key</i>	Key of node to be added
in	<i>algoID</i>	ID of algorithm for key
in	<i>keySize</i>	Length of key of the node

Returns

Return reference to the new node group

Implements **crypto::keyBank** (p. 472).

```
os::smart_ptr<nodeGroup> crypto::avlKeyBank::find ( os::smart_ptr< nodeNameReference >
name ) [virtual]
```

Find by group name reference.

Parameters

in	<i>name</i>	Name reference to be searched
----	-------------	-------------------------------

Returns

Node group found by arguments

Implements **crypto::keyBank** (p. 473).

```
os::smart_ptr<nodeGroup> crypto::avlKeyBank::find ( os::smart_ptr< nodeKeyReference > key
) [virtual]
```

Find by group key reference.

Parameters

in	<i>key</i>	Key reference to be searched
----	------------	------------------------------

Returns

Node group found by arguments

Implements **crypto::keyBank** (p. 473).

```
os::smart_ptr<nodeGroup> crypto::avlKeyBank::find ( std::string groupName, std::string name )  
[inline], [virtual]
```

Find by group name and name.

Parameters

in	<i>groupName</i>	Name of the node's group
in	<i>name</i>	Name of the node

Returns

Node group found by arguments

Reimplemented from **crypto::keyBank** (p. 473).

```
os::smart_ptr<nodeGroup> crypto::avlKeyBank::find ( os::smart_ptr< number > key, uint16_t  
algoID, uint16_t keySize ) [inline], [virtual]
```

Find by key information.

Parameters

in	<i>key</i>	Key of node to be added
in	<i>algoID</i>	ID of algorithm for key
in	<i>keySize</i>	Length of key of the node

Returns

Node group found by arguments

Reimplemented from **crypto::keyBank** (p. 474).

```
void crypto::avlKeyBank::load ( ) [protected], [virtual]
```

Loads bank from file.

Returns

void

Implements **crypto::keyBank** (p. 474).

```
void crypto::avlKeyBank::pushNewNode ( os::smart_ptr< nodeNameReference > name )
[protected], [virtual]
```

Add name node.

Inserts a name node into the bank. The name node has a reference to a node group.

Parameters

in	<i>name</i>	Name node to be added
----	-------------	-----------------------

Returns

void

Implements **crypto::keyBank** (p. 474).

```
void crypto::avlKeyBank::pushNewNode ( os::smart_ptr< nodeKeyReference > key )
[protected], [virtual]
```

Add key node.

Inserts a key node into the bank. The key node has a reference to a node group.

Parameters

in	<i>key</i>	Key node to be added
----	------------	----------------------

Returns

void

Implements **crypto::keyBank** (p. 475).

```
void crypto::avlKeyBank::save ( ) [virtual]
```

Saves bank to file.

Returns

void

Implements **crypto::keyBank** (p. 475).

30.3.4 Member Data Documentation

```
os::asyncAVLTree<nodeKeyReference> crypto::avlKeyBank::keyTree [private]
```

List of all keys associated with this node.

```
os::asyncAVLTree<nodeNameReference> crypto::avlKeyBank::nameTree [private]
```

List of all names associated with this node.


os::asyncAVLTree<**nodeGroup**> crypto::avlKeyBank::nodeBank [private]

List of all node groups.

30.4 crypto::binaryDecryptor Class Reference

Encrypted binary file output.

Inheritance diagram for crypto::binaryDecryptor:

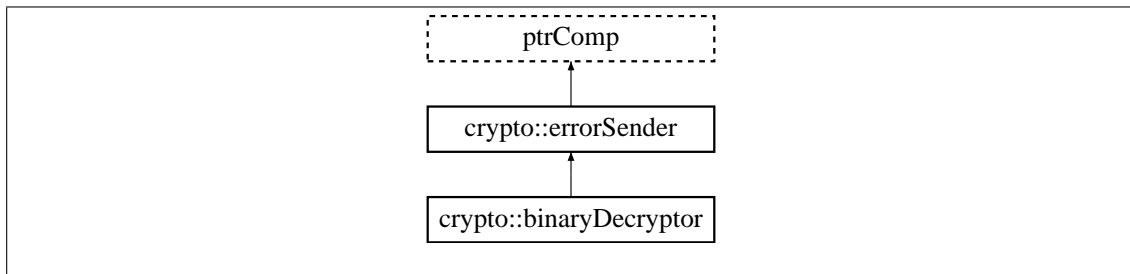

Public Member Functions

- **binaryDecryptor** (std::string file_name, os::smart_ptr< **keyBank** > kBank)
Construct with public key.
- **binaryDecryptor** (std::string file_name, os::smart_ptr< **publicKey** > publicKeyLock)
Construct with public key.
- **binaryDecryptor** (std::string file_name, std::string password)
Construct with password.
- **binaryDecryptor** (std::string file_name, unsigned char *key, unsigned int keyLen)
Construct with symmetric key.
- unsigned char **read** ()
Attempts to read a single character.
- unsigned int **read** (unsigned char *data, unsigned int dataLen)
Attempts to read a block of data.
- void **close** ()
Closes the output file.
- const std::string & **fileName** () const
Returns the name of target file.
- const os::smart_ptr< **streamPackageFrame** > **streamAlgorithm** () const
Returns the stream algorithm definition.
- bool **good** () const
Returns the current file state.
- bool **finished** () const
Returns if the file has finished writing.
- unsigned long **bytesLeft** () const
Returns the number of bytes left in the file.

- `os::smart_ptr< nodeGroup > author ()`
Pointer to the user which signed this file.
- `virtual ~binaryDecryptor ()`
Virtual destructor.

Private Member Functions

- `void build (unsigned char *key=NULL, unsigned int keyLen=0)`
Central constructor function.

Private Attributes

- `os::smart_ptr< publicKey > _publicKeyLock`
Pointer to the optional public key.
- `os::smart_ptr< keyBank > _keyBank`
Pointer to the key bank (to confirm public keys)
- `os::smart_ptr< nodeGroup > _author`
Pointer to the user which signed this file.
- `os::smart_ptr< streamPackageFrame > _streamAlgorithm`
Pointer to the mandatory stream algorithm definition.
- `os::smart_ptr< streamCipher > currentCipher`
Pointer to the current stream cipher.
- `bool _state`
State of the output file.
- `bool _finished`
Has the file been closed.
- `std::string _fileName`
Name of the file being read from.
- `std::ifstream input`
Binary input file.
- `unsigned long _bytesLeft`
Number of bytes left in the file.

Additional Inherited Members

30.4.1 Detailed Description

Encrypted binary file output.

The user defines an encryption algorithm and key, then places data into the file. This data is automatically encrypted with the specified algorithm and key.

30.4.2 Constructor & Destructor Documentation

`crypto::binaryDecryptor::binaryDecryptor (std::string file_name, os::smart_ptr< keyBank > kBank)`

Construct with public key.

Constructs the file reader with a public key.

Parameters

in	<i>file_name</i>	Name of input file
in	<i>kBank</i>	Record of public keys

`crypto::binaryDecryptor::binaryDecryptor (std::string file_name, os::smart_ptr< publicKey > publicKeyLock)`

Construct with public key.

Constructs the file reader with a public key.

Parameters

in	<i>file_name</i>	Name of input file
in	<i>publicKeyLock</i>	Public key to decrypt data

`crypto::binaryDecryptor::binaryDecryptor (std::string file_name, std::string password)`

Construct with password.

Constructs the file reader with a password.

Parameters

in	<i>file_name</i>	Name of input file
in	<i>password</i>	Password to decrypt data

`crypto::binaryDecryptor::binaryDecryptor (std::string file_name, unsigned char * key, unsigned int keyLen)`

Construct with symmetric key.

Constructs the file reader with a symmetric key.

Parameters

in	<i>file_name</i>	Name of input file
in	<i>key</i>	Symmetric key byte array
in	<i>keyLen</i>	Size of the symmetric key

virtual crypto::binaryDecryptor::~~binaryDecryptor () [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Also closes the input file.

30.4.3 Member Function Documentation

os::smart_ptr<nodeGroup> crypto::binaryDecryptor::author ()

Pointer to the user which signed this file.

Returns

crypto::binaryDecryptor::_author (p. 403)

void crypto::binaryDecryptor::build (unsigned char * key = NULL, unsigned int keyLen = 0)
[private]

Central constructor function.

This function reads the header of the encrypted binary file and attempts to initialize a stream cipher for decryption. Note that there is no guarantee that this can be done with the information given to the class. In this event, the class logs the error and sets it's state to false.

Parameters

in	key	Symmetric key, NULL by default
in	keyLen	Length of symmetric key, 0 by default

Returns

void

unsigned long crypto::binaryDecryptor::bytesLeft () const [inline]

Returns the number of bytes left in the file.

Returns

crypto::binaryDecryptor::_bytesLeft (p. 403)

void crypto::binaryDecryptor::close ()

Closes the output file.

Returns

void

const std::string& crypto::binaryDecryptor::fileName () const [inline]

Returns the name of target file.

Returns

crypto::binaryDecryptor::_fileName (p. 403)

bool crypto::binaryDecryptor::finished () const [inline]

Returns if the file has finished writing.

Returns

crypto::binaryDecryptor::_finished (p. 403)

bool crypto::binaryDecryptor::good () const [inline]

Returns the current file state.

Returns

crypto::binaryDecryptor::_state (p. 403)

unsigned char crypto::binaryDecryptor::read ()

Attempts to read a single character.

Note that if the reader is in a "good" state, then this function will read and decrypt a single byte of the file.

Returns

Character read, 0 if failed

unsigned int crypto::binaryDecryptor::read (unsigned char * data, unsigned int dataLen)

Attempts to read a block of data.

Note that if the reader is in a "good" state, then this function will read and decrypt the entire block of data requested.

Parameters

out	<i>data</i>	Array to place read data into
in	<i>dataLen</i>	Number of bytes attempting to read

Returns

Number of bytes read

const os::smart_ptr<**streamPackageFrame**> crypto::binaryDecryptor::streamAlgorithm () const [inline]

Returns the stream algorithm definition.

Returns

crypto::binaryDecryptor::_streamAlgorithm (p. 403)

30.4.4 Member Data Documentation

os::smart_ptr<**nodeGroup**> crypto::binaryDecryptor::_author [private]

Pointer to the user which signed this file.

This is only populated if a key-bank is bound to the class.

unsigned long crypto::binaryDecryptor::_bytesLeft [private]

Number of bytes left in the file.

std::string crypto::binaryDecryptor::_fileName [private]

Name of the file being read from.

bool crypto::binaryDecryptor::_finished [private]

Has the file been closed.

If true, the file is closed. Else, the file is open and may be read from.

os::smart_ptr<**keyBank**> crypto::binaryDecryptor::_keyBank [private]

Pointer to the key bank (to confirm public keys)

os::smart_ptr<**publicKey**> crypto::binaryDecryptor::_publicKeyLock [private]

Pointer to the optional public key.

bool crypto::binaryDecryptor::_state [private]

State of the output file.

This state is either "good" or "bad." A bad file is not merely defined by crypto::binaryDecryptor::input, but also by any cryptographic abnormalities that are detected.

os::smart_ptr<**streamPackageFrame**> crypto::binaryDecryptor::_streamAlgorithm [private]

Pointer to the mandatory stream algorithm definition.

os::smart_ptr<**streamCipher**> crypto::binaryDecryptor::currentCipher [private]

Pointer to the current stream cipher.

The current cipher will be of the type defined in the algorithm definition. It will be initialized with either the provided public key or the provided password.


std::ifstream crypto::binaryDecryptor::input [private]

Binary input file.

30.5 crypto::binaryEncryptor Class Reference

Encrypted binary file output.

Inheritance diagram for crypto::binaryEncryptor:

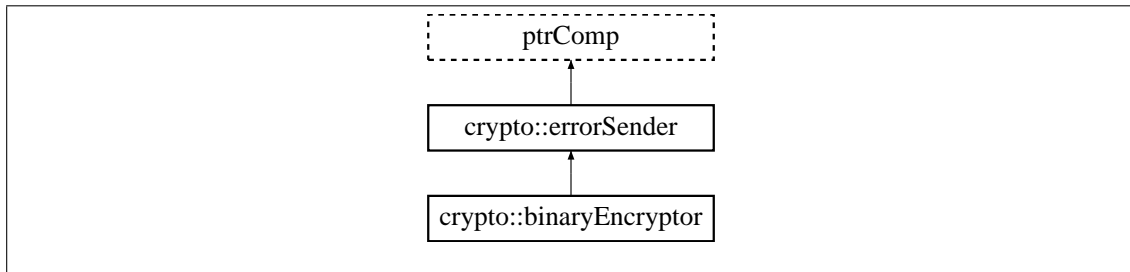

Public Member Functions

- **binaryEncryptor** (std::string file_name, os::smart_ptr< **publicKey** > publicKeyLock, unsigned int lockType=file::PRIVATE_UNLOCK, os::smart_ptr< **streamPackageFrame** > stream_algo=NULL)
Construct with public key.
- **binaryEncryptor** (std::string file_name, os::smart_ptr< **number** > **publicKey**, unsigned int pkAlgo, unsigned int pkSize, os::smart_ptr< **streamPackageFrame** > stream_algo=NULL)
Construct with number and public key algorithm.
- **binaryEncryptor** (std::string file_name, std::string password, os::smart_ptr< **streamPackageFrame** > stream_algo=NULL)
Construct with password.
- **binaryEncryptor** (std::string file_name, unsigned char *key, unsigned int keyLen, os::smart_ptr< **streamPackageFrame** > stream_algo=NULL)
Construct with symmetric key.
- void **write** (unsigned char data)
Write a single character.
- void **write** (const unsigned char *data, unsigned int dataLen)
Write an array of bytes.
- void **close** ()
Closes the output file.
- const std::string & **fileName** () const
Returns the name of target file.
- const os::smart_ptr< **streamPackageFrame** > **streamAlgorithm** () const
Returns the stream algorithm definition.
- bool **good** () const
Returns the current file state.
- bool **finished** () const
Returns if the file has finished writing.
- virtual ~**binaryEncryptor** ()
Virtual destructor.

Private Member Functions

- void **build** (unsigned char *key, unsigned int keyLen)
Construct class with password.
- void **build** (os::smart_ptr< **publicKey** > publicKeyLock)
Construct class with public key.
- void **build** (os::smart_ptr< **number** > pubKey, unsigned int pkAlgo, unsigned int pkSize)
Construct class with number and algorithm.

Private Attributes

- unsigned int **_publicLockType**
Defines method of locking the file.
- os::smart_ptr< **streamPackageFrame** > **_streamAlgorithm**
Pointer to the mandatory stream algorithm definition.
- os::smart_ptr< **streamCipher** > **currentCipher**
Pointer to the current stream cipher.
- bool **_state**
State of the output file.
- bool **_finished**
Has the file been closed.
- std::string **_fileName**
Name of the file being written to.
- std::ofstream **output**
Binary output file.

Additional Inherited Members

30.5.1 Detailed Description

Encrypted binary file output.

The user defines an encryption algorithm and key, then places data into the file. This data is automatically encrypted with the specified algorithm and key.

30.5.2 Constructor & Destructor Documentation

```
crypto::binaryEncryptor::binaryEncryptor ( std::string file_name, os::smart_ptr< publicKey
> publicKeyLock, unsigned int lockType = file::PRIVATE_UNLOCK, os::smart_ptr<
streamPackageFrame > stream_algo = NULL )
```

Construct with public key.

Constructs the file writer with a public key and an optional stream algorithm definition

Parameters

in	<i>file_name</i>	Name of output file
in	<i>publicKeyLock</i>	Public key to encrypt data

Parameters

in	<i>lockType</i>	Defines method of locking with public key
in	<i>stream_algo</i>	Optional stream algorithm definition

```
crypto::binaryEncryptor::binaryEncryptor ( std::string file_name, os::smart_ptr< number >
publicKey, unsigned int pkAlgo, unsigned int pkSize, os::smart_ptr< streamPackageFrame >
stream_algo = NULL )
```

Construct with number and public key algorithm.

Constructs the file writer with a public key and an optional stream algorithm definition

Parameters

in	<i>file_name</i>	Name of output file
in	publicKey (p. 532)	Number to encrypt data
in	<i>pkAlgo</i>	Defines public key algorithm
in	<i>pkSize</i>	Defines size of public key
in	<i>stream_algo</i>	Optional stream algorithm definition

```
crypto::binaryEncryptor::binaryEncryptor ( std::string file_name, std::string password,
os::smart_ptr< streamPackageFrame > stream_algo = NULL )
```

Construct with password.

Constructs the file writer with a password and an optional stream algorithm definition

Parameters

in	<i>file_name</i>	Name of output file
in	<i>password</i>	String to encrypt data with
in	<i>stream_algo</i>	Optional stream algorithm definition

```
crypto::binaryEncryptor::binaryEncryptor ( std::string file_name, unsigned char * key, unsigned int
keyLen, os::smart_ptr< streamPackageFrame > stream_algo = NULL )
```

Construct with symmetric key.

Constructs the file writer with a symmetric key and an optional stream algorithm definition

Parameters

in	<i>file_name</i>	Name of output file
in	<i>key</i>	Array of characters defining the symmetric key
in	<i>keyLen</i>	Length of symmetric key

Parameters

in	<i>stream_algo</i>	Optional stream algorithm definition
----	--------------------	--------------------------------------

```
virtual crypto::binaryEncryptor::~binaryEncryptor ( ) [inline], [virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Also closes the output file.

30.5.3 Member Function Documentation

```
void crypto::binaryEncryptor::build ( unsigned char * key, unsigned int keyLen ) [private]
```

Construct class with password.

This function acts as a constructor. It is only called by "true" constructors and exists to allow multiple data formats to be converted into the key.

Parameters

in	<i>key</i>	Array of characters defining the symmetric key
in	<i>keyLen</i>	Length of symmetric key

Returns

void

```
void crypto::binaryEncryptor::build ( os::smart_ptr< publicKey > publicKeyLock ) [private]
```

Construct class with public key.

This function acts as a constructor. It is only called by "true" constructors and exists to allow multiple types of data to be converted to a public key.

Parameters

in	<i>publicKeyLock</i>	Public key pair to encrypt data
----	----------------------	---------------------------------

Returns

void

```
void crypto::binaryEncryptor::build ( os::smart_ptr< number > pubKey, unsigned int pkAlgo, unsigned int pkSize ) [private]
```

Construct class with number and algorithm.

This function acts as a constructor. It is only called by "true" constructors and exists to allow multiple types of data to be converted to a public key.

Parameters

in	<i>pubKey</i>	Public key to encrypt data
in	<i>pkAlgo</i>	Algorithm ID
in	<i>pkSize</i>	Size of public key

Returns

void

void crypto::binaryEncryptor::close ()

Closes the output file.

Returns

void

const std::string& crypto::binaryEncryptor::fileName () const [inline]

Returns the name of target file.

Returns

crypto::binaryEncryptor::_fileName (p. 409)

bool crypto::binaryEncryptor::finished () const [inline]

Returns if the file has finished writing.

Returns

crypto::binaryEncryptor::_finished (p. 409)

bool crypto::binaryEncryptor::good () const [inline]

Returns the current file state.

Returns

crypto::binaryEncryptor::_state (p. 409)

const os::smart_ptr<streamPackageFrame> crypto::binaryEncryptor::streamAlgorithm () const [inline]

Returns the stream algorithm definition.

Returns

crypto::binaryEncryptor::_streamAlgorithm (p. 409)

void crypto::binaryEncryptor::write (unsigned char data)

Write a single character.

Parameters

in	<i>data</i>	Character to write
----	-------------	--------------------

Returns

void

void crypto::binaryEncryptor::write (const unsigned char * data, unsigned int dataLen)

Write an array of bytes.

Parameters

in	<i>data</i>	Data array to write
in	<i>dataLen</i>	Length of data array

Returns

void

30.5.4 Member Data Documentation

std::string crypto::binaryEncryptor::_fileName [private]

Name of the file being written to.

bool crypto::binaryEncryptor::_finished [private]

Has the file been closed.

If true, the file is closed. Else, the file is open and may be written to.

unsigned int crypto::binaryEncryptor::_publicLockType [private]

Defines method of locking the file.

bool crypto::binaryEncryptor::_state [private]

State of the output file.

This state is either "good" or "bad." A bad file is not merely defined by **crypto::binaryEncryptor**↪
::output (p. 410), but also by any cryptographic abnormalities that are detected.

os::smart_ptr<**streamPackageFrame**> crypto::binaryEncryptor::_streamAlgorithm [private]

Pointer to the mandatory stream algorithm definition.

os::smart_ptr<**streamCipher**> crypto::binaryEncryptor::currentCipher [private]

Pointer to the current stream cipher.

The current cipher will be of the type defined in the algorithm definition. It will be initialized with either the provided public key or the provided password.


std::ofstream crypto::binaryEncryptor::output [private]

Binary output file.

30.6 crypto::bufferLargeError Class Reference

Buffer too large.

Inheritance diagram for crypto::bufferLargeError:

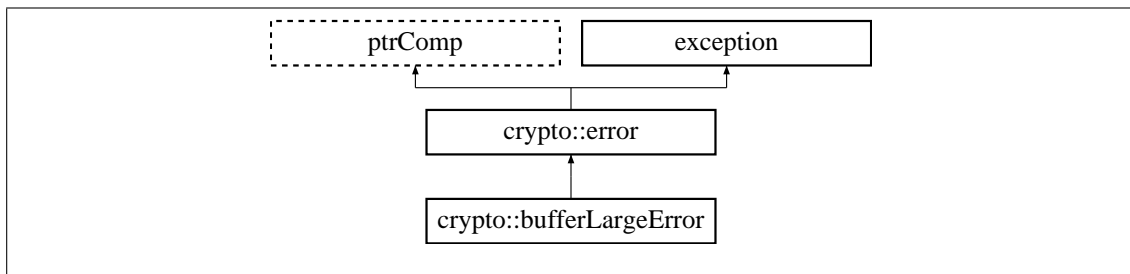

Public Member Functions

- virtual ~**bufferLargeError** () throw ()
Virtual destructor.
- std::string **errorTitle** () const
Short error descriptor Returns "Buffer Size Error".
- std::string **errorDescription** () const
Long error descriptor Returns "Buffer too large".

30.6.1 Detailed Description

Buffer too large.

Thrown when the buffer provided to some cryptographic function is too large.

30.6.2 Constructor & Destructor Documentation

virtual crypto::bufferLargeError::~~bufferLargeError () throw () [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.6.3 Member Function Documentation

`std::string crypto::bufferLargeError::errorDescription () const [inline], [virtual]`

Long error descriptor Returns "Buffer too large".

Returns

Error description `std::string`

Reimplemented from **crypto::error** (p. 416).

`std::string crypto::bufferLargeError::errorTitle () const [inline], [virtual]`

Short error descriptor Returns "Buffer Size Error".

Returns


Error title `std::string`

Reimplemented from **crypto::error** (p. 417).

30.7 crypto::bufferSmallError Class Reference

Buffer too small.

Inheritance diagram for `crypto::bufferSmallError`:

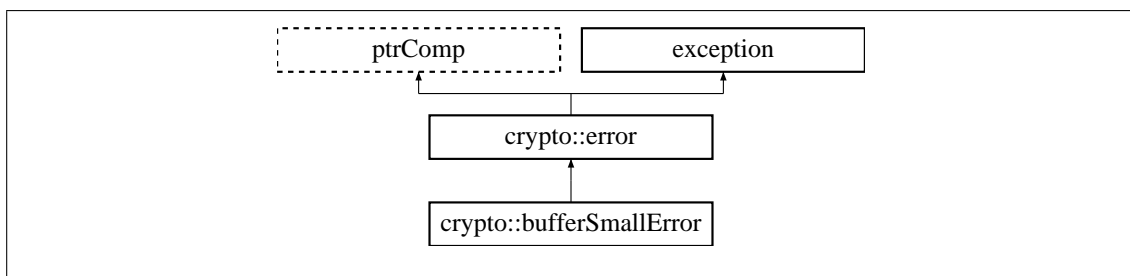

Public Member Functions

- virtual **~bufferSmallError** () throw ()
Virtual destructor.
- `std::string` **errorTitle** () const
Short error descriptor Returns "Buffer Size Error".
- `std::string` **errorDescription** () const
Long error descriptor Returns "Buffer too small".

30.7.1 Detailed Description

Buffer too small.

Thrown when the buffer provided to some cryptographic function is too small.

30.7.2 Constructor & Destructor Documentation

`virtual crypto::bufferSmallError::~bufferSmallError () throw () [inline], [virtual]`

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.7.3 Member Function Documentation

`std::string crypto::bufferSmallError::errorDescription () const [inline], [virtual]`

Long error descriptor Returns "Buffer too small".

Returns

Error description `std::string`

Reimplemented from **crypto::error** (p. 416).

`std::string crypto::bufferSmallError::errorTitle () const [inline], [virtual]`

Short error descriptor Returns "Buffer Size Error".

Returns


Error title `std::string`

Reimplemented from **crypto::error** (p. 417).

30.8 crypto::customError Class Reference

Custom **crypto::error** (p. 414).

Inheritance diagram for `crypto::customError`:

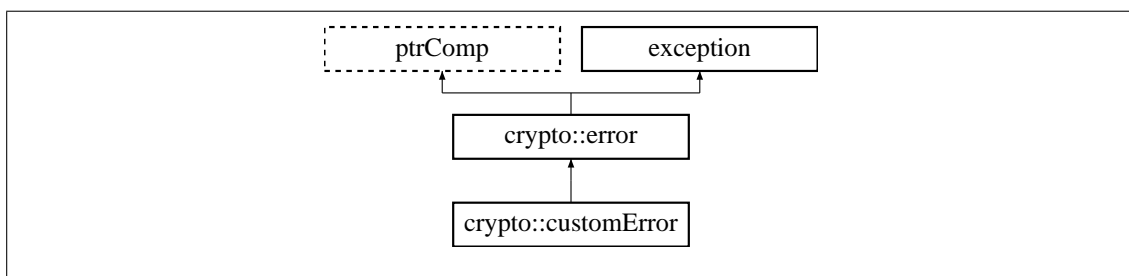

Public Member Functions

- **customError** (`std::string name, std::string description`)

Custom error constructor.

- virtual **~customError** () throw ()

Virtual destructor.

- `std::string errorTitle () const`
*Short error descriptor Returns "<name>" (**crypto::customError::_name** (p. 414))*
- `std::string errorDescription () const`
*Long error descriptor Returns "<description>" (**crypto::customError::_description** (p. 414))*

Private Attributes

- `std::string _name`
- `std::string _description`

30.8.1 Detailed Description

Custom **crypto::error** (p. 414).

Allows the programmer to define an error unique to a specific situation.

30.8.2 Constructor & Destructor Documentation

`crypto::customError::customError (std::string name, std::string description) [inline]`

Custom error constructor.

Parameters

in	<i>name</i>	Short error tag
in	<i>description</i>	Long error description

`virtual crypto::customError::~~customError () throw () [inline], [virtual]`

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.8.3 Member Function Documentation

`std::string crypto::customError::errorDescription () const [inline], [virtual]`

Long error descriptor Returns "<description>" (**crypto::customError::_description** (p. 414))

Returns

Error description `std::string`

Reimplemented from **crypto::error** (p. 416).

`std::string crypto::customError::errorTitle () const [inline], [virtual]`

Short error descriptor Returns "<name>" (**crypto::customError::_name** (p. 414))

Returns

Error title `std::string`

Reimplemented from **`crypto::error`** (p. 417).

30.8.4 Member Data Documentation

`std::string crypto::customError::_description` [private]

@ Long error descriptor


`std::string crypto::customError::_name` [private]

@ Short error descriptor

30.9 `crypto::error` Class Reference

Sortable exception.

Inheritance diagram for `crypto::error`:

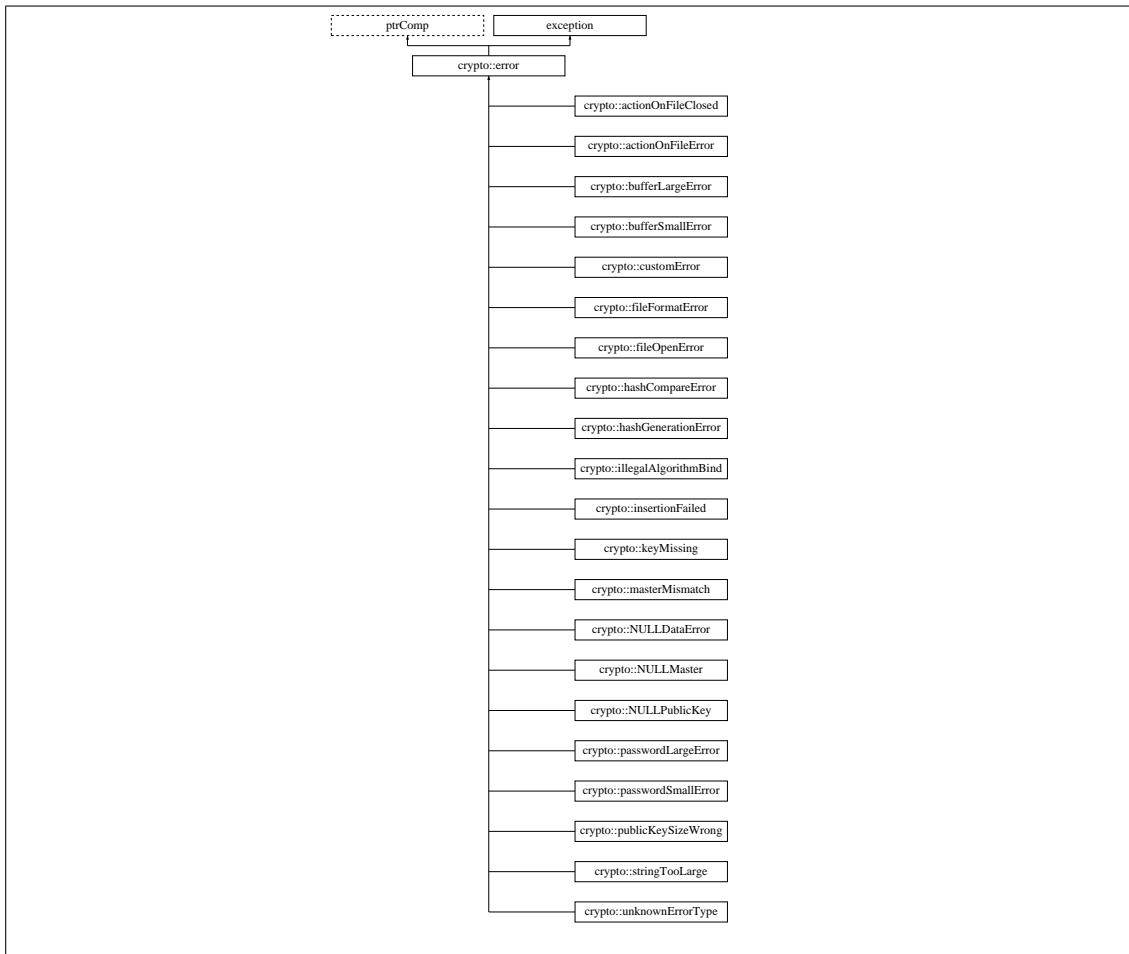

Public Member Functions

- **error ()**
Error constructor.
- **virtual ~error () throw ()**
Virtual destructor.
- **virtual std::string errorTitle () const**
Short error descriptor Returns "Error".
- **virtual std::string errorDescription () const**
Long error descriptor Returns "No description".
- **std::string timestampString () const**
Timestamp converted to string Returns the timestamp in a human readable string.
- **void log () const**
Logs error to crypto::cryptoerr Logs the error title, time created and error description on the Crypto→ Gateway error log.
- **uint64_t timestamp () const**

Time created.

- `const char * what () const throw ()`

Concatenated error data Returns a C string of the error title, time constructed and error description.

Private Attributes

- `uint64_t _timestamp`

Time the error was created.

- `std::string whatString`

Full error output.

30.9.1 Detailed Description

Sortable exception.

This class allows for more sophisticated logging of errors. It contains the time which the error occurred and can be thrown.

30.9.2 Constructor & Destructor Documentation

`crypto::error::error () [inline]`

Error constructor.

Constructs an error by setting the timestamp to the current time.

`virtual crypto::error::~~error () throw () [inline], [virtual]`

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.9.3 Member Function Documentation

`virtual std::string crypto::error::errorDescription () const [inline], [virtual]`

Long error descriptor Returns "No description".

Returns

Error description `std::string`

Reimplemented in `crypto::stringTooLarge` (p. 586), `crypto::unknownErrorType` (p. 588), `crypto::masterMismatch` (p. 483), `crypto::NULLMaster` (p. 509), `crypto::NULLDataError` (p. 507), `crypto::NULLPublicKey` (p. 510), `crypto::keyMissing` (p. 482), `crypto::publicKeySizeWrong` (p. 558), `crypto::actionOnFileClosed` (p. 391), `crypto::actionOnFileError` (p. 392), `crypto::hashGenerationError` (p. 457), `crypto::hashCompareError` (p. 455), `crypto::illegalAlgorithmBind` (p. 458), `crypto::fileFormatError` (p. 424), `crypto::fileOpenError` (p. 425), `crypto::customError` (p. 413), `crypto::insertionFailed` (p. 459), `crypto::bufferLargeError` (p. 411), `crypto::bufferSmallError` (p. 412), `crypto::passwordLargeError` (p. 530), and `crypto::passwordSmallError` (p. 531).

virtual std::string crypto::error::errorTitle () const [inline], [virtual]

Short error descriptor Returns "Error".

Returns

Error title std::string

Reimplemented in **crypto::stringTooLarge** (p. 587), **crypto::unknownErrorType** (p. 588), **crypto::masterMismatch** (p. 483), **crypto::NULLMaster** (p. 509), **crypto::NULLDataError** (p. 508), **crypto::NULLPublicKey** (p. 510), **crypto::keyMissing** (p. 482), **crypto::publicKeySizeWrong** (p. 558), **crypto::actionOnFileClosed** (p. 391), **crypto::actionOnFileError** (p. 392), **crypto::hashGenerationError** (p. 457), **crypto::hashCompareError** (p. 456), **crypto::illegalAlgorithmBind** (p. 458), **crypto::fileFormatError** (p. 424), **crypto::fileOpenError** (p. 425), **crypto::customError** (p. 413), **crypto::insertionFailed** (p. 460), **crypto::bufferLargeError** (p. 411), **crypto::bufferSmallError** (p. 412), **crypto::passwordLargeError** (p. 530), and **crypto::passwordSmallError** (p. 532).

void crypto::error::log () const [inline]

Logs error to crypto::cryptoerr Logs the error title, time created and error description on the CryptoGateway error log.

Returns

void

uint64_t crypto::error::timestamp () const [inline]

Time created.

Returns

crypto::error::_timestamp (p. 417)

std::string crypto::error::timestampString () const [inline]

Timestamp converted to string Returns the timestamp in a human readable string.

Returns

Time error was created

const char* crypto::error::what () const throw () [inline]

Concatenated error data Returns a C string of the error title, time constructed and error description.

Returns

Character pointer to error data

30.9.4 Member Data Documentation

uint64_t crypto::error::_timestamp [private]

Time the error was created.

std::string crypto::error::whatString [private]


Full error output.

The **crypto::error::what()** (p. 417) function must return a C string. This string is the position in memory that function returns. **crypto::error::what()** (p. 417) also constructs this string.

30.10 crypto::errorListener Class Reference

crypto::error (p. 414) listener

Inheritance diagram for crypto::errorListener:

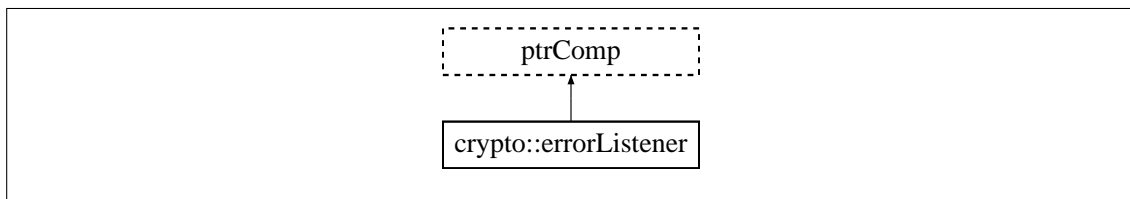

Public Member Functions

- virtual **~errorListener** ()
Virtual destructor.
- virtual void **receiveError** (**errorPointer** elm, os::smart_ptr< **errorSender** > source)
Receive error event.

Private Attributes

- os::spinLock **mtx**
Set protection mutex.
- os::smartSet< **errorSender** > **senders**
Set of senders.

Friends

- class **errorSender**
*Friendship with **crypto::errorSender** (p. 419).*

30.10.1 Detailed Description

crypto::error (p. 414) listener

Defines a class which is notified when another class throws a **crypto::error** (p. 414).

30.10.2 Constructor & Destructor Documentation

virtual crypto::errorListener::~errorListener () [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.10.3 Member Function Documentation

virtual void crypto::errorListener::receiveError (**errorPointer** elm, os::smart_ptr< **errorSender** > source) [inline], [virtual]

Receive error event.

Receives error from one of the senders this listener is registered to.

Parameters

in	<i>elm</i>	Error sent
in	<i>source</i>	Sender which sent error

Returns

void

30.10.4 Friends And Related Function Documentation

friend class **errorSender** [friend]

Friendship with **crypto::errorSender** (p. 419).

The error sender must be able to add and remove itself from the listener's set.

30.10.5 Member Data Documentation

os::spinLock crypto::errorListener::mtx [private]

Set protection mutex.

Protects access to the set of senders, allows for multi-threading.

os::smartSet<**errorSender**> crypto::errorListener::senders [private]


Set of senders.

All of the senders this listener is registered to.

30.11 crypto::errorSender Class Reference

Sends **crypto::error** (p. 414).

Inheritance diagram for crypto::errorSender:

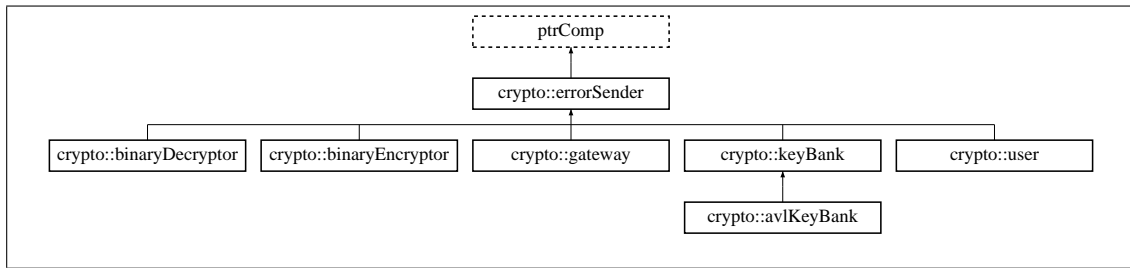

Public Member Functions

- **errorSender ()**
Error sender constructor.
- virtual **~errorSender ()**
Virtual destructor.
- void **pushErrorListener** (os::smart_ptr< **errorListener** > listener)
Register listener.
- void **removeErrorListener** (os::smart_ptr< **errorListener** > listener)
Un-register listener.
- **errorPointer popError ()**
Removes error from log.
- void **setLogLength** (unsigned int **logLength**)
Set length of log.
- unsigned int **logLength ()** const
Return length of log.
- unsigned int **numberErrors ()** const
Return number of errors in log.

Protected Member Functions

- virtual void **logError** (**errorPointer** elm)
Logs an error Dispatches an event to all listeners and stores the error in the log.

Private Attributes

- os::spinLock **listenerLock**
Set protection mutex.
- os::smartSet< **errorListener** > **errorListen**
Set of listeners.
- os::unsortedList< **error** > **errorLog**
List of current errors.
- unsigned int **_logLength**
Number of errors kept.

Friends

- class **errorListener**

Friendship with **crypto::errorListener** (p. 418).

30.11.1 Detailed Description

Sends **crypto::error** (p. 414).

Sends and logs crypto:error pointers. Does not catch the errors, simply logs ones which have already been created and caught.

30.11.2 Constructor & Destructor Documentation

crypto::errorSender::errorSender () [inline]

Error sender constructor.

Sets the length of the log to 20. Initializes with no errors and no listeners

virtual crypto::errorSender::~~errorSender () [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.11.3 Member Function Documentation

virtual void crypto::errorSender::logError (**errorPointer** elm) [protected], [virtual]

Logs an error Dispatches an event to all listeners and stores the error in the log.

Parameters

in	elm	Error to be logged
----	-----	--------------------

Returns

void

Reimplemented in **crypto::gateway** (p. 433).

unsigned int crypto::errorSender::logLength () const [inline]

Return length of log.

Returns

crypto::errorSender::_logLength (p. 423)

unsigned int crypto::errorSender::numberErrors () const [inline]

Return number of errors in log.

Returns

`crypto::errorSender::errorLog.size()`

errorPointer `crypto::errorSender::popError ()`

Removes error from log.

Returns

Oldest recorded error

`void crypto::errorSender::pushErrorListener (os::smart_ptr< errorListener > listener)`

Register listener.

Parameters

<i>[in/out]</i>	listener	Listener to register
-----------------	----------	----------------------

Returns

`void`

`void crypto::errorSender::removeErrorListener (os::smart_ptr< errorListener > listener)`

Un-register listener.

Parameters

in	<i>listener</i>	Listener to un-register
-----------	-----------------	-------------------------

Returns

`void`

`void crypto::errorSender::setLogLength (unsigned int logLength)`

Set length of log.

Parameters

in	<i>logLength</i>	Target length of log
-----------	------------------	----------------------

Returns

`void`

30.11.4 Friends And Related Function Documentation

friend class **errorListener** [friend]

Friendship with **crypto::errorListener** (p. 418).

The error listener must be able to add and remove itself from the sender's set.

30.11.5 Member Data Documentation

unsigned int crypto::errorSender::_logLength [private]

Number of errors kept.

Allows for old errors to expire in the event a sender logs a lot of errors.

os::smartSet<**errorListener**> crypto::errorSender::errorListen [private]

Set of listeners.

All of the listeners registered to this sender.

os::unsortedList<**error**> crypto::errorSender::errorLog [private]

List of current errors.

os::spinLock crypto::errorSender::listenerLock [private]


Set protection mutex.

Protects access to the set of listeners, allows for multi-threading.

30.12 crypto::fileFormatError Class Reference

File format error.

Inheritance diagram for crypto::fileFormatError:

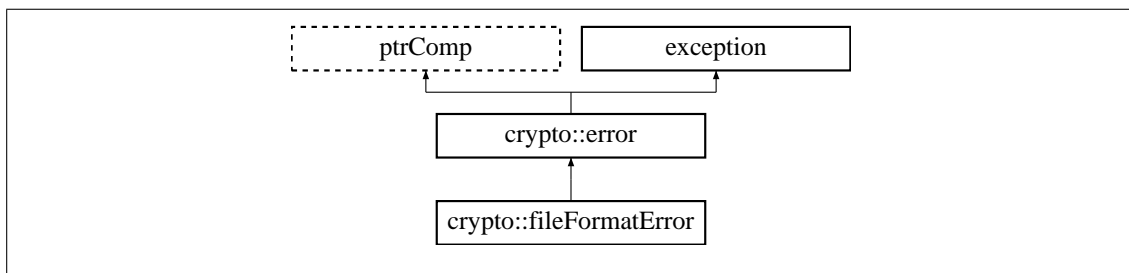

Public Member Functions

- virtual ~**fileFormatError** () throw ()

Virtual destructor.

- std::string **errorTitle** () const

Short error descriptor Returns "File Format Error".

- std::string **errorDescription** () const

Long error descriptor Returns "The file is not of the specified format, and an error resulted".

30.12.1 Detailed Description

File format error.

Thrown when a file is parsed but an error occurs while parsing.

30.12.2 Constructor & Destructor Documentation

```
virtual crypto::fileFormatError::~fileFormatError ( ) throw ( ) [inline], [virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.12.3 Member Function Documentation

```
std::string crypto::fileFormatError::errorDescription ( ) const [inline], [virtual]
```

Long error descriptor Returns "The file is not of the specified format, and an error resulted".

Returns

Error description std::string

Reimplemented from **crypto::error** (p. 416).

```
std::string crypto::fileFormatError::errorTitle ( ) const [inline], [virtual]
```

Short error descriptor Returns "File Format Error".

Returns


Error title std::string

Reimplemented from **crypto::error** (p. 417).

30.13 crypto::fileOpenError Class Reference

File open error.

Inheritance diagram for crypto::fileOpenError:

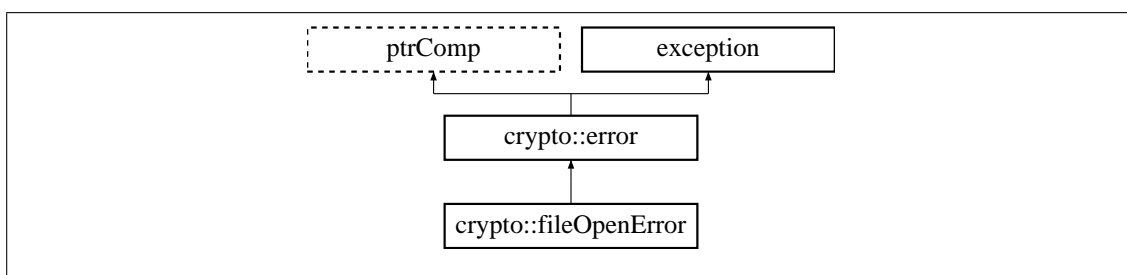

Public Member Functions

- virtual **~fileOpenError** () throw ()
Virtual destructor.
- std::string **errorTitle** () const
Short error descriptor Returns "File Open Error".
- std::string **errorDescription** () const
Long error descriptor Returns "Cannot open the specified file".

30.13.1 Detailed Description

File open error.

Thrown when a file cannot be found in the specified location.

30.13.2 Constructor & Destructor Documentation

virtual crypto::fileOpenError::~fileOpenError () throw () [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.13.3 Member Function Documentation

std::string crypto::fileOpenError::errorDescription () const [inline], [virtual]

Long error descriptor Returns "Cannot open the specified file".

Returns

Error description std::string

Reimplemented from **crypto::error** (p. 416).

std::string crypto::fileOpenError::errorTitle () const [inline], [virtual]

Short error descriptor Returns "File Open Error".

Returns


Error title std::string

Reimplemented from **crypto::error** (p. 417).

30.14 crypto::gateway Class Reference

Security gateway.

Inheritance diagram for crypto::gateway:

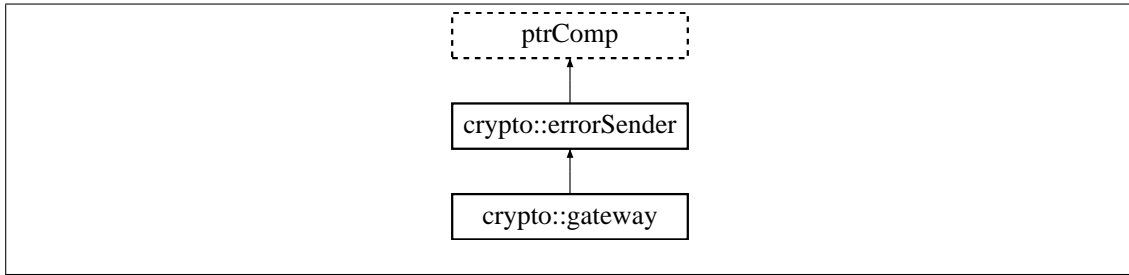

Public Member Functions

- **gateway** (os::smart_ptr< **user** > usr, std::string groupID="default")
Gateway constructor.
- virtual ~**gateway** ()
Virtual destructor.
- os::smart_ptr< **nodeGroup** > **brotherNode** ()
Return the node group of the brother.
- os::smart_ptr< **message** > **getMessage** ()
Returns next message from the gateway.
- os::smart_ptr< **message** > **send** (os::smart_ptr< **message** > msg)
Send message through the gateway.
- os::smart_ptr< **message** > **ping** ()
Ping message.
- os::smart_ptr< **message** > **processMessage** (os::smart_ptr< **message** > msg)
Process incoming message.
- void **processTimestamps** ()
Cycle time-stamp data.
- os::smart_ptr< **gatewaySettings** > **getBrotherSettings** ()
Access brother settings.
- os::smart_ptr< **gatewaySettings** > **getSelfSettings** ()
Access self settings.
- uint8_t **currentState** () const
This gateway's status.
- uint8_t **brotherState** () const
Brother gateway status.
- bool **secure** () const
Gateway security established.
- uint64_t **timeout** () const
Current receiver-side timeout value.
- uint64_t **safeTimeout** () const
Current sender-side timeout value.
- uint64_t **errorTimeout** () const
Current error timeout value.

- uint64_t **timeMessageReceived** () const
Time-stamp of the last received message.
- uint64_t **timeMessageSent** () const
Time-stamp of the last sent message.
- uint64_t **timeLastError** () const
Time-stamp of the last error.

Static Public Attributes

- static const uint64_t **DEFAULT_TIMEOUT** =60
Default timeout in seconds.
- static const uint64_t **DEFAULT_ERROR_TIMEOUT** =10
Default error timeout in seconds.
- static const uint8_t **UNKNOWN_STATE** =0
Unknown state value.
- static const uint8_t **UNKNOWN_BROTHER** =1
Unknown brother state.
- static const uint8_t **SETTINGS_EXCHANGED** =2
Settings exchanged state.
- static const uint8_t **ESTABLISHING_STREAM** =3
Establishing stream state.
- static const uint8_t **STREAM_ESTABLISHED** =4
Stream established state.
- static const uint8_t **SIGNING_STATE** =5
Signing state.
- static const uint8_t **CONFIRM_OLD** =6
Confirm old key state.
- static const uint8_t **ESTABLISHED** =7
Stream established state.
- static const uint8_t **CONFIRM_ERROR_STATE** =252
Confirm brother error state.
- static const uint8_t **BASIC_ERROR_STATE** =253
Basic error state.
- static const uint8_t **TIMEOUT_ERROR_STATE** =254
Timeout error state.
- static const uint8_t **PERMENANT_ERROR_STATE** =255
Permanent error state.

Protected Member Functions

- void **logError** (**errorPointer** elm, uint8_t errType)
Logs an error, with an error type.
- void **logError** (**errorPointer** elm)
Logs an error, with type basic.

Private Member Functions

- void **clearStream** ()
Resets stream tracking.
- void **buildStream** ()
Builds the output stream.
- os::smart_ptr< **message** > **encrypt** (os::smart_ptr< **message** > msg)
Encrypt a message.
- os::smart_ptr< **message** > **decrypt** (os::smart_ptr< **message** > msg)
Decrypt a message.
- os::smart_ptr< **message** > **currentError** ()
Build current error message.
- void **purgeLastError** ()
Reset error.

Private Attributes

- os::smart_ptr< **gatewaySettings** > **selfSettings**
Settings of this gateway.
- os::smart_ptr< **gatewaySettings** > **brotherSettings**
Settings of the reciprocal gateway.
- os::spinLock **lock**
Mutex protected gateway states.
- os::spinLock **stampLock**
Mutex protecting timestamps.
- uint8_t **_currentState**
Current state of this gateway.
- uint8_t **_brotherState**
State of the reciprocal gateway.
- **errorPointer** **_lastError**
Hold the most recent error.
- uint8_t **_lastErrorLevel**
Holds the level of the last error.
- uint64_t **_errorTimestamp**
Time-stamp of the last error.
- uint64_t **_timeout**
Number of seconds till timeout.
- uint64_t **_safeTimeout**
Number of seconds till partial timeout.
- uint64_t **_errorTimeout**
Number of seconds for error timeout.
- uint64_t **_messageReceived**
Time-stamp of last message received.
- uint64_t **_messageSent**

- *Time-stamp of last message sent.*
- **os::smart_ptr< streamPackageFrame > selfStream**
Stream algorithm for this gateway.
- **os::smart_ptr< publicKeyPackageFrame > selfPKFrame**
Public key algorithm for this gateway.
- **os::smart_ptr< publicKey > selfPublicKey**
Public/private key pair.
- **os::smart_ptr< number > selfPreciseKey**
Public key for this gateway.
- **os::smart_ptr< streamPackageFrame > brotherStream**
Stream algorithm for brother gateway.
- **os::smart_ptr< publicKeyPackageFrame > brotherPKFrame**
Public key algorithm for bro.
- **os::smart_ptr< number > brotherPublicKey**
Public key for brother gateway.
- **os::smart_ptr< message > streamMessageIn**
Stream defining message: in.
- **os::smart_ptr< streamDecrypter > inputStream**
Stream for incoming messages.
- **uint64_t streamEstTimestamp**
Time the output stream was defined.
- **os::smart_ptr< message > streamMessageOut**
Stream defining message: out.
- **os::smart_ptr< streamEncrypter > outputStream**
Stream for outgoing messages.
- **os::smart_ptr< uint8_t > outputHashArray**
Data for outgoing hashes.
- **uint16_t outputHashLength**
Length of outgoing hash array.
- **os::smart_ptr< hash > selfPrimarySignatureHash**
Hash for primary signature.
- **os::smart_ptr< hash > selfSecondarySignatureHash**
Hash for historical signature.
- **os::smart_ptr< message > selfSigningMessage**
Signing message: out.
- **os::unsortedList< hash > eligibleKeys**
List of eligible public keys.
- **os::smart_ptr< uint8_t > inputHashArray**
Data for incoming hashes.
- **uint16_t inputHashLength**
Length of incoming hash array.
- **os::smart_ptr< hash > brotherPrimarySignatureHash**
Hash of brother's primary signature.
- **os::smart_ptr< hash > brotherSecondarySignatureHash**
Hash of brother's historical signature.

30.14.1 Detailed Description

Security gateway.

This gateway establishes a secured connection between two users. The connection uses the preferred algorithms as defined by the user.

30.14.2 Constructor & Destructor Documentation

```
crypto::gateway::gateway ( os::smart_ptr< user > usr, std::string groupID = "default" )
```

Gateway constructor.

Constructs a gateway from a user and a group ID. This initializes all gateway variables and binds the user settings to this gateway.

Parameters

in	<i>usr</i>	User sending information through this gateway
in	<i>groupID</i>	Defines group ID, "default" by default

```
virtual crypto::gateway::~gateway ( ) [inline], [virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.14.3 Member Function Documentation

```
os::smart_ptr<nodeGroup> crypto::gateway::brotherNode ( )
```

Return the node group of the brother.

Uses the current key bank to find the node associated with this brother.

Returns

brother node

```
uint8_t crypto::gateway::brotherState ( ) const [inline]
```

Brother gateway status.

Returns

gateway::_brotherState (p. 435)

```
void crypto::gateway::buildStream ( ) [private]
```

Builds the output stream.

Returns

void

void crypto::gateway::clearStream () [private]

Resets stream tracking.

Resets all pointers defined while establishing a secure stream.

Returns

void

os::smart_ptr<message> crypto::gateway::currentError () [private]

Build current error message.

Returns

Message

uint8_t crypto::gateway::currentState () const [inline]

This gateway's status.

Returns

gateway::_currentState (p. 435)

os::smart_ptr<message> crypto::gateway::decrypt (os::smart_ptr< message > msg)
[private]

Decrypt a message.

Uses the established input stream to decrypt the provided message and return it as a new message.

Parameters

in	msg	Message to be decrypted
----	-----	-------------------------

Returns

Decrypted message

os::smart_ptr<message> crypto::gateway::encrypt (os::smart_ptr< message > msg)
[private]

Encrypt a message.

Uses the established output stream to encrypt the provided message and return it as a new message.

Parameters

in	msg	Message to be encrypted
----	-----	-------------------------

Returns

Encrypted message

```
uint64_t crypto::gateway::errorTimeout ( ) const [inline]
```

Current error timeout value.

Returns

gateway::_errorTimeout (p. 435)

```
os::smart_ptr<gatewaySettings> crypto::gateway::getBrotherSettings ( ) [inline]
```

Access brother settings.

Returns

Pointer to brother settings

```
os::smart_ptr<message> crypto::gateway::getMessage ( )
```

Returns next message from the gateway.

The function only returns the next message from the gateway's perspective. Gateway management messages are returned by this function.

Returns

Next management message

```
os::smart_ptr<gatewaySettings> crypto::gateway::getSelfSettings ( ) [inline]
```

Access self settings.

Returns

Pointer to self settings

```
void crypto::gateway::logError ( errorPointer elm, uint8_t errType ) [protected]
```

Logs an error, with an error type.

Wraps the "logError" function as defined by the **crypto::errorSender** (p. 419) class, also sets this particular gateway into some error state.

Parameters

in	<i>elm</i>	Error description
in	<i>errType</i>	Error level to determine timeout

Returns

void

void crypto::gateway::logError (**errorPointer** elm) [inline], [protected], [virtual]

Logs an error, with type basic.

Sets this particular gateway into a default error state by calling "logError" with a type.

Parameters

in	<i>elm</i>	Error description
----	------------	-------------------

Returns

void

Reimplemented from **crypto::errorSender** (p. 421).

os::smart_ptr<**message**> crypto::gateway::ping ()

Ping message.

Returns the ping message as defined by the **gatewaySettings** (p. 440) in this gateway.

Returns

Ping message for this user

os::smart_ptr<**message**> crypto::gateway::processMessage (os::smart_ptr< **message** > msg)

Process incoming message.

Decrypts and processes an incoming message. Note that messages must be coming from the brother gateway of this gateway.

Parameters

in	<i>msg</i>	Message to be processed
----	------------	-------------------------

Returns

Decrypted message

void crypto::gateway::processTimestamps ()

Cycle time-stamp data.

Compares registered time-stamps with the current time to determine if any state changes need to be made.

Returns

void

void crypto::gateway::purgeLastError () [private]

Reset error.

Resets all error variables and returns the gateway to its unconnected state.

Returns

void

uint64_t crypto::gateway::safeTimeout () const [inline]

Current sender-side timeout value.

Returns

gateway::_safeTimeout (p. 436)

bool crypto::gateway::secure () const [inline]

Gateway security established.

Returns

true if established, else, false

os::smart_ptr<**message**> crypto::gateway::send (os::smart_ptr< **message** > msg)

Send message through the gateway.

Takes a message and encrypts it with the gateway, assuming the secure stream has been established. Returns an encrypted version of the message sent through the gateway.

Parameters

in	<i>msg</i>	Message to be encrypted
----	------------	-------------------------

Returns

Encrypted message

uint64_t crypto::gateway::timeLastError () const [inline]

Time-stamp of the last error.

Returns

gateway::_errorTimestamp (p. 435)

uint64_t crypto::gateway::timeMessageReceived () const [inline]

Time-stamp of the last received message.

Returns

gateway::_messageReceived (p. 435)

uint64_t crypto::gateway::timeMessageSent () const [inline]

Time-stamp of the last sent message.

Returns

gateway::_messageSent (p. 436)

uint64_t crypto::gateway::timeout () const [inline]

Current receiver-side timeout value.

Returns

gateway::_timeout (p. 436)

30.14.4 Member Data Documentation

uint8_t crypto::gateway::_brotherState [private]

State of the reciprocal gateway.

uint8_t crypto::gateway::_currentState [private]

Current state of this gateway.

uint64_t crypto::gateway::_errorTimeout [private]

Number of seconds for error timeout.

When dealing with a timeout error, this defines how many seconds to wait before allowing a connection again.

uint64_t crypto::gateway::_errorTimestamp [private]

Time-stamp of the last error.

errorPointer crypto::gateway::_lastError [private]

Hold the most recent error.

This holds logging information for the most recent serious error. If an error is thrown while in an error state, the more serious error is kept in this variable.

uint8_t crypto::gateway::_lastErrorLevel [private]

Holds the level of the last error.

Either Basic, timeout or permanent. These are 253, 254 and 255 respectively.

uint64_t crypto::gateway::_messageReceived [private]

Time-stamp of last message received.

uint64_t crypto::gateway::_messageSent [private]

Time-stamp of last message sent.

uint64_t crypto::gateway::_safeTimeout [private]

Number of seconds till partial timeout.

This value is used as the timeout value when sending messages and is less than the timeout value so that receiving is more permissive than sending.

uint64_t crypto::gateway::_timeout [private]

Number of seconds till timeout.

This value is used when calculating timeout for receiving messages.

const uint8_t crypto::gateway::BASIC_ERROR_STATE =253 [static]

Basic error state.

A gateway has logged a low-level error. The connection must be re-set and re-established.

os::smart_ptr<**publicKeyPackageFrame**> crypto::gateway::brotherPKFrame [private]

Public key algorithm for bro.

os::smart_ptr<**hash**> crypto::gateway::brotherPrimarySignatureHash [private]

Hash of brother's primary signature.

If this hash is defined, then this gateway's brother has properly signed with the public key it declared.

os::smart_ptr<**number**> crypto::gateway::brotherPublicKey [private]

Public key for brother gateway.

os::smart_ptr<**hash**> crypto::gateway::brotherSecondarySignatureHash [private]

Hash of brother's historical signature.

When this hash is defined, this gateway's brother has properly signed with a historical public key.

os::smart_ptr<**gatewaySettings**> crypto::gateway::brotherSettings [private]

Settings of the reciprocal gateway.

Defined by the ping message which is received by this gateway's brother gateway.

os::smart_ptr<**streamPackageFrame**> crypto::gateway::brotherStream [private]

Stream algorithm for brother gateway.

```
const uint8_t crypto::gateway::CONFIRM_ERROR_STATE =252 [static]
```

Confirm brother error state.

In this state, a gateway is acknowledging to it's brother that the error notification sent by the brother was received and logged.

```
const uint8_t crypto::gateway::CONFIRM_OLD =6 [static]
```

Confirm old key state.

This indicates that a gateway has authenticated the identity of it's brother but has not been notified that its identity has been authenticated.

```
const uint64_t crypto::gateway::DEFAULT_ERROR_TIMEOUT =10 [static]
```

Default error timeout in seconds.

```
const uint64_t crypto::gateway::DEFAULT_TIMEOUT =60 [static]
```

Default timeout in seconds.

```
os::unsortedList<hash> crypto::gateway::eligibleKeys [private]
```

List of eligible public keys.

This list of hashes comes from the brother of this gateway. It is a list of the hashes of public keys associated with this node.

```
const uint8_t crypto::gateway::ESTABLISHED =7 [static]
```

Stream established state.

A secure and authentic stream has been established. Messages can be passed securely through the gateway.

```
const uint8_t crypto::gateway::ESTABLISHING_STREAM =3 [static]
```

Establishing stream state.

In this state, a gateway sends a symmetric stream key encrypted with the public key of the brother gateway.

```
os::smart_ptr<uint8_t> crypto::gateway::inputHashArray [private]
```

Data for incoming hashes.

```
uint16_t crypto::gateway::inputHashLength [private]
```

Length of incoming hash array.

```
os::smart_ptr<streamDecrypter> crypto::gateway::inputStream [private]
```

Stream for incoming messages.

os::spinLock crypto::gateway::lock [private]

Mutex protected gateway states.

os::smart_ptr<uint8_t> crypto::gateway::outputHashArray [private]

Data for outgoing hashes.

uint16_t crypto::gateway::outputHashLength [private]

Length of outgoing hash array.

os::smart_ptr<**streamEncrypter**> crypto::gateway::outputStream [private]

Stream for outgoing messages.

const uint8_t crypto::gateway::PERMENANT_ERROR_STATE =255 [static]

Permanent error state.

When gateways are in this state, a catastrophic error has occurred and the gateway refuses to reconnect.

os::smart_ptr<**publicKeyPackageFrame**> crypto::gateway::selfPKFrame [private]

Public key algorithm for this gateway.

os::smart_ptr<**number**> crypto::gateway::selfPreciseKey [private]

Public key for this gateway.

os::smart_ptr<**hash**> crypto::gateway::selfPrimarySignatureHash [private]

Hash for primary signature.

os::smart_ptr<**publicKey**> crypto::gateway::selfPublicKey [private]

Public/private key pair.

os::smart_ptr<**hash**> crypto::gateway::selfSecondarySignatureHash [private]

Hash for historical signature.

os::smart_ptr<**gatewaySettings**> crypto::gateway::selfSettings [private]

Settings of this gateway.

Defined by the user which constructed this gateway.

os::smart_ptr<**message**> crypto::gateway::selfSigningMessage [private]

Signing message: out.

This is a record of the message which was used to sign the current and historical public keys by this gateway in order to minimize the number of public key operations performed.

os::smart_ptr<**streamPackageFrame**> crypto::gateway::selfStream [private]

Stream algorithm for this gateway.

const uint8_t crypto::gateway::SETTINGS_EXCHANGED =2 [static]

Settings exchanged state.

Indicates that a gateway has received a ping message from its reciprocal gateway, but has not received notification that the reciprocal gateway has received the ping message from this gateway.

const uint8_t crypto::gateway::SIGNING_STATE =5 [static]

Signing state.

Gateways in this state have established a secure stream with their brother node and now need to prove they have access to their declared public key. The signing message also contains hashes of keys associated with the particular node.

os::spinLock crypto::gateway::stampLock [private]

Mutex protecting timestamps.

const uint8_t crypto::gateway::STREAM_ESTABLISHED =4 [static]

Stream established state.

Gateways in this state continue to send the symmetric stream key, but also indicates to the brother gateway that the stream key sent by it has been received.

uint64_t crypto::gateway::streamEstTimestamp [private]

Time the output stream was defined.

Allows for redefinition of the output stream if the definition becomes stale.

os::smart_ptr<**message**> crypto::gateway::streamMessageIn [private]

Stream defining message: in.

This is a record of the message which defined the incoming stream in-order to minimize public key cryptography performed.

os::smart_ptr<**message**> crypto::gateway::streamMessageOut [private]

Stream defining message: out.

This is a record of the message which defined the outgoing stream in-order to minimize public key cryptography performed.

```
const uint8_t crypto::gateway::TIMEOUT_ERROR_STATE =254  [static]
```

Timeout error state.

Gateways are placed in this state when an error occurs while authenticating the connection. Because an error in this state is usually both expensive and indicative of unauthorized access, when errors occur, this state forces a certain amount of time in the error state before allowing reconnection.

```
const uint8_t crypto::gateway::UNKNOWN_BROTHER =1  [static]
```

Unknown brother state.

A gateway is in this state when it is unaware of the gateway settings of its reciprocal, or brother, gateway. In short, a gateway which does not know its brother has not received a ping.

```
const uint8_t crypto::gateway::UNKNOWN_STATE =0  [static]
```


Unknown state value.

This state is used by a gateway when the it is not aware of the current state of its reciprocal gateway. A gateway should never be in this state itself.

30.15 crypto::gatewaySettings Class Reference

Holds settings for gateway encryption.

Inheritance diagram for crypto::gatewaySettings:

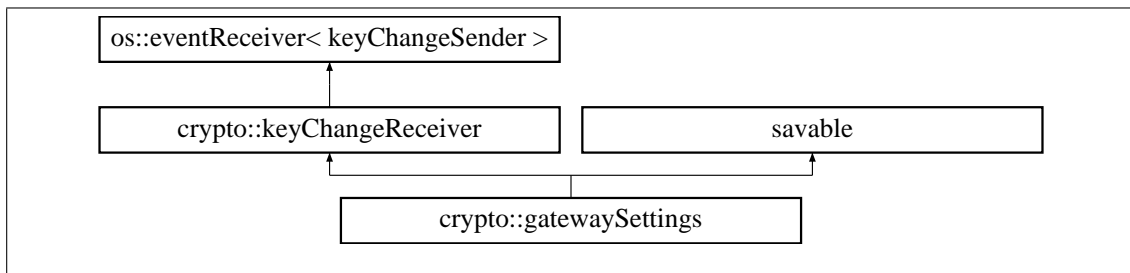

Public Member Functions

- **gatewaySettings** (os::smart_ptr< **user** > usr, std::string **groupID**, std::string **filePath**="")
User constructor.
- **gatewaySettings** (const **message** &msg)
Ping message constructor.
- virtual ~**gatewaySettings** ()
Virtual destructor.
- os::smartXMLNode **generateSaveTree** ()
Generate XML save stream.
- void **update** ()
Ensure preferred algorithms are defined.
- void **save** ()

- Saves the class to a file Saves the settings to an XML file, if the file path is defined.*
- void **load** ()
 - Loads the class from a file Loads the settings from an XML file, if the file path is defined.*
- const std::string & **filePath** () const
 - Return reference to the file path.*
- const std::string & **groupID** () const
 - Return reference to the group ID.*
- const std::string & **nodeName** () const
 - Return reference to the node name.*
- os::smart_ptr< **user** > **getUser** ()
 - Return user, if it is defined.*
- os::smart_ptr< **publicKey** > **getPrivateKey** ()
 - Return public/private key pair, if it is defined.*
- os::smart_ptr< **number** > **getPublicKey** ()
 - Return public key.*
- uint16_t **preferredPublicKeyAlgo** () const
 - Return public key algorithm ID.*
- uint16_t **preferredPublicKeySize** () const
 - Return public key algorithm size.*
- uint16_t **preferredHashAlgo** () const
 - Return hash algorithm ID.*
- uint16_t **preferredHashSize** () const
 - Return hash size.*
- uint16_t **preferredStreamAlgo** () const
 - Return stream algorithm ID.*
- os::smart_ptr< **message** > **ping** ()
 - Construct a ping message.*
- bool **operator==** (const **gatewaySettings** &cmp) const
 - Equality comparison operator.*
- bool **operator!=** (const **gatewaySettings** &cmp) const
 - Not-equals comparison operator.*
- bool **operator<** (const **gatewaySettings** &cmp) const
 - Less-than comparison operator.*
- bool **operator>** (const **gatewaySettings** &cmp) const
 - Greater-than comparison operator.*
- bool **operator<=** (const **gatewaySettings** &cmp) const
 - Less-than/Equals-to comparison operator.*
- bool **operator>=** (const **gatewaySettings** &cmp) const
 - Greater-than/Equals-to comparison operator.*

Public Attributes

- os::multiLock **lock**
 - Read/write mutex.*

Protected Member Functions

- void **publicKeyChanged** (os::smart_ptr< **publicKey** > pbk)
Triggered when the public key is changed.

Private Attributes

- std::string **_groupID**
Group ID of the node, unique to this settings class.
- std::string **_nodeName**
Name of the node, defined by the user.
- std::string **_filePath**
Save file path.
- os::smart_ptr< **user** > **_user**
Pointer to the user class.
- os::smart_ptr< **publicKey** > **_privateKey**
Pointer to public/private key pair.
- os::smart_ptr< **number** > **_publicKey**
Pointer to the public key.
- uint16_t **_preferredPublicKeyAlgo**
Public key algorithm ID.
- uint16_t **_preferredPublicKeySize**
Public key size (uint32_t size)
- uint16_t **_preferredHashAlgo**
Hash algorithm ID.
- uint16_t **_preferredHashSize**
Hash size (in bytes)
- uint16_t **_preferredStreamAlgo**
Stream algorithm ID.

30.15.1 Detailed Description

Holds settings for gateway encryption.

Contains all of the information needed to define how the gateway functions. This includes which algorithms are white-listed, which are black- listed and which are preferred. Note that this settings class can define the settings for a node whose private key is known or for a node whose private key is unknown.

30.15.2 Constructor & Destructor Documentation

```
crypto::gatewaySettings::gatewaySettings ( os::smart_ptr< user > usr, std::string groupID,  
std::string filePath = "" )
```

User constructor.

Constructs the class from a user. While this constructor can be called outside the user class, it is suggested to use the interface provided in **crypto::user** (p. 588) to create new gateway settings.

Parameters

in	<i>usr</i>	User defining the settings
in	<i>groupID</i>	Group ID of the settings
in	<i>filePath</i>	Save file location (optional)

`crypto::gatewaySettings::gatewaySettings (const message & msg)`

Ping message constructor.

Constructs the gateway settings from a ping message. This is usually used by the gateway to parse ping messages it receives.

Parameters

in	<i>msg</i>	Ping message
----	------------	--------------

`virtual crypto::gatewaySettings::~~gatewaySettings () [virtual]`

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.15.3 Member Function Documentation

`const std::string& crypto::gatewaySettings::filePath () const [inline]`

Return reference to the file path.

Returns

gatewaySettings::_filePath (p. 447)

`os::smartXMLNode crypto::gatewaySettings::generateSaveTree ()`

Generate XML save stream.

Returns

XML save tree

`os::smart_ptr<publicKey> crypto::gatewaySettings::getPrivateKey () [inline]`

Return public/private key pair, if it is defined.

Returns

gatewaySettings::_privateKey (p. 448)

os::smart_ptr<**number**> crypto::gatewaySettings::getPublicKey () [inline]

Return public key.

Returns

gatewaySettings::_publicKey (p. 448)

os::smart_ptr<**user**> crypto::gatewaySettings::getUser () [inline]

Return user, if it is defined.

Returns

gatewaySettings::_user (p. 448)

const std::string& crypto::gatewaySettings::groupID () const [inline]

Return reference to the group ID.

Returns

gatewaySettings::_groupID (p. 448)

void crypto::gatewaySettings::load ()

Loads the class from a file Loads the settings from an XML file, if the file path is defined.

Returns

void

const std::string& crypto::gatewaySettings::nodeName () const [inline]

Return reference to the node name.

Returns

gatewaySettings::_nodeName (p. 448)

bool crypto::gatewaySettings::operator!= (const **gatewaySettings** & cmp) const [inline]

Not-equals comparison operator.

Uses the group ID to gateway settings.

Parameters

in	cmp	Object to compare against
----	-----	---------------------------

Returns

this->_groupID != cmp._groupID

```
bool crypto::gatewaySettings::operator< ( const gatewaySettings & cmp ) const [inline]
```

Less-than comparison operator.

Uses the group ID to gateway settings.

Parameters

in	<i>cmp</i>	Object to compare against
----	------------	---------------------------

Returns

```
this->_groupID < cmp._groupID
```

```
bool crypto::gatewaySettings::operator<= ( const gatewaySettings & cmp ) const [inline]
```

Less-than/Equals-to comparison operator.

Uses the group ID to gateway settings.

Parameters

in	<i>cmp</i>	Object to compare against
----	------------	---------------------------

Returns

```
this->_groupID <= cmp._groupID
```

```
bool crypto::gatewaySettings::operator== ( const gatewaySettings & cmp ) const [inline]
```

Equality comparison operator.

Uses the group ID to gateway settings.

Parameters

in	<i>cmp</i>	Object to compare against
----	------------	---------------------------

Returns

```
this->_groupID == cmp._groupID
```

```
bool crypto::gatewaySettings::operator> ( const gatewaySettings & cmp ) const [inline]
```

Greater-than comparison operator.

Uses the group ID to gateway settings.

Parameters

in	<i>cmp</i>	Object to compare against
----	------------	---------------------------

Returns

`this->_groupID > cmp._groupID`

`bool crypto::gatewaySettings::operator>= (const gatewaySettings & cmp) const [inline]`

Greater-than/Equals-to comparison operator.
Uses the group ID to gateway settings.

Parameters

in	<i>cmp</i>	Object to compare against
----	------------	---------------------------

Returns

`this->_groupID >= cmp._groupID`

`os::smart_ptr<message> crypto::gatewaySettings::ping ()`

Construct a ping message.

Returns

New ping message

`uint16_t crypto::gatewaySettings::preferredHashAlgo () const [inline]`

Return hash algorithm ID.

Returns

gatewaySettings::_preferredHashAlgo (p. 448)

`uint16_t crypto::gatewaySettings::preferredHashSize () const [inline]`

Return hash size.

Returns

gatewaySettings::_preferredHashSize (p. 448)

`uint16_t crypto::gatewaySettings::preferredPublicKeyAlgo () const [inline]`

Return public key algorithm ID.

Returns

gatewaySettings::_preferredPublicKeyAlgo (p. 448)

`uint16_t crypto::gatewaySettings::preferredPublicKeySize () const [inline]`

Return public key algorithm size.

Returns

gatewaySettings::_preferredPublicKeySize (p. 448)

uint16_t crypto::gatewaySettings::preferredStreamAlgo () const [inline]

Return stream algorithm ID.

Returns

gatewaySettings::_preferredStreamAlgo (p. 448)

void crypto::gatewaySettings::publicKeyChanged (os::smart_ptr< **publicKey** > pbk)
[protected], [virtual]

Triggered when the public key is changed.

Updates the gateway settings when the user indicates a public key has been updated.

Parameters

in	<i>pbk</i>	Updated public/private key pair
----	------------	---------------------------------

Returns

void

Reimplemented from **crypto::keyChangeReceiver** (p. 478).

void crypto::gatewaySettings::save ()

Saves the class to a file Saves the settings to an XML file, if the file path is defined.

Returns

void

void crypto::gatewaySettings::update ()

Ensure preferred algorithms are defined.

Uses current information in the class to determine if known algorithms define the preferred algorithms in this class. If the preferred algorithms are not defined, they are changed to defined algorithms.

Returns

void

30.15.4 Member Data Documentation

std::string crypto::gatewaySettings::_filePath [private]

Save file path.

If the setting was defined by the user and not a "ping" message, it will often have a save file location.

`std::string crypto::gatewaySettings::_groupID [private]`

Group ID of the node, unique to this settings class.

`std::string crypto::gatewaySettings::_nodeName [private]`

Name of the node, defined by the user.

`uint16_t crypto::gatewaySettings::_prefferedHashAlgo [private]`

Hash algorithm ID.

`uint16_t crypto::gatewaySettings::_prefferedHashSize [private]`

Hash size (in bytes)

`uint16_t crypto::gatewaySettings::_prefferedPublicKeyAlgo [private]`

Public key algorithm ID.

`uint16_t crypto::gatewaySettings::_prefferedPublicKeySize [private]`

Public key size (uint32_t size)

`uint16_t crypto::gatewaySettings::_prefferedStreamAlgo [private]`

Stream algorithm ID.

`os::smart_ptr<publicKey> crypto::gatewaySettings::_privateKey [private]`

Pointer to public/private key pair.

`os::smart_ptr<number> crypto::gatewaySettings::_publicKey [private]`

Pointer to the public key.

`os::smart_ptr<user> crypto::gatewaySettings::_user [private]`

Pointer to the user class.

`os::multiLock crypto::gatewaySettings::lock`


Read/write mutex.

When this class is defined by a user, it is possible for the user to change the gateway settings during runtime. Because of this, a read/write lock is required.

30.16 crypto::hash Class Reference

Base hash class.

Inheritance diagram for crypto::hash:

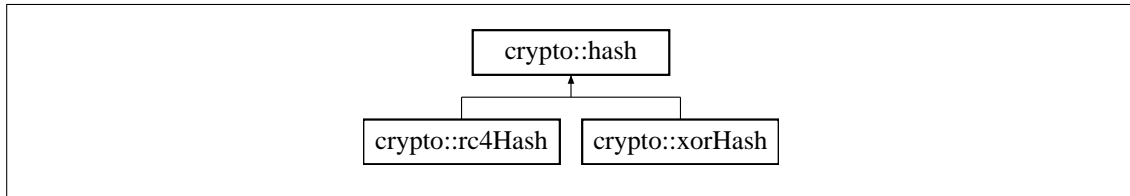

Public Member Functions

- **hash** (const **hash** &cpy)
Hash copy constructor.
- **hash** & **operator=** (const **hash** &cpy)
Equality constructor.
- virtual ~**hash** ()
Virtual destructor.
- int **compare** (const **hash** *_comp) const
Comparison function.
- virtual void **preformHash** (unsigned char ***data**, uint32_t dLen)
Binds a data-set.
- virtual std::string **algorithmName** () const
Algorithm name string access.
- uint16_t **algorithm** () const
Current algorithm ID.
- uint16_t **size** () const
Current hash size.
- uint32_t **numBits** () const
Current hash size, bits.
- unsigned char * **data** ()
Modifiable data access.
- const unsigned char * **data** () const
Constant data access.
- unsigned char **operator[]** (uint16_t pos) const
Modifiable data access.
- unsigned char & **operator[]** (uint16_t pos)
Constant data access.
- std::string **toString** () const
Converts hash to string.
- void **fromString** (const std::string &str)
Converts from string.

- bool **operator==** (const **hash** &comp) const
- bool **operator!=** (const **hash** &comp) const
- bool **operator>** (const **hash** &comp) const
- bool **operator>=** (const **hash** &comp) const
- bool **operator<** (const **hash** &comp) const
- bool **operator<=** (const **hash** &comp) const

Static Public Member Functions

- static std::string **staticAlgorithmName** ()
Algorithm name string access.
- static uint16_t **staticAlgorithm** ()
Algorithm ID number access.

Protected Member Functions

- **hash** (uint16_t **algorithm**=algo::hashNULL, uint16_t **size**=size::defaultHash)
Default hash constructor.

Protected Attributes

- uint16_t **_size**
Number of bytes in the hash.
- unsigned char * **_data**
Raw hash data.

Private Attributes

- uint16_t **_algorithm**
Hash algorithm ID.

30.16.1 Detailed Description

Base hash class.

This class manages the raw data of all hashes. Subsequent hashes define different algorithms to populate the hashes.

30.16.2 Constructor & Destructor Documentation

```
crypto::hash::hash ( uint16_t algorithm = algo::hashNULL, uint16_t size = size::defaultHash )  
[protected]
```

Default hash constructor.

Constructs a hash with the given size and algorithm ID, initializing the entire hash itself to 0.

Parameters

in	<i>algorithm</i>	Algorithm ID, NULL by default
in	<i>size</i>	Size of hash, <code>crypto::size::defaultHash</code> by default

`crypto::hash::hash (const hash & cpy)`

Hash copy constructor.

Constructs a hash with a hash. This copy constructor re-initializes the data array for the new hash.

Parameters

in	<i>cpy</i>	Hash to copy
----	------------	--------------

`virtual crypto::hash::~~hash () [virtual]`

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.16.3 Member Function Documentation

`uint16_t crypto::hash::algorithm () const [inline]`

Current algorithm ID.

Returns the algorithm ID bound to this hash.

Returns

crypto::hash::_algorithm (p. 454)

`virtual std::string crypto::hash::algorithmName () const [inline], [virtual]`

Algorithm name string access.

Returns the name of the current algorithm string. This function is virtual, so changes for each hash algorithm

Returns

"NULL"

Reimplemented in **crypto::xorHash** (p. 603), and **crypto::rc4Hash** (p. 572).

`int crypto::hash::compare (const hash * _comp) const`

Comparison function.

Takes into consideration the algorithm, size of the data and content of the hash. Used for all of the equality operators.

Returns

0 if equal, 1 if greater than, -1 if less than

unsigned char* crypto::hash::data () [inline]

Modifiable data access.

Provides mutable data-access to the raw hash data.

Returns

crypto::hash::_data (p. 454)

const unsigned char* crypto::hash::data () const [inline]

Constant data access.

Provides immutable data-access to the raw hash data.

Returns

crypto::hash::_data (p. 454)

void crypto::hash::fromString (const std::string & str)

Converts from string.

Rebuilds the hash from a hex string.

Parameters

in	str	Hex string
----	-----	------------

Returns

String representation of the hash

uint32_t crypto::hash::numBits () const [inline]

Current hash size, bits.

Return the hash size bound to this hash in bits.

Returns

crypto::hash::_size (p. 454)*8

bool crypto::hash::operator!= (const **hash** & comp) const [inline]

bool crypto::hash::operator< (const **hash** & comp) const [inline]

bool crypto::hash::operator<= (const **hash** & comp) const [inline]

hash& crypto::hash::operator= (const **hash** & cpy)

Equality constructor.

Rebuild this hash with the data from another hash.

Parameters

in	<i>cpy</i>	Hash to copy
----	------------	--------------

Returns

Reference to this

bool crypto::hash::operator==(const **hash** & comp) const [inline]

bool crypto::hash::operator> (const **hash** & comp) const [inline]

bool crypto::hash::operator>= (const **hash** & comp) const [inline]

unsigned char crypto::hash::operator[] (uint16_t pos) const

Modifiable data access.

Provides mutable data-access to the raw hash data.

Parameters

in	<i>pos</i>	Data index
----	------------	------------

Returns

crypto::hash::_data (p. 454)[pos]

unsigned char& crypto::hash::operator[] (uint16_t pos)

Constant data access.

Provides immutable data-access to the raw hash data.

Parameters

in	<i>pos</i>	Data index
----	------------	------------

Returns

crypto::hash::_data (p. 454)[pos]

virtual void crypto::hash::preformHash (unsigned char * data, uint32_t dLen) [inline],
[virtual]

Binds a data-set.

Preforms the hash algorithm on the set of data provided and binds the result to this hash.

Parameters

in	<i>data</i>	Data array to be hashed
in	<i>dLen</i>	Length of data array

`uint16_t crypto::hash::size () const [inline]`

Current hash size.

Returns the hash size bound to this hash in bytes.

Returns

crypto::hash::_size (p. 454)

`static uint16_t crypto::hash::staticAlgorithm () [inline], [static]`

Algorithm ID number access.

Returns the ID of the current algorithm. This function is static and can be accessed without instantiating the class.

Returns

crypto::algo::hashNULL

`static std::string crypto::hash::staticAlgorithmName () [inline], [static]`

Algorithm name string access.

Returns the name of the current algorithm string. This function is static and can be accessed without instantiating the class.

Returns

"NULL"

`std::string crypto::hash::toString () const`

Converts hash to string.

Converts the hash to a hex string.

Returns

String representation of the hash

30.16.4 Member Data Documentation

`uint16_t crypto::hash::_algorithm [private]`

Hash algorithm ID.

`unsigned char* crypto::hash::_data [protected]`

Raw hash data.


`uint16_t crypto::hash::_size [protected]`

Number of bytes in the hash.

30.17 crypto::hashCompareError Class Reference

Hash mis-match.

Inheritance diagram for crypto::hashCompareError:

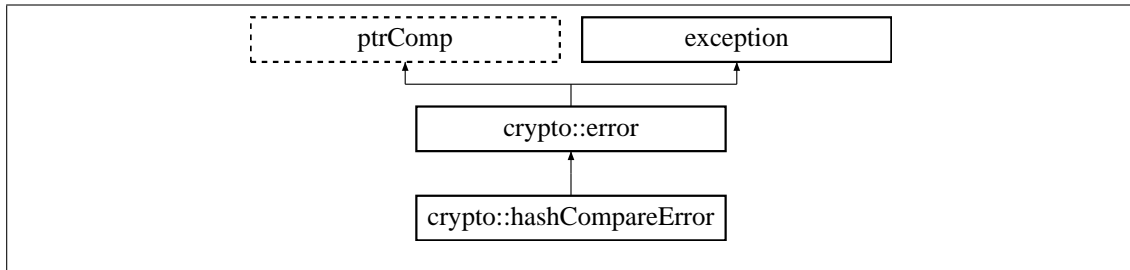

Public Member Functions

- virtual **~hashCompareError** () throw ()
Virtual destructor.
- std::string **errorTitle** () const
Short error descriptor Returns "Hash Compare".
- std::string **errorDescription** () const
Long error descriptor Returns "Provided and calculated hashes do not match".

30.17.1 Detailed Description

Hash mis-match.

Thrown when two hashes do not match. This error can be indicative of larger security issues, as it most commonly occurs during a failed authentication.

30.17.2 Constructor & Destructor Documentation

virtual crypto::hashCompareError::~~hashCompareError () throw () [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.17.3 Member Function Documentation

std::string crypto::hashCompareError::errorDescription () const [inline], [virtual]

Long error descriptor Returns "Provided and calculated hashes do not match".

Returns

Error description std::string

Reimplemented from **crypto::error** (p. 416).

`std::string crypto::hashCompareError::errorTitle () const [inline], [virtual]`

Short error descriptor Returns "Hash Compare".

Returns


Error title `std::string`

Reimplemented from **crypto::error** (p. 417).

30.18 crypto::hashGenerationError Class Reference

Hash generation error.

Inheritance diagram for `crypto::hashGenerationError`:

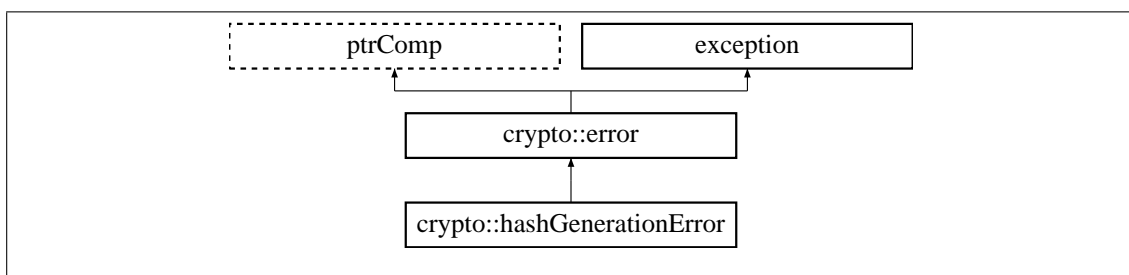

Public Member Functions

- virtual **~hashGenerationError** () throw ()
Virtual destructor.
- `std::string errorTitle` () const
Short error descriptor Returns "Hash Generation".
- `std::string errorDescription` () const
Long error descriptor Returns "Could not generate a hash with the given arguments".

30.18.1 Detailed Description

Hash generation error.

Thrown when a hash encounters an error while being created.

30.18.2 Constructor & Destructor Documentation

`virtual crypto::hashGenerationError::~~hashGenerationError () throw () [inline], [virtual]`

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.18.3 Member Function Documentation

`std::string crypto::hashGenerationError::errorDescription () const [inline], [virtual]`

Long error descriptor Returns "Could not generate a hash with the given arguments".

Returns

Error description `std::string`

Reimplemented from **crypto::error** (p. 416).

`std::string crypto::hashGenerationError::errorTitle () const [inline], [virtual]`

Short error descriptor Returns "Hash Generation".

Returns


Error title `std::string`

Reimplemented from **crypto::error** (p. 417).

30.19 crypto::illegalAlgorithmBind Class Reference

Algorithm bound failure.

Inheritance diagram for `crypto::illegalAlgorithmBind`:

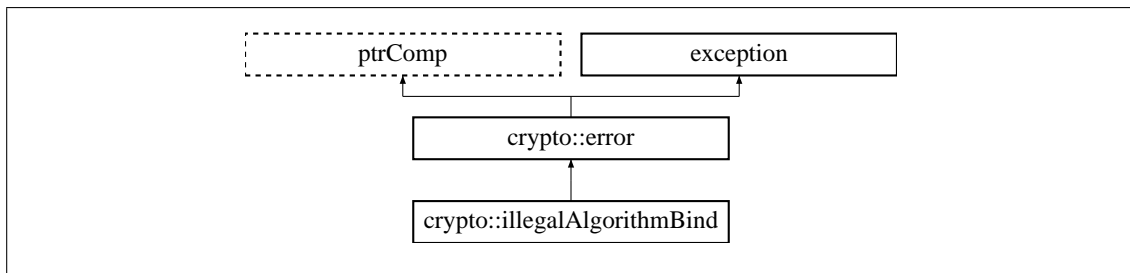

Public Member Functions

- **illegalAlgorithmBind** (`std::string algoName`)
Illegal algorithm error.
- virtual **~illegalAlgorithmBind** () throw ()
Virtual destructor.
- `std::string errorTitle` () const
Short error descriptor Returns "Illegal Algorithm Bind".
- `std::string errorDescription` () const
Long error descriptor Returns "Cannot bind algorithm of type: <algorithmName>".

Private Attributes

- `std::string algorithmName`

Name of algorithm.

30.19.1 Detailed Description

Algorithm bound failure.

Thrown when an algorithm cannot be found or used. Usually indicates the specified algorithm is not defined by the active version.

30.19.2 Constructor & Destructor Documentation

`crypto::illegalAlgorithmBind::illegalAlgorithmBind (std::string algoName) [inline]`

Illegal algorithm error.

Parameters

in	<i>algoName</i>	Name of illegal algorithm
----	-----------------	---------------------------

`virtual crypto::illegalAlgorithmBind::~~illegalAlgorithmBind () throw) [inline], [virtual]`

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.19.3 Member Function Documentation

`std::string crypto::illegalAlgorithmBind::errorDescription () const [inline], [virtual]`

Long error descriptor Returns "Cannot bind algorithm of type: <algorithmName>".

Returns

Error description `std::string`

Reimplemented from **crypto::error** (p. 416).

`std::string crypto::illegalAlgorithmBind::errorTitle () const [inline], [virtual]`

Short error descriptor Returns "Illegal Algorithm Bind".

Returns

Error title `std::string`

Reimplemented from **crypto::error** (p. 417).

30.19.4 Member Data Documentation


`std::string crypto::illegalAlgorithmBind::algorithmName` [private]

Name of algorithm.

30.20 crypto::insertionFailed Class Reference

ADS Insertion Failed.

Inheritance diagram for `crypto::insertionFailed`:

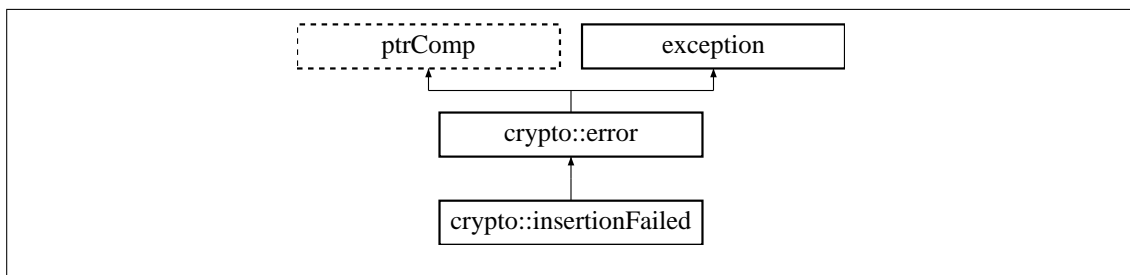

Public Member Functions

- virtual **~insertionFailed** () throw ()
Virtual destructor.
- `std::string errorTitle` () const
Short error descriptor Returns "Insertion Failed".
- `std::string errorDescription` () const
Long error descriptor Returns "Insertion into an abstract data-structure unexpectedly failed".

30.20.1 Detailed Description

ADS Insertion Failed.

Thrown when insertion to an `os::ads` structure unexpectedly fails.

30.20.2 Constructor & Destructor Documentation

`virtual crypto::insertionFailed::~~insertionFailed () throw` [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.20.3 Member Function Documentation

`std::string crypto::insertionFailed::errorDescription () const` [inline], [virtual]

Long error descriptor Returns "Insertion into an abstract data-structure unexpectedly failed".

Returns

Error description `std::string`

Reimplemented from **crypto::error** (p. 416).

```
std::string crypto::insertionFailed::errorTitle ( ) const [inline], [virtual]
```

Short error descriptor Returns "Insertion Failed".

Returns


Error title `std::string`

Reimplemented from **crypto::error** (p. 417).

30.21 crypto::integer Class Reference

Integer number definition.

Inheritance diagram for `crypto::integer`:

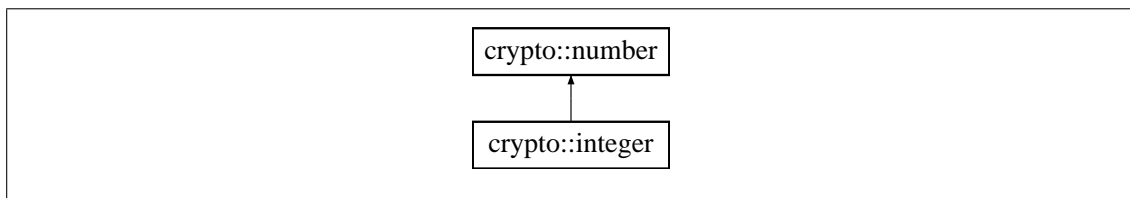

Public Member Functions

- **integer** ()
Default integer constructor.
- **integer** (uint16_t size)
Construct integer with size.
- **integer** (const uint32_t *d, uint16_t size)
Construct integer with data array.
- **integer** (const **integer** &num)
Copy constructor.
- virtual ~**integer** ()
Virtual destructor.
- bool **checkType** () const
Check if the number is valid.
- **operator number** () const
Allows integer to be cast as a number.
- **integer operator+** (const **integer** &n) const
Integer addition operator.
- **integer & operator+=** (const **integer** &n)

- Integer addition equals operator.*
- **integer & operator++ ()**
Increment operator.
- **integer operator++ (int dummy)**
Increment operator.
- **integer operator- (const integer &n) const**
Integer subtraction operator.
- **integer & operator-= (const integer &n)**
Integer subtraction equals operator.
- **integer & operator-- ()**
Decrement operator.
- **integer operator-- (int dummy)**
Decrement operator.
- **integer operator>> (uint16_t n) const**
Right shift operator.
- **integer operator<< (uint16_t n) const**
Left shift operator.
- **integer operator* (const integer &n) const**
Integer multiplication operator.
- **integer & operator*= (const integer &n)**
Integer multiplication equals operator.
- **integer operator/ (const integer &n) const**
Integer division operator.
- **integer & operator/= (const integer &n)**
Integer division equals operator.
- **integer operator% (const integer &n) const**
Integer modulo operator.
- **integer & operator%= (const integer &n)**
Integer modulo equals operator.
- **integer exponentiation (const integer &n) const**
Integer exponentiation function.
- **integer & exponentiationEquals (const integer &n)**
Integer exponentiation equals function.
- **integer moduloExponentiation (const integer &n, const integer &mod) const**
Integer modulo-exponentiation function.
- **integer & moduloExponentiationEquals (const integer &n, const integer &mod)**
Integer modulo-exponentiation equals function.
- **integer gcd (const integer &n) const**
Integer GCD function.
- **integer & gcdEquals (const integer &n)**
Integer GCD equals function.
- **integer modInverse (const integer &m) const**
Integer modular inverse function.

- **integer & modInverseEquals** (const **integer** &n)
Integer modular inverse equals function.
- bool **prime** (uint16_t testVal=algo::primeTestCycle) const
Test if this integer is prime.

Static Public Member Functions

- static **integer zero** ()
Constructs a '0' integer.
- static **integer one** ()
Constructs a '1' integer.
- static **integer two** ()
Constructs a '2' integer.

Additional Inherited Members

30.21.1 Detailed Description

Integer number definition.

A traditional numerical definition which can be of arbitrary size.

30.21.2 Constructor & Destructor Documentation

crypto::integer::integer ()

Default integer constructor.

crypto::integer::integer (uint16_t size)

Construct integer with size.

Parameters

in	size	Size integer is initialized with
----	------	----------------------------------

crypto::integer::integer (const uint32_t * d, uint16_t size)

Construct integer with data array.

Parameters

in	d	Data array to be bound
in	size	Size of array

`crypto::integer::integer (const integer & num)`

Copy constructor.

Parameters

in	<i>num</i>	Integer used to construct this
-----------	------------	--------------------------------

`virtual crypto::integer::~~integer () [inline], [virtual]`

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.21.3 Member Function Documentation

`bool crypto::integer::checkType () const [virtual]`

Check if the number is valid.

Checks to ensure that the number definition for this object is the Base-10 type. Ensure that all basic mathematical operators are defined.

Returns

true if valid type, else, false

Reimplemented from **crypto::number** (p. 515).

`integer crypto::integer::exponentiation (const integer & n) const`

Integer exponentiation function.

Parameters

in	<i>n</i>	Integer to be raised to
-----------	----------	-------------------------

Returns

`this^n`

`integer& crypto::integer::exponentiationEquals (const integer & n)`

Integer exponentiation equals function.

Parameters

in	<i>n</i>	Integer to be raised to
-----------	----------	-------------------------

Returns

$\text{this} = \text{this}^n$

integer crypto::integer::gcd (const **integer** & n) const

Integer GCD function.

Parameters

in	n	Integer to be compared against
----	-----	--------------------------------

Returns

GCD of this and n

integer& crypto::integer::gcdEquals (const **integer** & n)

Integer GCD equals function.

Parameters

in	n	Integer to be compared against
----	-----	--------------------------------

Returns

this = GCD of this and n

integer crypto::integer::modInverse (const **integer** & m) const

Integer modular inverse function.

Parameters

in	n	Integer representing modulo space
----	-----	-----------------------------------

Returns

$(\text{this}^{-1}) \% n$

integer& crypto::integer::modInverseEquals (const **integer** & n)

Integer modular inverse equals function.

Parameters

in	n	Integer representing modulo space
----	-----	-----------------------------------

Returns

`this = (this^-1) % n`

integer crypto::integer::moduloExponentiation (const **integer** & n, const **integer** & mod) const

Integer modulo-exponentiation function.

Parameters

in	<i>n</i>	Integer to be raised to
in	<i>mod</i>	Integer representing modulo space

Returns

`this^n % mod`

integer& crypto::integer::moduloExponentiationEquals (const **integer** & n, const **integer** & mod)

Integer modulo-exponentiation equals function.

Parameters

in	<i>n</i>	Integer to be raised to
in	<i>mod</i>	Integer representing modulo space

Returns

`this = this^n % mod`

static **integer** crypto::integer::one () [static]

Constructs a '1' integer.

Returns

`1`

crypto::integer::operator **number** () const [inline]

Allows integer to be cast as a number.

Returns

`number(*this)`

integer crypto::integer::operator% (const **integer** & n) const

Integer modulo operator.

Parameters

in	<i>n</i>	Integer defining modulo space this % n
----	----------	--

integer& crypto::integer::operator%= (const **integer** & n)

Integer modulo equals operator.

Parameters

in	<i>n</i>	Integer defining modulo space this = this % n
----	----------	---

integer crypto::integer::operator* (const **integer** & n) const

Integer multiplication operator.

Parameters

in	<i>n</i>	Integer to be multiplied this * n
----	----------	-----------------------------------

integer& crypto::integer::operator*= (const **integer** & n)

Integer multiplication equals operator.

Parameters

in	<i>n</i>	Integer to be multiplied this = this * n
----	----------	--

integer crypto::integer::operator+ (const **integer** & n) const

Integer addition operator.

Parameters

in	<i>n</i>	Integer to be added this + n
----	----------	------------------------------

integer& crypto::integer::operator++ ()

Increment operator.

Returns

this++

integer crypto::integer::operator++ (int dummy)

Increment operator.

Returns

++this

integer& crypto::integer::operator+= (const **integer** & n)

Integer addition equals operator.

Parameters

in	<i>n</i>	Integer to be added this = this + n
-----------	----------	-------------------------------------

integer crypto::integer::operator- (const **integer** & n) const

Integer subtraction operator.

Parameters

in	<i>n</i>	Integer to be subtracted this - n
-----------	----------	-----------------------------------

integer& crypto::integer::operator-- ()

Decrement operator.

Returns

this--

integer crypto::integer::operator-- (int dummy)

Decrement operator.

Returns

--this

integer& crypto::integer::operator-= (const **integer** & n)

Integer subtraction equals operator.

Parameters

in	<i>n</i>	Integer to be subtracted this = this - <i>n</i>
----	----------	---

integer crypto::integer::operator/ (const **integer** & *n*) const

Integer division operator.

Parameters

in	<i>n</i>	Integer to be divided by this / <i>n</i>
----	----------	--

integer& crypto::integer::operator/= (const **integer** & *n*)

Integer division equals operator.

Parameters

in	<i>n</i>	Integer to be divided by this = this / <i>n</i>
----	----------	---

integer crypto::integer::operator<< (uint16_t *n*) const

Left shift operator.

Parameters

in	<i>n</i>	Number of bits to shift
----	----------	-------------------------

Returns

this << *n*

integer crypto::integer::operator>> (uint16_t *n*) const

Right shift operator.

Parameters

in	<i>n</i>	Number of bits to shift
----	----------	-------------------------

Returns

this >> *n*

```
bool crypto::integer::prime ( uint16_t testVal = algo::primeTestCycle ) const
```

Test if this integer is prime.

Performs a probabilistic prime test on this number. This operation can be quite expensive, especially for large numbers.

Parameters

in	testVal	Number of test cycles, crypto::algo::primeTestCycle by default
----	---------	--

Returns

true if prime, else, false

```
static integer crypto::integer::two ( ) [static]
```

Constructs a '2' integer.

Returns

2

```
static integer crypto::integer::zero ( ) [inline], [static]
```

Constructs a '0' integer.


Returns

0

30.22 crypto::keyBank Class Reference

Key bank interface.

Inheritance diagram for crypto::keyBank:

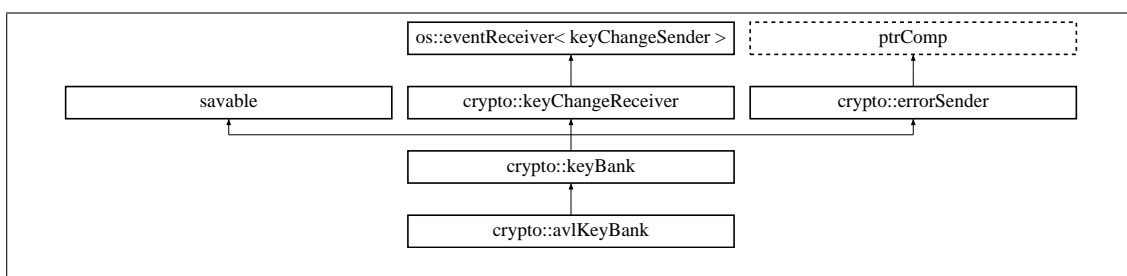

Public Member Functions

- virtual **~keyBank** ()
Virtual destructor.

- virtual os::smart_ptr< **nodeGroup** > **addPair** (std::string groupName, std::string name, os::smart_ptr< **number** > key, uint16_t algoID, uint16_t keySize)=0
Adds authenticated node to bank.
- virtual void **save** ()=0
Saves bank to file.
- const std::string & **savePath** () const
Get save path.
- virtual os::smart_ptr< **nodeGroup** > **find** (os::smart_ptr< **nodeNameReference** > name)=0
Find by group name reference.
- virtual os::smart_ptr< **nodeGroup** > **find** (os::smart_ptr< **nodeKeyReference** > key)=0
Find by group key reference.
- virtual os::smart_ptr< **nodeGroup** > **find** (std::string groupName, std::string name)
Find by group name and name.
- virtual os::smart_ptr< **nodeGroup** > **find** (os::smart_ptr< **number** > key, uint16_t algoID, uint16_t keySize)
Find by key information.
- void **setPassword** (const unsigned char *key=NULL, unsigned int keyLen=0)
Set password.
- void **setStreamPackage** (os::smart_ptr< **streamPackageFrame** > strmPack)
Set stream package.
- void **setPublicKey** (os::smart_ptr< **publicKey** > pubKey)
Set public key.

Protected Member Functions

- virtual void **pushNewNode** (os::smart_ptr< **nodeNameReference** > name)=0
Add name node.
- virtual void **pushNewNode** (os::smart_ptr< **nodeKeyReference** > key)=0
Add key node.
- virtual void **load** ()=0
Loads bank from file.
- void **publicKeyChanged** (os::smart_ptr< **publicKey** > pbk)
Triggers on key change.
- os::smart_ptr< **nodeGroup** > **fileLoadHelper** (os::smartXMLNode xmlTree)
Construct node with XML tree.
- **keyBank** (std::string **savePath**, const unsigned char *key=NULL, unsigned int keyLen=0, os::smart_ptr< **streamPackageFrame** > strmPck=NULL)
Construct with save path and key.
- **keyBank** (std::string **savePath**, os::smart_ptr< **publicKey** > pubKey, os::smart_ptr< **streamPackageFrame** > strmPck=NULL)
Construct with save path and public key.

Protected Attributes

- `os::smart_ptr< streamPackageFrame > _streamPackage`
Stream package.
- `unsigned char * _symKey`
Primary symmetric key.
- `unsigned int _keyLen`
Length of symmetric key.
- `os::smart_ptr< publicKey > _pubKey`
Public key group to encrypt file.

Private Attributes

- `std::string _savePath`
Path to save file.

Friends

- `class nodeGroup`
Friendship with node grouping.

30.22.1 Detailed Description

Key bank interface.

Acts as an interface for classes which allow for the storing, saving and searching of cryptographic keys. These banks act, in essence, as data-bases.

30.22.2 Constructor & Destructor Documentation

`crypto::keyBank::keyBank (std::string savePath, const unsigned char * key = NULL, unsigned int keyLen = 0, os::smart_ptr< streamPackageFrame > strmPck = NULL) [protected]`

Construct with save path and key.

Parameters

in	<i>savePath</i>	Path to save file
in	<i>key</i>	Symetric key
in	<i>keyLen</i>	Length of symetric key
in	<i>strmPck</i>	Definition of algorithms used

`crypto::keyBank::keyBank (std::string savePath, os::smart_ptr< publicKey > pubKey, os::smart_ptr< streamPackageFrame > strmPck = NULL) [protected]`

Construct with save path and public key.

Parameters

in	<i>savePath</i>	Path to save file
in	<i>pubKey</i>	Public key
in	<i>strmPck</i>	Definition of algorithms used

virtual crypto::keyBank::~~keyBank () [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.22.3 Member Function Documentation

virtual os::smart_ptr<**nodeGroup**> crypto::keyBank::addPair (std::string groupName, std::string name, os::smart_ptr< **number** > key, uint16_t algoID, uint16_t keySize) [pure virtual]

Adds authenticated node to bank.

Note that if a node has not be authenticated, adding it to the bank will cause a potential security vulnerability. Nodes should be authenticated before being added to the bank.

Parameters

in	<i>groupName</i>	Name of the node's group
in	<i>name</i>	Name of the node
in	<i>key</i>	Key of node to be added
in	<i>algoID</i>	ID of algorithm for key
in	<i>keySize</i>	Length of key of the node

Returns

Return reference to the new node group

Implemented in **crypto::avlKeyBank** (p. 395).

os::smart_ptr<**nodeGroup**> crypto::keyBank::fileLoadHelper (os::smartXMLNode xmlTree) [inline], [protected]

Construct node with XML tree.

Parameters

in	<i>xmlTree</i>	XML tree from file
----	----------------	--------------------

Returns

Node group constructed with tree

```
virtual os::smart_ptr<nodeGroup> crypto::keyBank::find ( os::smart_ptr< nodeNameReference >
name ) [pure virtual]
```

Find by group name reference.

Parameters

in	<i>name</i>	Name reference to be searched
----	-------------	-------------------------------

Returns

Node group found by arguments

Implemented in **crypto::avlKeyBank** (p. 395).

```
virtual os::smart_ptr<nodeGroup> crypto::keyBank::find ( os::smart_ptr< nodeKeyReference >
key ) [pure virtual]
```

Find by group key reference.

Parameters

in	<i>key</i>	Key reference to be searched
----	------------	------------------------------

Returns

Node group found by arguments

Implemented in **crypto::avlKeyBank** (p. 395).

```
virtual os::smart_ptr<nodeGroup> crypto::keyBank::find ( std::string groupName, std::string name
) [inline], [virtual]
```

Find by group name and name.

Parameters

in	<i>groupName</i>	Name of the node's group
in	<i>name</i>	Name of the node

Returns

Node group found by arguments

Reimplemented in **crypto::avlKeyBank** (p. 396).

```
virtual os::smart_ptr<nodeGroup> crypto::keyBank::find ( os::smart_ptr< number > key, uint16_t algoID, uint16_t keySize ) [inline], [virtual]
```

Find by key information.

Parameters

in	<i>key</i>	Key of node to be added
in	<i>algoID</i>	ID of algorithm for key
in	<i>keySize</i>	Length of key of the node

Returns

Node group found by arguments

Reimplemented in **crypto::avlKeyBank** (p. 396).

```
virtual void crypto::keyBank::load ( ) [protected], [pure virtual]
```

Loads bank from file.

Returns

void

Implemented in **crypto::avlKeyBank** (p. 396).

```
void crypto::keyBank::publicKeyChanged ( os::smart_ptr< publicKey > pbk ) [protected], [virtual]
```

Triggers on key change.

Marks this class for re-saving when the public key has been re-generated.

Parameters

in	<i>pbk</i>	Public key which was changed
----	------------	------------------------------

Returns

void

Reimplemented from **crypto::keyChangeReceiver** (p. 478).

```
virtual void crypto::keyBank::pushNewNode ( os::smart_ptr< nodeNameReference > name ) [protected], [pure virtual]
```

Add name node.

Inserts a name node into the bank. The name node has a reference to a node group.

Parameters

in	<i>name</i>	Name node to be added
----	-------------	-----------------------

Returns

void

Implemented in **crypto::avlKeyBank** (p. 397).

```
virtual void crypto::keyBank::pushNewNode ( os::smart_ptr< nodeKeyReference > key )  
[protected], [pure virtual]
```

Add key node.

Inserts a key node into the bank. The key node has a reference to a node group.

Parameters

in	<i>key</i>	Key node to be added
----	------------	----------------------

Returns

void

Implemented in **crypto::avlKeyBank** (p. 397).

```
virtual void crypto::keyBank::save ( ) [pure virtual]
```

Saves bank to file.

Returns

void

Implemented in **crypto::avlKeyBank** (p. 397).

```
const std::string& crypto::keyBank::savePath ( ) const [inline]
```

Get save path.

Returns

crypto::keyBank::_savePath (p. 476)

```
void crypto::keyBank::setPassword ( const unsigned char * key = NULL, unsigned int keyLen = 0 )
```

Set password.

Sets symmetric key used to securely save user data.

Parameters

in	<i>key</i>	Symetric key
in	<i>keyLen</i>	Length of symetric key

Returns

void

void crypto::keyBank::setPublicKey (os::smart_ptr< **publicKey** > pubKey)

Set public key.

Binds a new public key to this. Calls for saving of this user.

Parameters

in	<i>pubKey</i>	Public key
----	---------------	------------

Returns

void

void crypto::keyBank::setStreamPackage (os::smart_ptr< **streamPackageFrame** > strmPack)

Set stream package.

Binds a new stream package. Calls for saving of this user.

Parameters

in	<i>strmPack</i>	Stream package
----	-----------------	----------------

Returns

void

30.22.4 Friends And Related Function Documentation

friend class **nodeGroup** [friend]

Friendship with node grouping.

Node groups must be able to push name and key nodes onto the key bank.

30.22.5 Member Data Documentation

unsigned int crypto::keyBank::_keyLen [protected]

Length of symmetric key.

os::smart_ptr<**publicKey**> crypto::keyBank::_pubKey [protected]

Public key group to encrypt file.

std::string crypto::keyBank::_savePath [private]

Path to save file.

os::smart_ptr<**streamPackageFrame**> crypto::keyBank::_streamPackage [protected]

Stream package.

Used for the saving of the key bank. This defines the algorithms used for encrypting the saved bank, if it is encrypted.


unsigned char* crypto::keyBank::_symKey [protected]

Primary symmetric key.

30.23 crypto::keyChangeReceiver Class Reference

Interface for receiving key changes.

Inheritance diagram for crypto::keyChangeReceiver:

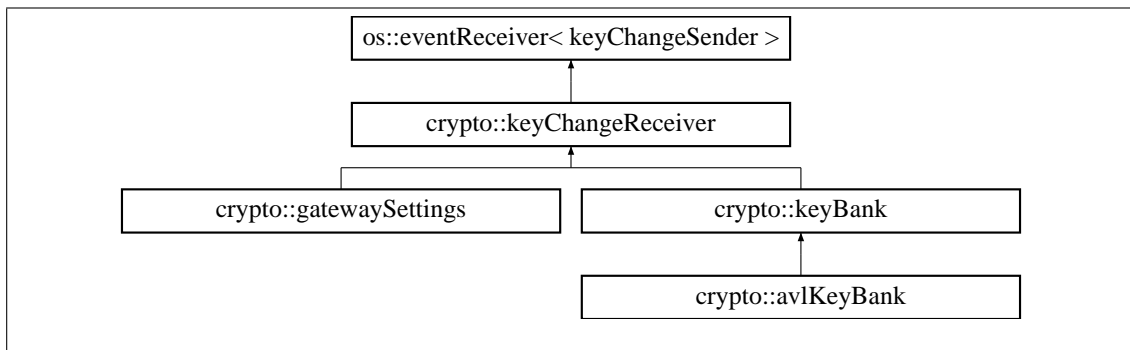

Public Member Functions

- virtual **~keyChangeReceiver** ()
Virtual destructor.
- virtual bool **operator==** (const **keyChangeReceiver** &l) const
Equality test.
- virtual bool **operator>** (const **keyChangeReceiver** &l) const
Greater than test.
- virtual bool **operator<** (const **keyChangeReceiver** &l) const
Less than test.
- virtual bool **operator>=** (const **keyChangeReceiver** &l) const
Greater than/equal to test.
- virtual bool **operator<=** (const **keyChangeReceiver** &l) const
Less than/equal to test.

Protected Member Functions

- virtual void **publicKeyChanged** (os::smart_ptr< **publicKey** > pbk)
Triggers on key change.

Friends

- class **keyChangeSender**

Allows access to **crypto::keyChangeReceiver::publicKeyChanged** (p. 478).

30.23.1 Detailed Description

Interface for receiving key changes.

A class which is alerted by public keys when the public key is updated.

30.23.2 Constructor & Destructor Documentation

virtual `crypto::keyChangeReceiver::~keyChangeReceiver () [inline], [virtual]`

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.23.3 Member Function Documentation

virtual `bool crypto::keyChangeReceiver::operator< (const keyChangeReceiver & l) const [inline], [virtual]`

Less than test.

virtual `bool crypto::keyChangeReceiver::operator<= (const keyChangeReceiver & l) const [inline], [virtual]`

Less than/equal to test.

virtual `bool crypto::keyChangeReceiver::operator== (const keyChangeReceiver & l) const [inline], [virtual]`

Equality test.

virtual `bool crypto::keyChangeReceiver::operator> (const keyChangeReceiver & l) const [inline], [virtual]`

Greater than test.

virtual `bool crypto::keyChangeReceiver::operator>= (const keyChangeReceiver & l) const [inline], [virtual]`

Greater than/equal to test.

virtual `void crypto::keyChangeReceiver::publicKeyChanged (os::smart_ptr< publicKey > pbk) [inline], [protected], [virtual]`

Triggers on key change.

Is triggered by **crypto::publicKey** (p. 532) whenever the public key is updated.

Parameters

in	pbk	Public key which was changed
----	-----	------------------------------

Returns

void

Reimplemented in **crypto::keyBank** (p. 474), and **crypto::gatewaySettings** (p. 447).

30.23.4 Friends And Related Function Documentation


friend class **keyChangeSender** [friend]

Allows access to **crypto::keyChangeReceiver::publicKeyChanged** (p. 478).

30.24 crypto::keyChangeSender Class Reference

Interface inherited by **publicKey** (p. 532).

Inheritance diagram for crypto::keyChangeSender:

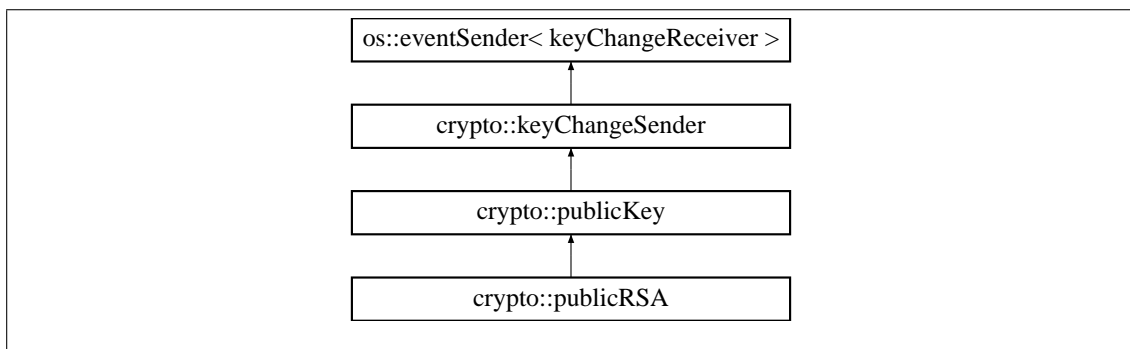

Public Member Functions

- virtual **~keyChangeSender** ()
Virtual destructor.
- virtual bool **operator==** (const **keyChangeSender** &l) const
Equality test.
- virtual bool **operator>** (const **keyChangeSender** &l) const
Greater than test.
- virtual bool **operator<** (const **keyChangeSender** &l) const
Less than test.
- virtual bool **operator>=** (const **keyChangeSender** &l) const
Greater than/equal to test.
- virtual bool **operator<=** (const **keyChangeSender** &l) const
Less than/equal to test.

Protected Member Functions

- void **sendEvent** (os::smart_ptr< **keyChangeReceiver** > ptr)
Sends key change event to listeners.

30.24.1 Detailed Description

Interface inherited by **publicKey** (p. 532).

This class is meaningless outside of **crypto::publicKey** (p. 532) and is only designed to be inherited by **publicKey** (p. 532) to interface with **crypto::keyChangeReceiver** (p. 477).

30.24.2 Constructor & Destructor Documentation

```
virtual crypto::keyChangeSender::~keyChangeSender ( ) [inline], [virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.24.3 Member Function Documentation

```
virtual bool crypto::keyChangeSender::operator< ( const keyChangeSender & l ) const  
[inline], [virtual]
```

Less than test.

```
virtual bool crypto::keyChangeSender::operator<= ( const keyChangeSender & l ) const  
[inline], [virtual]
```

Less than/equal to test.

```
virtual bool crypto::keyChangeSender::operator== ( const keyChangeSender & l ) const  
[inline], [virtual]
```

Equality test.

```
virtual bool crypto::keyChangeSender::operator> ( const keyChangeSender & l ) const  
[inline], [virtual]
```

Greater than test.

```
virtual bool crypto::keyChangeSender::operator>= ( const keyChangeSender & l ) const  
[inline], [virtual]
```

Greater than/equal to test.

```
void crypto::keyChangeSender::sendEvent ( os::smart_ptr< keyChangeReceiver > ptr )
[inline], [protected]
```

Sends key change event to listeners.

Using the interface provided by the os::eventSender class, alert any classes listening for a public key change that one has occurred.

Parameters

in	ptr	Receiver to alert
----	-----	-------------------


Returns

void

30.25 crypto::keyMissing Class Reference

Key missing error.

Inheritance diagram for crypto::keyMissing:

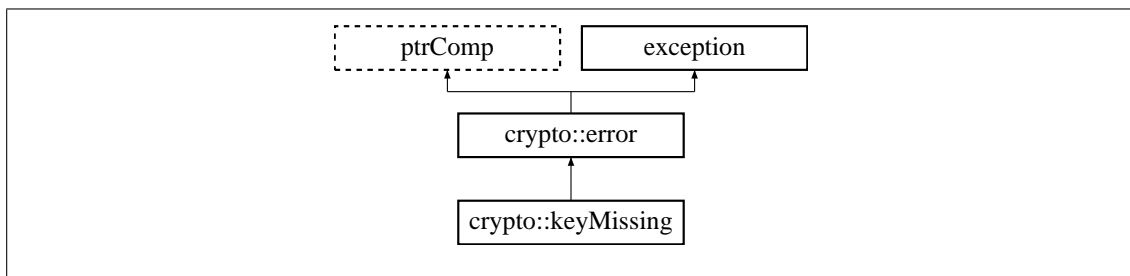

Public Member Functions

- virtual ~**keyMissing** () throw ()
Virtual destructor.
- std::string **errorTitle** () const
Short error descriptor Returns "Key missing".
- std::string **errorDescription** () const
Long error descriptor Returns "Cannot decrypt the data stream, the key is missing!".

30.25.1 Detailed Description

Key missing error.

Thrown when a key cannot be found to decrypt the incoming data stream

30.25.2 Constructor & Destructor Documentation

`virtual crypto::keyMissing::~~keyMissing () throw () [inline], [virtual]`

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.25.3 Member Function Documentation

`std::string crypto::keyMissing::errorDescription () const [inline], [virtual]`

Long error descriptor Returns "Cannot decrypt the data stream, the key is missing!".

Returns

Error description `std::string`

Reimplemented from **crypto::error** (p. 416).

`std::string crypto::keyMissing::errorTitle () const [inline], [virtual]`

Short error descriptor Returns "Key missing".

Returns


Error title `std::string`

Reimplemented from **crypto::error** (p. 417).

30.26 crypto::masterMismatch Class Reference

Master mis-match.

Inheritance diagram for `crypto::masterMismatch`:

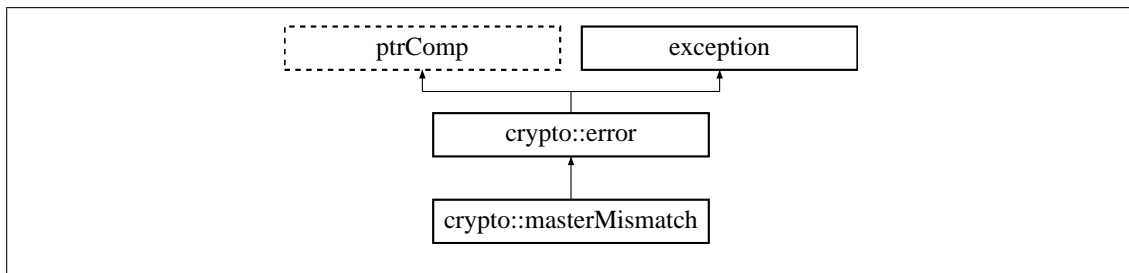

Public Member Functions

- `virtual ~masterMismatch () throw ()`

Virtual destructor.

- `std::string errorTitle () const`

Short error descriptor Returns "Master Comparison Mis-match".

- `std::string errorDescription () const`

Long error descriptor Returns "Two nodes which are interacting have different masters!".

30.26.1 Detailed Description

Master mis-match.

Thrown when two elements attempt an interaction but have different masters.

30.26.2 Constructor & Destructor Documentation

```
virtual crypto::masterMismatch::~~masterMismatch ( ) throw ( ) [inline], [virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.26.3 Member Function Documentation

```
std::string crypto::masterMismatch::errorDescription ( ) const [inline], [virtual]
```

Long error descriptor Returns "Two nodes which are interacting have different masters!".

Returns

Error description std::string

Reimplemented from **crypto::error** (p. 416).

```
std::string crypto::masterMismatch::errorTitle ( ) const [inline], [virtual]
```

Short error descriptor Returns "Master Comparison Mis-match".

Returns

Error title std::string

Reimplemented from **crypto::error** (p. 417).

30.27 crypto::message Class Reference

Crypto-Gateway message.

Public Member Functions

- **message** (uint16_t sz)
Constructs message with a size.
- **message** (const **message** &msg)
Copy constructor.
- virtual **~message** ()
Virtual destructor.
- uint16_t **messageSize** () const
Return message size.
- uint16_t **size** () const

- *Return message packet size.*
- uint16_t **encryptionDepth** () const
Return level of message encryption.
- uint8_t * **data** ()
Modifiable data pointer.
- const uint8_t * **data** () const
Immutable data pointer.
- bool **encrypted** () const
Is the message encrypted.
- bool **pushString** (std::string s)
Add string to this message.
- std::string **popString** ()
Remove string from this message.

Static Public Member Functions

- static **message encryptedMessage** (uint8_t *rawData, uint16_t sz)
Constructs an encrypted message.
- static **message decryptedMessage** (uint8_t *rawData, uint16_t sz)
Constructs an decrypted message.

Static Public Attributes

- static const uint8_t **BLOCKED** =0
Blocked message tag.
- static const uint8_t **PING** =1
Ping message tag.
- static const uint8_t **FORWARD** =2
Forward message tag.
- static const uint8_t **STREAM_KEY** =3
Stream key message tag.
- static const uint8_t **SIGNING_MESSAGE** =4
Signing message tag.
- static const uint8_t **SECURE_DATA_EXCHANGE** =5
Secure data exchange message tag.
- static const uint8_t **CONFIRM_ERROR** =252
Confirm error message tag.
- static const uint8_t **BASIC_ERROR** =253
Basic error message tag.
- static const uint8_t **TIMEOUT_ERROR** =254
Timeout error message tag.
- static const uint8_t **PERMENANT_ERROR** =255
Permenant error message tag.

Private Attributes

- `uint16_t _messageSize`
Size of message.
- `uint16_t _size`
Size of the message packet.
- `uint16_t _encryptionDepth`
Depth of encryption.
- `uint8_t * _data`
Data in the message packet.

Friends

- `class gatewaySettings`
Friendship with settings.
- `class gateway`
Friendship with gateway.

30.27.1 Detailed Description

Crypto-Gateway message.

This message is meant to be passed between machines. The gateway either encrypts or decrypts the message. This message allows for nested encryption.

30.27.2 Constructor & Destructor Documentation

`crypto::message::message (uint16_t sz)`

Constructs message with a size.

Parameters

in	sz	Size of message
----	----	-----------------

`crypto::message::message (const message & msg)`

Copy constructor.

Parameters

in	msg	Message to be copied
----	-----	----------------------

`virtual crypto::message::~message () [inline], [virtual]`

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.27.3 Member Function Documentation

`uint8_t* crypto::message::data () [inline]`

Modifiable data pointer.

Returns

message::_data (p. 488)

`const uint8_t* crypto::message::data () const [inline]`

Immutable data pointer.

Returns

message::_data (p. 488)

`static message crypto::message::decryptedMessage (uint8_t * rawData, uint16_t sz) [static]`

Constructs an decrypted message.

Parses an array of data assuming that the data in question has been generated outside of a gateway

Parameters

in	<i>rawData</i>	Incoming data array
in	<i>sz</i>	Size of incoming data

Returns

New message

`bool crypto::message::encrypted () const [inline]`

Is the message encrypted.

Returns

True if encrypted, else, false

`static message crypto::message::encryptedMessage (uint8_t * rawData, uint16_t sz) [static]`

Constructs an encrypted message.

Parses an array of data assuming that the data in question has come out of another gateway.

Parameters

in	<i>rawData</i>	Incoming data array
in	<i>sz</i>	Size of incoming data

Returns

New message

```
uint16_t crypto::message::encryptionDepth ( ) const [inline]
```

Return level of message encryption.

Returns

message::_encryptionDepth (p. 488)

```
uint16_t crypto::message::messageSize ( ) const [inline]
```

Return message size.

Returns

message::_messageSize (p. 488)

```
std::string crypto::message::popString ( )
```

Remove string from this message.

Returns

Next string to remove

```
bool crypto::message::pushString ( std::string s )
```

Add string to this message.

Returns

True if successful

```
uint16_t crypto::message::size ( ) const [inline]
```

Return message packet size.

Returns

message::_size (p. 488)

30.27.4 Friends And Related Function Documentation

```
friend class gateway [friend]
```

Friendship with gateway.

The **crypto::gateway** (p. 425) class encrypts and decrypts messages, so it must be able to access the intrinsics of the message.

friend class **gatewaySettings** [friend]

Friendship with settings.

The **crypto::gatewaySettings** (p. 440) class must be able to access the intrinsics of this class in order to create and parse a ping message.

30.27.5 Member Data Documentation

uint8_t* crypto::message::_data [private]

Data in the message packet.

uint16_t crypto::message::_encryptionDepth [private]

Depth of encryption.

Holds how many times this particular message has been encrypted.

uint16_t crypto::message::_messageSize [private]

Size of message.

This size refers to the size of the non-header and non-checksum bytes in the message. This value remains constant as messages are encrypted and decrypted.

uint16_t crypto::message::_size [private]

Size of the message packet.

This size includes all support data along with the meaningful message.

const uint8_t crypto::message::BASIC_ERROR =253 [static]

Basic error message tag.

Sent by a gateway when a basic error occurs.

const uint8_t crypto::message::BLOCKED =0 [static]

Blocked message tag.

Indicates that the node sending the particular message has blocked the node receiving the particular message.

const uint8_t crypto::message::CONFIRM_ERROR =252 [static]

Confirm error message tag.

Messages of this type are sent to allow the receiving gateway to know that the sending gateway has acknowledged its error.

const uint8_t crypto::message::FORWARD =2 [static]

Forward message tag.

Indicates a message is being sent through this gateway to another gateway for final decryption.

```
const uint8_t crypto::message::PERMENANT_ERROR =255  [static]
```

Permenant error message tag.

Sent by a gateway when a permenant error has occurred. Permenant errors never expire, and a gateway will never reconnect once a permenant error has occurred.

```
const uint8_t crypto::message::PING =1  [static]
```

Ping message tag.

Message type sent by gateways when exchanging names and public keys.

```
const uint8_t crypto::message::SECURE_DATA_EXCHANGE =5  [static]
```

Secure data exchange message tag.

Message passed between two gateways when secure. Used by the gateways to notify connected gateways when keys and algorithms change after a connection has been secured.

```
const uint8_t crypto::message::SIGNING_MESSAGE =4  [static]
```

Signing message tag.

Indicates a message is cryptographically establishing the identity of a node.

```
const uint8_t crypto::message::STREAM_KEY =3  [static]
```

Stream key message tag.

Indicates a message is exchanging stream cipher keys through the defined public key algorithm.

```
const uint8_t crypto::message::TIMEOUT_ERROR =254  [static]
```


Timeout error message tag.

Sent by a gateway when a timeout error occurs. Timeout errors are more serious and take a certain amount of time to expire.

30.28 crypto::nodeGroup Class Reference

Node group.

Inheritance diagram for crypto::nodeGroup:

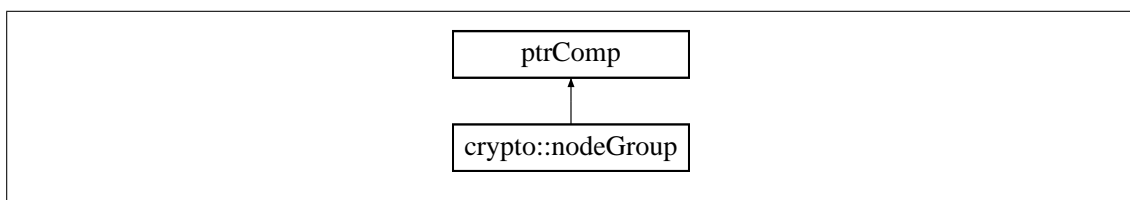

Public Member Functions

- **nodeGroup** (**keyBank** *master, std::string groupName, std::string **name**, os::smart_ptr< **number** > key, uint16_t algoID, uint16_t keySize)
Node group constructor.
- virtual ~**nodeGroup** ()
Virtual destructor.
- void **getName** (std::string &groupName, std::string &**name**)
Allows access to the most recent name.
- std::string **name** ()
Concatenated name.
- os::smart_ptr< os::adnode< **nodeNameReference** > > **getFirstName** ()
Returns first name in the list.
- os::smart_ptr< os::adnode< **nodeKeyReference** > > **getFirstKey** ()
Returns first key in the list.
- void **merge** (**nodeGroup** &source)
Merge a node group into this.
- void **addAlias** (std::string groupName, std::string **name**, uint64_t timestamp=os::getTimestamp())
Add new alias for group.
- void **addKey** (os::smart_ptr< **number** > key, uint16_t algoID, uint16_t keySize, uint64_t timestamp=os::getTimestamp())
Add new key for group.
- unsigned int **numberOfNames** () const
Returns the number of names.
- unsigned int **numberOfKeys** () const
Returns the number of keys.
- os::smart_ptr< os::smart_ptr< **nodeNameReference** > > **namesByTimestamp** (unsigned int &size)
Returns names sorted by timestamp.
- os::smart_ptr< os::smart_ptr< **nodeKeyReference** > > **keysByTimestamp** (unsigned int &size)
Returns keys sorted by timestamp.
- os::smartXMLNode **buildXML** ()
Build XML tree.

Private Member Functions

- void **sortKeys** ()
Sorts keys by timestamp.
- void **sortNames** ()
Sorts names by timestamp.
- **nodeGroup** (**keyBank** *master, os::smartXMLNode fileNode)
Node group constructor.

Private Attributes

- **keyBank * _master**
Pointer to key bank.
- **os::asyncAVLTree< nodeNameReference > nameList**
List of all names associated with this node.
- **os::asyncAVLTree< nodeKeyReference > keyList**
List of all keys associated with this node.
- **std::mutex sortingLock**
Lock used for sorting.
- **os::smart_ptr< os::smart_ptr< nodeNameReference > > sortedNames**
Array of names sorted by timestamp.
- **os::smart_ptr< os::smart_ptr< nodeKeyReference > > sortedKeys**
Array of keys sorted by timestamp.

Friends

- class **keyBank**
*Only **keyBank** (p. 469) can load a node group.*

30.28.1 Detailed Description

Node group.

A list of all names and keys which are associated with a single node. This must exist because nodes can change their name during operation.

30.28.2 Constructor & Destructor Documentation

`crypto::nodeGroup::nodeGroup (keyBank * master, os::smartXMLNode fileNode) [private]`

Node group constructor.

Constructs a node group with an XML tree. This constructor throws exceptions if errors occur.

Parameters

	<i>[in/out]</i>	master Reference to the 'master' group holder
in	<i>fileNode</i>	XML root which defines the group

`crypto::nodeGroup::nodeGroup (keyBank * master, std::string groupName, std::string name, os::smart_ptr< number > key, uint16_t algoID, uint16_t keySize)`

Node group constructor.

Parameters

	<i>[in/out]</i>	master Reference to the 'master' group holder
--	-----------------	---

Parameters

in	<i>groupName</i>	Group name of the node being registered
in	<i>name</i>	Name of the node being registered
in	<i>key</i>	The public key of a given node
in	<i>algoID</i>	The algorithm identifier
in	<i>keySize</i>	Size of the key provided

virtual crypto::nodeGroup::~~nodeGroup () [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.28.3 Member Function Documentation

void crypto::nodeGroup::addAlias (std::string groupName, std::string name, uint64_t timestamp = os::getTimestamp())

Add new alias for group.

Parameters

in	<i>groupName</i>	Group name of the node being registered
in	<i>name</i>	Name of the node being registered
	<i>timestamp</i>	The time this node was created, 'now' by default

Returns

void

void crypto::nodeGroup::addKey (os::smart_ptr< **number** > key, uint16_t algoID, uint16_t keySize, uint64_t timestamp = os::getTimestamp())

Add new key for group.

Parameters

in	<i>key</i>	The public key of a given node
in	<i>algoID</i>	The algorithm identifier
in	<i>keySize</i>	Size of the key provided
	<i>timestamp</i>	The time this node was created, 'now' by default

Returns

void

os::smartXMLNode crypto::nodeGroup::buildXML ()

Build XML tree.

Builds an XML tree from this node group. This tree is designed to be saved by the key bank.

Returns

Root of tree to be saved

os::smart_ptr<os::adnode<**nodeKeyReference**> > crypto::nodeGroup::getFirstKey ()
[inline]

Returns first key in the list.

This function returns an alphabetical order. Note that it is often the case that a user needs to sort by timestamp. This functionality is also provided.

Returns

crypto::nodeGroup::keyList.getFirst()

os::smart_ptr<os::adnode<**nodeNameReference**> > crypto::nodeGroup::getFirstName ()
[inline]

Returns first name in the list.

This function returns an alphabetical order. Note that it is often the case that a user needs to sort by timestamp. This functionality is also provided.

Returns

crypto::nodeGroup::nameList.getFirst()

void crypto::nodeGroup::getName (std::string & groupName, std::string & name)

Allows access to the most recent name.

Parameters

out	<i>groupName</i>	crypto::nodeGroup::sortedNames (p. 495)[0]->groupName()
out	<i>name</i>	crypto::nodeGroup::sortedNames (p. 495)[0]-> name() (p. 494)

Returns

void

os::smart_ptr<os::smart_ptr<**nodeKeyReference**> > crypto::nodeGroup::keysByTimestamp (unsigned int & size)

Returns keys sorted by timestamp.

Parameters

out	size	Size of array to be returned
-----	------	------------------------------

Returns

crypto::nodeGroup::sortedKeys (p. 495)

void crypto::nodeGroup::merge (**nodeGroup** & source)

Merge a node group into this.

Achieves merge entirely by reference. It is assumed that the node being merged into this node will shortly be deleted.

Parameters

in	source	Node group to merge
----	--------	---------------------

Returns

void

std::string crypto::nodeGroup::name ()

Concatenated name.

Concatenated the groupName and name and then returns the combination.
return groupName+"."+name

os::smart_ptr<os::smart_ptr<**nodeNameReference**> > crypto::nodeGroup::namesByTimestamp (unsigned int & size)

Returns names sorted by timestamp.

Parameters

out	size	Size of array to be returned
-----	------	------------------------------

Returns

crypto::nodeGroup::sortedNames (p. 495)

unsigned int crypto::nodeGroup::numberOfKeys () const [inline]

Returns the number of keys.

Returns

crypto::nodeGroup::keyList.size()

unsigned int crypto::nodeGroup::numberOfNames () const [inline]

Returns the number of names.

Returns

crypto::nodeGroup::nameList.size()

void crypto::nodeGroup::sortKeys () [private]

Sorts keys by timestamp.

void crypto::nodeGroup::sortNames () [private]

Sorts names by timestamp.

30.28.4 Friends And Related Function Documentation

friend class **keyBank** [friend]

Only **keyBank** (p. 469) can load a node group.

30.28.5 Member Data Documentation

keyBank* crypto::nodeGroup::_master [private]

Pointer to key bank.

os::asyncAVLTree<**nodeKeyReference**> crypto::nodeGroup::keyList [private]

List of all keys associated with this node.

os::asyncAVLTree<**nodeNameReference**> crypto::nodeGroup::nameList [private]

List of all names associated with this node.

os::smart_ptr<os::smart_ptr<**nodeKeyReference**> > crypto::nodeGroup::sortedKeys [private]

Array of keys sorted by timestamp.

os::smart_ptr<os::smart_ptr<**nodeNameReference**> > crypto::nodeGroup::sortedNames
[private]

Array of names sorted by timestamp.

std::mutex crypto::nodeGroup::sortingLock [private]

Lock used for sorting.

30.29 crypto::nodeKeyReference Class Reference

Key storage node.

Public Member Functions

- virtual **~nodeKeyReference** ()
Virtual destructor.
- **nodeGroup * master** ()
Returns a pointer to its master.
- os::smart_ptr< **number** > **key** () const
Returns the key.
- uint16_t **algID** () const
Returns the algorithm key.
- uint16_t **keySize** () const
Returns the key size.
- uint64_t **timestamp** () const
Returns the timestamp.
- int **compare** (const **nodeKeyReference** &comp) const
*Compare **crypto::nodeKeyReference** (p. 496).*
- bool **operator==** (const **nodeKeyReference** &comp) const
Equality operator.
- bool **operator!=** (const **nodeKeyReference** &comp) const
Not-equals operator.
- bool **operator>** (const **nodeKeyReference** &comp) const
Greater-than operator.
- bool **operator>=** (const **nodeKeyReference** &comp) const
Greater-than/equals to operator.
- bool **operator<** (const **nodeKeyReference** &comp) const
Less-than operator.
- bool **operator<=** (const **nodeKeyReference** &comp) const
Less-than/equals to operator.

Private Member Functions

- **nodeKeyReference** (**nodeGroup *master**, os::smart_ptr< **number** > **key**, uint16_t **algID**, uint16_t **keySize**, uint64_t **timestamp**=os::getTimestamp())
Key reference node constructor.
- **nodeKeyReference** (os::smart_ptr< **number** > **key**, uint16_t **algID**, uint16_t **keySize**)
Key reference node constructor for searching.

Private Attributes

- **nodeGroup * _master**
Pointer to node group.
- **os::smart_ptr< number > _key**
Shared pointer to public key.
- **uint16_t _algoid**
ID of public key algorithm.
- **uint16_t _keySize**
Size of public key.
- **uint64_t _timestamp**
Timestamp key created.

Friends

- class **nodeGroup**
*Friendship with **crypto::nodeGroup** (p. 489).*
- class **keyBank**
*Friendship with **crypto::keyBank** (p. 469).*

30.29.1 Detailed Description

Key storage node.

Allows for storage and sorting of a node group by its key. This node holds a reference to the larger group node.

30.29.2 Constructor & Destructor Documentation

`crypto::nodeKeyReference::nodeKeyReference (nodeGroup * master, os::smart_ptr< number > key, uint16_t algoid, uint16_t keySize, uint64_t timestamp = os::getTimestamp()) [private]`

Key reference node constructor.

Parameters

	<i>[in/out]</i>	
in	<i>key</i>	The public key of a given node
in	<i>algoid</i>	The algorithm identifier
in	<i>keySize</i>	Size of the key provided
	<i>timestamp</i>	The time this node was created, 'now' by default

`crypto::nodeKeyReference::nodeKeyReference (os::smart_ptr< number > key, uint16_t algoid, uint16_t keySize) [private]`

Key reference node constructor for searching.

Parameters

in	<i>key</i>	The public key of a given node
in	<i>algoID</i>	The algorithm identifier
in	<i>keySize</i>	Size of the key provided

virtual crypto::nodeKeyReference::~~nodeKeyReference () [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.29.3 Member Function Documentation

uint16_t crypto::nodeKeyReference::algoID () const [inline]

Returns the algorithm key.

Returns

crypto::nodeKeyReference::_algoID (p. 501)

int crypto::nodeKeyReference::compare (const **nodeKeyReference** & comp) const

Compare **crypto::nodeKeyReference** (p. 496).

Compares two node key references by their public key, returning the result in the form of a 1,0 or -1.

Parameters

in	<i>comp</i>	Key reference to compare against
----	-------------	----------------------------------

Returns

1, 0, -1 (Greater than, equal to, less than)

os::smart_ptr<**number**> crypto::nodeKeyReference::key () const [inline]

Returns the key.

Returns

crypto::nodeKeyReference::_key (p. 501)

uint16_t crypto::nodeKeyReference::keySize () const [inline]

Returns the key size.

Returns

crypto::nodeKeyReference::_keySize (p. 501)

nodeGroup* crypto::nodeKeyReference::master () [inline]

Returns a pointer to its master.

Returns

crypto::~~nodeKeyReference::_master

bool crypto::nodeKeyReference::operator!= (const **nodeKeyReference** & comp) const [inline]

Not-equals operator.

Parameters

in	comp	Key reference to compare against
----	------	----------------------------------

Returns

true if not equal, else, false

bool crypto::nodeKeyReference::operator< (const **nodeKeyReference** & comp) const [inline]

Less-than operator.

Parameters

in	comp	Key reference to compare against
----	------	----------------------------------

Returns

true if less than, else, false

bool crypto::nodeKeyReference::operator<= (const **nodeKeyReference** & comp) const [inline]

Less-than/equals to operator.

Parameters

in	comp	Key reference to compare against
----	------	----------------------------------

Returns

true if less than or equal to, else, false


```
bool crypto::nodeKeyReference::operator==( const nodeKeyReference & comp ) const  
[inline]
```

Equality operator.

Parameters

in	<i>comp</i>	Key reference to compare against
----	-------------	----------------------------------

Returns

true if equal, else, false

```
bool crypto::nodeKeyReference::operator> ( const nodeKeyReference & comp ) const [inline]
```

Greater-than operator.

Parameters

in	<i>comp</i>	Key reference to compare against
----	-------------	----------------------------------

Returns

true if greater than, else, false

```
bool crypto::nodeKeyReference::operator>= ( const nodeKeyReference & comp ) const  
[inline]
```

Greater-than/equals to operator.

Parameters

in	<i>comp</i>	Key reference to compare against
----	-------------	----------------------------------

Returns

true if greater than or equal to, else, false

```
uint64_t crypto::nodeKeyReference::timestamp ( ) const [inline]
```

Returns the timestamp.

Returns

crypto::nodeKeyReference::_timestamp (p. 501)

30.29.4 Friends And Related Function Documentation

friend class **keyBank** [friend]

Friendship with **crypto::keyBank** (p. 469).

The key bank must be able to create a node key to search by key

friend class **nodeGroup** [friend]

Friendship with **crypto::nodeGroup** (p. 489).

Only node groupings can meaningfully create this class, so the constructor is private and only accessible by **crypto::nodeGroup** (p. 489).

30.29.5 Member Data Documentation

uint16_t **crypto::nodeKeyReference::_algID** [private]

ID of public key algorithm.

os::smart_ptr<**number**> **crypto::nodeKeyReference::_key** [private]

Shared pointer to public key.

uint16_t **crypto::nodeKeyReference::_keySize** [private]

Size of public key.

nodeGroup* **crypto::nodeKeyReference::_master** [private]

Pointer to node group.

uint64_t **crypto::nodeKeyReference::_timestamp** [private]

Timestamp key created.

30.30 **crypto::nodeNameReference** Class Reference

Name storage node.

Public Member Functions

- virtual **~nodeNameReference** ()
Virtual destructor.
- **nodeGroup** * **master** ()
Returns a pointer to its master.
- std::string **groupName** () const
Returns the group name.
- std::string **name** () const
Returns the name.
- uint64_t **timestamp** () const

Returns the timestamp.

- int **compare** (const **nodeNameReference** &comp) const
*Compare **crypto::nodeNameReference** (p. 501).*
- bool **operator==** (const **nodeNameReference** &comp) const
Equality operator.
- bool **operator!=** (const **nodeNameReference** &comp) const
Not-equals operator.
- bool **operator>** (const **nodeNameReference** &comp) const
Greater-than operator.
- bool **operator>=** (const **nodeNameReference** &comp) const
Greater-than/equals to operator.
- bool **operator<** (const **nodeNameReference** &comp) const
Less-than operator.
- bool **operator<=** (const **nodeNameReference** &comp) const
Less-than/equals to operator.

Private Member Functions

- **nodeNameReference** (**nodeGroup** *master, std::string groupName, std::string name, uint64_t timestamp=os::getTimestamp())
Name reference node constructor.
- **nodeNameReference** (std::string groupName, std::string name)
Name reference node constructor for searching.

Private Attributes

- **nodeGroup** * _master
Pointer to node group.
- std::string _groupName
Name of the group this name is from.
- std::string _name
Name of the node.
- uint64_t _timestamp
Timestamp key created.

Friends

- class **nodeGroup**
*Friendship with **crypto::nodeGroup** (p. 489).*
- class **keyBank**
*Friendship with **crypto::keyBank** (p. 469).*

30.30.1 Detailed Description

Name storage node.

Allows for storage and sorting of a node group by its name. This node holds a reference to the larger group node.

30.30.2 Constructor & Destructor Documentation

```
crypto::nodeNameReference::nodeNameReference ( nodeGroup * master, std::string
groupName, std::string name, uint64_t timestamp = os::getTimestamp() ) [private]
```

Name reference node constructor.

Parameters

	<i>[in/out]</i>	master Reference to the 'master' group
in	<i>groupName</i>	Group name of the node being registered
in	<i>name</i>	Name of the node being registered
	<i>timestamp</i>	The time this node was created, 'now' by default

```
crypto::nodeNameReference::nodeNameReference ( std::string groupName, std::string name )
[private]
```

Name reference node constructor for searching.

Parameters

in	<i>groupName</i>	Group name of the node being registered
in	<i>name</i>	Name of the node being registered

```
virtual crypto::nodeNameReference::~~nodeNameReference ( ) [inline], [virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.30.3 Member Function Documentation

```
int crypto::nodeNameReference::compare ( const nodeNameReference & comp ) const
```

Compare **crypto::nodeNameReference** (p. 501).

Compares two node name references by their group and name, returning the result in the form of a 1,0 or -1.

Parameters

in	<i>comp</i>	Name reference to compare against
----	-------------	-----------------------------------

Returns

1, 0, -1 (Greater than, equal to, less than)

```
std::string crypto::nodeNameReference::groupName ( ) const [inline]
```

Returns the group name.

Returns

crypto::nodeNameReference::_groupName (p. 506)

```
nodeGroup* crypto::nodeNameReference::master ( ) [inline]
```

Returns a pointer to its master.

Returns

crypto::nodeNameReference::_master (p. 506)

```
std::string crypto::nodeNameReference::name ( ) const [inline]
```

Returns the name.

Returns

crypto::nodeNameReference::_name (p. 506)

```
bool crypto::nodeNameReference::operator!= ( const nodeNameReference & comp ) const [inline]
```

Not-equals operator.

Parameters

in	comp	Name reference to compare against
----	------	-----------------------------------

Returns

true if not equal, else, false

```
bool crypto::nodeNameReference::operator< ( const nodeNameReference & comp ) const [inline]
```

Less-than operator.

Parameters

in	comp	Name reference to compare against
----	------	-----------------------------------

Returns

true if less than, else, false

```
bool crypto::nodeNameReference::operator<= ( const nodeNameReference & comp ) const  
[inline]
```

Less-than/equals to operator.

Parameters

in	comp	Name reference to compare against
----	------	-----------------------------------

Returns

true if less than or equal to, else, false

```
bool crypto::nodeNameReference::operator== ( const nodeNameReference & comp ) const  
[inline]
```

Equality operator.

Parameters

in	comp	Name reference to compare against
----	------	-----------------------------------

Returns

true if equal, else, false

```
bool crypto::nodeNameReference::operator> ( const nodeNameReference & comp ) const  
[inline]
```

Greater-than operator.

Parameters

in	comp	Name reference to compare against
----	------	-----------------------------------

Returns

true if greater than, else, false

```
bool crypto::nodeNameReference::operator>= ( const nodeNameReference & comp ) const  
[inline]
```

Greater-than/equals to operator.

Parameters

<code>in</code>	<code>comp</code>	Name reference to compare against
-----------------	-------------------	-----------------------------------

Returns

true if greater than or equal to, else, false

`uint64_t crypto::nodeNameReference::timestamp () const [inline]`

Returns the timestamp.

Returns

`crypto::nodeNameReference::_timestamp` (p. 506)

30.30.4 Friends And Related Function Documentation

`friend class keyBank [friend]`

Friendship with **`crypto::keyBank`** (p. 469).

The key bank must be able to create a node name to search by name

`friend class nodeGroup [friend]`

Friendship with **`crypto::nodeGroup`** (p. 489).

Only node groupings can meaningfully create this class, so the constructor is private and only accessible by **`crypto::nodeGroup`** (p. 489).

30.30.5 Member Data Documentation

`std::string crypto::nodeNameReference::_groupName [private]`

Name of the group this name is from.

`nodeGroup*` `crypto::nodeNameReference::_master [private]`

Pointer to node group.

`std::string crypto::nodeNameReference::_name [private]`

Name of the node.


`uint64_t crypto::nodeNameReference::_timestamp [private]`

Timestamp key created.

30.31 crypto::NULLDataError Class Reference

NULL data error.

Inheritance diagram for crypto::NULLDataError:

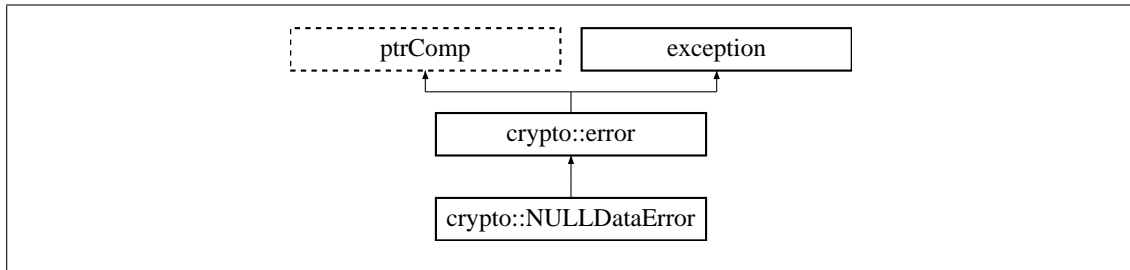

Public Member Functions

- virtual **~NULLDataError** () throw ()
Virtual destructor.
- std::string **errorTitle** () const
Short error descriptor Returns "NULL Data".
- std::string **errorDescription** () const
Long error descriptor Returns "A function was passed NULL data where this is illegal".

30.31.1 Detailed Description

NULL data error.

Thrown when NULL data is passed to a function or class.

30.31.2 Constructor & Destructor Documentation

virtual crypto::NULLDataError::~~NULLDataError () throw) [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.31.3 Member Function Documentation

std::string crypto::NULLDataError::errorDescription () const [inline], [virtual]

Long error descriptor Returns "A function was passed NULL data where this is illegal".

Returns

Error description std::string

Reimplemented from **crypto::error** (p. 416).

`std::string crypto::NULLDataError::errorTitle () const [inline], [virtual]`

Short error descriptor Returns "NULL Data".

Returns


Error title `std::string`

Reimplemented from **crypto::error** (p. 417).

30.32 crypto::NULLMaster Class Reference

NULL master error.

Inheritance diagram for `crypto::NULLMaster`:

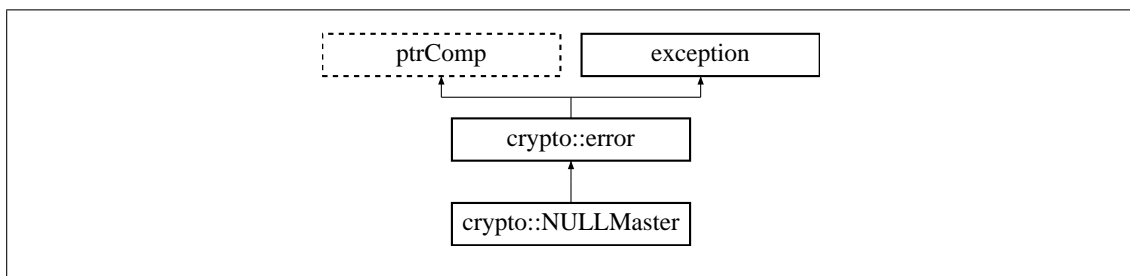

Public Member Functions

- virtual **~NULLMaster** () throw ()
Virtual destructor.
- `std::string errorTitle` () const
Short error descriptor Returns "NULL Master pointer".
- `std::string errorDescription` () const
Long error descriptor Returns "A class received a NULL master pointer, this is illegal".

30.32.1 Detailed Description

NULL master error.

Thrown when a class is passed a NULL master where such a class must have a defined master.

30.32.2 Constructor & Destructor Documentation

`virtual crypto::NULLMaster::~~NULLMaster () throw) [inline], [virtual]`

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.32.3 Member Function Documentation

`std::string crypto::NULLMaster::errorDescription () const [inline], [virtual]`

Long error descriptor Returns "A class received a NULL master pointer, this is illegal".

Returns

Error description `std::string`

Reimplemented from **crypto::error** (p. 416).

`std::string crypto::NULLMaster::errorTitle () const [inline], [virtual]`

Short error descriptor Returns "NULL Master pointer".

Returns


Error title `std::string`

Reimplemented from **crypto::error** (p. 417).

30.33 crypto::NULLPublicKey Class Reference

NULL public-key error.

Inheritance diagram for `crypto::NULLPublicKey`:

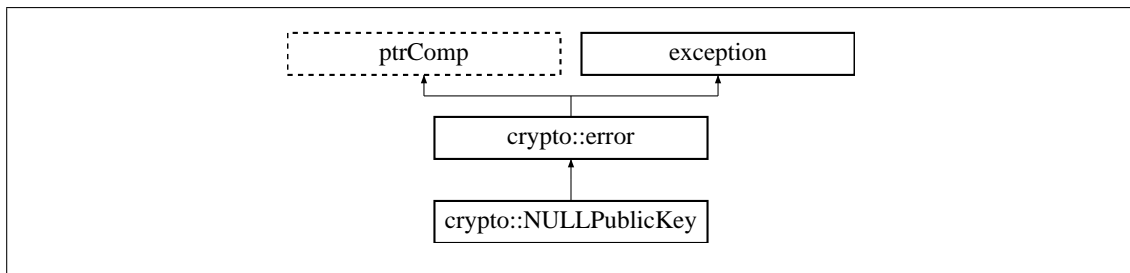

Public Member Functions

- `virtual ~NULLPublicKey () throw ()`
Virtual destructor.
- `std::string errorTitle () const`
Short error descriptor Returns "Public Key NULL".
- `std::string errorDescription () const`
Long error descriptor Returns "Attempted to bind a public key of illegal type NULL".

30.33.1 Detailed Description

NULL public-key error.

Thrown when a NULL public-key or public-key of undefined type is used.

30.33.2 Constructor & Destructor Documentation

`virtual crypto::NULLPublicKey::~~NULLPublicKey () throw () [inline], [virtual]`

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.33.3 Member Function Documentation

`std::string crypto::NULLPublicKey::errorDescription () const [inline], [virtual]`

Long error descriptor Returns "Attempted to bind a public key of illegal type NULL".

Returns

Error description `std::string`

Reimplemented from **crypto::error** (p. 416).

`std::string crypto::NULLPublicKey::errorTitle () const [inline], [virtual]`

Short error descriptor Returns "Public Key NULL".

Returns


Error title `std::string`

Reimplemented from **crypto::error** (p. 417).

30.34 crypto::number Class Reference

Basic number definition.

Inheritance diagram for `crypto::number`:

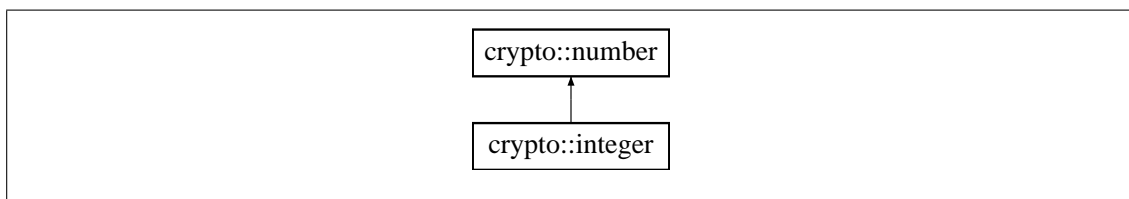

Public Member Functions

- **number** (struct **numberType** *numDef=**buildNullNumberType**())
Construct with number definition.
- **number** (uint16_t **size**, struct **numberType** *numDef=**buildNullNumberType**())
Construct with size.
- **number** (const uint32_t *d, uint16_t **size**, struct **numberType** *numDef=**buildNullNumberType**())

- Construct with data array.*
- **number** (const **number** &num)
 - Copy constructor.*
- **number & operator=** (const **number** &num)
 - Equality constructor.*
- virtual **~number** ()
 - Virtual destructor.*
- void **reduce** ()
 - Eliminate high-order zeros.*
- void **expand** (uint16_t size)
 - Expand number size.*
- os::smart_ptr< unsigned char > **getCharData** (unsigned int &arr_len) const
 - Build byte array.*
- os::smart_ptr< unsigned char > **getCompCharData** (unsigned int &arr_len) const
 - Build compatibility byte array.*
- std::string **toString** () const
 - Build hex string from number.*
- void **fromString** (const std::string &str)
 - Re-builds number from provided string.*
- uint32_t **operator[]** (uint16_t pos) const
 - Read-only data access.*
- uint32_t & **operator[]** (uint16_t pos)
 - Read/write data access.*
- const bool **operator==** (const **number** &comp) const
 - '==' comparison operator*
- const bool **operator!=** (const **number** &comp) const
 - '!=' comparison operator*
- const bool **operator<=** (const **number** &comp) const
 - '<=' comparison operator*
- const bool **operator>=** (const **number** &comp) const
 - '>=' comparison operator*
- const bool **operator<** (const **number** &comp) const
 - '<' comparison operator*
- const bool **operator>** (const **number** &comp) const
 - '>' comparison operator*
- int **compare** (const **number** *n2) const
 - Compares two numbers.*
- void **addition** (const **number** *n2, **number** *result) const
 - Addition function.*
- void **subtraction** (const **number** *n2, **number** *result) const
 - Subtraction function.*
- void **rightShift** (uint16_t n2, **number** *result) const
 - Right shift function.*

- void **leftShift** (uint16_t n2, **number** *result) const
Left shift function.
- void **multiplication** (const **number** *n2, **number** *result) const
Multiplication function.
- void **division** (const **number** *n2, **number** *result) const
Division function.
- void **modulo** (const **number** *n2, **number** *result) const
Modulo function.
- void **exponentiation** (const **number** *n2, **number** *result) const
Exponentiation function.
- void **moduloExponentiation** (const **number** *n2, const **number** *n3, **number** *result) const
Modular exponentiation.
- void **gcd** (const **number** *n2, **number** *result) const
Greatest-common-denominator function.
- void **modInverse** (const **number** *n2, **number** *result) const
Modular-inverse function.
- **number operator|** (const **number** &op) const
Or operator.
- **number & operator|=** (const **number** &op)
Or-equals operator.
- **number operator&** (const **number** &op) const
And operator.
- **number & operator&=** (const **number** &op)
And-equals operator.
- **number operator^** (const **number** &op) const
X-Or operator.
- **number & operator^=** (const **number** &op)
X-Or-equals operator.
- **number operator~** () const
Negate operator.
- virtual bool **checkType** () const
Check if the number is valid.
- bool **hasCompare** () const
Check for the 'compare' function.
- bool **hasAddition** () const
Check for the 'addition' function.
- bool **hasSubtraction** () const
Check for the 'subtraction' function.
- bool **hasRightShift** () const
Check for the 'rightShift' function.
- bool **hasLeftShift** () const
Check for the 'leftShift' function.
- bool **hasMultiplication** () const

- Check for the 'multiplication' function.*
- **bool hasDivision () const**
 - Check for the 'division' function.*
- **bool hasModulo () const**
 - Check for the 'modulo' function.*
- **bool hasExponentiation () const**
 - Check for the 'exponentiation' function.*
- **bool hasModuloExponentiation () const**
 - Check for the 'moduloExponentiation' function.*
- **bool hasGCD () const**
 - Check for the 'gcd' function.*
- **bool hasModInverse () const**
 - Check for the 'modInverse' function.*
- **uint16_t size () const**
 - Access data size.*
- **uint32_t * data ()**
 - Data access.*
- **const uint32_t * data () const**
 - Constant data access.*
- **const struct numberType * numberDefinition () const**
 - Access number definition.*
- **int typeId () const**
 - Access number ID.*
- **std::string name () const**
 - Access number name.*

Protected Member Functions

- **int _compare (const number &n2) const**
 - Compares two numbers.*

Protected Attributes

- **struct numberType * _numDef**
 - Definition of number algorithms.*
- **uint16_t _size**
 - Size of the data array.*
- **uint32_t * _data**
 - Data array.*

30.34.1 Detailed Description

Basic number definition.

This class defines the basics of all large number classes. Operators are specifically defined in each class which inherits from number.

30.34.2 Constructor & Destructor Documentation

`crypto::number::number (struct numberType * numDef = buildNullNumberType())`

Construct with number definition.

Parameters

in	<i>numDef</i>	Definition of number, by default buildNullNumberType () (p. 349)
----	---------------	---

`crypto::number::number (uint16_t size, struct numberType * numDef = buildNullNumberType())`

Construct with size.

Parameters

in	<i>size</i>	Size of the number to be constructed
in	<i>numDef</i>	Definition of number, by default buildNullNumberType () (p. 349)

`crypto::number::number (const uint32_t * d, uint16_t size, struct numberType * numDef = buildNullNumberType())`

Construct with data array.

Parameters

in	<i>d</i>	Data array to bind to this number
in	<i>size</i>	Size of the number to be constructed
in	<i>numDef</i>	Definition of number, by default buildNullNumberType () (p. 349)

`crypto::number::number (const number & num)`

Copy constructor.

Parameters

in	<i>num</i>	Number used to construct this
----	------------	-------------------------------

`virtual crypto::number::~~number () [virtual]`

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.34.3 Member Function Documentation

int crypto::number::_compare (const **number** & n2) const [protected]

Compares two numbers.

Parameters

in	<i>n2</i>	Number to be compared against
----	-----------	-------------------------------

Returns

0 if equal, 1 if greater than, -1 if less than

void crypto::number::addition (const **number** * n2, **number** * result) const

Addition function.

Preforms this+n2=result. Note that this function will only preform the addition if the number definition defines an addition function.

Parameters

in	<i>n2</i>	Number to be added
out	<i>result</i>	Result of addition

Returns

void

virtual bool crypto::number::checkType () const [inline], [virtual]

Check if the number is valid.

By default, this function returns false. Numbers which inherit this class are expected to use this function to check if the number definition matches the class definition.

Returns

true if valid type, else, false

Reimplemented in **crypto::integer** (p. 463).

int crypto::number::compare (const **number** * n2) const

Compares two numbers.

Parameters

in	<i>n2</i>	Number to be compared against
----	-----------	-------------------------------

Returns

0 if equal, 1 if greater than, -1 if less than

```
uint32_t* crypto::number::data ( ) [inline]
```

Data access.

Returns

crypto::number::_data (p. 527)

```
const uint32_t* crypto::number::data ( ) const [inline]
```

Constant data access.

Returns

crypto::number::_data (p. 527)

```
void crypto::number::division ( const number * n2, number * result ) const
```

Division function.

Preforms this/n2=result. Note that this function will only preform the division if the number definition defines an division function.

Parameters

in	<i>n2</i>	Number to be divided by
out	<i>result</i>	Result of division

Returns

void

```
void crypto::number::expand ( uint16_t size )
```

Expand number size.

Parameters

in	<i>size</i>	Size of the number to be constructed
----	-------------	--------------------------------------

Returns

void

```
void crypto::number::exponentiation ( const number * n2, number * result ) const
```

Exponentiation function.

Preforms this^n2=result. Note that this function will only preform the exponentiation if the number definition defines an exponentiation function.

Parameters

in	<i>n2</i>	Number to be raised to
out	<i>result</i>	Result of exponentiation

Returns

void

void crypto::number::fromString (const std::string & str)

Re-builds number from provided string.

Parameters

in	<i>str</i>	Hex string representing number
----	------------	--------------------------------

Returns

void

void crypto::number::gcd (const **number** * n2, **number** * result) const

Greatest-common-denominator function.

Preforms GCD of this and n2=result. Note that this function will only preform the greatest-common-denominator if the number definition defines an greatest-common-denominator function.

Parameters

in	<i>n2</i>	GCD target
out	<i>result</i>	Result of greatest-common-denominator

Returns

void

os::smart_ptr<unsigned char> crypto::number::getCharData (unsigned int & arr_len) const

Build byte array.

Constructs a byte array based on the data array of this number. Useful for binary saving and packet-izing.

Parameters

out	<i>arr_len</i>	return Byte array
-----	----------------	-------------------

os::smart_ptr<unsigned char> crypto::number::getCompCharData (unsigned int & arr_len) const

Build compatibility byte array.

Constructs a byte array based on the data array of this number. First eliminates endian differences of operating systems.

Parameters

out	arr_len	return Byte array
-----	---------	-------------------

bool crypto::number::hasAddition () const [inline]

Check for the 'addition' function.

Returns

crypto::number::_numDef (p. 527)->addition

bool crypto::number::hasCompare () const [inline]

Check for the 'compare' function.

Returns

crypto::number::_numDef (p. 527)->compare

bool crypto::number::hasDivision () const [inline]

Check for the 'division' function.

Returns

crypto::number::_numDef (p. 527)->division

bool crypto::number::hasExponentiation () const [inline]

Check for the 'exponentiation' function.

Returns

crypto::number::_numDef (p. 527)->exponentiation

bool crypto::number::hasGCD () const [inline]

Check for the 'gcd' function.

Returns

crypto::number::_numDef (p. 527)->gcd

bool crypto::number::hasLeftShift () const [inline]

Check for the 'leftShift' function.

Returns

crypto::number::_numDef (p. 527)->leftShift

bool crypto::number::hasModInverse () const [inline]

Check for the 'modInverse' function.

Returns

crypto::number::_numDef (p. 527)->modInverse

bool crypto::number::hasModulo () const [inline]

Check for the 'modulo' function.

Returns

crypto::number::_numDef (p. 527)->modulo

bool crypto::number::hasModuloExponentiation () const [inline]

Check for the 'moduloExponentiation' function.

Returns

crypto::number::_numDef (p. 527)->moduloExponentiation

bool crypto::number::hasMultiplication () const [inline]

Check for the 'multiplication' function.

Returns

crypto::number::_numDef (p. 527)->multiplication

bool crypto::number::hasRightShift () const [inline]

Check for the 'rightShift' function.

Returns

crypto::number::_numDef (p. 527)->rightShift

bool crypto::number::hasSubtraction () const [inline]

Check for the 'subtraction' function.

Returns

crypto::number::_numDef (p. 527)->subtraction

```
void crypto::number::leftShift ( uint16_t n2, number * result ) const
```

Left shift function.

Preforms this $\ll n2=result$. Note that this function will only preform the shift if the number definition defines an leftShift function.

Parameters

in	<i>n2</i>	Bits to be shifted by
out	<i>result</i>	Result of shift

Returns

void

```
void crypto::number::modInverse ( const number * n2, number * result ) const
```

Modular-inverse function.

Preforms $(this^{-1})n2=result$. Note that this function will only preform the modular-inverse if the number definition defines an modular-inverse function.

Parameters

in	<i>n2</i>	Number which defines the modulo space
out	<i>result</i>	Result of modular-inverse

Returns

void

```
void crypto::number::modulo ( const number * n2, number * result ) const
```

Modulo function.

Preforms this $n2=result$. Note that this function will only preform the modulo if the number definition defines an modulo function.

Parameters

in	<i>n2</i>	Number to be moded by
out	<i>result</i>	Result of modulo

Returns

void

```
void crypto::number::moduloExponentiation ( const number * n2, const number * n3, number * result ) const
```

Modular exponentiation.

Preforms this $^{n2} n3=result$. Note that this function will only preform the modular exponentiation if the number definition defines an modular exponentiation function.

Parameters

in	<i>n2</i>	Number to be raised to
in	<i>n3</i>	Number defines modulo space
out	<i>result</i>	Result of exponentiation

Returns

void

```
void crypto::number::multiplication ( const number * n2, number * result ) const
```

Multiplication function.

Preforms this $*n2=result$. Note that this function will only preform the multiplication if the number definition defines an multiplication function.

Parameters

in	<i>n2</i>	Number to be multiplied
out	<i>result</i>	Result of multiplication

Returns

void

```
std::string crypto::number::name ( ) const [inline]
```

Access number name.

Returns

crypto::number::_numDef (p. 527)->name

```
const struct numberType* crypto::number::numberDefinition ( ) const [inline]
```

Access number definition.

Returns

crypto::number::_numDef (p. 527)

```
const bool crypto::number::operator!= ( const number & comp ) const
```

'!=' comparison operator

Parameters

in	comp	Number to be compared against
----	------	-------------------------------

Returns

this != comp

number crypto::number::operator& (const **number** & op) const

And operator.

Preforms bitwise and on the number. Note that all numbers can preform bit-wise operations on all other numbers

Parameters

in	op	Number preforming bitwise operation
----	----	-------------------------------------

Returns

this & op

number& crypto::number::operator&= (const **number** & op)

And-equals operator.

Preforms bitwise and-equals on the number. Note that all numbers can preform bit-wise operations on all other numbers

Parameters

in	op	Number preforming bitwise operation
----	----	-------------------------------------

Returns

this = this & op

const bool crypto::number::operator< (const **number** & comp) const

'<' comparison operator

Parameters

in	comp	Number to be compared against
----	------	-------------------------------

Returns

`this < comp`

`const bool crypto::number::operator<= (const number & comp) const`

'<=' comparison operator

Parameters

<code>in</code>	<code>comp</code>	Number to be compared against
-----------------	-------------------	-------------------------------

Returns

`this <= comp`

`number& crypto::number::operator= (const number & num)`

Equality constructor.

Parameters

<code>in</code>	<code>num</code>	Number used to re-build this
-----------------	------------------	------------------------------

Returns

Reference to this

`const bool crypto::number::operator== (const number & comp) const`

'==' comparison operator

Parameters

<code>in</code>	<code>comp</code>	Number to be compared against
-----------------	-------------------	-------------------------------

Returns

`this == comp`

`const bool crypto::number::operator> (const number & comp) const`

'>' comparison operator

Parameters

<code>in</code>	<code>comp</code>	Number to be compared against
-----------------	-------------------	-------------------------------

Returns

`this > comp`

`const bool crypto::number::operator>= (const number & comp) const`

'>=' comparison operator

Parameters

in	<i>comp</i>	Number to be compared against
----	-------------	-------------------------------

Returns

`this >= comp`

`uint32_t crypto::number::operator[] (uint16_t pos) const`

Read-only data access.

Parameters

in	<i>pos</i>	Index to access
----	------------	-----------------

Returns

`crypto::number::_data (p. 527)[pos]`

`uint32_t& crypto::number::operator[] (uint16_t pos)`

Read/write data access.

Parameters

in	<i>pos</i>	Index to access
----	------------	-----------------

Returns

`crypto::number::_data (p. 527)[pos]`

`number crypto::number::operator^ (const number & op) const`

X-Or operator.

Preforms bitwise exclusive-or on the number. Note that all numbers can preform bit-wise operations on all other numbers

Parameters

in	<i>op</i>	Number preforming bitwise operation
----	-----------	-------------------------------------

Returns

`this ^ op`

number& crypto::number::operator^= (const **number** & op)

X-Or-equals operator.

Preforms bitwise exclusive-or-equals on the number. Note that all numbers can preform bit-wise operations on all other numbers

Parameters

in	op	Number preforming bitwise operation
----	----	-------------------------------------

Returns

`this=this ^ op`

number crypto::number::operator| (const **number** & op) const

Or operator.

Preforms bitwise or on the number. Note that all numbers can preform bit-wise operations on all other numbers

Parameters

in	op	Number preforming bitwise operation
----	----	-------------------------------------

Returns

`this | op`

number& crypto::number::operator|= (const **number** & op)

Or-equals operator.

Preforms bitwise or-equals on the number. Note that all numbers can preform bit-wise operations on all other numbers

Parameters

in	op	Number preforming bitwise operation
----	----	-------------------------------------

Returns

`this = this | op`

number crypto::number::operator~ () const

Negate operator.

Flips all bits in the number, returning a new number.

Returns

`~this`

`void crypto::number::reduce ()`

Eliminate high-order zeros.

Returns

`void`

`void crypto::number::rightShift (uint16_t n2, number * result) const`

Right shift function.

Preforms `this>>n2=result`. Note that this function will only preform the shift if the number definition defines an `rightShift` function.

Parameters

in	<i>n2</i>	Bits to be shifted by
out	<i>result</i>	Result of shift

Returns

`void`

`uint16_t crypto::number::size () const [inline]`

Access data size.

Returns

`crypto::number::_size` (p. 527)

`void crypto::number::subtraction (const number * n2, number * result) const`

Subtraction function.

Preforms `this-n2=result`. Note that this function will only preform the subtraction if the number definition defines an `subtraction` function.

Parameters

in	<i>n2</i>	Number to be subtracted
out	<i>result</i>	Result of subtraction

Returns

void

std::string crypto::number::toString () const

Build hex string from number.

Returns

Hex string

int crypto::number::typeID () const [inline]

Access number ID.

Returns

crypto::number::_numDef (p. 527)->typeID

30.34.4 Member Data Documentation

uint32_t* crypto::number::_data [protected]

Data array.

struct **numberType*** crypto::number::_numDef [protected]

Definition of number algorithms.

uint16_t crypto::number::_size [protected]

Size of the data array.

30.35 numberType Struct Reference

Number type function structure.

Public Attributes

- **int typeID**
ID integer of the number type.
- **const char * name**
Name of the number type.
- **compareFunction compare**
Pointer to comparison function.
- **operatorFunction addition**
Pointer to addition function.
- **operatorFunction subtraction**
Pointer to subtraction function.

- **shiftFunction rightShift**
Pointer to right-shift function.
- **shiftFunction leftShift**
Pointer to left-shift function.
- **operatorFunction multiplication**
Pointer to multiplication function.
- **operatorFunction division**
Pointer to division function.
- **operatorFunction modulo**
Pointer to modulo function.
- **operatorFunction exponentiation**
Pointer to exponentiation function.
- **tripleCalculation moduloExponentiation**
Pointer to modulo exponentiation function.
- **operatorFunction gcd**
Pointer to greatest common denominator function.
- **operatorFunction modInverse**
Pointer to modulo inverse function.

30.35.1 Detailed Description

Number type function structure.

This structure contains a series of meaningful function pointers which define functions required to meaningfully define a numerical system.

30.35.2 Member Data Documentation

operatorFunction numberType::addition

Pointer to addition function.

compareFunction numberType::compare

Pointer to comparison function.

operatorFunction numberType::division

Pointer to division function.

operatorFunction numberType::exponentiation

Pointer to exponentiation function.

operatorFunction numberType::gcd

Pointer to greatest common denominator function.

shiftFunction numberType::leftShift

Pointer to left-shift function.

operatorFunction numberType::modInverse

Pointer to modulo inverse function.

operatorFunction numberType::modulo

Pointer to modulo function.

tripleCalculation numberType::moduloExponentiation

Pointer to modulo exponentiation function.

operatorFunction numberType::multiplication

Pointer to multiplication function.

const char* numberType::name

Name of the number type.

shiftFunction numberType::rightShift

Pointer to right-shift function.

operatorFunction numberType::subtraction

Pointer to subtraction function.


int numberType::typeID

ID integer of the number type.

30.36 crypto::passwordLargeError Class Reference

Symmetric key too big.

Inheritance diagram for crypto::passwordLargeError:

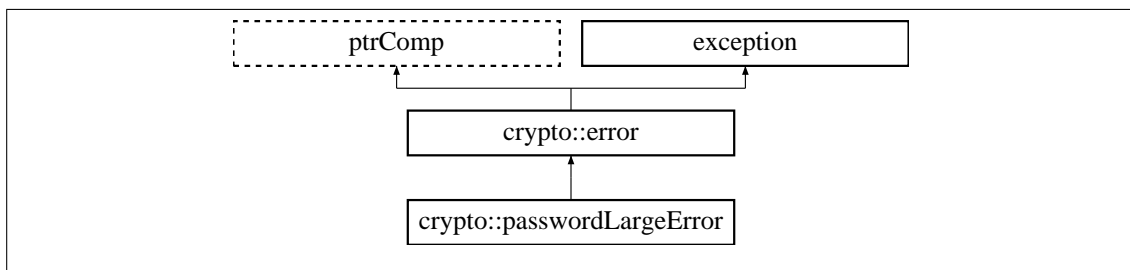

Public Member Functions

- virtual **~passwordLargeError** () throw ()
Virtual destructor.
- std::string **errorTitle** () const
Short error descriptor Returns "Password Size Error".
- std::string **errorDescription** () const
Long error descriptor Returns "Password too large".

30.36.1 Detailed Description

Symmetric key too big.

Thrown when a symmetric key is provided which is bigger than the maximum for the specific algorithm.

30.36.2 Constructor & Destructor Documentation

virtual crypto::passwordLargeError::~passwordLargeError () throw () [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.36.3 Member Function Documentation

std::string crypto::passwordLargeError::errorDescription () const [inline], [virtual]

Long error descriptor Returns "Password too large".

Returns

Error description std::string

Reimplemented from **crypto::error** (p. 416).

std::string crypto::passwordLargeError::errorTitle () const [inline], [virtual]

Short error descriptor Returns "Password Size Error".

Returns


Error title std::string

Reimplemented from **crypto::error** (p. 417).

30.37 crypto::passwordSmallError Class Reference

Symmetric key too small.

Inheritance diagram for crypto::passwordSmallError:

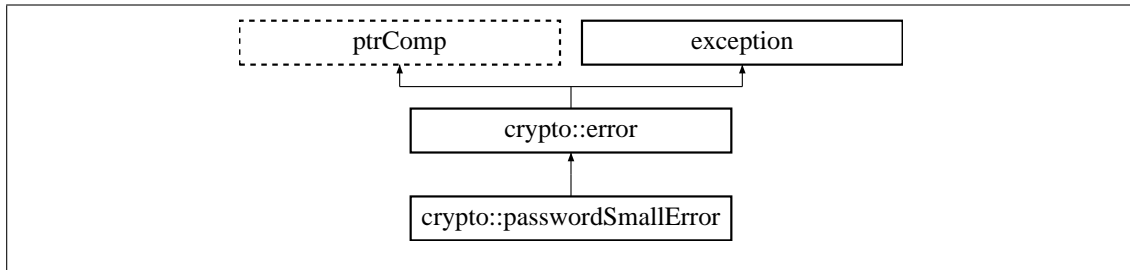

Public Member Functions

- virtual **~passwordSmallError** () throw ()
Virtual destructor.
- std::string **errorTitle** () const
Short error descriptor Returns "Password Size Error".
- std::string **errorDescription** () const
Long error descriptor Returns "Password too small".

30.37.1 Detailed Description

Symmetric key too small.

Thrown when a symmetric key is provided which is smaller than the minimum for the specific algorithm.

30.37.2 Constructor & Destructor Documentation

virtual crypto::passwordSmallError::~~passwordSmallError () throw () [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.37.3 Member Function Documentation

std::string crypto::passwordSmallError::errorDescription () const [inline], [virtual]

Long error descriptor Returns "Password too small".

Returns

Error description std::string

Reimplemented from **crypto::error** (p. 416).

std::string crypto::passwordSmallError::errorTitle () const [inline], [virtual]

Short error descriptor Returns "Password Size Error".

Returns


Error title std::string

Reimplemented from **crypto::error** (p. 417).

30.38 crypto::publicKey Class Reference

Base public-key class.

Inheritance diagram for crypto::publicKey:

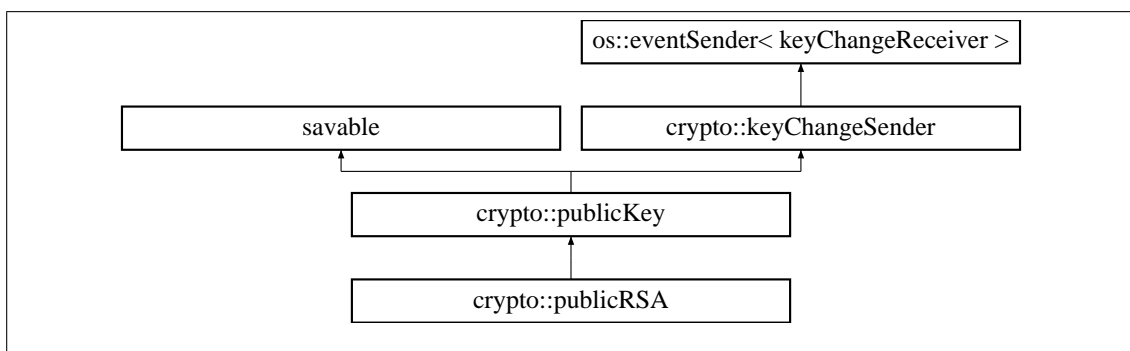

Public Member Functions

- void **readLock** ()
Increments the read-lock.
- void **readUnlock** ()
Decrements the read-lock.
- virtual ~**publicKey** ()
Virtual destructor.
- bool **searchKey** (hash hsh, unsigned int &hist, bool &type)
Searches for key by hash.
- bool **searchKey** (os::smart_ptr< **number** > key, unsigned int &hist, bool &type)
Searches for key.
- virtual os::smart_ptr< **number** > **copyConvert** (const os::smart_ptr< **number** > num) const
Converts number to correct type.
- virtual os::smart_ptr< **number** > **copyConvert** (const uint32_t *arr, uint16_t len) const
Converts array to correct number type.
- virtual os::smart_ptr< **number** > **copyConvert** (const unsigned char *arr, unsigned int len) const
Converts byte array to correct number type.
- os::smart_ptr< **number** > **getN** () const

- Public key access.*
- `os::smart_ptr< number > getD () const`
- Private key access.*
- `uint64_t timestamp () const`
- Time-stamp access.*
- `os::smart_ptr< number > getOldN (unsigned int history=0)`
- Access old public keys.*
- `os::smart_ptr< number > getOldD (unsigned int history=0)`
- Access old private keys.*
- `uint64_t getOldTimestamp (unsigned int history=0)`
- Access old time-stamps.*
- `virtual void generateNewKeys ()`
- Key generation function.*
- `virtual bool generating ()`
- Tests if the keys are in the process of generating.*
- `uint16_t algorithm () const`
- Access algorithm ID.*
- `virtual std::string algorithmName () const`
- Access algorithm name.*
- `uint16_t size () const`
- Access key size.*
- `void setHistory (uint16_t hist)`
- Sets history size.*
- `uint16_t history () const`
- `void save ()`
- Re-save the entire structure.*
- `void loadFile ()`
- Loads the structure from a file.*
- `void setFileName (std::string fileName)`
- Set the save file name.*
- `void setPassword (unsigned char *key, unsigned int keyLen)`
- Binds a new symmetric key.*
- `void setPassword (std::string password)`
- `void setEncryptionAlgorithm (os::smart_ptr< streamPackageFrame > stream_algo)`
- Sets the symmetric encryption algorithm.*
- `const std::string & fileName () const`
- Return the save file path.*
- `void addKeyPair (os::smart_ptr< number > _n, os::smart_ptr< number > _d, uint64_t tms=os->::getTimestamp())`
- Add key pair.*
- `virtual os::smart_ptr< number > encode (os::smart_ptr< number > code, os::smart_ptr< number > publicN=NULL) const`
- Number encode.*

- virtual void **encode** (unsigned char *code, unsigned int codeLength, os::smart_ptr< **number** > publicN=NULL) const
Data encode against number.
- virtual void **encode** (unsigned char *code, unsigned int codeLength, unsigned const char *publicN, unsigned int nLength) const
Data encode.
- virtual os::smart_ptr< **number** > **decode** (os::smart_ptr< **number** > code) const
Number decode.
- virtual os::smart_ptr< **number** > **decode** (os::smart_ptr< **number** > code, unsigned int hist)
Number decode, old key.
- void **decode** (unsigned char *code, unsigned int codeLength) const
Data decode.
- void **decode** (unsigned char *code, unsigned int codeLength, unsigned int hist)
Data decode, old key.
- bool **operator==** (const **publicKey** &cmp) const
Compares equality by size and algorithm.
- bool **operator!=** (const **publicKey** &cmp) const
Compares equality by size and algorithm.
- bool **operator<** (const **publicKey** &cmp) const
Compares equality by size and algorithm.
- bool **operator>** (const **publicKey** &cmp) const
Compares equality by size and algorithm.
- bool **operator<=** (const **publicKey** &cmp) const
Compares equality by size and algorithm.
- bool **operator>=** (const **publicKey** &cmp) const
Compares equality by size and algorithm.

Static Public Member Functions

- static os::smart_ptr< **number** > **copyConvert** (const os::smart_ptr< **number** > num, uint16_t **size**)
Converts number to correct type, statically.
- static os::smart_ptr< **number** > **copyConvert** (const uint32_t *arr, uint16_t len, uint16_t **size**)
Converts array to correct number type, statically.
- static os::smart_ptr< **number** > **copyConvert** (const unsigned char *arr, unsigned int len, uint16_t **size**)
Converts byte array to correct number type, statically.
- static uint16_t **staticAlgorithm** ()
Access algorithm ID.
- static std::string **staticAlgorithmName** ()
Access algorithm name.
- static os::smart_ptr< **number** > **encode** (os::smart_ptr< **number** > code, os::smart_ptr< **number** > publicN, uint16_t **size**)

Static number encode.

- static void **encode** (unsigned char *code, unsigned int codeLength, os::smart_ptr< **number** > publicN, uint16_t **size**)

Hybrid data encode against number.

- static void **encode** (unsigned char *code, unsigned int codeLength, unsigned const char *publicN, unsigned int nLength, uint16_t **size**)

Static data encode.

Static Public Attributes

- static const unsigned int **CURRENT_INDEX** = ~0

Current key index Allows the current key to be accessed as historical index '-1'.

- static const bool **PUBLIC** =true

Public boolean marker.

- static const bool **PRIVATE** =false

Private boolean marker.

- static const bool **N_MARKER** =true

N (public) boolean marker.

- static const bool **D_MARKER** =false

D (private) boolean marker.

Protected Member Functions

- **publicKey** (uint16_t algo, uint16_t sz=size::public512)

No key constructor.

- **publicKey** (const **publicKey** &ky)

Copy constructor.

- **publicKey** (os::smart_ptr< **number** > _n, os::smart_ptr< **number** > _d, uint16_t algo, uint16_t sz=size::public512, uint64_t tms=os::getTimestamp())

Construct with keys.

- **publicKey** (uint16_t algo, std::string **fileName**, std::string password="", os::smart_ptr< **streamPackageFrame** > stream_algo=NULL)

Construct with path to file and password.

- **publicKey** (uint16_t algo, std::string **fileName**, unsigned char *key, unsigned int keyLen, os::smart_ptr< **streamPackageFrame** > stream_algo=NULL)

Construct with path to file and password.

- void **writeLock** ()

Locks the write lock.

- void **writeUnlock** ()

Unlocks the write lock.

- int **compare** (const **publicKey** &cmp) const

Compare this with another public key.

- void **pushOldKeys** (os::smart_ptr< **number** > n, os::smart_ptr< **number** > d, uint64_t ts)

Bind old keys to history.

Protected Attributes

- `os::smart_ptr< number > n`
- `os::smart_ptr< number > d`
- `uint64_t _timestamp`
- `os::unsortedList< number > oldN`
- `os::unsortedList< number > oldD`
- `os::unsortedList< uint64_t > _timestamps`

Private Attributes

- `uint16_t _size`
- `uint16_t _algorithm`
- `uint16_t _history`
- `unsigned char * _key`
Symmetric key for encryption.
- `unsigned int _keyLen`
Length of symmetric key.
- `os::smart_ptr< streamPackageFrame > fePackage`
- `std::string _fileName`
- `os::multiLock keyLock`

30.38.1 Detailed Description

Base public-key class.

Class which defines the general structure of a public-private key pair. The class does not define the specifics of the algorithm.

30.38.2 Constructor & Destructor Documentation

```
crypto::publicKey::publicKey ( uint16_t algo, uint16_t sz = size::public512 ) [protected]
```

No key constructor.

Parameters

<i>algo</i>	Algorithm ID
<i>sz</i>	Size of key, size::public512 by default

```
crypto::publicKey::publicKey ( const publicKey & ky ) [protected]
```

Copy constructor.

Parameters

<i>ky</i>	Public key to be copied
-----------	-------------------------

```
crypto::publicKey::publicKey ( os::smart_ptr< number > _n, os::smart_ptr< number > _d,
uint16_t algo, uint16_t sz = size::public512, uint64_t tms = os::getTimestamp() )
[protected]
```

Construct with keys.

Parameters

<i>_n</i>	Smart pointer to public key
<i>_d</i>	Smart pointer to private key
<i>algo</i>	Algorithm ID
<i>sz</i>	Size of key, size::public512 by default
<i>tms</i>	Time-stamp of the current keys, now by default

```
crypto::publicKey::publicKey ( uint16_t algo, std::string fileName, std::string password = "",
os::smart_ptr< streamPackageFrame > stream_algo = NULL ) [protected]
```

Construct with path to file and password.

Parameters

<i>algo</i>	Algorithm ID
<i>fileName</i>	Name of file to find keys
<i>password</i>	String representing symmetric key, "" by default
<i>stream_algo</i>	Symmetric key encryption algorithm, NULL by default

```
crypto::publicKey::publicKey ( uint16_t algo, std::string fileName, unsigned char * key, unsigned
int keyLen, os::smart_ptr< streamPackageFrame > stream_algo = NULL ) [protected]
```

Construct with path to file and password.

Parameters

<i>algo</i>	Algorithm ID
<i>fileName</i>	Name of file to find keys
<i>key</i>	Symmetric key
<i>keyLen</i>	Length of symmetric key
<i>stream_algo</i>	Symmetric key encryption algorithm, NULL by default

```
virtual crypto::publicKey::~~publicKey ( ) [virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.38.3 Member Function Documentation

```
void crypto::publicKey::addKeyPair ( os::smart_ptr< number > _n, os::smart_ptr< number > _d,
uint64_t tms = os::getTimestamp() )
```

Add key pair.

Adds a key-pair and binds the current keys to the history;.

Parameters

<i>_n</i>	Smart pointer to public key
<i>_d</i>	Smart pointer to private key
<i>tms</i>	Time-stamp of the current keys, now by default

Returns

void

```
uint16_t crypto::publicKey::algorithm ( ) const [inline]
```

Access algorithm ID.

Returns

crypto::publicKey::_algorithm (p. 550)

```
virtual std::string crypto::publicKey::algorithmName ( ) const [inline], [virtual]
```

Access algorithm name.

Returns

crypto::publicKey::staticAlgorithmName() (p. 550)

Reimplemented in **crypto::publicRSA** (p. 564).

```
int crypto::publicKey::compare ( const publicKey & cmp ) const [protected]
```

Compare this with another public key.

Compares based on the algorithm ID and size of the key. Note that this will return 0 if two public keys have the same algorithm ID and size even if they have different keys.

Parameters

<i>in</i>	<i>cmp</i>	Public key to compare against
-----------	------------	-------------------------------

Returns

0 if equal, 1 if greater than, -1 if less than

```
virtual os::smart_ptr<number> crypto::publicKey::copyConvert ( const os::smart_ptr< number >
num ) const [virtual]
```

Converts number to correct type.

Parameters

in	<i>num</i>	Number to be converted
----	------------	------------------------

Returns

Converted number

Reimplemented in **crypto::publicRSA** (p. 564).

```
virtual os::smart_ptr<number> crypto::publicKey::copyConvert ( const uint32_t * arr, uint16_t len
) const [virtual]
```

Converts array to correct number type.

Parameters

in	<i>arr</i>	Array to be converted
in	<i>len</i>	Length of array to be converted

Returns

Converted number

Reimplemented in **crypto::publicRSA** (p. 564).

```
virtual os::smart_ptr<number> crypto::publicKey::copyConvert ( const unsigned char * arr,
unsigned int len ) const [virtual]
```

Converts byte array to correct number type.

Parameters

in	<i>arr</i>	Byte array to be converted
in	<i>len</i>	Length of array to be converted

Returns

Converted number

Reimplemented in **crypto::publicRSA** (p. 565).


```
static os::smart_ptr<number> crypto::publicKey::copyConvert ( const os::smart_ptr< number >
num, uint16_t size ) [static]
```

Converts number to correct type, statically.

Parameters

in	<i>num</i>	Number to be converted
----	------------	------------------------

Returns

Converted number

```
static os::smart_ptr<number> crypto::publicKey::copyConvert ( const uint32_t * arr, uint16_t len,
uint16_t size ) [static]
```

Converts array to correct number type, statically.

Parameters

in	<i>arr</i>	Array to be converted
in	<i>len</i>	Length of array to be converted

Returns

Converted number

```
static os::smart_ptr<number> crypto::publicKey::copyConvert ( const unsigned char * arr,
unsigned int len, uint16_t size ) [static]
```

Converts byte array to correct number type, statically.

Parameters

in	<i>arr</i>	Byte array to be converted
in	<i>len</i>	Length of array to be converted

Returns

Converted number

```
virtual os::smart_ptr<number> crypto::publicKey::decode ( os::smart_ptr< number > code ) const
[virtual]
```

Number decode.

Uses the private key to decode a set of data. Re-implemented by algorithm definitions which inherit from this class.

Parameters

in	<i>code</i>	Data to be decoded
----	-------------	--------------------

Returns

Decoded number

Reimplemented in **crypto::publicRSA** (p. 566).

```
virtual os::smart_ptr<number> crypto::publicKey::decode ( os::smart_ptr< number > code,  
unsigned int hist ) [virtual]
```

Number decode, old key.

Uses the private key to decode a set of data. Re-implemented by algorithm definitions which inherit from this class.

Parameters

in	<i>code</i>	Data to be decoded
in	<i>hist</i>	Index of historical key

Returns

Decoded number

Reimplemented in **crypto::publicRSA** (p. 566).

```
void crypto::publicKey::decode ( unsigned char * code, unsigned int codeLength ) const
```

Data decode.

Uses the private key to decode a set of data.

Parameters

	<i>[in/out]</i>	code Data to be decoded
in	<i>codeLength</i>	Length of code to be decoded

Returns

void

```
void crypto::publicKey::decode ( unsigned char * code, unsigned int codeLength, unsigned int hist  
)
```

Data decode, old key.

Uses the private key to decode a set of data.

Parameters

	<i>[in/out]</i>	code Data to be decoded
in	<i>codeLength</i>	Length of code to be decoded
in	<i>hist</i>	Index of historical key

Returns

void

```
static os::smart_ptr<number> crypto::publicKey::encode ( os::smart_ptr< number > code,  
os::smart_ptr< number > publicN, uint16_t size ) [static]
```

Static number encode.

This function is expected to be re-implemented for each public-key type. This function must be static because data can be encoded with a public key even though a node does not have its own keys defined.

Parameters

in	<i>code</i>	Data to be encoded
in	<i>publicN</i>	Public key to be encoded against
in	<i>size</i>	Size of key used

Returns

Encoded number

```
static void crypto::publicKey::encode ( unsigned char * code, unsigned int codeLength,  
os::smart_ptr< number > publicN, uint16_t size ) [static]
```

Hybrid data encode against number.

This function is expected to be re-implemented for each public-key type. This function must be static because data can be encoded with a public key even though a node does not have its own keys defined.

Parameters

	<i>[in/out]</i>	code Data to be encoded
in	<i>codeLength</i>	Length of code array
in	<i>publicN</i>	Public key to be encoded against, NULL by default

Returns

void

```
static void crypto::publicKey::encode ( unsigned char * code, unsigned int codeLength, unsigned
const char * publicN, unsigned int nLength, uint16_t size ) [static]
```

Static data encode.

This function is expected to be re-implemented for each public-key type. This function must be static because data can be encoded with a public key even though a node does not have its own keys defined.

Parameters

	<i>[in/out]</i>	code Data to be encoded
in	<i>codeLength</i>	Length of code array
in	<i>publicN</i>	Public key to be encoded against
in	<i>nLength</i>	Length of key array
in	<i>size</i>	Size of key used

Returns

void

```
virtual os::smart_ptr<number> crypto::publicKey::encode ( os::smart_ptr< number > code,
os::smart_ptr< number > publicN = NULL ) const [virtual]
```

Number encode.

Parameters

in	<i>code</i>	Data to be encoded
in	<i>publicN</i>	Public key to be encoded against, NULL by default

Returns

Encoded number

Reimplemented in **crypto::publicRSA** (p. 568).

```
virtual void crypto::publicKey::encode ( unsigned char * code, unsigned int codeLength,
os::smart_ptr< number > publicN = NULL ) const [virtual]
```

Data encode against number.

Parameters

	<i>[in/out]</i>	code Data to be encoded
in	<i>codeLength</i>	Length of code array
in	<i>publicN</i>	Public key to be encoded against, NULL by default

Returns

void

Reimplemented in **crypto::publicRSA** (p. 568).

```
virtual void crypto::publicKey::encode ( unsigned char * code, unsigned int codeLength, unsigned
const char * publicN, unsigned int nLength ) const [virtual]
```

Data encode.

Parameters

	<i>[in/out]</i>	code Data to be encoded
in	<i>codeLength</i>	Length of code array
in	<i>publicN</i>	Public key to be encoded against
in	<i>nLength</i>	Length of key array

Returns

void

Reimplemented in **crypto::publicRSA** (p. 568).

```
const std::string& crypto::publicKey::fileName ( ) const [inline]
```

Return the save file path.

Returns

crypto::publicKey::_fileName (p. 551)

```
virtual void crypto::publicKey::generateNewKeys ( ) [virtual]
```

Key generation function.

Generates new keys for the specific algorithm. This is re-implemented by every algorithm.

Returns

void

Reimplemented in **crypto::publicRSA** (p. 569).

```
virtual bool crypto::publicKey::generating ( ) [inline], [virtual]
```

Tests if the keys are in the process of generating.

Returns

True if generating new keys

Reimplemented in **crypto::publicRSA** (p. 569).

os::smart_ptr<number> crypto::publicKey::getD () const

Private key access.

Returns

crypto::publicKey::d (p. 551)

os::smart_ptr<number> crypto::publicKey::getN () const

Public key access.

Returns

crypto::publicKey::n (p. 552)

os::smart_ptr<number> crypto::publicKey::getOldD (unsigned int history = 0)

Access old private keys.

Parameters

<i>history</i>	Historical index, 0 by default
----------------	--------------------------------

Returns

Private key at given index

os::smart_ptr<number> crypto::publicKey::getOldN (unsigned int history = 0)

Access old public keys.

Parameters

<i>history</i>	Historical index, 0 by default
----------------	--------------------------------

Returns

Public key at given index

uint64_t crypto::publicKey::getOldTimestamp (unsigned int history = 0)

Access old time-stamps.

Parameters

<i>history</i>	Historical index, 0 by default
----------------	--------------------------------

Returns

Time-stamp at given index

```
uint16_t crypto::publicKey::history ( ) const [inline]
```

Access history size

Returns

crypto::publicKey::_history (p. 551)

```
void crypto::publicKey::loadFile ( )
```

Loads the structure from a file.

Returns

void

```
bool crypto::publicKey::operator!= ( const publicKey & cmp ) const [inline]
```

Compares equality by size and algorithm.

Returns

boolean '!='

```
bool crypto::publicKey::operator< ( const publicKey & cmp ) const [inline]
```

Compares equality by size and algorithm.

Returns

boolean '<'

```
bool crypto::publicKey::operator<= ( const publicKey & cmp ) const [inline]
```

Compares equality by size and algorithm.

Returns

boolean '<='

```
bool crypto::publicKey::operator== ( const publicKey & cmp ) const [inline]
```

Compares equality by size and algorithm.

Returns

boolean '=='

```
bool crypto::publicKey::operator> ( const publicKey & cmp ) const [inline]
```

Compares equality by size and algorithm.

Returns

boolean '>'

```
bool crypto::publicKey::operator>= ( const publicKey & cmp ) const [inline]
```

Compares equality by size and algorithm.

Returns

boolean '>='

```
void crypto::publicKey::pushOldKeys ( os::smart_ptr< number > n, os::smart_ptr< number > d,  
uint64_t ts ) [protected]
```

Bind old keys to history.

Parameters

in	<i>n</i>	Old public key
in	<i>d</i>	Old private key
in	<i>ts</i>	Old time-stamp

Returns

void

```
void crypto::publicKey::readLock ( ) [inline]
```

Increments the read-lock.

Returns

void

```
void crypto::publicKey::readUnlock ( ) [inline]
```

Decrements the read-lock.

Returns

void

```
void crypto::publicKey::save ( )
```

Re-save the entire structure.

Returns

void

bool crypto::publicKey::searchKey (**hash** hsh, unsigned int & hist, bool & type)

Searches for key by hash.

Binds the location that the keys were found in to the arguments of the function.

Parameters

in	<i>hsh</i>	Hash of the key to be searched for
out	<i>hist</i>	History value the key was found
out	<i>type</i>	Type (public or private)

Returns

True if the key was found, else, false

bool crypto::publicKey::searchKey (os::smart_ptr< **number** > key, unsigned int & hist, bool & type)

Searches for key.

Binds the location that the keys were found in to the arguments of the function.

Parameters

in	<i>num</i>	Key to search for
out	<i>hist</i>	History value the key was found
out	<i>type</i>	Type (public or private)

Returns

True if the key was found, else, false

void crypto::publicKey::setEncryptionAlgorithm (os::smart_ptr< **streamPackageFrame** > stream_algo)

Sets the symmetric encryption algorithm.

Parameters

in	<i>stream_algo</i>	Symmetric key algorithm
----	--------------------	-------------------------

Returns

void

void crypto::publicKey::setFileName (std::string fileName)

Set the save file name.

Parameters

in	<i>fileName</i>	Path of save file
----	-----------------	-------------------

Returns

void

void crypto::publicKey::setHistory (uint16_t hist)

Sets history size.

Determines the number of historical keys to keep recorded. Note that keys are sorted by the order they were received into this structure, not their time-stamp.

Parameters

in	<i>hist</i>	History size to be bound
----	-------------	--------------------------

Returns

void

void crypto::publicKey::setPassword (unsigned char * key, unsigned int keyLen)

Binds a new symmetric key.

Re-binding of the symmetric key will result in a re-save event through the savable class.

Parameters

in	<i>key</i>	Symmetric key
in	<i>keyLen</i>	Length of symmetric key

Returns

void

void crypto::publicKey::setPassword (std::string password)

Binds a new symmetric key

Parameters

in	<i>password</i>	String representing the symmetric key
----	-----------------	---------------------------------------

Returns

void

uint16_t crypto::publicKey::size () const [inline]

Access key size.

Returns

crypto::publicKey::_size (p. 551)

static uint16_t crypto::publicKey::staticAlgorithm () [inline], [static]

Access algorithm ID.

Returns

crypto::algo::publicNULL

static std::string crypto::publicKey::staticAlgorithmName () [inline], [static]

Access algorithm name.

Returns

"NULL Public Key"

uint64_t crypto::publicKey::timestamp () const [inline]

Time-stamp access.

Returns

crypto::publicKey::_timestamp (p. 551)

void crypto::publicKey::writeLock () [inline], [protected]

Locks the write lock.

Returns

void

void crypto::publicKey::writeUnlock () [inline], [protected]

Unlocks the write lock.

Returns

void

30.38.4 Member Data Documentation

uint16_t crypto::publicKey::_algorithm [private]

@ brief ID of algorithm used

```

std::string crypto::publicKey::_fileName [private]
@ brief Name of file this key is saved to

uint16_t crypto::publicKey::_history [private]
@ brief Number of historical keys to keep

unsigned char* crypto::publicKey::_key [private]
Symmetric key for encryption.

unsigned int crypto::publicKey::_keyLen [private]
Length of symmetric key.

uint16_t crypto::publicKey::_size [private]
@ brief Size of the keys used

uint64_t crypto::publicKey::_timestamp [protected]
@ brief Date/time keys created

os::unsortedList<uint64_t> crypto::publicKey::_timestamps [protected]
@ brief List of time-stamps for old pairs

const unsigned int crypto::publicKey::CURRENT_INDEX = ~0 [static]
Current key index Allows the current key to be accessed as historical index '-1'.

os::smart_ptr<number> crypto::publicKey::d [protected]
@ brief Private key

const bool crypto::publicKey::D_MARKER =false [static]
D (private) boolean marker.

os::smart_ptr<streamPackageFrame> crypto::publicKey::fePackage [private]
@ brief Algorithm used for encryption

os::multiLock crypto::publicKey::keyLock [private]
@ brief Mutex for replacing the keys

```

os::smart_ptr<number> crypto::publicKey::n [protected]

@ brief Public key

const bool crypto::publicKey::N_MARKER =true [static]

N (public) boolean marker.

os::unsortedList<number> crypto::publicKey::oldD [protected]

@ brief List of old private keys

os::unsortedList<number> crypto::publicKey::oldN [protected]

@ brief List of old public keys

const bool crypto::publicKey::PRIVATE =false [static]


Private boolean marker.

const bool crypto::publicKey::PUBLIC =true [static]

Public boolean marker.

30.39 crypto::publicKeyPackage< pkType > Class Template Reference

Inheritance diagram for crypto::publicKeyPackage< pkType >:

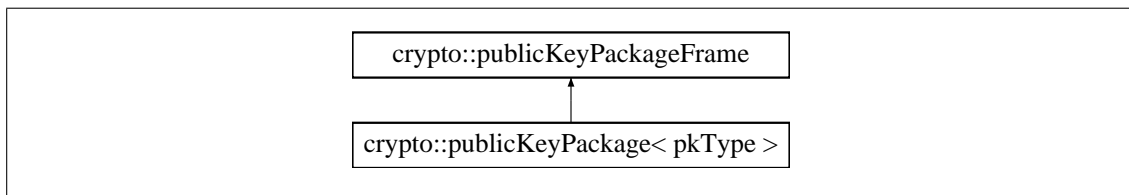

Public Member Functions

- **publicKeyPackage** (uint16_t publicSize=size::public512)
- virtual ~**publicKeyPackage** ()
- os::smart_ptr< **publicKeyPackageFrame** > **getCopy** () const
- os::smart_ptr< **number** > **convert** (uint32_t *arr, uint16_t len) const
- os::smart_ptr< **number** > **convert** (const unsigned char *arr, unsigned int len) const
- os::smart_ptr< **number** > **encode** (os::smart_ptr< **number** > code, os::smart_ptr< **number** > publicN) const
- void **encode** (unsigned char *code, unsigned int codeLength, os::smart_ptr< **number** > publicN) const

- void **encode** (unsigned char *code, unsigned int codeLength, unsigned const char *publicN, unsigned int nLength) const
- os::smart_ptr< **publicKey** > **generate** () const
- os::smart_ptr< **publicKey** > **bindKeys** (os::smart_ptr< **integer** > _n, os::smart_ptr< **integer** > _d) const
- os::smart_ptr< **publicKey** > **bindKeys** (uint32_t *_n, uint32_t *_d) const
- os::smart_ptr< **publicKey** > **openFile** (std::string fileName, std::string password) const
- os::smart_ptr< **publicKey** > **openFile** (std::string fileName, unsigned char *key, unsigned int keyLen) const
- std::string **algorithmName** () const
- uint16_t **algorithm** () const

Additional Inherited Members

30.39.1 Constructor & Destructor Documentation

template<class pkType > **crypto::publicKeyPackage**< pkType >::**publicKeyPackage** (uint16_t publicSize = size::public512) [inline]

template<class pkType > virtual **crypto::publicKeyPackage**< pkType >::~~**publicKeyPackage** () [inline], [virtual]

30.39.2 Member Function Documentation

template<class pkType > uint16_t **crypto::publicKeyPackage**< pkType >::algorithm () const [inline], [virtual]

Reimplemented from **crypto::publicKeyPackageFrame** (p. 555).

template<class pkType > std::string **crypto::publicKeyPackage**< pkType >::algorithmName () const [inline], [virtual]

Reimplemented from **crypto::publicKeyPackageFrame** (p. 556).

template<class pkType > os::smart_ptr<**publicKey**> **crypto::publicKeyPackage**< pkType >::bindKeys (os::smart_ptr< **integer** > _n, os::smart_ptr< **integer** > _d) const [inline], [virtual]

Reimplemented from **crypto::publicKeyPackageFrame** (p. 556).

template<class pkType > os::smart_ptr<**publicKey**> **crypto::publicKeyPackage**< pkType >::bindKeys (uint32_t *_n, uint32_t *_d) const [inline], [virtual]

Reimplemented from **crypto::publicKeyPackageFrame** (p. 556).

template<class pkType > os::smart_ptr<**number**> **crypto::publicKeyPackage**< pkType >::convert (uint32_t * arr, uint16_t len) const [inline], [virtual]

Reimplemented from **crypto::publicKeyPackageFrame** (p. 556).

```
template<class pkType > os::smart_ptr<number> crypto::publicKeyPackage< pkType >::convert
( const unsigned char * arr, unsigned int len ) const [inline], [virtual]
```

Reimplemented from **crypto::publicKeyPackageFrame** (p. 556).

```
template<class pkType > os::smart_ptr<number> crypto::publicKeyPackage< pkType >::encode
( os::smart_ptr< number > code, os::smart_ptr< number > publicN ) const [inline],
[virtual]
```

Reimplemented from **crypto::publicKeyPackageFrame** (p. 556).

```
template<class pkType > void crypto::publicKeyPackage< pkType >::encode ( unsigned char *
code, unsigned int codeLength, os::smart_ptr< number > publicN ) const [inline], [virtual]
```

Reimplemented from **crypto::publicKeyPackageFrame** (p. 556).

```
template<class pkType > void crypto::publicKeyPackage< pkType >::encode ( unsigned char *
code, unsigned int codeLength, unsigned const char * publicN, unsigned int nLength ) const
[inline], [virtual]
```

Reimplemented from **crypto::publicKeyPackageFrame** (p. 556).

```
template<class pkType > os::smart_ptr<publicKey> crypto::publicKeyPackage< pkType
>::generate ( ) const [inline], [virtual]
```

Reimplemented from **crypto::publicKeyPackageFrame** (p. 556).

```
template<class pkType > os::smart_ptr<publicKeyPackageFrame> crypto::publicKeyPackage<
pkType >::getCopy ( ) const [inline], [virtual]
```

Reimplemented from **crypto::publicKeyPackageFrame** (p. 556).

```
template<class pkType > os::smart_ptr<publicKey> crypto::publicKeyPackage< pkType
>::openFile ( std::string fileName, std::string password ) const [inline], [virtual]
```


Reimplemented from **crypto::publicKeyPackageFrame** (p. 557).

```
template<class pkType > os::smart_ptr<publicKey> crypto::publicKeyPackage< pkType
>::openFile ( std::string fileName, unsigned char * key, unsigned int keyLen ) const [inline],
[virtual]
```

Reimplemented from **crypto::publicKeyPackageFrame** (p. 557).

30.40 crypto::publicKeyPackageFrame Class Reference

Inheritance diagram for **crypto::publicKeyPackageFrame**:

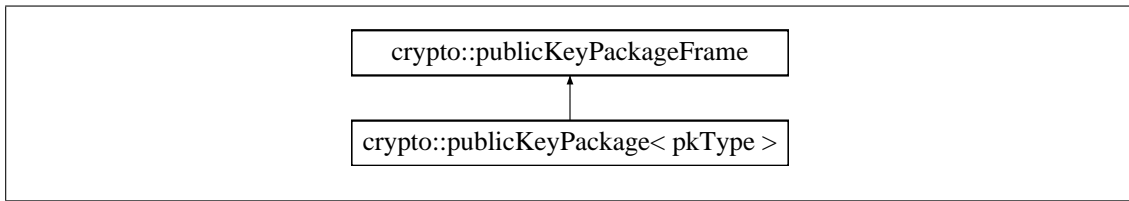

Public Member Functions

- **publicKeyPackageFrame** (uint16_t publicSize=size::public512)
- virtual ~**publicKeyPackageFrame** ()
- virtual os::smart_ptr< **publicKeyPackageFrame** > **getCopy** () const
- virtual os::smart_ptr< **number** > **convert** (uint32_t *arr, uint16_t len) const
- virtual os::smart_ptr< **number** > **convert** (const unsigned char *arr, unsigned int len) const
- virtual os::smart_ptr< **number** > **encode** (os::smart_ptr< **number** > code, os::smart_ptr< **number** > publicN) const
- virtual void **encode** (unsigned char *code, unsigned int codeLength, os::smart_ptr< **number** > publicN) const
- virtual void **encode** (unsigned char *code, unsigned int codeLength, unsigned const char *publicN, unsigned int nLength) const
- virtual os::smart_ptr< **publicKey** > **generate** () const
- virtual os::smart_ptr< **publicKey** > **bindKeys** (os::smart_ptr< **integer** > _n, os::smart_ptr< **integer** > _d) const
- virtual os::smart_ptr< **publicKey** > **bindKeys** (uint32_t *_n, uint32_t *_d) const
- virtual os::smart_ptr< **publicKey** > **openFile** (std::string fileName, std::string password) const
- virtual os::smart_ptr< **publicKey** > **openFile** (std::string fileName, unsigned char *key, unsigned int keyLen) const
- virtual std::string **algorithmName** () const
- virtual uint16_t **algorithm** () const
- void **setKeySize** (uint16_t publicSize)
- uint16_t **keySize** () const

Protected Attributes

- uint16_t **_publicSize**

30.40.1 Constructor & Destructor Documentation

crypto::publicKeyPackageFrame::publicKeyPackageFrame (uint16_t publicSize = size::public512) [inline]

virtual crypto::publicKeyPackageFrame::~~publicKeyPackageFrame () [inline], [virtual]

30.40.2 Member Function Documentation

virtual uint16_t crypto::publicKeyPackageFrame::algorithm () const [inline], [virtual]

Reimplemented in **crypto::publicKeyPackage< pkType >** (p. 553).


```
virtual std::string crypto::publicKeyPackageFrame::algorithmName ( ) const [inline],  
[virtual]
```

Reimplemented in **crypto::publicKeyPackage< pkType >** (p. 553).

```
virtual os::smart_ptr<publicKey> crypto::publicKeyPackageFrame::bindKeys ( os::smart_ptr<  
integer > _n, os::smart_ptr< integer > _d ) const [inline], [virtual]
```

Reimplemented in **crypto::publicKeyPackage< pkType >** (p. 553).

```
virtual os::smart_ptr<publicKey> crypto::publicKeyPackageFrame::bindKeys ( uint32_t * _n,  
uint32_t * _d ) const [inline], [virtual]
```

Reimplemented in **crypto::publicKeyPackage< pkType >** (p. 553).

```
virtual os::smart_ptr<number> crypto::publicKeyPackageFrame::convert ( uint32_t * arr, uint16_t  
len ) const [inline], [virtual]
```

Reimplemented in **crypto::publicKeyPackage< pkType >** (p. 553).

```
virtual os::smart_ptr<number> crypto::publicKeyPackageFrame::convert ( const unsigned char *  
arr, unsigned int len ) const [inline], [virtual]
```

Reimplemented in **crypto::publicKeyPackage< pkType >** (p. 554).

```
virtual os::smart_ptr<number> crypto::publicKeyPackageFrame::encode ( os::smart_ptr< number  
> code, os::smart_ptr< number > publicN ) const [inline], [virtual]
```

Reimplemented in **crypto::publicKeyPackage< pkType >** (p. 554).

```
virtual void crypto::publicKeyPackageFrame::encode ( unsigned char * code, unsigned int  
codeLength, os::smart_ptr< number > publicN ) const [inline], [virtual]
```

Reimplemented in **crypto::publicKeyPackage< pkType >** (p. 554).

```
virtual void crypto::publicKeyPackageFrame::encode ( unsigned char * code, unsigned int  
codeLength, unsigned const char * publicN, unsigned int nLength ) const [inline], [virtual]
```

Reimplemented in **crypto::publicKeyPackage< pkType >** (p. 554).

```
virtual os::smart_ptr<publicKey> crypto::publicKeyPackageFrame::generate ( ) const  
[inline], [virtual]
```

Reimplemented in **crypto::publicKeyPackage< pkType >** (p. 554).

```
virtual os::smart_ptr<publicKeyPackageFrame> crypto::publicKeyPackageFrame::getCopy ( )  
const [inline], [virtual]
```

Reimplemented in **crypto::publicKeyPackage< pkType >** (p. 554).

```
uint16_t crypto::publicKeyPackageFrame::keySize ( ) const [inline]
```

```
virtual os::smart_ptr<publicKey> crypto::publicKeyPackageFrame::openFile ( std::string fileName,
std::string password ) const [inline], [virtual]
```

Reimplemented in **crypto::publicKeyPackage< pkType >** (p. 554).

```
virtual os::smart_ptr<publicKey> crypto::publicKeyPackageFrame::openFile ( std::string fileName,
unsigned char * key, unsigned int keyLen ) const [inline], [virtual]
```

Reimplemented in **crypto::publicKeyPackage< pkType >** (p. 554).

```
void crypto::publicKeyPackageFrame::setKeySize ( uint16_t publicSize ) [inline]
```


30.40.3 Member Data Documentation

```
uint16_t crypto::publicKeyPackageFrame::_publicSize [protected]
```

30.41 crypto::publicKeySizeWrong Class Reference

Public-key size error.

Inheritance diagram for crypto::publicKeySizeWrong:

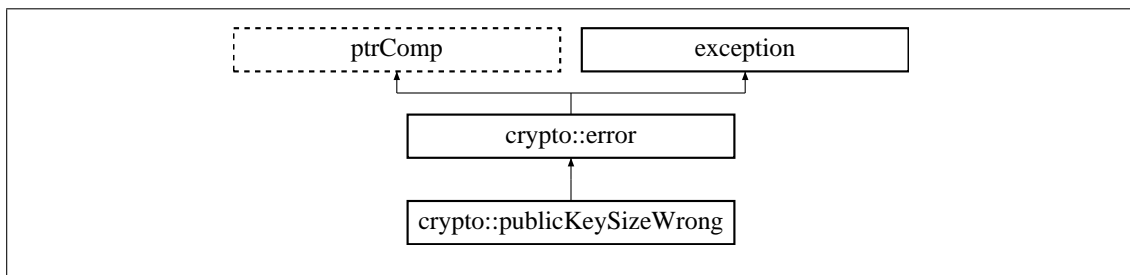

Public Member Functions

- virtual **~publicKeySizeWrong** () throw ()
Virtual destructor.
- std::string **errorTitle** () const
Short error descriptor Returns "Public Key Size Wrong".
- std::string **errorDescription** () const
Long error descriptor Returns "Attempted to use a code or n of improper size".

30.41.1 Detailed Description

Public-key size error.

Thrown when a public key or public key interaction detects a size mis-match or illegal size.

30.41.2 Constructor & Destructor Documentation

`virtual crypto::publicKeySizeWrong::~~publicKeySizeWrong () throw () [inline], [virtual]`

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.41.3 Member Function Documentation

`std::string crypto::publicKeySizeWrong::errorDescription () const [inline], [virtual]`

Long error descriptor Returns "Attempted to use a code or n of improper size".

Returns

Error description `std::string`

Reimplemented from **crypto::error** (p. 416).

`std::string crypto::publicKeySizeWrong::errorTitle () const [inline], [virtual]`

Short error descriptor Returns "Public Key Size Wrong".

Returns

Error title `std::string`

Reimplemented from **crypto::error** (p. 417).

30.42 crypto::publicKeyTypeBank Class Reference

Public Member Functions

- virtual **~publicKeyTypeBank** ()
- void **setDefaultPackage** (os::smart_ptr< **publicKeyPackageFrame** > package)
- const os::smart_ptr< **publicKeyPackageFrame** > **defaultPackage** () const
- void **pushPackage** (os::smart_ptr< **publicKeyPackageFrame** > package)
- const os::smart_ptr< **publicKeyPackageFrame** > **findPublicKey** (uint16_t pkID) const
- const os::smart_ptr< **publicKeyPackageFrame** > **findPublicKey** (const std::string &pkName) const

Static Public Member Functions

- static os::smart_ptr< **publicKeyTypeBank** > **singleton** ()

Private Member Functions

- **publicKeyTypeBank** ()

Private Attributes

- `os::smart_ptr< publicKeyPackageFrame > _defaultPackage`
- `std::vector< os::smart_ptr< publicKeyPackageFrame > > packageVector`

30.42.1 Constructor & Destructor Documentation

```
crypto::publicKeyTypeBank::publicKeyTypeBank ( ) [private]
```

```
virtual crypto::publicKeyTypeBank::~~publicKeyTypeBank ( ) [inline], [virtual]
```

30.42.2 Member Function Documentation

```
const os::smart_ptr<publicKeyPackageFrame> crypto::publicKeyTypeBank::defaultPackage ( )  
const [inline]
```

```
const os::smart_ptr<publicKeyPackageFrame> crypto::publicKeyTypeBank::findPublicKey (   
uint16_t pkID ) const
```

```
const os::smart_ptr<publicKeyPackageFrame> crypto::publicKeyTypeBank::findPublicKey ( const  
std::string & pkName ) const
```

```
void crypto::publicKeyTypeBank::pushPackage ( os::smart_ptr< publicKeyPackageFrame >  
package )
```

```
void crypto::publicKeyTypeBank::setDefaultPackage ( os::smart_ptr< publicKeyPackageFrame >  
package )
```

```
static os::smart_ptr<publicKeyTypeBank> crypto::publicKeyTypeBank::singleton ( ) [static]
```

30.42.3 Member Data Documentation


```
os::smart_ptr<publicKeyPackageFrame> crypto::publicKeyTypeBank::_defaultPackage  
[private]
```

```
std::vector<os::smart_ptr<publicKeyPackageFrame> > crypto::publicKeyTypeBank::package↔  
Vector [private]
```

30.43 crypto::publicRSA Class Reference

RSA public-key encryption.

Inheritance diagram for `crypto::publicRSA`:

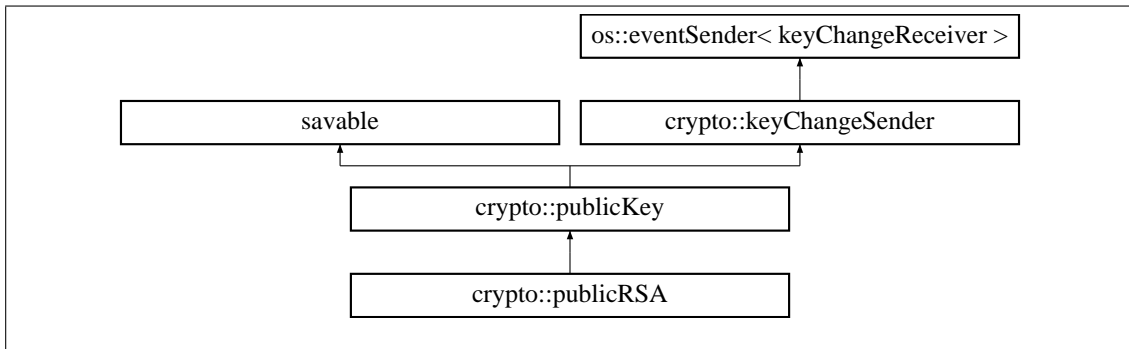

Public Member Functions

- **publicRSA** (uint16_t sz=size::public256)
Default RSA constructor.
- **publicRSA** (**publicRSA** &ky)
Copy Constructor.
- **publicRSA** (os::smart_ptr< **integer** > _n, os::smart_ptr< **integer** > _d, uint16_t sz=size::public512, uint64_t tms=os::getTimestamp())
Construct with keys.
- **publicRSA** (uint32_t *_n, uint32_t *_d, uint16_t sz=size::public512, uint64_t tms=os::getTimestamp())
Construct with key arrays.
- **publicRSA** (std::string **fileName**, std::string password="", os::smart_ptr< **streamPackageFrame** > stream_algo=NULL)
Construct with path to file and password.
- **publicRSA** (std::string **fileName**, unsigned char *key, unsigned int keyLen, os::smart_ptr< **streamPackageFrame** > stream_algo=NULL)
Construct with path to file and password.
- virtual ~**publicRSA** ()
Virtual destructor.
- os::smart_ptr< **number** > **copyConvert** (const os::smart_ptr< **number** > num) const
Converts number to integer.
- os::smart_ptr< **number** > **copyConvert** (const uint32_t *arr, uint16_t len) const
Converts array to integer.
- os::smart_ptr< **number** > **copyConvert** (const unsigned char *arr, unsigned int len) const
Converts byte array to integer.
- std::string **algorithmName** () const
Access algorithm name.
- bool **generating** ()
Tests if the keys are in the process of generating.
- void **generateNewKeys** ()
Key generation function.

- `os::smart_ptr< number > encode (os::smart_ptr< number > code, os::smart_ptr< number > publicN=NULL) const`
Number encode.
- `void encode (unsigned char *code, unsigned int codeLength, os::smart_ptr< number > publicN=NULL) const`
Hybrid data encode against number.
- `void encode (unsigned char *code, unsigned int codeLength, unsigned const char *publicN, unsigned int nLength) const`
Data encode against number.
- `os::smart_ptr< number > decode (os::smart_ptr< number > code) const`
Number decode.
- `os::smart_ptr< number > decode (os::smart_ptr< number > code, unsigned int hist)`
Old number decode.

Static Public Member Functions

- `static os::smart_ptr< number > copyConvert (const os::smart_ptr< number > num, uint16_t size)`
Converts number to integer, statically.
- `static os::smart_ptr< number > copyConvert (const uint32_t *arr, uint16_t len, uint16_t size)`
Converts array to integer, statically.
- `static os::smart_ptr< number > copyConvert (const unsigned char *arr, unsigned int len, uint16_t size)`
Converts byte array to integer, statically.
- `static uint16_t staticAlgorithm ()`
Access algorithm ID.
- `static std::string staticAlgorithmName ()`
Access algorithm name.
- `static os::smart_ptr< number > encode (os::smart_ptr< number > code, os::smart_ptr< number > publicN, uint16_t size)`
Static number encode.
- `static void encode (unsigned char *code, unsigned int codeLength, os::smart_ptr< number > publicN, uint16_t size)`
Static data encode.
- `static void encode (unsigned char *code, unsigned int codeLength, unsigned const char *publicN, unsigned int nLength, uint16_t size)`
Static data encode.

Private Member Functions

- `void initE ()`
Subroutine initializing `crypto::publicRSA::e` (p. 570).

Private Attributes

- **integer e**
Used in intermediate calculation.
- `os::smart_ptr< RSAKeyGenerator > keyGen`
Key generation class.

Friends

- **class RSAKeyGenerator**
Friendship with key generation.

Additional Inherited Members

30.43.1 Detailed Description

RSA public-key encryption.

This class defines an RSA algorithm for public-key cryptography.

30.43.2 Constructor & Destructor Documentation

`crypto::publicRSA::publicRSA (uint16_t sz = size::public256)`

Default RSA constructor.

Initializes and generates keys for a new pair of RSA keys. This serves as the default constructor for RSA keys.

Parameters

in	sz	Size of keys, <code>crypto::size::public256</code> by default
-----------	-----------	---

`crypto::publicRSA::publicRSA (publicRSA & ky)`

Copy Constructor.

Copies the keys in one RSA pair into another. This copying includes all historical records as well.

Parameters

in	ky	Key pair to be copied
-----------	-----------	-----------------------

`crypto::publicRSA::publicRSA (os::smart_ptr< integer > _n, os::smart_ptr< integer > _d, uint16_t sz = size::public512, uint64_t tms = os::getTimestamp())`

Construct with keys.

Parameters

<i>_n</i>	Smart pointer to public key
<i>_d</i>	Smart pointer to private key
<i>sz</i>	Size of key, size::public512 by default
<i>tms</i>	Time-stamp of the current keys, now by default

```
crypto::publicRSA::publicRSA ( uint32_t * _n, uint32_t * _d, uint16_t sz = size::public512,
uint64_t tms = os::getTimestamp() )
```

Construct with key arrays.

Parameters

<i>_n</i>	Array of public key
<i>_d</i>	Array of private key
<i>sz</i>	Size of key, size::public512 by default
<i>tms</i>	Time-stamp of the current keys, now by default

```
crypto::publicRSA::publicRSA ( std::string fileName, std::string password = "", os::smart_ptr<
streamPackageFrame > stream_algo = NULL )
```

Construct with path to file and password.

Parameters

<i>fileName</i>	Name of file to find keys
<i>password</i>	String representing symmetric key, "" by default
<i>stream_algo</i>	Symmetric key encryption algorithm, NULL by default

```
crypto::publicRSA::publicRSA ( std::string fileName, unsigned char * key, unsigned int keyLen,
os::smart_ptr< streamPackageFrame > stream_algo = NULL )
```

Construct with path to file and password.

Parameters

<i>fileName</i>	Name of file to find keys
<i>key</i>	Symmetric key
<i>keyLen</i>	Length of symmetric key
<i>stream_algo</i>	Symmetric key encryption algorithm, NULL by default

virtual crypto::publicRSA::~~publicRSA () [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.43.3 Member Function Documentation

std::string crypto::publicRSA::algorithmName () const [inline], [virtual]

Access algorithm name.

Returns

crypto::publicRSA::staticAlgorithmName() (p. 569)

Reimplemented from **crypto::publicKey** (p. 538).

os::smart_ptr<**number**> crypto::publicRSA::copyConvert (const os::smart_ptr< **number** > num)
const [virtual]

Converts number to integer.

Parameters

in	<i>num</i>	Number to be converted
----	------------	------------------------

Returns

Converted number

Reimplemented from **crypto::publicKey** (p. 539).

os::smart_ptr<**number**> crypto::publicRSA::copyConvert (const uint32_t * arr, uint16_t len)
const [virtual]

Converts array to integer.

Parameters

in	<i>arr</i>	Array to be converted
in	<i>len</i>	Length of array to be converted

Returns

Converted number

Reimplemented from **crypto::publicKey** (p. 539).

os::smart_ptr<**number**> crypto::publicRSA::copyConvert (const unsigned char * arr, unsigned int len) const [virtual]

Converts byte array to integer.

Parameters

in	<i>arr</i>	Byte array to be converted
in	<i>len</i>	Length of array to be converted

Returns

Converted number

Reimplemented from **crypto::publicKey** (p. 539).

static os::smart_ptr<**number**> crypto::publicRSA::copyConvert (const os::smart_ptr< **number** > num, uint16_t size) [static]

Converts number to integer, statically.

Parameters

in	<i>num</i>	Number to be converted
----	------------	------------------------

Returns

Converted number

static os::smart_ptr<**number**> crypto::publicRSA::copyConvert (const uint32_t * arr, uint16_t len, uint16_t size) [static]

Converts array to integer, statically.

Parameters

in	<i>arr</i>	Array to be converted
in	<i>len</i>	Length of array to be converted

Returns

Converted number

static os::smart_ptr<**number**> crypto::publicRSA::copyConvert (const unsigned char * arr, unsigned int len, uint16_t size) [static]

Converts byte array to integer, statically.

Parameters

in	<i>arr</i>	Byte array to be converted
in	<i>len</i>	Length of array to be converted

Returns

Converted number

```
os::smart_ptr<number> crypto::publicRSA::decode ( os::smart_ptr< number > code ) const  
[virtual]
```

Number decode.

Uses the private key to decode a set of data based on the RSA algorithm.

Parameters

in	<i>code</i>	Data to be decoded
----	-------------	--------------------

Returns

Decoded number

Reimplemented from **crypto::publicKey** (p. 540).

```
os::smart_ptr<number> crypto::publicRSA::decode ( os::smart_ptr< number > code, unsigned  
int hist ) [virtual]
```

Old number decode.

Uses old private keys to decode a set of data based on the RSA algorithm.

Parameters

in	<i>code</i>	Data to be decoded
in	<i>hist</i>	Index of historical key

Returns

Decoded number

Reimplemented from **crypto::publicKey** (p. 541).

```
static os::smart_ptr<number> crypto::publicRSA::encode ( os::smart_ptr< number > code,  
os::smart_ptr< number > publicN, uint16_t size ) [static]
```

Static number encode.

Encodes based on the RSA algorithm. This function must be static because data can be encoded with a public key even though a node does not have its own keys defined.

Parameters

in	<i>code</i>	Data to be encoded
in	<i>publicN</i>	Public key to be encoded against
in	<i>size</i>	Size of key used

Returns

Encoded number

```
static void crypto::publicRSA::encode ( unsigned char * code, unsigned int codeLength,  
os::smart_ptr< number > publicN, uint16_t size ) [static]
```

Static data encode.

Encodes based on the RSA algorithm. This function must be static because data can be encoded with a public key even though a node does not have its own keys defined.

Parameters

	<i>[in/out]</i>	code Data to be encoded
in	<i>codeLength</i>	Length of code array
in	<i>publicN</i>	Public key to be encoded against
in	<i>size</i>	Size of key used

Returns

void

```
static void crypto::publicRSA::encode ( unsigned char * code, unsigned int codeLength, unsigned  
const char * publicN, unsigned int nLength, uint16_t size ) [static]
```

Static data encode.

Encodes based on the RSA algorithm. This function must be static because data can be encoded with a public key even though a node does not have its own keys defined.

Parameters

	<i>[in/out]</i>	code Data to be encoded
in	<i>codeLength</i>	Length of code array
in	<i>publicN</i>	Public key to be encoded against
in	<i>nLength</i>	Length of key array
in	<i>size</i>	Size of key used

Returns

void

```
os::smart_ptr<number> crypto::publicRSA::encode ( os::smart_ptr< number > code,  
os::smart_ptr< number > publicN = NULL ) const [virtual]
```

Number encode.

Parameters

in	<i>code</i>	Data to be encoded
in	<i>publicN</i>	Public key to be encoded against, NULL by default

Returns

Encoded number

Reimplemented from **crypto::publicKey** (p. 543).

```
void crypto::publicRSA::encode ( unsigned char * code, unsigned int codeLength, os::smart_ptr<  
number > publicN = NULL ) const [virtual]
```

Hybrid data encode against number.

Parameters

	<i>[in/out]</i>	code Data to be encoded
in	<i>codeLength</i>	Length of code array
in	<i>publicN</i>	Public key to be encoded against, NULL by default

Returns

void

Reimplemented from **crypto::publicKey** (p. 543).

```
void crypto::publicRSA::encode ( unsigned char * code, unsigned int codeLength, unsigned const  
char * publicN, unsigned int nLength ) const [virtual]
```

Data encode against number.

Parameters

	<i>[in/out]</i>	code Data to be encoded
in	<i>codeLength</i>	Length of code array
in	<i>publicN</i>	Public key to be encoded against, NULL by default

Returns

void

Reimplemented from **crypto::publicKey** (p. 544).

void crypto::publicRSA::generateNewKeys () [virtual]

Key generation function.

Generates new keys for the specific algorithm. This is re-implemented by every algorithm.

Returns

void

Reimplemented from **crypto::publicKey** (p. 544).

bool crypto::publicRSA::generating () [virtual]

Tests if the keys are in the process of generating.

Returns

True if generating new keys

Reimplemented from **crypto::publicKey** (p. 544).

void crypto::publicRSA::initE () [private]

Subroutine initializing **crypto::publicRSA::e** (p. 570).

static uint16_t crypto::publicRSA::staticAlgorithm () [inline], [static]

Access algorithm ID.

Returns

crypto::algo::publicRSA

static std::string crypto::publicRSA::staticAlgorithmName () [inline], [static]

Access algorithm name.

Returns

"RSA"

30.43.4 Friends And Related Function Documentation

friend class **RSAKeyGenerator** [friend]

Friendship with key generation.

The **crypto::RSAKeyGenerator** (p. 576) must be able to access the private members of the RSA public key class to bind newly generated keys.

30.43.5 Member Data Documentation

integer crypto::publicRSA::e [private]

Used in intermediate calculation.

os::smart_ptr<**RSAKeyGenerator**> crypto::publicRSA::keyGen [private]


Key generation class.

This pointer will be NULL unless a key is currently being generated/

30.44 crypto::rc4Hash Class Reference

RC-4 hash class.

Inheritance diagram for crypto::rc4Hash:

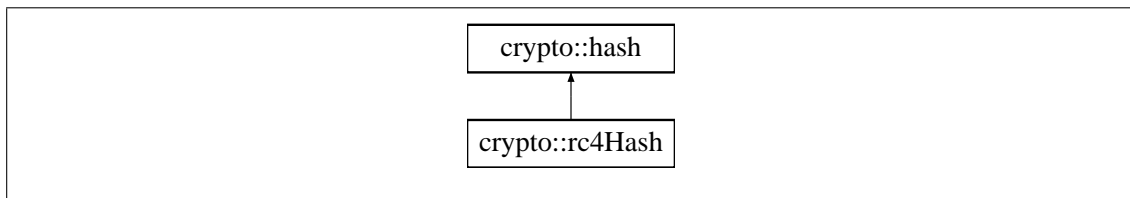

Public Member Functions

- **rc4Hash** ()
Default RC-4 hash constructor.
- **rc4Hash** (const unsigned char ***data**, uint16_t **size**)
Raw data copy.
- **rc4Hash** (const **rc4Hash** &cpy)
RC-4 copy constructor.
- void **performHash** (const unsigned char ***data**, uint32_t dLen)
Binds a data-set.
- std::string **algorithmName** () const
Algorithm name string access.

Static Public Member Functions

- static std::string **staticAlgorithmName** ()
Algorithm name string access.
- static uint16_t **staticAlgorithm** ()
Algorithm ID number access.
- static **rc4Hash** **hash64Bit** (const unsigned char ***data**, uint32_t length)
Static 64 bit hash.
- static **rc4Hash** **hash128Bit** (const unsigned char ***data**, uint32_t length)

Static 128 bit hash.

- static **rc4Hash hash256Bit** (const unsigned char ***data**, uint32_t length)

Static 256 bit hash.

- static **rc4Hash hash512Bit** (const unsigned char ***data**, uint32_t length)

Static 512 bit hash.

Private Member Functions

- **rc4Hash** (const unsigned char ***data**, uint32_t length, uint16_t **size**)

RC-4 hash constructor.

Additional Inherited Members

30.44.1 Detailed Description

RC-4 hash class.

This class defines an RC-4 based hash. Note that this hash is likely cryptographically secure, but not proven cryptographically secure.

30.44.2 Constructor & Destructor Documentation

crypto::rc4Hash::rc4Hash (const unsigned char * data, uint32_t length, uint16_t size)
[private]

RC-4 hash constructor.

Constructs a hash with the data to be hashed, the length of the array and the size of the hash to be constructed.

Parameters

in	<i>data</i>	Data array
in	<i>length</i>	Length of data array
in	<i>size</i>	Size of hash

crypto::rc4Hash::rc4Hash () [inline]

Default RC-4 hash constructor.

Constructs an empty RC-4 hash class.

crypto::rc4Hash::rc4Hash (const unsigned char * data, uint16_t size)

Raw data copy.

Initializes the RC-4 hash with a data array. This data array is not hashed but assumed to represent hashed data.

Parameters

in	<i>data</i>	Hashed data array
in	<i>size</i>	Size of hash array

```
crypto::rc4Hash::rc4Hash ( const rc4Hash & cpy ) [inline]
```

RC-4 copy constructor.

Constructs an RC-4 hash with another RC-4 hash.

Parameters

in	<i>cpy</i>	Hash to be copied
----	------------	-------------------

30.44.3 Member Function Documentation

```
std::string crypto::rc4Hash::algorithmName ( ) const [inline], [virtual]
```

Algorithm name string access.

Returns the name of the current algorithm string. This function requires an instantiated RC-4 hash.

Returns

"RC-4"

Reimplemented from **crypto::hash** (p. 451).

```
static rc4Hash crypto::rc4Hash::hash128Bit ( const unsigned char * data, uint32_t length )  
[inline], [static]
```

Static 128 bit hash.

Hashes the provided data array with the RC-4 algorithm, returning a 128 bit RC-4 hash.

Parameters

<i>data</i>	Data array to be hashed
<i>length</i>	Length of data array to be hashed

Returns

New **xorHash** (p. 601)

```
static rc4Hash crypto::rc4Hash::hash256Bit ( const unsigned char * data, uint32_t length )  
[inline], [static]
```

Static 256 bit hash.

Hashes the provided data array with the RC-4 algorithm, returning a 256 bit RC-4 hash.

Parameters

<i>data</i>	Data array to be hashed
<i>length</i>	Length of data array to be hashed

Returns

New **xorHash** (p. 601)

```
static rc4Hash crypto::rc4Hash::hash512Bit ( const unsigned char * data, uint32_t length )  
[inline], [static]
```

Static 512 bit hash.

Hashes the provided data array with the RC-4 algorithm, returning a 512 bit RC-4 hash.

Parameters

<i>data</i>	Data array to be hashed
<i>length</i>	Length of data array to be hashed

Returns

New **xorHash** (p. 601)

```
static rc4Hash crypto::rc4Hash::hash64Bit ( const unsigned char * data, uint32_t length )  
[inline], [static]
```

Static 64 bit hash.

Hashes the provided data array with the RC-4 algorithm, returning a 64 bit RC-4 hash.

Parameters

<i>data</i>	Data array to be hashed
<i>length</i>	Length of data array to be hashed

Returns

New **xorHash** (p. 601)

```
void crypto::rc4Hash::preformHash ( const unsigned char * data, uint32_t dLen )
```

Binds a data-set.

Preforms the hash algorithm on the set of data provided and binds the result to this hash.

Parameters

in	<i>data</i>	Data array to be hashed
in	<i>dLen</i>	Length of data array

```
static uint16_t crypto::rc4Hash::staticAlgorithm ( ) [inline], [static]
```

Algorithm ID number access.

Returns the ID of the current algorithm. This function is static and can be accessed without instantiating the class.

Returns

`crypto::algo::hashRC4`

```
static std::string crypto::rc4Hash::staticAlgorithmName ( ) [inline], [static]
```

Algorithm name string access.


Returns the name of the current algorithm string. This function is static and can be accessed without instantiating the class.

Returns

`"RC-4"`

30.45 crypto::RCFour Class Reference

Inheritance diagram for crypto::RCFour:

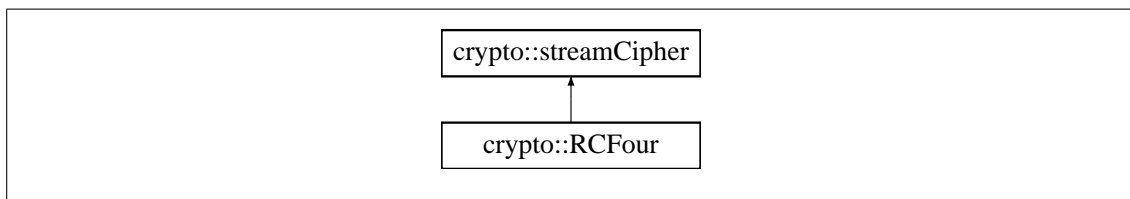

Public Member Functions

- **RCFour** (uint8_t *arr, int len)
- virtual ~**RCFour** ()
- uint8_t **getNext** ()
- uint16_t **algorithm** () const
- const std::string **algorithmName** () const

Static Public Member Functions

- static uint16_t **staticAlgorithm** ()
- static std::string **staticAlgorithmName** ()

Private Attributes

- uint8_t * **SArray**
- int **i**
- int **j**
- int **u**

30.45.1 Constructor & Destructor Documentation

`crypto::RCFour::RCFour (uint8_t * arr, int len)`

`virtual crypto::RCFour::~~RCFour () [virtual]`

30.45.2 Member Function Documentation

`uint16_t crypto::RCFour::algorithm () const [inline], [virtual]`

Reimplemented from **crypto::streamCipher** (p. 578).

`const std::string crypto::RCFour::algorithmName () const [inline], [virtual]`

Reimplemented from **crypto::streamCipher** (p. 579).

`uint8_t crypto::RCFour::getNext () [virtual]`

Reimplemented from **crypto::streamCipher** (p. 579).

`static uint16_t crypto::RCFour::staticAlgorithm () [inline], [static]`

`static std::string crypto::RCFour::staticAlgorithmName () [inline], [static]`

30.45.3 Member Data Documentation

`int crypto::RCFour::i [private]`

`int crypto::RCFour::j [private]`

`uint8_t* crypto::RCFour::SArray [private]`

`int crypto::RCFour::u [private]`

30.46 crypto::RSAKeyGenerator Class Reference

Helper key generation class.

Public Member Functions

- **RSAKeyGenerator (publicRSA &m)**
Constructs a generator with an RSA key.
- **virtual ~RSAKeyGenerator ()**
Virtual destructor.
- **integer generatePrime ()**
Generates a prime number.
- **void pushValues ()**
Bind generated keys to master.

Public Attributes

- **integer p**
Intermediate prime.
- **integer q**
Intermediate prime.

Private Attributes

- **publicRSA * master**
Pointer to keys.

30.46.1 Detailed Description

Helper key generation class.

This class helps to generate RSA keys. Once keys are generated, this class is destroyed.

30.46.2 Constructor & Destructor Documentation

`crypto::RSAKeyGenerator::RSAKeyGenerator (publicRSA & m)`

Constructs a generator with an RSA key.

This class is meaningless without a reference to an RSA key to bind newly created keys to.

`virtual crypto::RSAKeyGenerator::~RSAKeyGenerator () [inline], [virtual]`

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.46.3 Member Function Documentation

integer `crypto::RSAKeyGenerator::generatePrime ()`

Generates a prime number.

Returns

Prime integer

`void crypto::RSAKeyGenerator::pushValues ()`

Bind generated keys to master.

Returns

void

30.46.4 Member Data Documentation

publicRSA* crypto::RSAKeyGenerator::master [private]

Pointer to keys.

Points to the RSA keys this generator will be placing its generated keys into.

integer crypto::RSAKeyGenerator::p


Intermediate prime.

integer crypto::RSAKeyGenerator::q

Intermediate prime.

30.47 crypto::streamCipher Class Reference

Inheritance diagram for crypto::streamCipher:

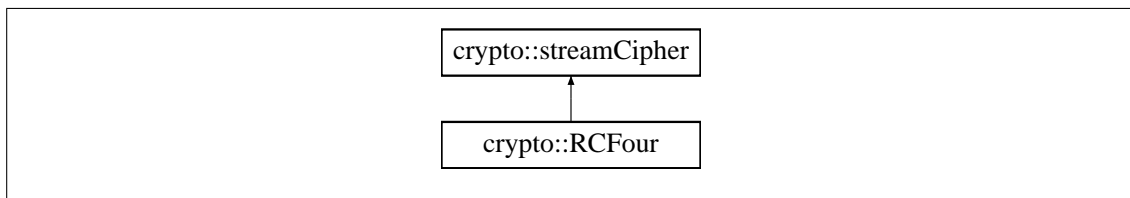

Public Member Functions

- virtual **~streamCipher** ()
- virtual uint8_t **getNext** ()
- virtual uint16_t **algorithm** () const
- virtual const std::string **algorithmName** () const

Static Public Member Functions

- static uint16_t **staticAlgorithm** ()
- static std::string **staticAlgorithmName** ()

30.47.1 Constructor & Destructor Documentation

virtual crypto::streamCipher::~streamCipher () [inline], [virtual]

30.47.2 Member Function Documentation

virtual uint16_t crypto::streamCipher::algorithm () const [inline], [virtual]

Reimplemented in **crypto::RCFour** (p. 576).

virtual const std::string crypto::streamCipher::algorithmName () const [inline], [virtual]

Reimplemented in **crypto::RCFour** (p. 576).

virtual uint8_t crypto::streamCipher::getNext () [inline], [virtual]

Reimplemented in **crypto::RCFour** (p. 576).

static uint16_t crypto::streamCipher::staticAlgorithm () [inline], [static]

static std::string crypto::streamCipher::staticAlgorithmName () [inline], [static]

30.48 crypto::streamDecrypter Class Reference

Public Member Functions

- **streamDecrypter** (os::smart_ptr< **streamCipher** > c)
- virtual **~streamDecrypter** ()
- uint8_t * **recieveData** (uint8_t *array, unsigned int len, uint16_t flag)

Private Attributes

- os::smart_ptr< **streamCipher** > **cipher**
- **streamPacket** ** **packetArray**
- unsigned int **last_value**
- unsigned int **mid_value**

30.48.1 Constructor & Destructor Documentation

crypto::streamDecrypter::streamDecrypter (os::smart_ptr< **streamCipher** > c)

virtual crypto::streamDecrypter::~~streamDecrypter () [virtual]

30.48.2 Member Function Documentation

uint8_t* crypto::streamDecrypter::recieveData (uint8_t * array, unsigned int len, uint16_t flag)

30.48.3 Member Data Documentation

os::smart_ptr<**streamCipher**> crypto::streamDecrypter::cipher [private]

unsigned int crypto::streamDecrypter::last_value [private]

unsigned int crypto::streamDecrypter::mid_value [private]

streamPacket** crypto::streamDecrypter::packetArray [private]

30.49 crypto::streamEncrypter Class Reference

Public Member Functions

- **streamEncrypter** (os::smart_ptr< **streamCipher** > c)

- virtual **~streamEncrypter** ()
- uint8_t * **sendData** (uint8_t *array, unsigned int len, uint16_t &flag)

Private Attributes

- os::smart_ptr< **streamCipher** > **cipher**
- unsigned int **last_loc**
- uint16_t * **ID_check**

30.49.1 Constructor & Destructor Documentation

crypto::streamEncrypter::streamEncrypter (os::smart_ptr< **streamCipher** > c)

virtual crypto::streamEncrypter::~~streamEncrypter () [virtual]

30.49.2 Member Function Documentation

uint8_t* crypto::streamEncrypter::sendData (uint8_t * array, unsigned int len, uint16_t & flag)

30.49.3 Member Data Documentation


os::smart_ptr<**streamCipher**> crypto::streamEncrypter::cipher [private]

uint16_t* crypto::streamEncrypter::ID_check [private]

unsigned int crypto::streamEncrypter::last_loc [private]

30.50 crypto::streamPackage< streamType, hashType > Class Template Reference

Inheritance diagram for crypto::streamPackage< streamType, hashType >:

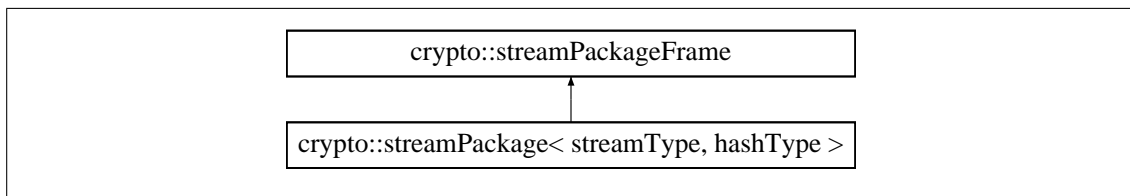

Public Member Functions

- **streamPackage** (uint16_t **hashSize**=size::hash256)
- virtual **~streamPackage** ()
- os::smart_ptr< **streamPackageFrame** > **getCopy** () const
- **hash hashEmpty** () const
- **hash hashData** (unsigned char *data, uint32_t len) const
- **hash hashCopy** (unsigned char *data) const
- os::smart_ptr< **streamCipher** > **buildStream** (unsigned char *data, uint32_t len) const
- std::string **streamAlgorithmName** () const

- `uint16_t streamAlgorithm () const`
- `std::string hashAlgorithmName () const`
- `uint16_t hashAlgorithm () const`

Additional Inherited Members

30.50.1 Constructor & Destructor Documentation

```
template<class streamType , class hashType > crypto::streamPackage< streamType, hashType
>::streamPackage ( uint16_t hashSize = size::hash256 ) [inline]
```

```
template<class streamType , class hashType > virtual crypto::streamPackage< streamType,
hashType >::~streamPackage ( ) [inline], [virtual]
```

30.50.2 Member Function Documentation

```
template<class streamType , class hashType > os::smart_ptr<streamCipher>
crypto::streamPackage< streamType, hashType >::buildStream ( unsigned char * data, uint32_t
len ) const [inline], [virtual]
```

Reimplemented from **crypto::streamPackageFrame** (p. 583).

```
template<class streamType , class hashType > os::smart_ptr<streamPackageFrame>
crypto::streamPackage< streamType, hashType >::getCopy ( ) const [inline], [virtual]
```

Reimplemented from **crypto::streamPackageFrame** (p. 583).

```
template<class streamType , class hashType > uint16_t crypto::streamPackage< streamType,
hashType >::hashAlgorithm ( ) const [inline], [virtual]
```

Reimplemented from **crypto::streamPackageFrame** (p. 583).

```
template<class streamType , class hashType > std::string crypto::streamPackage< streamType,
hashType >::hashAlgorithmName ( ) const [inline], [virtual]
```

Reimplemented from **crypto::streamPackageFrame** (p. 583).

```
template<class streamType , class hashType > hash crypto::streamPackage< streamType,
hashType >::hashCopy ( unsigned char * data ) const [inline], [virtual]
```

Reimplemented from **crypto::streamPackageFrame** (p. 583).

```
template<class streamType , class hashType > hash crypto::streamPackage< streamType,
hashType >::hashData ( unsigned char * data, uint32_t len ) const [inline], [virtual]
```

Reimplemented from **crypto::streamPackageFrame** (p. 583).

```
template<class streamType , class hashType > hash crypto::streamPackage< streamType,
hashType >::hashEmpty ( ) const [inline], [virtual]
```

Reimplemented from **crypto::streamPackageFrame** (p. 583).

```
template<class streamType , class hashType > uint16_t crypto::streamPackage< streamType,
hashType >::streamAlgorithm ( ) const [inline], [virtual]
```


Reimplemented from **crypto::streamPackageFrame** (p. 583).

```
template<class streamType , class hashType > std::string crypto::streamPackage< streamType,
hashType >::streamAlgorithmName ( ) const [inline], [virtual]
```

Reimplemented from **crypto::streamPackageFrame** (p. 584).

30.51 crypto::streamPackageFrame Class Reference

Inheritance diagram for crypto::streamPackageFrame:

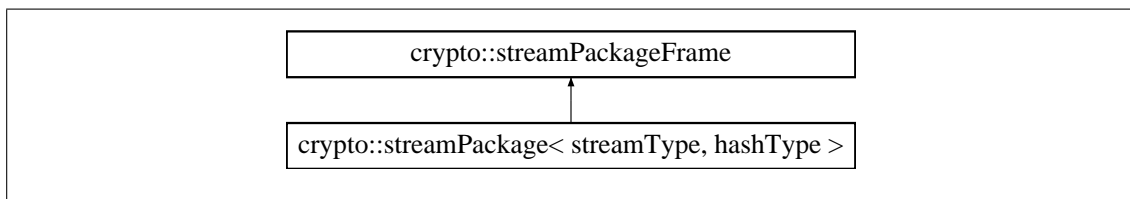

Public Member Functions

- **streamPackageFrame** (uint16_t **hashSize**=size::hash256)
- virtual ~**streamPackageFrame** ()
- virtual os::smart_ptr< **streamPackageFrame** > **getCopy** () const
- virtual **hash** **hashEmpty** () const
- virtual **hash** **hashData** (unsigned char *data, uint32_t len) const
- virtual **hash** **hashCopy** (unsigned char *data) const
- virtual os::smart_ptr< **streamCipher** > **buildStream** (unsigned char *data, uint32_t len) const
- virtual std::string **streamAlgorithmName** () const
- virtual uint16_t **streamAlgorithm** () const
- virtual std::string **hashAlgorithmName** () const
- virtual uint16_t **hashAlgorithm** () const
- void **setHashSize** (uint16_t **hashSize**)
- uint16_t **hashSize** () const

Protected Attributes

- uint16_t **_hashSize**

30.51.1 Constructor & Destructor Documentation

`crypto::streamPackageFrame::streamPackageFrame (uint16_t hashSize = size::hash256)`
[inline]

`virtual crypto::streamPackageFrame::~~streamPackageFrame ()` [inline], [virtual]

30.51.2 Member Function Documentation

`virtual os::smart_ptr<streamCipher> crypto::streamPackageFrame::buildStream (unsigned char * data, uint32_t len) const` [inline], [virtual]

Reimplemented in **crypto::streamPackage< streamType, hashType >** (p. 581).

`virtual os::smart_ptr<streamPackageFrame> crypto::streamPackageFrame::getCopy () const`
[inline], [virtual]

Reimplemented in **crypto::streamPackage< streamType, hashType >** (p. 581).

`virtual uint16_t crypto::streamPackageFrame::hashAlgorithm () const` [inline], [virtual]

Reimplemented in **crypto::streamPackage< streamType, hashType >** (p. 581).

`virtual std::string crypto::streamPackageFrame::hashAlgorithmName () const` [inline], [virtual]

Reimplemented in **crypto::streamPackage< streamType, hashType >** (p. 581).

`virtual hash crypto::streamPackageFrame::hashCopy (unsigned char * data) const` [inline], [virtual]

Reimplemented in **crypto::streamPackage< streamType, hashType >** (p. 581).

`virtual hash crypto::streamPackageFrame::hashData (unsigned char * data, uint32_t len) const`
[inline], [virtual]

Reimplemented in **crypto::streamPackage< streamType, hashType >** (p. 581).

`virtual hash crypto::streamPackageFrame::hashEmpty () const` [inline], [virtual]

Reimplemented in **crypto::streamPackage< streamType, hashType >** (p. 581).

`uint16_t crypto::streamPackageFrame::hashSize () const` [inline]

`void crypto::streamPackageFrame::setHashSize (uint16_t hashSize)` [inline]

`virtual uint16_t crypto::streamPackageFrame::streamAlgorithm () const` [inline], [virtual]

Reimplemented in **crypto::streamPackage< streamType, hashType >** (p. 582).

virtual std::string crypto::streamPackageFrame::streamAlgorithmName () const [inline],
[virtual]

Reimplemented in **crypto::streamPackage< streamType, hashType >** (p. 582).

30.51.3 Member Data Documentation

uint16_t crypto::streamPackageFrame::_hashSize [protected]

30.52 crypto::streamPackageTypeBank Class Reference

Public Member Functions

- virtual **~streamPackageTypeBank** ()
- void **setDefaultPackage** (os::smart_ptr< **streamPackageFrame** > package)
- const os::smart_ptr< **streamPackageFrame** > **defaultPackage** () const
- void **pushPackage** (os::smart_ptr< **streamPackageFrame** > package)
- const os::smart_ptr< **streamPackageFrame** > **findStream** (uint16_t streamID, uint16_t hashID) const
- const os::smart_ptr< **streamPackageFrame** > **findStream** (const std::string &streamName, const std::string &hashName) const

Static Public Member Functions

- static os::smart_ptr< **streamPackageTypeBank** > **singleton** ()

Private Member Functions

- **streamPackageTypeBank** ()

Private Attributes

- os::smart_ptr< **streamPackageFrame** > **_defaultPackage**
- std::vector< os::smart_ptr< std::vector< os::smart_ptr< **streamPackageFrame** > > > > **packageVector**

30.52.1 Constructor & Destructor Documentation

crypto::streamPackageTypeBank::streamPackageTypeBank () [private]

virtual crypto::streamPackageTypeBank::~~streamPackageTypeBank () [inline], [virtual]

30.52.2 Member Function Documentation

const os::smart_ptr<**streamPackageFrame**> crypto::streamPackageTypeBank::defaultPackage () const [inline]

const os::smart_ptr<**streamPackageFrame**> crypto::streamPackageTypeBank::findStream (uint16_t streamID, uint16_t hashID) const

```
const os::smart_ptr<streamPackageFrame> crypto::streamPackageTypeBank::findStream ( const
std::string & streamName, const std::string & hashName ) const
```

```
void crypto::streamPackageTypeBank::pushPackage ( os::smart_ptr< streamPackageFrame >
package )
```

```
void crypto::streamPackageTypeBank::setDefaultPackage ( os::smart_ptr< streamPackageFrame
> package )
```

```
static os::smart_ptr<streamPackageTypeBank> crypto::streamPackageTypeBank::singleton ( )
[static]
```

30.52.3 Member Data Documentation

```
os::smart_ptr<streamPackageFrame> crypto::streamPackageTypeBank::_defaultPackage
[private]
```

```
std::vector<os::smart_ptr<std::vector<os::smart_ptr<streamPackageFrame> > > >
crypto::streamPackageTypeBank::packageVector [private]
```

30.53 crypto::streamPacket Class Reference

Public Member Functions

- **streamPacket** (os::smart_ptr< **streamCipher** > source, unsigned int s)
- virtual ~**streamPacket** ()
- uint16_t **getIdentifier** () const
- const uint8_t* **getPacket** () const
- uint8_t* **encrypt** (uint8_t* pt, unsigned int len, bool surpress=true) const

Private Attributes

- uint8_t* **packetArray**
- uint16_t **identifier**
- unsigned int **size**

30.53.1 Constructor & Destructor Documentation

```
crypto::streamPacket::streamPacket ( os::smart_ptr< streamCipher > source, unsigned int s )
```

```
virtual crypto::streamPacket::~~streamPacket ( ) [virtual]
```

30.53.2 Member Function Documentation

```
uint8_t* crypto::streamPacket::encrypt ( uint8_t* pt, unsigned int len, bool surpress = true )
const
```

```
uint16_t crypto::streamPacket::getIdentifier ( ) const
```

```
const uint8_t* crypto::streamPacket::getPacket ( ) const
```


30.53.3 Member Data Documentation

```
uint16_t crypto::streamPacket::identifier [private]
uint8_t* crypto::streamPacket::packetArray [private]
unsigned int crypto::streamPacket::size [private]
```

30.54 crypto::stringTooLarge Class Reference

String size error.

Inheritance diagram for crypto::stringTooLarge:

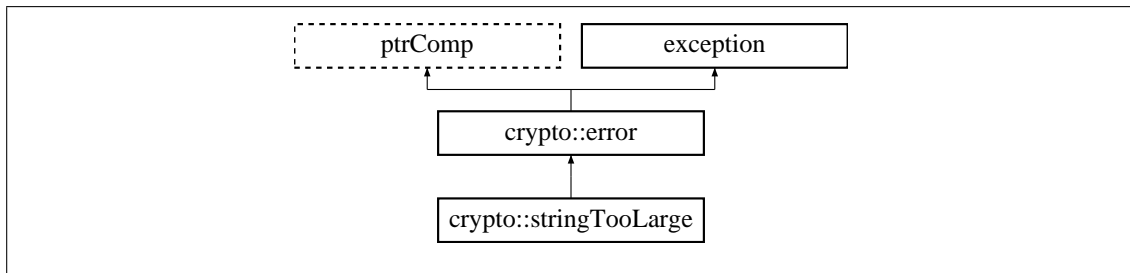

Public Member Functions

- virtual **~stringTooLarge** () throw ()
Virtual destructor.
- std::string **errorTitle** () const
Short error descriptor Returns "Group ID/Name Size Error".
- std::string **errorDescription** () const
Long error descriptor Returns "Group ID or Name was larger than the maximum size. Please user a smaller string".

30.54.1 Detailed Description

String size error.

Thrown when either the username or group ID are too large.

30.54.2 Constructor & Destructor Documentation

```
virtual crypto::stringTooLarge::~~stringTooLarge ( ) throw ( ) [inline], [virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.54.3 Member Function Documentation

```
std::string crypto::stringTooLarge::errorDescription ( ) const [inline], [virtual]
```

Long error descriptor Returns "Group ID or Name was larger than the maximum size. Please user a smaller string".

Returns

Error description `std::string`

Reimplemented from **crypto::error** (p. 416).

```
std::string crypto::stringTooLarge::errorTitle ( ) const [inline], [virtual]
```

Short error descriptor Returns "Group ID/Name Size Error".

Returns


Error title `std::string`

Reimplemented from **crypto::error** (p. 417).

30.55 crypto::unknownErrorType Class Reference

Unknown error.

Inheritance diagram for `crypto::unknownErrorType`:

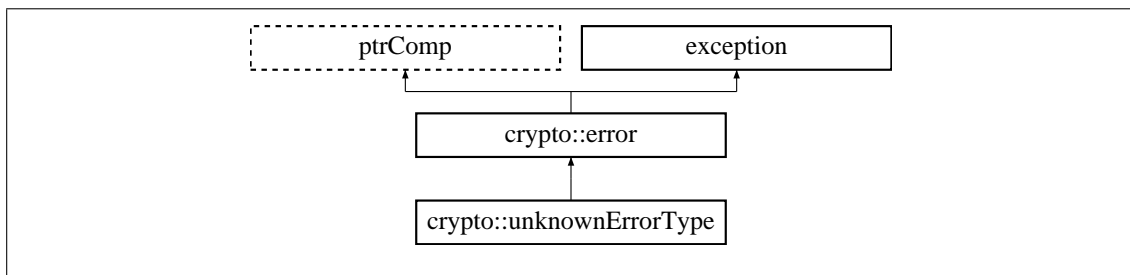

Public Member Functions

- virtual **~unknownErrorType** () throw ()
Virtual destructor.
- `std::string errorTitle` () const
Short error descriptor Returns "Unknown Error Type".
- `std::string errorDescription` () const
Long error descriptor Returns "Caught some exception, but the type is unknown".

30.55.1 Detailed Description

Unknown error.

Thrown when an error of undefined type occurs. Used as a catch-all exception.

30.55.2 Constructor & Destructor Documentation

virtual crypto::unknownErrorType::~~unknownErrorType () throw) [inline], [virtual]

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called. Must explicitly declare that this function does not throw exceptions.

30.55.3 Member Function Documentation

std::string crypto::unknownErrorType::errorDescription () const [inline], [virtual]

Long error descriptor Returns "Caught some exception, but the type is unknown".

Returns

Error description std::string

Reimplemented from **crypto::error** (p. 416).

std::string crypto::unknownErrorType::errorTitle () const [inline], [virtual]

Short error descriptor Returns "Unknown Error Type".

Returns


Error title std::string

Reimplemented from **crypto::error** (p. 417).

30.56 crypto::user Class Reference

Primary user class.

Inheritance diagram for crypto::user:

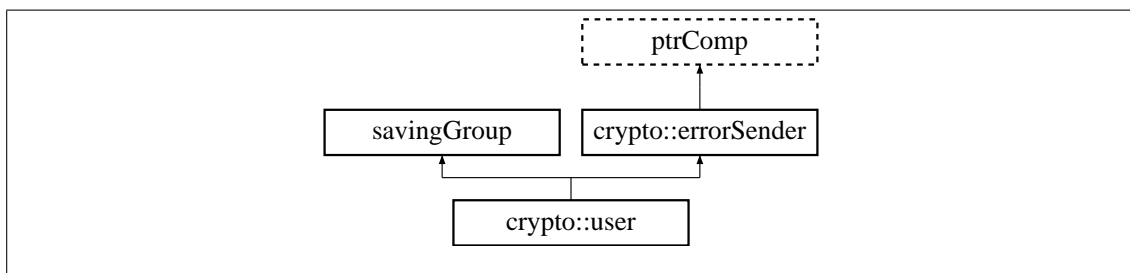

Public Member Functions

- bool **wasConstructed** () const
Returns the construction state of the user.
- **user** (std::string **username**, std::string saveDir="", const unsigned char *key=NULL, unsigned int keyLen=0)

- Constructs the user from scratch or directory.*

 - virtual **~user** ()
Virtual destructor.
- void **save** ()
Saves all dependencies.
- void **setPassword** (const unsigned char *key=NULL, unsigned int keyLen=0)
Set password.
- void **setStreamPackage** (os::smart_ptr< **streamPackageFrame** > strmPack)
Set stream package.
- bool **setDefaultPublicKey** (os::smart_ptr< **publicKey** > key)
Sets the default public key.
- bool **addPublicKey** (os::smart_ptr< **publicKey** > key)
Attempt to add new public key.
- os::smart_ptr< **publicKey** > **findPublicKey** (os::smart_ptr< **publicKeyPackageFrame** > pkfrm)
Find public key by information.
- unsigned char * **unsignedIDMessage** (unsigned int &len, std::string groupID="default", std::string nodeName="")
Produces an unsigned ID message.
- bool **processIDMessage** (unsigned char *mess, unsigned int len)
Process ID message.
- unsigned char * **encryptMessage** (unsigned int &finishedLen, const unsigned char *mess, unsigned int len, std::string groupID, std::string nodeName)
Encrypt an out-going message.
- unsigned char * **decryptMessage** (unsigned int &finishedLen, const unsigned char *mess, unsigned int len, std::string groupID, std::string nodeName)
Decrypt a message.
- const std::string & **username** () const
Access name of user.
- const unsigned char * **password** () const
Access raw password.
- unsigned int **passwordLength** () const
Access password length.
- std::string **directory** () const
Access save directory.
- os::smart_ptr< **streamPackageFrame** > **streamPackage** () const
Access streaming package.
- os::smart_ptr< **keyBank** > **getKeyBank** ()
Access key bank.
- os::smart_ptr< **publicKey** > **getDefaultPublicKey** ()
Returns the default public key.
- os::smart_ptr< os::adnode< **publicKey** > > **getFirstPublicKey** ()
Returns the first public key group.

- `os::smart_ptr< os::adnode< publicKey > > getLastPublicKey ()`
Returns the last public key group.
- `os::smart_ptr< gatewaySettings > findSettings (std::string group="default")`
Find gateway settings.
- `os::smart_ptr< gatewaySettings > insertSettings (std::string group)`
Insert gateway settings.
- `os::smart_ptr< os::adnode< gatewaySettings > > getFirstSettings ()`
Returns the first gateway settings group.
- `os::smart_ptr< os::adnode< gatewaySettings > > getLastSettings ()`
Returns the last gateway settings group.
- `os::smart_ptr< publicKey > searchKey (hash hsh, unsigned int &hist, bool &type)`
Searches for key by hash.
- `os::smart_ptr< publicKey > searchKey (os::smart_ptr< number > key, unsigned int &hist, bool &type)`
Searches for key.
- `os::smart_ptr< publicKey > searchKey (hash hsh)`
Searches for key.
- `os::smart_ptr< publicKey > searchKey (os::smart_ptr< number > key)`
Searches for key.

Static Public Member Functions

- static bool **isIDMessage** (unsigned char m)
Check if a message is an ID message.
- static bool **isDataMessage** (unsigned char m)
Check if a message is a data message.
- static bool **isEncrypted** (unsigned char m)
Check if a message is encrypted.

Protected Member Functions

- `os::smartXMLNode generateSaveTree ()`
Creates meta-data XML file.

Protected Attributes

- bool **_wasConstructed**
- std::string **_username**
Name of user.
- unsigned char * **_password**
Primary symmetric key.
- unsigned int **_passwordLength**
Length of symmetric key.
- std::string **_saveDir**

Save directory for user.

- `os::smart_ptr< streamPackageFrame > _streamPackage`

Default stream package.

- `os::smart_ptr< keyBank > _keyBank`

Key bank.

- `os::asyncAVLTree< publicKey > _publicKeys`

Public keys.

- `os::smart_ptr< publicKey > _defaultKey`

Default public key.

- `os::asyncAVLTree< gatewaySettings > _settings`

List of gateway settings.

30.56.1 Detailed Description

Primary user class.

The user class defines a set of keys associated with a local user. This class notifies a set of listeners when various passwords and keys are changed, as this class allows for the encryption of a group of files with the provided keys

30.56.2 Constructor & Destructor Documentation

```
crypto::user::user ( std::string username, std::string saveDir = "", const unsigned char * key =  
NULL, unsigned int keyLen = 0 )
```

Constructs the user from scratch or directory.

Constructs a user from a directory or from scratch. If the specified directory does not exists, this class creates the directory and begins to populate it. If no key is specified, all files are un-encrypted. If a key is specified, all files are encrypted with this key.

Parameters

in	<i>username</i>	Name of user to be saved
in	<i>saveDir</i>	Directory to save users in
in	<i>key</i>	Symetric key
in	<i>keyLen</i>	Length of symetric key

```
virtual crypto::user::~~user ( ) [virtual]
```

Virtual destructor.

Destructor must be virtual, if an object of this type is deleted, the destructor of the type which inherits this class should be called.

30.56.3 Member Function Documentation

```
bool crypto::user::addPublicKey ( os::smart_ptr< publicKey > key )
```

Attempt to add new public key.

Attempts to add a public key to the public key bank. If successful, and if the default key is NULL, the added key becomes the default key.

Parameters

in	key	Public key to be added
----	-----	------------------------

Returns

True if successfully added, else, false

```
unsigned char* crypto::user::decryptMessage ( unsigned int & finishedLen, const unsigned char *  
mess, unsigned int len, std::string groupId, std::string nodeName )
```

Decrypt a message.

Takes an array of data representing an encrypted message targeted for this user. The message is decrypted and returned.

Parameters

out	<i>finishedLen</i>	Length of the finished message
in	<i>mess</i>	Message to be decrypted
in	<i>len</i>	Length of the message to be decrypted
in	<i>groupId</i>	Group ID of message source
in	<i>nodeName</i>	Name of message source

Returns

Decrypted message

```
std::string crypto::user::directory ( ) const [inline]
```

Access save directory.

Returns

crypto::user::_saveDir (p. 600) + username

```
unsigned char* crypto::user::encryptMessage ( unsigned int & finishedLen, const unsigned char *  
mess, unsigned int len, std::string groupId, std::string nodeName )
```

Encrypt an out-going message.

Takes an array of data and encrypts it with the default public-key of the target user. Takes a group ID and node name to target the message.

Parameters

out	<i>finishedLen</i>	Length of the finished message
in	<i>mess</i>	Message to be encrypted
in	<i>len</i>	Length of message to be encrypted
in	<i>groupID</i>	String of the target group
in	<i>nodeName</i>	String of the name of the target node

Returns

Encrypted message pointer

```
os::smart_ptr<publicKey> crypto::user::findPublicKey ( os::smart_ptr< publicKeyPackageFrame  
> pkfrm )
```

Find public key by information.

Searches for a public key with the given' characteristics. Keys are searched by algorithm and size.

Parameters

in	<i>pkfrm</i>	Public key information to match
----	--------------	---------------------------------

Returns

Public key matching intrinsics

```
os::smart_ptr<gatewaySettings> crypto::user::findSettings ( std::string group = "default" )
```

Find gateway settings.

Parameters

in	<i>group</i>	Name of group of the settings
----	--------------	-------------------------------

Returns

Pointer to the found gateway settings

```
os::smartXMLNode crypto::user::generateSaveTree ( ) [protected]
```

Creates meta-data XML file.

Constructs and returns the XML tree for this class. The XML tree may or may not be encrypted.

Returns

XML tree for saving

os::smart_ptr<**publicKey**> crypto::user::getDefaultPublicKey () [inline]

Returns the default public key.

Returns

crypto::user::_defaultKey (p. 600)

os::smart_ptr<os::adnode<**publicKey**> > crypto::user::getFirstPublicKey () [inline]

Returns the first public key group.

Allows programs to list off the available key groups bound to this user

Returns

crypto::user::_publicKeys.getFirst()

os::smart_ptr<os::adnode<**gatewaySettings**> > crypto::user::getFirstSettings () [inline]

Returns the first gateway settings group.

Allows programs to list off the available gateway settings bound to this user

Returns

crypto::user::_settings.getFirst()

os::smart_ptr<**keyBank**> crypto::user::getKeyBank () [inline]

Access key bank.

Returns

crypto::user::_keyBank (p. 600)

os::smart_ptr<os::adnode<**publicKey**> > crypto::user::getLastPublicKey () [inline]

Returns the last public key group.

Allows programs to list off the available key groups bound to this user

Returns

crypto::user::_publicKeys.getFirst()

os::smart_ptr<os::adnode<**gatewaySettings**> > crypto::user::getLastSettings () [inline]

Returns the last gateway settings group.

Allows programs to list off the available gateway settings bound to this user

Returns

crypto::user::_settings.getLast()

os::smart_ptr<**gatewaySettings**> crypto::user::insertSettings (std::string group)

Insert gateway settings.

Parameters

in	<i>group</i>	Name of group of the settings
-----------	--------------	-------------------------------

Returns

Point to the inserted gateway settings

```
static bool crypto::user::isDataMessage ( unsigned char m ) [inline], [static]
```

Check if a message is a data message.

Checks the first byte of a message to see if it is a data message.

Returns

True if a data message, else, false

```
static bool crypto::user::isEncrypted ( unsigned char m ) [inline], [static]
```

Check if a message is encrypted.

Checks the first byte of a message to see if it is encrypted

Returns

True if encrypted, else, false

```
static bool crypto::user::isIDMessage ( unsigned char m ) [inline], [static]
```

Check if a message is an ID message.

Checks the first byte of a message to see if it is an ID message.

Returns

True if an ID message, else, false

```
const unsigned char* crypto::user::password ( ) const [inline]
```

Access raw password.

Returns

crypto::user::_password (p. 600)

```
unsigned int crypto::user::passwordLength ( ) const [inline]
```

Access password length.

Returns

crypto::user::_passwordLength (p. 600)


```
bool crypto::user::processIDMessage ( unsigned char * mess, unsigned int len )
```

Process ID message.

Processes any ID message. Note that this function can process both targeted and non-targeted ID messages.

Parameters

in	<i>mess</i>	Incoming message
in	<i>len</i>	Length of incoming message

Returns

True if valid ID message, else, false

void crypto::user::save ()

Saves all dependencies.

This function saves all dependencies based on the save queue.

Returns

void

os::smart_ptr<**publicKey**> crypto::user::searchKey (**hash** hsh, unsigned int & hist, bool & type)

Searches for key by hash.

Binds the location that the keys were found in to the arguments of the function.

Parameters

in	<i>hsh</i>	Hash of the key to be searched for
out	<i>hist</i>	History value the key was found
out	<i>type</i>	Type (public or private)

Returns

Key pair conatining the searched key

os::smart_ptr<**publicKey**> crypto::user::searchKey (os::smart_ptr< **number** > key, unsigned int & hist, bool & type)

Searches for key.

Binds the location that the keys were found in to the arguments of the function.

Parameters

in	<i>num</i>	Key to search for
out	<i>hist</i>	History value the key was found
out	<i>type</i>	Type (public or private)

Returns

Key pair containing the searched key

`os::smart_ptr<PublicKey> crypto::user::searchKey (hash hsh) [inline]`

Searches for key.

Parameters

in	num	Key to search for
----	-----	-------------------

Returns

Key pair containing the searched key

`os::smart_ptr<PublicKey> crypto::user::searchKey (os::smart_ptr< number > key) [inline]`

Searches for key.

Parameters

in	num	Key to search for
----	-----	-------------------

Returns

Key pair containing the searched key

`bool crypto::user::setDefaultPublicKey (os::smart_ptr< PublicKey > key)`

Sets the default public key.

Attempts to bind a public key as the default public key. First checks if the key in question exists and binds the key with the characteristics of the provided key as the default key.

Parameters

in	key	Public key to be bound as the default key
----	-----	---

Returns

True if default key bound, else, false

`void crypto::user::setPassword (const unsigned char * key = NULL, unsigned int keyLen = 0)`

Set password.

Sets symmetric key used to securely save user data.

Parameters

in	<i>key</i>	Symetric key
in	<i>keyLen</i>	Length of symetric key

Returns

void

void crypto::user::setStreamPackage (os::smart_ptr< **streamPackageFrame** > strmPack)

Set stream package.

Binds a new stream package. Calls for saving of this user.

Parameters

in	<i>strmPack</i>	Stream package
----	-----------------	----------------

Returns

void

os::smart_ptr<**streamPackageFrame**> crypto::user::streamPackage () const [inline]

Access streaming package.

Returns

crypto::user::_streamPackage (p. 600)

unsigned char* crypto::user::unsignedIDMessage (unsigned int & len, std::string groupID = "default", std::string nodeName = "")

Produces an unsigned ID message.

Generates an identification message to be sent to a node. If the target node is specified, this function will encrypt the target message for that target node.

Parameters

out	<i>len</i>	Length of returned array
in	<i>groupID</i>	Group this user is part of
in	<i>nodeName</i>	Name of target node

Returns

Unsigned ID message

const std::string& crypto::user::username () const [inline]

Access name of user.

Returns

crypto::user::_username (p. 601)

bool crypto::user::wasConstructed () const [inline]

Returns the construction state of the user.

Returns

crypto::bool::_wasConstructed

30.56.4 Member Data Documentation

os::smart_ptr<**publicKey**> crypto::user::_defaultKey [protected]

Default public key.

Sets the default public key definition. Note that a default public key will be defined the moment any public key is bound to a user.

os::smart_ptr<**keyBank**> crypto::user::_keyBank [protected]

Key bank.

This key bank defines all of the public keys which are known by this user

unsigned char* crypto::user::_password [protected]

Primary symmetric key.

unsigned int crypto::user::_passwordLength [protected]

Length of symmetric key.

os::asyncAVLTree<**publicKey**> crypto::user::_publicKeys [protected]

Public keys.

This stores all public keys accociated with this specific user.

std::string crypto::user::_saveDir [protected]

Save directory for user.

os::asyncAVLTree<**gatewaySettings**> crypto::user::_settings [protected]

List of gateway settings.

os::smart_ptr<**streamPackageFrame**> crypto::user::_streamPackage [protected]

Default stream package.

std::string crypto::user::_username [protected]

Name of user.


bool crypto::user::_wasConstructed [protected]

Stores if the user was constructed

30.57 crypto::xorHash Class Reference

XOR hash class.

Inheritance diagram for crypto::xorHash:

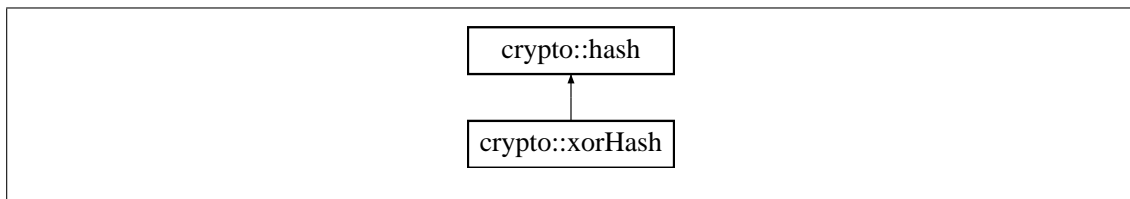

Public Member Functions

- **xorHash** ()
Default XOR hash constructor.
- **xorHash** (const unsigned char ***data**, uint16_t **size**)
Raw data copy.
- **xorHash** (const **xorHash** &cpy)
XOR copy constructor.
- void **performHash** (const unsigned char ***data**, uint32_t dLen)
Binds a data-set.
- std::string **algorithmName** () const
Algorithm name string access.

Static Public Member Functions

- static std::string **staticAlgorithmName** ()
Algorithm name string access.
- static uint16_t **staticAlgorithm** ()
Algorithm ID number access.
- static **xorHash hash64Bit** (const unsigned char ***data**, uint32_t length)
Static 64 bit hash.
- static **xorHash hash128Bit** (const unsigned char ***data**, uint32_t length)
Static 128 bit hash.
- static **xorHash hash256Bit** (const unsigned char ***data**, uint32_t length)
Static 256 bit hash.

- static **xorHash hash512Bit** (const unsigned char ***data**, uint32_t length)
Static 512 bit hash.

Private Member Functions

- **xorHash** (const unsigned char ***data**, uint32_t length, uint16_t **size**)
XOR hash constructor.

Additional Inherited Members

30.57.1 Detailed Description

XOR hash class.

This class defines an XOR based hash. Note that this hash is not cryptographically secure and essentially just acts as a checksum.

30.57.2 Constructor & Destructor Documentation

```
crypto::xorHash::xorHash ( const unsigned char * data, uint32_t length, uint16_t size )  
[private]
```

XOR hash constructor.

Constructs a hash with the data to be hashed, the length of the array and the size of the hash to be constructed.

Parameters

in	<i>data</i>	Data array
in	<i>length</i>	Length of data array
in	<i>size</i>	Size of hash

```
crypto::xorHash::xorHash ( ) [inline]
```

Default XOR hash constructor.

Constructs an empty XOR hash class.

```
crypto::xorHash::xorHash ( const unsigned char * data, uint16_t size )
```

Raw data copy.

Initializes the XOR hash with a data array. This data array is not hashed but assumed to represent hashed data.

Parameters

in	<i>data</i>	Hashed data array
in	<i>size</i>	Size of hash array

`crypto::xorHash::xorHash (const xorHash & cpy) [inline]`

XOR copy constructor.

Constructs an XOR hash with another XOR hash.

Parameters

<i>in</i>	<i>cpy</i>	Hash to be copied
-----------	------------	-------------------

30.57.3 Member Function Documentation

`std::string crypto::xorHash::algorithmName () const [inline], [virtual]`

Algorithm name string access.

Returns the name of the current algorithm string. This function requires an instantiated XOR hash.

Returns

"XOR"

Reimplemented from **crypto::hash** (p. 451).

`static xorHash crypto::xorHash::hash128Bit (const unsigned char * data, uint32_t length) [inline], [static]`

Static 128 bit hash.

Hashes the provided data array with the XOR algorithm, returning a 128 bit XOR hash.

Parameters

<i>data</i>	Data array to be hashed
<i>length</i>	Length of data array to be hashed

Returns

New **xorHash** (p. 601)

`static xorHash crypto::xorHash::hash256Bit (const unsigned char * data, uint32_t length) [inline], [static]`

Static 256 bit hash.

Hashes the provided data array with the XOR algorithm, returning a 256 bit XOR hash.

Parameters

<i>data</i>	Data array to be hashed
<i>length</i>	Length of data array to be hashed

Returns

New **xorHash** (p. 601)

```
static xorHash crypto::xorHash::hash512Bit ( const unsigned char * data, uint32_t length )  
[inline], [static]
```

Static 512 bit hash.

Hashes the provided data array with the XOR algorithm, returning a 512 bit XOR hash.

Parameters

<i>data</i>	Data array to be hashed
<i>length</i>	Length of data array to be hashed

Returns

New **xorHash** (p. 601)

```
static xorHash crypto::xorHash::hash64Bit ( const unsigned char * data, uint32_t length )  
[inline], [static]
```

Static 64 bit hash.

Hashes the provided data array with the XOR algorithm, returning a 64 bit XOR hash.

Parameters

<i>data</i>	Data array to be hashed
<i>length</i>	Length of data array to be hashed

Returns

New **xorHash** (p. 601)

```
void crypto::xorHash::preformHash ( const unsigned char * data, uint32_t dLen )
```

Binds a data-set.

Preforms the hash algorithm on the set of data provided and binds the result to this hash.

Parameters

in	<i>data</i>	Data array to be hashed
in	<i>dLen</i>	Length of data array

```
static uint16_t crypto::xorHash::staticAlgorithm ( ) [inline], [static]
```

Algorithm ID number access.

Returns the ID of the current algorithm. This function is static and can be accessed without instantiating the class.

Returns

`crypto::algo::hashXOR`

```
static std::string crypto::xorHash::staticAlgorithmName ( ) [inline], [static]
```

Algorithm name string access.

Returns the name of the current algorithm string. This function is static and can be accessed without instantiating the class.

Returns

`"XOR"`

Part VI

glGraphics Library

Chapter 31

Introduction

The glGraphics library contains cross-platform graphics tools. glGraphics visualizes through OpenGL, allowing graphics to appear consistent across all systems. Furthermore, glGraphics provides an interface to perform unit tests on the interfaces constructed through the library.

31.1 Namespace

glGraphics uses the gl namespace. The gl namespace is designed for class, functions and constants related to visualization through OpenGL. glGraphics depends on many of the tools defined in the os namespace.

Chapter 32

File Index

32.1 File List

Here is a list of all files with brief descriptions:

freeglut.h	610
Windows/freeglut.h	
Windows freeglut header	610
freeglut_ext.h	610
Windows/freeglut_ext.h	
Windows freeglut_ext header	610
freeglut_std.h	611
Windows/freeglut_std.h	
Windows freeglut_std header	611
glCheckbox.cpp	611
glCheckbox.h	611
glColors.cpp	611
glColors.h	612
glContainers.cpp	612
glContainers.h	612
glForm.cpp	613
glForm.h	613
glFrame.cpp	614
glFrame.h	614
glInput.cpp	615
glInput.h	615
glLabel.cpp	616
glLabel.h	616
glLibrary.h	617
glLogging.cpp	617
glLogging.h	617
glOSFunctions.cpp	617
Unix/glOSFunctions.cpp	
Unix specific graphics functions	617
Windows/glOSFunctions.cpp	
Windows specific graphics functions	618

glOSFunctions.h	618
Unix/glOSFunctions.h	
Unix specific graphics functions	618
Windows/glOSFunctions.h	
Windows specific graphics functions	619
glPopUp.cpp	620
glPopUp.h	620
glTest.cpp	
Defines glGraphics test suite	620
glTest.h	
Testing suite for the glGraphics library	620
glTestingFrame.cpp	
Implements the UI testing framework	621
glTestingFrame.h	
Defines the UI testing framework	621
glTextbox.cpp	622
glTextbox.h	622
glut.h	623
glut_w.h	623
image_DXT.cpp	623
image_DXT.h	623
image_helper.cpp	624
image_helper.h	625
osGraphics.h	625
Unix/osGraphics.h	
Unix specific openGL functions	625
Windows/osGraphics.h	
Windows specific openGL functions	626
SOIL.cpp	
Simple OpenGL Image Library	626
SOIL.h	
Simple OpenGL Image Library	627
stb_image_aug.cpp	
JPEG/PNG reader implementation	627
stb_image_aug.h	
JPEG/PNG reader header	627
stbi_DDS_aug.h	
DDS loading support	628
stbi_DDS_aug_c.h	628
textureManager.cpp	628
textureManager.h	629

Chapter 33

File Documentation

33.1 freeglut.h File Reference

33.2 freeglut.h File Reference

Windows freeglut header.

33.2.1 Detailed Description

Windows freeglut header.

Author

Jonathan Bedard

Date

5/19/2016

Bug None

33.3 freeglut_ext.h File Reference

33.4 freeglut_ext.h File Reference

Windows freeglut_ext header.

33.4.1 Detailed Description

Windows freeglut_ext header.

Author

Jonathan Bedard

Date

5/19/2016

Bug None

33.5 freeglut_std.h File Reference

33.6 freeglut_std.h File Reference

Windows freeglut_std header.

33.6.1 Detailed Description

Windows freeglut_std header.

Author

Jonathan Bedard

Date

5/19/2016

Bug None

33.7 glCheckbox.cpp File Reference

33.8 glCheckbox.h File Reference

Classes

- class **gl::checkbox**
- class **gl::checkboxGroup**

Namespaces

- **gl**

Enumerations

- enum **gl::checkboxGroupType** { **gl::checkbox_noRestriction** =0, **gl::checkbox_single**, **gl::checkbox_chooseOne**, **gl::checkbox_chooseSome** }

33.9 glColors.cpp File Reference

Namespaces

- **gl**
- **gl::col**

Variables

- const color **gl::col::red** (1, 0, 0, 1)
- const color **gl::col::yellow** (.8,.8, 0, 1)
- const color **gl::col::green** (0, 1, 0, 1)
- const color **gl::col::blue** (0, 0, 1, 1)
- const color **gl::col::black** (0, 0, 0, 1)
- const color **gl::col::brown** (.6,.2,.2, 1)
- const color **gl::col::white** (1, 1, 1, 1)
- const color **gl::col::clear** (1, 1, 1, 0)
- const color **gl::col::clickedBlue** (.3,.3, 1,.7)
- const color **gl::col::textboxBlue** (.3,.3, 1,.5)
- const color **gl::col::darkGray** (.4,.4,.4, 1)
- const color **gl::col::gray** (.7,.7,.7, 1)
- const color **gl::col::inactiveGray** (.8,.8,.8, 1)
- const color **gl::col::lightGray** (.9,.9,.9, 1)
- const color **gl::col::overlayGray** (.7,.7,.7,.5)
- const color **gl::col::overlayBlack** (0, 0, 0,.7)
- const color **gl::col::darkGreen** (0,.6, 0, 1)

33.10 glColors.h File Reference

Namespaces

- **gl**
- **gl::col**

33.11 glContainers.cpp File Reference

33.12 glContainers.h File Reference

Classes

- class **gl::box**
- class **gl::wrappableBox**
- class **gl::fileBar**
- class **gl::barGroup**
- class **gl::scrollbar**
- class **gl::scrollArea**
- class **gl::entireFormScroll**

Namespaces

- **gl**

Enumerations

- enum **gl::scrollbarDir** { **gl::scrollbar_vertical** =0, **gl::scrollbar_horizontal** }

33.13 glForm.cpp File Reference

Functions

- void **func_mouseMove** (int mousePositionX, int mousePositionY)
- void **func_mouseClick** (int **button**, int state, int mousePositionX, int mousePositionY)
- void **func_keyboardDown** (unsigned char _key, int mouseX, int mouseY)
- void **func_keyboardUp** (unsigned char _key, int mouseX, int mouseY)
- void **func_specialKeyboardDown** (int _key, int mouseX, int mouseY)
- void **func_specialKeyboardUp** (int _key, int mouseX, int mouseY)
- void **raw_display** ()

Variables

- static smart_ptr<**baseUIDriver**> **singleUIDriver**
- static smart_ptr<**UIDriver**> **uiDrive**

33.13.1 Function Documentation

void func_keyboardDown (unsigned char _key, int mouseX, int mouseY)

void func_keyboardUp (unsigned char _key, int mouseX, int mouseY)

void func_mouseClick (int button, int state, int mousePositionX, int mousePositionY) [inline]

void func_mouseMove (int mousePositionX, int mousePositionY) [inline]

void func_specialKeyboardDown (int _key, int mouseX, int mouseY)

void func_specialKeyboardUp (int _key, int mouseX, int mouseY)

void raw_display ()

33.13.2 Variable Documentation

smart_ptr<**baseUIDriver**> singleUIDriver [static]

smart_ptr<**UIDriver**> uiDrive [static]

33.14 glForm.h File Reference

Classes

- class **gl::form**
- class **gl::form3d**
- class **gl::baseUIDriver**
- class **gl::UIDriver**
- class **gl::testingDriver**

Namespaces

- **gl**

Enumerations

- enum **gl::resizePolicyEnum** {
 gl::resize_none =0, **gl::resize_master**, **gl::resize_minimum**, **gl::resize_maximum**,
 gl::resize_bounded, **gl::resize_lock**, **gl::resize_custom** }

Variables

- const int **gl::form_width_minimum** =116
- const int **gl::form_height_minimum** =0

33.15 glFrame.cpp File Reference

33.16 glFrame.h File Reference

Classes

- struct **gl::color**
- class **gl::clickedListener**
- class **gl::pressedListener**
- class **gl::depressedListener**
- class **gl::enterListener**
- class **gl::resizedListener**
- class **gl::clickedFunction**
- class **gl::clickedFunctionVoid**
- class **gl::pressedFunction**
- class **gl::pressedFunctionVoid**
- class **gl::depressedFunction**
- class **gl::depressedFunctionVoid**
- class **gl::enterFunction**
- class **gl::enterFunctionVoid**
- class **gl::resizeFunction**
- class **gl::resizeFunctionVoid**
- class **gl::element**
- class **gl::frame**

Namespaces

- **gl**

Typedefs

- typedef void(* **gl::elementHandler**) (os::smart_ptr< element > elm)
- typedef void(* **gl::elementHandler_void**) (os::smart_ptr< element > elm, void *vptr)

33.17 glInput.cpp File Reference

Variables

- static os::smart_ptr< **mouse** > **singletonMouse**
- static os::smart_ptr< **keyboard** > **singletonKeyboard**

33.17.1 Variable Documentation

os::smart_ptr<**keyboard**> singletonKeyboard [static]

os::smart_ptr<**mouse**> singletonMouse [static]

33.18 glInput.h File Reference

Classes

- class **gl::key**
- class **gl::mouseListener**
- class **gl::keyboardListener**
- class **gl::globalMouseListener**
- class **gl::globalKeyboardListener**
- class **gl::mouse**
- class **gl::keyboard**

Namespaces

- **gl**

Enumerations

- enum **gl::elementDepth** { **gl::defaultDepth** =0, **gl::bottomDepth**, **gl::middleDepth**, **gl::topDepth** }
- enum **gl::keyType** { **gl::key_standard** =0, **gl::key_special** =1 }

Variables

- const key **gl::ESCAPE**
- const key **gl::ENTER**
- const key **gl::DELETE_KEY**
- const key **gl::BACKSPACE**
- const key **gl::TAB**
- const key **gl::SPACE**

- const key **gl::ARROWUP**
- const key **gl::ARROWDOWN**
- const key **gl::ARROWLEFT**
- const key **gl::ARROWRIGHT**
- const int **gl::MOUSE_DOWN** =0
- const int **gl::MOUSE_UP** =1
- const int **gl::MOUSE_RIGHT_BUTTON** =2
- const int **gl::MOUSE_SCROLLBUTTON** =1
- const int **gl::MOUSE_LEFT_BUTTON** =0
- const int **gl::MOUSE_SCROLLUP** =3
- const int **gl::MOUSE_SCROLLDOWN** =4

33.19 glLabel.cpp File Reference

33.20 glLabel.h File Reference

Classes

- class **gl::font**
- class **gl::TimesRomanStroke**
- class **gl::TimesMonoRomanStroke**
- class **gl::TimesRoman**
- class **gl::Helvetica**
- class **gl::label**
- class **gl::button**
- class **gl::arrowButton**
- class **gl::activeDisplayButton**
- class **gl::activeDisplayArrowButton**

Namespaces

- **gl**

Enumerations

- enum **gl::lateralTextLayout** { **gl::layout_right** =0, **gl::layout_center**, **gl::layout_left** }
- enum **gl::verticalTextLayout** { **gl::layout_top** =0, **gl::layout_middle**, **gl::layout_bottom** }
- enum **gl::arrowType** { **gl::arrow_up** =0, **gl::arrow_right**, **gl::arrow_down**, **gl::arrow_left** }

Functions

- os::smart_ptr< std::string > **gl::displayAssembleString** (std::string str, int &length)
- void **gl::drawText** (double x, double y, std::string str, const **color** &c, const **font** *_font, **lateral**↵
TextLayout layout=layout_left)
- void **gl::drawText** (double x, double y, const char *str, const **color** &c, const **font** *_font, **lateral**↵
TextLayout layout=layout_left)

- void **gl::drawText** (double x, double y, os::smart_ptr< std::string > strArr, int length, const **color** &c, const **font** *_font, **lateralTextLayout** layout)
- double **gl::textHeight** (os::smart_ptr< std::string > strArr, int length, const **font** *_font)
- double **gl::textHeight** (std::string str, const **font** *_font)
- double **gl::textWidth** (os::smart_ptr< std::string > strArr, int length, const **font** *_font)
- double **gl::textWidth** (std::string str, const **font** *_font)
- std::string **gl::textChop** (std::string str, double length_bound, const **font** *_font)

33.21 glLibrary.h File Reference

33.22 glLogging.cpp File Reference

33.23 glLogging.h File Reference

Namespaces

- **gl**

Functions

- std::ostream & **gl::glout_func** ()
- std::ostream & **gl::glerr_func** ()

Variables

- os::smart_ptr< std::ostream > **gl::glout_ptr** = &(std::cout)
- os::smart_ptr< std::ostream > **gl::glerr_ptr** = &(std::cerr)

33.24 gLOFunctions.cpp File Reference

33.25 gLOFunctions.cpp File Reference

Unix specific graphics functions.

33.25.1 Detailed Description

Unix specific graphics functions.

Author

Jonathan Bedard

Date

5/19/2016

Bug None

Implements a number of graphics functions uniquely for Unix.

33.26 gLOFunctions.cpp File Reference

Windows specific graphics functions.

33.26.1 Detailed Description

Windows specific graphics functions.

Author

Jonathan Bedard

Date

5/19/2016

Bug None

Implements a number of graphics functions uniquely for Windows.

33.27 gLOFunctions.h File Reference

Namespaces

- **gl**

Variables

- const double **gl::PI** =3.14159265
- const double **gl::DEG_RAD** =(PI/180)
- const double **gl::RAD_DEG** =(180/PI)

33.28 gLOFunctions.h File Reference

Unix specific graphics functions.

Namespaces

- **gl**

Functions

- void **gl::glSetSource** (char *source_string)
- std::string **gl::glGetSource** ()
- std::string **gl::glGetExecutable** ()
- int **gl::glGetSourceDepth** ()
- bool **gl::gllsBase** (std::string loc)
- void **gl::glTestCreateFolder** (std::string n)

- bool **gl::gl_is_directory** (std::string file)
- std::string * **gl::gl_list_files** (std::string directory, int *len)
- std::string **gl::gl_extract_name** (std::string full_path)
- void **gl::gl_delete_file** (std::string path)
- FILE * **gl::fopen_s** (FILE **f, const char *name, const char *read_type)

Variables

- const std::string **gl::DEFAULT_LOC** = "/home"

33.28.1 Detailed Description

Unix specific graphics functions.

Author

Jonathan Bedard

Date

5/19/2016

Bug None

Defines a number of graphics functions uniquely for Unix.

33.29 gLOFunctions.h File Reference

Windows specific graphics functions.

33.29.1 Detailed Description

Windows specific graphics functions.

Author

Jonathan Bedard

Date

5/19/2016

Bug None

Defines a number of graphics functions uniquely for Windows.

33.30 glPopUp.cpp File Reference

33.31 glPopUp.h File Reference

Classes

- class **gl::popUp**
- class **gl::singleButtonPopUp**
- class **gl::navForm**

Namespaces

- **gl**

33.32 glTest.cpp File Reference

Defines glGraphics test suite.

33.32.1 Detailed Description

Defines glGraphics test suite.

Author

Jonathan Bedard

Date

5/19/2016

Bug None

Defines the test suite for the glGraphics library.

33.33 glTest.h File Reference

Testing suite for the glGraphics library.

33.33.1 Detailed Description

Testing suite for the glGraphics library.

Author

Jonathan Bedard

Date

5/19/2016

Bug None

Declares the test suite for the glGraphics library. This suite can be added to the test battery for an application

33.34 glTestingFrame.cpp File Reference

Implements the UI testing framework.

33.34.1 Detailed Description

Implements the UI testing framework.

Author

Jonathan Bedard

Date

5/19/2016

Bug None

Implements tools used to preform unit tests on the graphics framework.

33.35 glTestingFrame.h File Reference

Defines the UI testing framework.

Classes

- class **test::singleUITest**
- class **test::singleUIFunctionTest**
- class **test::UITestSuite**
- class **test::resizedTestListener**
- class **test::clickedTestListener**
- class **test::pressedTestListener**
- class **test::depressedTestListener**
- class **test::enterTestListener**
- class **test::testForm**
- class **test::textboxForm**
- class **test::checkboxForm**

Namespaces

- **test**
- **test::macro**

Functions

- void **test::setUpGraphicsTest** ()
- void **test::tearDownGraphicsTest** ()
- os::smart_ptr< **gl::testingDriver** > **test::getTestDriver** () throw (os::smart_ptr<std::exception>)
- void **test::macro::moveMouseTo** (int xPos, int yPos)
- void **test::macro::moveMouseTo** (const **gl::element** &elm)
- void **test::macro::moveMouseTo** (std::string str)
- void **test::macro::mousePress** ()
- void **test::macro::mouseRelease** ()
- void **test::macro::mouseClick** ()
- void **test::macro::mouseClick** (**gl::element** &elm)
- void **test::macro::mouseClick** (std::string str)
- void **test::macro::keyboardClick** (const **gl::key** &_key)
- void **test::macro::keyboardDown** (const **gl::key** &_key)
- void **test::macro::keyboardUp** (const **gl::key** &_key)
- void **test::macro::keyboardType** (const std::string &str)
- void **test::macro::clickFileBar** (os::smart_ptr< **gl::barGroup** > target)
- os::smart_ptr< os::unsortedList< **gl::element** > > **test::macro::searchUIBy** (std::string str)

33.35.1 Detailed Description

Defines the UI testing framework.

Author

Jonathan Bedard

Date

5/19/2016

Bug None

Defines tools used to preform unit tests on the graphics framework.

33.36 glTextbox.cpp File Reference

33.37 glTextbox.h File Reference

Classes

- class **gl::textbox**

Namespaces

- **gl**

33.38 glut.h File Reference

33.39 glut_w.h File Reference

33.40 image_DXT.cpp File Reference

Namespaces

- **gl**

Functions

- void **gl::compress_DDS_color_block** (int channels, const unsigned char *const uncompressed, unsigned char compressed[8])
- void **gl::compress_DDS_alpha_block** (const unsigned char *const uncompressed, unsigned char compressed[8])
- int **gl::save_image_as_DDS** (const char *filename, int width, int height, int channels, const unsigned char *const data)
- unsigned char * **gl::convert_image_to_DXT1** (const unsigned char *const uncompressed, int width, int height, int channels, int *out_size)
- unsigned char * **gl::convert_image_to_DXT5** (const unsigned char *const uncompressed, int width, int height, int channels, int *out_size)
- int **gl::convert_bit_range** (int c, int from_bits, int to_bits)
- int **gl::rgb_to_565** (int r, int g, int b)
- void **gl::rgb_888_from_565** (unsigned int c, int *r, int *g, int *b)
- void **gl::compute_color_line_STDEV** (const unsigned char *const uncompressed, int channels, float point[3], float direction[3])
- void **gl::LSE_master_colors_max_min** (int *cmax, int *cmin, int channels, const unsigned char *const uncompressed)

33.41 image_DXT.h File Reference

Classes

- struct **gl::DDS_header**

Namespaces

- **gl**

Functions

- int **gl::save_image_as_DDS** (const char *filename, int width, int height, int channels, const unsigned char *const data)
- unsigned char * **gl::convert_image_to_DXT1** (const unsigned char *const uncompressed, int width, int height, int channels, int *out_size)
- unsigned char * **gl::convert_image_to_DXT5** (const unsigned char *const uncompressed, int width, int height, int channels, int *out_size)

Variables

- `const uint32_t gl::DDSD_CAPS = 0x00000001`
- `const uint32_t gl::DDSD_HEIGHT = 0x00000002`
- `const uint32_t gl::DDSD_WIDTH = 0x00000004`
- `const uint32_t gl::DDSD_PITCH = 0x00000008`
- `const uint32_t gl::DDSD_PIXELFORMAT = 0x00001000`
- `const uint32_t gl::DDSD_MIPMAPCOUNT = 0x00020000`
- `const uint32_t gl::DDSD_LINEARSIZE = 0x00080000`
- `const uint32_t gl::DDSD_DEPTH = 0x00800000`
- `const uint32_t gl::DDPF_ALPHAPIXELS = 0x00000001`
- `const uint32_t gl::DDPF_FOURCC = 0x00000004`
- `const uint32_t gl::DDPF_RGB = 0x00000040`
- `const uint32_t gl::DDSCAPS_COMPLEX = 0x00000008`
- `const uint32_t gl::DDSCAPS_TEXTURE = 0x00001000`
- `const uint32_t gl::DDSCAPS_MIPMAP = 0x00400000`
- `const uint32_t gl::DDSCAPS2_CUBEMAP = 0x00000200`
- `const uint32_t gl::DDSCAPS2_CUBEMAP_POSITIVEX = 0x00000400`
- `const uint32_t gl::DDSCAPS2_CUBEMAP_NEGATIVEX = 0x00000800`
- `const uint32_t gl::DDSCAPS2_CUBEMAP_POSITIVEY = 0x00001000`
- `const uint32_t gl::DDSCAPS2_CUBEMAP_NEGATIVEY = 0x00002000`
- `const uint32_t gl::DDSCAPS2_CUBEMAP_POSITIVEZ = 0x00004000`
- `const uint32_t gl::DDSCAPS2_CUBEMAP_NEGATIVEZ = 0x00008000`
- `const uint32_t gl::DDSCAPS2_VOLUME = 0x00200000`

33.42 image_helper.cpp File Reference

Namespaces

- **gl**

Functions

- `int gl::up_scale_image` (const unsigned char *const orig, int width, int height, int channels, unsigned char *resampled, int resampled_width, int resampled_height)
- `int gl::mipmap_image` (const unsigned char *const orig, int width, int height, int channels, unsigned char *resampled, int block_size_x, int block_size_y)
- `int gl::scale_image_RGB_to_NTSC_safe` (unsigned char *orig, int width, int height, int channels)
- `unsigned char gl::clamp_byte` (int x)
- `int gl::convert_RGB_to_YCoCg` (unsigned char *orig, int width, int height, int channels)
- `int gl::convert_YCoCg_to_RGB` (unsigned char *orig, int width, int height, int channels)
- `float gl::find_max_RGBE` (unsigned char *image, int width, int height)
- `int gl::RGBE_to_RGBdivA` (unsigned char *image, int width, int height, int rescale_to_max)
- `int gl::RGBE_to_RGBdivA2` (unsigned char *image, int width, int height, int rescale_to_max)

33.43 image_helper.h File Reference

Namespaces

- **gl**

Functions

- int **gl::up_scale_image** (const unsigned char *const orig, int width, int height, int channels, unsigned char *resampled, int resampled_width, int resampled_height)
- int **gl::mipmap_image** (const unsigned char *const orig, int width, int height, int channels, unsigned char *resampled, int block_size_x, int block_size_y)
- int **gl::scale_image_RGB_to_NTSC_safe** (unsigned char *orig, int width, int height, int channels)
- int **gl::convert_RGB_to_YCoCg** (unsigned char *orig, int width, int height, int channels)
- int **gl::convert_YCoCg_to_RGB** (unsigned char *orig, int width, int height, int channels)
- int **gl::RGBE_to_RGBdivA** (unsigned char *image, int width, int height, int rescale_to_max)
- int **gl::RGBE_to_RGBdivA2** (unsigned char *image, int width, int height, int rescale_to_max)

33.44 osGraphics.h File Reference

33.45 osGraphics.h File Reference

Unix specific OpenGL functions.

Functions

- static void **glutLeaveMainLoop** ()
- static int **glutStrokeHeight** (const void *ptr)
- static int **glutBitmapHeight** (const void *ptr)

33.45.1 Detailed Description

Unix specific OpenGL functions.

Author

Jonathan Bedard

Date

5/19/2016

Bug None

Includes a number of headers specific to certain operating systems needed for OpenGL.

33.45.2 Function Documentation

static int glutBitmapHeight (const void * ptr) [static]

static void glutLeaveMainLoop () [static]

static int glutStrokeHeight (const void * ptr) [static]

33.46 osGraphics.h File Reference

Windows specific openGL functions.

33.46.1 Detailed Description

Windows specific openGL functions.

Author

Jonathan Bedard

Date

5/19/2016

Bug None

Includes a number of headers specific to certain operating systems needed for openGL.

33.47 SOIL.cpp File Reference

Simple OpenGL Image Library.

33.47.1 Detailed Description

Simple OpenGL Image Library.

Author

Jonathan Dummer

Date

7/26/2007

Bug None

Public Domain using Sean Barret's stb_image as a base

Thanks to:

Sean Barret - for the awesome stb_image

Dan Venkitachalam - for finding some non-compliant DDS files, and patching some explicit casts
everybody at gamedev.net

Edited by Jonathan Bedard for compatibility with glGraphics C++ library

33.48 SOIL.h File Reference

Simple OpenGL Image Library.

33.48.1 Detailed Description

Simple OpenGL Image Library.

Author

Jonathan Dummer

Date

7/26/2007

Bug None

A tiny c library for uploading images as textures into OpenGL. Also saving and loading of images is supported.

Edited by Jonathan Bedard for compatibility with glGraphics C++ library

33.49 stb_image_aug.cpp File Reference

JPEG/PNG reader implementation.

33.49.1 Detailed Description

JPEG/PNG reader implementation.

Author

Jonathan Dummer

Date

7/26/2007

Bug None

Edited by Jonathan Bedard for compatibility with glGraphics C++ library

33.50 stb_image_aug.h File Reference

JPEG/PNG reader header.

33.50.1 Detailed Description

JPEG/PNG reader header.

Author

Jonathan Dummer

Date

7/26/2007

Bug None

Edited by Jonathan Bedard for compatibility with glGraphics C++ library

33.51 stbi_DDS_aug.h File Reference

DDS loading support.

33.51.1 Detailed Description

DDS loading support.

DDS file support.

Author

Jonathan Dummer

Date

7/26/2007

Bug None

Edited by Jonathan Bedard for compatibility with glGraphics C++ library

Author

Jonathan Dummer

Date

7/26/2007

Bug None

Edited by Jonathan Bedard for compatibility with glGraphics C++ library

33.52 stbi_DDS_aug_c.h File Reference

33.53 textureManager.cpp File Reference

Variables

- static os::smart_ptr< **textureManager** > **global_texture_manager** = NULL
- static bool **create_flag** = false

33.53.1 Variable Documentation

`bool create_flag = false` [static]

`os::smart_ptr<textureManager> global_texture_manager = NULL` [static]

33.54 textureManager.h File Reference

Classes

- struct **gl::texture_data**
- class **gl::textureManager**
- class **gl::imageElement**

Namespaces

- **gl**

Functions

- GLuint **gl::load_texture** (std::string file_name)
- os::smart_ptr< **textureManager** > **gl::globalTextureManager** ()
- void **gl::deleteTextures** ()

Chapter 34

Class Index

34.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

gl::activeDisplayArrowButton	646
gl::activeDisplayButton	647
gl::arrowButton	649
gl::barGroup	652
gl::baseUIDriver	655
gl::box	657
gl::button	659
gl::checkbox	661
test::checkboxForm	664
gl::checkboxGroup	665
gl::clickedFunction	669
gl::clickedFunctionVoid	670
gl::clickedListener	670
test::clickedTestListener	672
gl::color	673
gl::DDS_header	674
gl::depressedFunction	675
gl::depressedFunctionVoid	676
gl::depressedListener	677
test::depressedTestListener	678
gl::element	679
gl::enterFunction	688
gl::enterFunctionVoid	689
gl::enterListener	690
test::enterTestListener	691
gl::entireFormScroll	692
gl::fileBar	692
gl::font	695
gl::form	697
gl::form3d	702
gl::frame	703

gl::globalKeyboardListener	708
gl::globalMouseListener	709
gl::Helvetica	710
gl::imageElement	710
gl::key	711
gl::keyboard	712
gl::keyboardListener	714
gl::label	715
gl::mouse	718
gl::mouseListener	719
gl::navForm	721
gl::popUp	722
gl::pressedFunction	725
gl::pressedFunctionVoid	726
gl::pressedListener	727
test::pressedTestListener	728
gl::resizedListener	728
test::resizedTestListener	729
gl::resizeFunction	730
gl::resizeFunctionVoid	731
gl::scrollArea	732
gl::scrollbar	734
gl::singleButtonPopUp	737
test::singleUIFunctionTest	738
test::singleUITest	739
test::testForm	739
gl::testingDriver	741
gl::textbox	743
test::textboxForm	747
gl::texture_data	748
gl::textureManager	749
gl::TimesMonoRomanStroke	750
gl::TimesRoman	751
gl::TimesRomanStroke	752
gl::UIDriver	752
test::UITestSuite	754
gl::wrappableBox	754

Chapter 35

Namespace Documentation

35.1 gl Namespace Reference

Namespaces

- **col**

Classes

- class **activeDisplayArrowButton**
- class **activeDisplayButton**
- class **arrowButton**
- class **barGroup**
- class **baseUIDriver**
- class **box**
- class **button**
- class **checkbox**
- class **checkboxGroup**
- class **clickedFunction**
- class **clickedFunctionVoid**
- class **clickedListener**
- struct **color**
- struct **DDS_header**
- class **depressedFunction**
- class **depressedFunctionVoid**
- class **depressedListener**
- class **element**
- class **enterFunction**
- class **enterFunctionVoid**
- class **enterListener**
- class **entireFormScroll**
- class **fileBar**
- class **font**

- class **form**
- class **form3d**
- class **frame**
- class **globalKeyListener**
- class **globalMouseListener**
- class **Helvetica**
- class **imageElement**
- class **key**
- class **keyboard**
- class **keyboardListener**
- class **label**
- class **mouse**
- class **mouseListener**
- class **navForm**
- class **popUp**
- class **pressedFunction**
- class **pressedFunctionVoid**
- class **pressedListener**
- class **resizedListener**
- class **resizeFunction**
- class **resizeFunctionVoid**
- class **scrollArea**
- class **scrollbar**
- class **singleButtonPopUp**
- class **testingDriver**
- class **textbox**
- struct **texture_data**
- class **textureManager**
- class **TimesMonoRomanStroke**
- class **TimesRoman**
- class **TimesRomanStroke**
- class **UIDriver**
- class **wrappableBox**

Typedefs

- typedef void(* **elementHandler**) (os::smart_ptr< **element** > elm)
- typedef void(* **elementHandler_void**) (os::smart_ptr< **element** > elm, void *vptr)

Enumerations

- enum **checkboxGroupType** { **checkbox_noRestriction** =0, **checkbox_single**, **checkbox_chooseOne**, **checkbox_chooseSome** }
- enum **scrollbarDir** { **scrollbar_vertical** =0, **scrollbar_horizontal** }
- enum **resizePolicyEnum** { **resize_none** =0, **resize_master**, **resize_minimum**, **resize_maximum**, **resize_bounded**, **resize_lock**, **resize_custom** }

- enum **elementDepth** { **defaultDepth** =0, **bottomDepth**, **middleDepth**, **topDepth** }
- enum **keyType** { **key_standard** =0, **key_special** =1 }
- enum **lateralTextLayout** { **layout_right** =0, **layout_center**, **layout_left** }
- enum **verticalTextLayout** { **layout_top** =0, **layout_middle**, **layout_bottom** }
- enum **arrowType** { **arrow_up** =0, **arrow_right**, **arrow_down**, **arrow_left** }

Functions

- os::smart_ptr< std::string > **displayAssembleString** (std::string str, int &length)
- void **drawText** (double x, double y, std::string str, const **color** &c, const **font** *_font, **lateralTextLayout** layout=**layout_left**)
- void **drawText** (double x, double y, const char *str, const **color** &c, const **font** *_font, **lateralTextLayout** layout=**layout_left**)
- void **drawText** (double x, double y, os::smart_ptr< std::string > strArr, int length, const **color** &c, const **font** *_font, **lateralTextLayout** layout)
- double **textHeight** (os::smart_ptr< std::string > strArr, int length, const **font** *_font)
- double **textHeight** (std::string str, const **font** *_font)
- double **textWidth** (os::smart_ptr< std::string > strArr, int length, const **font** *_font)
- double **textWidth** (std::string str, const **font** *_font)
- std::string **textChop** (std::string str, double length_bound, const **font** *_font)
- std::ostream & **glout_func** ()
- std::ostream & **glerr_func** ()
- void **compress_DDS_color_block** (int channels, const unsigned char *const uncompressed, unsigned char compressed[8])
- void **compress_DDS_alpha_block** (const unsigned char *const uncompressed, unsigned char compressed[8])
- int **save_image_as_DDS** (const char *filename, int width, int height, int channels, const unsigned char *const data)
- unsigned char * **convert_image_to_DXT1** (const unsigned char *const uncompressed, int width, int height, int channels, int *out_size)
- unsigned char * **convert_image_to_DXT5** (const unsigned char *const uncompressed, int width, int height, int channels, int *out_size)
- int **convert_bit_range** (int c, int from_bits, int to_bits)
- int **rgb_to_565** (int r, int g, int b)
- void **rgb_888_from_565** (unsigned int c, int *r, int *g, int *b)
- void **compute_color_line_STDEV** (const unsigned char *const uncompressed, int channels, float point[3], float direction[3])
- void **LSE_master_colors_max_min** (int *cmax, int *cmin, int channels, const unsigned char *const uncompressed)
- int **up_scale_image** (const unsigned char *const orig, int width, int height, int channels, unsigned char *resampled, int resampled_width, int resampled_height)
- int **mipmap_image** (const unsigned char *const orig, int width, int height, int channels, unsigned char *resampled, int block_size_x, int block_size_y)
- int **scale_image_RGB_to_NTSC_safe** (unsigned char *orig, int width, int height, int channels)
- unsigned char **clamp_byte** (int x)
- int **convert_RGB_to_YCoCg** (unsigned char *orig, int width, int height, int channels)
- int **convert_YCoCg_to_RGB** (unsigned char *orig, int width, int height, int channels)

- float **find_max_RGBE** (unsigned char *image, int width, int height)
- int **RGBE_to_RGBdivA** (unsigned char *image, int width, int height, int rescale_to_max)
- int **RGBE_to_RGBdivA2** (unsigned char *image, int width, int height, int rescale_to_max)
- GLuint **load_texture** (std::string file_name)
- os::smart_ptr< **textureManager** > **globalTextureManager** ()
- void **deleteTextures** ()
- void **glSetSource** (char *source_string)
- std::string **glGetSource** ()
- std::string **glGetExecutable** ()
- int **glGetSourceDepth** ()
- bool **gllsBase** (std::string loc)
- void **glTestCreateFolder** (std::string n)
- bool **gl_is_directory** (std::string file)
- std::string * **gl_list_files** (std::string directory, int *len)
- std::string **gl_extract_name** (std::string full_path)
- void **gl_delete_file** (std::string path)
- FILE * **fopen_s** (FILE **f, const char *name, const char *read_type)

Variables

- const int **form_width_minimum** =116
- const int **form_height_minimum** =0
- const key **ESCAPE**
- const key **ENTER**
- const key **DELETE_KEY**
- const key **BACKSPACE**
- const key **TAB**
- const key **SPACE**
- const key **ARROWUP**
- const key **ARROWDOWN**
- const key **ARROWLEFT**
- const key **ARROWRIGHT**
- const int **MOUSE_DOWN** =0
- const int **MOUSE_UP** =1
- const int **MOUSE_RIGHT_BUTTON** =2
- const int **MOUSE_SCROLLBUTTON** =1
- const int **MOUSE_LEFT_BUTTON** =0
- const int **MOUSE_SCROLLUP** =3
- const int **MOUSE_SCROLLDOWN** =4
- os::smart_ptr< std::ostream > **glout_ptr** = &(std::cout)
- os::smart_ptr< std::ostream > **glerr_ptr** = &(std::cerr)
- const double **PI** =3.14159265
- const double **DEG_RAD** =(PI/180)
- const double **RAD_DEG** =(180/PI)
- const uint32_t **DDSD_CAPS** =0x00000001
- const uint32_t **DDSD_HEIGHT** =0x00000002

- `const uint32_t DDS_D_WIDTH = 0x00000004`
- `const uint32_t DDS_D_PITCH = 0x00000008`
- `const uint32_t DDS_D_PIXELFORMAT = 0x00001000`
- `const uint32_t DDS_D_MIPMAPCOUNT = 0x00020000`
- `const uint32_t DDS_D_LINEAR_SIZE = 0x00080000`
- `const uint32_t DDS_D_DEPTH = 0x00800000`
- `const uint32_t DDS_DPF_ALPHAPIXELS = 0x00000001`
- `const uint32_t DDS_DPF_FOURCC = 0x00000004`
- `const uint32_t DDS_DPF_RGB = 0x00000040`
- `const uint32_t DDS_DSCAPS_COMPLEX = 0x00000008`
- `const uint32_t DDS_DSCAPS_TEXTURE = 0x00001000`
- `const uint32_t DDS_DSCAPS_MIPMAP = 0x00400000`
- `const uint32_t DDS_DSCAPS2_CUBEMAP = 0x00000200`
- `const uint32_t DDS_DSCAPS2_CUBEMAP_POSITIVEX = 0x00000400`
- `const uint32_t DDS_DSCAPS2_CUBEMAP_NEGATIVEX = 0x00000800`
- `const uint32_t DDS_DSCAPS2_CUBEMAP_POSITIVEY = 0x00001000`
- `const uint32_t DDS_DSCAPS2_CUBEMAP_NEGATIVEY = 0x00002000`
- `const uint32_t DDS_DSCAPS2_CUBEMAP_POSITIVEZ = 0x00004000`
- `const uint32_t DDS_DSCAPS2_CUBEMAP_NEGATIVEZ = 0x00008000`
- `const uint32_t DDS_DSCAPS2_VOLUME = 0x00200000`
- `const std::string DEFAULT_LOC = "/home"`

35.1.1 Typedef Documentation

`typedef void(* gl::elementHandler) (os::smart_ptr< element > elm)`

`typedef void(* gl::elementHandler_void) (os::smart_ptr< element > elm, void *vptr)`

35.1.2 Enumeration Type Documentation

enum **gl::arrowType**

Enumerator

arrow_up

arrow_right

arrow_down

arrow_left

enum **gl::checkboxGroupType**

Enumerator

checkbox_noRestriction

checkbox_single

checkbox_chooseOne

checkbox_chooseSome

enum **gl::elementDepth**

Enumerator

defaultDepth
bottomDepth
middleDepth
topDepth

enum **gl::keyType**

Enumerator

key_standard
key_special

enum **gl::lateralTextLayout**

Enumerator

layout_right
layout_center
layout_left

enum **gl::resizePolicyEnum**

Enumerator

resize_none
resize_master
resize_minimum
resize_maximum
resize_bounded
resize_lock
resize_custom

enum **gl::scrollbarDir**

Enumerator

scrollbar_vertical
scrollbar_horizontal

enum **gl::verticalTextLayout**

Enumerator

layout_top
layout_middle
layout_bottom

35.1.3 Function Documentation

unsigned char gl::clamp_byte (int x)

void gl::compress_DDS_alpha_block (const unsigned char *const uncompressed, unsigned char compressed[8])

void gl::compress_DDS_color_block (int channels, const unsigned char *const uncompressed, unsigned char compressed[8])

void gl::compute_color_line_STDEV (const unsigned char *const uncompressed, int channels, float point[3], float direction[3])

int gl::convert_bit_range (int c, int from_bits, int to_bits)

unsigned char * gl::convert_image_to_DXT1 (const unsigned char *const uncompressed, int width, int height, int channels, int * out_size)

take an image and convert it to DXT1 (no alpha)

unsigned char * gl::convert_image_to_DXT5 (const unsigned char *const uncompressed, int width, int height, int channels, int * out_size)

take an image and convert it to DXT5 (with alpha)

int gl::convert_RGB_to_YCoCg (unsigned char * orig, int width, int height, int channels)

This function takes the RGB components of the image and converts them into YCoCg. 3 components will be re-ordered to CoYCg (for optimum DXT1 compression), while 4 components will be ordered CoCgAY (for DXT5 compression).

int gl::convert_YCoCg_to_RGB (unsigned char * orig, int width, int height, int channels)

This function takes the YCoCg components of the image and converts them into RGB. See above.

void gl::deleteTextures ()

os::smart_ptr< std::string > gl::displayAssembleString (std::string str, int & length)

void gl::drawText (double x, double y, std::string str, const **color** & c, const **font** * _font, **lateralTextLayout** layout = **layout_left**)

void gl::drawText (double x, double y, const char * str, const **color** & c, const **font** * _font, **lateralTextLayout** layout = **layout_left**) [inline]

void gl::drawText (double x, double y, os::smart_ptr< std::string > strArr, int length, const **color** & c, const **font** * _font, **lateralTextLayout** layout)

float gl::find_max_RGBE (unsigned char * image, int width, int height)

FILE* gl::fopen_s (FILE ** f, const char * name, const char * read_type)

void gl::gl_delete_file (std::string path)

```

std::string gl::gl_extract_name ( std::string full_path )
bool gl::gl_is_directory ( std::string file )
std::string* gl::gl_list_files ( std::string directory, int * len )
std::ostream & gl::glerr_func ( )
std::string gl::glGetExecutable ( )
std::string gl::glGetSource ( )
int gl::glGetSourceDepth ( )
bool gl::gllsBase ( std::string loc )
os::smart_ptr< textureManager > gl::globalTextureManager ( )
std::ostream & gl::glout_func ( )
void gl::glSetSource ( char * source_string )
void gl::glTestCreateFolder ( std::string n )
GLuint gl::load_texture ( std::string file_name )
void gl::LSE_master_colors_max_min ( int * cmax, int * cmin, int channels, const unsigned char
*const uncompressed )
int gl::mipmap_image ( const unsigned char *const orig, int width, int height, int channels,
unsigned char * resampled, int block_size_x, int block_size_y )

```

This function downscales an image. Used for creating MIPmaps, the incoming image should be a power-of-two sized.

```

void gl::rgb_888_from_565 ( unsigned int c, int * r, int * g, int * b )
int gl::rgb_to_565 ( int r, int g, int b )
int gl::RGBE_to_RGBdivA ( unsigned char * image, int width, int height, int rescale_to_max )

```

Converts an HDR image from an array of unsigned chars (RGBE) to RGBdivA

Returns

0 if failed, otherwise returns 1

```

int gl::RGBE_to_RGBdivA2 ( unsigned char * image, int width, int height, int rescale_to_max )

```

Converts an HDR image from an array of unsigned chars (RGBE) to RGBdivA2

Returns

0 if failed, otherwise returns 1

```
int gl::save_image_as_DDS ( const char * filename, int width, int height, int channels, const
unsigned char *const data )
```

Converts an image from an array of unsigned chars (RGB or RGBA) to DXT1 or DXT5, then saves the converted image to disk.

Returns

0 if failed, otherwise returns 1

```
int gl::scale_image_RGB_to_NTSC_safe ( unsigned char * orig, int width, int height, int channels
)
```

This function takes the RGB components of the image and scales each channel from [0,255] to [16,235]. This makes the colors "Safe" for display on NTSC displays. Note that this is *NOT* a good idea for loading images like normal- or height-maps!

```
std::string gl::textChop ( std::string str, double length_bound, const font * _font )
```

```
double gl::textHeight ( os::smart_ptr< std::string > strArr, int length, const font * _font )
```

```
double gl::textHeight ( std::string str, const font * _font )
```

```
double gl::textWidth ( os::smart_ptr< std::string > strArr, int length, const font * _font )
```

```
double gl::textWidth ( std::string str, const font * _font )
```

```
int gl::up_scale_image ( const unsigned char *const orig, int width, int height, int channels,
unsigned char * resampled, int resampled_width, int resampled_height )
```

This function upscales an image. Not to be used to create MIPmaps, but to make it square, or to make it a power-of-two sized.

35.1.4 Variable Documentation

```
const key gl::ARROWDOWN
```

```
const key gl::ARROWLEFT
```

```
const key gl::ARROWRIGHT
```

```
const key gl::ARROWUP
```

```
const key gl::BACKSPACE
```

```
const uint32_t gl::DDPF_ALHAPIXELS =0x00000001
```

```
const uint32_t gl::DDPF_FOURCC =0x00000004
```

```
const uint32_t gl::DDPF_RGB =0x00000040
```

```
const uint32_t gl::DDSCAPS2_CUBEMAP =0x00000200
```

```
const uint32_t gl::DDSCAPS2_CUBEMAP_NEGATIVEX =0x00000800
```

```

const uint32_t gl::DDSCAPS2_CUBEMAP_NEGATIVEY =0x00002000
const uint32_t gl::DDSCAPS2_CUBEMAP_NEGATIVEZ =0x00008000
const uint32_t gl::DDSCAPS2_CUBEMAP_POSITIVEX =0x00000400
const uint32_t gl::DDSCAPS2_CUBEMAP_POSITIVEY =0x00001000
const uint32_t gl::DDSCAPS2_CUBEMAP_POSITIVEZ =0x00004000
const uint32_t gl::DDSCAPS2_VOLUME =0x00200000
const uint32_t gl::DDSCAPS_COMPLEX =0x00000008
const uint32_t gl::DDSCAPS_MIPMAP =0x00400000
const uint32_t gl::DDSCAPS_TEXTURE =0x00001000
const uint32_t gl::DDSD_CAPS =0x00000001
const uint32_t gl::DDSD_DEPTH =0x00800000
const uint32_t gl::DDSD_HEIGHT =0x00000002
const uint32_t gl::DDSD_LINEARSIZE =0x00080000
const uint32_t gl::DDSD_MIPMAPCOUNT =0x00020000
const uint32_t gl::DDSD_PITCH =0x00000008
const uint32_t gl::DDSD_PIXELFORMAT =0x00001000
const uint32_t gl::DDSD_WIDTH =0x00000004
const std::string gl::DEFAULT_LOC ="/home"
const double gl::DEG_RAD =(PI/180)
const key gl::DELETE_KEY
const key gl::ENTER
const key gl::ESCAPE
const int gl::form_height_minimum =0
const int gl::form_width_minimum =116
os::smart_ptr< std::ostream > gl::glerr_ptr = &(std::cerr)
os::smart_ptr< std::ostream > gl::glout_ptr = &(std::cout)
const int gl::MOUSE_DOWN =0
const int gl::MOUSE_LEFT_BUTTON =0
const int gl::MOUSE_RIGHT_BUTTON =2
const int gl::MOUSE_SCROLLBUTTON =1

```

```

const int gl::MOUSE_SCROLLDOWN =4
const int gl::MOUSE_SCROLLUP =3
const int gl::MOUSE_UP =1
const double gl::PI =3.14159265
const double gl::RAD_DEG =(180/PI)
const key gl::SPACE
const key gl::TAB

```

35.2 gl::col Namespace Reference

Variables

- const **color red** (1, 0, 0, 1)
- const **color yellow** (.8,.8, 0, 1)
- const **color green** (0, 1, 0, 1)
- const **color blue** (0, 0, 1, 1)
- const **color black** (0, 0, 0, 1)
- const **color brown** (.6,.2,.2, 1)
- const **color white** (1, 1, 1, 1)
- const **color clear** (1, 1, 1, 0)
- const **color clickedBlue** (.3,.3, 1,.7)
- const **color textboxBlue** (.3,.3, 1,.5)
- const **color darkGray** (.4,.4,.4, 1)
- const **color gray** (.7,.7,.7, 1)
- const **color inactiveGray** (.8,.8,.8, 1)
- const **color lightGray** (.9,.9,.9, 1)
- const **color overlayGray** (.7,.7,.7,.5)
- const **color overlayBlack** (0, 0, 0,.7)
- const **color darkGreen** (0,.6, 0, 1)

35.2.1 Variable Documentation

```

const color gl::col::black
const color gl::col::blue
const color gl::col::brown
const color gl::col::clear
const color gl::col::clickedBlue
const color gl::col::darkGray
const color gl::col::darkGreen

```

```
const color gl::col::gray
const color gl::col::green
const color gl::col::inactiveGray
const color gl::col::lightGray
const color gl::col::overlayBlack
const color gl::col::overlayGray
const color gl::col::red
const color gl::col::textboxBlue
const color gl::col::white
const color gl::col::yellow
```

35.3 test Namespace Reference

Namespaces

- **macro**

Classes

- class **checkboxForm**
- class **clickedTestListener**
- class **depressedTestListener**
- class **enterTestListener**
- class **pressedTestListener**
- class **resizedTestListener**
- class **singleUIFunctionTest**
- class **singleUITest**
- class **testForm**
- class **textboxForm**
- class **UITestSuite**

Functions

- void **setUpGraphicsTest** ()
- void **tearDownGraphicsTest** ()
- os::smart_ptr< **gl::testingDriver** > **getTestDriver** () throw (os::smart_ptr<std::exception>)

35.3.1 Function Documentation

os::smart_ptr<gl::testingDriver> test::getTestDriver () throw os::smart_ptr< std::exception >)

void test::setUpGraphicsTest ()

void test::tearDownGraphicsTest ()

35.4 test::macro Namespace Reference

Functions

- void **moveMouseTo** (int xPos, int yPos)
- void **moveMouseTo** (const gl::element &elm)
- void **moveMouseTo** (std::string str)
- void **mousePress** ()
- void **mouseRelease** ()
- void **mouseClick** ()
- void **mouseClick** (gl::element &elm)
- void **mouseClick** (std::string str)
- void **keyboardClick** (const gl::key &_key)
- void **keyboardDown** (const gl::key &_key)
- void **keyboardUp** (const gl::key &_key)
- void **keyboardType** (const std::string &str)
- void **clickFileBar** (os::smart_ptr< gl::barGroup > target)
- os::smart_ptr< os::unsortedList< gl::element > > **searchUIBy** (std::string str)

35.4.1 Function Documentation

void test::macro::clickFileBar (os::smart_ptr< gl::barGroup > target)

void test::macro::keyboardClick (const gl::key & _key)

void test::macro::keyboardDown (const gl::key & _key)

void test::macro::keyboardType (const std::string & str)

void test::macro::keyboardUp (const gl::key & _key)

void test::macro::mouseClick ()

void test::macro::mouseClick (gl::element & elm)

void test::macro::mouseClick (std::string str)

void test::macro::mousePress ()

void test::macro::mouseRelease ()

void test::macro::moveMouseTo (int xPos, int yPos)

void test::macro::moveMouseTo (const gl::element & elm)


```
void test::macro::moveMouseTo ( std::string str )  
os::smart_ptr<os::unsortedList<gl::element> > test::macro::searchUIBy ( std::string str )
```

Chapter 36

Class Documentation

36.1 gl::activeDisplayArrowButton Class Reference

Inheritance diagram for gl::activeDisplayArrowButton:

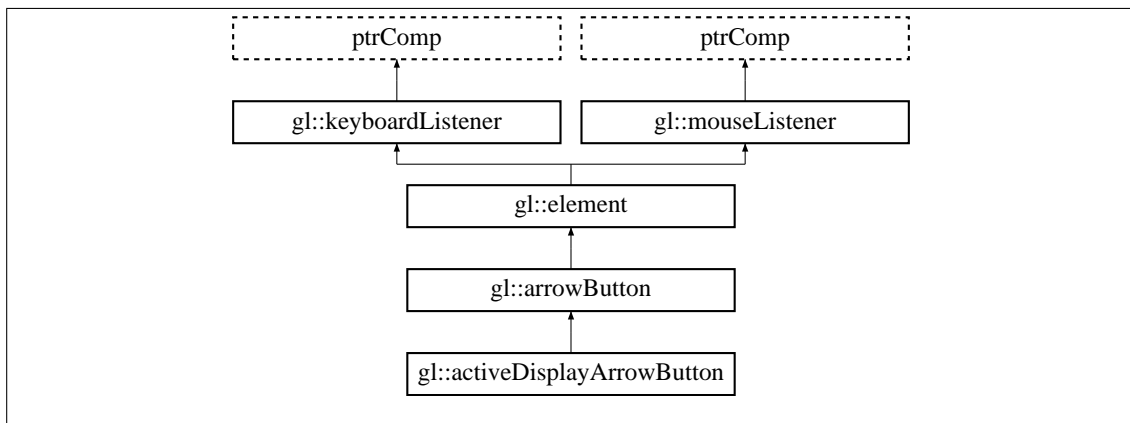

Public Member Functions

- **activeDisplayArrowButton (frame *master)**
- **virtual ~activeDisplayArrowButton ()**
- **virtual void setActive (bool active)**
- **void setActiveColor (const color &activeColor)**
- **void setActiveArrowColor (const color &activeArrowColor)**
- **void setInactiveColor (const color &inactiveColor)**
- **void setInactiveArrowColor (const color &inactiveArrowColor)**
- **color activeColor () const**
- **color activeArrowColor () const**
- **color inactiveColor () const**
- **color inactiveArrowColor () const**

Protected Attributes

- **color _activeColor**
- **color _activeArrowColor**
- **color _inactiveColor**
- **color _inactiveArrowColor**

Additional Inherited Members

36.1.1 Constructor & Destructor Documentation

activeDisplayArrowButton::activeDisplayArrowButton (**frame** * master)

virtual gl::activeDisplayArrowButton::~~activeDisplayArrowButton () [inline], [virtual]

36.1.2 Member Function Documentation

color gl::activeDisplayArrowButton::activeArrowColor () const [inline]

color gl::activeDisplayArrowButton::activeColor () const [inline]

color gl::activeDisplayArrowButton::inactiveArrowColor () const [inline]

color gl::activeDisplayArrowButton::inactiveColor () const [inline]

void activeDisplayArrowButton::setActive (bool active) [virtual]

Reimplemented from **gl::arrowButton** (p. 651).

void activeDisplayArrowButton::setActiveArrowColor (const **color** & activeArrowColor)

void activeDisplayArrowButton::setActiveColor (const **color** & activeColor)

void activeDisplayArrowButton::setInactiveArrowColor (const **color** & inactiveArrowColor)

void activeDisplayArrowButton::setInactiveColor (const **color** & inactiveColor)

36.1.3 Member Data Documentation

color gl::activeDisplayArrowButton::_activeArrowColor [protected]


color gl::activeDisplayArrowButton::_activeColor [protected]

color gl::activeDisplayArrowButton::_inactiveArrowColor [protected]

color gl::activeDisplayArrowButton::_inactiveColor [protected]

36.2 gl::activeDisplayButton Class Reference

Inheritance diagram for **gl::activeDisplayButton**:

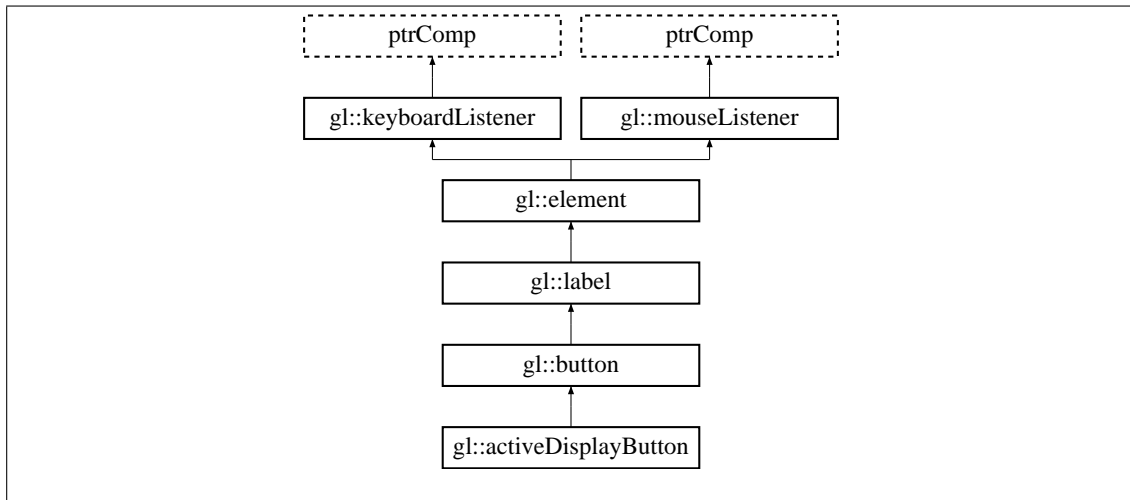

Public Member Functions

- **activeDisplayButton (frame *master)**
- virtual **~activeDisplayButton ()**
- virtual void **setActive (bool active)**
- void **setActiveColor (const color &activeColor)**
- void **setActiveTextColor (const color &activeTextColor)**
- void **setInactiveColor (const color &inactiveColor)**
- void **setInactiveTextColor (const color &inactiveTextColor)**
- **color activeColor () const**
- **color activeTextColor () const**
- **color inactiveColor () const**
- **color inactiveTextColor () const**

Protected Attributes

- **color _activeColor**
- **color _activeTextColor**
- **color _inactiveColor**
- **color _inactiveTextColor**

Additional Inherited Members

36.2.1 Constructor & Destructor Documentation

`activeDisplayButton::activeDisplayButton (frame * master)`

`virtual gl::activeDisplayButton::~~activeDisplayButton () [inline], [virtual]`

36.2.2 Member Function Documentation

```

color gl::activeDisplayButton::activeColor ( ) const [inline]
color gl::activeDisplayButton::activeTextColor ( ) const [inline]
color gl::activeDisplayButton::inactiveColor ( ) const [inline]
color gl::activeDisplayButton::inactiveTextColor ( ) const [inline]
void activeDisplayButton::setActive ( bool active ) [virtual]

```

Reimplemented from **gl::button** (p. 661).

```

void activeDisplayButton::setActiveColor ( const color & activeColor )
void activeDisplayButton::setActiveTextColor ( const color & activeTextColor )
void activeDisplayButton::setInactiveColor ( const color & inactiveColor )
void activeDisplayButton::setInactiveTextColor ( const color & inactiveTextColor )

```

36.2.3 Member Data Documentation


```

color gl::activeDisplayButton::_activeColor [protected]
color gl::activeDisplayButton::_activeTextColor [protected]
color gl::activeDisplayButton::_inactiveColor [protected]
color gl::activeDisplayButton::_inactiveTextColor [protected]

```

36.3 gl::arrowButton Class Reference

Inheritance diagram for gl::arrowButton:

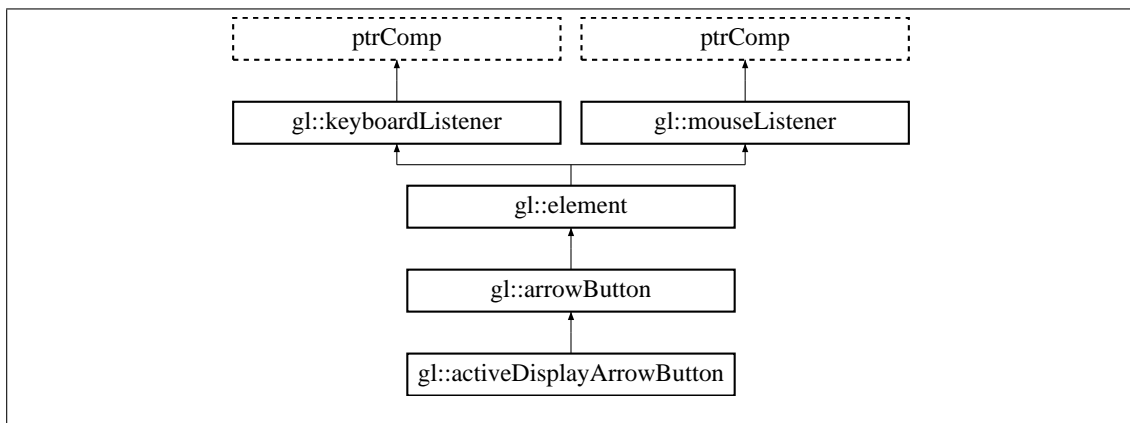

Public Member Functions

- **arrowButton** (frame *master)
- virtual ~**arrowButton** ()

- virtual void **drawBackground** ()
- virtual void **drawMain** ()
- virtual bool **focusable** () const
- virtual void **buttonClicked** (int **button**, int state, int mouseX, int mouseY)
- virtual bool **keyPress** (const **key** &_key)
- virtual bool **keyUnpress** (const **key** &_key)
- void **unsetFocus** ()
- bool **selectSize** () const
- void **setSelectSize** (int selSize)
- int **arrowBoarder** () const
- void **setArrowBoarder** (int **arrowBoarder**)
- virtual void **setHeight** (int **height**)
- virtual void **setWidth** (int **width**)
- **color** **clickedColor** () const
- void **setClickedColor** (const **color** &clickedCol)
- **color** **arrowColor** () const
- void **setArrowColor** (const **color** &arrowCol)
- **arrowType** **arrow** () const
- void **setArrow** (**arrowType** **arrow**)
- virtual void **setActive** (bool **active**)
- bool **active** () const

Protected Member Functions

- const bool **clickedDown** () const
- const bool **enterDown** () const
- void **drawArrow** () const

Protected Attributes

- **color** **_clickedColor**
- **color** **_arrowColor**
- **arrowType** **_arrowType**

Private Attributes

- int **_selectSize**
- int **_arrowBorder**
- bool **_clickedDown**
- bool **_active**
- bool **_enterDown**

36.3.1 Constructor & Destructor Documentation

`arrowButton::arrowButton (frame * master)`

`virtual gl::arrowButton::~~arrowButton () [inline], [virtual]`

36.3.2 Member Function Documentation

`bool gl::arrowButton::active () const [inline]`

`arrowType gl::arrowButton::arrow () const [inline]`

`int gl::arrowButton::arrowBoarder () const [inline]`

`color gl::arrowButton::arrowColor () const [inline]`

`void arrowButton::buttonClicked (int button, int state, int mouseX, int mouseY) [virtual]`

Reimplemented from **gl::mouseListener** (p. 720).

`color gl::arrowButton::clickedColor () const [inline]`

`const bool gl::arrowButton::clickedDown () const [inline], [protected]`

`void arrowButton::drawArrow () const [protected]`

`void arrowButton::drawBackground () [virtual]`

Reimplemented from **gl::element** (p. 683).

`void arrowButton::drawMain () [virtual]`

Reimplemented from **gl::element** (p. 683).

`const bool gl::arrowButton::enterDown () const [inline], [protected]`

`virtual bool gl::arrowButton::focusable () const [inline], [virtual]`

Reimplemented from **gl::element** (p. 683).

`bool arrowButton::keyPress (const key & _key) [virtual]`

Reimplemented from **gl::keyboardListener** (p. 715).

`bool arrowButton::keyUnpress (const key & _key) [virtual]`

Reimplemented from **gl::keyboardListener** (p. 715).

`bool gl::arrowButton::selectSize () const [inline]`

`virtual void gl::arrowButton::setActive (bool active) [inline], [virtual]`

Reimplemented in **gl::activeDisplayArrowButton** (p. 647).


```

void gl::arrowButton::setArrow ( arrowType arrow ) [inline]
void arrowButton::setArrowBoarder ( int arrowBoarder )
void gl::arrowButton::setArrowColor ( const color & arrowCol ) [inline]
void gl::arrowButton::setClickedColor ( const color & clickedCol ) [inline]
void arrowButton::setHeight ( int height ) [virtual]

```

Reimplemented from **gl::element** (p. 686).

```

void arrowButton::setSelectSize ( int selSize )
void arrowButton::setWidth ( int width ) [virtual]

```

Reimplemented from **gl::element** (p. 686).

```

void arrowButton::unsetFocus ( ) [virtual]

```

Reimplemented from **gl::element** (p. 687).

36.3.3 Member Data Documentation


```

bool gl::arrowButton::_active [private]
int gl::arrowButton::_arrowBorder [private]
color gl::arrowButton::_arrowColor [protected]
arrowType gl::arrowButton::_arrowType [protected]
color gl::arrowButton::_clickedColor [protected]
bool gl::arrowButton::_clickedDown [private]
bool gl::arrowButton::_enterDown [private]
int gl::arrowButton::_selectSize [private]

```

36.4 gl::barGroup Class Reference

Inheritance diagram for gl::barGroup:

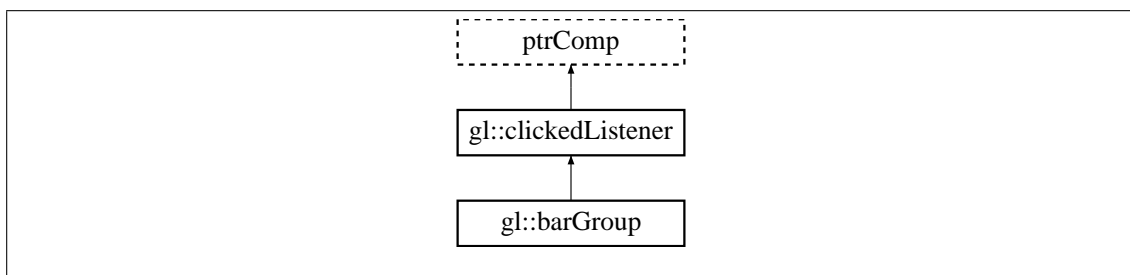

Public Member Functions

- **barGroup** (std::string **name**)
- virtual ~**barGroup** ()
- os::smart_ptr< **barGroup** > **master** ()
- const os::smart_ptr< **barGroup** > **master** () const
- void **addChild** (os::smart_ptr< **barGroup** > child)
- void **setChildren** (os::smart_ptr< os::unsortedList< **barGroup** > > **children**)
- void **refreshChildren** ()
- os::unsortedList< **barGroup** > & **children** ()
- const os::unsortedList< **barGroup** > & **children** () const
- int **preferredWidth** () const
- void **setName** (std::string **name**)
- const std::string & **name** () const
- os::smart_ptr< **button** > **myButton** ()
- bool **inside** (int xVal, int yVal)
- bool **mouseIn** ()
- void **mouseMove** (int mousePositionX, int mousePositionY)
- virtual void **receivedClicked** (os::smart_ptr< **element** > elm)
- void **pushClickedListener** (os::smart_ptr< **clickedListener** > clickedListen)
- void **removeClickedListener** (os::smart_ptr< **clickedListener** > clickedListen)

Private Member Functions

- void **teardown** ()
- os::smart_ptr< **button** > **buildButton** (os::smart_ptr< **frame** > mFrame)
- void **setHeight** (int height)
- void **setTextColor** (const **color** &col)
- void **setColor** (const **color** &col)
- void **setClickedColor** (const **color** &col)
- void **setFont** (os::smart_ptr< **font** > fon)

Private Attributes

- int **_preferredWidth**
- std::string **_name**
- os::smart_ptr< **barGroup** > **_master**
- os::smart_ptr< os::unsortedList< **barGroup** > > **_children**
- os::smartSet< **clickedListener** > **_listeners**
- os::smart_ptr< **button** > **_myButton**
- os::smart_ptr< **frame** > **myFrame**
- bool **isTopLevel**
- int **_height**
- **color** **_textColor**
- **color** **_color**
- **color** **_clickedColor**
- os::smart_ptr< **font** > **_font**

Friends

- class **fileBar**

36.4.1 Constructor & Destructor Documentation

barGroup::barGroup (std::string name)

virtual gl::barGroup::~~barGroup () [inline], [virtual]

36.4.2 Member Function Documentation

void barGroup::addChild (os::smart_ptr< **barGroup** > child)

os::smart_ptr< **button** > barGroup::buildButton (os::smart_ptr< **frame** > mFrame) [private]

os::unsortedList<**barGroup**>& gl::barGroup::children () [inline]

const os::unsortedList<**barGroup**>& gl::barGroup::children () const [inline]

bool barGroup::inside (int xVal, int yVal)

os::smart_ptr<**barGroup**> gl::barGroup::master () [inline]

const os::smart_ptr<**barGroup**> gl::barGroup::master () const [inline]

bool barGroup::mouseIn ()

void barGroup::mouseMove (int mousePositionX, int mousePositionY)

os::smart_ptr<**button**> gl::barGroup::myButton () [inline]

const std::string& gl::barGroup::name () const [inline]

int gl::barGroup::prefferedWidth () const [inline]

void barGroup::pushClickedListener (os::smart_ptr< **clickedListener** > clickedListen)

void barGroup::receivedClicked (os::smart_ptr< **element** > elm) [virtual]

Reimplemented from **gl::clickedListener** (p. 672).

void barGroup::refreshChildren ()

void barGroup::removeClickedListener (os::smart_ptr< **clickedListener** > clickedListen)

void barGroup::setChildren (os::smart_ptr< os::unsortedList< **barGroup** > > children)

void barGroup::setClickedColor (const **color** & col) [private]

void barGroup::setColor (const **color** & col) [private]

void barGroup::setFont (os::smart_ptr< **font** > fon) [private]

void barGroup::setHeight (int height) [private]

void barGroup::setName (std::string name)

```
void barGroup::setTextColor ( const color & col ) [private]
```

```
void barGroup::teardown ( ) [private]
```

36.4.3 Friends And Related Function Documentation

```
friend class fileBar [friend]
```

36.4.4 Member Data Documentation

```
os::smart_ptr<os::unsortedList<barGroup> > gl::barGroup::_children [private]
```

```
color gl::barGroup::_clickedColor [private]
```

```
color gl::barGroup::_color [private]
```

```
os::smart_ptr<font> gl::barGroup::_font [private]
```

```
int gl::barGroup::_height [private]
```

```
os::smartSet<clickedListener> gl::barGroup::_listeners [private]
```

```
os::smart_ptr<barGroup> gl::barGroup::_master [private]
```

```
os::smart_ptr<button> gl::barGroup::_myButton [private]
```

```
std::string gl::barGroup::_name [private]
```

```
int gl::barGroup::_prefferedWidth [private]
```


```
color gl::barGroup::_textColor [private]
```

```
bool gl::barGroup::isTopLevel [private]
```

```
os::smart_ptr<frame> gl::barGroup::myFrame [private]
```

36.5 gl::baseUIDriver Class Reference

Inheritance diagram for gl::baseUIDriver:

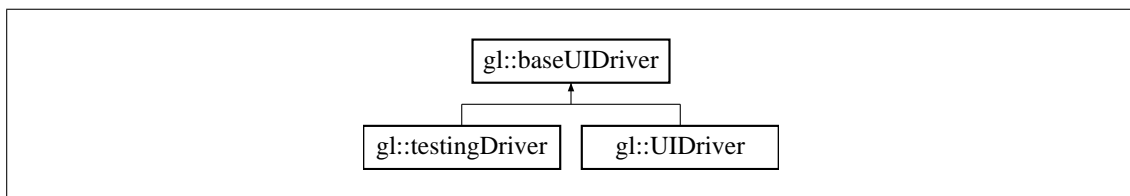

Public Member Functions

- virtual ~**baseUIDriver** ()
- virtual void **display** ()
- os::smart_ptr< **form** > **root** ()
- os::smart_ptr< **form** > **topForm** ()
- virtual bool **opengl** () const

- virtual void **buttonClicked** (int **button**, int state, int mousePositionX, int mousePositionY)
- virtual void **mouseMove** (int mousePositionX, int mousePositionY)
- void **keyPress** (const **key** &_key)
- void **keyUnpress** (const **key** &_key)
- virtual int **windowWidth** () const
- virtual int **windowHeight** () const
- virtual void **setWindowDimensions** (int _width, int _height)
- virtual void **setTypingMode** (bool **typingMode**)
- bool **typingMode** () const

Static Public Member Functions

- static os::smart_ptr< **baseUIDriver** > **singleton** ()

Protected Member Functions

- **baseUIDriver** (os::smart_ptr< **form** > **root**)

Protected Attributes

- os::smart_ptr< **form** > **root_form**
- bool **_typingMode**

Friends

- class **form**

36.5.1 Constructor & Destructor Documentation

baseUIDriver::baseUIDriver (os::smart_ptr< **form** > root) [protected]

virtual gl::baseUIDriver::~~baseUIDriver () [inline], [virtual]

36.5.2 Member Function Documentation

void baseUIDriver::buttonClicked (int button, int state, int mousePositionX, int mousePositionY) [virtual]

Reimplemented in **gl::testingDriver** (p. 742).

virtual void gl::baseUIDriver::display () [inline], [virtual]

Reimplemented in **gl::testingDriver** (p. 742), and **gl::UIDriver** (p. 753).

void baseUIDriver::keyPress (const **key** &_key)

void baseUIDriver::keyUnpress (const **key** &_key)

void baseUIDriver::mouseMove (int mousePositionX, int mousePositionY) [virtual]

Reimplemented in **gl::testingDriver** (p. 742).

virtual bool gl::baseUIDriver::opengl () const [inline], [virtual]

Reimplemented in **gl::testingDriver** (p. 742), and **gl::UIDriver** (p. 753).

os::smart_ptr<**form**> gl::baseUIDriver::root () [inline]

virtual void gl::baseUIDriver::setTypingMode (bool typingMode) [inline], [virtual]

Reimplemented in **gl::UIDriver** (p. 753).

virtual void gl::baseUIDriver::setWindowDimensions (int _width, int _height) [inline], [virtual]

Reimplemented in **gl::testingDriver** (p. 742), and **gl::UIDriver** (p. 753).

os::smart_ptr< **baseUIDriver** > baseUIDriver::singleton () [static]

os::smart_ptr< **form** > baseUIDriver::topForm ()

bool gl::baseUIDriver::typingMode () const [inline]

virtual int gl::baseUIDriver::windowHeight () const [inline], [virtual]

Reimplemented in **gl::testingDriver** (p. 742), and **gl::UIDriver** (p. 753).

virtual int gl::baseUIDriver::windowWidth () const [inline], [virtual]

Reimplemented in **gl::testingDriver** (p. 743), and **gl::UIDriver** (p. 754).

36.5.3 Friends And Related Function Documentation

friend class **form** [friend]


36.5.4 Member Data Documentation

bool gl::baseUIDriver::_typingMode [protected]

os::smart_ptr<**form**> gl::baseUIDriver::root_form [protected]

36.6 gl::box Class Reference

Inheritance diagram for gl::box:

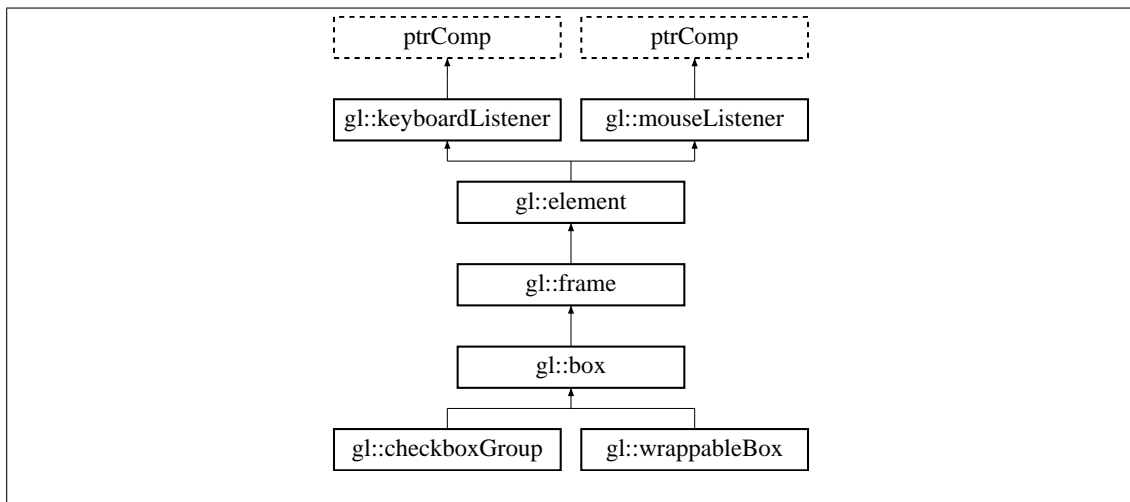

Public Member Functions

- **box** (**frame** *master, **elementDepth** depth=defaultDepth)
- virtual ~**box** ()
- virtual void **drawBackground** ()
- void **setFrameSize** (int **frameSize**)
- int **frameSize** () const
- void **setFrameColor** (const **color** &frameColor)
- **color** **frameColor** () const

Protected Attributes

- **color** _frameColor

Private Attributes

- int _frameSize

Additional Inherited Members

36.6.1 Constructor & Destructor Documentation

box::box (**frame** * master, **elementDepth** depth = **defaultDepth**)

virtual gl::box::~~box () [inline], [virtual]

36.6.2 Member Function Documentation

void box::drawBackground () [virtual]

Reimplemented from **gl::frame** (p. 706).

```

color gl::box::frameColor ( ) const [inline]
int gl::box::frameSize ( ) const [inline]
void gl::box::setFrameColor ( const color & frameColor ) [inline]
void box::setFrameSize ( int frameSize )

```

36.6.3 Member Data Documentation


```

color gl::box::_frameColor [protected]
int gl::box::_frameSize [private]

```

36.7 gl::button Class Reference

Inheritance diagram for gl::button:

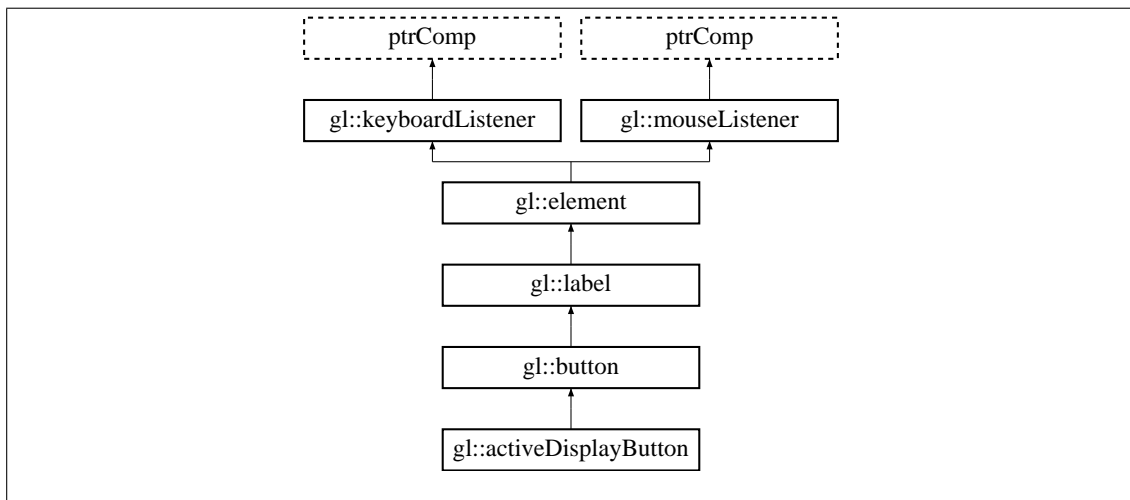

Public Member Functions

- **button** (frame *master)
- virtual ~**button** ()
- virtual void **drawBackground** ()
- virtual void **drawMain** ()
- virtual bool **focusable** () const
- virtual void **buttonClicked** (int **button**, int state, int mousePositionX, int mousePositionY)
- virtual bool **keyPress** (const **key** &_key)
- virtual bool **keyUnpress** (const **key** &_key)
- void **unsetFocus** ()
- bool **selectSize** () const
- void **setSelectSize** (int selSize)
- virtual void **setHeight** (int **height**)
- virtual void **setWidth** (int **width**)

- **color clickedColor** () const
- void **setClickedColor** (const **color** &clickedCol)
- virtual void **setActive** (bool **active**)
- bool **active** () const

Protected Member Functions

- const bool **clickedDown** () const
- const bool **enterDown** () const

Protected Attributes

- **color _clickedColor**

Private Attributes

- int **_selectSize**
- bool **_clickedDown**
- bool **_enterDown**
- bool **_active**

36.7.1 Constructor & Destructor Documentation

button::button (**frame** * master)

virtual gl::button::~~button () [inline], [virtual]

36.7.2 Member Function Documentation

bool gl::button::active () const [inline]

void button::buttonClicked (int button, int state, int mouseX, int mouseY)
[virtual]

Reimplemented from **gl::mouseListener** (p. 720).

color gl::button::clickedColor () const [inline]

const bool gl::button::clickedDown () const [inline], [protected]

void button::drawBackground () [virtual]

Reimplemented from **gl::element** (p. 683).

void button::drawMain () [virtual]

Reimplemented from **gl::label** (p. 716).

const bool gl::button::enterDown () const [inline], [protected]

virtual bool gl::button::focusable () const [inline], [virtual]

Reimplemented from **gl::element** (p. 683).

bool button::keyPress (const **key** & _key) [virtual]

Reimplemented from **gl::keyboardListener** (p. 715).

bool button::keyUnpress (const **key** & _key) [virtual]

Reimplemented from **gl::keyboardListener** (p. 715).

bool gl::button::selectSize () const [inline]

virtual void gl::button::setActive (bool active) [inline], [virtual]

Reimplemented in **gl::activeDisplayButton** (p. 649).

void gl::button::setClickedColor (const **color** & clickedCol) [inline]

void button::setHeight (int height) [virtual]

Reimplemented from **gl::label** (p. 717).

void button::setSelectSize (int selSize)

void button::setWidth (int width) [virtual]

Reimplemented from **gl::label** (p. 717).

void button::unsetFocus () [virtual]

Reimplemented from **gl::element** (p. 687).

36.7.3 Member Data Documentation

bool gl::button::_active [private]

color gl::button::_clickedColor [protected]


bool gl::button::_clickedDown [private]

bool gl::button::_enterDown [private]

int gl::button::_selectSize [private]

36.8 gl::checkbox Class Reference

Inheritance diagram for gl::checkbox:

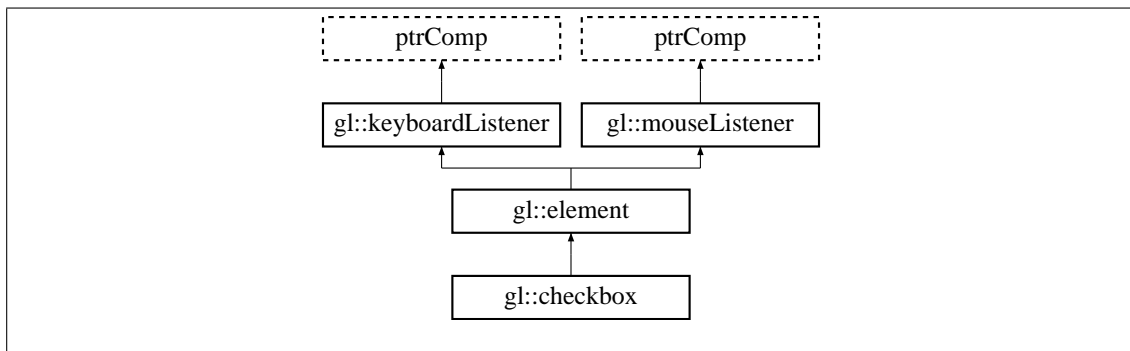

Public Member Functions

- **checkbox** (**frame** ***master**)
- virtual ~**checkbox** ()
- void **setBorderSize** (int **borderSize**)
- int **borderSize** () const
- void **setHeight** (int **height**)
- void **setWidth** (int **width**)
- virtual void **drawBackground** ()
- virtual void **drawMain** ()
- virtual void **drawTop** ()
- void **buttonClicked** (int **button**, int state, int mousePositionX, int mousePositionY)
- bool **keyPress** (const **key** &**_key**)
- bool **keyUnpress** (const **key** &**_key**)
- bool **focusable** () const
- void **setChecked** (bool **checked**)
- bool **checked** () const
- void **setFrameColor** (const **color** &**frameColor**)
- void **setCheckColor** (const **color** &**checkColor**)
- void **setClickedColor** (const **color** &**clickedColor**)
- const **color** & **frameColor** () const
- const **color** & **checkColor** () const
- const **color** & **clickedColor** () const

Protected Attributes

- **color** **_frameColor**
- **color** **_checkColor**
- **color** **_clickedColor**
- bool **_checked**

Private Attributes

- bool **_mouseDown**
- bool **_keyDown**
- int **_borderSize**

Additional Inherited Members

36.8.1 Constructor & Destructor Documentation

`checkbox::checkbox (frame * master)`

`virtual gl::checkbox::~~checkbox () [inline], [virtual]`

36.8.2 Member Function Documentation

`int gl::checkbox::borderSize () const [inline]`

`void checkbox::buttonClicked (int button, int state, int mousePositionX, int mousePositionY) [virtual]`

Reimplemented from **gl::mouseListener** (p. 720).

`const color& gl::checkbox::checkColor () const [inline]`

`bool gl::checkbox::checked () const [inline]`

`const color& gl::checkbox::clickedColor () const [inline]`

`void checkbox::drawBackground () [virtual]`

Reimplemented from **gl::element** (p. 683).

`void checkbox::drawMain () [virtual]`

Reimplemented from **gl::element** (p. 683).

`void checkbox::drawTop () [virtual]`

Reimplemented from **gl::element** (p. 683).

`bool gl::checkbox::focusable () const [inline], [virtual]`

Reimplemented from **gl::element** (p. 683).

`const color& gl::checkbox::frameColor () const [inline]`

`bool checkbox::keyPress (const key & _key) [virtual]`

Reimplemented from **gl::keyboardListener** (p. 715).

`bool checkbox::keyUnpress (const key & _key) [virtual]`

Reimplemented from **gl::keyboardListener** (p. 715).

```

void checkbox::setBorderSize ( int borderSize )
void gl::checkbox::setCheckColor ( const color & checkColor ) [inline]
void gl::checkbox::setChecked ( bool checked ) [inline]
void gl::checkbox::setClickedColor ( const color & clickedColor ) [inline]
void gl::checkbox::setFrameColor ( const color & frameColor ) [inline]
void checkbox::setHeight ( int height ) [virtual]

```

Reimplemented from **gl::element** (p. 686).

```

void checkbox::setWidth ( int width ) [virtual]

```

Reimplemented from **gl::element** (p. 686).

36.8.3 Member Data Documentation


```

int gl::checkbox::_borderSize [private]
color gl::checkbox::_checkColor [protected]
bool gl::checkbox::_checked [protected]
color gl::checkbox::_clickedColor [protected]
color gl::checkbox::_frameColor [protected]
bool gl::checkbox::_keyDown [private]
bool gl::checkbox::_mouseDown [private]

```

36.9 test::checkboxForm Class Reference

Inheritance diagram for test::checkboxForm:

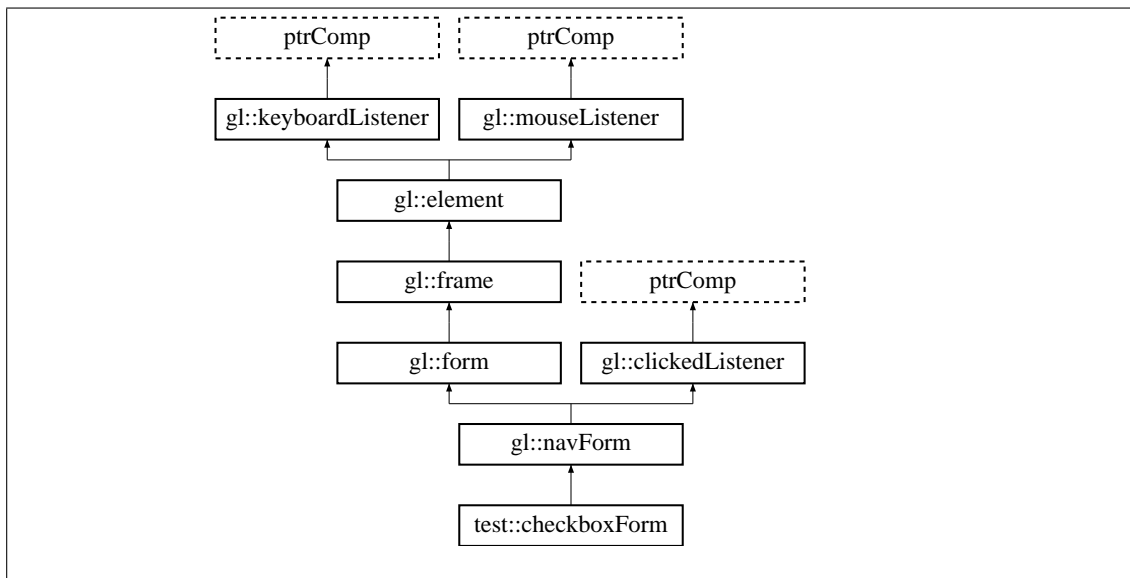

Public Member Functions

- **checkboxForm** (os::smart_ptr< **gl::form** > prev)
- virtual ~checkboxForm ()

Public Attributes

- **gl::checkbox** chxOne
- **gl::checkbox** chxTwo
- **gl::checkboxGroup** checkGroup

Additional Inherited Members

36.9.1 Constructor & Destructor Documentation

test::checkboxForm::checkboxForm (os::smart_ptr< **gl::form** > prev)

virtual test::checkboxForm::~checkboxForm () [inline], [virtual]

36.9.2 Member Data Documentation


gl::checkboxGroup test::checkboxForm::checkGroup

gl::checkbox test::checkboxForm::chxOne

gl::checkbox test::checkboxForm::chxTwo

36.10 gl::checkboxGroup Class Reference

Inheritance diagram for `gl::checkboxGroup`:

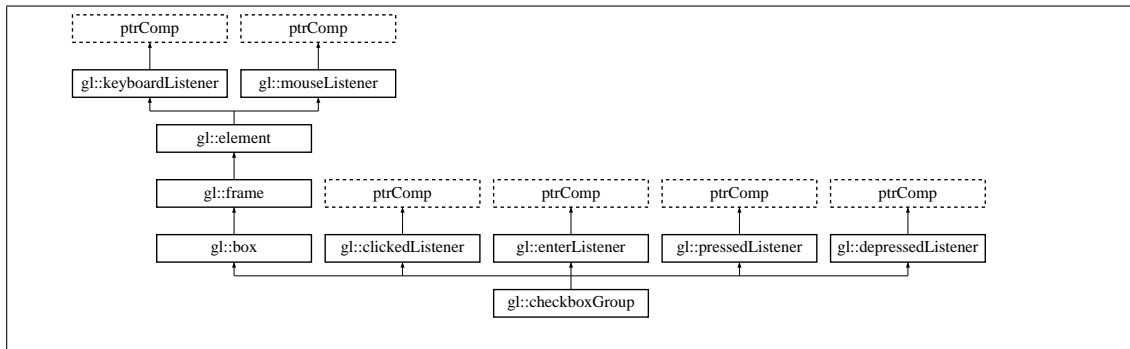

Public Member Functions

- **checkboxGroup** (**frame *master**, **elementDepth depth=defaultDepth**)
- virtual **~checkboxGroup** ()
- void **setTitle** (**std::string title**)
- const **std::string & title** () const
- void **addString** (**const std::string &str**)
- void **addStrings** (**const std::vector< std::string > &strs**)
- const **std::vector< std::string > & strings** () const
- unsigned int **numString** () const
- void **setChoice** (**checkboxGroupType singleChoice**)
- **checkboxGroupType choice** () const
- void **receivedClicked** (**os::smart_ptr< element > elm**)
- void **receivedEnter** (**os::smart_ptr< element > elm**)
- void **receivedDepressed** (**os::smart_ptr< element > elm**)
- void **receivedPressed** (**os::smart_ptr< element > elm**)
- void **setFont** (**os::smart_ptr< font > f**)
- const **os::smart_ptr< font > getFont** () const
- void **setTextColor** (**const color &textColor**)
- void **setCheckFrameColor** (**const color &checkFrameColor**)
- void **setCheckBackgroundColor** (**const color &checkBackgroundColor**)
- void **setClickedColor** (**const color &clickedColor**)
- const **color & textColor** () const
- const **color & checkFrameColor** () const
- const **color & checkBackgroundColor** () const
- const **color & clickedColor** () const
- void **rebindSize** ()
- void **setHeight** (**int h**)
- void **setWidth** (**int w**)
- bool **operator[]** (**int i**) const
- void **setCheckbox** (**int i**, **bool checked**)

Protected Member Functions

- void **receivedChanged** (**os::smart_ptr< element > elm**)

Private Attributes

- `std::string _title`
- `label lblTitle`
- `os::smart_ptr< font > _font`
- `std::vector< std::string > _stringList`
- `std::vector< os::smart_ptr< checkbox > > _checkboxList`
- `std::vector< os::smart_ptr< label > > _labelNames`
- `checkboxGroupType _choice`
- `color _textColor`
- `color _checkFrameColor`
- `color _checkBackgroundColor`
- `color _clickedColor`

Additional Inherited Members

36.10.1 Constructor & Destructor Documentation

`checkboxGroup::checkboxGroup (frame * master, elementDepth depth = defaultDepth)`

`virtual gl::checkboxGroup::~~checkboxGroup () [inline], [virtual]`

36.10.2 Member Function Documentation

`void checkboxGroup::addString (const std::string & str)`

`void checkboxGroup::addStrings (const std::vector< std::string > & strs)`

`const color& gl::checkboxGroup::checkBackgroundColor () const [inline]`

`const color& gl::checkboxGroup::checkFrameColor () const [inline]`

`checkboxGroupType gl::checkboxGroup::choice () const [inline]`

`const color& gl::checkboxGroup::clickedColor () const [inline]`

`const os::smart_ptr gl::checkboxGroup::getFont () const [inline]`

`unsigned int gl::checkboxGroup::numString () const [inline]`

`bool checkboxGroup::operator[] (int i) const`

`void checkboxGroup::rebindSize ()`

`void checkboxGroup::receivedChanged (os::smart_ptr< element > elm) [protected]`

`void gl::checkboxGroup::receivedClicked (os::smart_ptr< element > elm) [inline], [virtual]`

Reimplemented from `gl::clickedListener` (p. 672).

`void gl::checkboxGroup::receivedDepressed (os::smart_ptr< element > elm) [inline], [virtual]`

Reimplemented from `gl::depressedListener` (p. 678).

void gl::checkboxGroup::receivedEnter (os::smart_ptr< **element** > elm) [inline], [virtual]

Reimplemented from **gl::enterListener** (p. 690).

void gl::checkboxGroup::receivedPressed (os::smart_ptr< **element** > elm) [inline], [virtual]

Reimplemented from **gl::pressedListener** (p. 727).

void checkboxGroup::setCheckBackgroundColor (const **color** & checkBackgroundColor)

void checkboxGroup::setCheckbox (int i, bool checked)

void checkboxGroup::setCheckFrameColor (const **color** & checkFrameColor)

void checkboxGroup::setChoice (**checkboxGroupType** singleChoice)

void checkboxGroup::setClickedColor (const **color** & clickedColor)

void checkboxGroup::setFont (os::smart_ptr< **font** > f)

void checkboxGroup::setHeight (int h) [virtual]

Reimplemented from **gl::element** (p. 686).

void checkboxGroup::setTextColor (const **color** & textColor)

void checkboxGroup::setTitle (std::string title)

void checkboxGroup::setWidth (int w) [virtual]

Reimplemented from **gl::element** (p. 686).

const std::vector<std::string>& gl::checkboxGroup::strings () const [inline]

const **color**& gl::checkboxGroup::textColor () const [inline]

const std::string& gl::checkboxGroup::title () const [inline]

36.10.3 Member Data Documentation

color gl::checkboxGroup::_checkBackgroundColor [private]

std::vector<os::smart_ptr<**checkbox**> > gl::checkboxGroup::_checkboxList [private]

color gl::checkboxGroup::_checkFrameColor [private]

checkboxGroupType gl::checkboxGroup::_choice [private]

color gl::checkboxGroup::_clickedColor [private]

os::smart_ptr<**font**> gl::checkboxGroup::_font [private]

std::vector<os::smart_ptr<**label**> > gl::checkboxGroup::_labelNames [private]

`std::vector<std::string> gl::checkboxGroup::_stringList [private]`


`color gl::checkboxGroup::_textColor [private]`

`std::string gl::checkboxGroup::_title [private]`

`label gl::checkboxGroup::lblTitle [private]`

36.11 gl::clickedFunction Class Reference

Inheritance diagram for `gl::clickedFunction`:

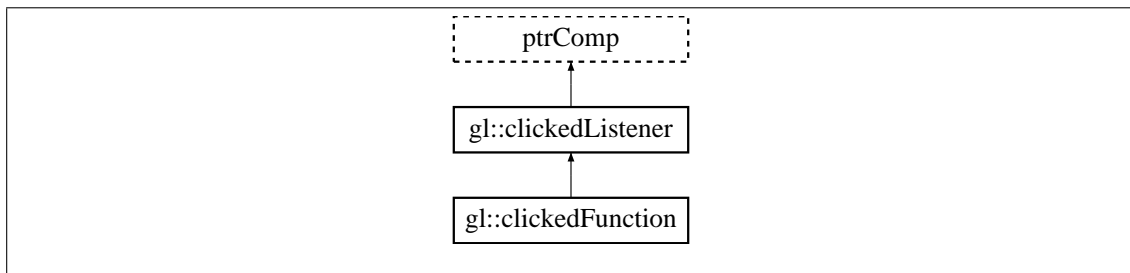

Public Member Functions

- **clickedFunction** (**elementHandler** handler)
- virtual **~clickedFunction** ()
- virtual void **receivedClicked** (os::smart_ptr< **element** > elm)

Protected Attributes

- **elementHandler ehan**

36.11.1 Constructor & Destructor Documentation

`gl::clickedFunction::clickedFunction (elementHandler handler) [inline]`

`virtual gl::clickedFunction::~~clickedFunction () [inline], [virtual]`

36.11.2 Member Function Documentation

`virtual void gl::clickedFunction::receivedClicked (os::smart_ptr< element > elm) [inline], [virtual]`


Reimplemented from **gl::clickedListener** (p. 672).

36.11.3 Member Data Documentation

elementHandler `gl::clickedFunction::ehan [protected]`

36.12 gl::clickedFunctionVoid Class Reference

Inheritance diagram for gl::clickedFunctionVoid:

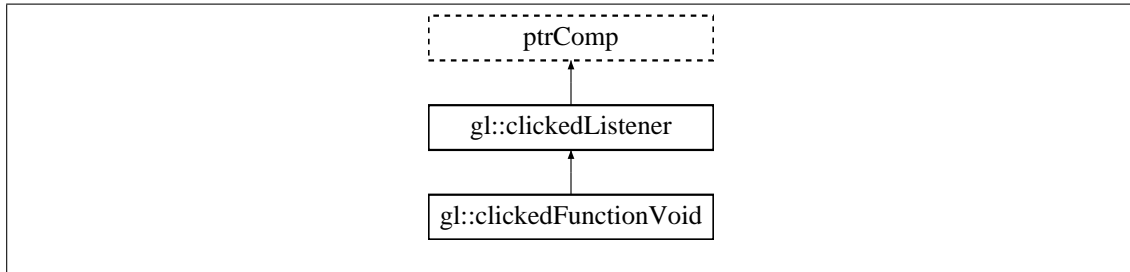

Public Member Functions

- **clickedFunctionVoid** (**elementHandler_void** handler, void *void_ptr)
- virtual **~clickedFunctionVoid** ()
- virtual void **receivedClicked** (os::smart_ptr< **element** > elm)

Protected Attributes

- **elementHandler_void** ehan
- void * **vptr**

36.12.1 Constructor & Destructor Documentation

gl::clickedFunctionVoid::clickedFunctionVoid (**elementHandler_void** handler, void * void_ptr)
[inline]

virtual gl::clickedFunctionVoid::~~clickedFunctionVoid () [inline], [virtual]

36.12.2 Member Function Documentation

virtual void gl::clickedFunctionVoid::receivedClicked (os::smart_ptr< **element** > elm) [inline],
[virtual]

Reimplemented from **gl::clickedListener** (p. 672).


36.12.3 Member Data Documentation

elementHandler_void gl::clickedFunctionVoid::ehan [protected]

void* gl::clickedFunctionVoid::vptr [protected]

36.13 gl::clickedListener Class Reference

Inheritance diagram for gl::clickedListener:

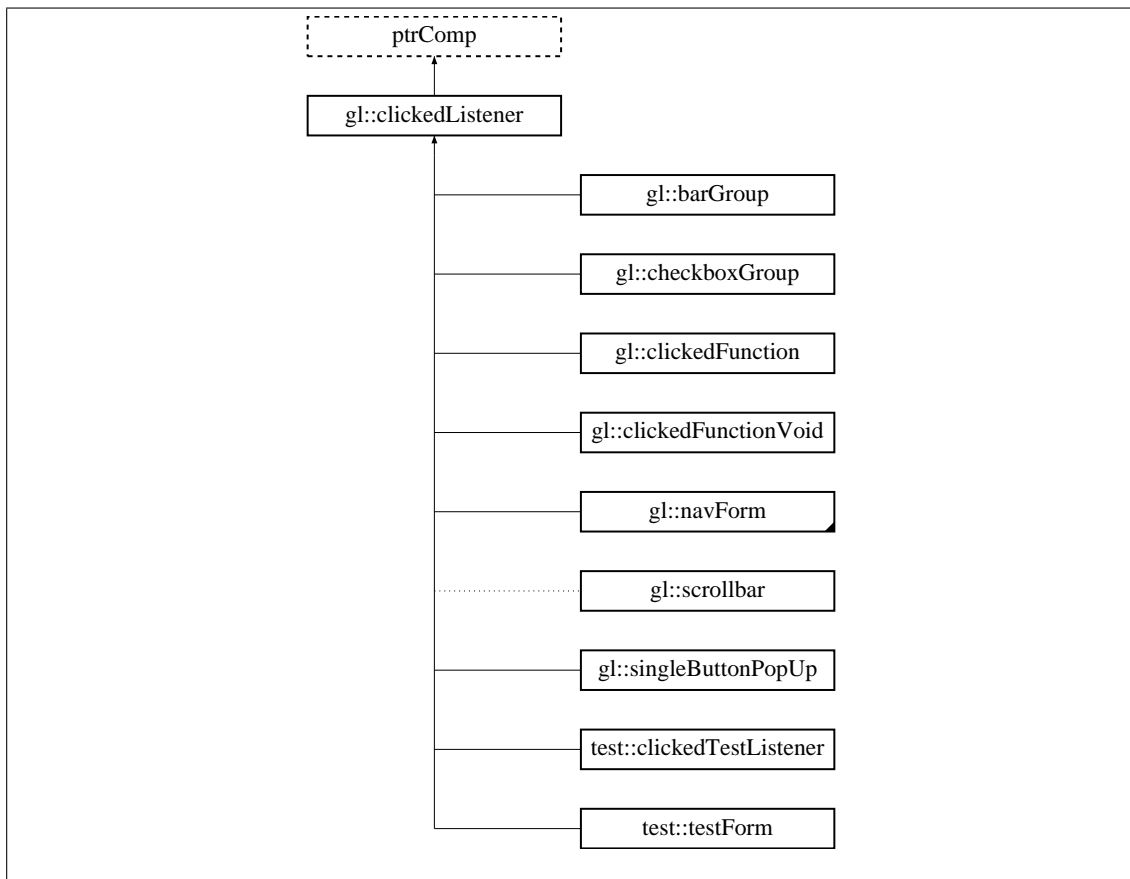

Public Member Functions

- virtual `~clickedListener()`
- virtual void **receivedClicked** (os::smart_ptr< **element** > elm)

Private Attributes

- std::mutex **mtx**
- os::smartSet< **element** > **senders**

Friends

- class **element**

36.13.1 Constructor & Destructor Documentation

`clickedListener::~clickedListener()` [virtual]

36.13.2 Member Function Documentation

virtual void gl::clickedListener::receivedClicked (os::smart_ptr< **element** > elm) [inline],
[virtual]

Reimplemented in **gl::scrollbar** (p. 736), **gl::barGroup** (p. 654), **gl::clickedFunctionVoid** (p. 670),
gl::checkboxGroup (p. 667), **gl::clickedFunction** (p. 669), **test::clickedTestListener** (p. 673),
gl::navForm (p. 722), and **gl::singleButtonPopUp** (p. 738).

36.13.3 Friends And Related Function Documentation

friend class **element** [friend]


36.13.4 Member Data Documentation

std::mutex gl::clickedListener::mtx [private]

os::smartSet<**element**> gl::clickedListener::senders [private]

36.14 test::clickedTestListener Class Reference

Inheritance diagram for test::clickedTestListener:

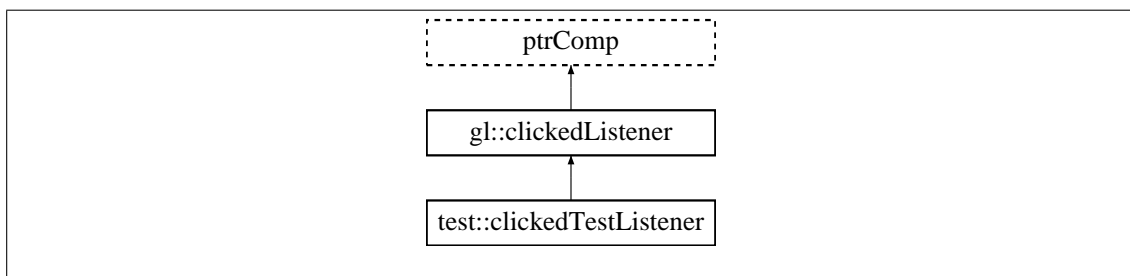

Public Member Functions

- **clickedTestListener** ()
- virtual **~clickedTestListener** ()
- void **resetFlag** ()
- void **receivedClicked** (os::smart_ptr< **gl::element** > elm)
- bool **flag** () const

Private Attributes

- bool **_flag**

36.14.1 Constructor & Destructor Documentation

test::clickedTestListener::clickedTestListener () [inline]

virtual test::clickedTestListener::~~clickedTestListener () [inline], [virtual]

36.14.2 Member Function Documentation

```
bool test::clickedTestListener::flag ( ) const [inline]
```

```
void test::clickedTestListener::receivedClicked ( os::smart_ptr< gl::element > elm ) [inline],  
[virtual]
```

Reimplemented from **gl::clickedListener** (p. 672).

```
void test::clickedTestListener::resetFlag ( ) [inline]
```

36.14.3 Member Data Documentation

```
bool test::clickedTestListener::_flag [private]
```

36.15 gl::color Struct Reference

Public Member Functions

- **color** ()
- **color** (double r, double g, double b, double a)
- **color** (const **color** &col)
- const **color** & **operator=** (const **color** &col)
- bool **operator==** (const **color** &col) const
- bool **operator!=** (const **color** &col) const

Public Attributes

- double **red**
- double **green**
- double **blue**
- double **alpha**

36.15.1 Constructor & Destructor Documentation

```
color::color ( )
```

```
color::color ( double r, double g, double b, double a )
```

```
color::color ( const color & col )
```

36.15.2 Member Function Documentation

```
bool color::operator!= ( const color & col ) const
```

```
const color & color::operator= ( const color & col )
```

```
bool color::operator== ( const color & col ) const
```

36.15.3 Member Data Documentation

```
double gl::color::alpha
```

```
double gl::color::blue
```

double gl::color::green

double gl::color::red

36.16 gl::DDS_header Struct Reference

Public Attributes

- unsigned int **dwMagic**
- unsigned int **dwSize**
- unsigned int **dwFlags**
- unsigned int **dwHeight**
- unsigned int **dwWidth**
- unsigned int **dwPitchOrLinearSize**
- unsigned int **dwDepth**
- unsigned int **dwMipMapCount**
- unsigned int **dwReserved1** [11]
- struct {
 - unsigned int **dwSize**
 - unsigned int **dwFlags**
 - unsigned int **dwFourCC**
 - unsigned int **dwRGBBitCount**
 - unsigned int **dwRBitMask**
 - unsigned int **dwGBitMask**
 - unsigned int **dwBBitMask**
 - unsigned int **dwAlphaBitMask** } **sPixelFormat**
- struct {
 - unsigned int **dwCaps1**
 - unsigned int **dwCaps2**
 - unsigned int **dwDD SX**
 - unsigned int **dwReserved** } **sCaps**
- unsigned int **dwReserved2**

36.16.1 Detailed Description

A bunch of DirectDraw Surface structures and flags

36.16.2 Member Data Documentation

unsigned int gl::DDS_header::dwAlphaBitMask

unsigned int gl::DDS_header::dwBBitMask

unsigned int gl::DDS_header::dwCaps1


```

unsigned int gl::DDS_header::dwCaps2
unsigned int gl::DDS_header::dwDDSX
unsigned int gl::DDS_header::dwDepth
unsigned int gl::DDS_header::dwFlags
unsigned int gl::DDS_header::dwFourCC
unsigned int gl::DDS_header::dwGBitMask
unsigned int gl::DDS_header::dwHeight
unsigned int gl::DDS_header::dwMagic
unsigned int gl::DDS_header::dwMipMapCount
unsigned int gl::DDS_header::dwPitchOrLinearSize
unsigned int gl::DDS_header::dwRBitMask
unsigned int gl::DDS_header::dwReserved
unsigned int gl::DDS_header::dwReserved1[11]
unsigned int gl::DDS_header::dwReserved2
unsigned int gl::DDS_header::dwRGBBitCount
unsigned int gl::DDS_header::dwSize
unsigned int gl::DDS_header::dwWidth
struct { ... } gl::DDS_header::sCaps
struct { ... } gl::DDS_header::sPixelFormat

```

36.17 gl::depressedFunction Class Reference

Inheritance diagram for gl::depressedFunction:

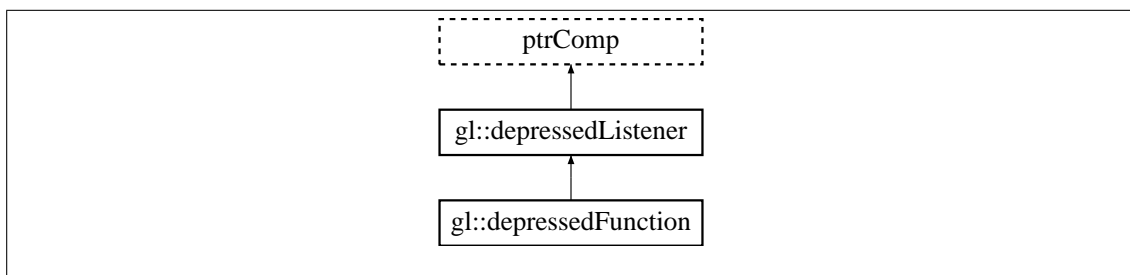

Public Member Functions

- **depressedFunction** (**elementHandler** handler)
- virtual **~depressedFunction** ()

- virtual void **receivedDepressed** (os::smart_ptr< **element** > elm)

Protected Attributes

- **elementHandler ehan**

36.17.1 Constructor & Destructor Documentation

gl::depressedFunction::depressedFunction (**elementHandler** handler) [inline]

virtual gl::depressedFunction::~~depressedFunction () [inline], [virtual]

36.17.2 Member Function Documentation

virtual void gl::depressedFunction::receivedDepressed (os::smart_ptr< **element** > elm) [inline], [virtual]


Reimplemented from **gl::depressedListener** (p. 678).

36.17.3 Member Data Documentation

elementHandler gl::depressedFunction::ehan [protected]

36.18 gl::depressedFunctionVoid Class Reference

Inheritance diagram for gl::depressedFunctionVoid:

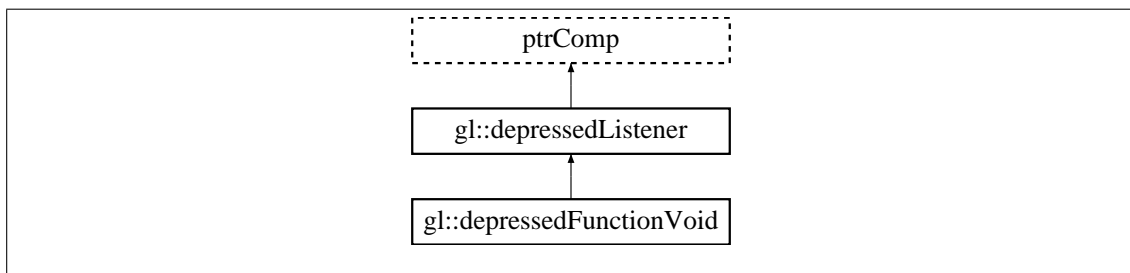

Public Member Functions

- **depressedFunctionVoid** (**elementHandler_void** handler, void *void_ptr)
- virtual **~depressedFunctionVoid** ()
- virtual void **receivedDepressed** (os::smart_ptr< **element** > elm)

Protected Attributes

- **elementHandler_void ehan**
- void * **vp_ptr**

36.18.1 Constructor & Destructor Documentation

`gl::depressedFunctionVoid::depressedFunctionVoid (elementHandler_void handler, void * void_ptr) [inline]`

`virtual gl::depressedFunctionVoid::~~depressedFunctionVoid () [inline], [virtual]`

36.18.2 Member Function Documentation

`virtual void gl::depressedFunctionVoid::receivedDepressed (os::smart_ptr< element > elm) [inline], [virtual]`

Reimplemented from **gl::depressedListener** (p. 678).


36.18.3 Member Data Documentation

elementHandler_void `gl::depressedFunctionVoid::ehan` [protected]

`void*` `gl::depressedFunctionVoid::vptr` [protected]

36.19 gl::depressedListener Class Reference

Inheritance diagram for `gl::depressedListener`:

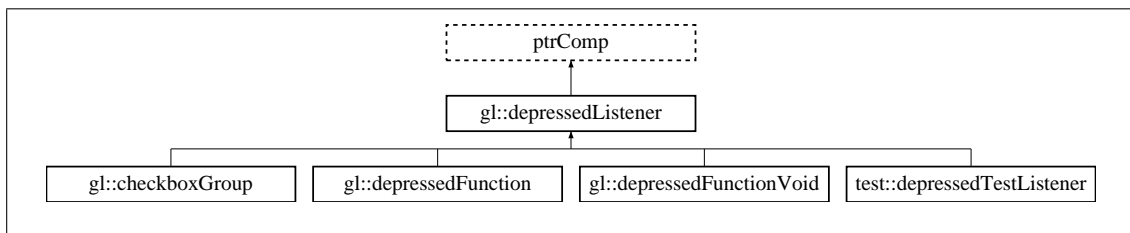

Public Member Functions

- virtual **~depressedListener** ()
- virtual void **receivedDepressed** (os::smart_ptr< **element** > elm)

Private Attributes

- std::mutex **mtx**
- os::smartSet< **element** > **senders**

Friends

- class **element**

36.19.1 Constructor & Destructor Documentation

`depressedListener::~depressedListener () [virtual]`

36.19.2 Member Function Documentation

`virtual void gl::depressedListener::receivedDepressed (os::smart_ptr< element > elm) [inline], [virtual]`

Reimplemented in **gl::depressedFunctionVoid** (p. 677), **gl::depressedFunction** (p. 676), **gl::checkboxGroup** (p. 667), and **test::depressedTestListener** (p. 679).

36.19.3 Friends And Related Function Documentation

`friend class element [friend]`


36.19.4 Member Data Documentation

`std::mutex gl::depressedListener::mtx [private]`

`os::smartSet<element> gl::depressedListener::senders [private]`

36.20 test::depressedTestListener Class Reference

Inheritance diagram for `test::depressedTestListener`:

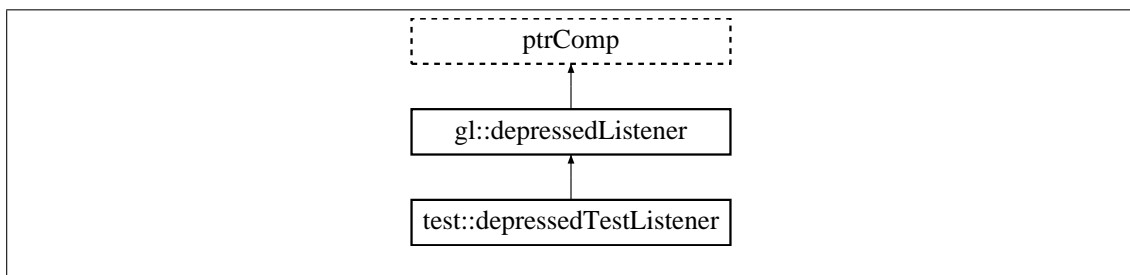

Public Member Functions

- **depressedTestListener** ()
- virtual **~depressedTestListener** ()
- void **resetFlag** ()
- void **receivedDepressed** (os::smart_ptr< **gl::element** > elm)
- bool **flag** () const

Private Attributes

- bool **_flag**

36.20.1 Constructor & Destructor Documentation

test::depressedTestListener::depressedTestListener () [inline]

virtual test::depressedTestListener::~~depressedTestListener () [inline], [virtual]

36.20.2 Member Function Documentation

bool test::depressedTestListener::flag () const [inline]

void test::depressedTestListener::receivedDepressed (os::smart_ptr< **gl::element** > elm) [inline], [virtual]

Reimplemented from **gl::depressedListener** (p. 678).


void test::depressedTestListener::resetFlag () [inline]

36.20.3 Member Data Documentation

bool test::depressedTestListener::_flag [private]

36.21 gl::element Class Reference

Inheritance diagram for gl::element:

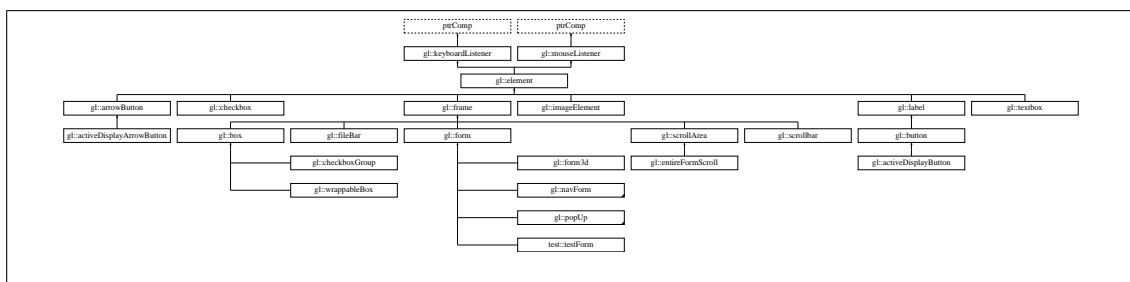

Public Member Functions

- **element** (**frame** ***master**, int targWidth=0, int targHeight=0, **elementDepth** depth=default↵**Depth**)
- **element** (const **element** &elm)
- virtual ~**element** ()
- virtual const std::string **stringID** () const
- virtual os::smart_ptr< os::unsortedList< **gl::element** > > **searchUIBy** (std::string str)
- os::smart_ptr< **frame** > **master** ()
- const os::smart_ptr< **frame** > **master** () const
- os::smart_ptr< **element** > **getTopLevel** ()
- os::smart_ptr< **form** > **getTopLevelForm** ()
- virtual void **setX** (int **x**)
- virtual void **setY** (int **y**)
- virtual void **setHeight** (int **height**)

- virtual void **setWidth** (int **width**)
- virtual void **setColor** (const **color** &**color**)
- virtual void **resize** ()
- void **setEnabled** (bool enab)
- void **enable** ()
- void **disable** ()
- int **x** () const
- int **y** () const
- int **width** () const
- int **height** () const
- int **trueX** () const
- int **trueY** () const
- void **setDepth** (elementDepth _dep)
- **elementDepth** **depth** () const
- **color** **getColor** () const
- bool **enabled** () const
- bool **disabled** () const
- virtual bool **inside** (int xVal, int yVal) const
- void **testMouse** ()
- virtual void **mouseMove** (int mousePositionX, int mousePositionY)
- bool **mouseIn** () const
- virtual bool **focusUp** ()
- virtual bool **focusDown** ()
- virtual void **draw** ()
- virtual void **drawBackground** ()
- virtual void **drawMain** ()
- virtual void **drawTop** ()
- virtual bool **childrenFocusable** () const
- virtual bool **focusable** () const
- bool **focused** () const
- virtual void **focus** ()
- virtual void **unsetFocus** ()
- virtual os::smart_ptr< **element** > **getFocused** ()
- void **pushClickedListener** (os::smart_ptr< **clickedListener** > func)
- void **pushPressedListener** (os::smart_ptr< **pressedListener** > func)
- void **pushDepressedListener** (os::smart_ptr< **depressedListener** > func)
- void **pushEnterListener** (os::smart_ptr< **enterListener** > func)
- void **pushResizeListener** (os::smart_ptr< **resizedListener** > func)
- void **removeClickedListener** (os::smart_ptr< **clickedListener** > func)
- void **removePressedListener** (os::smart_ptr< **pressedListener** > func)
- void **removeDepressedListener** (os::smart_ptr< **depressedListener** > func)
- void **removeEnterListener** (os::smart_ptr< **enterListener** > func)
- void **removeResizeListener** (os::smart_ptr< **resizedListener** > func)
- void **pushClickedListener** (**elementHandler** han)
- void **pushPressedListener** (**elementHandler** han)
- void **pushDepressedListener** (**elementHandler** han)

- void **pushEnterListener** (elementHandler han)
- void **pushResizeListener** (elementHandler han)
- void **removeClickedListener** (elementHandler han)
- void **removePressedListener** (elementHandler han)
- void **removeDepressedListener** (elementHandler han)
- void **removeEnterListener** (elementHandler han)
- void **removeResizeListener** (elementHandler han)
- void **pushClickedListener** (elementHandler_void han, void *ptr)
- void **pushPressedListener** (elementHandler_void han, void *ptr)
- void **pushDepressedListener** (elementHandler_void han, void *ptr)
- void **pushEnterListener** (elementHandler_void han, void *ptr)
- void **pushResizeListener** (elementHandler_void han, void *ptr)
- void **removeClickedListener** (elementHandler_void han, void *ptr)
- void **removePressedListener** (elementHandler_void han, void *ptr)
- void **removeDepressedListener** (elementHandler_void han, void *ptr)
- void **removeEnterListener** (elementHandler_void han, void *ptr)
- void **removeResizeListener** (elementHandler_void han, void *ptr)
- void **pushListener** (os::smart_ptr< **clickedListener** > func)
- void **pushListener** (os::smart_ptr< **pressedListener** > func)
- void **pushListener** (os::smart_ptr< **depressedListener** > func)
- void **pushListener** (os::smart_ptr< **enterListener** > func)
- void **pushListener** (os::smart_ptr< **resizedListener** > func)
- void **removeListener** (os::smart_ptr< **clickedListener** > func)
- void **removeListener** (os::smart_ptr< **pressedListener** > func)
- void **removeListener** (os::smart_ptr< **depressedListener** > func)
- void **removeListener** (os::smart_ptr< **enterListener** > func)
- void **removeListener** (os::smart_ptr< **resizedListener** > func)

Protected Member Functions

- virtual void **update** ()
- virtual void **click** ()
- virtual void **press** ()
- virtual void **depress** ()
- virtual void **enter** ()

Protected Attributes

- int **_x**
- int **_y**
- color **_color**

Private Member Functions

- **element** ()

Private Attributes

- `std::mutex` **listenerMtx**
- `os::smartSet< clickedListener >` **clickedListen**
- `os::smartSet< pressedListener >` **pressedListen**
- `os::smartSet< depressedListener >` **depressedListen**
- `os::smartSet< enterListener >` **enterListen**
- `os::smartSet< resizedListener >` **resizedListen**
- `int` **_trueX**
- `int` **_trueY**
- `elementDepth` **_depth**
- `std::recursive_mutex` **mtx**
- `os::smart_ptr< frame >` **_master**
- `int` **_height**
- `int` **_width**
- `bool` **_mouseIn**
- `bool` **_focused**
- `bool` **_enabled**

Friends

- class **clickedListener**
- class **pressedListener**
- class **depressedListener**
- class **enterListener**
- class **resizedListener**
- class **frame**
- class **form**
- class **popUp**

36.21.1 Constructor & Destructor Documentation

`element::element ()` [private]

`element::element (frame * master, int targWidth = 0, int targHeight = 0, elementDepth depth = defaultDepth)`

`element::element (const element & elm)`

`element::~~element ()` [virtual]

36.21.2 Member Function Documentation

`virtual bool gl::element::childrenFocusable () const` [inline], [virtual]

Reimplemented in **gl::frame** (p. 705), **gl::scrollbar** (p. 735), and **gl::fileBar** (p. 694).

void element::click () [protected], [virtual]

void element::depress () [protected], [virtual]

elementDepth gl::element::depth () const [inline], [virtual]

Reimplemented from **gl::mouseListener** (p. 720).

void gl::element::disable () [inline]

bool gl::element::disabled () const [inline], [virtual]

Reimplemented from **gl::mouseListener** (p. 720).

void element::draw () [virtual]

Reimplemented in **gl::scrollbar** (p. 735), and **gl::fileBar** (p. 694).

void element::drawBackground () [virtual]

Reimplemented in **gl::frame** (p. 706), **gl::arrowButton** (p. 651), **gl::button** (p. 660), **gl::imageElement** (p. 711), **gl::form** (p. 700), **gl::textbox** (p. 745), **gl::checkbox** (p. 663), **gl::popUp** (p. 724), and **gl::box** (p. 658).

void element::drawMain () [virtual]

Reimplemented in **gl::frame** (p. 706), **gl::arrowButton** (p. 651), **gl::scrollbar** (p. 735), **gl::button** (p. 660), **gl::label** (p. 716), **gl::textbox** (p. 745), and **gl::checkbox** (p. 663).

void element::drawTop () [virtual]

Reimplemented in **gl::frame** (p. 706), **gl::textbox** (p. 745), and **gl::checkbox** (p. 663).

void gl::element::enable () [inline]

bool gl::element::enabled () const [inline], [virtual]

Reimplemented from **gl::mouseListener** (p. 720).

void element::enter () [protected], [virtual]

void element::focus () [virtual]

Reimplemented in **gl::textbox** (p. 745).

virtual bool gl::element::focusable () const [inline], [virtual]

Reimplemented in **gl::arrowButton** (p. 651), **gl::button** (p. 661), **gl::textbox** (p. 745), and **gl::checkbox** (p. 663).

virtual bool gl::element::focusDown () [inline], [virtual]

Reimplemented in **gl::frame** (p. 706).

bool gl::element::focused () const [inline]

virtual bool gl::element::focusUp () [inline], [virtual]

Reimplemented in **gl::frame** (p. 706).

color gl::element::getColor () const [inline]

virtual os::smart_ptr<**element**> gl::element::getFocused () [inline], [virtual]

Reimplemented in **gl::frame** (p. 706).

os::smart_ptr< **element** > element::getTopLevel ()

os::smart_ptr< **form** > element::getTopLevelForm ()

int gl::element::height () const [inline]

bool element::inside (int xVal, int yVal) const [virtual]

Reimplemented in **gl::fileBar** (p. 694).

os::smart_ptr<**frame**> gl::element::master () [inline]

const os::smart_ptr<**frame**> gl::element::master () const [inline]

bool gl::element::mouseIn () const [inline], [virtual]

Reimplemented from **gl::mouseListener** (p. 720).

virtual void gl::element::mouseMove (int mousePositionX, int mousePositionY) [inline], [virtual]

Reimplemented from **gl::mouseListener** (p. 721).

Reimplemented in **gl::frame** (p. 706), **gl::scrollbar** (p. 736), **gl::form** (p. 700), **gl::textbox** (p. 746), and **gl::fileBar** (p. 694).

void element::press () [protected], [virtual]

void element::pushClickedListener (os::smart_ptr< **clickedListener** > func)

void gl::element::pushClickedListener (**elementHandler** han) [inline]

void gl::element::pushClickedListener (**elementHandler_void** han, void * ptr) [inline]

void element::pushDepressedListener (os::smart_ptr< **depressedListener** > func)

void gl::element::pushDepressedListener (**elementHandler** han) [inline]

```

void gl::element::pushDepressedListener ( elementHandler_void han, void * ptr ) [inline]
void element::pushEnterListener ( os::smart_ptr< enterListener > func )
void gl::element::pushEnterListener ( elementHandler han ) [inline]
void gl::element::pushEnterListener ( elementHandler_void han, void * ptr ) [inline]
void gl::element::pushListener ( os::smart_ptr< clickedListener > func ) [inline]
void gl::element::pushListener ( os::smart_ptr< pressedListener > func ) [inline]
void gl::element::pushListener ( os::smart_ptr< depressedListener > func ) [inline]
void gl::element::pushListener ( os::smart_ptr< enterListener > func ) [inline]
void gl::element::pushListener ( os::smart_ptr< resizedListener > func ) [inline]
void element::pushPressedListener ( os::smart_ptr< pressedListener > func )
void gl::element::pushPressedListener ( elementHandler han ) [inline]
void gl::element::pushPressedListener ( elementHandler_void han, void * ptr ) [inline]
void element::pushResizeListener ( os::smart_ptr< resizedListener > func )
void gl::element::pushResizeListener ( elementHandler han ) [inline]
void gl::element::pushResizeListener ( elementHandler_void han, void * ptr ) [inline]
void element::removeClickedListener ( os::smart_ptr< clickedListener > func )
void gl::element::removeClickedListener ( elementHandler han ) [inline]
void gl::element::removeClickedListener ( elementHandler_void han, void * ptr ) [inline]
void element::removeDepressedListener ( os::smart_ptr< depressedListener > func )
void gl::element::removeDepressedListener ( elementHandler han ) [inline]
void gl::element::removeDepressedListener ( elementHandler_void han, void * ptr ) [inline]
void element::removeEnterListener ( os::smart_ptr< enterListener > func )
void gl::element::removeEnterListener ( elementHandler han ) [inline]
void gl::element::removeEnterListener ( elementHandler_void han, void * ptr ) [inline]
void gl::element::removeListener ( os::smart_ptr< clickedListener > func ) [inline]
void gl::element::removeListener ( os::smart_ptr< pressedListener > func ) [inline]
void gl::element::removeListener ( os::smart_ptr< depressedListener > func ) [inline]
void gl::element::removeListener ( os::smart_ptr< enterListener > func ) [inline]
void gl::element::removeListener ( os::smart_ptr< resizedListener > func ) [inline]
void element::removePressedListener ( os::smart_ptr< pressedListener > func )

```

```

void gl::element::removePressedListener ( elementHandler han ) [inline]
void gl::element::removePressedListener ( elementHandler_void han, void * ptr ) [inline]
void element::removeResizeListener ( os::smart_ptr< resizedListener > func )
void gl::element::removeResizeListener ( elementHandler han ) [inline]
void gl::element::removeResizeListener ( elementHandler_void han, void * ptr ) [inline]
void element::resize ( ) [virtual]

```

Reimplemented in **gl::scrollArea** (p. 733), **gl::scrollbar** (p. 736), and **gl::popUp** (p. 724).

```

os::smart_ptr< os::unsortedList< gl::element > > element::searchUIBy ( std::string str )
[virtual]

```

Reimplemented in **gl::frame** (p. 707).

```

virtual void gl::element::setColor ( const color & color ) [inline], [virtual]

```

Reimplemented in **gl::fileBar** (p. 695).

```

void element::setDepth ( elementDepth _dep )
void gl::element::setEnabled ( bool enab ) [inline]
void element::setHeight ( int height ) [virtual]

```

Reimplemented in **gl::arrowButton** (p. 652), **gl::button** (p. 661), **gl::label** (p. 717), **gl::checkboxGroup** (p. 668), **gl::form** (p. 700), **gl::fileBar** (p. 695), **gl::textbox** (p. 746), and **gl::checkbox** (p. 664).

```

void element::setWidth ( int width ) [virtual]

```

Reimplemented in **gl::arrowButton** (p. 652), **gl::button** (p. 661), **gl::label** (p. 717), **gl::checkboxGroup** (p. 668), **gl::form** (p. 701), **gl::textbox** (p. 746), and **gl::checkbox** (p. 664).

```

virtual void gl::element::setX ( int x ) [inline], [virtual]

```

Reimplemented in **gl::frame** (p. 707).

```

virtual void gl::element::setY ( int y ) [inline], [virtual]

```

Reimplemented in **gl::frame** (p. 707).

```

virtual const std::string gl::element::stringID ( ) const [inline], [virtual]

```

Reimplemented in **gl::label** (p. 717), and **gl::textbox** (p. 746).

void gl::element::testMouse () [inline]

int gl::element::trueX () const [inline]

int gl::element::trueY () const [inline]

void element::unsetFocus () [virtual]

Reimplemented in **gl::frame** (p. 707), **gl::arrowButton** (p. 652), **gl::button** (p. 661), and **gl::textbox** (p. 747).

virtual void gl::element::update () [inline], [protected], [virtual]

Reimplemented in **gl::frame** (p. 707).

int gl::element::width () const [inline]

int gl::element::x () const [inline]

int gl::element::y () const [inline]

36.21.3 Friends And Related Function Documentation

friend class **clickedListener** [friend]

friend class **depressedListener** [friend]

friend class **enterListener** [friend]

friend class **form** [friend]

friend class **frame** [friend]

friend class **popUp** [friend]

friend class **pressedListener** [friend]

friend class **resizedListener** [friend]

36.21.4 Member Data Documentation

color gl::element::_color [protected]

elementDepth gl::element::_depth [private]

bool gl::element::_enabled [private]

bool gl::element::_focused [private]

int gl::element::_height [private]

os::smart_ptr<**frame**> gl::element::_master [private]

bool gl::element::_mouseIn [private]

int gl::element::_trueX [private]


```

int gl::element::_trueY [private]
int gl::element::_width [private]
int gl::element::_x [protected]
int gl::element::_y [protected]
os::smartSet<clickedListener> gl::element::clickedListen [private]
os::smartSet<depressedListener> gl::element::depressedListen [private]
os::smartSet<enterListener> gl::element::enterListen [private]
std::mutex gl::element::listenerMtx [private]
std::recursive_mutex gl::element::mtx [private]
os::smartSet<pressedListener> gl::element::pressedListen [private]
os::smartSet<resizedListener> gl::element::resizedListen [private]

```

36.22 gl::enterFunction Class Reference

Inheritance diagram for gl::enterFunction:

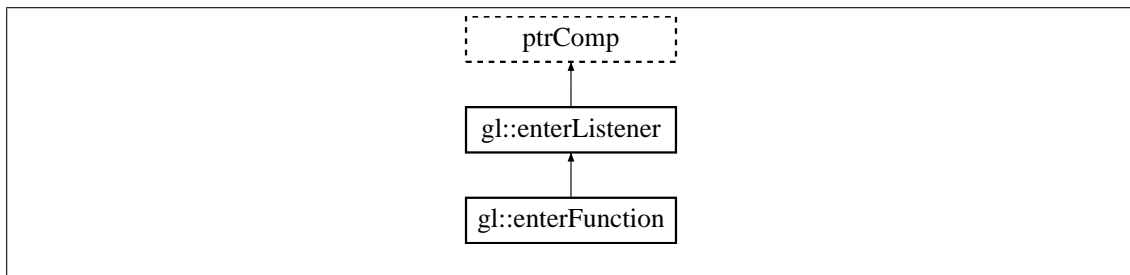

Public Member Functions

- **enterFunction** (**elementHandler** handler)
- virtual **~enterFunction** ()
- virtual void **receivedEnter** (os::smart_ptr< **element** > elm)

Protected Attributes

- **elementHandler** ehan

36.22.1 Constructor & Destructor Documentation

```

gl::enterFunction::enterFunction ( elementHandler handler ) [inline]
virtual gl::enterFunction::~~enterFunction ( ) [inline], [virtual]

```

36.22.2 Member Function Documentation

virtual void gl::enterFunction::receivedEnter (os::smart_ptr< **element** > elm) [inline],
[virtual]


Reimplemented from **gl::enterListener** (p. 690).

36.22.3 Member Data Documentation

elementHandler gl::enterFunction::ehan [protected]

36.23 gl::enterFunctionVoid Class Reference

Inheritance diagram for gl::enterFunctionVoid:

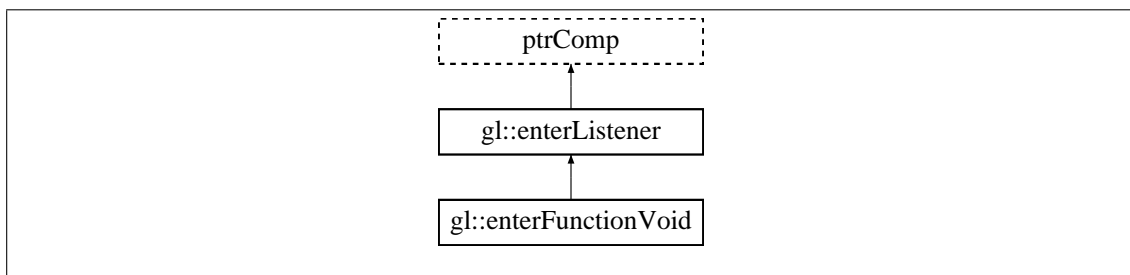

Public Member Functions

- **enterFunctionVoid** (**elementHandler_void** handler, void *void_ptr)
- virtual **~enterFunctionVoid** ()
- virtual void **receivedEnter** (os::smart_ptr< **element** > elm)

Protected Attributes

- **elementHandler_void** ehan
- void * **vp**tr

36.23.1 Constructor & Destructor Documentation

gl::enterFunctionVoid::enterFunctionVoid (**elementHandler_void** handler, void * void_ptr)
[inline]

virtual gl::enterFunctionVoid::~~enterFunctionVoid () [inline], [virtual]

36.23.2 Member Function Documentation

virtual void gl::enterFunctionVoid::receivedEnter (os::smart_ptr< **element** > elm) [inline],
[virtual]

Reimplemented from **gl::enterListener** (p. 690).


36.23.3 Member Data Documentation

elementHandler_void gl::enterFunctionVoid::ehan [protected]

void* gl::enterFunctionVoid::vptr [protected]

36.24 gl::enterListener Class Reference

Inheritance diagram for gl::enterListener:

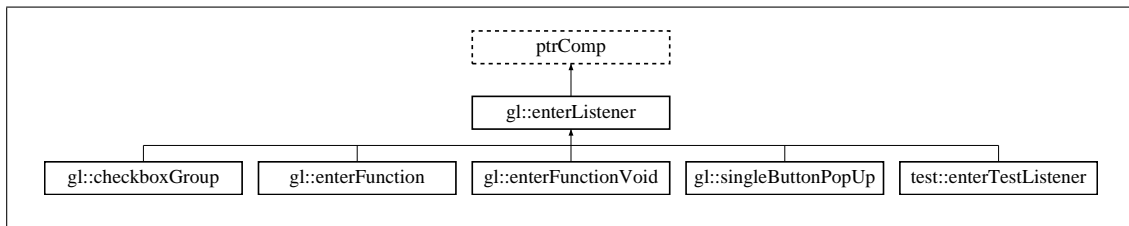

Public Member Functions

- virtual **~enterListener** ()
- virtual void **receivedEnter** (os::smart_ptr< **element** > elm)

Private Attributes

- std::mutex **mtx**
- os::smartSet< **element** > **senders**

Friends

- class **element**

36.24.1 Constructor & Destructor Documentation

enterListener::~enterListener () [virtual]

36.24.2 Member Function Documentation

virtual void gl::enterListener::receivedEnter (os::smart_ptr< **element** > elm) [inline], [virtual]

Reimplemented in **gl::enterFunctionVoid** (p. 689), **gl::enterFunction** (p. 689), **test::enterTestListener** (p. 691), **gl::checkboxGroup** (p. 668), and **gl::singleButtonPopUp** (p. 738).

36.24.3 Friends And Related Function Documentation

friend class **element** [friend]


36.24.4 Member Data Documentation

std::mutex gl::enterListener::mtx [private]

os::smartSet<element> gl::enterListener::senders [private]

36.25 test::enterTestListener Class Reference

Inheritance diagram for test::enterTestListener:

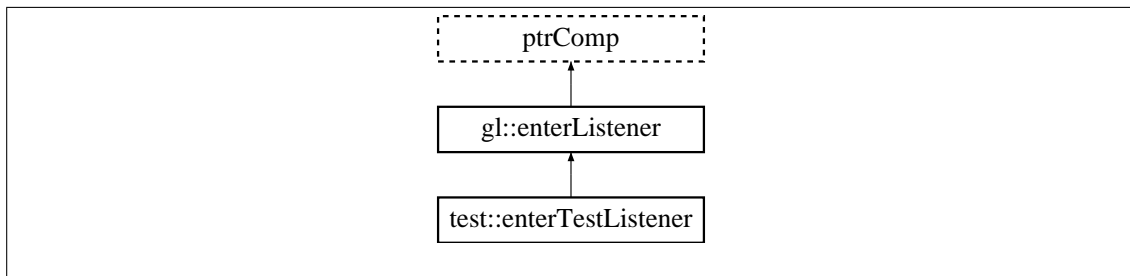

Public Member Functions

- **enterTestListener** ()
- virtual **~enterTestListener** ()
- void **resetFlag** ()
- void **receivedEnter** (os::smart_ptr< **gl::element** > elm)
- bool **flag** () const

Private Attributes

- bool **_flag**

36.25.1 Constructor & Destructor Documentation

test::enterTestListener::enterTestListener () [inline]

virtual test::enterTestListener::~~enterTestListener () [inline], [virtual]

36.25.2 Member Function Documentation

bool test::enterTestListener::flag () const [inline]

void test::enterTestListener::receivedEnter (os::smart_ptr< **gl::element** > elm) [inline], [virtual]

Reimplemented from **gl::enterListener** (p. 690).


void test::enterTestListener::resetFlag () [inline]

36.25.3 Member Data Documentation

bool test::enterTestListener::_flag [private]

36.26 gl::entireFormScroll Class Reference

Inheritance diagram for gl::entireFormScroll:

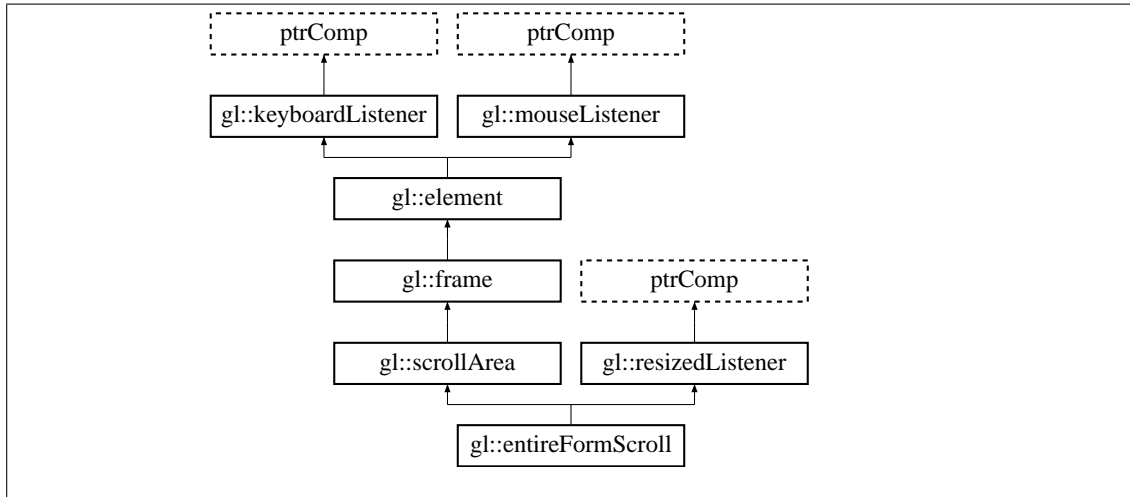

Public Member Functions

- **entireFormScroll** (**form** *master)
- virtual **~entireFormScroll** ()
- virtual void **receivedResize** (os::smart_ptr< **element** > elm)

Additional Inherited Members

36.26.1 Constructor & Destructor Documentation

`entireFormScroll::entireFormScroll (form * master)`

`virtual gl::entireFormScroll::~~entireFormScroll () [inline], [virtual]`


36.26.2 Member Function Documentation

`void entireFormScroll::receivedResize (os::smart_ptr< element > elm) [virtual]`

Reimplemented from **gl::resizedListener** (p. 729).

36.27 gl::fileBar Class Reference

Inheritance diagram for gl::fileBar:

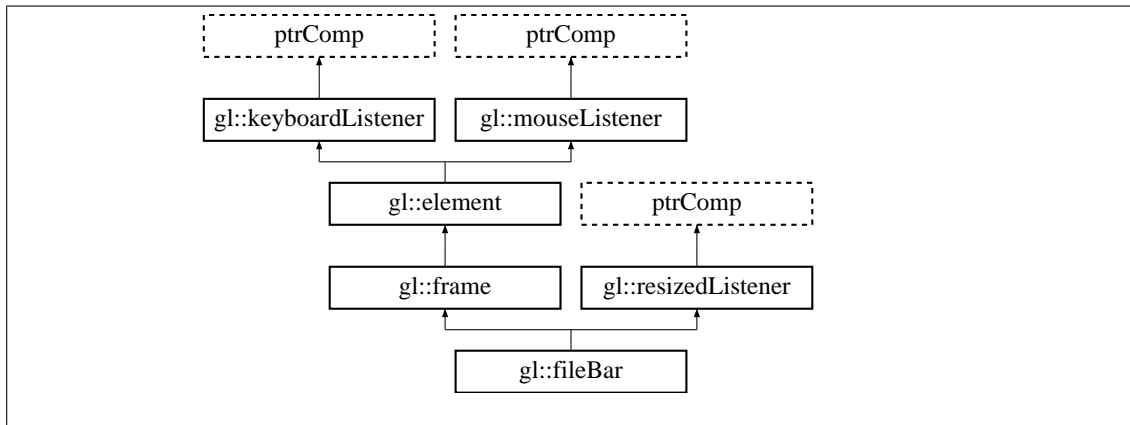

Public Member Functions

- **fileBar (frame *master)**
- virtual **~fileBar ()**
- virtual void **receivedResize** (os::smart_ptr< **element** > elm)
- virtual **elementDepth depth** () const
- virtual void **draw** ()
- virtual bool **inside** (int xVal, int yVal) const
- virtual void **mouseMove** (int mousePositionX, int mousePositionY)
- bool **childrenFocusable** () const
- void **addChild** (os::smart_ptr< **barGroup** > child)
- void **setChildren** (os::smart_ptr< os::unsortedList< **barGroup** > > **children**)
- void **refreshChildren** ()
- os::unsortedList< **barGroup** > & **children** ()
- const os::unsortedList< **barGroup** > & **children** () const
- void **setButtonSize** (int **buttonSize**)
- int **buttonSize** () const
- void **setHideDisplay** (bool **hideDisplay**)
- bool **hideDisplay** () const
- void **setOverlayColor** (const **color** &overlayColor)
- void **setClickedColor** (const **color** &clickedColor)
- virtual void **setHeight** (int hei)
- virtual void **setColor** (const **color** &color)
- void **setFont** (os::smart_ptr< **font** > fon)
- **color overlayColor** () const
- **color clickedColor** () const
- const os::smart_ptr< **font** > **getFont** () const

Protected Attributes

- os::unsortedList< **element** > **_dividers**
- os::smart_ptr< os::unsortedList< **barGroup** > > **_children**

Private Attributes

- **int** **_buttonSize**
- **bool** **_hideDisplay**
- **color** **_overlayColor**
- **color** **_clickedColor**
- **os::smart_ptr** **_font**

Additional Inherited Members

36.27.1 Constructor & Destructor Documentation

fileBar::fileBar (**frame** * master)

virtual gl::fileBar::~fileBar () **[inline]**, **[virtual]**

36.27.2 Member Function Documentation

void fileBar::addChild (**os::smart_ptr<barGroup>** child)

int gl::fileBar::buttonSize () **const** **[inline]**

os::unsortedList<barGroup>& gl::fileBar::children () **[inline]**

const os::unsortedList<barGroup>& gl::fileBar::children () **const** **[inline]**

bool gl::fileBar::childrenFocusable () **const** **[inline]**, **[virtual]**

Reimplemented from **gl::frame** (p. 705).

color gl::fileBar::clickedColor () **const** **[inline]**

virtual elementDepth gl::fileBar::depth () **const** **[inline]**, **[virtual]**

Reimplemented from **gl::mouseListener** (p. 720).

void fileBar::draw () **[virtual]**

Reimplemented from **gl::element** (p. 683).

const os::smart_ptr gl::fileBar::getFont () **const** **[inline]**

bool gl::fileBar::hideDisplay () **const** **[inline]**

bool fileBar::inside (**int** xVal, **int** yVal) **const** **[virtual]**

Reimplemented from **gl::element** (p. 684).

void fileBar::mouseMove (**int** mousePositionX, **int** mousePositionY) **[virtual]**

Reimplemented from **gl::frame** (p. 706).

color gl::fileBar::overlayColor () const [inline]

void fileBar::receivedResize (os::smart_ptr< **element** > elm) [virtual]

Reimplemented from **gl::resizedListener** (p. 729).

void fileBar::refreshChildren ()

void fileBar::setButtonSize (int buttonSize)

void fileBar::setChildren (os::smart_ptr< os::unsortedList< **barGroup** > > children)

void fileBar::setClickedColor (const **color** & clickedColor)

void fileBar::setColor (const **color** & color) [virtual]

Reimplemented from **gl::element** (p. 686).

void fileBar::setFont (os::smart_ptr< **font** > fon)

void fileBar::setHeight (int hei) [virtual]

Reimplemented from **gl::element** (p. 686).

void gl::fileBar::setHideDisplay (bool hideDisplay) [inline]

void fileBar::setOverlayColor (const **color** & overlayColor)

36.27.3 Member Data Documentation

int gl::fileBar::_buttonSize [private]

os::smart_ptr<os::unsortedList<**barGroup**> > gl::fileBar::_children [protected]

color gl::fileBar::_clickedColor [private]

os::unsortedList<**element**> gl::fileBar::_dividers [protected]


os::smart_ptr<**font**> gl::fileBar::_font [private]

bool gl::fileBar::_hideDisplay [private]

color gl::fileBar::_overlayColor [private]

36.28 gl::font Class Reference

Inheritance diagram for gl::font:

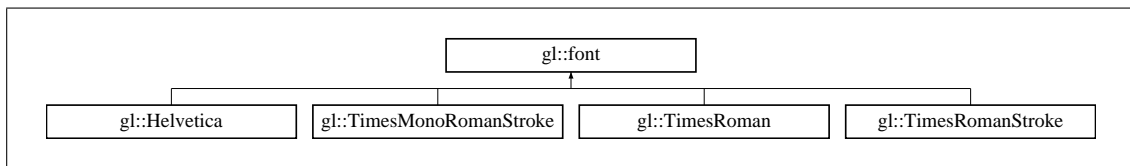

Public Member Functions

- virtual **~font** ()
- const void * **font_ptr** () const
- virtual void **setSize** (unsigned int **size**)
- void **setLineSpace** (double **lineSpace**)
- unsigned int **size** () const
- virtual const std::string & **name** () const
- double **lineSpace** () const
- bool **stroke** () const
- int **height** () const

Protected Member Functions

- **font** (void ***font_ptr**, bool isStroke)

Protected Attributes

- void * **_font**

Private Attributes

- unsigned int **_size**
- double **_linespace**
- bool **stroke_font**

36.28.1 Constructor & Destructor Documentation

font::font (void * font_ptr, bool isStroke) [protected]

virtual gl::font::~~font () [inline], [virtual]

36.28.2 Member Function Documentation

const void* gl::font::font_ptr () const [inline]

int font::height () const

double gl::font::lineSpace () const [inline]

virtual const std::string& gl::font::name () const [inline], [virtual]

Reimplemented in **gl::Helvetica** (p. 710), **gl::TimesRoman** (p. 751), **gl::TimesMonoRomanStroke** (p. 751), and **gl::TimesRomanStroke** (p. 752).

void font::setLineSpace (double lineSpace)

void font::setSize (unsigned int size) [virtual]

Reimplemented in **gl::Helvetica** (p. 710), and **gl::TimesRoman** (p. 751).

```
unsigned int gl::font::size ( ) const [inline]
```

```
bool gl::font::stroke ( ) const [inline]
```

36.28.3 Member Data Documentation

```
void* gl::font::_font [protected]
```


```
double gl::font::_linespace [private]
```

```
unsigned int gl::font::_size [private]
```

```
bool gl::font::stroke_font [private]
```

36.29 gl::form Class Reference

Inheritance diagram for gl::form:

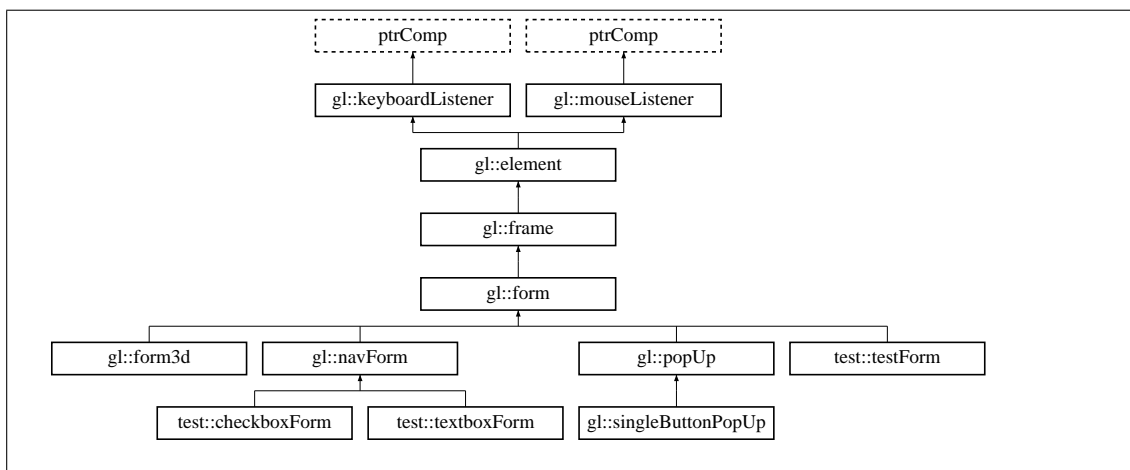

Public Member Functions

- **form** (int *argc, char **argv, int wid=400, int hei=400)
- **form** (os::smart_ptr< **form** > **prev**=NULL)
- virtual ~**form** ()
- bool **isForm** ()
- os::smart_ptr< **form** > **prev** ()
- const os::smart_ptr< **form** > **prev** () const
- os::smart_ptr< **form** > **next** ()
- const os::smart_ptr< **form** > **next** () const
- os::smart_ptr< **form** > **topForm** ()
- bool **open** () const
- void **open** (os::smart_ptr< **form** > **next**)
- void **close** ()
- virtual void **drawBackground** ()
- const std::string & **title** () const

- void **setTitle** (const std::string &str)
- void **setTitle** (const char *str)
- void **setResizePolicy** (resizePolicyEnum rpe)
- **resizePolicyEnum** **resizePolicy** () const
- **resizePolicyEnum** **truePolicy** () const
- virtual void **customResize** ()
- int **minWidth** () const
- int **minHeight** () const
- int **maxWidth** () const
- int **maxHeight** () const
- int **targWidth** () const
- int **targHeight** () const
- void **setMinWidth** (int **minWidth**)
- void **setMinHeight** (int **minHeight**)
- void **setMaxWidth** (int **maxWidth**)
- void **setMaxHeight** (int **maxHeight**)
- void **setTargWidth** (int **targWidth**)
- void **setTargHeight** (int **targHeight**)
- virtual void **setHeight** (int hght)
- virtual void **setWidth** (int wdth)
- virtual void **buttonClicked** (int **button**, int state, int mouseX, int mouseY)
- virtual void **mouseMove** (int mouseX, int mouseY)
- virtual bool **keyPress** (const **key** &_key)
- virtual bool **keyUnpress** (const **key** &_key)

Protected Member Functions

- bool **wrapFocus** () const

Private Member Functions

- void **_refreshTitle** () const
- virtual void **_clear** ()
- virtual void **_initialize** ()
- void **_draw** ()
- void **_update** ()
- virtual void **_currentFormDraw** ()
- void **processResize** ()

Private Attributes

- os::smart_ptr< **form** > **_prev**
- os::smart_ptr< **form** > **_next**
- bool **_open**
- bool **_requireDisplayInit**
- std::string **_title**

- **resizePolicyEnum _resizePolicy**
- **int _minWidth**
- **int _minHeight**
- **int _maxWidth**
- **int _maxHeight**
- **int _targWidth**
- **int _targHeight**

Friends

- **class form3d**
- **class popUp**
- **class testingDriver**
- **class UIDriver**

Additional Inherited Members

36.29.1 Constructor & Destructor Documentation

`form::form (int * argc, char ** argv, int wid = 400, int hei = 400)`

`form::form (os::smart_ptr< form > prev = NULL)`

`form::~form () [virtual]`

36.29.2 Member Function Documentation

`void form::_clear () [private], [virtual]`

Reimplemented in **gl::form3d** (p. 703), and **gl::popUp** (p. 724).

`void form::_currentFormDraw () [private], [virtual]`

Reimplemented in **gl::popUp** (p. 724).

`void form::_draw () [private]`

`void form::_initialize () [private], [virtual]`

`void form::_refreshTitle () const [private]`

`void form::_update () [private]`

`void form::buttonClicked (int button, int state, int mouseX, int mouseY) [virtual]`

Reimplemented from **gl::frame** (p. 705).


```

void form::close ( )

virtual void gl::form::customResize ( ) [inline], [virtual]

void form::drawBackground ( ) [virtual]

Reimplemented from gl::frame (p. 706).
    Reimplemented in gl::popUp (p. 724).

bool gl::form::isForm ( ) [inline], [virtual]

Reimplemented from gl::frame (p. 706).

bool form::keyPress ( const key & _key ) [virtual]

Reimplemented from gl::frame (p. 706).
    Reimplemented in gl::navForm (p. 722).

bool form::keyUnpress ( const key & _key ) [virtual]

Reimplemented from gl::frame (p. 706).
    Reimplemented in gl::navForm (p. 722).

int gl::form::maxHeight ( ) const [inline]
int gl::form::maxWidth ( ) const [inline]
int gl::form::minHeight ( ) const [inline]
int gl::form::minWidth ( ) const [inline]
void form::mouseMove ( int mouseX, int mouseY ) [virtual]

Reimplemented from gl::frame (p. 706).

os::smart_ptr<form> gl::form::next ( ) [inline]
const os::smart_ptr<form> gl::form::next ( ) const [inline]
bool gl::form::open ( ) const [inline]
void form::open ( os::smart_ptr< form > next )
os::smart_ptr<form> gl::form::prev ( ) [inline]
const os::smart_ptr<form> gl::form::prev ( ) const [inline]
void form::processResize ( ) [private]
resizePolicyEnum gl::form::resizePolicy ( ) const [inline]
void form::setHeight ( int hgt ) [virtual]

Reimplemented from gl::element (p. 686).

```

```

void form::setMaxHeight ( int maxHeight )
void form::setMaxWidth ( int maxWidth )
void form::setMinHeight ( int minHeight )
void form::setMinWidth ( int minWidth )
void gl::form::setResizePolicy ( resizePolicyEnum rpe ) [inline]
void form::setTargHeight ( int targHeight )
void form::setTargWidth ( int targWidth )
void form::setTitle ( const std::string & str )
void gl::form::setTitle ( const char * str ) [inline]
void form::setWidth ( int wdth ) [virtual]

```

Reimplemented from **gl::element** (p. 686).

```

int gl::form::targHeight ( ) const [inline]
int gl::form::targWidth ( ) const [inline]
const std::string& gl::form::title ( ) const [inline]
os::smart_ptr< form > form::topForm ( )
resizePolicyEnum form::truePolicy ( ) const
bool gl::form::wrapFocus ( ) const [inline], [protected], [virtual]

```

Reimplemented from **gl::frame** (p. 707).

Reimplemented in **gl::popUp** (p. 724).

36.29.3 Friends And Related Function Documentation

```

friend class form3d [friend]
friend class popUp [friend]
testingDriver [friend]
friend class UIDriver [friend]

```

36.29.4 Member Data Documentation

```

int gl::form::_maxHeight [private]
int gl::form::_maxWidth [private]
int gl::form::_minHeight [private]
int gl::form::_minWidth [private]

```


```

os::smart_ptr<form> gl::form::_next [private]
bool gl::form::_open [private]
os::smart_ptr<form> gl::form::_prev [private]
bool gl::form::_requireDisplayInit [private]
resizePolicyEnum gl::form::_resizePolicy [private]
int gl::form::_targHeight [private]
int gl::form::_targWidth [private]
std::string gl::form::_title [private]

```

36.30 gl::form3d Class Reference

Inheritance diagram for gl::form3d:

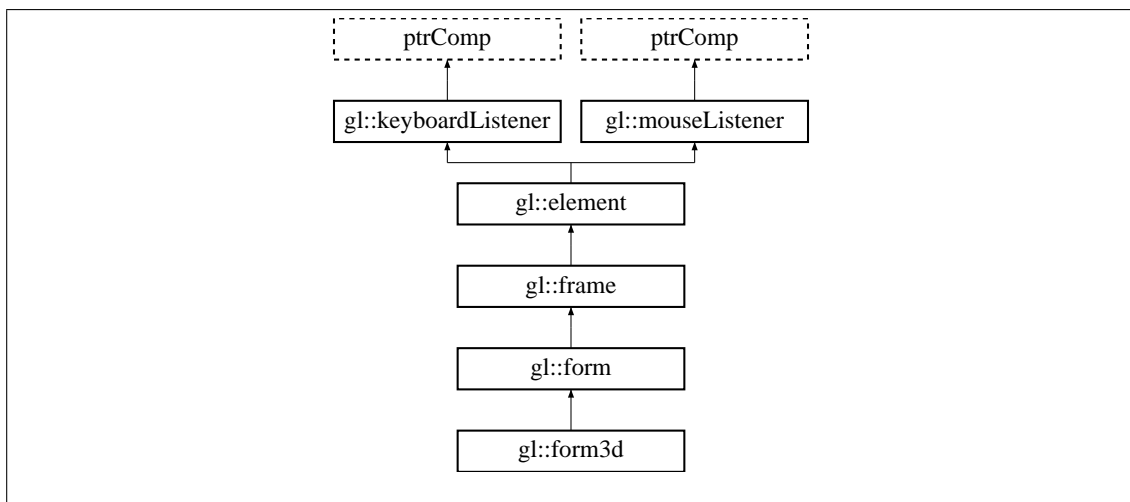

Public Member Functions

- **form3d** (int *argc, char **argv)
- **form3d** (os::smart_ptr< **form** > **prev**=NULL)
- virtual ~**form3d** ()
- virtual void **threeDDraw** ()
- void **setFieldOfViewAngle** (double **fieldOfViewAngle**)
- void **setZNear** (double **zNear**)
- void **setZFar** (double **zFar**)
- double **fieldOfViewAngle** () const
- double **zNear** () const
- double **zFar** () const

Private Member Functions

- void **_clear** ()

Private Attributes

- double **_fieldOfViewAngle**
- double **_zNear**
- double **_zFar**

Additional Inherited Members

36.30.1 Constructor & Destructor Documentation

form3d::form3d (int * argc, char ** argv)

form3d::form3d (os::smart_ptr< **form** > prev = NULL)

virtual gl::form3d::~~form3d () [inline], [virtual]

36.30.2 Member Function Documentation

void form3d::_clear () [private], [virtual]

Reimplemented from **gl::form** (p. 699).

double gl::form3d::fieldOfViewAngle () const [inline]

void form3d::setFieldOfViewAngle (double fieldOfViewAngle)

void form3d::setZFar (double zFar)

void form3d::setZNear (double zNear)

virtual void gl::form3d::threeDDraw () [inline], [virtual]

double gl::form3d::zFar () const [inline]

double gl::form3d::zNear () const [inline]

36.30.3 Member Data Documentation


double gl::form3d::_fieldOfViewAngle [private]

double gl::form3d::_zFar [private]

double gl::form3d::_zNear [private]

36.31 gl::frame Class Reference

Inheritance diagram for gl::frame:

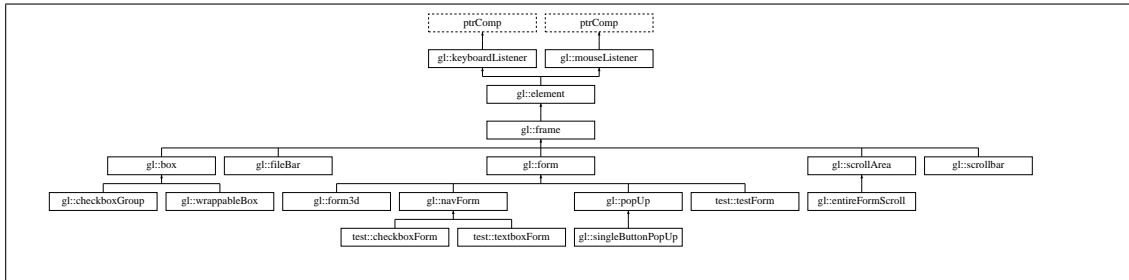

Public Member Functions

- **frame** (**frame** *master, **elementDepth** depth=defaultDepth)
- virtual ~**frame** ()
- virtual bool **isForm** ()
- os::smart_ptr< os::unsortedList< **gl::element** > > **searchUIBy** (std::string str)
- virtual void **setX** (int x)
- virtual void **setY** (int y)
- virtual void **drawBackground** ()
- virtual void **drawMain** ()
- virtual void **drawTop** ()
- virtual bool **childrenFocusable** () const
- bool **focus** (os::smart_ptr< **element** > elm)
- void **unsetFocus** ()
- os::smart_ptr< **element** > **getFocused** ()
- void **addMouseListener** (os::smart_ptr< **mouseListener** > listen)
- void **removeMouseListener** (os::smart_ptr< **mouseListener** > listen)
- void **addKeyListener** (os::smart_ptr< **keyboardListener** > listen)
- void **removeKeyListener** (os::smart_ptr< **keyboardListener** > listen)
- virtual void **buttonClicked** (int button, int state, int mouseX, int mouseY)
- virtual void **mouseMove** (int mouseX, int mouseY)
- virtual bool **keyPress** (const **key** &_key)
- virtual bool **keyUnpress** (const **key** &_key)
- bool **focusUp** ()
- bool **focusDown** ()
- os::smart_ptr< **gl::element** > **firstElement** ()
- os::smart_ptr< **gl::element** > **lastElement** ()

Protected Member Functions

- virtual void **update** ()
- void **unfocusUp** ()
- virtual bool **wrapFocus** () const

Protected Attributes

- `os::smartSet< element > backgroundList`
- `os::smartSet< element > middleList`
- `os::smartSet< element > topList`
- `std::recursive_mutex keyboardMutex`
- `os::smartSet< keyboardListener > keyboardListeners`
- `std::recursive_mutex mouseMutex`
- `os::smartSet< mouseListener > mouseListeners`

Private Member Functions

- `void pushElement (os::smart_ptr< element > frm)`
- `void removeElement (os::smart_ptr< element > frm)`
- `frame ()`
- `void mouseMoveSupport (bool &glbFlag, elementDepth dep, int xPos, int yPos)`

Private Attributes

- `std::recursive_mutex mtx`

Friends

- `class element`
- `class form`

36.31.1 Constructor & Destructor Documentation

`frame::frame () [private]`

`frame::frame (frame * master, elementDepth depth = defaultDepth)`

`frame::~~frame () [virtual]`

36.31.2 Member Function Documentation

`void frame::addKeyboardListener (os::smart_ptr< keyboardListener > listen)`

`void frame::addMouseListener (os::smart_ptr< mouseListener > listen)`

`void frame::buttonClicked (int button, int state, int mousePositionX, int mousePositionY)
[virtual]`

Reimplemented from `gl::mouseListener` (p. 720).

Reimplemented in `gl::scrollbar` (p. 735), and `gl::form` (p. 699).

`virtual bool gl::frame::childrenFocusable () const [inline], [virtual]`

Reimplemented from `gl::element` (p. 682).

Reimplemented in `gl::scrollbar` (p. 735), and `gl::fileBar` (p. 694).

`void frame::drawBackground () [virtual]`

Reimplemented from **gl::element** (p. 683).

Reimplemented in **gl::form** (p. 700), **gl::popUp** (p. 724), and **gl::box** (p. 658).

`void frame::drawMain () [virtual]`

Reimplemented from **gl::element** (p. 683).

Reimplemented in **gl::scrollbar** (p. 735).

`void frame::drawTop () [virtual]`

Reimplemented from **gl::element** (p. 683).

`os::smart_ptr< gl::element > frame::firstElement ()`

`bool frame::focus (os::smart_ptr< element > elm)`

`bool frame::focusDown () [virtual]`

Reimplemented from **gl::element** (p. 684).

`bool frame::focusUp () [virtual]`

Reimplemented from **gl::element** (p. 684).

`os::smart_ptr< element > frame::getFocused () [virtual]`

Reimplemented from **gl::element** (p. 684).

`virtual bool gl::frame::isForm () [inline], [virtual]`

Reimplemented in **gl::form** (p. 700).

`bool frame::keyPress (const key & _key) [virtual]`

Reimplemented from **gl::keyboardListener** (p. 715).

Reimplemented in **gl::form** (p. 700), and **gl::navForm** (p. 722).

`bool frame::keyUnpress (const key & _key) [virtual]`

Reimplemented from **gl::keyboardListener** (p. 715).

Reimplemented in **gl::form** (p. 700), and **gl::navForm** (p. 722).

`os::smart_ptr< gl::element > frame::lastElement ()`

`void frame::mouseMove (int mouseX, int mouseY) [virtual]`

Reimplemented from **gl::element** (p. 684).

Reimplemented in **gl::scrollbar** (p. 736), **gl::form** (p. 700), and **gl::fileBar** (p. 694).

```

void frame::mouseMoveSupport ( bool & glbFlag, elementDepth dep, int xPos, int yPos )
[private]

void frame::pushElement ( os::smart_ptr< element > frm ) [private]
void frame::removeElement ( os::smart_ptr< element > frm ) [private]
void frame::removeKeyboardListener ( os::smart_ptr< keyboardListener > listen )
void frame::removeMouseListener ( os::smart_ptr< mouseListener > listen )
os::smart_ptr< os::unsortedList< gl::element > > frame::searchUIBy ( std::string str ) [virtual]

```

Reimplemented from **gl::element** (p. 686).

```

void frame::setX ( int x ) [virtual]

```

Reimplemented from **gl::element** (p. 686).

```

void frame::setY ( int y ) [virtual]

```

Reimplemented from **gl::element** (p. 686).

```

void frame::unfocusUp ( ) [protected]

```

```

void frame::unsetFocus ( ) [virtual]

```

Reimplemented from **gl::element** (p. 687).

```

void frame::update ( ) [protected], [virtual]

```

Reimplemented from **gl::element** (p. 687).

```

virtual bool gl::frame::wrapFocus ( ) const [inline], [protected], [virtual]

```

Reimplemented in **gl::form** (p. 701), **gl::wrappableBox** (p. 755), and **gl::popUp** (p. 724).

36.31.3 Friends And Related Function Documentation

```

friend class element [friend]

```

```

friend class form [friend]

```

36.31.4 Member Data Documentation

```

os::smartSet<element> gl::frame::backgroundList [protected]

```

```

os::smartSet<keyboardListener> gl::frame::keyboardListeners [protected]

```

```

std::recursive_mutex gl::frame::keyboardMutex [protected]

```

```

os::smartSet<element> gl::frame::middleList [protected]

```




```

os::smartSet<mouseListener> gl::frame::mouseListeners [protected]
std::recursive_mutex gl::frame::mouseMutex [protected]
std::recursive_mutex gl::frame::mtx [private]
os::smartSet<element> gl::frame::topList [protected]

```

36.32 gl::globalKeyboardListener Class Reference

Inheritance diagram for gl::globalKeyboardListener:

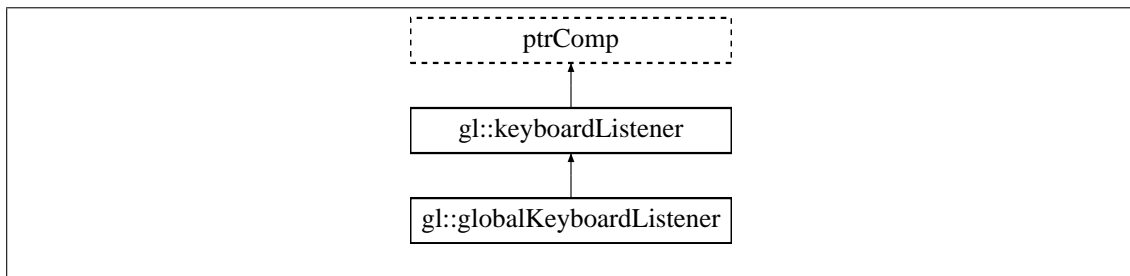

Public Member Functions

- **globalKeyboardListener** ()
- virtual ~**globalKeyboardListener** ()
- const os::smart_ptr< **keyboard** > **getKeyboard** () const
- bool **keyboardListening** () const

Private Attributes

- os::smart_ptr< **keyboard** > **_keyboard**

Friends

- class **keyboard**

36.32.1 Constructor & Destructor Documentation

```
globalKeyboardListener::globalKeyboardListener ( )
```

```
globalKeyboardListener::~globalKeyboardListener ( ) [virtual]
```

36.32.2 Member Function Documentation

```
const os::smart_ptr<keyboard> gl::globalKeyboardListener::getKeyboard ( ) const [inline]
```

```
bool gl::globalKeyboardListener::keyboardListening ( ) const [inline]
```

36.32.3 Friends And Related Function Documentation


friend class **keyboard** [friend]

36.32.4 Member Data Documentation

os::smart_ptr<**keyboard**> gl::globalKeyboardListener::_keyboard [private]

36.33 gl::globalMouseListener Class Reference

Inheritance diagram for gl::globalMouseListener:

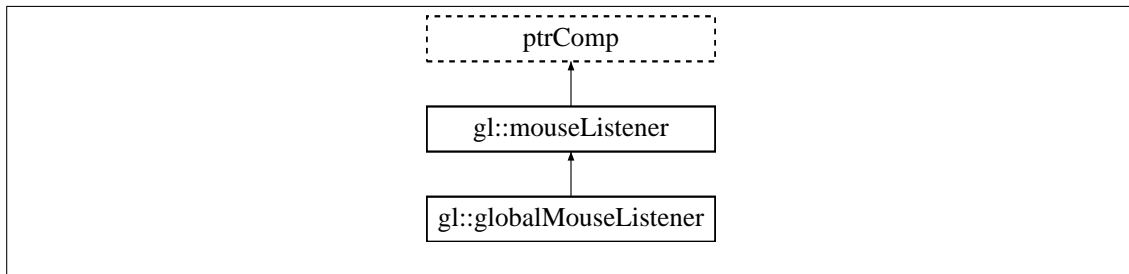

Public Member Functions

- **globalMouseListener** ()
- virtual ~**globalMouseListener** ()
- const os::smart_ptr< **mouse** > **keyboard** () const
- bool **mouseListening** () const

Private Attributes

- os::smart_ptr< **mouse** > **_mouse**

Friends

- class **mouse**

36.33.1 Constructor & Destructor Documentation

globalMouseListener::globalMouseListener ()

globalMouseListener::~globalMouseListener () [virtual]

36.33.2 Member Function Documentation

const os::smart_ptr<**mouse**> gl::globalMouseListener::keyboard () const [inline]

bool gl::globalMouseListener::mouseListening () const [inline], [virtual]

Reimplemented from **gl::mouseListener** (p. 720).

36.33.3 Friends And Related Function Documentation


friend class **mouse** [friend]

36.33.4 Member Data Documentation

os::smart_ptr<**mouse**> gl::globalMouseListener::_mouse [private]

36.34 gl::Helvetica Class Reference

Inheritance diagram for gl::Helvetica:

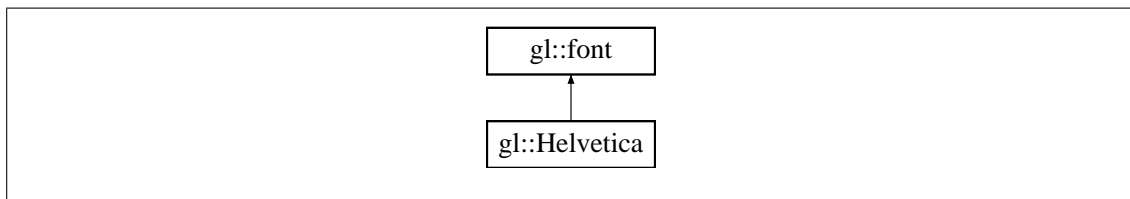

Public Member Functions

- **Helvetica** ()
- virtual ~**Helvetica** ()
- virtual void **setSize** (unsigned int **size**)
- virtual const std::string & **name** () const

Additional Inherited Members

36.34.1 Constructor & Destructor Documentation

gl::Helvetica::Helvetica () [inline]

virtual gl::Helvetica::~~Helvetica () [inline], [virtual]

36.34.2 Member Function Documentation

virtual const std::string& gl::Helvetica::name () const [inline], [virtual]


Reimplemented from **gl::font** (p. 696).

void Helvetica::setSize (unsigned int size) [virtual]

Reimplemented from **gl::font** (p. 696).

36.35 gl::imageElement Class Reference

Inheritance diagram for gl::imageElement:

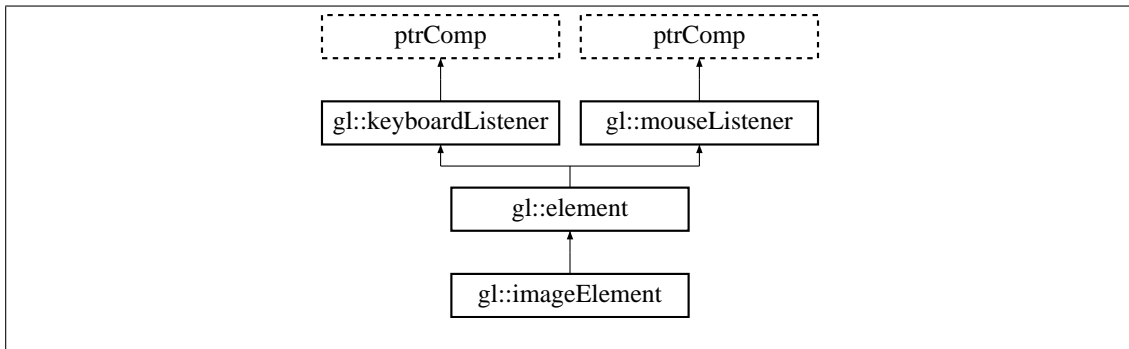

Public Member Functions

- **imageElement** (**frame** *master)
- void **setTexture** (GLuint t)
- GLuint **texture** () const
- virtual void **drawBackground** ()

Private Attributes

- GLuint **_texture**

Additional Inherited Members

36.35.1 Constructor & Destructor Documentation

imageElement::imageElement (**frame** * master)

36.35.2 Member Function Documentation

void imageElement::drawBackground () [virtual]

Reimplemented from **gl::element** (p. 683).

void imageElement::setTexture (GLuint t)

GLuint gl::imageElement::texture () const [inline]

36.35.3 Member Data Documentation

GLuint gl::imageElement::_texture [private]

36.36 gl::key Class Reference

Public Member Functions

- **key** (**keyType** _type=**key_standard**, unsigned char _value=0)
- bool **operator==** (const **key** &k) const
- bool **operator!=** (const **key** &k) const

- bool **operator**< (const **key** &k) const
- bool **operator**<= (const **key** &k) const
- bool **operator**> (const **key** &k) const
- bool **operator**>= (const **key** &k) const

Public Attributes

- **keyType** type
- unsigned char **value**

Private Member Functions

- int **compare** (const **key** &k) const

36.36.1 Constructor & Destructor Documentation

key::key (**keyType** _type = **key_standard**, unsigned char _value = 0)

36.36.2 Member Function Documentation

```
int key::compare ( const key &k ) const [private]
bool gl::key::operator!= ( const key &k ) const [inline]
bool gl::key::operator< ( const key &k ) const [inline]
bool gl::key::operator<= ( const key &k ) const [inline]
bool gl::key::operator== ( const key &k ) const [inline]
bool gl::key::operator> ( const key &k ) const [inline]
bool gl::key::operator>= ( const key &k ) const [inline]
```

36.36.3 Member Data Documentation

keyType gl::key::type

unsigned char gl::key::value

36.37 gl::keyboard Class Reference

Public Member Functions

- virtual ~**keyboard** ()
- bool **operator**[] (unsigned int index) const
- bool **operator**[] (const **key** &index) const

Static Public Member Functions

- static os::smart_ptr< **keyboard** > **singleton** ()
- static int **numberOfKeys** ()

Private Member Functions

- **keyboard** ()
- void **_keyPress** (const **key** &_key)
- void **_keyUnpress** (const **key** &_key)
- bool & **operator[]** (unsigned int index)
- bool & **operator[]** (const **key** &index)

Private Attributes

- bool * **keyStatus**
- std::recursive_mutex **mtx**
- os::smartSet< **globalKeyboardListener** > **listenerSet**

Friends

- class **baseUIDriver**
- class **globalKeyboardListener**

36.37.1 Constructor & Destructor Documentation

keyboard::keyboard () [private]

keyboard::~~keyboard () [virtual]

36.37.2 Member Function Documentation

void keyboard::_keyPress (const **key** &_key) [private]

void keyboard::_keyUnpress (const **key** &_key) [private]

static int gl::keyboard::numberOfKeys () [inline], [static]

bool& gl::keyboard::operator[] (unsigned int index) [inline], [private]

bool& gl::keyboard::operator[] (const **key** & index) [inline], [private]

bool keyboard::operator[] (unsigned int index) const

bool gl::keyboard::operator[] (const **key** & index) const [inline]

os::smart_ptr< **keyboard** > keyboard::singleton () [static]

36.37.3 Friends And Related Function Documentation

friend class **baseUIDriver** [friend]


friend class **globalKeyboardListener** [friend]

36.37.4 Member Data Documentation

bool* gl::keyboard::keyStatus [private]

```
std::recursive_mutex gl::keyboard::mtx [private]
```

Inheritance diagram for `gl::keyboardListener`:

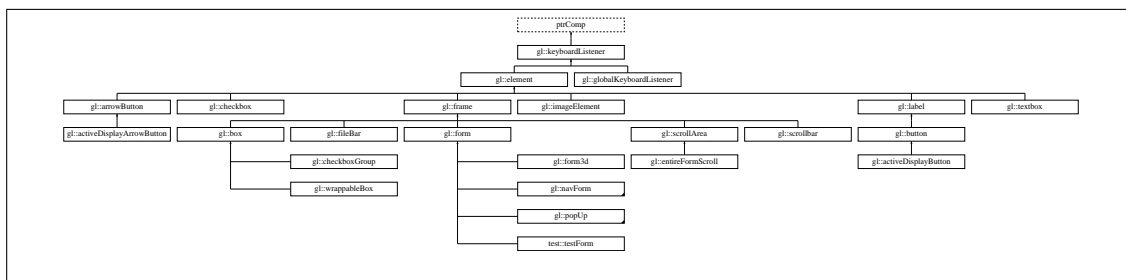

- virtual ~**keyboardListener** ()
- virtual bool **keyPress** (const **key** &_key)
- virtual bool **keyUnpress** (const **key** &_key)
- bool **keyboardListening** () const
- os::smart_ptr< **frame** > **keyboardSender** ()
- virtual bool **enabled** () const
- virtual bool **disabled** () const

- `os::smart_ptr< frame > _keyboardSender`

- class **frame**

```
keyboardListener::~~keyboardListener ( ) [virtual]
```

```
virtual bool gl::keyboardListener::disabled ( ) const [inline], [virtual]
```

Reimplemented in **gl::element** (p. 683).

```
virtual bool gl::keyboardListener::enabled ( ) const [inline], [virtual]
```

Reimplemented in **gl::element** (p. 683).

```
bool gl::keyboardListener::keyboardListening ( ) const [inline]
```

```
os::smart_ptr<frame> gl::keyboardListener::keyboardSender ( ) [inline]
```

```
virtual bool gl::keyboardListener::keyPress ( const key & _key ) [inline], [virtual]
```

Reimplemented in **gl::frame** (p. 706), **gl::arrowButton** (p. 651), **gl::button** (p. 661), **gl::form** (p. 700), **gl::textbox** (p. 745), **gl::navForm** (p. 722), and **gl::checkbox** (p. 663).

```
virtual bool gl::keyboardListener::keyUnpress ( const key & _key ) [inline], [virtual]
```

Reimplemented in **gl::frame** (p. 706), **gl::arrowButton** (p. 651), **gl::button** (p. 661), **gl::form** (p. 700), **gl::textbox** (p. 746), **gl::navForm** (p. 722), and **gl::checkbox** (p. 663).

36.38.3 Friends And Related Function Documentation


```
friend class frame [friend]
```

36.38.4 Member Data Documentation

```
os::smart_ptr<frame> gl::keyboardListener::_keyboardSender [private]
```

36.39 gl::label Class Reference

Inheritance diagram for gl::label:

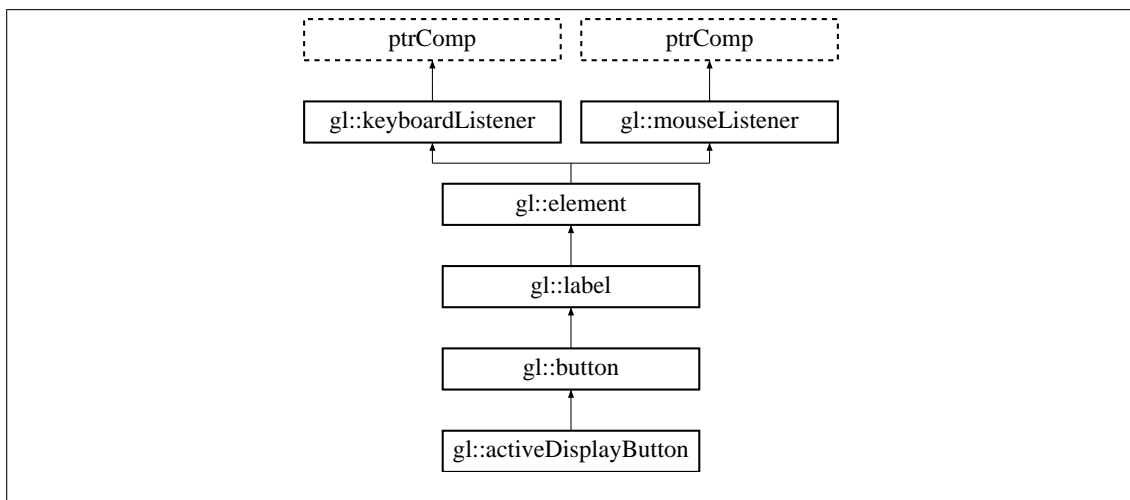

Public Member Functions

- **label** (**frame** ***master**, int targWidth=0, int targHeight=0)
- virtual ~**label** ()
- const std::string **stringID** () const
- virtual void **drawMain** ()
- const std::string & **text** () const

- **color textColor** () const
- const os::smart_ptr< **font** > **getFont** () const
- void **setText** (const std::string &**text**)
- void **setTextColor** (const **color** &**textColor**)
- void **setFont** (os::smart_ptr< **font** > fnt)
- void **setFontSize** (int font_size)
- void **setLineSpace** (double lineSpace)
- virtual void **setHeight** (int **height**)
- virtual void **setWidth** (int **width**)
- bool **bounded** () const
- **lateralTextLayout lateralLayout** () const
- **verticalTextLayout verticalLayout** () const
- void **setBounded** (bool isBounded)
- void **setLateralLayout** (**lateralTextLayout** ltl)
- void **setVerticalLayout** (**verticalTextLayout** ltl)

Protected Member Functions

- void **refreshString** ()

Protected Attributes

- **color _textColor**

Private Attributes

- std::string **_text**
- os::smart_ptr< **font** > **_font**
- int **array_length**
- os::smart_ptr< std::string > **parsed_strings**
- double **xPlus**
- double **yPlus**
- bool **_isBounded**
- **lateralTextLayout _lateralLayout**
- **verticalTextLayout _verticalLayout**

36.39.1 Constructor & Destructor Documentation

label::label (**frame** * master, int targWidth = 0, int targHeight = 0)

virtual gl::label::~~label () [inline], [virtual]

36.39.2 Member Function Documentation

bool gl::label::bounded () const [inline]

void label::drawMain () [virtual]

Reimplemented from **gl::element** (p. 683).

Reimplemented in **gl::button** (p. 660).

const os::smart_ptr<**font**> gl::label::getFont () const [inline]

lateralTextLayout gl::label::lateralLayout () const [inline]

void label::refreshString () [protected]

void label::setBounded (bool isBounded)

void label::setFont (os::smart_ptr< **font** > fnt)

void label::setFontSize (int font_size)

void label::setHeight (int height) [virtual]

Reimplemented from **gl::element** (p. 686).

Reimplemented in **gl::button** (p. 661).

void label::setLateralLayout (**lateralTextLayout** ltl)

void label::setLineSpace (double lineSpace)

void label::setText (const std::string & text)

void label::setTextColor (const **color** & textColor)

void label::setVerticalLayout (**verticalTextLayout** ltl)

void label::setWidth (int width) [virtual]

Reimplemented from **gl::element** (p. 686).

Reimplemented in **gl::button** (p. 661).

const std::string gl::label::stringID () const [inline], [virtual]

Reimplemented from **gl::element** (p. 686).

const std::string& gl::label::text () const [inline]

color gl::label::textColor () const [inline]

verticalTextLayout gl::label::verticalLayout () const [inline]

36.39.3 Member Data Documentation

os::smart_ptr<**font**> gl::label::_font [private]

bool gl::label::_isBounded [private]

lateralTextLayout gl::label::_lateralLayout [private]

std::string gl::label::_text [private]

color gl::label::_textColor [protected]

verticalTextLayout gl::label::_verticalLayout [private]

int gl::label::array_length [private]

os::smart_ptr<std::string> gl::label::parsed_strings [private]

double gl::label::xPlus [private]

double gl::label::yPlus [private]

36.40 gl::mouse Class Reference

Public Member Functions

- virtual ~**mouse** ()
- int **x** () const
- int **y** () const
- int **operator[]** (unsigned int index) const

Static Public Member Functions

- static os::smart_ptr< **mouse** > **singleton** ()
- static int **numberOfButtons** ()

Private Member Functions

- **mouse** ()
- void **_buttonClicked** (int **button**, int state, int mousePositionX, int mousePositionY)
- void **_mouseMove** (int mousePositionX, int mousePositionY)

Private Attributes

- int **_x**
- int **_y**
- int * **buttonStatus**
- std::recursive_mutex **mtx**
- os::smartSet< **globalMouseListener** > **listenerSet**

Friends

- class **baseUIDriver**
- class **testingDriver**
- class **globalMouseListener**

36.40.1 Constructor & Destructor Documentation

mouse::mouse () [private]

mouse::~mouse () [virtual]

36.40.2 Member Function Documentation

```

void mouse::_buttonClicked ( int button, int state, int mousePositionX, int mousePositionY )
[private]

void mouse::_mouseMove ( int mousePositionX, int mousePositionY ) [private]

static int gl::mouse::numberOfButtons ( ) [inline], [static]

int mouse::operator[] ( unsigned int index ) const

os::smart_ptr< mouse > mouse::singleton ( ) [static]

int gl::mouse::x ( ) const [inline]

int gl::mouse::y ( ) const [inline]

```

36.40.3 Friends And Related Function Documentation

```

friend class baseUIDriver [friend]

friend class globalMouseListener [friend]

friend class testingDriver [friend]

```

36.40.4 Member Data Documentation

```

int gl::mouse::_x [private]

int gl::mouse::_y [private]

int* gl::mouse::buttonStatus [private]


os::smartSet<globalMouseListener> gl::mouse::listenerSet [private]

std::recursive_mutex gl::mouse::mtx [private]

```

36.41 gl::mouseListener Class Reference

Inheritance diagram for gl::mouseListener:

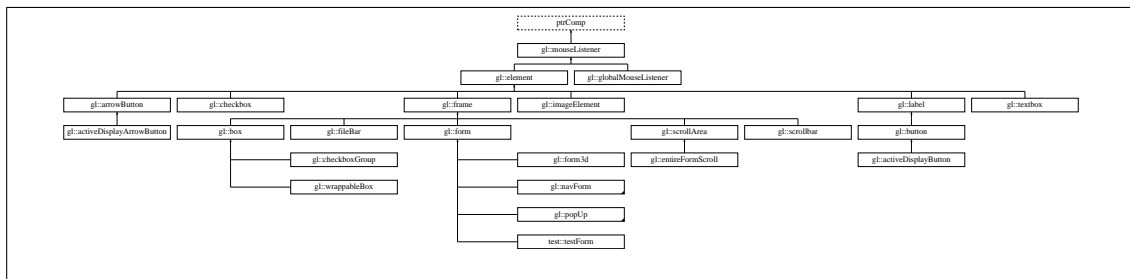

Public Member Functions

- virtual ~**MouseListener** ()
- virtual void **buttonClicked** (int **button**, int state, int mousePositionX, int mousePositionY)
- virtual void **mouseMove** (int mousePositionX, int mousePositionY)

- virtual bool **mouseListening** () const
- os::smart_ptr< **frame** > **mouseSender** ()
- virtual **elementDepth** **depth** () const
- virtual bool **mouseIn** () const
- virtual bool **enabled** () const
- virtual bool **disabled** () const

Private Attributes

- os::smart_ptr< **frame** > **_mouseSender**

Friends

- class **frame**

36.41.1 Constructor & Destructor Documentation

mouseListener::~~mouseListener () [virtual]

36.41.2 Member Function Documentation

virtual void gl::mouseListener::buttonClicked (int button, int state, int mouseX, int mouseY) [inline], [virtual]

Reimplemented in **gl::frame** (p. 705), **gl::arrowButton** (p. 651), **gl::scrollbar** (p. 735), **gl::button** (p. 660), **gl::form** (p. 699), **gl::textbox** (p. 745), and **gl::checkbox** (p. 663).

virtual **elementDepth** gl::mouseListener::depth () const [inline], [virtual]

Reimplemented in **gl::element** (p. 683), and **gl::fileBar** (p. 694).

virtual bool gl::mouseListener::disabled () const [inline], [virtual]

Reimplemented in **gl::element** (p. 683).

virtual bool gl::mouseListener::enabled () const [inline], [virtual]

Reimplemented in **gl::element** (p. 683).

virtual bool gl::mouseListener::mouseIn () const [inline], [virtual]

Reimplemented in **gl::element** (p. 684).

virtual bool gl::mouseListener::mouseListening () const [inline], [virtual]

Reimplemented in **gl::globalMouseListener** (p. 709).

```
virtual void gl::mouseListener::mouseMove ( int mouseX, int mouseY )
[inline], [virtual]
```

Reimplemented in **gl::frame** (p. 706), **gl::element** (p. 684), **gl::scrollbar** (p. 736), **gl::form** (p. 700), **gl::textbox** (p. 746), and **gl::fileBar** (p. 694).

```
os::smart_ptr<frame> gl::mouseListener::mouseSender ( ) [inline]
```

36.41.3 Friends And Related Function Documentation


```
friend class frame [friend]
```

36.41.4 Member Data Documentation

```
os::smart_ptr<frame> gl::mouseListener::_mouseSender [private]
```

36.42 gl::navForm Class Reference

Inheritance diagram for gl::navForm:

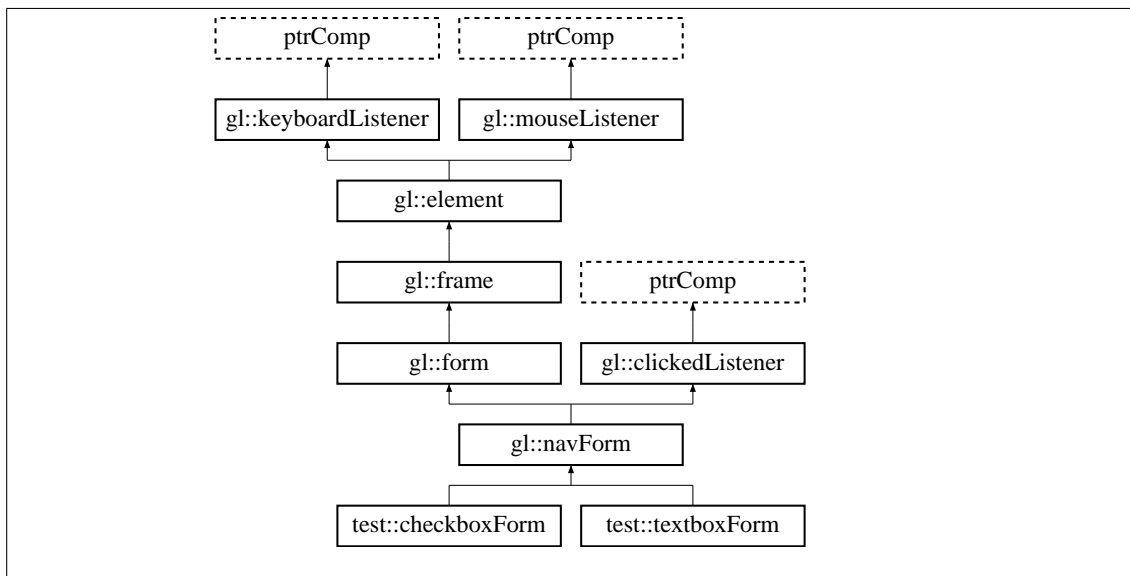

Public Member Functions

- **navForm** (os::smart_ptr< **form** > **prev**)
- virtual ~**navForm** ()
- virtual void **receivedClicked** (os::smart_ptr< **element** > elm)
- virtual bool **keyPress** (const **key** &_key)
- virtual bool **keyUnpress** (const **key** &_key)
- bool **backspaceNav** () const
- void **setBackspaceNav** (bool bspn)

Public Attributes

- **gl::fileBar barTop**
- **os::smart_ptr< gl::barGroup > btnBack**

Private Attributes

- **bool _backspaceNav**
- **bool _backTrack**

Additional Inherited Members

36.42.1 Constructor & Destructor Documentation

```
navForm::navForm ( os::smart_ptr< form > prev )  
virtual gl::navForm::~~navForm ( ) [inline], [virtual]
```

36.42.2 Member Function Documentation

```
bool gl::navForm::backspaceNav ( ) const [inline]  
bool navForm::keyPress ( const key & _key ) [virtual]
```

Reimplemented from **gl::form** (p. 700).

```
bool navForm::keyUnpress ( const key & _key ) [virtual]
```

Reimplemented from **gl::form** (p. 700).

```
void navForm::receivedClicked ( os::smart_ptr< element > elm ) [virtual]
```

Reimplemented from **gl::clickedListener** (p. 672).

```
void gl::navForm::setBackspaceNav ( bool bspn ) [inline]
```

36.42.3 Member Data Documentation


```
bool gl::navForm::_backspaceNav [private]  
bool gl::navForm::_backTrack [private]
```

gl::fileBar gl::navForm::barTop

os::smart_ptr<**gl::barGroup**> gl::navForm::btnBack

36.43 gl::popUp Class Reference

Inheritance diagram for gl::popUp:

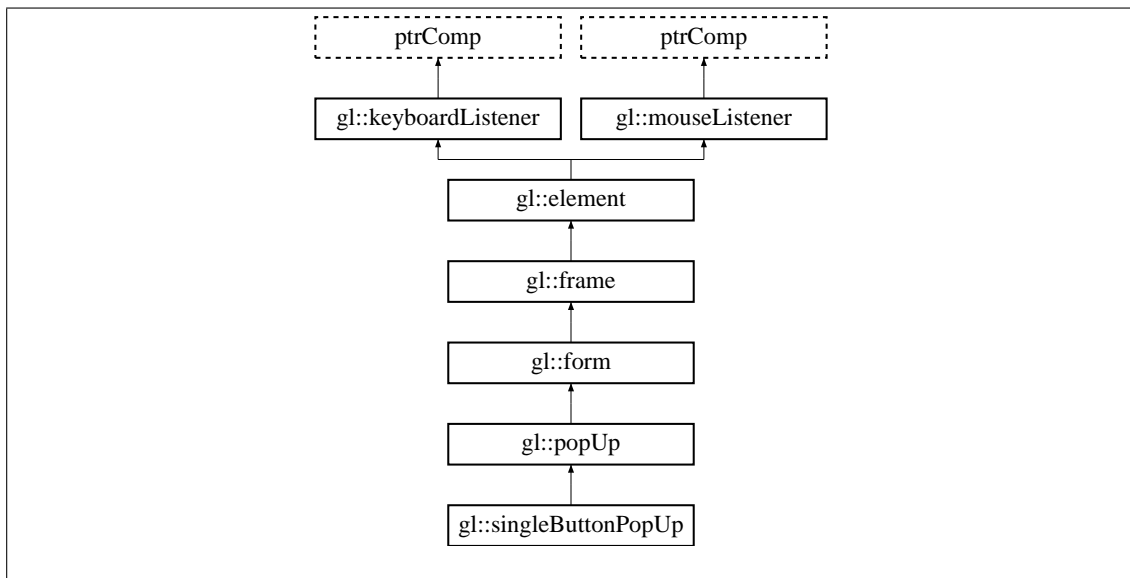

Public Member Functions

- **popUp** (os::smart_ptr< **form** > **prev**)
- virtual ~**popUp** ()
- virtual void **drawBackground** ()
- virtual void **resize** ()
- void **setFrameWidth** (int **frameWidth**)
- void **setFrameHeight** (int **frameHeight**)
- int **frameWidth** () const
- int **frameHeight** () const

Protected Member Functions

- virtual void **resizeFrame** ()
- **box** & **popUpFrame** ()
- bool **wrapFocus** () const

Private Member Functions

- void **_currentFormDraw** ()
- void **_clear** ()

Private Attributes

- **element_background**
- **wrappableBox_popUpFrame**
- int **_frameWidth**
- int **_frameHeight**

- `int _targFrameWidth`
- `int _targFrameHeight`

Additional Inherited Members

36.43.1 Constructor & Destructor Documentation

```
popUp::popUp ( os::smart_ptr< form > prev )
virtual gl::popUp::~~popUp ( ) [inline], [virtual]
```

36.43.2 Member Function Documentation

```
void popUp::_clear ( ) [private], [virtual]
```

Reimplemented from **gl::form** (p. 699).

```
void popUp::_currentFormDraw ( ) [private], [virtual]
```

Reimplemented from **gl::form** (p. 699).

```
void popUp::drawBackground ( ) [virtual]
```

Reimplemented from **gl::form** (p. 700).

```
int gl::popUp::frameHeight ( ) const [inline]
```

```
int gl::popUp::frameWidth ( ) const [inline]
```

```
box& gl::popUp::popUpFrame ( ) [inline], [protected]
```

```
void popUp::resize ( ) [virtual]
```

Reimplemented from **gl::element** (p. 686).

```
void popUp::resizeFrame ( ) [protected], [virtual]
```

Reimplemented in **gl::singleButtonPopUp** (p. 738).

```
void popUp::setFrameHeight ( int frameHeight )
```

```
void popUp::setFrameWidth ( int frameWidth )
```

```
bool gl::popUp::wrapFocus ( ) const [inline], [protected], [virtual]
```


Reimplemented from **gl::form** (p. 701).

36.43.3 Member Data Documentation

element gl::popUp::_background [private]
int gl::popUp::_frameHeight [private]
int gl::popUp::_frameWidth [private]
wrappableBox gl::popUp::_popUpFrame [private]
int gl::popUp::_targFrameHeight [private]
int gl::popUp::_targFrameWidth [private]

36.44 gl::pressedFunction Class Reference

Inheritance diagram for gl::pressedFunction:

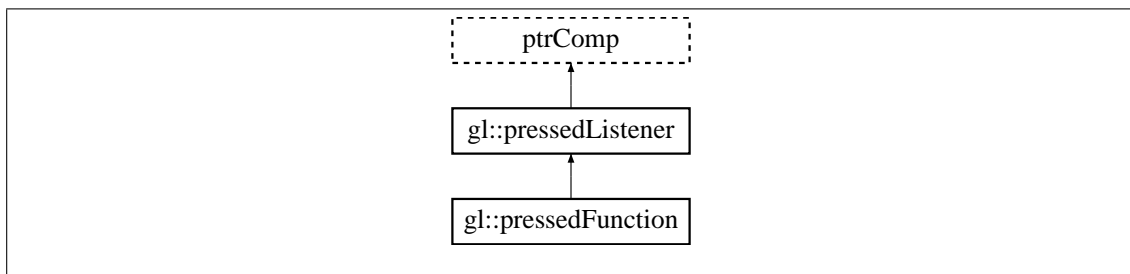

Public Member Functions

- **pressedFunction** (**elementHandler** handler)
- virtual **~pressedFunction** ()
- virtual void **receivedPressed** (os::smart_ptr< **element** > elm)

Protected Attributes

- **elementHandler** ehan

36.44.1 Constructor & Destructor Documentation

gl::pressedFunction::pressedFunction (**elementHandler** handler) [inline]
virtual gl::pressedFunction::~~pressedFunction () [inline], [virtual]

36.44.2 Member Function Documentation

virtual void gl::pressedFunction::receivedPressed (os::smart_ptr< **element** > elm) [inline], [virtual]


Reimplemented from **gl::pressedListener** (p. 727).

36.44.3 Member Data Documentation

elementHandler gl::pressedFunction::ehan [protected]

36.45 gl::pressedFunctionVoid Class Reference

Inheritance diagram for gl::pressedFunctionVoid:

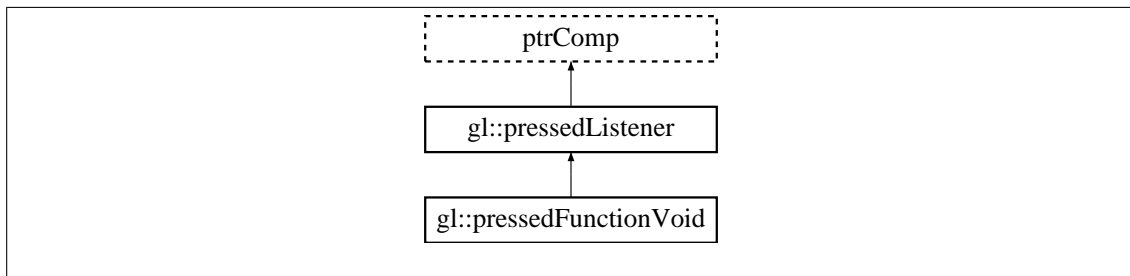

Public Member Functions

- **pressedFunctionVoid** (**elementHandler_void** handler, void *void_ptr)
- virtual **~pressedFunctionVoid** ()
- virtual void **receivedPressed** (os::smart_ptr< **element** > elm)

Protected Attributes

- **elementHandler_void** ehan
- void * **vptr**

36.45.1 Constructor & Destructor Documentation

gl::pressedFunctionVoid::pressedFunctionVoid (**elementHandler_void** handler, void * void_ptr)
[inline]

virtual gl::pressedFunctionVoid::~~pressedFunctionVoid () [inline], [virtual]

36.45.2 Member Function Documentation

virtual void gl::pressedFunctionVoid::receivedPressed (os::smart_ptr< **element** > elm)
[inline], [virtual]

Reimplemented from **gl::pressedListener** (p. 727).


36.45.3 Member Data Documentation

elementHandler_void gl::pressedFunctionVoid::ehan [protected]

void* gl::pressedFunctionVoid::vptr [protected]

36.46 gl::pressedListener Class Reference

Inheritance diagram for gl::pressedListener:

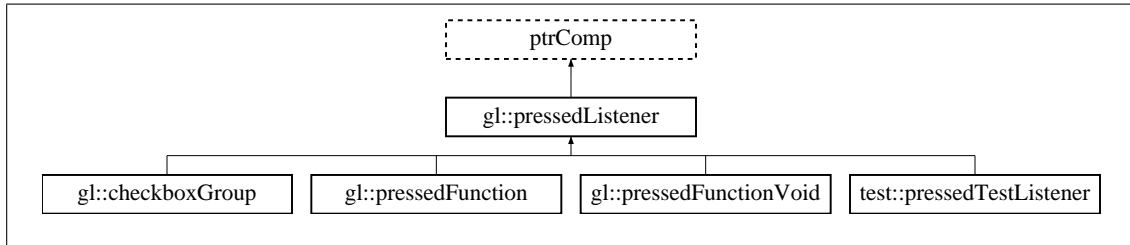

Public Member Functions

- virtual **~pressedListener** ()
- virtual void **receivedPressed** (os::smart_ptr< **element** > elm)

Private Attributes

- std::mutex **mtx**
- os::smartSet< **element** > **senders**

Friends

- class **element**

36.46.1 Constructor & Destructor Documentation

pressedListener::~pressedListener () [virtual]

36.46.2 Member Function Documentation

virtual void gl::pressedListener::receivedPressed (os::smart_ptr< **element** > elm) [inline], [virtual]

Reimplemented in **gl::pressedFunctionVoid** (p. 726), **gl::pressedFunction** (p. 725), **gl::checkboxGroup** (p. 668), and **test::pressedTestListener** (p. 728).

36.46.3 Friends And Related Function Documentation

friend class **element** [friend]


36.46.4 Member Data Documentation

std::mutex gl::pressedListener::mtx [private]

os::smartSet<**element**> gl::pressedListener::senders [private]

36.47 test::pressedTestListener Class Reference

Inheritance diagram for test::pressedTestListener:

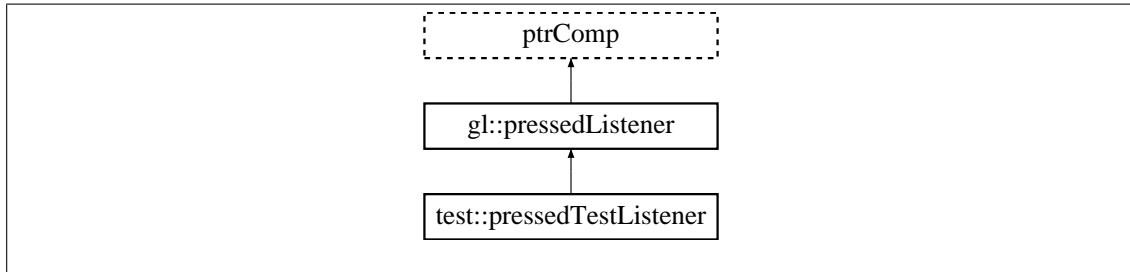

Public Member Functions

- **pressedTestListener** ()
- virtual **~pressedTestListener** ()
- void **resetFlag** ()
- void **receivedPressed** (os::smart_ptr< **gl::element** > elm)
- bool **flag** () const

Private Attributes

- bool **_flag**

36.47.1 Constructor & Destructor Documentation

test::pressedTestListener::pressedTestListener () [inline]

virtual test::pressedTestListener::~~pressedTestListener () [inline], [virtual]

36.47.2 Member Function Documentation

bool test::pressedTestListener::flag () const [inline]

void test::pressedTestListener::receivedPressed (os::smart_ptr< **gl::element** > elm) [inline], [virtual]

Reimplemented from **gl::pressedListener** (p. 727).


void test::pressedTestListener::resetFlag () [inline]

36.47.3 Member Data Documentation

bool test::pressedTestListener::_flag [private]

36.48 gl::resizedListener Class Reference

Inheritance diagram for gl::resizedListener:

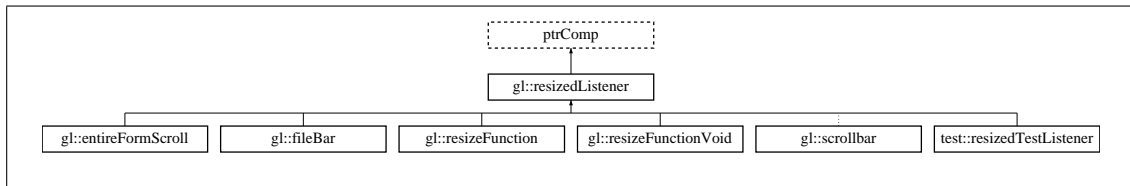

Public Member Functions

- virtual **~resizedListener** ()
- virtual void **receivedResize** (os::smart_ptr< **element** > elm)

Private Attributes

- std::mutex **mtx**
- os::smartSet< **element** > **senders**

Friends

- class **element**

36.48.1 Constructor & Destructor Documentation

resizedListener::~resizedListener () [virtual]

36.48.2 Member Function Documentation

virtual void gl::resizedListener::receivedResize (os::smart_ptr< **element** > elm) [inline], [virtual]

Reimplemented in **gl::entireFormScroll** (p. 692), **gl::resizeFunctionVoid** (p. 732), **gl::resizeFunction** (p. 731), **gl::scrollbar** (p. 736), **test::resizedTestListener** (p. 730), and **gl::fileBar** (p. 695).

36.48.3 Friends And Related Function Documentation

friend class **element** [friend]


36.48.4 Member Data Documentation

std::mutex gl::resizedListener::mtx [private]

os::smartSet<**element**> gl::resizedListener::senders [private]

36.49 test::resizedTestListener Class Reference

Inheritance diagram for test::resizedTestListener:

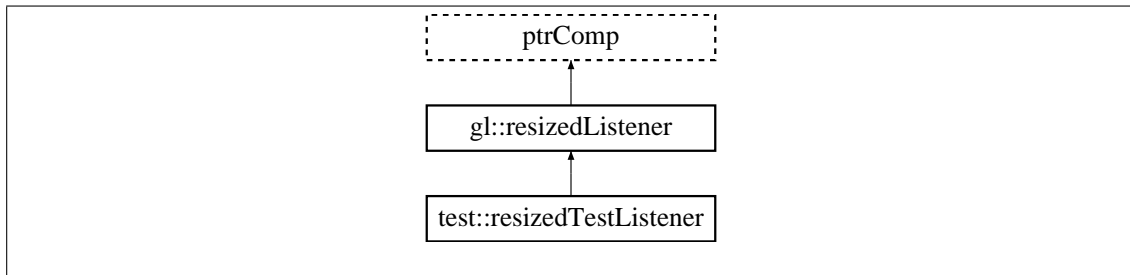

Public Member Functions

- **resizedTestListener** ()
- virtual **~resizedTestListener** ()
- void **resetFlag** ()
- void **receivedResize** (os::smart_ptr< **gl::element** > elm)
- bool **flag** () const

Private Attributes

- bool **_flag**

36.49.1 Constructor & Destructor Documentation

test::resizedTestListener::resizedTestListener () [inline]

virtual test::resizedTestListener::~~resizedTestListener () [inline], [virtual]

36.49.2 Member Function Documentation

bool test::resizedTestListener::flag () const [inline]

void test::resizedTestListener::receivedResize (os::smart_ptr< **gl::element** > elm) [inline], [virtual]

Reimplemented from **gl::resizedListener** (p. 729).


void test::resizedTestListener::resetFlag () [inline]

36.49.3 Member Data Documentation

bool test::resizedTestListener::_flag [private]

36.50 gl::resizeFunction Class Reference

Inheritance diagram for gl::resizeFunction:

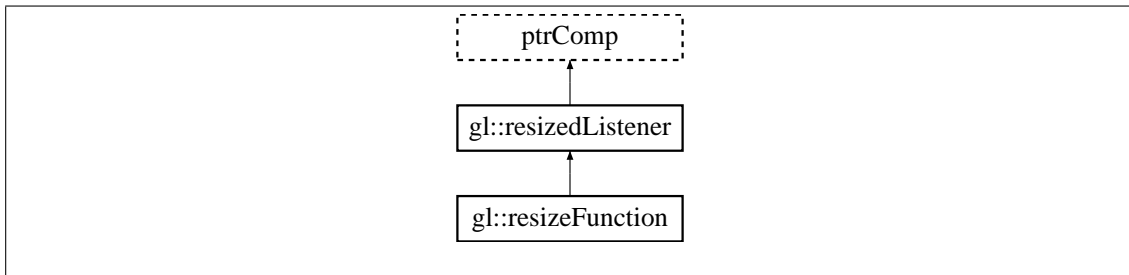

Public Member Functions

- **resizeFunction** (**elementHandler** handler)
- virtual **~resizeFunction** ()
- virtual void **receivedResize** (os::smart_ptr< **element** > elm)

Protected Attributes

- **elementHandler ehan**

36.50.1 Constructor & Destructor Documentation

gl::resizeFunction::resizeFunction (**elementHandler** handler) [inline]

virtual gl::resizeFunction::~~resizeFunction () [inline], [virtual]

36.50.2 Member Function Documentation

virtual void gl::resizeFunction::receivedResize (os::smart_ptr< **element** > elm) [inline], [virtual]


Reimplemented from **gl::resizedListener** (p. 729).

36.50.3 Member Data Documentation

elementHandler gl::resizeFunction::ehan [protected]

36.51 gl::resizeFunctionVoid Class Reference

Inheritance diagram for gl::resizeFunctionVoid:

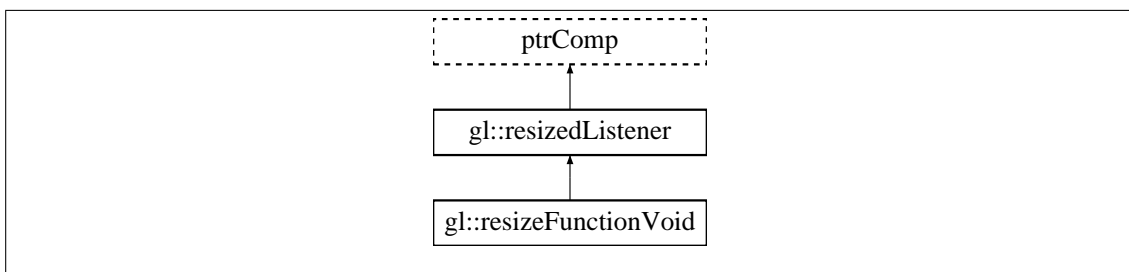

Public Member Functions

- **resizeFunctionVoid** (**elementHandler_void** handler, void *void_ptr)
- virtual **~resizeFunctionVoid** ()
- virtual void **receivedResize** (os::smart_ptr< **element** > elm)

Protected Attributes

- **elementHandler_void ehan**
- void * **vptr**

36.51.1 Constructor & Destructor Documentation

gl::resizeFunctionVoid::resizeFunctionVoid (**elementHandler_void** handler, void * void_ptr)
[inline]

virtual gl::resizeFunctionVoid::~~resizeFunctionVoid () [inline], [virtual]

36.51.2 Member Function Documentation

virtual void gl::resizeFunctionVoid::receivedResize (os::smart_ptr< **element** > elm) [inline],
[virtual]

Reimplemented from **gl::resizedListener** (p. 729).


36.51.3 Member Data Documentation

elementHandler_void gl::resizeFunctionVoid::ehan [protected]

void* gl::resizeFunctionVoid::vptr [protected]

36.52 gl::scrollArea Class Reference

Inheritance diagram for gl::scrollArea:

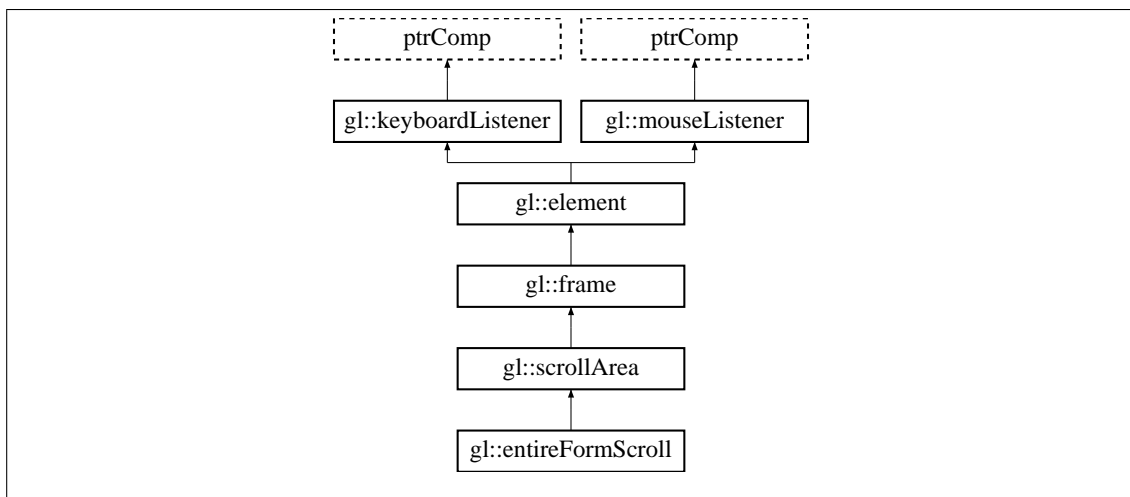

Public Member Functions

- **scrollArea** (**frame** ***master**, **elementDepth** **depth**=**defaultDepth**)
- virtual **~scrollArea** ()
- virtual void **resize** ()
- const **scrollbar** & **vertical** () const
- **scrollbar** & **vertical** ()
- const **scrollbar** & **lateral** () const
- **scrollbar** & **lateral** ()
- const **frame** & **scrollZone** () const
- **frame** & **scrollZone** ()

Private Attributes

- **scrollbar** **scrollVertical**
- **scrollbar** **scrollLateral**
- **frame** **_scrollZone**

Additional Inherited Members

36.52.1 Constructor & Destructor Documentation

scrollArea::scrollArea (**frame** * **master**, **elementDepth** **depth** = **defaultDepth**)

virtual **gl::scrollArea::~scrollArea** () [inline], [virtual]

36.52.2 Member Function Documentation

const **scrollbar**& **gl::scrollArea::lateral** () const [inline]

scrollbar& **gl::scrollArea::lateral** () [inline]

void **scrollArea::resize** () [virtual]

Reimplemented from **gl::element** (p. 686).

const **frame**& **gl::scrollArea::scrollZone** () const [inline]

frame& **gl::scrollArea::scrollZone** () [inline]

const **scrollbar**& **gl::scrollArea::vertical** () const [inline]

scrollbar& **gl::scrollArea::vertical** () [inline]

36.52.3 Member Data Documentation


frame **gl::scrollArea::_scrollZone** [private]

scrollbar **gl::scrollArea::scrollLateral** [private]

scrollbar **gl::scrollArea::scrollVertical** [private]

36.53 gl::scrollbar Class Reference

Inheritance diagram for gl::scrollbar:

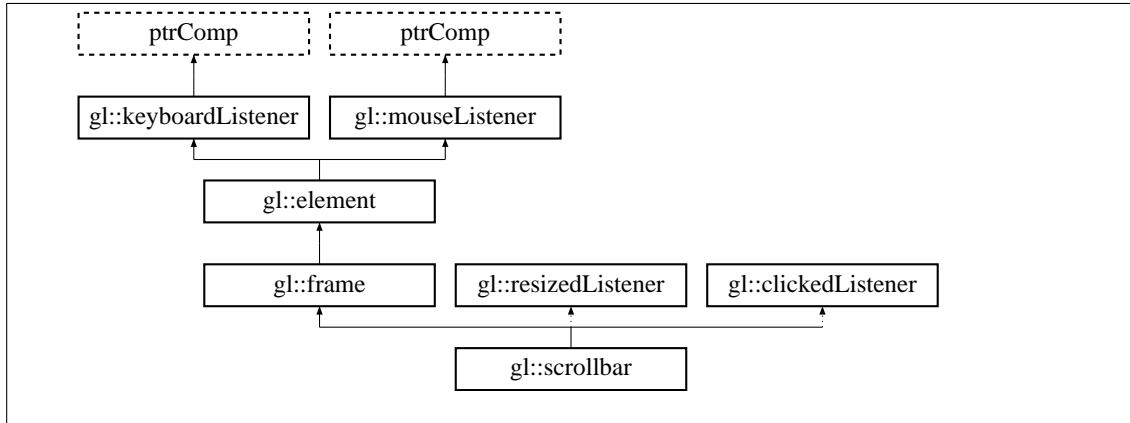

Public Member Functions

- **scrollbar** (`scrollArea *master`, `scrollbarDir scrDir`)
- virtual `~scrollbar` ()
- virtual void **resize** ()
- virtual void **draw** ()
- virtual void **drawMain** ()
- virtual void **receivedResize** (`os::smart_ptr< element > elm`)
- virtual void **receivedClicked** (`os::smart_ptr< element > elm`)
- virtual void **buttonClicked** (`int button`, `int state`, `int mousePositionX`, `int mousePositionY`)
- virtual void **mouseMove** (`int mousePositionX`, `int mousePositionY`)
- bool **childrenFocusable** () const
- int **scrollSize** () const
- int **scrollPos** () const
- void **setActive** (`bool active`)
- bool **active** () const
- int **thickness** () const
- void **setThickness** (`int thick`)
- void **setButtonColor** (`const color &col`)
- void **setClickedColor** (`const color &col`)
- const `color & buttonColor` () const
- const `color & clickedColor` () const

Private Attributes

- `scrollArea * _scrollArea`
- `arrowButton upArrow`
- `arrowButton downArrow`
- `scrollbarDir _scrollDir`

- `bool _active`
- `int _scrollSize`
- `int _thickness`
- `bool _sideBarClicked`
- `int _lastPos`
- `color _buttonColor`
- `color _clickedColor`
- `int _scrollPos`
- `int _scrollbarSize`
- `int _barSize`
- `int _startPos`

Friends

- class `scrollArea`

Additional Inherited Members

36.53.1 Constructor & Destructor Documentation

`scrollbar::scrollbar (scrollArea * master, scrollbarDir scrDir)`

`virtual gl::scrollbar::~~scrollbar () [inline], [virtual]`

36.53.2 Member Function Documentation

`bool gl::scrollbar::active () const [inline]`

`void scrollbar::buttonClicked (int button, int state, int mouseX, int mouseY) [virtual]`

Reimplemented from `gl::frame` (p. 705).

`const color& gl::scrollbar::buttonColor () const [inline]`

`bool gl::scrollbar::childrenFocusable () const [inline], [virtual]`

Reimplemented from `gl::frame` (p. 705).

`const color& gl::scrollbar::clickedColor () const [inline]`

`void scrollbar::draw () [virtual]`

Reimplemented from `gl::element` (p. 683).

`void scrollbar::drawMain () [virtual]`

Reimplemented from `gl::frame` (p. 706).

void scrollbar::mouseMove (int mouseX, int mouseY) [virtual]

Reimplemented from **gl::frame** (p. 706).

void scrollbar::receivedClicked (os::smart_ptr< **element** > elm) [virtual]

Reimplemented from **gl::clickedListener** (p. 672).

void scrollbar::receivedResize (os::smart_ptr< **element** > elm) [virtual]

Reimplemented from **gl::resizedListener** (p. 729).

void scrollbar::resize () [virtual]

Reimplemented from **gl::element** (p. 686).

int gl::scrollbar::scrollPos () const [inline]

int gl::scrollbar::scrollSize () const [inline]

void scrollbar::setActive (bool active)

void scrollbar::setButtonColor (const **color** & col)

void scrollbar::setClickedColor (const **color** & col)

void scrollbar::setThickness (int thick)

int gl::scrollbar::thickness () const [inline]

36.53.3 Friends And Related Function Documentation

friend class **scrollArea** [friend]

36.53.4 Member Data Documentation

bool gl::scrollbar::_active [private]

int gl::scrollbar::_barSize [private]

color gl::scrollbar::_buttonColor [private]

color gl::scrollbar::_clickedColor [private]

int gl::scrollbar::_lastPos [private]

scrollArea* gl::scrollbar::_scrollArea [private]

int gl::scrollbar::_scrollbarSize [private]

scrollbarDir gl::scrollbar::_scrollDir [private]

int gl::scrollbar::_scrollPos [private]

int gl::scrollbar::_scrollSize [private]


```

bool gl::scrollbar::_sideBarClicked [private]
int gl::scrollbar::_startPos [private]
int gl::scrollbar::_thickness [private]
arrowButton gl::scrollbar::downArrow [private]
arrowButton gl::scrollbar::upArrow [private]

```

36.54 gl::singleButtonPopUp Class Reference

Inheritance diagram for gl::singleButtonPopUp:

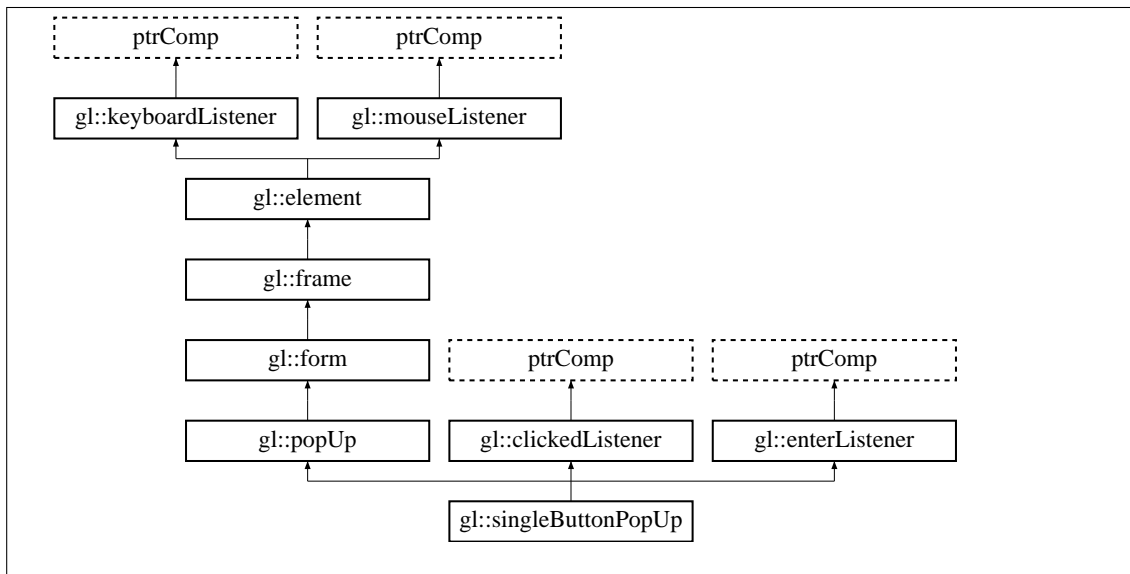

Public Member Functions

- **singleButtonPopUp** (os::smart_ptr< **form** > **prev**, std::string labelText="", std::string buttonText="Ok")
- virtual ~**singleButtonPopUp** ()
- virtual void **receivedClicked** (os::smart_ptr< **element** > elm)
- virtual void **receivedEnter** (os::smart_ptr< **element** > elm)

Protected Member Functions

- virtual void **resizeFrame** ()

Protected Attributes

- **gl::button** btnMain
- **gl::label** lblMain

36.54.1 Constructor & Destructor Documentation

`singleButtonPopUp::singleButtonPopUp (os::smart_ptr< form > prev, std::string labelText = "", std::string buttonText = "Ok")`

`virtual gl::singleButtonPopUp::~~singleButtonPopUp () [inline], [virtual]`

36.54.2 Member Function Documentation

`void singleButtonPopUp::receivedClicked (os::smart_ptr< element > elm) [virtual]`

Reimplemented from **gl::clickedListener** (p. 672).

`void singleButtonPopUp::receivedEnter (os::smart_ptr< element > elm) [virtual]`

Reimplemented from **gl::enterListener** (p. 690).

`void singleButtonPopUp::resizeFrame () [protected], [virtual]`

Reimplemented from **gl::popUp** (p. 724).


36.54.3 Member Data Documentation

gl::button `gl::singleButtonPopUp::btnMain [protected]`

gl::label `gl::singleButtonPopUp::lblMain [protected]`

36.55 test::singleUIFunctionTest Class Reference

Inheritance diagram for `test::singleUIFunctionTest`:

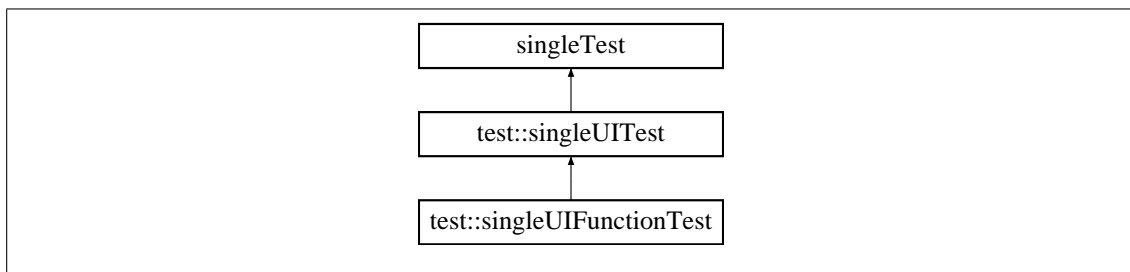

Public Member Functions

- **singleUIFunctionTest** (std::string tn, testFunction f)
- virtual **~singleUIFunctionTest** ()
- void **test** () throw (os::smart_ptr<std::exception>)

Private Attributes

- testFunction **func**

36.55.1 Constructor & Destructor Documentation

```
test::singleUIFunctionTest::singleUIFunctionTest ( std::string tn, testFunction f )
```

```
virtual test::singleUIFunctionTest::~~singleUIFunctionTest ( ) [inline], [virtual]
```

36.55.2 Member Function Documentation


```
void test::singleUIFunctionTest::test ( ) throw os::smart_ptr< std::exception >)
```

36.55.3 Member Data Documentation

```
testFunction test::singleUIFunctionTest::func [private]
```

36.56 test::singleUITest Class Reference

Inheritance diagram for test::singleUITest:

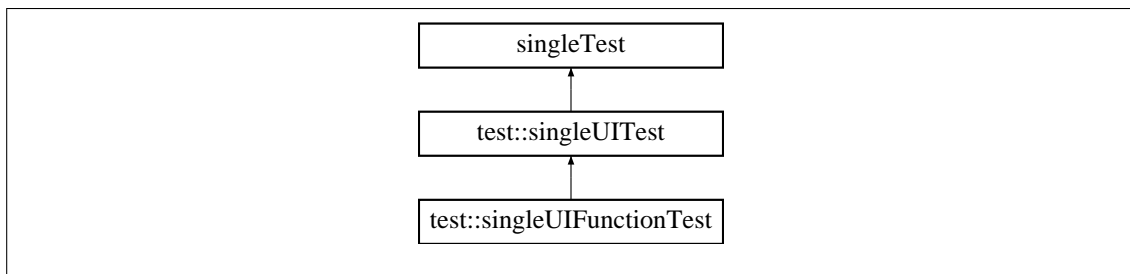

Public Member Functions

- **singleUITest** (std::string tn)
- virtual **~singleUITest** ()
- virtual void **setupTest** () throw (os::smart_ptr<std::exception>)
- virtual void **teardownTest** () throw (os::smart_ptr<std::exception>)

36.56.1 Constructor & Destructor Documentation

```
test::singleUITest::singleUITest ( std::string tn ) [inline]
```

```
virtual test::singleUITest::~~singleUITest ( ) [inline], [virtual]
```


36.56.2 Member Function Documentation

```
virtual void test::singleUITest::setupTest ( ) throw os::smart_ptr< std::exception > ) [inline], [virtual]
```

```
virtual void test::singleUITest::teardownTest ( ) throw os::smart_ptr< std::exception > ) [inline], [virtual]
```

36.57 test::testForm Class Reference

Inheritance diagram for test::testForm:

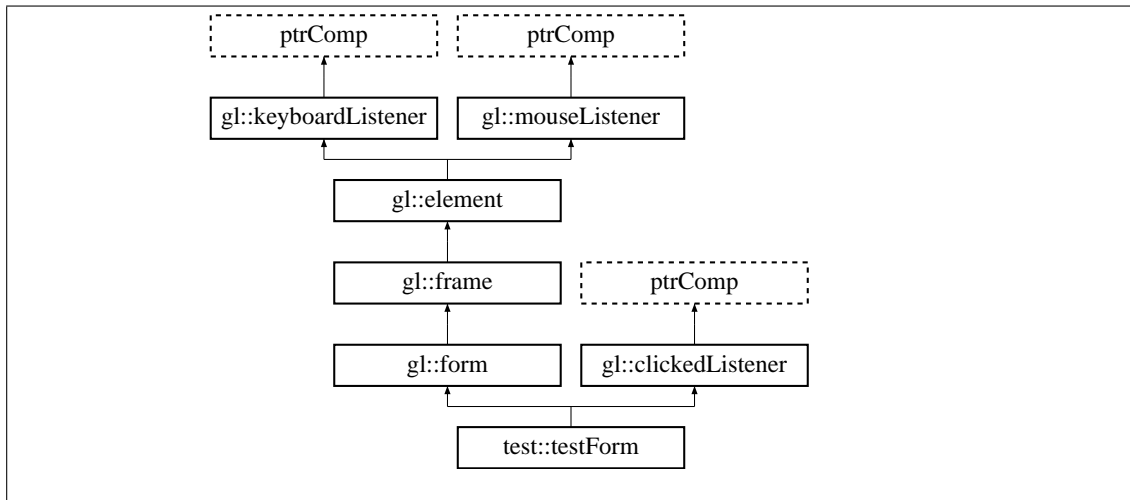

Public Member Functions

- **testForm** (int *argc, char **argv)
- **testForm** (os::smart_ptr< **form** > **prev**)
- virtual ~**testForm** ()
- virtual void **receivedClicked** (os::smart_ptr< **element** > elm)

Public Attributes

- **gl::fileBar** barTop
- **gl::button** btn1
- **gl::button** btn2
- **gl::button** btn3
- **gl::button** btn4
- **gl::button** btn5
- os::smart_ptr< **gl::barGroup** > btnExit
- os::smart_ptr< **gl::barGroup** > btnBack
- os::smart_ptr< **gl::barGroup** > btnScrollform
- os::smart_ptr< **gl::barGroup** > btnTextboxform
- os::smart_ptr< **gl::barGroup** > btnCheckboxform
- os::smart_ptr< **gl::barGroup** > btnPopup

Private Member Functions

- void **initForm** ()

Additional Inherited Members

36.57.1 Constructor & Destructor Documentation

```
test::testForm::testForm ( int * argc, char ** argv )  
test::testForm::testForm ( os::smart_ptr< form > prev )  
virtual test::testForm::~~testForm ( ) [inline], [virtual]
```

36.57.2 Member Function Documentation


```
void test::testForm::initForm ( ) [private]  
virtual void test::testForm::receivedClicked ( os::smart_ptr< element > elm ) [virtual]
```

36.57.3 Member Data Documentation

```
gl::fileBar test::testForm::barTop  
gl::button test::testForm::btn1  
gl::button test::testForm::btn2  
gl::button test::testForm::btn3  
gl::button test::testForm::btn4  
gl::button test::testForm::btn5  
os::smart_ptr<gl::barGroup> test::testForm::btnBack  
os::smart_ptr<gl::barGroup> test::testForm::btnCheckboxform  
os::smart_ptr<gl::barGroup> test::testForm::btnExit  
os::smart_ptr<gl::barGroup> test::testForm::btnPopup  
os::smart_ptr<gl::barGroup> test::testForm::btnScrollform  
os::smart_ptr<gl::barGroup> test::testForm::btnTextboxform
```

36.58 gl::testingDriver Class Reference

Inheritance diagram for gl::testingDriver:

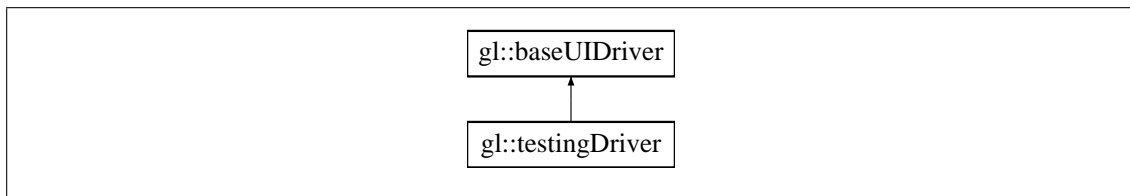

Public Member Functions

- **testingDriver** ()
- virtual **~testingDriver** ()
- bool **opengl** () const
- void **buttonClicked** (int **button**, int state, int mousePositionX, int mousePositionY)
- void **mouseMove** (int mousePositionX, int mousePositionY)
- void **display** ()
- int **windowWidth** () const
- int **windowHeight** () const
- void **setWindowDimensions** (int _width, int _height)

Private Attributes

- int **width**
- int **height**

Additional Inherited Members

36.58.1 Constructor & Destructor Documentation

testingDriver::testingDriver ()

testingDriver::~~testingDriver () [virtual]

36.58.2 Member Function Documentation

void testingDriver::buttonClicked (int button, int state, int mousePositionX, int mousePositionY)
[virtual]

Reimplemented from **gl::baseUIDriver** (p. 656).

void testingDriver::display () [virtual]

Reimplemented from **gl::baseUIDriver** (p. 656).

void testingDriver::mouseMove (int mousePositionX, int mousePositionY) [virtual]

Reimplemented from **gl::baseUIDriver** (p. 656).

bool gl::testingDriver::opengl () const [inline], [virtual]

Reimplemented from **gl::baseUIDriver** (p. 657).

void testingDriver::setWindowDimensions (int _width, int _height) [virtual]

Reimplemented from **gl::baseUIDriver** (p. 657).

int gl::testingDriver::windowHeight () const [inline], [virtual]

Reimplemented from **gl::baseUIDriver** (p. 657).

int gl::testingDriver::windowWidth () const [inline], [virtual]

Reimplemented from **gl::baseUIDriver** (p. 657).


36.58.3 Member Data Documentation

int gl::testingDriver::height [private]

int gl::testingDriver::width [private]

36.59 gl::textbox Class Reference

Inheritance diagram for gl::textbox:

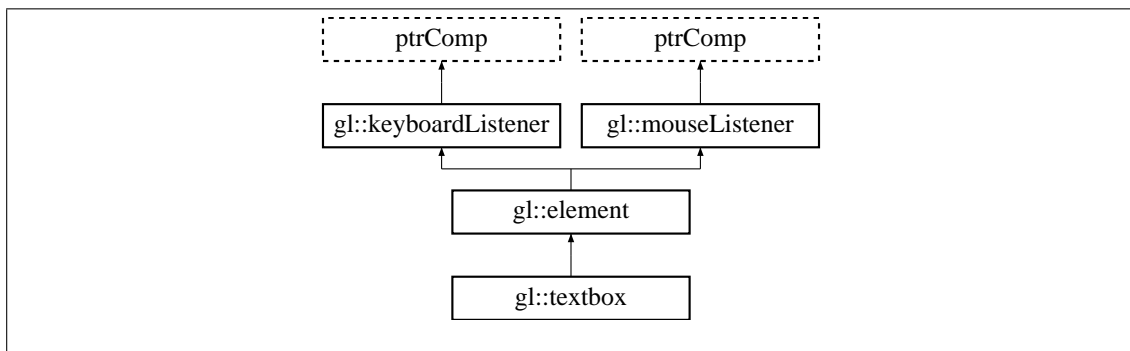

Public Member Functions

- **textbox (frame *master)**
- virtual **~textbox ()**
- virtual void **drawBackground ()**
- virtual void **drawMain ()**
- virtual void **drawTop ()**
- void **setBorderSize** (int border)
- int **borderSize ()** const
- void **setHeight** (int height)
- void **setWidth** (int width)
- const os::smart_ptr< font > **getFont ()** const
- void **setFont** (os::smart_ptr< font > fnt)
- void **setFontSize** (int font_size)
- void **setTextHidden** (bool textHidden)
- bool **setText** (std::string text)
- bool **textHidden ()** const
- const std::string & **trueText ()** const
- const std::string & **displayText ()** const
- const std::string **stringID ()** const
- void **setFrameColor** (const color &frameColor)
- void **setTextColor** (const color &textColor)

- void **setClickedColor** (const **color** &**clickedColor**)
- const **color** & **frameColor** () const
- const **color** & **textColor** () const
- const **color** & **clickedColor** () const
- void **setKeyWhiteList** (bool whitelist)
- bool **keyWhitelist** () const
- void **setGood** (unsigned char **key**)
- void **unsetGood** (unsigned char **key**)
- void **setBad** (unsigned char **key**)
- void **unsetBad** (unsigned char **key**)
- bool **goodKey** (unsigned char **key**) const
- bool **badKey** (unsigned char **key**) const
- void **setTabEvent** (bool enbtap)
- bool **tabEvent** () const
- bool **focusable** () const
- void **focus** ()
- void **unsetFocus** ()
- void **buttonClicked** (int **button**, int state, int mousePositionX, int mousePositionY)
- void **mouseMove** (int mousePositionX, int mousePositionY)
- bool **keyPress** (const **key** &_key)
- bool **keyUnpress** (const **key** &_key)

Protected Member Functions

- int **horizontalPositionQuery** (int trueHorz)

Protected Attributes

- **color** **_frameColor**
- **color** **_textColor**
- **color** **_clickedColor**
- bool **_keyWhitelist**
- bool **_goodKey** [256]
- bool **_badKey** [256]
- bool **_tabEvent**

Private Attributes

- bool **_hideText**
- std::string **_trueText**
- std::string **_displayText**
- os::smart_ptr< **font** > **_font**
- int **_cursorPos**
- int **_cursorPos2**
- int **_textHeight**
- int **_cursorDisplayCount**
- int **_borderSize**

36.59.1 Constructor & Destructor Documentation

```
textbox::textbox ( frame * master )  
virtual gl::textbox::~~textbox ( ) [inline], [virtual]
```

36.59.2 Member Function Documentation

```
bool gl::textbox::badKey ( unsigned char key ) const [inline]  
int gl::textbox::borderSize ( ) const [inline]  
void textbox::buttonClicked ( int button, int state, int mouseX, int mouseY )  
[virtual]
```

Reimplemented from **gl::mouseListener** (p. 720).

```
const color& gl::textbox::clickedColor ( ) const [inline]  
const std::string& gl::textbox::displayText ( ) const [inline]  
void textbox::drawBackground ( ) [virtual]
```

Reimplemented from **gl::element** (p. 683).

```
void textbox::drawMain ( ) [virtual]
```

Reimplemented from **gl::element** (p. 683).

```
void textbox::drawTop ( ) [virtual]
```

Reimplemented from **gl::element** (p. 683).

```
void textbox::focus ( ) [virtual]
```

Reimplemented from **gl::element** (p. 683).

```
bool gl::textbox::focusable ( ) const [inline], [virtual]
```

Reimplemented from **gl::element** (p. 683).

```
const color& gl::textbox::frameColor ( ) const [inline]  
const os::smart_ptr<font> gl::textbox::getFont ( ) const [inline]  
bool gl::textbox::goodKey ( unsigned char key ) const [inline]  
int textbox::horizontalPositionQuery ( int trueHorz ) [protected]  
bool textbox::keyPress ( const key & _key ) [virtual]
```

Reimplemented from **gl::keyboardListener** (p. 715).

```
bool textbox::keyUnpress ( const key & _key ) [virtual]
```

Reimplemented from **gl::keyboardListener** (p. 715).

```
bool gl::textbox::keyWhitelist ( ) const [inline]
```

```
void textbox::mouseMove ( int mouseX, int mouseY ) [virtual]
```

Reimplemented from **gl::element** (p. 684).

```
void gl::textbox::setBad ( unsigned char key ) [inline]
```

```
void textbox::setBorderSize ( int border )
```

```
void gl::textbox::setClickedColor ( const color & clickedColor ) [inline]
```

```
void textbox::setFont ( os::smart_ptr< font > fnt )
```

```
void textbox::setFontSize ( int font_size )
```

```
void gl::textbox::setFrameColor ( const color & frameColor ) [inline]
```

```
void gl::textbox::setGood ( unsigned char key ) [inline]
```

```
void textbox::setHeight ( int height ) [virtual]
```

Reimplemented from **gl::element** (p. 686).

```
void gl::textbox::setKeyWhiteList ( bool whitelist ) [inline]
```

```
void gl::textbox::setTabEvent ( bool enbtap ) [inline]
```

```
bool textbox::setText ( std::string text )
```

```
void gl::textbox::setTextColor ( const color & textColor ) [inline]
```

```
void textbox::setTextHidden ( bool textHidden )
```

```
void textbox::setWidth ( int width ) [virtual]
```

Reimplemented from **gl::element** (p. 686).

```
const std::string gl::textbox::stringID ( ) const [inline], [virtual]
```

Reimplemented from **gl::element** (p. 686).

```
bool gl::textbox::tabEvent ( ) const [inline]
```

```
const color& gl::textbox::textColor ( ) const [inline]
```

```
bool gl::textbox::textHidden ( ) const [inline]
```

```
const std::string& gl::textbox::trueText ( ) const [inline]
```

```
void gl::textbox::unsetBad ( unsigned char key ) [inline]
```

```
void textbox::unsetFocus ( ) [virtual]
```

Reimplemented from **gl::element** (p. 687).

```
void gl::textbox::unsetGood ( unsigned char key ) [inline]
```

36.59.3 Member Data Documentation

```
bool gl::textbox::_badKey[256] [protected]
```

```
int gl::textbox::_borderSize [private]
```

```
color gl::textbox::_clickedColor [protected]
```

```
int gl::textbox::_cursorDisplayCount [private]
```

```
int gl::textbox::_cursorPos [private]
```

```
int gl::textbox::_cursorPos2 [private]
```

```
std::string gl::textbox::_displayText [private]
```

```
os::smart_ptr<font> gl::textbox::_font [private]
```

```
color gl::textbox::_frameColor [protected]
```

```
bool gl::textbox::_goodKey[256] [protected]
```

```
bool gl::textbox::_hideText [private]
```

```
bool gl::textbox::_keyWhitelist [protected]
```

```
bool gl::textbox::_tabEvent [protected]
```


```
color gl::textbox::_textColor [protected]
```

```
int gl::textbox::_textHeight [private]
```

```
std::string gl::textbox::_trueText [private]
```

36.60 test::textboxForm Class Reference

Inheritance diagram for test::textboxForm:

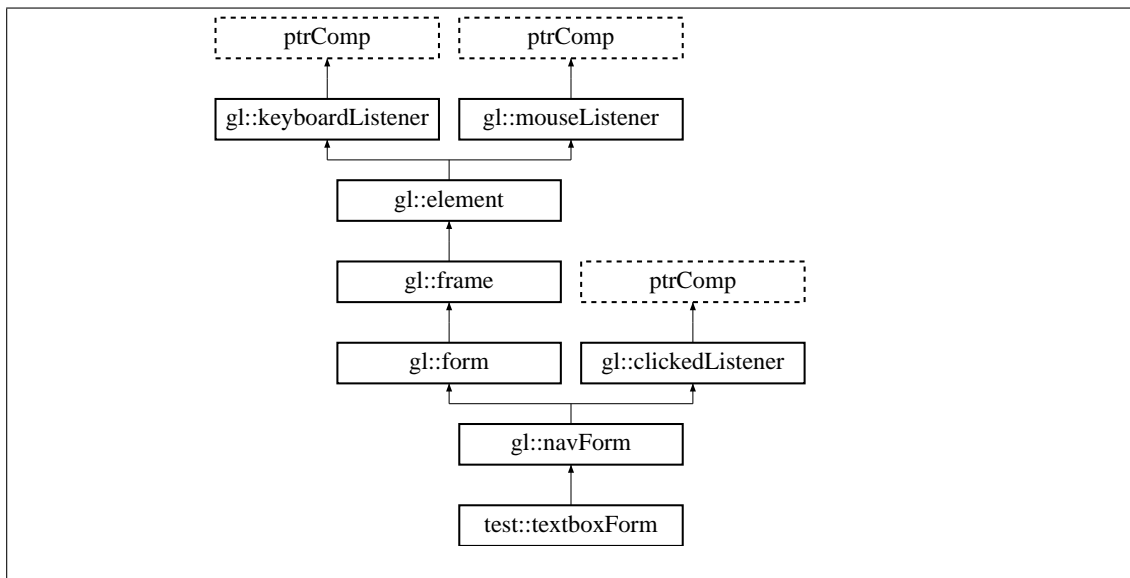

Public Member Functions

- **textboxForm** (os::smart_ptr< **gl::form** > prev)
- virtual ~**textboxForm** ()

Public Attributes

- **gl::textbox** tbxOne
- **gl::textbox** tbxTwo

Additional Inherited Members

36.60.1 Constructor & Destructor Documentation

test::textboxForm::textboxForm (os::smart_ptr< **gl::form** > prev)

virtual test::textboxForm::~~textboxForm () [inline], [virtual]

36.60.2 Member Data Documentation

gl::textbox test::textboxForm::tbxOne

gl::textbox test::textboxForm::tbxTwo

36.61 gl::texture_data Struct Reference

Public Member Functions

- ~**texture_data** ()

Public Attributes

- std::string **file_path**
- std::string **name**
- std::string **full_file_path**
- GLuint **texture**

36.61.1 Constructor & Destructor Documentation

texture_data::~texture_data ()

36.61.2 Member Data Documentation

std::string gl::texture_data::file_path

std::string gl::texture_data::full_file_path

std::string gl::texture_data::name

GLuint gl::texture_data::texture

36.62 gl::textureManager Class Reference

Public Member Functions

- ~**textureManager** ()
- void **setDefaultPath** (std::string path)
- std::string **getDefaultPath** ()
- GLuint **getTexture_file** (std::string file)
- GLuint **getTexture_name** (std::string nick_name)
- bool **checkTexture** (GLuint t)
- **texture_data** * **getFullTexture_file** (std::string file)
- **texture_data** * **getFullTexture_name** (std::string file)
- **texture_data** * **getFullTexture** (GLuint t)
- GLuint **setTexture** (std::string file, std::string name)
- bool **deleteTexture** (GLuint t)

Static Public Member Functions

- static os::smart_ptr< **textureManager** > **singleton** ()

Private Member Functions

- **textureManager** ()

Private Attributes

- std::string **default_path**
- std::map< std::string, **texture_data** * > **by_name**
- std::map< std::string, **texture_data** * > **by_file**
- std::map< GLuint, **texture_data** * > **by_texture**

36.62.1 Constructor & Destructor Documentation

`textureManager::textureManager () [private]`

`textureManager::~~textureManager ()`

36.62.2 Member Function Documentation

`bool textureManager::checkTexture (GLuint t)`

`bool textureManager::deleteTexture (GLuint t)`

`string textureManager::getDefaultPath ()`

`texture_data * textureManager::getFullTexture (GLuint t)`

`texture_data * textureManager::getFullTexture_file (std::string file)`

`texture_data * textureManager::getFullTexture_name (std::string file)`

`GLuint textureManager::getTexture_file (std::string file)`

`GLuint textureManager::getTexture_name (std::string nick_name)`

`void textureManager::setDefaultPath (std::string path)`

`GLuint textureManager::setTexture (std::string file, std::string name)`

`os::smart_ptr< textureManager > textureManager::singleton () [static]`

36.62.3 Member Data Documentation

`std::map<std::string,texture_data> gl::textureManager::by_file [private]`


`std::map<std::string,texture_data> gl::textureManager::by_name [private]`

`std::map<GLuint,texture_data> gl::textureManager::by_texture [private]`

`std::string gl::textureManager::default_path [private]`

36.63 gl::TimesMonoRomanStroke Class Reference

Inheritance diagram for `gl::TimesMonoRomanStroke`:

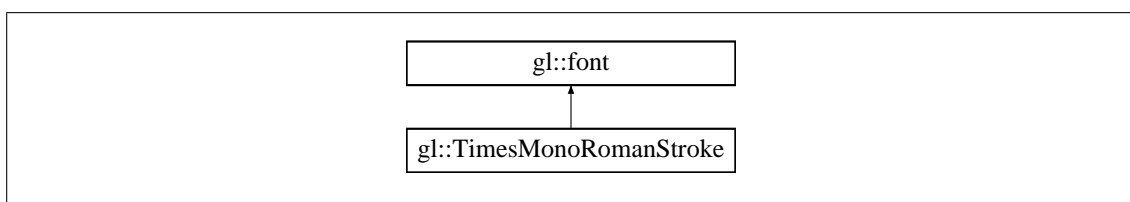

Public Member Functions

- **TimesMonoRomanStroke** ()
- virtual **~TimesMonoRomanStroke** ()

- virtual const std::string & **name** () const

Additional Inherited Members

36.63.1 Constructor & Destructor Documentation

gl::TimesMonoRomanStroke::TimesMonoRomanStroke () [inline]

virtual gl::TimesMonoRomanStroke::~~TimesMonoRomanStroke () [inline], [virtual]


36.63.2 Member Function Documentation

virtual const std::string& gl::TimesMonoRomanStroke::name () const [inline], [virtual]

Reimplemented from **gl::font** (p. 696).

36.64 gl::TimesRoman Class Reference

Inheritance diagram for gl::TimesRoman:

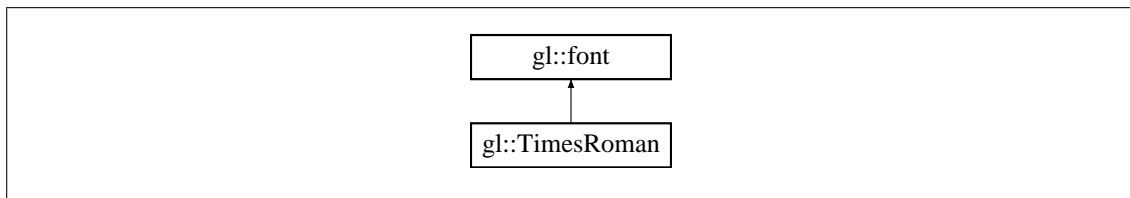

Public Member Functions

- **TimesRoman** ()
- virtual ~**TimesRoman** ()
- virtual void **setSize** (unsigned int **size**)
- virtual const std::string & **name** () const

Additional Inherited Members

36.64.1 Constructor & Destructor Documentation

gl::TimesRoman::TimesRoman () [inline]

virtual gl::TimesRoman::~~TimesRoman () [inline], [virtual]

36.64.2 Member Function Documentation

virtual const std::string& gl::TimesRoman::name () const [inline], [virtual]


Reimplemented from **gl::font** (p. 696).

void TimesRoman::setSize (unsigned int size) [virtual]

Reimplemented from **gl::font** (p. 696).

36.65 gl::TimesRomanStroke Class Reference

Inheritance diagram for gl::TimesRomanStroke:

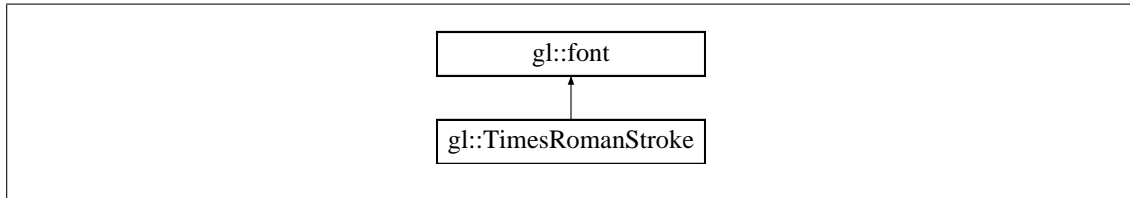

Public Member Functions

- **TimesRomanStroke** ()
- virtual ~**TimesRomanStroke** ()
- virtual const std::string & **name** () const

Additional Inherited Members

36.65.1 Constructor & Destructor Documentation

gl::TimesRomanStroke::TimesRomanStroke () [inline]

virtual gl::TimesRomanStroke::~~TimesRomanStroke () [inline], [virtual]


36.65.2 Member Function Documentation

virtual const std::string& gl::TimesRomanStroke::name () const [inline], [virtual]

Reimplemented from **gl::font** (p. 696).

36.66 gl::UIDriver Class Reference

Inheritance diagram for gl::UIDriver:

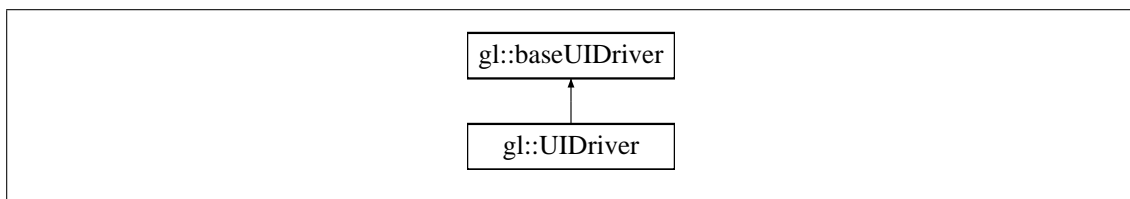

Public Member Functions

- virtual ~**UIDriver** ()
- bool **opengl** () const
- double **fps** () const
- double & **fps** ()

- void **display** ()
- void **setTypingMode** (bool **typingMode**)
- int **windowWidth** () const
- int **windowHeight** () const
- void **setWindowDimensions** (int _width, int _height)

Private Member Functions

- **UIDriver** (os::smart_ptr< **form** > **root**, int *argc, char **argv)

Private Attributes

- double **_fps**

Friends

- class **form**

Additional Inherited Members

36.66.1 Constructor & Destructor Documentation

UIDriver::UIDriver (os::smart_ptr< **form** > root, int * argc, char ** argv) [private]

UIDriver::~~UIDriver () [virtual]

36.66.2 Member Function Documentation

void UIDriver::display () [virtual]

Reimplemented from **gl::baseUIDriver** (p. 656).

double gl::UIDriver::fps () const [inline]

double& gl::UIDriver::fps () [inline]

bool gl::UIDriver::opengl () const [inline], [virtual]

Reimplemented from **gl::baseUIDriver** (p. 657).

void UIDriver::setTypingMode (bool typingMode) [virtual]

Reimplemented from **gl::baseUIDriver** (p. 657).

void gl::UIDriver::setWindowDimensions (int _width, int _height) [inline], [virtual]

Reimplemented from **gl::baseUIDriver** (p. 657).

int gl::UIDriver::windowHeight () const [inline], [virtual]

Reimplemented from **gl::baseUIDriver** (p. 657).

int gl::UIDriver::windowWidth () const [inline], [virtual]

Reimplemented from **gl::baseUIDriver** (p. 657).

36.66.3 Friends And Related Function Documentation


friend class **form** [friend]

36.66.4 Member Data Documentation

double gl::UIDriver::_fps [private]

36.67 test::UITestSuite Class Reference

Inheritance diagram for test::UITestSuite:

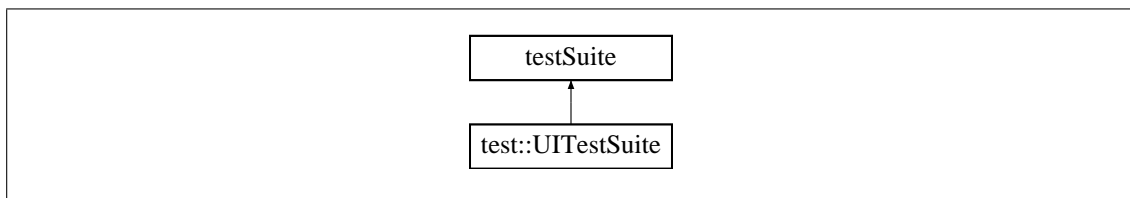

Public Member Functions

- **UITestSuite** (std::string sn)
- virtual ~**UITestSuite** ()
- virtual void **pushTest** (std::string str, testFunction tst)

36.67.1 Constructor & Destructor Documentation

test::UITestSuite::UITestSuite (std::string sn) [inline]


virtual test::UITestSuite::~~UITestSuite () [inline], [virtual]

36.67.2 Member Function Documentation

virtual void test::UITestSuite::pushTest (std::string str, testFunction tst) [inline], [virtual]

36.68 gl::wrappableBox Class Reference

Inheritance diagram for gl::wrappableBox:

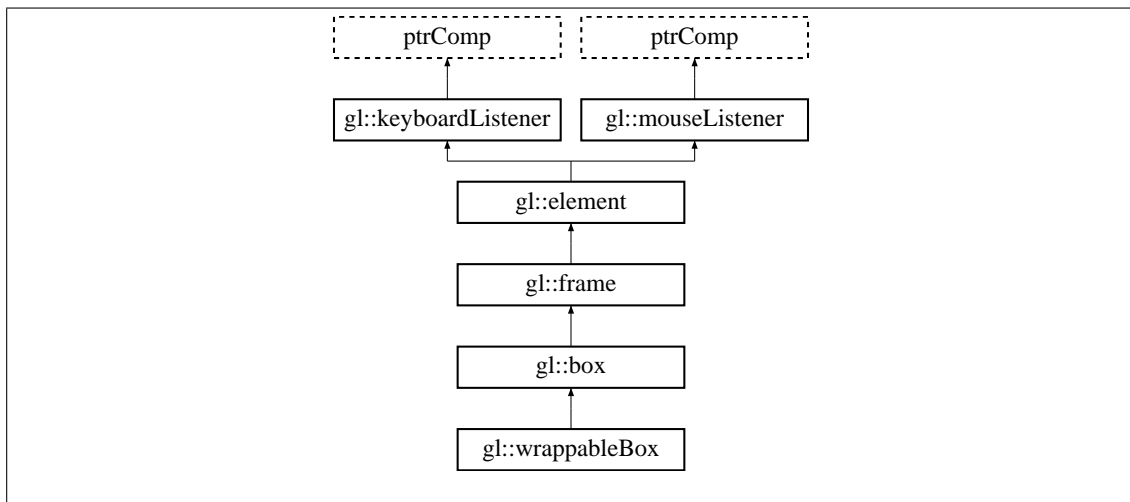

Public Member Functions

- **wrappableBox** (**frame** *master, **elementDepth** depth=defaultDepth)
- virtual ~**wrappableBox** ()

Protected Member Functions

- bool **wrapFocus** () const

Additional Inherited Members

36.68.1 Constructor & Destructor Documentation

gl::wrappableBox::wrappableBox (**frame** * master, **elementDepth** depth = **defaultDepth**)
[inline]

virtual gl::wrappableBox::~~wrappableBox () [inline], [virtual]

36.68.2 Member Function Documentation

bool gl::wrappableBox::wrapFocus () const [inline], [protected], [virtual]

Reimplemented from **gl::frame** (p. 707).