TECHNICAL DOCUMENTATION

MyRota Complete Application Documentation

This document explains the MyRota application end to end: business purpose, runtime architecture, repository structure, Firestore rota data, Oracle-backed microsites, Jira integration, deployment pipeline, admin access logic, and maintenance guidance.

PREPARED FOR	PROJECT	VERSION DATE	PRIMARY AUTHOR
HCL / LC EDI	MyRota	April 6, 2026	Akash Satapathy

Contents

- 1. Product Overview
- 2. Runtime Architecture
- 3. Module And Folder Breakdown
- 4. Data Model And Microsite Storage
- 5. End-To-End Flows
- 6. Build And Deployment
- 7. Security, Operations, And Maintenance
- 8. Cleanup Completed In This Update

1. Product Overview

Purpose

MyRota is the central team dashboard for rota management and daily operational

Main User Groups

- Portal users who need view access to operational information

AUTHOR: AKASH SATAPATHY ON BEHALF OF HCL

visibility. It combines rota views, leave visibility, admin-controlled editing, audit logs, Jira monitoring, and quick navigation to related microsites.

- Admin users who maintain rota data and review logs
- Jira consumers who need issue counts and drill-down lists

Frontend Stack

React 19, Vite, custom CSS, lazy-loaded Jira screens.

Data Layer

Firestore for rota data plus Oracle tables for APF, SFTP, Documentation, and Certificate microsites.

Integration Layer

Netlify Functions proxy Jira, while Oracle-backed Node services persist the linked microsites.

> The application has two separate access concepts: the landing-page portal login for entering the app, and the Edit ROTA admin login used from inside the app when the MyRota logo is clicked.

2. Runtime Architecture

The main application is a client-rendered React single-page app. Firestore handles real-time rota data. Jira data is fetched through a Netlify serverless function so Jira credentials remain off the client, while the linked APF microsites use Oracle-backed Node APIs for their own operational records.

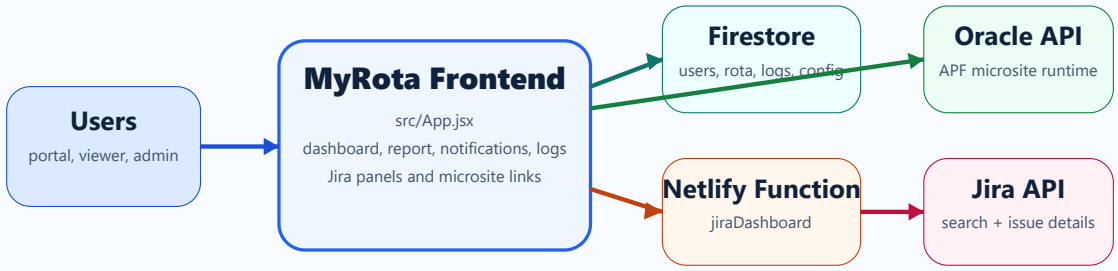

AUTHOR: AKASH SATAPATHY ON BEHALF OF HCL

Jira is intentionally not called directly from the browser. The Netlify function protects Jira credentials and standardizes request and response handling.

ROTA and admin data remain in Firestore. The linked APF, SFTP, Documentation, and Certificate microsites now persist to Oracle instead of browser-local temporary storage.

3. Module And Folder Breakdown

Path	Responsibility	Notes
src/App.jsx	Main application shell and page orchestration	Contains landing login, admin mode, dashboard, report, notifications, logs, and home composition
src/firebase.js	Firebase bootstrapping	Initializes Firestore with long-polling-friendly settings for browser reliability
src/jira/api.js	Frontend Jira API client	Resolves Netlify function endpoint and formats Jira timestamps
src/jira/JiraDashboardSection.jsx	Home-page Jira summary cards	Loads summary counters and recent change request cards
src/jira/JiraIssuesPage.jsx	Drill-down page for Jira issue lists	Shows selected view data returned by the Netlify function
netlify/functions/jiraDashboard.js	Serverless Jira endpoint	Supports summary and detail modes

AUTHOR: AKASH SATAPATHY ON BEHALF OF HCL

Path	Responsibility	Notes
netlify/jira/	Jira configuration and view definitions	Owns JQL strings, response normalization, and environment-variable validation
scripts/copy-microsites.mjs	Build-time microsite publishing	Copies APF, SFTP, Certificate, and Documentation site assets into `dist/`
APF/	Microsites and legacy site assets	Contains the Oracle-backed APF, SFTP, Documentation, and Certificate workspaces

4. Data Model And Microsite Storage

Path	Data Stored	Usage In App
users/{username}	Employee metadata and sort position	Used to build and order the employee list shown in the rota views
users/admin	Admin password field	Primary source for Edit ROTA admin login verification
rota/master	Central keyed rota map	Stores shift and leave assignments for each day and employee slot
logs/{logId}	Audit history	Stores admin edits and supports the Logs page
config/admin	Optional backup admin settings	Secondary fallback if `users/admin` is not available

AUTHOR: AKASH SATAPATHY ON BEHALF OF HCL

> The current admin login path for Edit ROTA is designed to read the password from `users/admin` first, which aligns with the live Firestore document structure.

Oracle Microsite Tables

- `MYROTA_APF` stores BU inbound / outbound directory links.
- `MYROTA_SFTP` stores partner connection details and supports bulk Excel publish.
- `MYROTA_DOCUMENTATION` stores notes and media in Oracle without bulk import.
- `MYROTA_CERTIFICATE` stores tracked certificate records, uploads, and renewal notes.

Microsite UX Notes

- APF now exposes only Inbound and Outbound sections with BU selection in the side column.
- APF, SFTP, and Certificate can download an Excel template and bulk publish multiple rows.
- Certificate supports popup add / edit windows, row-level delete, and a tracked-count card.
- ROTA was intentionally left on Firestore and was not moved to Oracle.

5. End-To-End Flows

Portal Login Flow

- User lands on the portal login screen.
- App validates the default portal credentials stored in the frontend constants.
- Session state is written into browser storage.
- User is taken to the home page and navigation is unlocked.

Edit ROTA Admin Flow

- User clicks the MyRota logo from inside the app.
- Admin modal opens and requests the rota edit password.
- App fetches `users/admin` from Firestore.
- Password match enables admin state, rota editing, and logs access.

AUTHOR: AKASH SATAPATHY ON BEHALF OF HCL

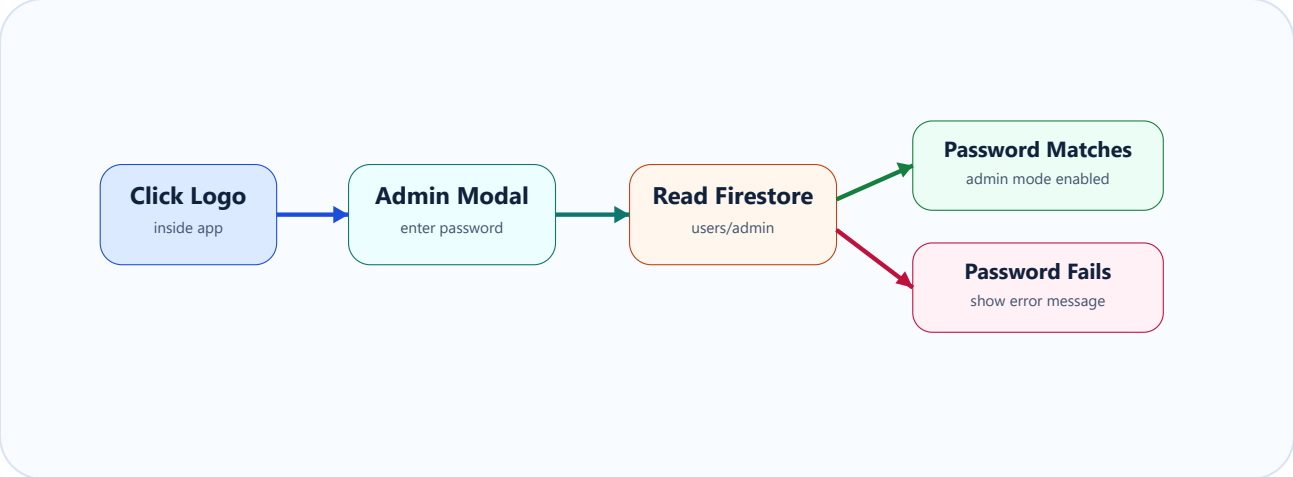

Jira Summary Flow

- Home page reaches the Jira section.
- Frontend calls the Netlify Jira function in summary mode.
- Function runs predefined JQL queries and returns normalized counts.
- User sees counters and recent issues.

Jira Detail Flow

- User clicks a Jira card or queue.
- Frontend calls the same function in detail mode with `view` id.
- Function returns full issue rows for that specific JQL view.
- User can open the issue directly in Jira.

6. Build And Deployment

Step 1

`npm run build` produces the main Vite frontend output in `dist/`.

Step 2

`scripts/copy-microsites.mjs` copies selected APF, SFTP, Certificate, and Documentation assets into `dist/`.

Step 3

Netlify serves `dist/` and hosts the Jira serverless endpoint from `netlify/functions`. Oracle-backed microsites also run through their APF Node service for local / internal deployment.

AUTHOR: AKASH SATAPATHY ON BEHALF OF HCL

System	Configuration	Purpose
Netlify	`publish = "dist"` and `functions = "netlify/functions"`	Hosts frontend and serverless endpoints
Jira Function	`JIRA_BASE_URL`, `JIRA_USERNAME`, `JIRA_PASSWORD`	Allows secure server-side Jira access
Preview behavior	`JIRA_DASHBOARD_USE_MOCK`	Enables mock Jira data for preview or branch deployments

7. Security, Operations, And Maintenance

Operational Notes

- Portal login is browser-side and separate from Edit ROTA admin mode.
- Admin edit access depends on the `users/admin` Firestore document.
- Rota edits are logged into `logs/*` for traceability.
- APF, SFTP, Documentation, and Certificate records now persist in Oracle.

Recommended Maintenance Boundary

- Main ownership zone: `src/`, `src/jira/`, `netlify/`, `scripts/`, `docs/`
- Change APF folders only when those microsites are intentionally updated.
- Keep generated assets and unrelated legacy folders out of routine cleanup work.
- Validate with a production build after each meaningful change.

> The portal login credentials are still defined inside frontend code. For stronger security, the next improvement would be moving that gate to a server-backed or identity-backed model.

8. Cleanup Completed In This Update

- Confirmed the repository is pushed to `origin/main`.
- Removed the unused Firebase Auth export from `src/firebase.js`.

AUTHOR: AKASH SATAPATHY ON BEHALF OF HCL

- Removed the unused Jira date helper from `src/jira/api.js`.
- Simplified the fixed dark-mode flag in `src/App.jsx`.
- Replaced the placeholder README with project-specific repository guidance.
- Added a presentation deck and a complete documentation document under `docs/`.
- Integrated Oracle-backed persistence for APF, SFTP, Documentation, and Certificate microsites.
- Added Excel bulk publish flows for APF, SFTP, and Certificate.

> This cleanup was intentionally limited to the primary MyRota application path. Large APF folders, generated outputs, and unrelated legacy files were not mass-removed because doing so would be high risk without a dedicated microsite-by-microsite validation pass.

AUTHOR: AKASH SATAPATHY ON BEHALF OF HCL