TECHNICAL DOCUMENTATION

MyRota Complete Application Documentation

This document explains the MyRota application end to end: business purpose, runtime architecture, repository structure, Firestore data model, Jira integration, deployment pipeline, admin access logic, and maintenance guidance.

PREPARED FOR
HCL / LC EDI

PROJECT
MyRota

VERSION DATE
April 6, 2026

PRIMARY AUTHOR
Akash Satapathy

Contents

- 1. Product Overview
- 2. Runtime Architecture
- 3. Module And Folder Breakdown
- 4. Firestore Data Model
- 5. End-To-End Flows
- 6. Build And Deployment
- 7. Security, Operations, And Maintenance
- 8. Cleanup Completed In This Update

1. Product Overview

Purpose

MyRota is the central team dashboard for rota management and daily operational

Main User Groups

- Portal users who need view access to operational information

AUTHOR: AKASH SATAPATHY ON BEHALF OF HCL

visibility. It combines rota views, leave visibility, admin-controlled editing, audit logs, Jira monitoring, and quick navigation to related microsites.

- Admin users who maintain rota data and review logs
- Jira consumers who need issue counts and drill-down lists

Frontend Stack

React 19, Vite, custom CSS, lazy-loaded Jira screens.

Data Layer

Firestore for users, rota data, admin credentials, and audit logs.

Integration Layer

Netlify Functions proxy Jira API access using server-side environment variables.

> The application has two separate access concepts: the landing-page portal login for entering the app, and the Edit ROTA admin login used from inside the app when the MyRota logo is clicked.

2. Runtime Architecture

The main application is a client-rendered React single-page app. Firestore handles real-time operational data. Jira data is fetched through a Netlify serverless function so Jira credentials remain off the client.

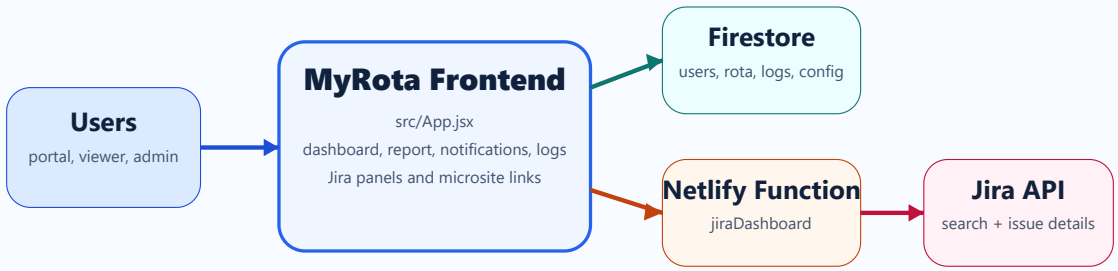

AUTHOR: AKASH SATAPATHY ON BEHALF OF HCL

> Jira is intentionally not called directly from the browser. The Netlify function protects Jira credentials and standardizes request and response handling.

3. Module And Folder Breakdown

Path	Responsibility	Notes
src/App.jsx	Main application shell and page orchestration	Contains landing login, admin mode, dashboard, report, notifications, logs, and home composition
src/firebase.js	Firebase bootstrapping	Initializes Firestore with long-polling-friendly settings for browser reliability
src/jira/api.js	Frontend Jira API client	Resolves Netlify function endpoint and formats Jira timestamps
src/jira/JiraDashboardSection.jsx	Home-page Jira summary cards	Loads summary counters and recent change request cards
src/jira/JiraIssuesPage.jsx	Drill-down page for Jira issue lists	Shows selected view data returned by the Netlify function
netlify/functions/jiraDashboard.js	Serverless Jira endpoint	Supports summary and detail modes
netlify/jira/	Jira configuration and view definitions	Owns JQL strings, response normalization, and environment-variable validation

AUTHOR: AKASH SATAPATHY ON BEHALF OF HCL

Path	Responsibility	Notes
scripts/copy-microsites.mjs	Build-time microsite publishing	Copies APF, SFTP, Certificate, and Documentation site assets into `dist/`
APF/	Microsites and legacy site assets	Published selectively but not part of the main React runtime path

4. Firestore Data Model

Path	Data Stored	Usage In App
users/{username}	Employee metadata and sort position	Used to build and order the employee list shown in the rota views
users/admin	Admin password field	Primary source for Edit ROTA admin login verification
rota/master	Central keyed rota map	Stores shift and leave assignments for each day and employee slot
logs/{logId}	Audit history	Stores admin edits and supports the Logs page
config/admin	Optional backup admin settings	Secondary fallback if `users/admin` is not available

> The current admin login path for Edit ROTA is designed to read the password from `users/admin` first, which aligns with the live Firestore document structure.

5. End-To-End Flows

AUTHOR: AKASH SATAPATHY ON BEHALF OF HCL

Portal Login Flow

- User lands on the portal login screen.
- App validates the default portal credentials stored in the frontend constants.
- Session state is written into browser storage.
- User is taken to the home page and navigation is unlocked.

Edit ROTA Admin Flow

- User clicks the MyRota logo from inside the app.
- Admin modal opens and requests the rota edit password.
- App fetches `users/admin` from Firestore.
- Password match enables admin state, rota editing, and logs access.

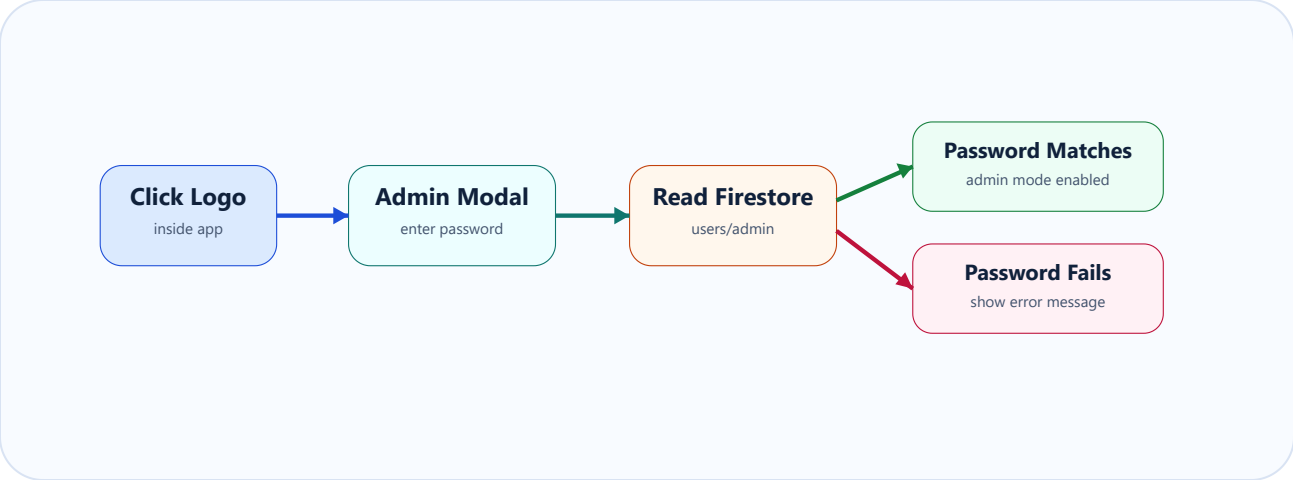

Jira Summary Flow

- Home page reaches the Jira section.
- Frontend calls the Netlify Jira function in summary mode.
- Function runs predefined JQL queries and returns normalized counts.
- User sees counters and recent issues.

Jira Detail Flow

- User clicks a Jira card or queue.
- Frontend calls the same function in detail mode with `view` id.
- Function returns full issue rows for that specific JQL view.
- User can open the issue directly in Jira.

6. Build And Deployment

Step 1

`npm run build` produces the main Vite

Step 2

`scripts/copy-microsites.mjs` copies selected APF, SFTP,

Step 3

Netlify serves `dist/` and hosts the Jira serverless

AUTHOR: AKASH SATAPATHY ON BEHALF OF HCL

frontend output in `dist/`.

Certificate, and Documentation assets into `dist/`.

endpoint from `netlify/functions`.

System	Configuration	Purpose
Netlify	`publish = "dist"` and `functions = "netlify/functions"`	Hosts frontend and serverless endpoints
Jira Function	`JIRA_BASE_URL`, `JIRA_USERNAME`, `JIRA_PASSWORD`	Allows secure server-side Jira access
Preview behavior	`JIRA_DASHBOARD_USE_MOCK`	Enables mock Jira data for preview or branch deployments

7. Security, Operations, And Maintenance

Operational Notes

- Portal login is browser-side and separate from Edit ROTA admin mode.
- Admin edit access depends on the `users/admin` Firestore document.
- Rota edits are logged into `logs/*` for traceability.
- Certificate reminders are stored locally in browser storage, not Firestore.

Recommended Maintenance Boundary

- Main ownership zone: `src/`, `src/jira/`, `netlify/`, `scripts/`, `docs/`
- Change APF folders only when those microsites are intentionally updated.
- Keep generated assets and unrelated legacy folders out of routine cleanup work.
- Validate with a production build after each meaningful change.

> The portal login credentials are still defined inside frontend code. For stronger security, the next improvement would be moving that gate to a server-backed or identity-backed model.

AUTHOR: AKASH SATAPATHY ON BEHALF OF HCL

8. Cleanup Completed In This Update

- Confirmed the repository is pushed to `origin/main`.
- Removed the unused Firebase Auth export from `src/firebase.js`.
- Removed the unused Jira date helper from `src/jira/api.js`.
- Simplified the fixed dark-mode flag in `src/App.jsx`.
- Replaced the placeholder README with project-specific repository guidance.
- Added a presentation deck and a complete documentation document under `docs/`.

> This cleanup was intentionally limited to the primary MyRota application path. Large APF folders, generated outputs, and unrelated legacy files were not mass-removed because doing so would be high risk without a dedicated microsite-by-microsite validation pass.

AUTHOR: AKASH SATAPATHY ON BEHALF OF HCL