
Lombok



Features

- @Getter and @Setter
- @FieldNameConstants
- @ToString
- @EqualsAndHashCode
- @AllArgsConstructor, @RequiredArgsConstructor and @NoArgsConstructor
- @Log, @Log4j, @Log4j2, @Slf4j, @XSlf4j, @CommonsLog, @JBossLog, @Flogger, @CustomLog
- @Data
- · @Builder
- @SuperBuilder
- @Singular
- @Delegate
- @Value
- @Accessors
- @Wither
- @With
- @SneakyThrows
- @val
- @var
- · experimental @var
- @UtilityClass

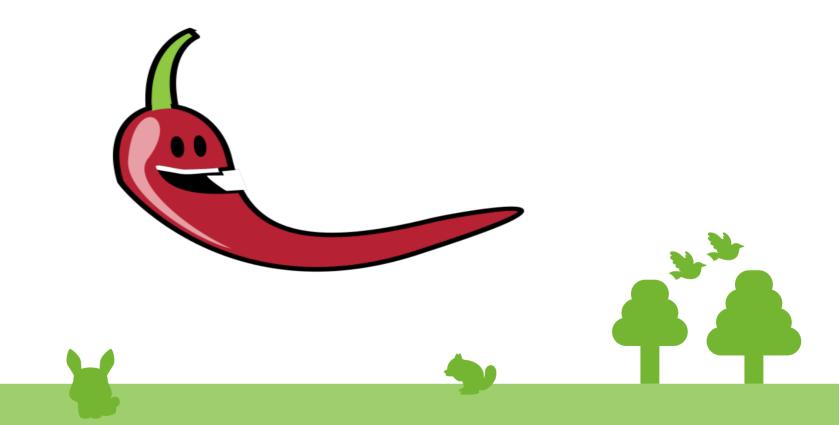

Gebruik van Lombok



```
public class Generiek_Toolbar { @ simple (0%)
public Generiek_Toolbar() { PageFactory.initElements(GWD.getDriver(), page: this); }
@FindBy(xpath = "//a[contains (@class, 'button icon-plus')]")
 private WebElement plusWithText;
@FindBy(xpath = "//a[@class=\"icon new pat-tooltip tooltip-inactive\"]")
private WebElement plus:
@FindBy(xpath = "//div[@class=\"tippy-content\"]")
@FindBy(xpath = "//select[@name=\"versie\"]")
private WebElement concept;
@FindBy(xpath = "//button[@id=\"modal-main-submit\"]")
private WebElement publiceerNu;
 public WebElement getPlusWithText() {
                                          Zonder Lombok
```

get...



