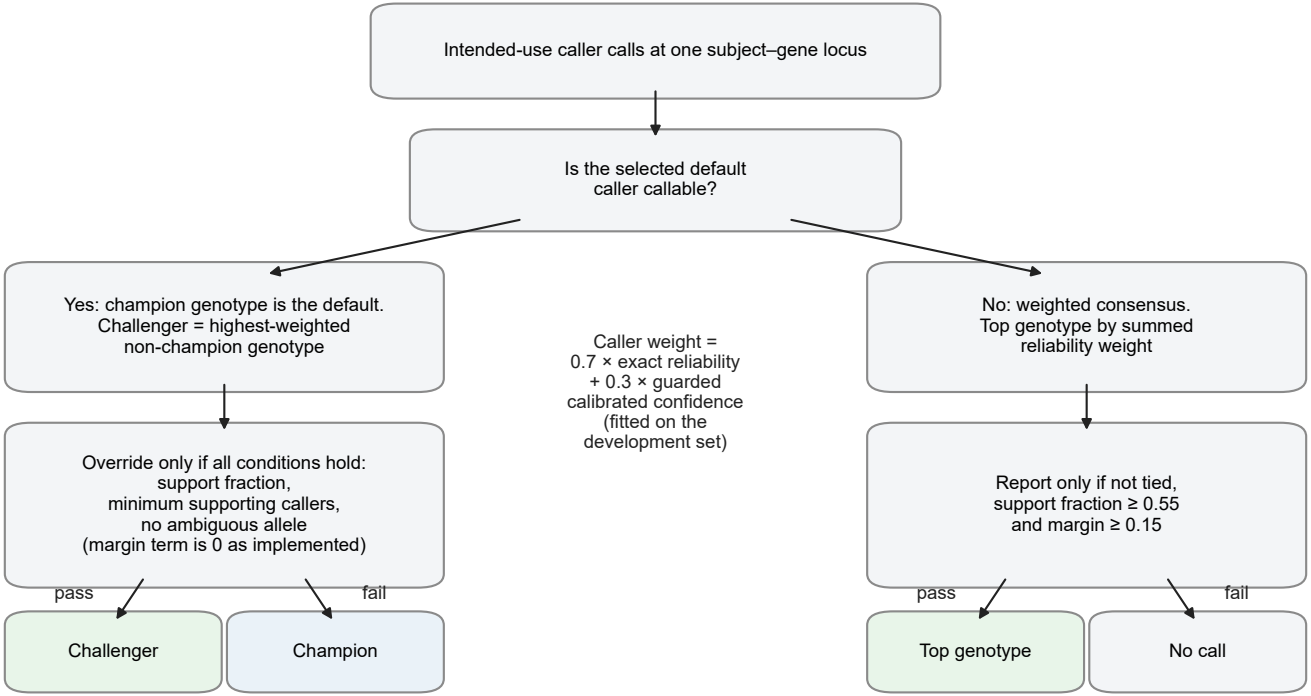

Intended-use caller calls at one subject–gene locus
Is the selected default caller callable?
Yes: champion genotype is the default. Challenger = highest-weighted non-champion genotype
Override only if all conditions hold: support fraction, minimum supporting callers, no ambiguous allele (margin term is 0 as implemented)
pass
fail
Challenger
Champion
Caller weight = 0.7 × exact reliability + 0.3 × guarded calibrated confidence (fitted on the development set)
No: weighted consensus. Top genotype by summed reliability weight
Report only if not tied, support fraction ≥ 0.55 and margin ≥ 0.15
pass
fail
Top genotype
No call