

Java Programming



Somkiat Puisungnoen

Search

Somkiat | Home

Update Info 1 View Activity Log 10+ ...

Timeline About Friends 3,138 Photos More

When did you work at Opendream? X

... 22 Pending Items

Post Photo/Video Live Video Life Event

What's on your mind?

Public Post

Intro

Software Craftsmanship

Software Practitioner at สยามช่างนาฏกิจ พ.ศ. 2556

Agile Practitioner and Technical at SPRINT3r

Somkiat Puisungnoen 15 mins · Bangkok · ...

Java and Bigdata



somkiat.cc

Page Messages Notifications 3 Insights Publishing Tools Settings Help ▾

somkiat.cc
@somkiat.cc

Home Posts Videos Photos

Liked Following Share ... + Add a Button



Agenda Day 1

- Introduction to Java Programming
- Installation and configuration
- IDE
- Basic of Java Programming
- Mistake from Java programmer
- Write automated tests with JUnit
- SOLID :: How to design testable application



Agenda Day 2

- Introduction to Spring Boot
- Create starter project
- Structure of project
- Develop RESTful APIs
- Working with Database with JDBC
- Working with Database with JPA



Agenda Day 3

- Testing with Spring Boot
- Introduction to Spring Security
- Type of Spring Security
- Develop RESTful APIs with security



Java Programming



Software Requirements

Java Development Kit 8 (JDK 8)

Eclipse IDE (PHOTON)

Git



Download JDK 8

Java SE Development Kit 8u181

You must accept the [Oracle Binary Code License Agreement for Java SE](#) to download this software.


Accept License Agreement Decline License Agreement

Product / File Description	File Size	Download
Linux ARM 32 Hard Float ABI	72.95 MB	jdk-8u181-linux-arm32-vfp-hflt.tar.gz
Linux ARM 64 Hard Float ABI	69.89 MB	jdk-8u181-linux-arm64-vfp-hflt.tar.gz
Linux x86	165.06 MB	jdk-8u181-linux-i586.rpm
Linux x86	179.87 MB	jdk-8u181-linux-i586.tar.gz
Linux x64	162.15 MB	jdk-8u181-linux-x64.rpm
Linux x64	177.05 MB	jdk-8u181-linux-x64.tar.gz
Mac OS X x64	242.83 MB	jdk-8u181-macosx-x64.dmg
Solaris SPARC 64-bit (SVR4 package)	133.17 MB	jdk-8u181-solaris-sparcv9.tar.Z
Solaris SPARC 64-bit	94.34 MB	jdk-8u181-solaris-sparcv9.tar.gz
Solaris x64 (SVR4 package)	133.83 MB	jdk-8u181-solaris-x64.tar.Z
Solaris x64	92.11 MB	jdk-8u181-solaris-x64.tar.gz
Windows x86	194.41 MB	jdk-8u181-windows-i586.exe
Windows x64	202.73 MB	jdk-8u181-windows-x64.exe


<http://www.oracle.com/technetwork/java/javase/downloads/jdk8-downloads-2133151.html>



Install JDK 8 (1)

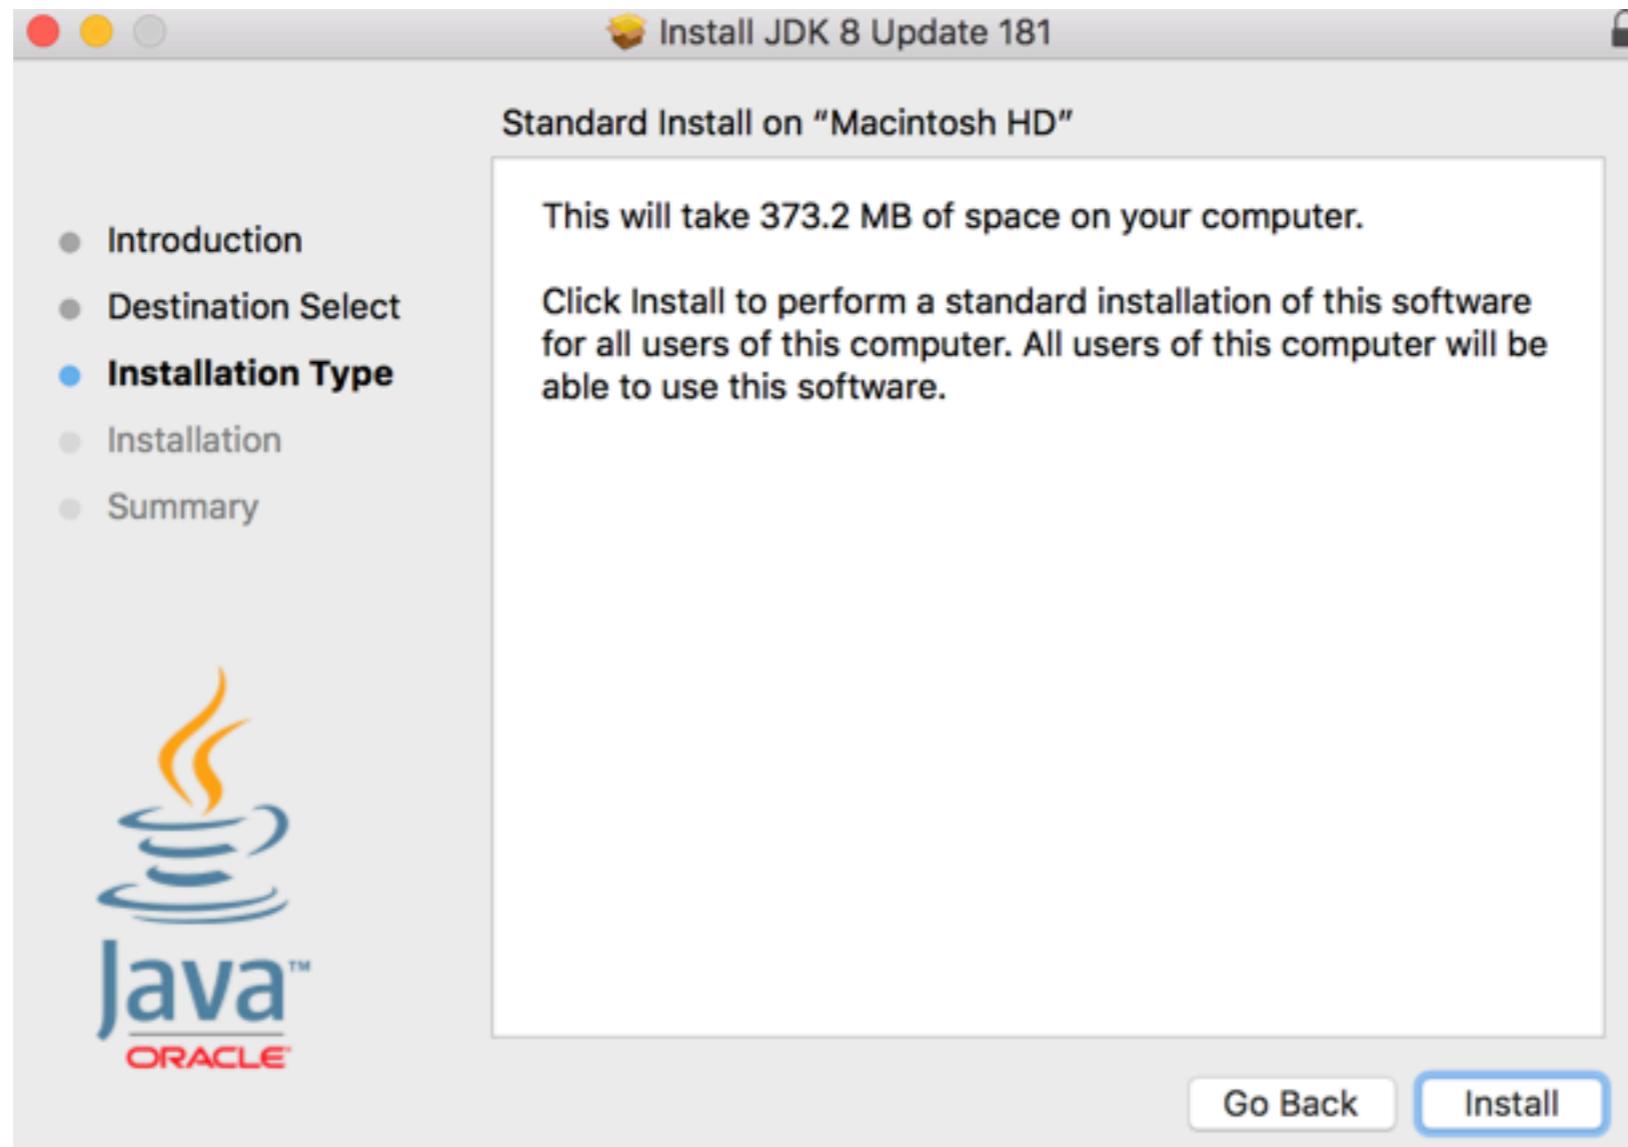

Install JDK 8 (2)

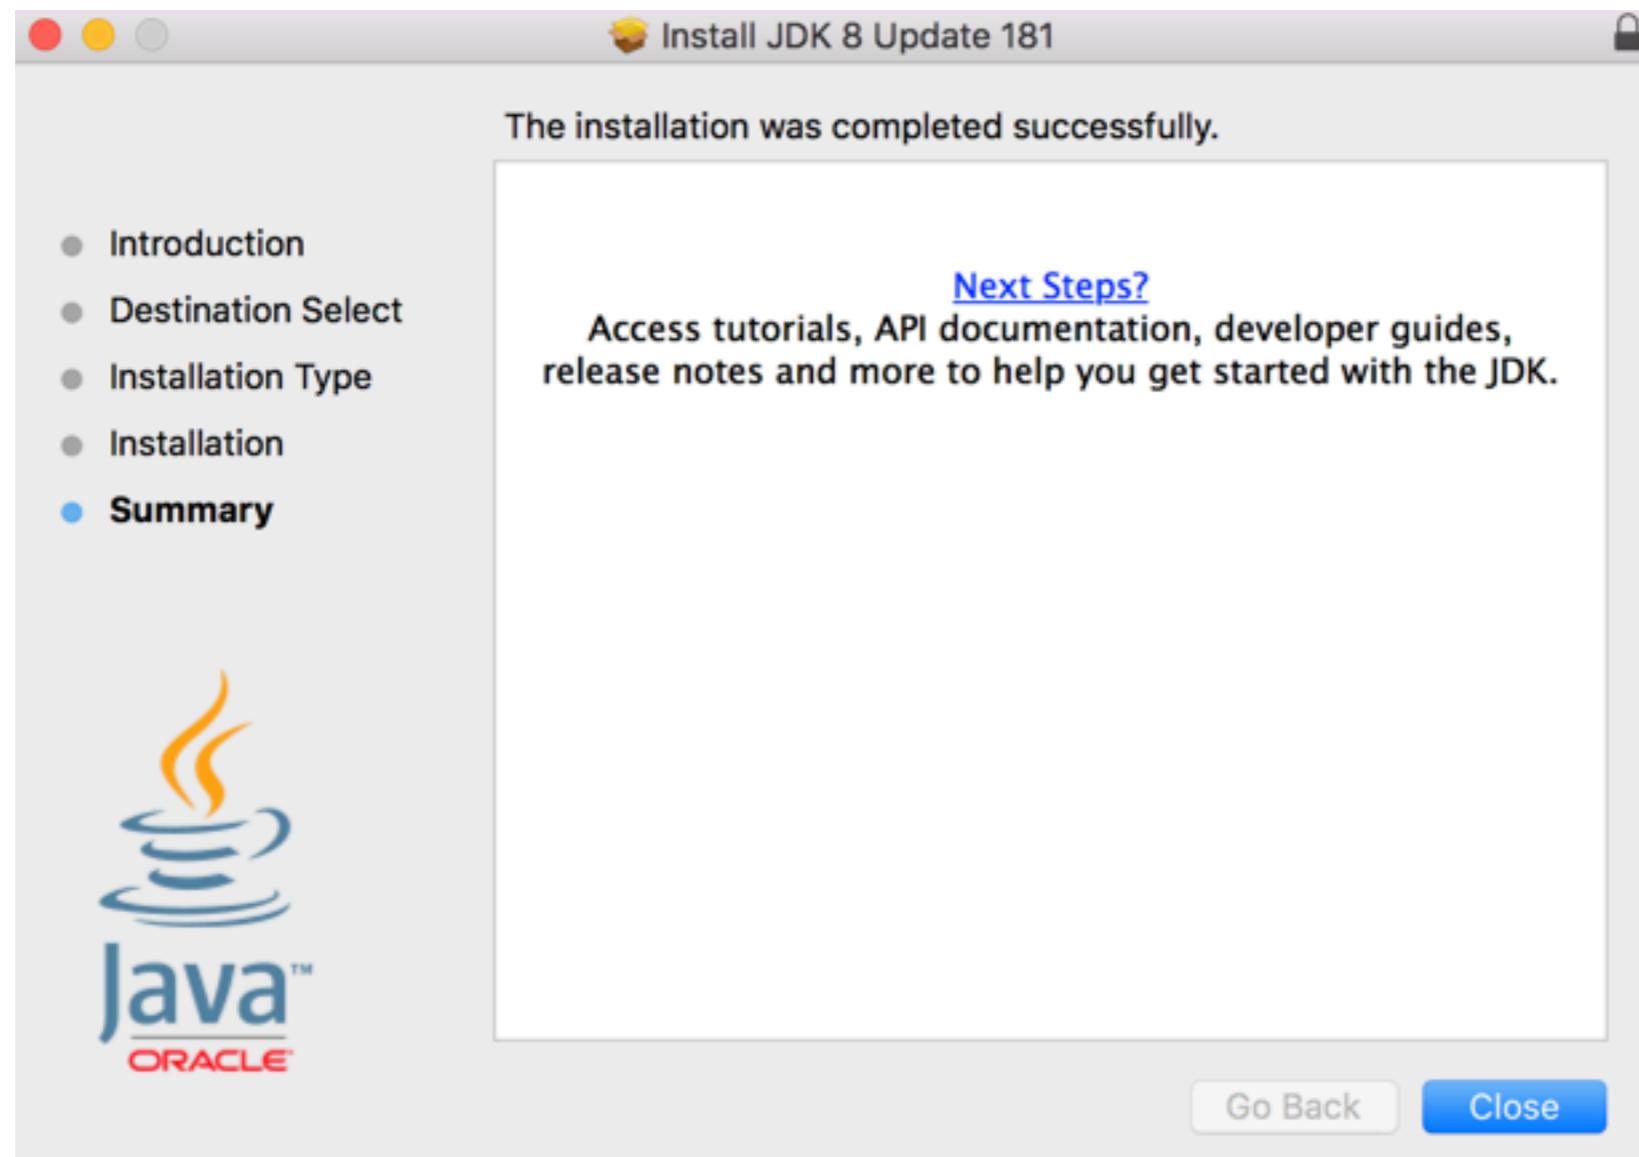

Config JAVA_HOME and PATH

```
set JAVA_HOME=<path of JDK>
```

```
set PATH=.;%JAVA_HOME%\bin;%PATH%
```



Testing configuration

```
$javac -version  
$java -version
```



Download Eclipse IDE



Get Eclipse **PHOTON**

Install your favorite Eclipse packages.


[Download 64 bit](#)

[Download Packages](#) | [Need Help?](#)

<https://www.eclipse.org/downloads/>




Install Eclipse IDE (1)

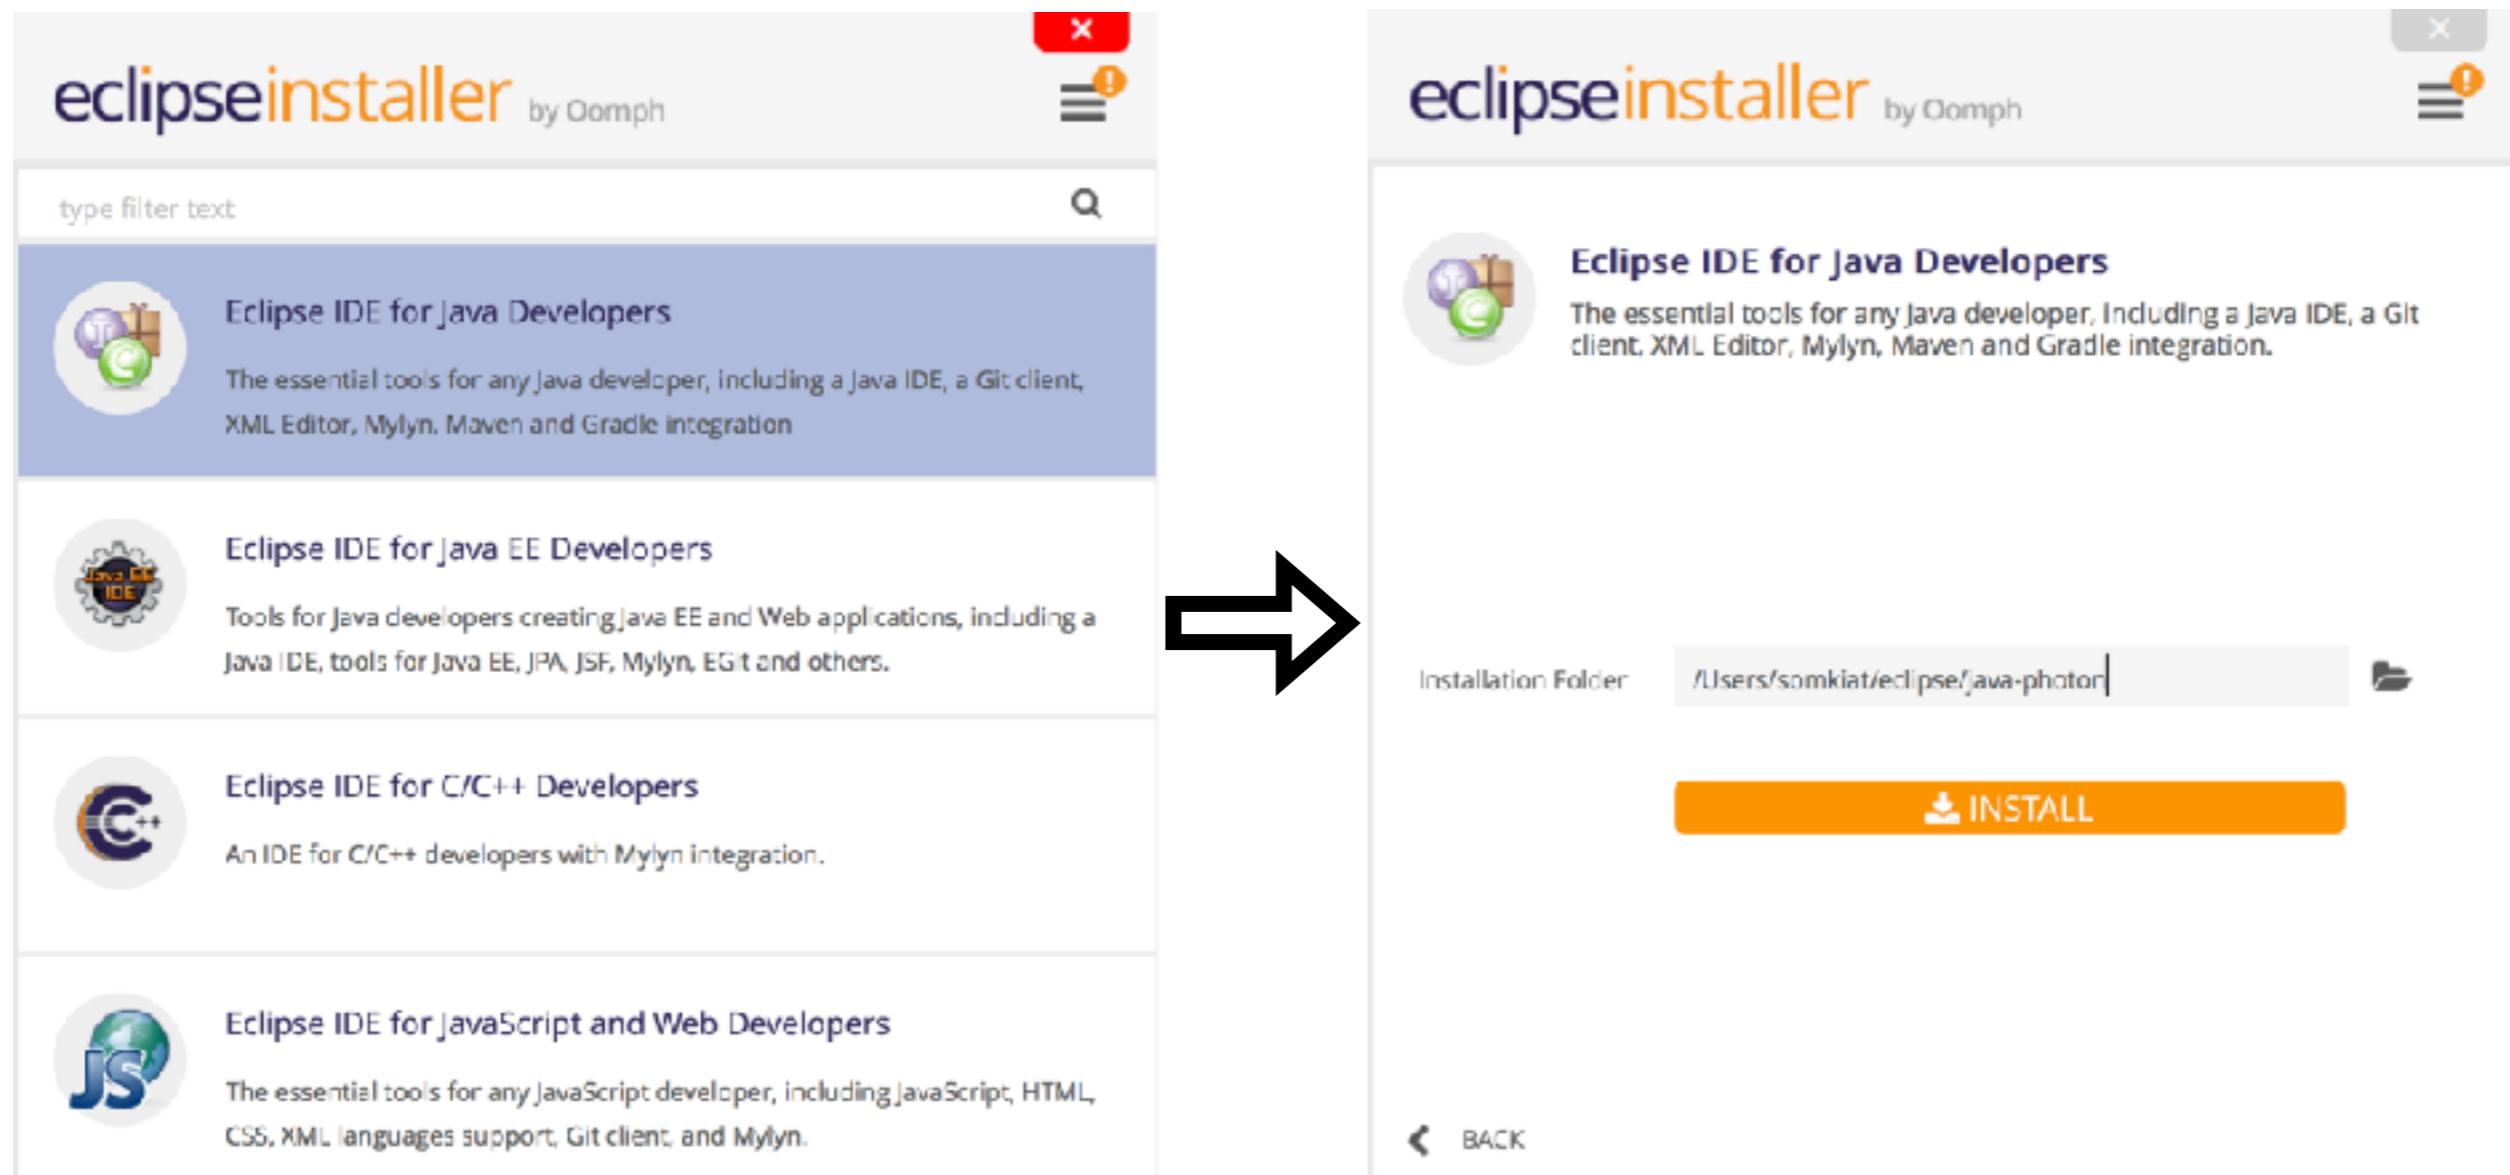


<https://www.eclipse.org/downloads/>




Install Eclipse IDE (2)

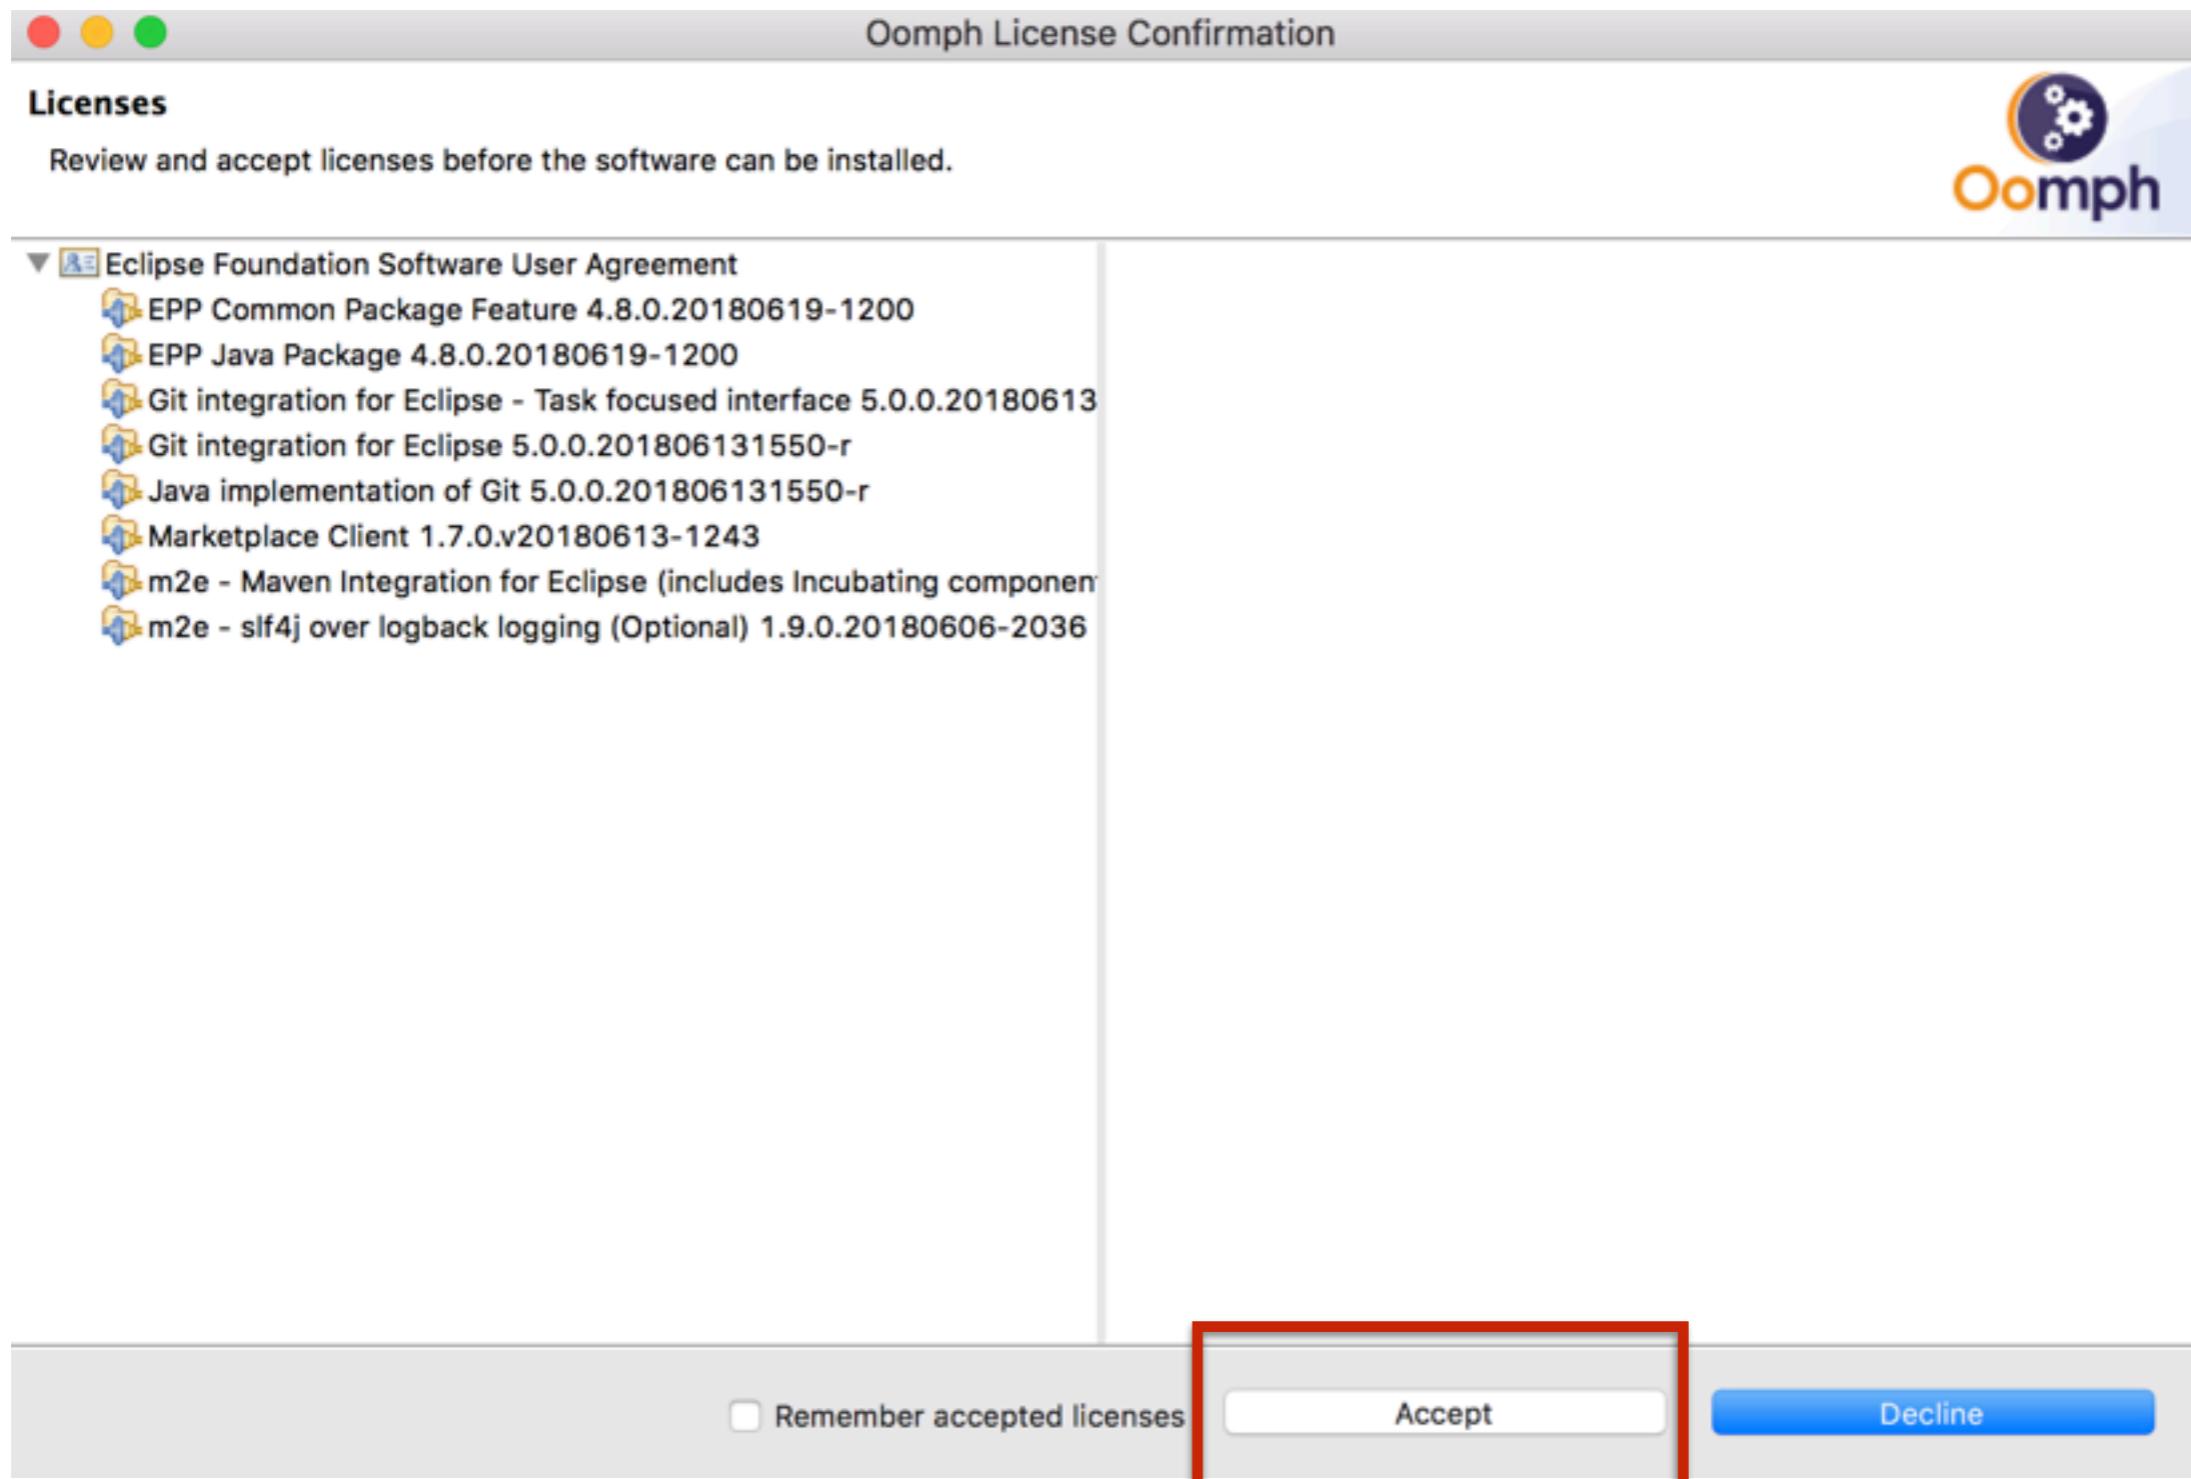

Install Eclipse IDE (3)

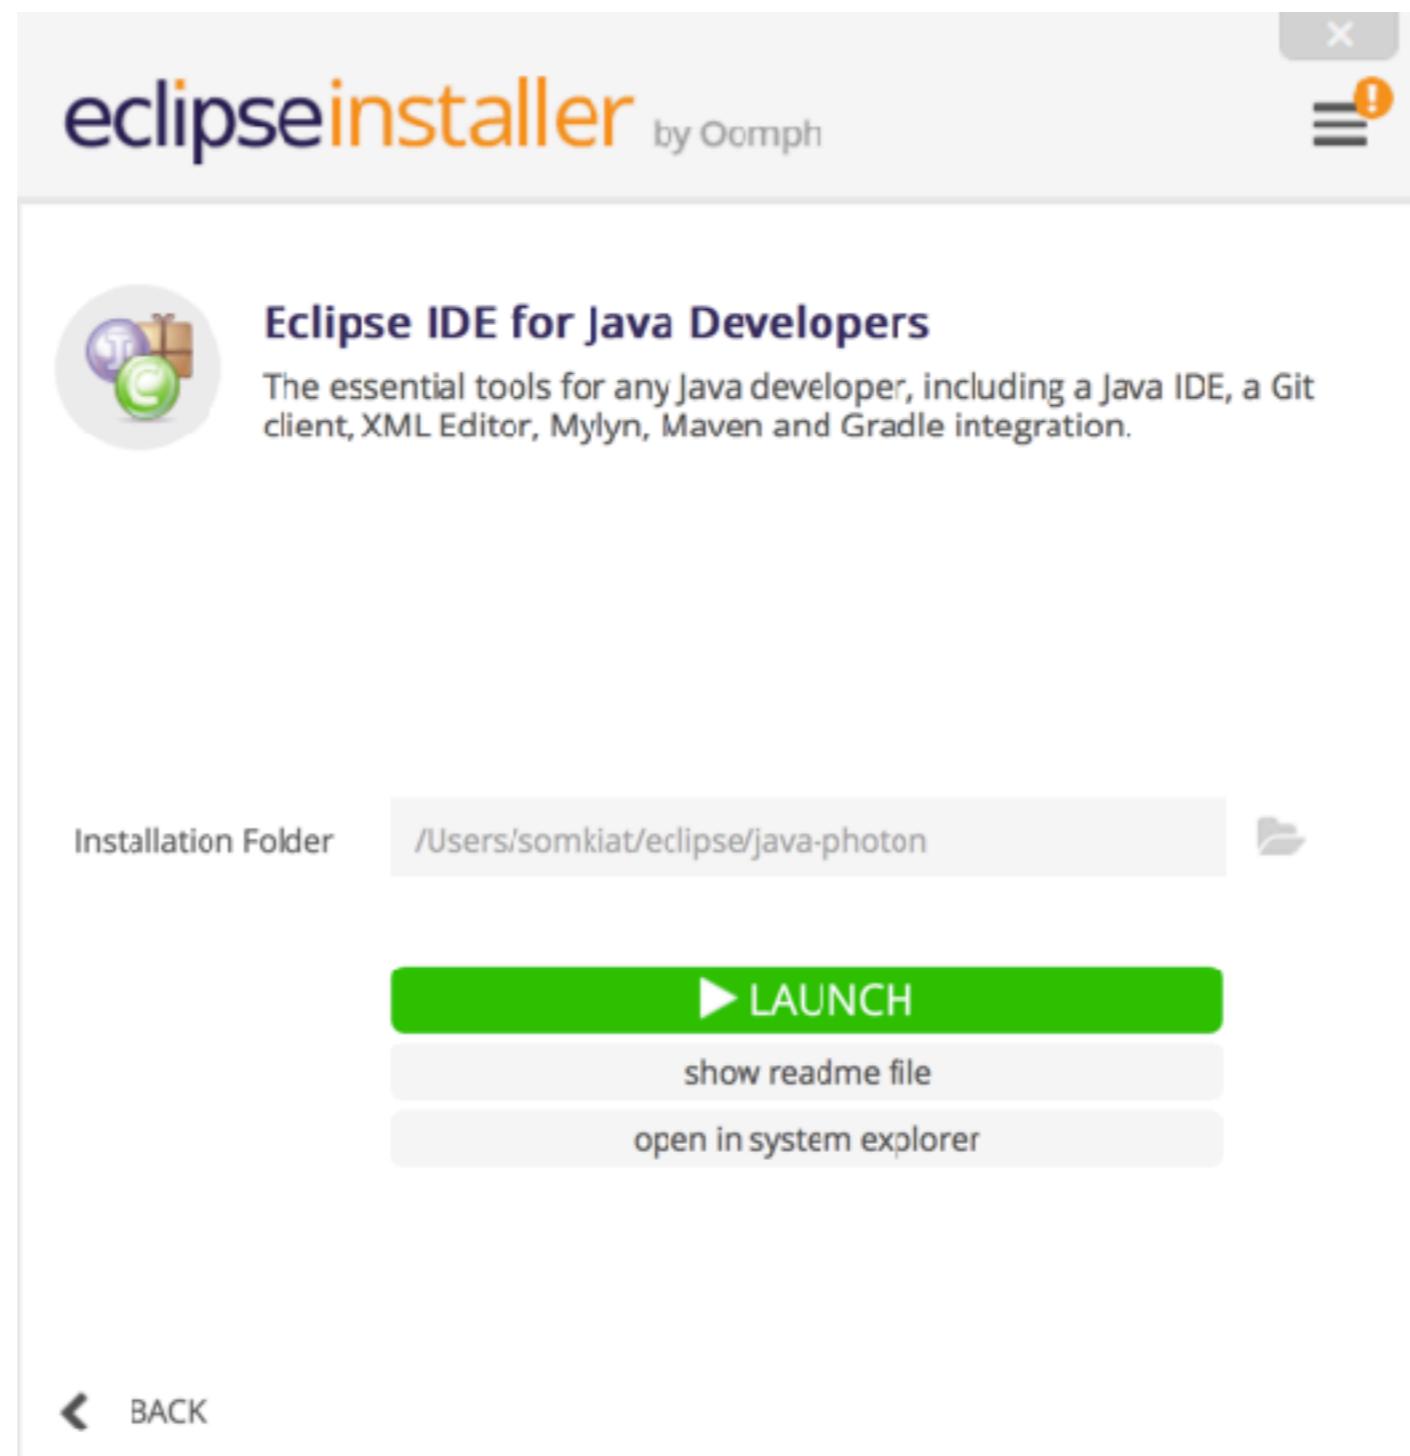

Eclipse IDE

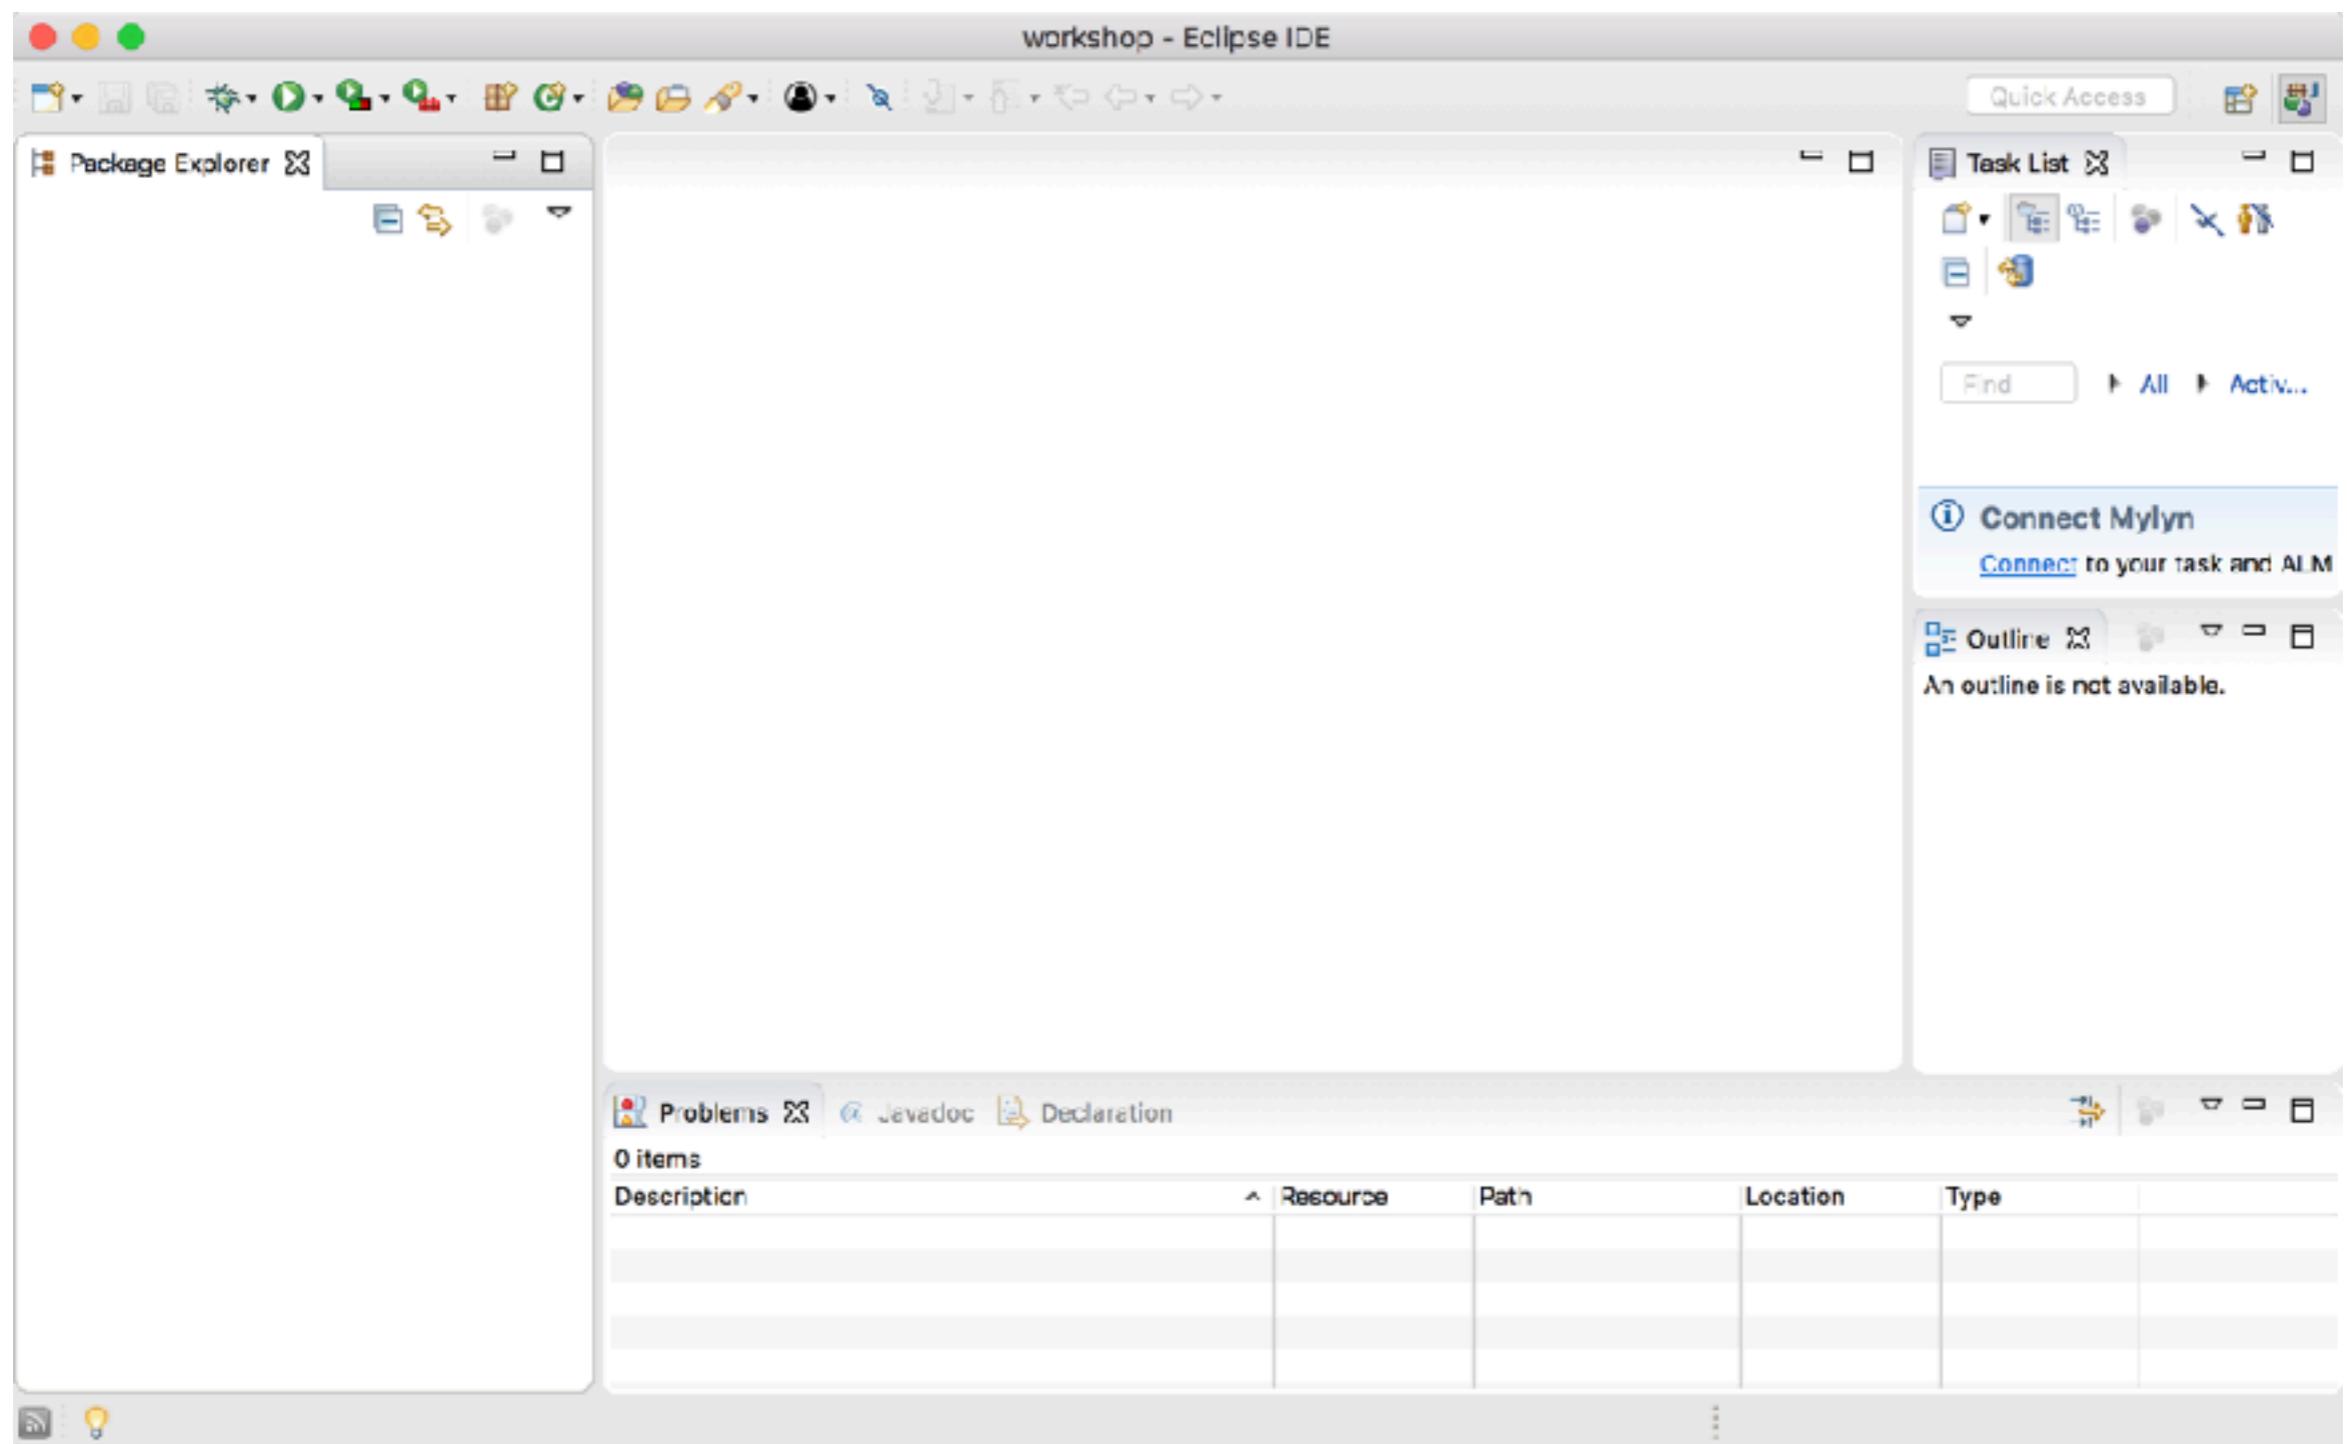

Source code management



Download and Install Git

The screenshot shows the official Git website at <https://git-scm.com/>. At the top, the Git logo and the slogan '--distributed-is-the-new-centralized' are displayed. A search bar is located in the top right corner. Below the logo, a brief introduction states: 'Git is a **free and open source** distributed version control system designed to handle everything from small to very large projects with speed and efficiency.' To the right of this text is a diagram illustrating the distributed nature of Git, showing multiple repositories connected by red lines on a grid background. Below the introduction, another paragraph highlights Git's features: 'Git is **easy to learn** and has a **tiny footprint with lightning fast performance**. It outclasses SCM tools like Subversion, CVS, Perforce, and ClearCase with features like **cheap local branching**, convenient **staging areas**, and **multiple workflows**.' A 'Try Git' button with a user icon is present. The main content area is divided into several sections: 'About' (with a gear icon), 'Documentation' (with a book icon), 'Downloads' (with a download arrow icon), and 'Community' (with a speech bubble icon). On the right side, a large monitor displays the 'Latest source Release **2.18.0**' with a 'Release Notes (2018-06-21)' link and a 'Download 2.17.1 for Mac' button.

<https://git-scm.com/>



Git command line

\$git status

\$git init

\$git add <file>

\$git commit -m “Reason to commit”

\$git push <remote> <local branch>

\$git pull <remote> <local branch>

\$git remote add <name> <url>



Create repository at Github

Create a new repository

A repository contains all the files for your project, including the revision history.

Owner Repository name

 up1 

Great repository names are short and memorable. Need inspiration? How about [bookish-octo-tribble](#).

Description (optional)

 **Public**
Anyone can see this repository. You choose who can commit.

 **Private**
You choose who can see and commit to this repository.

Initialize this repository with a README
This will let you immediately clone the repository to your computer. Skip this step if you're importing an existing repository.

Add .gitignore: **None** ▾ | Add a license: **None** ▾ 

Create repository



Create already

The screenshot shows a GitHub repository page for 'up1 / sample'. The top navigation bar includes links for Code, Issues (0), Pull requests (0), Projects (0), Wiki, Insights, and Settings. A 'Unwatch' button with a count of 1 is also present. The main content area features a 'Quick setup — if you've done this kind of thing before' section with options for 'Set up in Desktop' (selected), 'HTTPS', and 'SSH', along with the URL <https://github.com/up1/sample.git>. Below this, a note says 'We recommend every repository include a [README](#), [LICENSE](#), and [.gitignore](#)'. Further down, instructions for creating a new repository on the command line are provided, enclosed in a red box:

```
echo "# sample" >> README.md
git init
git add README.md
git commit -m "first commit"
git remote add origin https://github.com/up1/sample.git
git push -u origin master
```



Working with Git



1. Create repos on your folder

```
$git init
```



2. Add file/folder to git repos

\$git add <filename>

\$git add <folder>



3. Commit your change

```
$git commit -m "<message>"
```



4. Add remote repository

\$git remote add <name> <remote url>

\$git remote add **origin** **https://github.com/up1/sample.git**



5. Push your change to remote repos

```
$git push origin master
```

And check your code at github.com



Programming Language



Programming Language

Program is a set of instruction that tell a computer
We **execute** the instruction lists from program
Instructions are described using
Programming Language



Categories of language

High-level Language


Assembly Language

Machine Language


Hardware




Categories of language

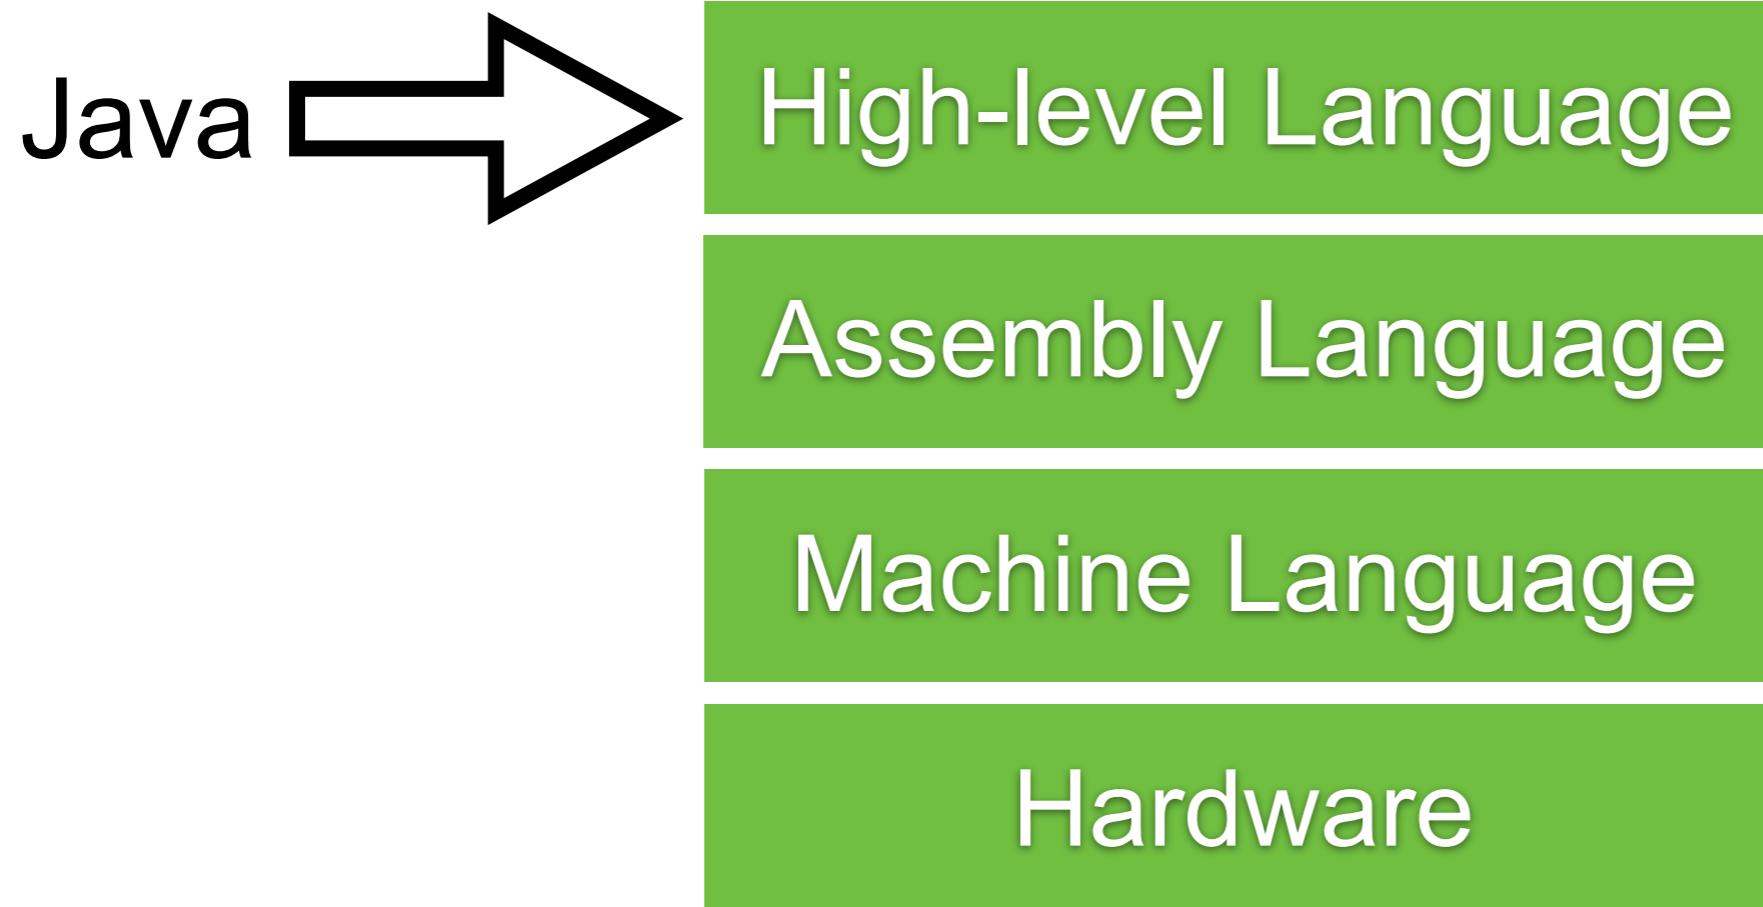

Java workflow

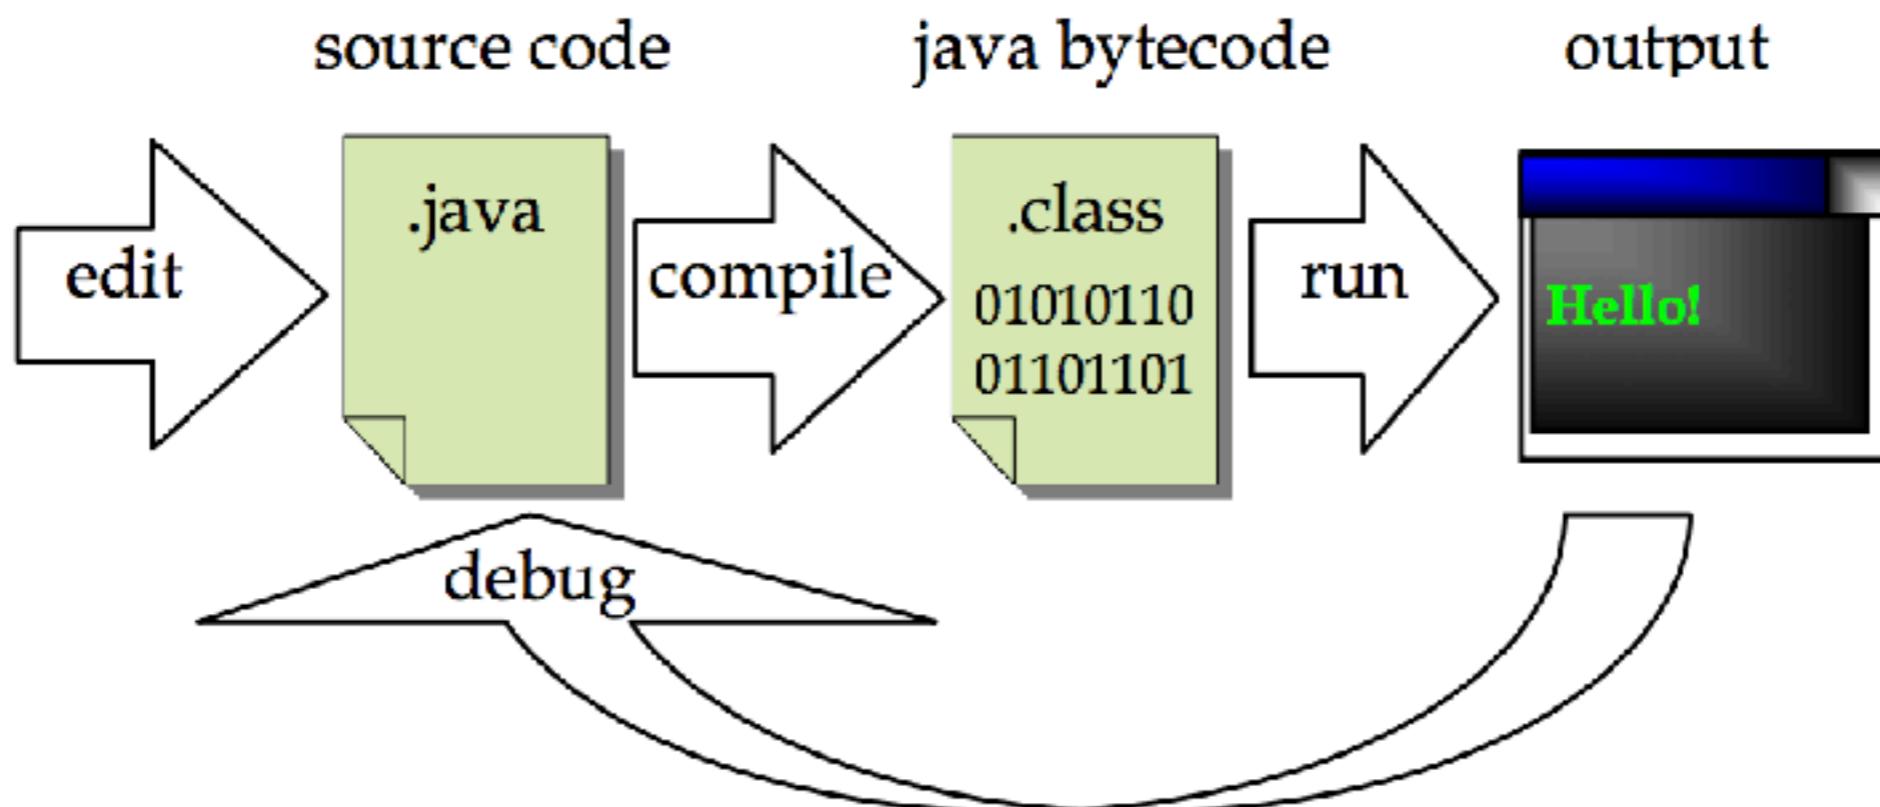

Write once run anywhere ?

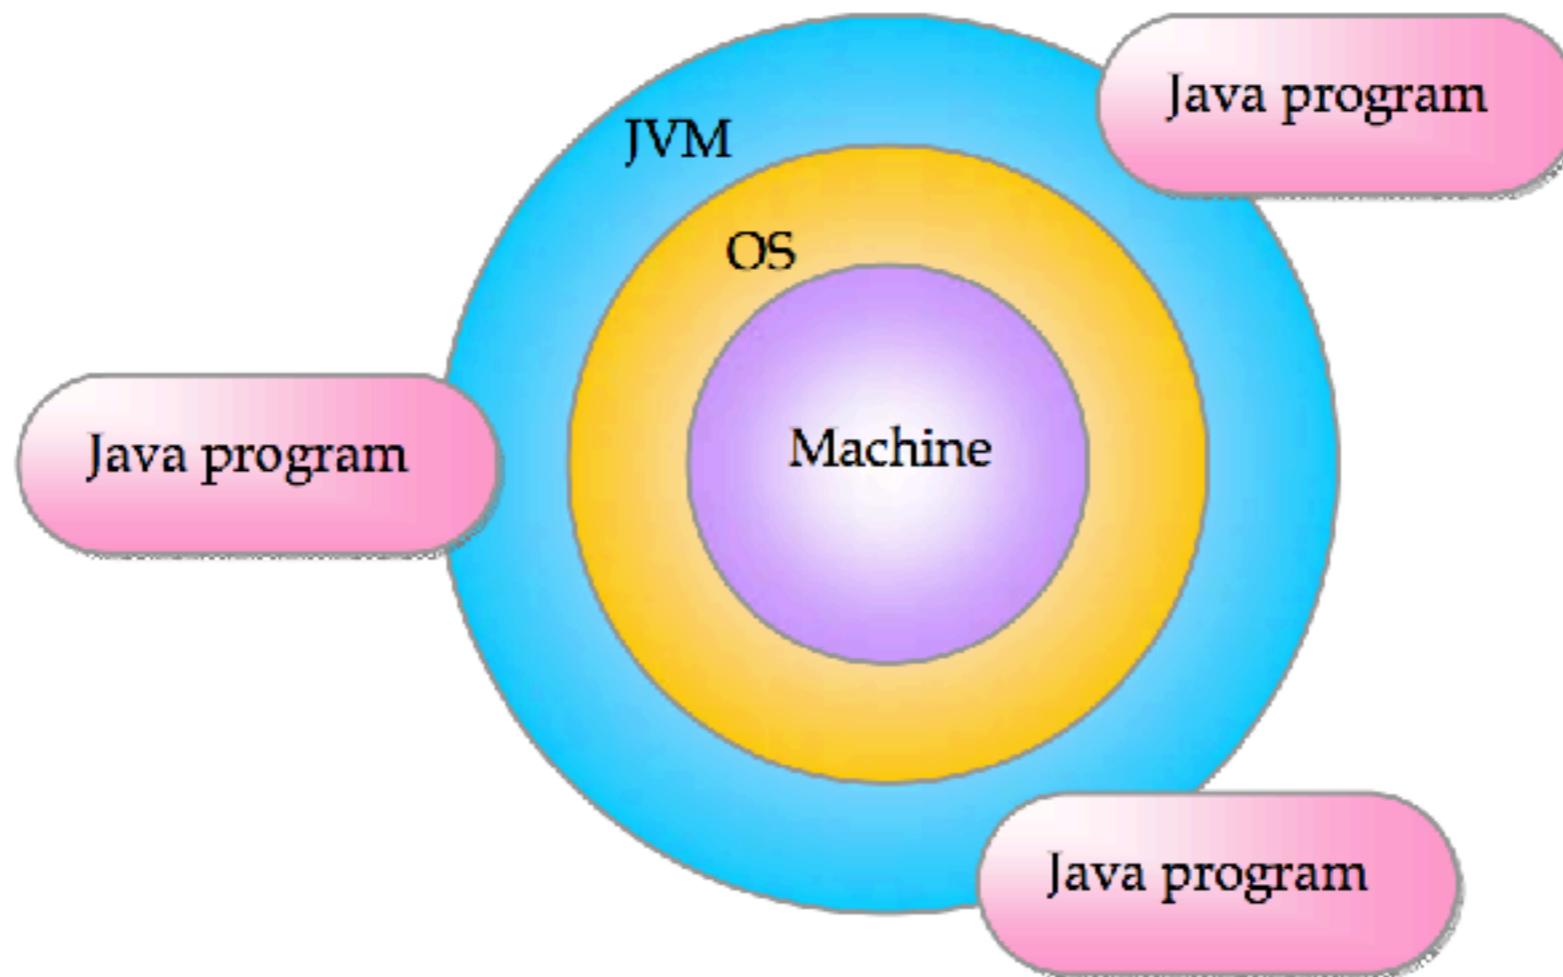

Introduction to Java




Structure of Java program

Create file HelloWorld.java

```
1 public class HelloWorld {  
2  
3     // Show message in a console  
4     public static void main(String[] args) {  
5         System.out.println("Hello World");  
6     }  
7 }  
8  
9 }
```



Compile and Run program

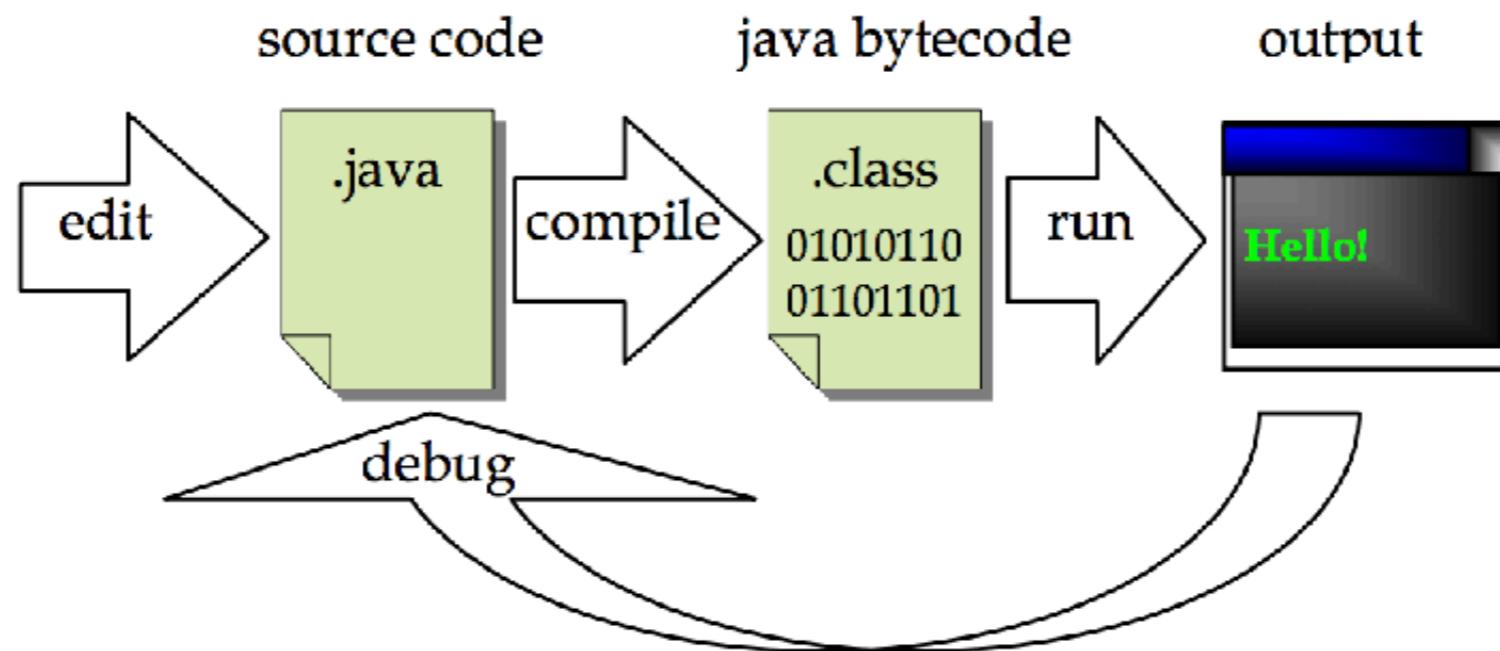

```
$javac HelloWorld.java
```

```
$java HelloWorld
```

Hello World



Keywords

abstract	continue	for	new	switch
assert	default	goto	package	synchronized
boolean	do	if	private	this
break	double	implements	protected	throw
byte	else	import	public	throws
case	enum	instanceof	return	transient
catch	extends	int	short	try
char	final	interface	static	void
class	finally	long	strictfp	volatile
const	float	native	super	while

https://docs.oracle.com/javase/tutorial/java/nutsandbolts/_keywords.html



Comments

Documentation comment

Single line comment (C++ style)

Multi-line comment (C style)



Comments


```
1 /**
2  * 1. Documentation comment
3  *
4  * @author somkiat
5 */
6 public class HelloWorld {
7
8     // 2. Single line comment (C++ style)
9 public static void main(String[] args) {
10    /*
11        3. Multi-line comment (C style)
12    */
13    System.out.println("Hello World");
14
15 }
16
17 }
```



Formatting/ Readability

Whitespace characters in program are ignored during the compilation

```
1 public class HelloWorld {  
2 public static void main(String[] args) {  
3 System.out.println("Hello World");}}
```



```
1 public class HelloWorld {  
2     public static void main(String[] args) {  
3         System.out.println("Hello World");  
4     }  
5 }
```



Any fool can write code that
a computer can understand.
Good programmers write
code that humans can
understand.


Martin Fowler

QuoteAddicts.com



Formatting code in Eclipse IDE

Go to Source -> Format

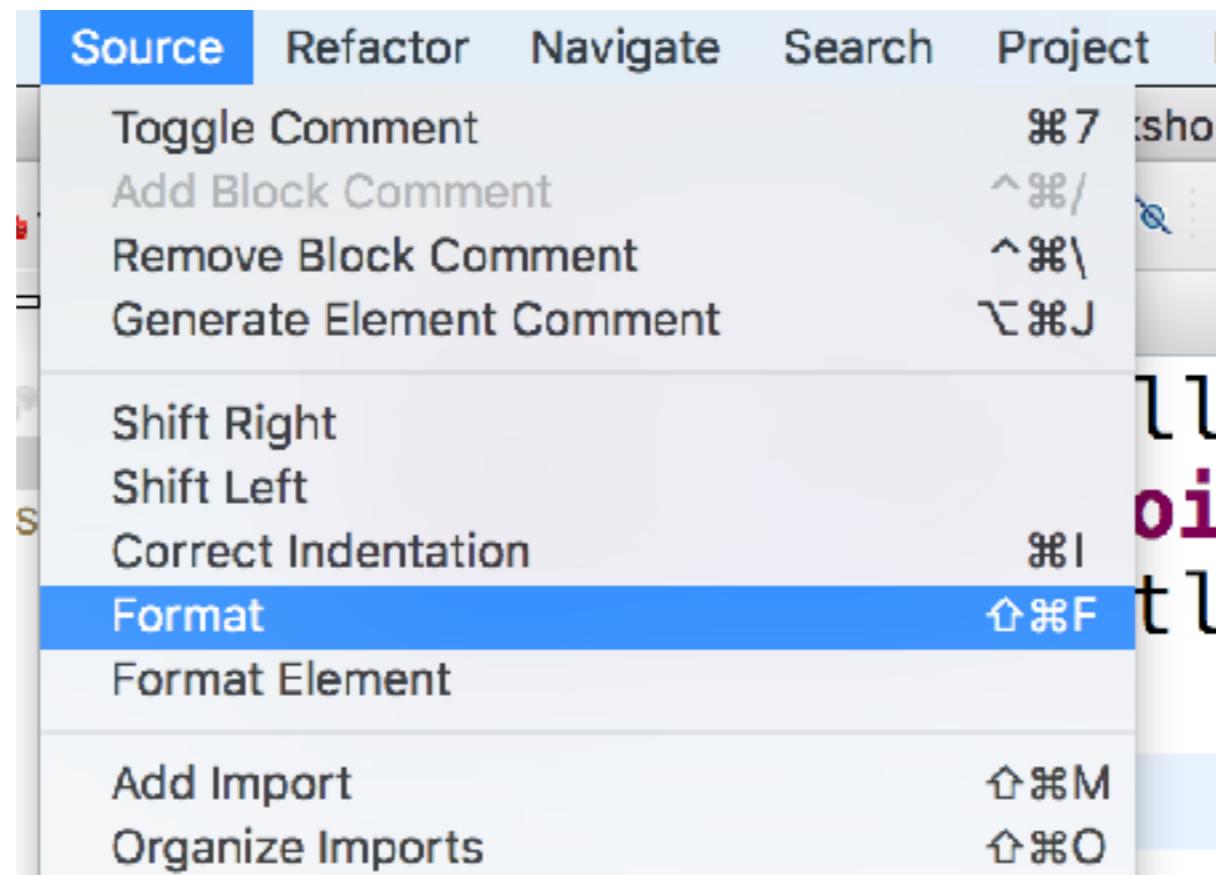

Java Code convention

Oracle (1997)

<https://goo.gl/pfPc1S>

Google

<https://github.com/google/styleguide>

<https://google.github.io/styleguide/javaguide.html>

Spring Framework


<https://github.com/spring-projects/spring-framework/wiki/Code-Style>

<https://github.com/47deg/coding-guidelines/tree/master/java/spring>




Tips for Eclipse IDE

Go to Window -> Preferences

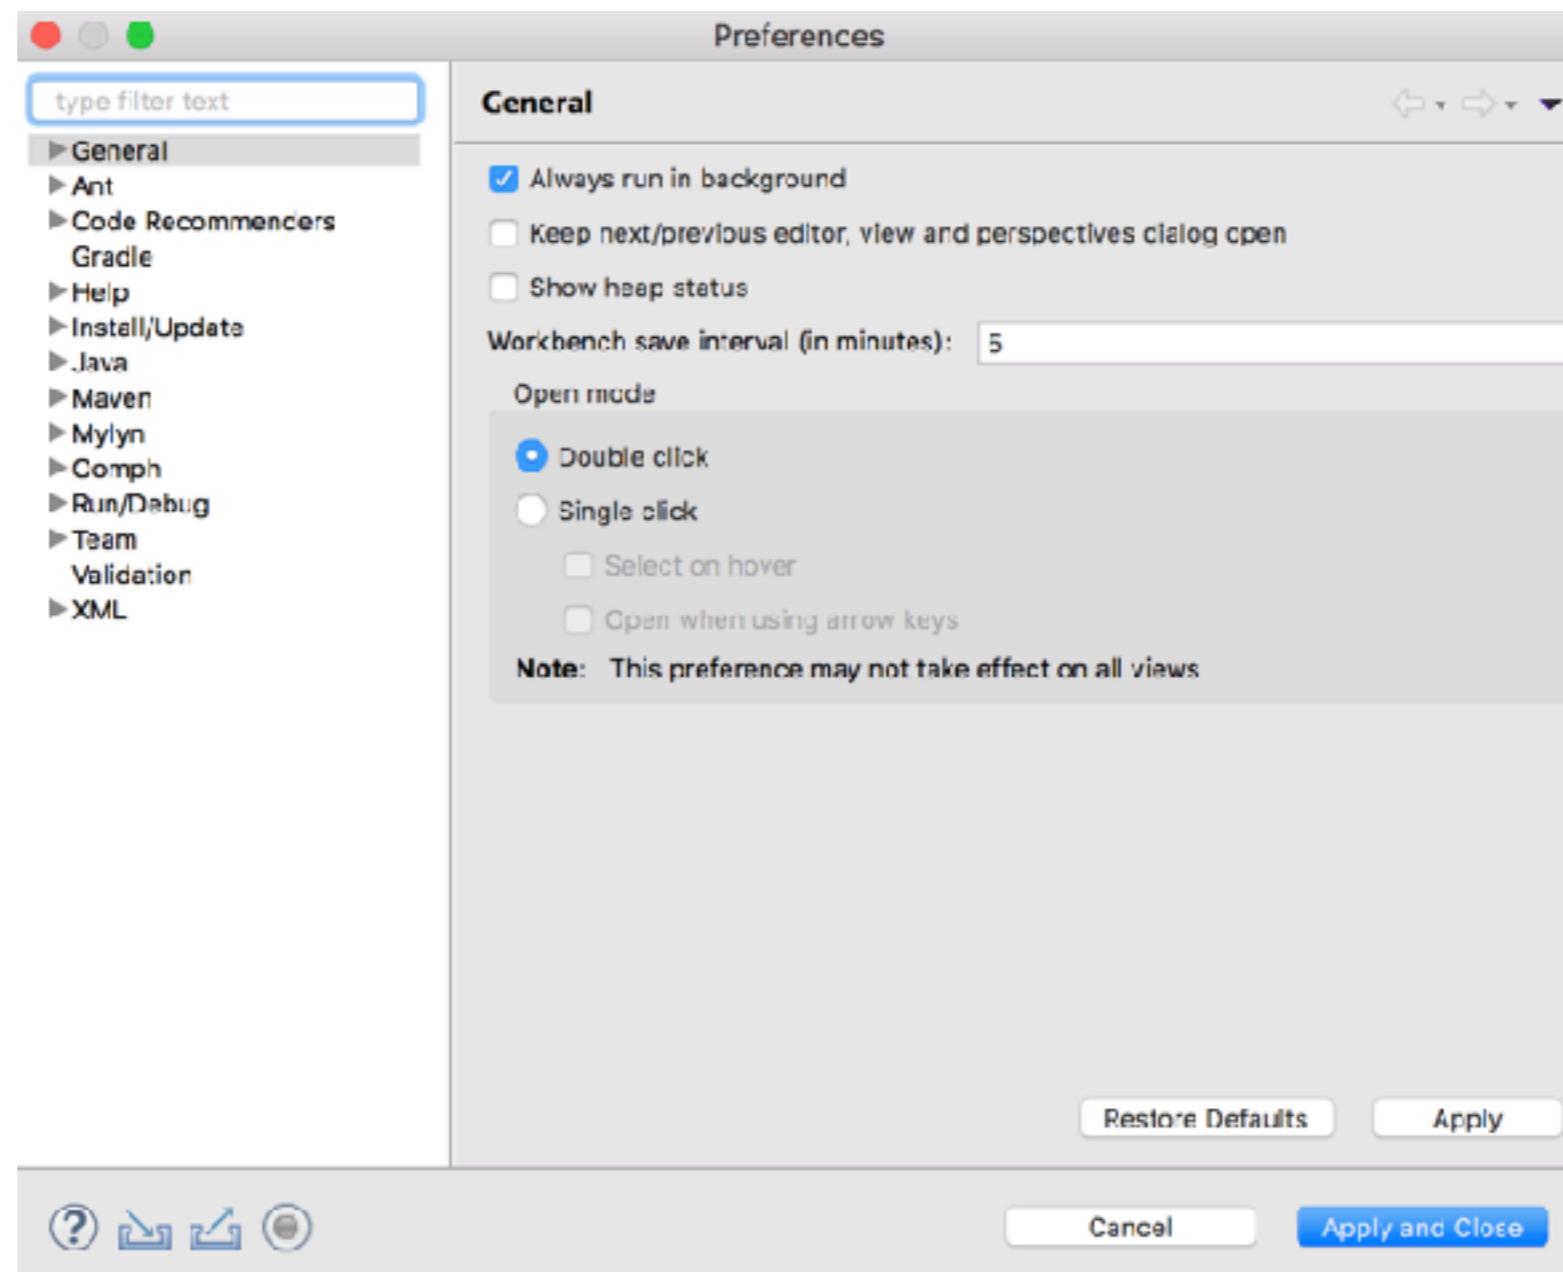


1. Set fonts of Java code

Go to General -> Appearance -> Colors and Fonts

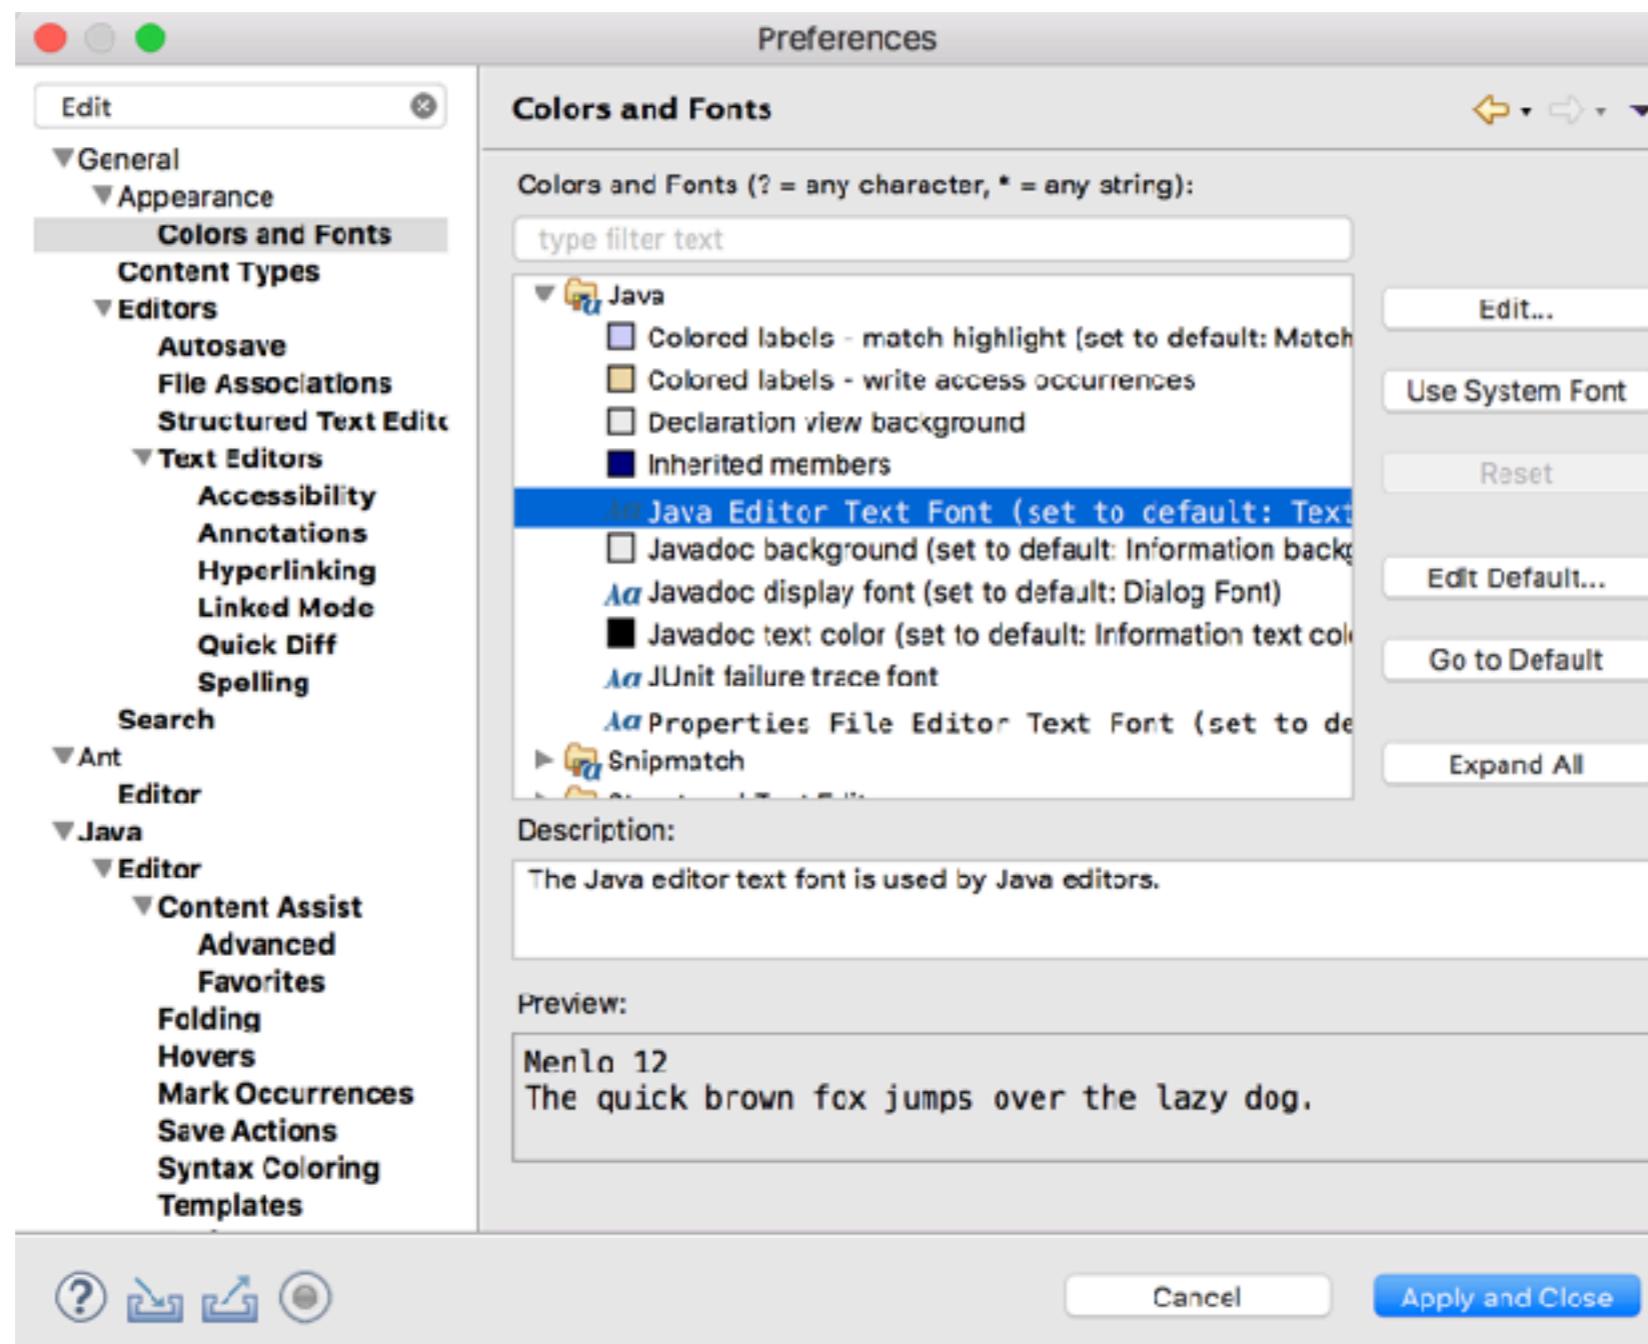


2. Insertion mode (overwrite)

Go to Java -> Editor -> Content Assist

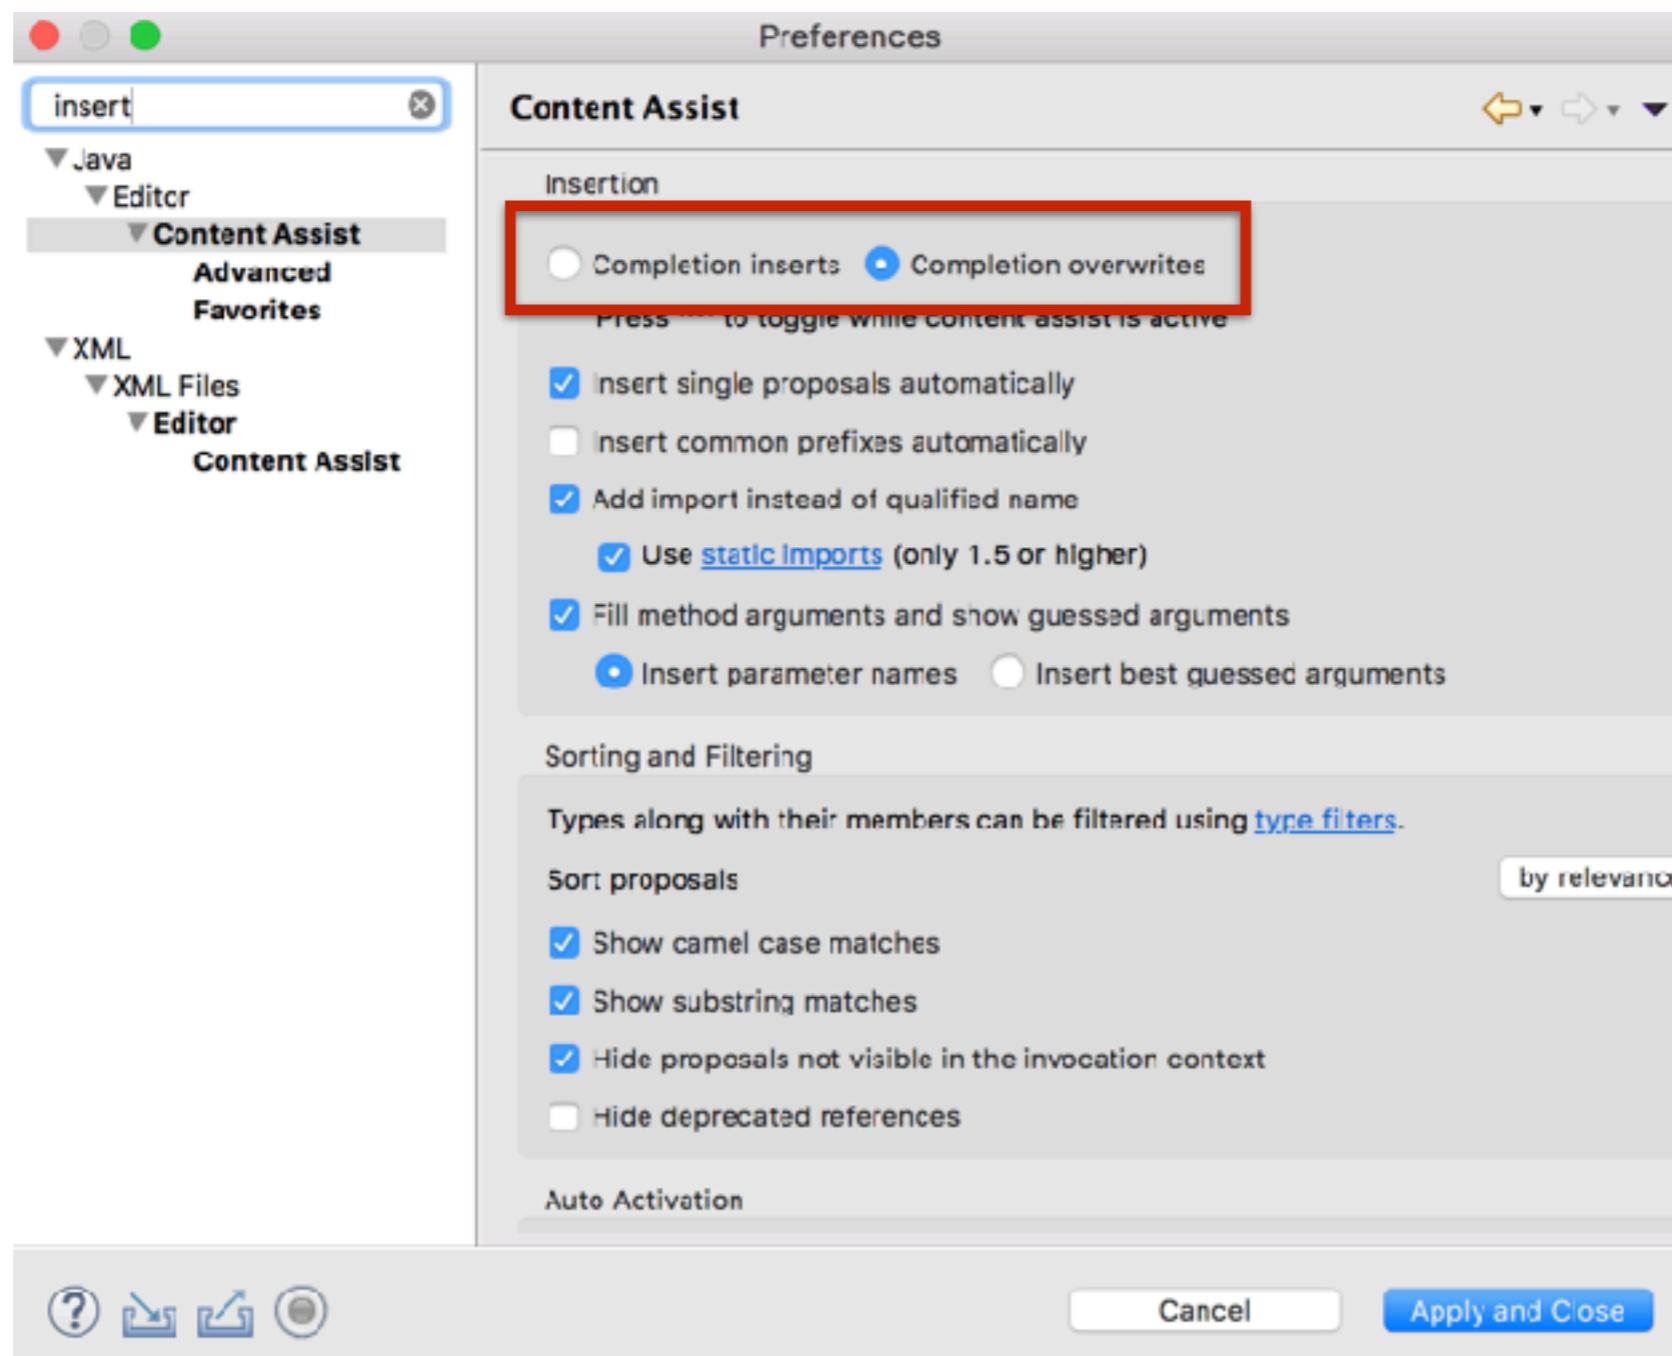


3. Set spaces for tab (1)

Go to Java -> Code Style -> Formatter

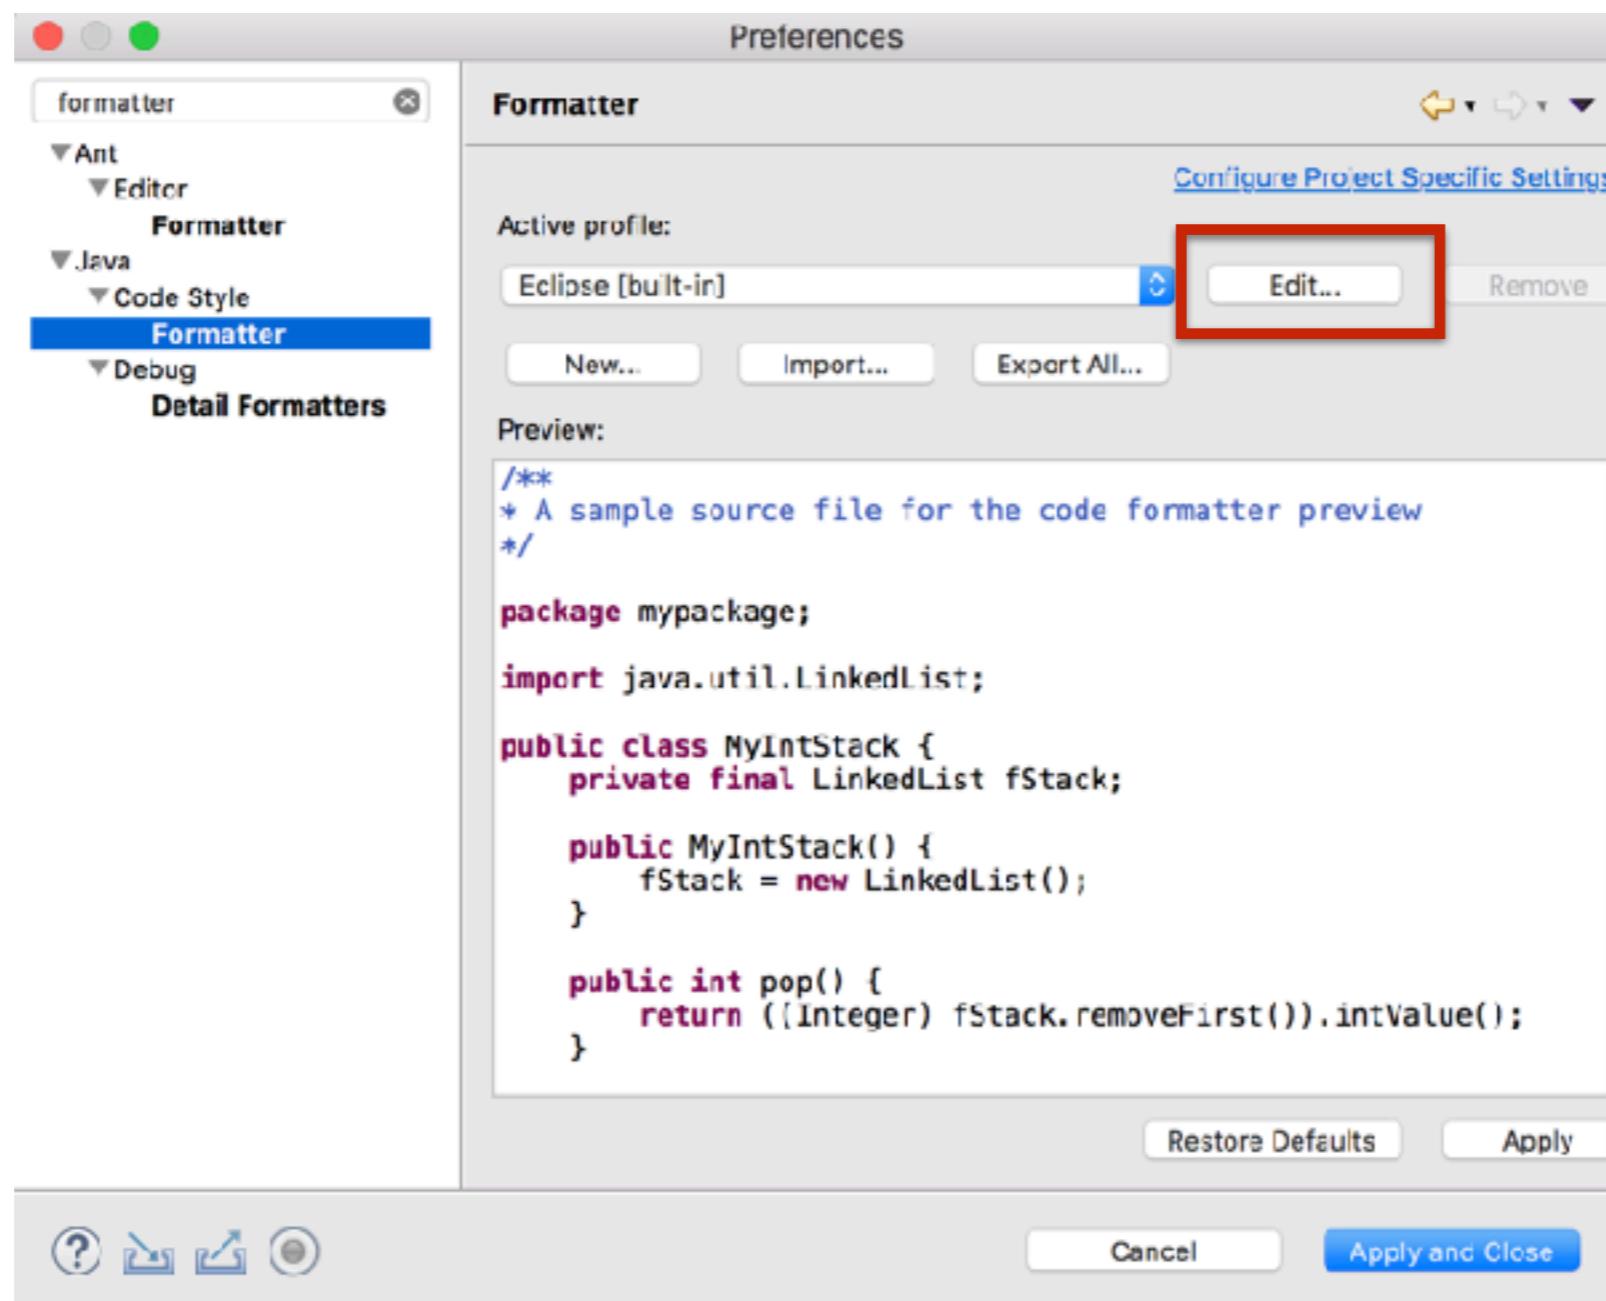


3. Set spaces for tab (2)

Indentation -> Tab policy = Space only

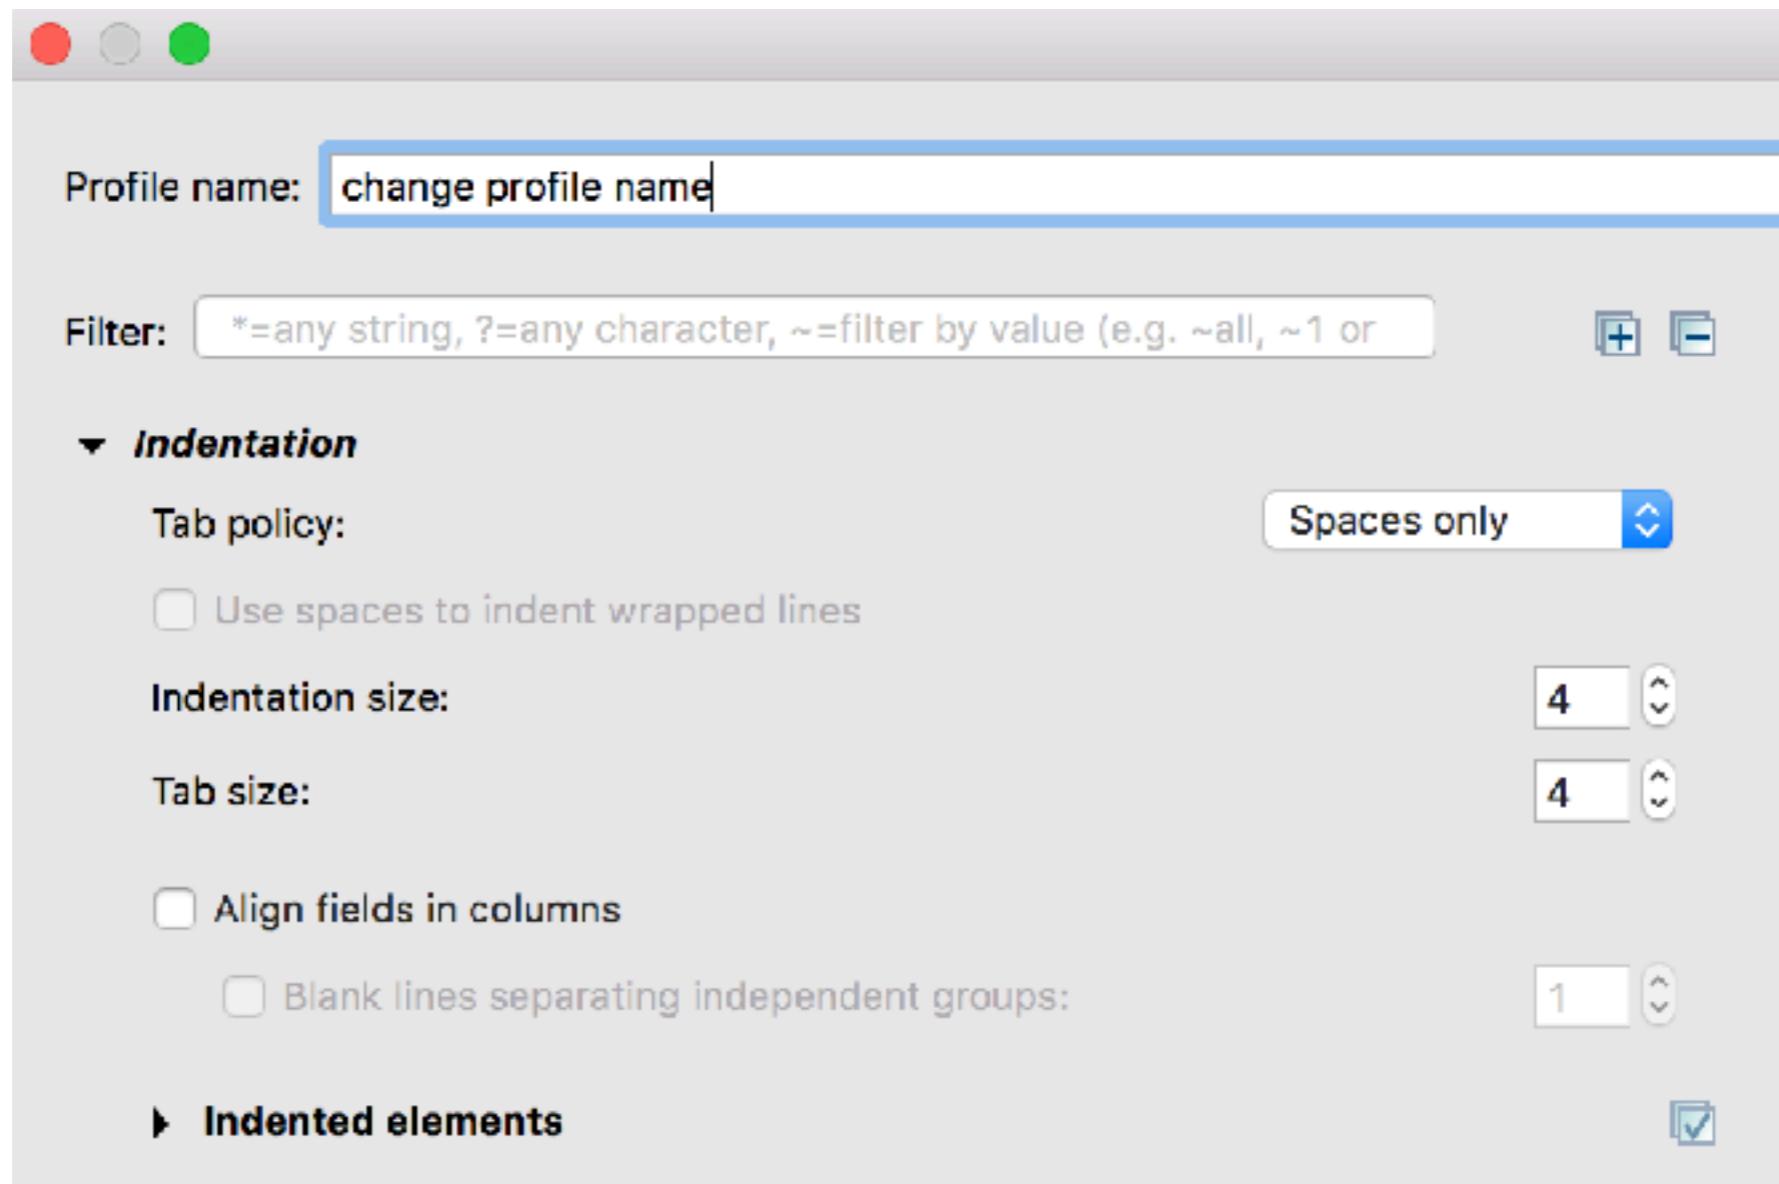


4. Installed JRE and default

Java -> Installed JREs

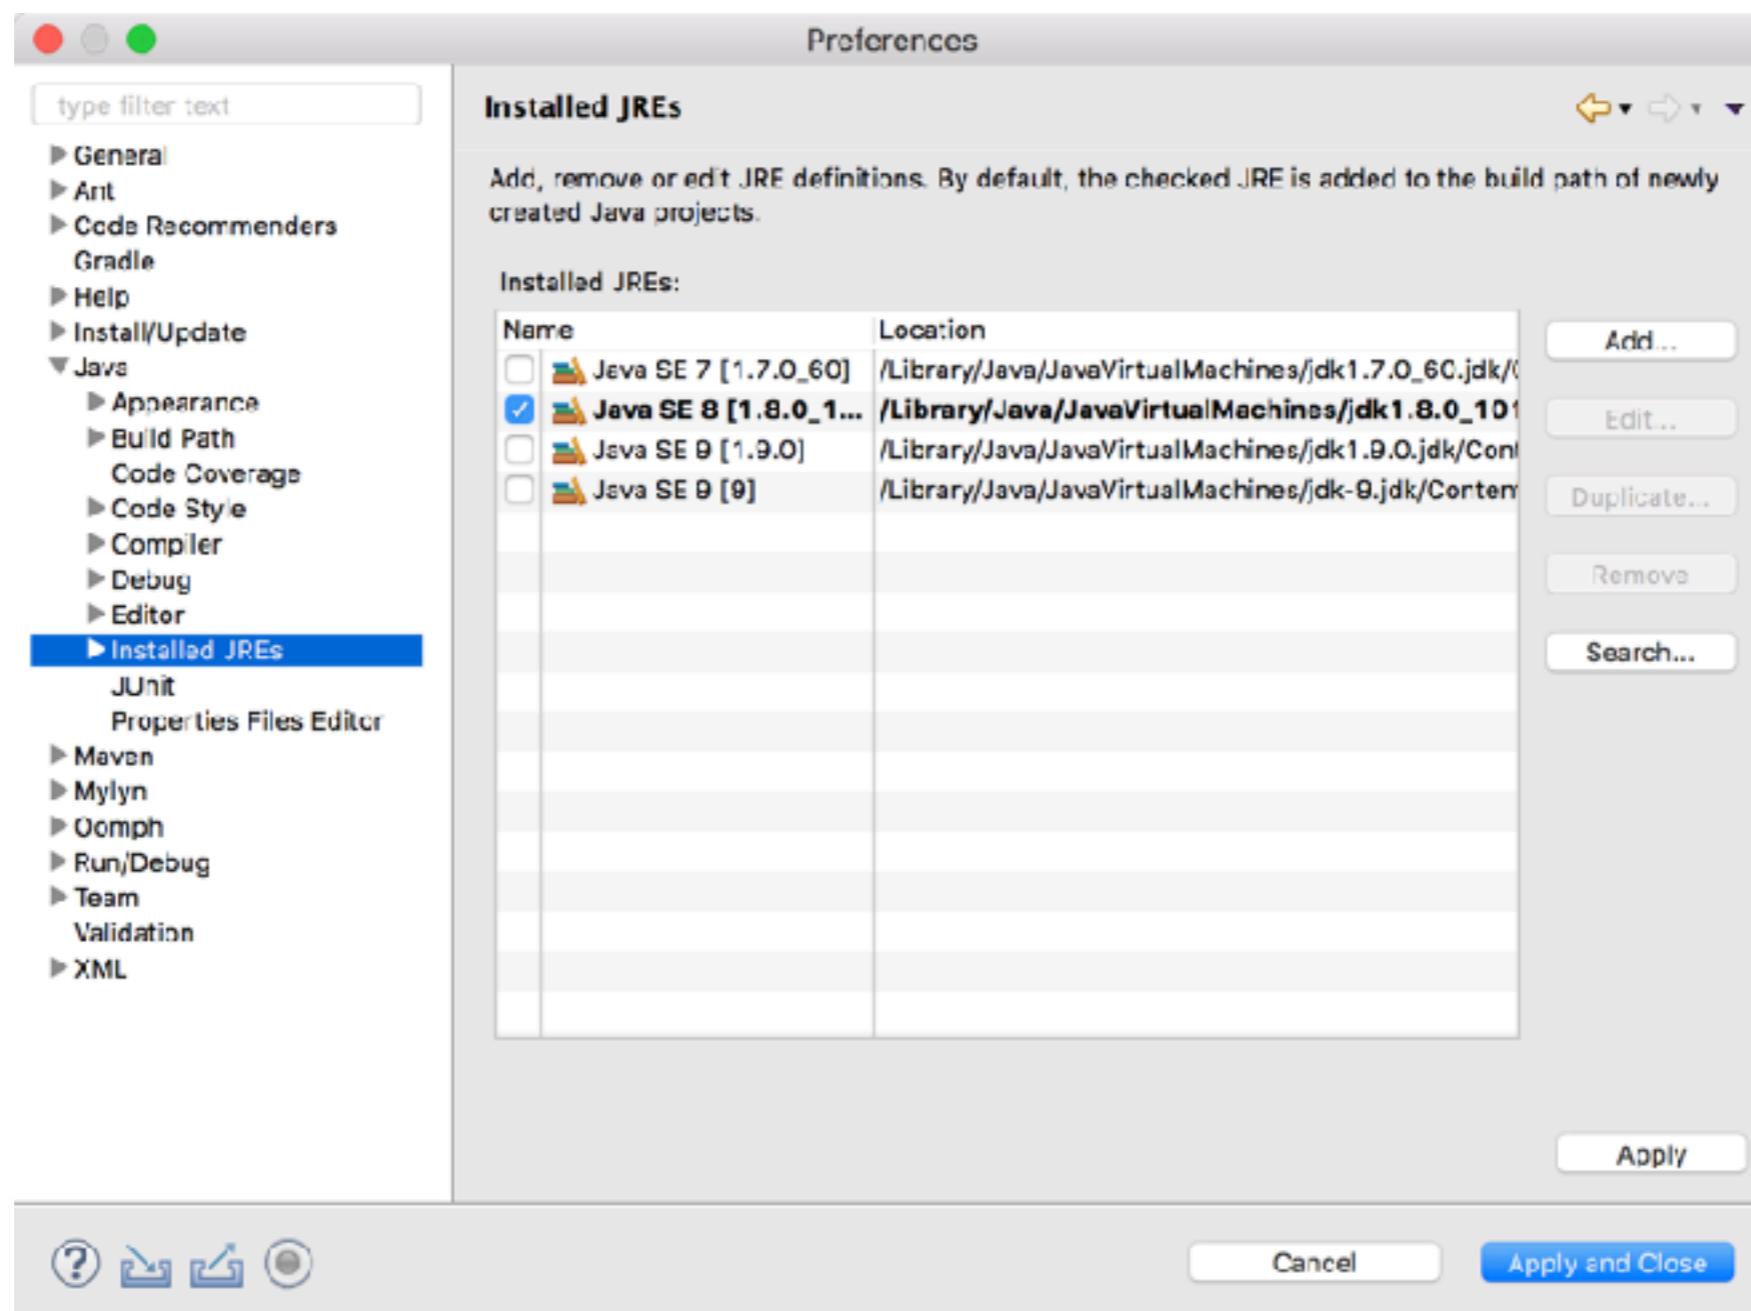

5. Java compiler

Java -> Compiler = 1.8

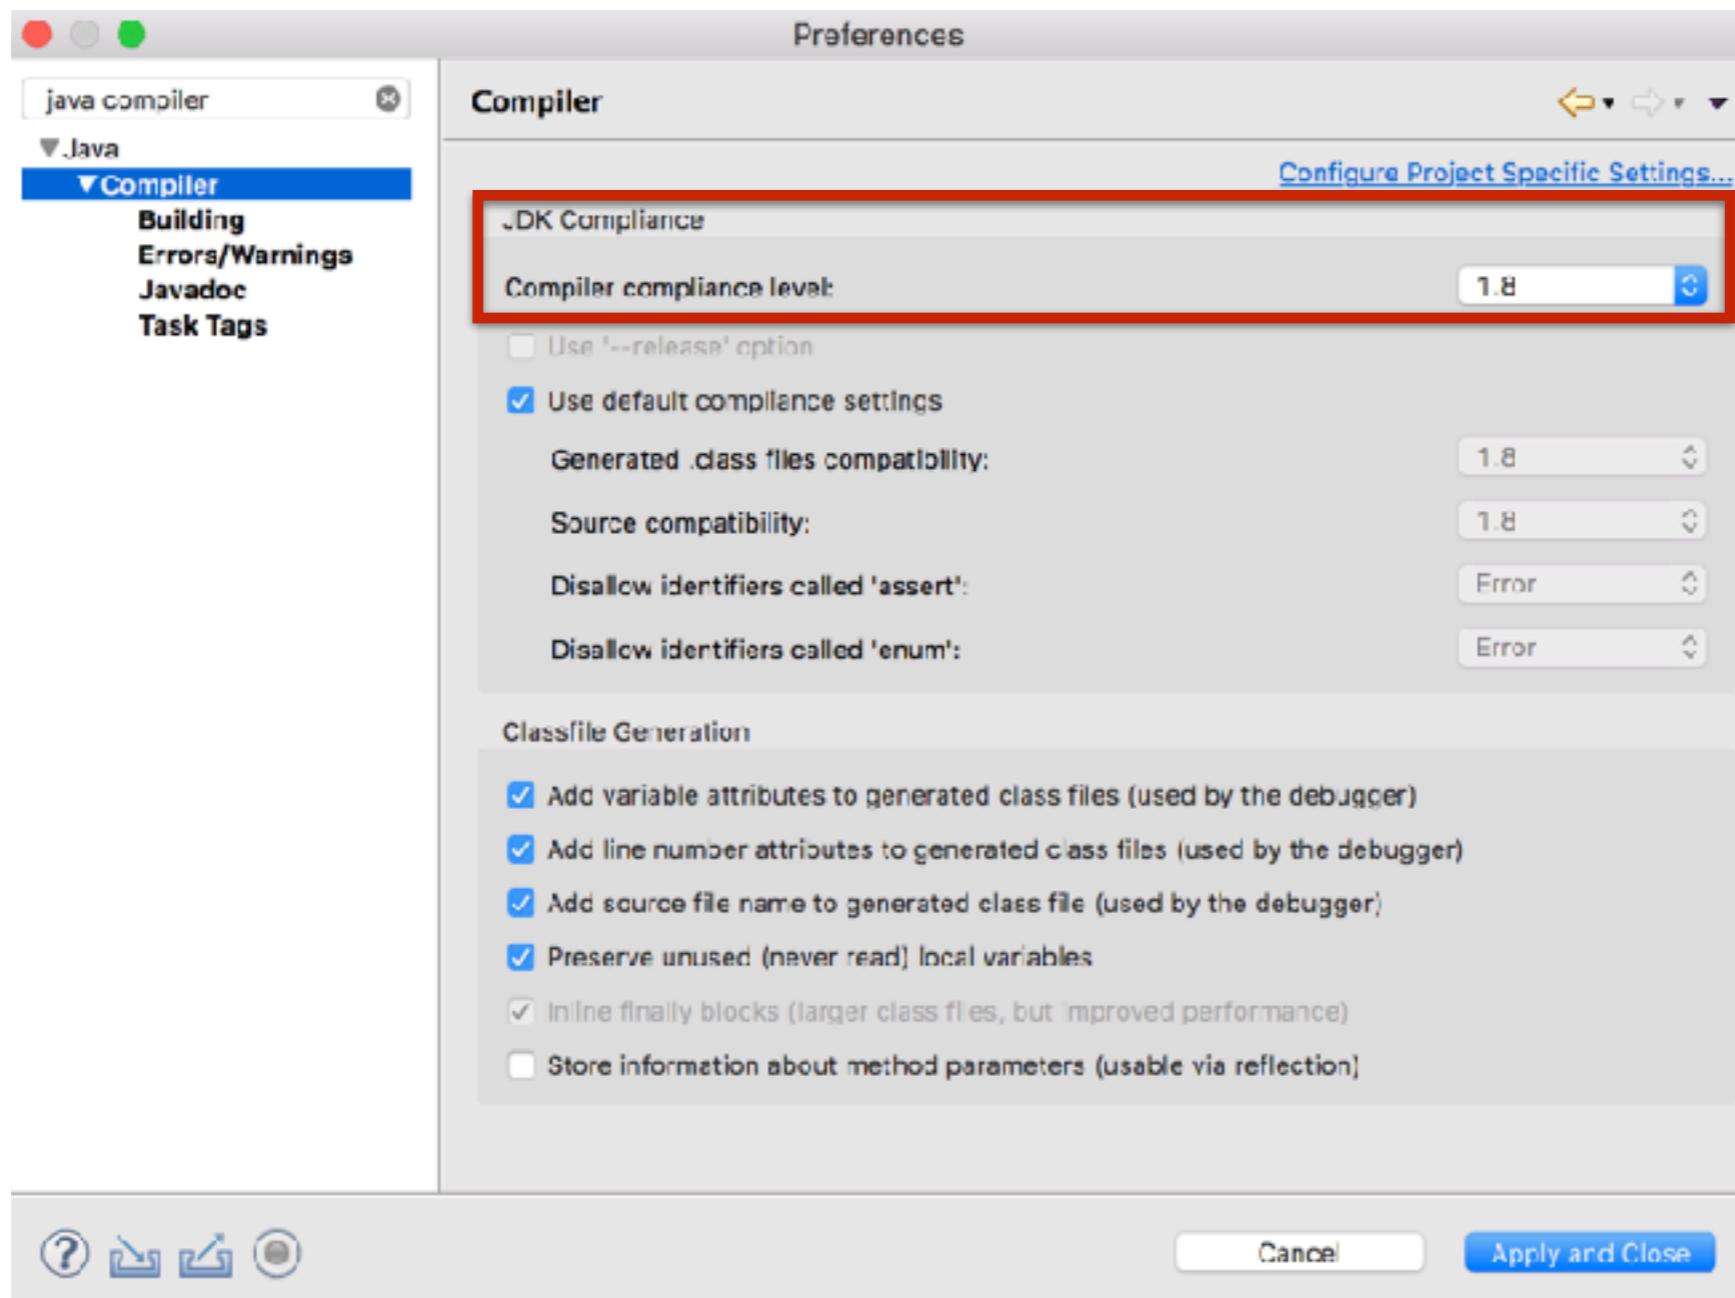

Basic of Java



Basic of Java Part 1



Basic of Java Part 1

Variables name
Expressions
Statements
Data types
Operators



Variables and assign value

Symbolic names of memory location

A variable must have name and data type (static type)

Must be declared before using it

```
int number;  
int counter = 1;  
String name;  
double averageScore = 3.5;
```



Naming rule for Java identifier

Can't be a Java keyword

Case-sensitive

Unlimited length of Unicode letters and digits

Must begin with a letter, underscore(_) and dollar sign (\$)

White space not allowed



White space ?

Such as spacebar

isWhitespace

```
public static boolean isWhitespace(char ch)
```

Determines if the specified character is white space according to Java. A character is a Java whitespace if:

- It is a Unicode space character (SPACE_SEPARATOR, LINE_SEPARATOR, or PARAGRAPH_SEPARATOR) ('\u0020', '\u00A0', or '\u202F').
- It is '\t', U+0009 HORIZONTAL TABULATION.
- It is '\n', U+000A LINE FEED.
- It is '\u000B', U+000B VERTICAL TABULATION.
- It is '\f', U+000C FORM FEED.
- It is '\r', U+000D CARRIAGE RETURN.
- It is '\u001C', U+001C FILE SEPARATOR.
- It is '\u001D', U+001D GROUP SEPARATOR.
- It is '\u001E', U+001E RECORD SEPARATOR.
- It is '\u001F', U+001F UNIT SEPARATOR.

<https://docs.oracle.com/javase/8/docs/api/java/lang/Character.html#isWhitespace-char->



Naming convention

Use meaningful name

For compound words use **camelCase**

Class name begin with an **Uppercase** letter

Variable and **method** name begin with a **Lowercase** letter

For a **constant** use **all uppercase letter** and **underscore(_)** to separate word



Meaningful name

```
int d = 10;  
int days = 10;  
int daysSinceCreation = 10;  
int daysSinceLastModification = 10;
```



Expressions

Expression is a value, variable, method or one of their combination that can be evaluated to a value

3.14

a + b

a + c -10

a > 10

Math.sqrt(4)

“Hi, all”

(a + 3 > b) && (a - 3 < c)



Statements

Complete sentence that causes some action to occur
End with semicolon (;

```
int a;  
int b = 10;  
c = a + b;  
boolean isPass = a > b;  
System.out.println("Hello");
```



Data types (Statically typed)

1. Primitive data types
2. Classes



1. Primitive data types

Basic of Java data types have 8 types
Can't add and change

Value type	Primitive data types
Integer (-10, 10, 0)	byte, short, int, long
Floating-point (1.0, -1.5, 3.144)	float, double
Character ('a', 'ñ')	char
Logical (true, false)	boolean

<https://docs.oracle.com/javase/tutorial/java/nutsandbolts/datatypes.html>




Primitive data types

Primitive data types		Min/Max value
byte	8-bit signed two complement integer	-128 / 127
short	16-bit signed two complement integer	-32,768 / 32,767
int	32-bit signed two complement integer	-2^31 / 2^31 - 1
long	64-bit signed two complement integer	-2^63 / 2^63 - 1
float	32-bit IEEE 754 floating point	
double	64-bit IEEE 754 floating point	
boolean		true, false
char	16-bit Unicode character	\u0000 / \uffff



Wrapper class

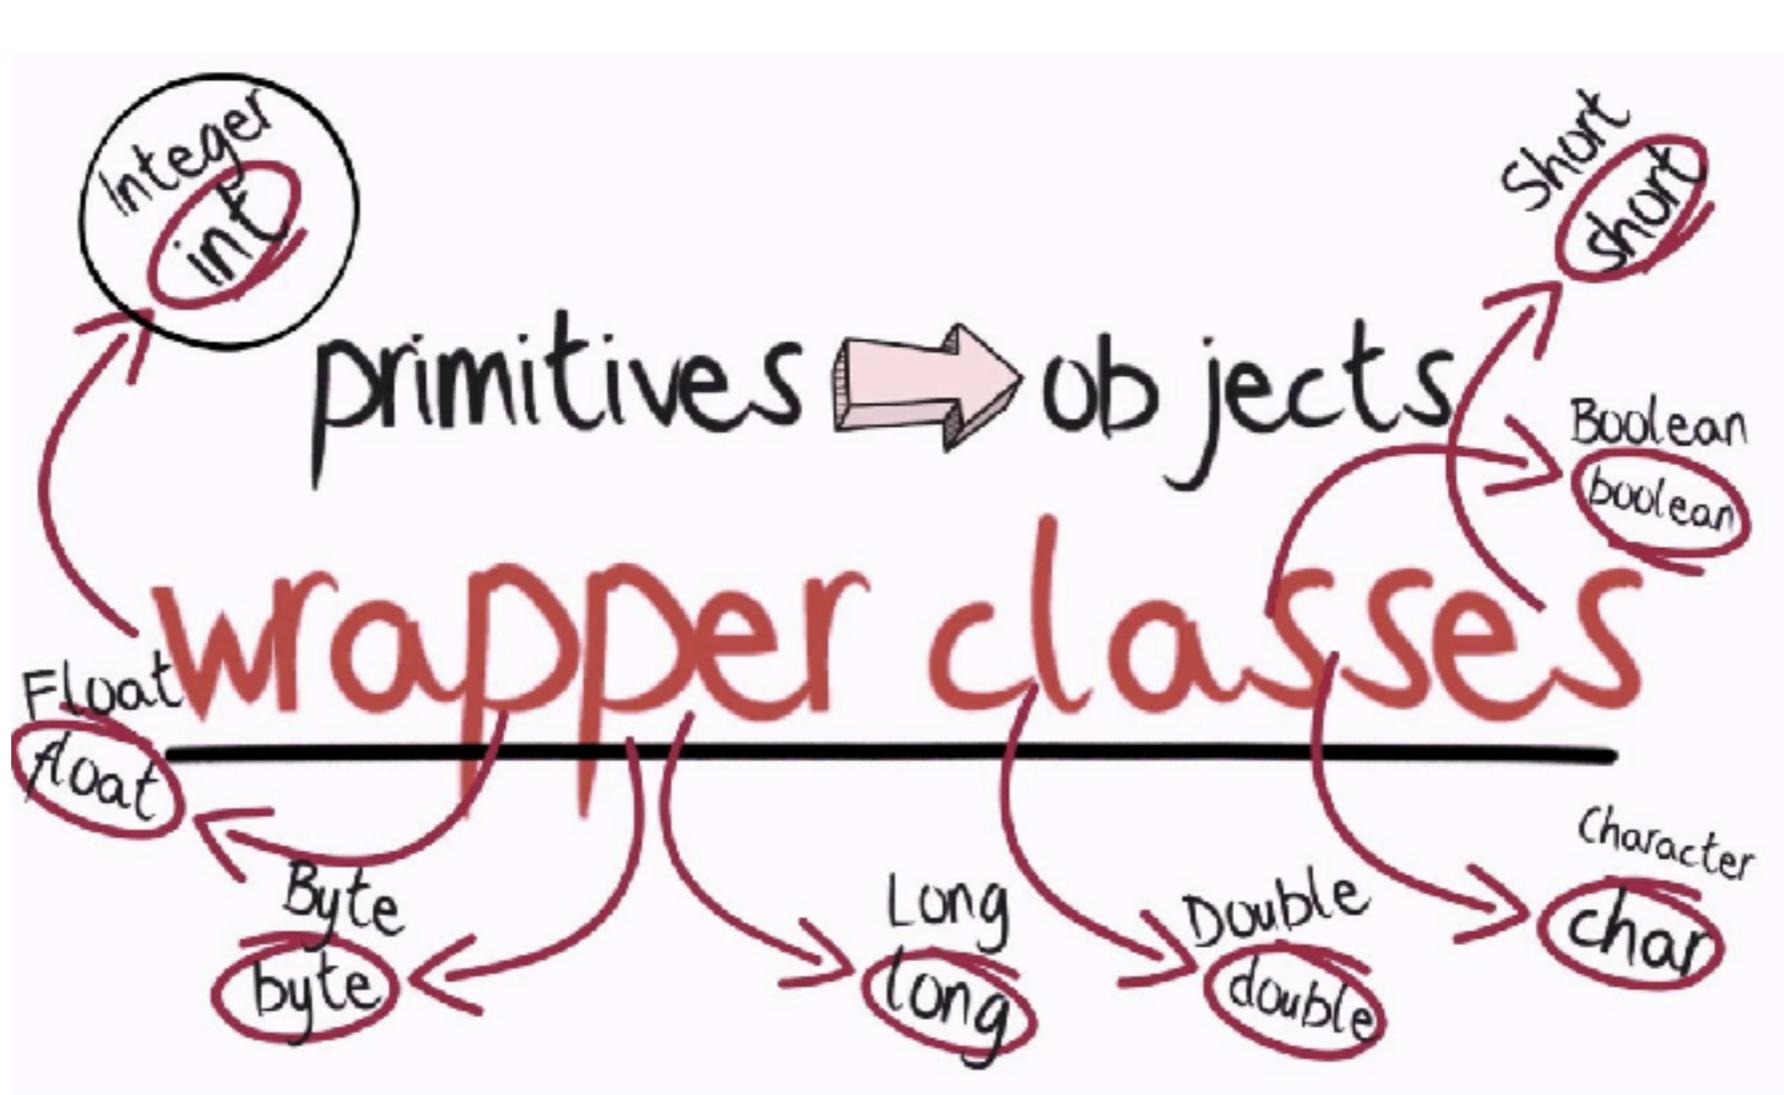


Wrapper class

Primitive data types	Wrapper class
byte	Byte
short	Short
int	Integer
long	Long
float	Float
double	Double
boolean	Boolean
char	Character



Wrapper class hierarchy

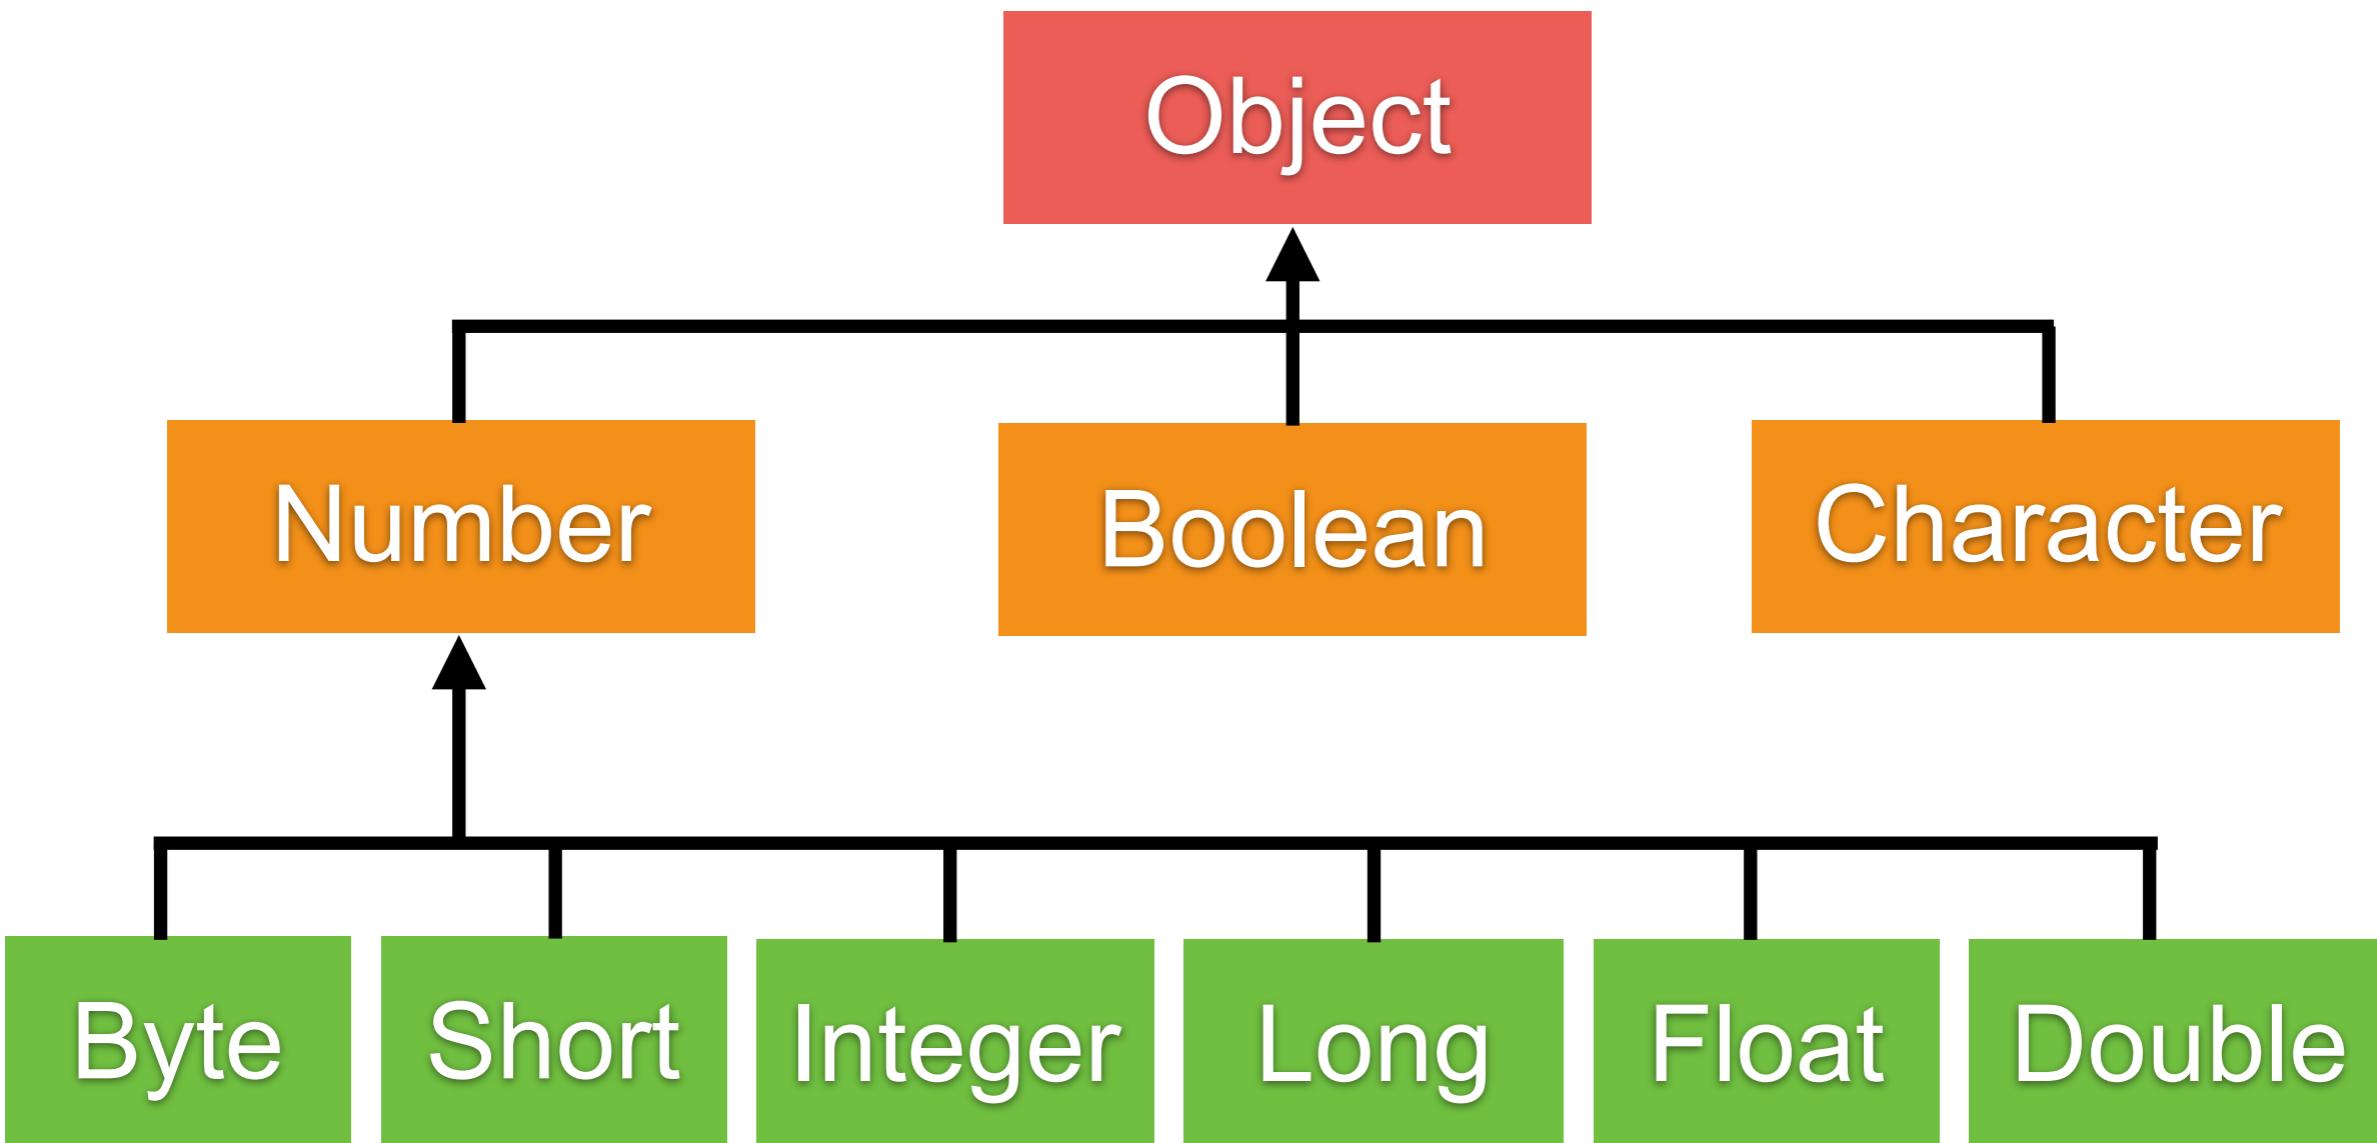


Min/Max value of primitive type

Primitive data types	Minimum value	Maximum value
byte	Byte.MIN_VALUE	Byte.MAX_VALUE
short	Short.MIN_VALUE	Short.MAX_VALUE
int	Integer.MIN_VALUE	Integer.MAX_VALUE
long	Long.MIN_VALUE	Long.MAX_VALUE
float	Float.MIN_VALUE	Float.MAX_VALUE
double	Double.MIN_VALUE	Double.MAX_VALUE
char	Character.MIN_VALUE	Character.MAX_VALUE



Working with wrapper class (1)

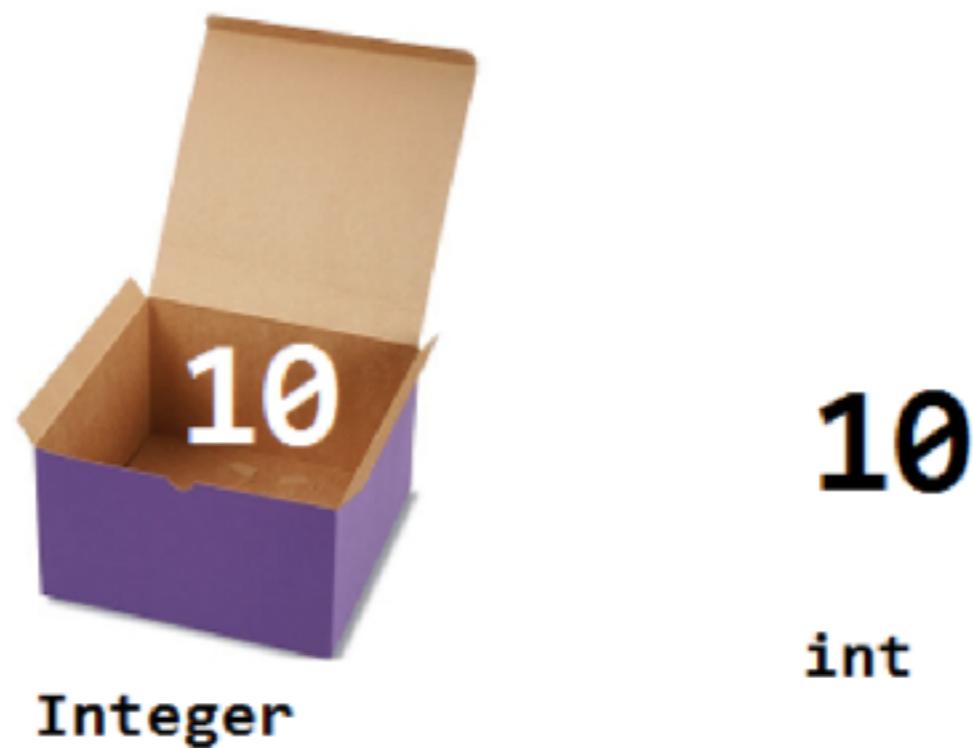

Working with wrapper class (2)

```
// Wrapping
int number = 10;
Integer number2 = new Integer(number);
Integer number3 = Integer.valueOf(number);

// Unwrapping
int valueBack2 = number2.intValue();
int valueBack3 = number3.intValue();
System.out.println(valueBack2);
System.out.println(valueBack3);
```



Wrapper class conversion

Autoboxing and Autounboxing

```
// Autoboxing  
int number = 10;  
Integer number2 = number;
```

```
// Autounboxing  
int valueBack2 = number2;  
System.out.println(valueBack2);
```



Final variables

Can't change the value of variables (immutable)
Use keyword **final**

```
// Constant variable
private static final int NUMBER_ONE = 1;

private void init() {
    // Final variable
    final int number = 10;
    number = 200; // Can't modify value
}
```



2. Classes

Complex data types

Classes are **standard** from Java such as String,
Integer

We can create new classes as we need



Working with String

Not primitive data type

Standard class in Java

Represent a sequence of one or more characters

```
String shortName = "S";  
String name = "Somkiat Puisungngoen";
```

<https://docs.oracle.com/javase/8/docs/api/java/lang/String.html>



Working with String operation

```
String name = "Somkiat";
System.out.println(name.concat(" Pui"));
System.out.println(name.substring(1, 2));
System.out.println(name.charAt(0));
System.out.println(name.startsWith("S"));
System.out.println(name.endsWith("t"));
```



Operators

Operators that require 2 operands are called
Binary operator

Operators that require only 1 operand are called
Unary operator

Parentheses, () are called **Grouping operator**



Operators

Arithmetic operators

 Unary operators

Equality and Relational operators

 Conditional operators

Bitwise and bit shift operators



Arithmetic operators

Operator	Description
+	Addition operator (can use for String concatenation)
-	Subtraction operator
*	Multiplication operator
/	Division operator
%	Remainder operator



String with additional operator

```
String firstName = "Somkiat";
String lastname = "Puisungnoen";
int age = 30;
```

```
String result = firstName + lastname + age;
```

```
System.out.println(result);
```



Formatting result

```
String firstName = "Somkiat";
String lastname = "Puisungnoen";
int age = 30;
```

```
System.out.printf("%s %s %d"
    , firstName, lastname, age);
```



Formatting result with String

```
String firstName = "Somkiat";
String lastname = "Puisungnoen";
int age = 30;
```

```
String result = String.format("%s %s %d",
    firstName, lastname, age);
```

```
System.out.println(result);
```



Unary operators

Required only one operand

Operator	Description
+	Unary plus operator
-	Unary minus operator
++	Increment operator
--	Decrement operator
!	Logical complement operator



Equality and relational operator

Operator	Description
<code>==</code>	Equal to
<code>!=</code>	Not equal to
<code>></code>	Greater than
<code>>=</code>	Greater than or equal to
<code><</code>	Less than
<code><=</code>	Less than or equal to



Conditional operator

Operator	Description
&&	Conditional-AND
	Conditional-OR
?:	Ternary (shorthand for if-then-else statement)



Type comparison with instanceof

```
String object1 = new String();
```

```
System.out.println(object1 instanceof String);  
System.out.println(object1 instanceof Object);
```



Bitwise and bit shift operator

Operator	Description
&	Bitwise AND operator
	Bitwise inclusive OR operator
^	Bitwise exclusive OR operator
~	Unary bitwise complement
>>	Signed left shift
<<	Signed right shift
>>>	Unsigned right shift



Useful methods from Math (1)

Method	Description
abs()	returns the absolute value of the input value
round()	returns the integer nearest to the input value
ceil()	returns the smallest integer that is bigger than or equal to the input value
floor()	returns the biggest integer that is smaller than or equal to the input value
exp()	returns the exponential of the input value
max()	returns the bigger between the two input values
min()	returns the smaller between the two input values

<https://docs.oracle.com/javase/8/docs/api/java/lang/Math.html>



Useful methods from Math (2)

Method	Description
pow()	returns the value of the first value raised to the power of the second value.
sqrt()	returns the square root of the input value.
sin()	returns the trigonometric sine value of the input value
cos()	returns the trigonometric cosine value of the input value.
tan()	returns the trigonometric tangent value of the input value.

<https://docs.oracle.com/javase/8/docs/api/java/lang/Math.html>



Workshop with Math

The distance, d , between two points in the three-dimensional space (x_1, y_1, z_1) and (x_2, y_2, z_2) can be computed from:

$$d = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2}$$

The following program computes and shows the distance between $(2, 1, 3)$ and $(0, 0, 6)$



Compound assignment

Original	Shorthand
<code>x = x + 1</code>	<code>x += 1</code>
<code>x = x - 1</code>	<code>x -= 1</code>
<code>x = x * 1</code>	<code>x *= 1</code>
<code>x = x / 1</code>	<code>x /= 1</code>



Caution for complex expression

Original	Shorthand
$x = x / y + 1$	$x /= y + 1$ (Wrong !!)
$x = x / y + 1$	$x /= (y + 1)$



Operator precedence (1)

No.	Operator	Precedence
1	Grouping	()
2	Postfix	expr++, expr--
3	Unary/Prefix	++expr, --expr, +expr, -expr, ~ . !
4	Multiplicative	* , / , %
5	Addtitive	+ , -
6	Shift	>> , << , >>>
7	Relational	< , > , <= , >= , instance

<https://docs.oracle.com/javase/tutorial/java/nutsandbolts/operators.html>



Operator precedence (2)

No.	Operator	Precedence
8	Equality	<code>==, !=</code>
9	Bitwise AND	<code>&</code>
10	Bitwise exclusive OR	<code>^</code>
11	Bitwise inclusive OR	<code> </code>
12	Logical AND	<code>&&</code>
13	Logical OR	<code> </code>
14	Ternary	<code>?:</code>
15	Assignment	<code>=, +=, <<=, >>= ...</code>



Increment/Decrement operator

Prefix

the value inside the variable is incremented (or decremented) and then use to evaluate the expression

Postfix

the value inside the variable is used to evaluate the expression and then the value is incremented (or decremented)



Workshop

```
int a, b, c = 0;  
a = c++;  
b = ++a;  
c++;  
b = ++c + a++;  
a = --b + c++;
```

a	b	c
0	0	0

```
System.out.println(a); // ?  
System.out.println(b); // ?  
System.out.println(c); // ?
```



Basic of Java Part 2



Basic of Java Part 2

Control flow statements

Conditional statements (if-else/switch case)

For loop


While loop

Do-while loop




Conditional statements

if-else if - else
switch-case

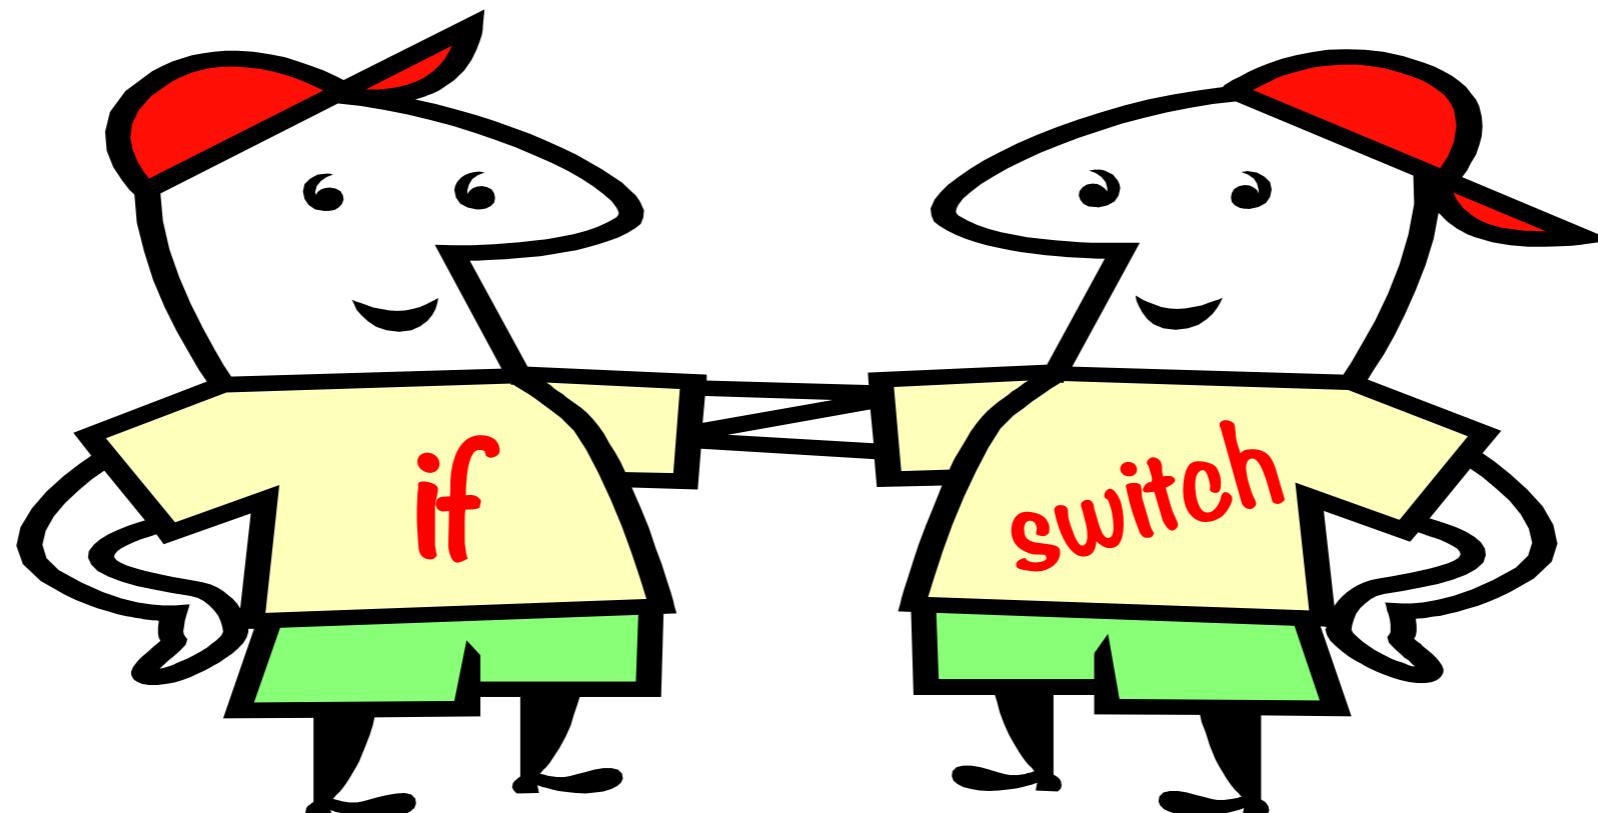

IF - ELSE IF - ELSE

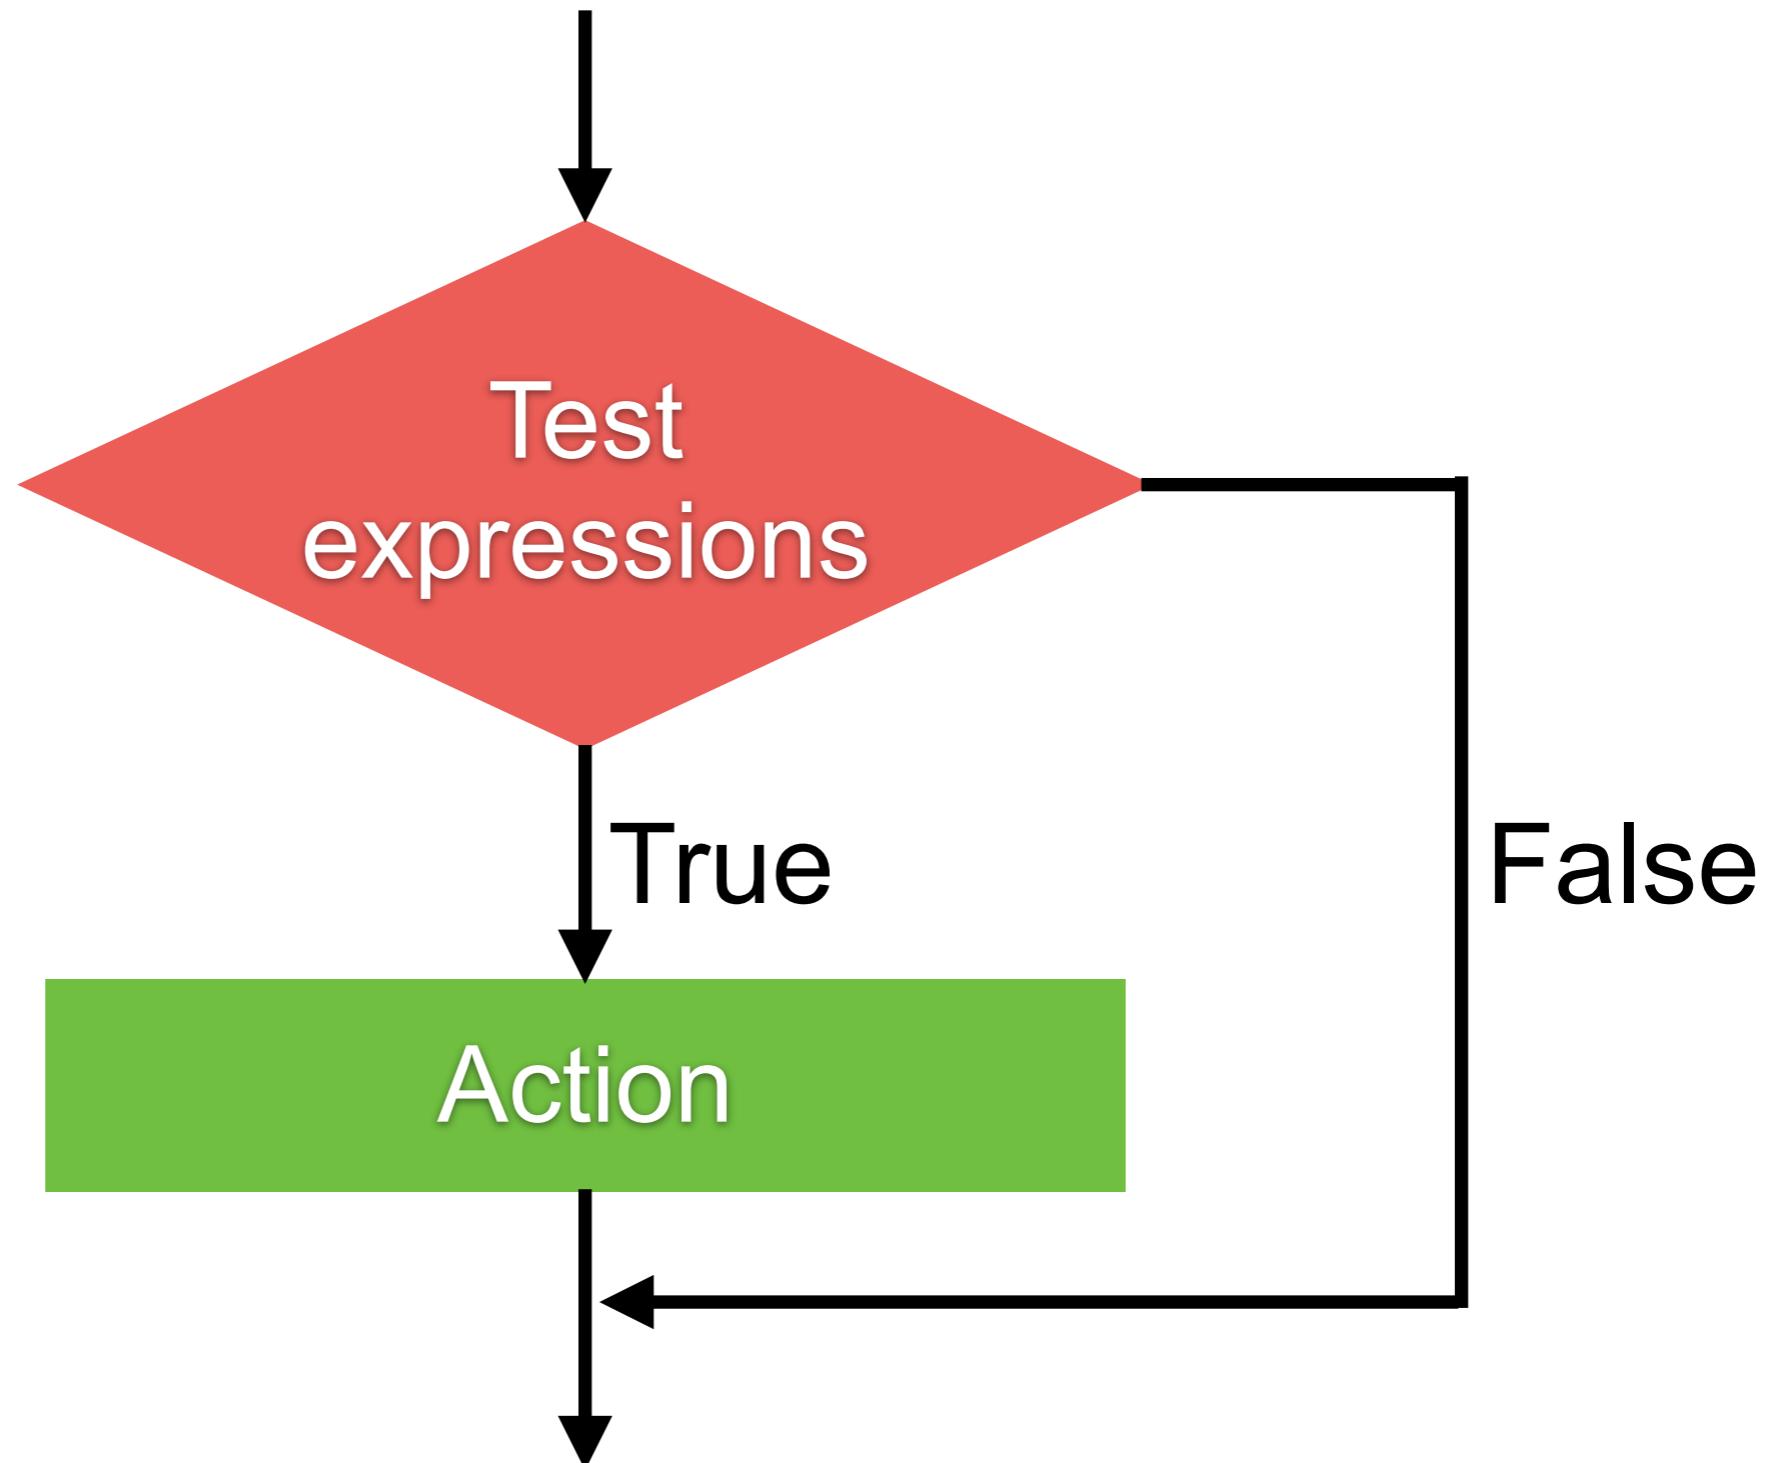

IF - ELSE IF - ELSE

```
int score = 50;

if (score >= 80 && score <= 100) {
    System.out.println("Grade A");
} else if (score >= 70 && score < 80) {
    System.out.println("Grade B");
} else if (score >= 60 && score < 70) {
    System.out.println("Grade C");
} else if (score >= 50 && score < 60) {
    System.out.println("Grade D");
} else {
    System.out.println("Grade F");
}
```



Ternary operator (short if)

```
int score = 50;
```

```
String grade = score > 80 ? "A" : score > 70 ? "B" : "C";
```

```
System.out.println(grade);
```

Easy to read and understand ?



Workshop

String comparison



String comparison (1)

```
String name1 = new String("Somkiat");
String name2 = new String("Somkiat");

if(name1 == name2) {
    System.out.println("Equal");
} else {
    System.out.println("Not equal");
}
```



String comparison (2)

```
String name1 = new String("Somkiat");
String name2 = new String("Somkiat");

if(name1.equals(name2)) {
    System.out.println("Equal");
} else {
    System.out.println("Not equal");
}
```



String Equality



String comparison (3)

```
String name1 = "Somkiat";
String name2 = "Somkiat";

if(name1 == name2) {
    System.out.println("Equal");
} else {
    System.out.println("Not equal");
}
```




String comparison (4)

```
String name1 = "Somkiat";
String name2 = "Somkiat";

if(name1.equals(name2)) {
    System.out.println("Equal");
} else {
    System.out.println("Not equal");
}
```




String Equality

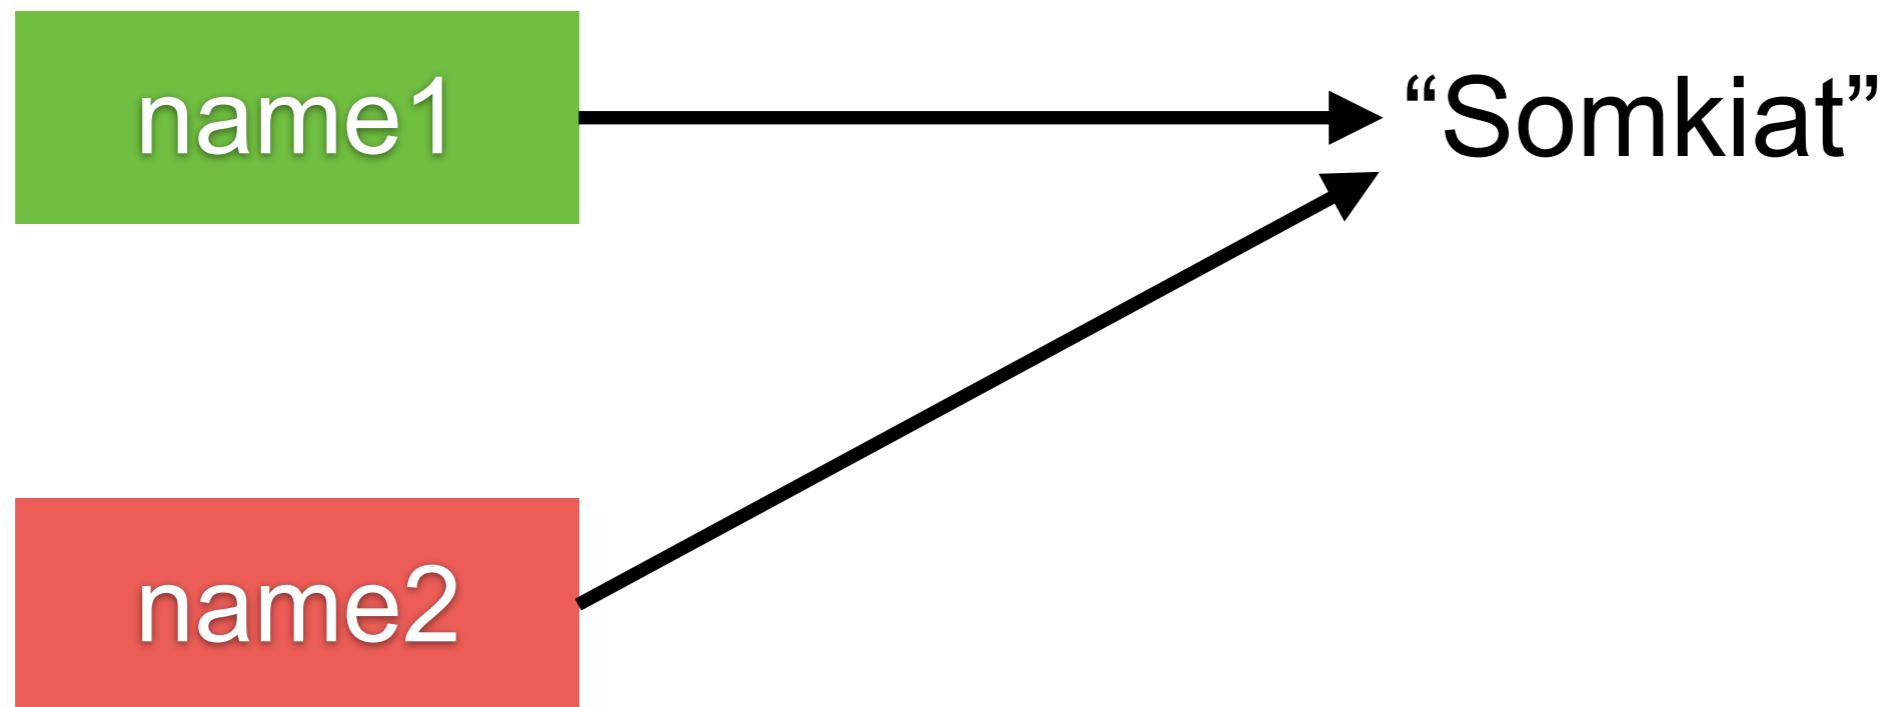

Switch-Case



Switch-Case

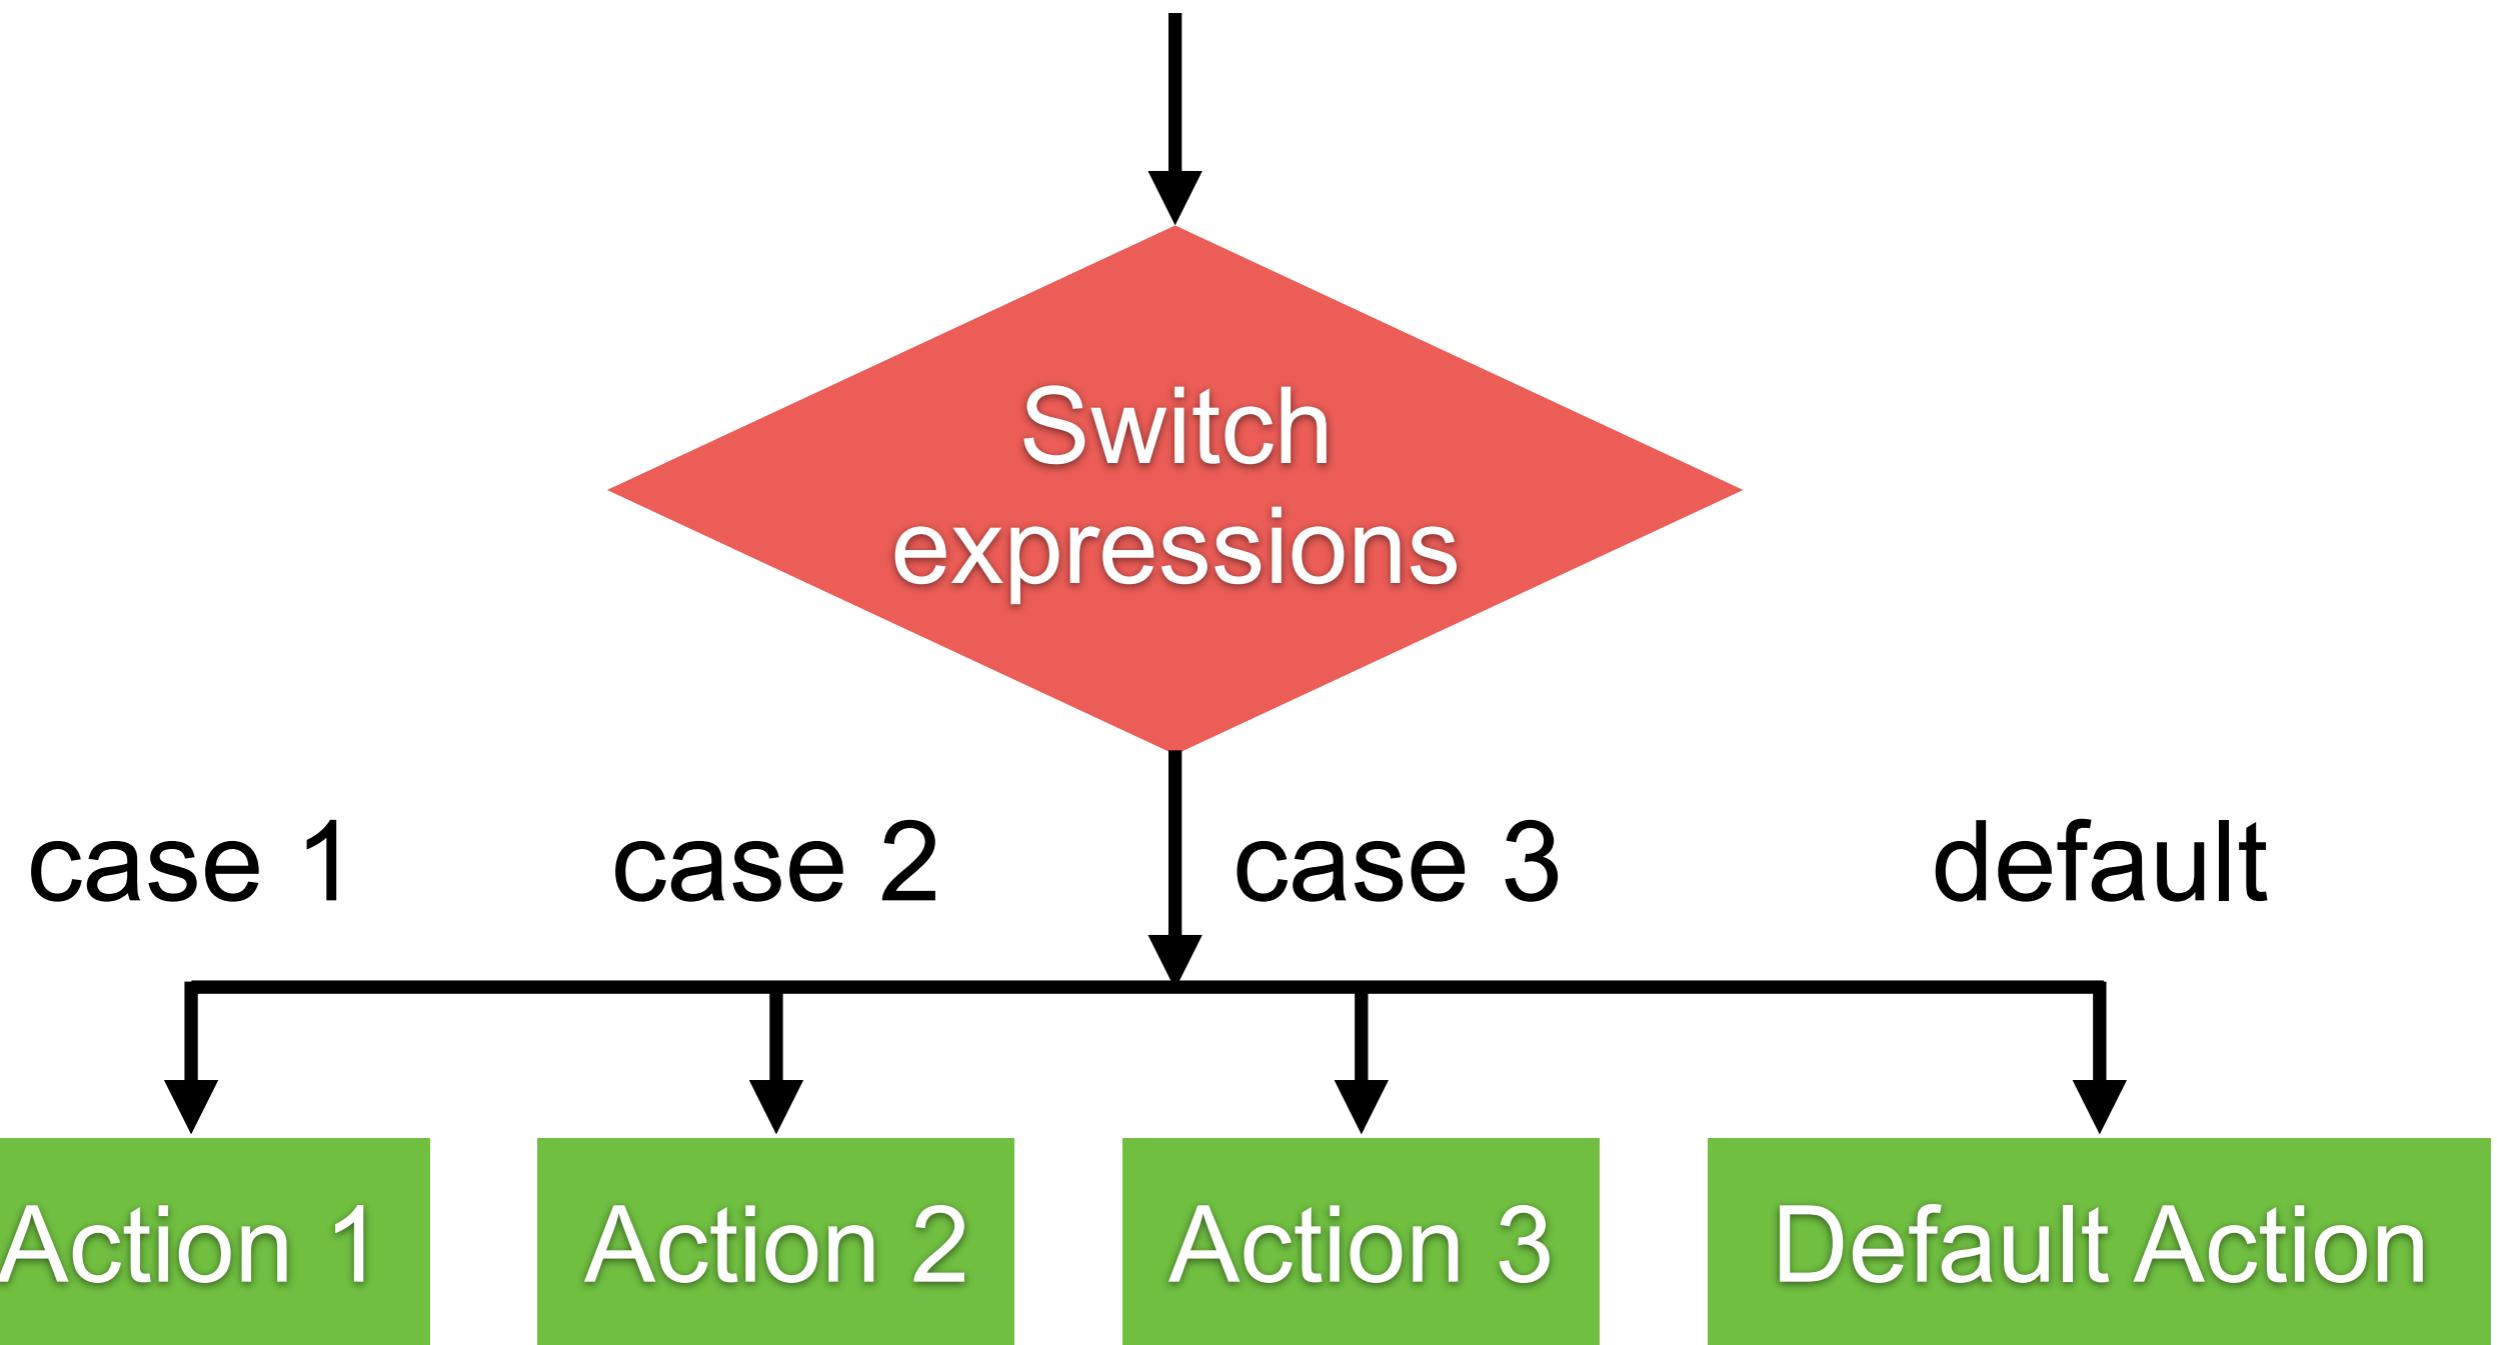

Switch-Case

```
int number = 1;

switch (number) {
case 1:
    System.out.println("Case 1");
    break;
case 2:
    System.out.println("Case 1");
    break;

default:
    System.out.println("Default");
}
```



All about break !!

```
int number = 1;

switch (number) {
case 1:
    System.out.println("Case 1");
case 2:
    System.out.println("Case 1");

default:
    System.out.println("Default");
}
```




Workshop

Conditional statement



FizzBuzz

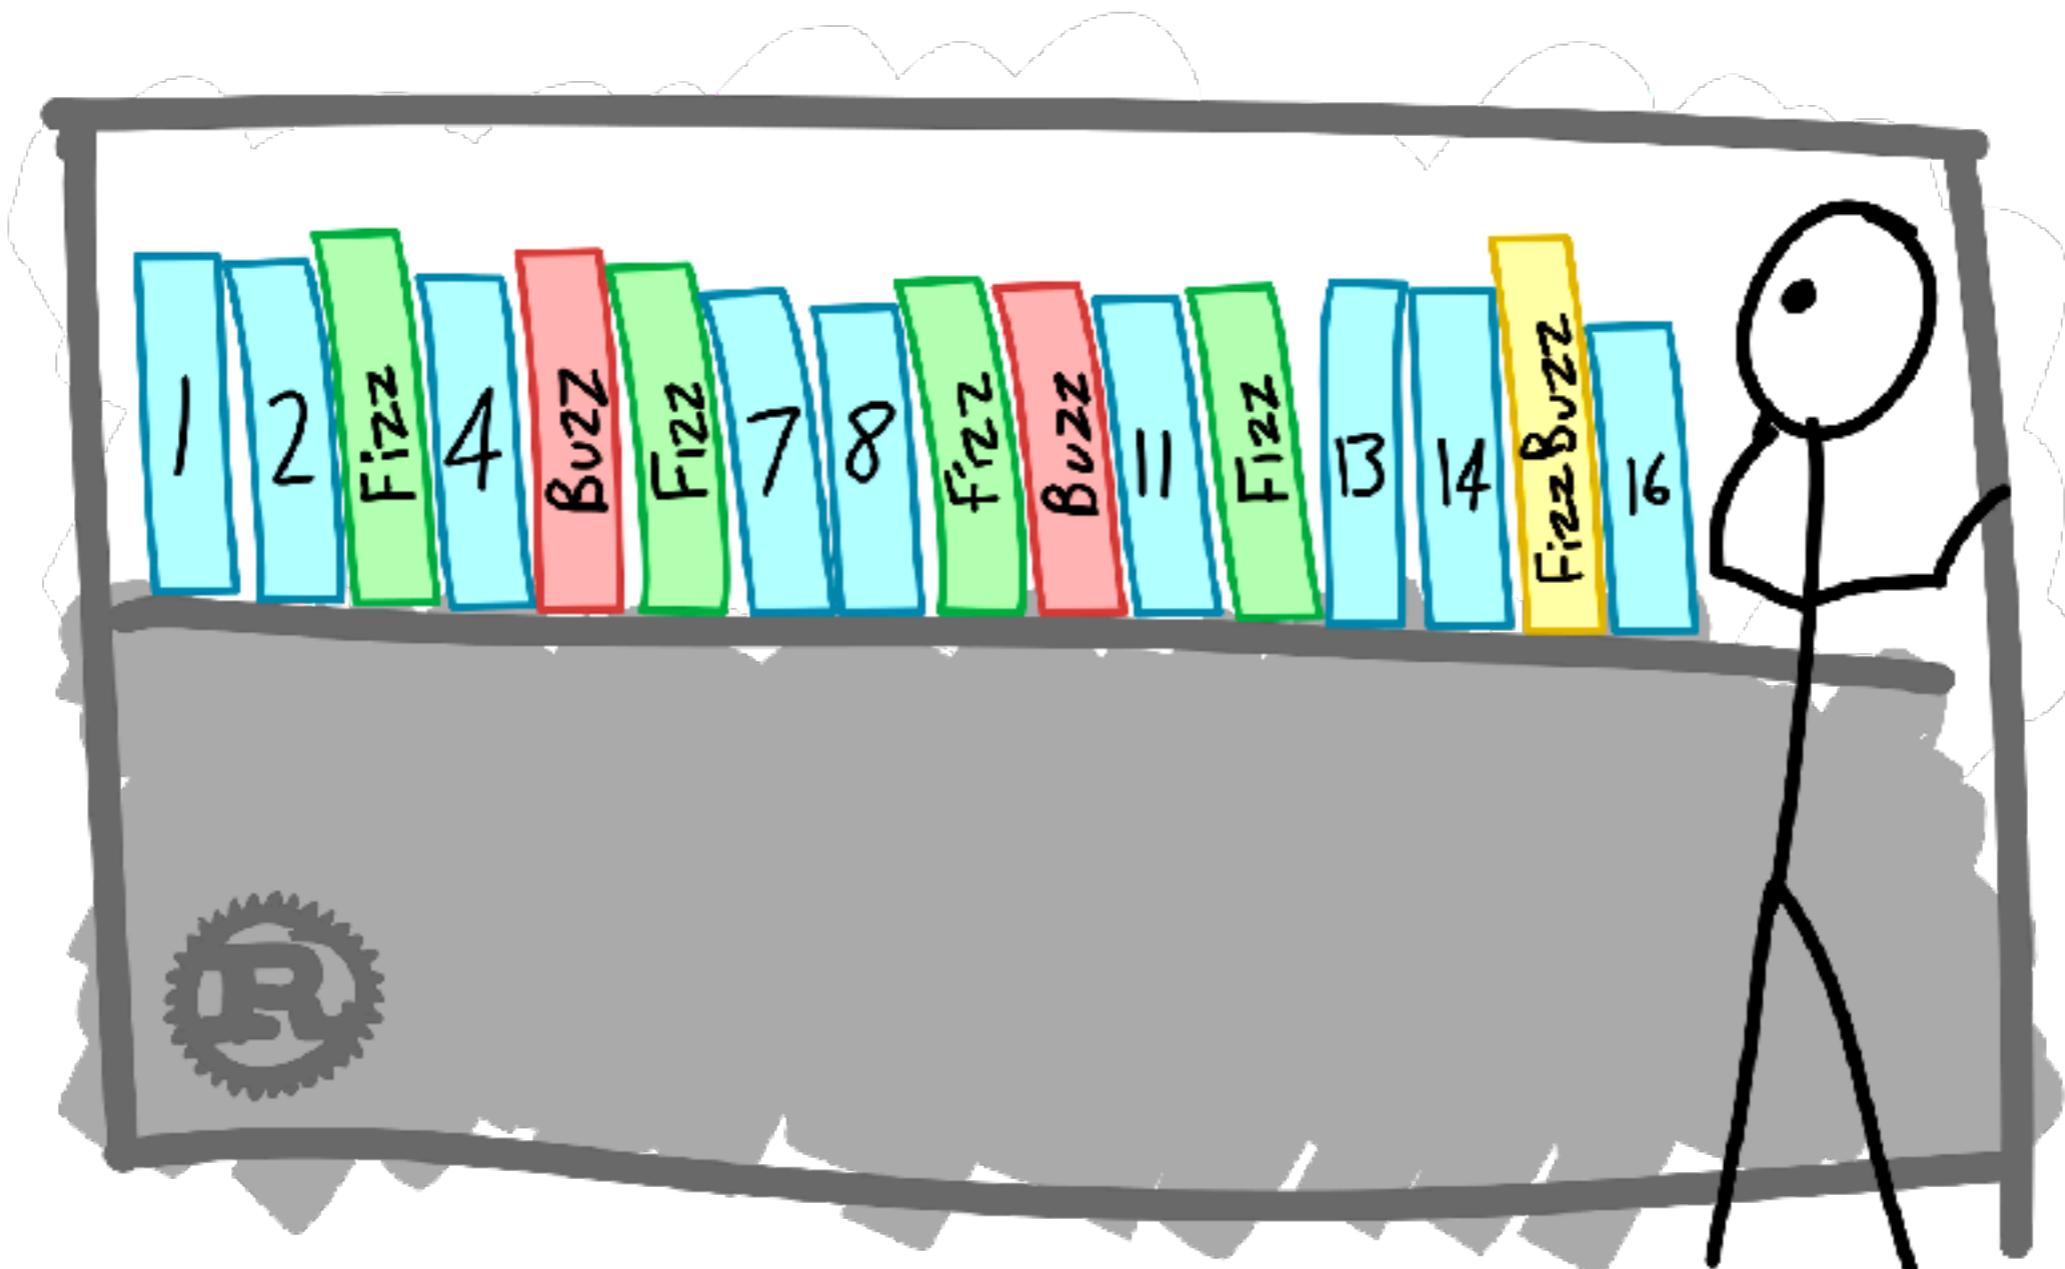

Iteration statements

for statement

while statement

do-while statement




Why we need it ?

Find the sum of integer from 1 to 10 ?



For statement

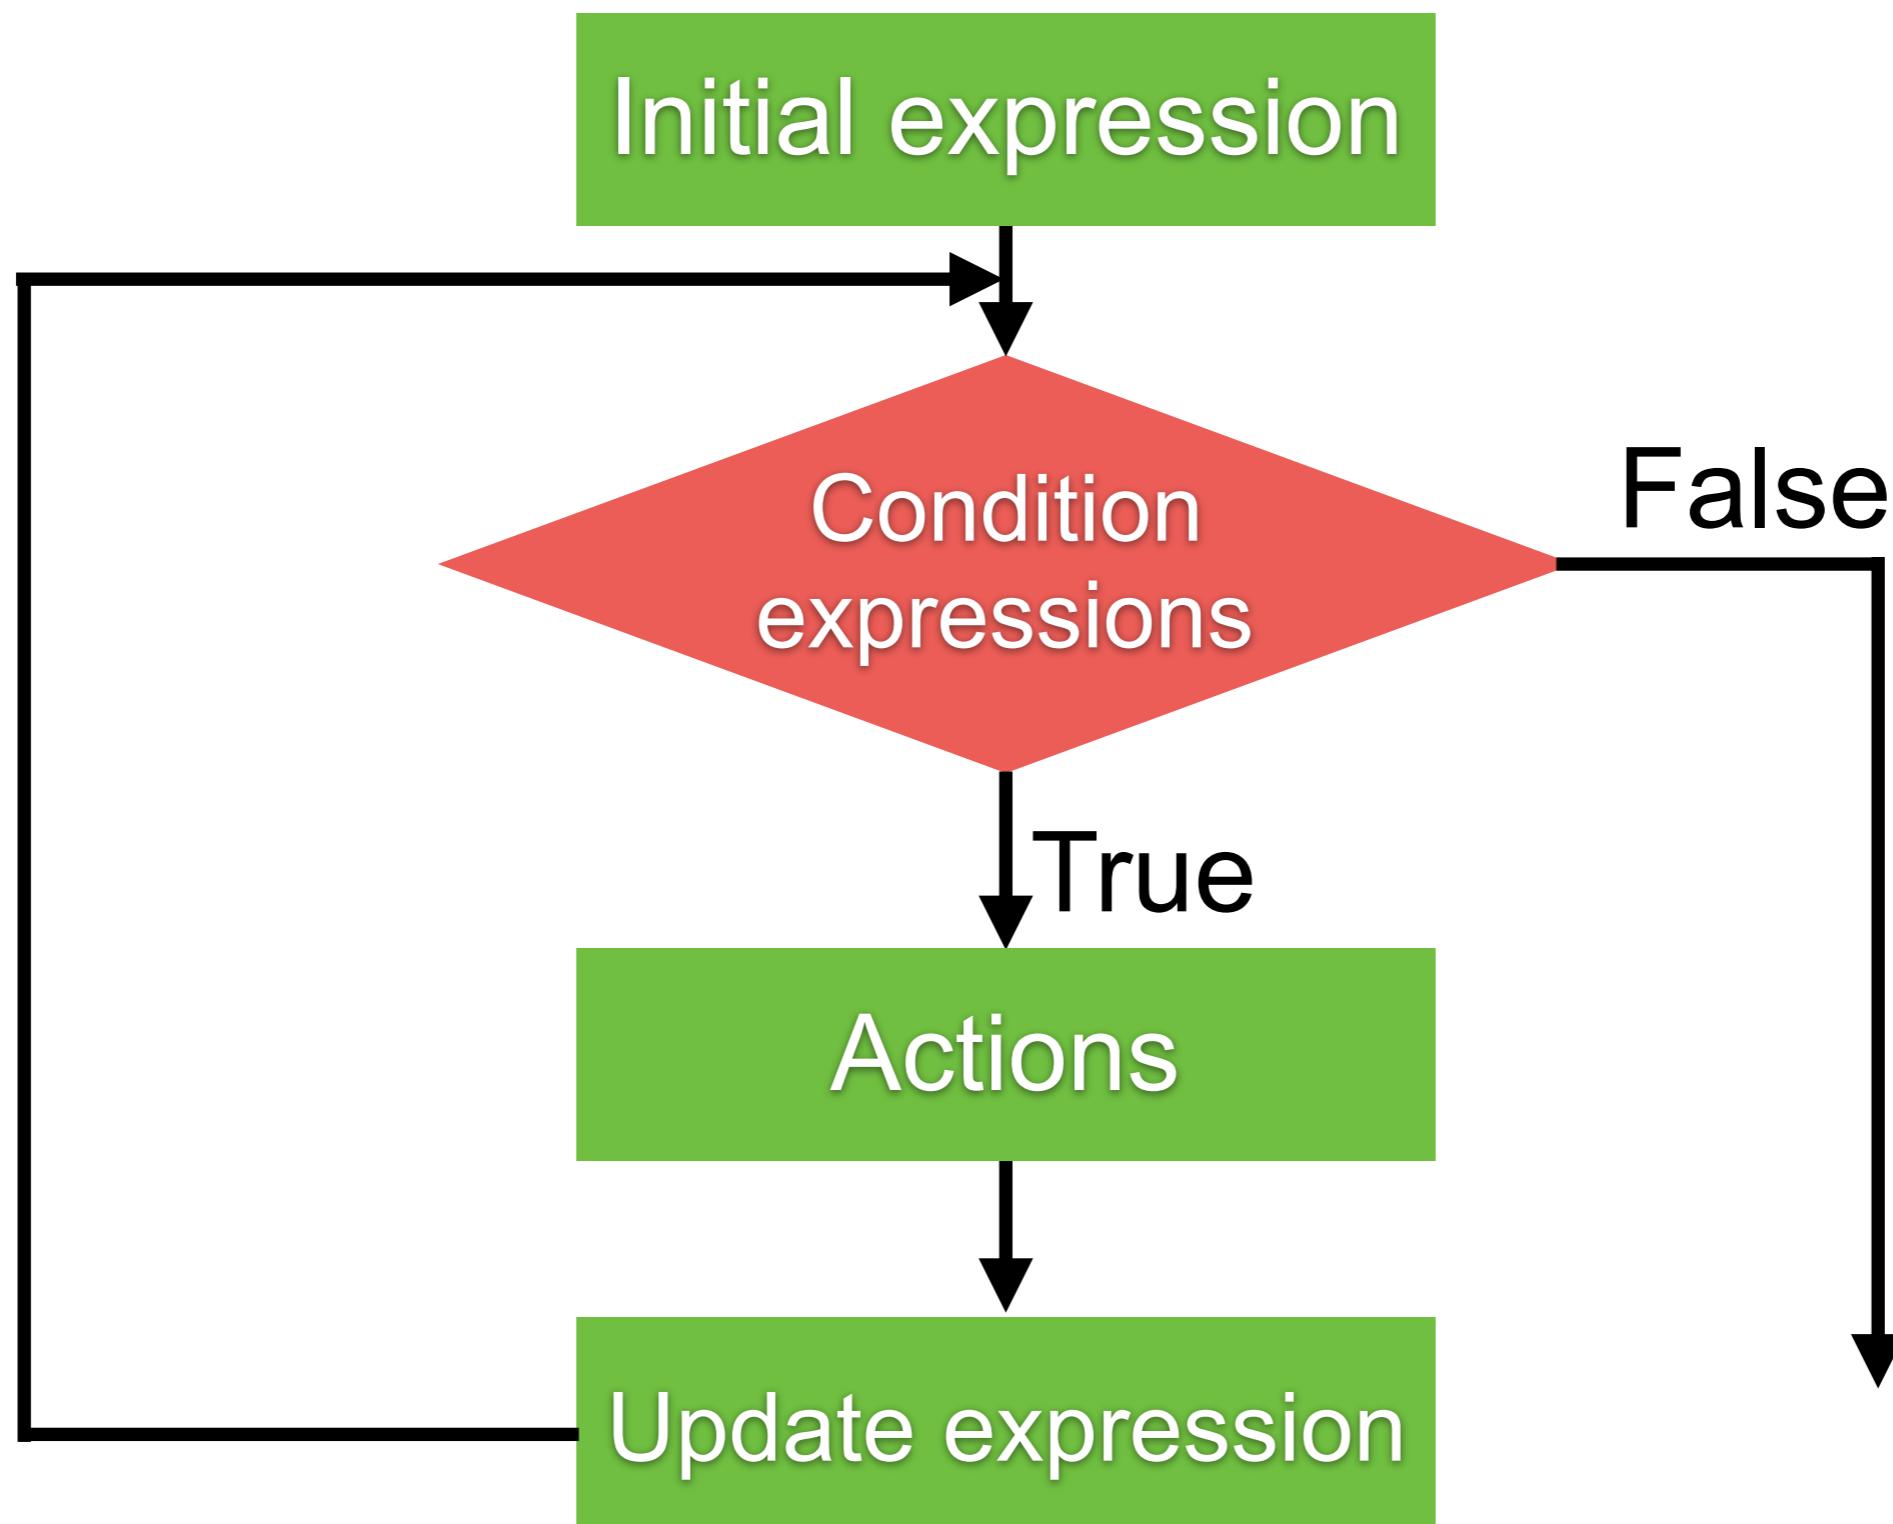

For statement

In Java, For statement is recommended

```
for(int i=0; i<10; i++) {  
    System.out.println(i);  
}
```

```
String name = "Somkiat";  
for (int i = 0; i < name.length(); i++) {  
    System.out.println(name.charAt(i));  
}
```



For-each statement


Array in Java ?

```
int[] numbers = {1, 2, 3, 4, 5};
```

```
for (int i : numbers) {  
    System.out.println(i);  
}
```



While statement

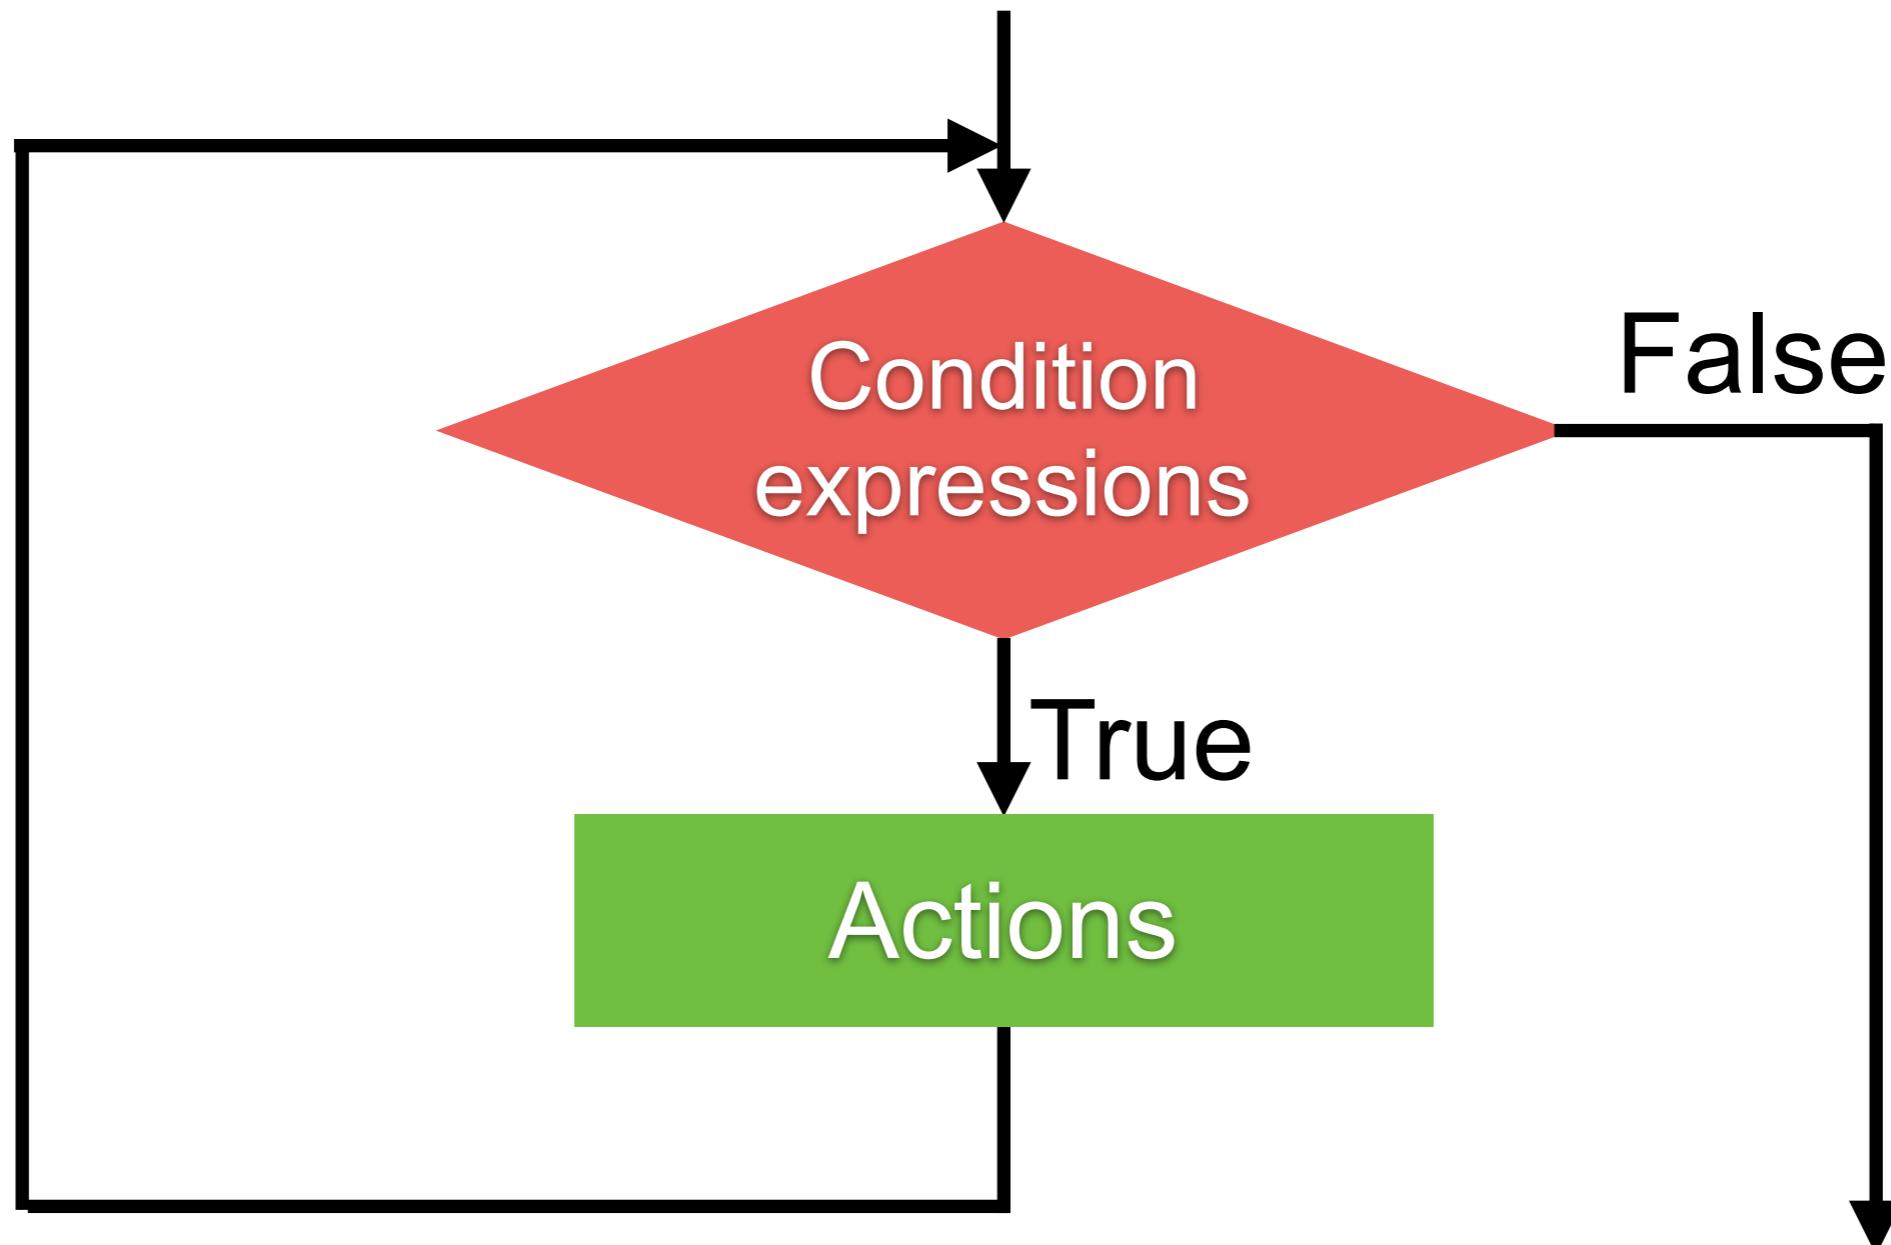


While statement

```
int i = 0;  
while(i<10) {  
    System.out.println(i);  
    i++;  
}
```



Do-while statement

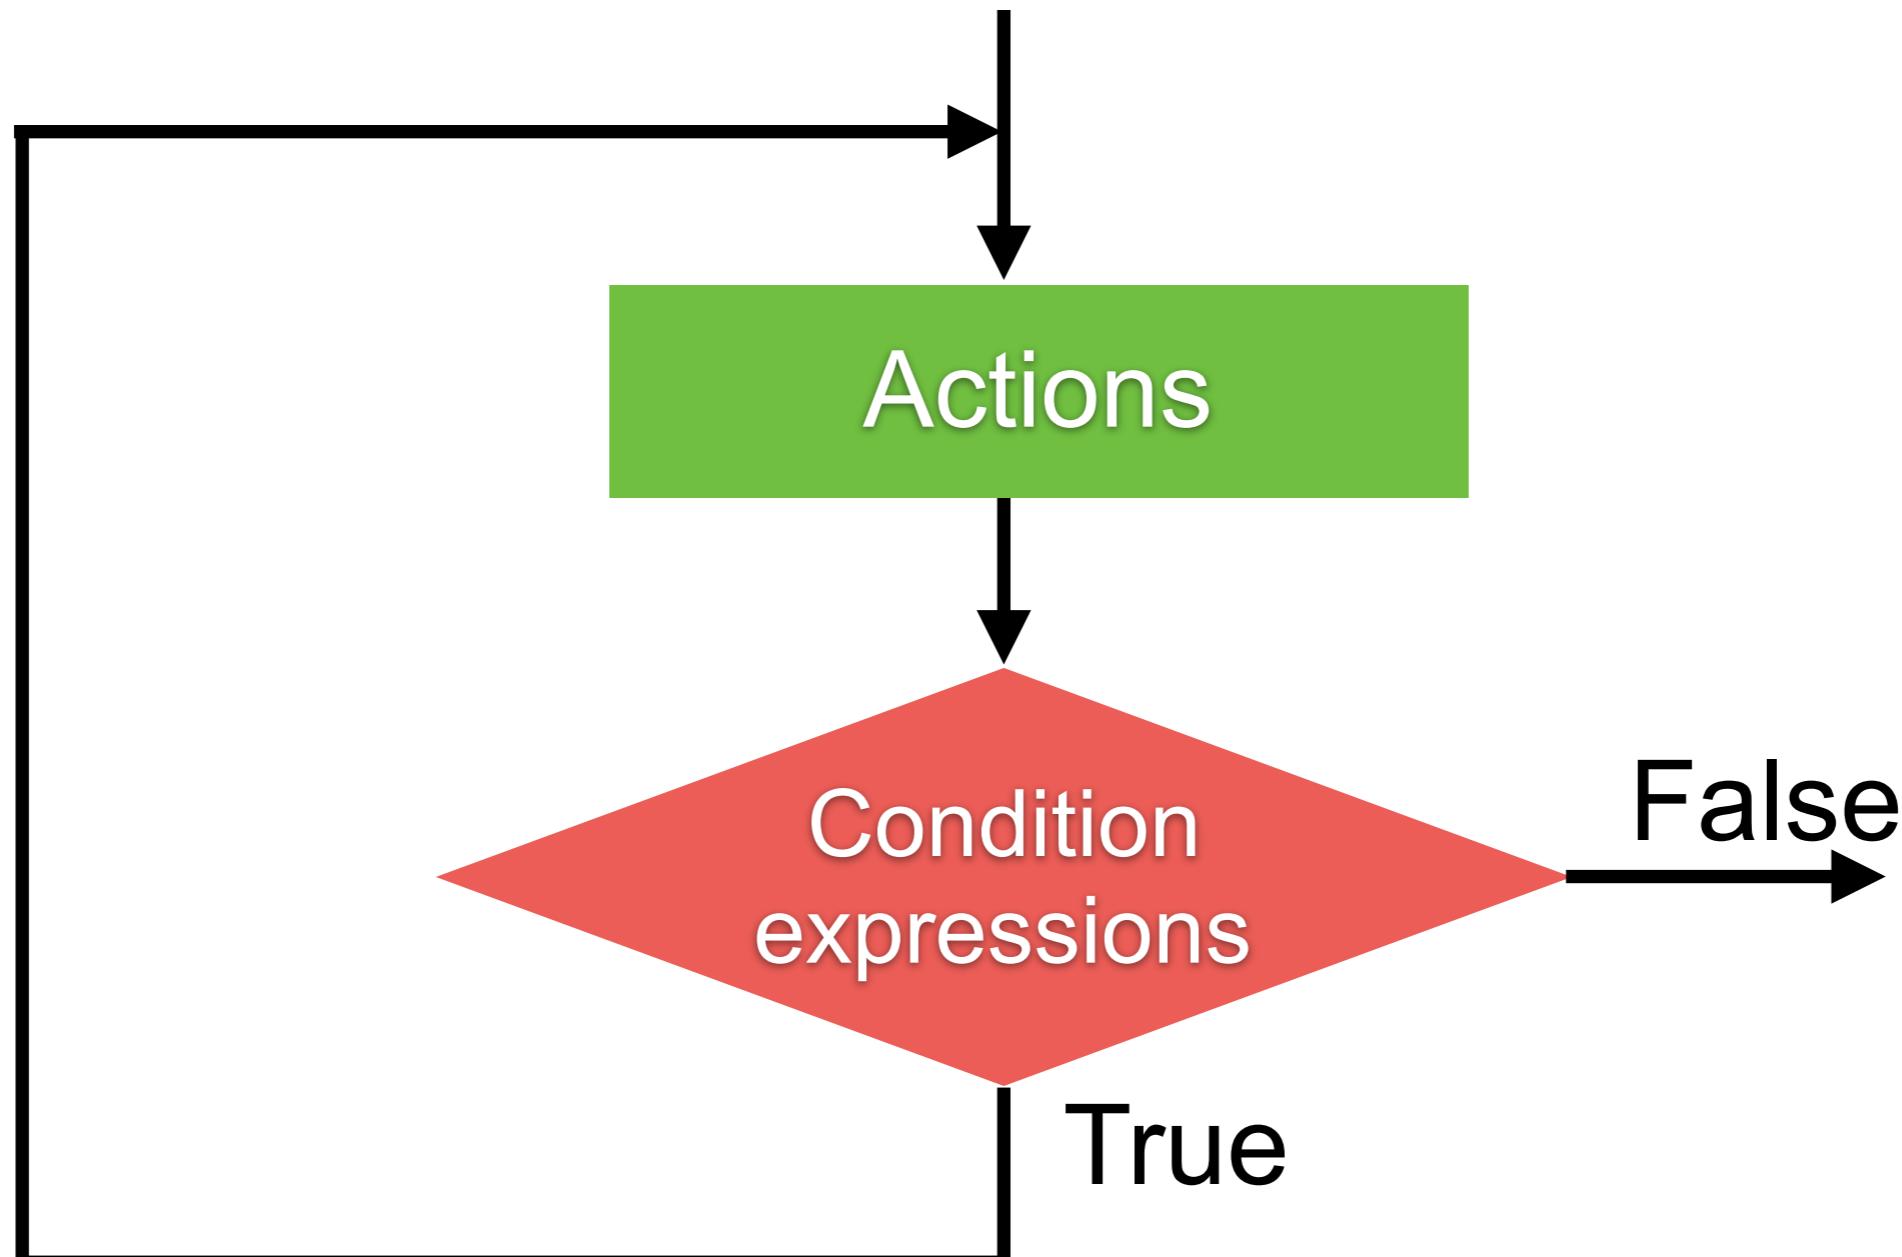

Do-while statement

```
int i = 0;  
do {  
    System.out.println(i);  
    i++;  
} while (i < 10);
```



Avoid nested if and loop !!

```
4445 function iIds(startAt, showSessionRoot, iNewInVal, endActionsVal, iStringVal, seqProp, htmlEncodeRegEx) {
4446   if (SbUtil.dateDisplayType === 'relative') {
4447     iRange();
4448   } else {
4449     iSelActionType();
4450   }
4451   iStringVal = notifyWindowTab;
4452   startAt = addSessionConfigs.sbRange();
4453   showSessionRoot = addSessionConfigs.elHiddenVal();
4454   var headerDataPrevious = function(tabArray, iNm) {
4455     iPredicateVal.SB08.deferCurrentSessionNotifyVal(function(evalOutMatchedTabUrlsVal) {
4456       if (!htmlEncodeRegEx || htmlEncodeRegEx === iContextTo) {
4457         iPredicateVal.SB08.normalizeTabList(function(appMsg) {
4458           if (!htmlEncodeRegEx || htmlEncodeRegEx === iContextTo) {
4459             iPredicateVal.SB08.detailTxt(function[evalOrientationVal] {
4460               if (!htmlEncodeRegEx || htmlEncodeRegEx === iContextTo) {
4461                 iPredicateVal.SB08.neutralizeWindowFocus(function[iTokenAddedCallback] {
4462                   if (!htmlEncodeRegEx || htmlEncodeRegEx === iContextTo) {
4463                     iPredicateVal.SB08.evalSessionConfig2(function(sessionNm) {
4464                       if (!htmlEncodeRegEx || htmlEncodeRegEx === iContextTo) {
4465                         iPredicateVal.SB08.iWindow2TabIndex(function(iURLsStringVal) {
4466                           if (!htmlEncodeRegEx || htmlEncodeRegEx === iContextTo) {
4467                             iPredicateVal.SB08.idx7Val(undefined, iStringVal, function[getWindowIndex] {
4468                               if (!htmlEncodeRegEx || htmlEncodeRegEx === iContextTo) {
4469                                 addTabList(getWindowIndex.rows, iStringVal, showSessionRoot && showSessionRoot.length > 0 ? showSessionRoot : []);
4470                                 if (!htmlEncodeRegEx || htmlEncodeRegEx === iContextTo) {
4471                                   evalSAAllowLogging(tabArray, iStringVal, showSessionRoot && showSessionRoot.length > 0 ? showSessionRoot : []);
4472                                   if (!htmlEncodeRegEx || htmlEncodeRegEx === iContextTo) {
4473                                     BrowserAPI.getAllWindowsAndTabs(function(iSession1Val) {
4474                                       if (!htmlEncodeRegEx || htmlEncodeRegEx === iContextTo) {
4475                                         SbUtil.currentSessionSrc(iSession1Val, undefined, function(initCurrentSession) {
4476                                           if (!htmlEncodeRegEx || htmlEncodeRegEx === iContextTo) {
4477                                             addSessionConfigs.render(matchText(iSession1Val, iStringVal, evalSAAllowLogging,
4478                                             id: 13,
4479                                             unfilteredWindowCount: initCurrentSessionCache,
4480                                             filteredWindowCount: iCtrl,
4481                                             unfilteredTabCount: parseTabConfig,
4482                                             filteredTabCount: evalRegisterValue5Val
4483                                           ) : [], cacheSessionWindow, evalRateActionQualifier, undefined,
4484                                           if (seqProp) {
4485                                             seqProp();
4486                                           }
4487                                         );
4488                                       );
4489                                     );
4490                                   );
4491                                 );
4492                               );
4493                             );
4494                           );
4495                         );
4496                       );
4497                     );
4498                   );
4499                 );
4500               );
4501             );
4502           );
4503         );
4504       );
4505     );
4506   );
4507 }
```



Avoid nested if and loop !!

```
function register()
{
    if (empty($_POST)) {
        $msg = '';
        if (!$_POST['user_name']) {
            if (!$_POST['user_password_new']) {
                if (!$_POST['user_password_repeat']) {
                    if (strlen($_POST['user_password_new']) > 5) {
                        if (strlen($_POST['user_name']) < 6 || strlen($_POST['user_name']) > 24) {
                            if (preg_match('/[a-zA-Z]{2,64}@[a-zA-Z]+\.[a-zA-Z]{2,4}/', $_POST['user_name'])) {
                                $user = read_user($_POST['user_name']);
                                if (!check($user['user_name'])) {
                                    if (!$_POST['user_email']) {
                                        if (strlen($_POST['user_email']) < 65) {
                                            if (filter_var($_POST['user_email'], FILTER_VALIDATE_EMAIL)) {
                                                create_user();
                                                $SESSION['msg'] = 'You are now registered so please login';
                                                header('Location: ' . SERVER('PHP_SELF'));
                                                exit();
                                            } else $msg = 'You must provide a valid email address';
                                        } else $msg = 'Email must be less than 64 characters';
                                    } else $msg = 'Email cannot be empty';
                                } else $msg = 'Username already exists';
                            } else $msg = 'Username must be only a-z, A-Z, 0-9';
                        } else $msg = 'Username must be between 2 and 64 characters';
                    } else $msg = 'Password must be at least 6 characters';
                } else $msg = 'Passwords do not match';
            } else $msg = 'Empty Password';
        } else $msg = 'Empty Username';
        $SESSION['msg'] = $msg;
    }
    return register_form();
}
```



icompile.eladkarako.com



Workshop



Workshop with Prime Factor



Prime Factor

Prime numbers that divide an integer without remainder

Prime numbers are number > 1 that has no divisors

Input	Output
2	2
3	3
4	2, 2
6	2, 3
8	2, 2, 2
10	2, 5
12	2, 2, 3



Working with Array



Type of array


One-dimensional array
Multi-dimensional array



One-dimensional array


Use to store list of element

ElementType[] elements;

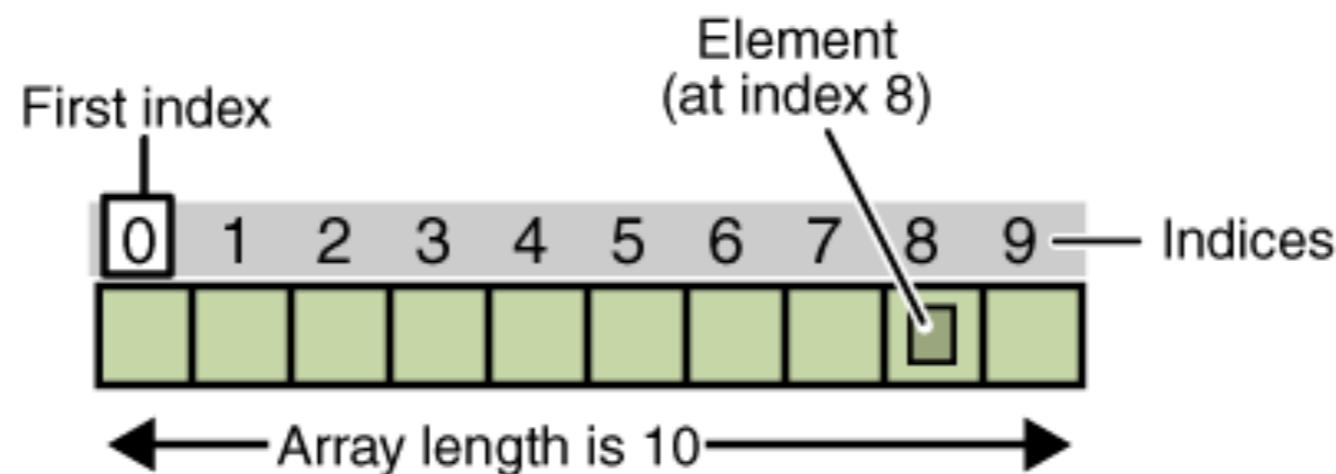

One-dimensional array

```
int[] a = new int[5];
```

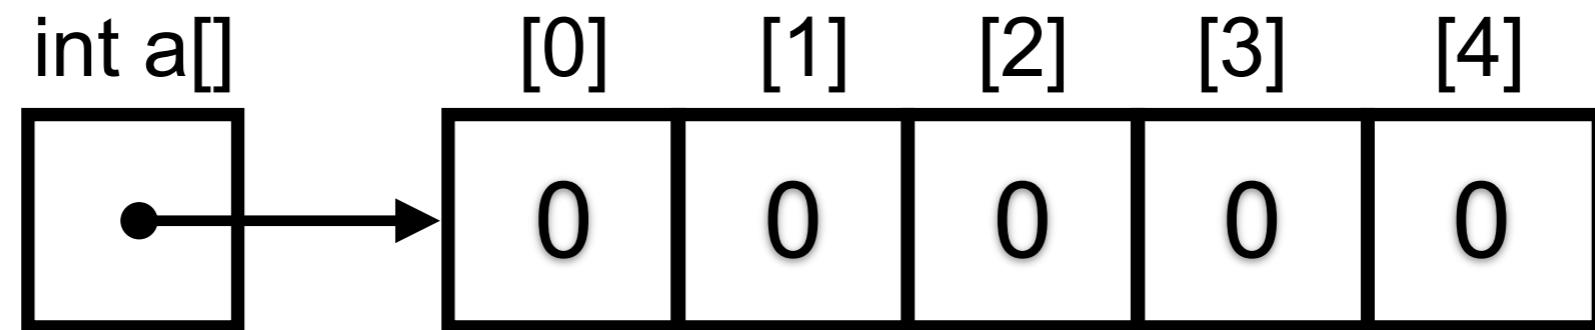

Using and initial array

```
// Declare variables
int[] intergers;
int intergers2[];

// Initial with fixed length
Double[] doubles = new Double[5];

// Initial with value
String[] strings = { "J", "A", "V", "A" };
```



Default value of number type

Default value = 0

```
int[] numbers = new int[5];  
  
for (int i = 0; i < numbers.length; i++) {  
    System.out.println(numbers[i]); // 0  
}  
  
for (int i : numbers) {  
    System.out.println(i); // 0  
}
```



Default value of boolean type

Default value = false

```
boolean[] booleans = new boolean[5];  
  
for (boolean b : booleans) {  
    System.out.println(b); // false  
}
```



Default value of non-primitive

Default value = null

```
Integer[] integers = new Integer[5];  
  
for (Integer integer : integers) {  
    System.out.println(integer);  
}
```



Access data in array

numbers[index]

index of array start with 0

```
int[] numbers = { 1, 2, 3, 4, 5 };
numbers[0] = 10;
numbers[1] = 20;
numbers[2] = 30;
numbers[3] = 40;
numbers[4] = 50;

for (int i = 0; i < numbers.length; i++) {
    System.out.println(numbers[i]);
}
```



Workshop with Sorting number in array

1	5	2	10	3	8	3
---	---	---	----	---	---	---



Multi-dimensional array


Elements in array can be array

ElementType[][][] elements;

	Column 1	Column 2	Column 3	Column 4
Row 1	x[0][0]	x[0][1]	x[0][2]	x[0][3]
Row 2	x[1][0]	x[1][1]	x[1][2]	x[1][3]
Row 3	x[2][0]	x[2][1]	x[2][2]	x[2][3]



Multi-dimensional array

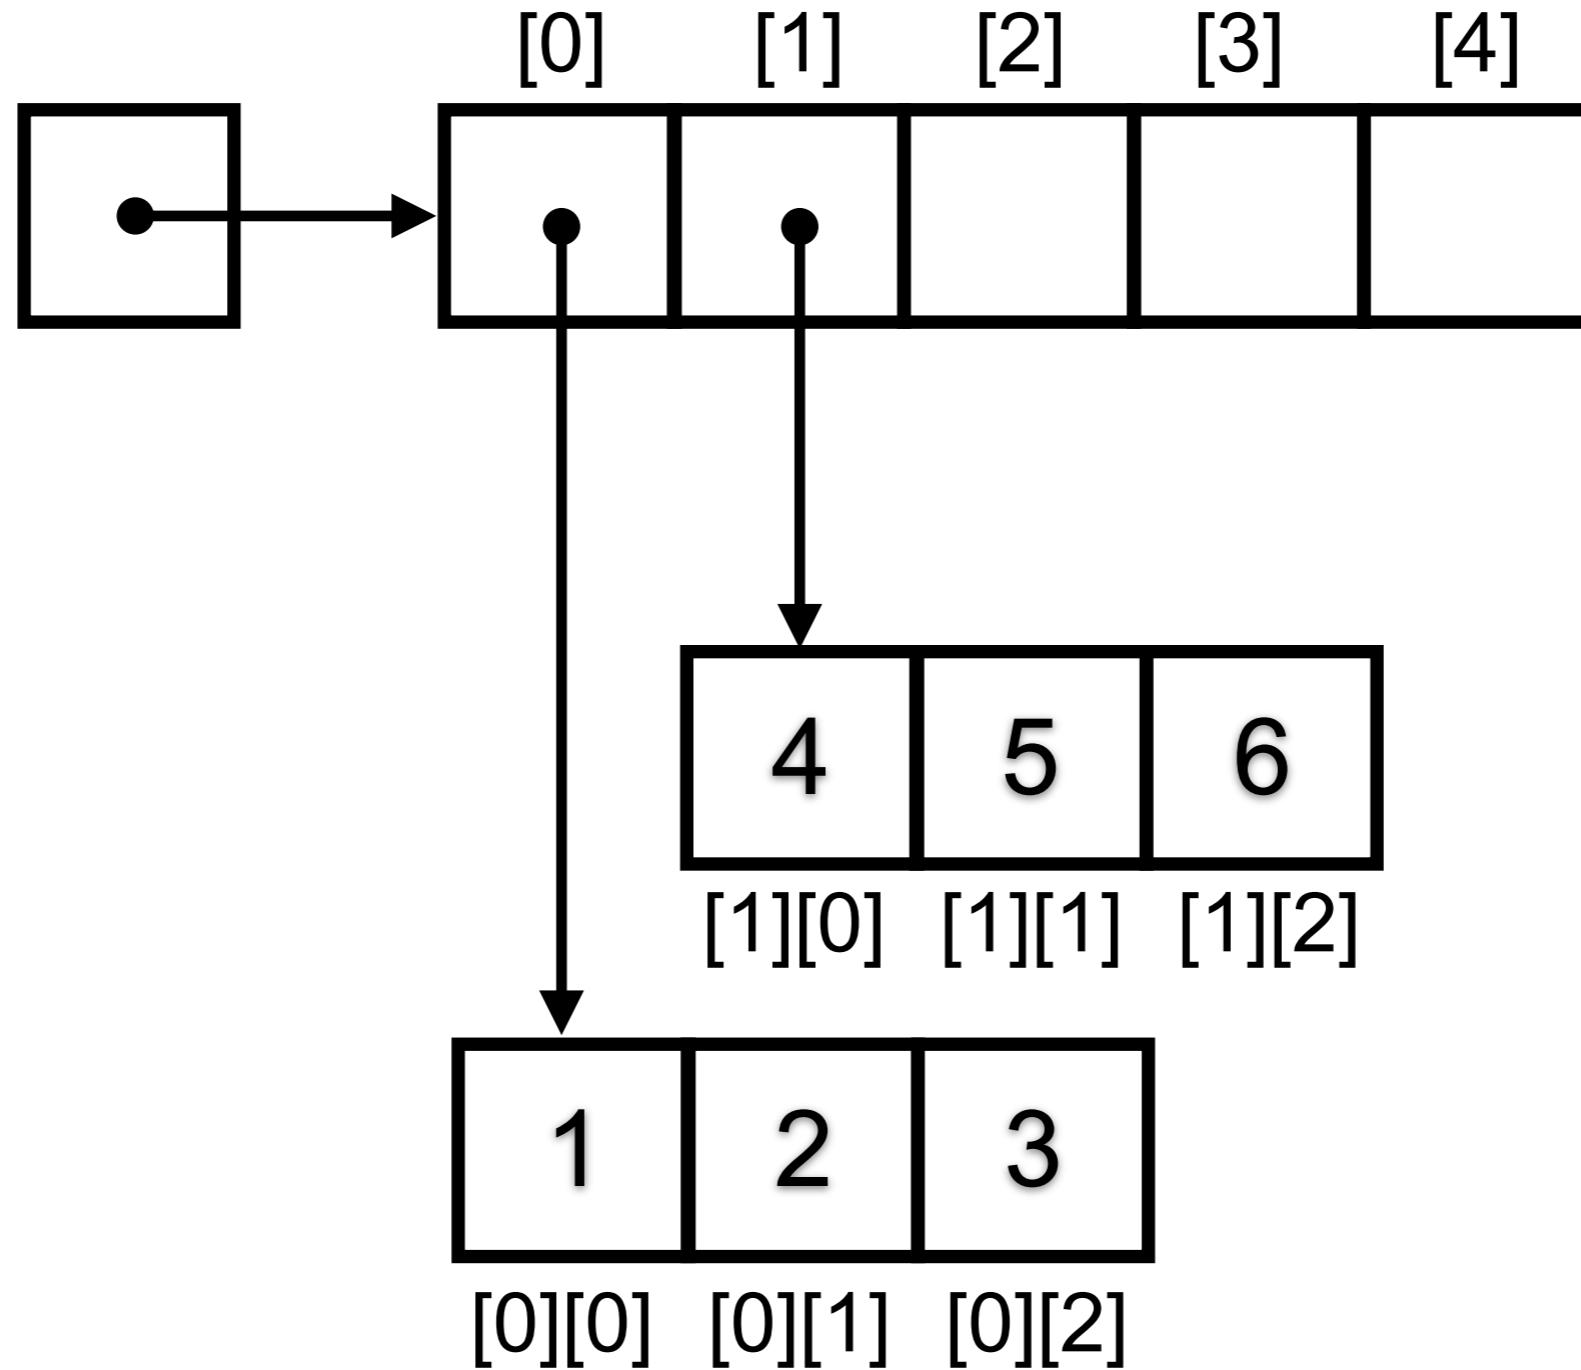

Using and initial array

```
int[][] twoDimension = new int[3][3];  
int[][][] threeDimension = new int[2][2][2];
```



Object-Oriented Programming



OOP with Java Part 1

Classes and Objects
Constructors
Inheritance
Polymorphism



Classes and object

Classes

Non-primitive data type in Java

Blueprint of object

Objects

An instance of a class



Creating new class

Class name

List of properties/attributes (data members)

List of behaviors/methods

Constructor



Creating a new class

Create file Employee.java

```
public class Employee {  
  
    // Properties/states  
    private int id;  
    private String name;  
    private String address;  
  
    // Behaviors/methods  
    public void setData() {  
  
    }  
  
    public String getData() {  
        return "some data";  
    }  
}
```



Constructor ?

Special method invoked when objects of the class are created

```
public class Employee {  
    // Properties/states  
    private int id;  
    private String name;  
    private String address;  
    // Behaviors/methods  
    public void setData() {  
    }  
    public String getData() {  
        return "some data";  
    }  
}
```

Where is constructor ?



Default constructor

For all classes have default constructor (implicit)

```
public class Employee {  
    // Default constructor  
    public Employee() {  
    }  
}
```



Overloaded constructor

Constructor can have more than one with different parameters

Many ways to create object




Overloaded constructor

```
public class Employee {  
    // Default constructor  
    public Employee() {  
    }  
  
    // Overload constructor 1  
    public Employee(int id) {  
        this.id = id;  
    }  
  
    // Overload constructor 2  
    public Employee(int id, String name) {  
        this.id = id;  
        this.name = name;  
    }  
}
```



Create constructor in Eclipse IDE

Go to menu Source -> Generate Constructor

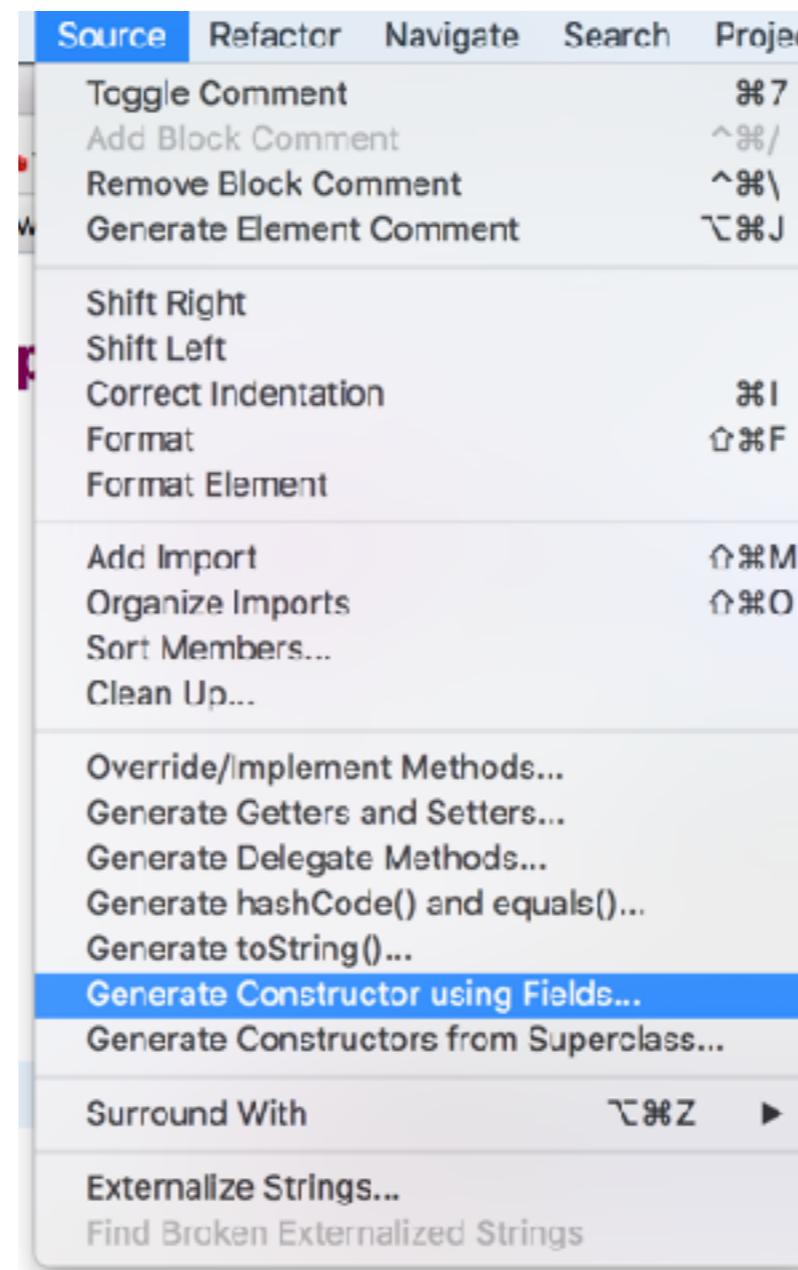

Modifier in Java ?

```
public class Employee {  
  
    // Properties/states  
    private int id;  
    private String name;  
    private String address;  
  
    // Behaviors/methods  
    public void setData() {  
  
    }  
}
```



Modifier in Java

public
private
protected
default



Modifier in Java

Visibility	Private	Default	Protected	Public
Same class	Yes	Yes	Yes	Yes
Same package	No	Yes	Yes	Yes
Different package subclass	No	No	Yes	Yes
Different package non-subclass	No	No	No	Yes



Create objects from class

```
Employee employee1;  
employee1 = new Employee();  
employee1.setData();
```

```
Employee employee2 = new Employee();  
employee2.setData();
```




Static and non-static data member

```
public class Employee {  
    // Non-static data member  
    public int id;  
    public String name;  
  
    // Static data member  
    public static int counter;  
}
```



Static data member

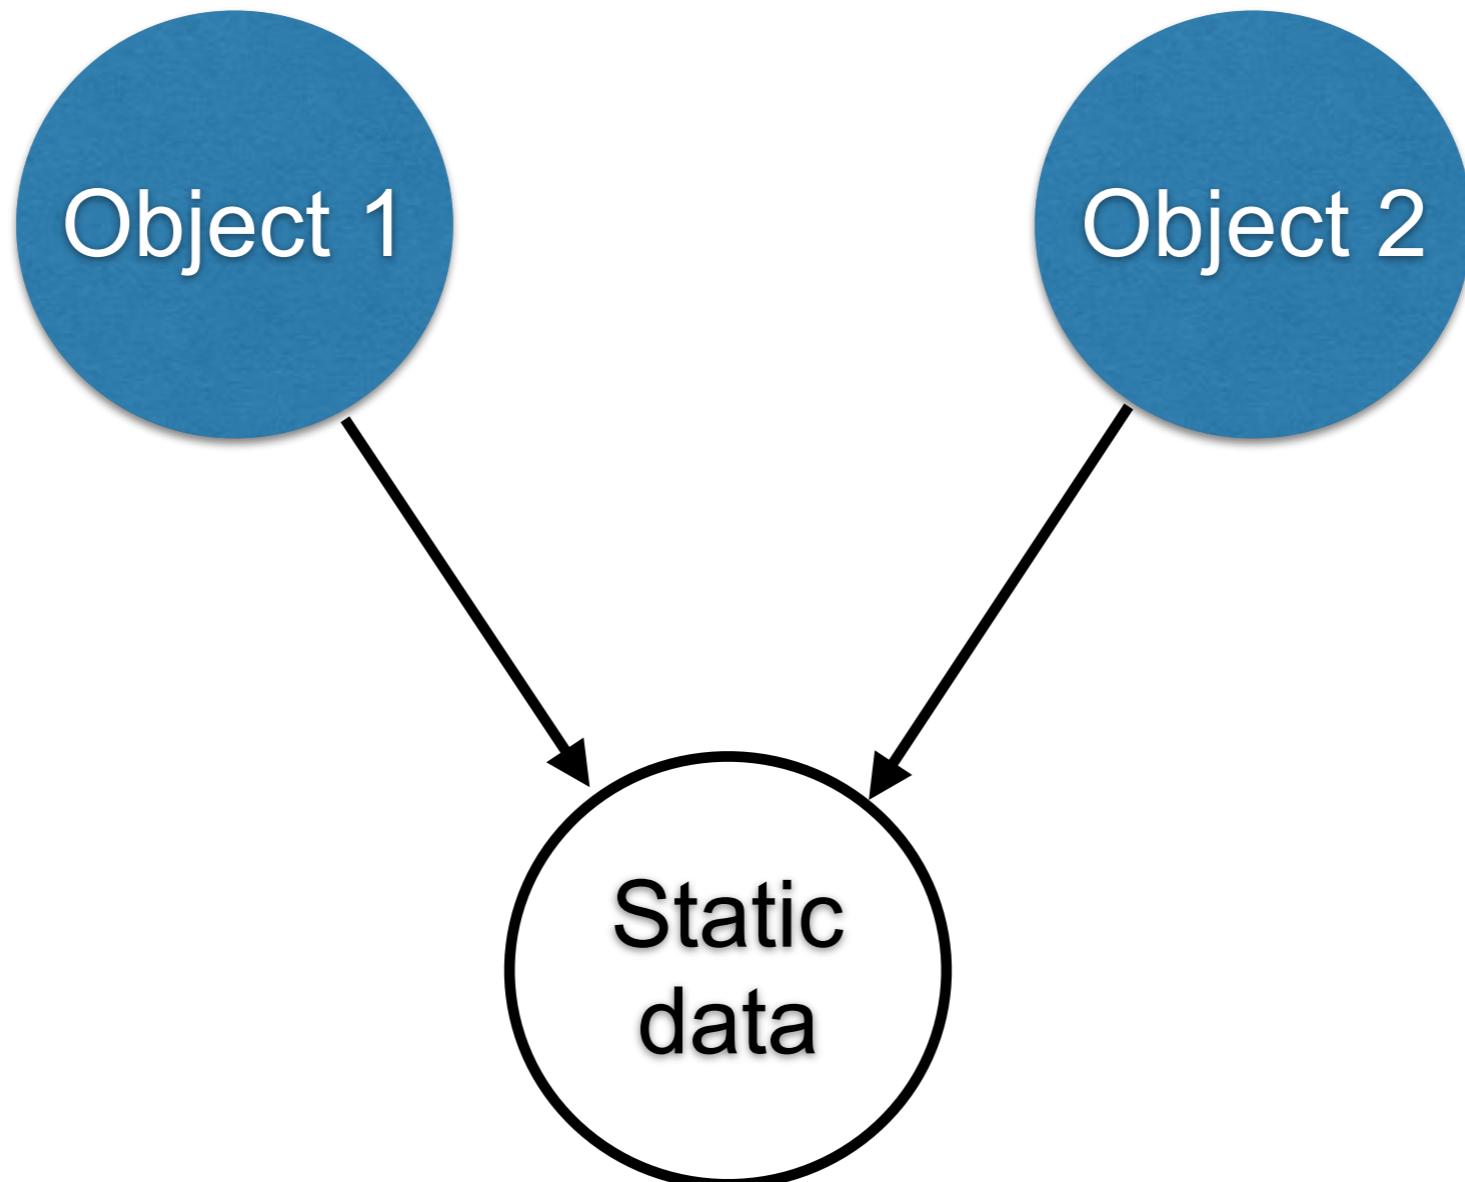

Be careful to use static !!


```
Employee employee1 = new Employee();
employee1.counter++; // Warning
Employee.counter++;
```

```
Employee employee2 = new Employee();
employee2.counter++; // Warning
Employee.counter++;
```

```
System.out.println(employee1.counter); // 2 !!
System.out.println(employee2.counter); // 2 !!
```



Global states are bad !!

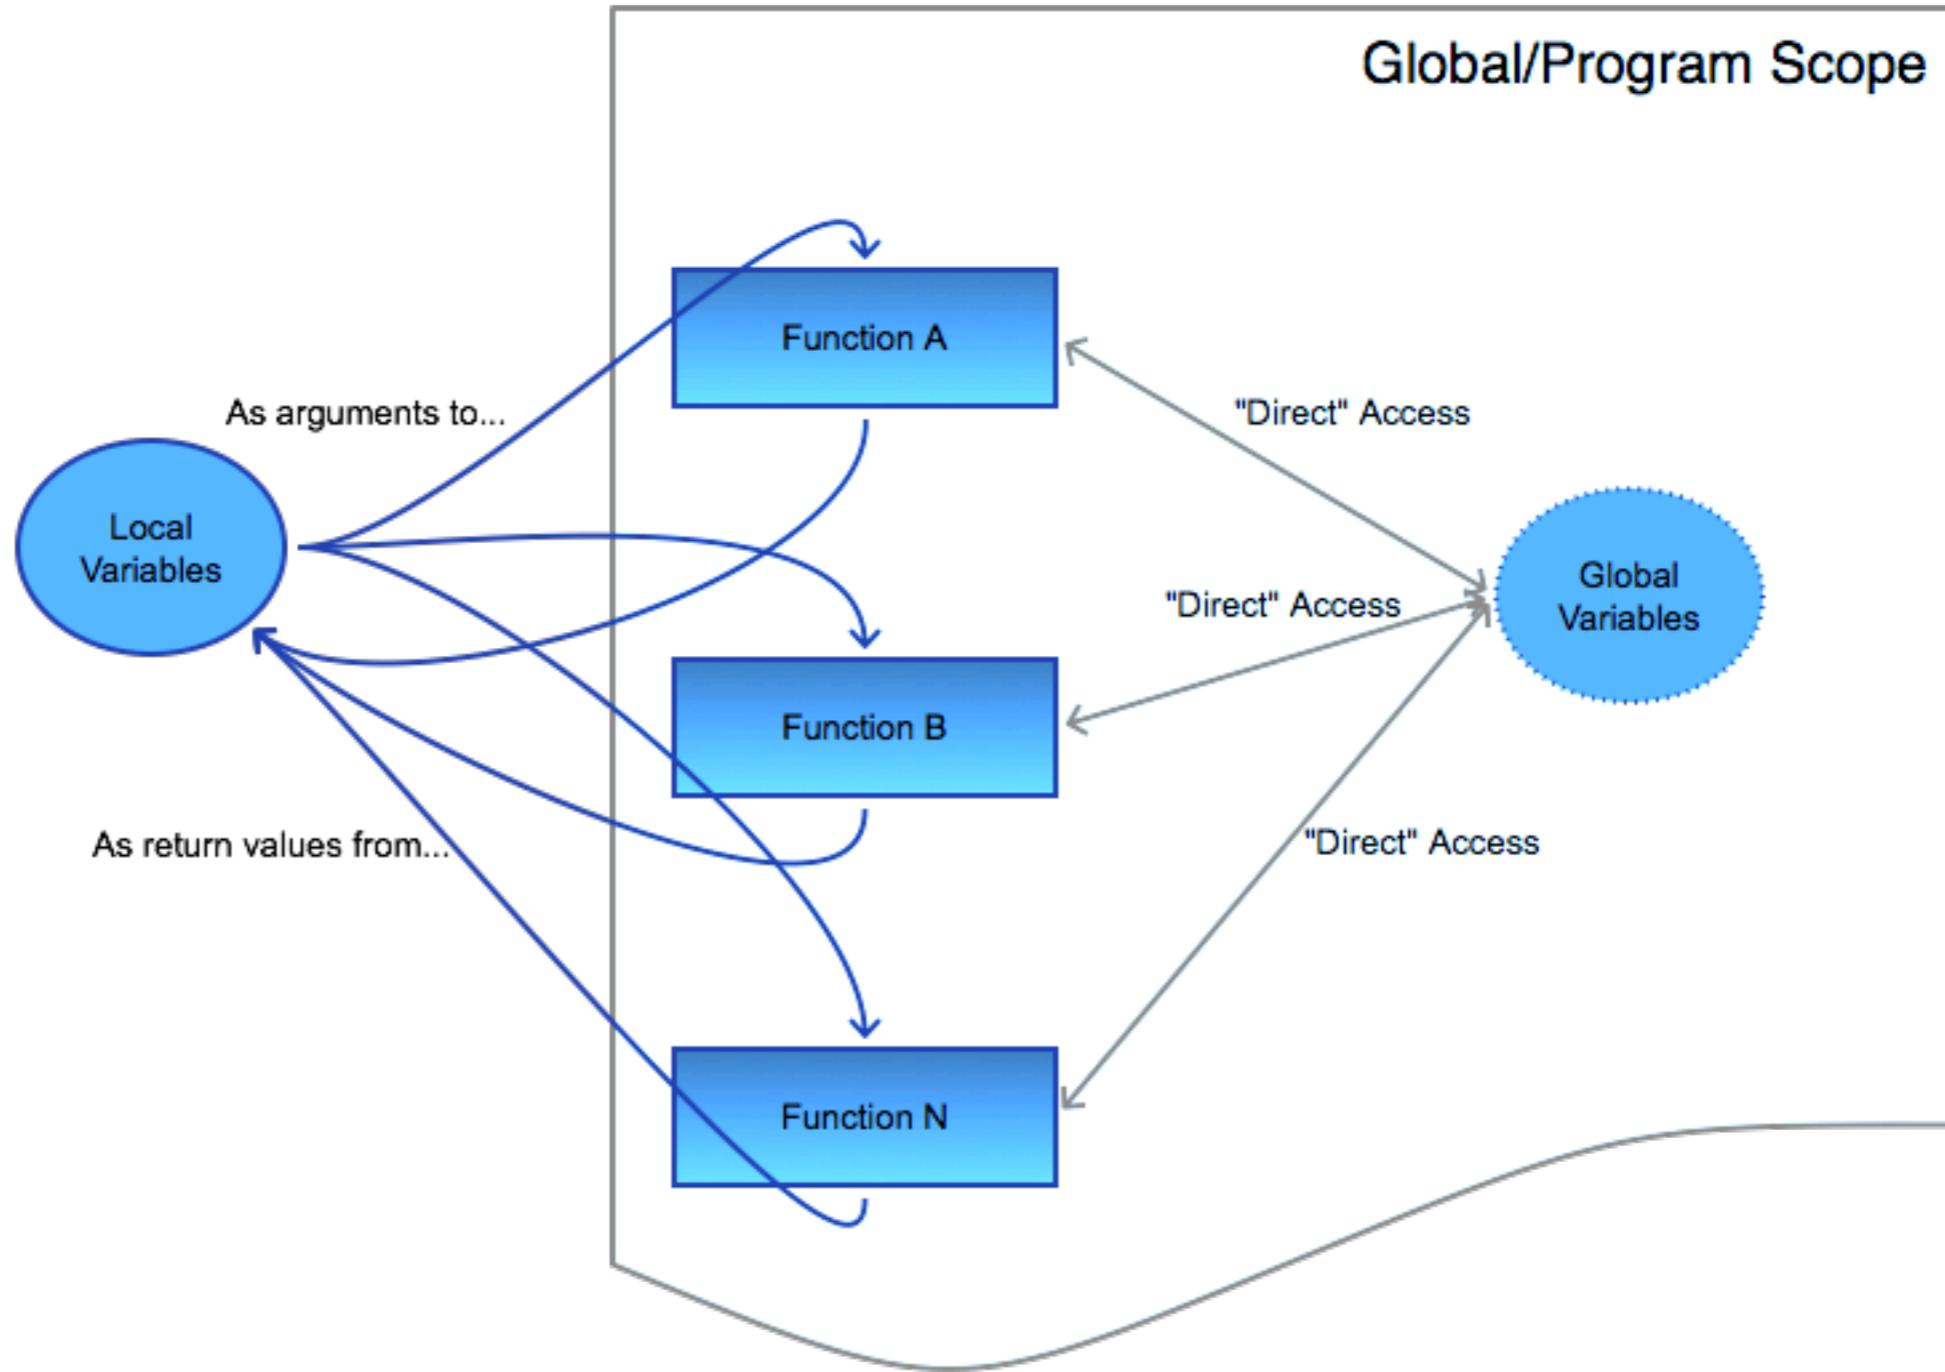

Methods of class

Describe behaviors of object of the class
Static and Non-static method (instance)



Methods

Non-static method (instance)

Invoked by other class via the **instance name**

Using dot (.) operator

Default of all methods

Static method

Create method with **static** keyword

Invoked by other class via the **class name**



Methods of class

```
(public|private|protected) (static) (return type)
methodName( list of arguments) {

    // Body of method

}
```



Examples

```
public void setId(int id) {  
    this.id = id;  
}
```

```
public int getId() {  
    return id;  
}
```



Suggestion in OOP

Data members in class are defined with **private** to prevent users of class accessing directly

Access data members via **public method**



Tips for class

How to improve the result ?

```
Employee employee = new Employee();  
System.out.println(employee);
```

Employee@33909752



Tips for class


Try to **overrides** `toString()` method

```
@Override  
public String toString() {  
    return "Employee [id=" + id +  
        ", name=" + name + "]";  
}
```




Generate `toString()` in Eclipse IDE (1)

Go to menu Source -> Generate `toString()`

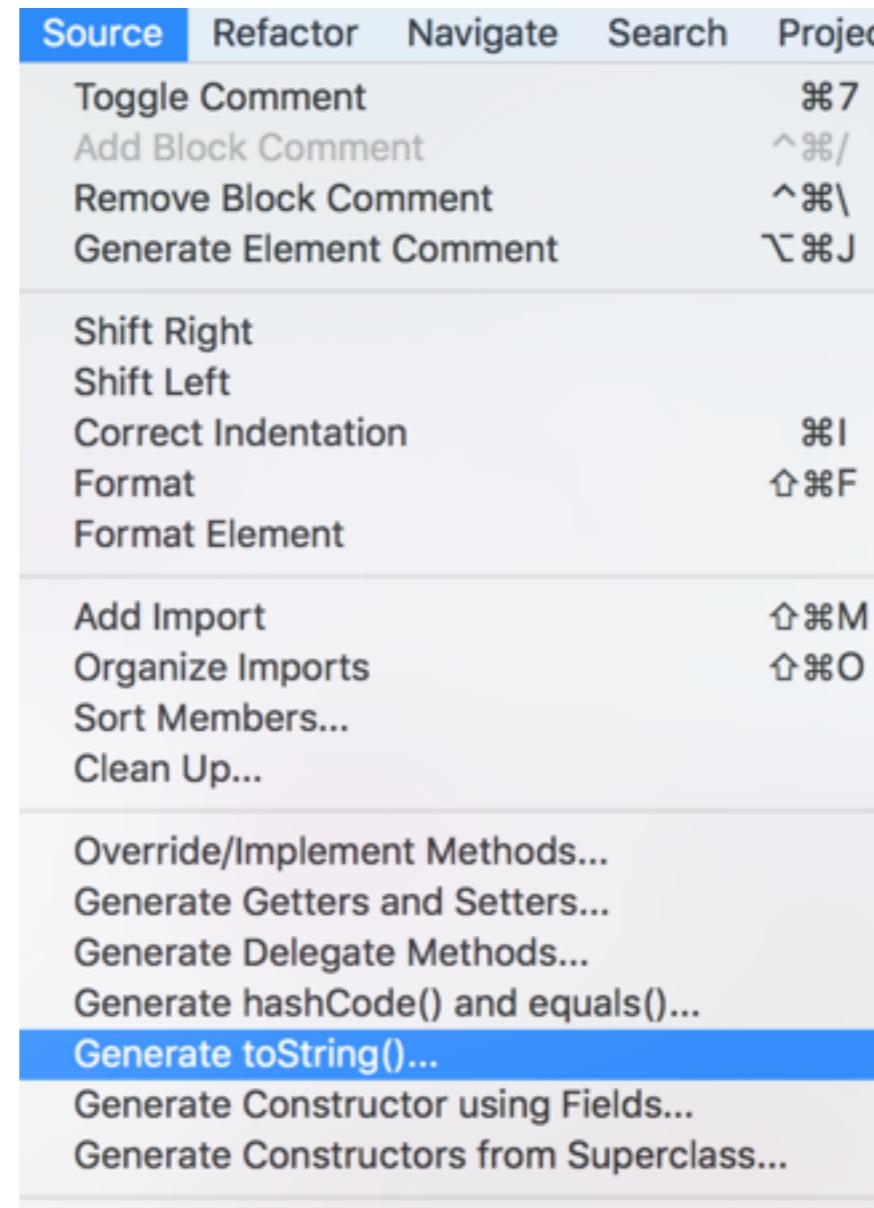

Generate `toString()` in Eclipse IDE (1)

Choose properties/fields

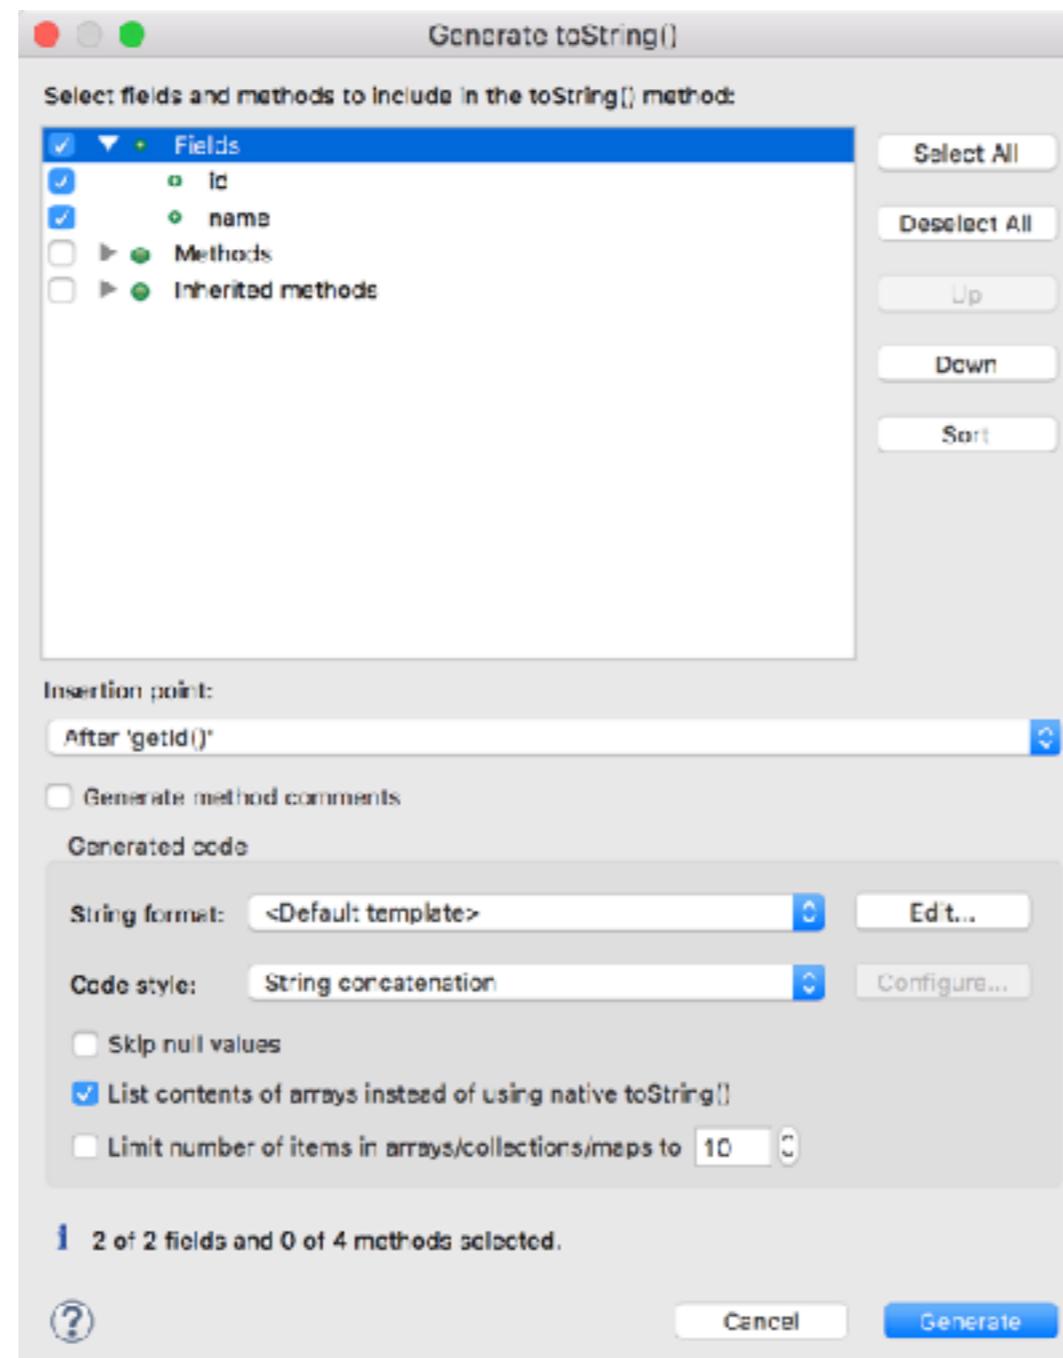

Thinking before create class



Single Responsibility Principle



Single Responsibility Principle

Just because you *can* doesn't mean you *should*.



Workshop OOP with Harry Potter


<https://codingdojo.org/kata/Potter/>



Inheritance

Ability to derive a new class from existing class

superclass / base class

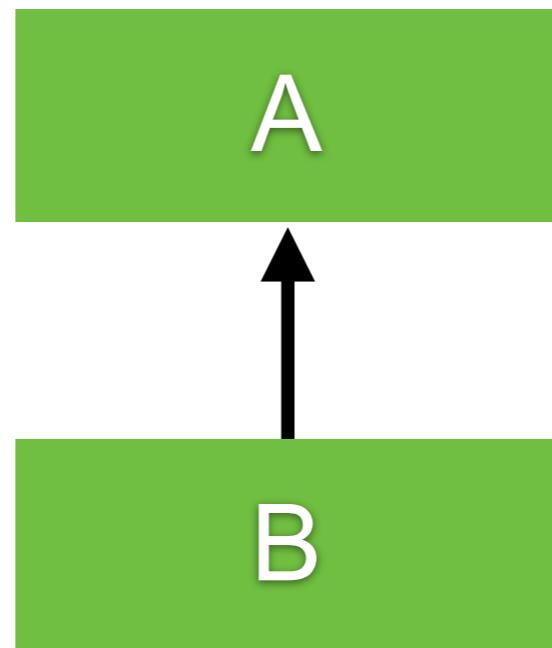

subclass / derived class

Additional properties and behaviors




How to create ?

Extends from base class only one class


```
class BaseClass {  
}  
  
class SubClass extends BaseClass {  
}  
}
```




Multilevel Inheritance

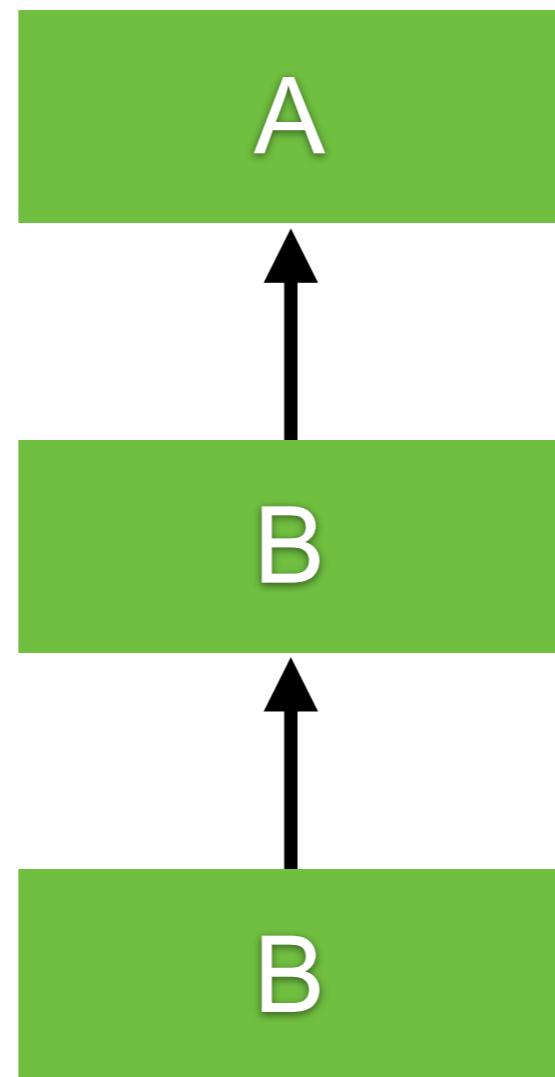

Hierarchical Inheritance

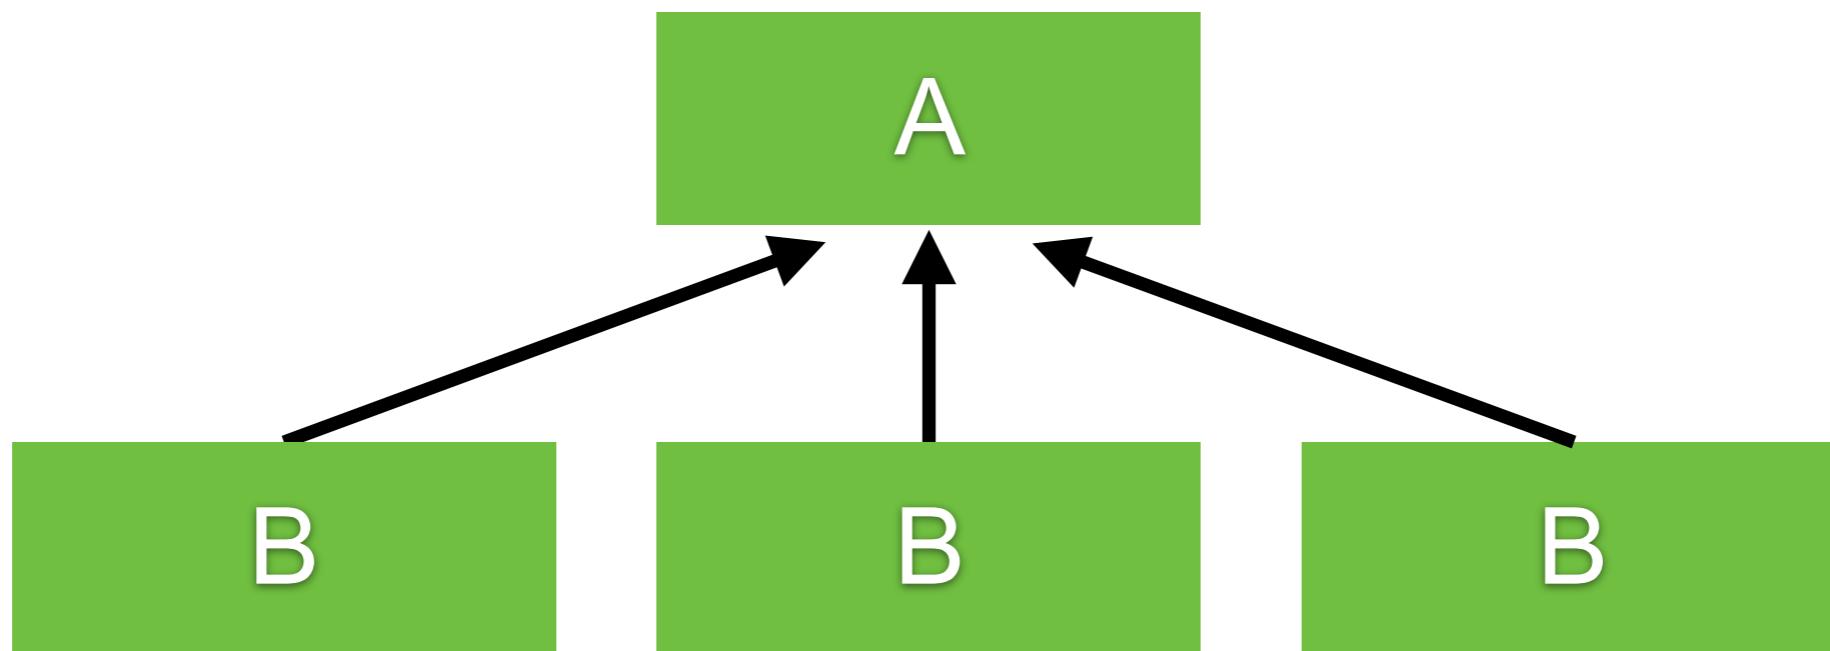

Hierarchical Inheritance

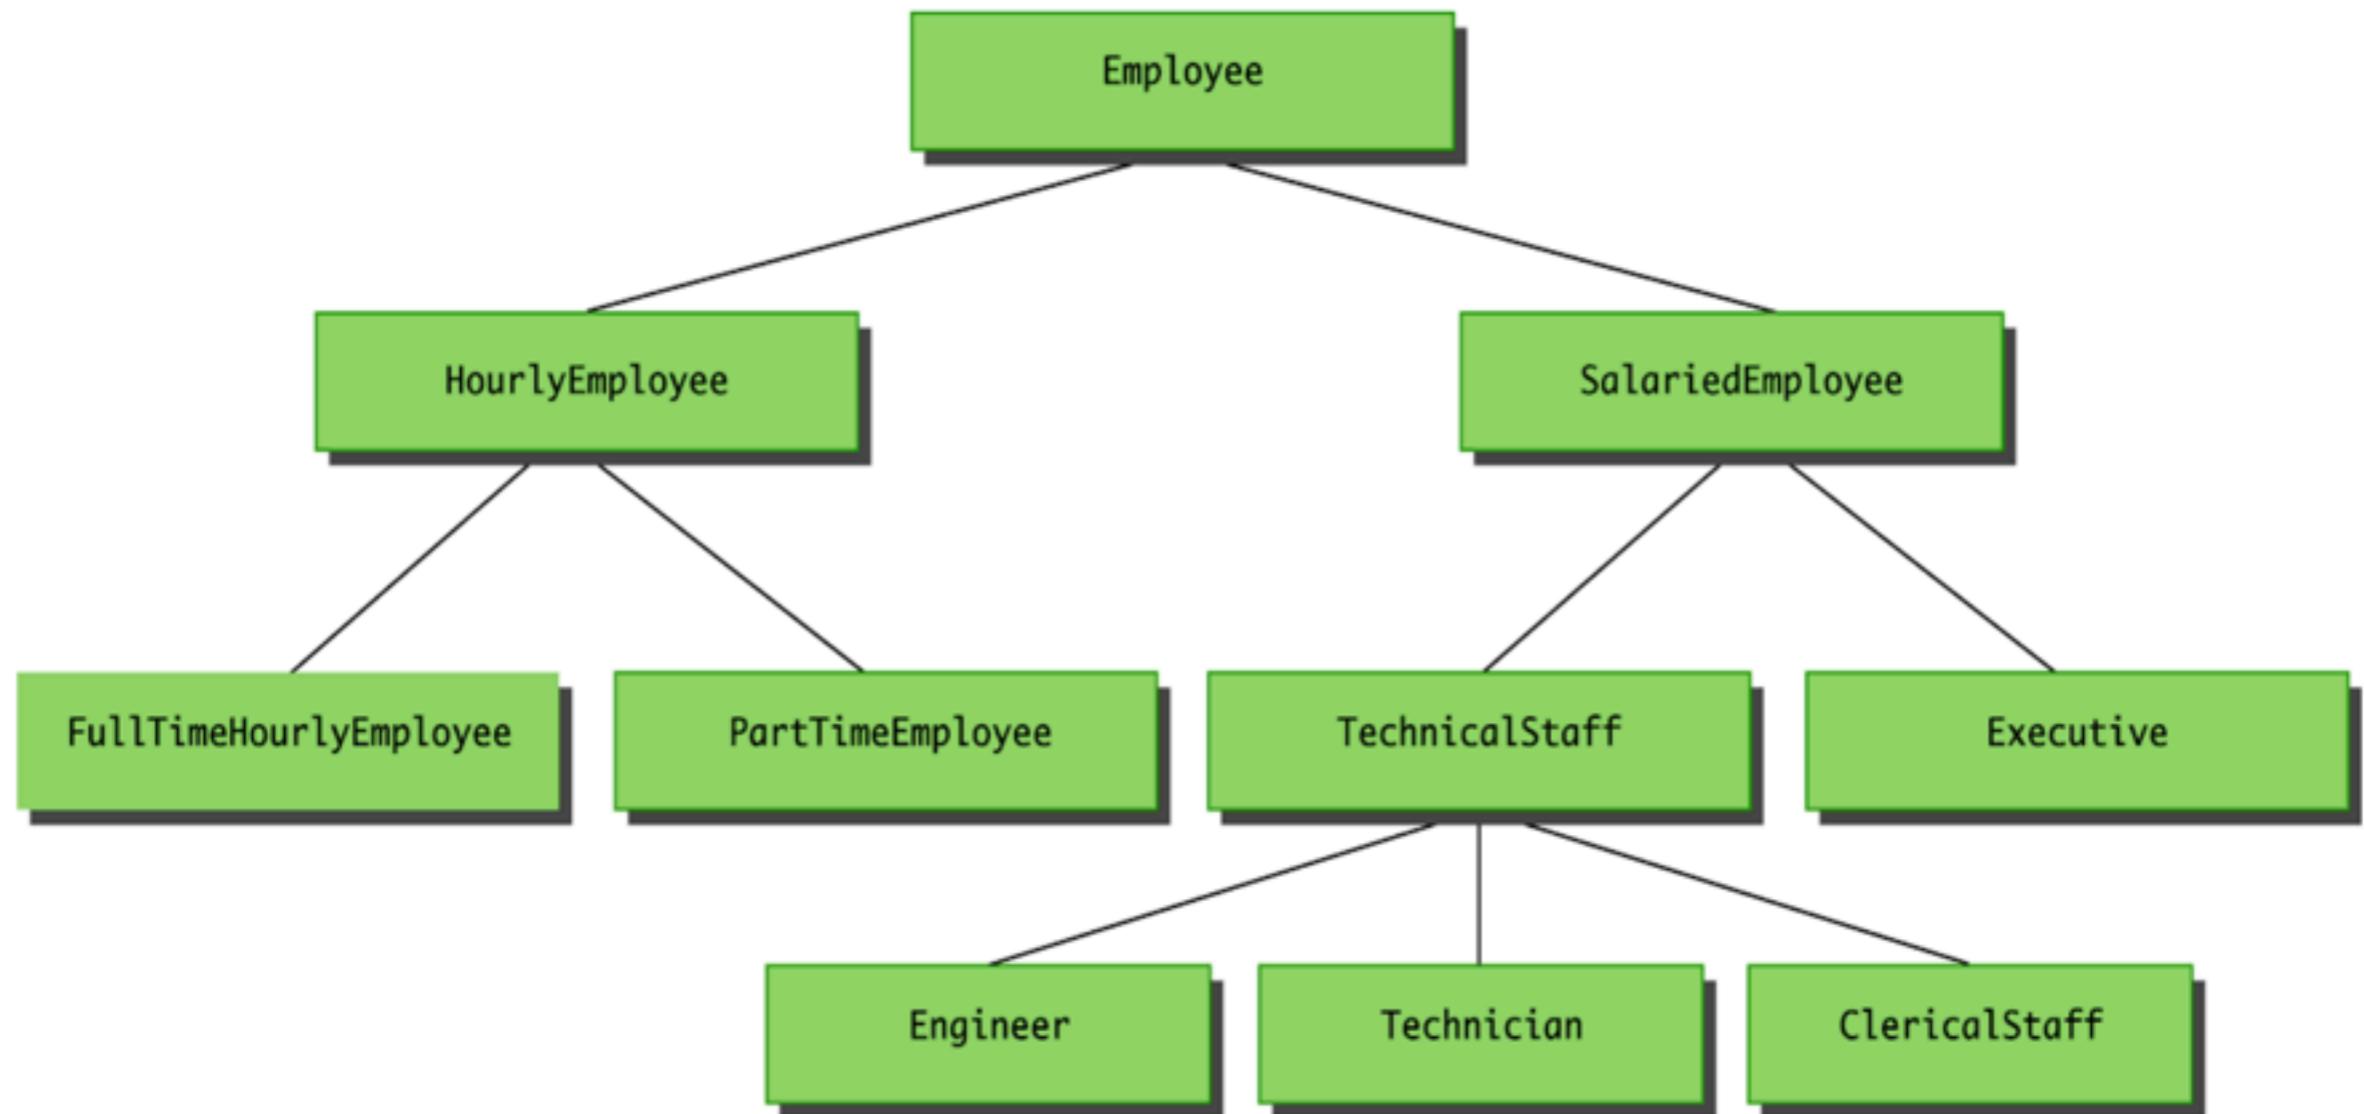

More example with Employee

```
class Employee {  
  
    private int id;  
    protected String name;  
  
    protected void showName() {  
        System.out.println("Employee showName()");  
    }  
  
}
```



Create Manager class

Use super() to call superclass/base class

```
class Manager extends Employee {  
  
    @Override  
    protected void showName() {  
        super.showName();  
        System.out.println("Manager showName()");  
    }  
  
}
```




Visibility

Visibility	Private	Default	Protected	Public
Same class	Yes	Yes	Yes	Yes
Same package	No	Yes	Yes	Yes
Different package subclass	No	No	Yes	Yes
Different package non-subclass	No	No	No	Yes



Animal Hierarchical

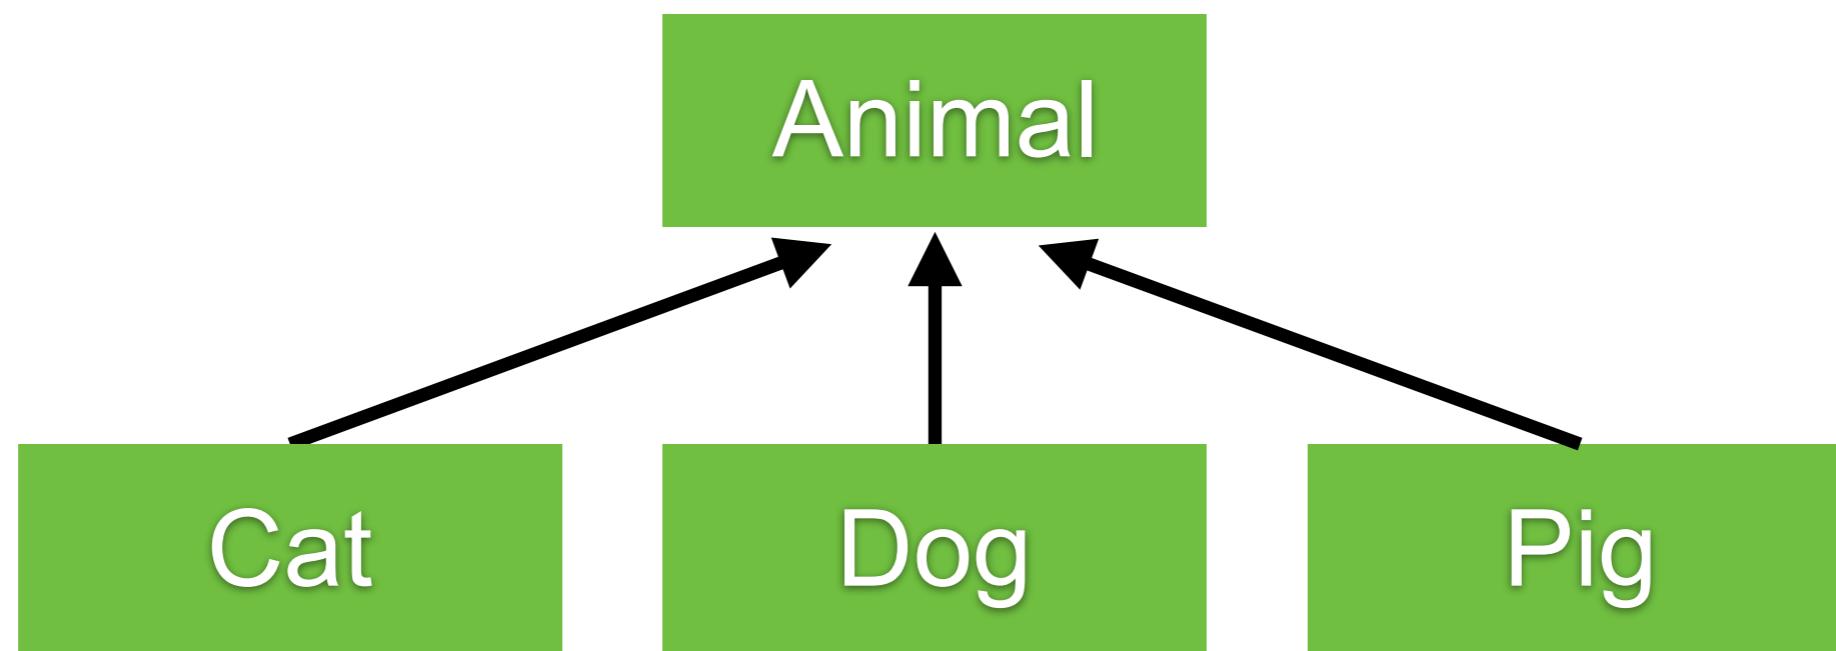

Animal class

```
class Animal {  
    public void speak(int i) {  
        System.out.println("Animal "+ i);  
    }  
}
```



Subclass class

```
class Cat extends Animal {  
    @Override  
    public void speak(int i) {  
        System.out.println("Cat "+ i);  
    }  
}  
  
class Dog extends Animal {  
    @Override  
    public void speak(int i) {  
        System.out.println("Dog "+ i);  
    }  
}  
  
class Pig extends Animal {  
    @Override  
    public void speak(int i) {  
        System.out.println("Pig "+ i);  
    }  
}
```



Animal in the Zoo

```
public class Zoo {  
  
    public static void main(String[] args) {  
        Cat cat = new Cat();  
        Dog dog = new Dog();  
        Pig pig = new Pig();  
  
        cat.speak(1);  
        dog.speak(2);  
        pig.speak(3);  
    }  
  
}
```



Animal in the Zoo

```
public class Zoo {  
    public static void main(String[] args) {  
        Cat cat = new Cat();  
        Dog dog = new Dog();  
        Pig pig = new Pig();  
  
        cat.speak(1);  
        dog.speak(2);  
        pig.speak(3);  
    }  
}
```

Problem with Zoo ?



Problem with Zoo

Contain type-specific in each type

What happen when add new type of Animal ?

We need the better code !!!



Solution

Called Polymorphism

```
public class Zoo {  
    public static void main(String[] args) {  
        Cat cat = new Cat();  
        Dog dog = new Dog();  
        Pig pig = new Pig();  
  
        speak(cat, 1);  
        speak(dog, 2);  
        speak(pig, 3);  
    }  
  
    public static void speak(Animal animal, int i) {  
        animal.speak(i);  
    }  
}
```



OOP with Java Part 2

Abstract classes
Interfaces



Abstract classes

Placeholder for a method that fully defined in a subclass

Class have abstract modifier

Method can have abstract modifier

Abstract method can't be private

Abstract method can't have body

*“Class that contains an abstract method is called
Abstract class”*



Classes

“*Class that contains an abstract method is called
Abstract class*”

“*Class that not contains an abstract method is called
Concrete class*”



Abstract classes

```
abstract class Employee {  
    private int id;  
  
    public abstract double getSalary();  
  
    public boolean sameSalary(Employee other) {  
        return this.getSalary() == other.getSalary();  
    }  
}
```



Pitfall of abstract class

You can't create instances of an abstract class
Abstract class can only use to derive more classes



Purpose of abstract class


Create a function as base class
But can be extended by sub class

```
abstract class Report {  
    public abstract void createHeader();  
    public abstract void createBody();  
    public abstract void createFooter();  
  
    public void generate() {  
        createHeader();  
        createBody();  
        createFooter();  
    }  
}
```



Purpose of abstract class


Template method design pattern

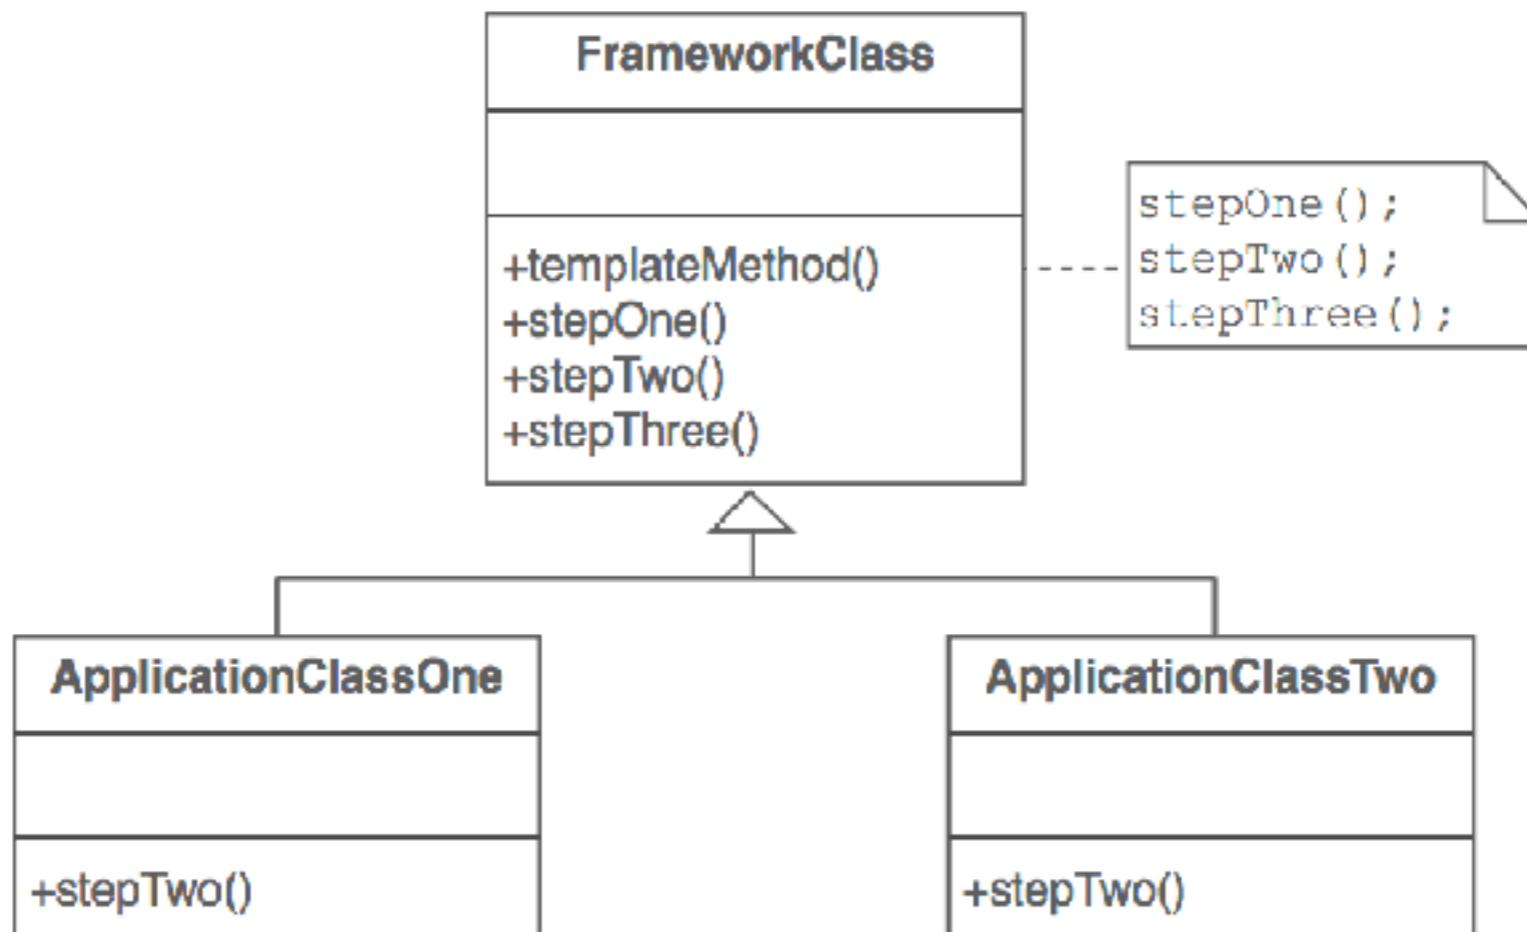

https://sourcemaking.com/design_patterns/template_method



Template method design pattern

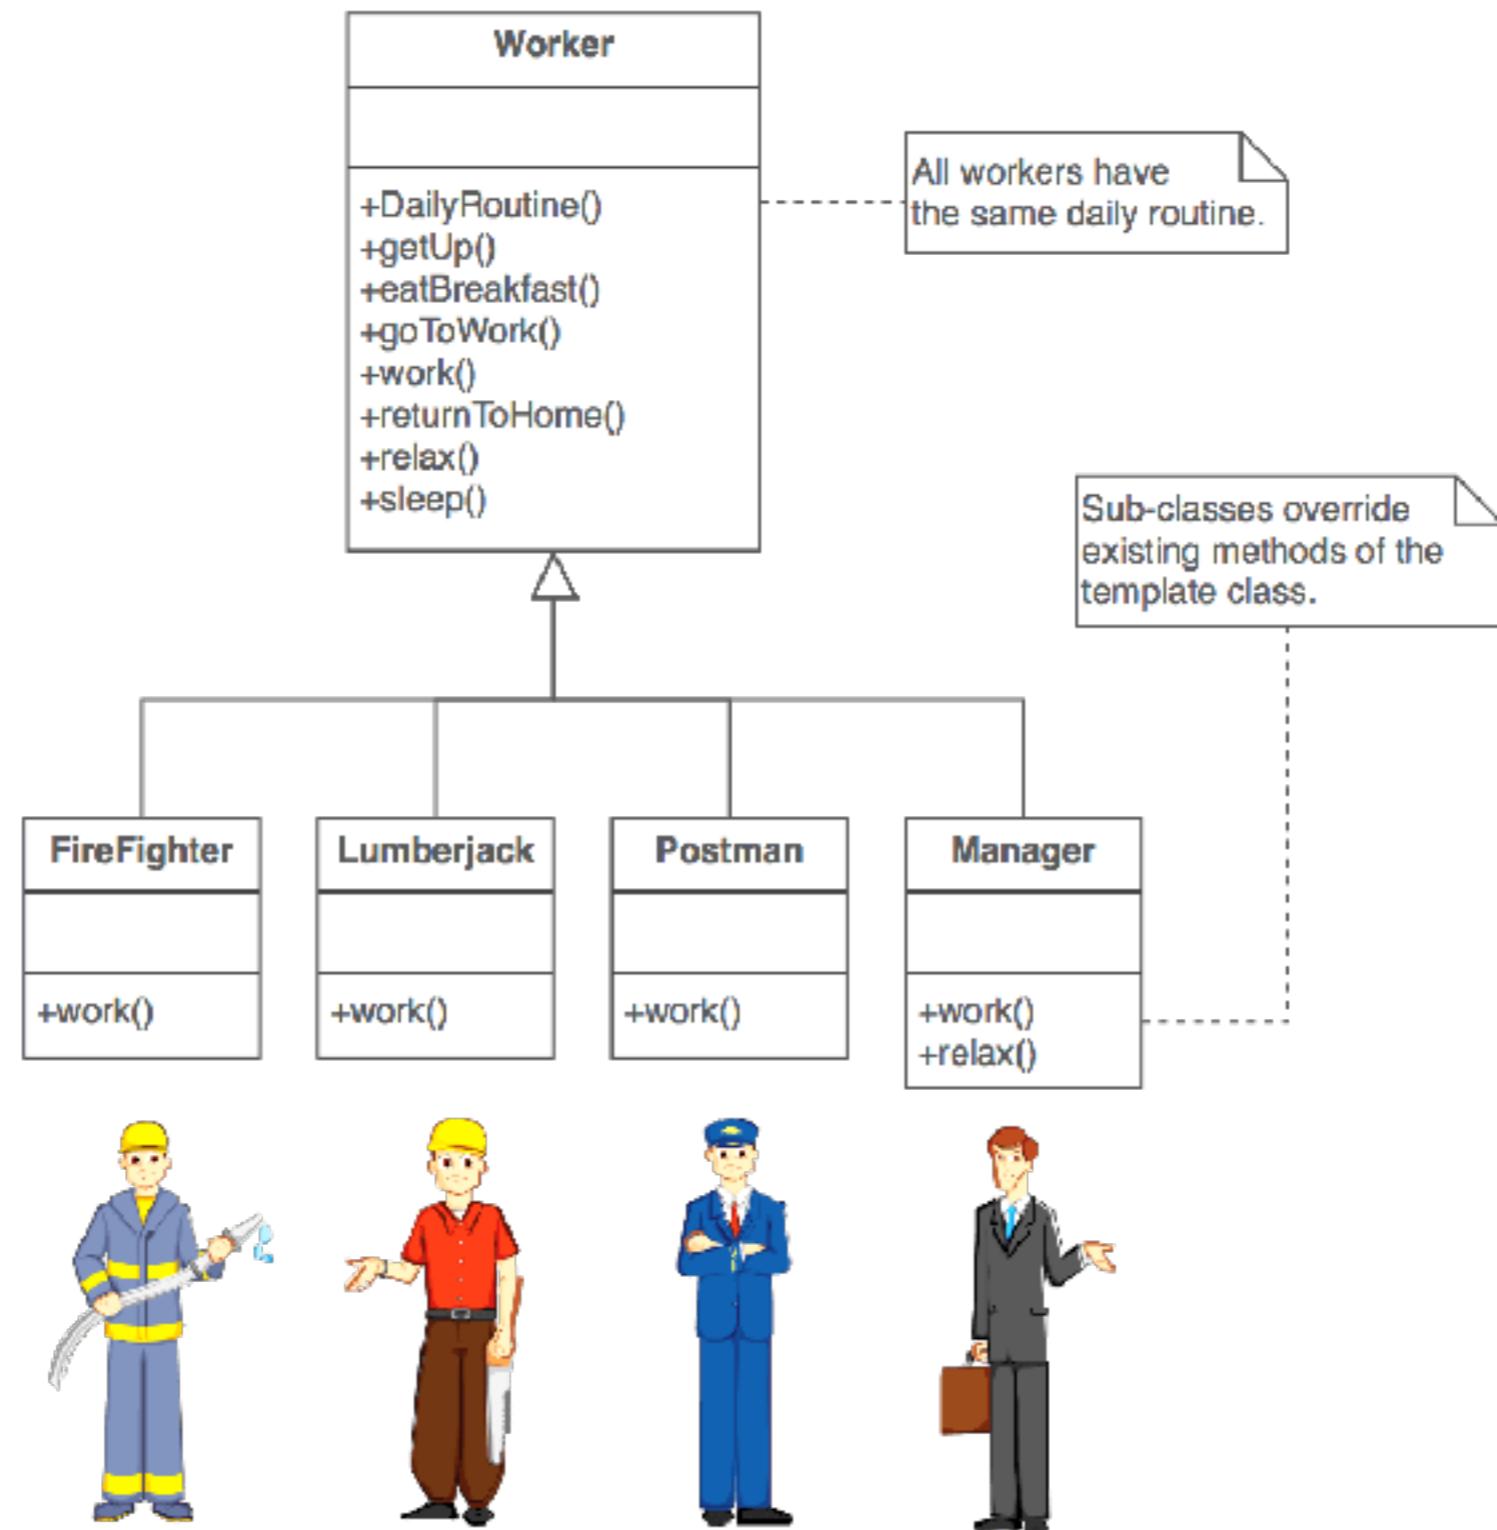

Interfaces

Like an extreme abstract class

All of methods in an interface are abstract by default

Not a class

No instance variables

```
interface Animal {  
    void eat();  
    void sleep();  
}
```



Using interface from class (1)

```
class Cat implements Animal {
```

```
    @Override  
    public void eat() {  
    }
```

```
    @Override  
    public void sleep() {  
    }
```

```
}
```



Using interface from class (2)

```
class Cat implements Animal {  
  
    @Override  
    public void eat() {  
    }  
  
    @Override  
    public void sleep() {  
    }  
}
```

Need to implements all method from interface



Multiple implements interfaces

Class can be implement multiple interfaces

```
interface Animal {  
    void eat();  
    void sleep();  
}
```

```
interface Animal2018 {  
    void die();  
}
```



Multiple implements interfaces

```
class BlackPanther implements Animal, Animal2018 {  
  
    @Override  
    public void die() {  
    }  
  
    @Override  
    public void eat() {  
    }  
  
    @Override  
    public void sleep() {  
    }  
  
}
```



Extending an interface

A new interface can add method definitions to existing interface by **extending** the old

```
interface Animal {  
    void eat();  
    void sleep();  
}
```

```
interface Animal2018 extends Animal {  
    void die();  
}
```




Java Collection Framework


<https://docs.oracle.com/javase/8/docs/technotes/guides/collections/overview.html>



Java Collection Framework

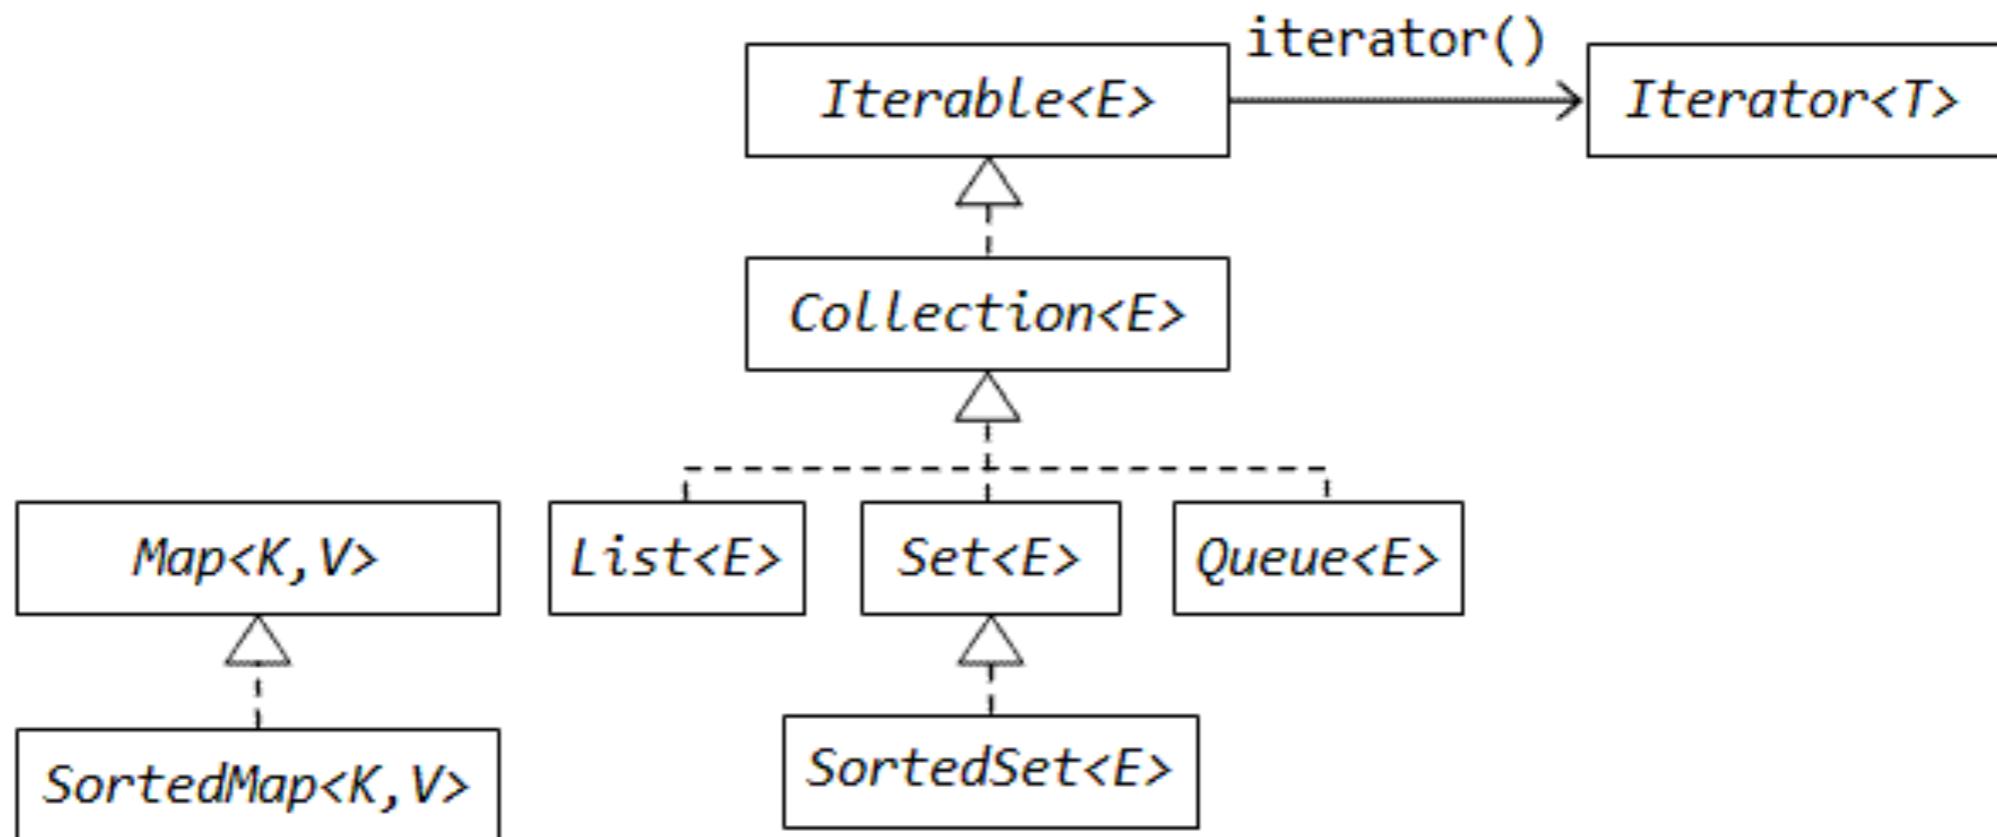

Java Collection Framework

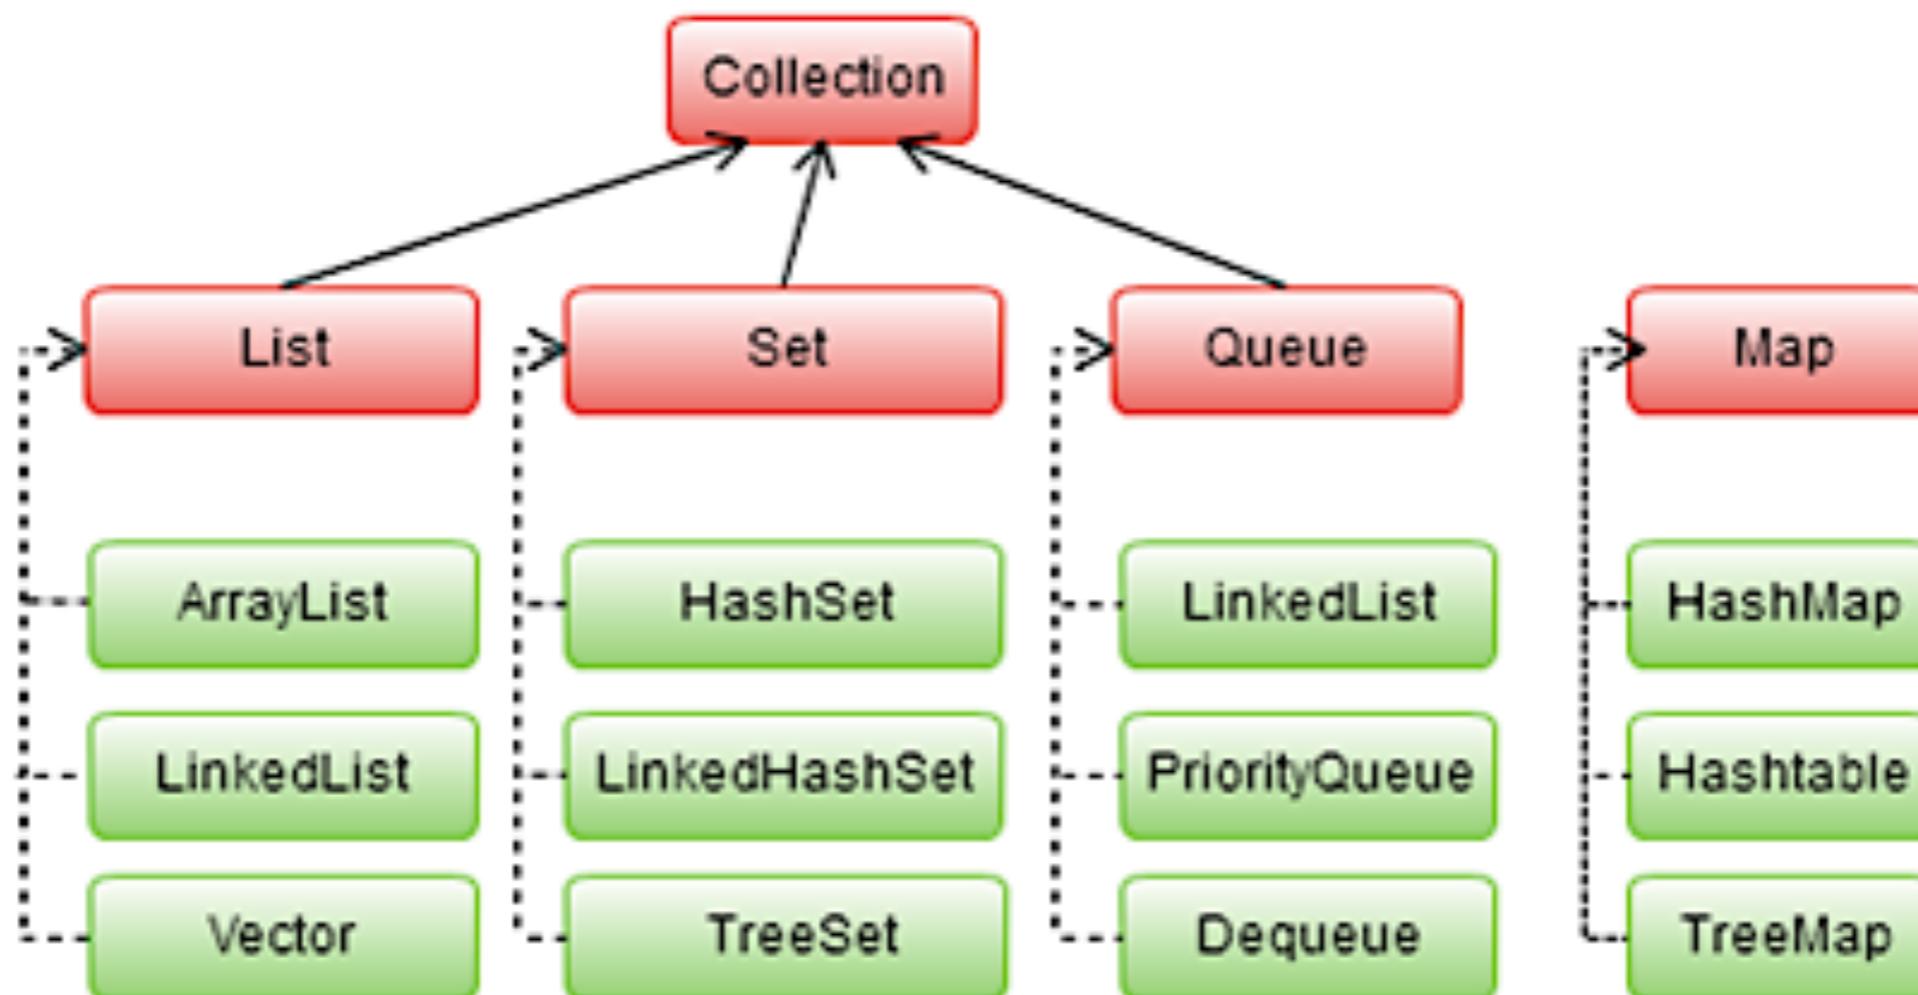

Notable Java collections libraries

Fastutil

<http://fastutil.dl.unimi.it/>

Fast & compact type-specific collections for Java
Great default choice for collections of primitive types, like int or long. Also handles big collections with more than 2^{31} elements well.

Guava

<https://github.com/google/guava>

Google Core Libraries for Java 6+
Perhaps the default collection library for Java projects. Contains a magnitude of convenient methods for creating collection, like fluent builders, as well as advanced collection types.

Eclipse Collections

<https://www.eclipse.org/collections/>

Features you want with the collections you need
Previously known as gs-collections, this library includes almost any collection you might need: primitive type collections, multimap, bidirectional maps and so on.

JCTools

<https://github.com/JCTools/JCTools>

Java Concurrency Tools for the JVM.
If you work on high throughput concurrent applications and need a way to increase your performance, check out JCTools.

What can your collection do for you?

Collection class	Thread-safe alternative	Your data				Operations on your collections					
		Individual elements	Key-value pairs	Duplicate element support	Primitive support	FIFO	Sorted	LIFO	Perform 'contains' check	By key	By value
HashMap	ConcurrentHashMap	✗	✓	✗	✗	✗	✗	✗	✓	✓	✗
HashBiMap (Guava)	Maps.synchronizedBiMap (new HashBiMap())	✗	✓	✗	✗	✗	✗	✗	✓	✓	✓
ArrayListMultimap (Guava)	Maps.synchronizedMultiMap (new ArrayListMultimap())	✗	✓	✓	✗	✗	✗	✗	✓	✓	✗
LinkedHashMap	Collections.synchronizedMap (new LinkedHashMap())	✗	✓	✗	✗	✓	✗	✗	✓	✓	✗
TreeMap	ConcurrentSkipListMap	✗	✓	✗	✗	✗	✓	✗	✓*	✓*	✗
Int2IntMap (Fastutil)		✗	✓	✗	✓	✗	✗	✗	✓	✓	✓
ArrayList	CopyOnWriteArrayList	✓	✗	✓	✗	✓	✗	✓	✗	✗	✓
HashSet	Collections.newSetFromMap (new ConcurrentHashMap<>())	✓	✗	✗	✗	✗	✗	✗	✓	✗	✓
IntArrayList (Fastutil)		✓	✗	✓	✓	✓	✗	✓	✓	✗	✓
PriorityQueue	PriorityBlockingQueue	✓	✗	✓	✗	✗	✓**	✗	✗	✗	✗
ArrayDeque	ArrayBlockingQueue	✓	✗	✓	✗	✓**	✗	✓**	✗	✗	✗

* $O(\log n)$ complexity, while all others are $O(1)$ - constant time

** when using Queue interface methods: offer() / poll()

How fast are your collections?

Collection class	Random access by index / key	Search / Contains	Insert
ArrayList	$O(1)$	$O(n)$	$O(n)$
HashSet	$O(1)$	$O(1)$	$O(1)$
HashMap	$O(1)$	$O(1)$	$O(1)$
TreeMap	$O(\log(n))$	$O(\log(n))$	$O(\log(n))$

Remember, not all operations are equally fast. Here's a reminder of how to treat the Big-O complexity notation:

$O(1)$ - constant time, really fast, doesn't depend on the size of your collection

$O(\log(n))$ - pretty fast, your collection size has to be extreme to notice a performance impact

$O(n)$ - linear to your collection size: the larger your collection is, the slower your operations will be

BROUGHT TO YOU BY
JRebel

http://files.zeroturnaround.com/pdf/zt_java_collections_cheat_sheet.pdf



Types of Error in Java




Types of Errors

- Compile-time errors
- Runtime errors
- Logical errors



Exception classes

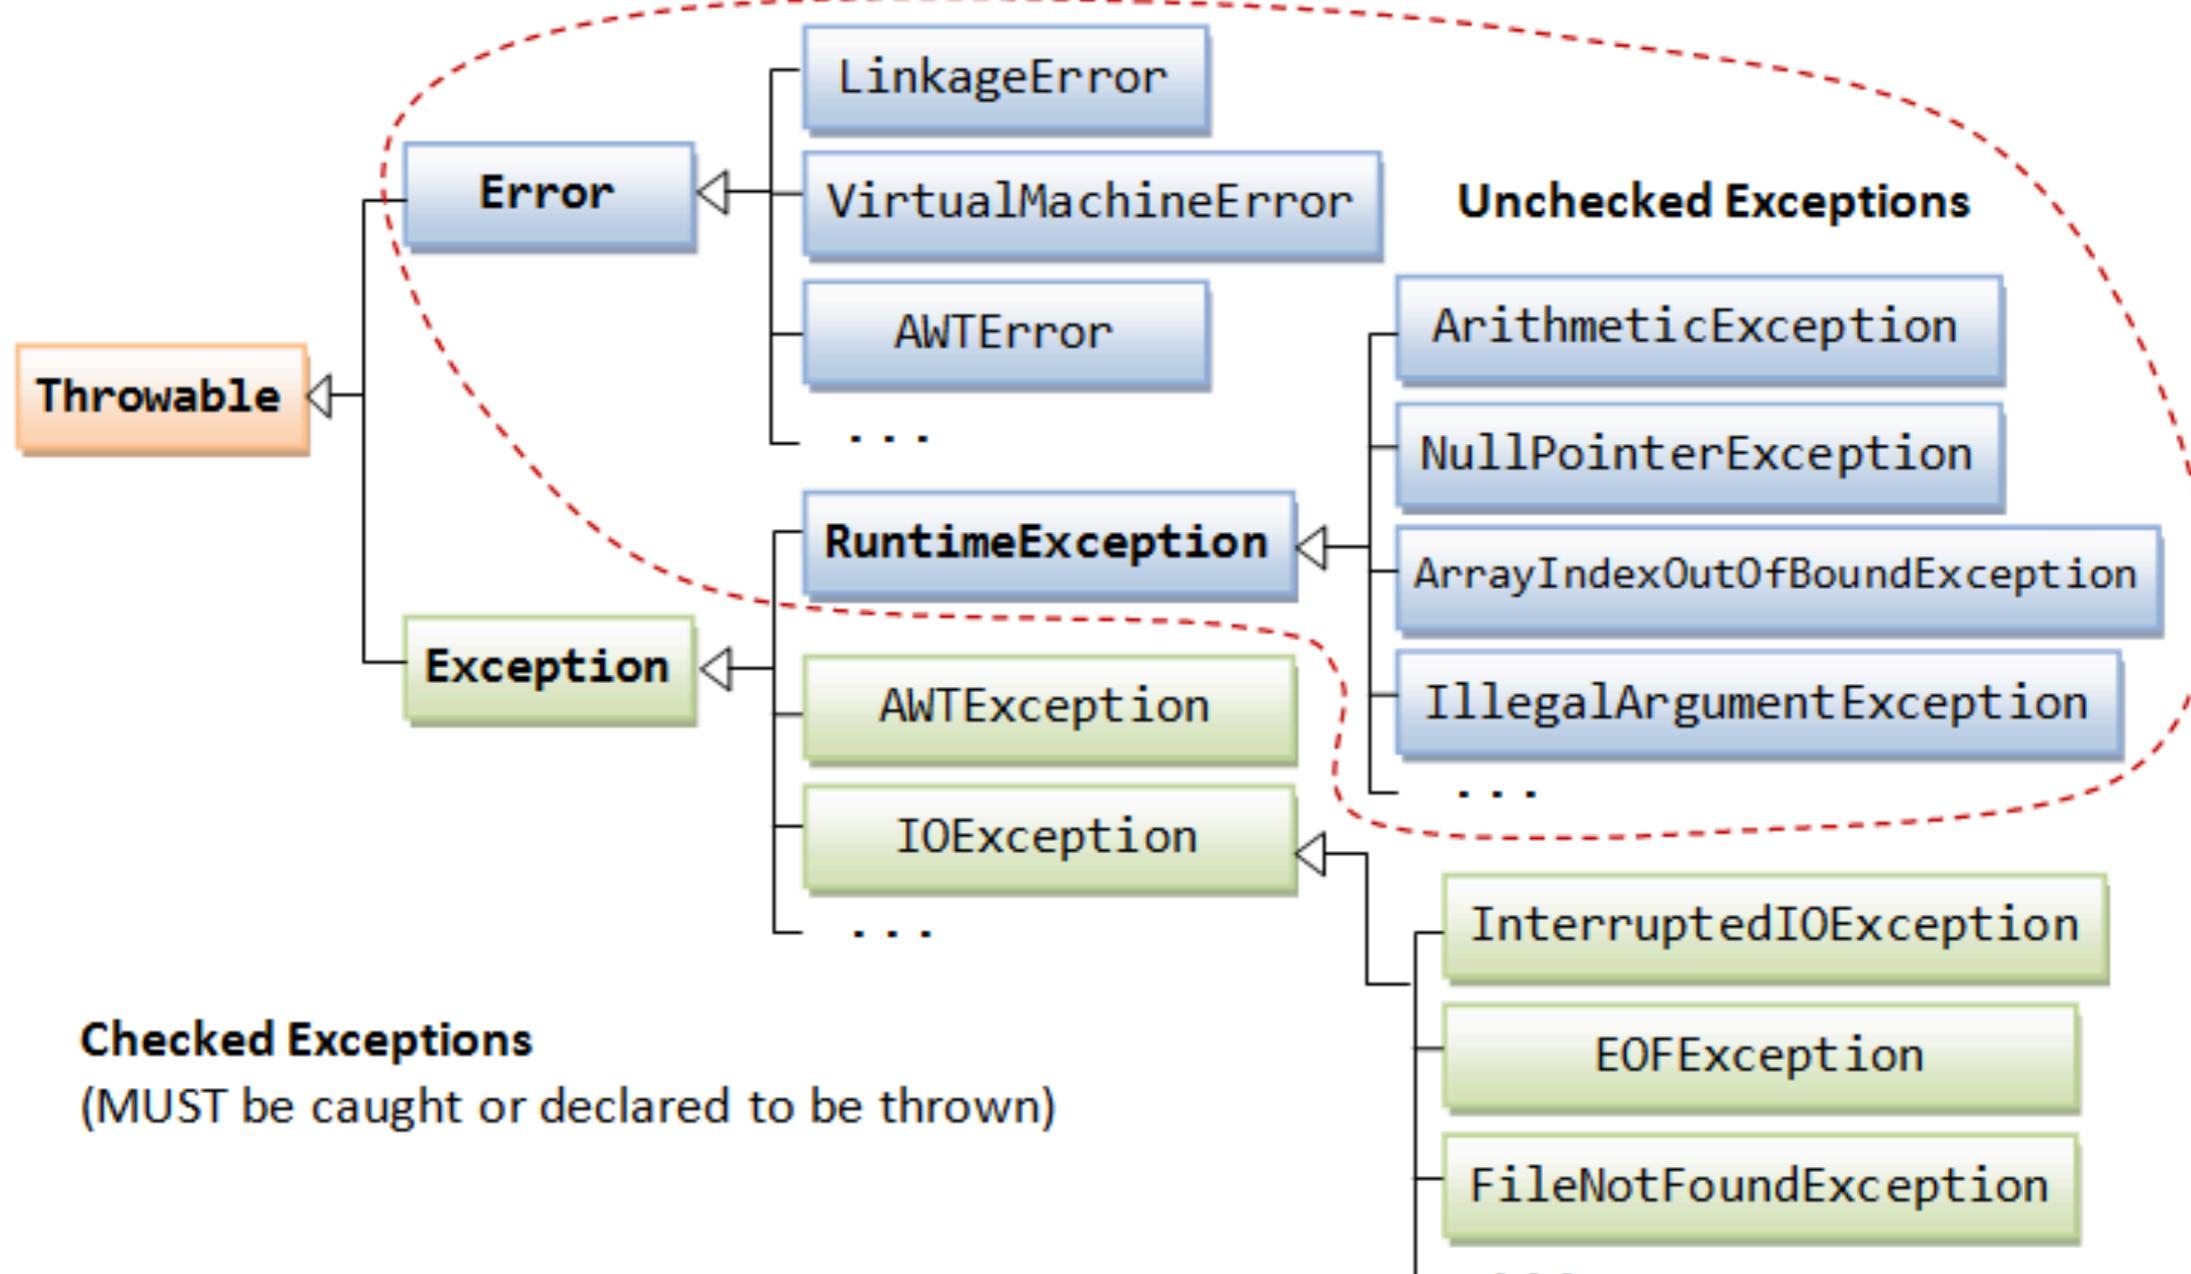

Lambda expression



Java 8 Best Practices Cheat Sheet



BROUGHT TO YOU BY



Default methods

Evolve interfaces & create traits

```
// Default methods in interfaces
@FunctionalInterface
interface Utilities {
    default Consumer<Runnable> m() {
        return (r) -> r.run();
    }

    // default methods, still functional
    Object function(Object o);
}

class A implements Utilities { // implement
    public Object function(Object o) {
        return new Object();
    }

    // call a default method
    Consumer<Runnable> n = new A().m();
}
}
```

Traits: 1 default method per interface
Don't enhance functional interfaces
Only conservative implementations

Lambdas

Syntax:

```
(parameters) -> expression
(parameters) -> { statements; }
```

```
// takes a Long, returns a String
Function<Long, String> f = (l) -> l.toString();

// takes nothing gives you Threads
Supplier<Thread> s = Thread::currentThread;

// takes a string as the parameter
Consumer<String> c = System.out::println;

// use them with streams
new ArrayList<String>().stream();

// peek: debug streams without changes
peek(e -> System.out.println(e));

// map: convert every element into something
map(e -> e.hashCode());

// filter: pass some elements through
filter(e -> ((e.hashCode() % 2) == 0));

// collect all values from the stream
collect(Collectors.toCollection(TreeSet::new))
```

java.util. Optional

A container for possible null values

```
// Create an optional
Optional<String> optional =
Optional.ofNullable(a);

// process the optional
optional.map(s -> "RebellLabs:" + s);

// map a function that returns Optional
optional.flatMap(s -> Optional.ofNullable(s));

// run if the value is there
optional.ifPresent(System.out::println);

// get the value or throw an exception
optional.get();

// return the value or the given value
optional.orElse("Hello world!");

// return empty Optional if not satisfied
optional.filter(s -> s.startsWith("RebellLabs"));
```

Rules of Thumb

Expressions over statements
Refactor to use method references
Chain lambdas rather than growing them

Fields - use plain objects
Method parameters, use plain objects
Return values - use Optional
Use `orElse()` instead of `get()`

http://files.zeroturnaround.com/pdf/zt_java8_best_practices.pdf



Lambda expression

Functionality as a method arguments

Code as data

Help code more compact



Demo with Sorting data

Sorting data in List with Comparator

Employee id=1 name=First

Employee id=2 name=Second

Employee id=3 name=Third



Create class Employee

```
class Employee {  
    private int id;  
    private String name;  
    private double salary;  
  
    //Setter and Getter methods
```



Sorting with java.util.Comparator

```
Comparator<Employee> sortByName = new Comparator<Employee>() {  
    @Override  
    public int compare(Employee e1, Employee e2) {  
        return e1.getName().compareTo(e2.getName());  
    }  
};
```



Using with Collections.sort()

```
List<Employee> list = new ArrayList<>();
list.add(new Employee(500, "First", 150000));
list.add(new Employee(504, "Second", 120000));
list.add(new Employee(503, "Third", 100000));
list.add(new Employee(730, "Forth", 45000));

Collections.sort(list, sortByName);
list.forEach(System.out::println);
```



Run and see output

```
demo.java8.lambda.Employee@e9e54c2  
demo.java8.lambda.Employee@65ab7765  
demo.java8.lambda.Employee@1b28cdfa  
demo.java8.lambda.Employee@eed1f14
```

*Try to improve format of output !!
more readable*



Override `toString()`

```
class Employee {  
    private int id;  
    private String name;  
    private double salary;  
  
    @Override  
    public String toString() {  
        return "Employee [id=" + id + ", name=" + name + ", salary=" +  
salary + "]";  
    }  
}
```

```
Employee [id=500, name=First, salary=150000.0]  
Employee [id=504, name=Second, salary=120000.0]  
Employee [id=503, name=Third, salary=100000.0]  
Employee [id=730, name=Forth, salary=45000.0]
```



Sorting with Lambda expression

```
Comparator<Employee> sortByNameWithLambda =  
    (Employee e1, Employee e2) ->  
        e1.getName().compareTo(e2.getName());  
  
Collections.sort(list, sortByName);  
list.forEach(System.out::println);
```



Workshop

Sort by name (Z to A)

Sort by ID (0 to 9)



Java Stream API



Java Stream API

A new package **java.util.stream**

New functionality which contains classes for processing sequences of elements



Java Stream API

Working with List and Array

```
String[] datas = new String[] {"P", "U", "I"};
Stream<String> streams = Arrays.stream(datas);
streams.forEach(System.out::println);
```

```
Stream<String> streams2 = Stream.of("P", "U", "I");
streams2.forEach(System.out::println);
```



Java Stream API

Sequential and Parallel

```
List<String> myList = Arrays.asList("P", "U", "I");
```

```
myList.stream().forEach(System.out::println);
```

```
myList.parallelStream().forEach(System.out::println);
```



Operations

Iterating
Filtering
Mapping
Matching
Collecting



Iterating

```
myList.stream().forEach(System.out::println);
```



Filtering

```
myList.stream()  
    .filter(element -> element.contains("P"))  
    .forEach(System.out::println);
```



Matching

Try to validate all elements of sequence

```
boolean isValid = myList.stream()  
    .anyMatch(element -> element.contains("P"));  
  
out.println(isValid);
```



Mapping

Try to convert elements by apply a special function

```
List<String> results =  
    myList.stream().map(element -> element.toLowerCase())  
        .collect(Collectors.toList());  
  
out.println(results);
```



Collecting

Try to convert stream to collection or map

```
List<String> results =  
    myList.stream().map(element -> element.toLowerCase())  
        .collect(Collectors.toList());  
  
out.println(results);
```



Workshop

United States of America => **USA**

united states of america => **USA**

Light Amplification by Stimulation of Emitted Radiation => **LASER**


Jordan Of the World => **JTW**




Automated testing with Java



Automation test

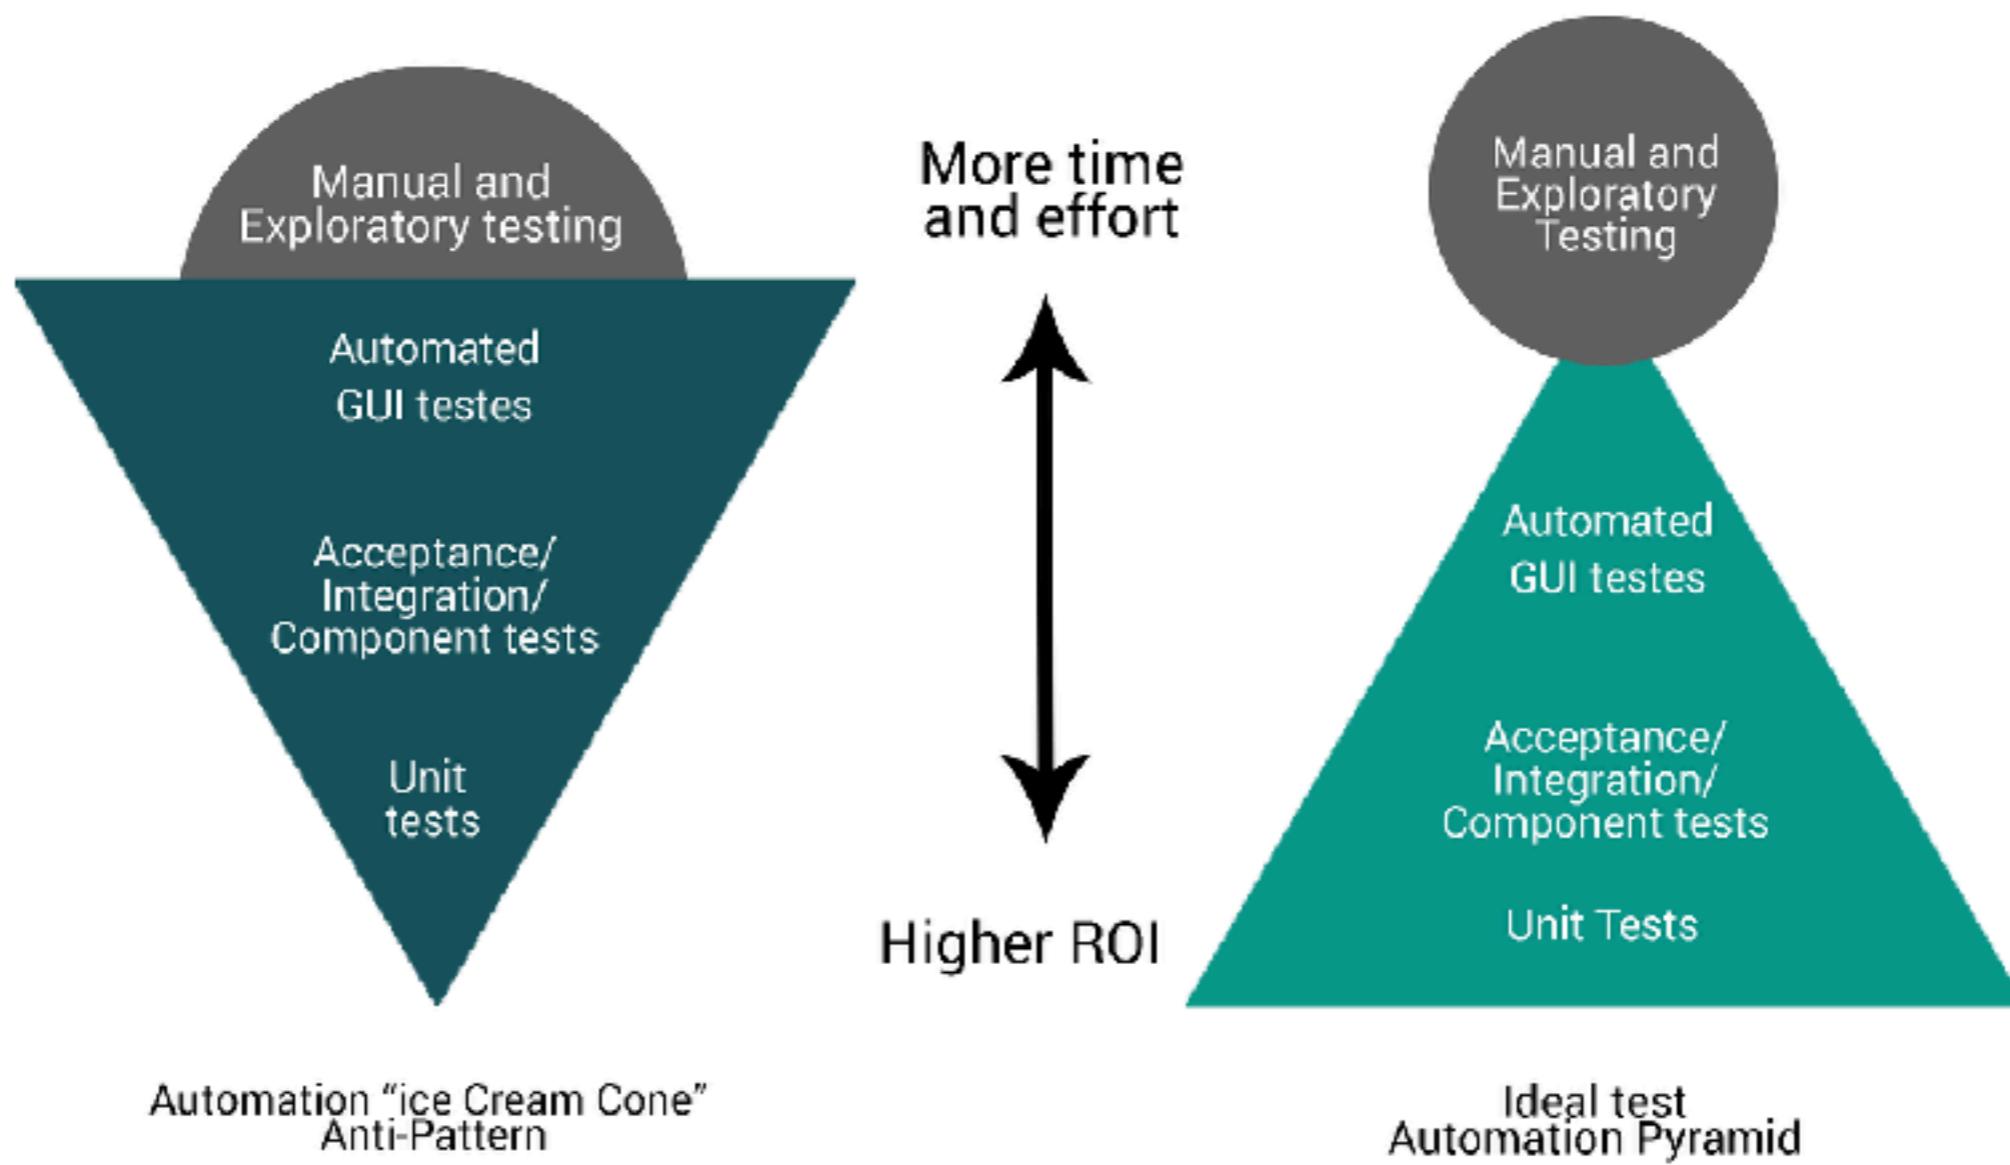

Unit test

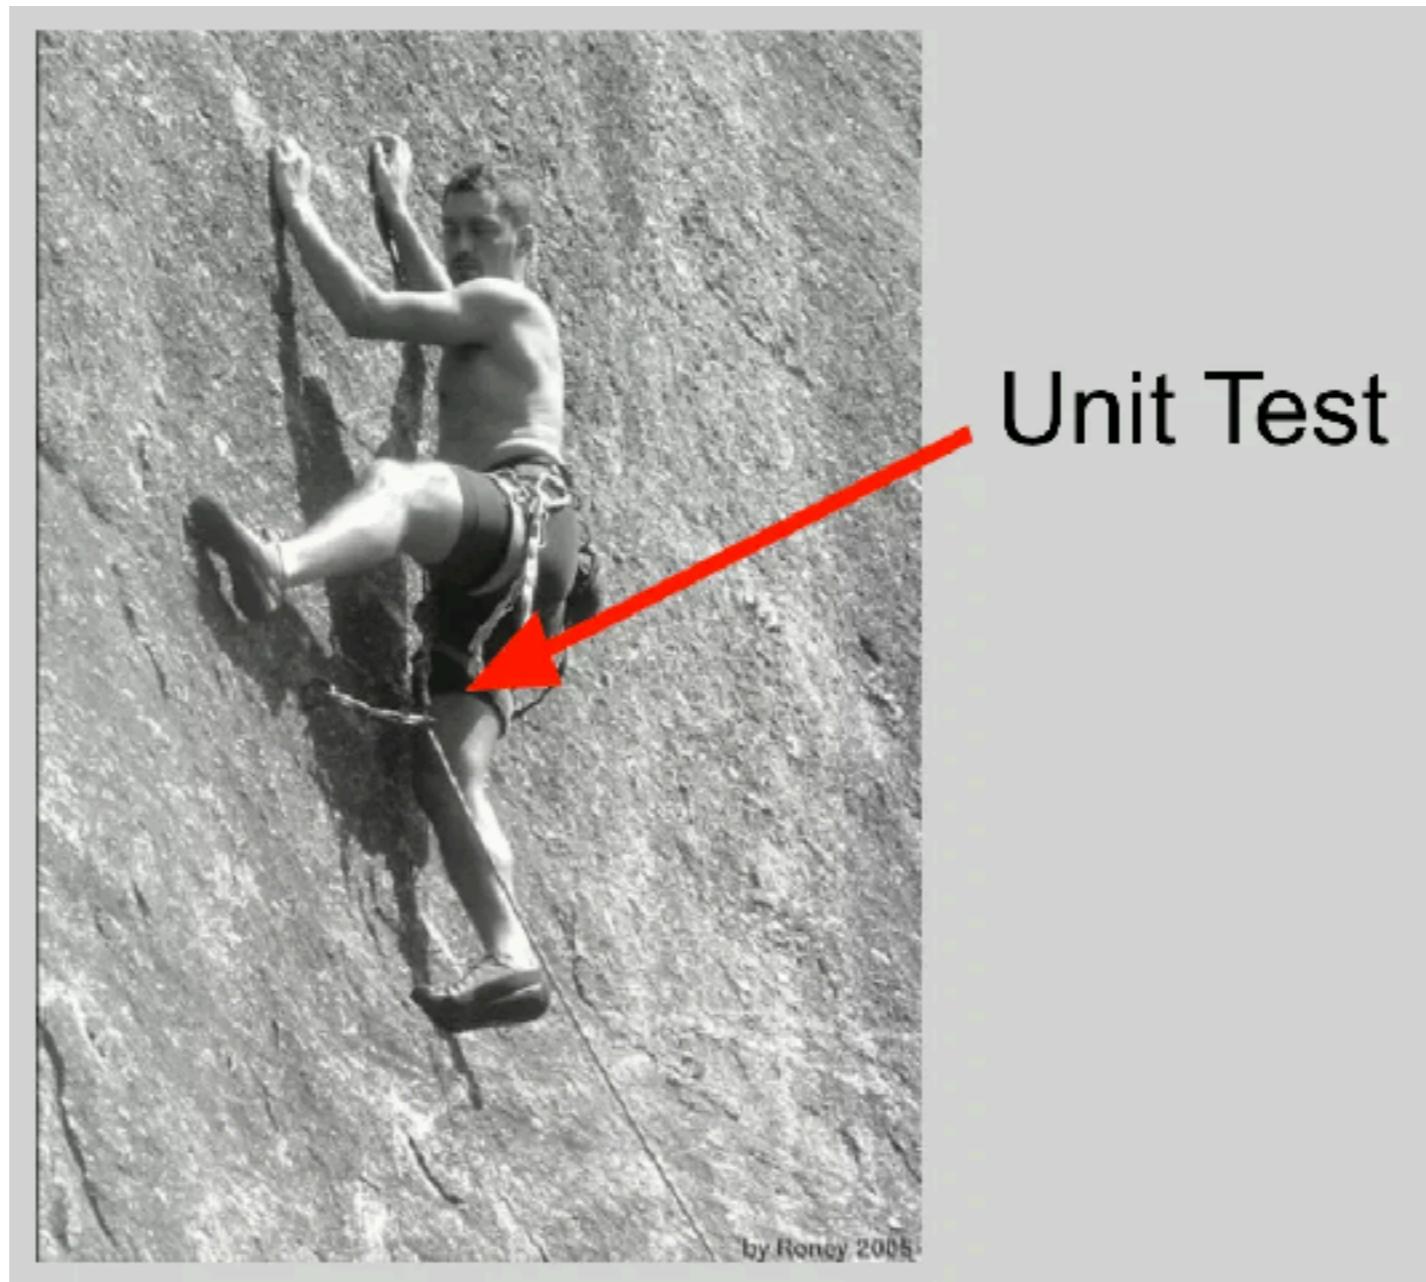

<https://less.works/less/technical-excellence/unit-testing.html>



Purpose of Unit test

Facilitates changes
Simplified integration
Documentation
Design tool




Why Unit test ?

Total cost of ownership
Internal vs External quality
Quality of feedback



Quality of feedback

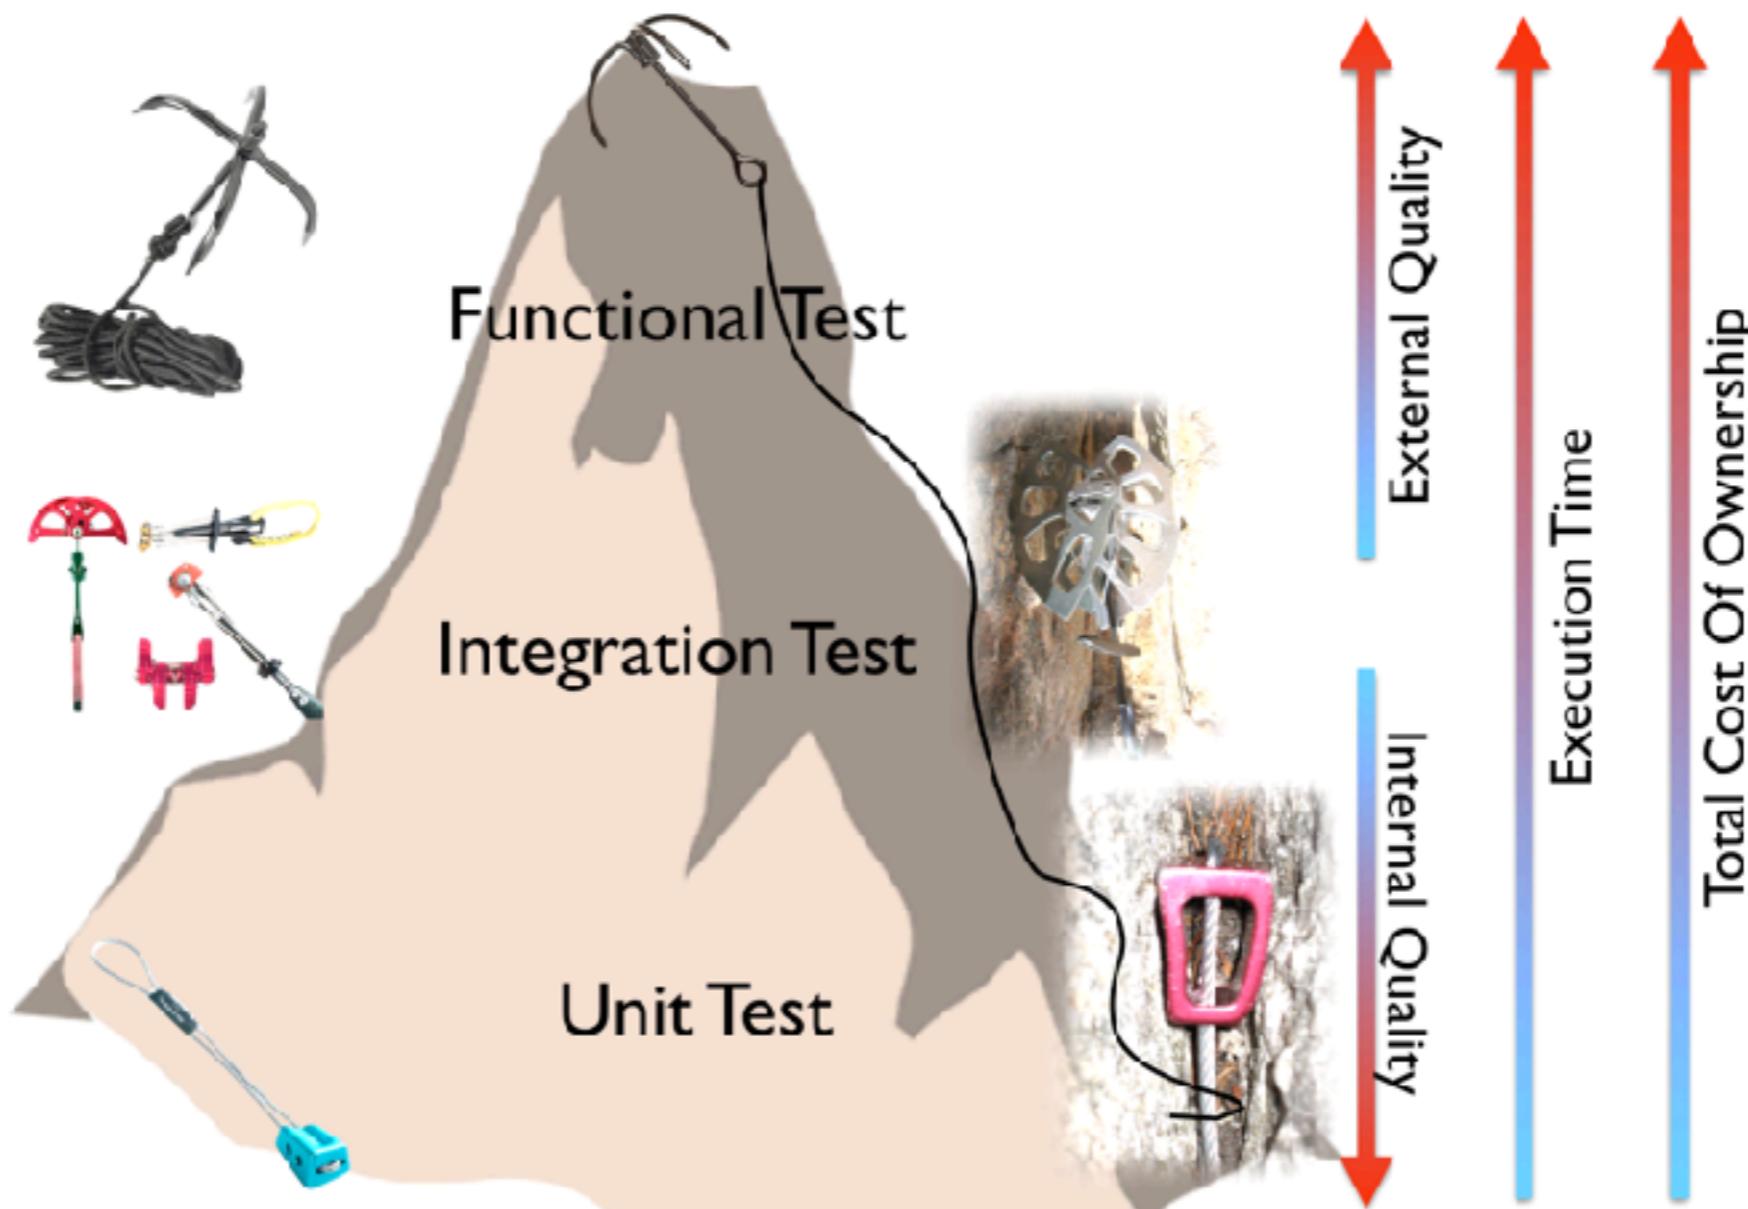

<https://less.works/less/technical-excellence/unit-testing.html>



Golden rule of Unit test


“Each unit test case
should be **very limited** in scope”



Test-Driven Development (TDD)









TDD Cycle

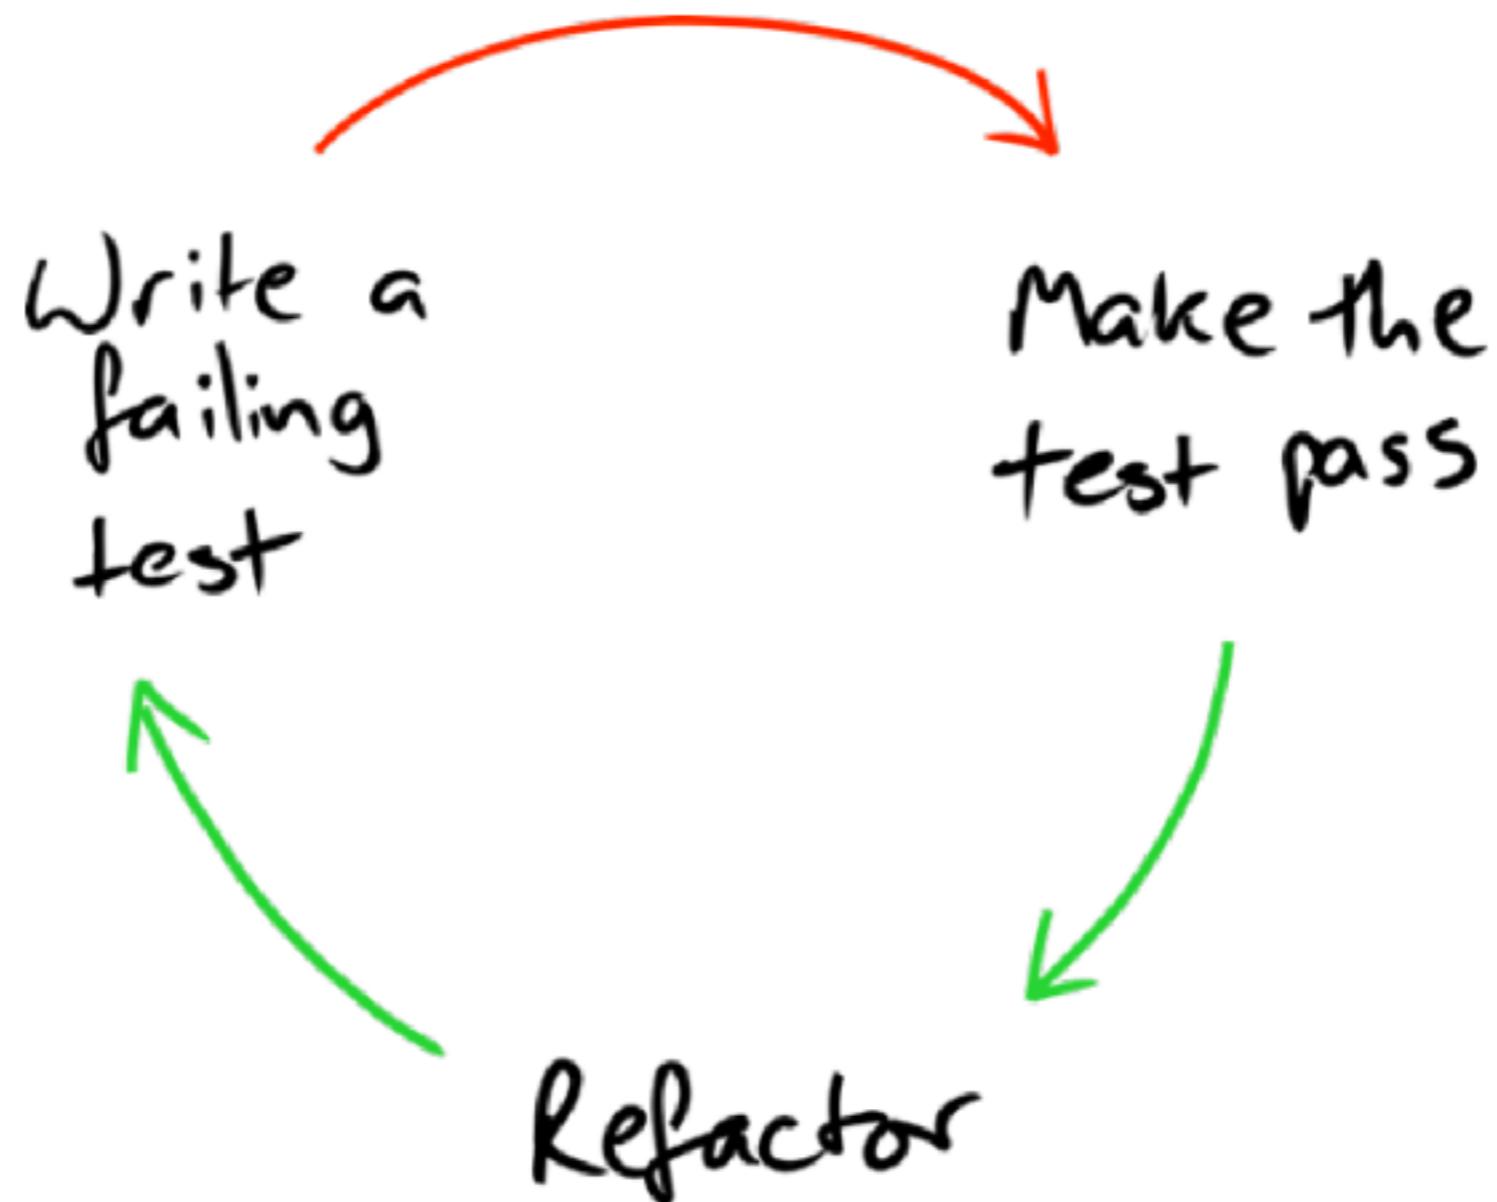

Refactor

Change the structure of code without change the behaviour of code

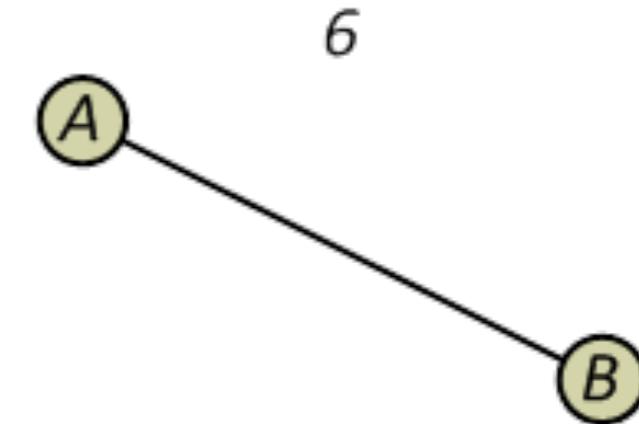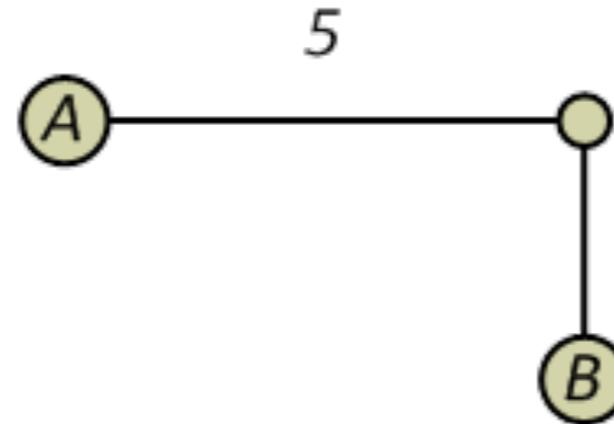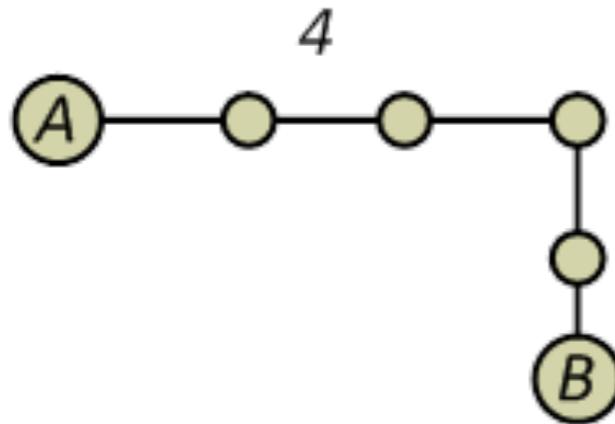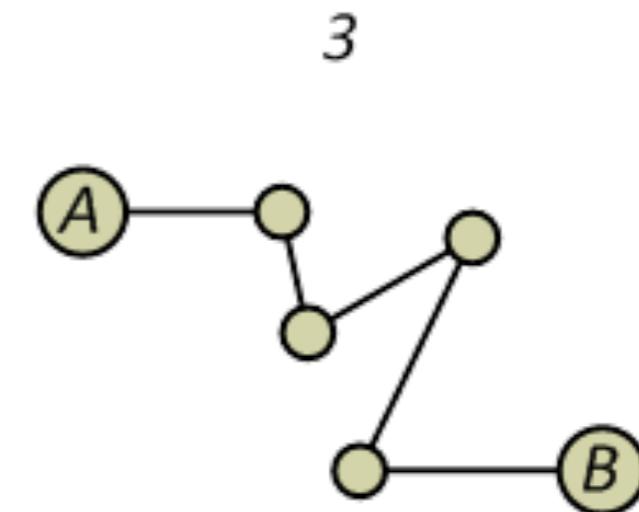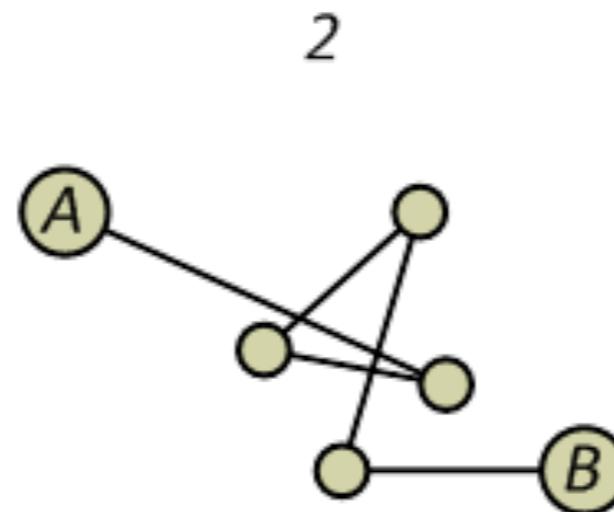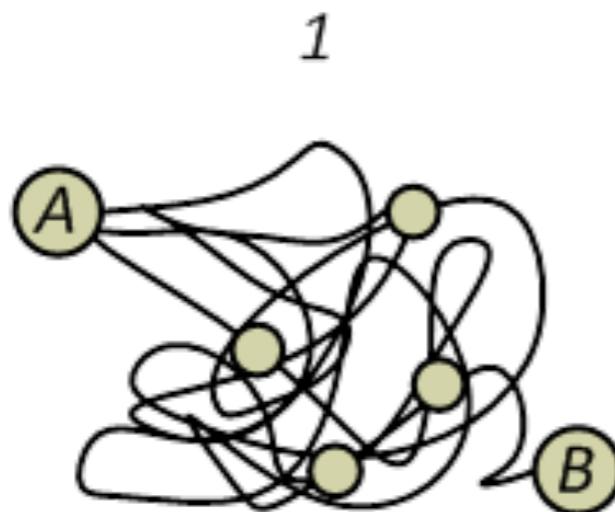


Simple Rule of TDD

1. Write a failing test before write any code
2. Remove duplication code



TDD Cycle

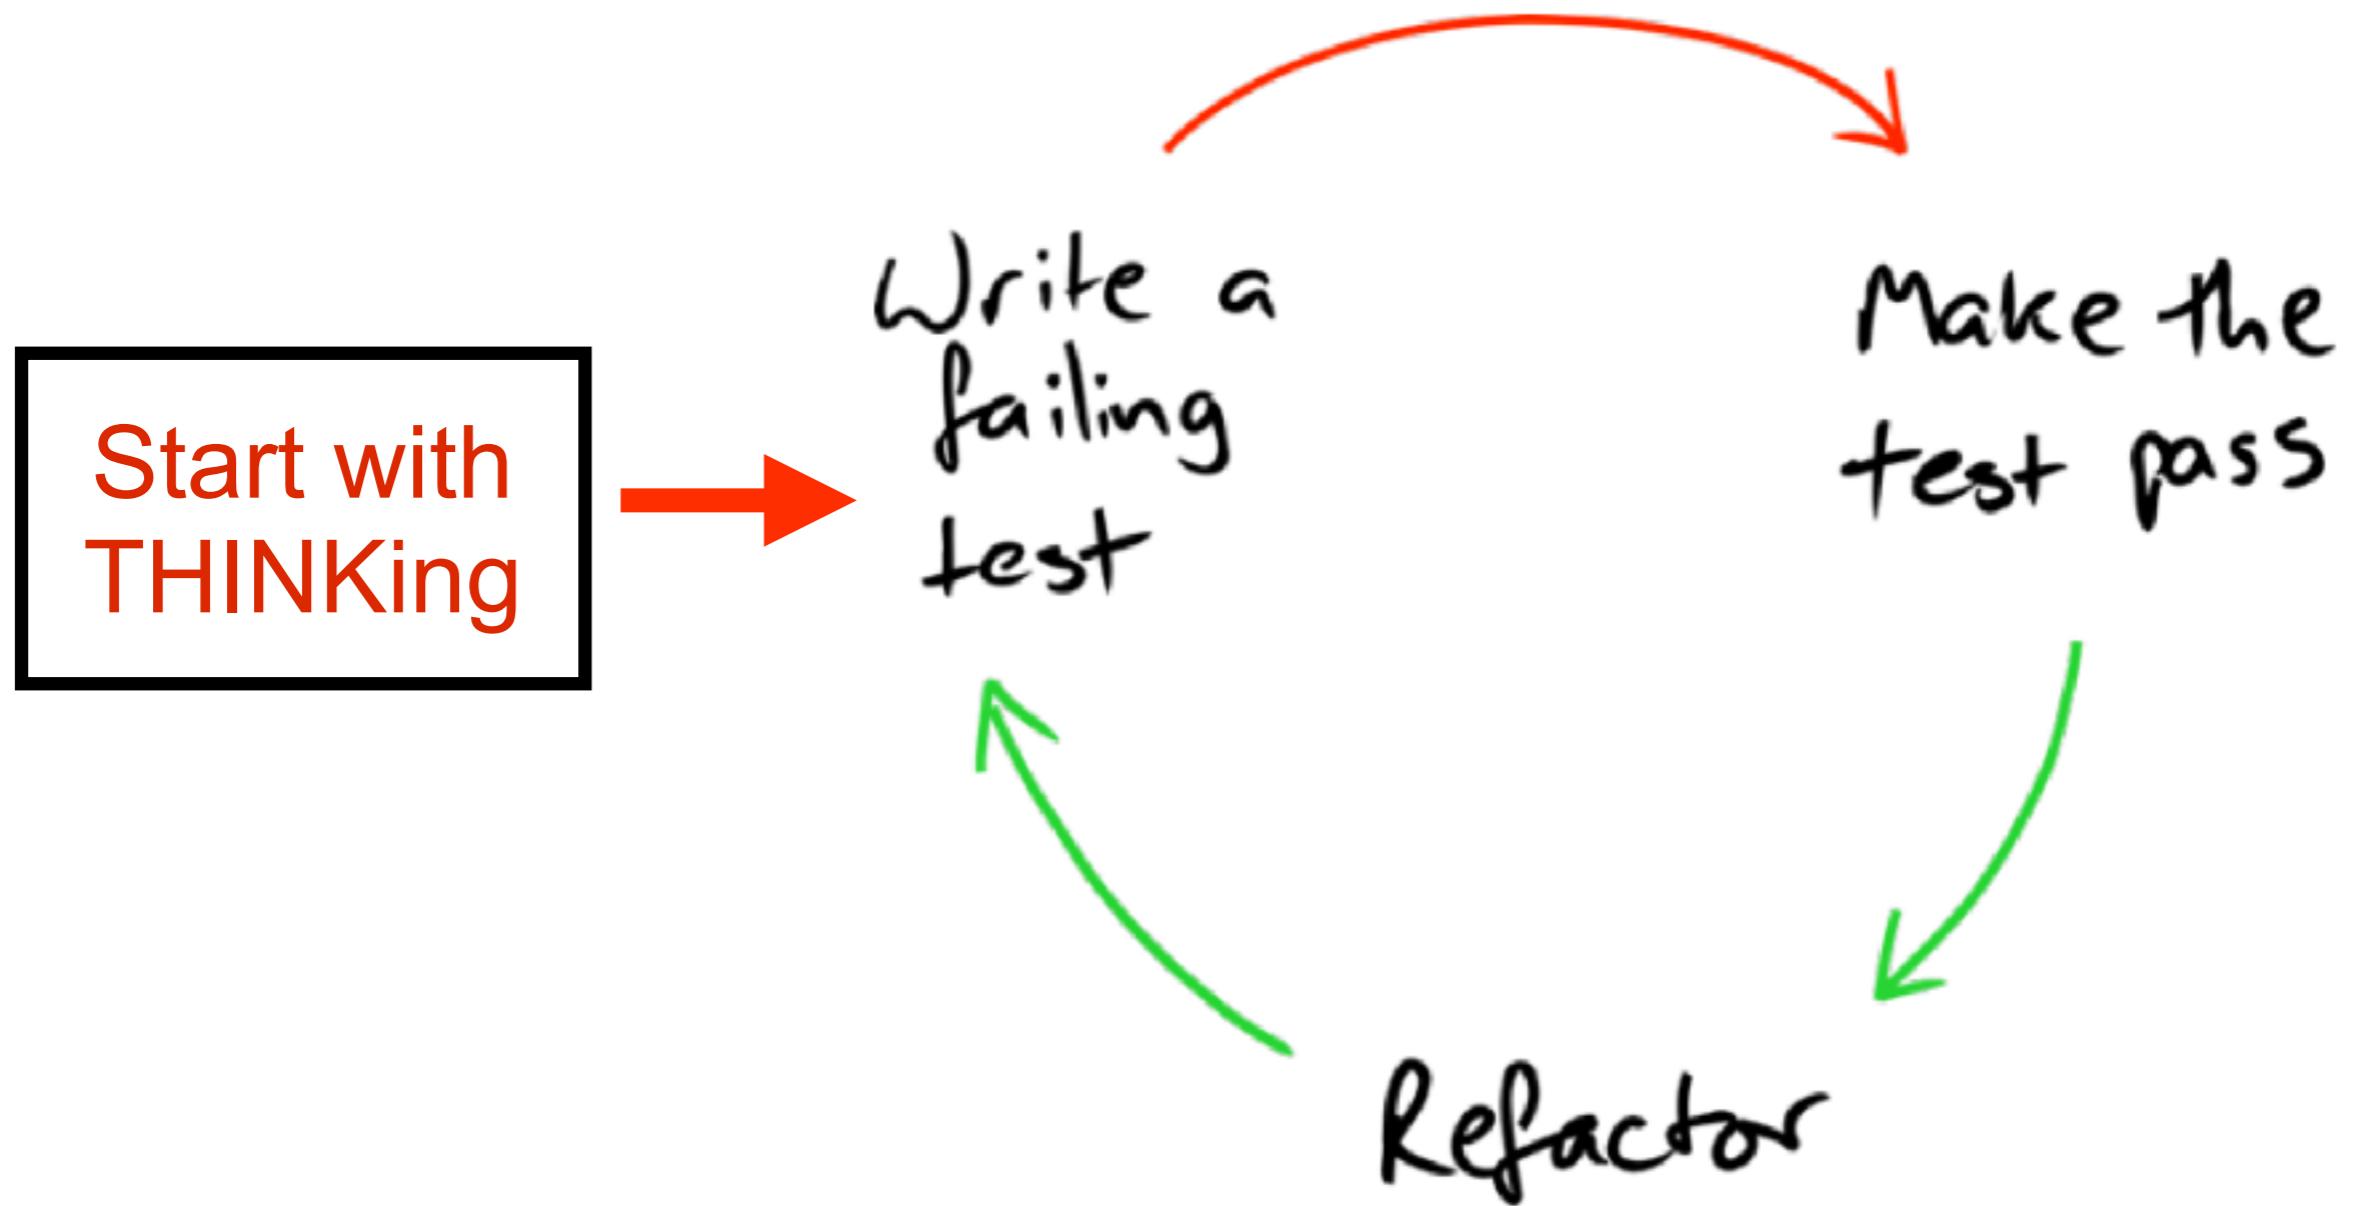


TDD cycle should be

Short
Rhythmic
Incremental
Design-focus
Discipline



TDD with DLP


Debug Later Programming

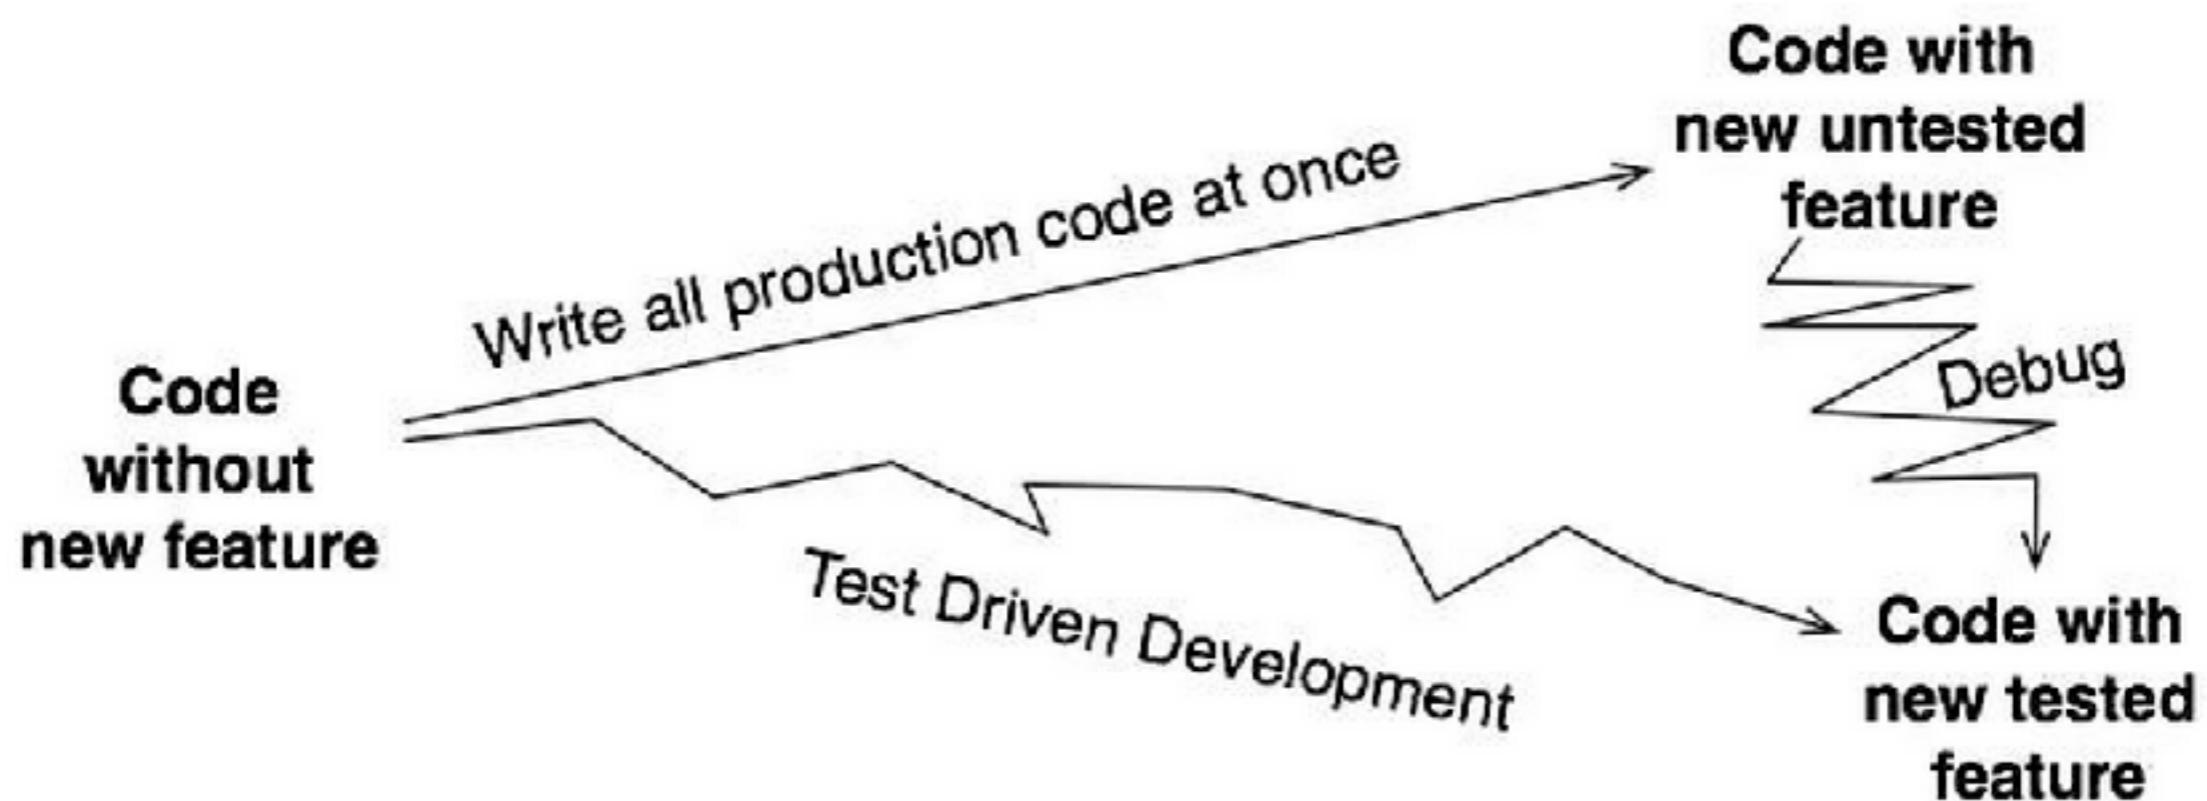

<https://www.wingman-sw.com/>



Let's start with Small Step

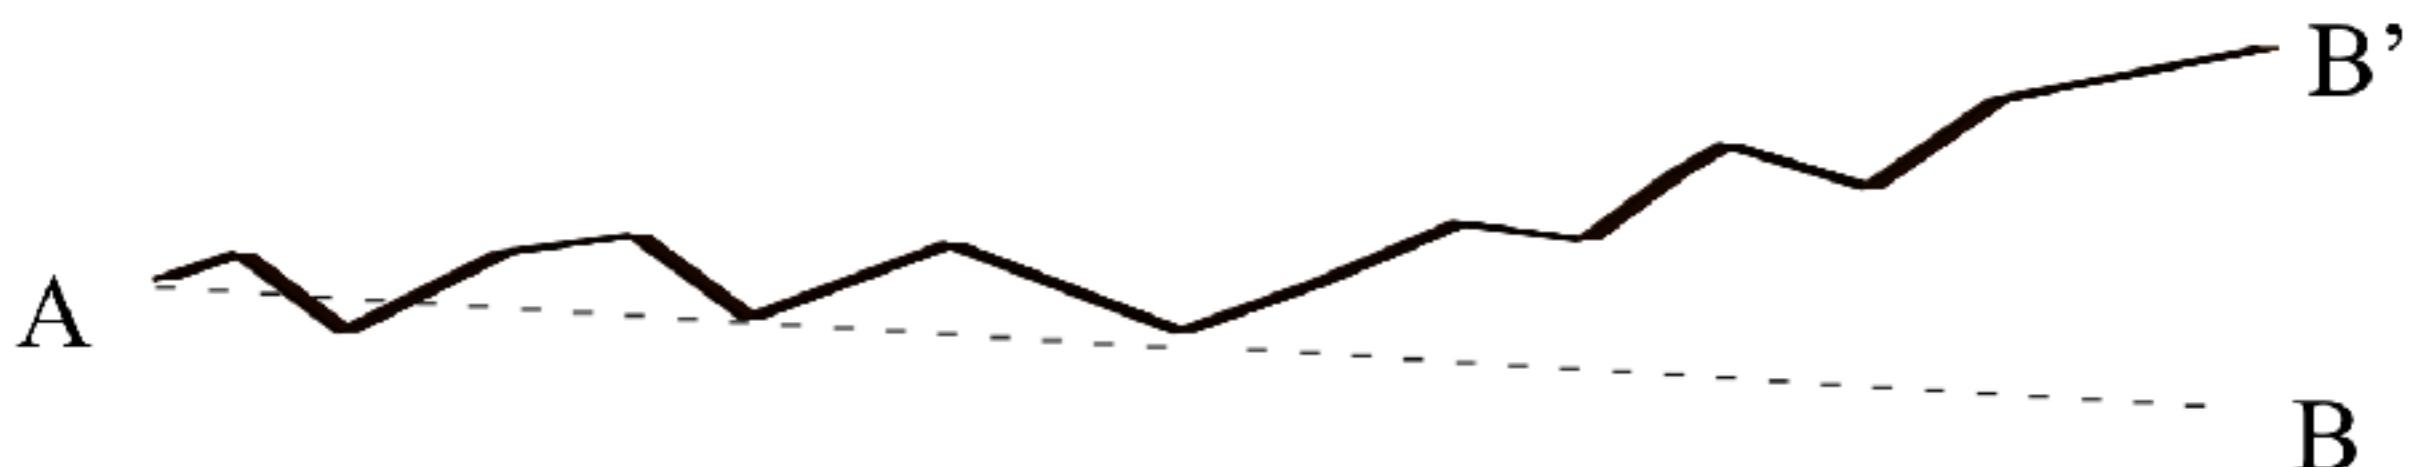

Good Unit Test

Fast
Isolation
Repeatable
Self-validate
Timely



Let's start to write Unit tests with Java

JUnit



**BUT we need to separate the
Test code from Production
code !!**



We need new Project Structure




<https://maven.apache.org/>




Create Apache Maven project


Working with Eclipse IDE

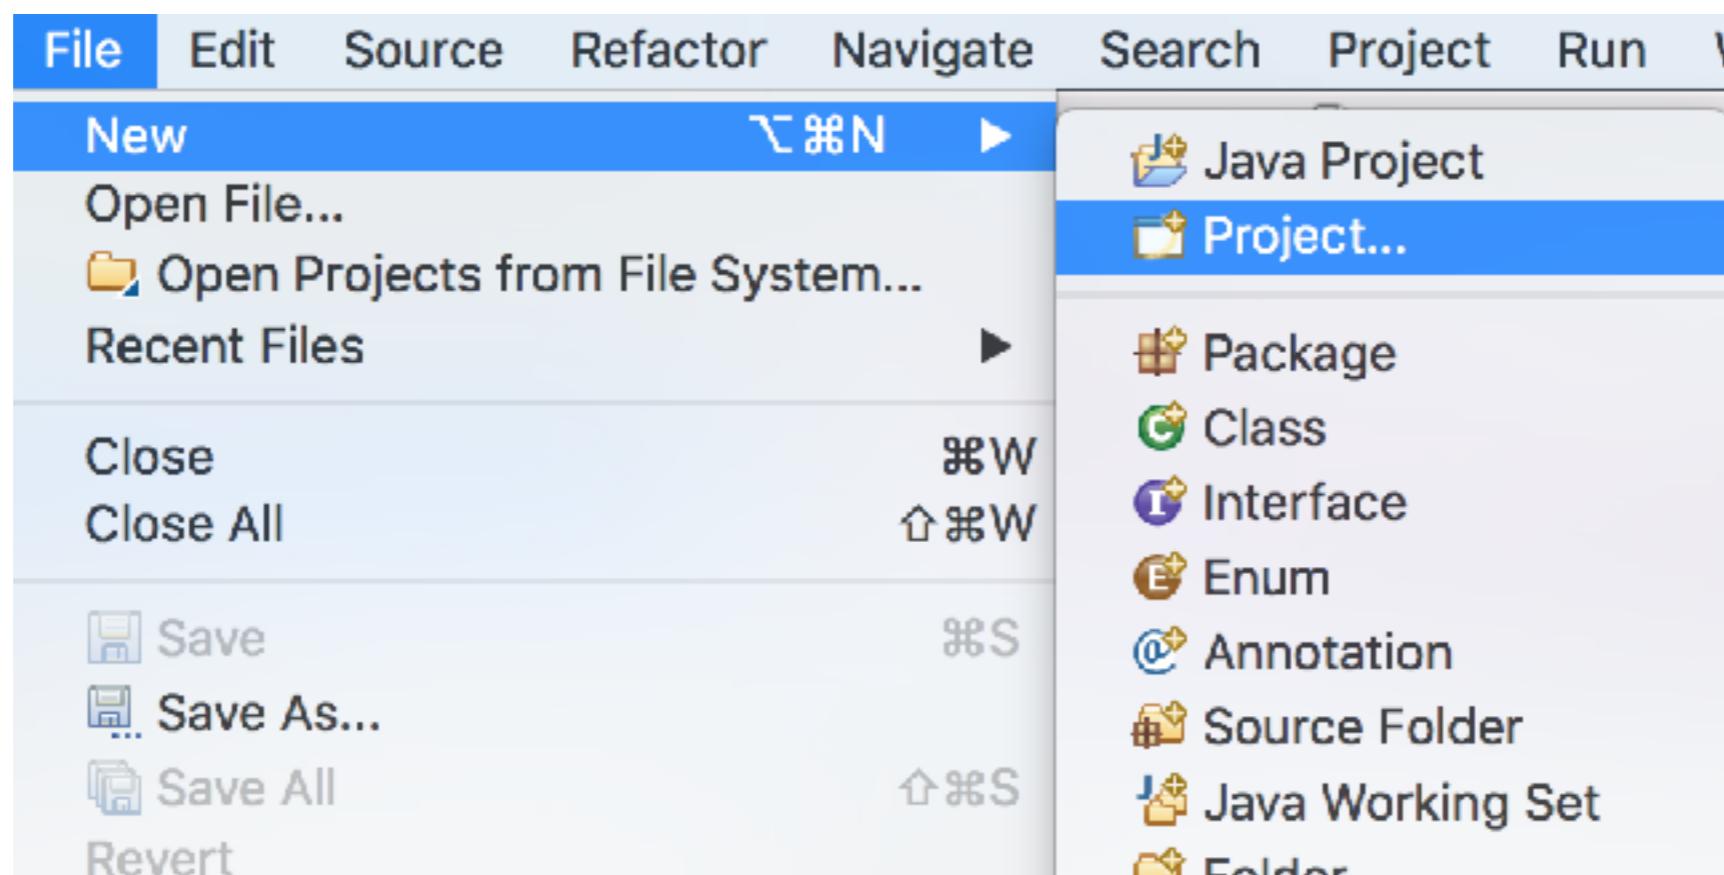


Choose Maven -> Maven project

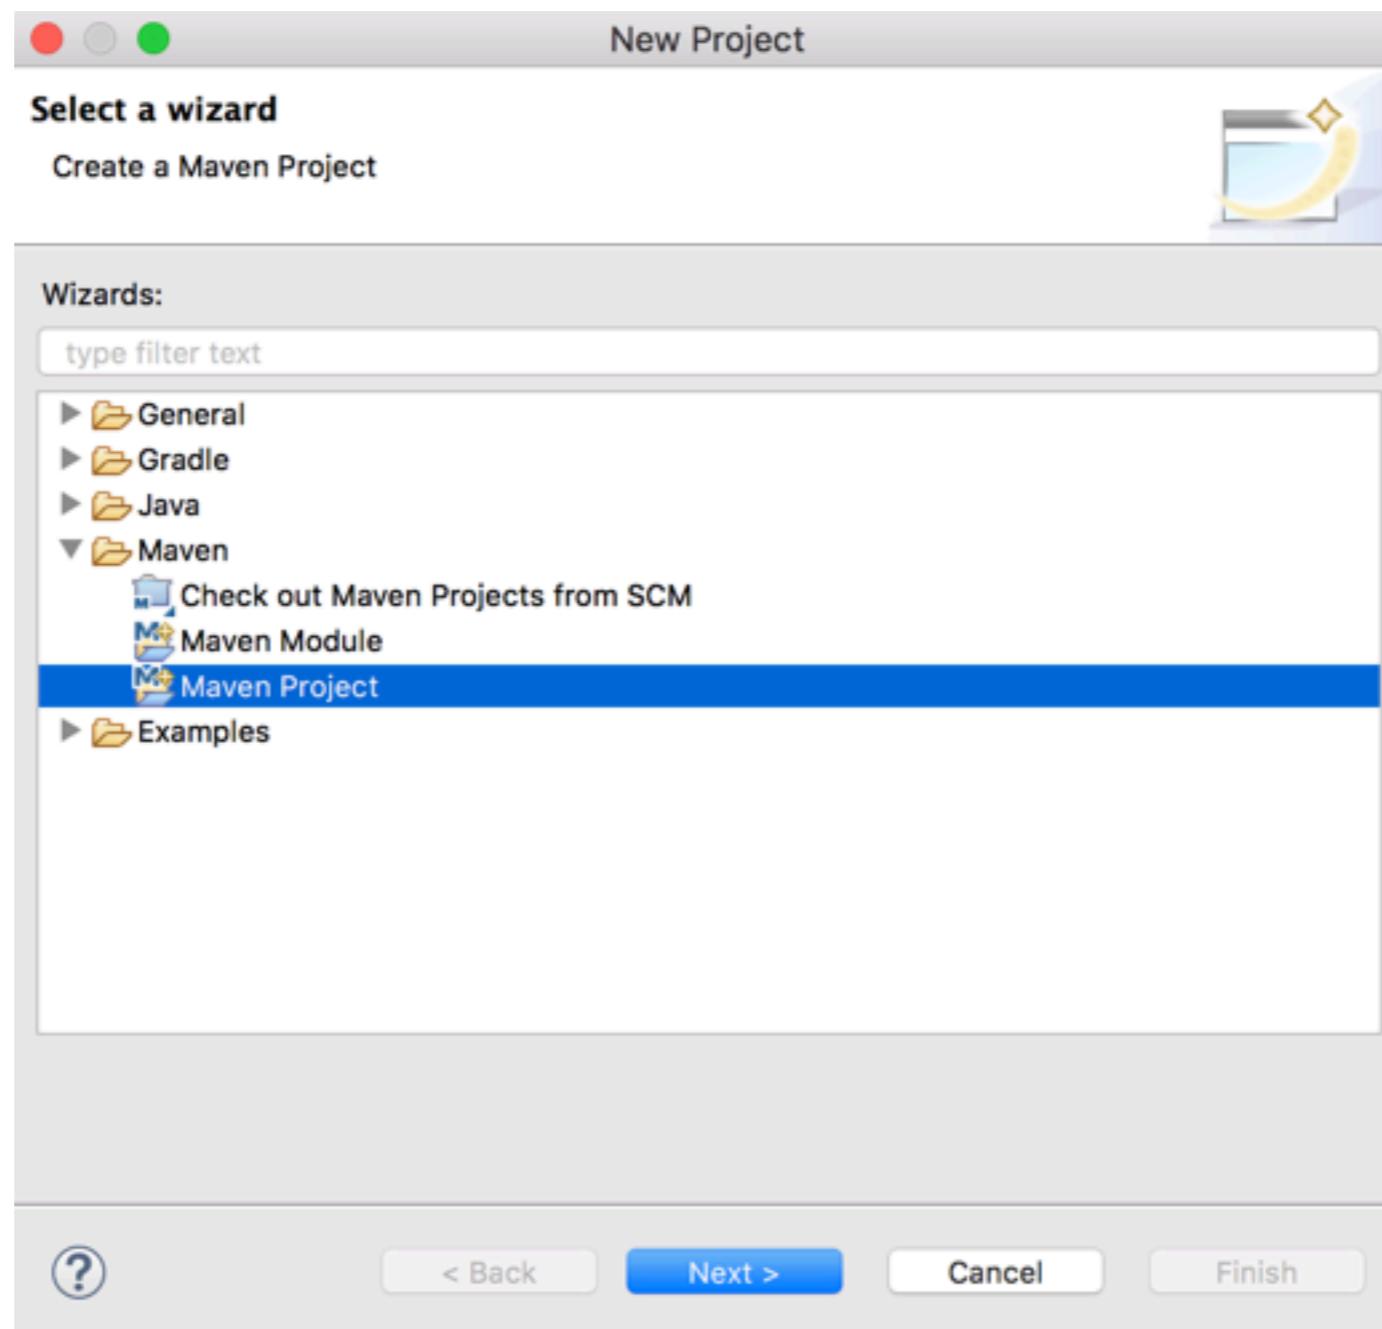


Use a simple project

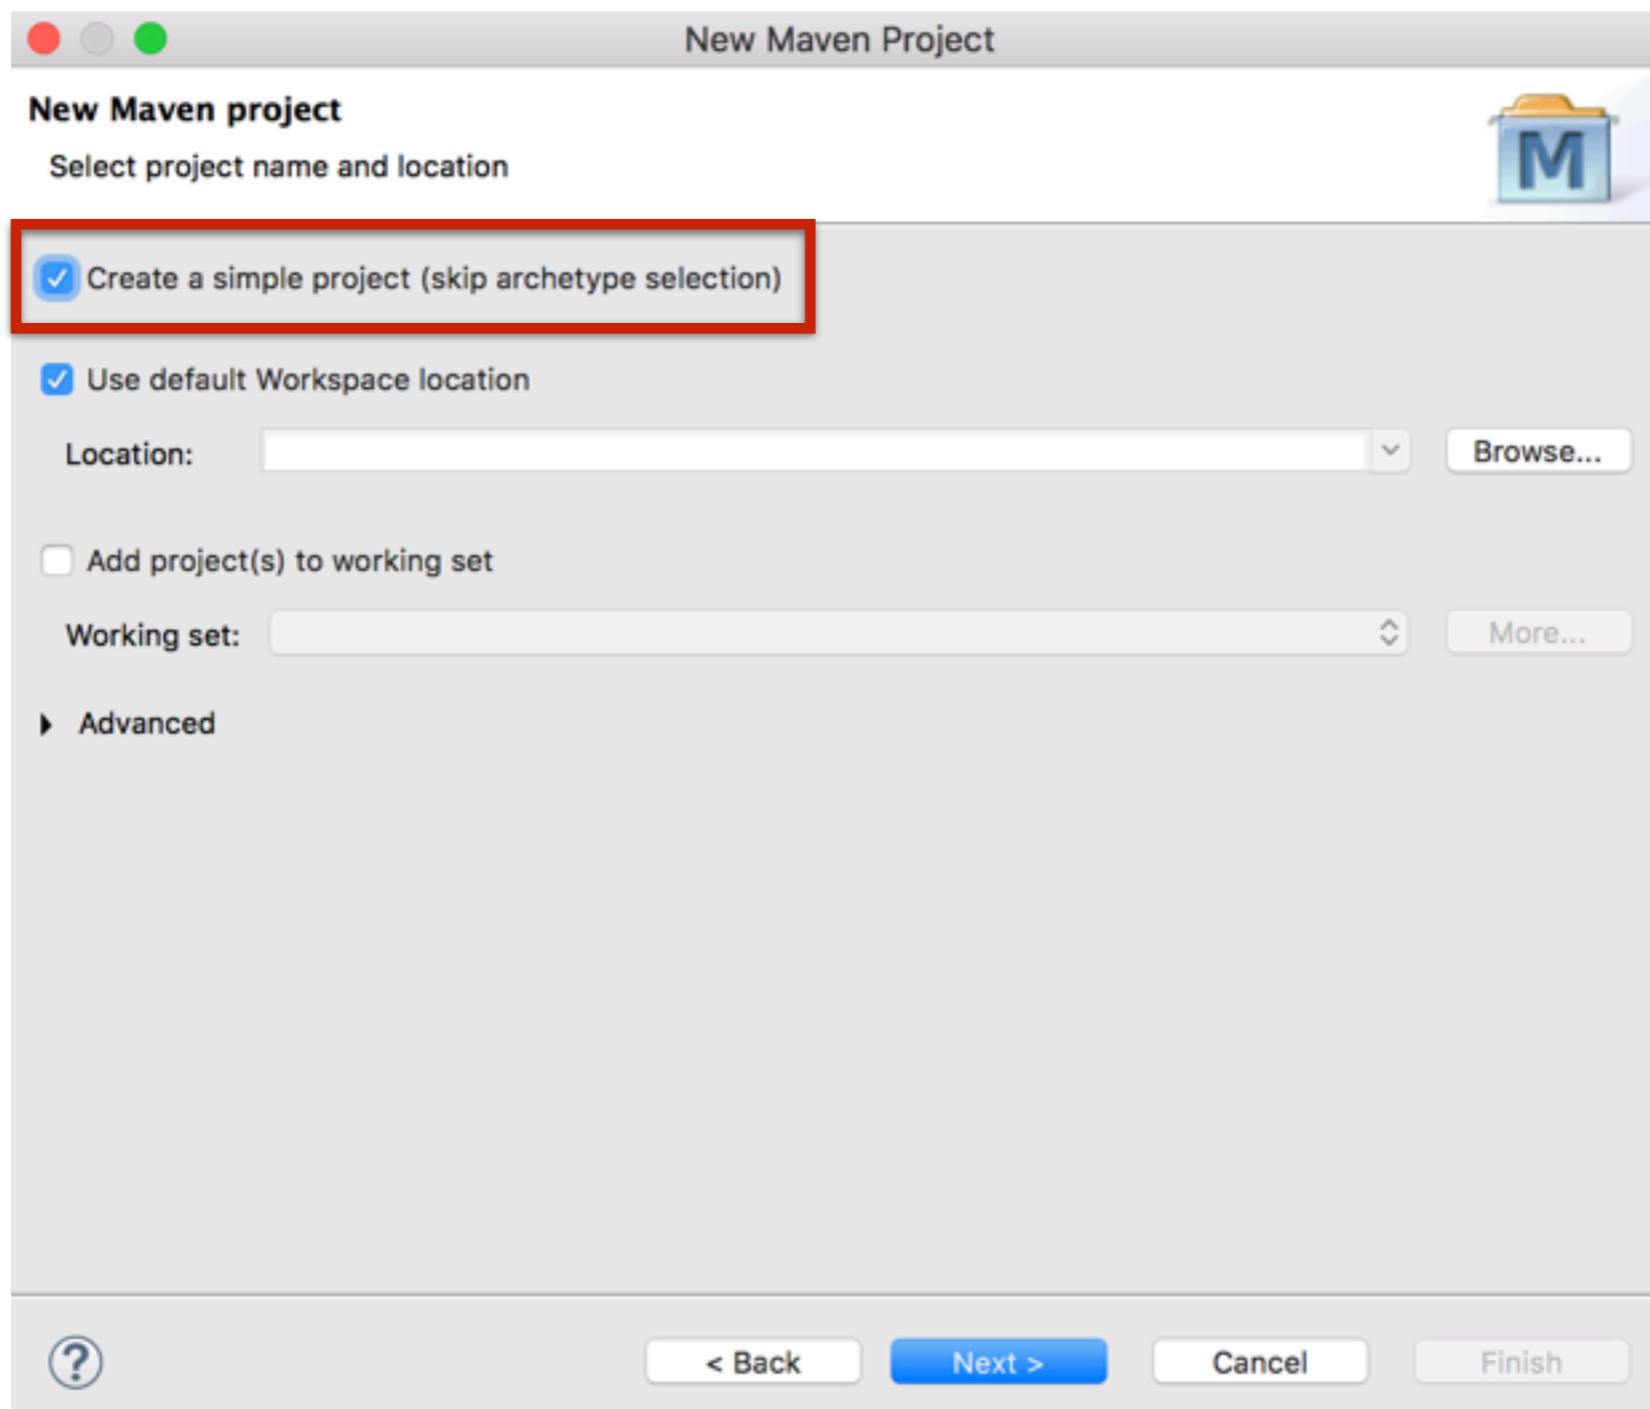

Fill in group and artefact id

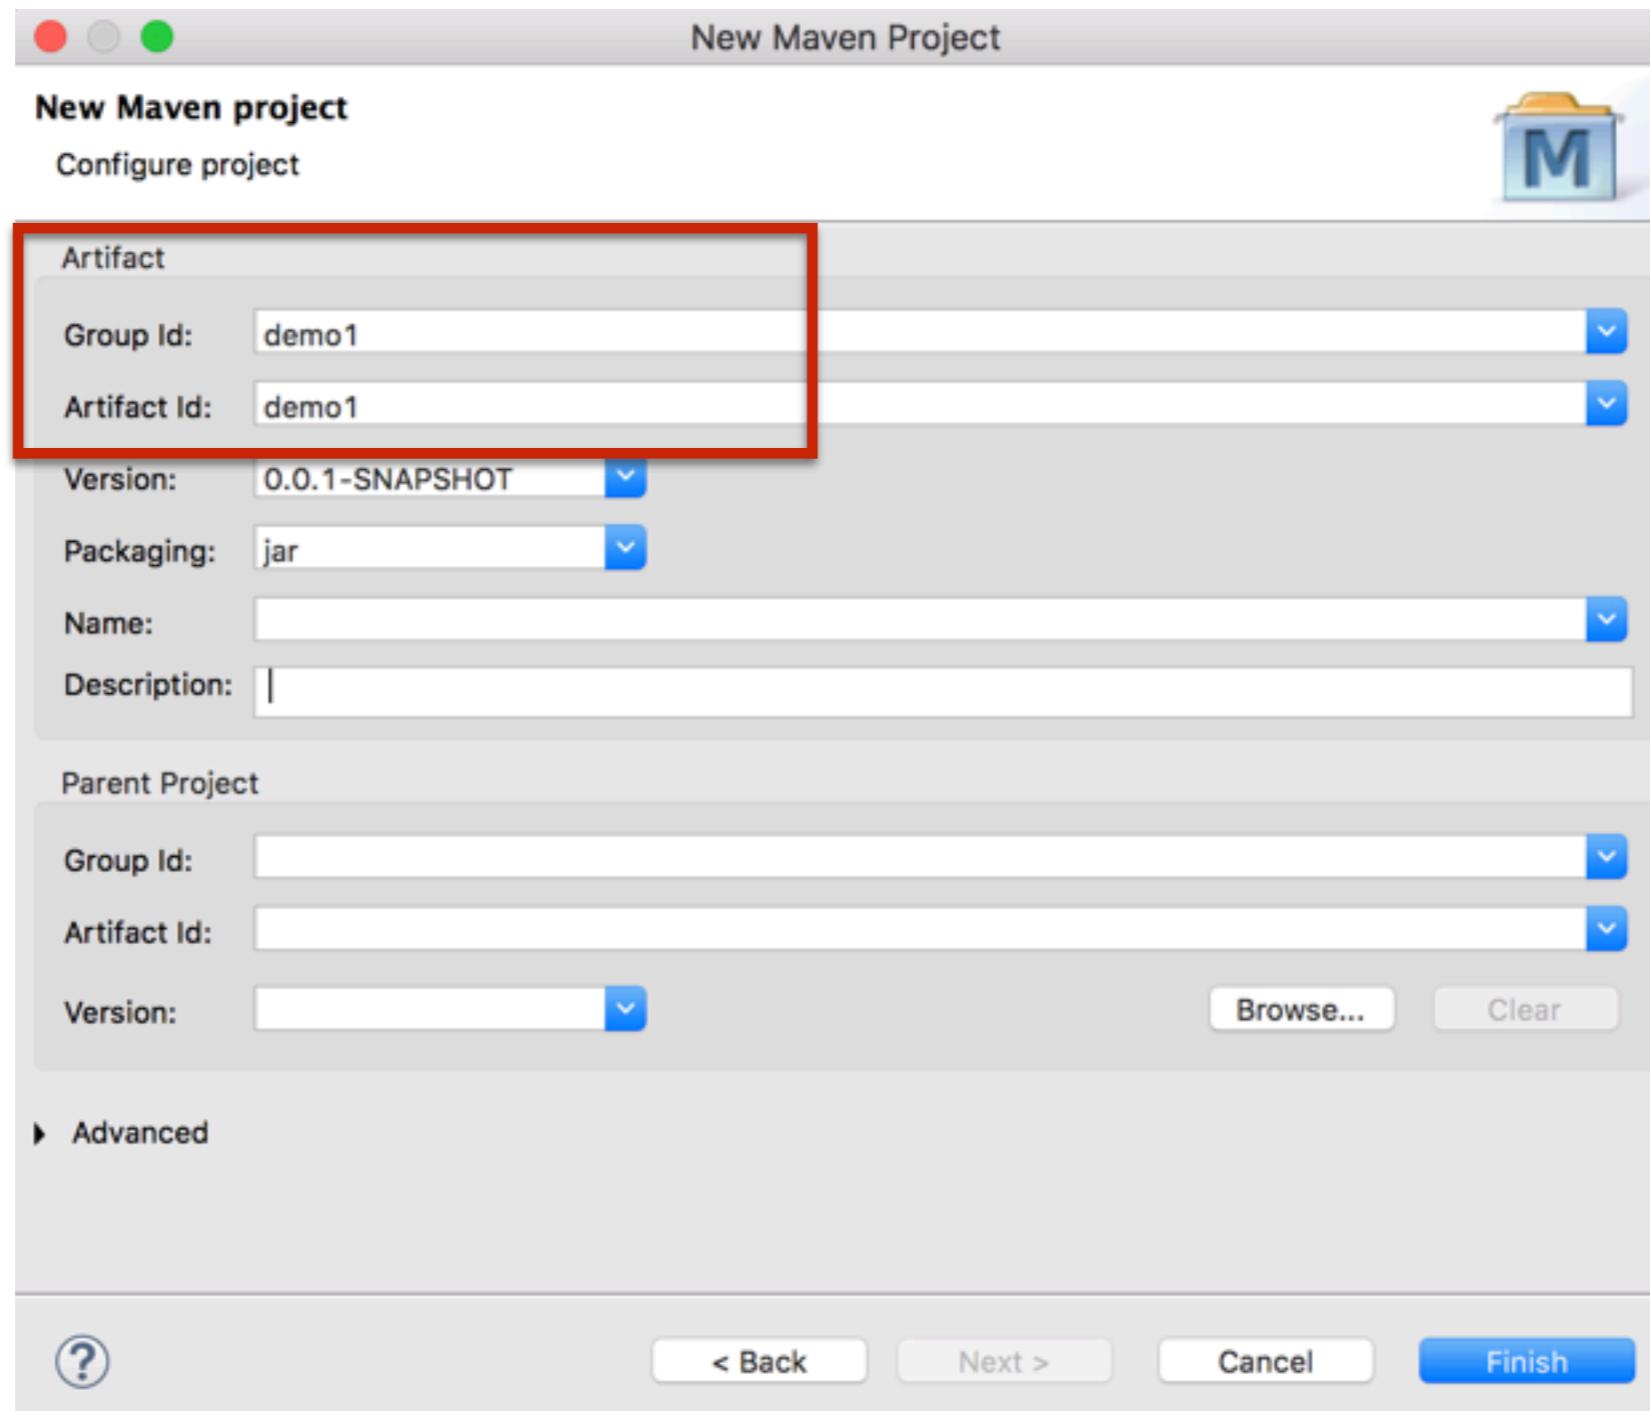

Hello Maven project

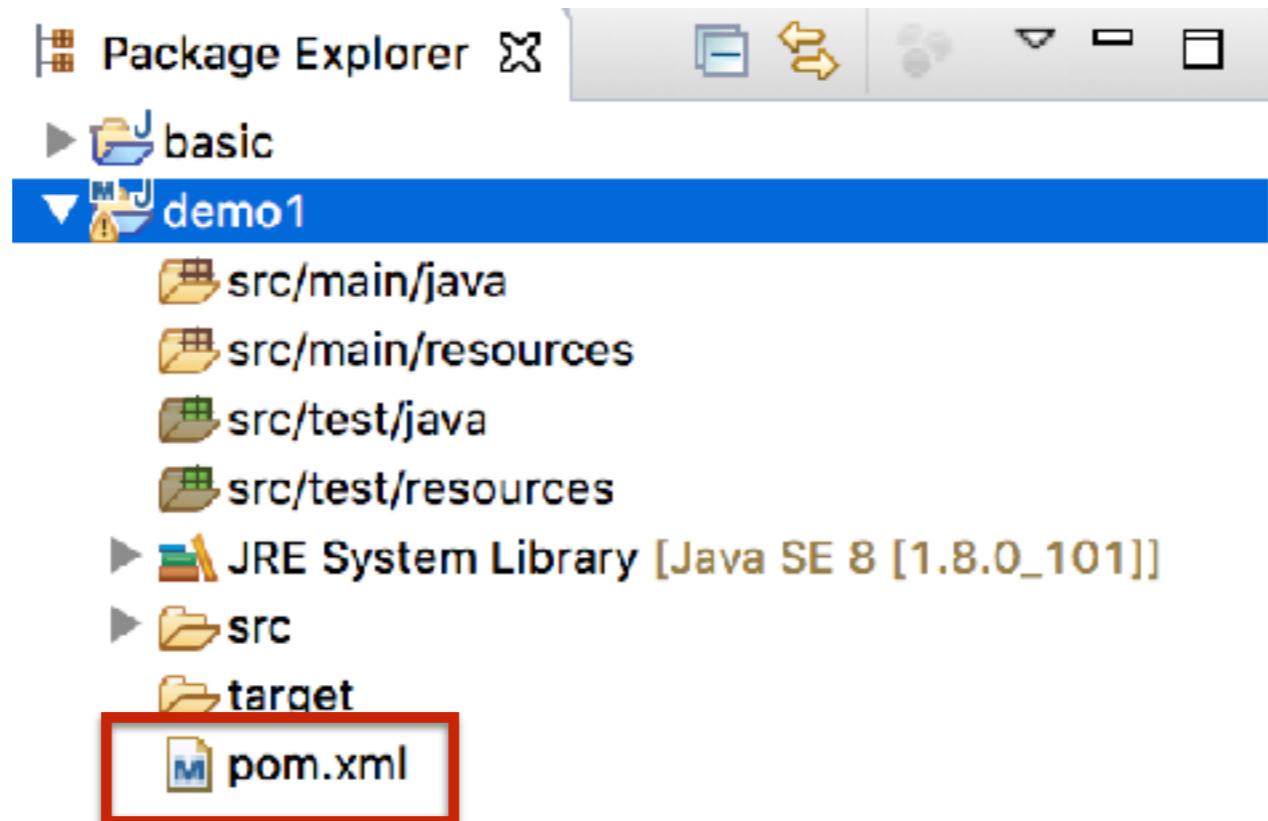

POM file (Project Object Model)



POM file (1)

Project Object Model
Represent in XML format
Filename is **pom.xml**



POM file (2)

```
1<project xmlns="http://maven.apache.org/
2   <modelVersion>4.0.0</modelVersion>
3   <groupId>demo1</groupId>
4   <artifactId>demo1</artifactId>
5   <version>0.0.1-SNAPSHOT</version>
6 </project>
```



POM file (2)

Add new dependency => junit

```
1<project xmlns="http://maven.apache.org/POM/4.0.0"
2   xmlns:xsi="http://www.w3.org/2001/XMLSchema-instantiation"
3   xsi:schemaLocation="http://maven.apache.org/POM/4.0.0
4     pom-4.0.0.xsd">
5   <modelVersion>4.0.0</modelVersion>
6   <groupId>demo1</groupId>
7   <artifactId>demo1</artifactId>
8   <version>0.0.1-SNAPSHOT</version>
9
10  <dependencies>
11    <dependency>
12      <groupId>junit</groupId>
13      <artifactId>junit</artifactId>
14      <version>4.12</version>
15      <scope>test</scope>
16    </dependency>
17  </dependencies>
18</project>
```

<https://github.com/junit-team/junit4/wiki/use-with-maven>





Write first unit test case




Create new junit test case

Right click at src/test/java and choose new -> Unit Test Case

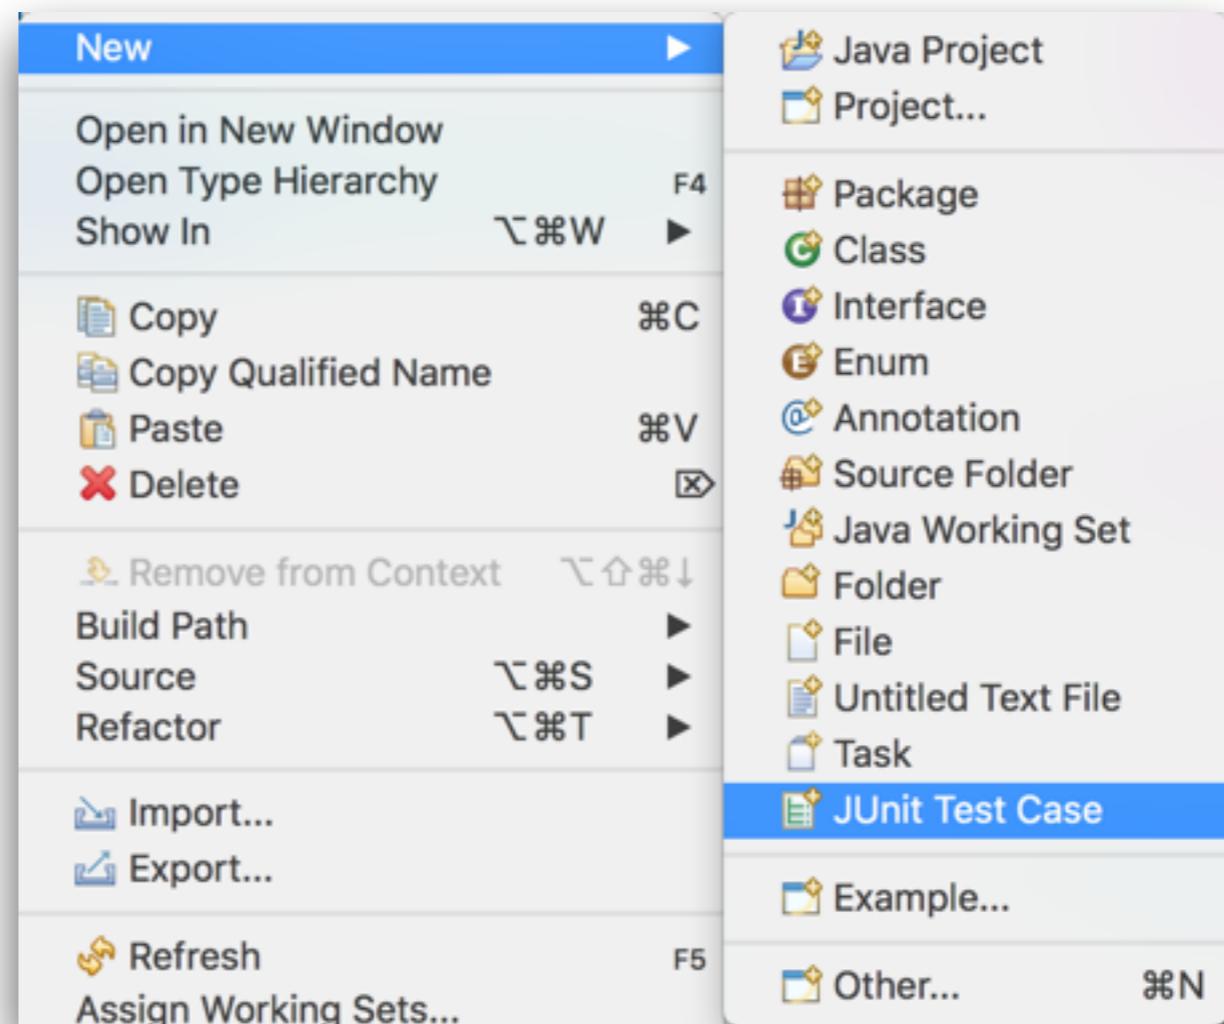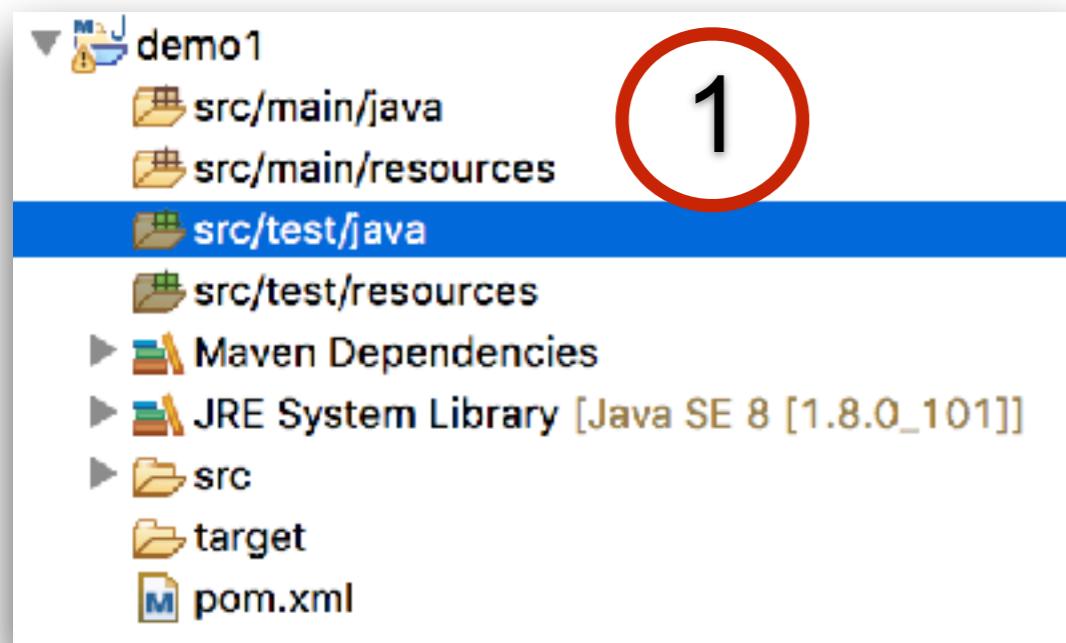

Create new junit test case

Test case name = HelloWorldTest

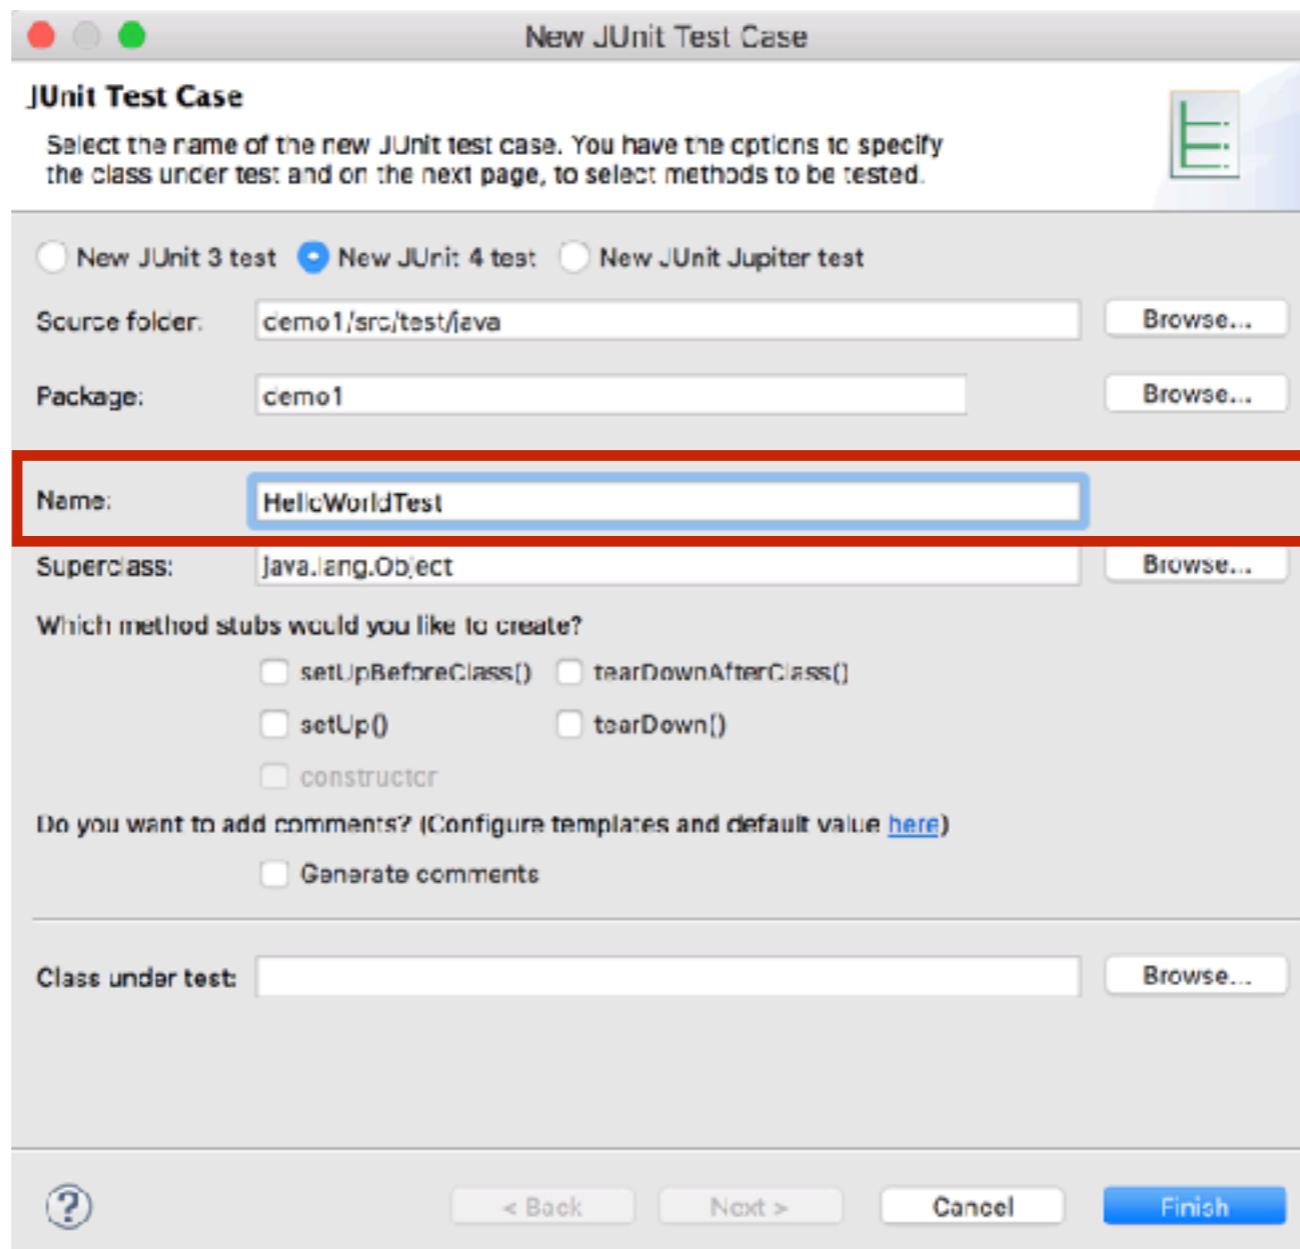

Write first test case (1)

Test case name is very importance

```
public class HelloWorldTest {  
  
    @Test  
    public void  
    should_hello_somkiat_when_input_is_somkiat() {  
  
        // Arrange  
        Reception reception = new Reception();  
  
        // Act  
        String actualResult = reception.hello("somkiat");  
  
        // Assert  
        assertEquals("Hello somkiat", actualResult);  
  
    }  
  
}
```



Write first test case (2)

Well test case structure is easy to read

```
public class HelloWorldTest {  
  
    @Test  
    public void  
should_hello_somkiat_when_input_is_somkiat() {  
  
        // Arrange  
        Reception reception = new Reception();  
  
        // Act  
        String actualResult = reception.hello("somkiat");  
  
        // Assert  
        assertEquals("Hello somkiat", actualResult);  
    }  
  
}
```




The ratio of time spent in code
Read vs Write is +10:1



Run your test in Eclipse IDE


Right click your test -> Run AS -> JUnit Test

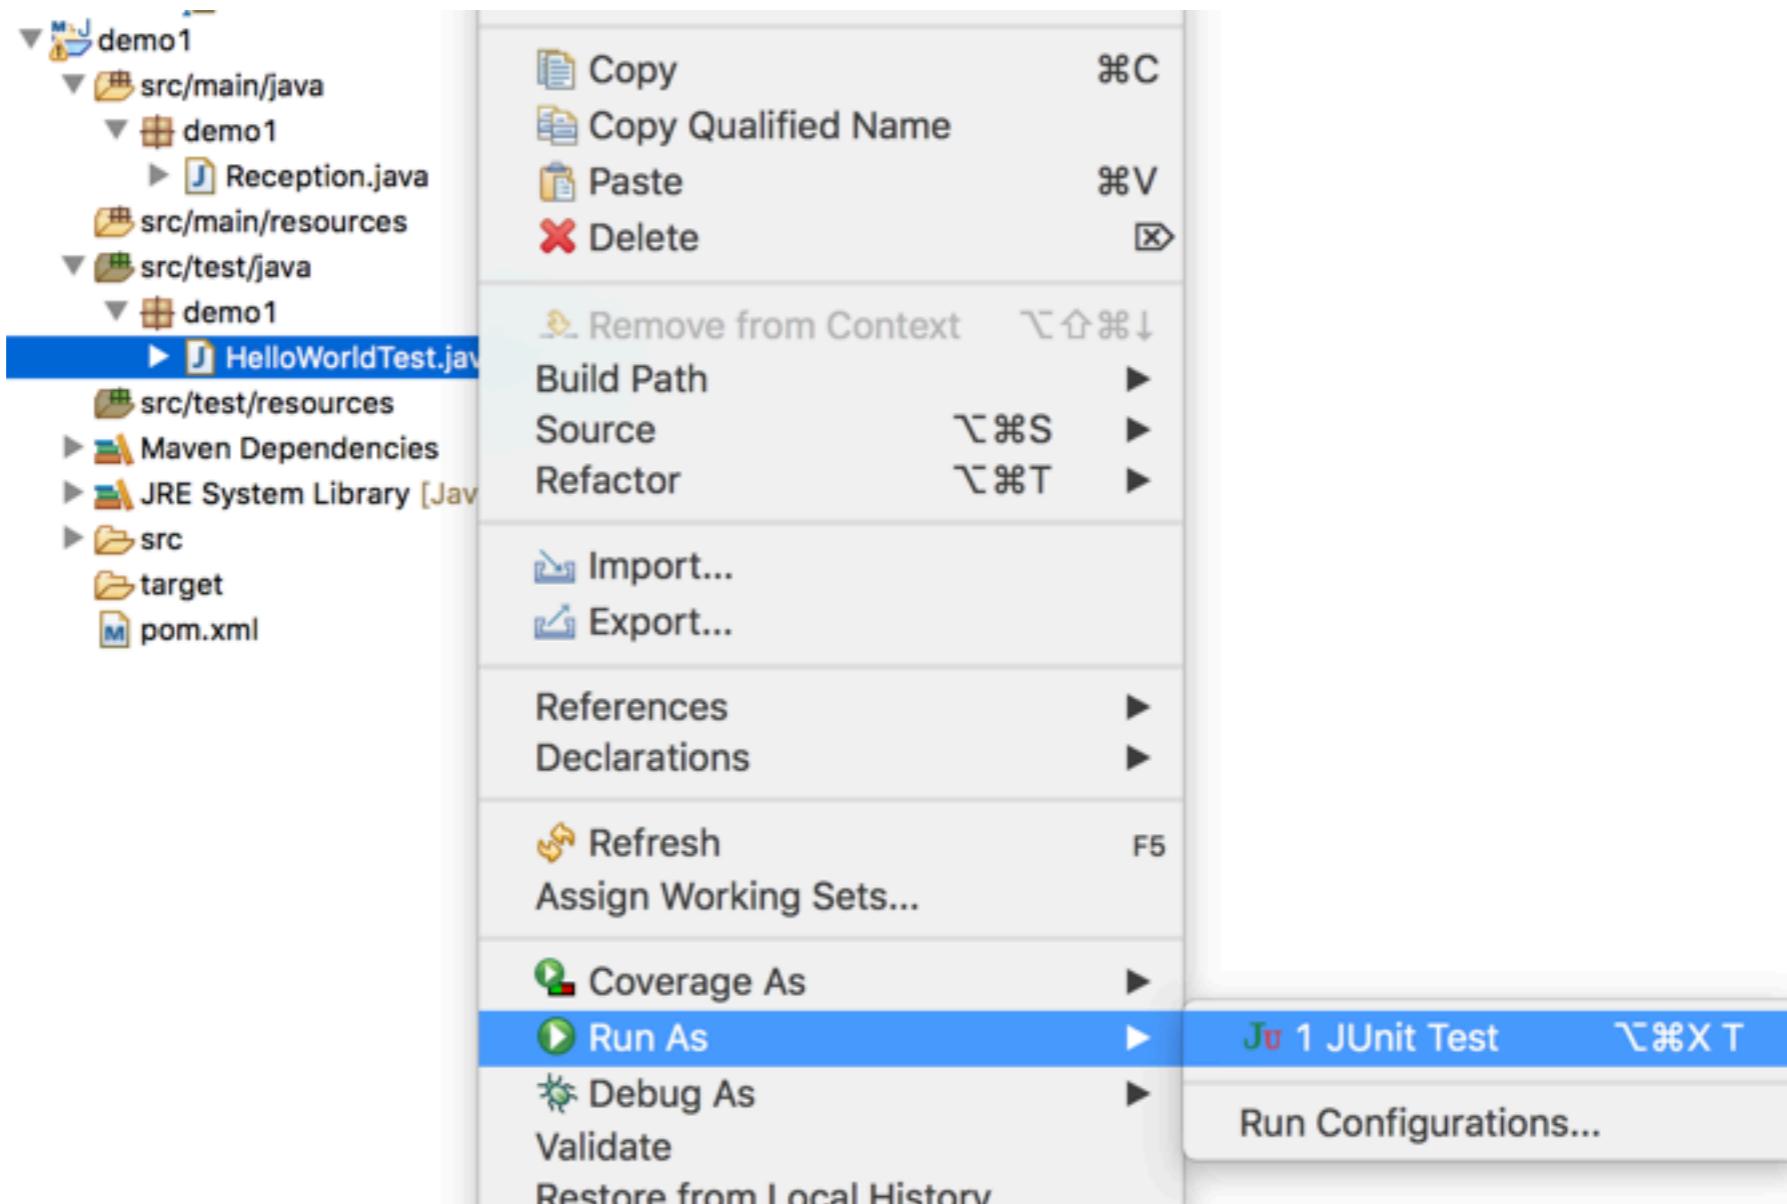

Show result of testing

Result should be **failure (Red)**

rerun test

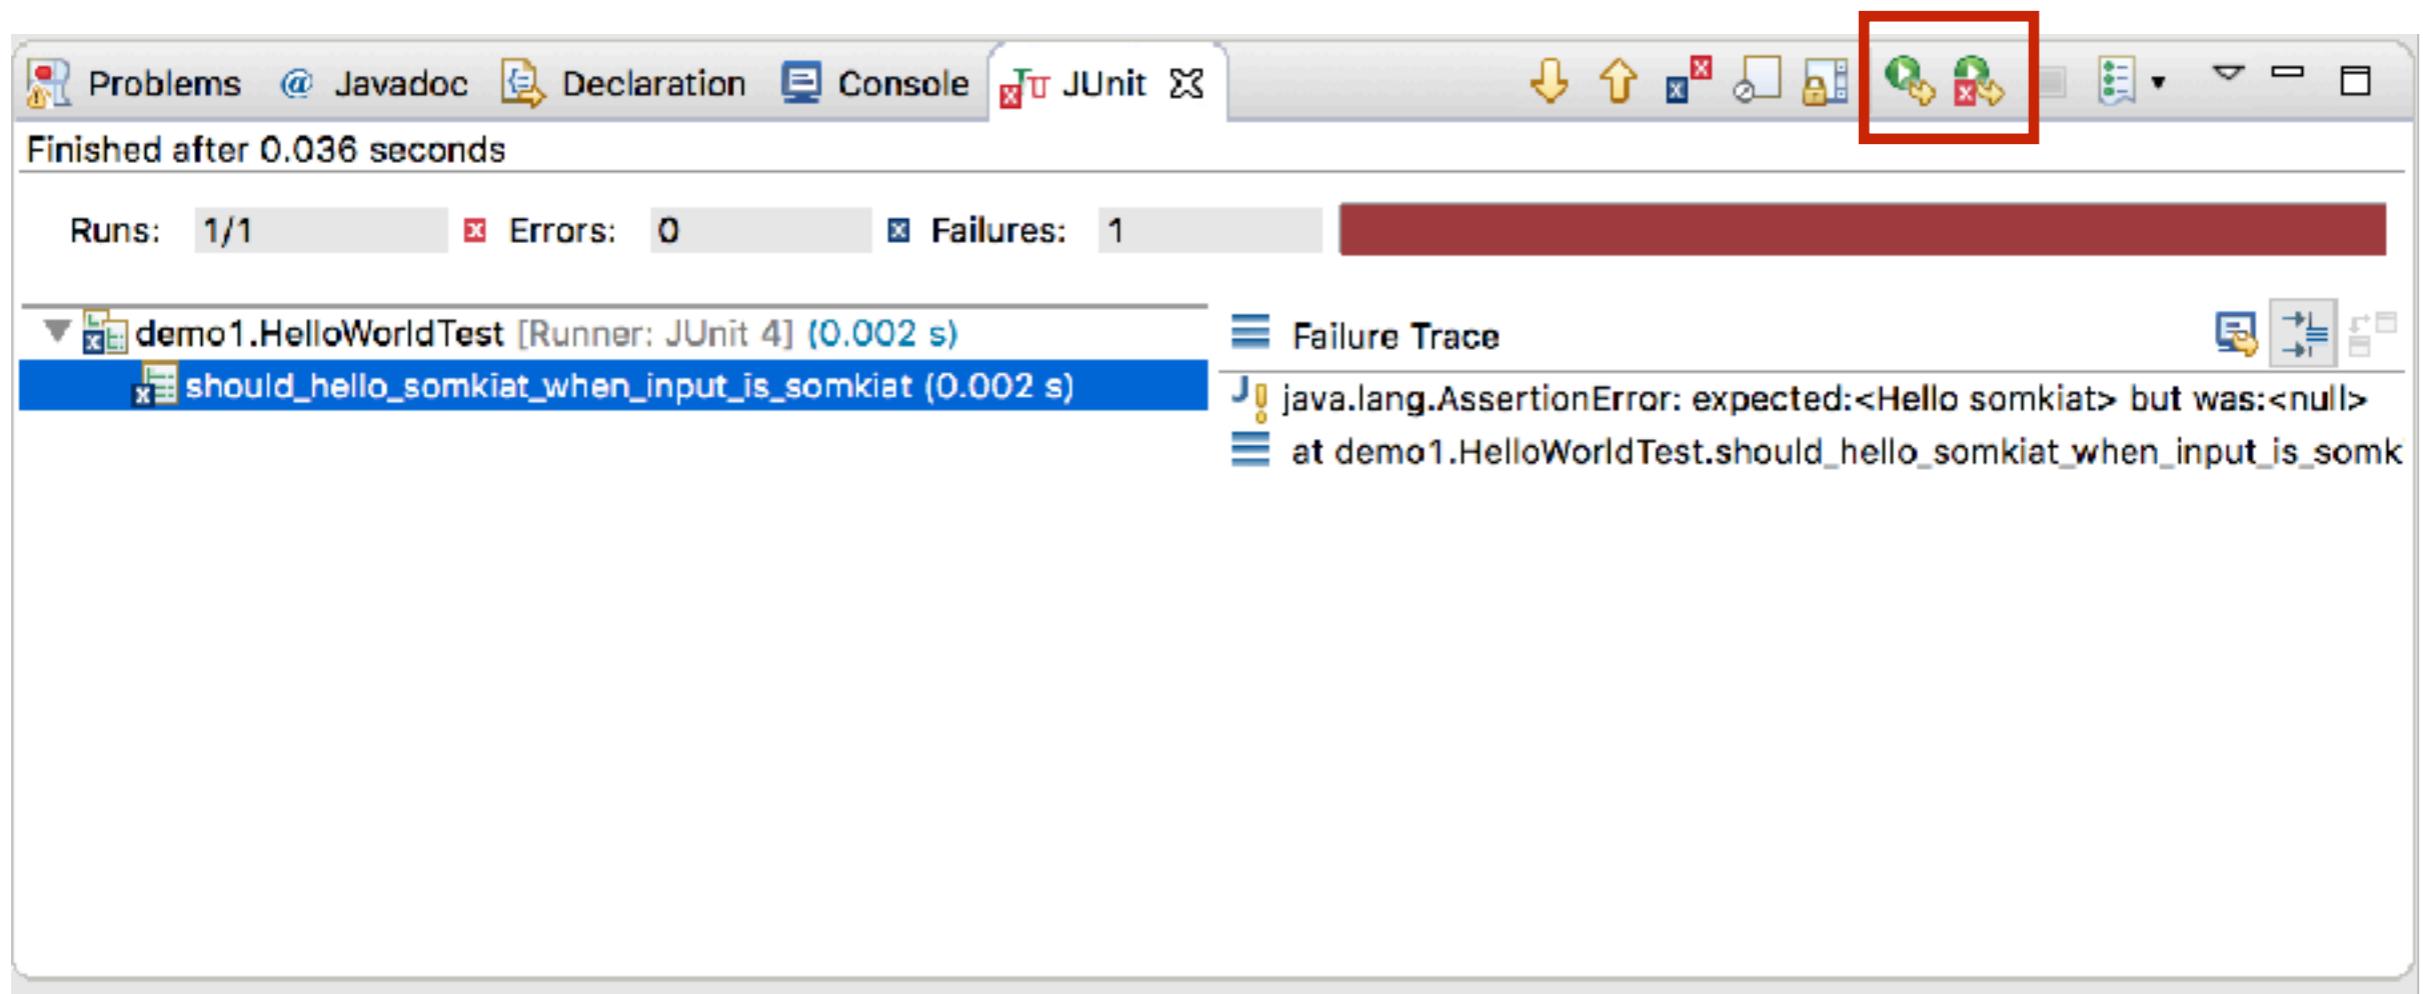

Run your test in command line

\$mvn clean test

\$mvn clean package




Make your test pass

```
public class Reception {  
    public String hello(String name) {  
        return "Hello " + name;  
    }  
}
```



Run test again

Result should be pass (Green)

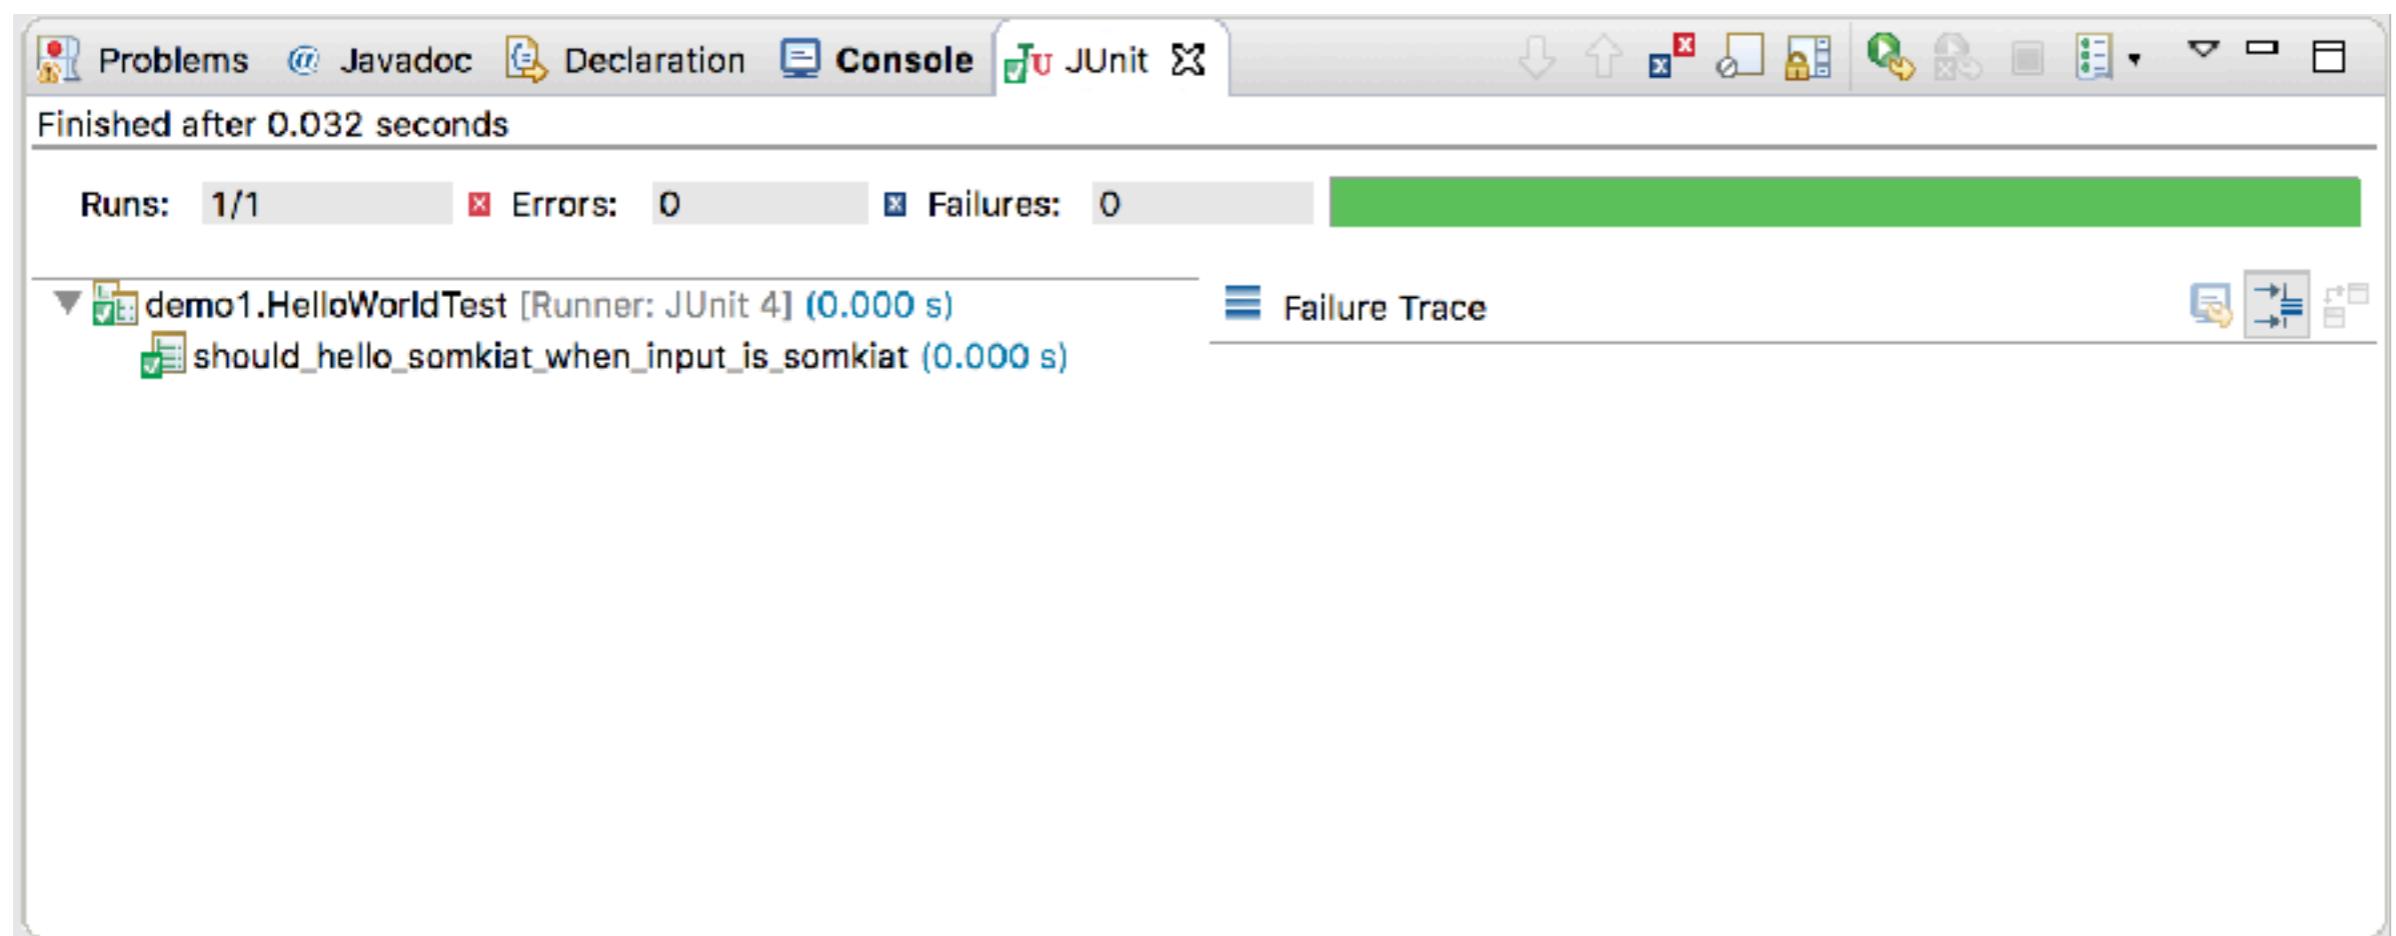


Write next test case ...



Simple Rule of TDD (again)

1. Write a failing test before write any code
2. Remove duplication code

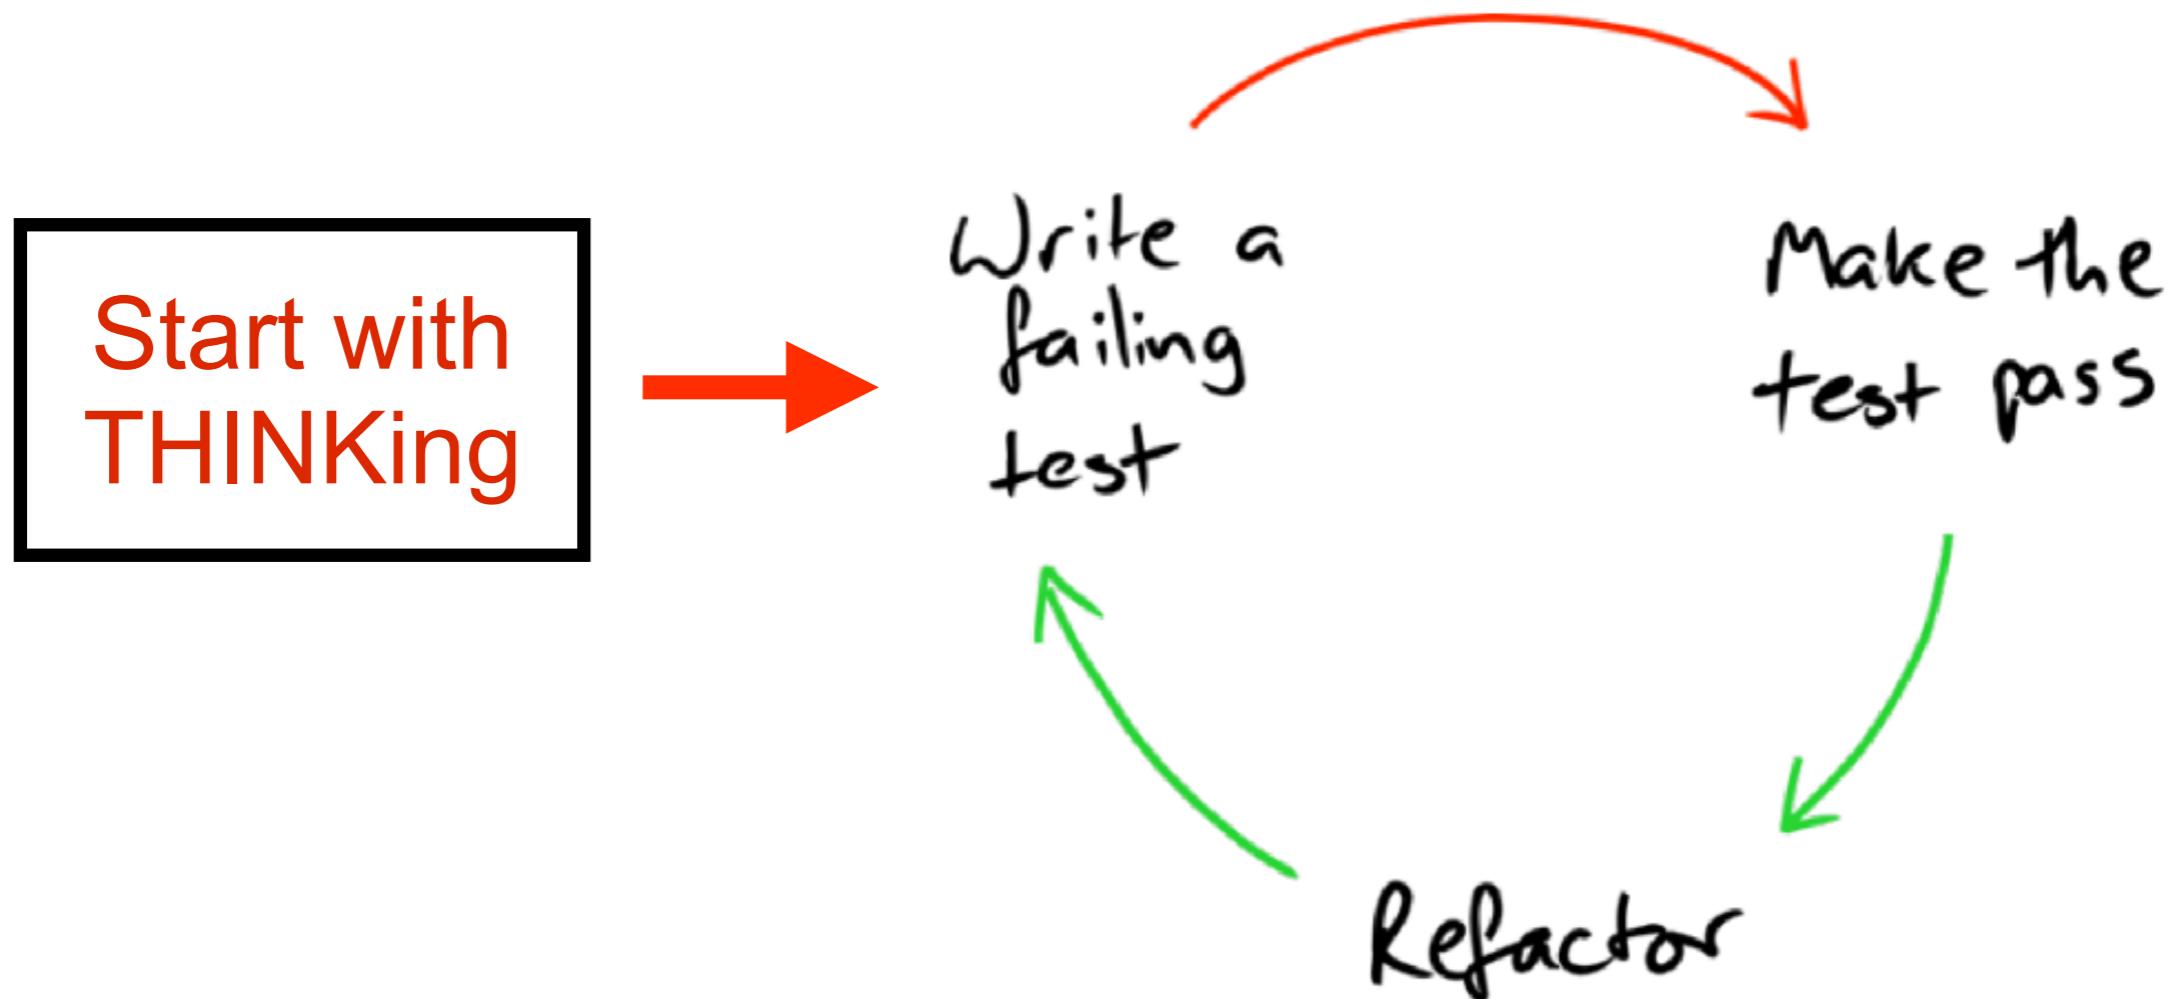


Code Coverage




Run code coverage in Eclipse IDE

Right click your test -> Coverage As -> JUnit Test

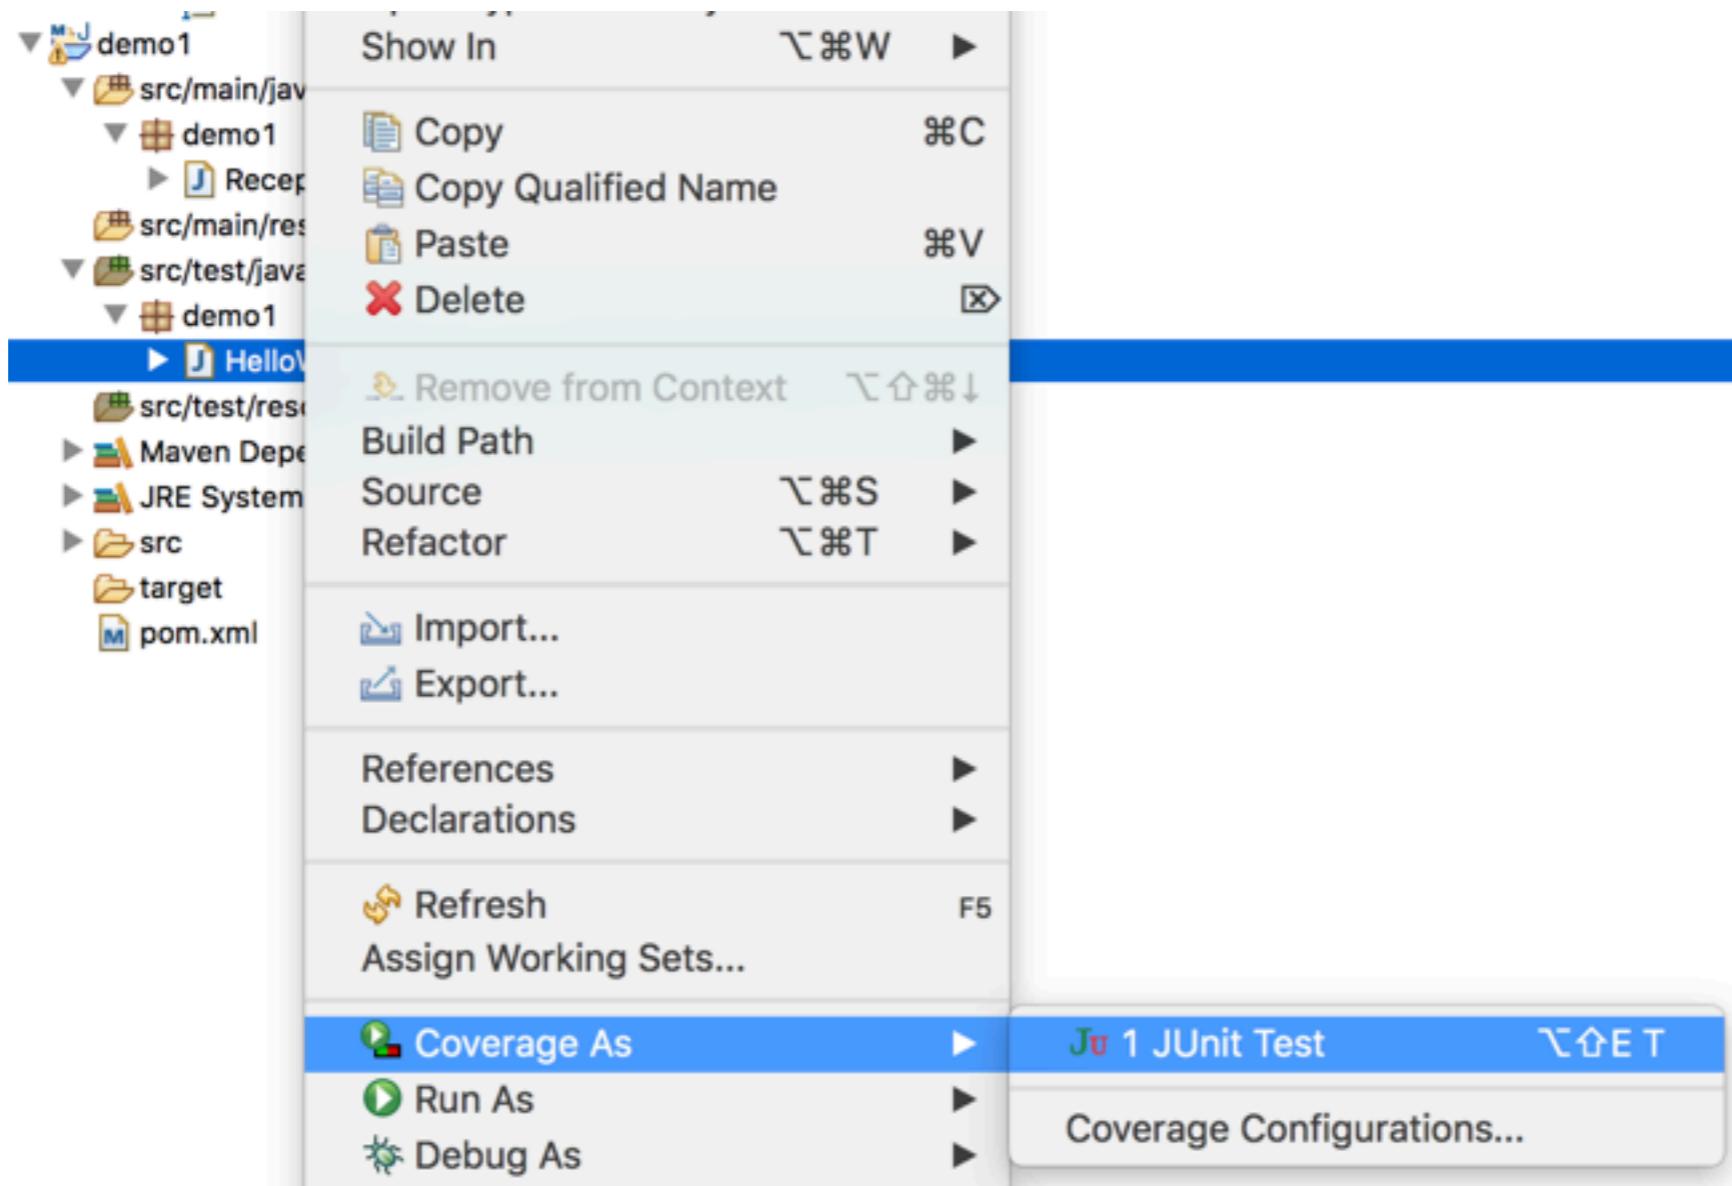

Show result of code coverage

Summary result report

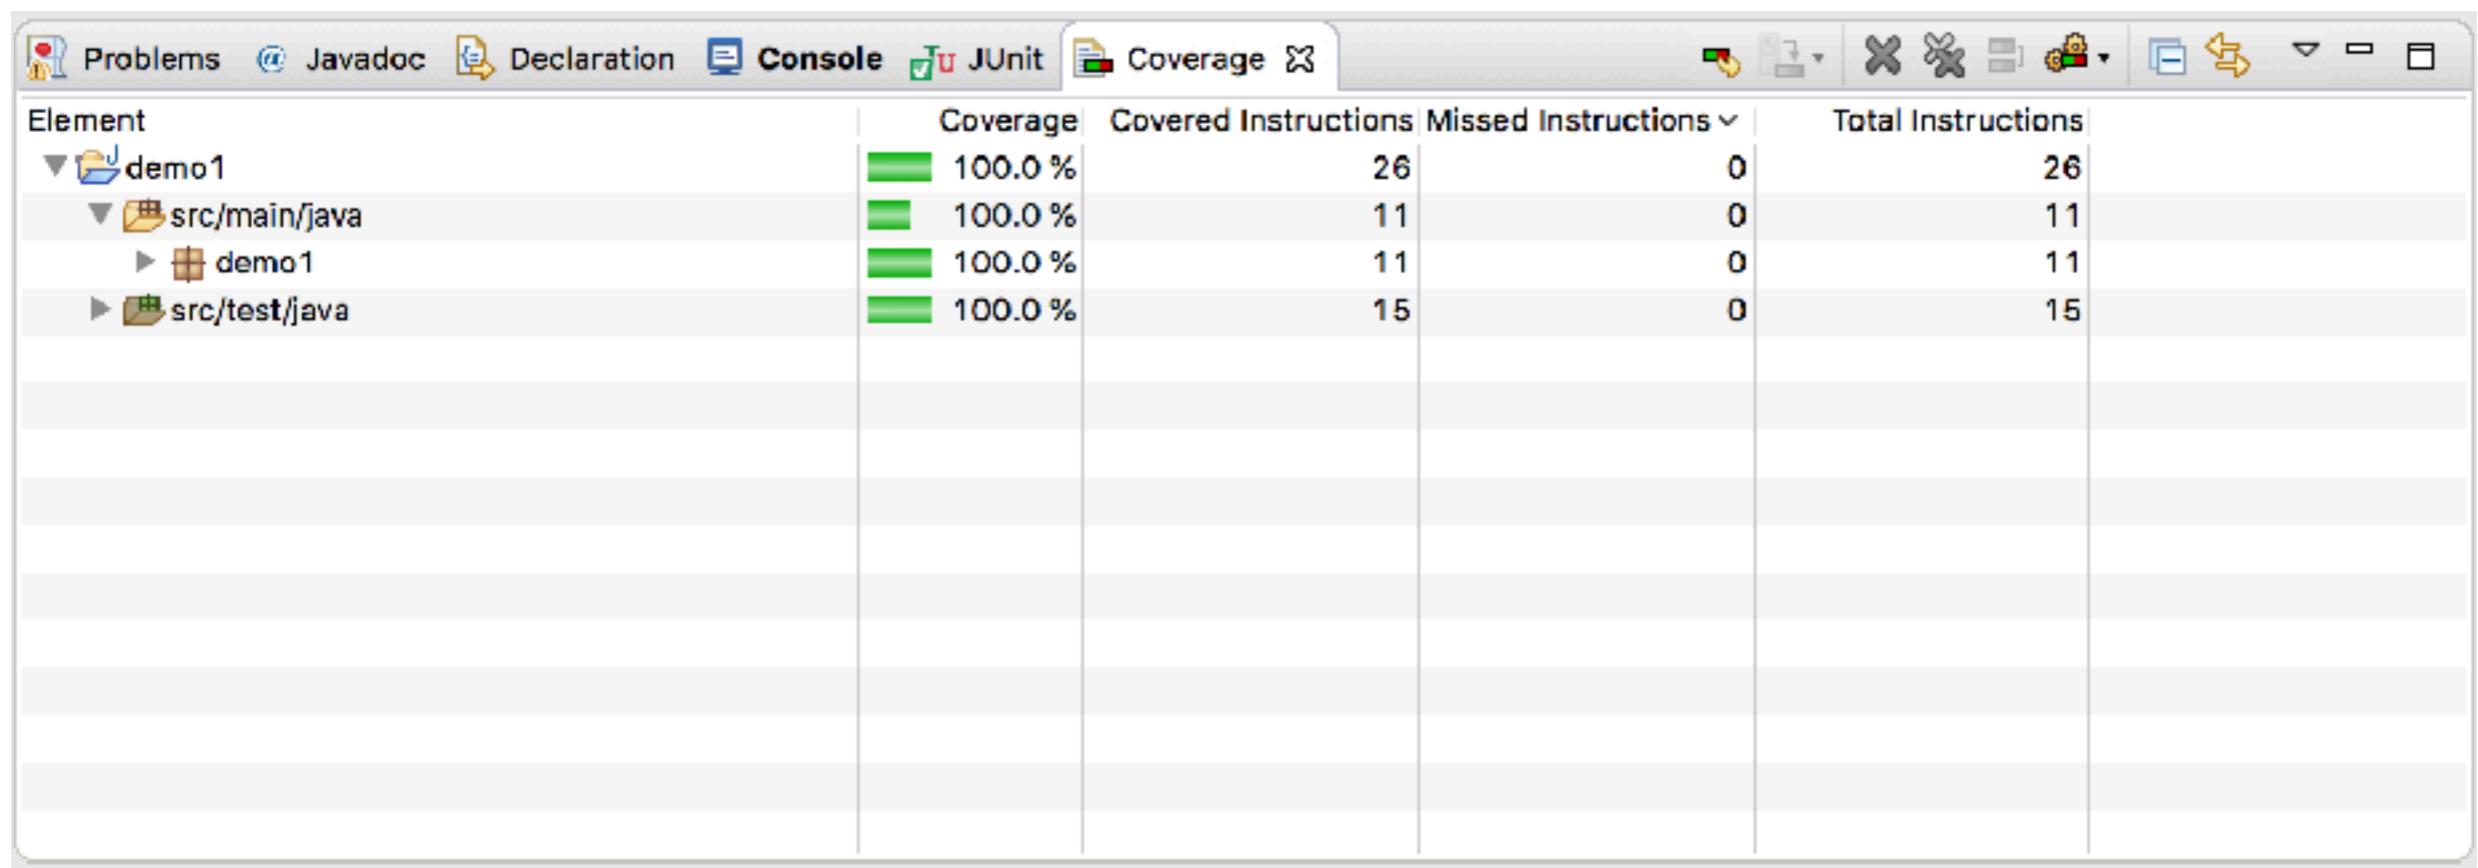

The screenshot shows a software interface with a toolbar at the top containing icons for Problems, Javadoc, Declaration, Console, JUnit, and Coverage. The Coverage tab is selected. Below the toolbar is a table titled 'Element' with columns for Coverage, Covered Instructions, Missed Instructions, and Total Instructions. The table lists four items under the 'demo1' project: 'src/main/java/demo1' with 100.0% coverage, 26 covered instructions, 0 missed instructions, and 26 total instructions; 'src/main/java/demo1' with 100.0% coverage, 11 covered instructions, 0 missed instructions, and 11 total instructions; 'src/test/java' with 100.0% coverage, 11 covered instructions, 0 missed instructions, and 11 total instructions; and 'src/test/java' with 100.0% coverage, 15 covered instructions, 0 missed instructions, and 15 total instructions.

Element	Coverage	Covered Instructions	Missed Instructions	Total Instructions
demo1	100.0 %	26	0	26
src/main/java	100.0 %	11	0	11
demo1	100.0 %	11	0	11
src/test/java	100.0 %	15	0	15



Show result of code coverage

See result in each file/class

```
1 package demo1;  
2  
3 public class Reception {  
4  
5     public String hello(String name) {  
6         return "Hello " + name;  
7     }  
8  
9 }
```



Run code coverage in command line

```
$mvn cobertura:cobertura
```



Workshop



Range of number

Create test case = **RangeTest**

Input	Expected output
[1,5]	1,2,3,4,5
[1,5)	1,2,3,4
(1,5]	2,3,4,5
(1,5)	2,3,4

Thinking before coding



Code Smell & Refactoring

https://en.wikipedia.org/wiki/Code_smell



Code Smell



Code Smell




Code Smell make problems

```
41 static MappedField validateQuery(final Class clazz, final Mapper mapper, final StringBuilder origProp, final FilterOperator op, final
42     MappedField mf = null;
43     final String prop = origProp.toString();
44     boolean hasTranslations = false;
45     if (!origProp.substring(0, 1).equals("$")) {
46         final String[] parts = prop.split(regex: "W.");
47         if (clazz == null) { return null; }
48         MappedClass mc = mapper.getMappedClass(clazz);
49         //CHECKSTYLE:OFF
50         for (int i = 0; ; ) {Eek!
51             //CHECKSTYLE:ON
52             final String part = parts[i];
53             boolean fieldIsArrayOperator = part.equals("$");
54             nf = mc.getMappedField(part);
55             //translate from java field name to stored field name
56             if (mf == null && !fieldIsArrayOperator) {
57                 mf = mc.getMappedFieldByJavaFieldName(part);
58                 if (validateNames && mf == null) {
59                     throw new ValidationException(format("The field '%s' could not be found in '%s' while validating - %s; if you wi:
60                 }
61                 hasTranslations = true;
62                 if (mf != null) {
63                     parts[i] = mf.getNameInStore();
64                 }
65             }
66             i++;
67             if (mf != null && mf.isMap()) {
68                 //skip the map key validation, and move to the next part
69                 i++;
70             }
71             if (i >= parts.length) {
72                 break;
73             }
74             if (!fieldIsArrayOperator) {
75                 //catch people trying to search/update into @Reference/@Serialized fields
76                 if (validateNames && !canQueryPast(mf)) {
77                     throw new ValidationException(format("Cannot use dot-notation past '%s' in '%s'; found while validating - %s", pi:
78                 }
79                 if (mf == null && mc.isInterface()) {
80                     break;
81                 } else if (mf == null) {
82                     throw new ValidationException(format("The field '%s' could not be found in '%s'", prop, mc.getClazz().getName()));
83                 }
84                 //get the next MappedClass for the next field validation
85                 mc = mapper.getMappedClass((mf.isSingleValue() ? mf.getType() : mf.getSubClass()));
86             }
87         }
88         //record new property string if there has been a translation to any part
89         if (hasTranslations) {
90             origProp.setLength(0); // clear existing content
91             origProp.append(parts[0]);
92             for (int i = 1; i < parts.length; i++) {
93                 
```

What's a prop?
What's a part?
Why all the null checks?
Control the loop
Comments, because code is unclear
Parameter mutation!



Do you know Code smell ?

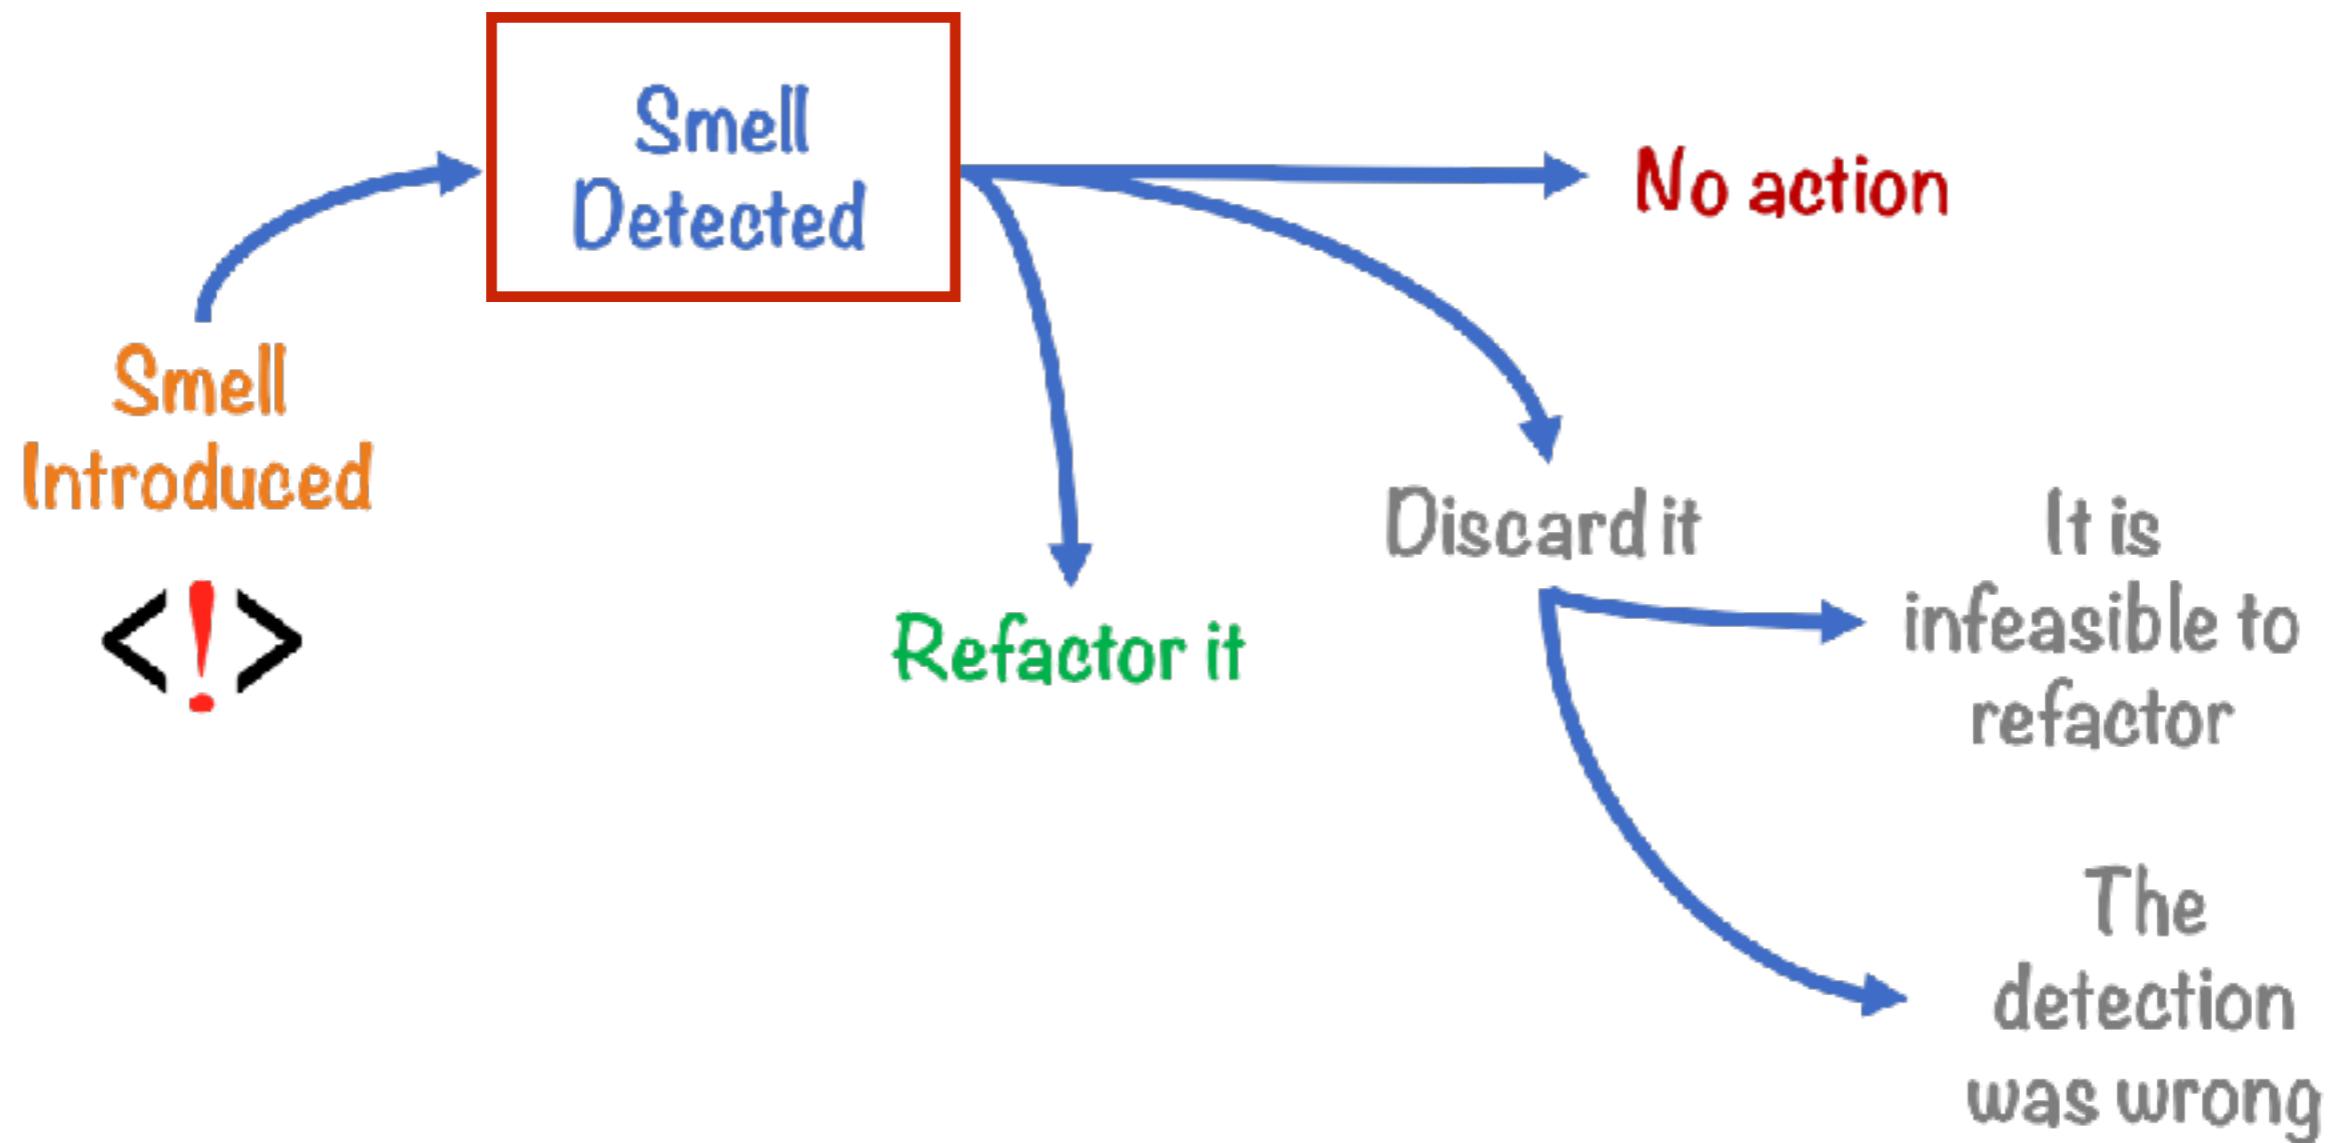

Code Smell (example)

Duplication code

Long method

Large class (God class)

Comments

Long parameter list

Switch/If statements

Divergent change (one class)

Shotgun surgery (one class)

<https://sourcemaking.com/refactoring/smells>



**Not taking too much
Show me the code**



Code Smell Workshop

<https://github.com/emilybache/Tennis-Refactoring-Kata>



SOLID principle



SOLID principle



SOLID

Software development is not a Jenga game.



1. Single Responsibility Principle




Single Responsibility Principle



Just because you *can* doesn't mean you *should*.



Example

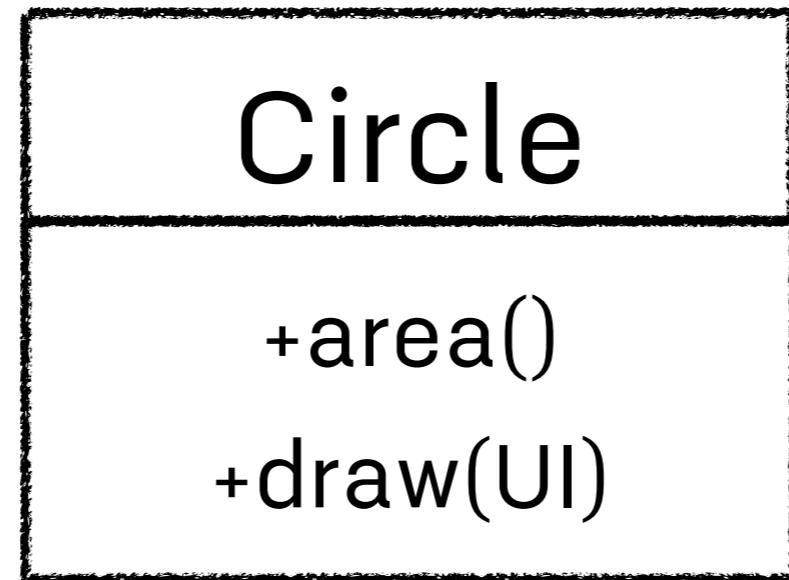

Example

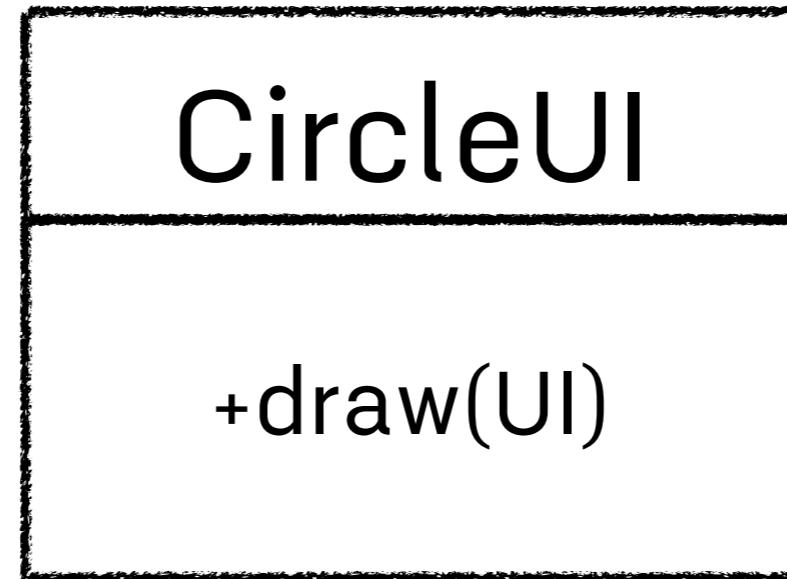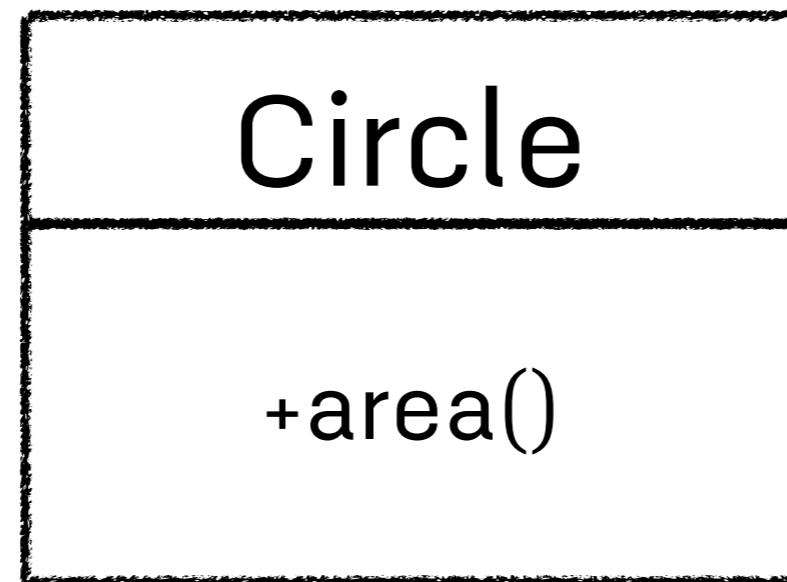

2. Open-Closed Principle



Example

DrawingEditor


+draw()

-drawCircle()

-drawRectangle()




Example

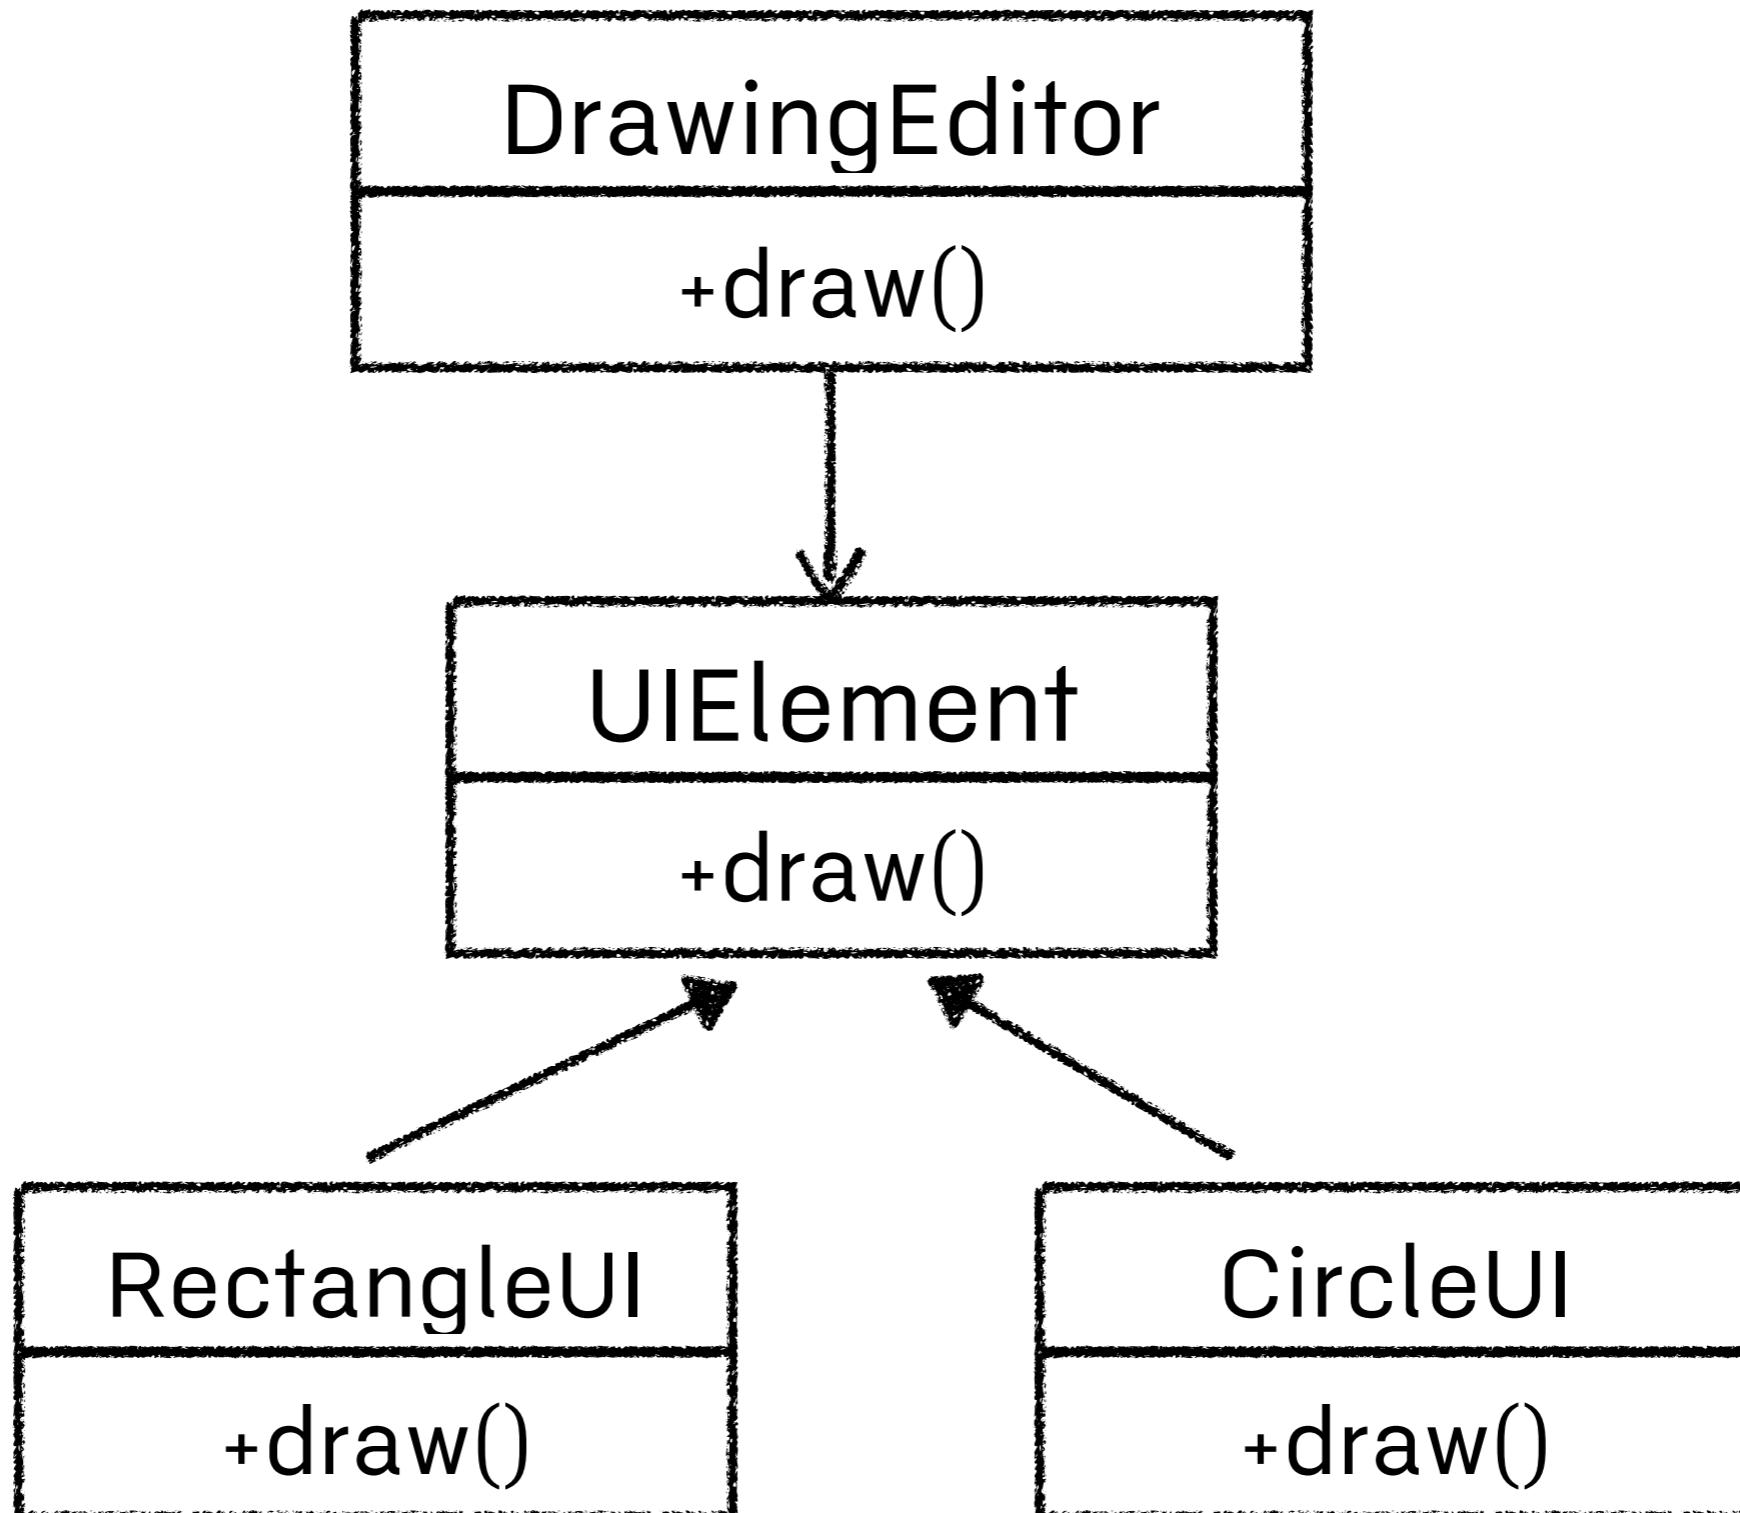

Workshop



3. Liskov Substitution Principle

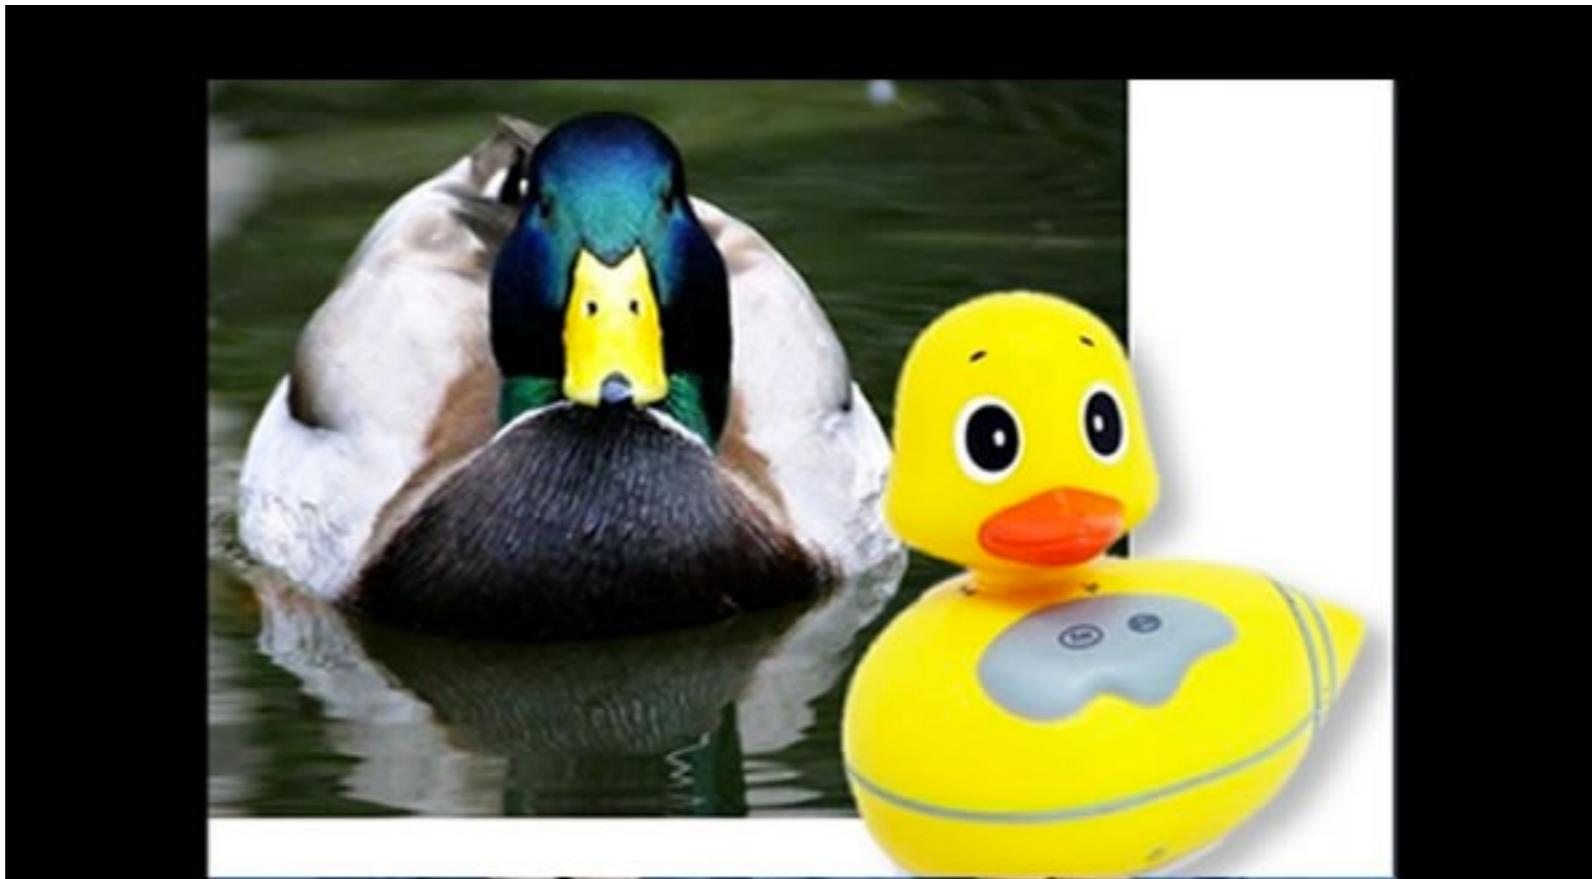


Liskov Substitution Principle

If it looks like a duck and quacks like a duck but needs batteries,
you probably have the wrong abstraction.




4. Interface Segregation Principle

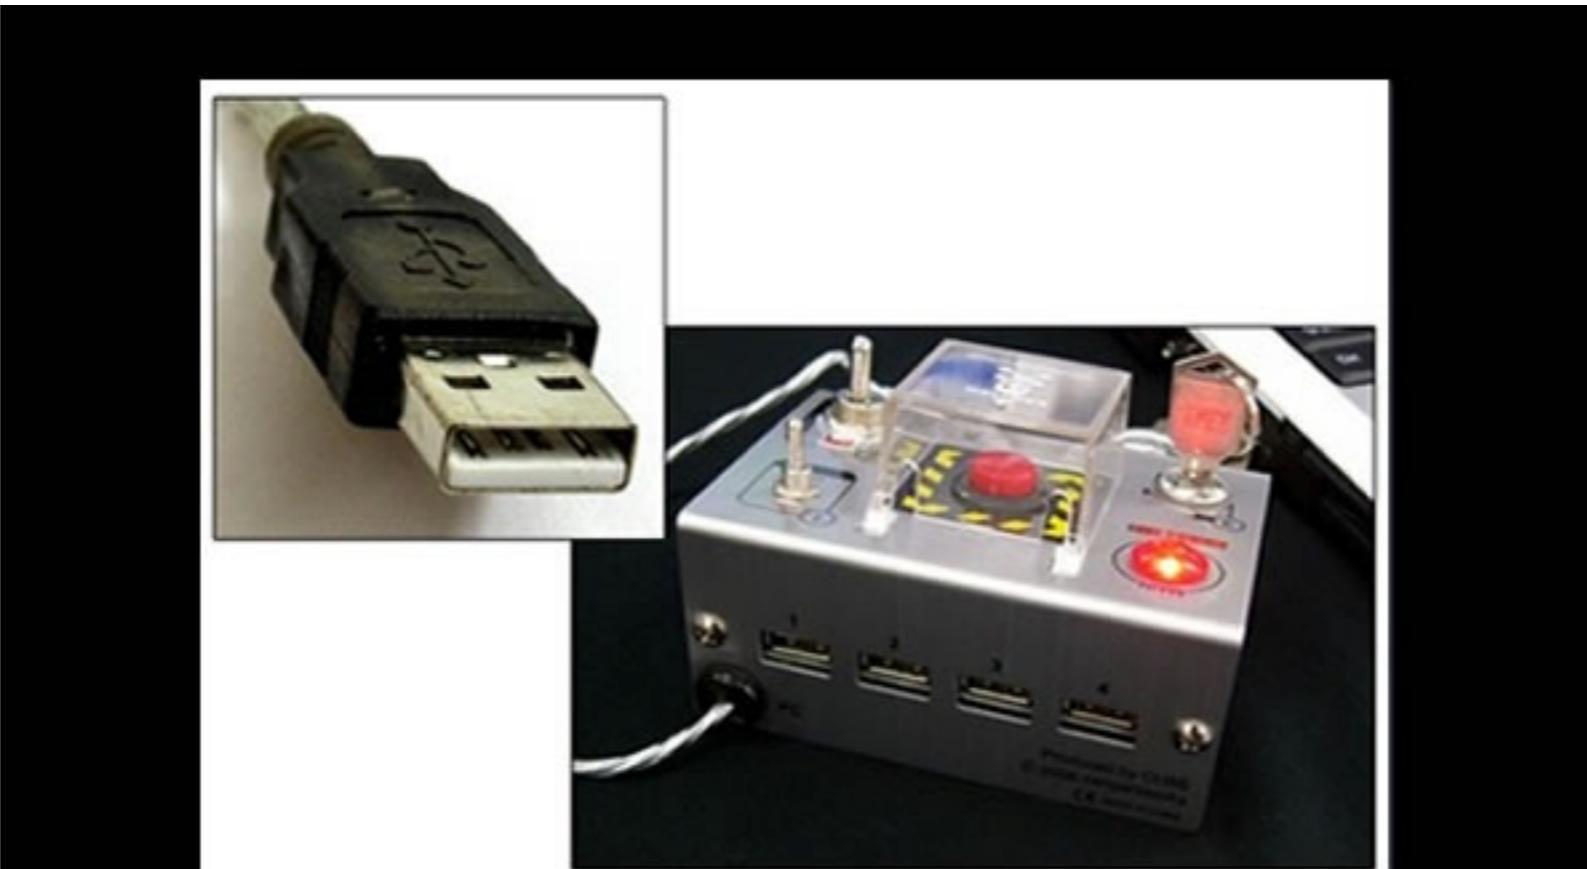

Interface Segregation Principle
You want me to plug this in *where?*



5. Dependency Inversion Principle

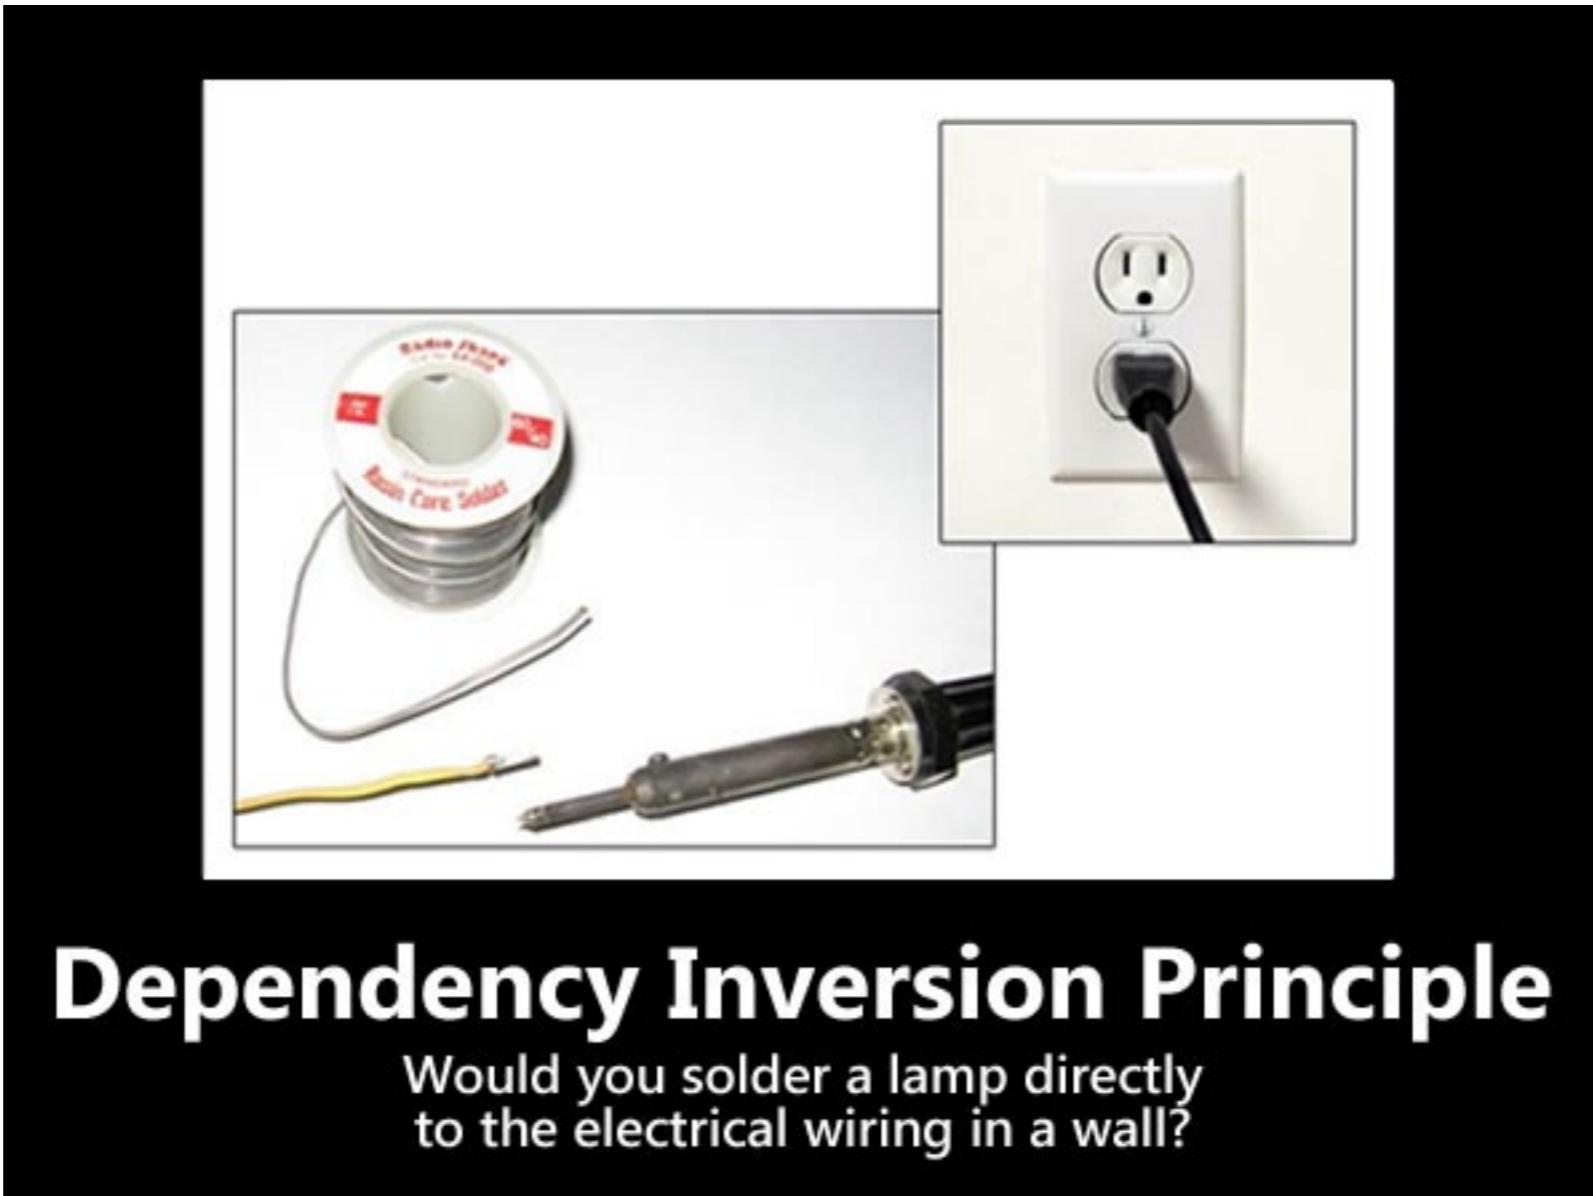

Workshop



Spring Boot



Agenda

- RESTful API
- Java frameworks
- Building RESTful API with Spring Boot
- Spring Boot with Spring Data (JDBC/JPA)
- Testing with Spring Boot



REST

REpresentation **S**tate **T**ransfer

The style of software architecture behind
RESTful services

Defined in 2000 by Roy Fielding

https://www.ics.uci.edu/~fielding/pubs/dissertation/rest_arch_style.htm



Goals

Scalability

Generality of interfaces

Independent deployment of components



RESTful service



REST Request Messages

RESTful request is typically in form of
Uniform Resource Identifiers (URI)



REST Request Messages

RESTful request is typically in form of
Uniform Resource Identifiers (URI)

Structure of URI depend on specific service



REST Request Messages

RESTful request is typically in form of
Uniform Resource Identifiers (URI)

Structure of URI depend on specific service


Request can include parameter and data in
body of request as XML, JSON etc.



REST Request & Response

Request Method

GET, POST, PUT, DELETE

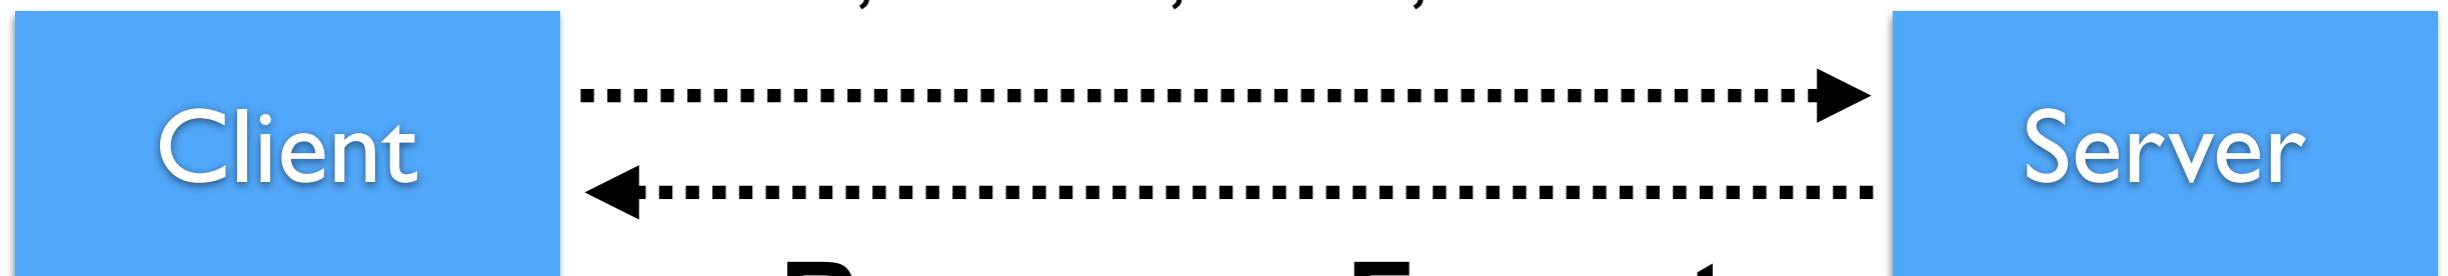

Response Format

XML or JSON



HTTP Methods meaning


Method	Meaning
GET	Read data
POST	Create/Insert new data
PUT/PATCH	Update data or insert if a new id
DELETE	Delete data



Response format ?



Good APIs ?

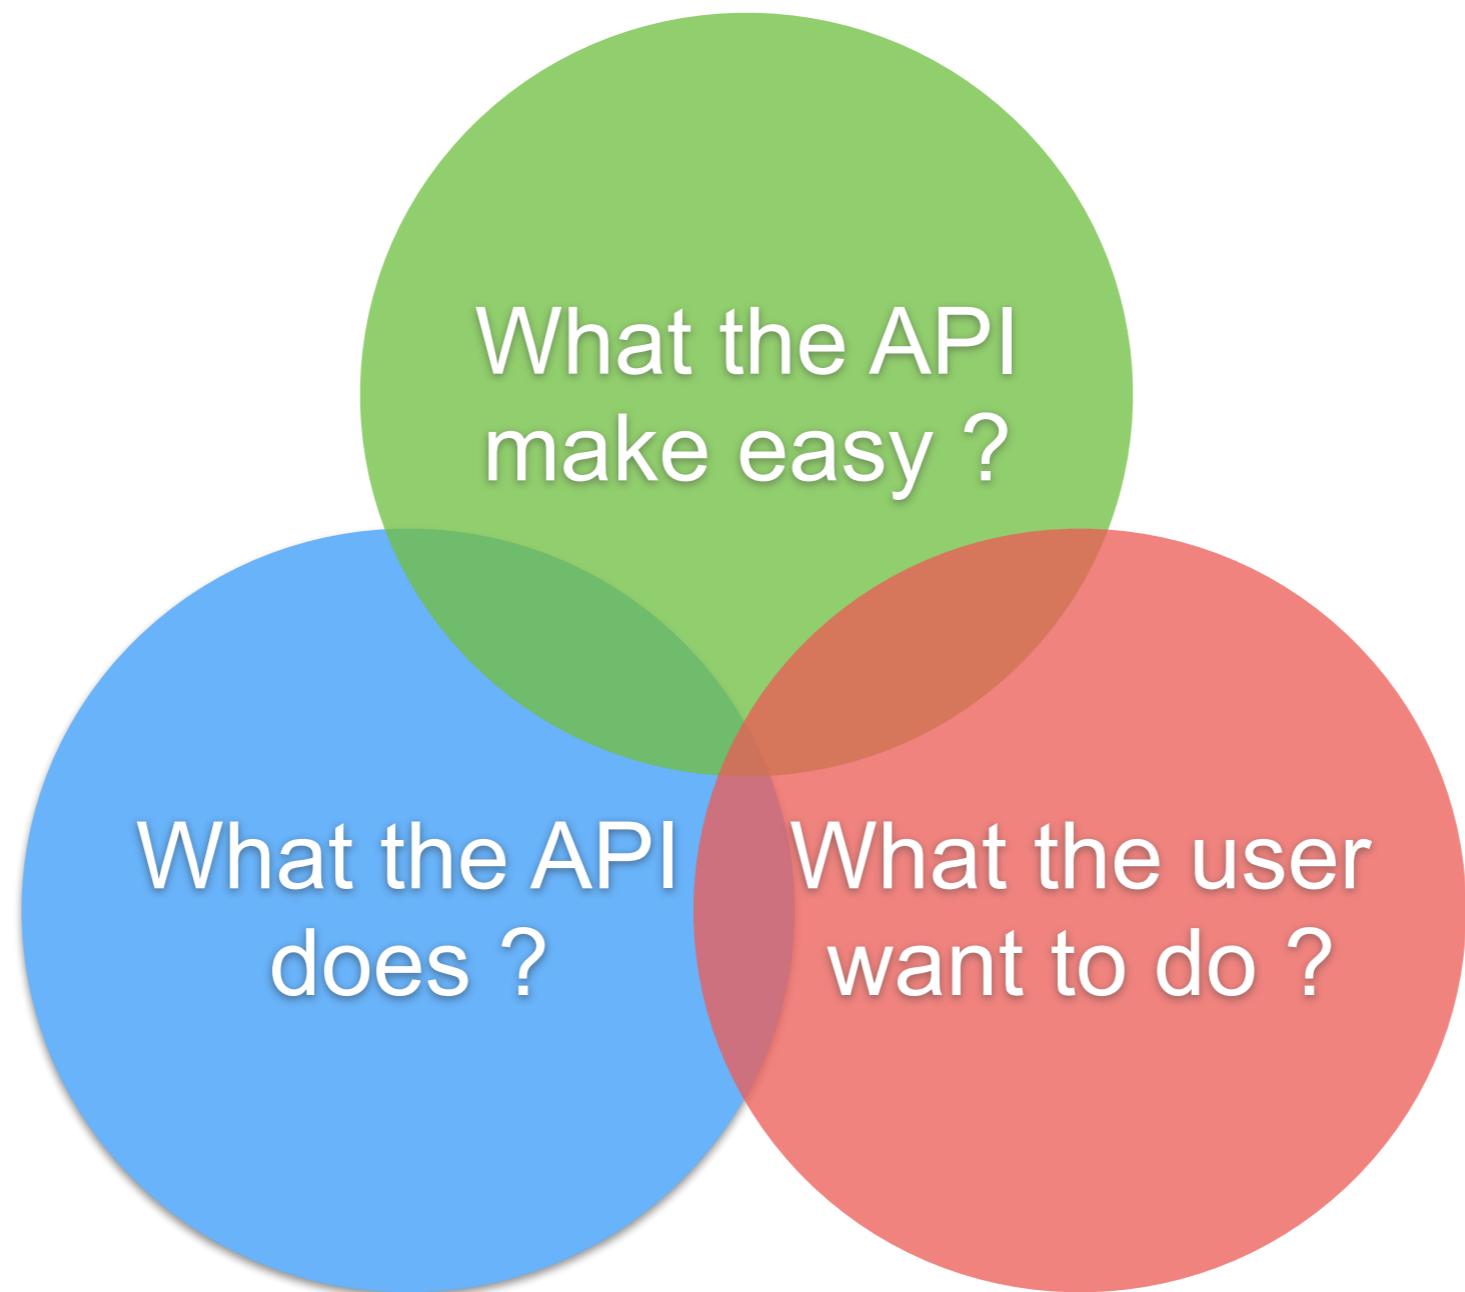

Java Framework for RESTful



unirest

Lightweight HTTP Request Client Libraries



Dropwizard



Restlet



ACT.framework




Hello Spring Boot 2.x



Why ?

Application skeleton generator
Reduce effort to add new technologies

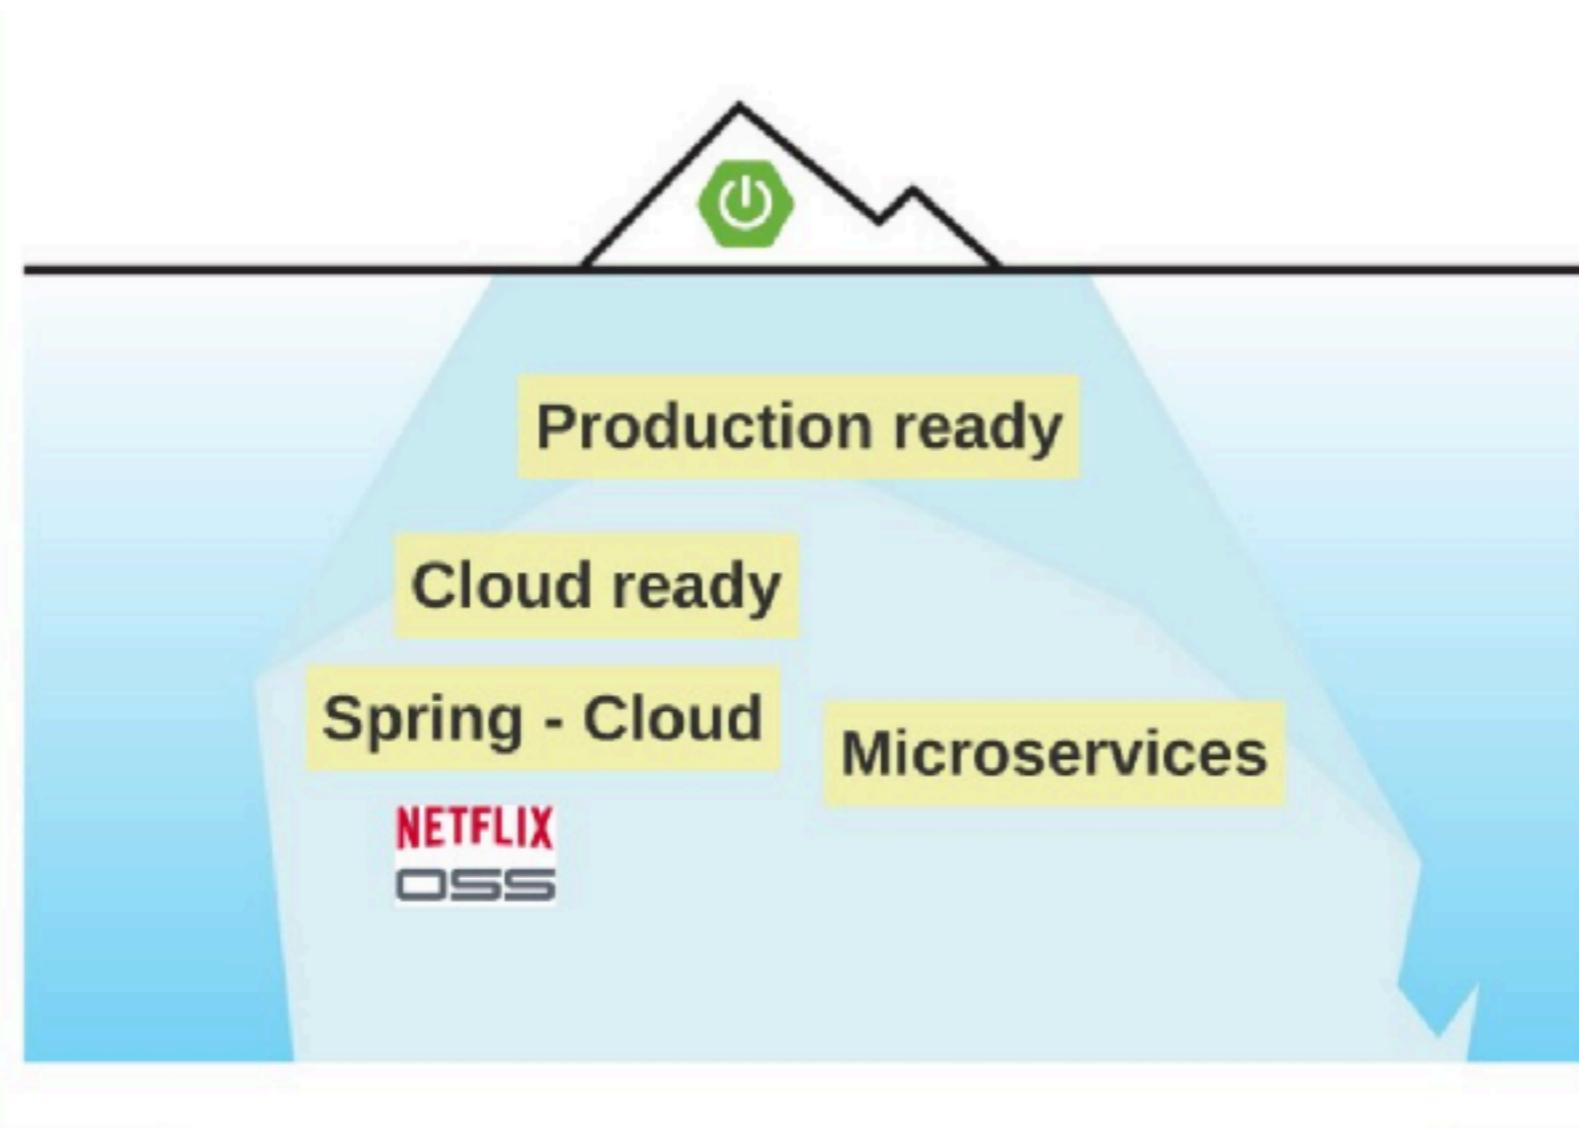

What ?

Embedded application server

Integration with tools/technologies (starter)

Production tools (monitoring, health check)


Configuration management

Dev tools


No source code generation, no XML



How ?

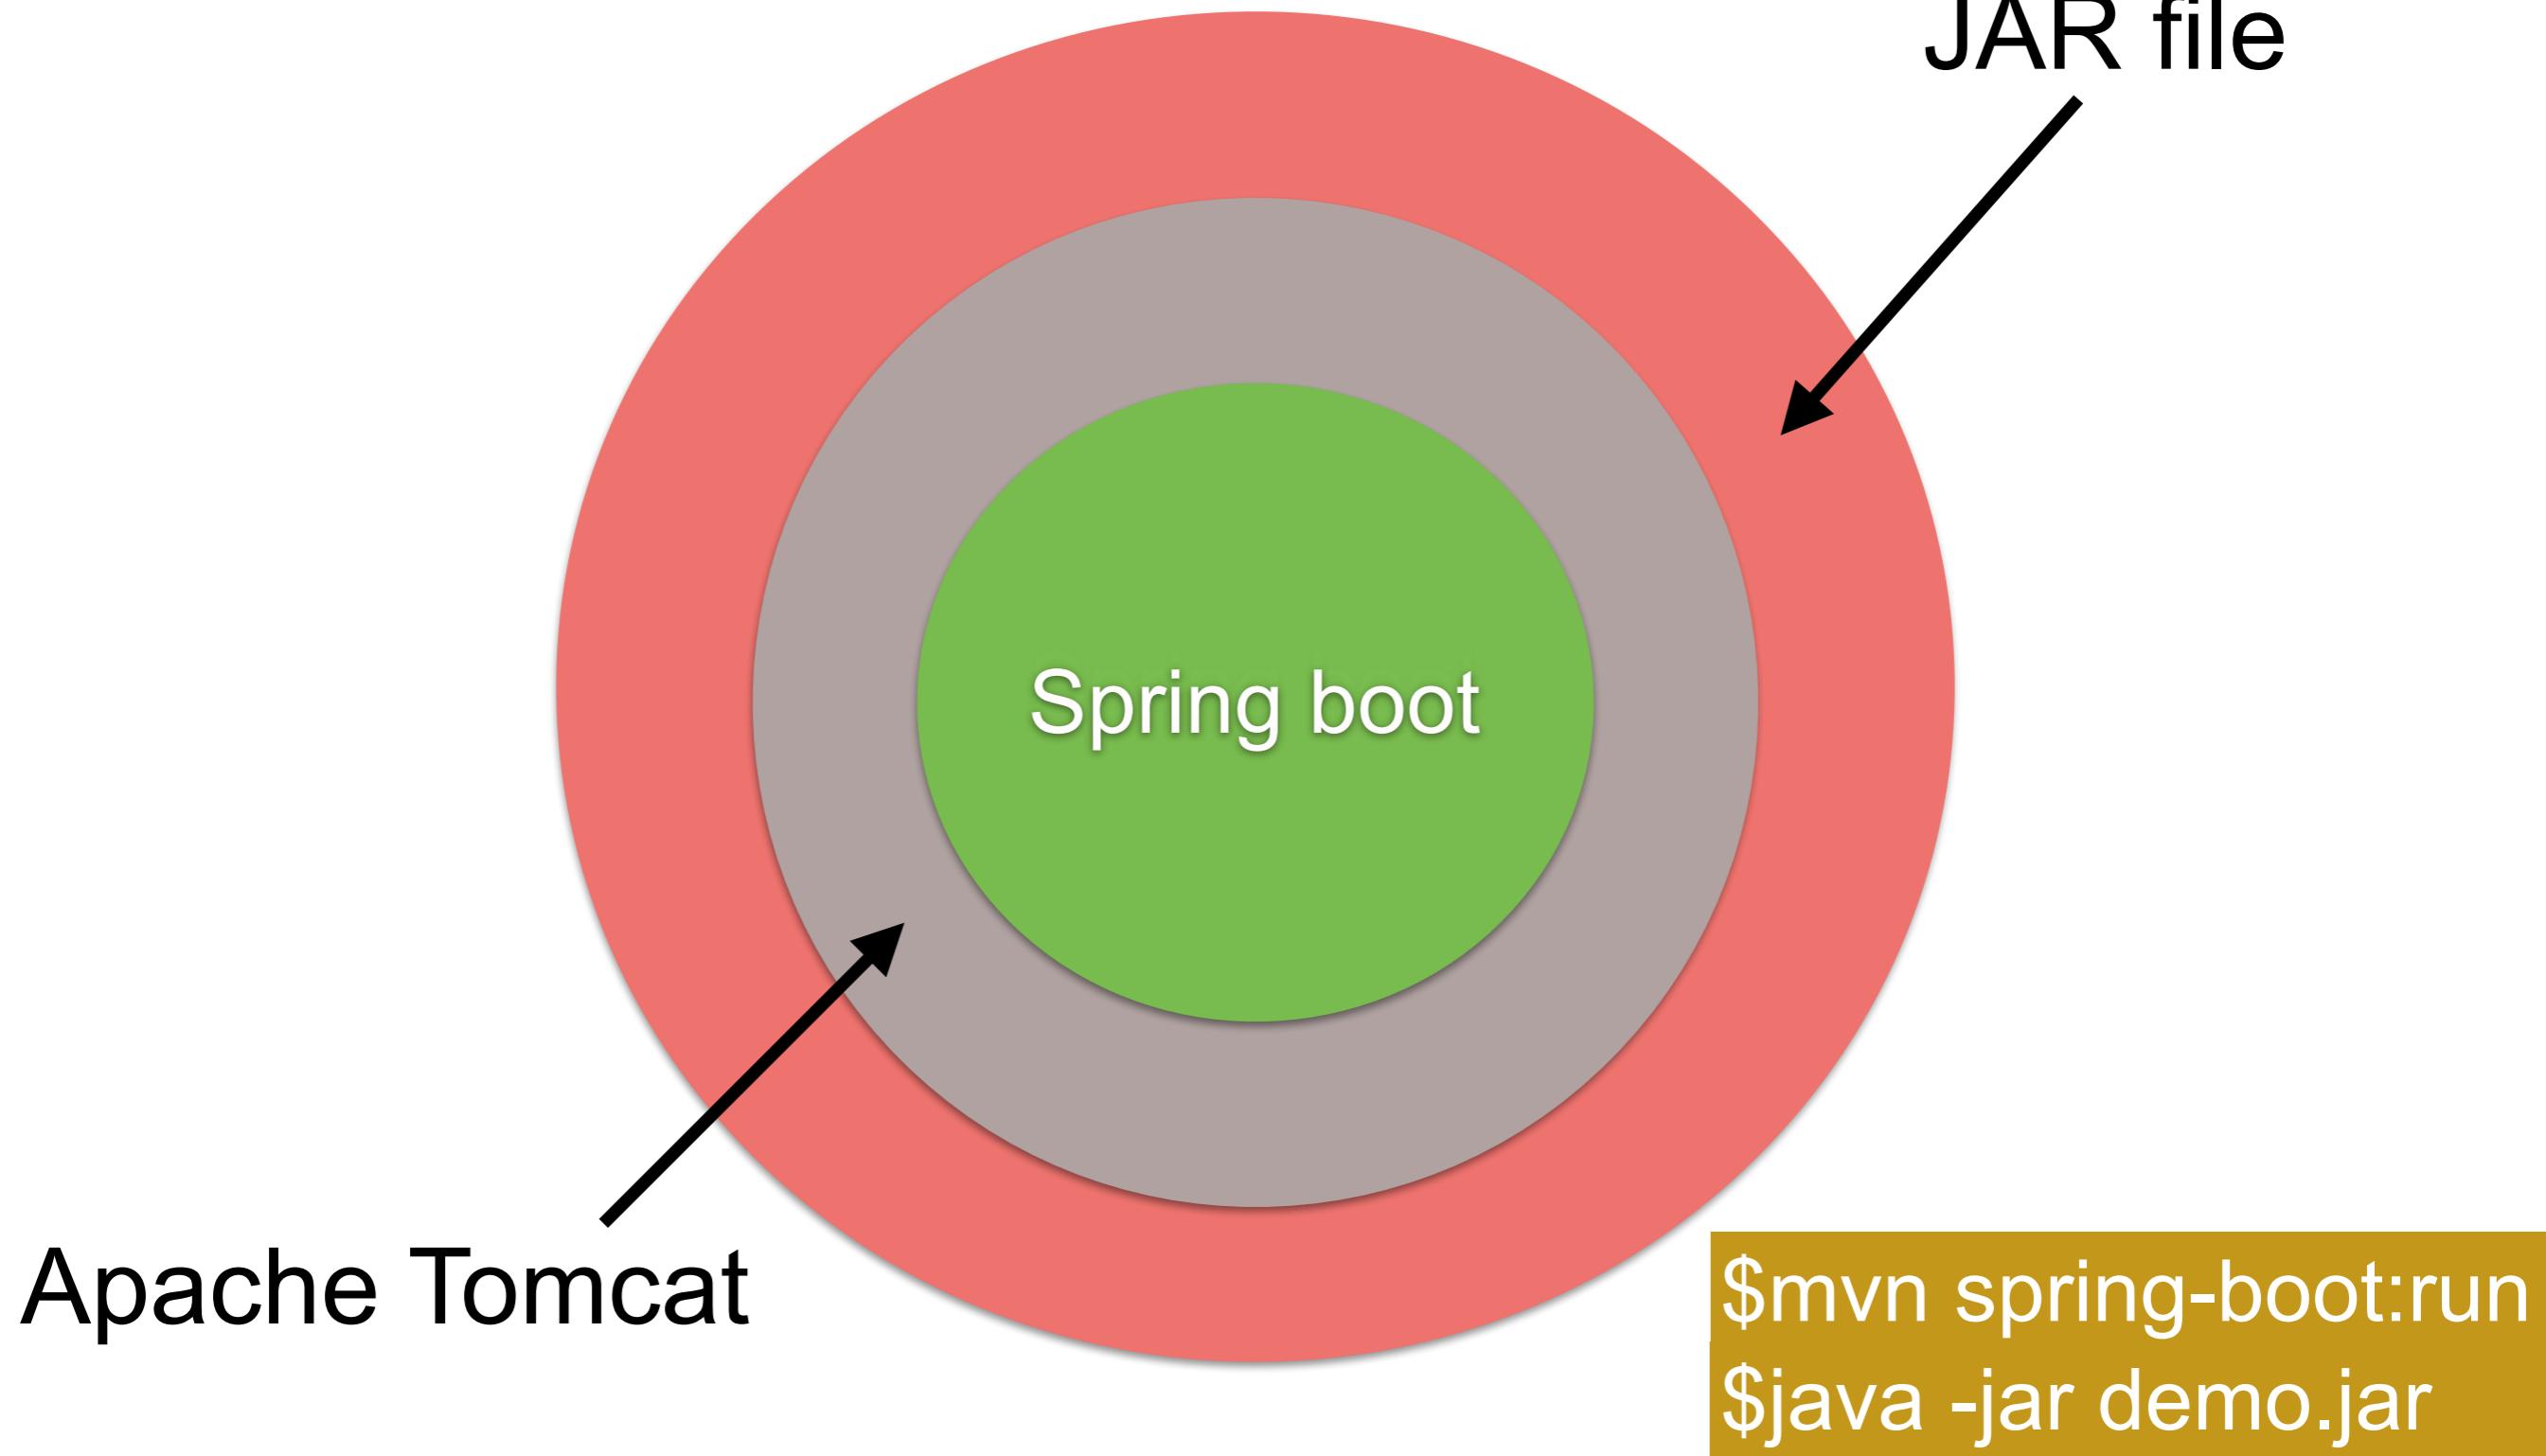


How ?

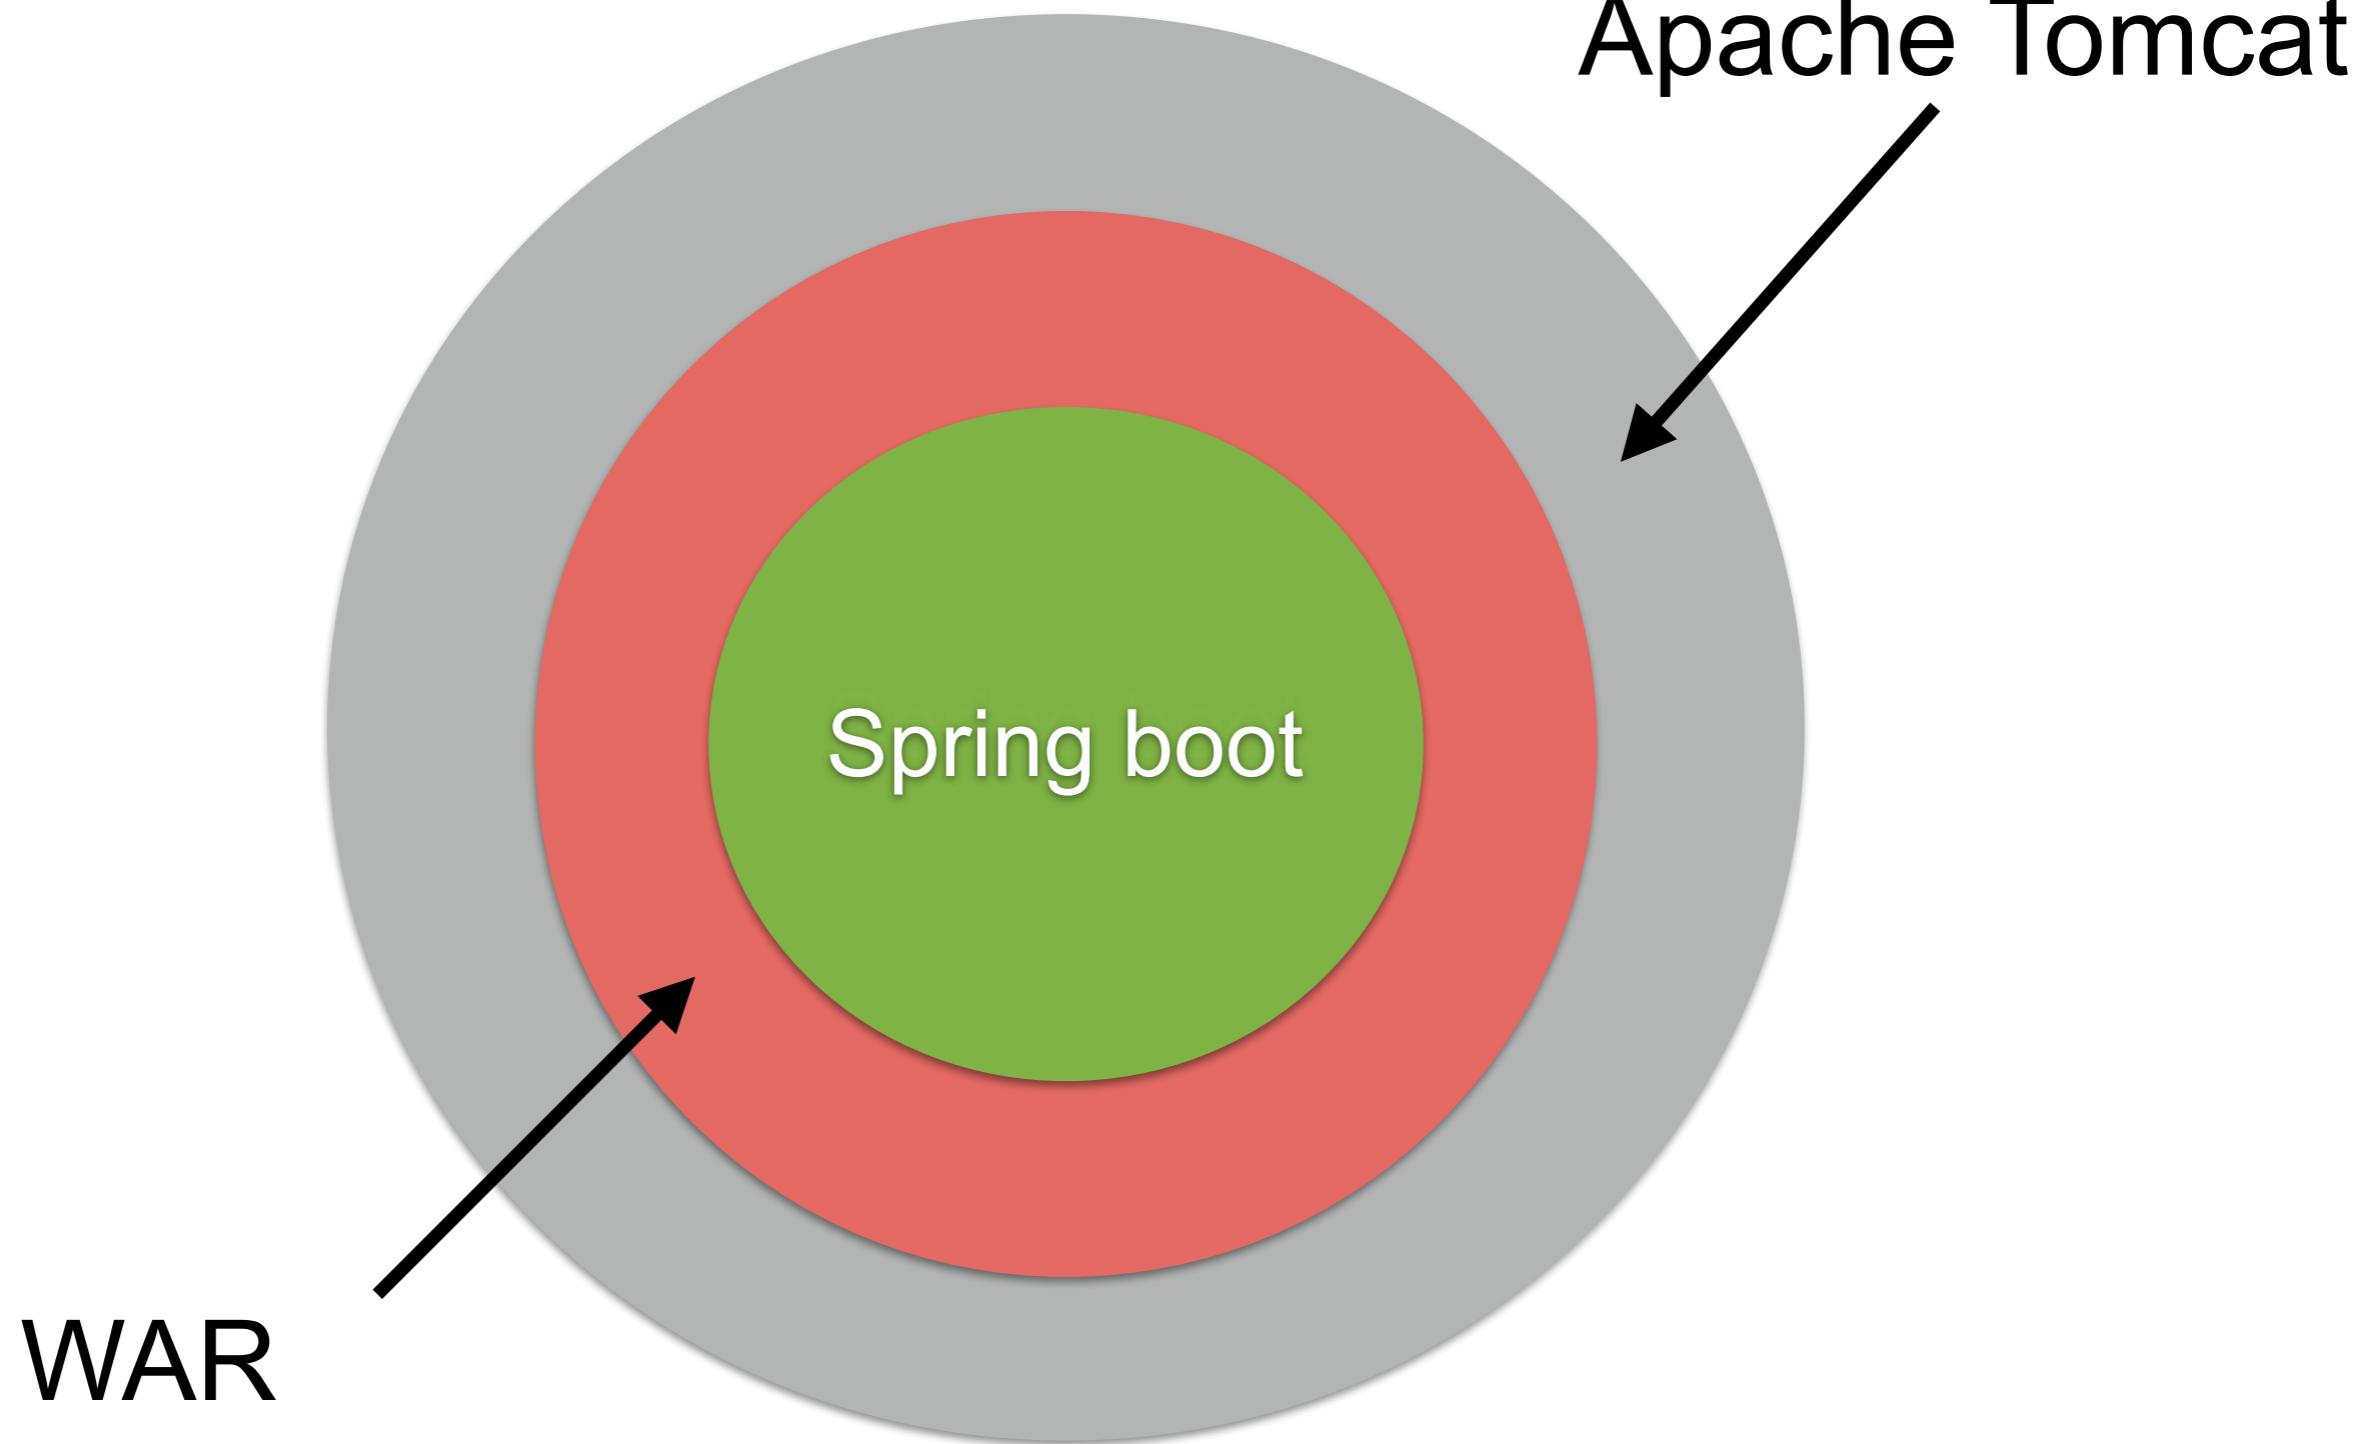


Building RESTful API with Spring Boot



Service Structure

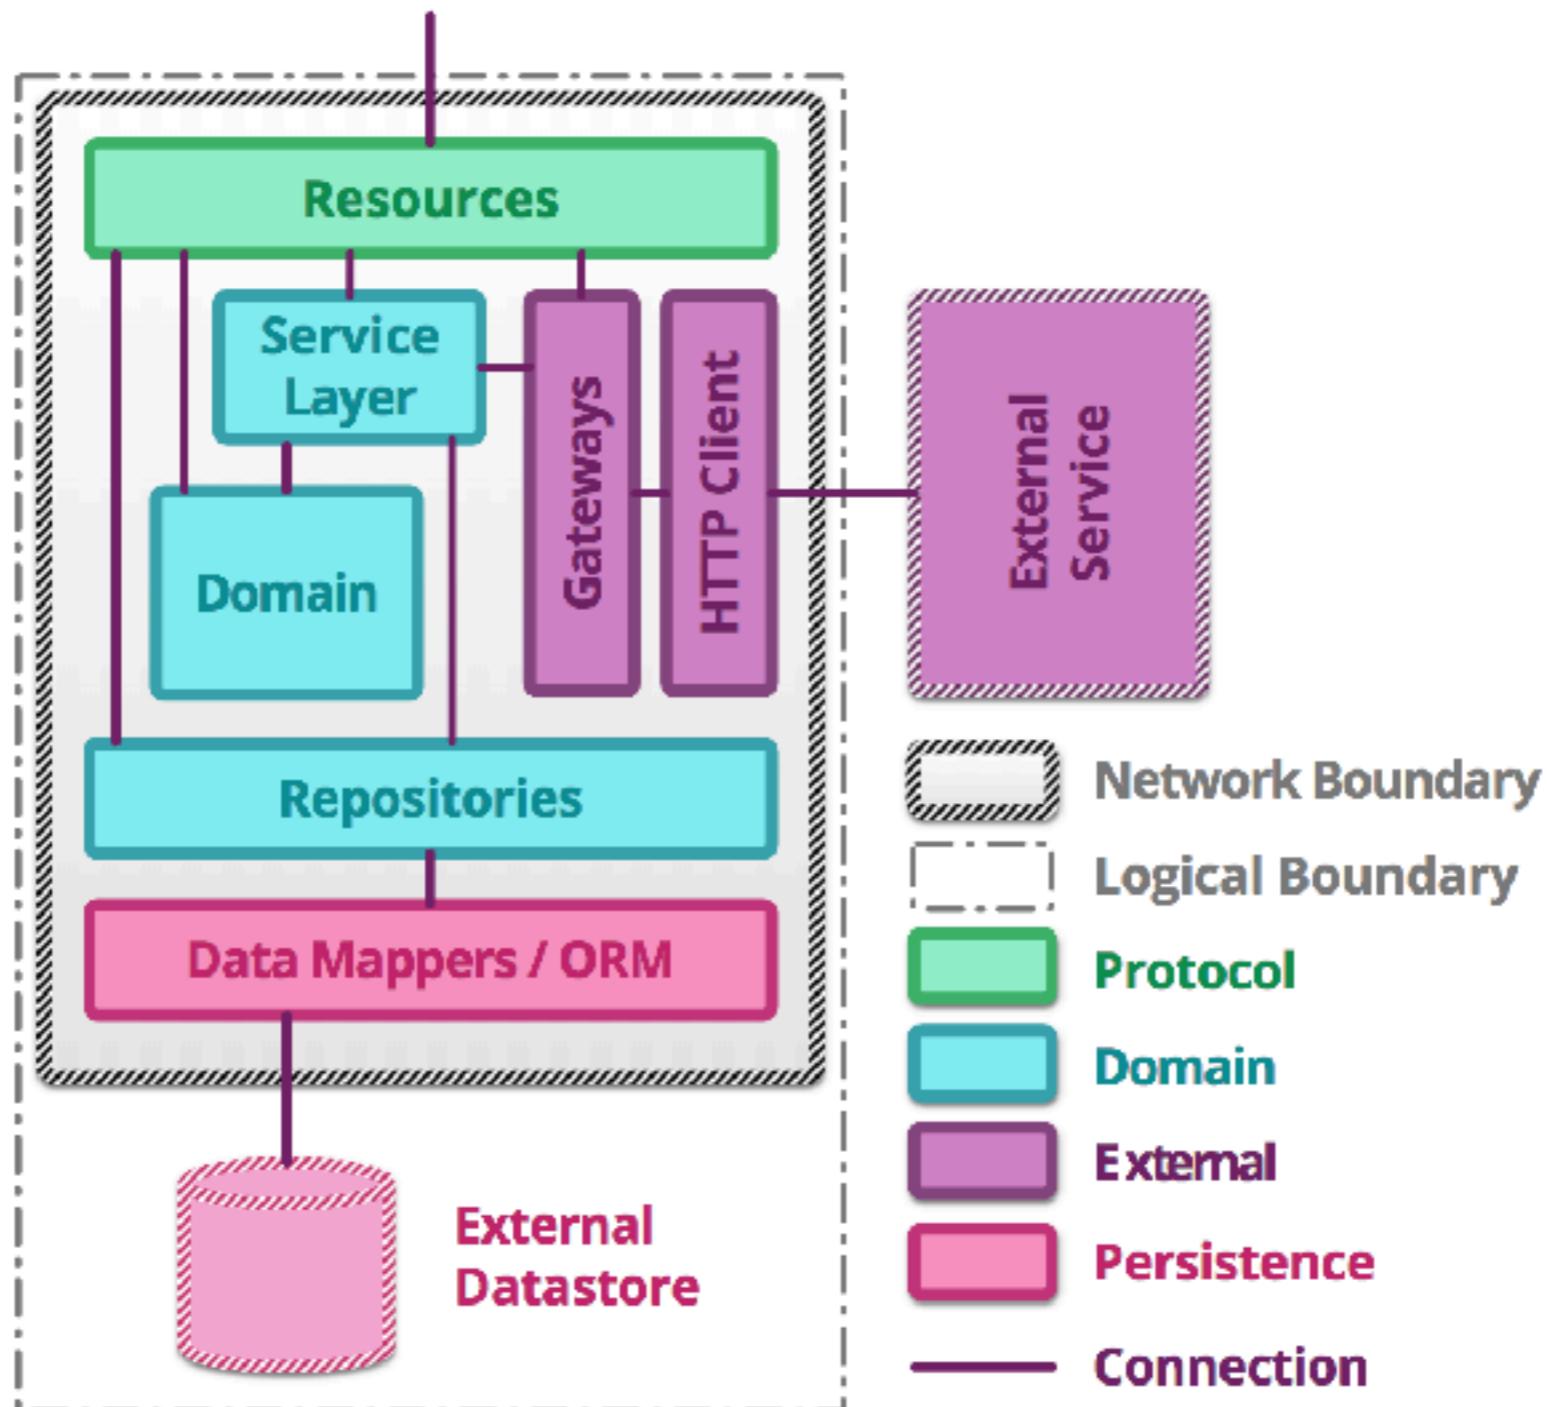

Service Structure

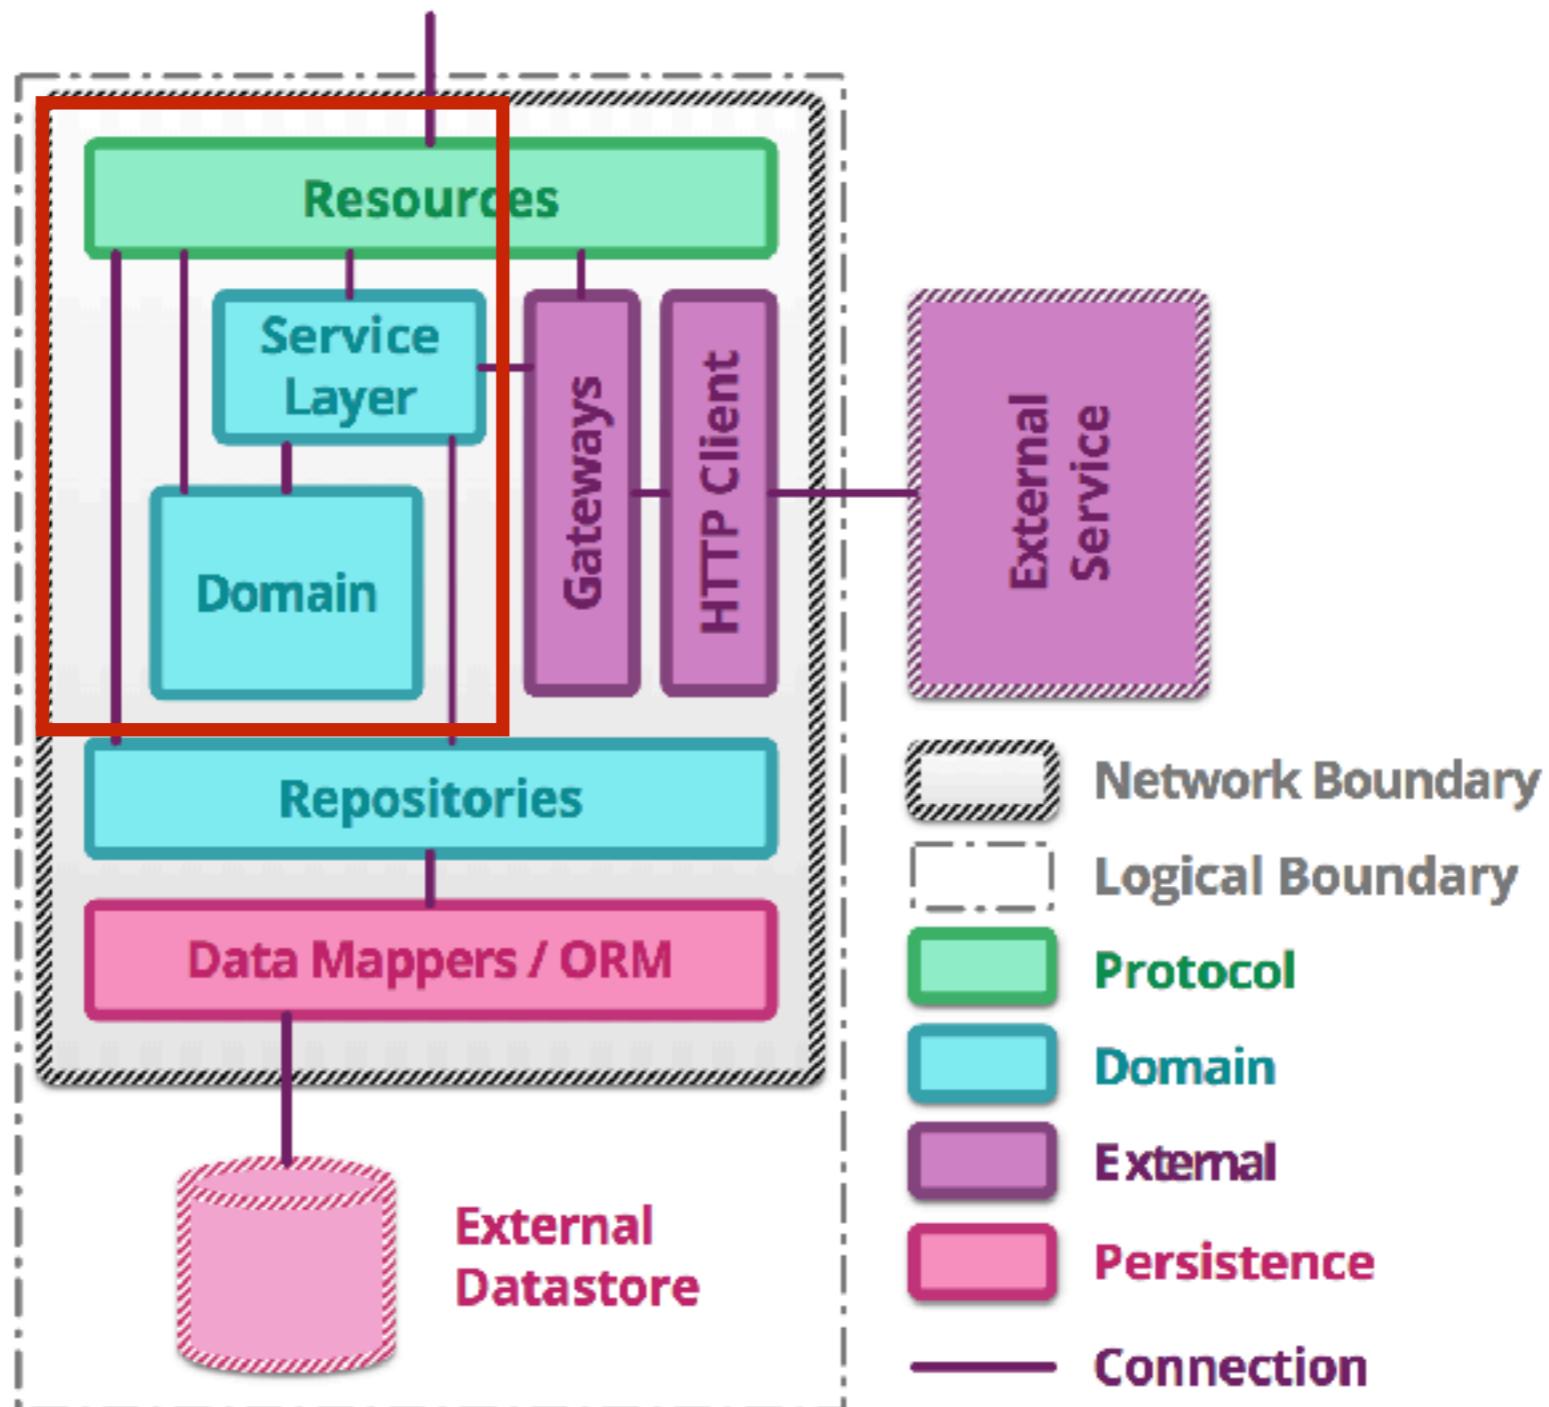

Create project with Spring Initializr



Spring Initializr

<https://start.spring.io/>

SPRING INITIALIZR bootstrap your application now

Generate a with and Spring Boot

Project Metadata

Artifact coordinates

Group

Artifact

Dependencies

Add Spring Boot Starters and dependencies to your application

Search for dependencies

Selected Dependencies

Don't know what to look for? Want more options? [Switch to the full version.](#)

start.spring.io is powered by [Spring Initializr](#) and [Pivotal Web Services](#)



Structure of Spring Boot



Spring Boot main class

```
package com.example.demo;

import org.springframework.boot.SpringApplication;
import org.springframework.boot.autoconfigure.SpringBootApplication;

@SpringBootApplication
public class DemoApplication {

    public static void main(String[] args) {
        SpringApplication.run(DemoApplication.class, args);
    }
}
```



Run project

```
./mvnw package  
$java -jar target/<file name>.jar
```

The Spring Boot logo consists of a grid of characters including slashes, parentheses, brackets, and underscores, arranged in a pattern that forms the words "Spring Boot". Below the grid, the text ":: Spring Boot ::" is written in green, and "(v2.0.2.RELEASE)" is written in gray.

```
2018-06-07 13:03:30.412  INFO 12828 --- [  
oApplication           : Starting DemoApplication on  
D 12828 (started by somkiat in /Users/somkiat/Down  
2018-06-07 13:03:30.418  INFO 12828 --- [  
oApplication           : No active profile set, fall
```



Custom banner


The Spring Boot logo is a complex arrangement of various characters including slashes, parentheses, brackets, and underscores, all connected by a network of lines to form a circular, organic shape.

```
2018-06-07 13:03:30.412  INFO 12828 --- [  
  oApplication : Starting DemoApplication on  
D 12828 (started by somkiat in /Users/somkiat/Down  
2018-06-07 13:03:30.418  INFO 12828 --- [  
  oApplication : No active profile set, fall
```



Custom banner (1)

Create file banner.txt or banner.png in resources folder

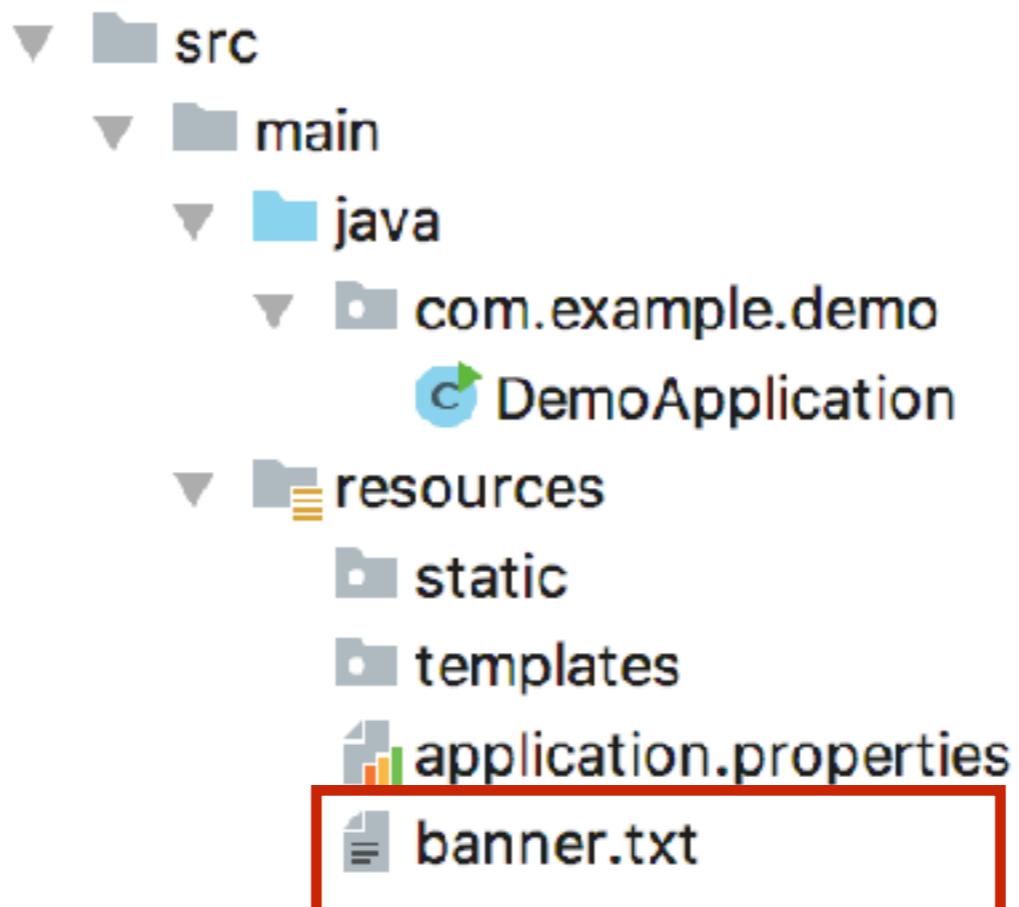

Custom banner (2)

```
@SpringBootApplication
public class DemoApplication {

    public static void main(String[] args) {
        ImageBanner banner = new ImageBanner(
            new ClassPathResource("try.png"));

        new SpringApplicationBuilder()
            .sources(DemoApplication.class)
            .banner(banner)
            .run();
    }
}
```




Disable banner

```
@SpringBootApplication
public class DemoApplication {

    public static void main(String[] args) {
        new SpringApplicationBuilder()
            .sources(DemoApplication.class)
            .bannerMode(Banner.Mode.OFF)
            .run(args);
    }
}
```



Anatomy of Starter

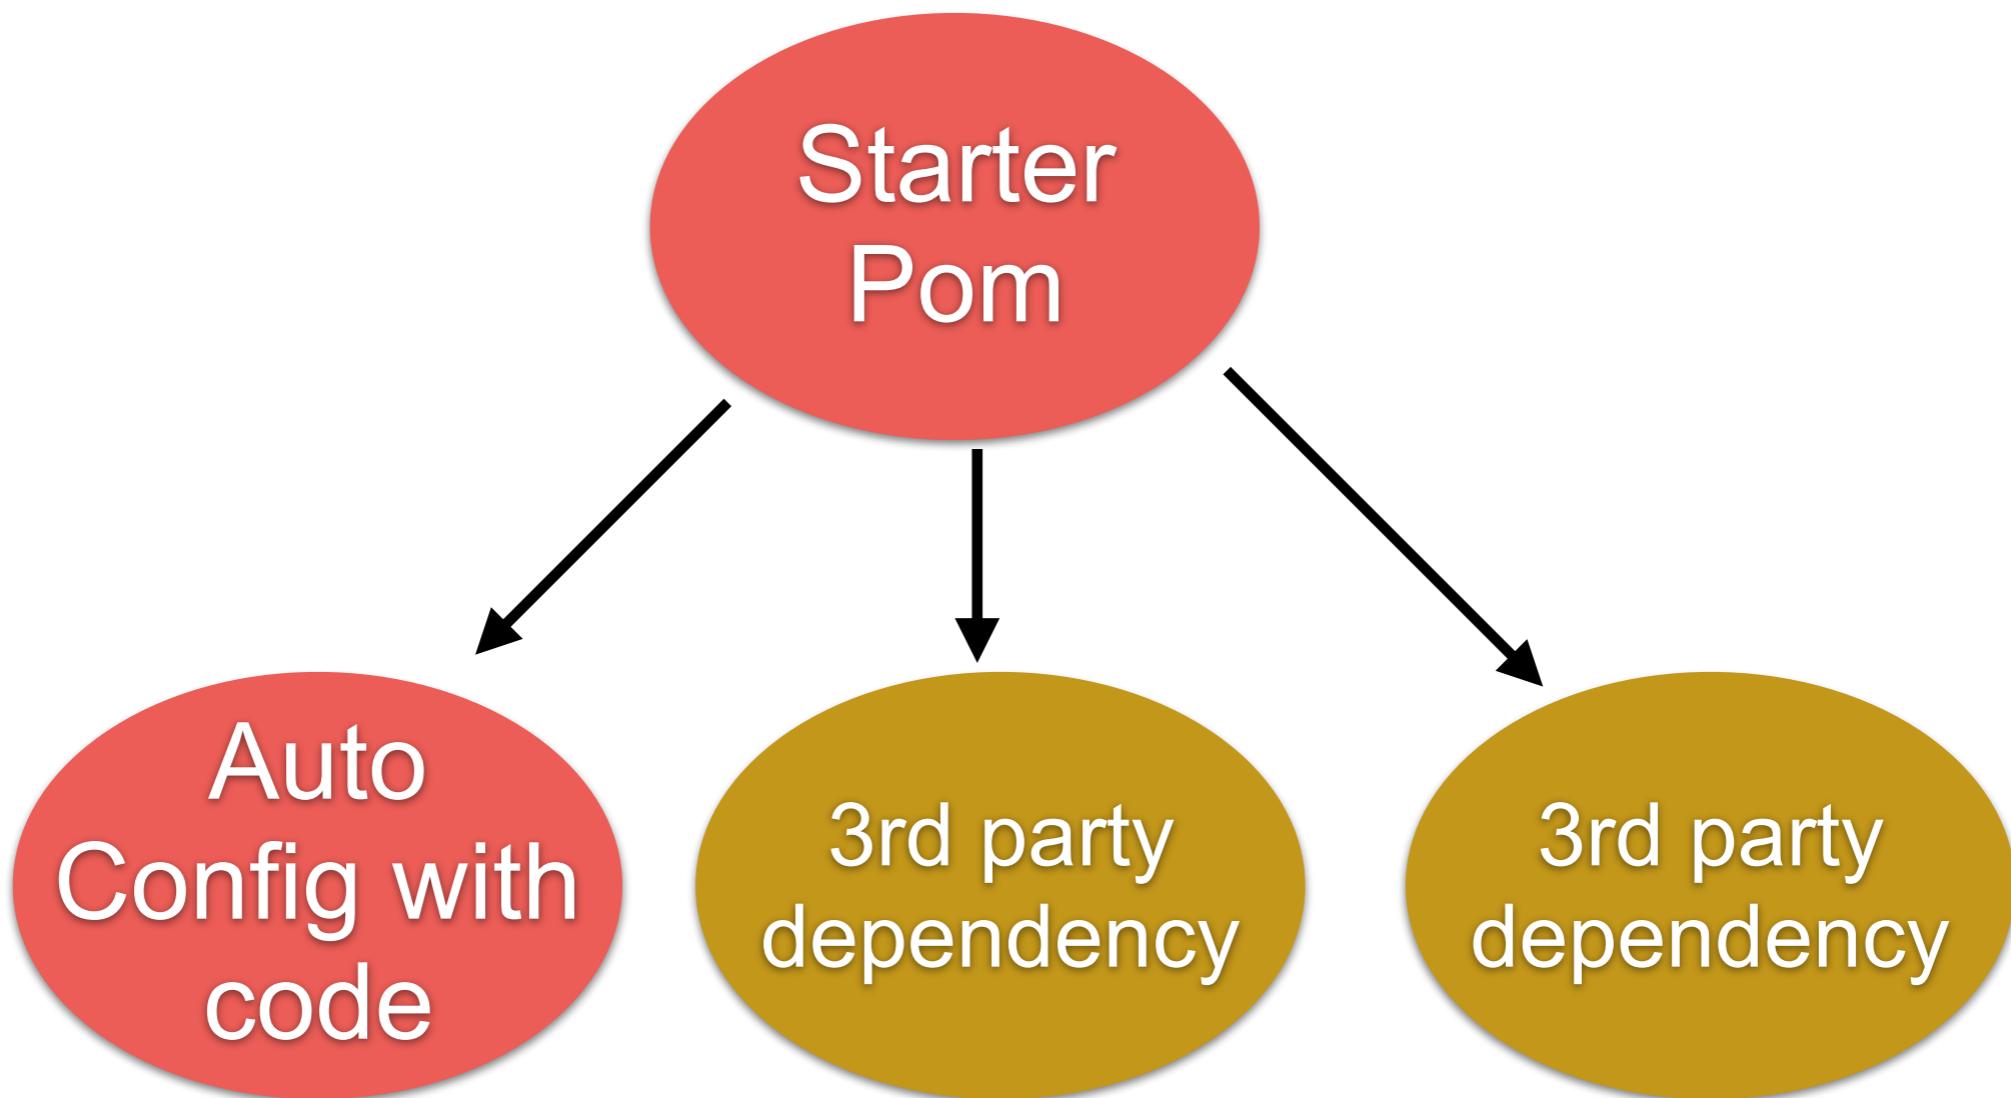

Configuration management

Properties/XML/YAML

Config server (App, Spring cloud config, git)

17 ways !!!


<https://docs.spring.io/spring-boot/docs/current/reference/html/boot-features-external-config.html>




Create project with IDE



1. Create Maven Project

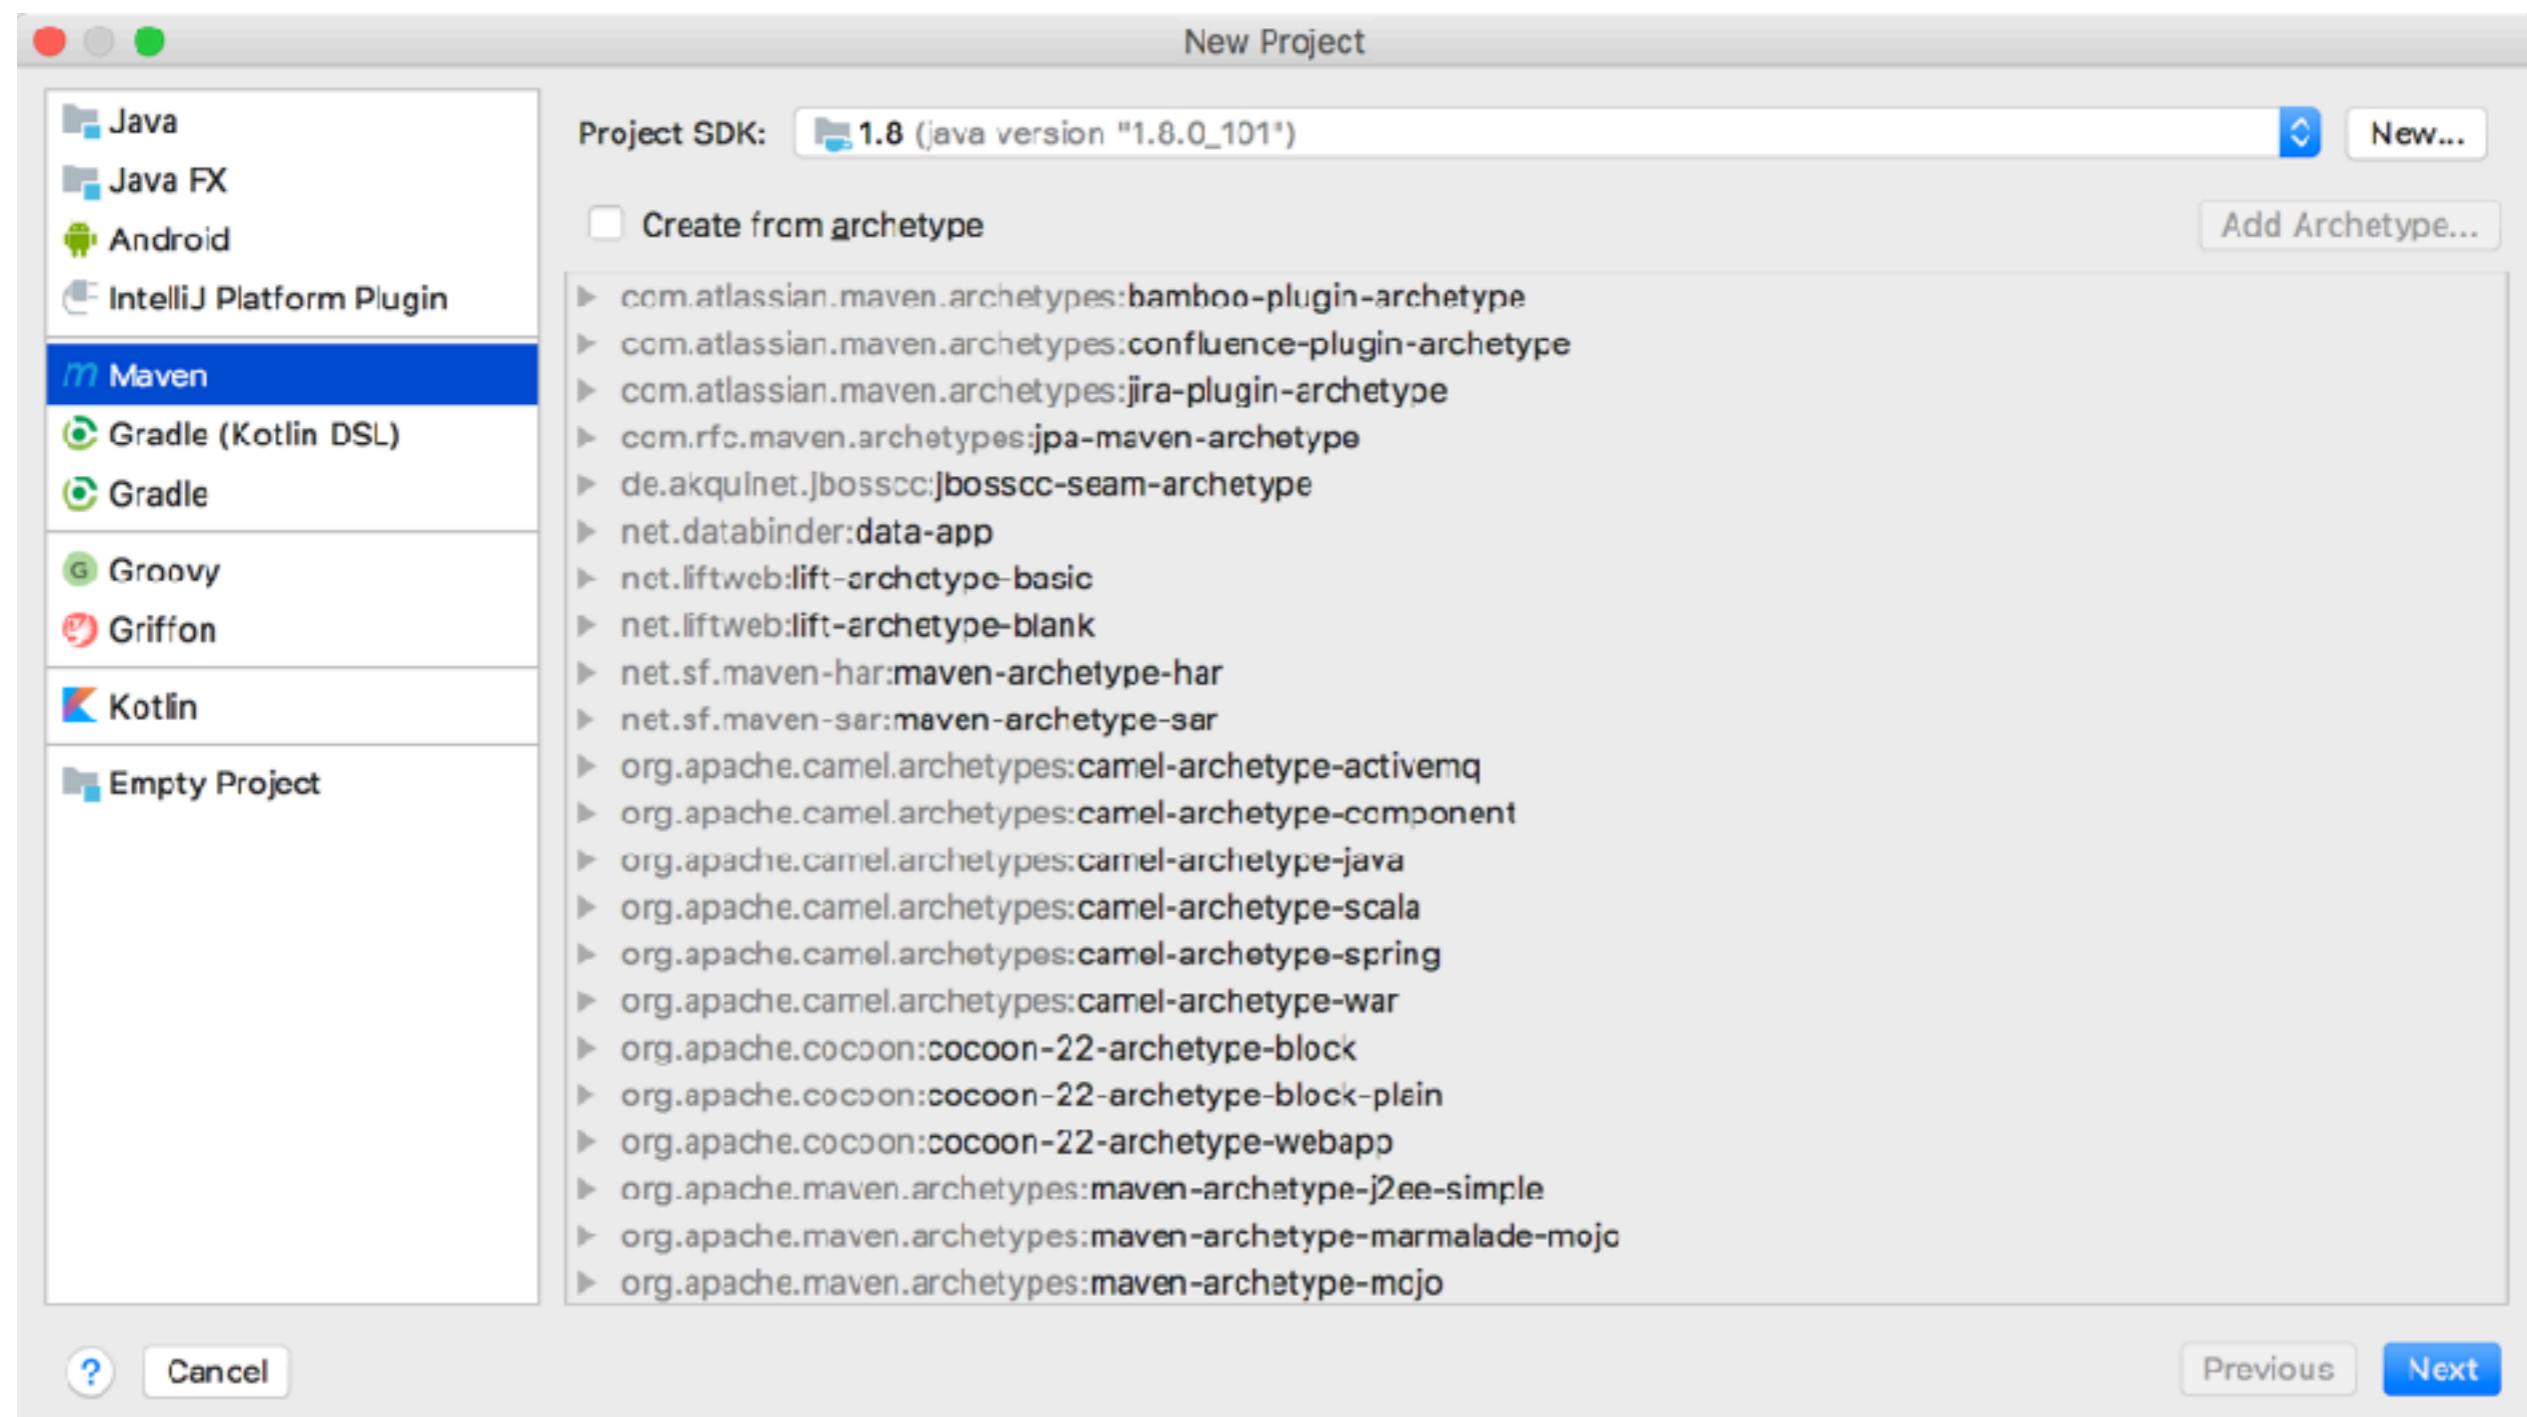

2. Project Name

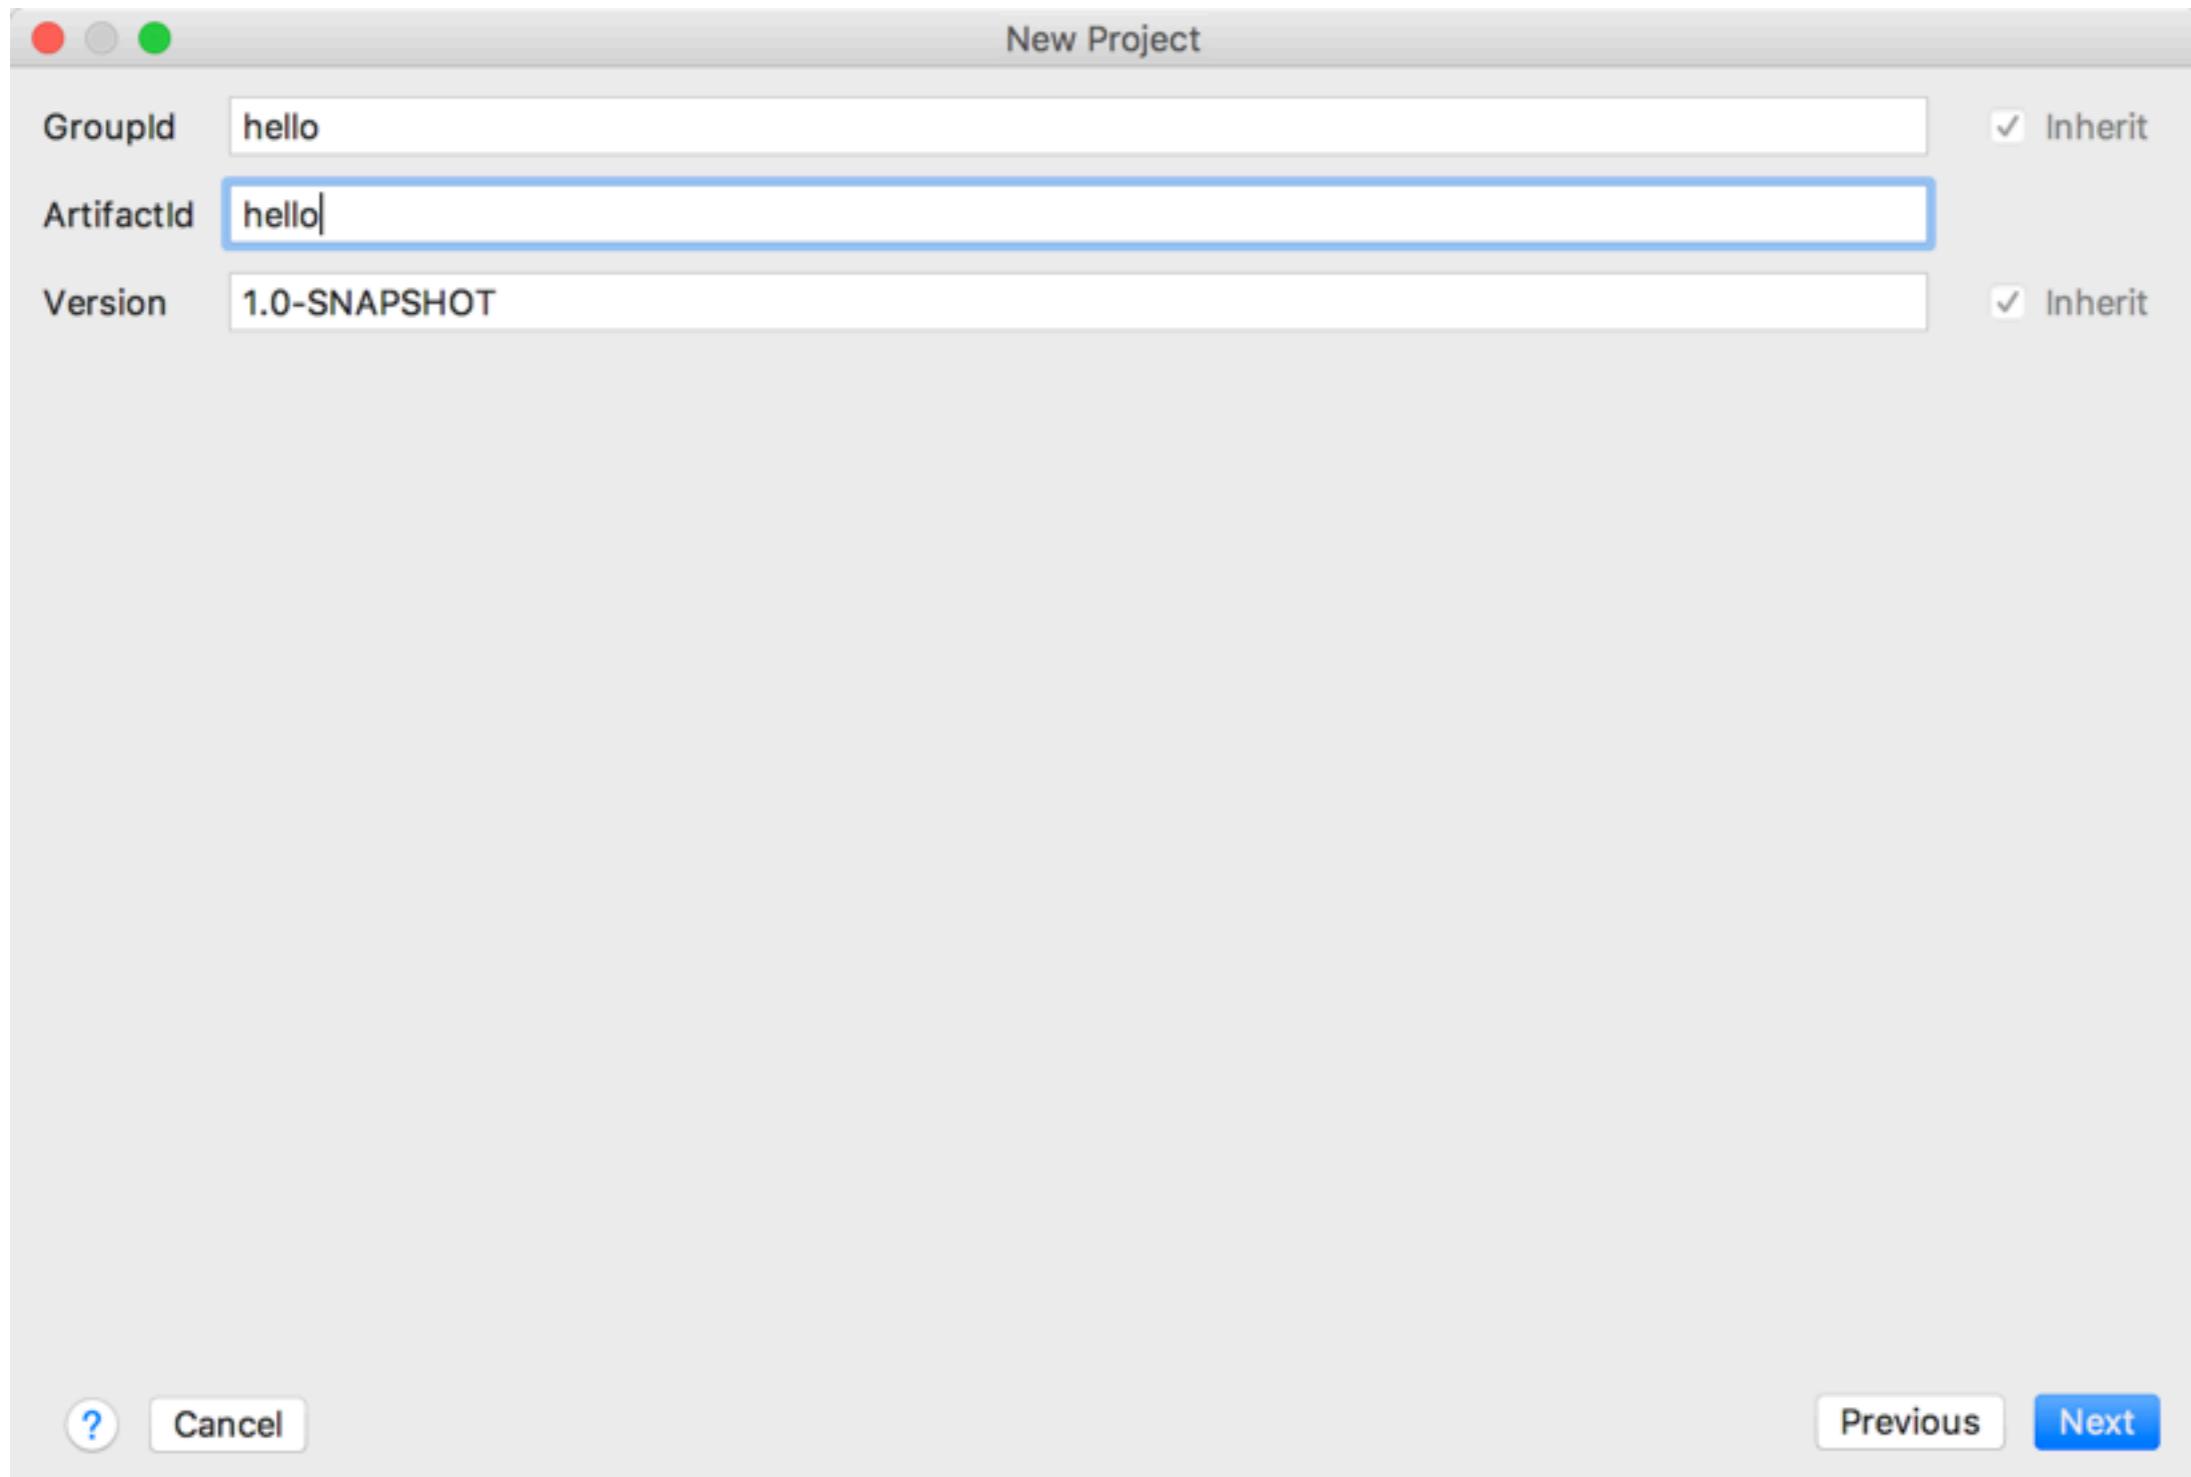

3. Modify pom.xml (1)

```
<project xmlns="http://maven.apache.org/POM/4.0.0"
    xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xsi:schemaLocation="http://maven.apache.org/POM/4.0.0 http://maven.apache.o
<modelVersion>4.0.0</modelVersion>

<groupId>hello</groupId>
<artifactId>hello</artifactId>
<version>1.0-SNAPSHOT</version>
<packaging>jar</packaging>

<parent>
    <groupId>org.springframework.boot</groupId>
    <artifactId>spring-boot-starter-parent</artifactId>
    <version>2.0.0.RELEASE</version>
    <relativePath/> <!-- lookup parent from repository -->
</parent>

<properties>
    <project.build.sourceEncoding>UTF-8</project.build.sourceEncoding>
    <project.reporting.outputEncoding>UTF-8</project.reporting.outputEncoding>
    <java.version>1.8</java.version>
</properties>
```



3. Modify pom.xml (2)

```
<dependencies>
    <dependency>
        <groupId>org.springframework.boot</groupId>
        <artifactId>spring-boot-starter-web</artifactId>
    </dependency>

    <dependency>
        <groupId>org.springframework.boot</groupId>
        <artifactId>spring-boot-starter-test</artifactId>
        <scope>test</scope>
    </dependency>
</dependencies>

<build>
    <finalName>hello</finalName>
    <plugins>
        <plugin>
            <groupId>org.springframework.boot</groupId>
            <artifactId>spring-boot-maven-plugin</artifactId>
        </plugin>
    </plugins>
</build>
```



4. Create Spring boot application

hello.HelloApplication.java

```
package hello;

import org.springframework.boot.SpringApplication;
import org.springframework.boot.autoconfigure.SpringBootApplication;

@SpringBootApplication
public class HelloApplication {


    public static void main(String[] args) {
        SpringApplication.run(HelloApplication.class, args);
    }

}
```



Spring Boot Structure

Separate by function/domain

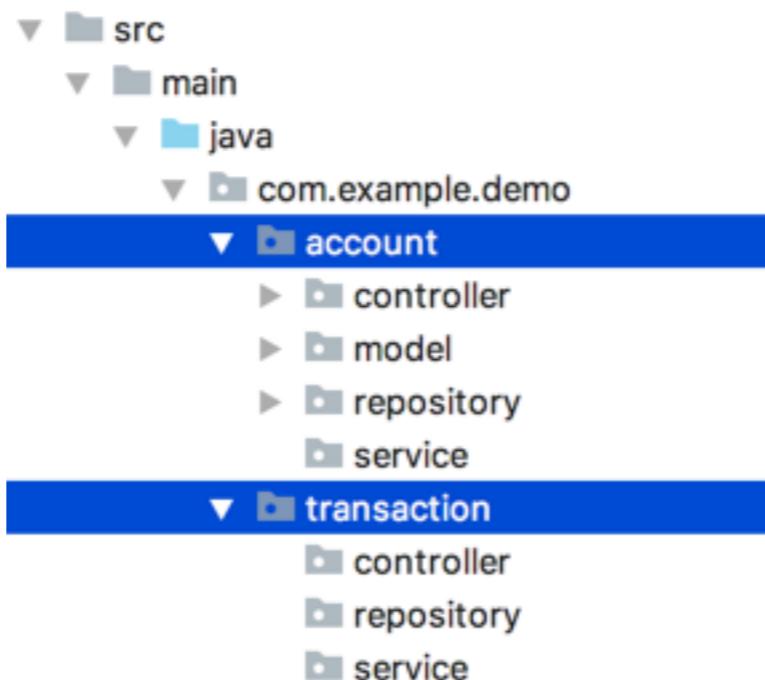

5. Create model class

hello.model.Hello.java

```
package hello.domain;

public class Hello {

    private String message;

    public Hello(String message) {
        this.message = message;
    }

    public String getMessage() {
        return message;
    }

    public void setMessage(String message) {
        this.message = message;
    }
}
```



6. Create REST Controller

hello.controller.HelloController.java

```
package hello.controller;

import hello.domain.Hello;
import org.springframework.web.bind.annotation.GetMapping;
import org.springframework.web.bind.annotation.PathVariable;
import org.springframework.web.bind.annotation.RestController;

@RestController
public class HelloController {

    @GetMapping("/hello/{name}")
    public Hello sayHi(@PathVariable String name) {
        return new Hello("Hello " + name);
    }

}
```



7. Compile and Packaging

\$mvn clean package




8. Run

```
$java -jar target/hello.jar
```



9. Open in browser

<http://localhost:8080/hello/somkiat>

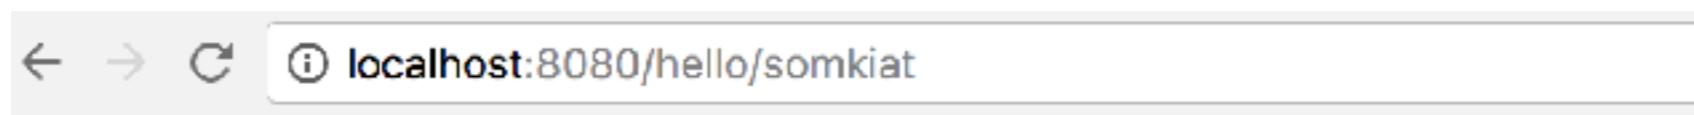


{ "message": "Hello somkiat" }



How to test the Hello service ?



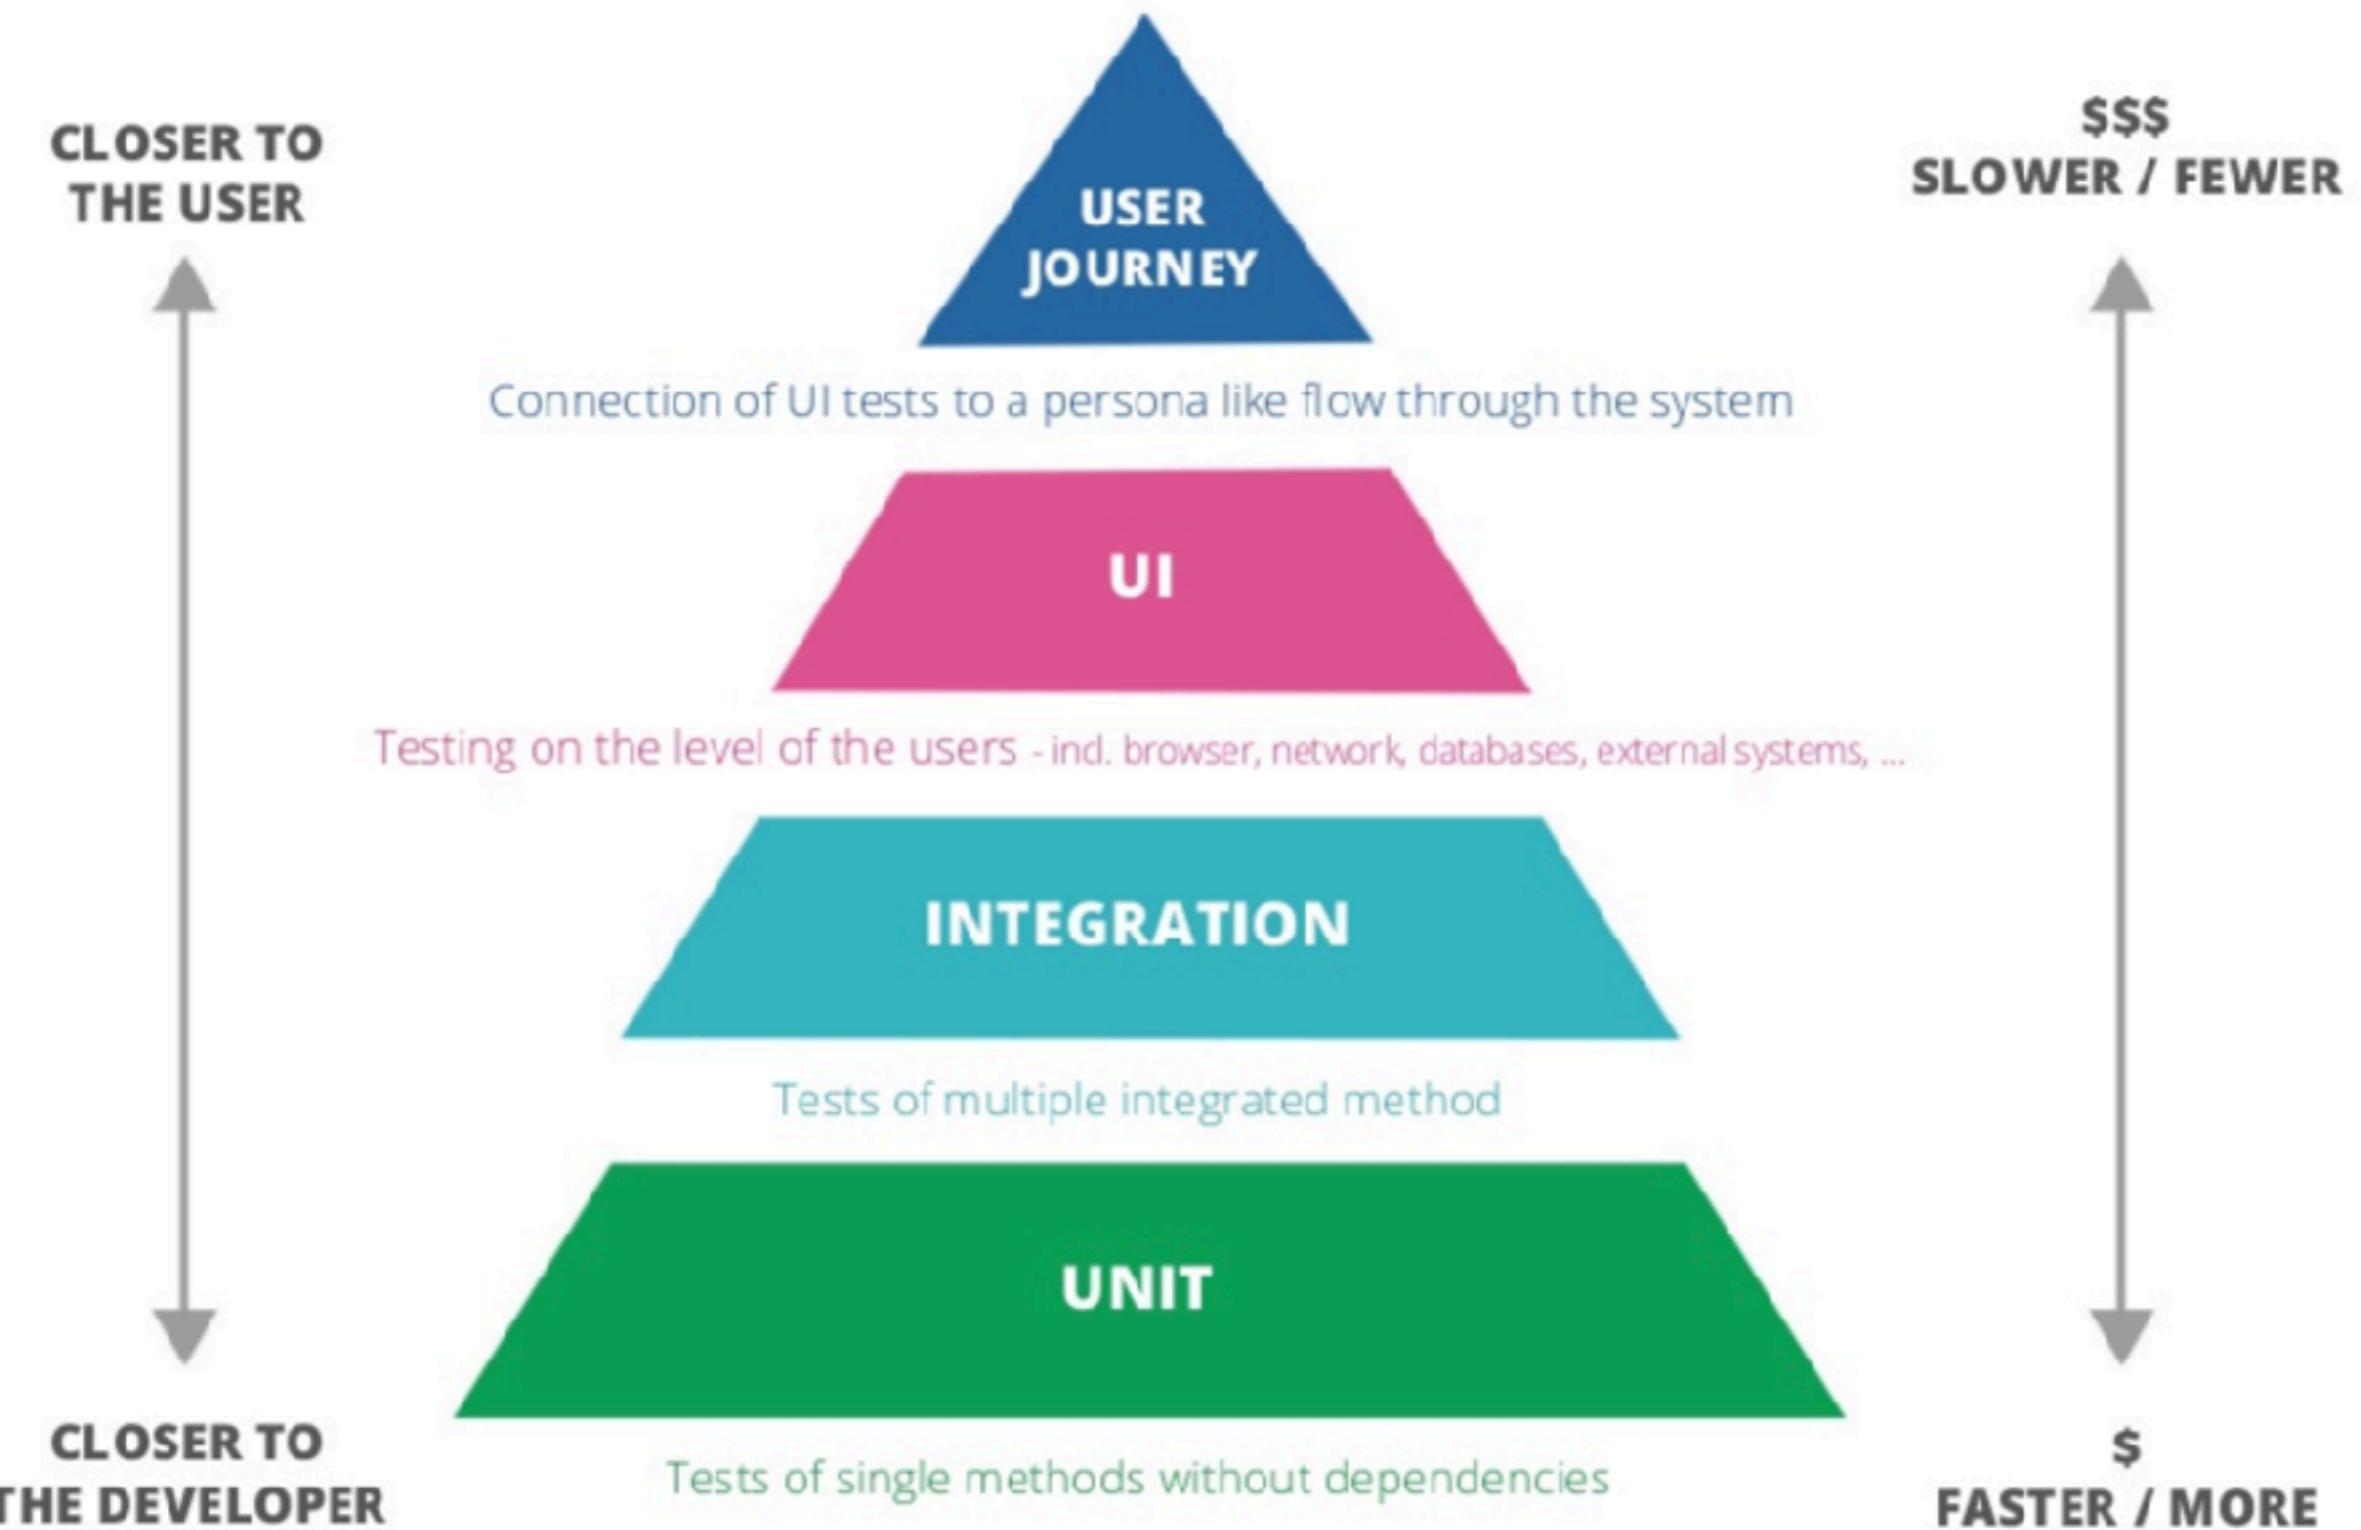

Unit tests

How to use model ?

```
public class HelloTest {  
  
    @Test  
    public void success_to_create_model_with_constructor() {  
        Hello hello = new Hello("Somkiat");  
        assertEquals( expected: "Somkiat", hello.getMessage());  
    }  
  
}
```



API/Controller tests

How to use controller ?

Spring boot provides MockMvc to test Controller

```
package hello.controller;

import hello.domain.Hello;
import org.springframework.web.bind.annotation.GetMapping;
import org.springframework.web.bind.annotation.PathVariable;
import org.springframework.web.bind.annotation.RestController;

@RestController
public class HelloController {

    @GetMapping("/hello/{name}")
    public Hello sayHi(@PathVariable String name) {
        return new Hello("Hello " + name);
    }

}
```



API/Controller tests

```
@RunWith(SpringRunner.class)
@WebMvcTest/controllers = HelloController.class)
public class HelloControllerTest {

    @Autowired
    private MockMvc mockMvc;

    @Test
    public void shouldReturnHelloSomkiat() throws Exception {
        mockMvc.perform(get(urlTemplate: "/hello/somkiat"))
            .andExpect(jsonPath(expression: "$.message")
                .value(expectedValue: "Hello somkiat"))
            .andExpect(status().is2xxSuccessful());
    }

}
```



API/Controller tests

With Spring Boot Testing + TestRestTemplate

```
@RunWith(SpringRunner.class)
@SpringBootTest(
    webEnvironment = WebEnvironment.RANDOM_PORT)
public class AccountControllerTest {

    @Autowired
    private TestRestTemplate testRestTemplate;

    @Autowired
    private AccountRepository accountRepository;

    @Before
    public void initData() {
        accountRepository.save(new Account("01"));
        accountRepository.save(new Account("02"));
    }
}
```



API/Controller tests

With Spring Boot Testing + TestRestTemplate

```
@Test  
public void  
    เรียกข้อมูลบัญชีของหมายเลข_0868696209_ต้องเจอสองบัญชีนั่น () {  
    List<AccountResponse> accountResponses  
        = testRestTemplate.getForObject(  
            "/account/0868696209", List.class);  
  
    assertEquals(2, accountResponses.size());  
}
```



Compile with testing

\$mvn clean package

```
[INFO]
[INFO] Results:
[INFO]
[INFO] Tests run: 2, Failures: 0, Errors: 0, Skipped: 0
[INFO]
[INFO]
```



% of Code/Test coverage



Add coverage to pom.xml (1)

```
<build>
    <finalName>hello</finalName>
    <plugins>
        <plugin>
            <groupId>org.springframework.boot</groupId>
            <artifactId>spring-boot-maven-plugin</artifactId>
        </plugin>

        <plugin>
            <artifactId>maven-compiler-plugin</artifactId>
            <version>2.5.1</version>
            <configuration>
                <source>${java.version}</source>
                <target>${java.version}</target>
                <encoding>${project.build.sourceEncoding}</encoding>
            </configuration>
        </plugin>
    </plugins>
</build>
```



Add coverage to pom.xml (2)

```
<plugin>
  <groupId>org.codehaus.mojo</groupId>
  <artifactId>cobertura-maven-plugin</artifactId>
  <version>2.7</version>
  <configuration>
    <formats>
      <format>html</format>
      <format>xml</format>
    </formats>
  </configuration>
  <executions>
    <execution>
      <phase>package</phase>
      <goals>
        <goal>cobertura</goal>
      </goals>
    </execution>
  </executions>
  <dependencies>
    <dependency>
      <groupId>org.ow2.asm</groupId>
      <artifactId>asm</artifactId>
      <version>5.0.3</version>
    </dependency>
  </dependencies>
</plugin>
```



Run test again

\$mvn clean package

Cobertura Report generation was successful.

Cobertura 2.1.1 - GNU GPL License (NO WARRANTY) - See COPYRIGHT file

Cobertura: Loaded information on 3 classes.

time: 125ms

Cobertura Report generation was successful.

BUILD SUCCESS



Coverage report

open target/site/cobertura/index.html

Packages

All
[hello](#)
[hello.controller](#)
[hello.domain](#)

Coverage Report - All Packages

Package	# Classes	Line Coverage	Branch Coverage	Complexity
All Packages	3	63% 7/11	N/A N/A	1
hello	1	33% 1/3	N/A N/A	1
hello.controller	1	100% 2/2	N/A N/A	1
hello.domain	1	66% 4/6	N/A N/A	1

Report generated by [Cobertura](#) 2.1.1 on 3/6/18 12:40 AM.

All Packages

Classes


[Hello \(66%\)](#)
[HelloApplication \(33%\)](#)
[HelloController \(100%\)](#)




How to improve % of coverage ?




Service Structure

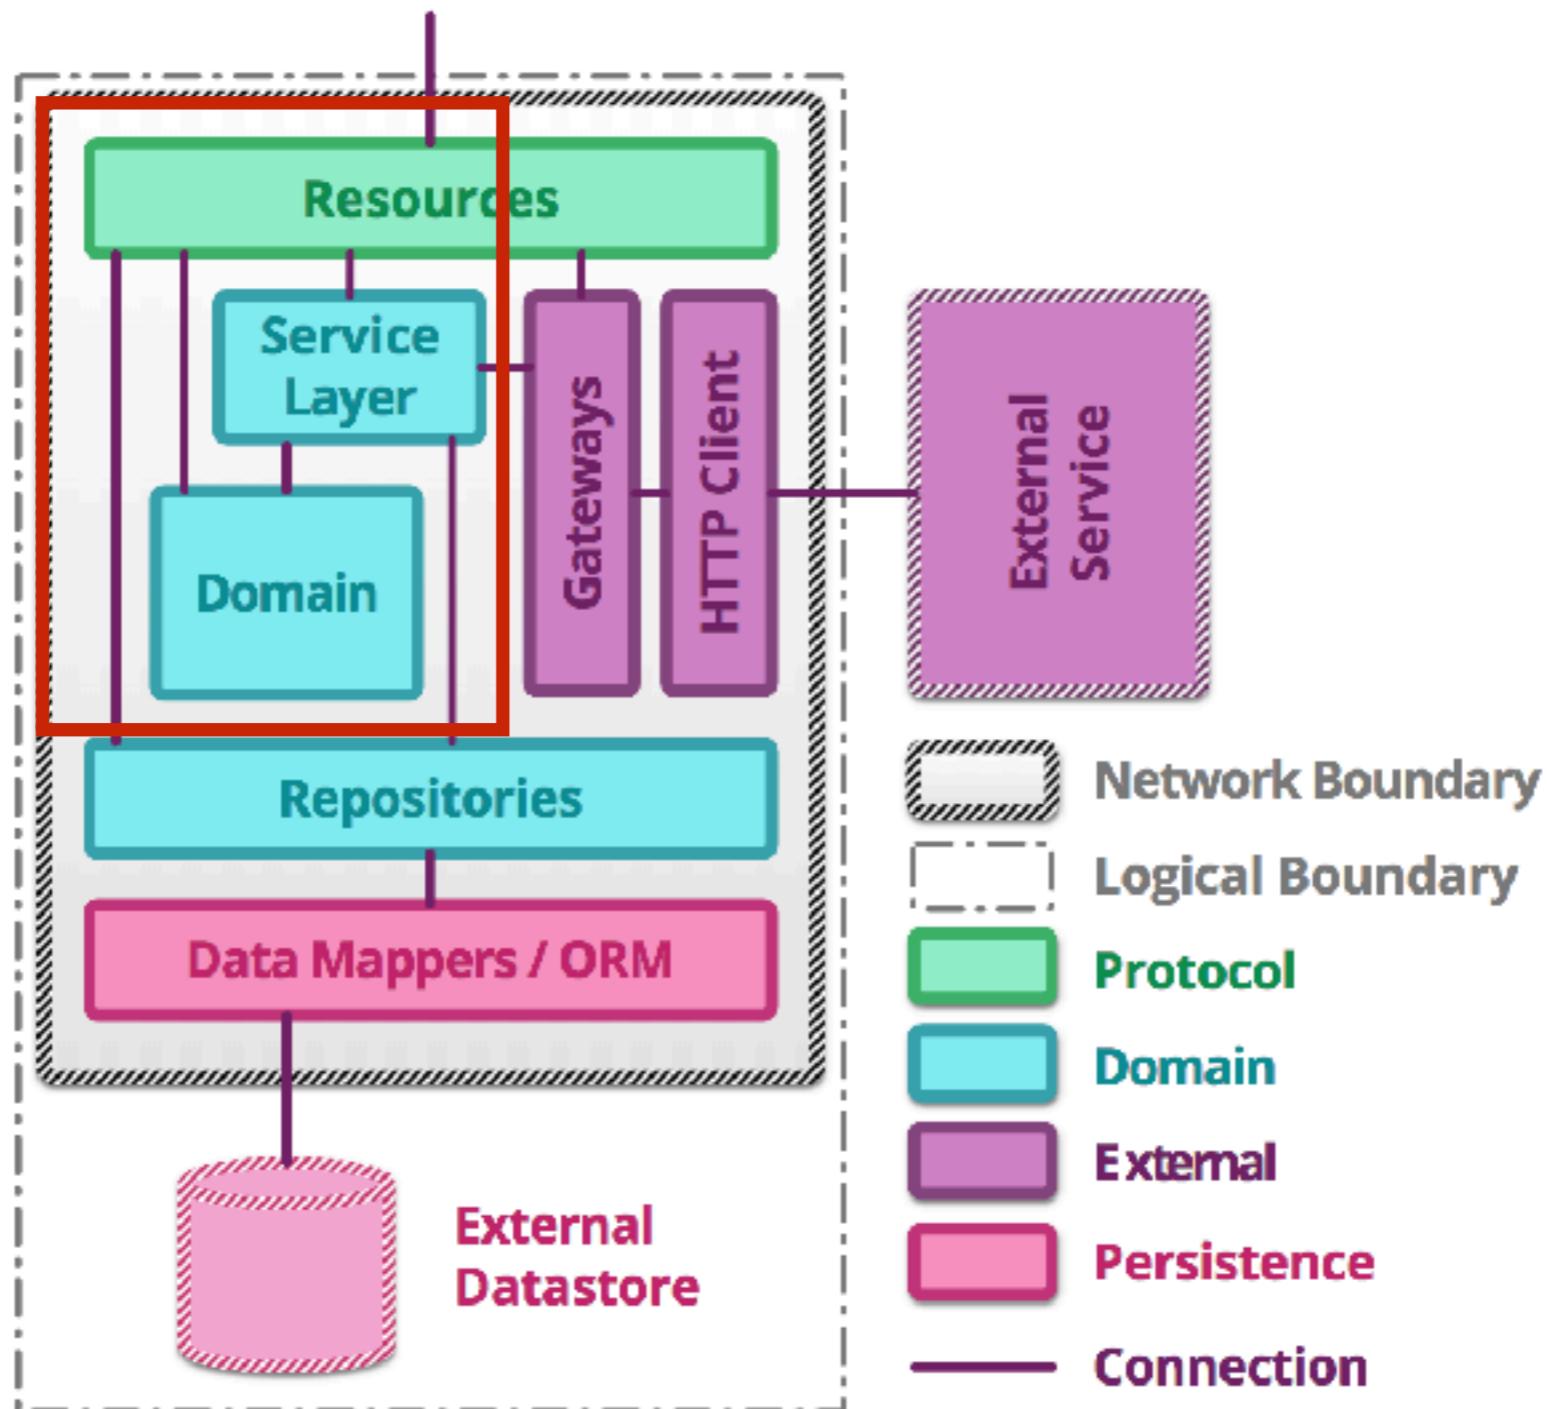


Service Structure

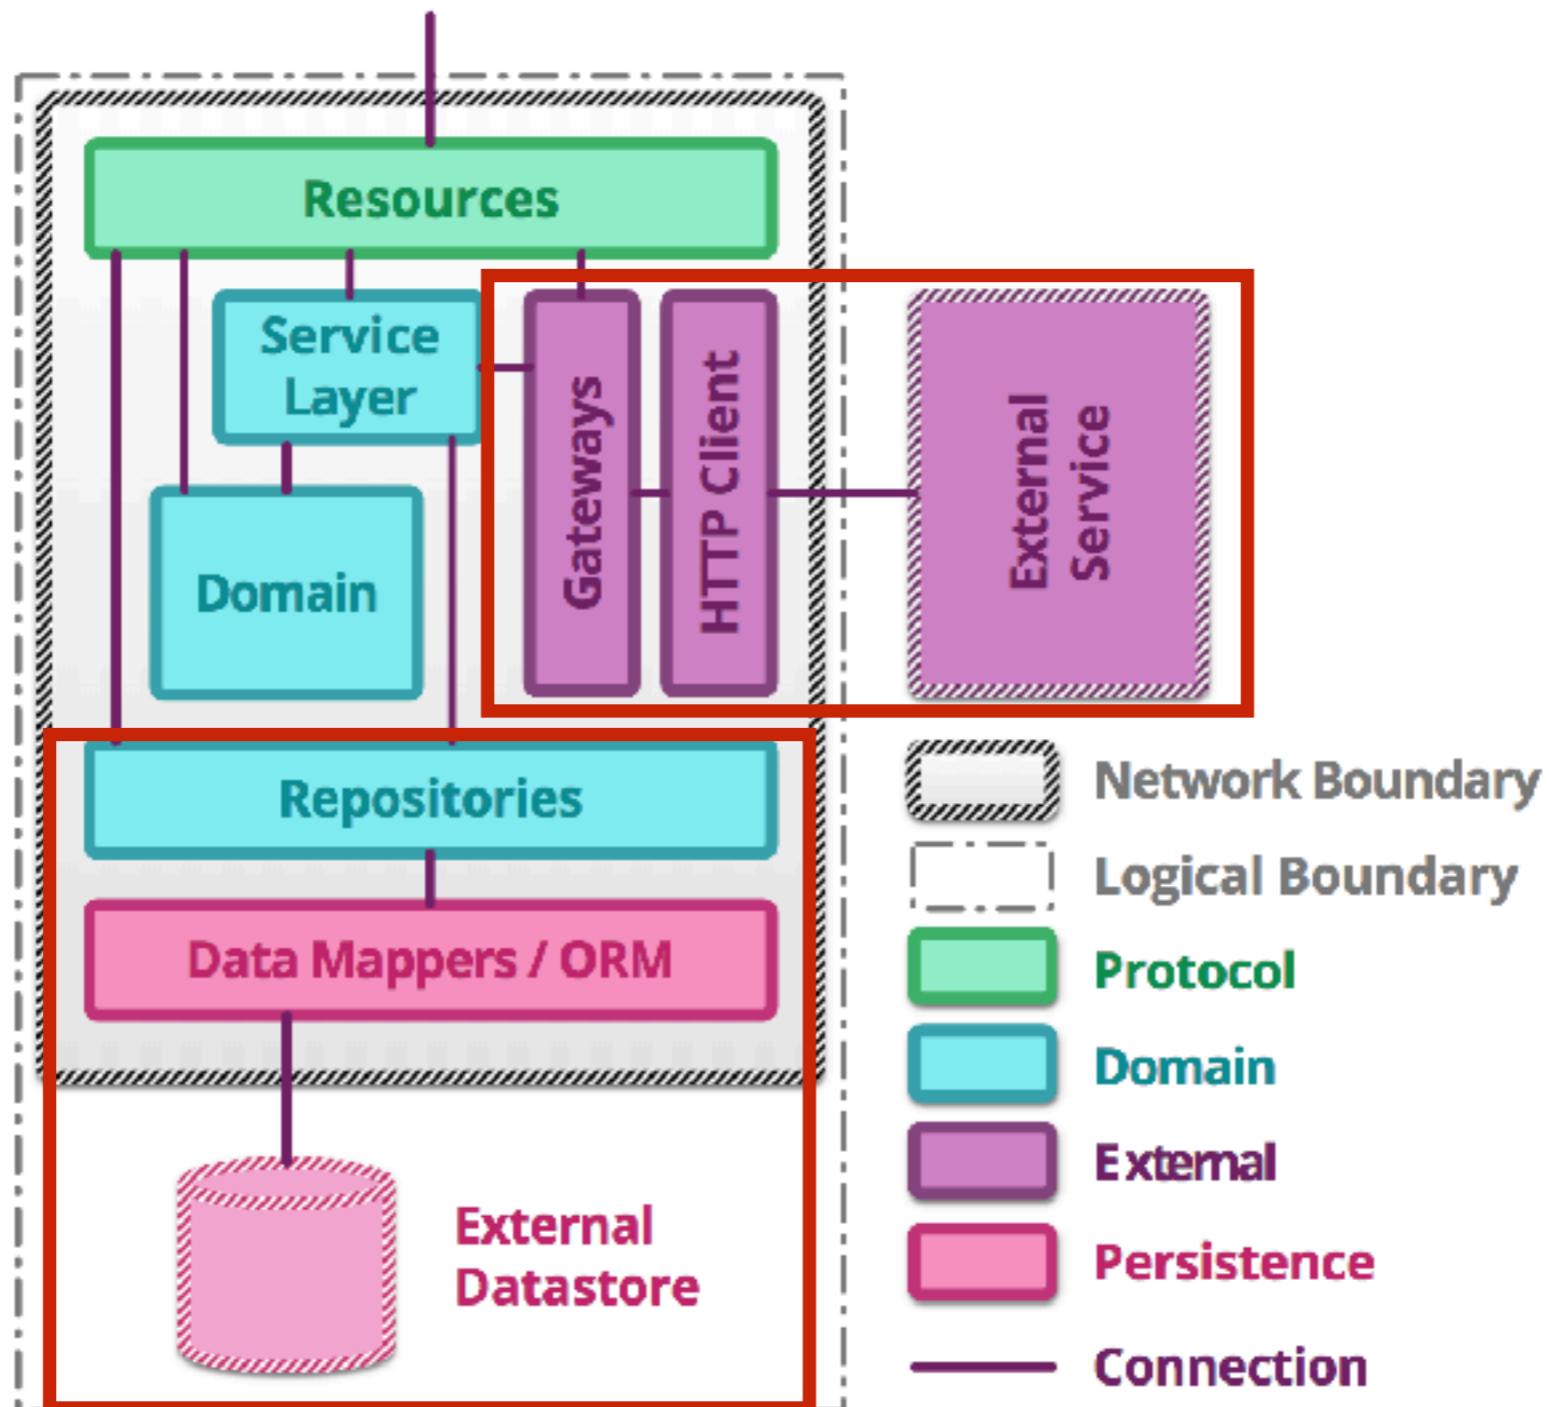

Sample application

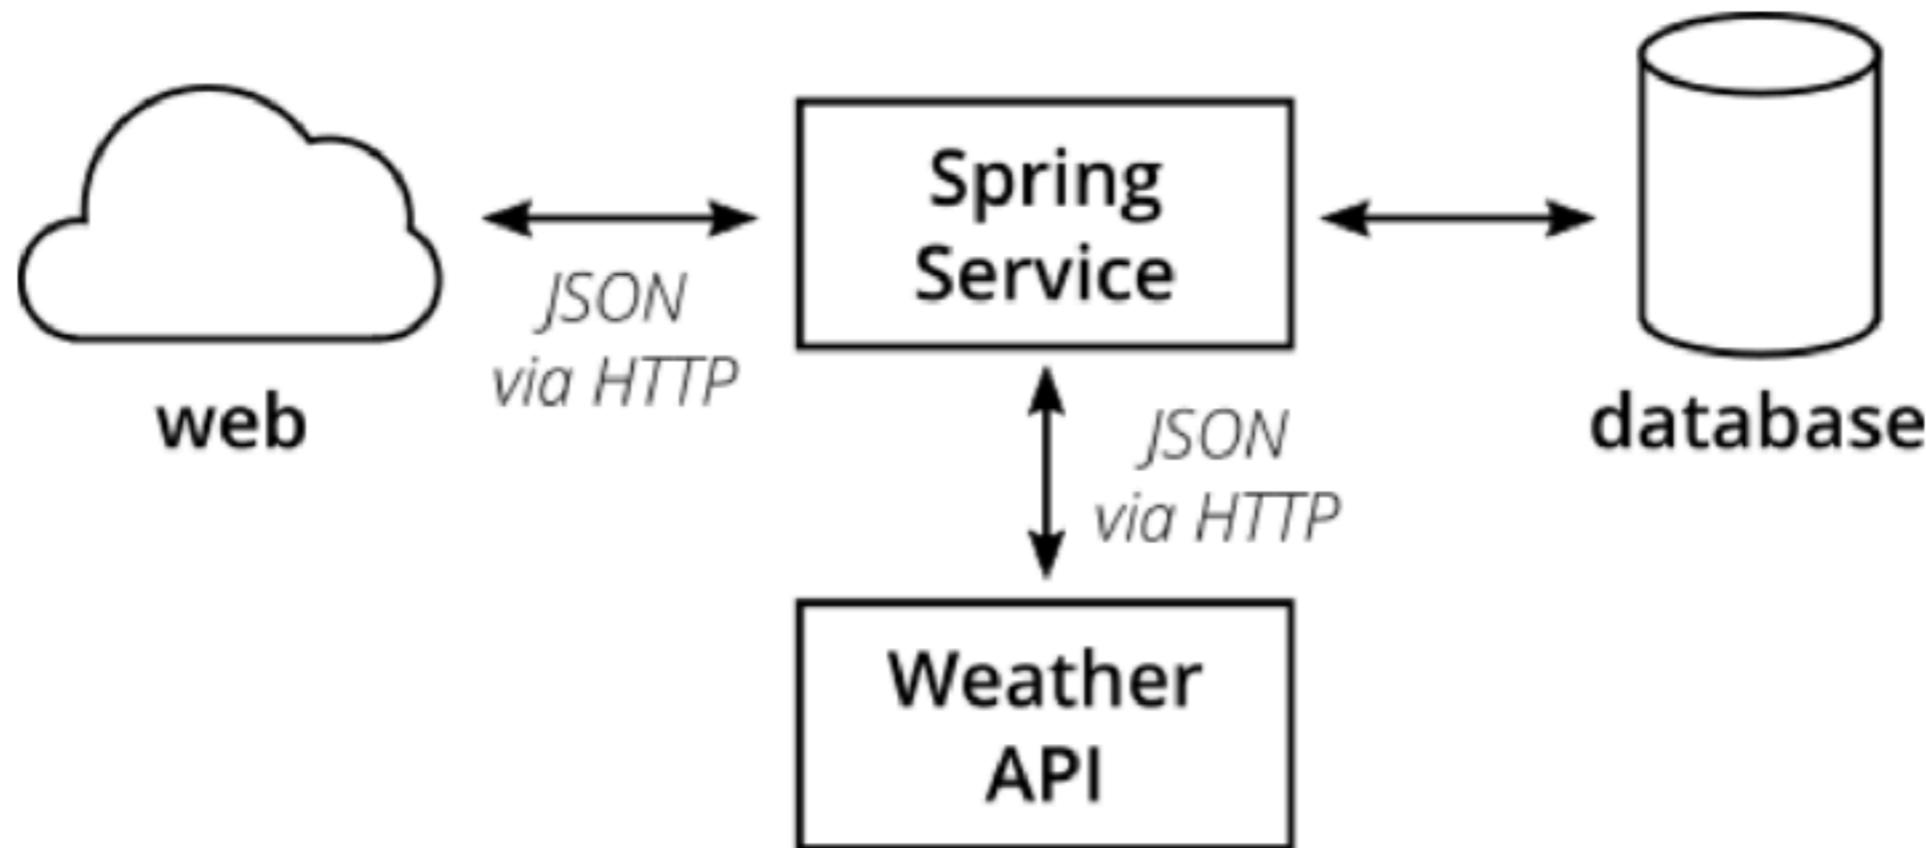

Project structure

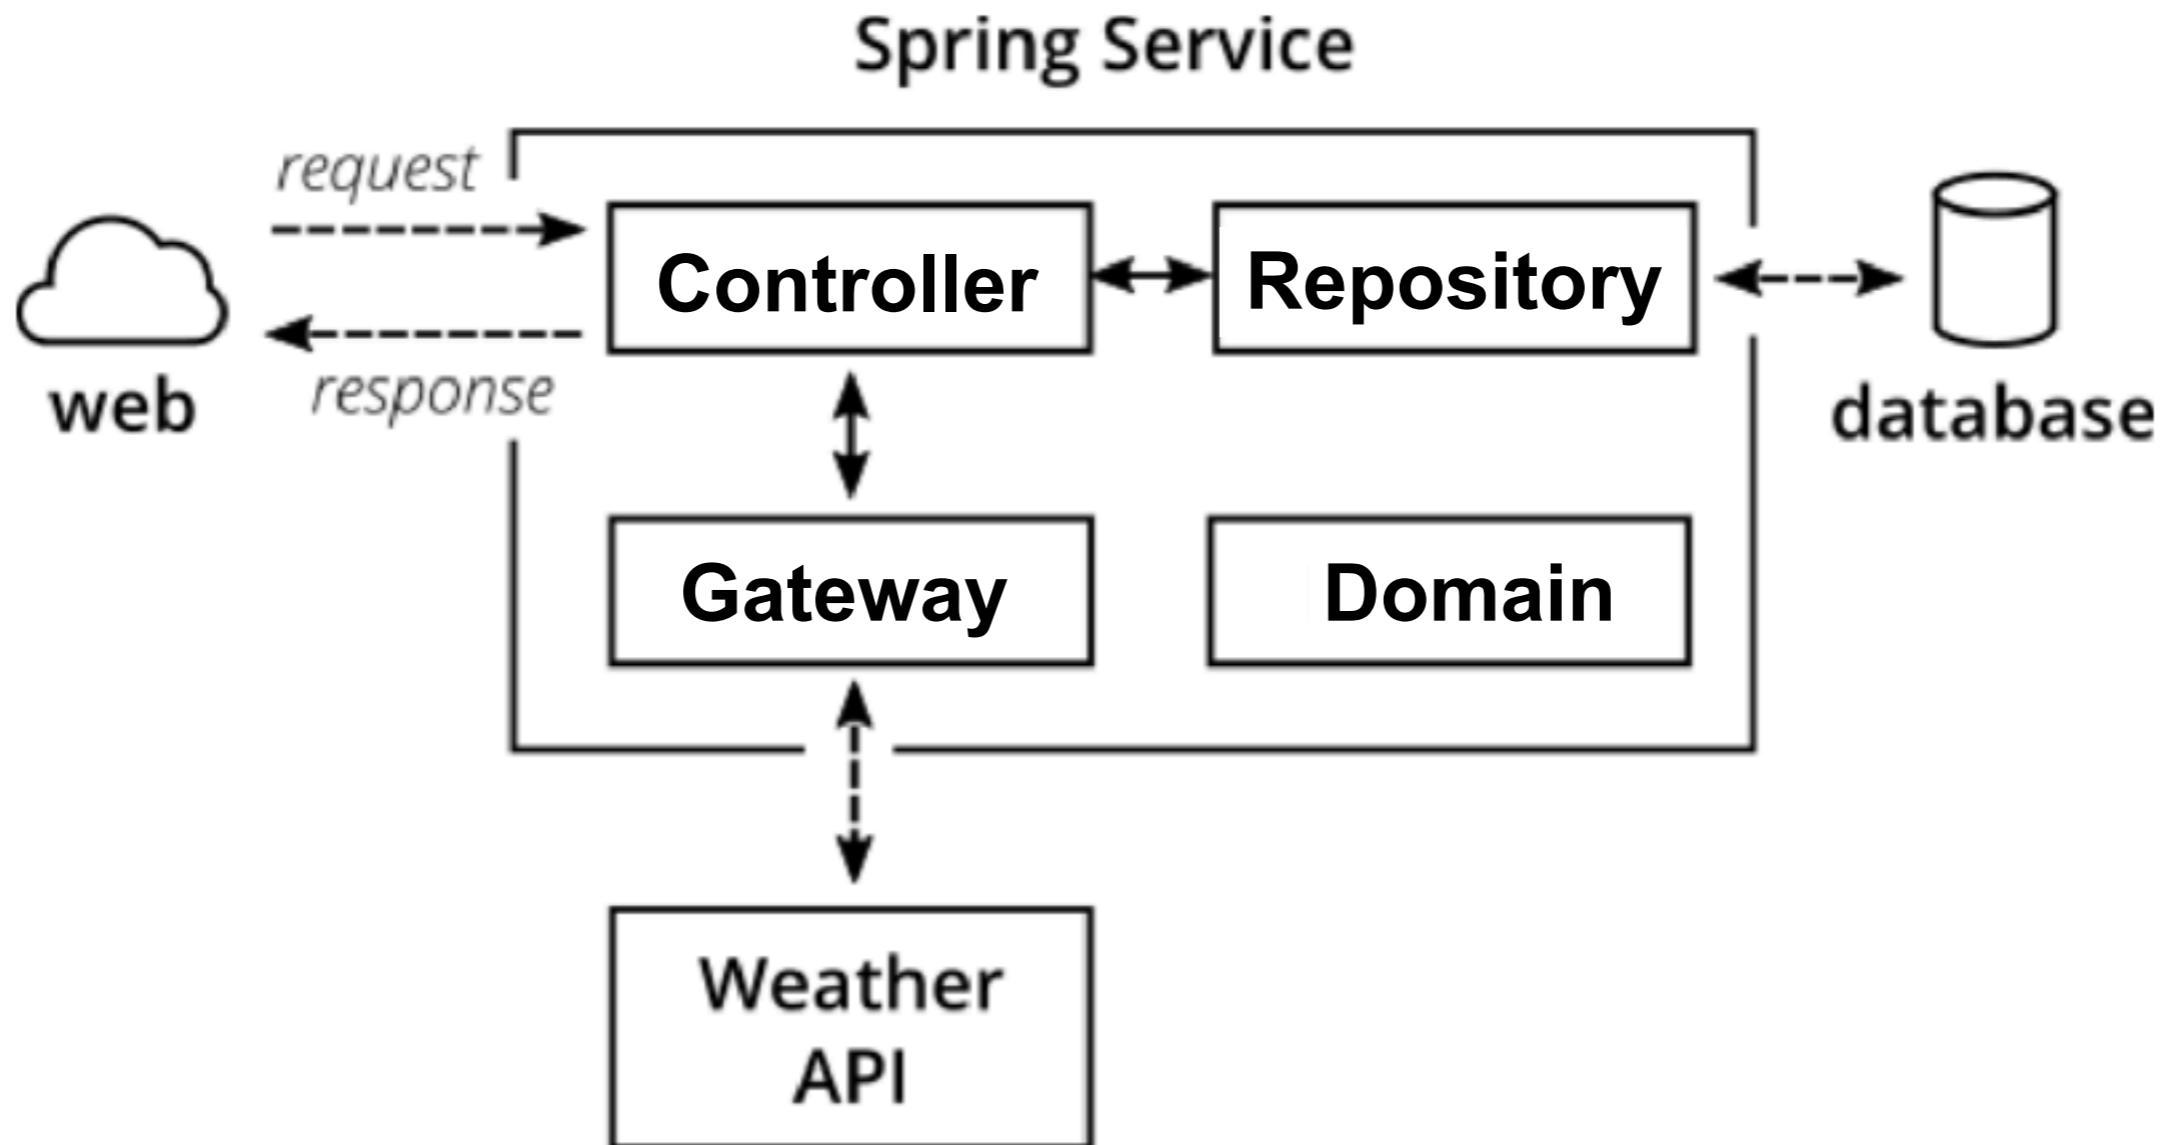


How to test ?







Unit testing

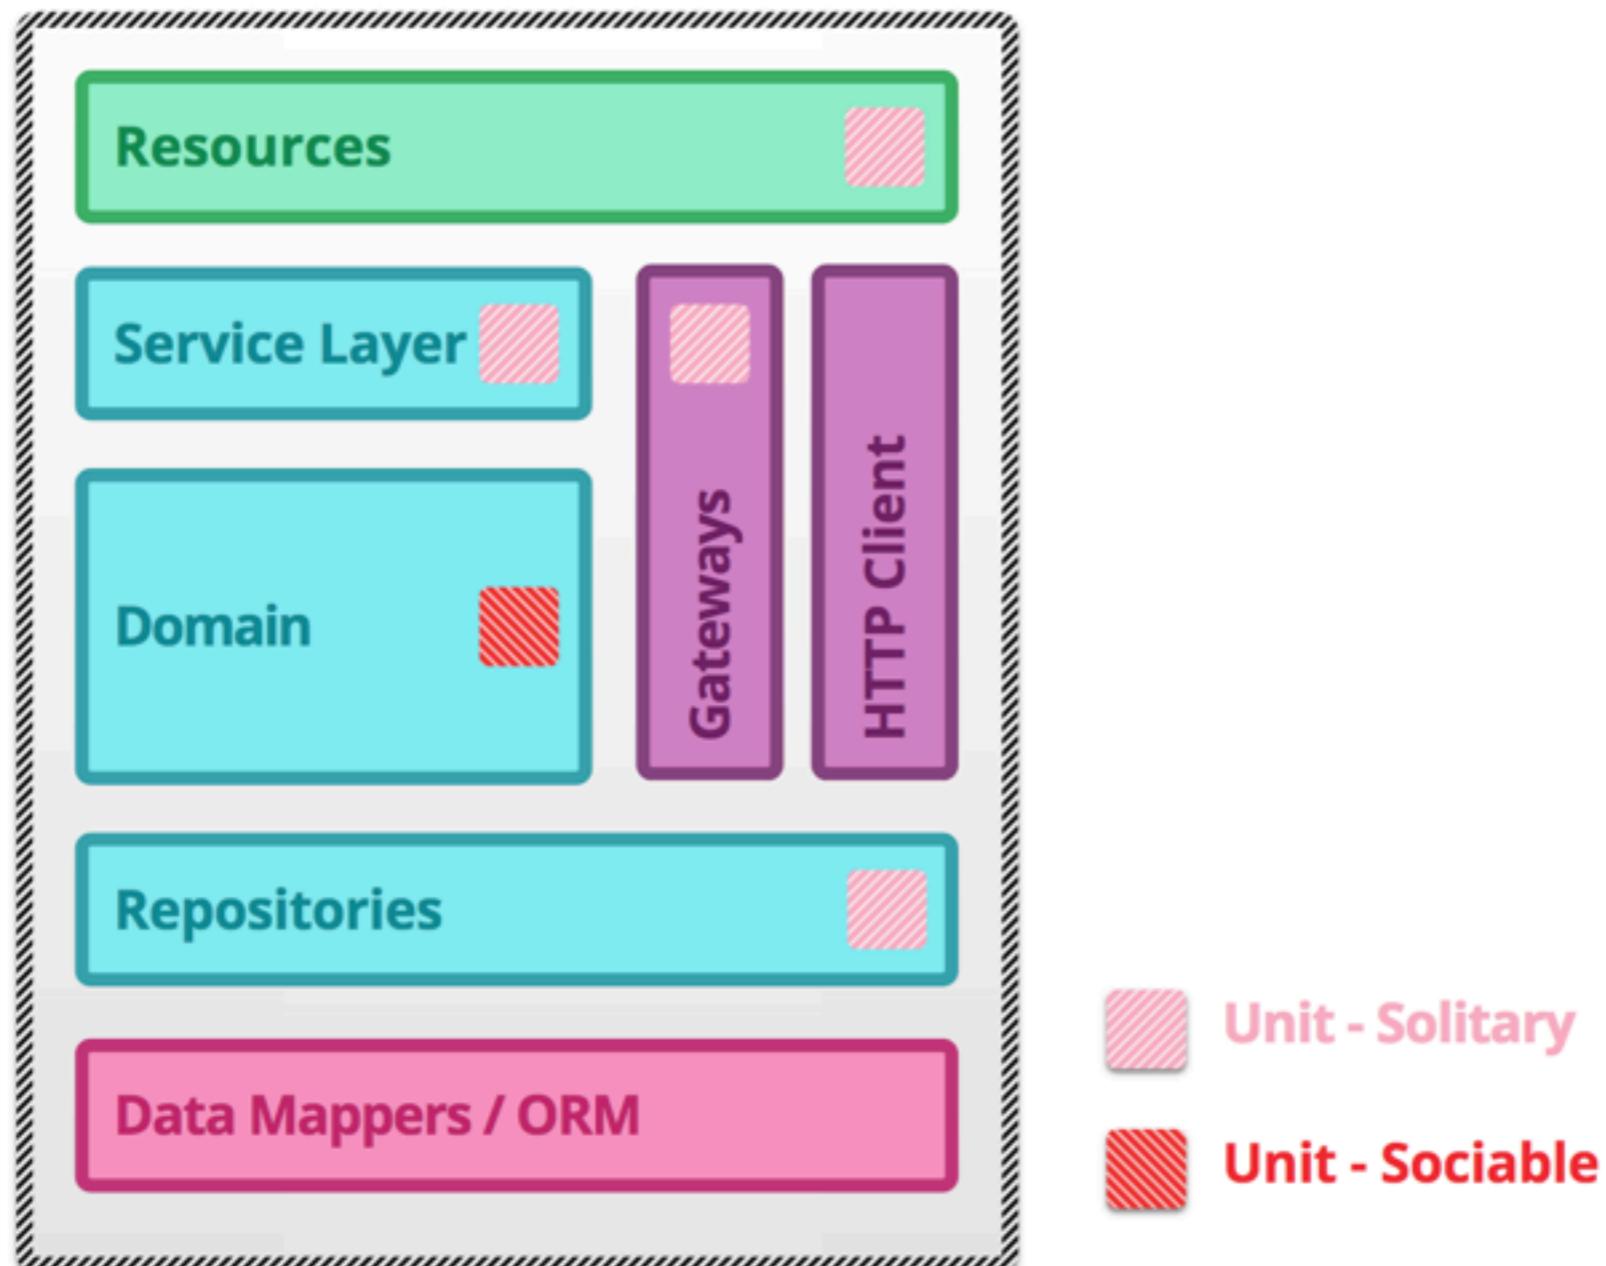


Integration testing

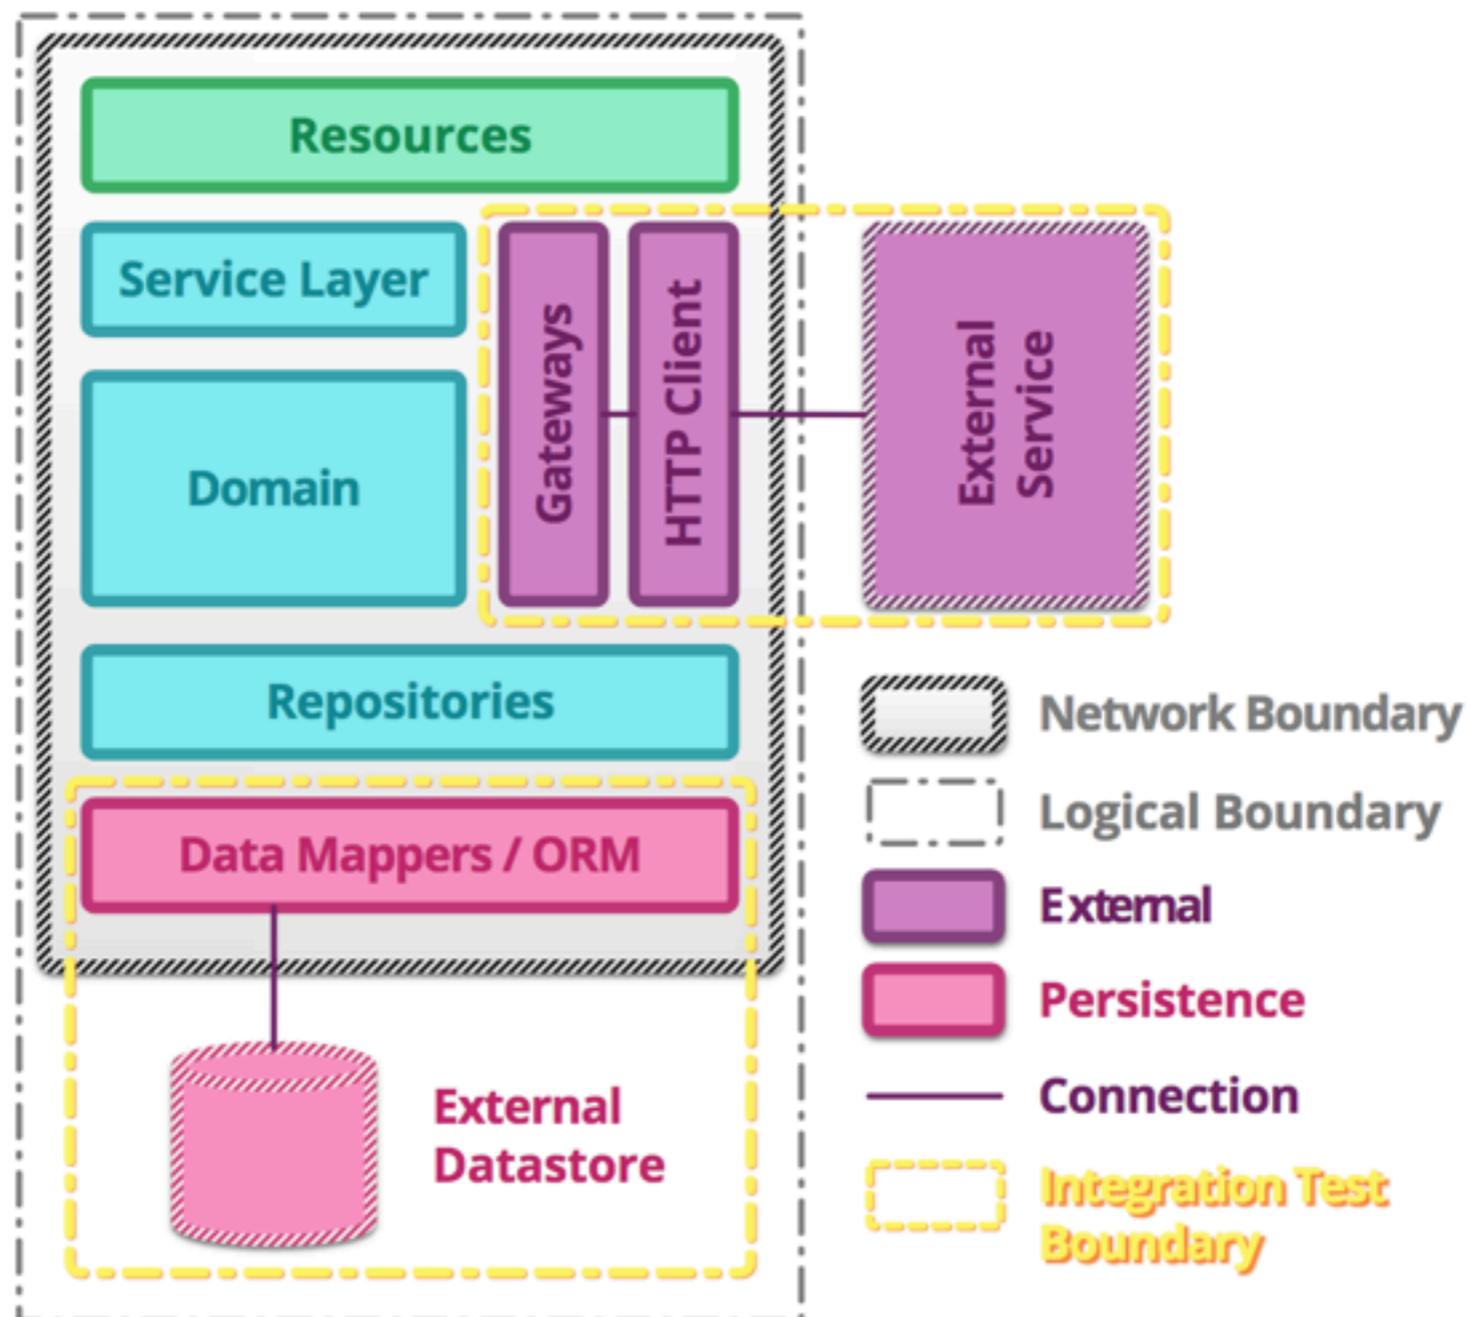


Component testing

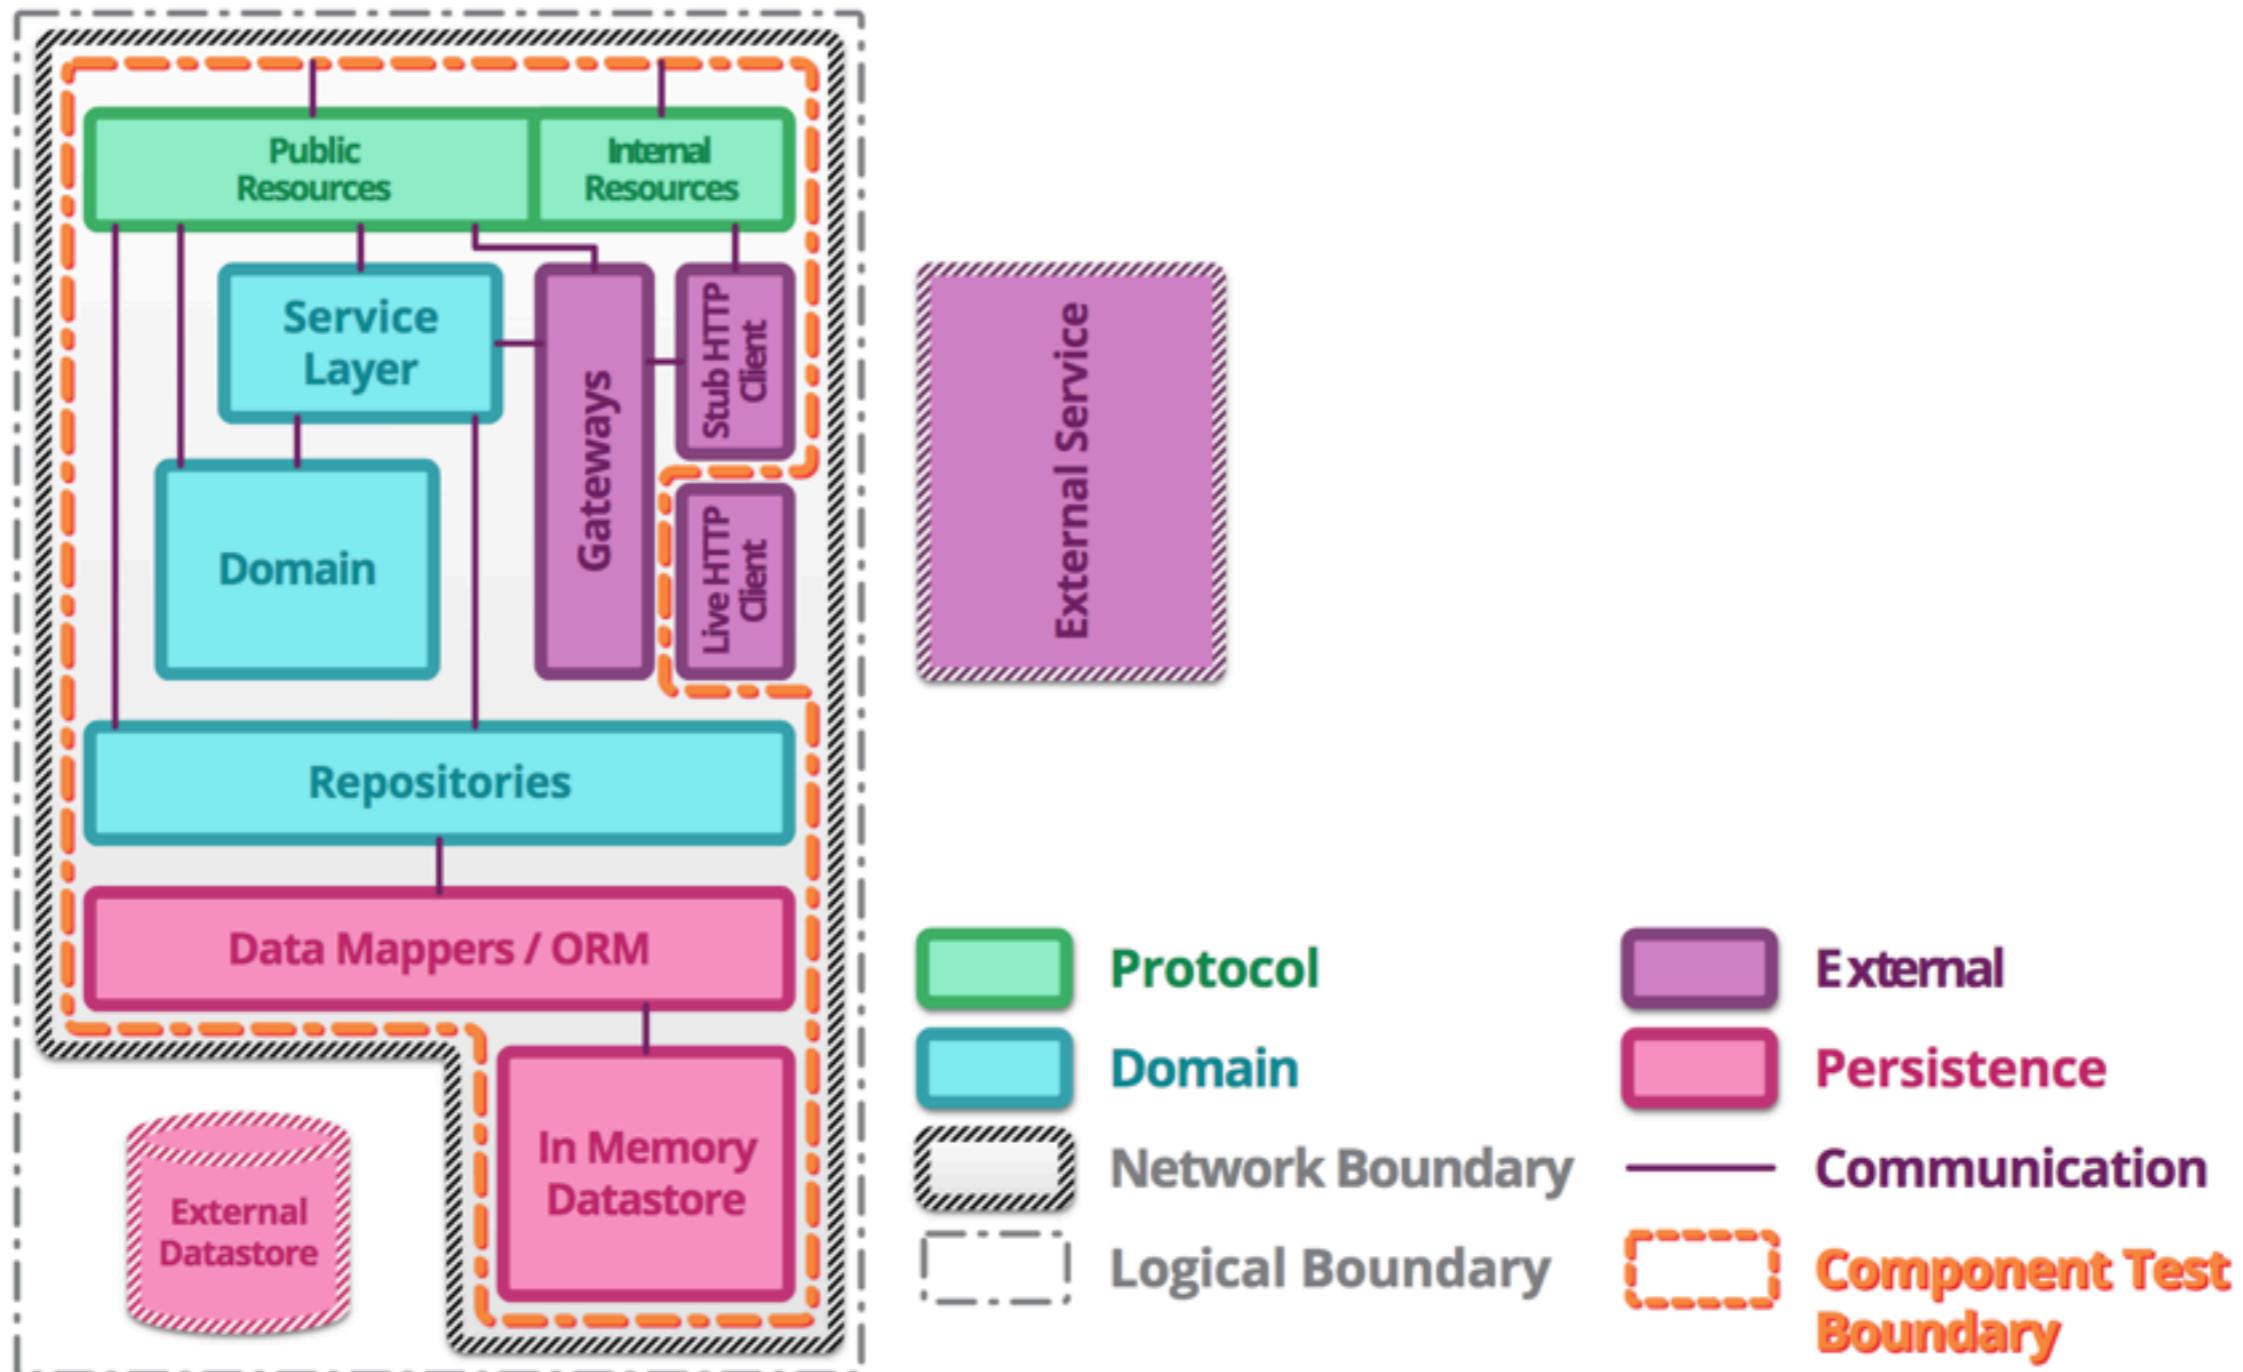

Contract testing

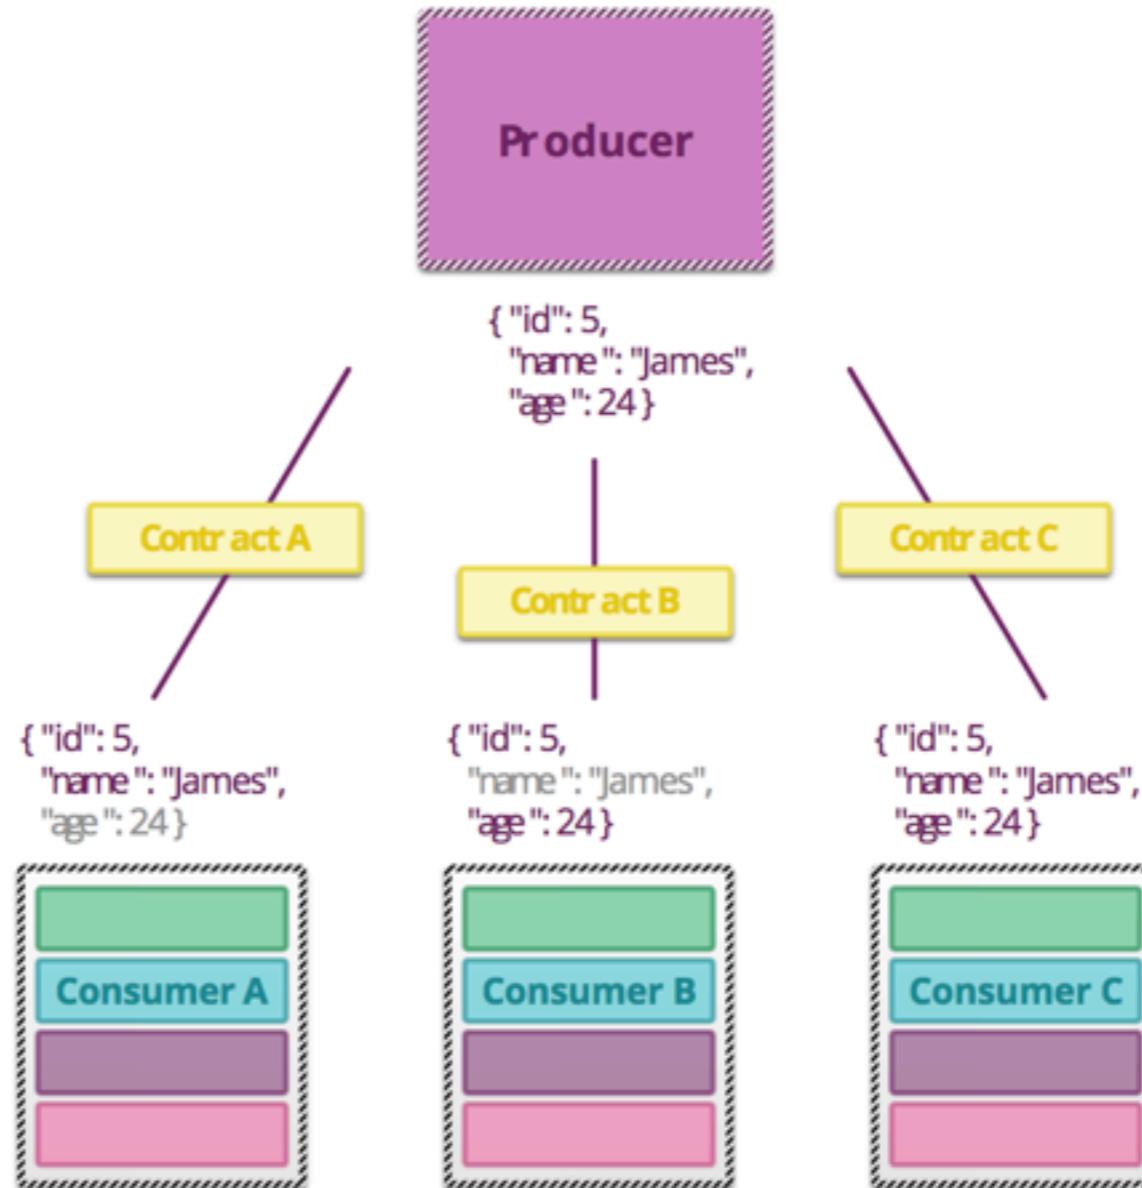


End-to-End testing

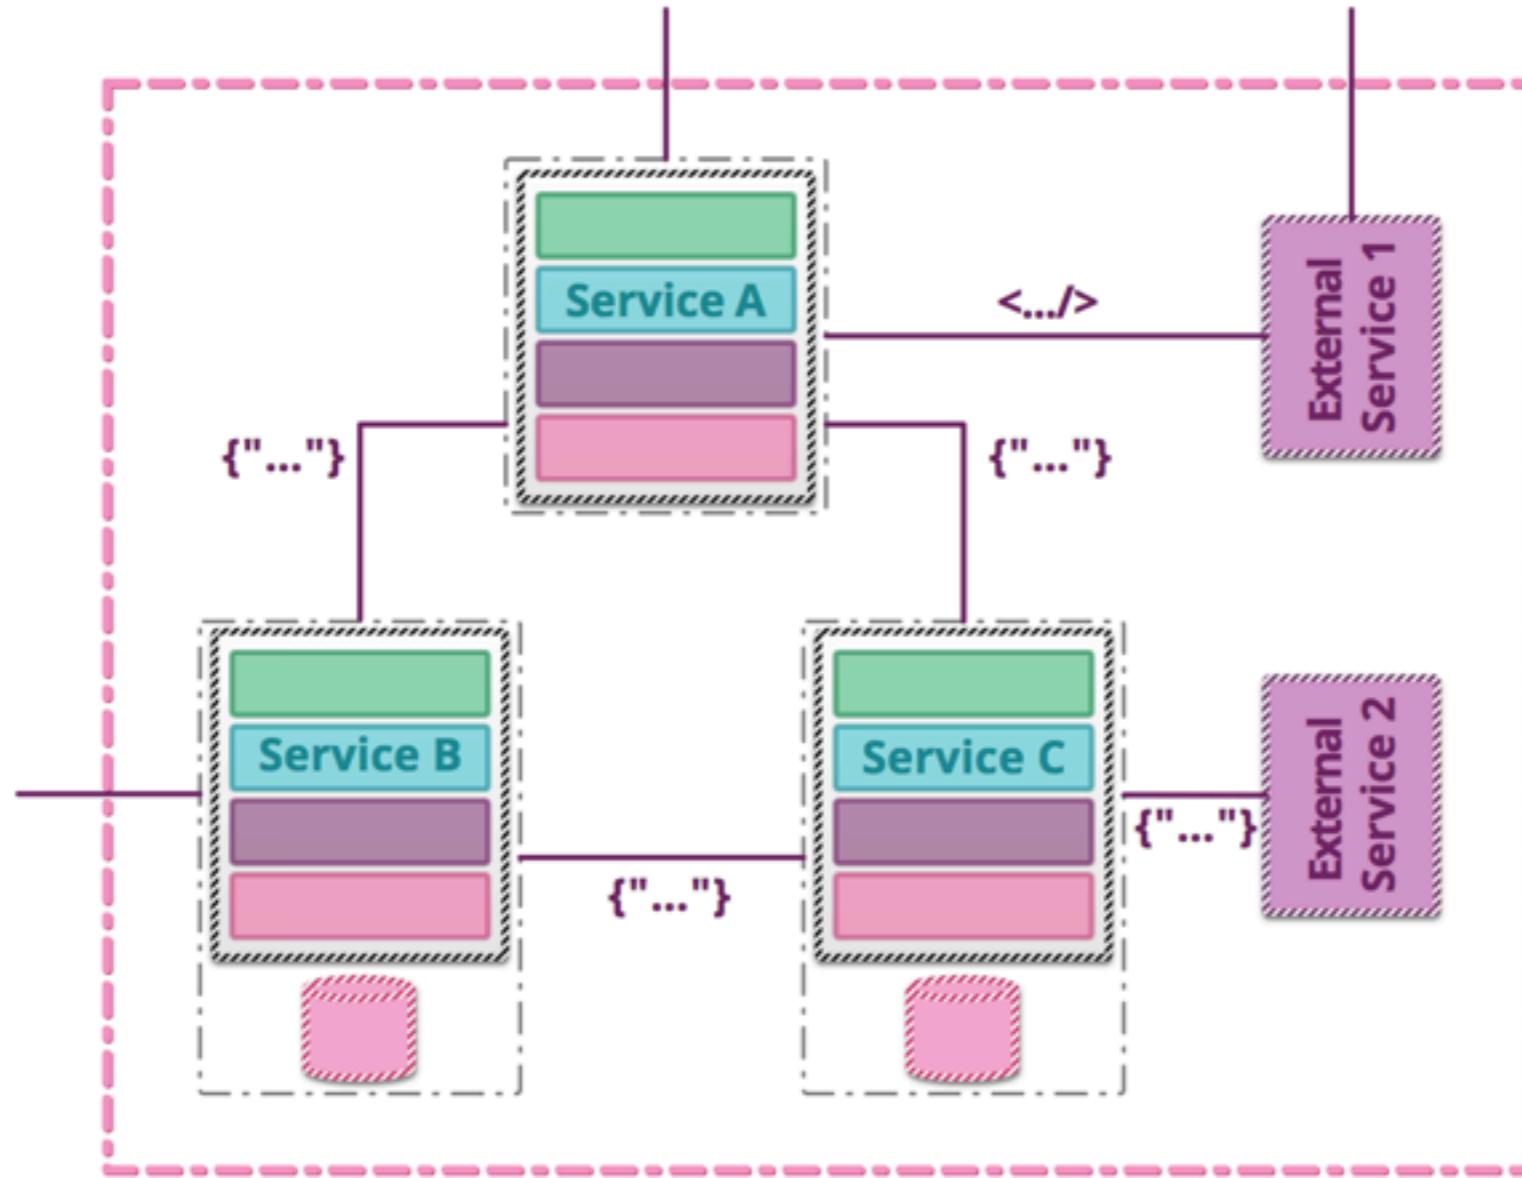

Summary

 **Unit tests** : exercise the smallest pieces of testable software in the application to determine whether they behave as expected.

 **Integration tests** : verify the communication paths and interactions between components to detect interface defects.

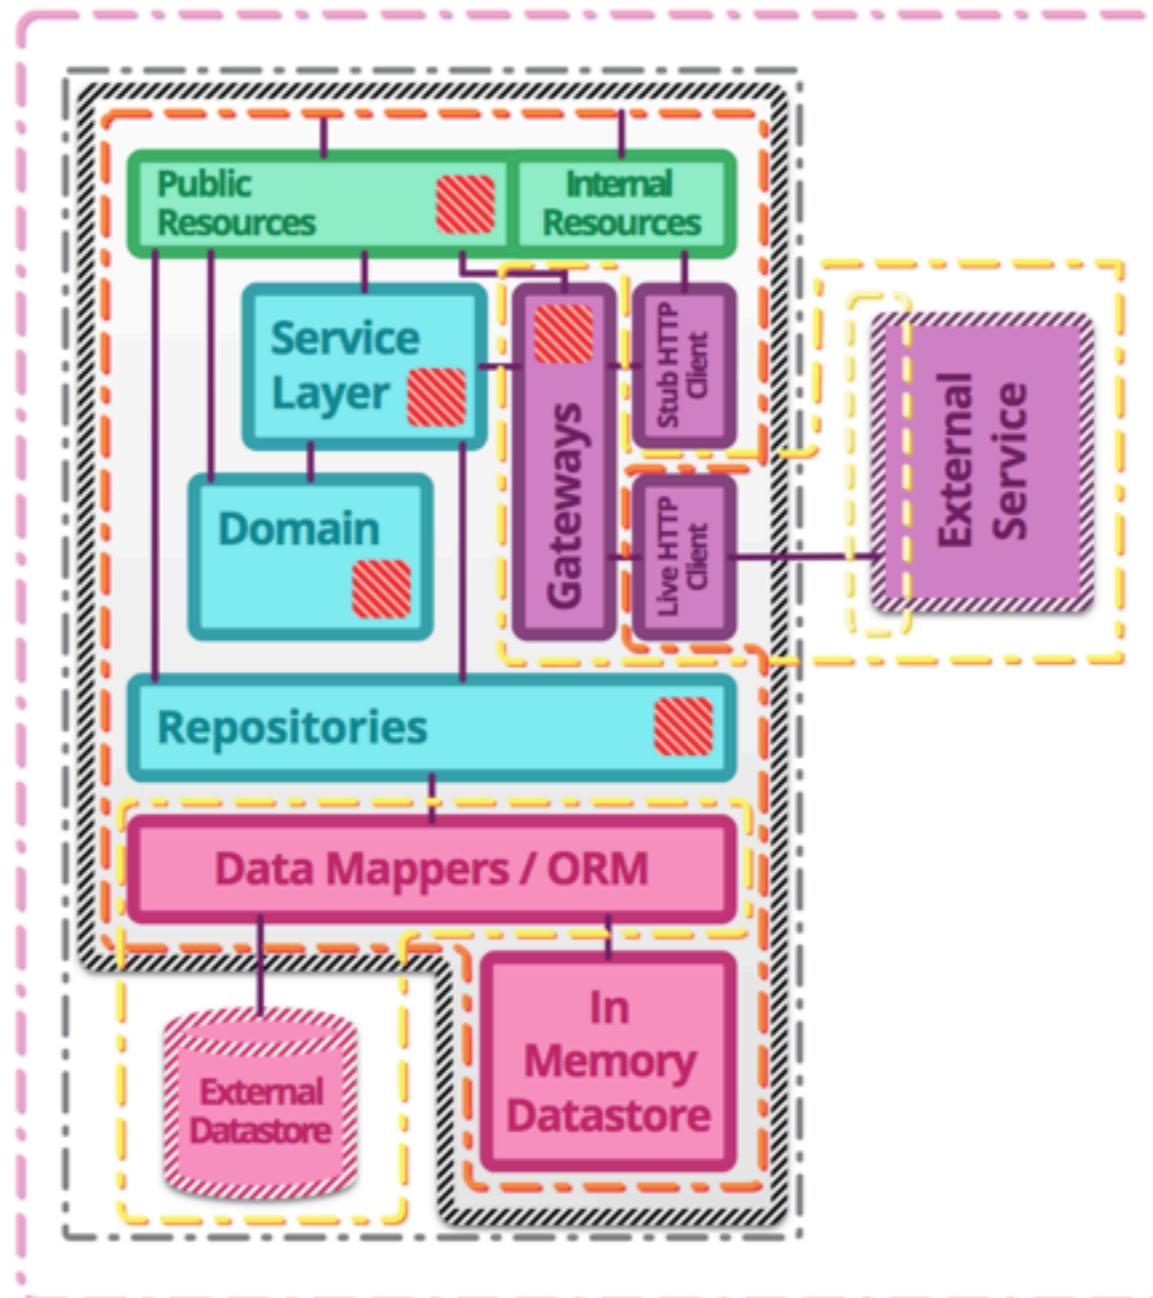

 **Component tests** : limit the scope of the exercised software to a portion of the system under test, manipulating the system through internal code interfaces and using test doubles to isolate the code under test from other components.

 **Contract tests** : verify interactions at the boundary of an external service asserting that it meets the contract expected by a consuming service.


 **End-to-end tests** : verify that a system meets external requirements and achieves its goals, testing the entire system, from end to end.



Let's workshop with Repository



Working with repository

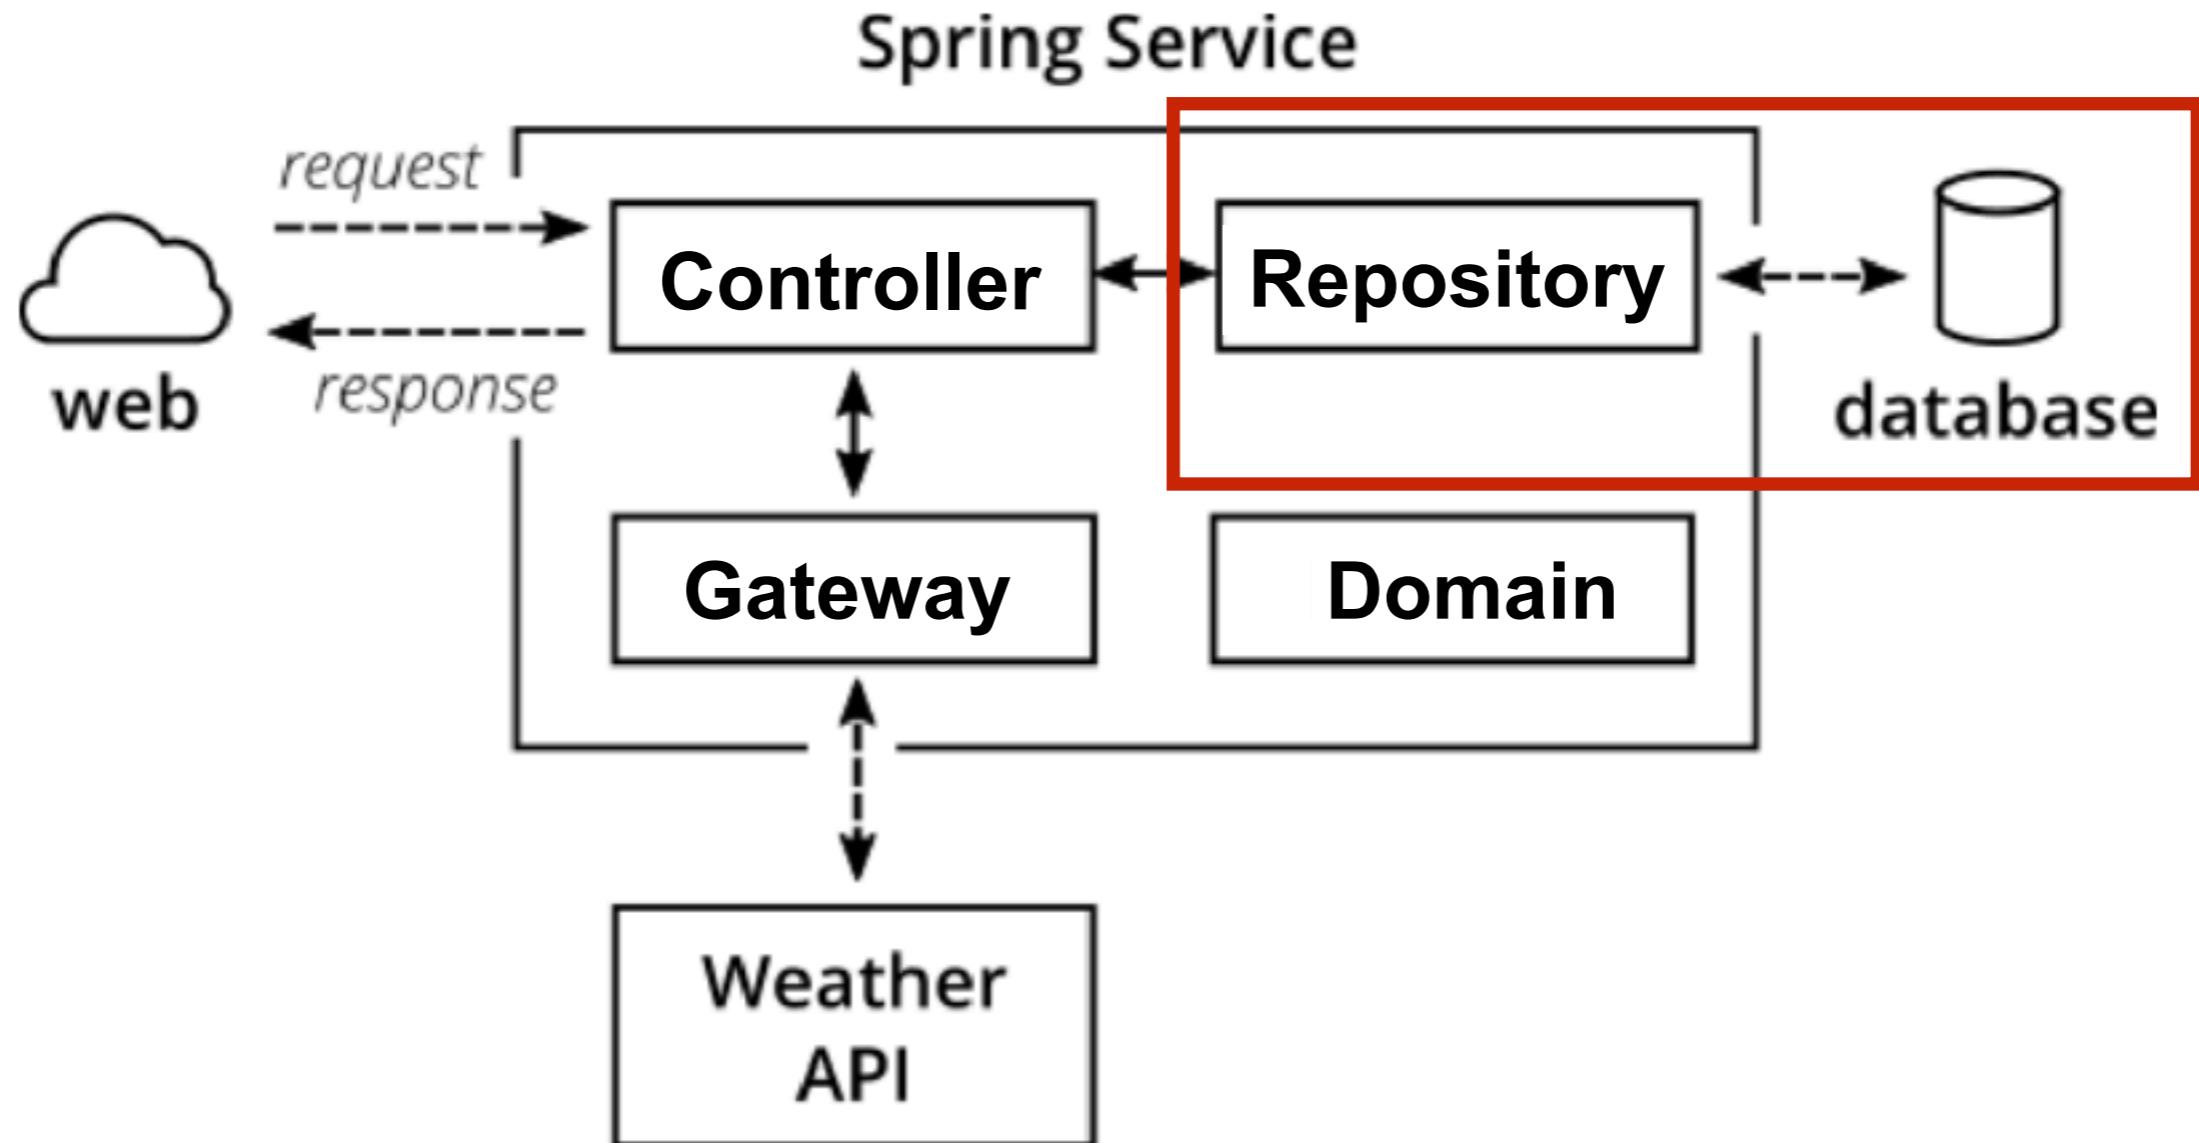

Working with repository

We're using Spring Data



Modify pom.xml

Add library of Spring Data

```
<dependency>
    <groupId>org.springframework.boot</groupId>
    <artifactId>spring-boot-starter-data-jpa</artifactId>
</dependency>
```



Modify pom.xml

Add library of Persistence/data store

```
<dependency>
    <groupId>org.postgresql</groupId>
    <artifactId>postgresql</artifactId>
    <version>42.1.1</version>
</dependency>
```



Add data store config

In src/main/resources

```
spring.datasource.url= jdbc:postgresql://127.0.0.1:15432/postgres
spring.datasource.username= user
spring.datasource.password= password
spring.datasource.platform= POSTGRESQL

spring.jpa.show-sql= true
spring.jpa.hibernate.ddl-auto= create-drop
spring.jpa.database-platform= org.hibernate.dialect.PostgreSQLDialect
```



Create repository interface

hello.repository.PersonRepository.java

```
public interface PersonRepository  
    extends CrudRepository<Person, String> {  
  
    Optional<Person> findByFirstName(String name);  
}
```



Create Entity class

hello.repository.Person.java

```
@Entity
public class Person {

    @Id
    @GeneratedValue(strategy = GenerationType.AUTO)
    private int id;
    private String firstName;
    private String lastName;

    public Person() {
    }

    public Person(String firstName, String lastName) {
        this.firstName = firstName;
        this.lastName = lastName;
    }
}
```



Create new controller

hello.repository.HelloControllerWithRepository.java

```
public class HelloControllerWithRepository {  
  
    private final PersonRepository personRepository;  
  
    @Autowired  
    public HelloControllerWithRepository(PersonRepository personRepository) {  
        this.personRepository = personRepository;  
    }  
  
    @GetMapping("/hello/data/{name}")  
    public Hello sayHi(@PathVariable String name) {  
        Optional<Person> foundPerson = personRepository.findByName(name);  
        String result = foundPerson  
            .map(person -> String.format("Hello %s", person.getFirstName()))  
            .orElse( other: "Data not found");  
        return new Hello(result);  
    }  
}
```



Run test and package

\$mvn clean package

```
Cobertura Report generation was successful.  
Cobertura 2.1.1 - GNU GPL License (NO WARRANTY) - See COPYRIGHT file  
Cobertura: Loaded information on 3 classes.  
time: 125ms
```

```
Cobertura Report generation was successful.
```

```
BUILD SUCCESS
```



Run your application

```
$java -jar target/hello.jar
```



Coverage report

Packages

All
[hello](#)
[hello.controller](#)
[hello.domain](#)
[hello.repository](#)

Coverage Report - All Packages

Package	# Classes	Line Coverage	Branch Coverage	Complexity
All Packages	6	25% 2/8	N/A	N/A
hello	1	33% 1/3	N/A	N/A
hello.controller	2	20% 2/10	N/A	N/A
hello.domain	1	66% 4/6	N/A	N/A
hello.repository	2	0% 0/9	N/A	N/A

Report generated by [Cobertura](#) 2.1.1 on 3/6/18 8:52 AM.

All Packages

Classes


[Hello](#) (66%)
[HelloApplication](#) (33%)
[HelloController](#) (100%)
[HelloControllerWithRepository](#) (0%)
[Person](#) (0%)
[PersonRepository](#) (N/A)



How to test ?




How to test with Repository ?

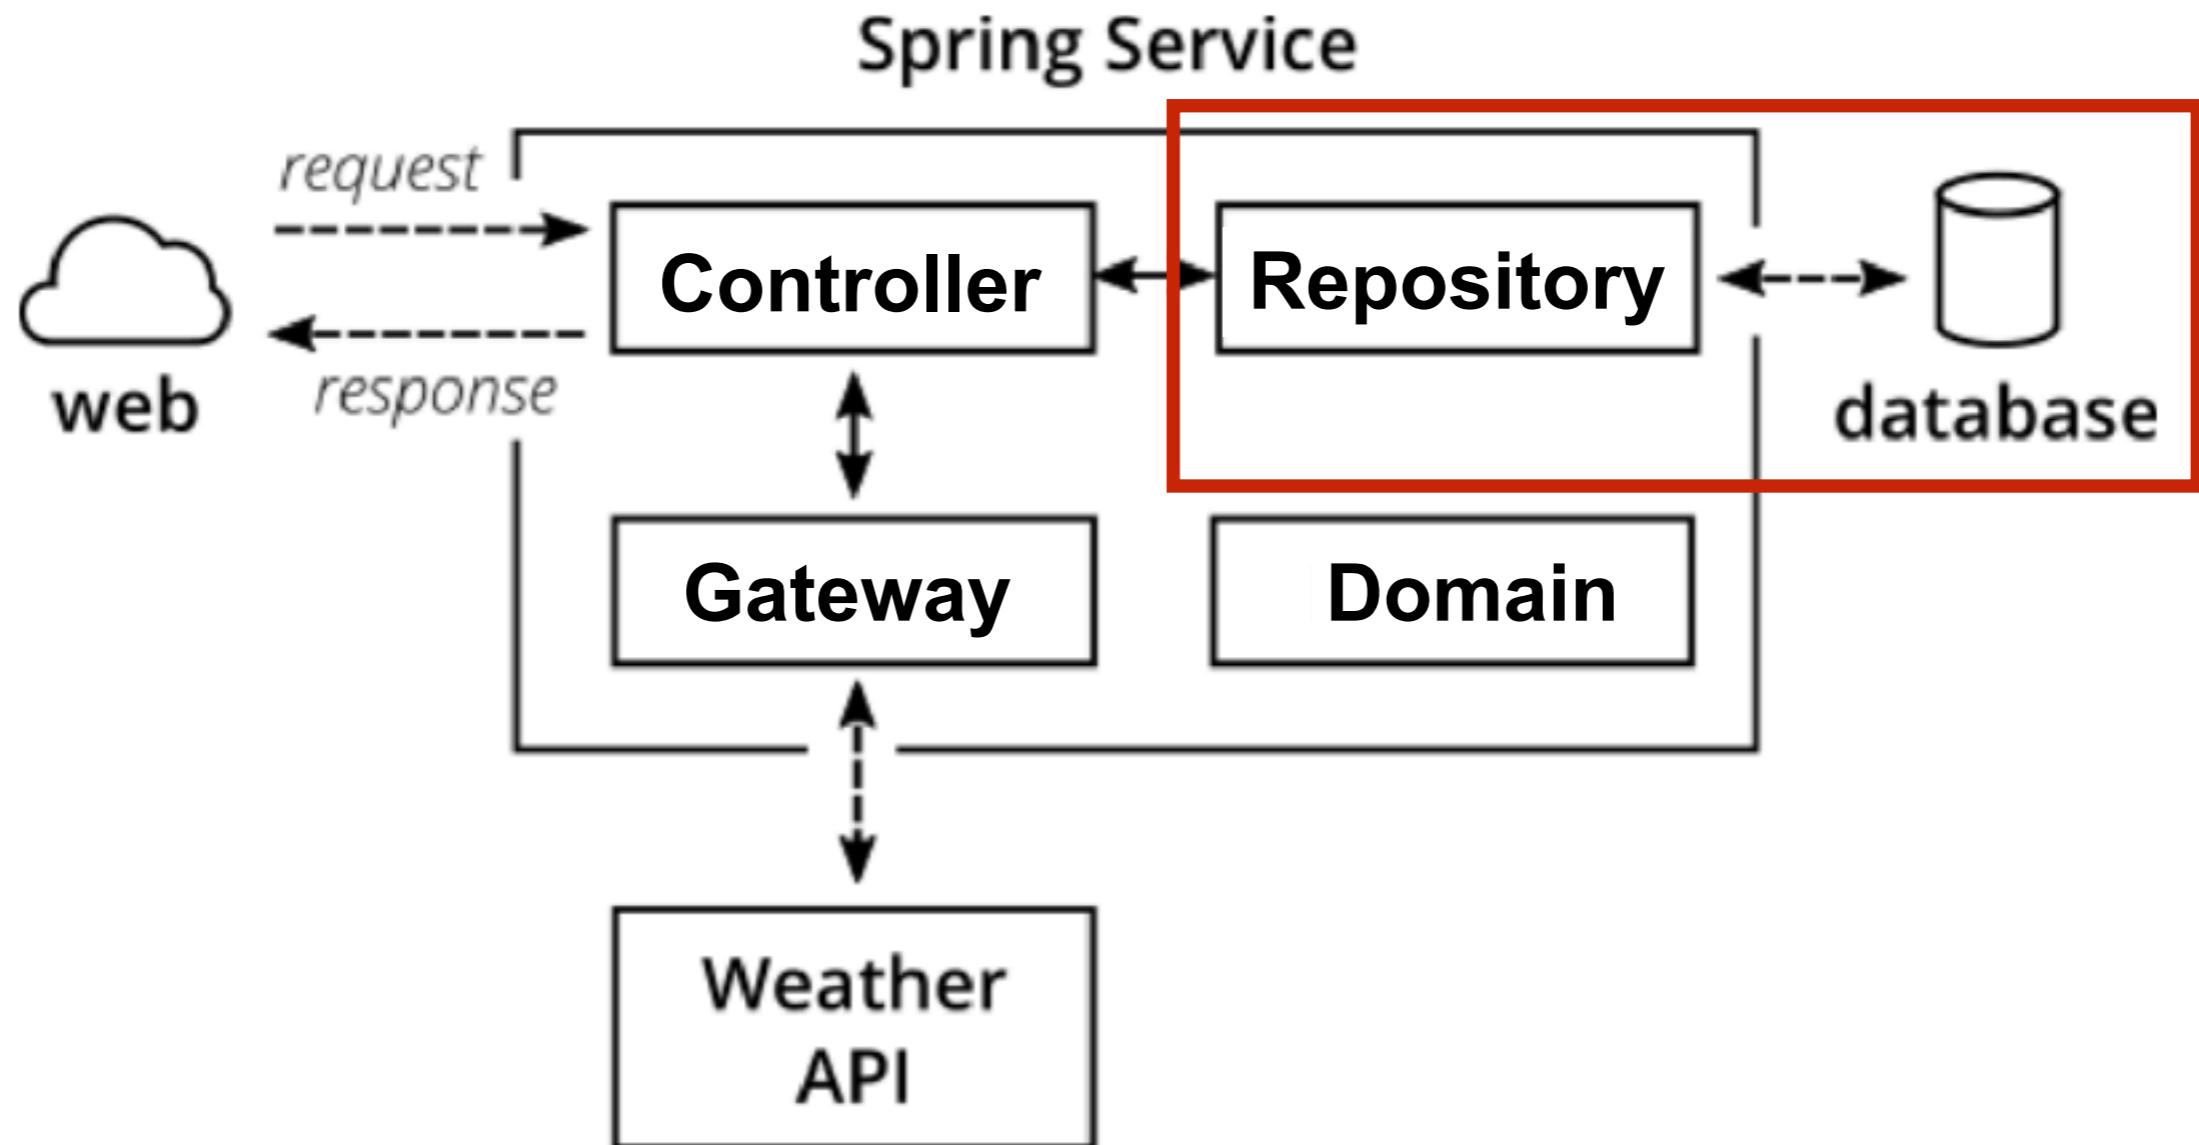

Repository Testing

Using `@DataJpaTest`

Spring Testing

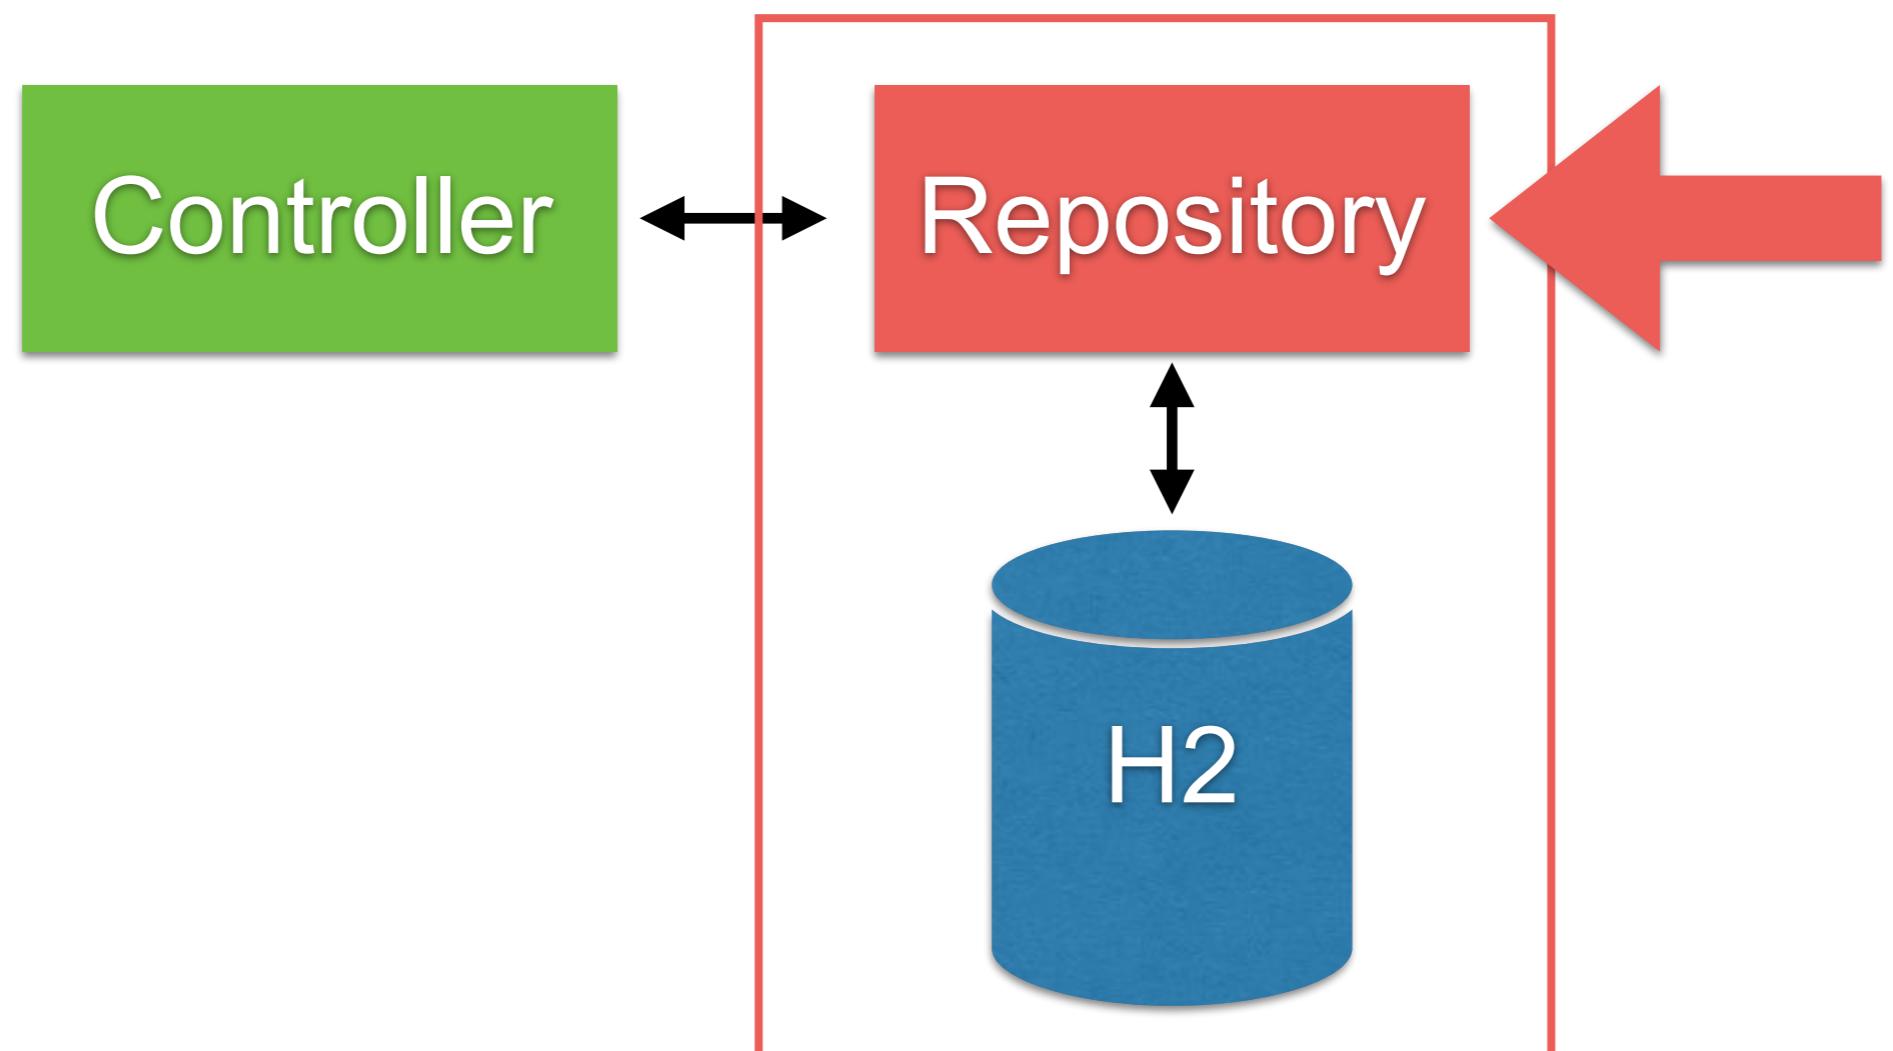

Spring boot provide DataJpaTest

should be add H2 library to pom.xml

```
<dependency>
    <groupId>com.h2database</groupId>
    <artifactId>h2</artifactId>
    <scope>test</scope>
</dependency>
```



Repository Testing (1)

```
@RunWith(SpringRunner.class)
@DataJpaTest
public class PersonRepositoryTest {

    @Autowired
    private PersonRepository personRepository;

    @After
    public void clearData() {
        personRepository.deleteAll();
    }
}
```



Repository Testing (2)

Add a test case

```
@Test  
public void shouldSaveAndGetData() throws Exception {  
    //Arrange  
    Person somkiat = new Person("somkiat", "pui");  
    personRepository.save(somkiat);  
  
    Optional<Person> shouldSomkiat  
        = personRepository.findByFirstName("somkiat");  
  
    assertEquals( expected: "somkiat",  
        shouldSomkiat.get().getFirstName());  
}
```



Run test and package

\$mvn clean package

```
Cobertura Report generation was successful.  
Cobertura 2.1.1 - GNU GPL License (NO WARRANTY) - See COPYRIGHT file  
Cobertura: Loaded information on 3 classes.  
time: 125ms
```

```
Cobertura Report generation was successful.
```

```
BUILD SUCCESS
```




Coverage report

Packages

All
[hello](#)
[hello.controller](#)
[hello.domain](#)
[hello.repository](#)

Coverage Report - All Packages

Package	# Classes	Line Coverage	Branch Coverage	Complexity
All Packages	6	53%  15/28	N/A	N/A
hello	1	33%  1/3	N/A	N/A
hello.controller	2	20%  2/10	N/A	N/A
hello.domain	1	66%  4/6	N/A	N/A
hello.repository	2	88%  8/9	N/A	N/A

Report generated by [Cobertura](#) 2.1.1 on 3/6/18 9:32 AM.

All Packages

Classes

[Hello \(66%\)](#)
[HelloApplication \(33%\)](#)
[HelloController \(100%\)](#)
[HelloControllerWithRepository \(0%\)](#)
[Person \(88%\)](#)
[PersonRepository \(N/A\)](#)




Working with Real Database




Working with Database

Production

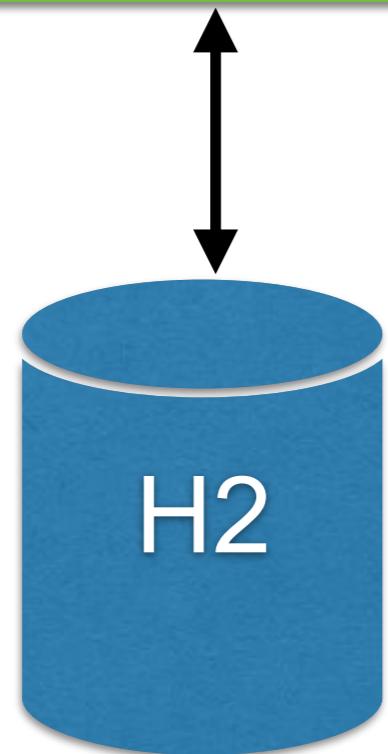

Testing

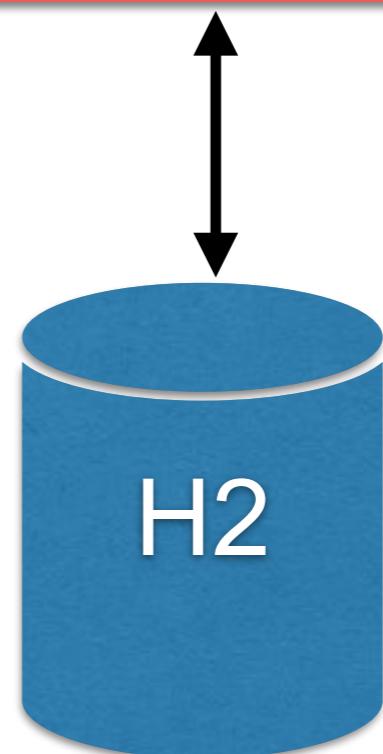

Initial database 1

Using @PostConstruct

```
@PostConstruct  
public void initData() {  
    Account account1 = new Account();  
    account1.setAccountId("01");  
    accountRepository.save(account1);  
    Account account2 = new Account();  
    account2.setAccountId("02");  
    accountRepository.save(account2);  
}
```



Initial database 2

Schema (resources/schema.sql)

Data (resources/data.sql)

Schema.sql

```
CREATE TABLE account(
    id BIGINT AUTO_INCREMENT PRIMARY KEY,
    account_Id VARCHAR(16) NOT NULL UNIQUE,
    mobile_No VARCHAR(10),
    name VARCHAR(50),
    account_Type CHAR(2)
);
```

Data.sql

```
INSERT INTO account (account_Id) VALUES ('01');
INSERT INTO account (account_Id) VALUES ('02');
```



Initial database 2

Disable auto generate DDL from JPA in file application.yml

```
spring:  
  jpa:  
    show-sql: true  
    hibernate:  
      ddl-auto: none
```



Initial database 2

Problem with naming strategy !!

```
spring:  
  jpa:  
    show-sql: true  
    hibernate:  
      ddl-auto: none  
      naming:  
        physical-strategy:  
          org.springframework.boot.orm.jpa.hibernate.SpringPhysicalNamingStrategy  
        implicit-strategy:  
          org.springframework.boot.orm.jpa.hibernate.SpringImplicitNamingStrategy
```

<https://github.com/spring-projects/spring-boot/tree/master/spring-boot-project/spring-boot/src/main/java/org/springframework/boot/orm/jpa/hibernate>



Run and see from logging

Execute file schema.sql and data.sql

```
o.s.jdbc.datasource.init.ScriptUtils      : Executing SQL script from URL [file:/Users/somkiat/dat
o.s.jdbc.datasource.init.ScriptUtils      : Executed SQL script from URL [file:/Users/somkiat/data
49 ms.
o.s.jdbc.datasource.init.ScriptUtils      : Executing SQL script from URL [file:/Users/somkiat/dat
o.s.jdbc.datasource.init.ScriptUtils      : Executed SQL script from URL [file:/Users/somkiat/data
ms.
```



Run service


http://localhost:8080/account/0868696209

```
← → ⌂ ⓘ localhost:8080/account/0868696209
[
  - {
    accountNo: "01",
    mobileNo: null,
    name: "",
    accountType: ""
  },
  - {
    accountNo: "02",
    mobileNo: null,
    name: "",
    accountType: ""
  }
]
```




Working with Database

Production

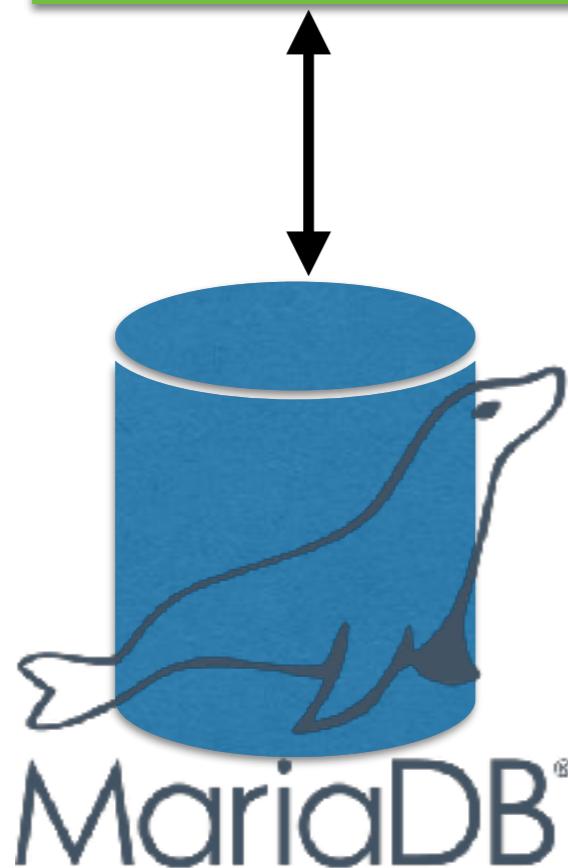

Testing

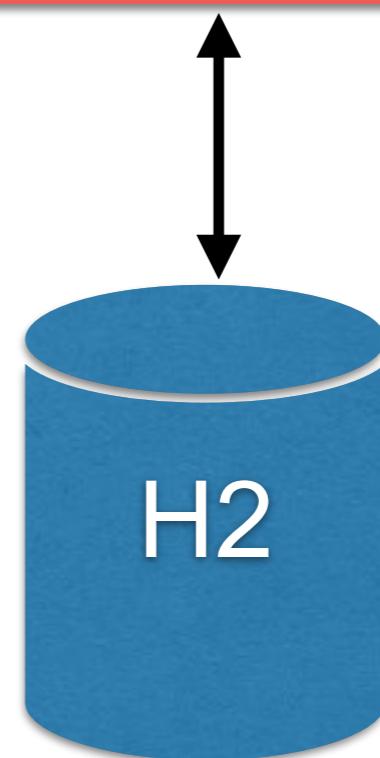

Add database dependency

In file pom.xml

```
<dependency>
    <groupId>org.mariadb.jdbc</groupId>
    <artifactId>mariadb-java-client</artifactId>
    <version>2.2.5</version>
</dependency>
```

<https://mariadb.com/kb/en/library/about-mariadb-connector-j/>



Config database in application

In file resources/application.yml

```
spring:
  datasource:
    driver-class-name: org.mariadb.jdbc.Driver
    url: jdbc:mariadb://35.198.254.195:3306/account
    username: user01
    password: password

    initialization-mode: always
    testWhileIdle: true
    validationQuery: SELECT 1

  jpa:
    show-sql: true
    properties:
      hibernate:
        dialect: org.hibernate.dialect.MySQL5InnoDBDialect
```



Config database in application

Required config for database

```
spring:
```

```
  datasource:  
    driver-class-name: org.mariadb.jdbc.Driver  
    url: jdbc:mariadb://35.198.254.195:3306/account  
    username: user01  
    password: password
```

```
    initialization-mode: always
```

```
    testWhileIdle: true
```

```
    validationQuery: SELECT 1
```

```
jpa:
```

```
  show-sql: true
```

```
  properties:
```

```
    hibernate:
```

```
      dialect: org.hibernate.dialect.MySQL5InnoDBDialect
```



Config database in application

Required config for database

```
spring:  
  datasource:  
    driver-class-name: org.mariadb.jdbc.Driver  
    url: jdbc:mariadb://35.198.254.195:3306/account  
    username: user01  
    password: password
```

```
  initialization-mode: always
```

```
  testWhileIdle: true  
  validationQuery: SELECT 1  
  
  jpa:  
    show-sql: true  
    properties:  
      hibernate:  
        dialect: org.hibernate.dialect.MySQL5InnoDBDialect
```

By default not run



Run service

http://localhost:8080/account/0868696209

```
← → ⌂ ⓘ localhost:8080/account/0868696209
[
  - {
    accountNo: "01",
    mobileNo: null,
    name: "",
    accountType: ""
  },
  - {
    accountNo: "02",
    mobileNo: null,
    name: "",
    accountType: ""
  }
]
```



Check your test ?

\$mvnw clean test



Step to test

Stop the real database before run test

See result



Error ?

Spring boot try to connect to the real database ?



Fix Error

Create file /resources/application.yml in test folder

spring: **config of H2 database**


```
datasource:  
  driver-class-name: org.h2.Driver  
  url: jdbc:h2:mem:db;DB_CLOSE_DELAY=-1  
  username: sa  
  password: sa
```

```
jpa:  
  show-sql: true  
  properties:  
    hibernate:  
      dialect: org.hibernate.dialect.H2Dialect
```



Question ?

Dependency Scopes in file pom.xml
runtime ?

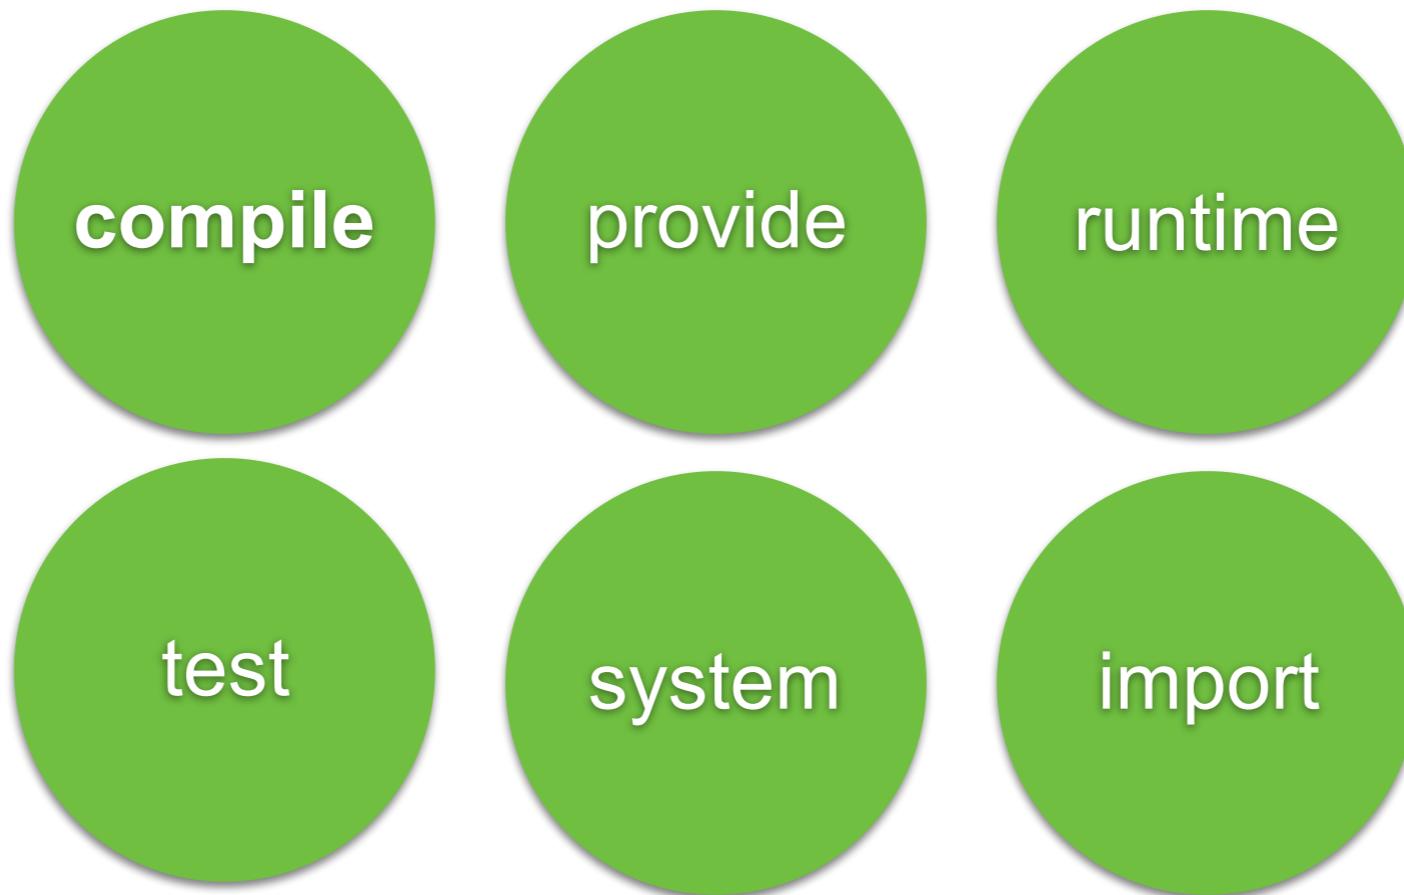

https://maven.apache.org/guides/introduction/introduction-to-dependency-mechanism.html#Dependency_Scope



Question ?

show_sql=true not working ?

```
jpa:  
  show_sql: true  
  hibernate:  
    ddl-auto: none  
properties:  
  hibernate:  
    format_sql: true  
  dialect: org.hibernate.dialect.MySQL5InnoDBDialect
```

```
logging:  
  level:  
    org.hibernate.SQL: DEBUG
```

Beautiful sql format

Default log level = INFO

<http://www.baeldung.com/sql-logging-spring-boot>



Result of logging message

```
13:18:36.336 INFO 79616 --- [nio-8080-exec-2] o.s.web.servlet.DispatcherServlet : initialization completed in 37 ms
13:18:36.864 INFO 79616 --- [nio-8080-exec-2] o.h.h.i.QueryTranslatorFactory      : HHH000397: Using ASTQueryTranslatorFactory
13:18:37.138 DEBUG 79616 --- [nio-8080-exec-2] org.hibernate.SQL
select account0_.id as id1_0_, account0_.account_id as account_2_0_, ac
 as account_3_0_, account0_.mobile_no as mobile_n4_0_, account0_.name a
unt account0_
```



Log Levels

Level	Color
FATAL	Red
ERROR	Red
WARN	Yellow
INFO (default)	Green
DEBUG	Green
TRACE	Green

<https://docs.spring.io/spring-boot/docs/current/reference/html/boot-features-logging.html>



Testing with Mocking




Controller/Service Testing

Unit testing ?


Spring Unit testing with MockMvc ?



Controller Testing with Unit test

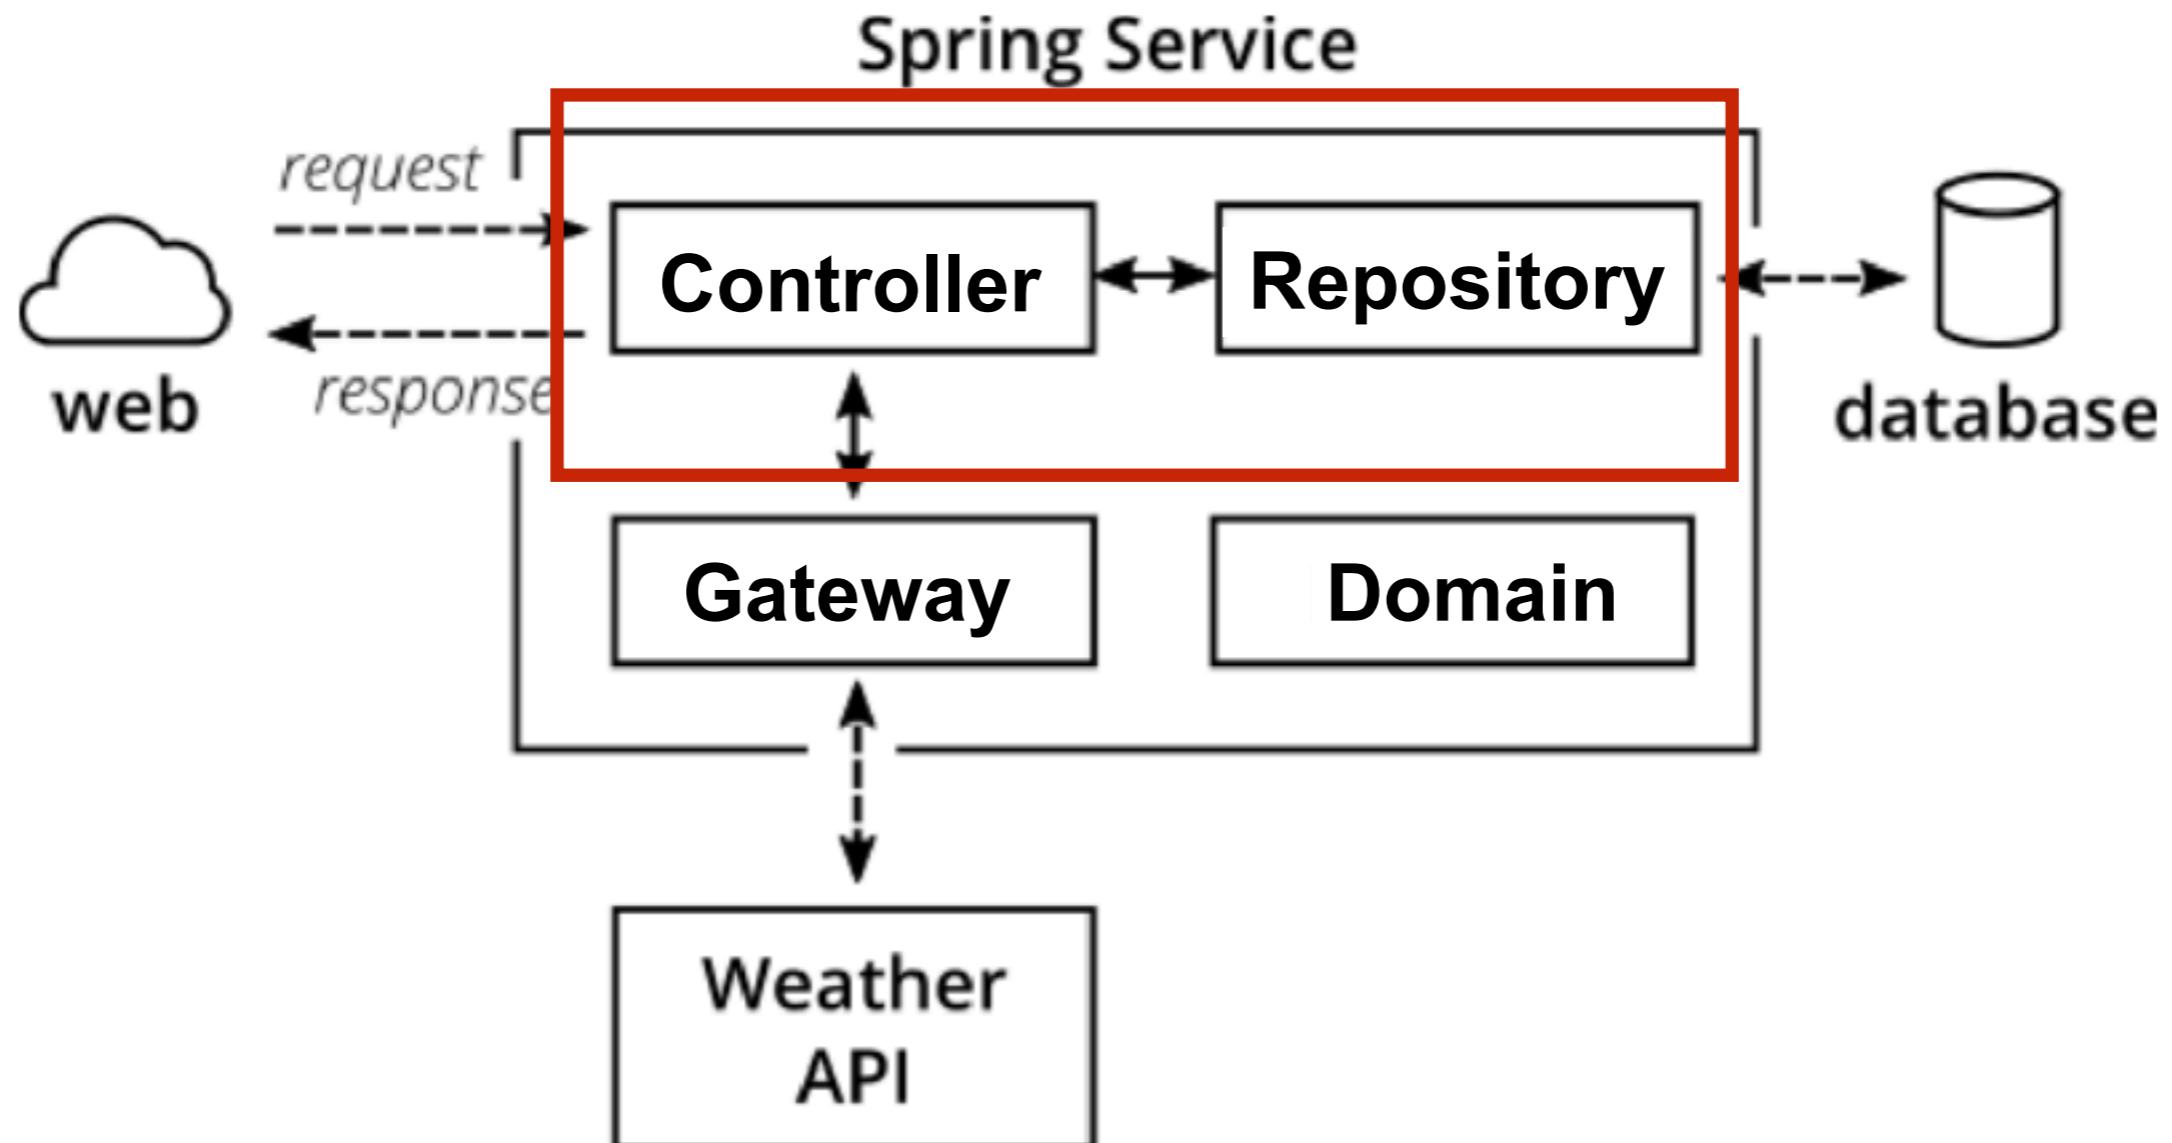


Controller Testing

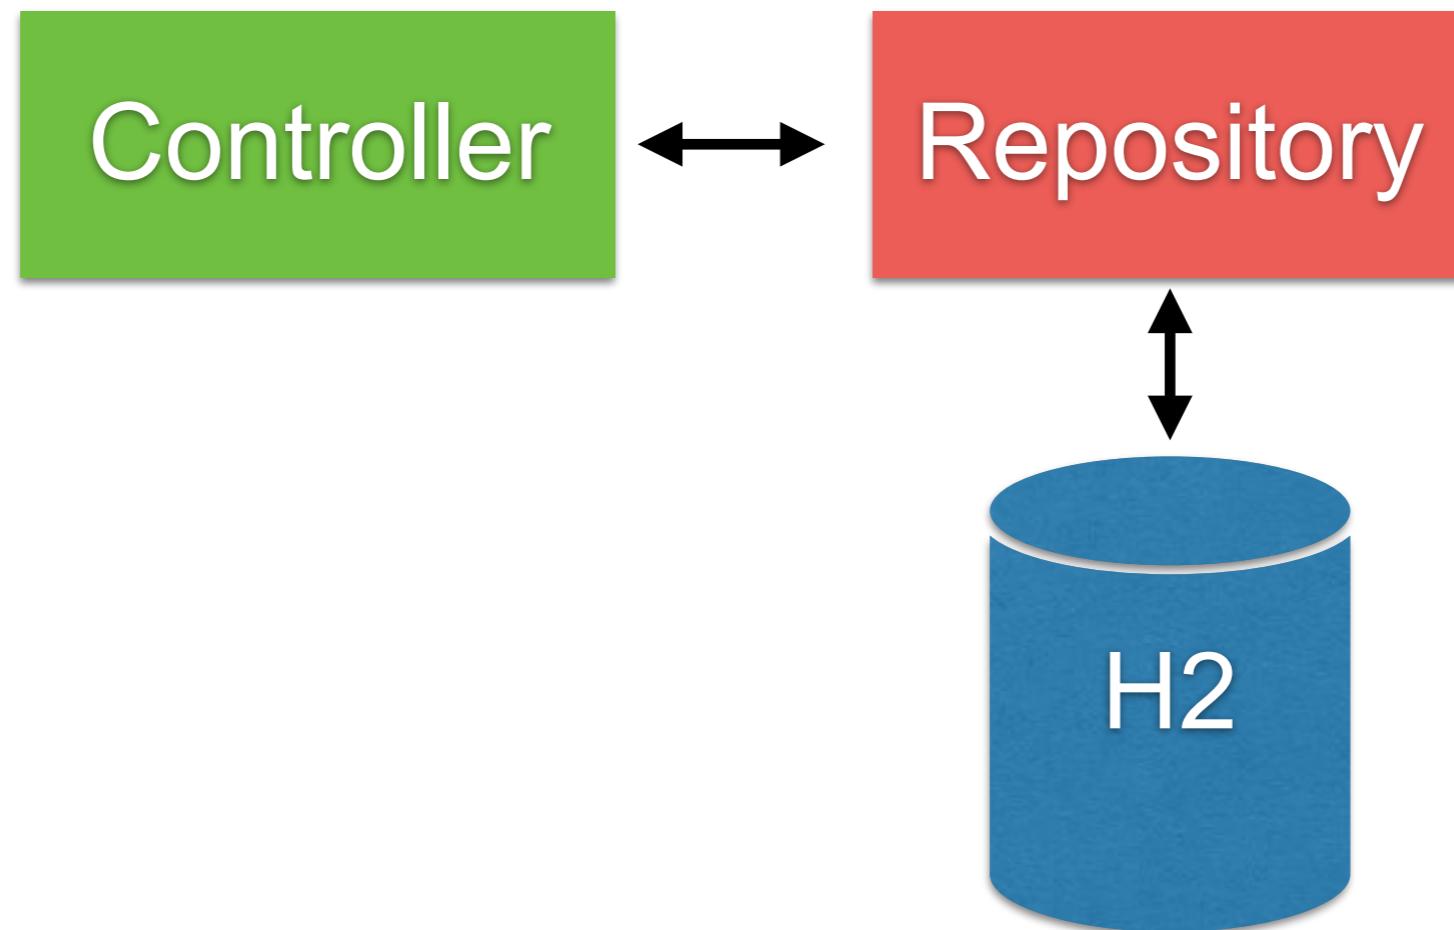

Controller Testing

Using `@SpringBootTest`

Spring Testing

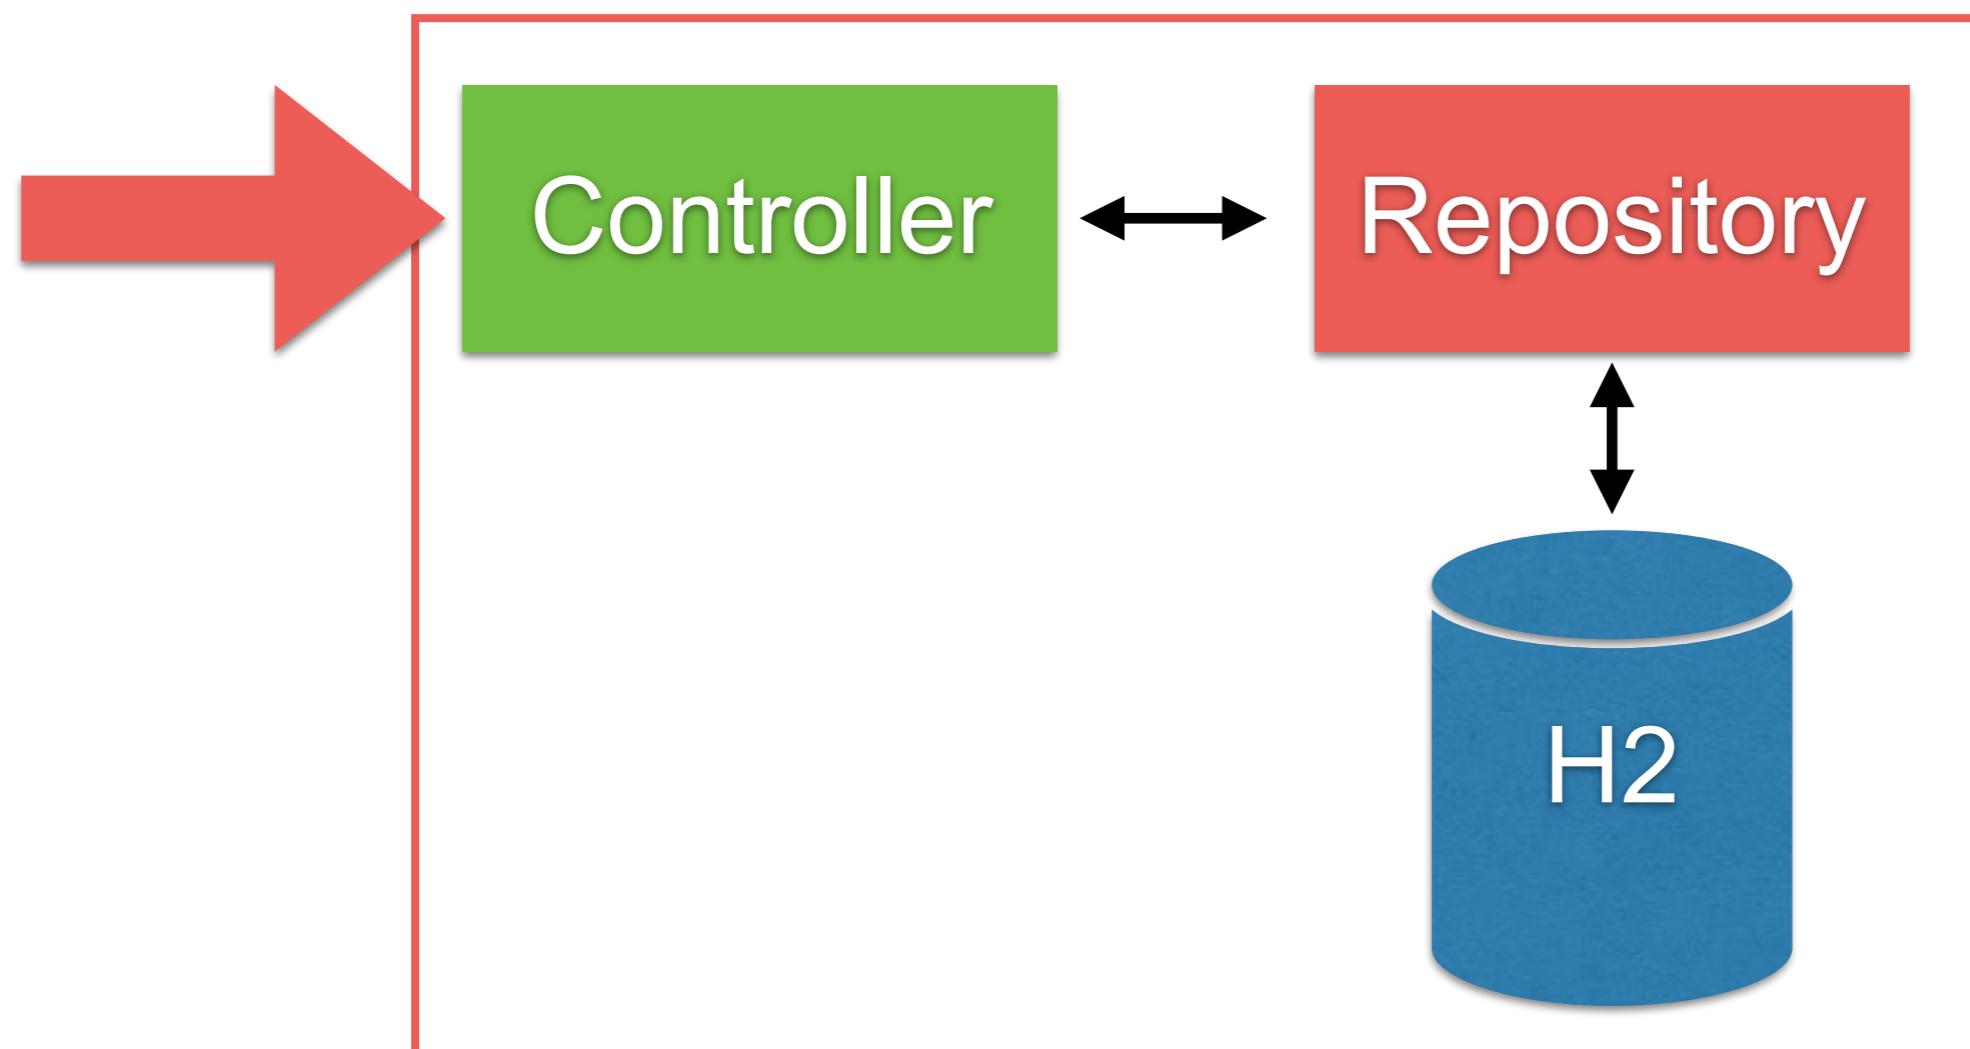

Unit test

Use Test Double

In java, use Mockito library



<http://site.mockito.org/>



Unit test with Mockito (1)

```
public class HelloControllerWithRepositoryTest {  
  
    private HelloControllerWithRepository controllerWithRepository;  
  
    @Mock  
    private PersonRepository personRepository;  
  
    @Before  
    public void init() {  
        initMocks(testClass: this);  
        controllerWithRepository  
            = new HelloControllerWithRepository(personRepository);  
    }  
}
```



Unit test with Mockito (2)

```
@Test
public void shouldReturnHelloSomkiat() {
    //Arrange
    Person somkiat = new Person("somkiat", "pui");
    given(personRepository.findByName("somkiat"))
        .willReturn(Optional.of(somkiat));

    // Action
    Hello hello = controllerWithRepository.sayHi( name: "somkiat");

    // Assert
    assertEquals( expected: "Hello somkiat", hello.getMessage());
}
```




Try by yourself



Controller Testing with mock

Using `@SpringBootTest`

Spring Testing

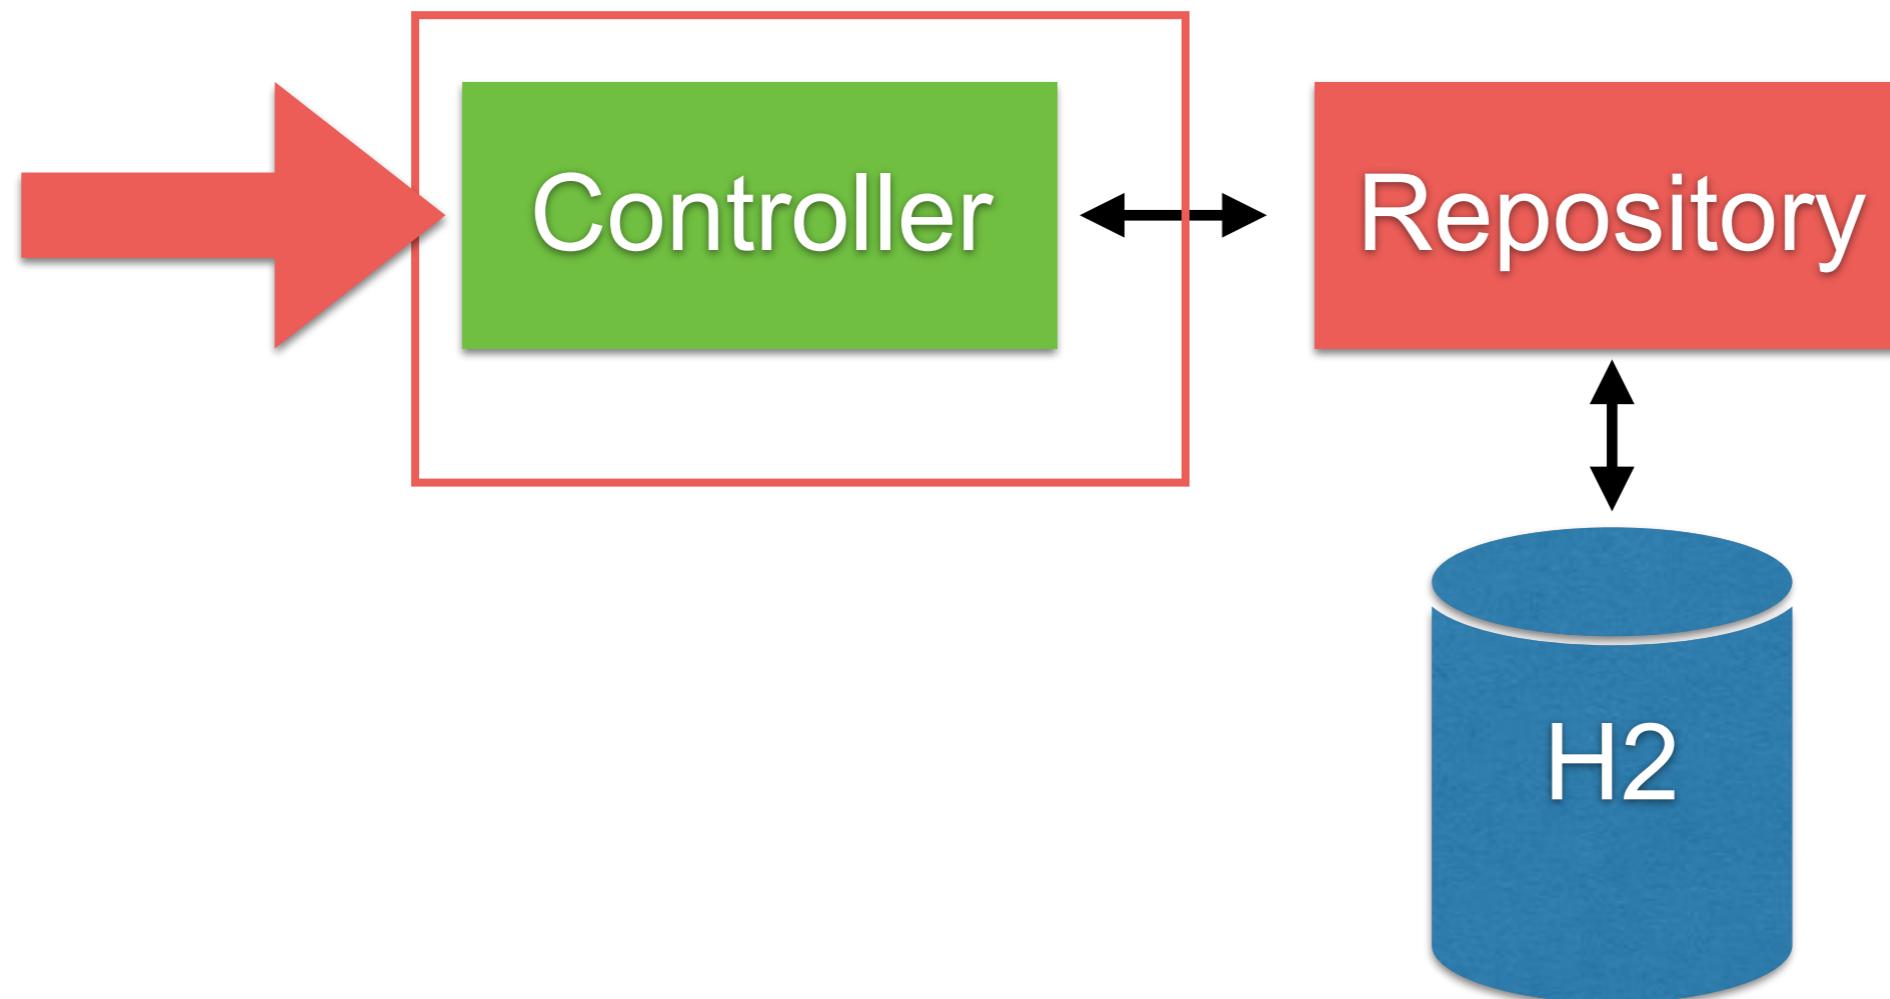

Controller Testing with mock (1)

```
@RunWith(SpringRunner.class)
@SpringBootTest(
    webEnvironment = WebEnvironment.RANDOM_PORT)
public class AccountControllerMockTest {

    @Autowired
    private TestRestTemplate testRestTemplate;

    @MockBean
    private AccountRepository accountRepository;
```



Controller Testing with mock (2)

```
@Test  
public void เรียกข้อมูลบัญชีของหมายเลข_0868696209_ต้องเจอสองบัญชีนั่น()  
{  
    // Arrange  
    List<Account> accountIterable = new ArrayList<>();  
    accountIterable.add(new Account("01"));  
    accountIterable.add(new Account("02"));  
    given(accountRepository.findAll()).willReturn(accountIterable);  
  
    // Act  
    List<AccountResponse> accountResponses  
        = testRestTemplate.getForObject(  
            "/account/0868696209", List.class);  
  
    // Assert  
    assertEquals(2, accountResponses.size());  
}
```

Controller Testing with mock (3)

```
@Test
public void
    เรียกข้อมูลบัญชีของหมายเลข_0868696209_ต้องเจอสองบัญชีนั่น() {
        // Arrange
        List<Account> accountIterable = new ArrayList<>();
        accountIterable.add(new Account("01"));
        accountIterable.add(new Account("02"));
        given(accountRepository.findAll()).willReturn(accountIterable);

        // Act
        List<AccountResponse> accountResponses
            = testRestTemplate.getForObject(
                "/account/0868696209", List.class);

        // Assert
        assertEquals(2, accountResponses.size());
    }
```

Call service with rest template



Coverage report

Packages

All
[toystore](#)
[toystore.controller](#)
[toystore.domain](#)
[toystore.repository](#)

Coverage Report - All Packages

Package	# Classes	Line Coverage	Branch Coverage	Complexity
All Packages	6	90% 25/28	50% 1/2	1.1
toystore	1	33% 1/3	N/A	1
toystore.controller	2	93% 15/16	50% 1/2	2
toystore.domain	1	100% 4/4	N/A	1
toystore.repository	2	100% 9/9	N/A	1

Report generated by [Cobertura](#) 2.1.1 on 3/6/18 5:20 PM.


All Packages

Classes

[Hello](#) (100%)
[HelloController](#) (83%)
[HelloWithRepositoryController](#) (100%)
[Person](#) (100%)
[PersonRepository](#) (N/A)
[ToyStoreApplication](#) (33%)



Controller Testing with Unit test

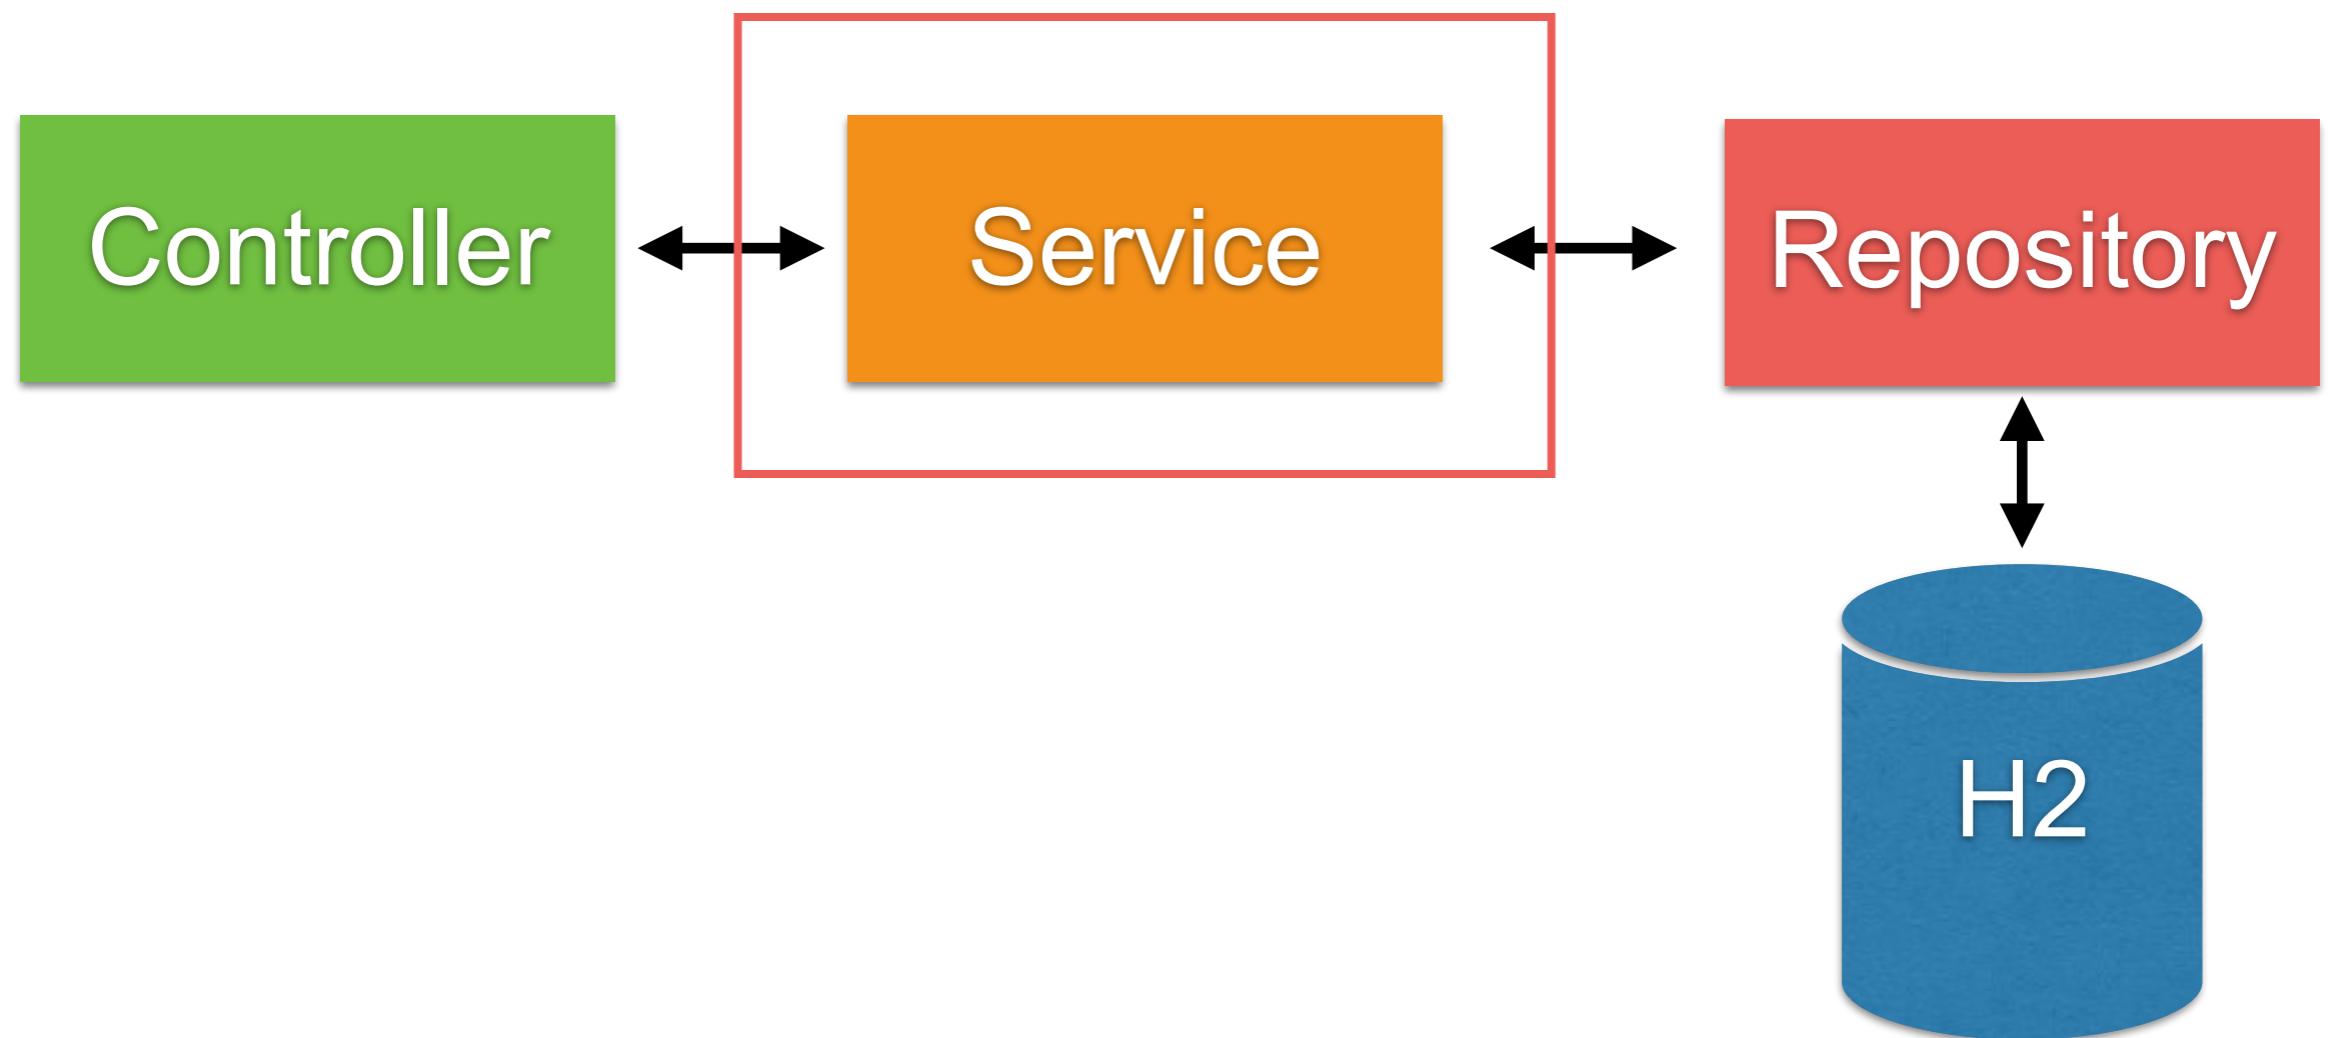

Spring Security

<https://spring.io/projects/spring-security>



Spring Security

Comprehensive support Authentication and Authorization

Protection against common attacks

Integration with Servlet/Spring MVC/ Boot/ Data

CSRF (Cross Site Request Forgery) protection

Java configuration support



Features

LDAP (Lightweight Directory Access Protocol)
Single Sing-On (SSO)
Basic Access Authentication
Digest Access Authentication
Web Form Authentication
Authorization
HTTP Authorization
OAuth 2.0 Login



Spring project modules !!

spring-security-core

spring-security-config

spring-security-web

spring-security-ldap

spring-security-oauth2-core

spring-security-oauth2-client

spring-security-oauth2-jose

spring-security-acl



Workshop



<https://github.com/up1/course-basic-java-5-days>

