

ELK Stack





Somkiat Puisungnoen

Somkiat Puisungnoen

Update Info 1 View Activity Log 10+ ...

Timeline About Friends 3,138 Photos More

When did you work at Opendream? X

... 22 Pending Items

Intro

Software Craftsmanship

Software Practitioner at สยามชัมนาณกิจ พ.ศ. 2556

Agile Practitioner and Technical at SPRINT3r

Post Photo/Video Live Video Life Event

What's on your mind?

Public Post

Somkiat Puisungnoen 15 mins · Bangkok · ⚙️

Java and Bigdata



Page

Messages

Notifications 3

Insights

Publishing Tools

Settings

Help ▾



somkiat.cc


@somkiat.cc

Home

Posts

Videos

Photos

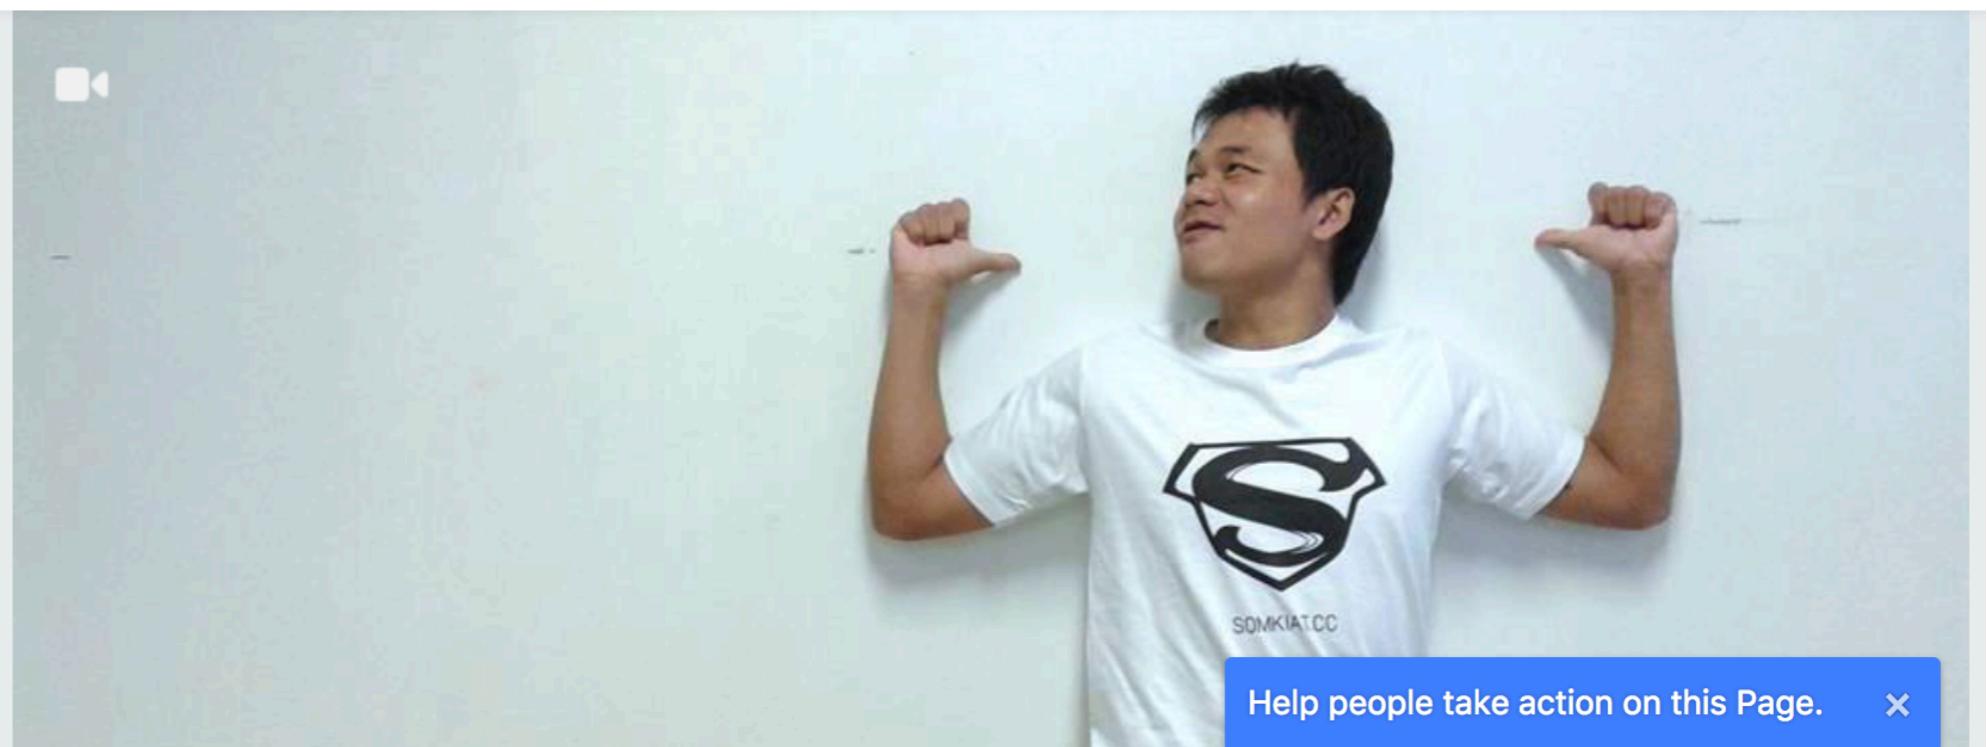

ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

https://github.com/up1/course_elk



Agenda

- ELK stack
- Introduction to Elasticsearch
- CRUD (Create, Read, Update, Delete)
- Search DSL (Domain Specific Language)
- Analyzer
- Mapping
- Aggregation



Agenda


- Working with Kibana
- Useful features
 - Auto-suggestion
 - ngram algorithm
- Clustering management
- Design for scaling
- Working with Logstash



Agenda


- Working with Prometheus
- Working with Grafana
- Workshop



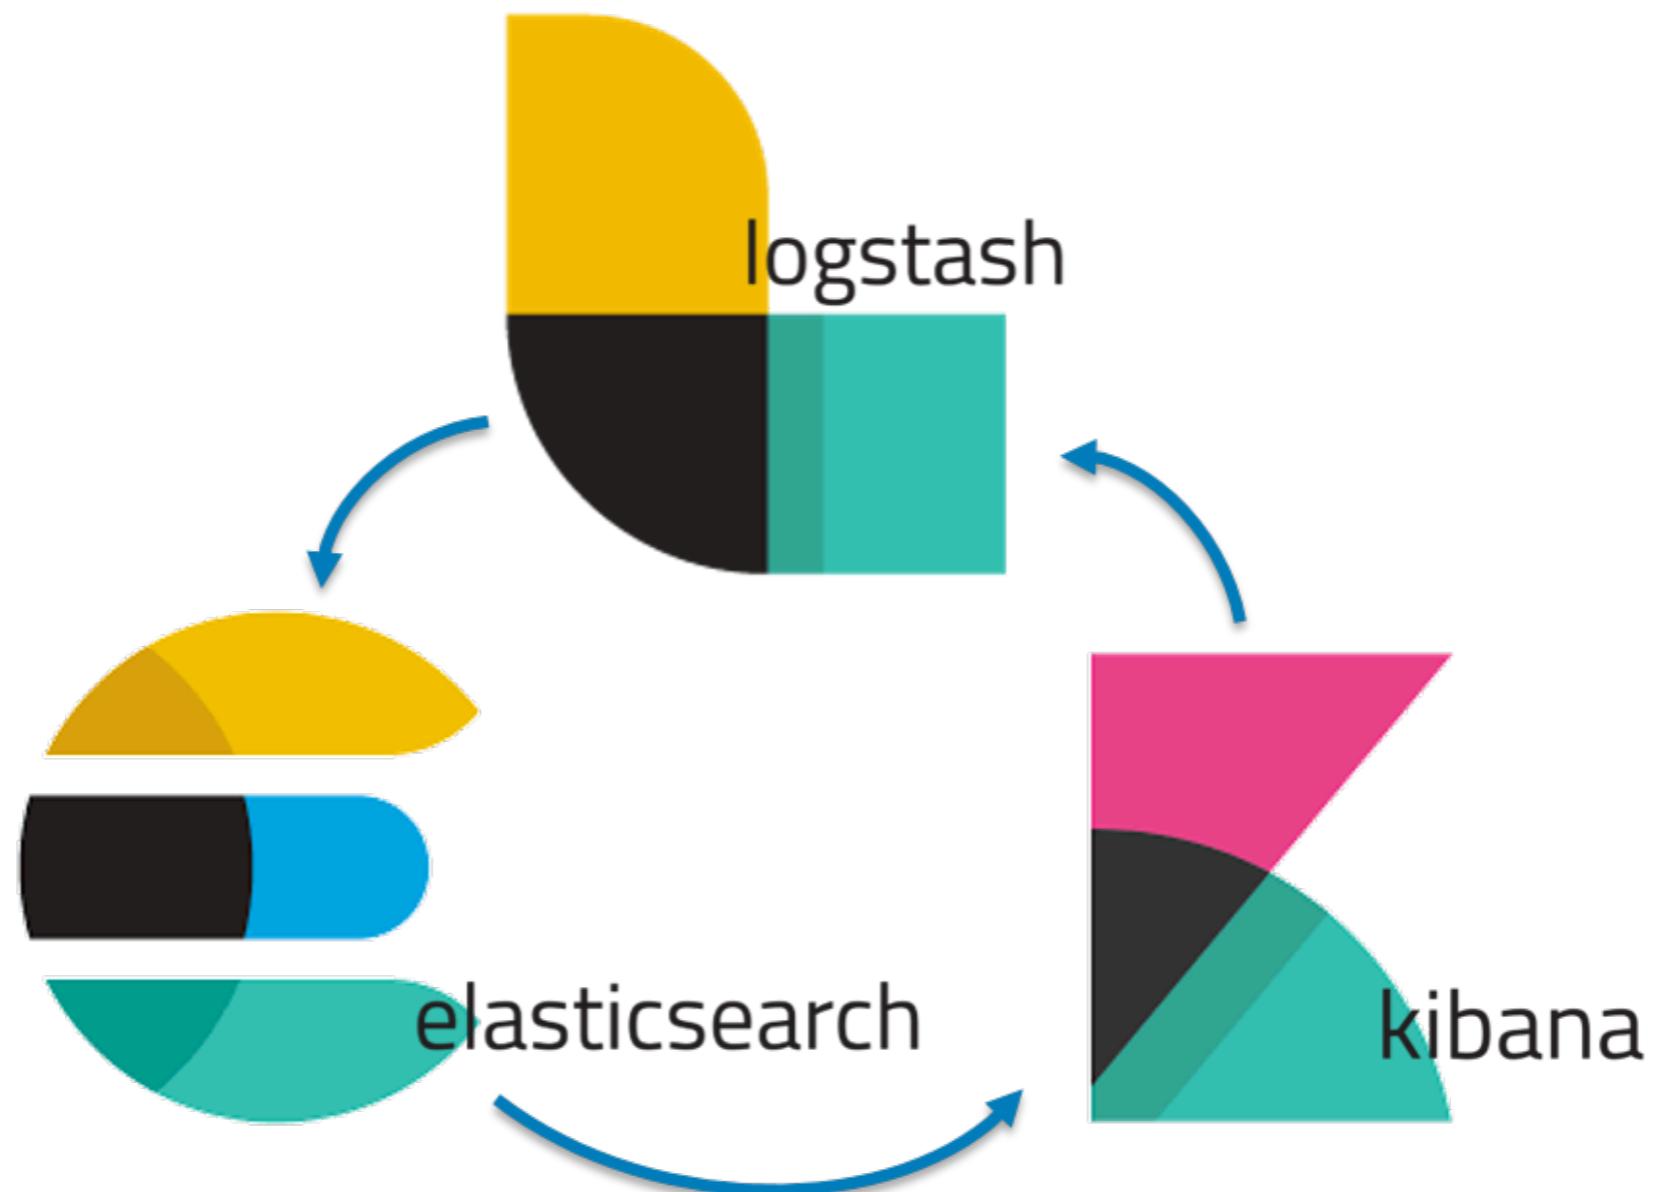



Beat

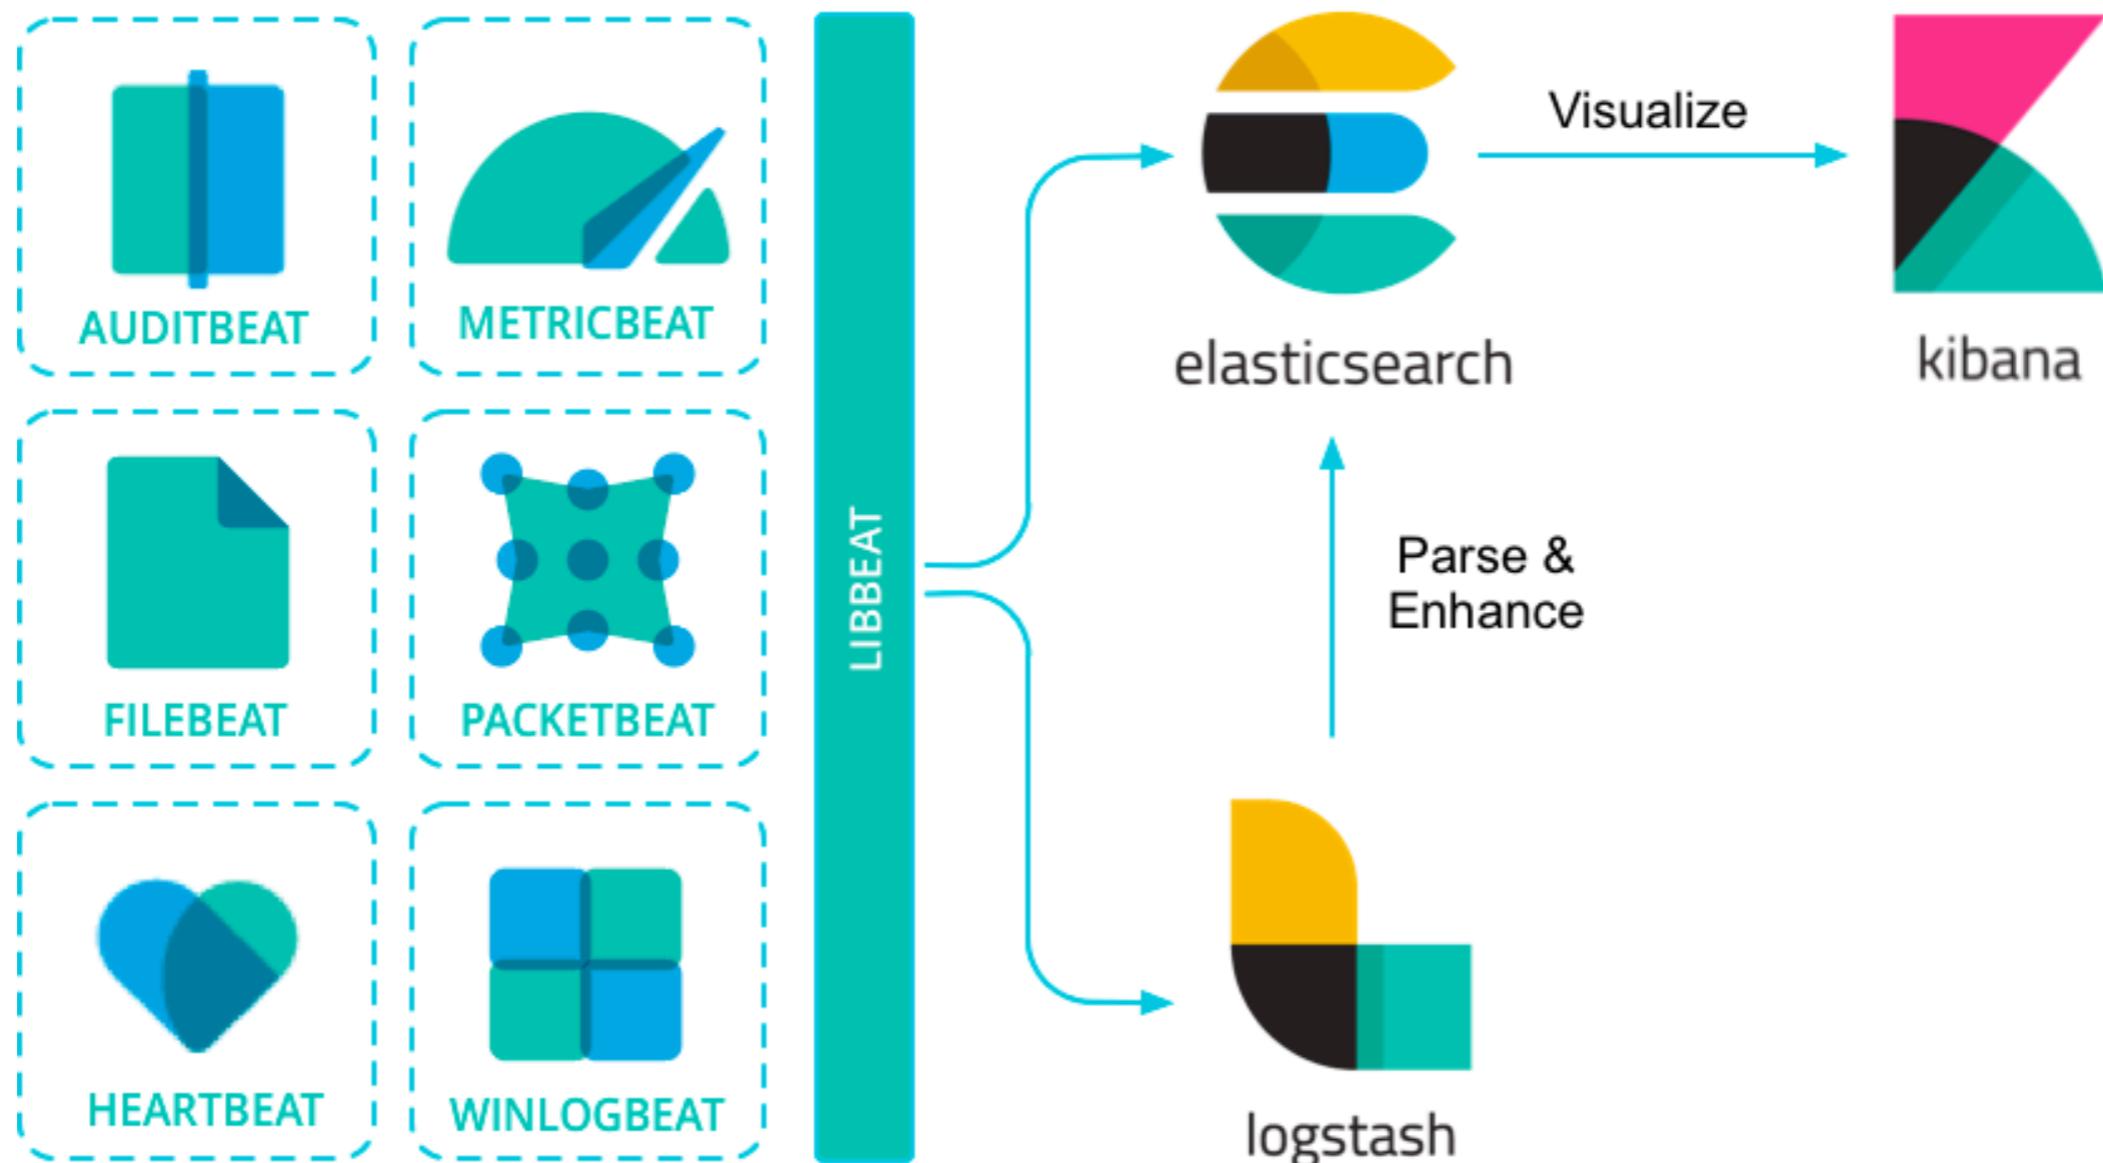

<https://www.elastic.co/guide/en/beats/libbeat/current/index.html>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

Beat

Purpose	Library
Audit data	Auditbeat
Log files	Filebeat
Cloud data	Functionbeat
Availability	Heartbeat
Metrics	Metricbeat
Network traffic	Packetbeat
Windows event logs	Winlogbeat


<https://www.elastic.co/guide/en/beats/libbeat/current/beats-reference.html>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

ELK stack

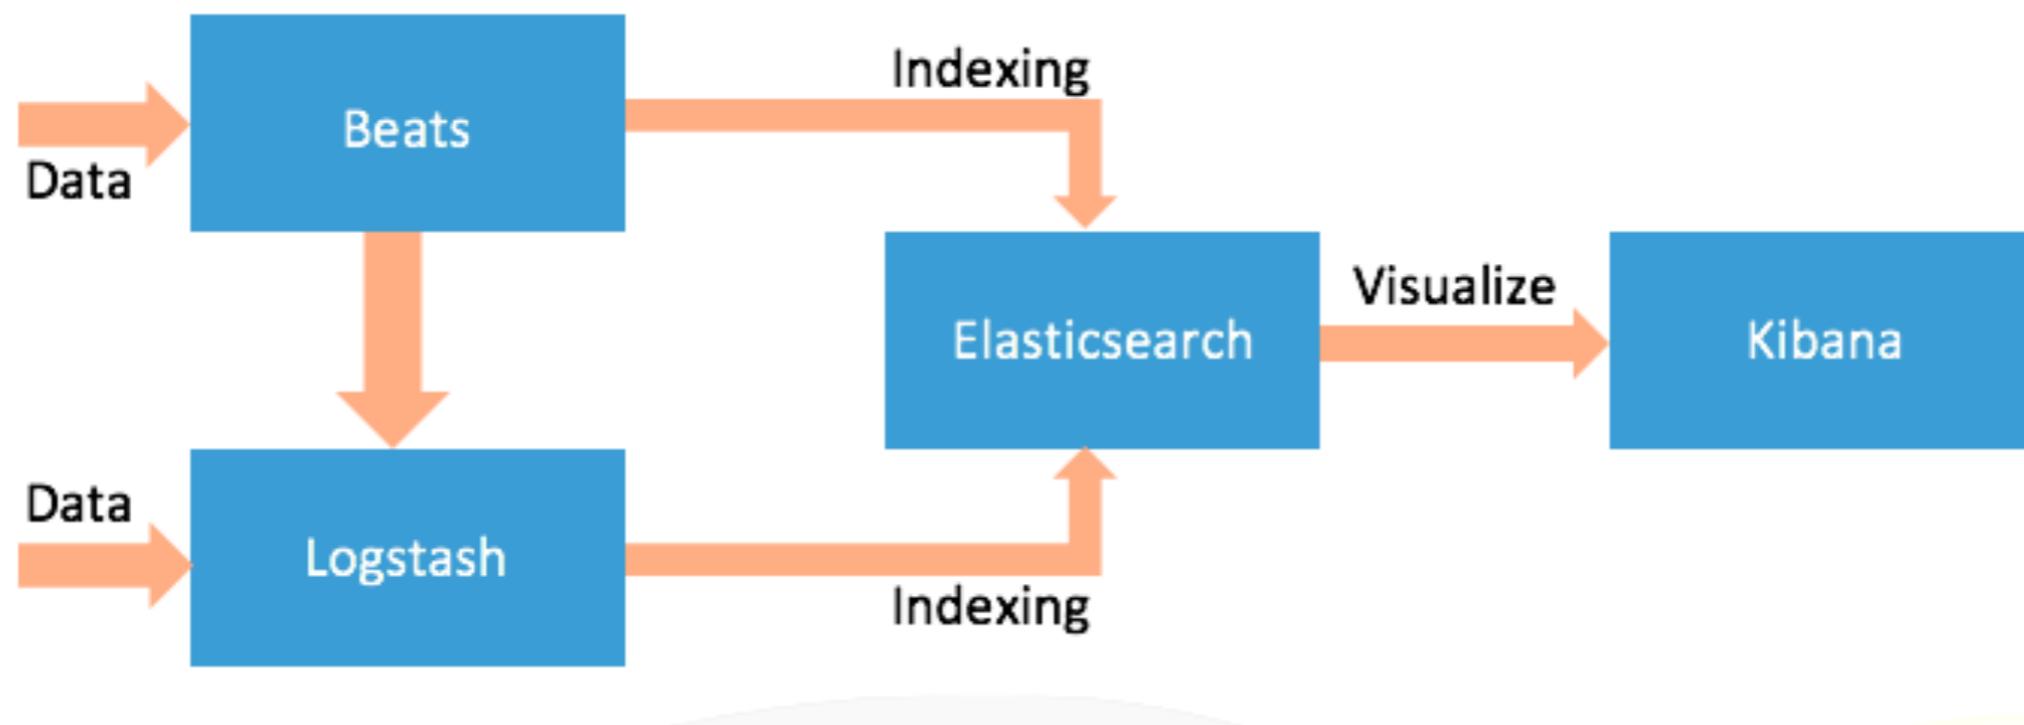

Elasticsearch ?



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

Elasticsearch

Search
Analytic
Real-time
Distributed
Scalability



Distributed Search Engine

Open Source
Document-based
Based on **Apache Lucene**
JSON over HTTP



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

Distributed Search Engine



Compass



elasticsearch



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

Apache Lucene

The screenshot shows the official Apache Lucene website. At the top, there's a navigation bar with a search bar containing "Search with Apache So" and a dropdown menu "select provider". Below the search bar are three tabs: "CORE (JAVA)", "SOLR", and "PYLUCENE". A large green banner features the text "Ultra-fast Search Library and Server" and the Apache Lucene logo. To the right of the banner is the Solr logo. Below the banner, a dark grey box contains the text "Apache Lucene and Solr set the standard for search and indexing performance". The main content area has a light grey background. It features a "Welcome to Apache Lucene" heading and a list of projects developed by the Lucene project. On the right side, there are two "DOWNLOAD" buttons: one for "Apache Lucene 7.5.0" (green) and one for "Apache Solr 7.5.0" (orange). A "Projects" link is located at the bottom right of this section. The footer of the page includes the Apache logo and the URL "http://lucene.apache.org/".

Apache Lucene™ is a Java-based search library and server.

Apache Lucene and Solr set the standard for search and indexing performance.

Welcome to Apache Lucene

The Apache Lucene™ project develops open-source search software, including:

- [Lucene Core](#), our flagship sub-project, provides Java-based indexing and search technology, as well as spellchecking, hit highlighting and advanced analysis/tokenization capabilities.
- [Solr™](#) is a high performance search server built using Lucene Core, with XML/HTTP and JSON/Python/Ruby APIs, hit highlighting, faceted search, caching, replication, and a web admin interface.
- [PyLucene](#) is a Python port of the Core project.

[DOWNLOAD](#)

Apache Lucene 7.5.0

[DOWNLOAD](#)

Apache Solr 7.5.0

[Projects](#)


<http://lucene.apache.org/>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

Compass

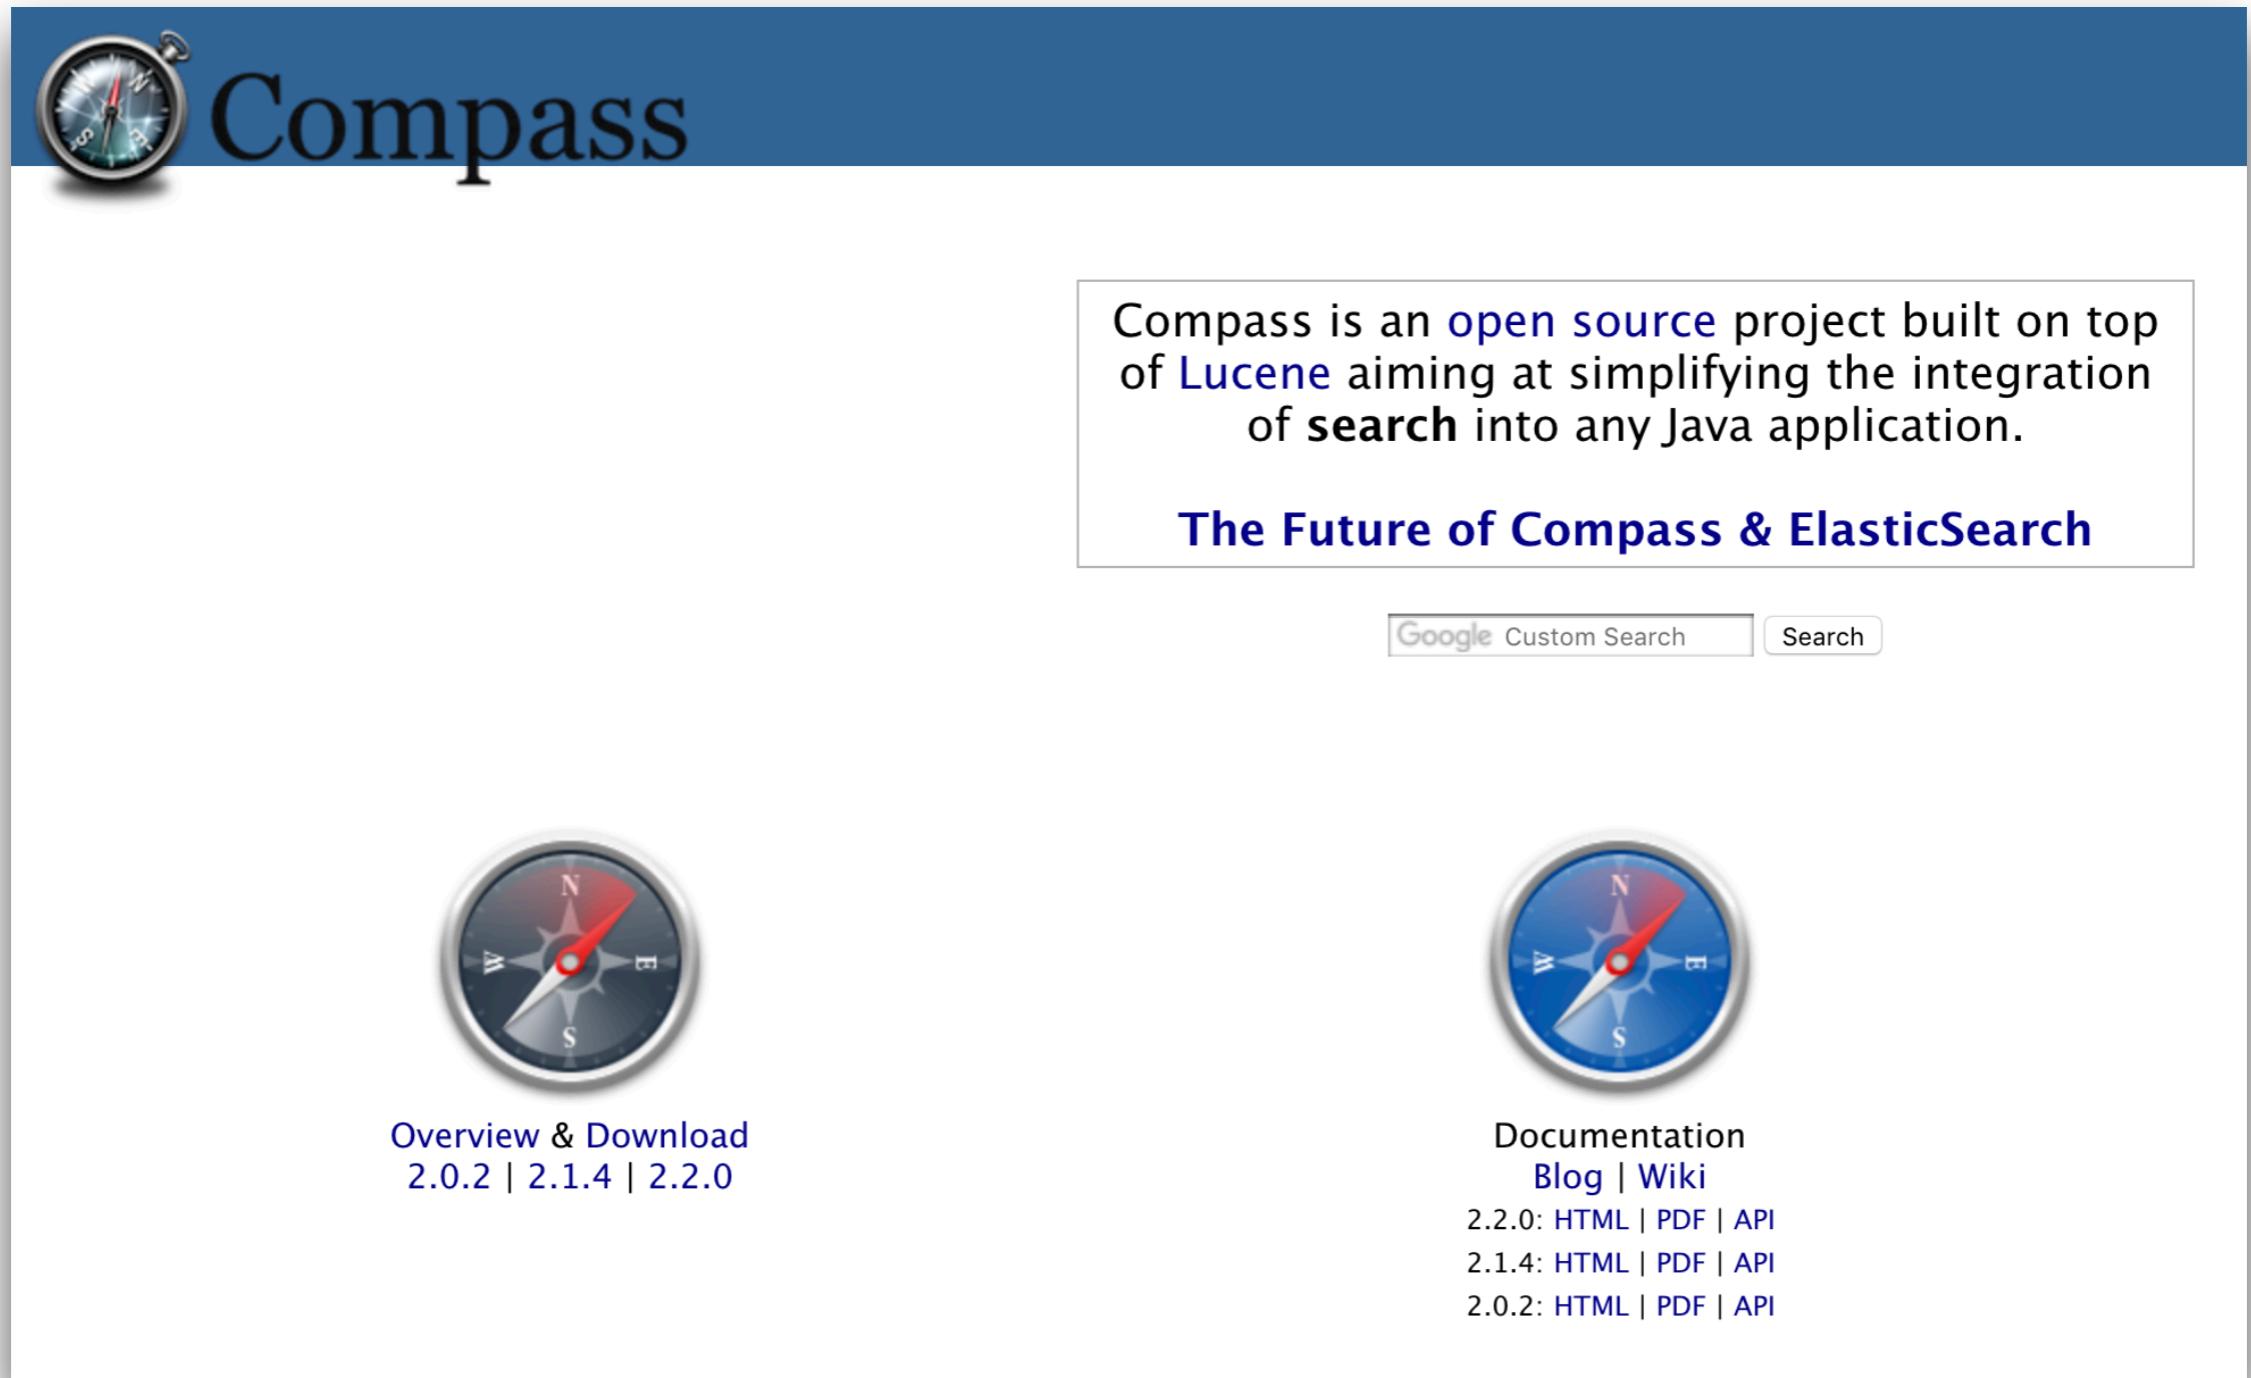

The screenshot shows the official website for the Compass project. At the top left is a compass icon. To its right, the word "Compass" is written in a large, serif font. Below this, a box contains a paragraph about the project and a link to a blog post. At the bottom, there are two columns: one for "Overview & Download" and one for "Documentation". Both columns feature a compass icon and links to various versions of the software.

Compass is an [open source](#) project built on top of [Lucene](#) aiming at simplifying the integration of [search](#) into any Java application.

[The Future of Compass & ElasticSearch](#)

[Google Custom Search](#) [Search](#)

[Overview & Download](#)
2.0.2 | 2.1.4 | 2.2.0

[Documentation](#)
[Blog](#) | [Wiki](#)
2.2.0: [HTML](#) | [PDF](#) | [API](#)
2.1.4: [HTML](#) | [PDF](#) | [API](#)
2.0.2: [HTML](#) | [PDF](#) | [API](#)

<http://www.compass-project.org/>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

Document based

JSON (JavaScript Object Notation)

Dynamic Schema (Schema-less)

Some relationship (nested, parent/child)



StackOverflow Question

```
{  
  "items": [  
    {  
      "owner": {  
        "reputation": 13,  
        "user_id": 9796344,  
        "user_type": "registered",  
        "profile_image": "",  
        "display_name": "Cherry",  
        "link": "https://stackoverflow.com/users/9796344/cherry"  
      },  
      "score": 0,  
      "last_activity_date": 1528986761,  
      "creation_date": 1528986761,  
      "post_type": "question",  
      "post_id": 50859951,  
      "link": "https://stackoverflow.com/q/50859951"  
    }  
  ],  
  "has_more": false,  
  "quota_max": 10000,  
  "quota_remaining": 9986  
}
```

<https://api.stackexchange.com/docs/posts-by-ids>



Ranking from DB Engine (2018)

350 systems in ranking, June 2019

Rank			DBMS	Database Model	Score		
Jun 2019	May 2019	Jun 2018			Jun 2019	May 2019	Jun 2018
1.	1.	1.	Oracle 	Relational, Multi-model 	1299.21	+13.67	-12.04
2.	2.	2.	MySQL 	Relational, Multi-model 	1223.63	+4.67	-10.06
3.	3.	3.	Microsoft SQL Server 	Relational, Multi-model 	1087.76	+15.57	+0.03
4.	4.	4.	PostgreSQL 	Relational, Multi-model 	476.62	-2.27	+65.95
5.	5.	5.	MongoDB 	Document	403.90	-4.17	+60.12
6.	6.	6.	IBM Db2 	Relational, Multi-model 	172.20	-2.24	-13.44
7.	7.	8.	Elasticsearch 	Search engine, Multi-model 	148.82	+0.20	+17.78
8.	8.	7.	Redis 	Key-value, Multi-model 	146.13	-2.28	+9.83
9.	9.	9.	Microsoft Access	Relational	141.01	-2.77	+10.02
10.	10.	10.	Cassandra 	Wide column	125.18	-0.54	+5.97

<https://db-engines.com/en/ranking>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

Use cases

Security/log analytics
Marketing
Operations
Searching data



Let's start



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

Installation

Elasticsearch
Kibana



Install Elasticsearch



Elasticsearch

Required Java 8
JDK and Open JDK
Need \$JAVA_HOME



JAVA_HOME

\$echo %JAVA_HOME% //For Windows

\$echo \$JAVA_HOME // for Linux/Mac



Start Elasticsearch

./bin/elasticsearch

```
[0g8-71W] loaded module [reindex]
[0g8-71W] loaded module [repository-url]
[0g8-71W] loaded module [transport-netty4]
[0g8-71W] loaded module [tribe]
[0g8-71W] no plugins loaded
[0g8-71W] using discovery type [zen]
initialized
[0g8-71W] starting ...
[0g8-71W] publish_address {127.0.0.1:9300},
[0g8-71W] recovered [0] indices into cluster_state
transport] [0g8-71W] publish_address {127.0.0.1:9200},
```



Configuration files

`elasticsearch.yml`

`jvm.options`

`log4j2.properties`

Default : `$ES_HOME/config`

Custom config path : `$ES_PATH_CONF`



Default of Memory

1 GB !!! (Java need more memory)

```
 ] [DW5j42N] JVM arguments [-Xms1g, -Xmx1g, -  
ction=75, -XX:+UseCMSInitiatingOccupancyOnly, -XX:  
Dfile.encoding=UTF-8, -Djna.nosys=true, -XX:-Omit  
.netty.noKeySetOptimization=true, -Dio.netty.recy  
led=false, -Dlog4j2.disable.jmx=true, -Djava.io.t  
T/elasticsearch.G4kbTLZn, -XX:+HeapDumpOnOutOfMem  
s_err_pid%p.log, -Xlog:gc*,gc+age=trace,safepoint  
ize=64m, -Djava.locale.providers=COMPAT, -XX:UseA
```



Config of JVM

`$ES_HOME/config/jvm.options`

```
# Xms represents the initial size of total heap space  
# Xmx represents the maximum size of total heap space  
  
-Xms1g  
-Xmx1g
```



Default plugins

```
[o.e.p.PluginsService      ] [DW5j42N] loaded module [aggs-matrix-stats]
[o.e.p.PluginsService      ] [DW5j42N] loaded module [analysis-common]
[o.e.p.PluginsService      ] [DW5j42N] loaded module [ingest-common]
[o.e.p.PluginsService      ] [DW5j42N] loaded module [lang-expression]
[o.e.p.PluginsService      ] [DW5j42N] loaded module [lang-mustache]
[o.e.p.PluginsService      ] [DW5j42N] loaded module [lang-painless]
[o.e.p.PluginsService      ] [DW5j42N] loaded module [mapper-extras]
[o.e.p.PluginsService      ] [DW5j42N] loaded module [parent-join]
[o.e.p.PluginsService      ] [DW5j42N] loaded module [percolator]
[o.e.p.PluginsService      ] [DW5j42N] loaded module [rank-eval]
[o.e.p.PluginsService      ] [DW5j42N] loaded module [reindex]
[o.e.p.PluginsService      ] [DW5j42N] loaded module [repository-url]
[o.e.p.PluginsService      ] [DW5j42N] loaded module [transport-netty4]
[o.e.p.PluginsService      ] [DW5j42N] loaded module [tribe]
```



Install X-Pack by default

```
[o.e.p.PluginsService      ] [DW5j42N] loaded module [x-pack-core]
[o.e.p.PluginsService      ] [DW5j42N] loaded module [x-pack-deprecation]
[o.e.p.PluginsService      ] [DW5j42N] loaded module [x-pack-graph]
[o.e.p.PluginsService      ] [DW5j42N] loaded module [x-pack-logstash]
[o.e.p.PluginsService      ] [DW5j42N] loaded module [x-pack-ml]
[o.e.p.PluginsService      ] [DW5j42N] loaded module [x-pack-monitoring]
[o.e.p.PluginsService      ] [DW5j42N] loaded module [x-pack-rollup]
[o.e.p.PluginsService      ] [DW5j42N] loaded module [x-pack-security]
[o.e.p.PluginsService      ] [DW5j42N] loaded module [x-pack-sql]
[o.e.p.PluginsService      ] [DW5j42N] loaded module [x-pack-upgrade]
[o.e.p.PluginsService      ] [DW5j42N] loaded module [x-pack-watcher]
[o.e.p.PluginsService      ] [DW5j42N] no plugins loaded
```

<https://www.elastic.co/guide/en/elasticsearch/reference/current/installing-xpack-es.html>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

X-Pack ?

Elastic Stack Extension
Security
Monitoring
Alerting
Reporting
Machine Learning



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

Licence

	FREE OPEN SOURCE	BASIC	GOLD	PLATINUM
Elasticsearch	Download		Request Info	Request Info
✓ Scalability & Resiliency	✓	✓	✓	✓
✓ Query & Analytics	✓	✓	✓	✓
✓ Data Enrichment	✓	✓	✓	✓
✓ Management & Tooling	✓	✓	✓	✓
✓ Security			✓	✓
✓ Alerting			✓	✓
✓ Machine Learning				✓
Kibana				
✓ Explore & Visualize	✓	✓	✓	✓
✓ Stack Management & Tooling	✓	✓	✓	✓
✓ Stack Monitoring		✓	✓	✓

<https://www.elastic.co/subscriptions>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

Hello Elasticsearch


<http://localhost:9200/>

```
{  
    name: "Somkiats-MacBook-Pro",  
    cluster_name: "elasticsearch",  
    cluster_uuid: "gglAIg0NRHyn4AefFR6law",  
    - version: {  
        number: "7.1.1",  
        build_flavor: "default",  
        build_type: "tar",  
        build_hash: "7a013de",  
        build_date: "2019-05-23T14:04:00.380842Z",  
        build_snapshot: false,  
        lucene_version: "8.0.0",  
        minimum_wire_compatibility_version: "6.8.0",  
        minimum_index_compatibility_version: "6.0.0-beta1"  
    },  
    tagline: "You Know, for Search"  
}
```



Ports of Elasticsearch

RESTful API with JSON Over HTTP (9200)
Java API (9300)

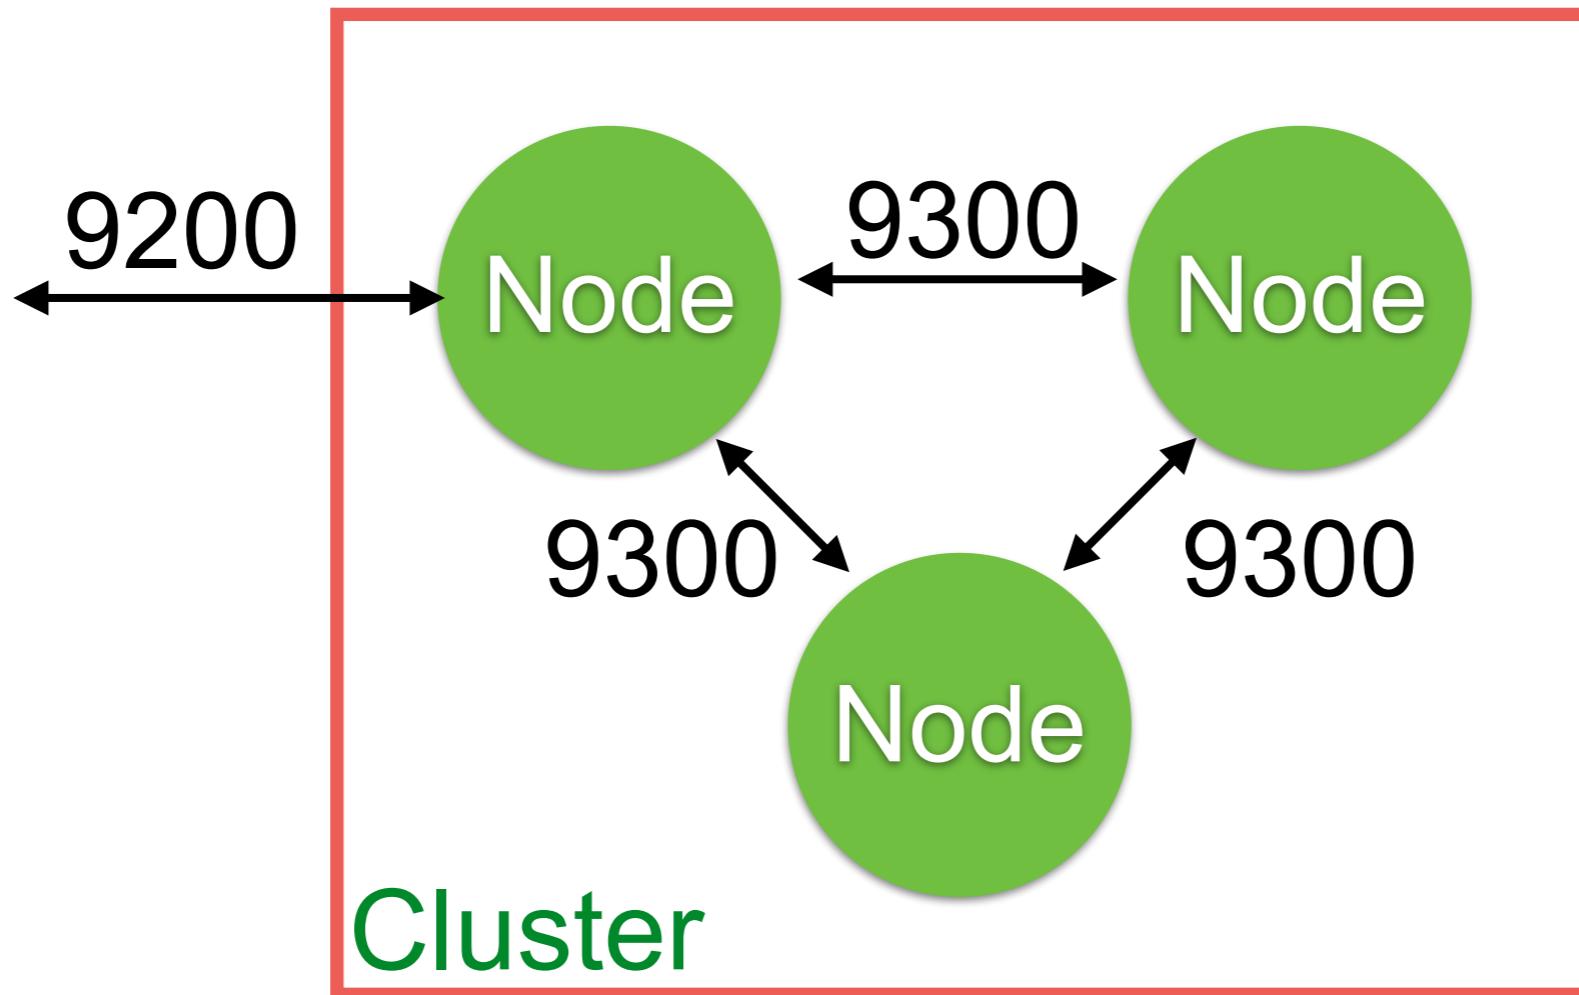

Name of node and cluster

```
{  
  name: "Somkiats-MacBook-Pro",  
  cluster_name: "elasticsearch",  
  cluster_uuid: "gglAIg0NRHyn4AefFR61aw",  
  - version: {  
      number: "7.1.1",  
      build_flavor: "default",  
      build_type: "tar",  
      build_hash: "7a013de",  
      build_date: "2019-05-23T14:04:00.380842Z",  
      build_snapshot: false,  
      lucene_version: "8.0.0",  
      minimum_wire_compatibility_version: "6.8.0",  
      minimum_index_compatibility_version: "6.0.0-beta1"  
    },  
  tagline: "You Know, for Search"  
}
```



Name of node and cluster

\$ES_HOME/config/elasticsearch.yml

```
# ----- Cluster -----  
#  
# Use a descriptive name for your cluster:  
#  
cluster.name: my-application  
#  
# ----- Node -----  
#  
# Use a descriptive name for the node:  
#  
node.name: node-1  
#  
# Add custom attributes to the node:  
#  
#node.attr.rack: r1  
#
```



Change in Elasticsearch 7.x

Default name = Hostname

<https://www.elastic.co/guide/en/elasticsearch/reference/master/breaking-changes-7.0.html>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

Try to change and restart !!!



```
{  
  name: "Somkiats-MacBook-Pro",  
  cluster_name: "elasticsearch",  
  cluster_uuid: "gglAIg0NRHyn4AefFR61aw",  
  - version: {  
      number: "7.1.1",  
      build_flavor: "default",  
      build_type: "tar",  
      build_hash: "7a013de",  
      build_date: "2019-05-23T14:04:00.380842Z",  
      build_snapshot: false,  
      lucene_version: "8.0.0",  
      minimum_wire_compatibility_version: "6.8.0",  
      minimum_index_compatibility_version: "6.0.0-beta1"  
    },  
  tagline: "You Know, for Search"  
}
```



Compatibility of DSL and Index



```
{  
  name: "Somkiats-MacBook-Pro",  
  cluster_name: "elasticsearch",  
  cluster_uuid: "gglAIg0NRHyn4AefFR61aw",  
  - version: {  
      number: "7.1.1",  
      build_flavor: "default",  
      build_type: "tar",  
      build_hash: "7a013de",  
      build_date: "2019-05-23T14:04:00.380842Z",  
      build_snapshot: false,  
      lucene_version: "8.0.0",  
      minimum_wire_compatibility_version: "6.8.0",  
      minimum_index_compatibility_version: "6.0.0-beta1"  
    },  
  tagline: "You Know, for Search"  
}
```

DSL version

Index version



```
{  
  name: "Somkiats-MacBook-Pro",  
  cluster_name: "elasticsearch",  
  cluster_uuid: "gglAIg0NRHyn4AefFR61aw",  
  - version: {  
      number: "7.1.1",  
      build_flavor: "default",  
      build_type: "tar",  
      build_hash: "7a013de",  
      build_date: "2019-05-23T14:04:00.380842Z",  
      build_snapshot: false,  
      lucene_version: "8.0.0",  
      minimum_wire_compatibility_version: "6.8.0",  
      minimum_index_compatibility_version: "6.0.0-beta1"  
    },  
  tagline: "You Know, for Search"  
}
```

Index version



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

Health of cluster

http://localhost:9200/_cluster/health

```
{  
  "cluster_name": "elasticsearch",  
  "status": "green",  
  "timed_out": false,  
  "number_of_nodes": 1,  
  "number_of_data_nodes": 1,  
  "active_primary_shards": 0,  
  "active_shards": 0,  
  "relocating_shards": 0,  
  "initializing_shards": 0,  
  "unassigned_shards": 0,  
  "delayed_unassigned_shards": 0,  
  "number_of_pending_tasks": 0,  
  "number_of_in_flight_fetch": 0,  
  "task_max_waiting_in_queue_millis": 0,  
  "active_shards_percent_as_number": 100.0  
}
```



Health of cluster

Status	Meaning
Green	All shards are allocated
Yellow	Primary shard is allocated, but replicas are not
Red	Shard not allocated in the cluster



cat APIs

`http://localhost:9200/_cat`

```
=^.^=
/_cat/allocation
/_cat/shards
/_cat/shards/{index}
/_cat/master
/_cat/nodes
/_cat/tasks
/_cat/indices
/_cat/indices/{index}
/_cat/segments
/_cat/segments/{index}
/_cat/count
/_cat/count/{index}
/_cat/recovery
/_cat/recovery/{index}
/_cat/health
/_cat/pending_tasks
/_cat/aliases
/_cat/aliases/{alias}
```

<https://www.elastic.co/guide/en/elasticsearch/reference/current/cat.html>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

cat APIs

`http://localhost:9200/_cat/nodes?v`

ip	heap.percent	ram.percent	cpu	load_1m	load_5m	load_15m	node.role	master	name
127.0.0.1	20	100	7	1.98			mdi	*	DW5j42N



Install Kibana



Start Kibana

```
[status][plugin:xpack_main@6.4.2] Status changed from yellow to green - Ready
[status][plugin:searchprofiler@6.4.2] Status changed from yellow to green - Ready
[status][plugin:ml@6.4.2] Status changed from yellow to green - Ready
[status][plugin:tilemap@6.4.2] Status changed from yellow to green - Ready
[status][plugin:watcher@6.4.2] Status changed from yellow to green - Ready
[status][plugin:index_management@6.4.2] Status changed from yellow to green - Ready

[status][plugin:graph@6.4.2] Status changed from yellow to green - Ready
[status][plugin:grokdebugger@6.4.2] Status changed from yellow to green - Ready
[status][plugin:logstash@6.4.2] Status changed from yellow to green - Ready
[status][plugin:reporting@6.4.2] Status changed from yellow to green - Ready
[kibana-monitoring][monitoring-ui] Starting monitoring stats collection
[status][plugin:security@6.4.2] Status changed from yellow to green - Ready
[license][xpack] Imported license information from Elasticsearch for the [monitor]
tatus: active
[listening][server][http] Server running at http://localhost:5601
```



Hello Kibana

<http://localhost:5601/>

The image shows the Kibana interface, which is a part of the ELK Stack. It features a sidebar on the left with icons for APM, Logging, Metrics, Security analytics, Dashboard, Discover, Timelion, Visualize, Console, Index Patterns, and Saved Objects. The main content area is divided into several sections:

- Add Data to Kibana:** This section contains four cards: APM, Logging, Metrics, and Security analytics. Each card has a corresponding icon and a brief description. Buttons for "Add APM", "Add log data", "Add metric data", and "Add security events" are located at the bottom of their respective cards.
- Data already in Elasticsearch?**: A button labeled "Set up index patterns".
- Visualize and Explore Data:** This section contains two cards: Dashboard and Timelion. Each card has an icon and a brief description. Buttons for "Add APM", "Add log data", "Add metric data", and "Add security events" are located at the bottom of their respective cards.
- Manage and Administer the Elastic Stack:** This section contains three cards: Discover, Visualize, and Saved Objects. Each card has an icon and a brief description. Buttons for "Add APM", "Add log data", "Add metric data", and "Add security events" are located at the bottom of their respective cards.



Using Dev Tools

The screenshot shows the Kibana interface with a sidebar on the left containing various navigation items: Discover, Visualize, Dashboard, Timelion, APM, Dev Tools (which is highlighted with a red box), Monitoring, and Management. The main content area is titled "Dev Tools" and "Welcome to Console". It includes a "Quick intro to the UI" section with text about the split editor and response panes, and a code editor pane showing a cURL request example:

```
1 # index a doc
2 PUT index/type/1
3 {
4   "body": "here"
5 }
6
7 # and get it ...
8 GET index/type/1
```

Below the code editor, there is a note about request suggestions and a section titled "A few quick tips, while I have your attention" with the following list:

- Submit requests to ES using the green triangle button.
- Use the wrench menu for other useful things.
- You can paste requests in cURL format and they will be translated to the Console syntax.
- You can resize the editor and output panes by dragging the separator between them.
- Study the keyboard shortcuts under the Help button. Good stuff in there!


A blue "Get to work" button is located at the bottom of the main content area.



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

Ready to start

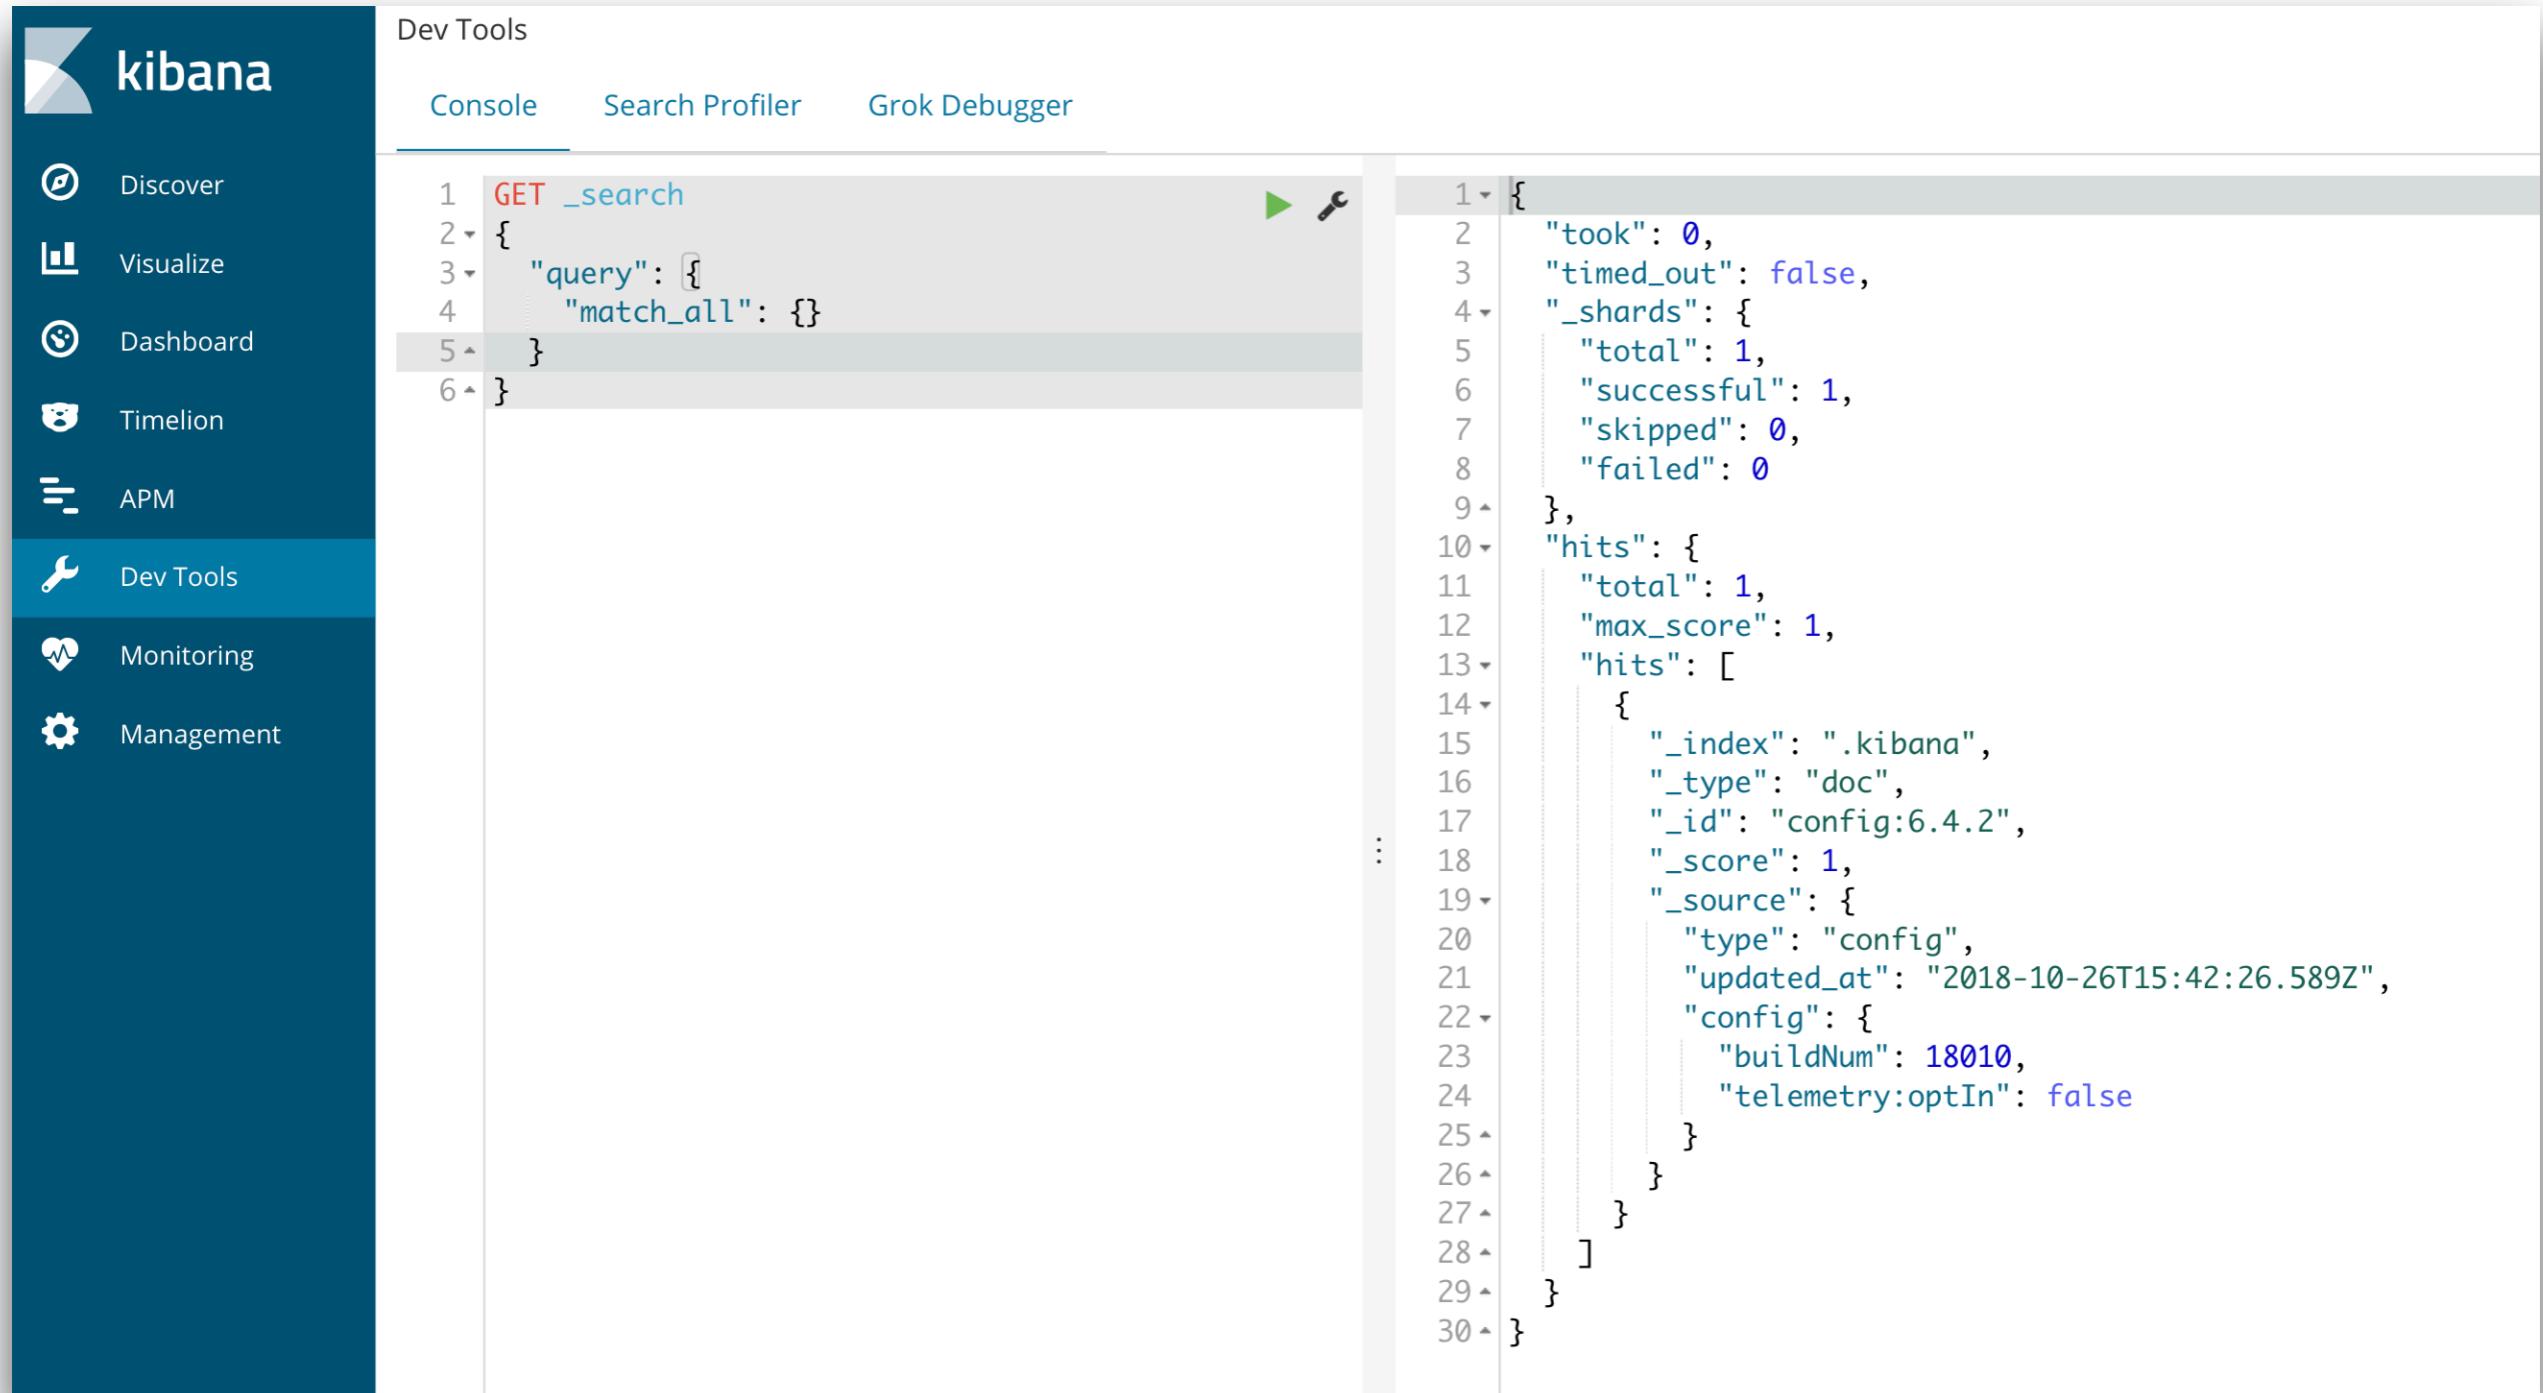

The screenshot shows the Kibana Dev Tools interface. On the left is a sidebar with icons for Discover, Visualize, Dashboard, Timelion, APM, Dev Tools (which is selected), Monitoring, and Management. The main area is titled "Dev Tools" and contains three tabs: Console, Search Profiler, and Grok Debugger. The "Console" tab is active, displaying a code editor with a GET _search request and its JSON response. The request is:1 GET _search
2 {
3 "query": {
4 "match_all": {}
5 }
6 }The response is:1 {
2 "took": 0,
3 "timed_out": false,
4 "_shards": {
5 "total": 1,
6 "successful": 1,
7 "skipped": 0,
8 "failed": 0
9 },
10 "hits": {
11 "total": 1,
12 "max_score": 1,
13 "hits": [
14 {
15 "_index": ".kibana",
16 "_type": "doc",
17 "_id": "config:6.4.2",
18 "_score": 1,
19 "_source": {
20 "type": "config",
21 "updated_at": "2018-10-26T15:42:26.589Z",
22 "config": {
23 "buildNum": 18010,
24 "telemetry:optIn": false
25 }
26 }
27 }
28]
29 }
30 }



Elasticsearch architecture



Basic concepts

Cluster

Node

Shard

Replica

Gateway

Index


Document

Type


Mapping




Cluster

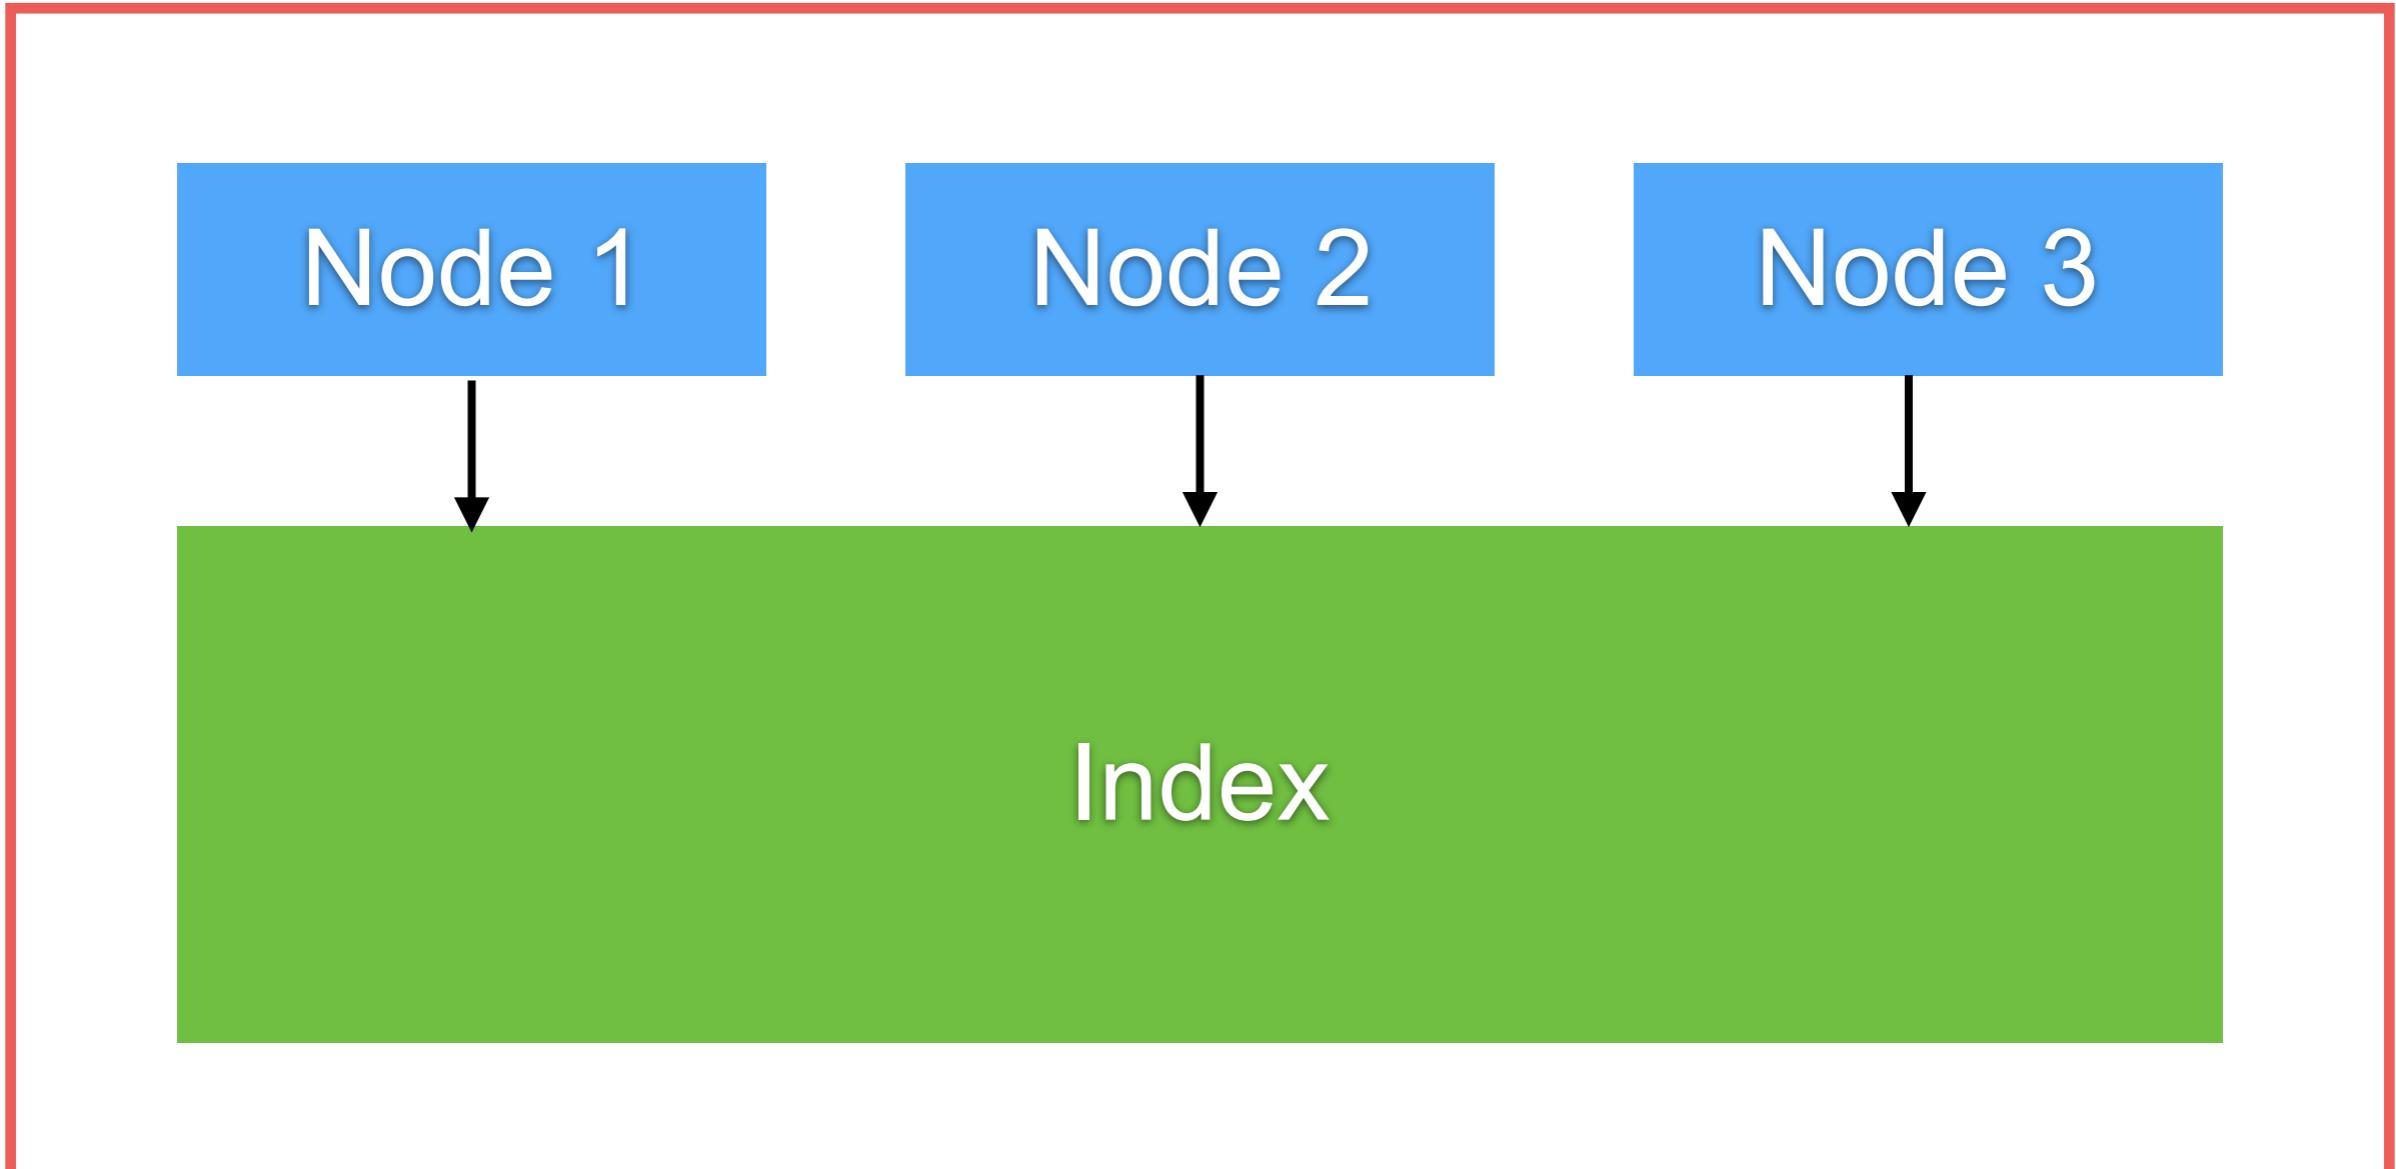


Documents !!

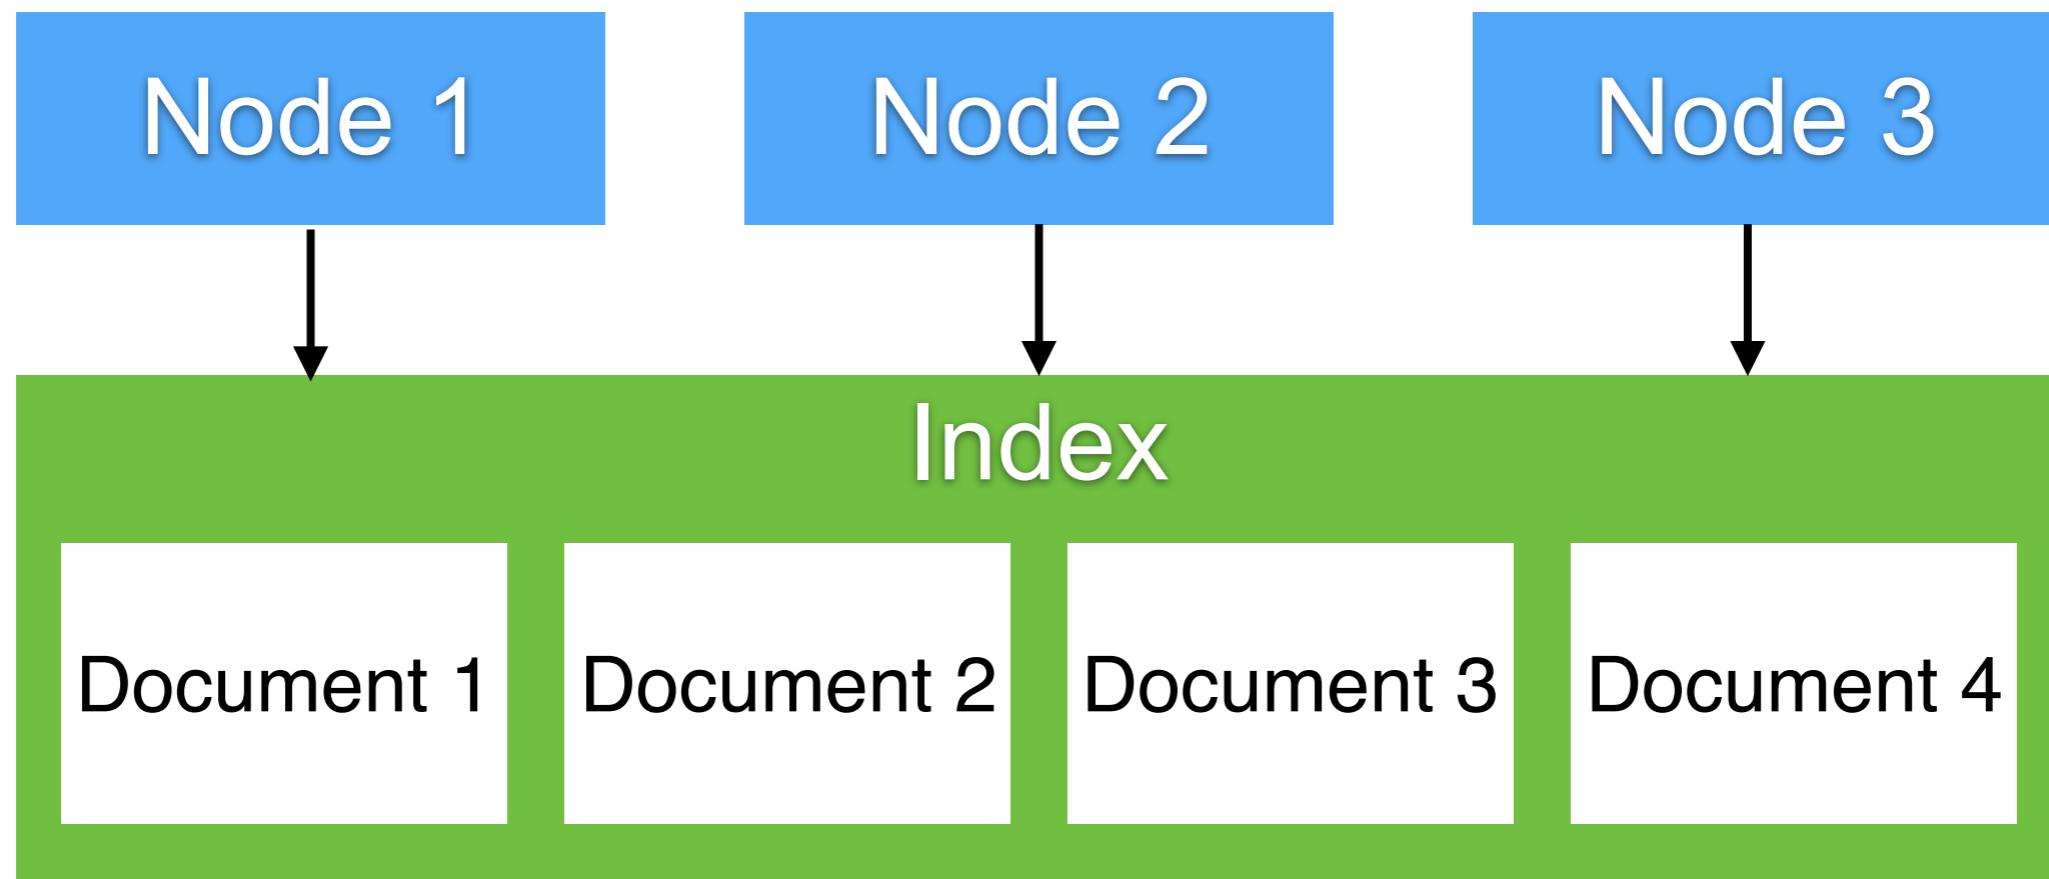

Distributed database

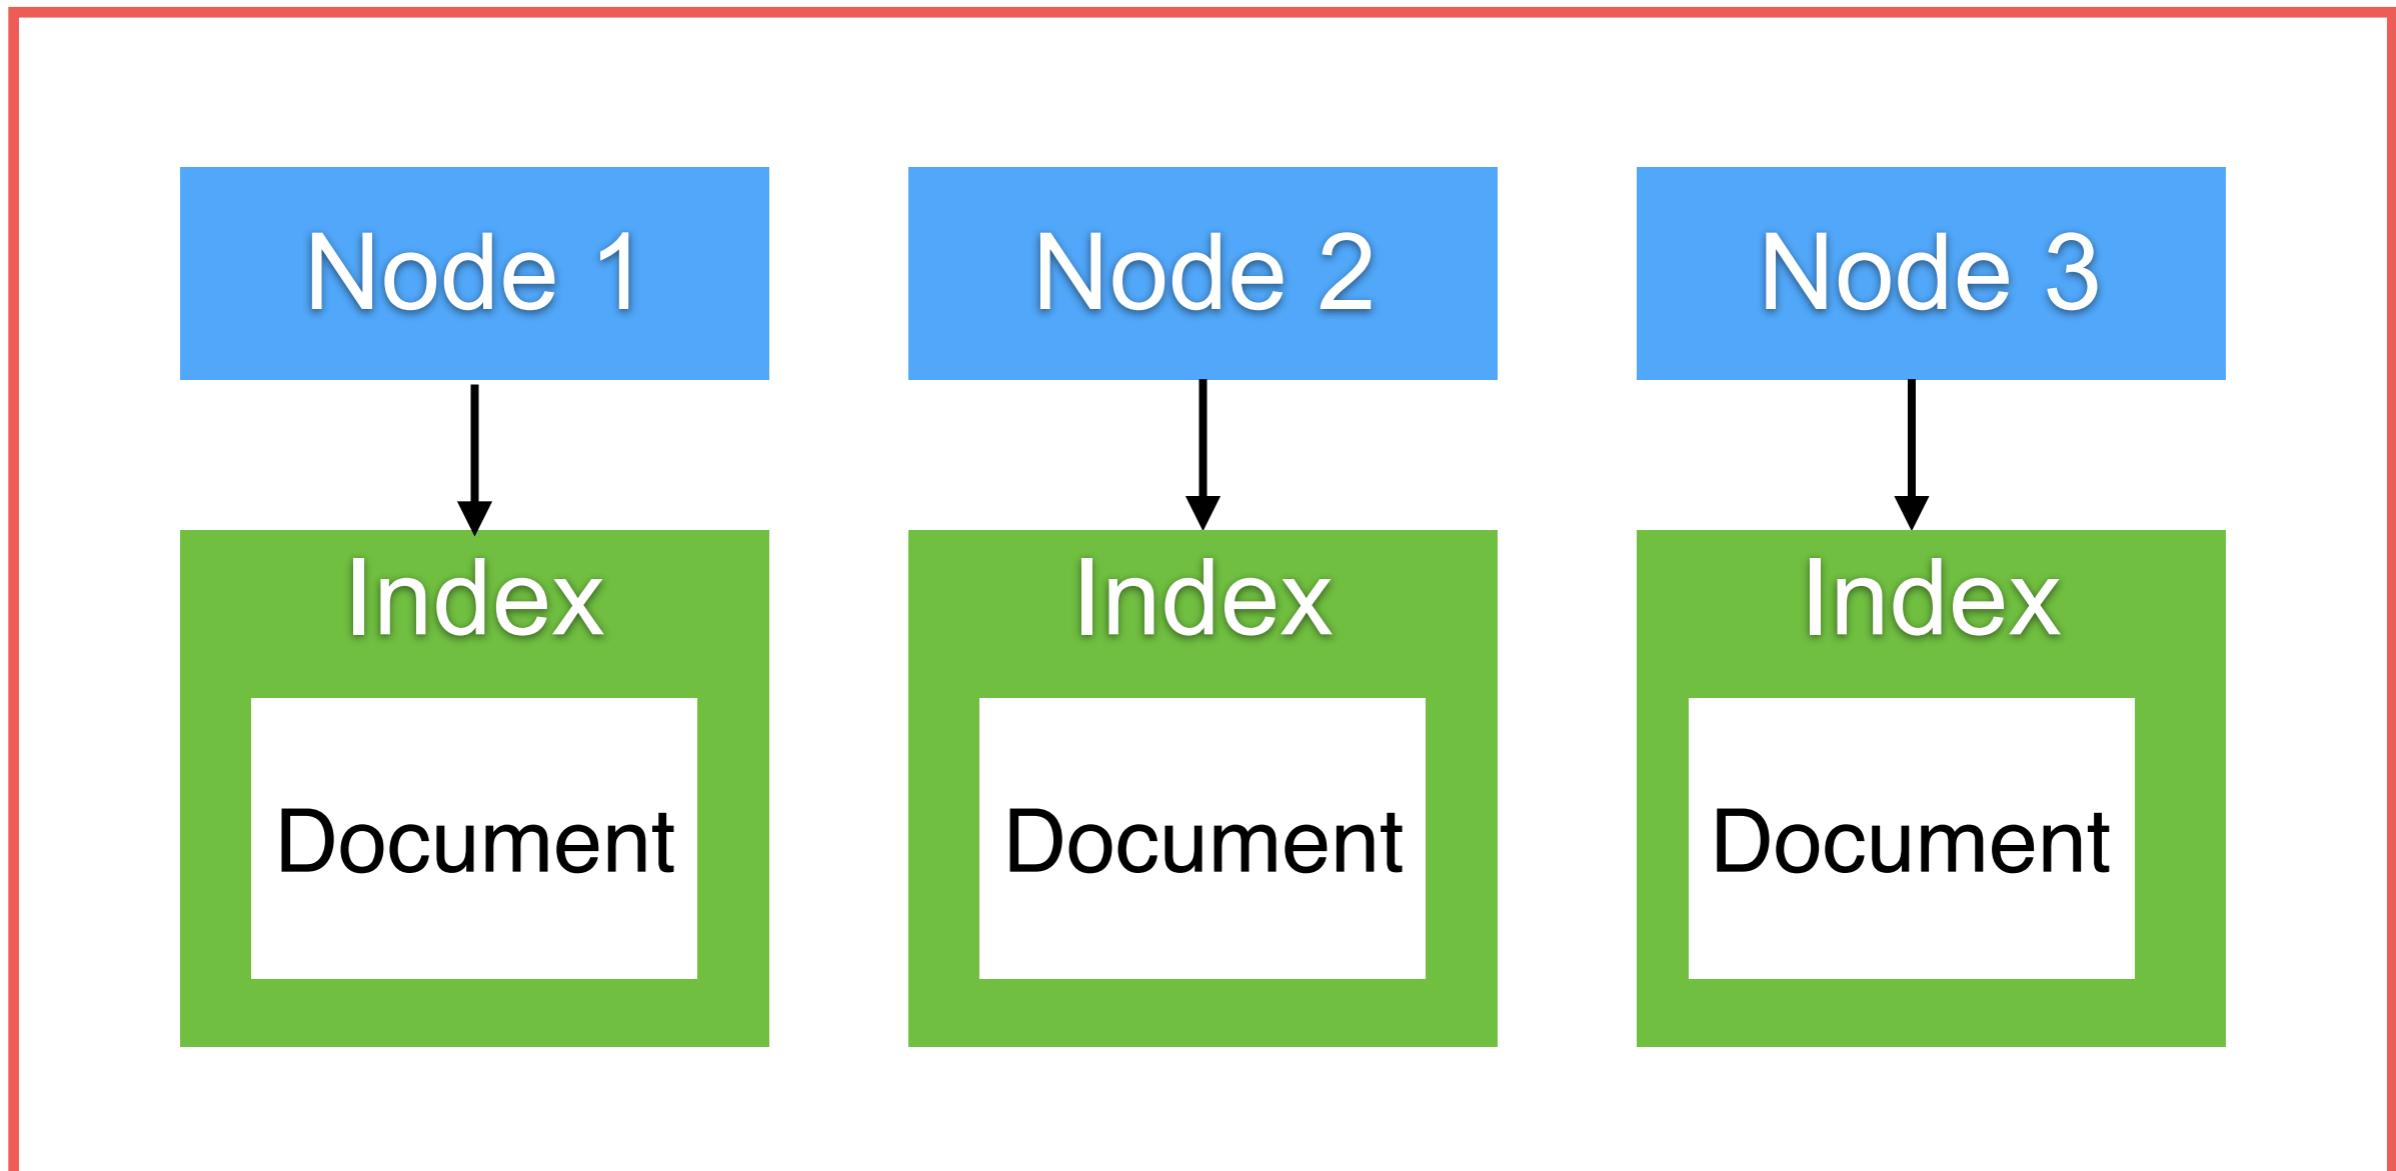

Design for scale (Shard)

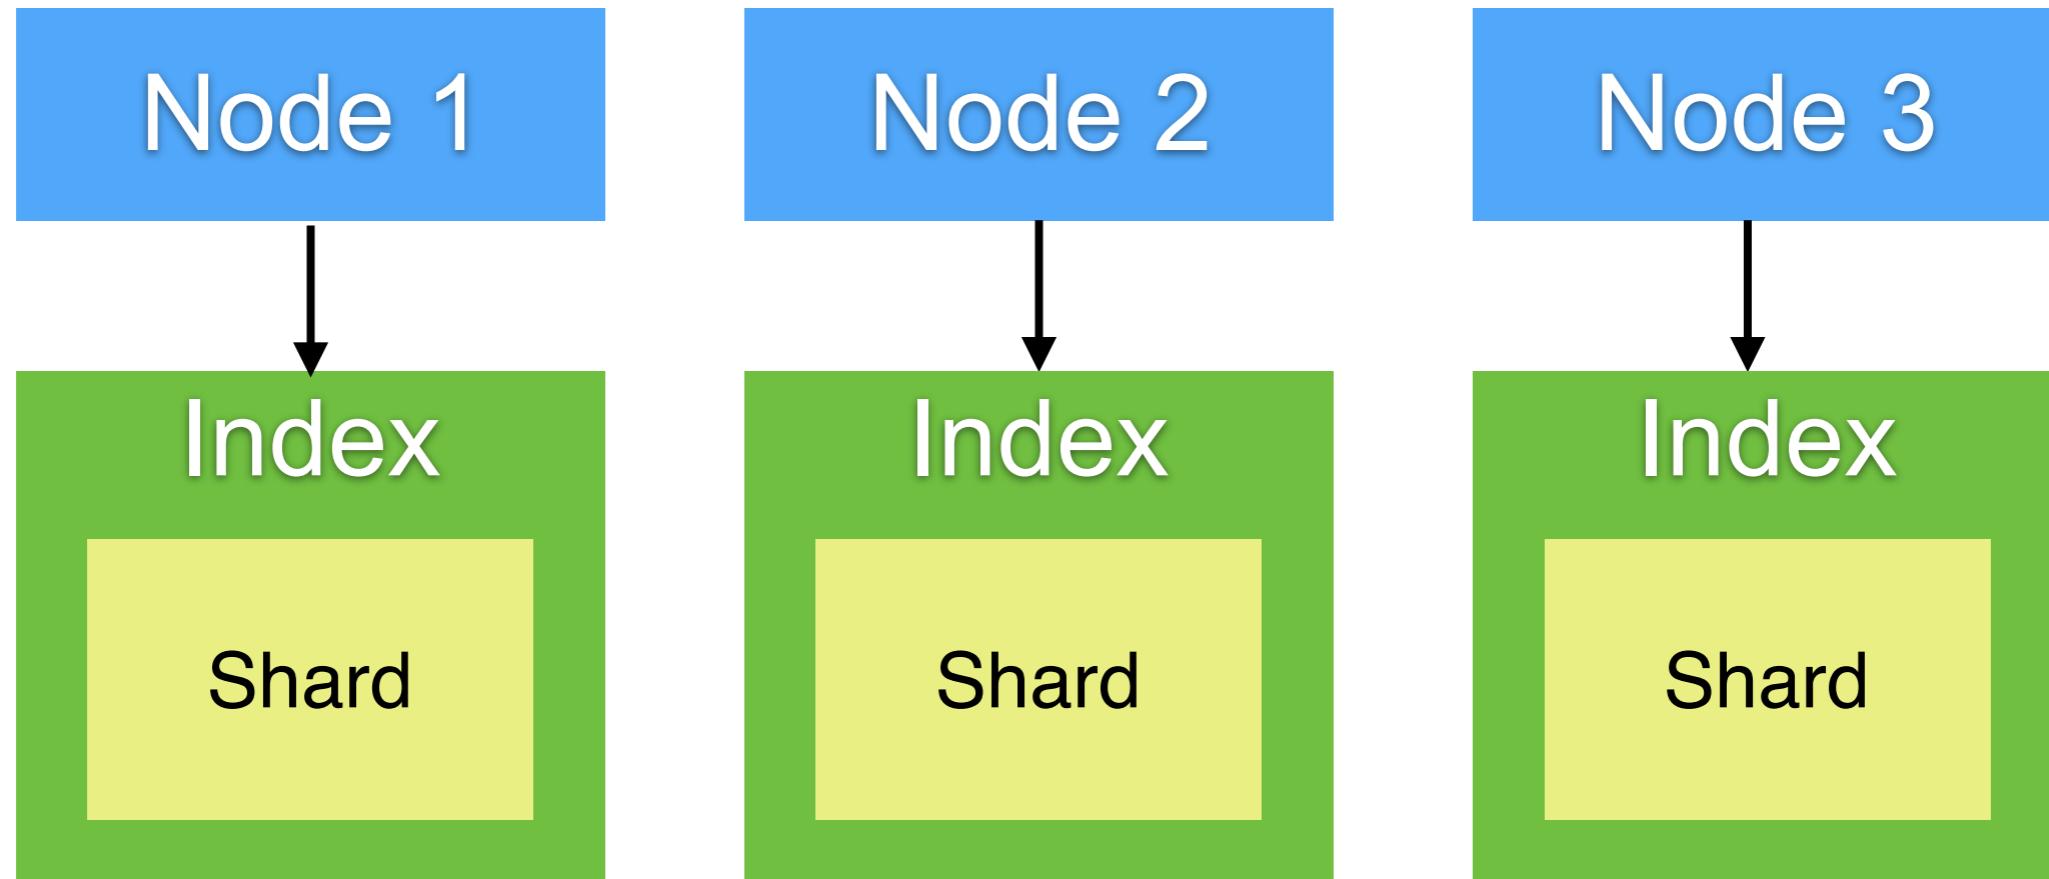


Index is split into shards

Each shard may be on a different node in cluster


Every shard is a self-contained *Lucene index*



Documents are hashed

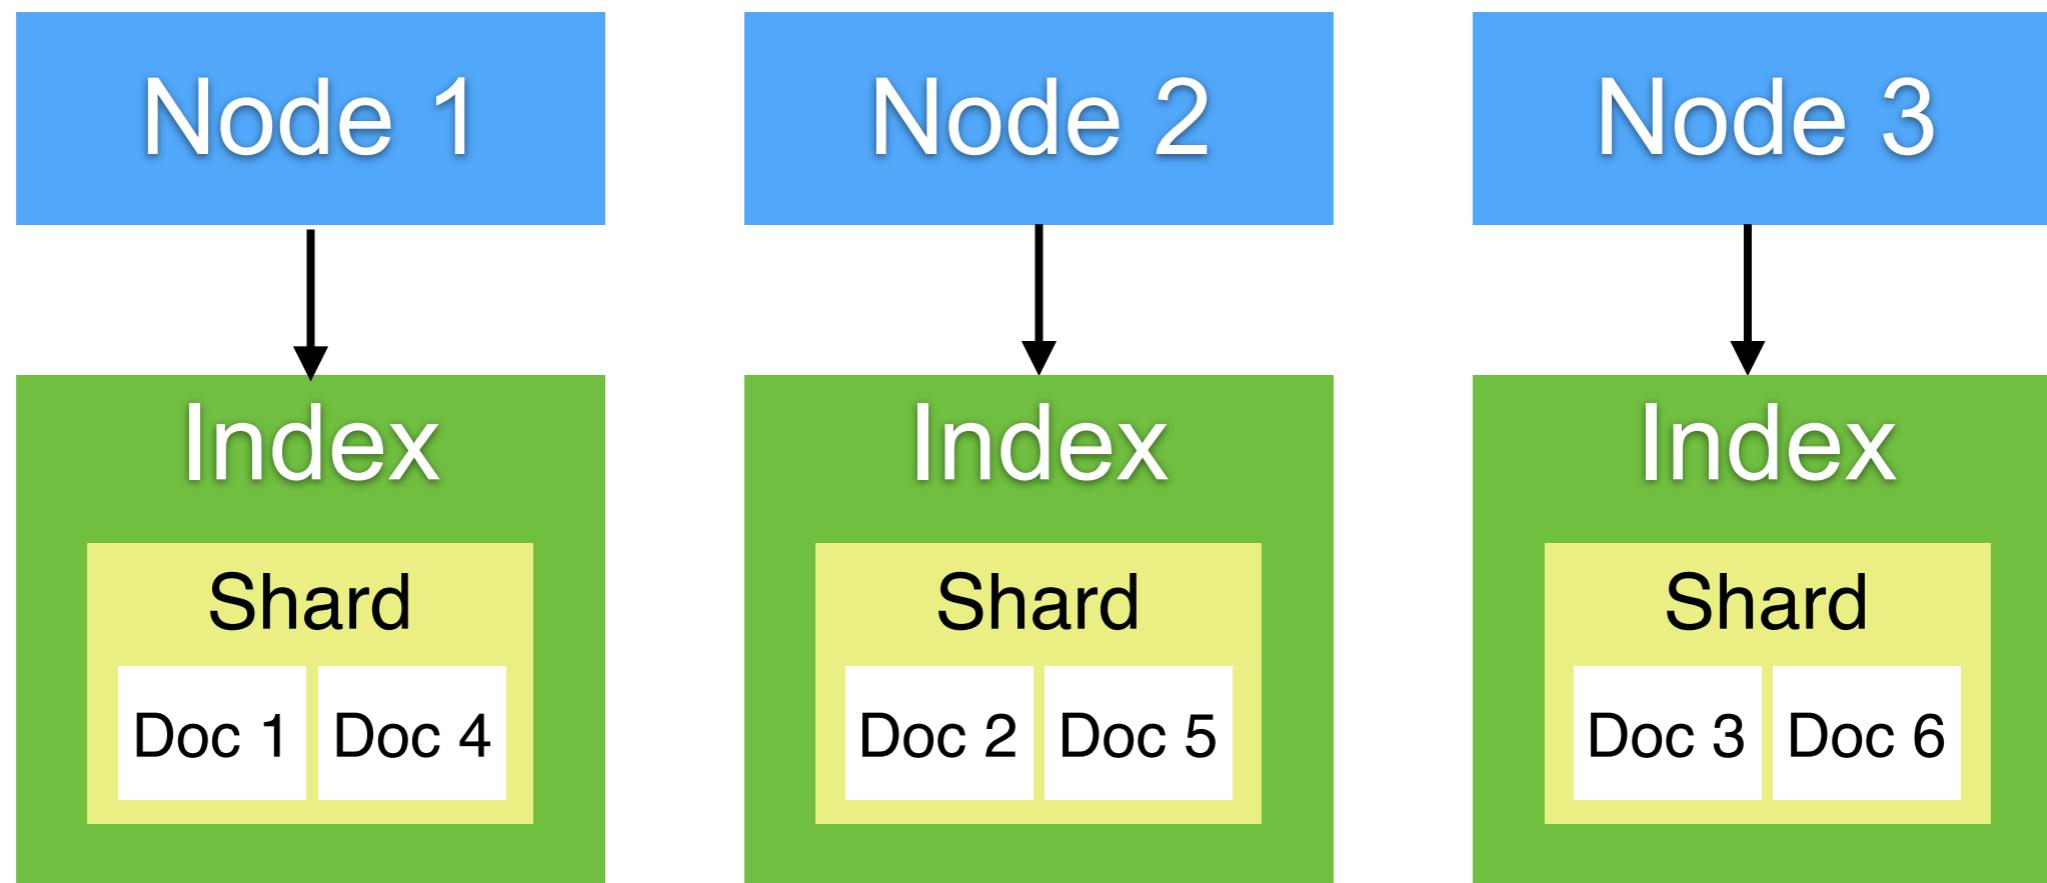

Design for fail (Replica)

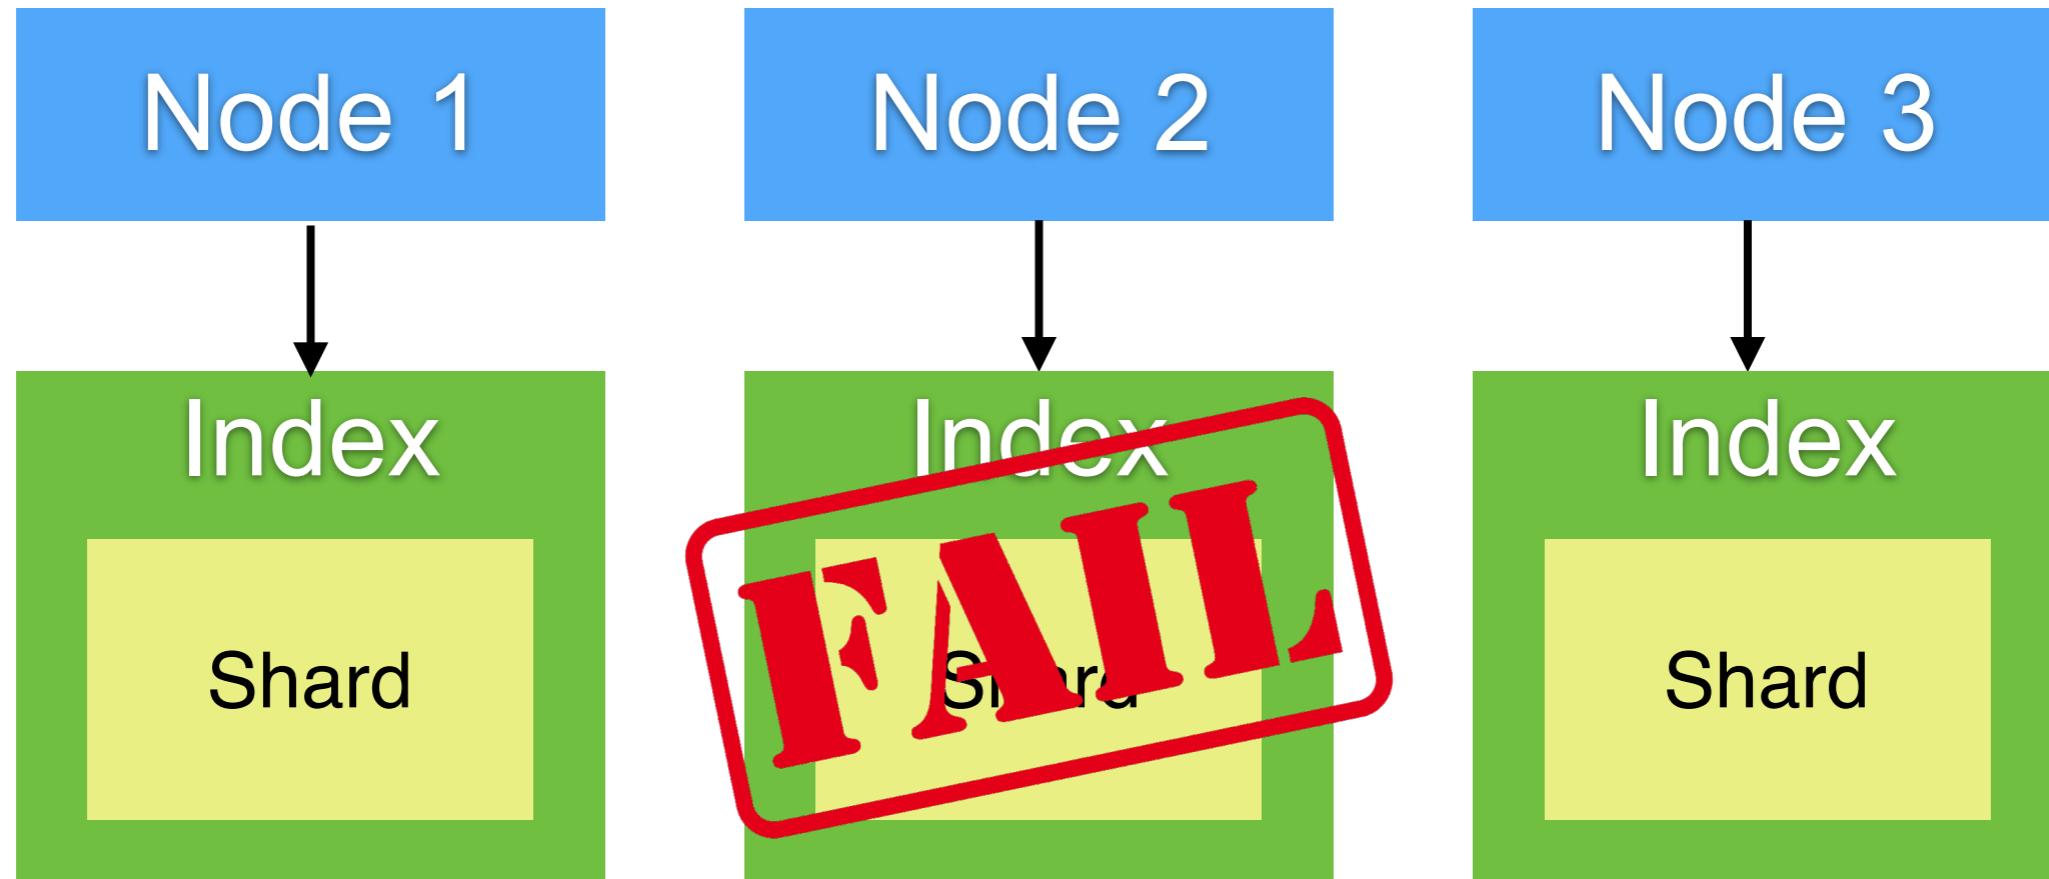

Replica = copy of shards


1 replica = 1 Primary + 1 Replica

2 replicas = 1 Primary + 2 Replicas


3 replicas = 1 Primary + 3 Replicas



Replica = 2

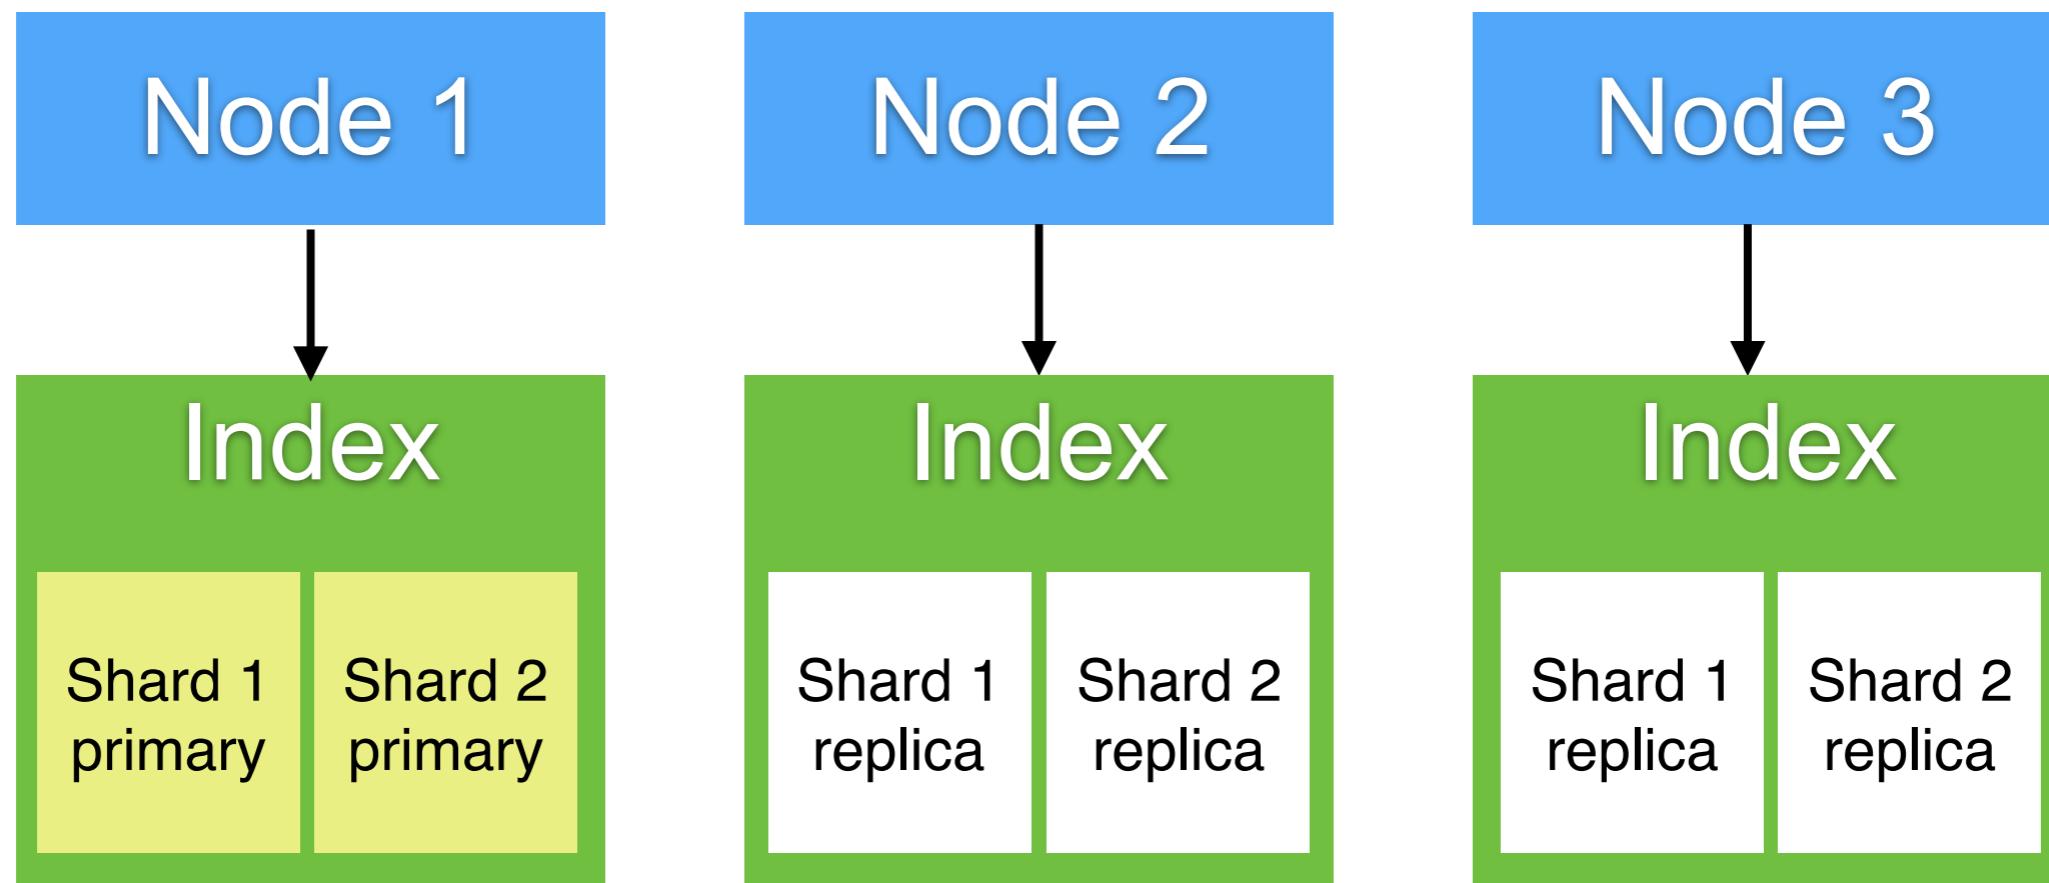

Basic concepts

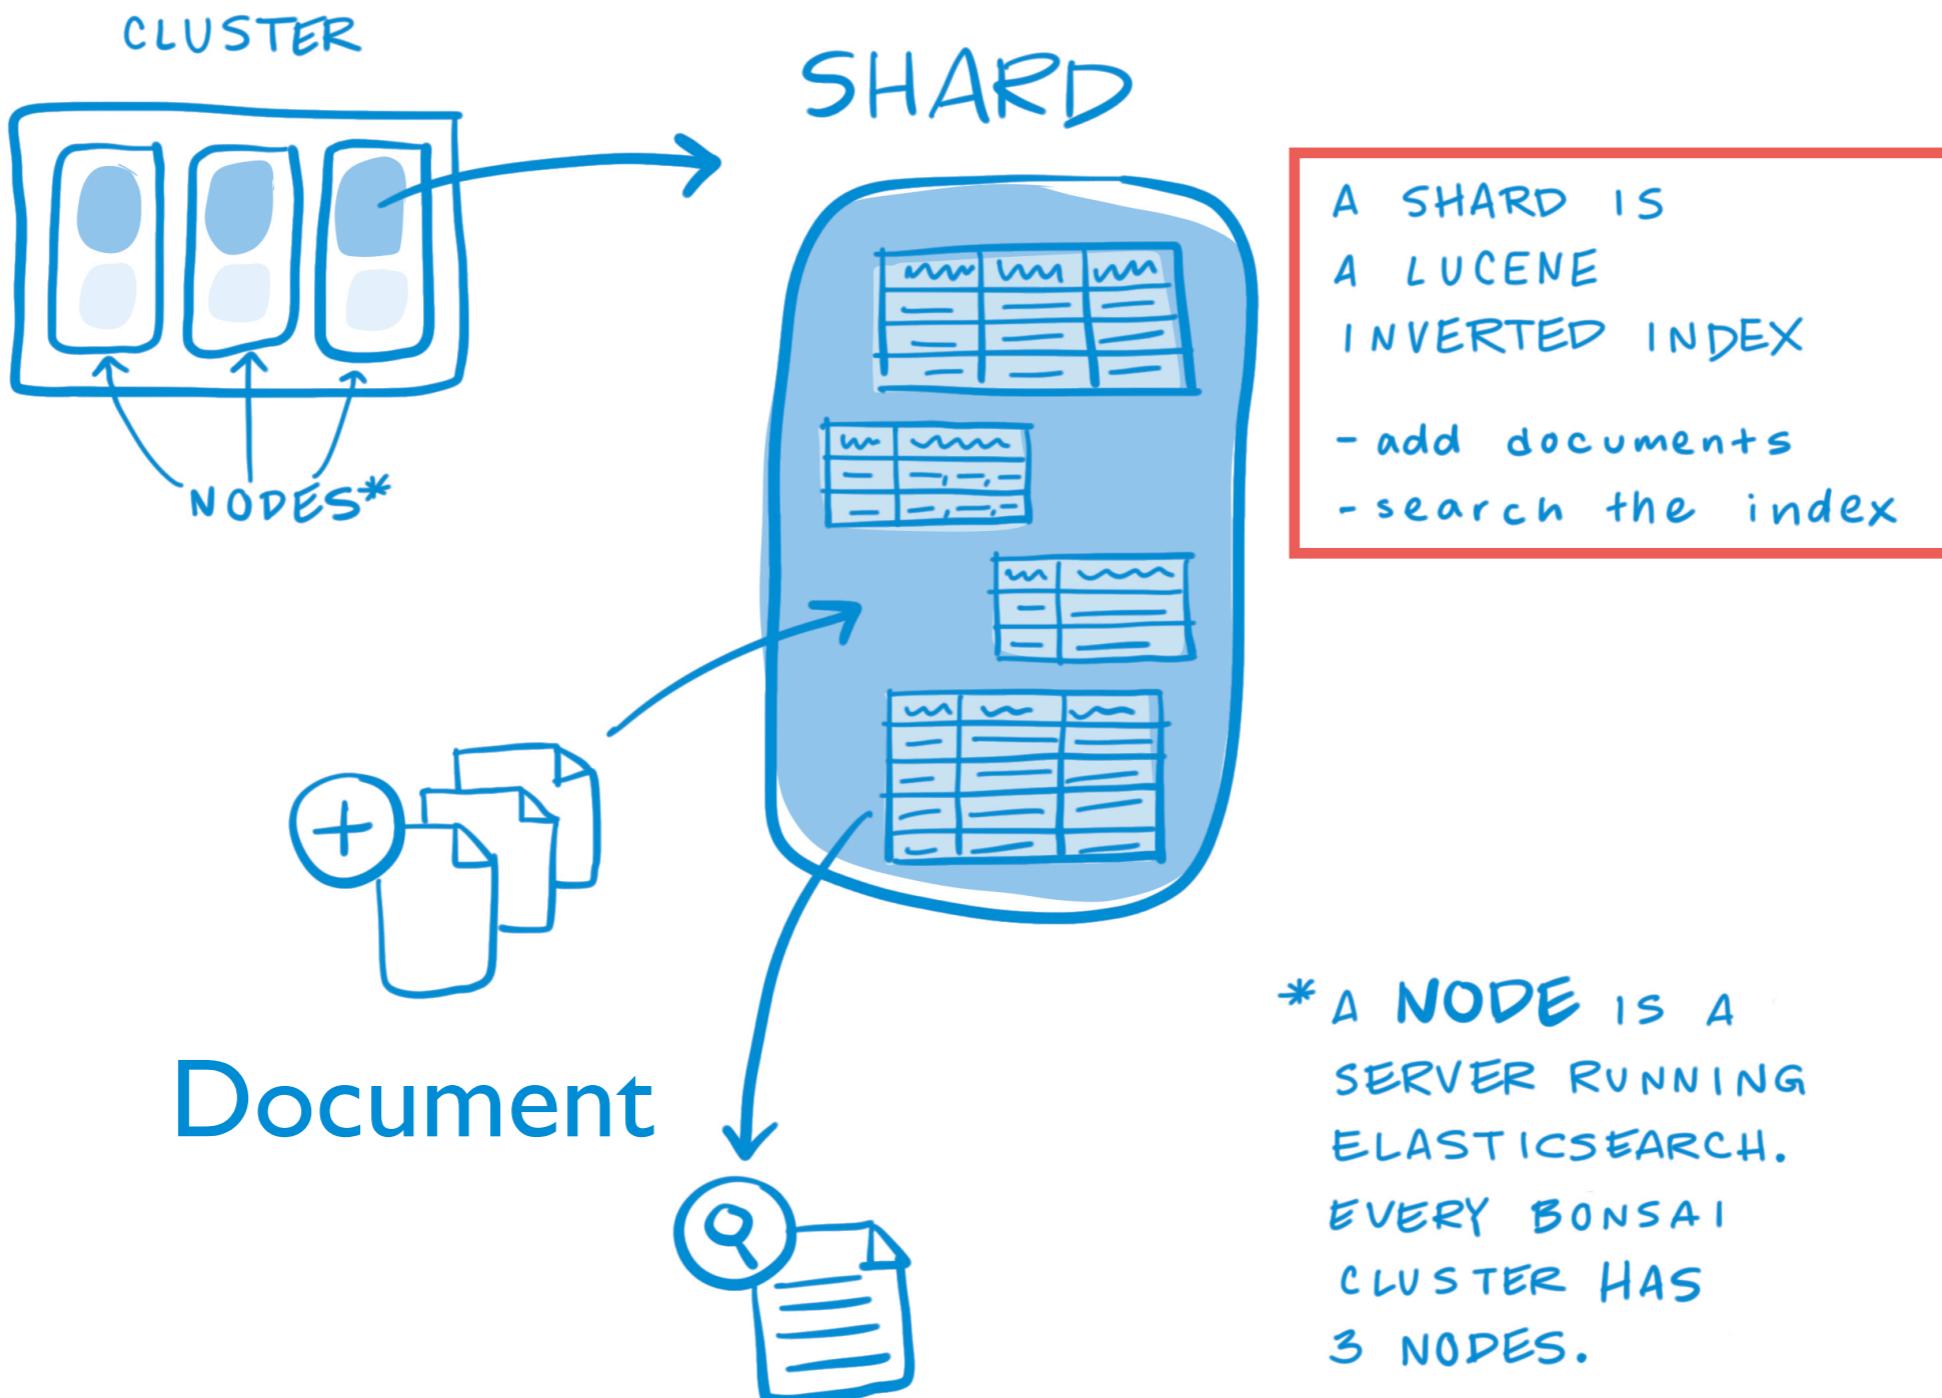


Inverted Index



Inverted Index

Corpus is a collection of documents

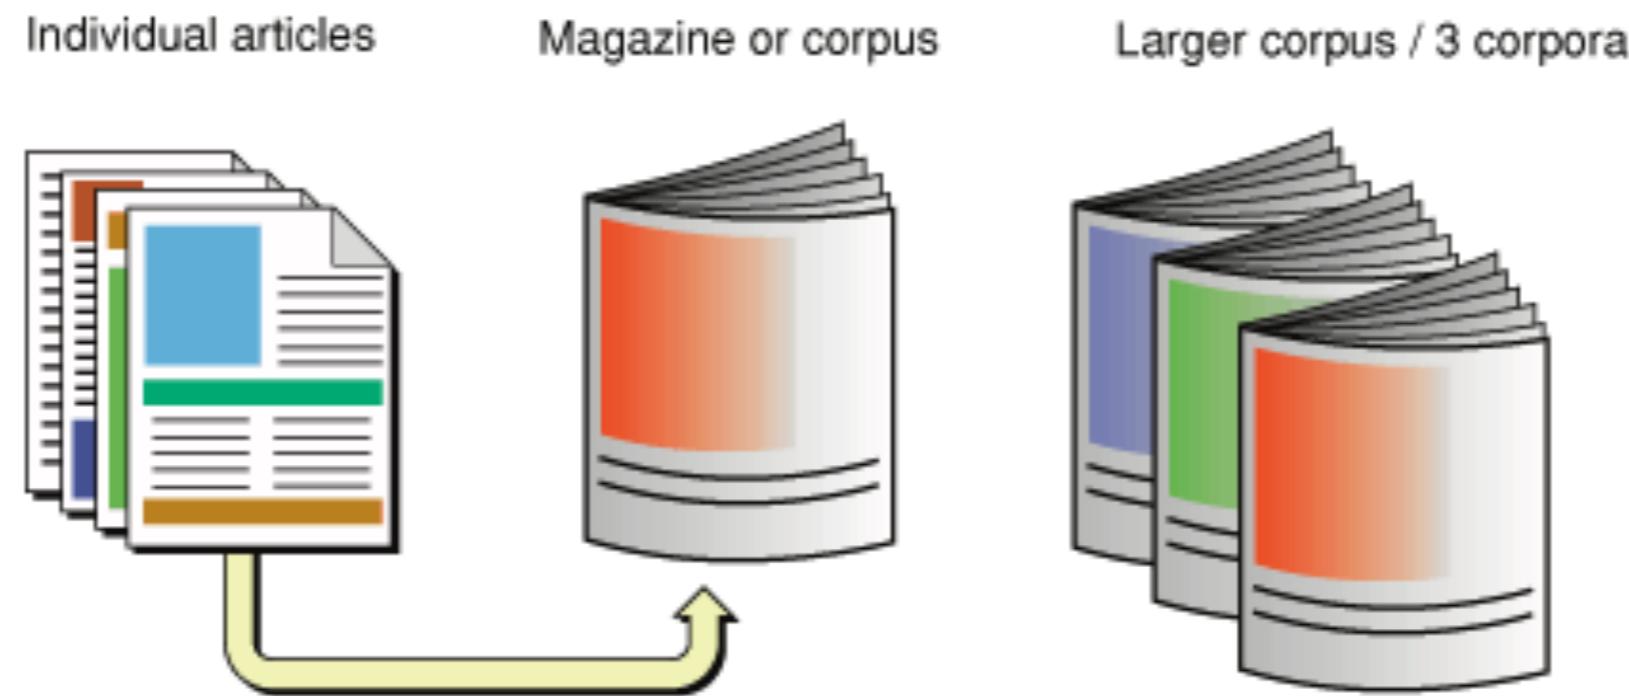

https://developer.apple.com/library/archive/documentation/UserExperience/Conceptual/SearchKitConcepts/searchKit_basics/searchKit_basics.html#/apple_ref/doc/uid/TP40002843-TPXREF101




ELK Stack

© 2017 - 2018 Siam Chamnkit Company Limited. All rights reserved.

Inverted Index

Try to construct index

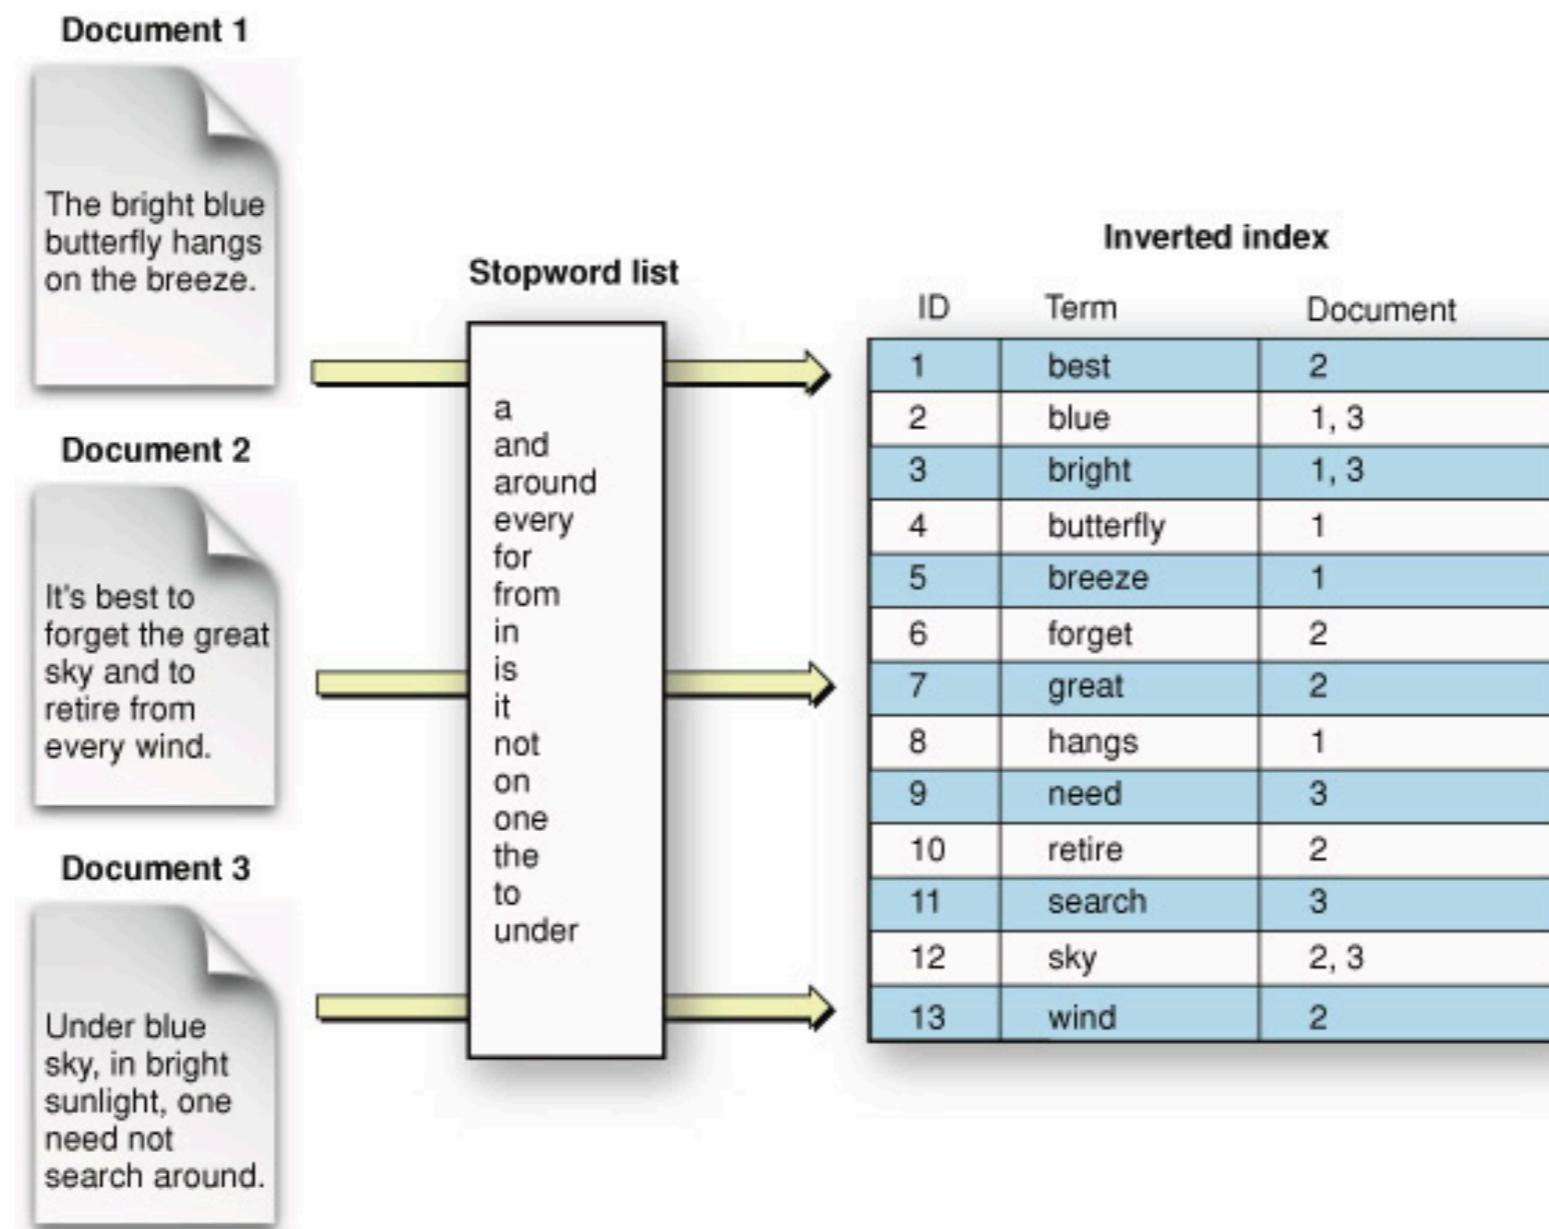

Apache Lucene

Elasticsearch

Apache Lucene

JVM

<https://lucene.apache.org/>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

Basic concept

Apache Lucene writes all the information to a structure called “**Inverted Index**”



Basic concept

Document
Field
Term
Token



Example

Document no.	Data
1	Elasticsearch Server
2	Mastering Elasticsearch Second Edition
3	Apache Solr Cookbook Third Edition



Token

Token	Document no.
Elasticsearch	1
Elasticsearch	2
Server	1
Mastering	2
Second	2
Edition	2
Edition	3
Apache	3
Solr	3
Cookbook	3
Third	3



Term

Token	Count	Document no.
elasticsearch	2	1,2
server	1	1
mastering	1	2
second	1	2
edition	2	2,3
apache	1	3
solr	1	3
cookbook	1	3
third	1	3



Lucene inverted index

Token	Count	Document no.
elasticsearch	2	1,2
server	1	1
mastering	1	2
second	1	2
edition	2	2,3
apache	1	3
solr	1	3
cookbook	1	3
third	1	3



Lucene inverted index

Write-once and read-many-times structure

Called “**Segment**”

Can't be delete (just marked to deleted)




Input data analysis

Write-once and read-many-times structure




Input data analysis

Write-once and read-many-times structure

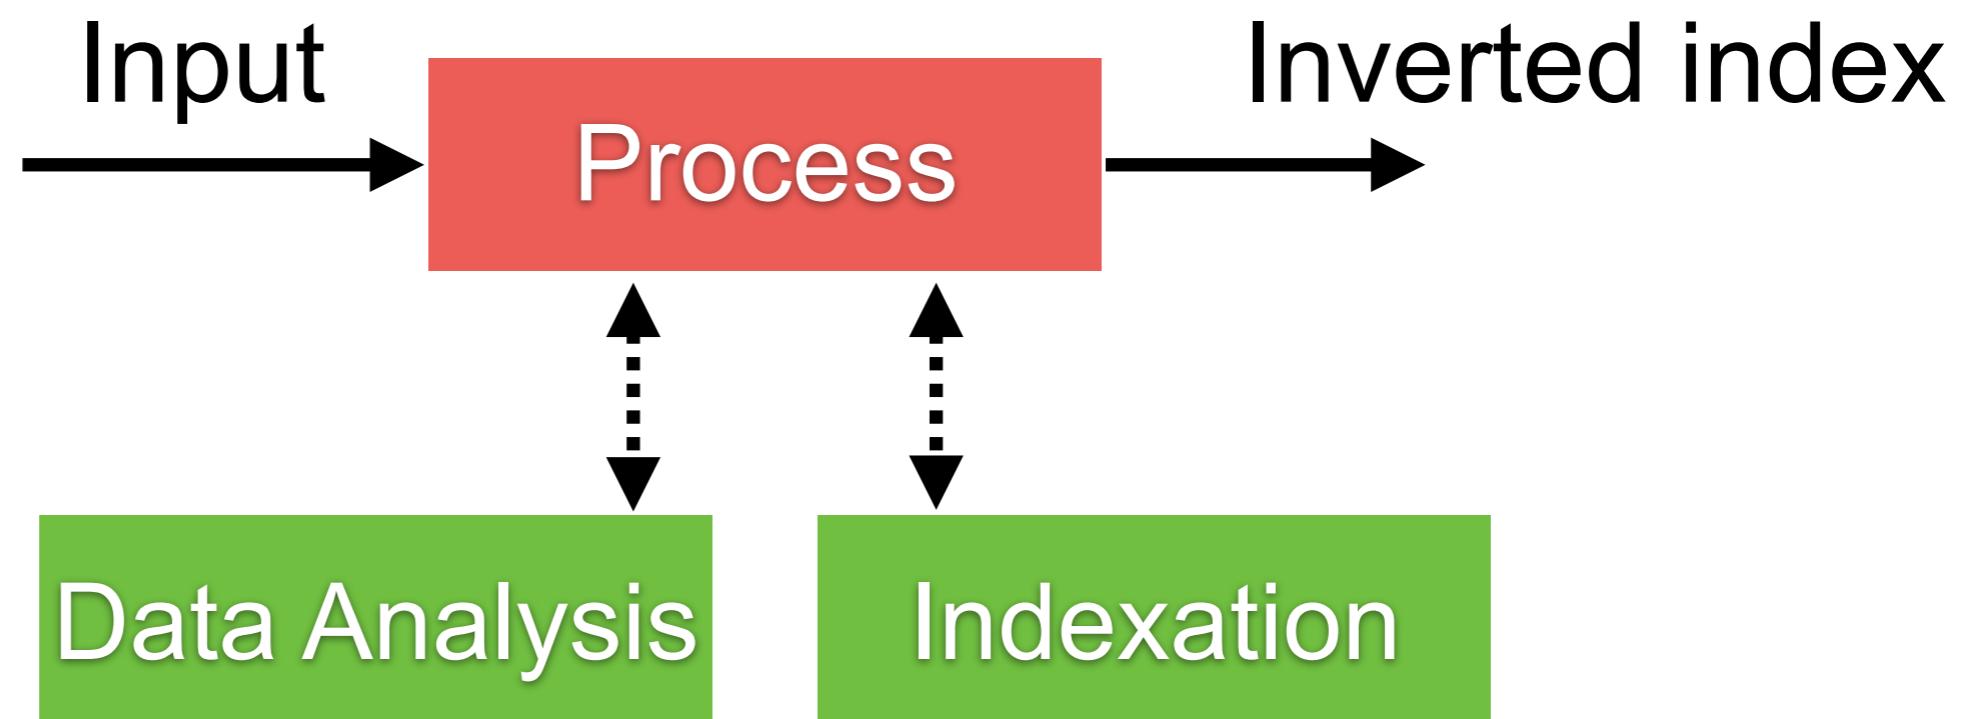

Process ?

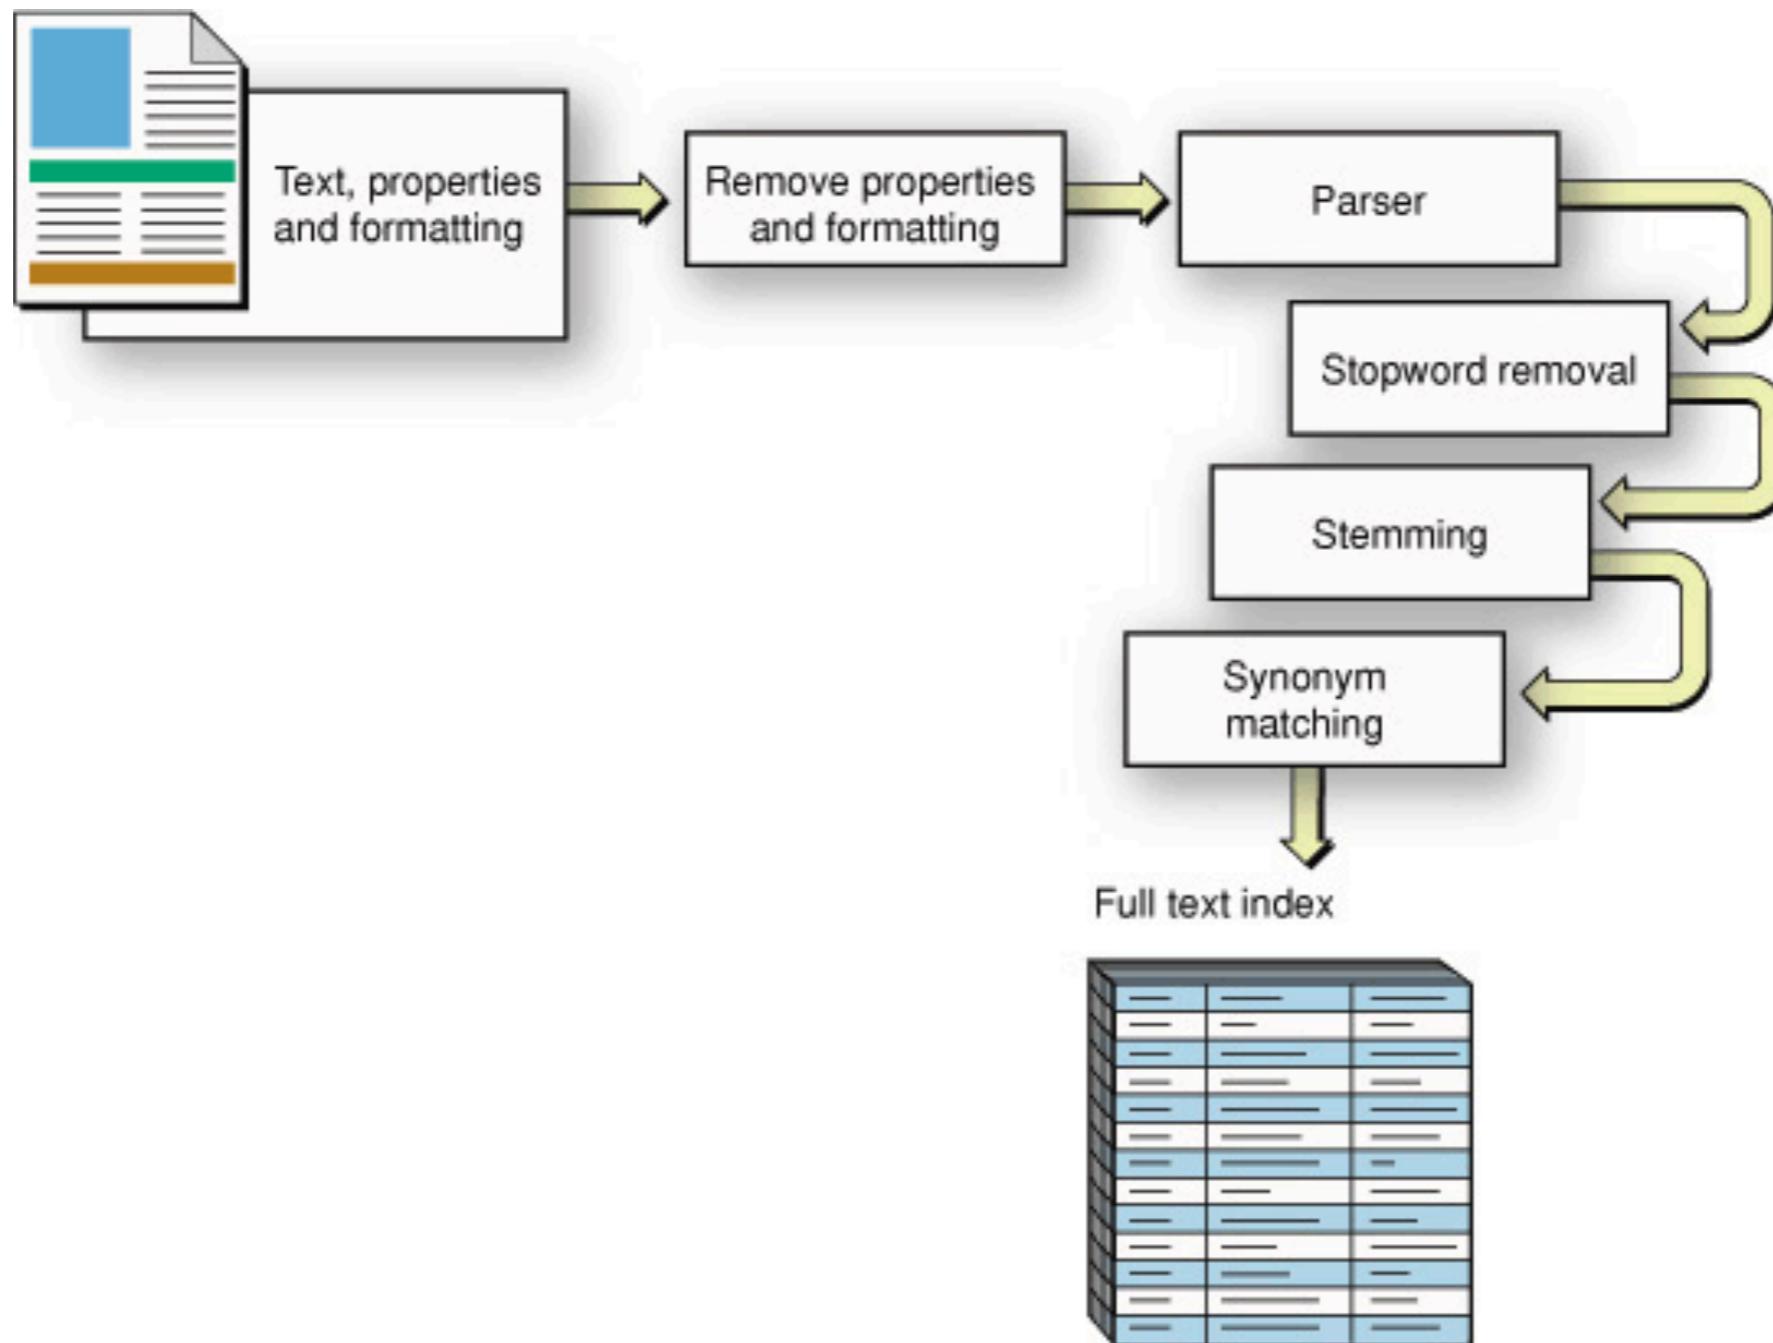

CRUD with Elasticsearch

02-crud/book_document.json



CRUD with Elasticsearch

Create document

Read document

Update document

Delete document



Compare with RDBMS

Database

Table

Row

Column

Index

Type*

Document

Field

* Only 1 type per index



Create a document

PUT /store/book/1

```
{  
  "title": "Elasticsearch: The Definitive Guide",  
  "author_name": [  
    "Clinton Gormley",  
    "Zachary Tong"  
,  
  "tag": [  
    "search",  
    "computer"  
,  
  "isbn-13": "978-1449358549",  
  "isbn-10": "1449358543",  
  "price": 44.3,  
  "page": 724,  
}
```



Create document

PUT **/store/book/1**

Index name

Type name

Document ID



1 Type per Index

Removal of mapping types



IMPORTANT

Indices created in Elasticsearch 6.0.0 or later may only contain a single [mapping type](#). Indices created in 5.x with multiple mapping types will continue to function as before in Elasticsearch 6.x. Mapping types will be completely removed in Elasticsearch 7.0.0.


<https://www.elastic.co/guide/en/elasticsearch/reference/6.5/removal-of-types.html>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

Create document (1 type)

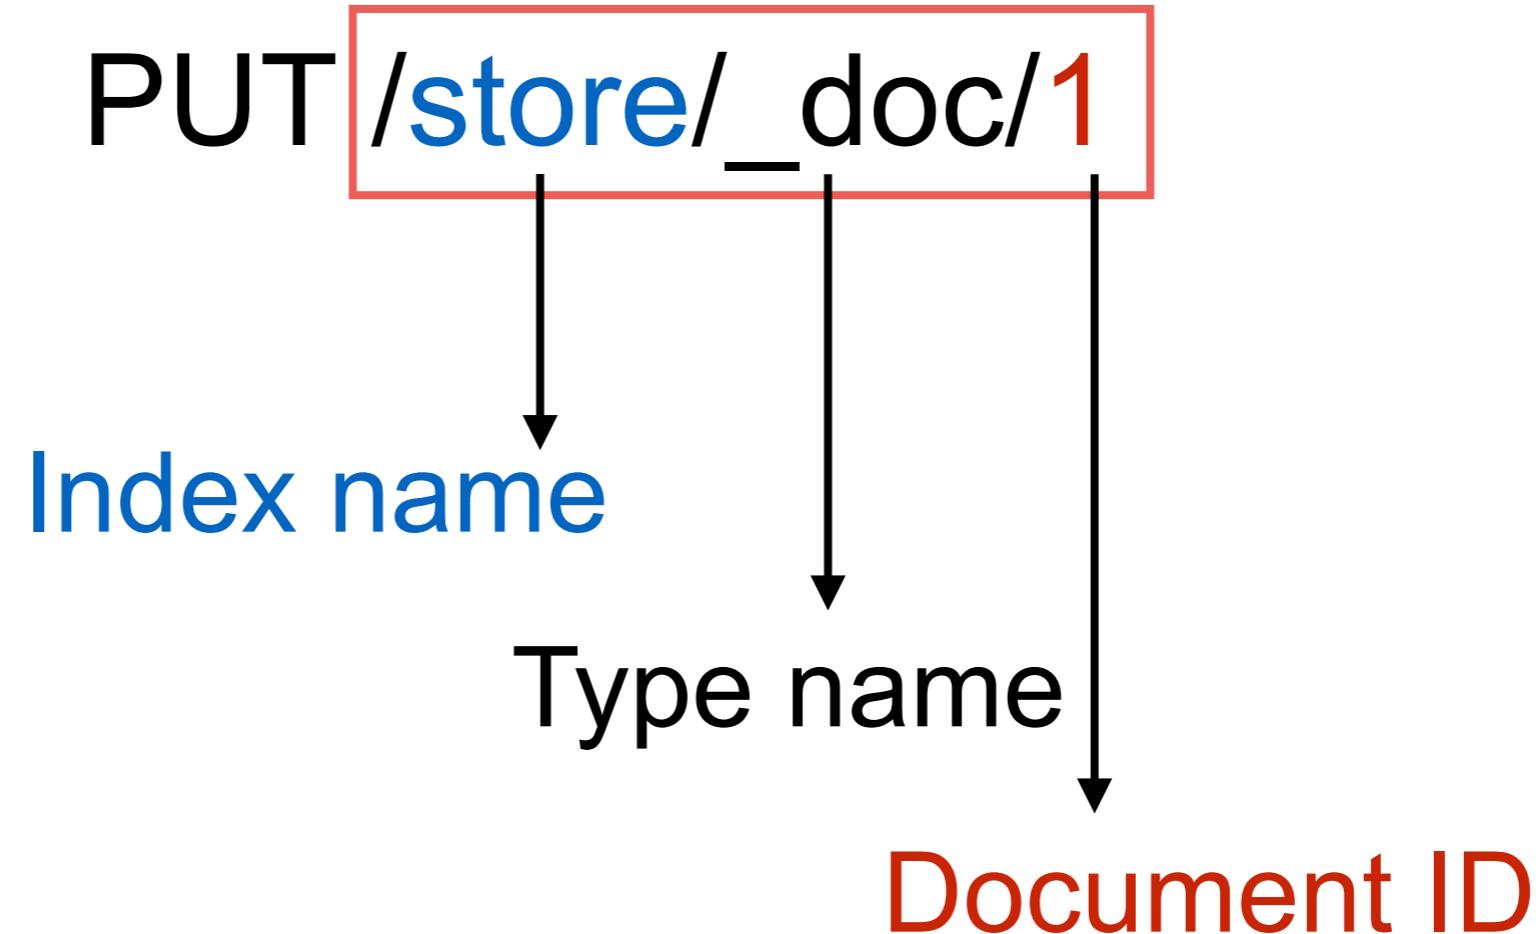

Change in Elasticsearch 7.x

of shard of index change from 5 to 1

#! Deprecation: the default number of shards will change from [5] to [1] in 7.0.0; if you wish to continue using the default of [5] shards, you must manage this on the create index request or with an index template

```
{  
  "_index": "store1",  
  "_type": "book",  
  "_id": "2",  
  "_version": 1,  
  "result": "created",  
  "_shards": {
```



Read document

GET /store/book/1

```
{  
  "_index": "store",  
  "_type": "book",  
  "_id": "1",  
  "_version": 1,  
  "found": true,  
  "_source": {  
    "title": "Elasticsearch: The Definitive Guide",  
    "author_name": [  
      "Clinton Gormley",  
      "Zachary Tong"  
    ],  
    "tag": [  
      "search",  
      "computer"  
    ]  
  }  
}
```

Information of document



Update document

Whole document
Partial document



Update whole document

PUT /store/_doc/123

```
{  
  "title": "Update",  
  "author_name": [  
    "user1",  
    "user2"  
  ],  
  "tag": [  
    "update",  
    "book"  
  ]  
}
```



Update partial document

POST /store/_update/123

```
{  
  "doc": {  
    "title": "partial update",  
    "tag": [  
      "test",  
      "computer"  
    ],  
    "views": 0  
  }  
}
```



Delete document

DELETE /store/_doc/1

```
{  
  "_index": "store",  
  "_type": "book",  
  "_id": "1",  
  "_version": 2,  
  "result": "deleted",  
  "_shards": {  
    "total": 2,  
    "successful": 1,  
    "failed": 0  
  },  
  "_seq_no": 1,  
  "_primary_term": 1  
}
```



More features

Update by query

Delete by query

Partial update document



Routing

<https://www.elastic.co/guide/en/elasticsearch/reference/current/mapping-routing-field.html#>




ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.


Default indexing

ES calculate the hash value of the doc id

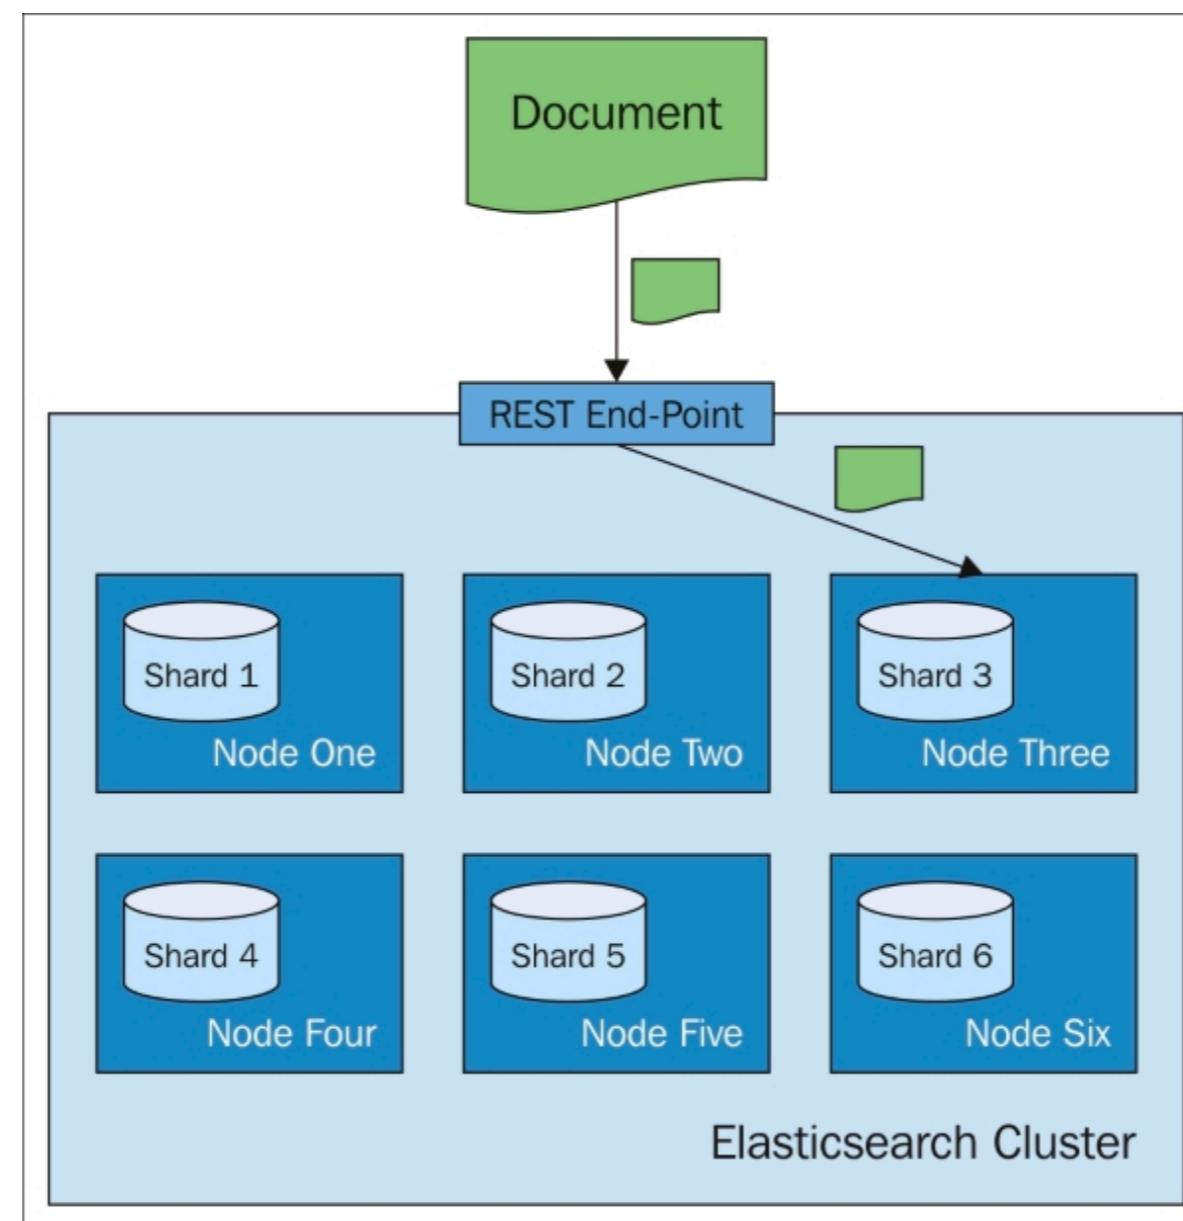

Default searching/query

Query all the shards to get data
(depend on search type)

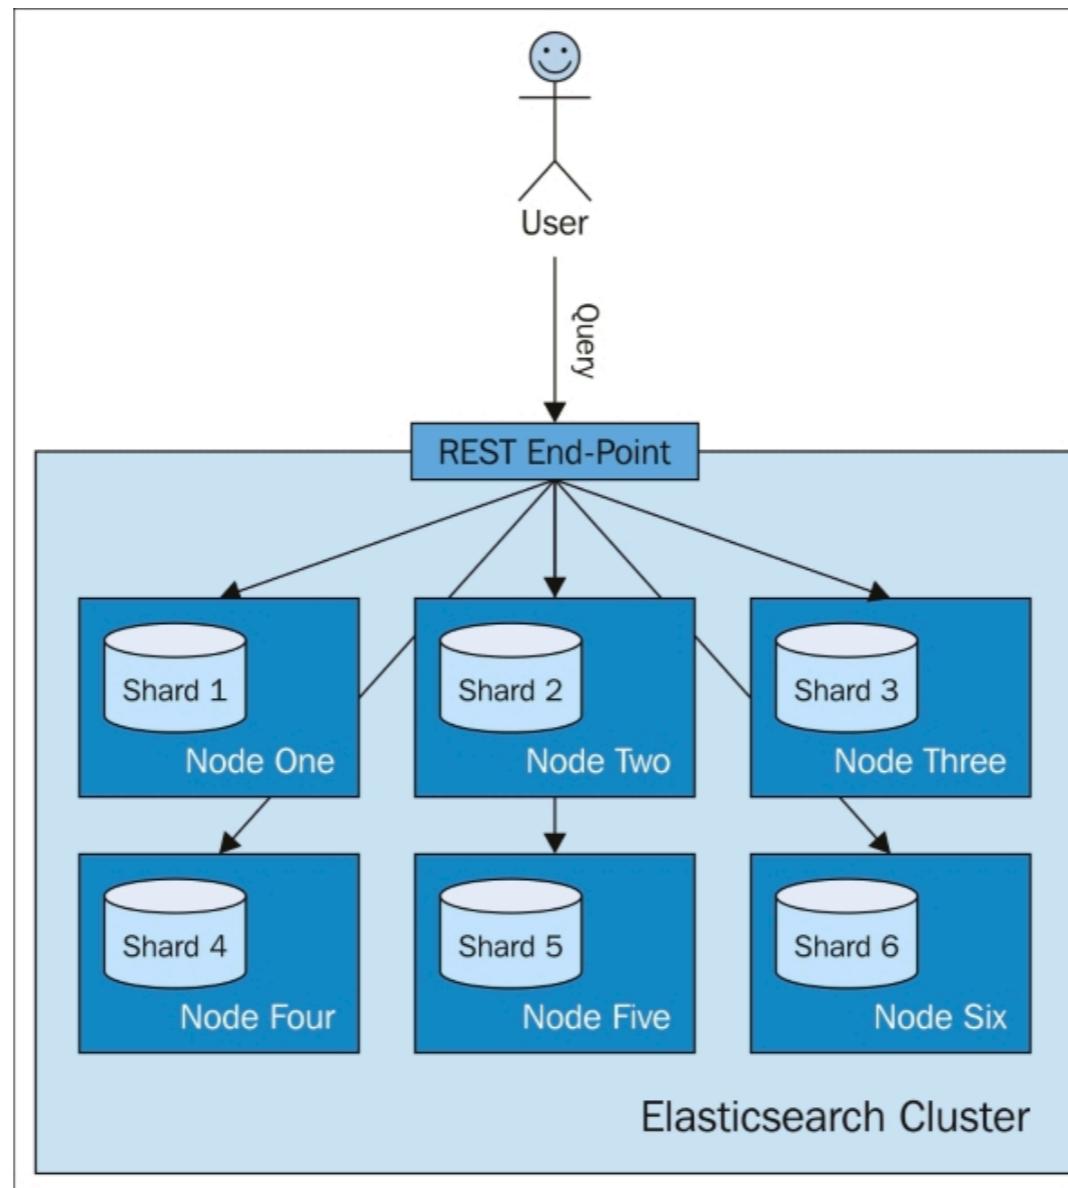

Custom routing

Routing field
Routing to index partition



Routing field

```
shard_num =  
hash(_routing) % num_primary_shards
```



Routing to index partition

```
shard_num  
=  
(hash(_routing) + hash(_id)) % routing_partition_size)  
%
```


num_primary_shards

routing_partition_size = 1 (default)



Custom routing

ES will send our query to a single shard

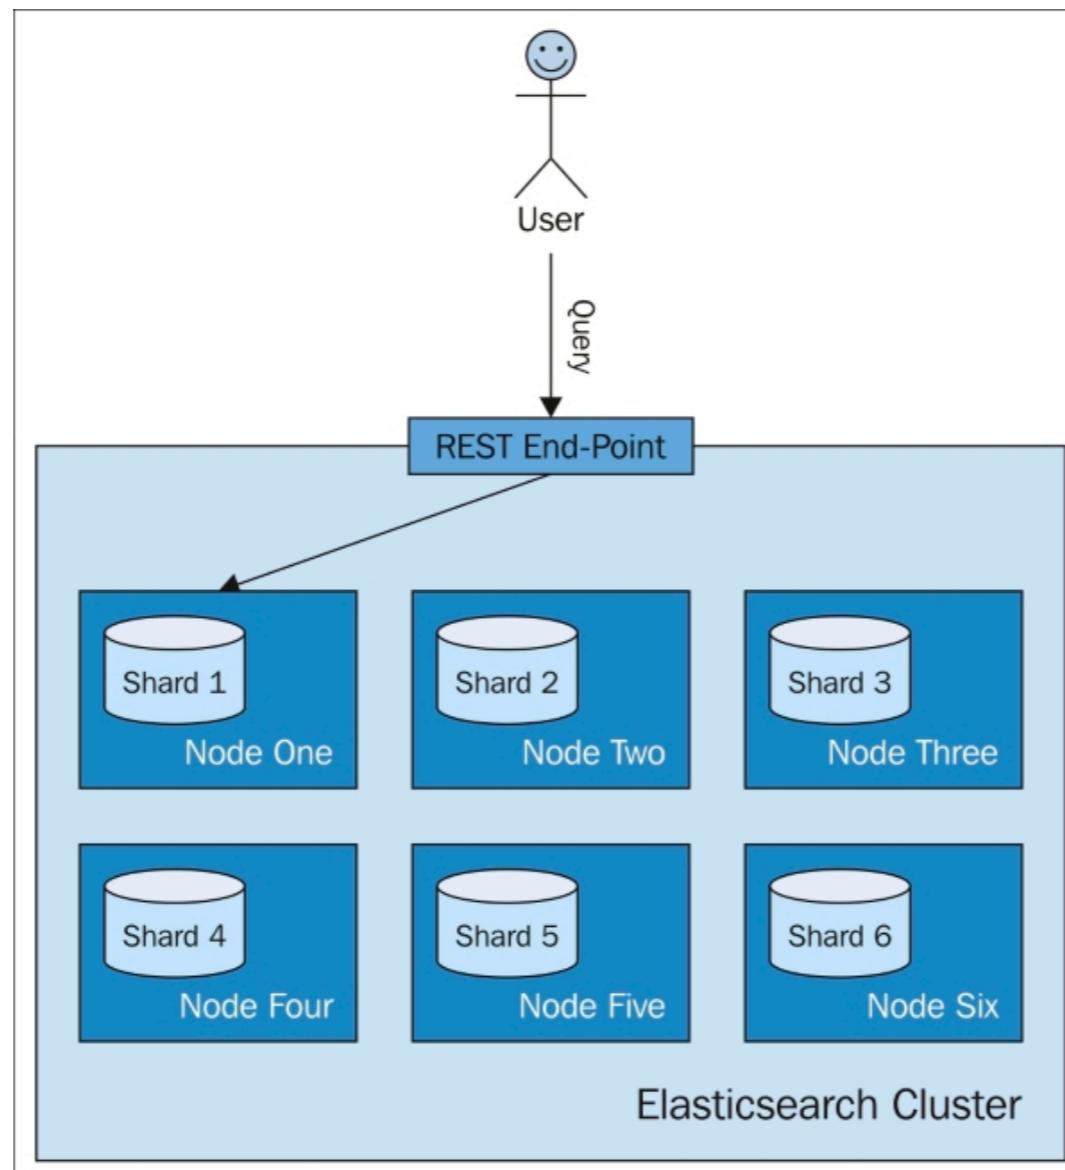

Bulk API

03-bulk/book_bulk.json

<https://www.elastic.co/guide/en/elasticsearch/reference/current/docs-bulk.html>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.


Bulk API

Perform many index/delete operation in single API call


Increase indexing speed



Without Bulk API

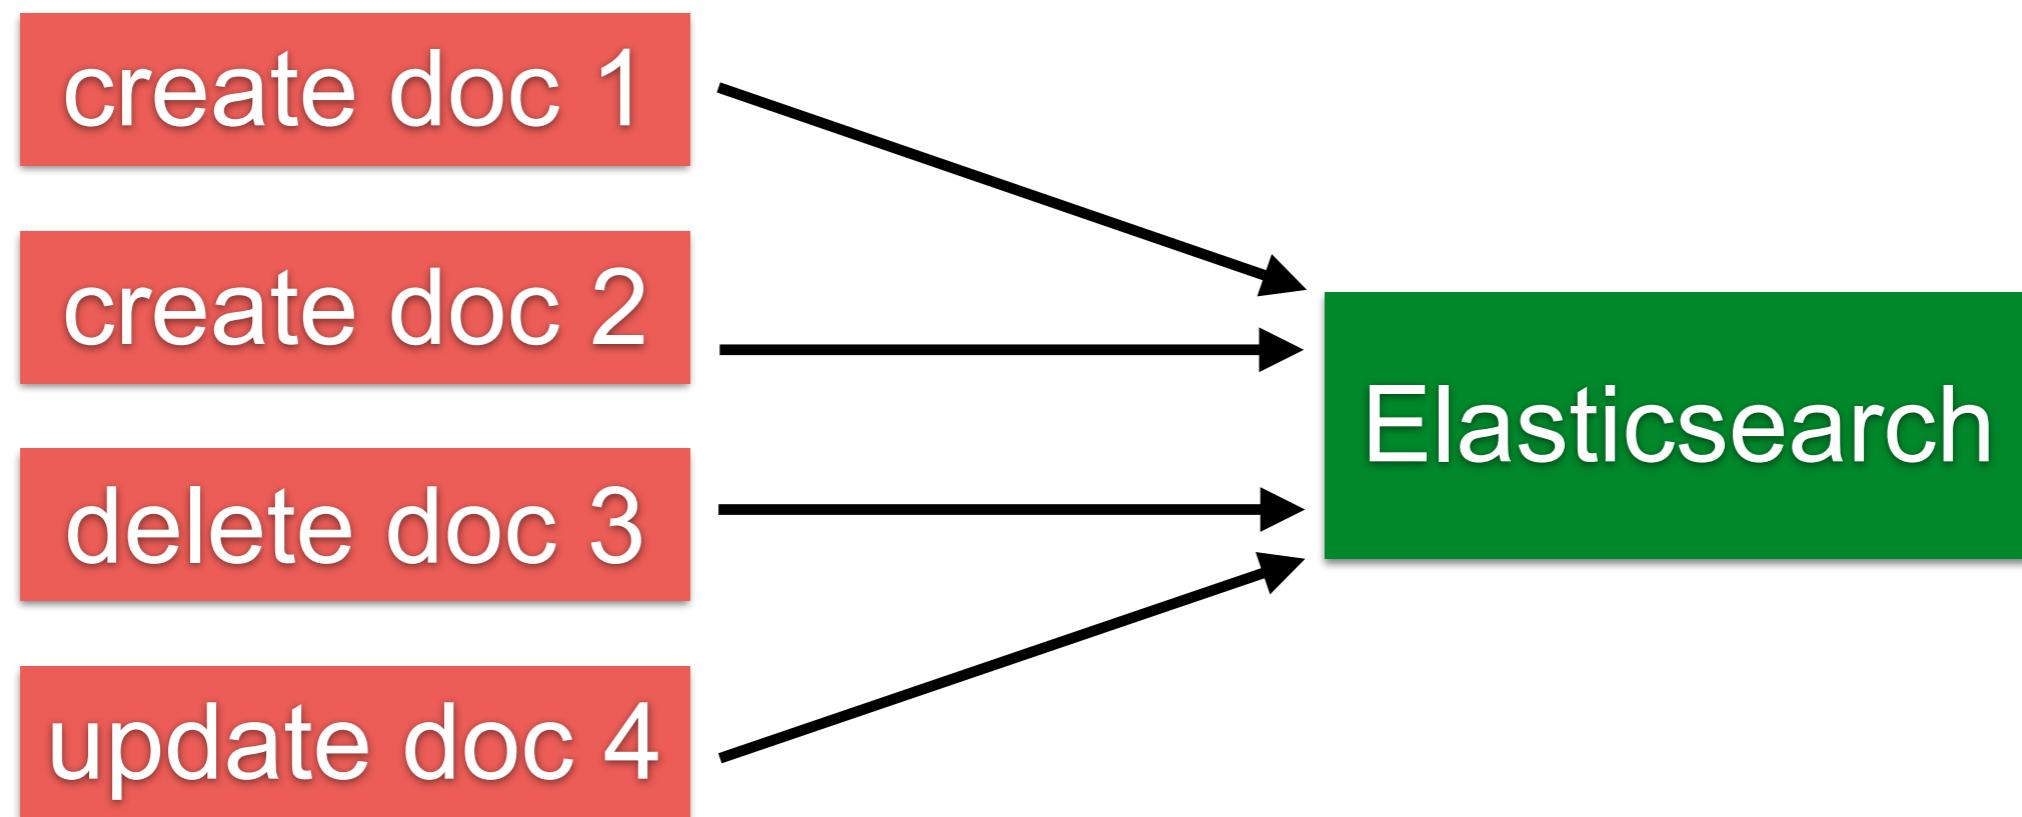


With Bulk API

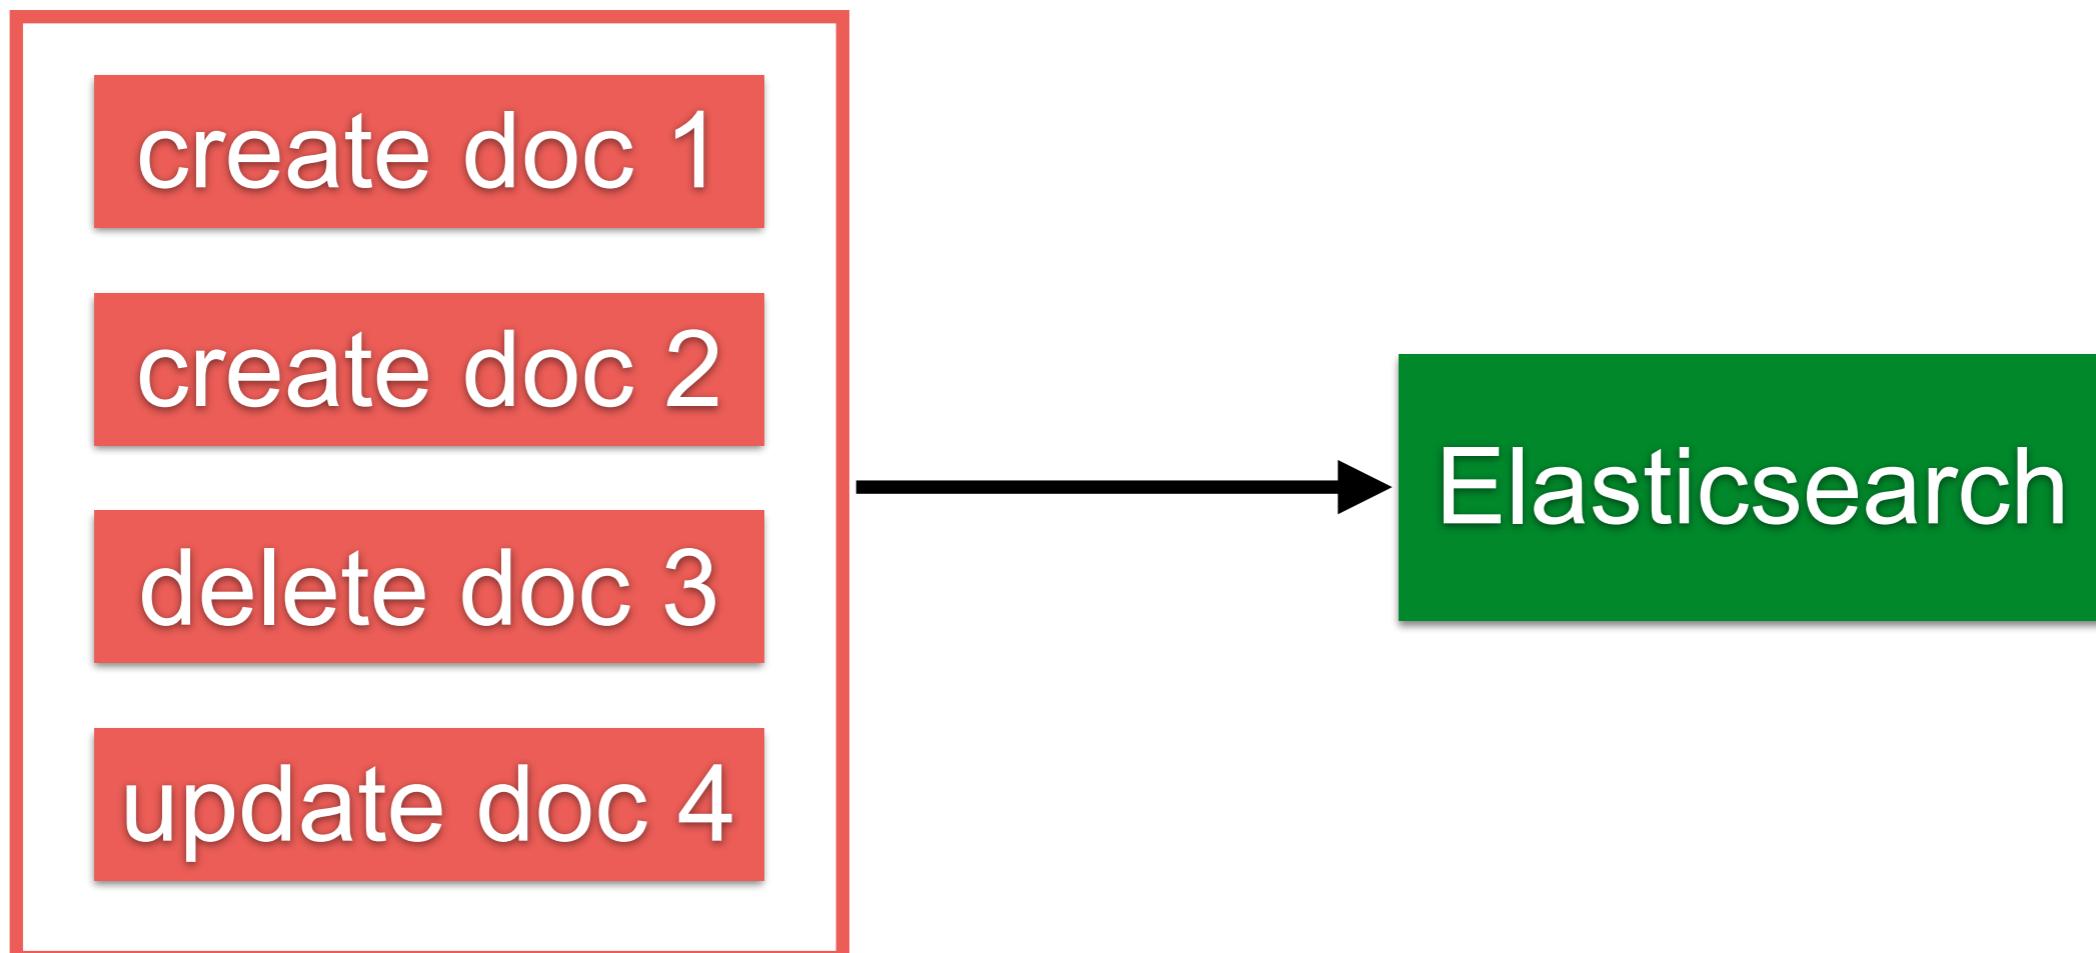

Store in memory 5-15 MB



No transaction in bulk api

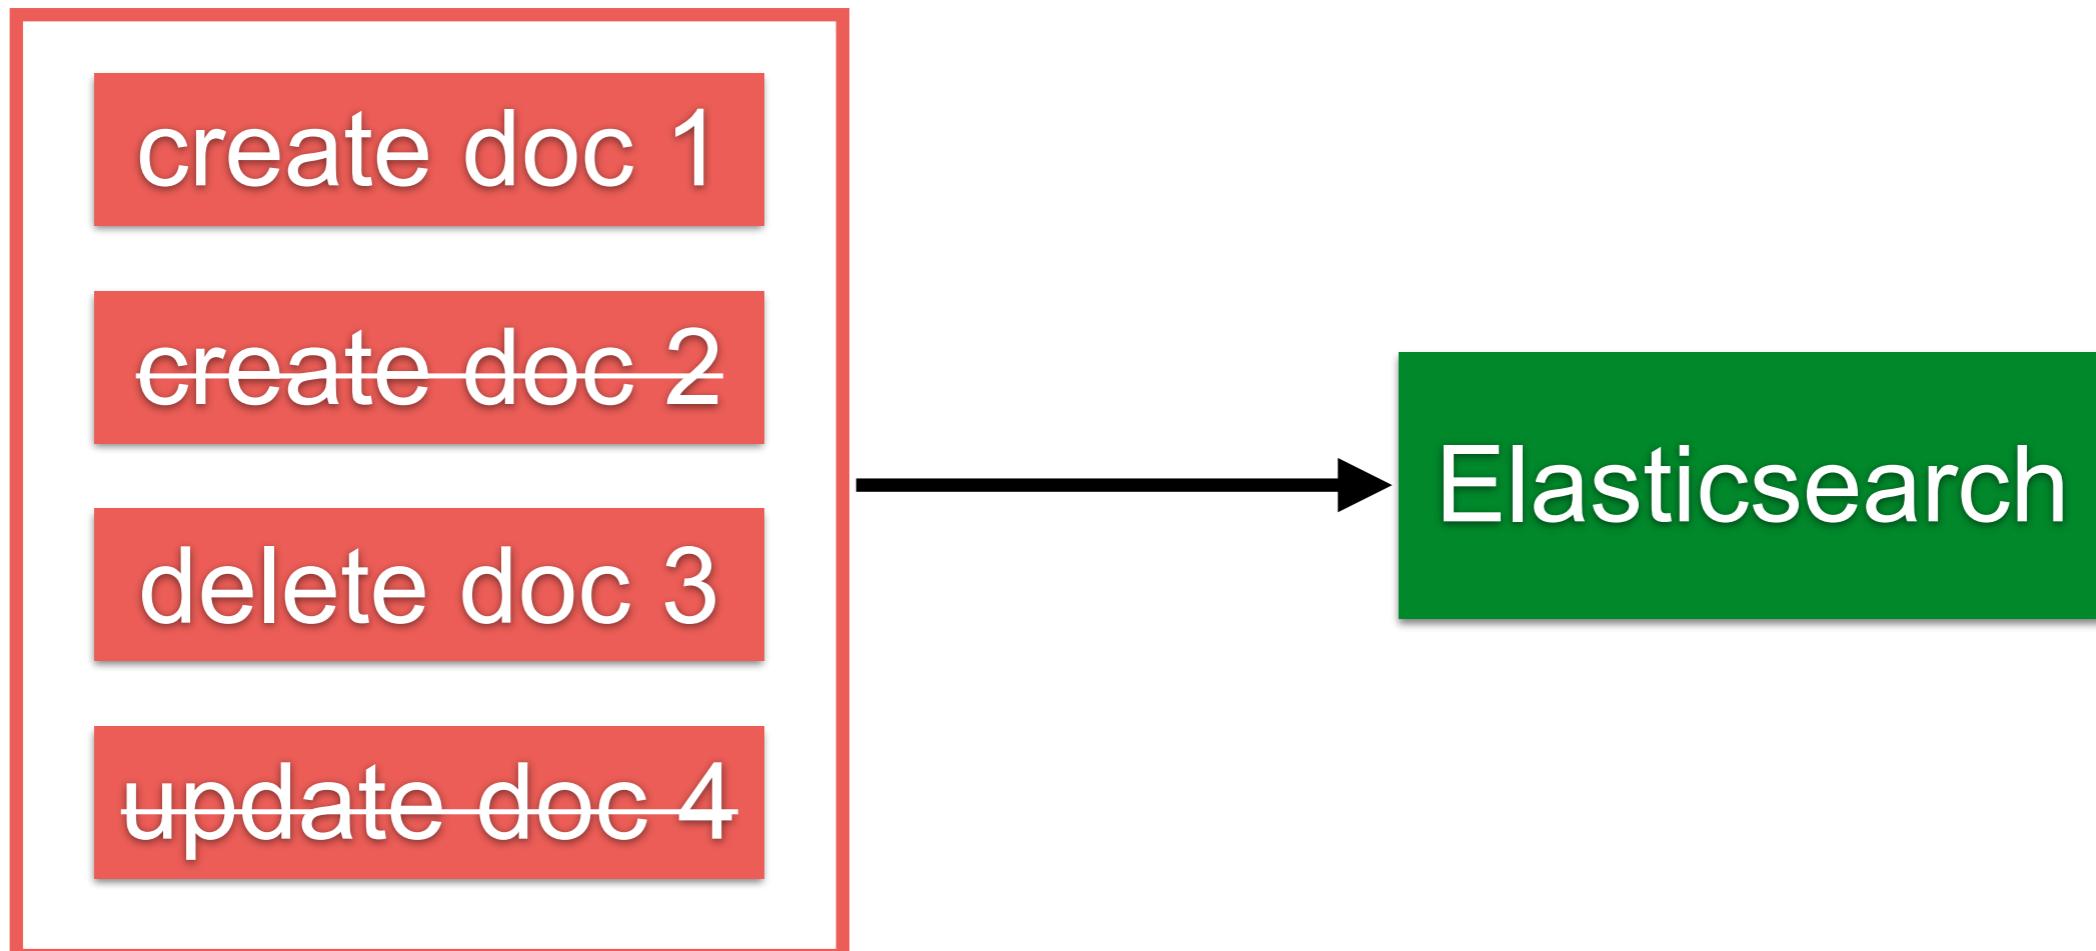

Create a document

POST /store/book/_bulk

```
{"create": {"_id": "1001"}  
{"title": "new book 1000", "description": "my new book"}}
```



Response from Bulk API

```
{  
  "took": 89,  
  "errors": false,  
  "items": [  
    {  
      "create": {  
        "_index": "store",  
        "_type": "book",  
        "_id": "1001",  
        "_version": 1,  
        "result": "created",  
        "_shards": {  
          "total": 2,  
          "successful": 1,  
          "failed": 0  
        },  
        "_seq_no": 0,  
        "_primary_term": 1,  
        "status": 201  
      }  
    }  
  ]  
}
```

Time in milliseconds

HTTP Status 201 = Created



Searching / Query




Searching


Scattering phase
Gathering phase



Scattering phase

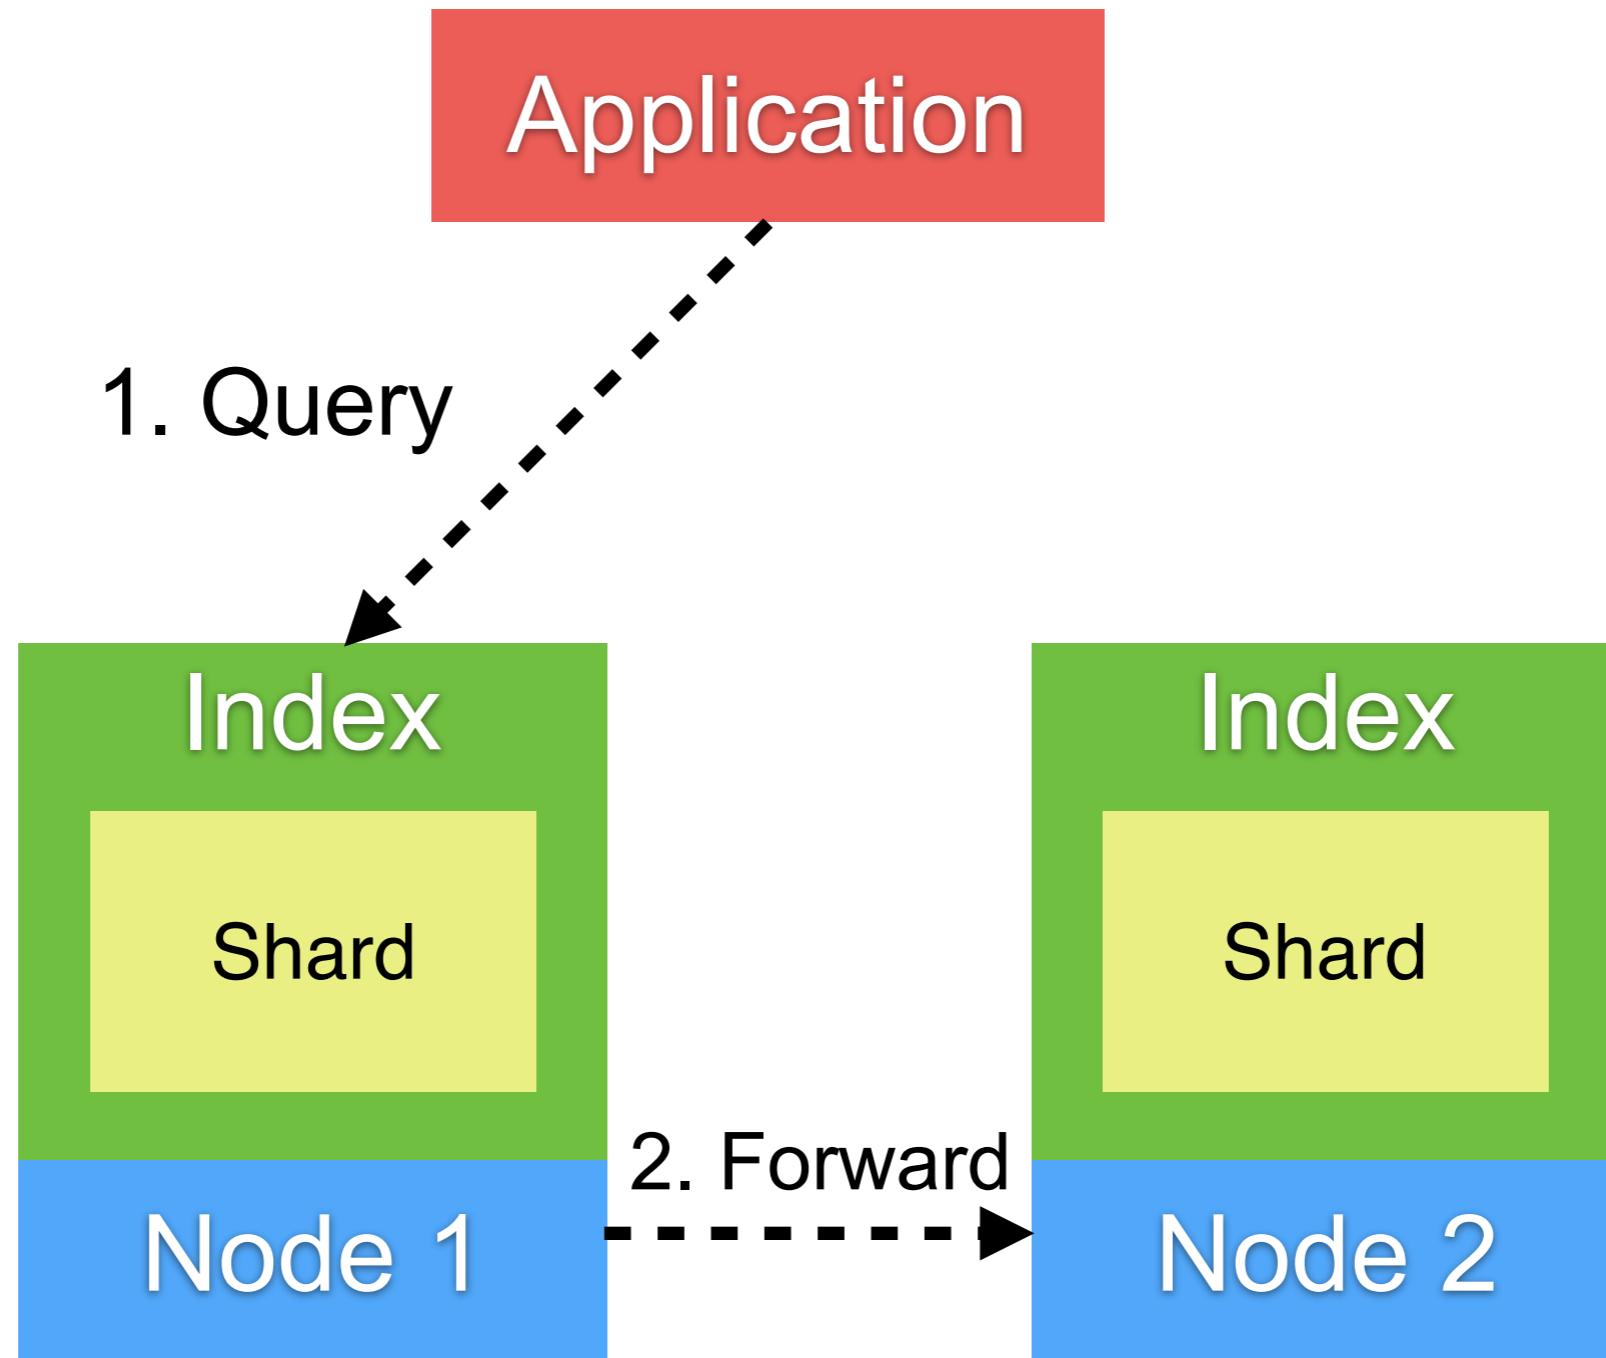

Gathering phase

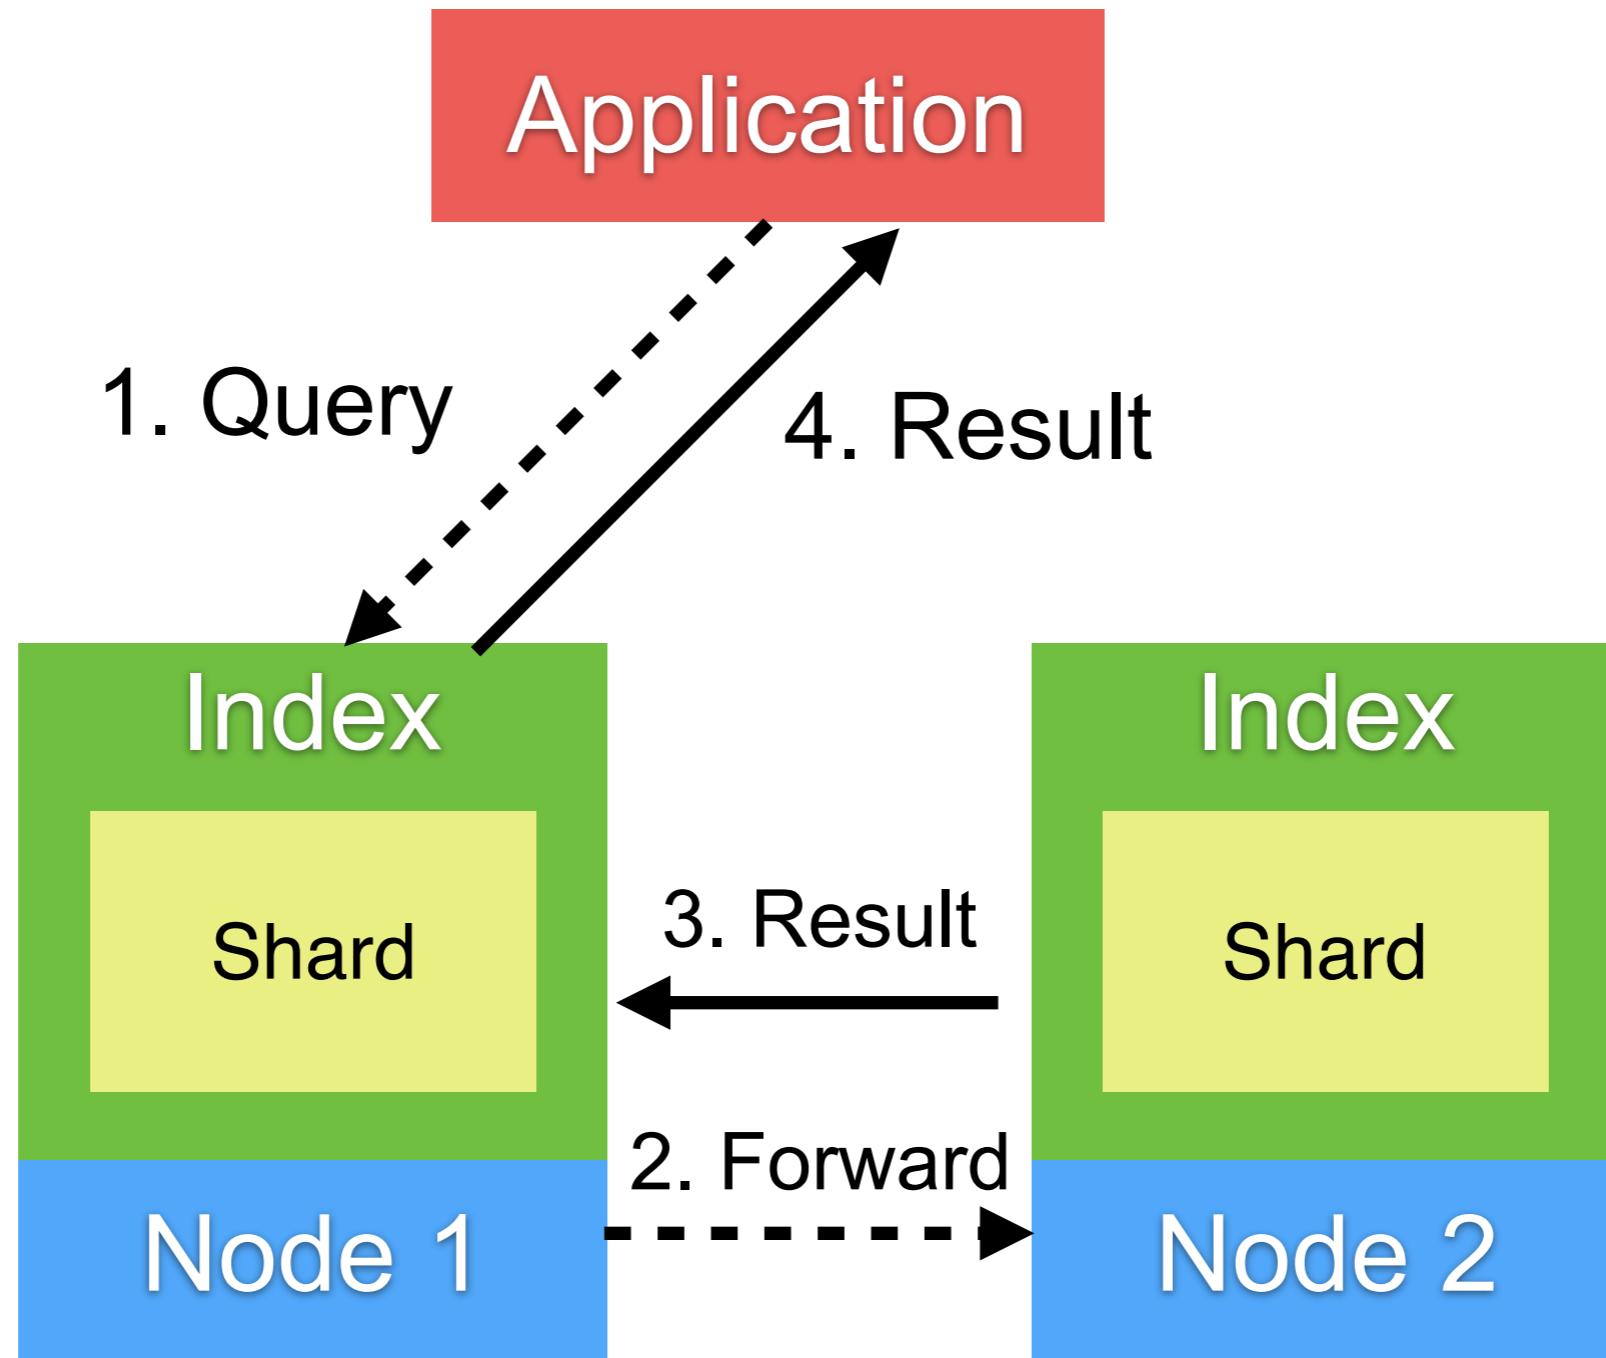

Query DSL

04-search/book_search.json



Query DSL

Domain Specific Language for query data
Flexible query language
Based on JSON format

<https://www.elastic.co/guide/en/elasticsearch/reference/current/query-dsl.html>




ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.


Query DSL

1. Leaf query clause
2. Compound query clause

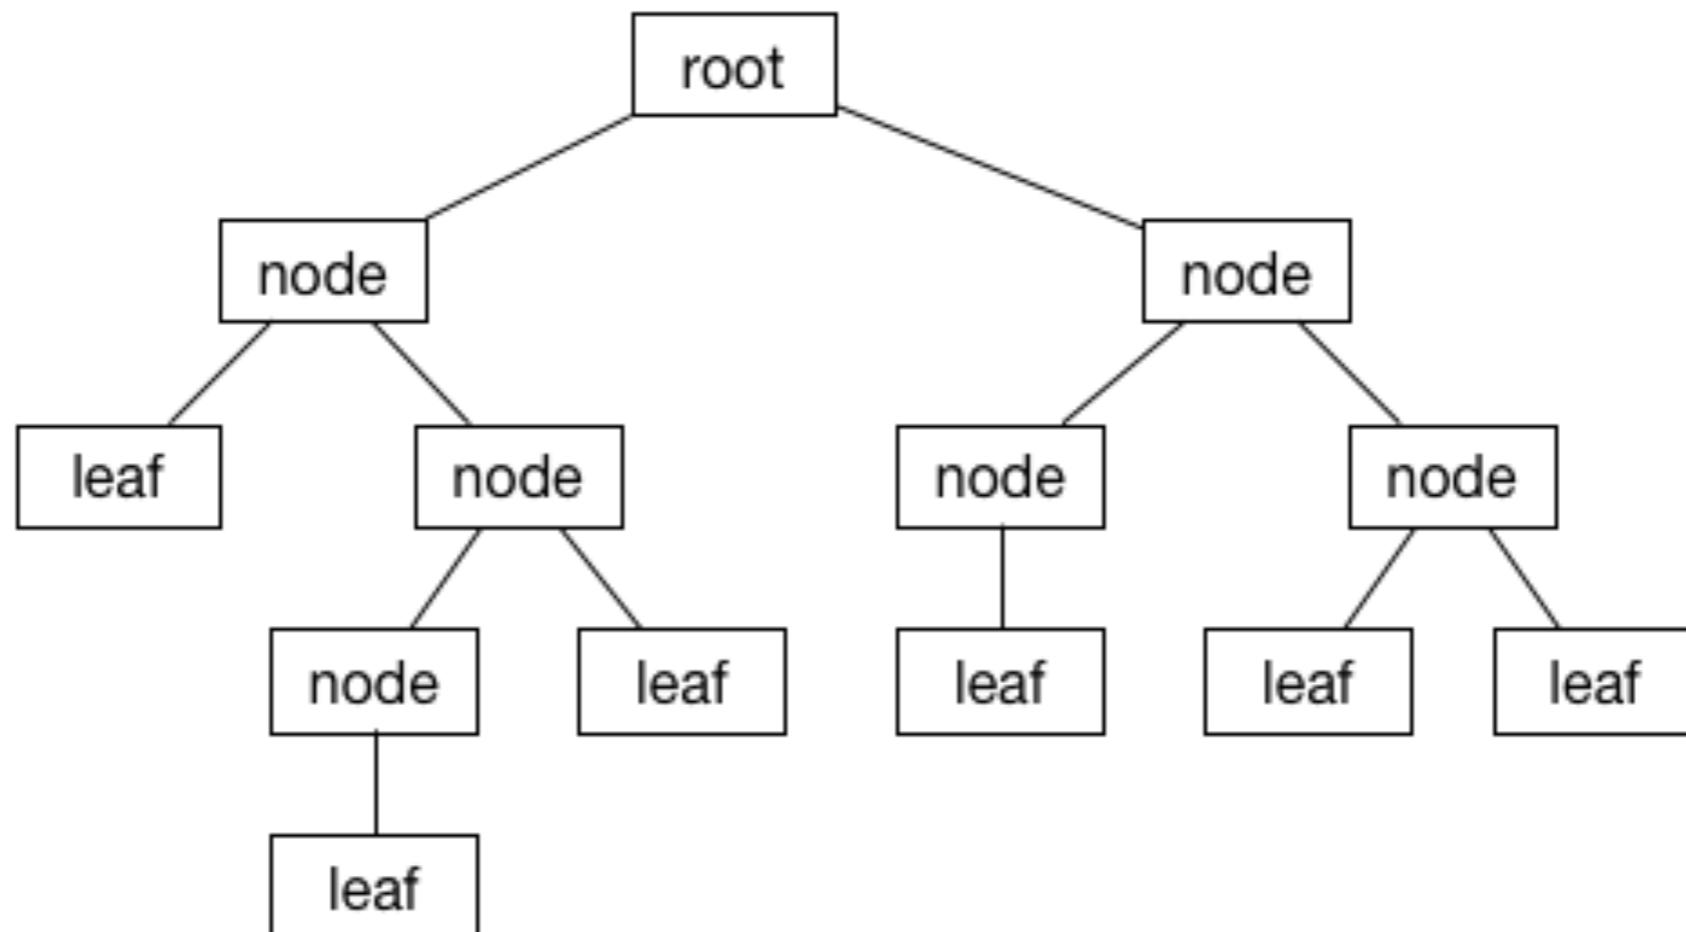

Query DSL

Query (unstructured data)
Filter (structured data)

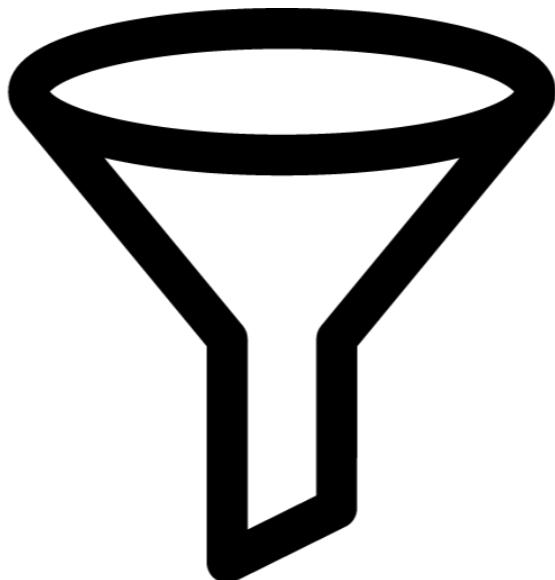

Query



Query DSL

Query	Filter
Relevance	Boolean, yes/no
Full text search	Exact values
Not cached	Cached
Slower	Faster

Filter first, then query remaining documents



Query DSL

Full text query
Term level query
Compound query
Joining query
Geo query
Specialized query
Span query



Leaf query clause

GET /store/book/_search

```
{  
  "query": {  
    "match_all": {}  
  }  
}
```



Compound query clause

GET /store/book/_search

```
{  
  "query": {  
    "bool": {  
      "must": [{}],  
      "should": [{}],  
      "must_not": [{}]  
    }  
  }  
}
```



_all field is disabled (ES 6.0+)

_all field



WARNING

Deprecated in 6.0.0.

`_all` may no longer be enabled for indices created in 6.0+, use a custom field and the mapping `copy_to` parameter

Space issue
Analyzer issue
Highlighting issue

<https://www.elastic.co/guide/en/elasticsearch/reference/6.5/mapping-all-field.html>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

Workshop

amazon

All ▾ elasticsearch

New to Amazon? Click here to learn more

Deliver to Thailand

Departments ▾ Your Amazon.com Today's Deals Gift Cards Sell

EN ▾ Hello. Sign in Account & Lists ▾ Orders Cart 0

1-16 of 119 results for "elasticsearch"

Show results for

Books

- Computers & Technology
- Data Processing
- Web Development & Design
- Online Internet Searching
- Databases & Big Data
- ▼ See more

Kindle Store

- Computers & Technology
- Business Software
- Search Engines
- Application Development
- Computer Databases
- ▼ See more
- ▼ See All 8 Departments

Refine by

Book Language

- English

Book Format

- Paperback

Packt

SPONSORED BY PACKT PUBLISHING

Complete Database Solutions with PostgreSQL

Shop now ▾

SQL Server 2017 Administrator's Guide

PostgreSQL 9.6 High Performance

SQL Server 2017 Administrators Guide

PostgreSQL 9.6 High Performance: Optimize your...

Advertisement

Sponsored ⓘ

Learning Elastic Stack 6.0: A beginner's guide to distributed search, analytics, and visualization using Elasticsearch, Logstash and Kibana

Dec 22, 2017

by Pranav Shukla and Sharath Kumar M N

Eligible for Shipping to Thailand

Get to grips with the new features introduced in Elastic Stack 6.0, and deliver end-to-end real-time distributed data processing solutions.

Paperback

\$34⁹⁹

In Stock

★★★★★ 7

Previous Page 1 2 3 ... 8 Next Page



Query

amazon

All ▾ elasticsearch

Departments ▾ Your Amazon.com Today's Deals Gift Cards Sell

New to Amazon? EN Hello. Sign in Account Lists Orders Cart

Sort by Featured

Filter

Books

- Computers & Technology
- Data Processing
- Web Development & Design
- Online Internet Searching
- Databases & Big Data
- ▼ See more

Kindle Store

- Computers & Technology
- Business Software
- Search Engines
- Application Development
- Computer Databases
- ▼ See more
- ▼ See All 8 Departments

Refine by

Book Language

- English

Book Format

- Paperback

Packt

SPONSORED BY PACKT PUBLISHING

Complete Database Solutions with PostgreSQL

Shop now ›

Learning Elastic Stack 6.0

A beginner's guide to distributed search, analytics, and visualization using Elasticsearch, Logstash, and Kibana

By Pranav Shukla and Sharath Kumar M N

Eligible for Shipping to Thailand

Get to grips with the new features introduced in Elastic Stack 6.0, and deliver end-to-end real-time distributed data processing solutions.

Paging

Previous Page 1 2 3 ... 8 Next Page

Sorting

SQL Server 2017 Administrator's Guide

By Waheed Ahmad and Imanuele Pollicino

SQL Server 2017 Administrators Guide

★★★★★ 3 prime

PostgreSQL 9.6 High Performance

By Waheed Ahmad, Gregory Smith

PostgreSQL 9.6 High Performance: Optimize your PostgreSQL database

★★★★★ 1 prime

Advertisement



Aggregation API

05-aggregation/book_aggregation.json

<https://www.elastic.co/guide/en/elasticsearch/reference/current/search-aggregations.html>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

```
SELECT count(1), sum(price)  
FROM some_table  
GROUP BY some_column
```



Aggregation Types

Bucketing
Metric
Matrix
Pipeline



Structure

```
"aggregations" : {  
    "<aggregation_name>" : {  
        "<aggregation_type>" : {  
            <aggregation_body>  
        }  
        [ , "meta" : { [ <meta_data_body> ] } ] ?  
        [ , "aggregations" : { [ <sub_aggregation> ]+ } ] ?  
    }  
    [ , "<aggregation_name_2>" : { ... } ] *  
}
```



Count by category

GET /store/_search

```
{  
  "aggs": {  
    "all_book_title": {  
      "terms": {  
        "field": "category.keyword"  
      }  
    }  
  }  
}
```



Count by category

GET /store/_search

```
{  
  "aggs": {  
    "all_book_title": {  
      "terms": {  
        "field": "category.keyword"  
      }  
    }  
  }  
}
```



Count by category

GET /store/_search

```
{  
  "aggs": {  
    "all_book_title": {  
      "terms": { Aggregation type  
        "field": "category.keyword"  
      }  
    }  
  }  
}
```



Result of aggregation

```
{  
  "hits": {  
    "total": 5,  
    "max_score": 1,  
    "hits": [  
      {  
        "_source": {  
          "title": "The Logstash Book"  
        }  
      },  
      {  
        "_source": {  
          "title": "Elasticsearch Server: Second Edition"  
        }  
      }  
    ]  
  }  
}
```

Search result



Result of aggregation

```
"aggregations": {  
    "all_book_title": {  
        "doc_count_error_upper_bound": 0,  
        "sum_other_doc_count": 0,  
        "buckets": [          Aggregation result  
            {  
                "key": "Computer & Technology",  
                "doc_count": 5  
            },  
            {  
                "key": "Online Searching",  
                "doc_count": 3  
            },  
            {  
                "key": "Java Programming",  
                "doc_count": 2  
            }  
        ]  
    }  
}
```



Show only aggregation result

GET /store/_search

```
{  
  "size": 0, Set search result size = 0  
  "aggs": {  
    "all_book_title": {  
      "terms": {  
        "field": "category.keyword"  
      }  
    }  
  }  
}
```



Range of price

GET /store/_search

```
{  
  "size": 0,  
  "aggs": {  
    "price_range": {  
      "range": {  
        "field": "price",  
        "ranges": [  
          { "from": 0, "to": 10 },  
          { "from": 11, "to": 20 },  
          { "from": 21, "to": 50 }  
        ]  
      }  
    }  
  }  
}
```



Result of aggregation

```
"buckets": [
  {
    "key": "0.0-10.0",
    "from": 0,
    "to": 10,
    "doc_count": 1
  },
  {
    "key": "11.0-20.0",
    "from": 11,
    "to": 20,
    "doc_count": 0
  },
  {
    "key": "21.0-50.0",
    "from": 21,
    "to": 50,
    "doc_count": 3
  }
]
```



Range of price and ordering

GET /store/_search

```
{  
  "size": 0,  
  "aggs": {  
    "price_range": {  
      "range": {  
        "field": "price",  
        "ranges": [  
          { "from": 0, "to": 10 },  
          { "from": 11, "to": 20 },  
          { "from": 21, "to": 50 }  
        ]  
      }  
    }  
  }  
}
```



Workshop aggregation with car

05-aggregation/car.json



Try by yourself

Best seller by color


Statistic of best seller by color

Detail of car in each color


Min/max of price by make



Top cars in each price range ?

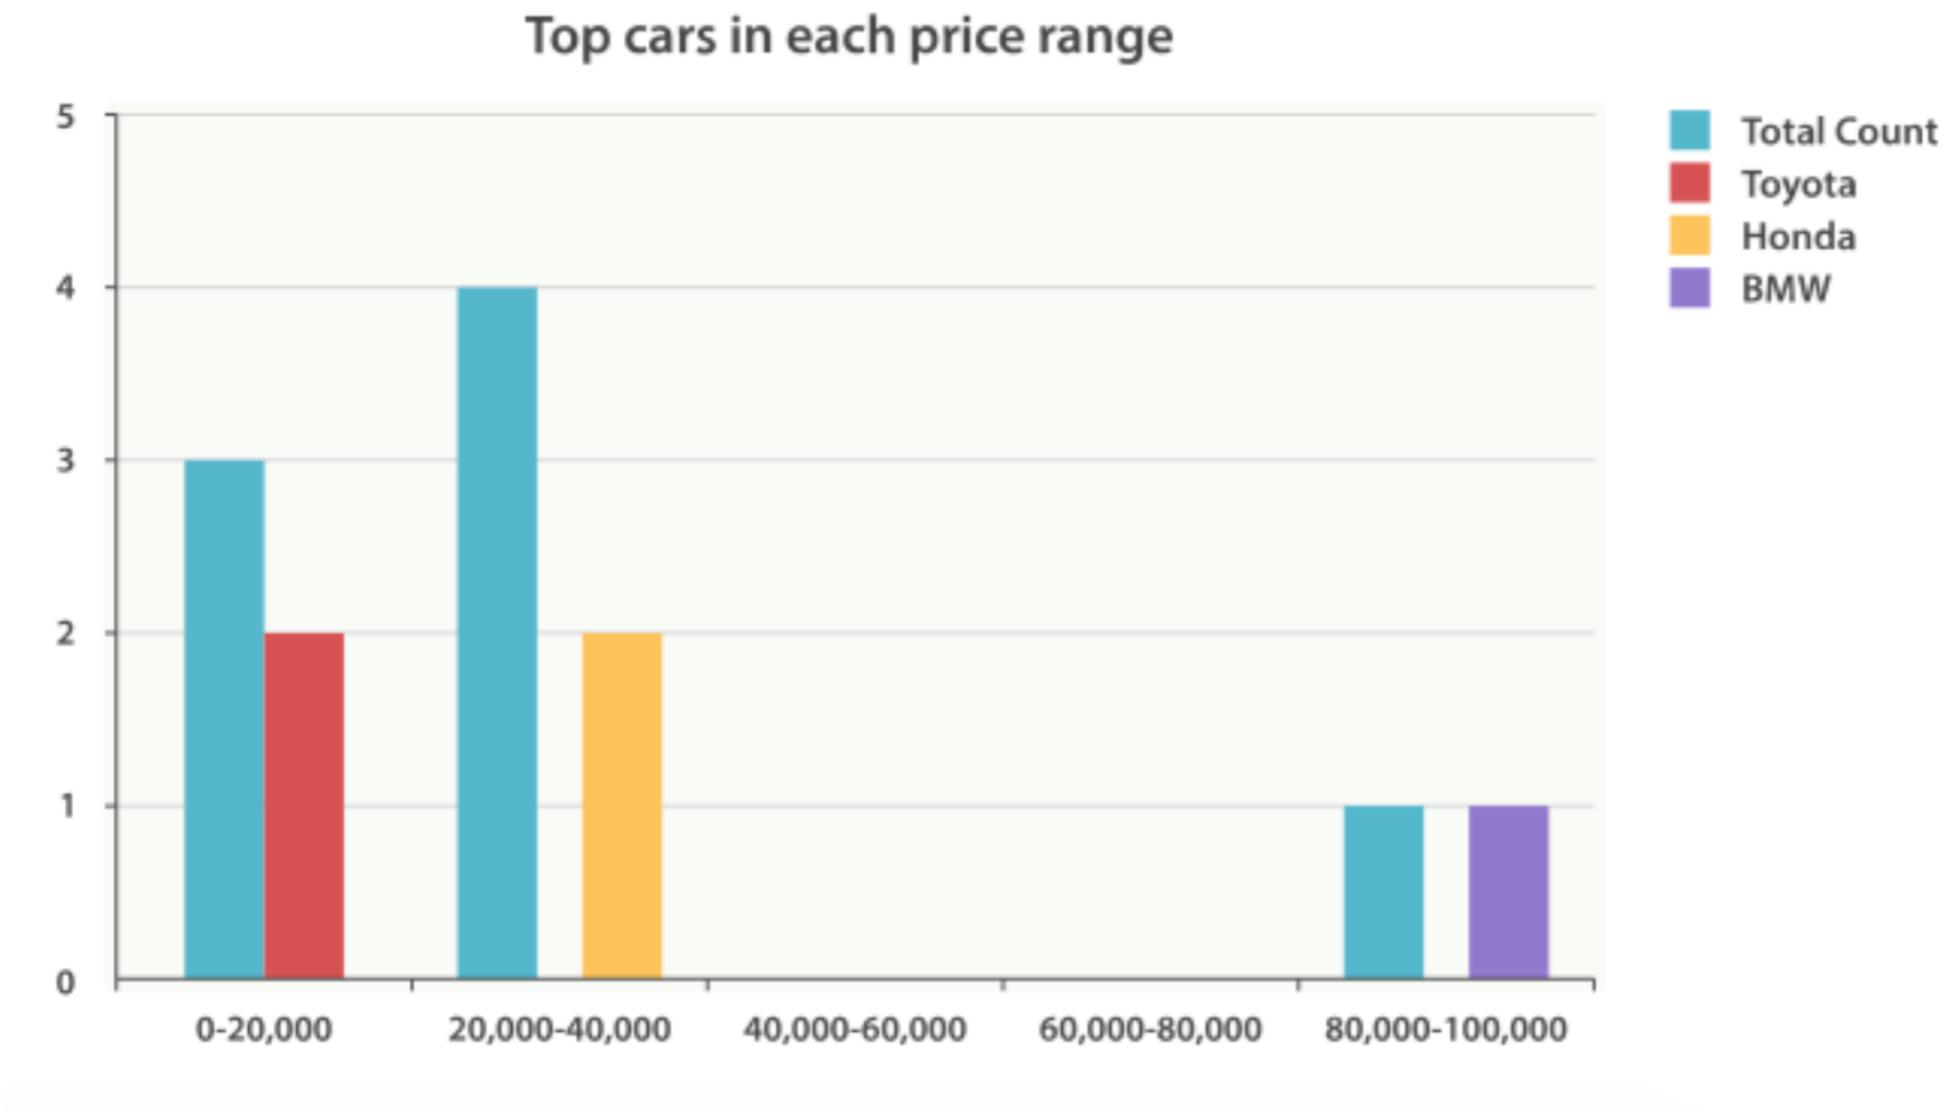

Cars sold over Time ?

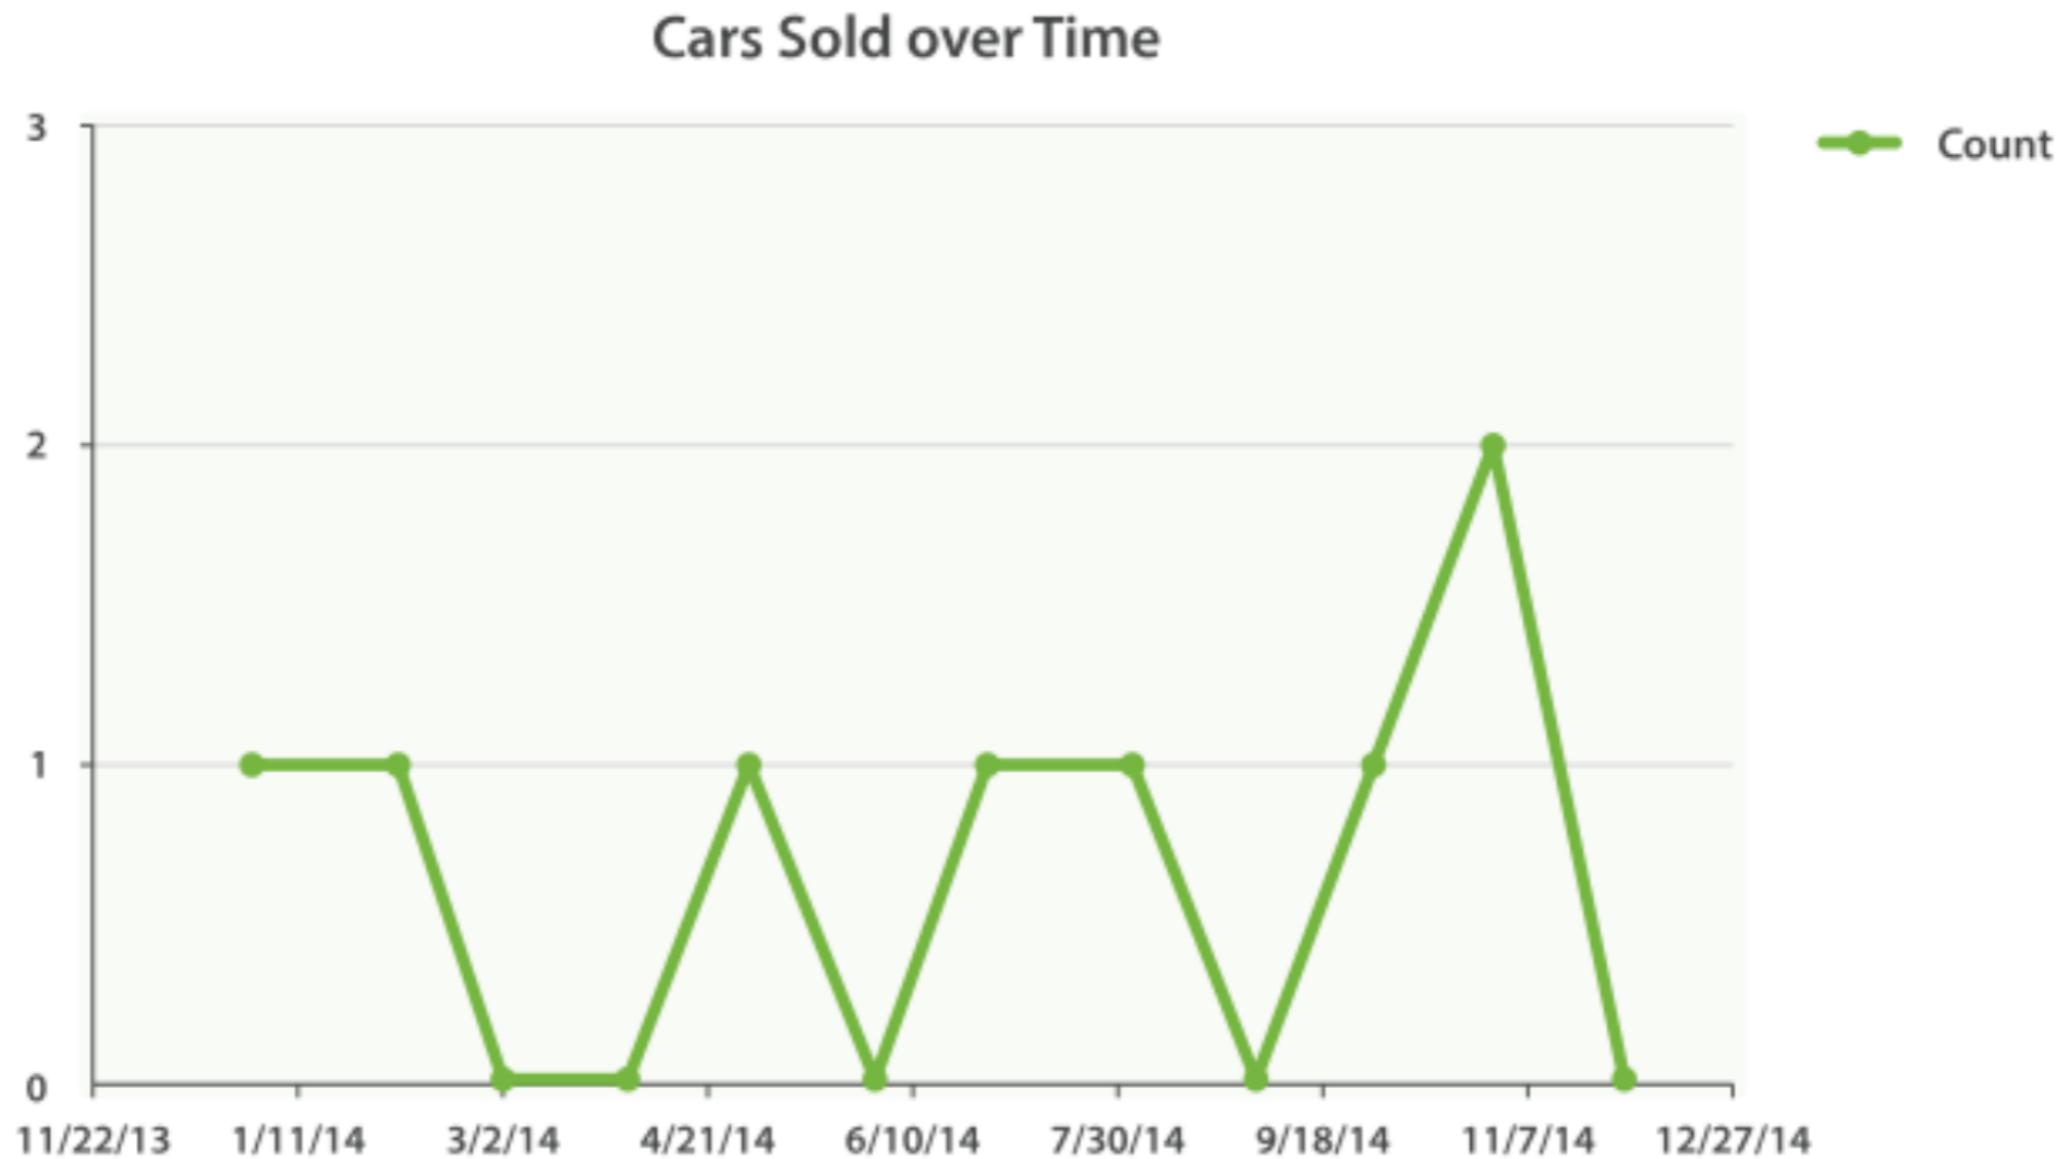

Mapping

<https://www.elastic.co/guide/en/elasticsearch/reference/current/mapping.html>





ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

142

Explicit Mapping

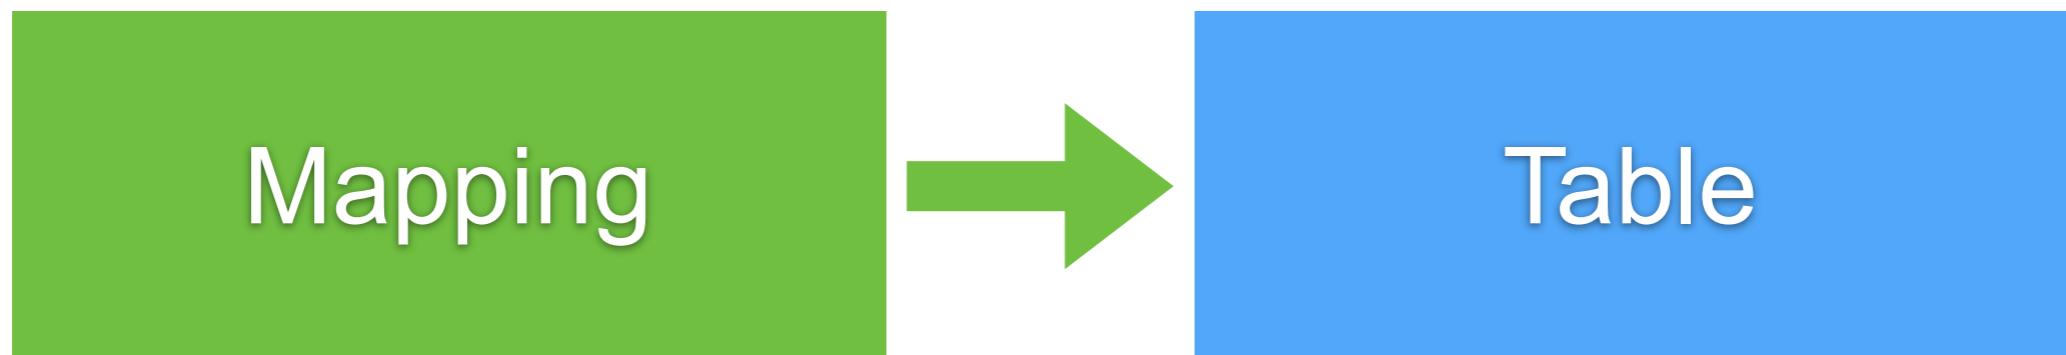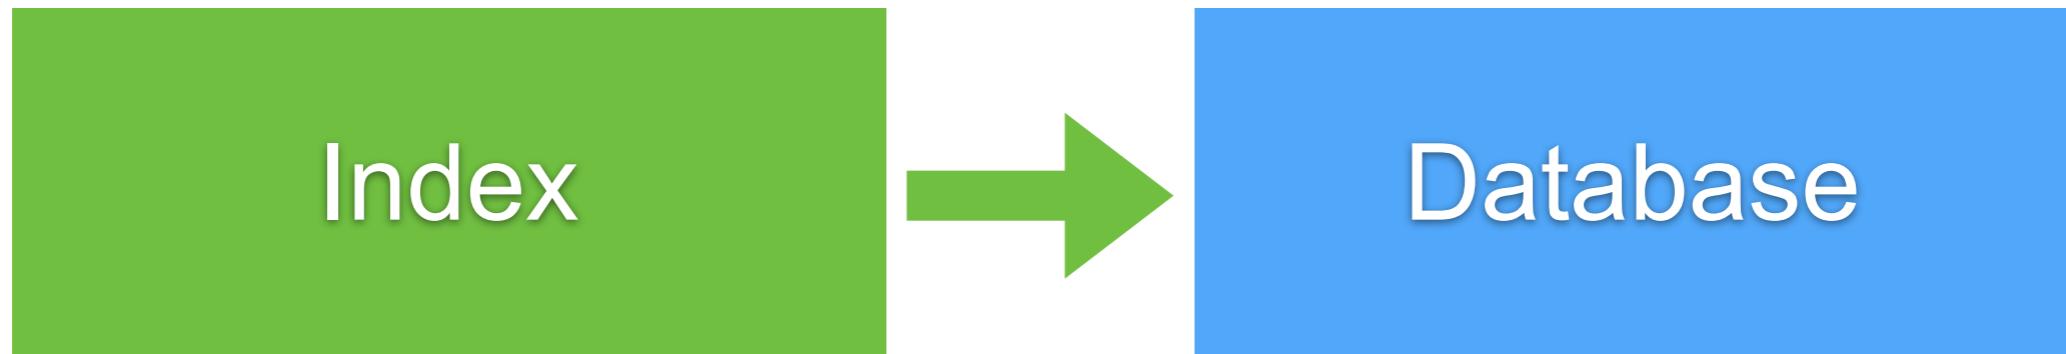

Mapping type

Meta-fields

Field or properties



Meta-field

Metadata of document
`_index, _type, _id, _source`



Field or properties

List of fields or properties of document



Mapping/Schema of document

GET /store/_mapping/book

```
"mappings": {  
    "book": {  
        "properties": {  
            "author name": {  
                "type": "text",  
                "fields": {  
                    "keyword": {  
                        "type": "keyword",  
                        "ignore_above": 256  
                    }  
                }  
            }  
        }  
    }  
}
```



Mapping/Schema of document

GET /store/_mapping/book

```
"mappings": {  
    "book": {  
        "page": {  
            "type": "long"  
        },  
        "price": {  
            "type": "float"  
        },  
        "published_date": {  
            "type": "date"  
        }  
    }  
}
```



Field Datatypes

Core

Complex

Geo

Specialized



Field Datatypes

text	date
keyword	ip
long	boolean
double	completion
geo_point	geo_shape
array	object
nested	binary

<https://www.elastic.co/guide/en/elasticsearch/reference/current/mapping-types.html>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

Field Datatypes

text	date
keyword	ip
long	boolean
double	completion
geo_point	geo_shape
array	object
nested	binary

<https://www.elastic.co/guide/en/elasticsearch/reference/current/mapping-types.html>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

Array

No data type **array** in Elasticsearch

["name", "title"]	array of string
[1, 2, 3]	array of integer
[{"name": "up1", "age": 30}]	array of object



Mapping configuration

Maximum number of fields = 1,000

Maximum depth of fields = 20

Maximum depth of nested fields = 50



Dynamic/Explicit mapping

Fields and mapping types not need to defined before being used



Mapping

Explicit mapping

Quick data insertion

Manual mapping

Better search Results

Increased performance

Concerned of the field types



Custom Mapping in ES 7

Don't specify the type name !!

```
PUT project/_mapping
{
  "properties": {
    "user_id": {
      "type": "keyword"
    },
    "image_name": {
      "type": "keyword"
    }
  }
}
```



Analyzer

07-analyzer

<https://www.elastic.co/guide/en/elasticsearch/reference/current/analysis.html>




ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

Inverted Index

Corpus is a collection of documents

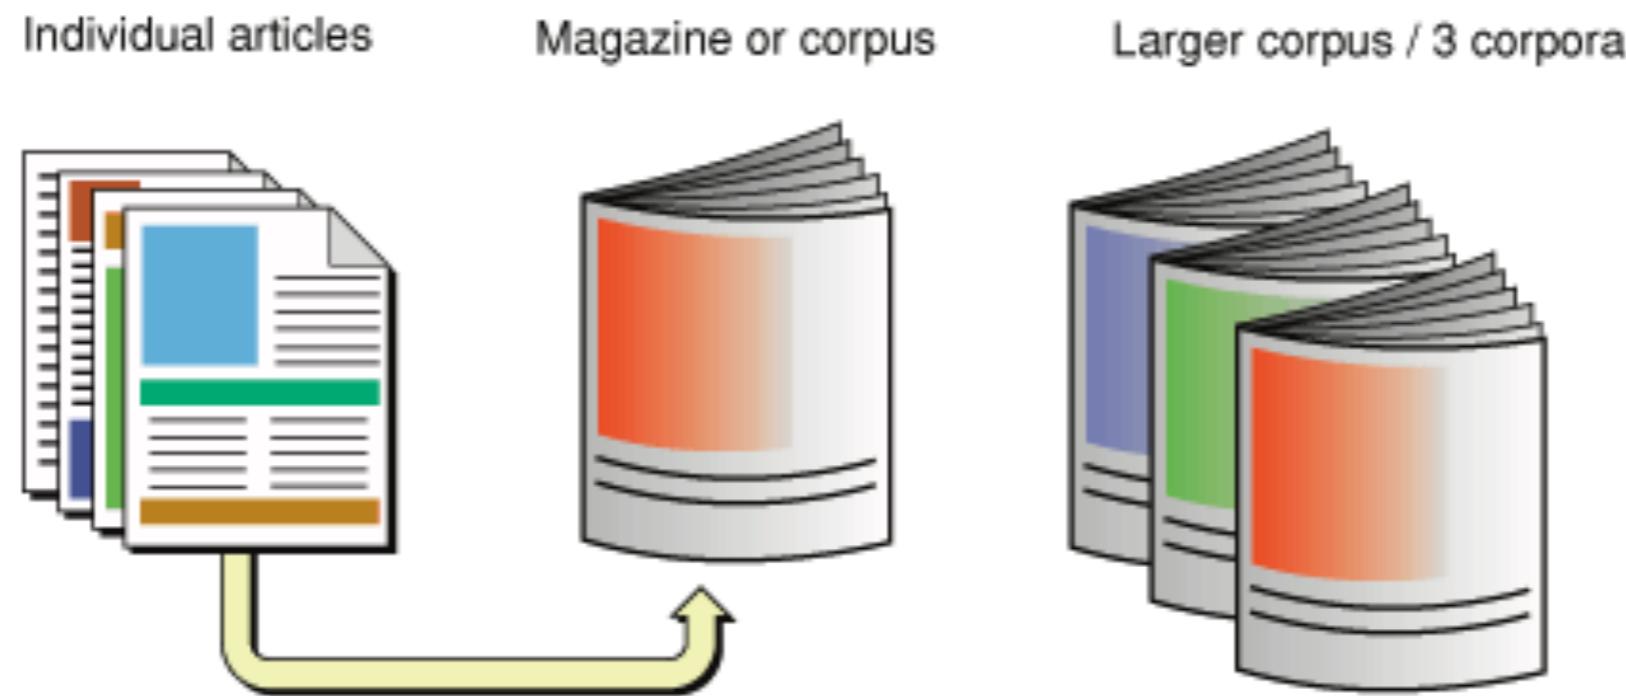

https://developer.apple.com/library/archive/documentation/UserExperience/Conceptual/SearchKitConcepts/searchKit_basics/searchKit_basics.html#/apple_ref/doc/uid/TP40002843-TPXREF101




ELK Stack


© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

Inverted Index

Try to construct index

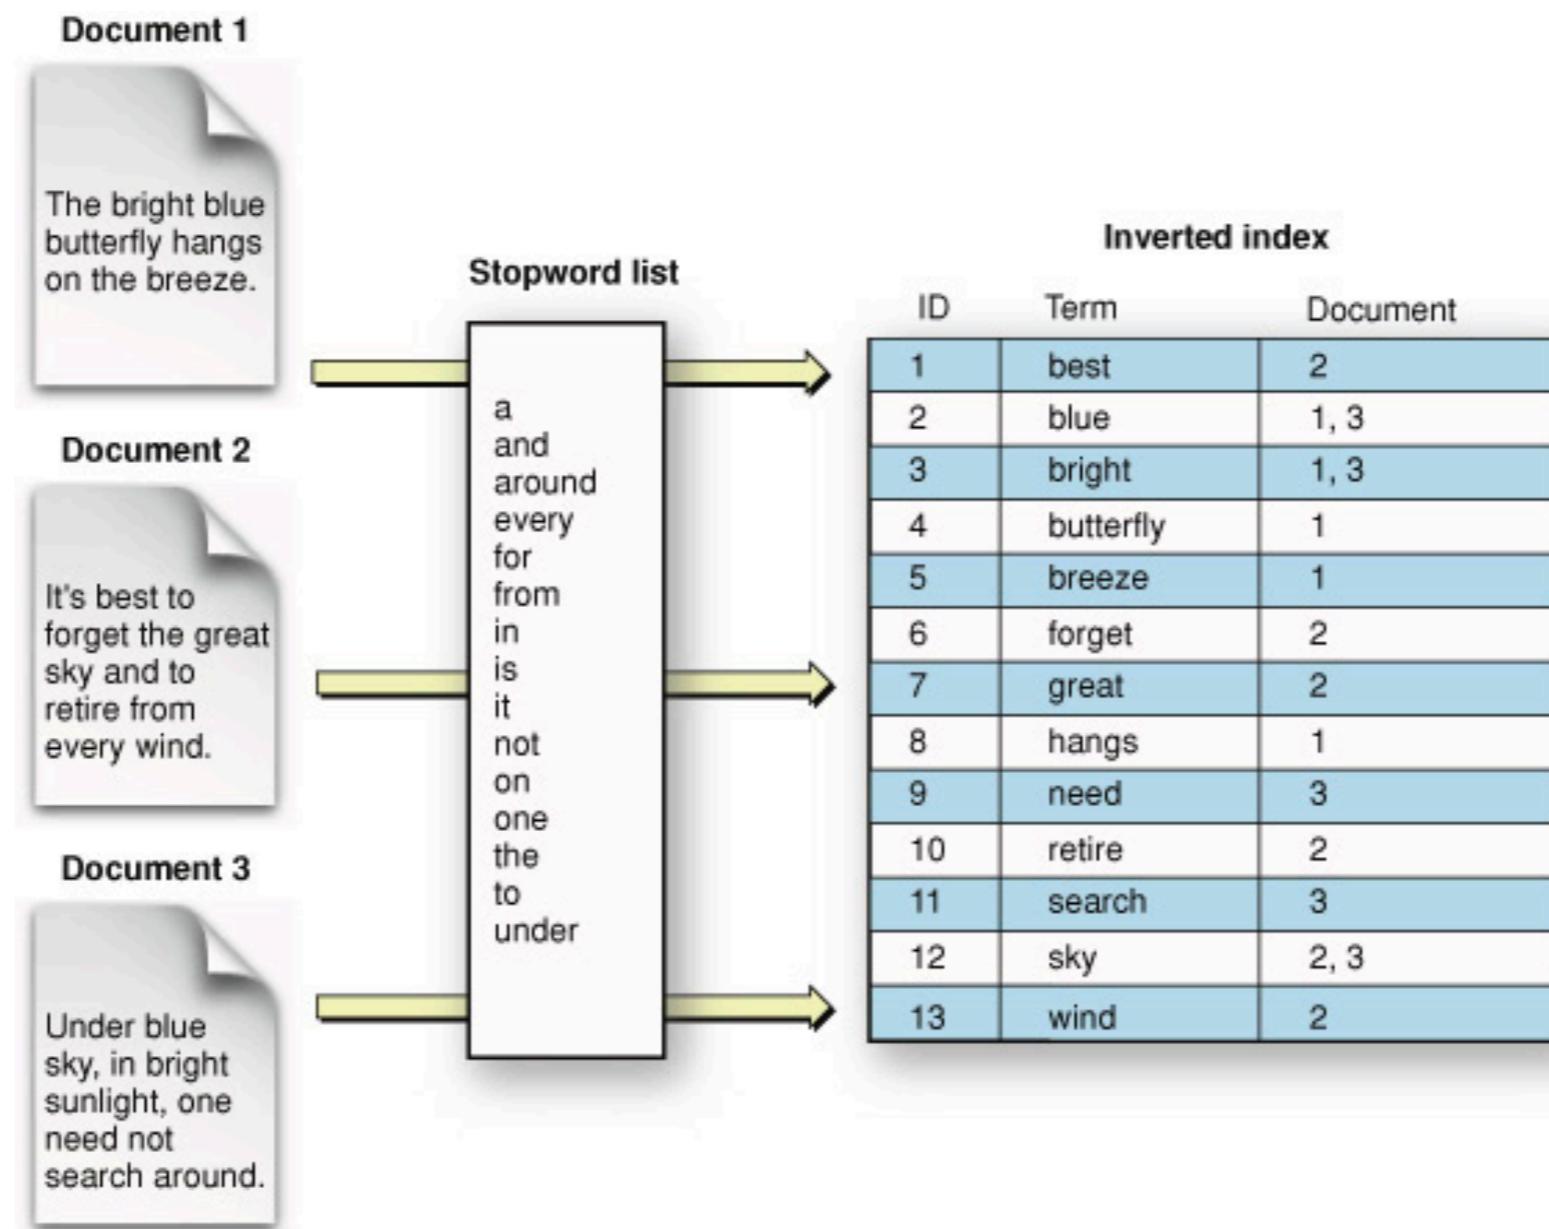

Text extraction

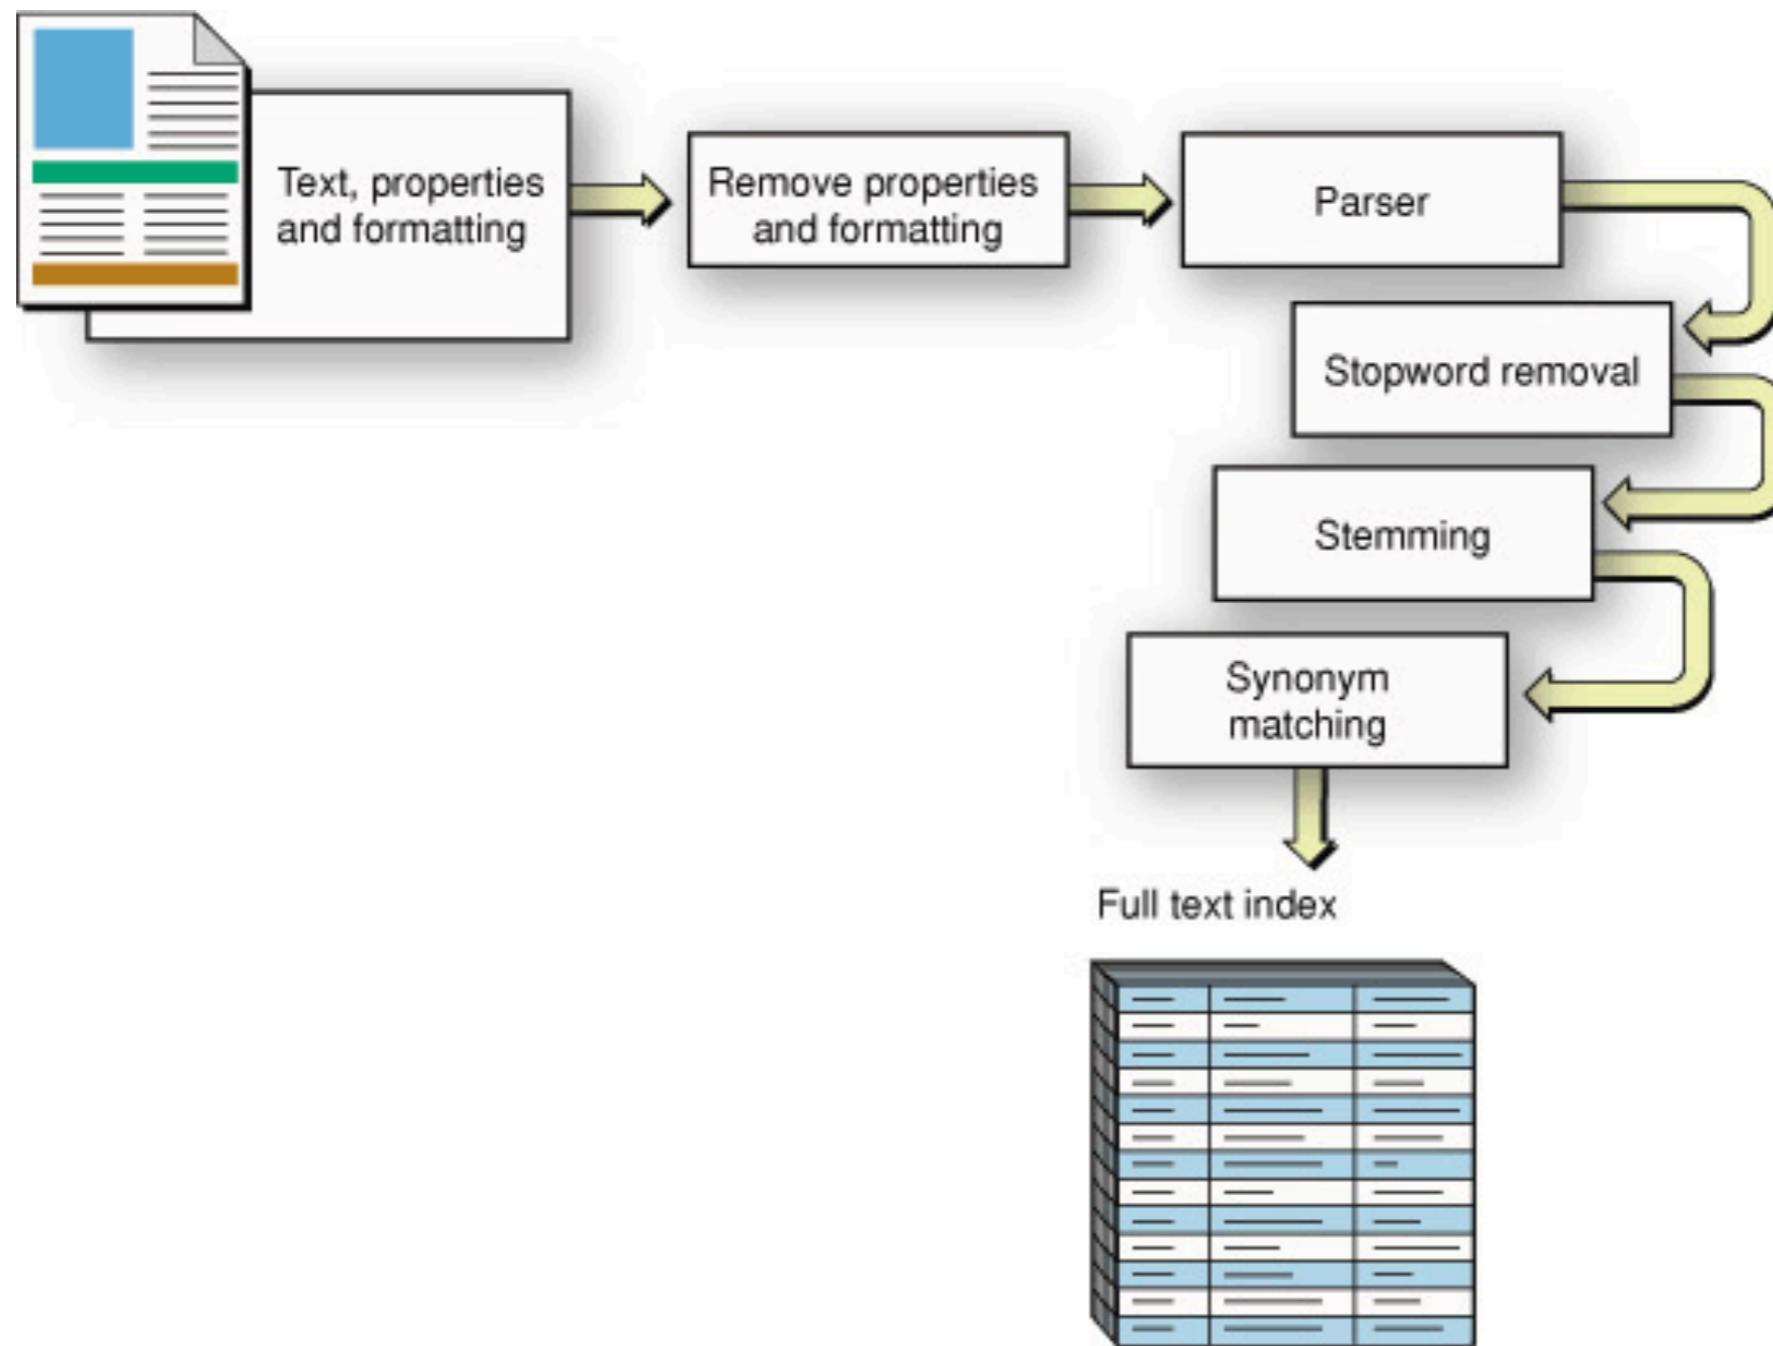

Analyzer in ES

Analyzer
Tokenizer
Filter



Testing analyzer !!

Very important



Testing analyzer !!

```
POST _analyze
{
  "analyzer": "whitespace",
  "text":      "The quick brown fox."
}
```



Default analyzer !!

```
POST _analyze
{
    "text": "The quick brown fox."
}
```



Thai analyzer !!

```
POST _analyze
{
  "analyzer": "thai",
  "text":      "สวัสดีประเทศไทย"
}
```



Tokenizer and filter

```
POST _analyze
{
  "tokenizer": "standard",
  "filter": [ "lowercase", "asciifolding" ],
  "text":      "Is this déjà vu?"
}
```



Analyze by index

```
POST my_index/_analyze
{
  "analyzer": "your_analyzer",
  "text":      "your text"
}
```



Analyze by field

```
POST my_index/_analyze
{
  "field": "my_text",
  "text": "your text"
}
```



Working with Suggester

<https://www.elastic.co/guide/en/elasticsearch/reference/current/search-suggesters.html>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

Suggesters in ES

Term
Phrase
Completion
Context



Basic knowledge

N-gram tokenizer
Edge-ngram tokenizer

<https://www.elastic.co/guide/en/elasticsearch/reference/7.1/analysis-ngram-tokenizer.html>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

N-Gram

Terms as a sequence of n words

search

Unigram	s,e,a,r,c,h
Bigram	se, ea, ar,rc, ch
Trigram	sea, ear, arc, rch
4-gram	sear, earc, arch
5-gram	searc, earch



Workshop

ngram/ngram.json



More tools



Elasticsearch Head

 **ElasticSearch Head**
offered by travistx

★★★★★ (75) | [Developer Tools](#) | 45,312 users

[OVERVIEW](#) | [REVIEWS](#) | [SUPPORT](#) | [RELATED](#)

ElasticSearch http://192.168.7.8:9200/ Connect Rick cluster health: yellow (6, 18)

Overview Browser Structured Query Any Request Info Status Nodes Stats Cluster Nodes Cluster State Cluster Health

Cluster Overview New Index

	cu_docs	bnvil	cu_msg	anvil
Leon	size: 180Gb (540Gb) docs: 995131 (995131)	size: 80kb (480kb) docs: 90 (90)	size: 313Gb (1.56Tb) docs: 10047450 (10140915)	index: close
Pris	Info Actions	Info Actions	Info Actions	Info Actions
Rick	0 1	0 1	0 1 2 3 4	0 1 2 3 4
Rachel	1 2	0 1	0 1 2 3 4	0 1 2 3 4
Zhora	1 2	0 1	0 1 2 3 4	0 1 2 3 4
Roy	0 2	0 1	0 1 2 3 4	0 1 2 3 4
Unassigned	0 0	0 1	0 1 2 3 4	0 1 2 3 4

Compatible with your device

ElasticSearch Head
Chrome Extension containing the excellent Elasticsearch Head application.

[Website](#) | [Report Abuse](#)

Additional Information
Version: 0.1.3
Updated: December 4, 2017
Size: 434KiB
Language: English (United States)



<https://github.com/mobz/elasticsearch-head>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

Elasticsearch Dump



<https://github.com/taskrabbit/elasticsearch-dump>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

Geo Location

08-geo-location/sample_geo.json



Geo Location Type

Geo-point
Geo-shape



Geo-point

Must pre-define in mapping of index

```
PUT /my_map
{
  "mappings": {
    "city": {
      "properties": {
        "name": {
          "type": "text"
        },
        "location": {
          "type": "geo_point"
        }
      }
    }
  }
}
```



Geo-point Format

Geo-point as object

Geo-point as string

Geo-point as array

Geo-point as geohash

<https://www.elastic.co/guide/en/elasticsearch/reference/current/geo-point.html>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

180

Geo-point Format

Type	Format
Object	lat = lon =
String	lat, lon
Array	[lon, lat] ** GeoJSON **

<https://en.wikipedia.org/wiki/GeoJSON>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

Geohash converter

Geohash Converter

Simple and fast conversion from geohash to latitude/longitude and from latitude/longitude to geohash.

GeoHash

Lat, Lng

Precision

<http://geohash.co/>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

Geo-point query

Geo-bounding-box

Geo-distance

Geo-polygon


<https://www.elastic.co/guide/en/elasticsearch/reference/current/geo-queries.html>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

Bounding Box

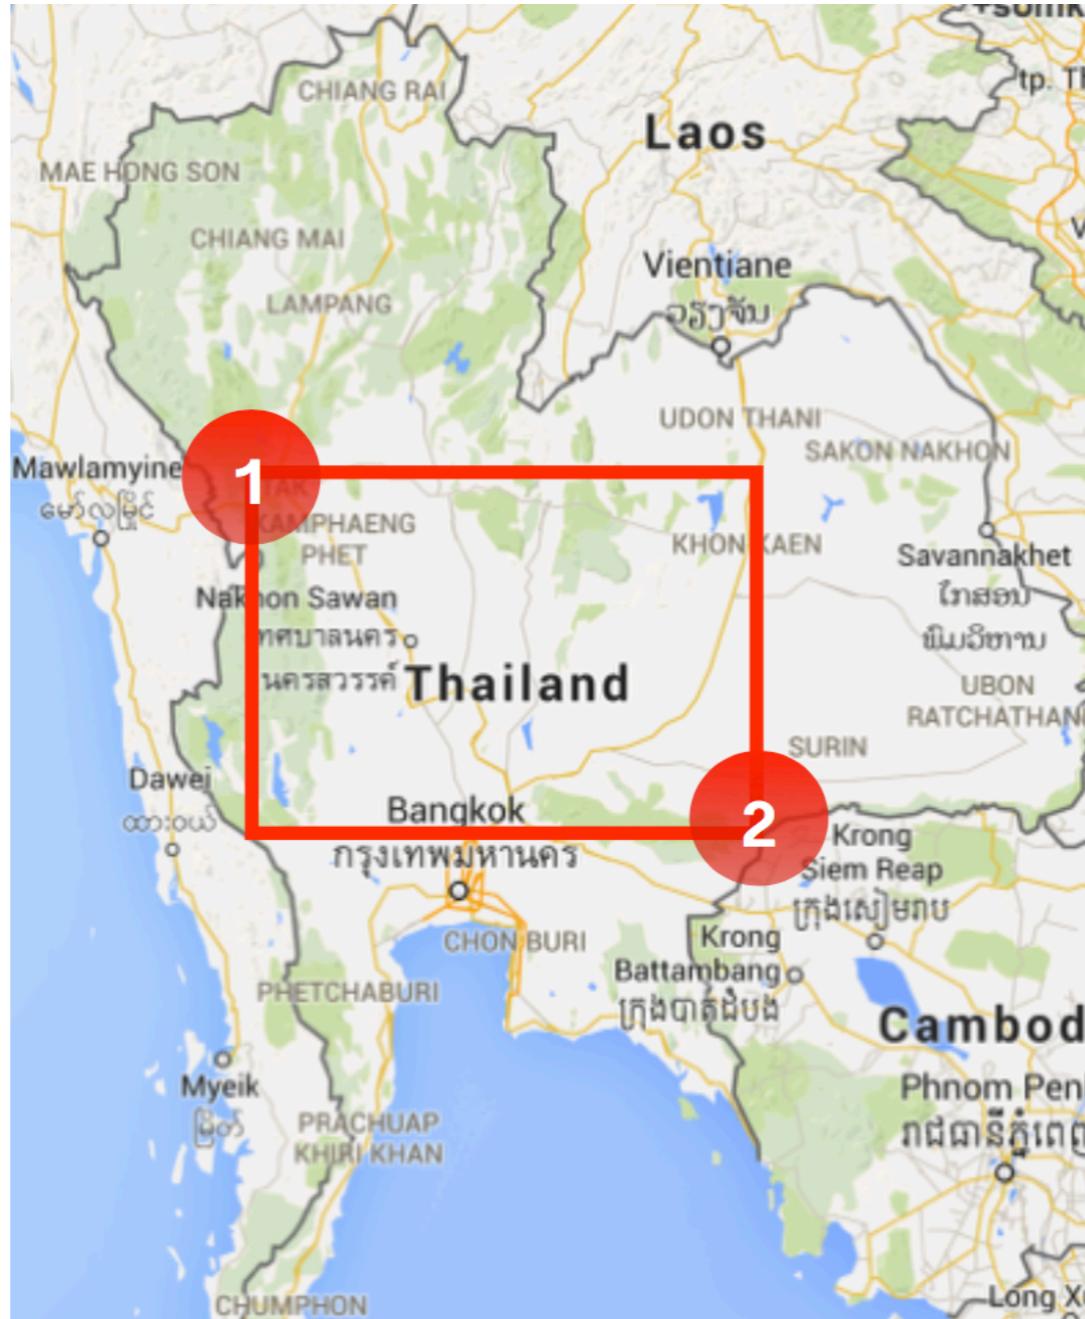

<https://www.elastic.co/guide/en/elasticsearch/reference/current/query-dsl-geo-bounding-box-query.html>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

Geo Distance




<https://www.elastic.co/guide/en/elasticsearch/reference/current/query-dsl-geo-distance-query.html>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

Try to ordering result

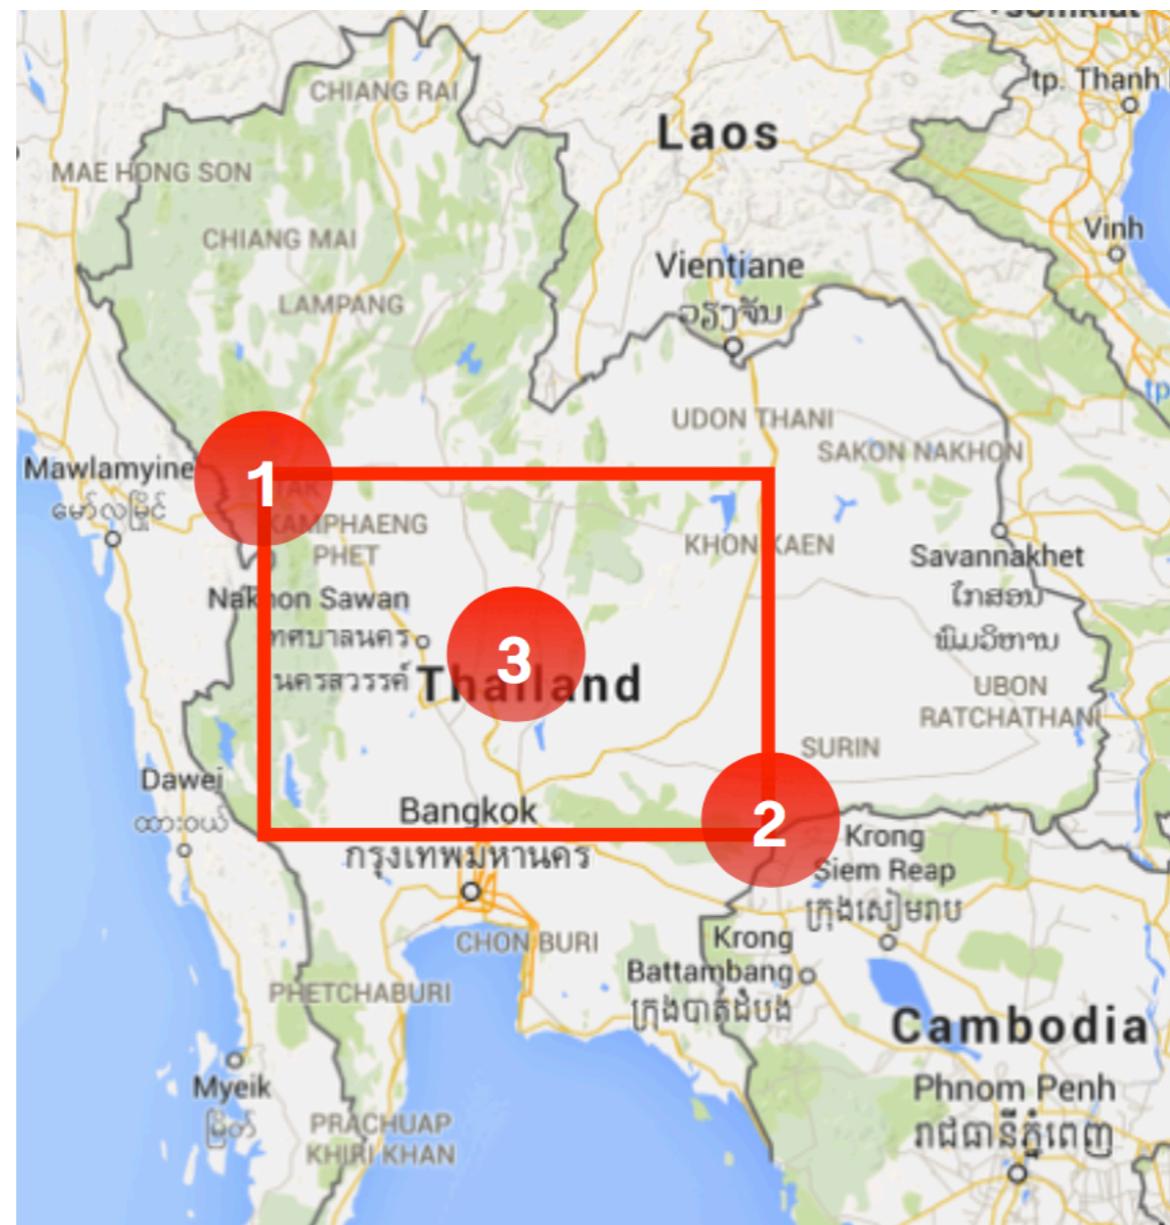

Explain and Profiling your query



2 ways

Explain API
Profile API



Explain API

GET /my_map/_search

```
{  
  "explain": true,  
  "query": {  
    "bool": {
```

<https://www.elastic.co/guide/en/elasticsearch/reference/6.3/search-explain.html>



ELK Stack

© 2017 - 2018 Siam Chamnkit Company Limited. All rights reserved.

Profile API

Debugging tool

Add overhead to search execution

Output is verbose and depend on internal operation

<https://www.elastic.co/guide/en/elasticsearch/reference/6.3/search-profile.html>



Profile API

GET /my_map/_search

```
{  
  "profile": true,  
  "query": {  
    "bool": {
```



Working with Data

<https://www.elastic.co/guide/en/kibana/current/tutorial-load-dataset.html>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

Working with Data

\$elasticsearch-plugin install **ingest-geoip**

<https://www.elastic.co/guide/en/elasticsearch/plugins/current/ingest-geoip.html>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

GeolP with Elasticsearch

geoip/instruction.json





Sample Data

```
{"index":{"_index":"logstash-2015.05.18","_type":"log"}},  
{"@timestamp":"2015-05-18T09:03:25.877Z","ip":"185.124.182.12"},  
{"index":{"_index":"logstash-2015.05.18","_type":"log"}},  
{"@timestamp":"2015-05-18T12:28:25.013Z","ip":"79.1.14.87","e"},  
{"index":{"_index":"logstash-2015.05.18","_type":"log"}},  
{"@timestamp":"2015-05-18T17:44:34.357Z","ip":"178.209.1.7"},  
{"index":{"_index":"logstash-2015.05.18","_type":"log"}},  
{"@timestamp":"2015-05-18T13:04:18.120Z","ip":"118.140.92.127"},  
{"index":{"_index":"logstash-2015.05.18","_type":"log"}},  
{"@timestamp":"2015-05-18T11:37:40.653Z","ip":"235.154.34.221"},  
{"index":{"_index":"logstash-2015.05.18","_type":"log"}},  
{"@timestamp":"2015-05-18T08:46:07.025Z","ip":"228.216.38.41"}
```



Working with Ingest

Pre-process document before actual indexing

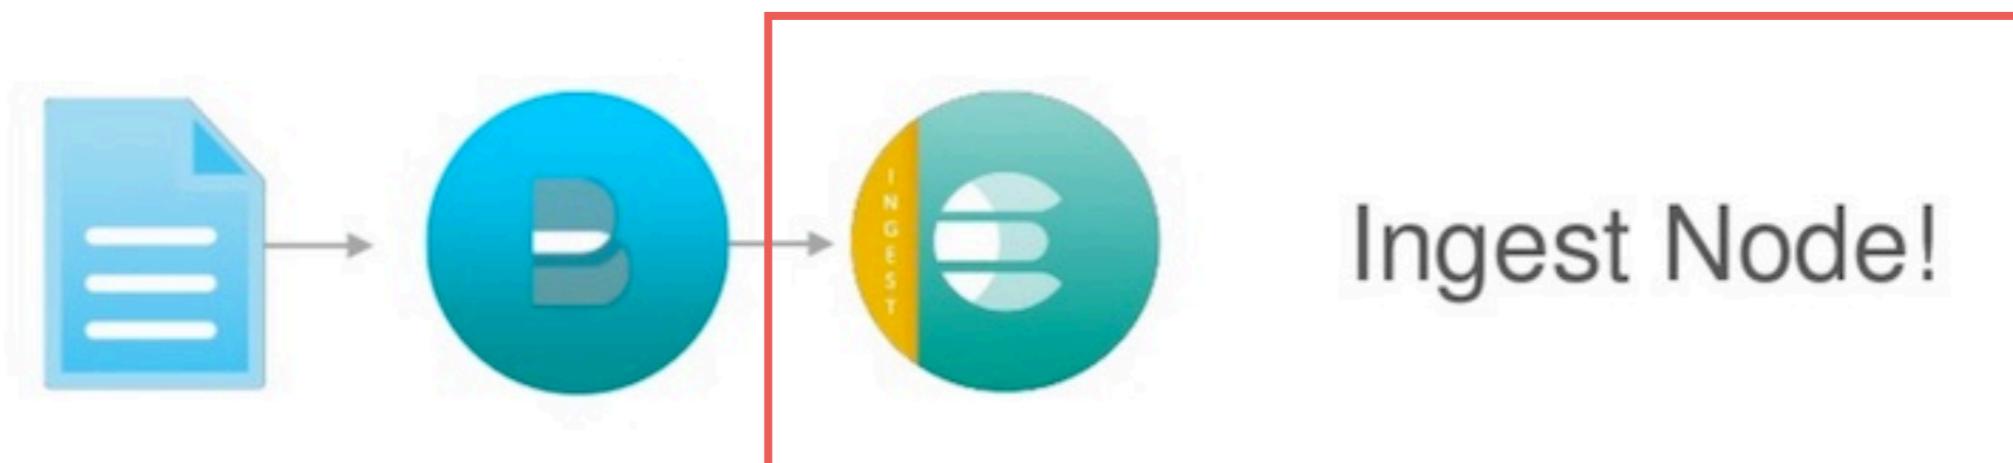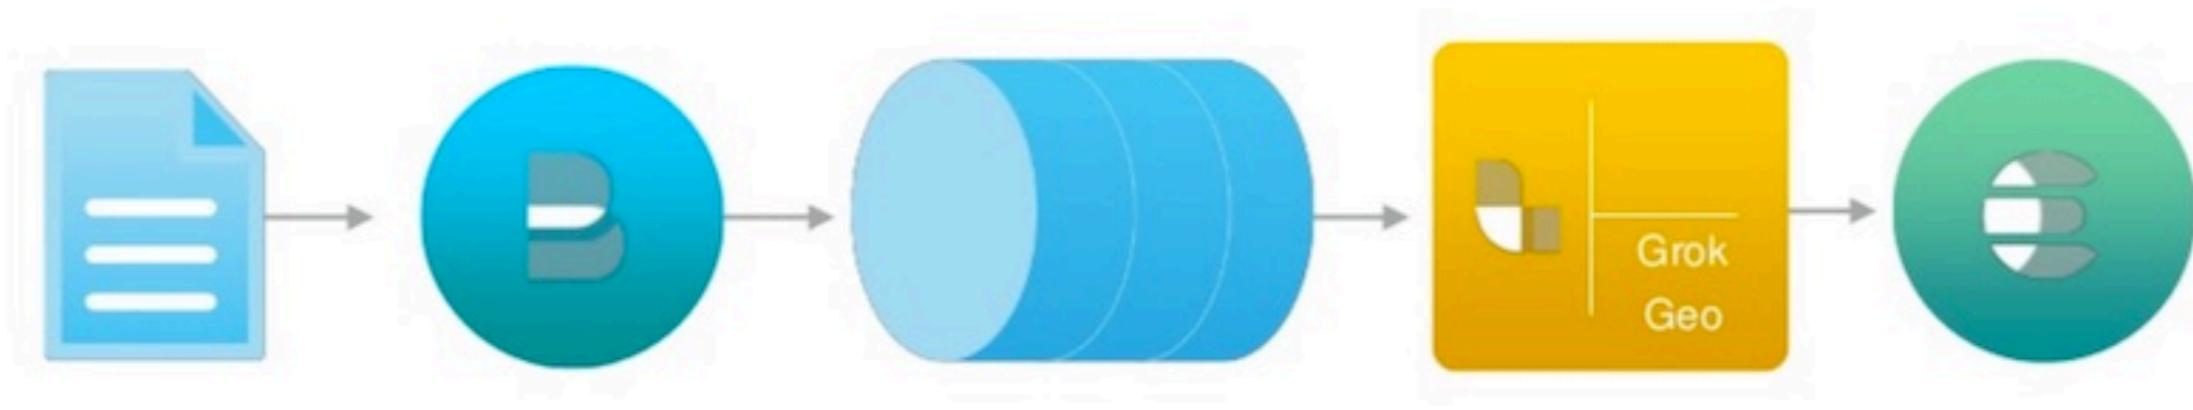

<https://www.elastic.co/guide/en/elasticsearch/reference/current/ingest.html>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

Install plugin

```
$elasticsearch-plugin install ingest-geoip
```

<https://www.elastic.co/guide/en/elasticsearch/plugins/current/ingest-geoip.html>



Alias Index



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

198

Alias Index

TODO

TODO

TODO


<https://www.elastic.co/guide/en/elasticsearch/reference/current/indices-aliases.html>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.


ELK stack

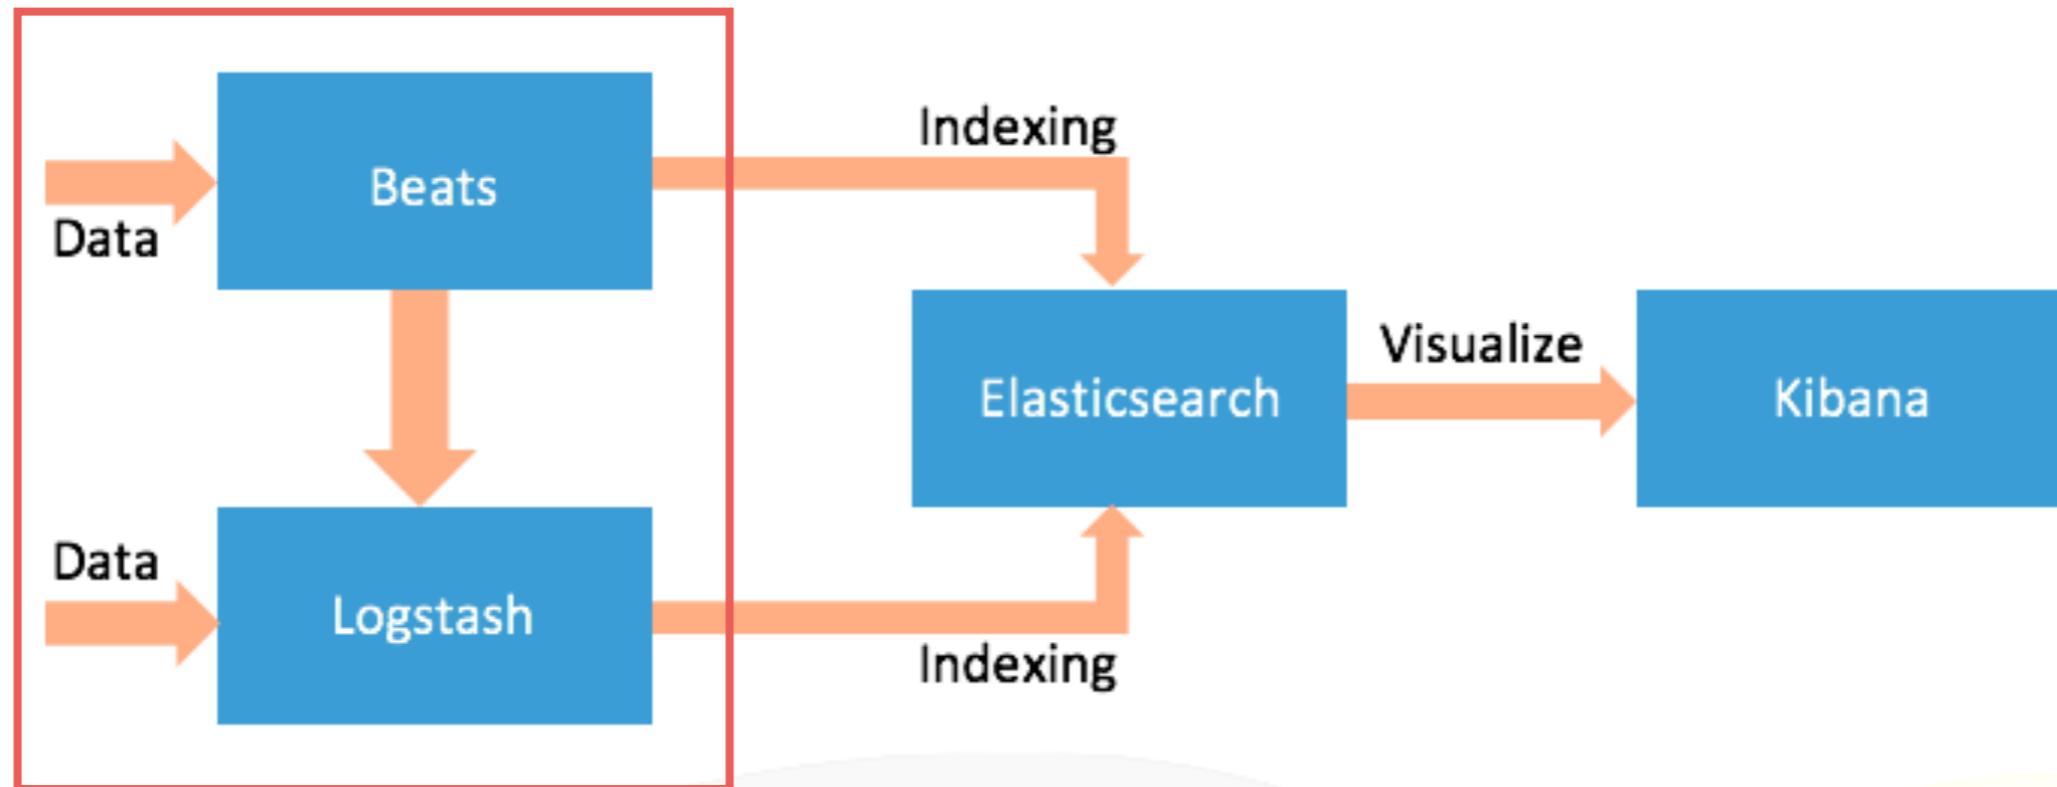

fluentd



EFK stack

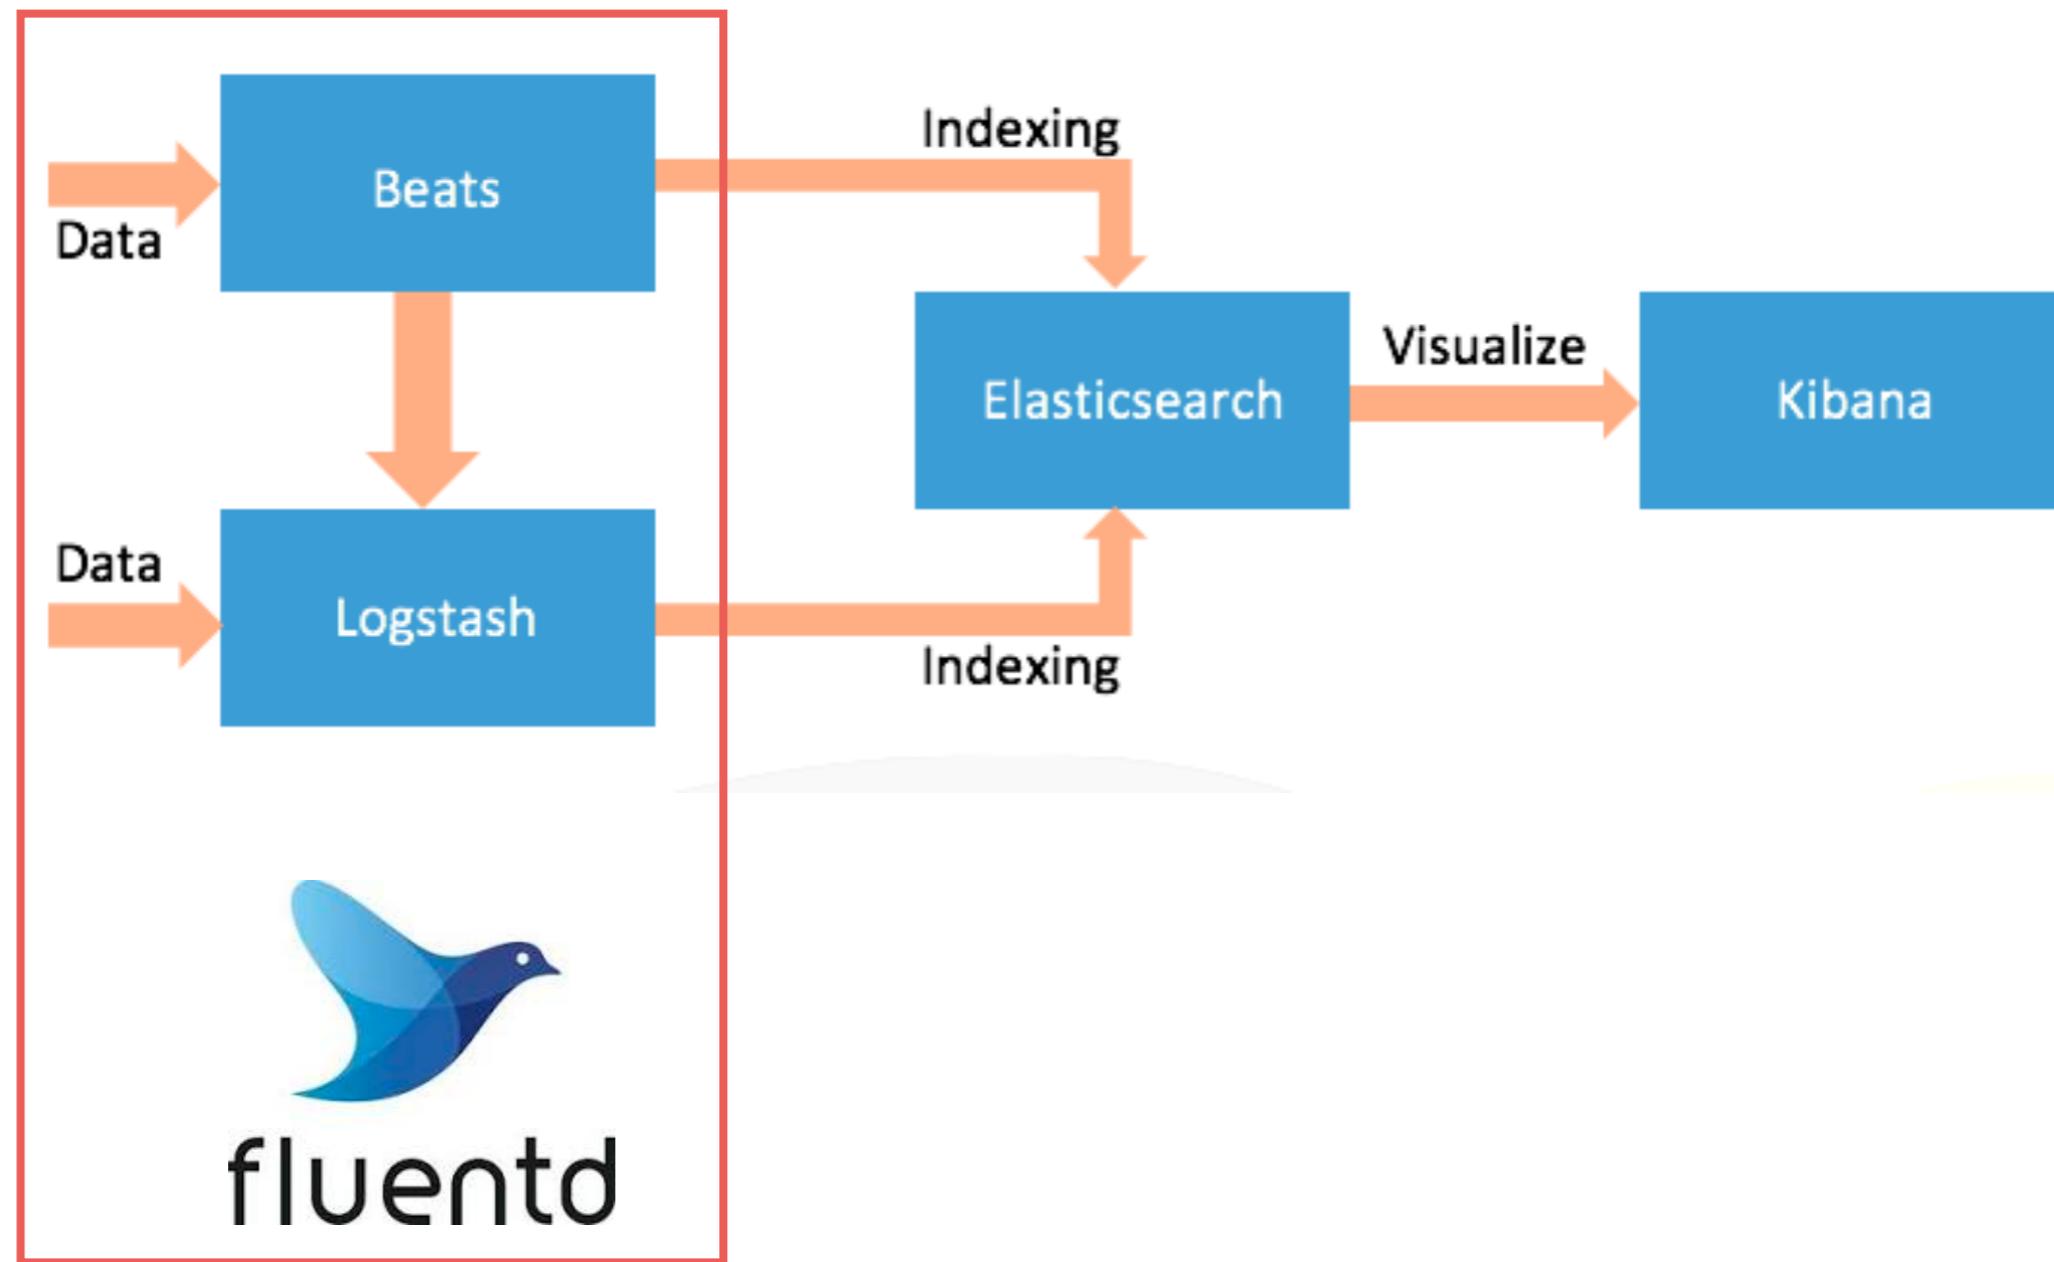

Working with Logstash

<https://www.elastic.co/guide/en/logstash/current/index.html>



ELK Stack


© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

202

Logstash



Logstash

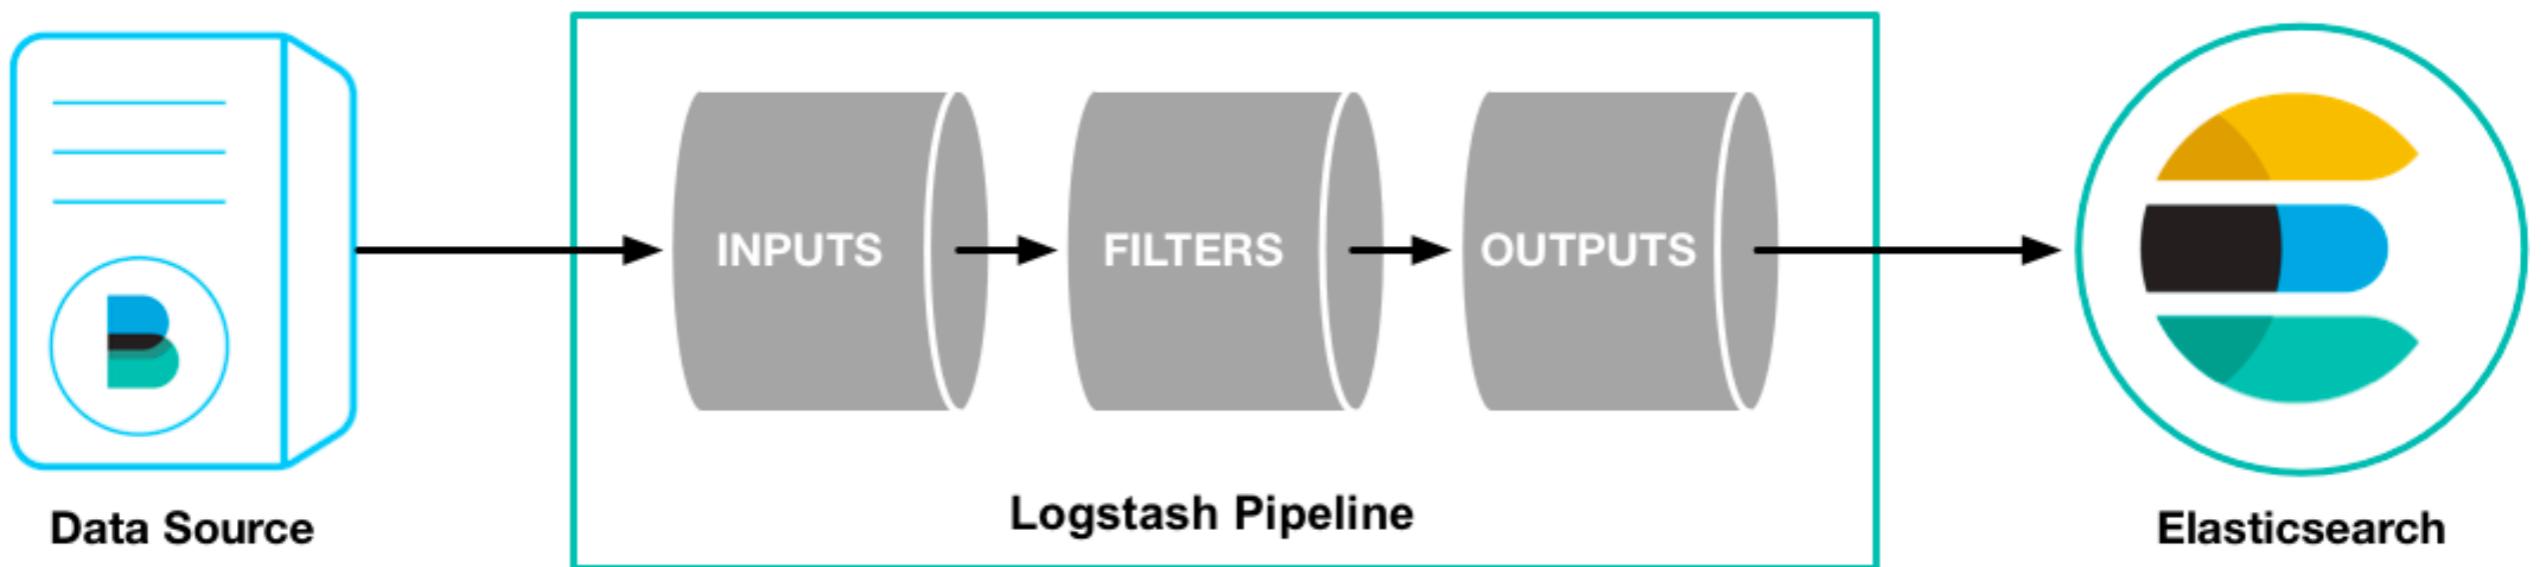

Example



sample.conf

```
input {  
    stdin{  
}  
  
output {  
    stdout {  
        codec => rubydebug  
    }  
}
```




Example

\$logstash -f sample.conf

```
hello world
{
    "message" => "hello world",
    "@timestamp" => 2019-06-20T06:01:30.048Z,
    "@version" => "1",
    "host" => "Somkiats-MacBook-Pro"
}
```



Change output to ES

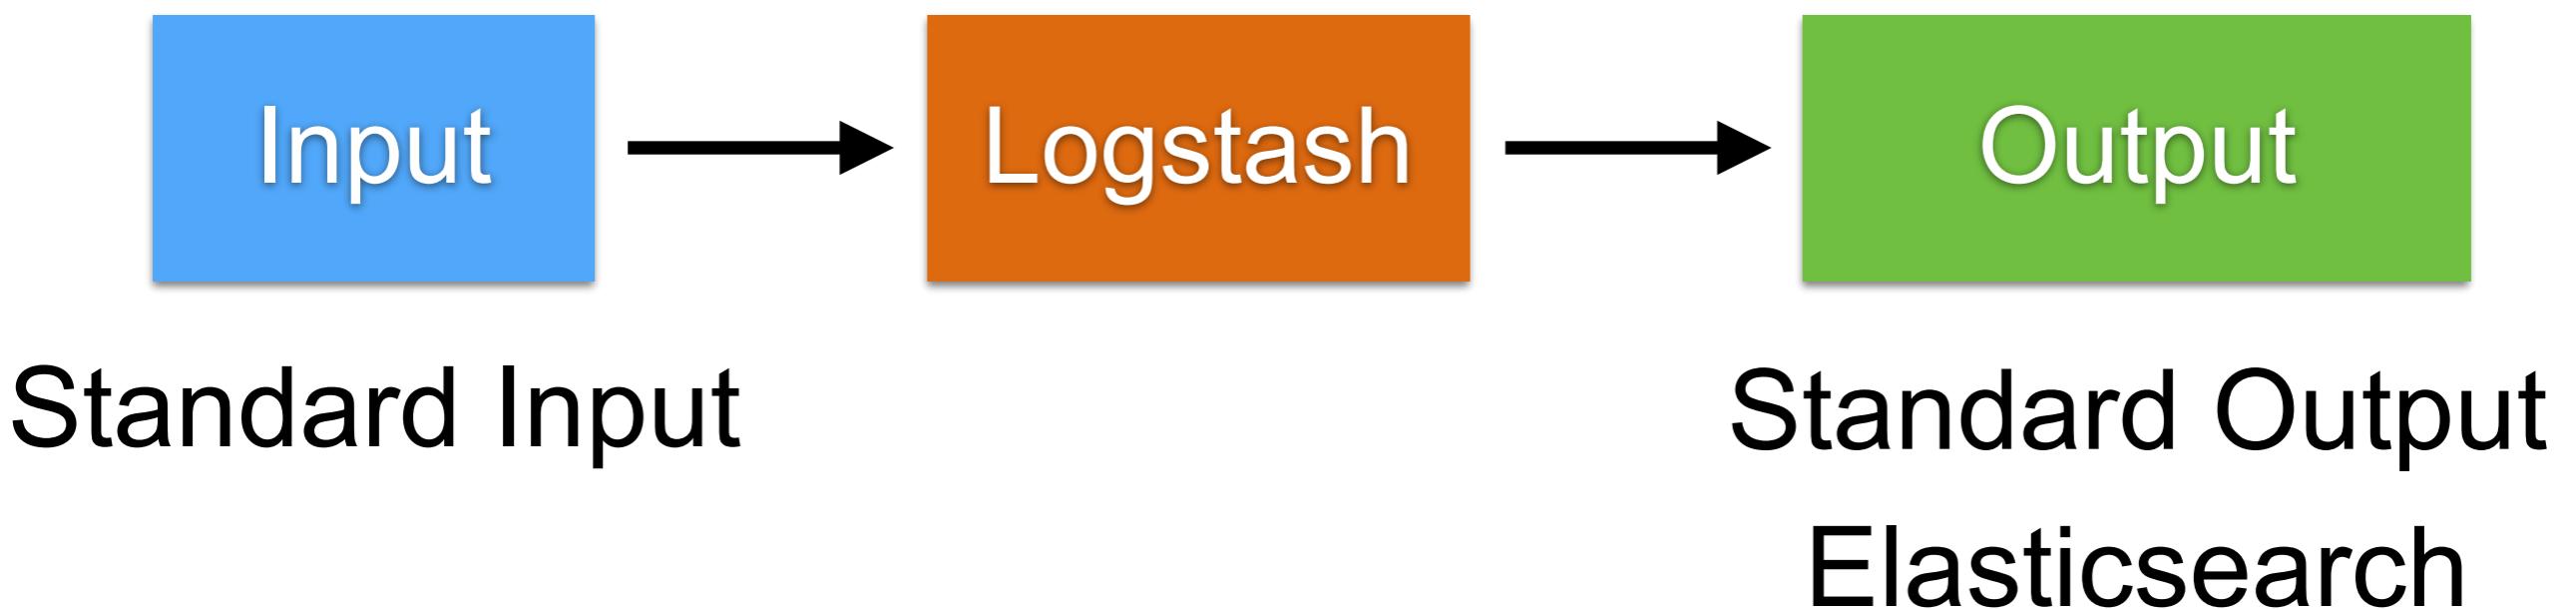

<https://www.elastic.co/guide/en/logstash/current/plugins-outputs-elasticsearch.html>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

sample.conf

```
input {  
    stdin{  
}  
  
output {  
    stdout {  
        codec => rubydebug  
}  
  
    elasticsearch {  
}  
}
```



Working with Filter



<https://www.elastic.co/guide/en/logstash/current/filter-plugins.html>



sample.conf

```
input {
    stdin{}
}

filter {
    grok {
        match => { "message" => "%{WORD:firstname} %
{WORD:lastname}" }
    }
}

output {
    stdout {
        codec => rubydebug
    }
}
```



Workshop



File system

Standard Output

Elasticsearch

`workshop/logstash-beat-fluentd/demo.conf`



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

try.conf

```
input {  
    stdin{}  
}  
  
output {  
    stdout {  
        codec => rubydebug  
    }  
  
    elasticsearch {  
    }  
}
```



Design your input first !!



Use beats is better

<https://www.elastic.co/products/beats>




ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

215

Beat

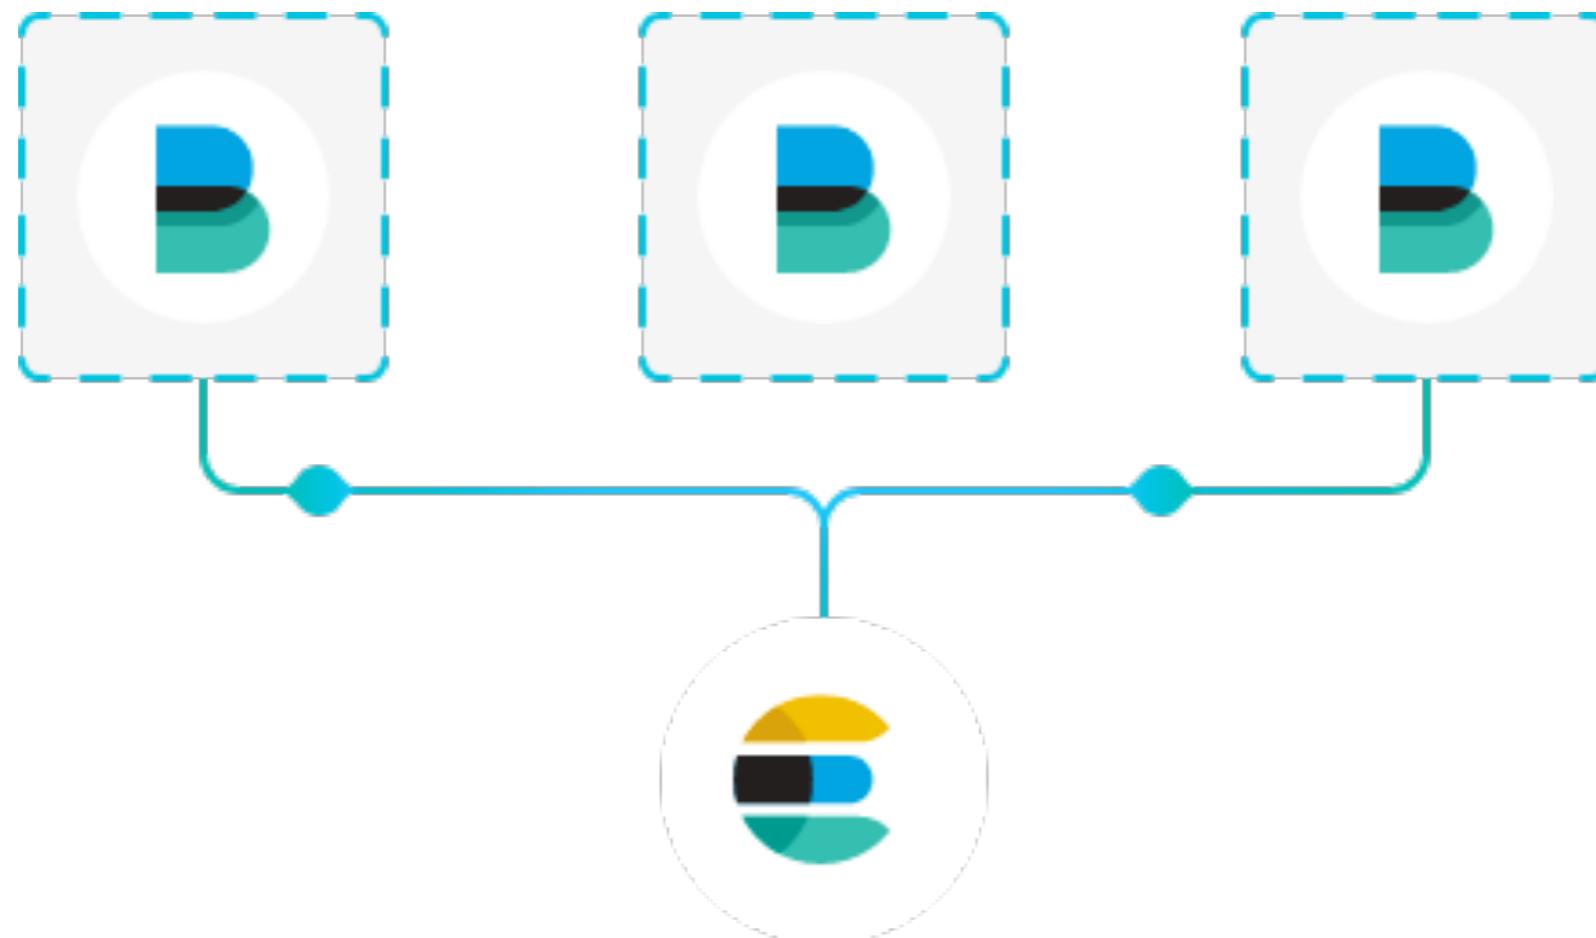


<https://www.elastic.co/guide/en/beats/filebeat/current/index.html>



ELK Stack

© 2017 - 2018 Siam Chamnkit Company Limited. All rights reserved.


Beat

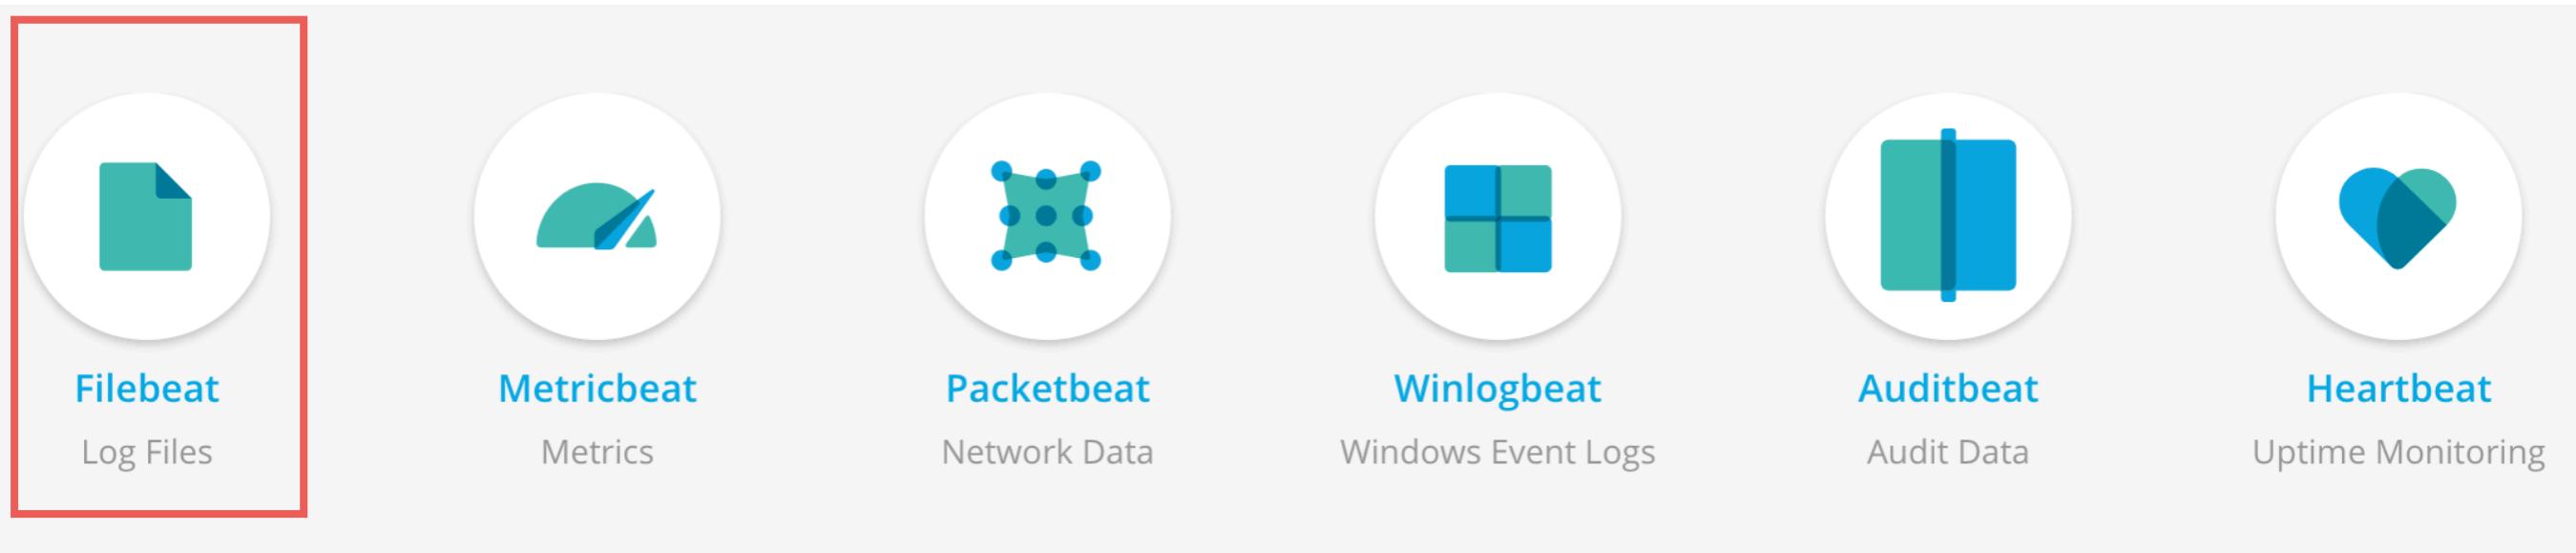

ELK Stack


© 2017 - 2018 Siam Chamnkit Company Limited. All rights reserved.

Example of filebeat

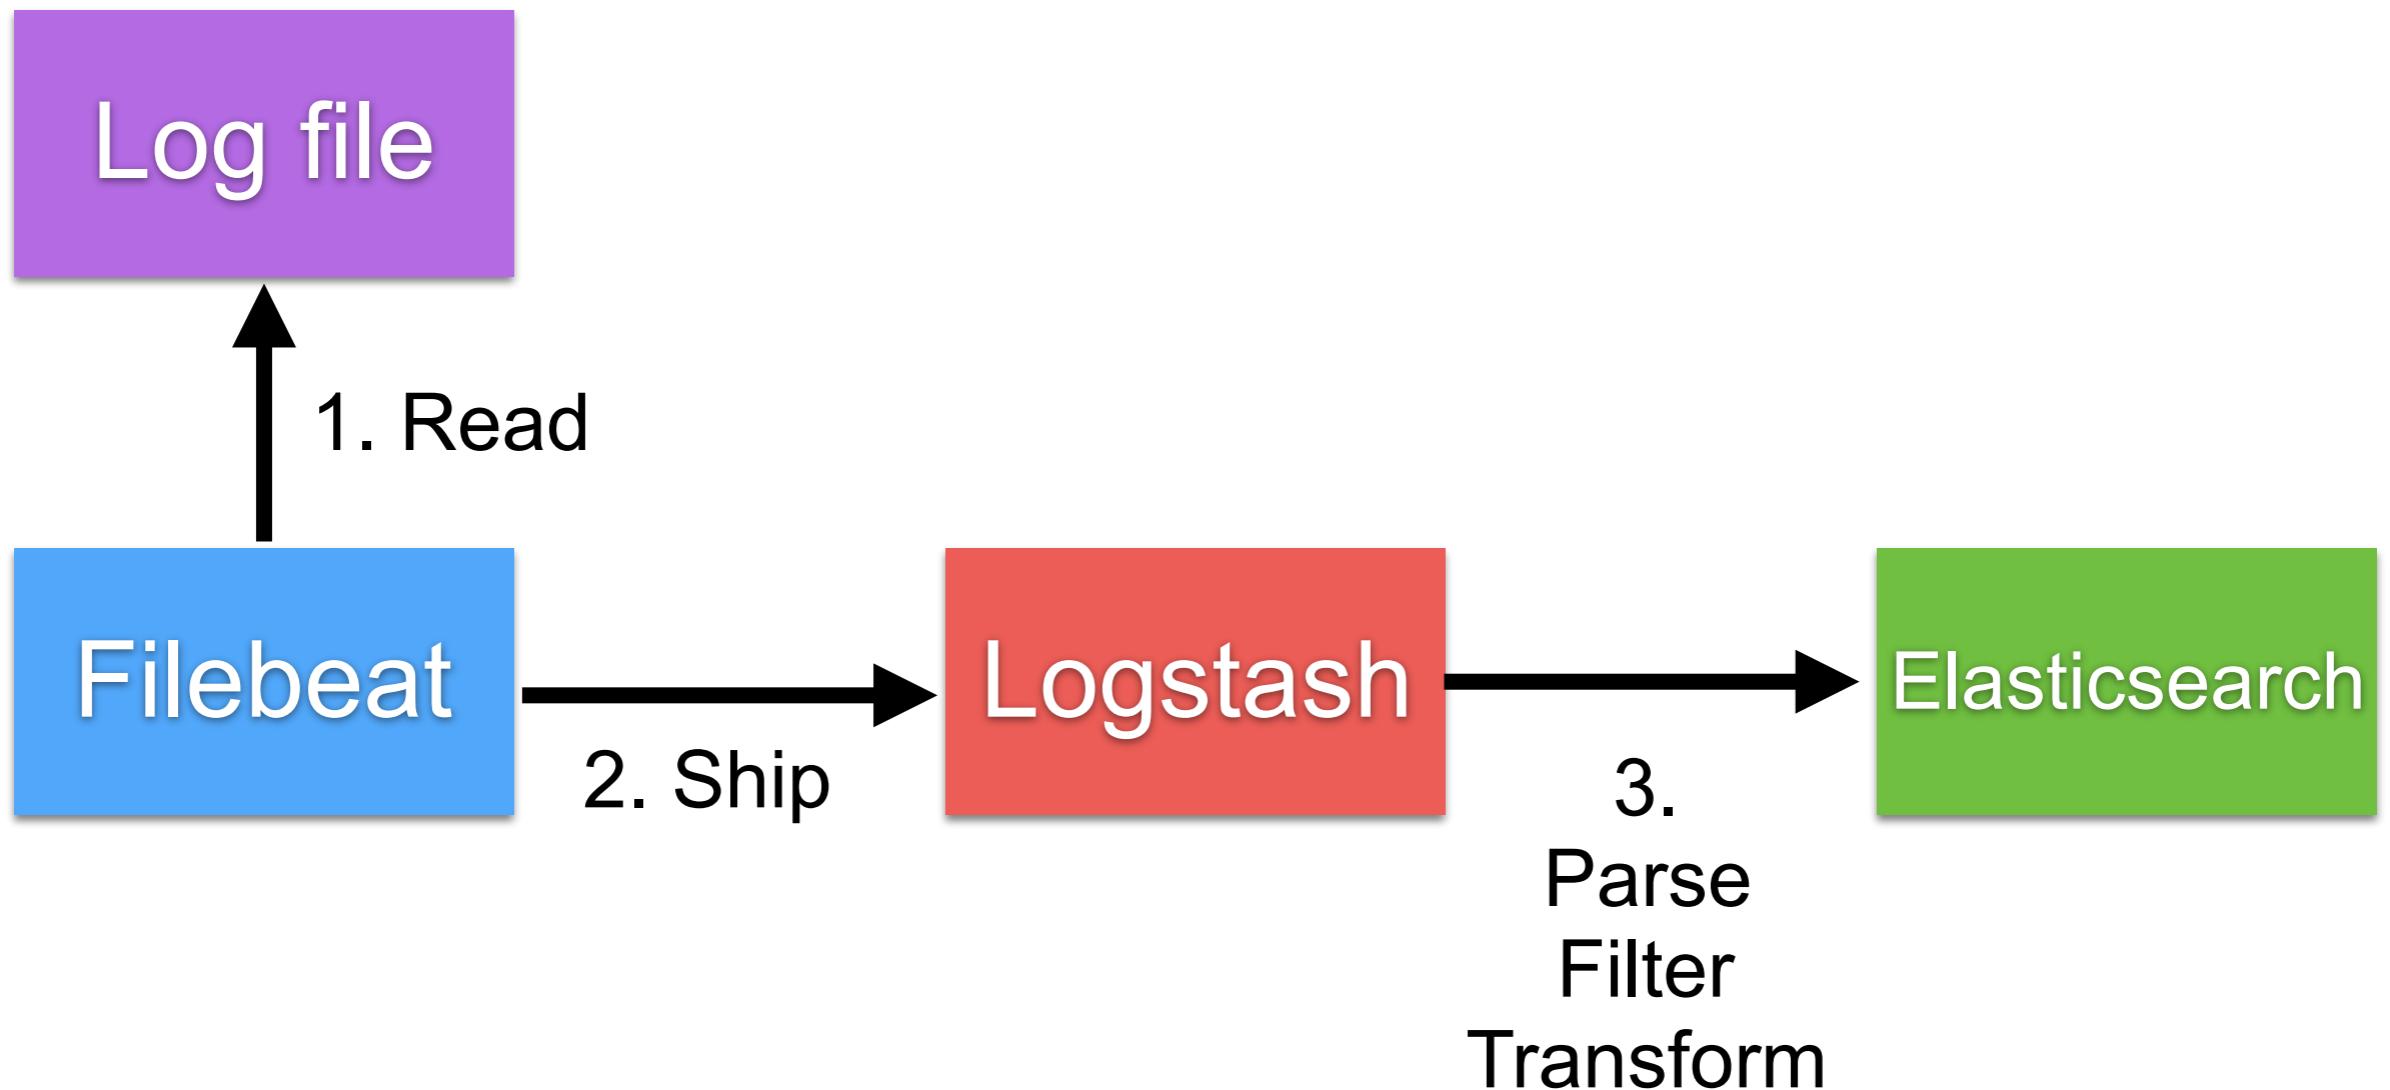


Example of filebeat

Server A

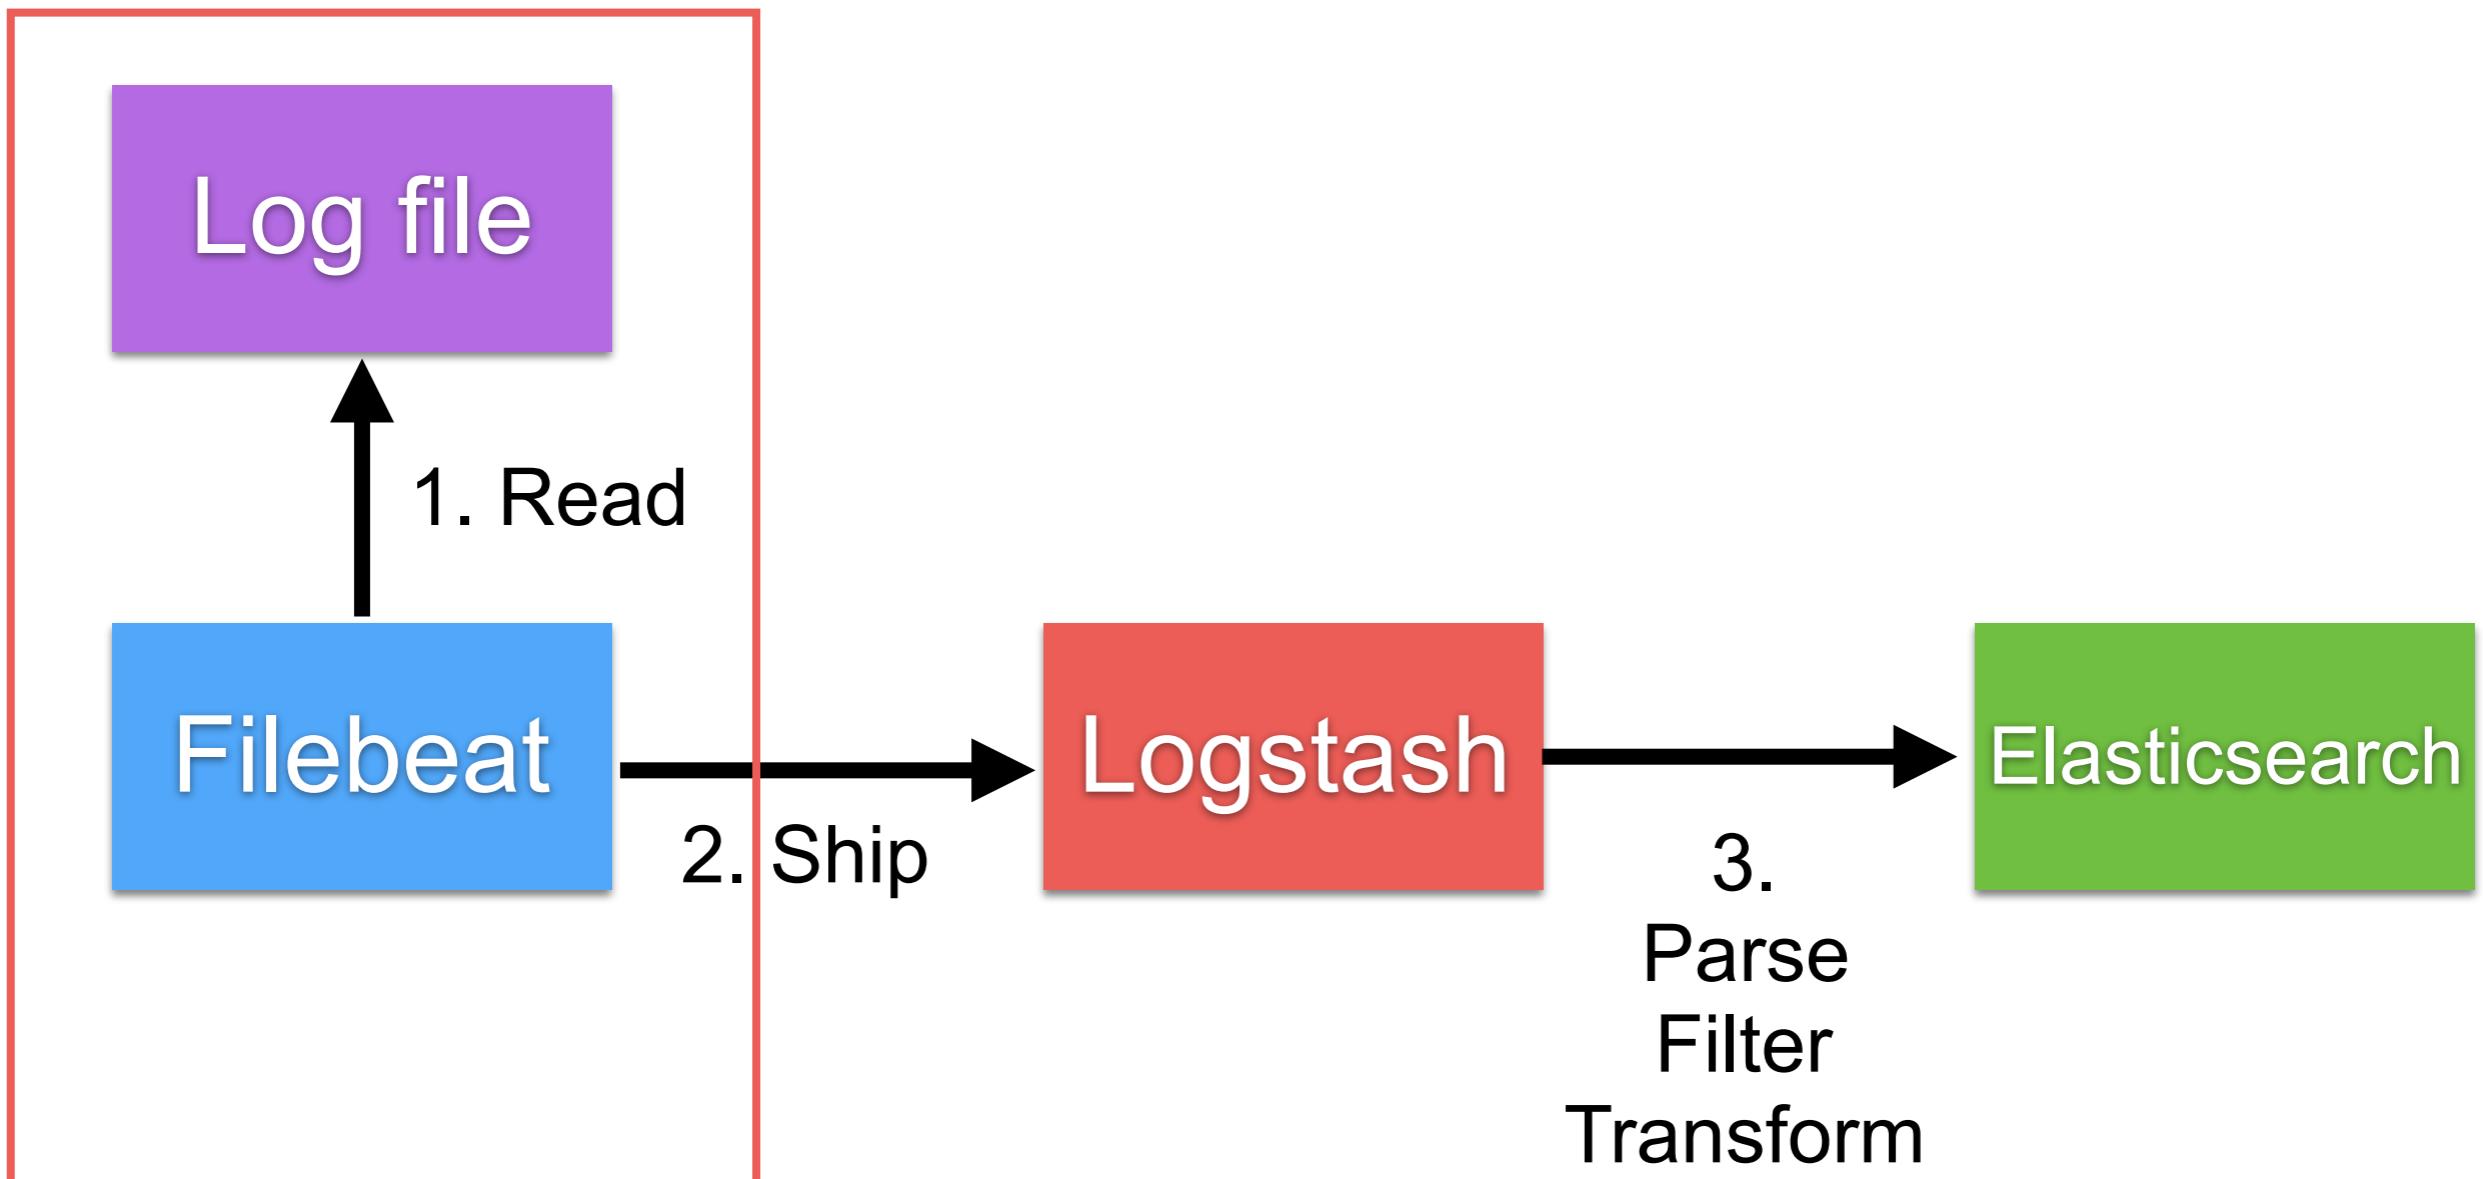


Example of filebeat


Server A

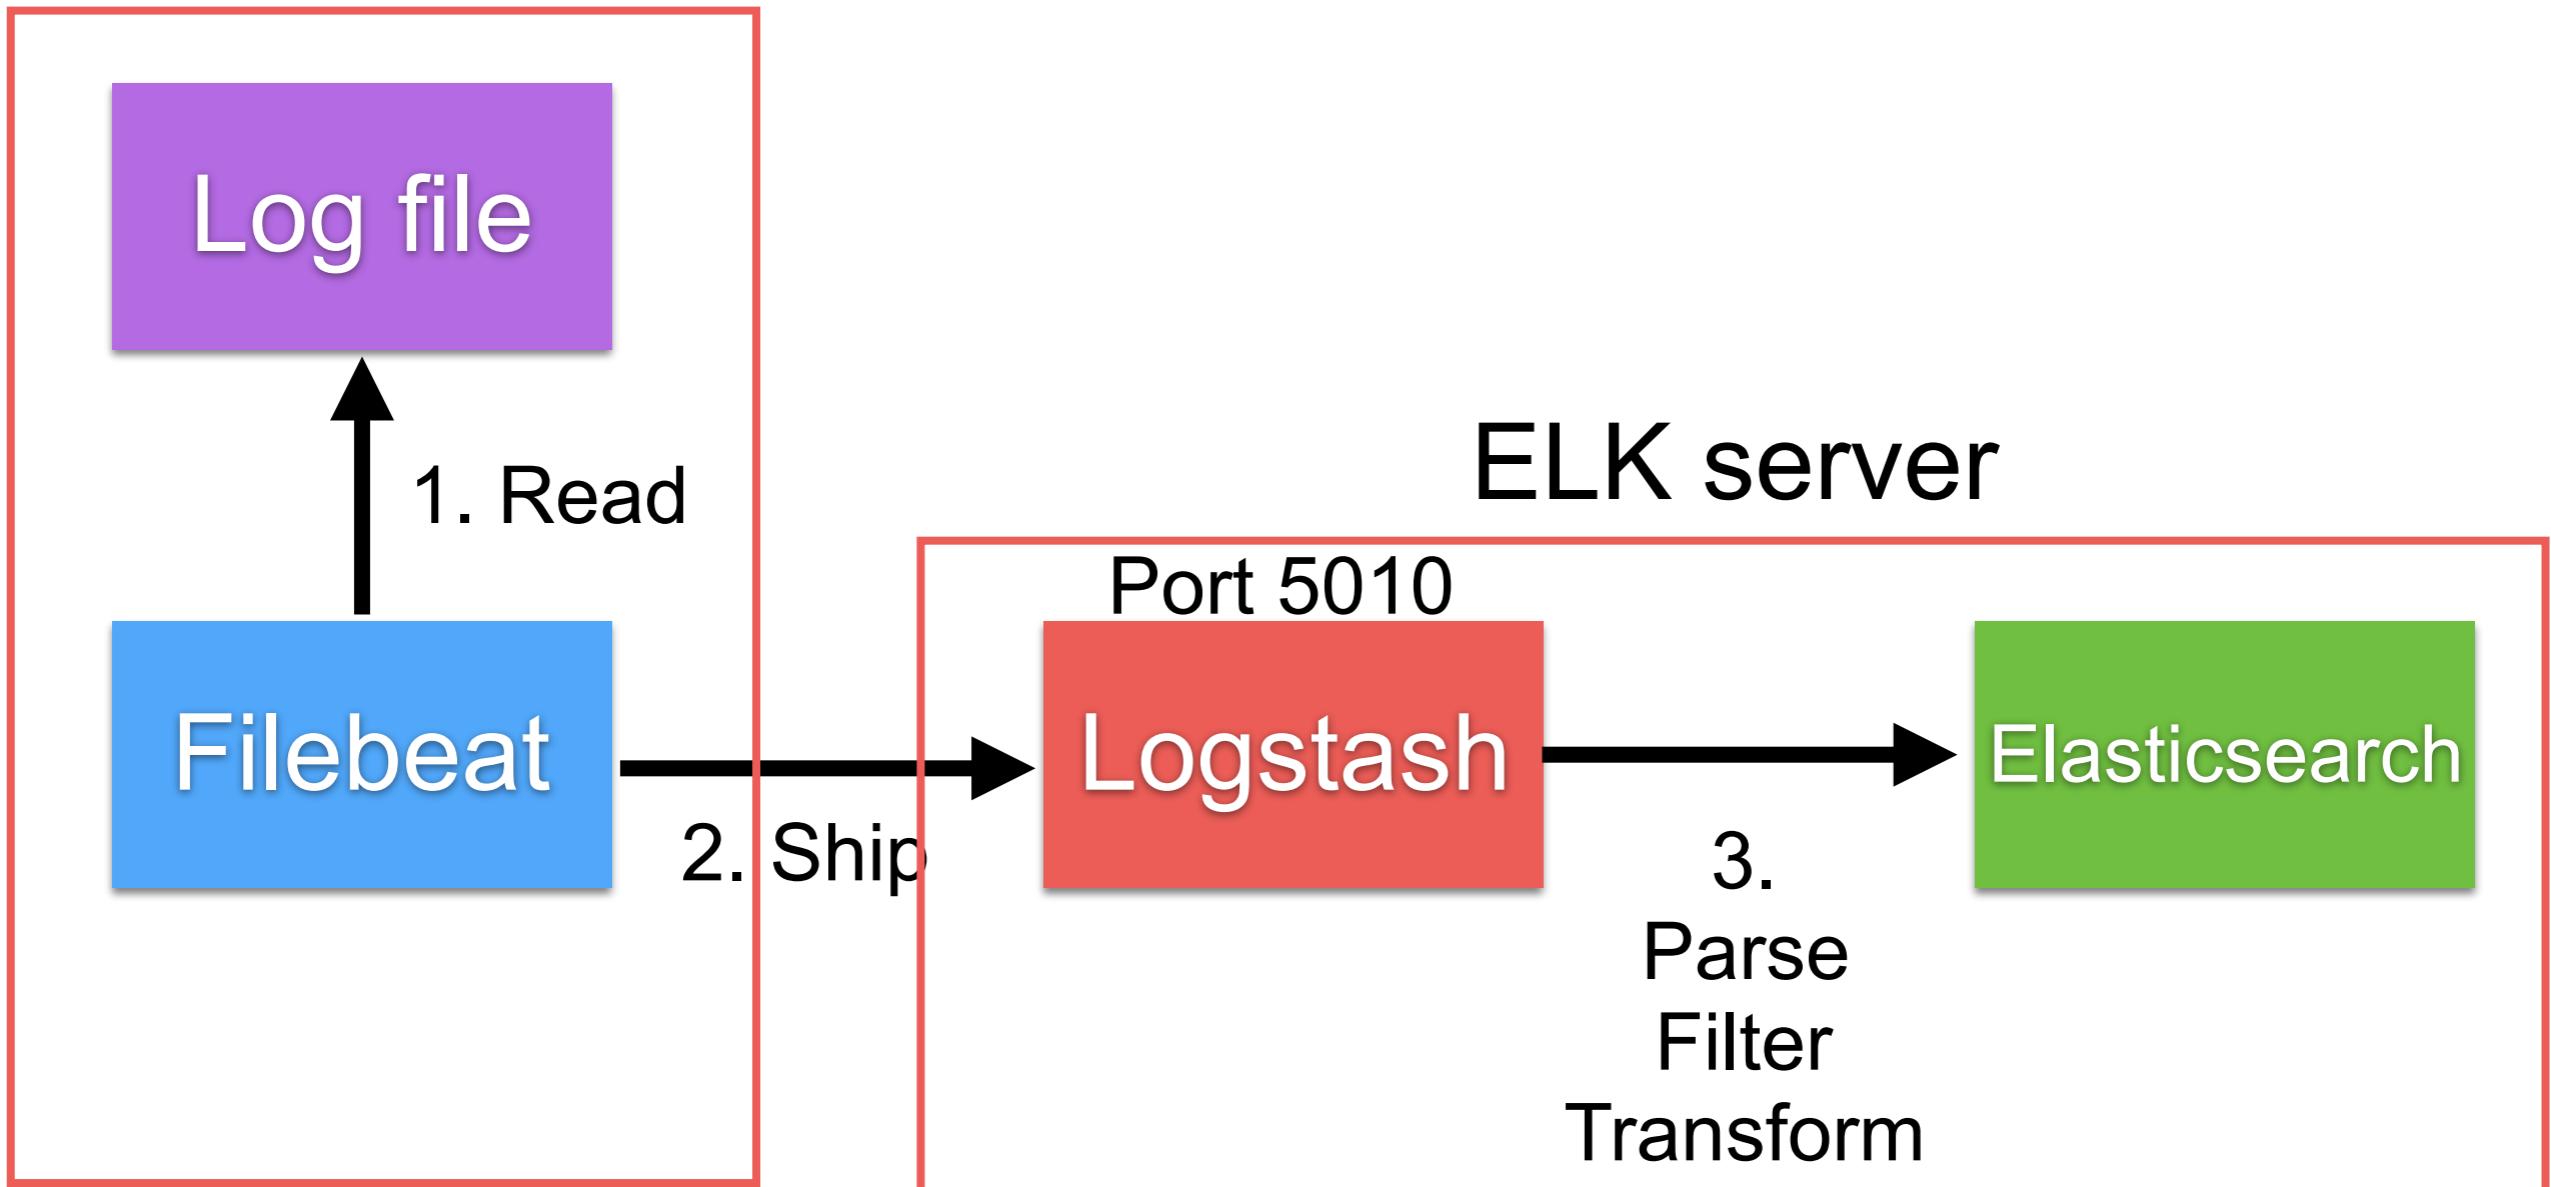

Beat and Logstash

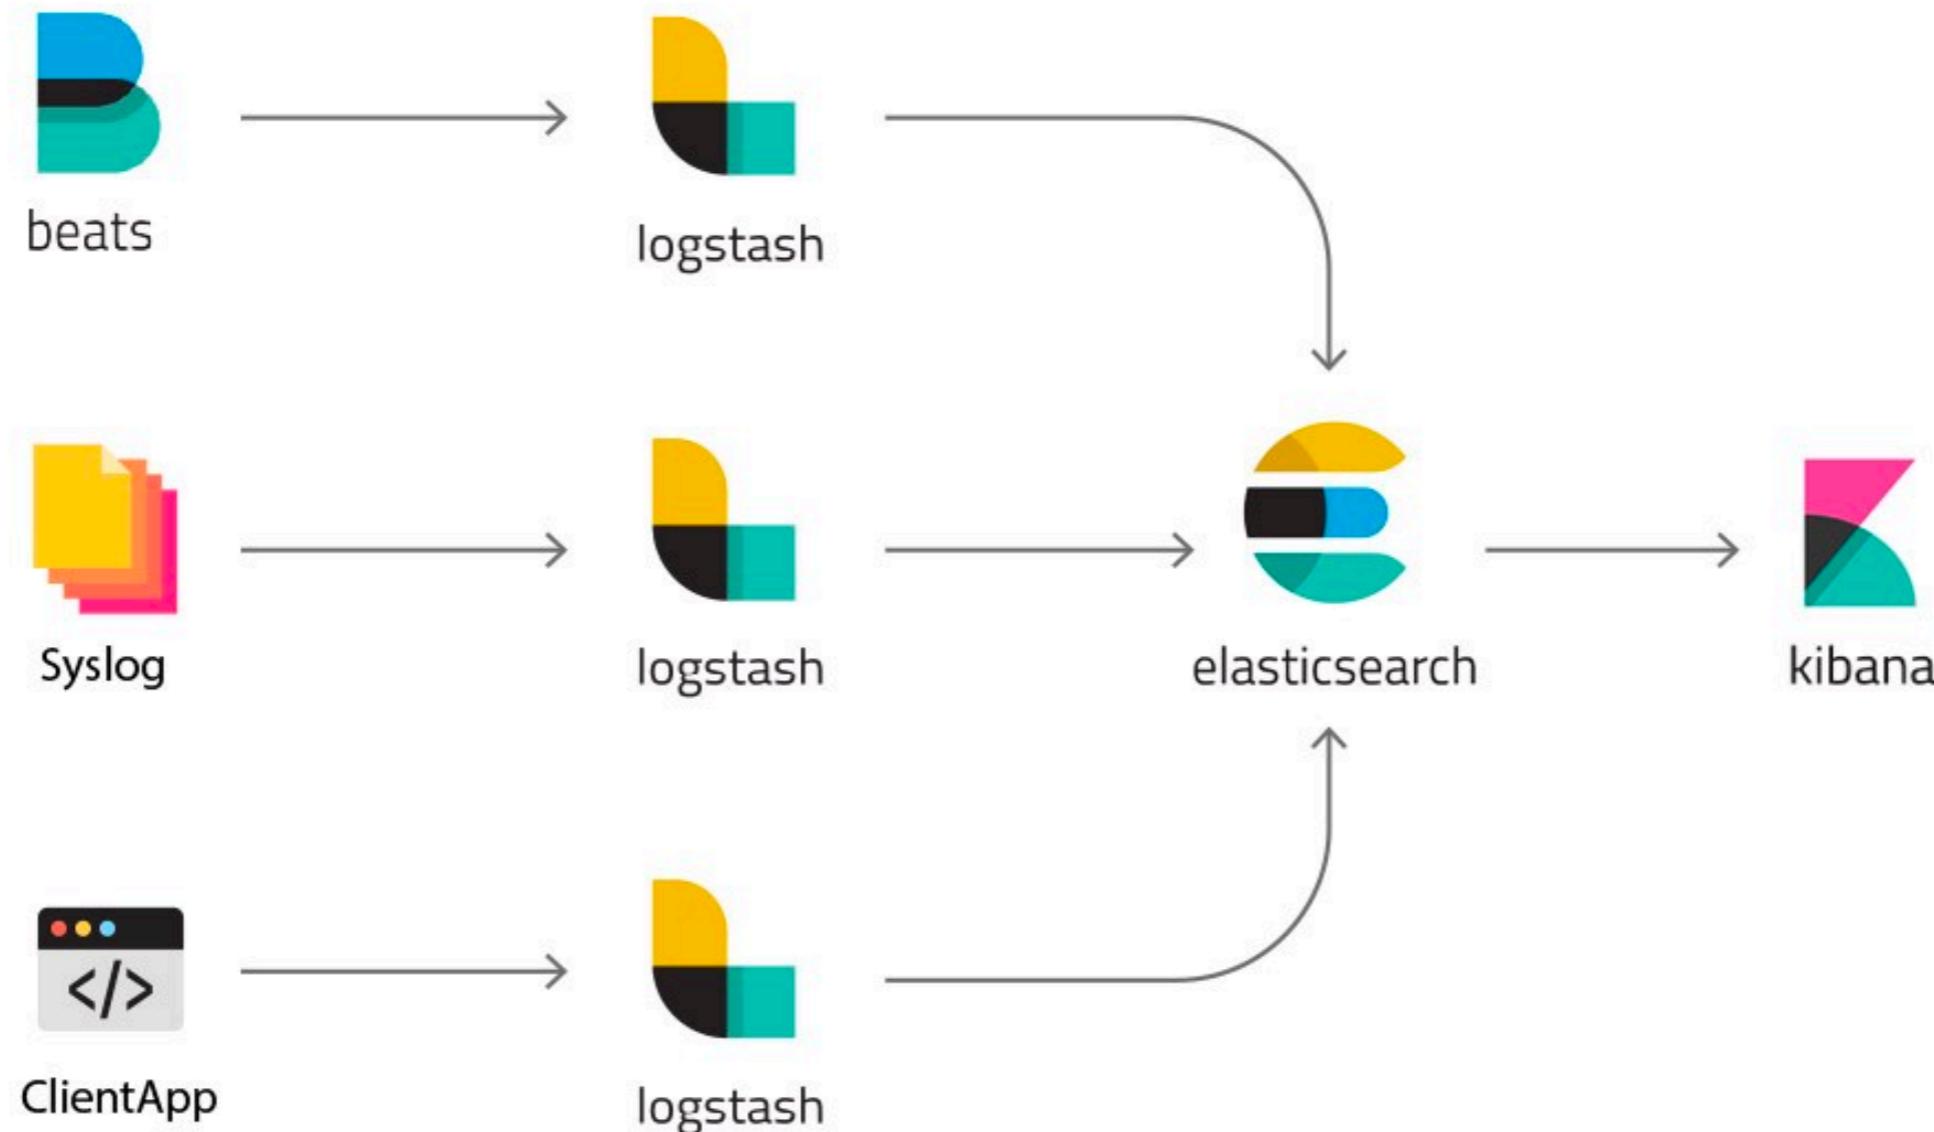

Scaling

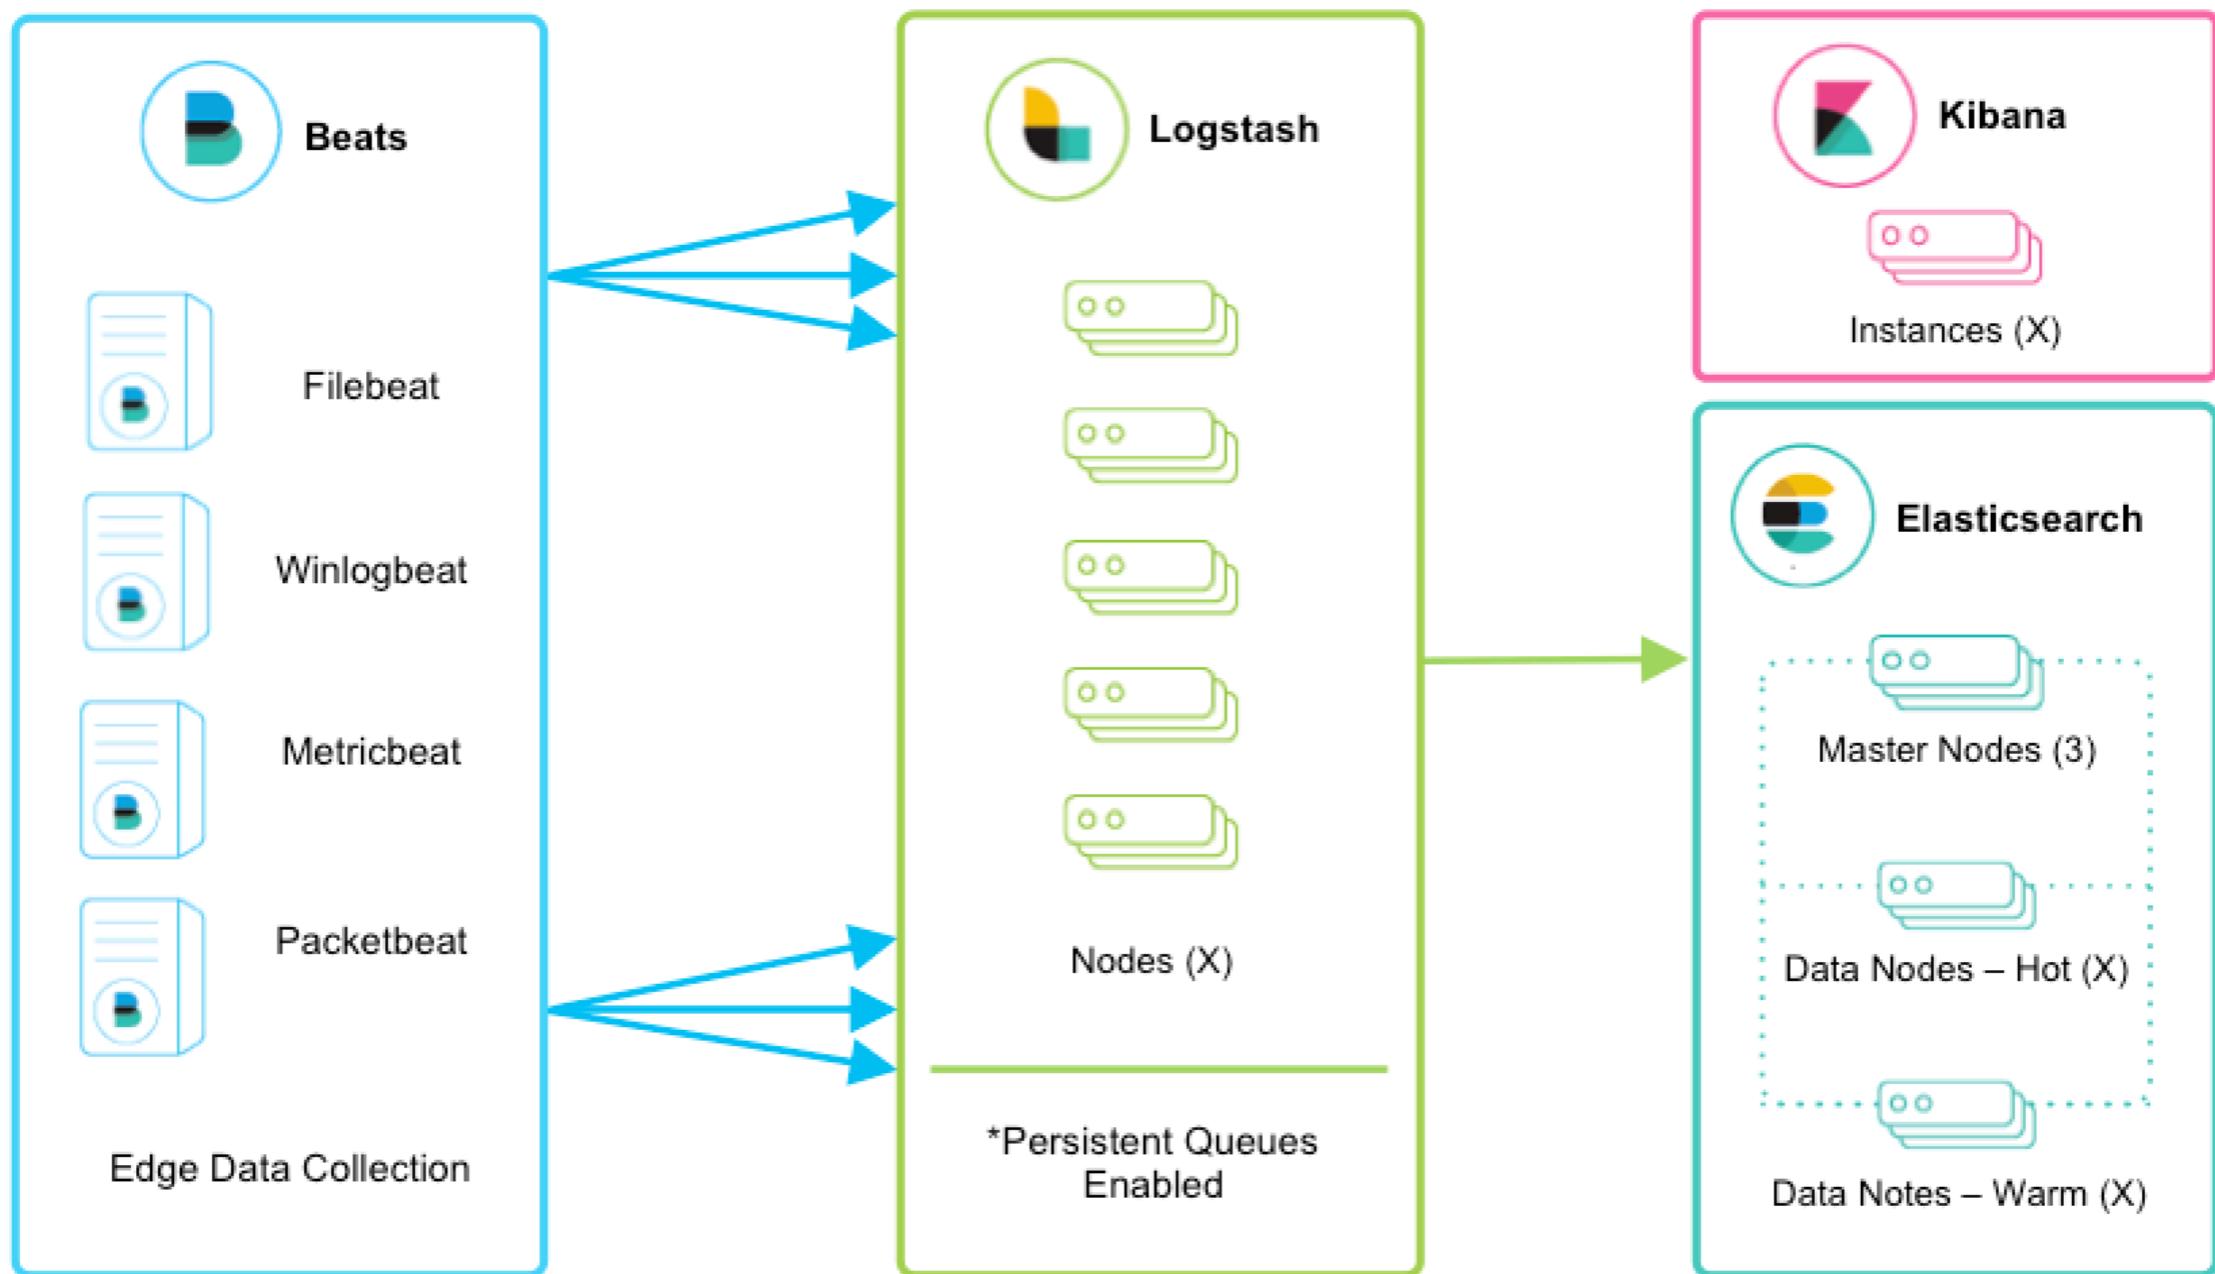


<https://www.elastic.co/guide/en/logstash/current/deploying-and-scaling.html>



ELK Stack

© 2017 - 2018 Siam Chamnkit Company Limited. All rights reserved.


More data sources

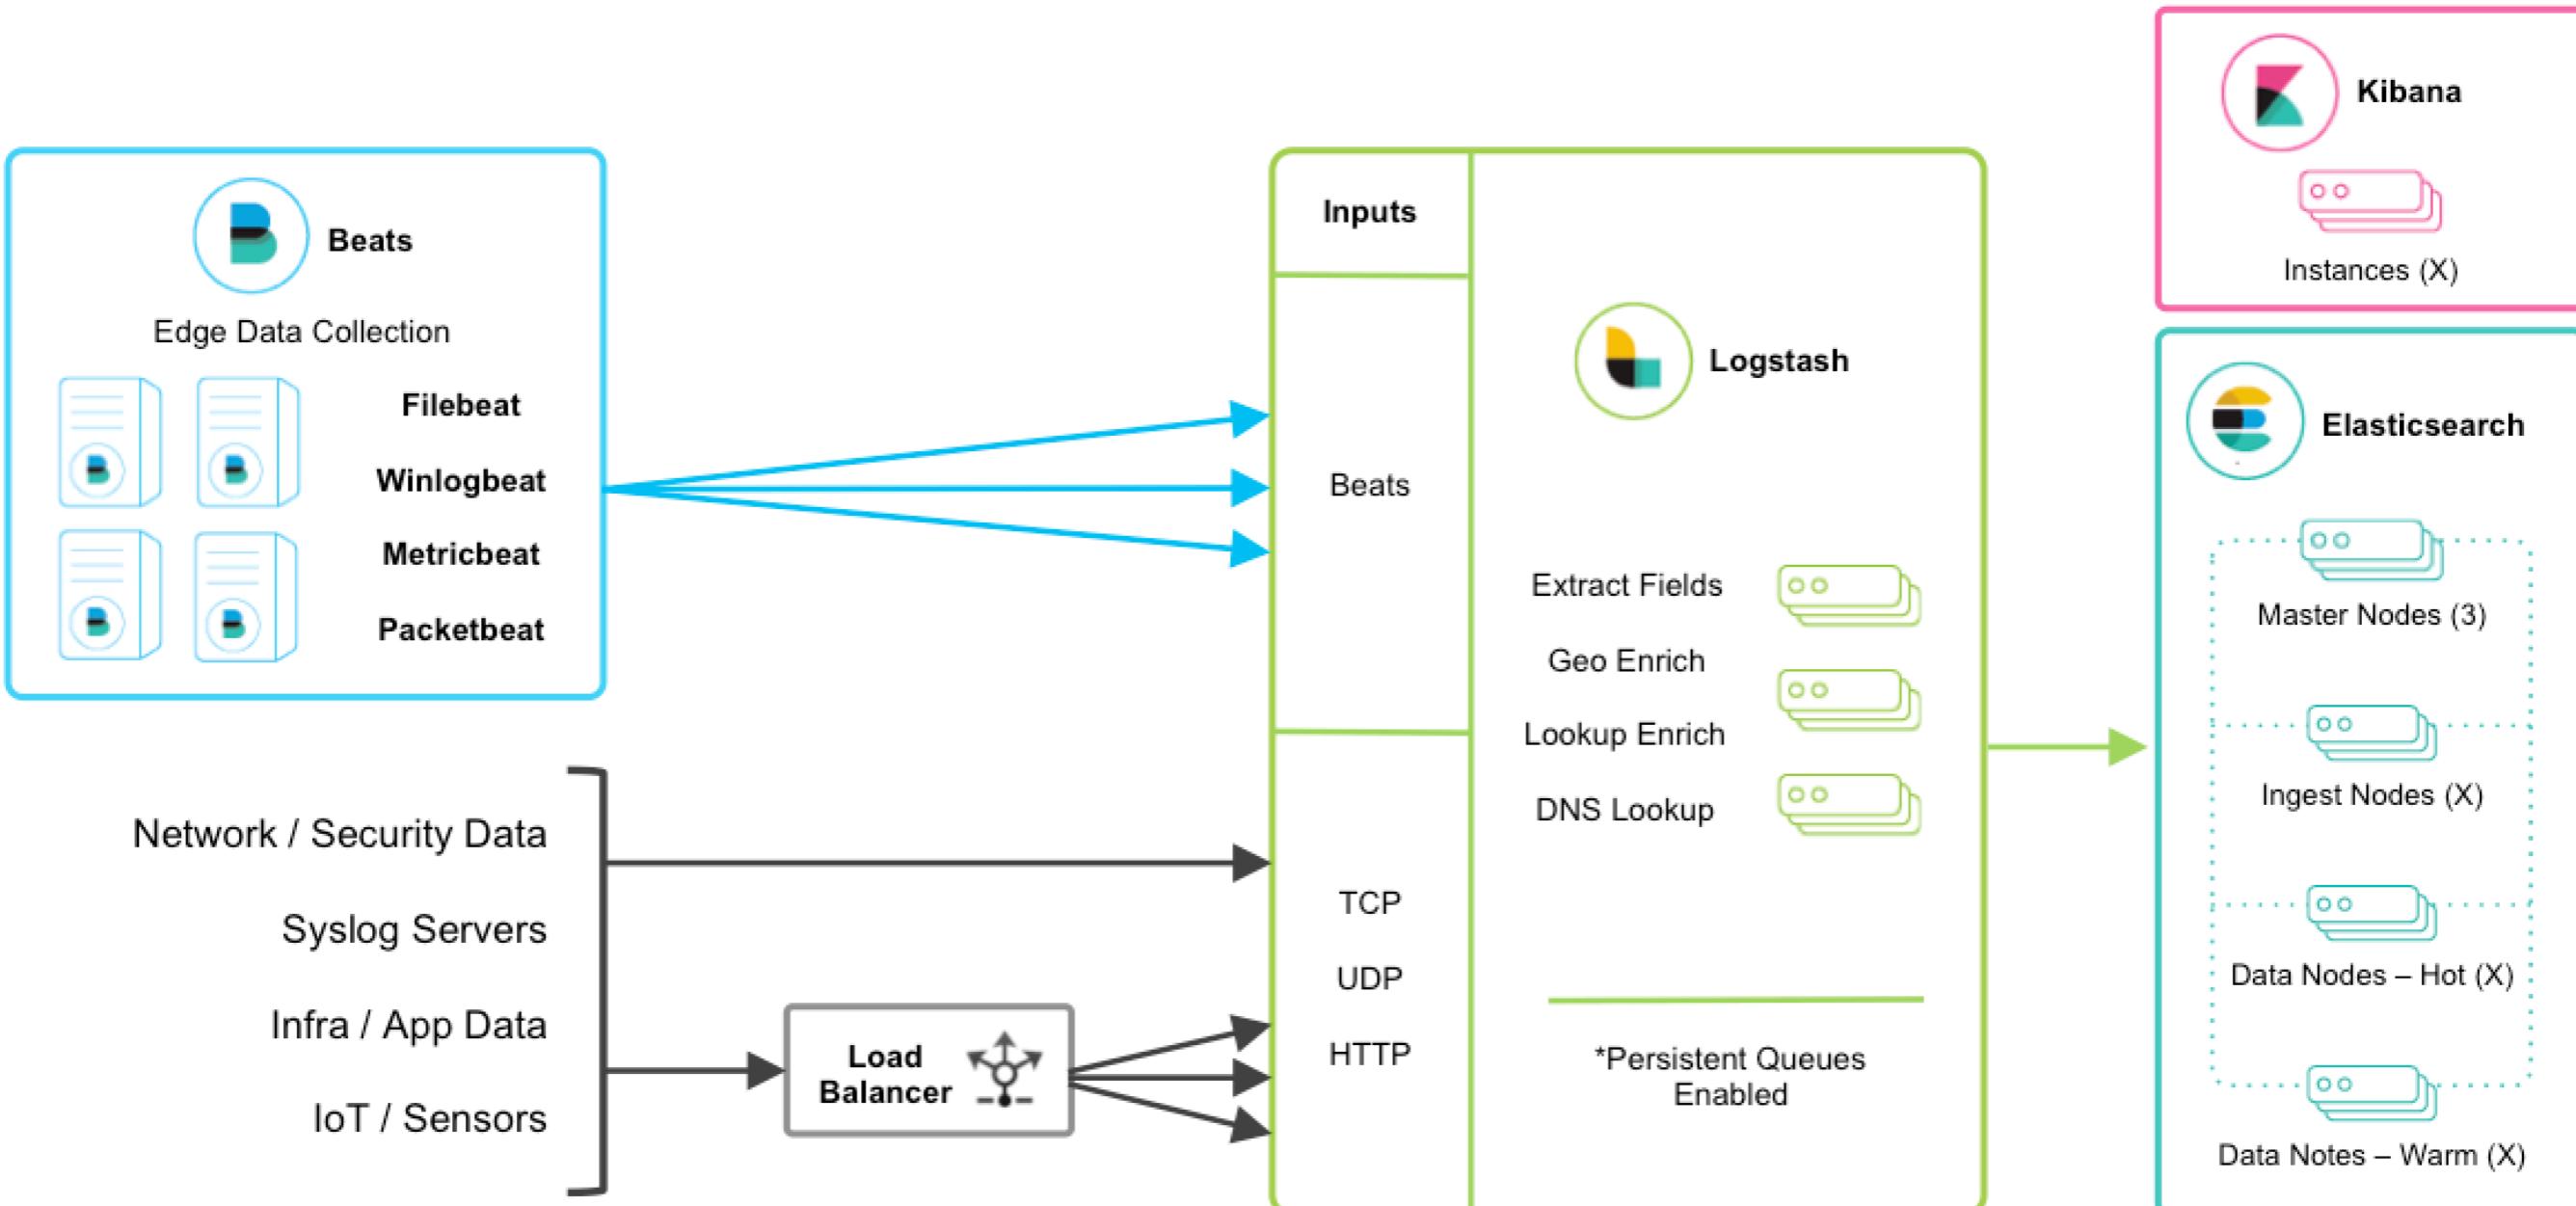

<https://www.elastic.co/guide/en/logstash/current/deploying-and-scaling.html>



Use messaging Queue

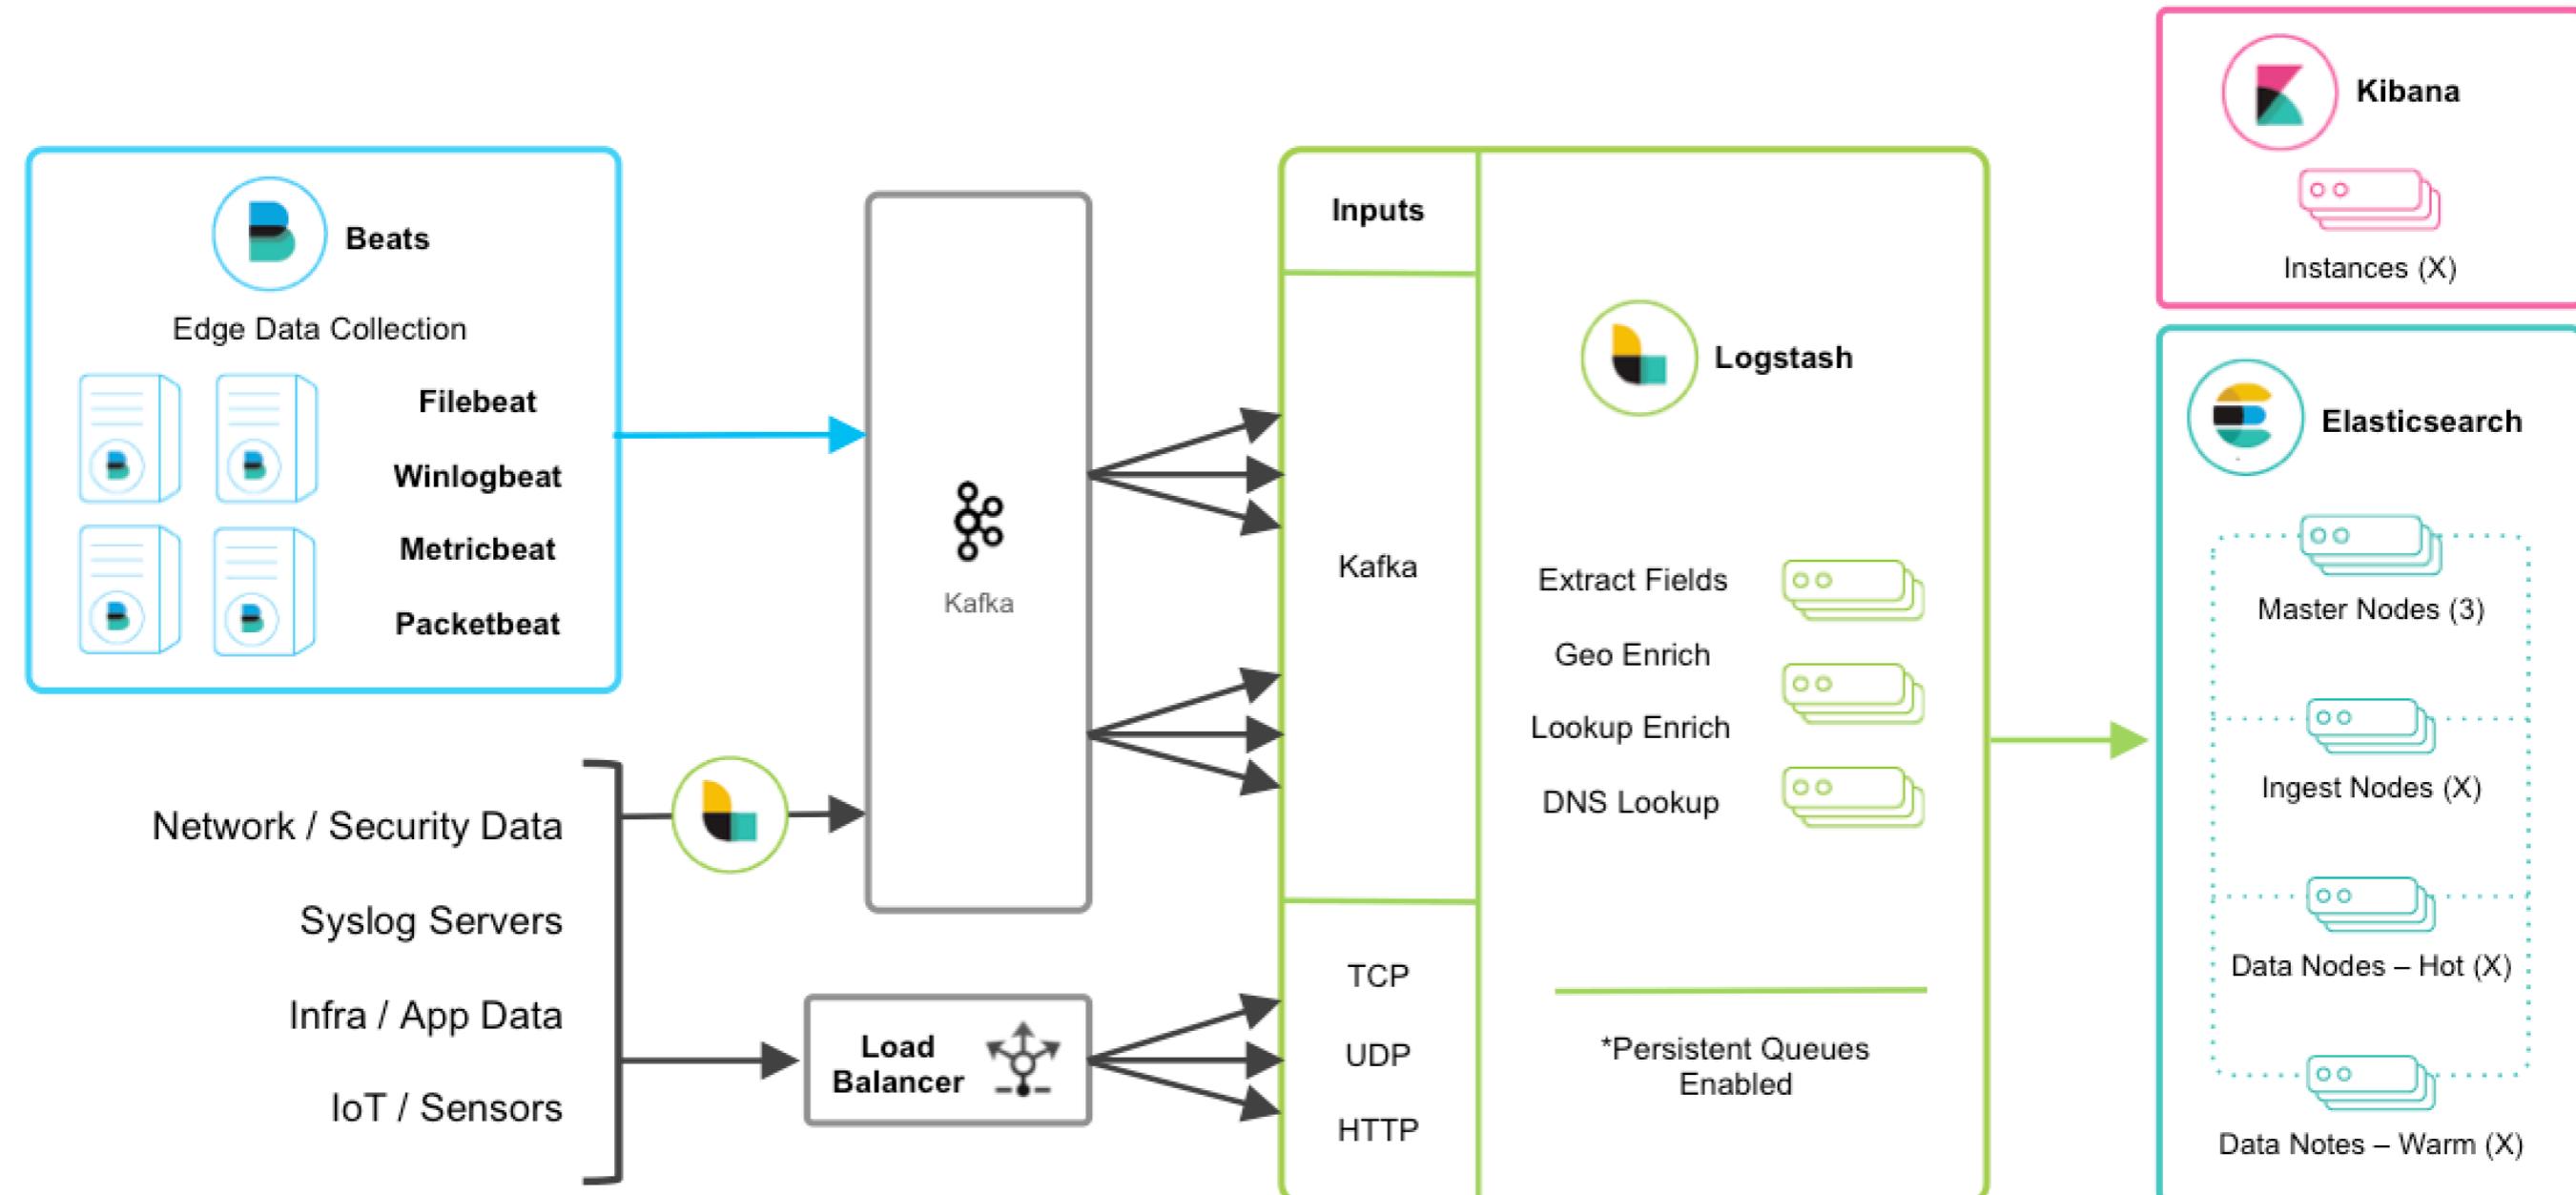

<https://www.elastic.co/blog/logstash-persistent-queue>




Working with Fluentd


<https://www.fluentd.org/>



Fluentd

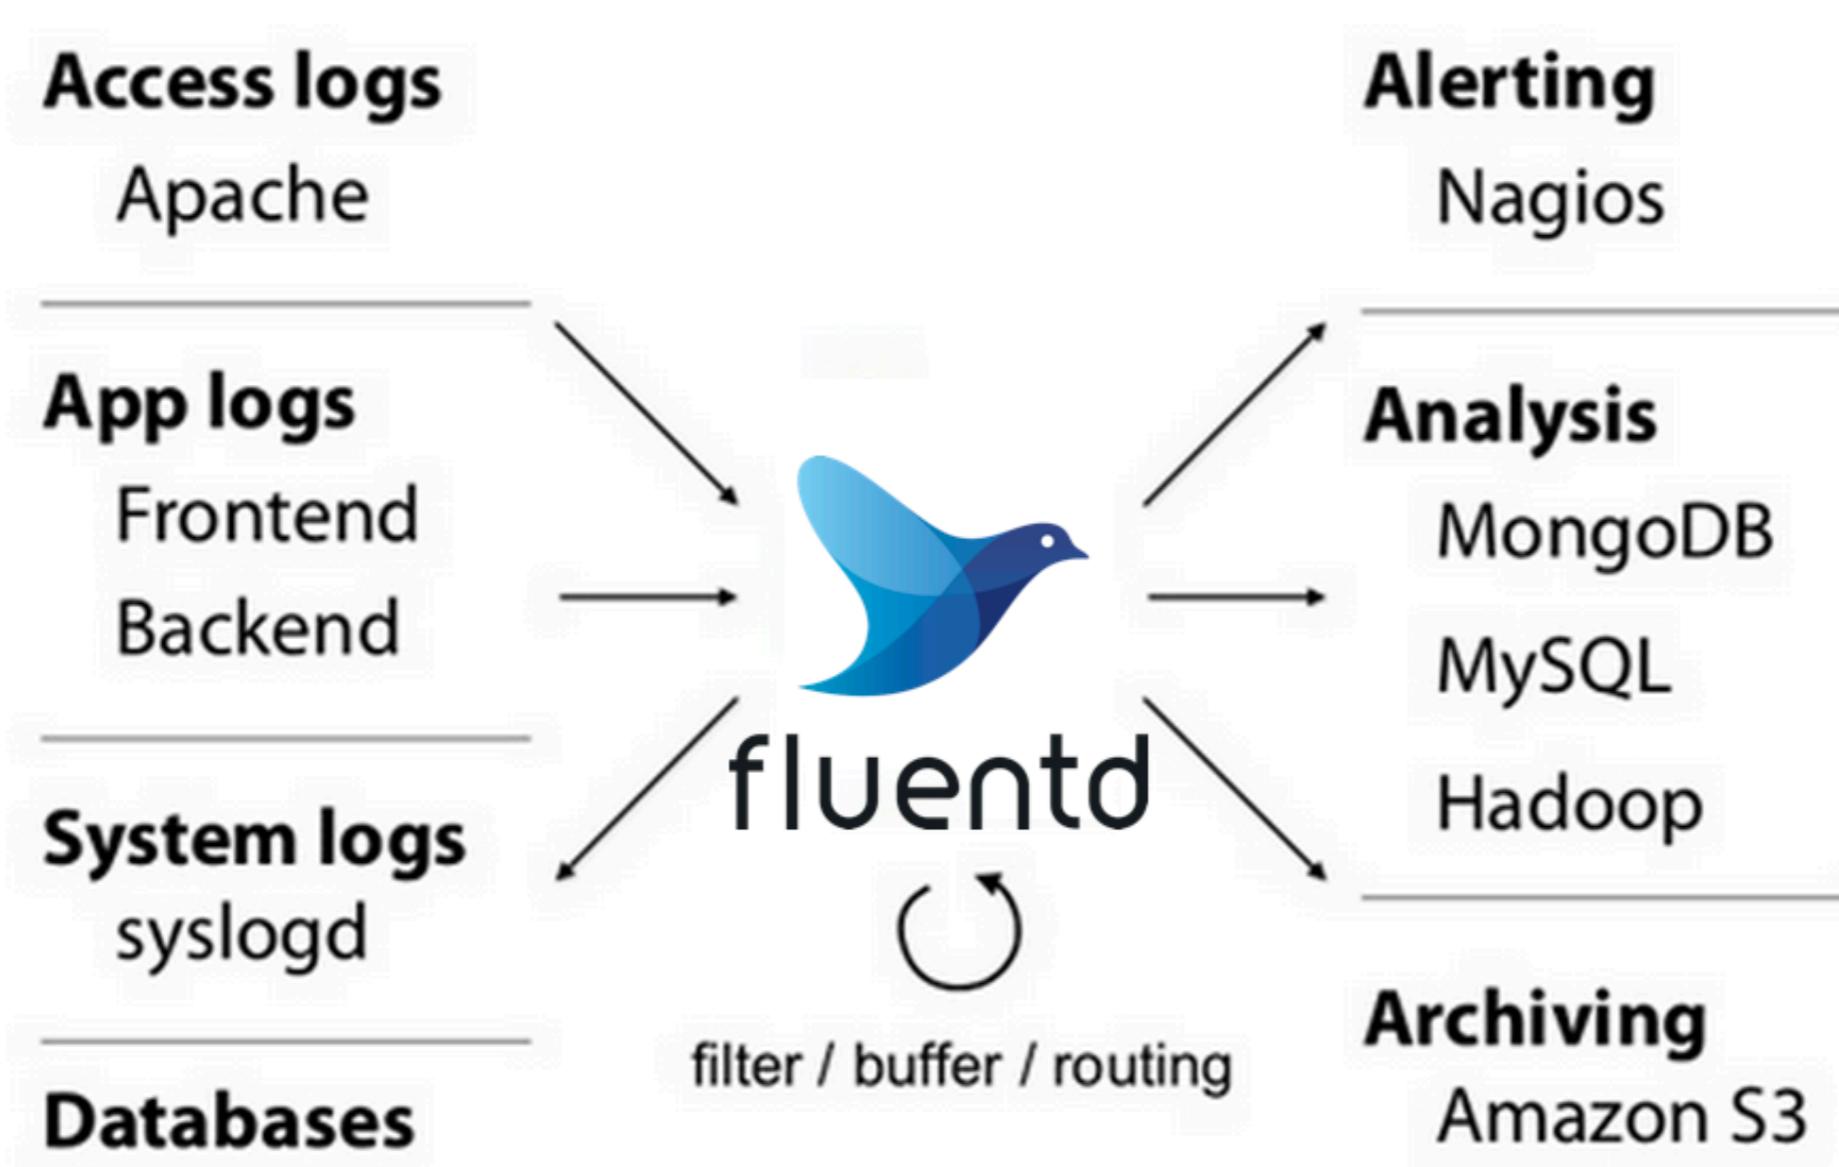


EFK stack

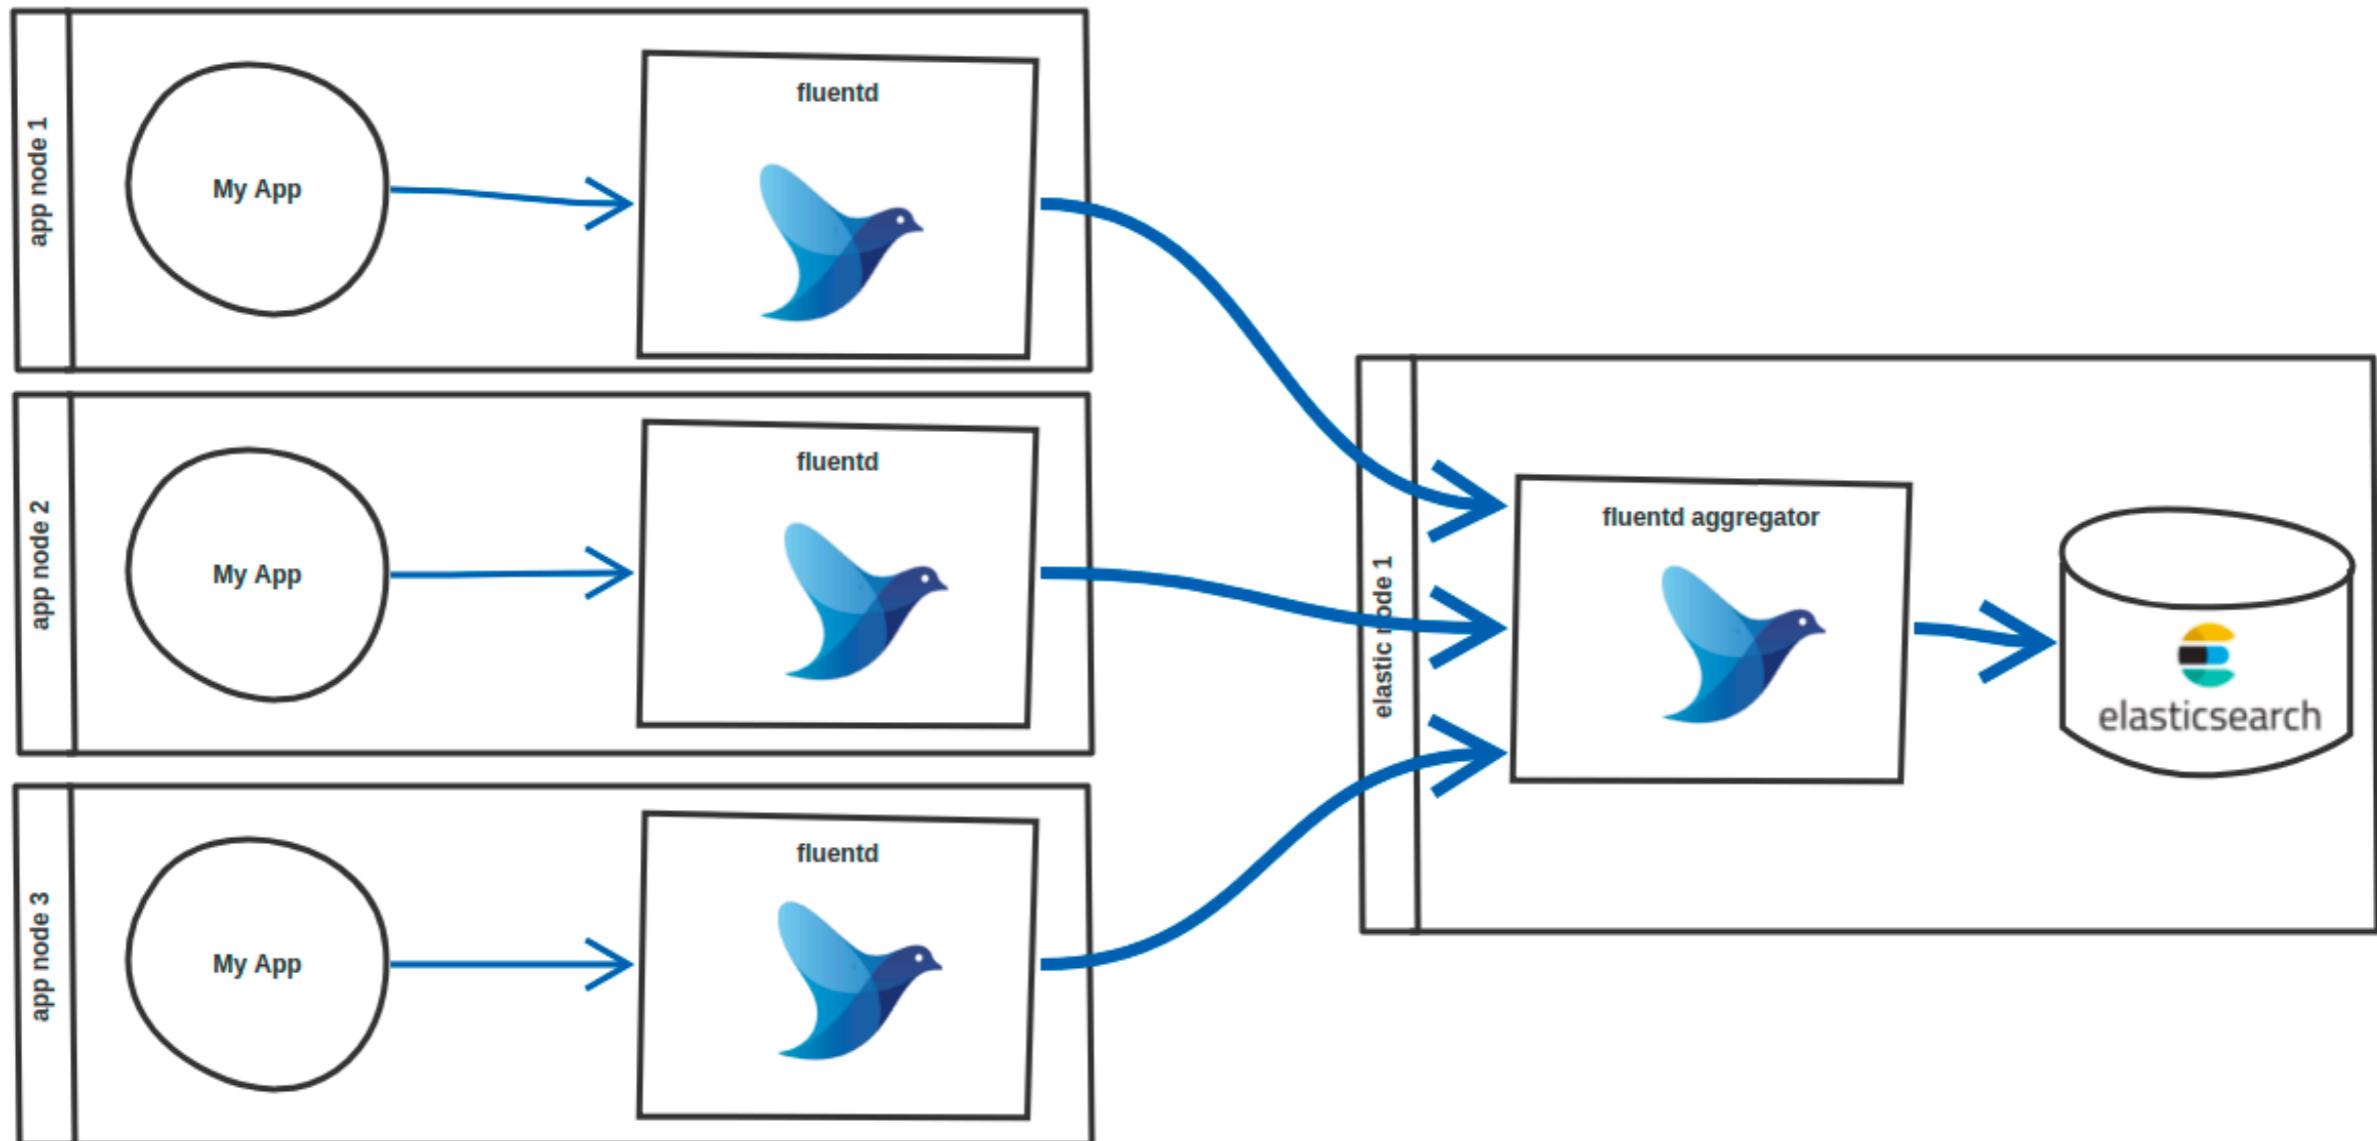

Example of fluentd

Server A

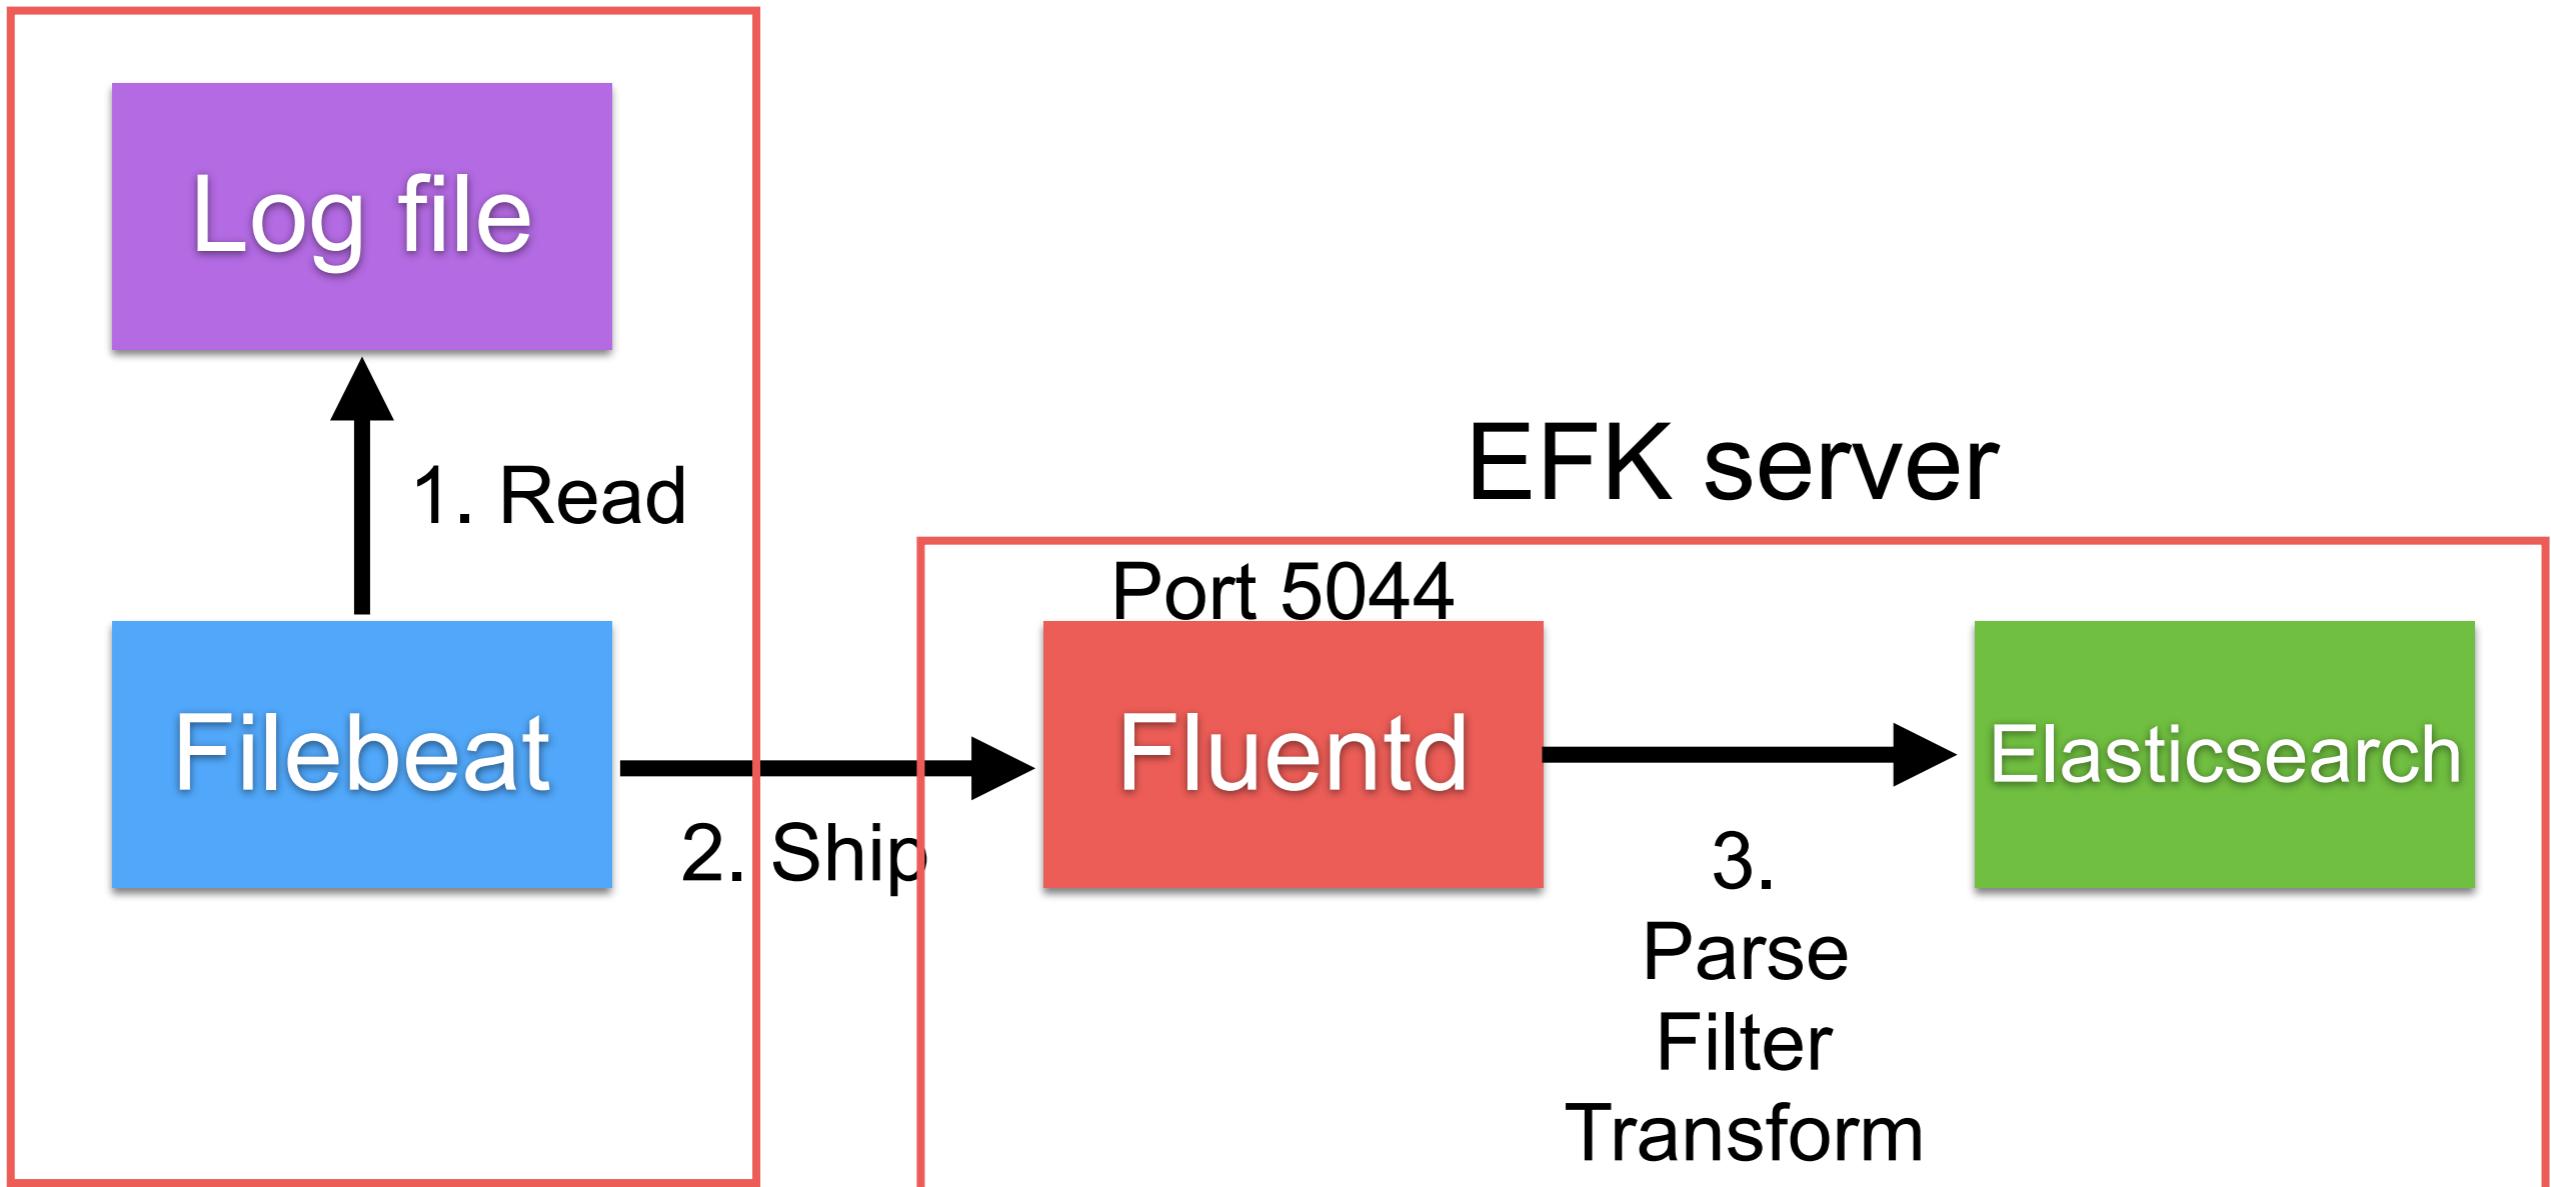

Fluentd regex editor

Fluentular fluentd v1.5.2

a Fluentd regular expression editor

</> Regular Expression

```
^(?<host>[^\ ]*) [^\ ]* (?<user>[^\ ]*) \[(?<time>[^\\ ]*)\] "(?<method>\S+)(?: +(?<path>[^\ ]*) +\S*)?" (?<code>[^\ ]*) (?<size>[^\ ]*)(?: "(?<referer>[^\\"]*)" "(?<agent>[^\\"]*)")?$/
```

“ Test String

⌚ Custom Time Format (See also ruby document; [strftime](#))

%d/%b/%Y:%H:%M:%S %z

Parse

Example (Apache)

Regular expression:

```
^(?<host>[^\ ]*) [^\ ]* (?<user>[^\ ]*) \[(?<time>[^\\ ]*)\] "(?<method>\S+)(?: +(?<path>[^\ ]*) +\S*)?" (?<code>[^\ ]*) (?<size>[^\ ]*)(?: "(?<referer>[^\\"]*)" "(?<agent>[^\\"]*)")?$/
```

Time Format:

```
%d/%b/%Y:%H:%M:%S %z
```

<http://fluentular.herokuapp.com/>




ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

229

Fluentd with Docker

Using docker-compose

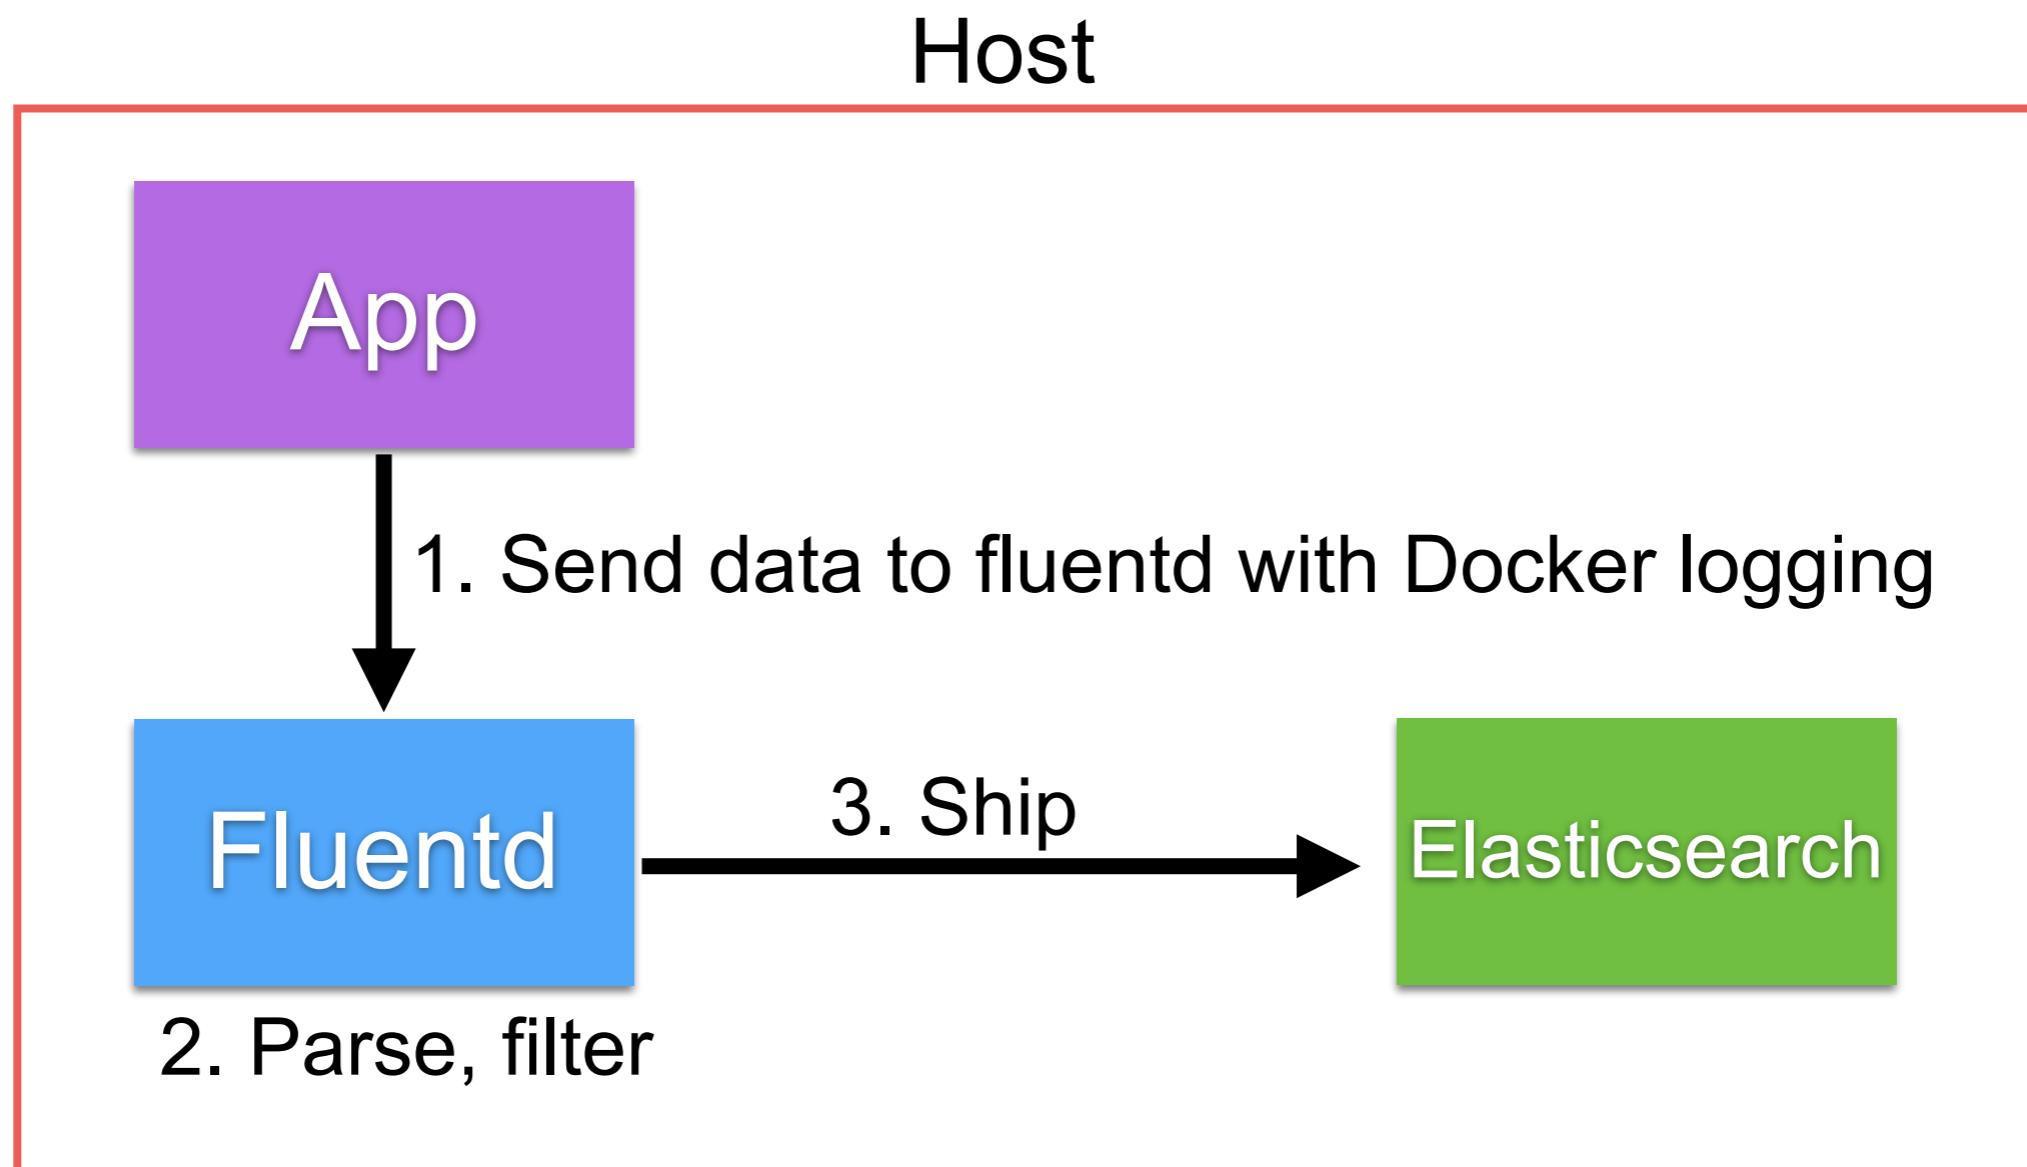

Design for Failure

09-cluster



Elasticsearch Nodes

Node Type	Description
Master	Control the cluster
Data	Keep/store data
HTTP/Query	Run your query
Coordinating	Smart Load Balancer
Ingest	Pre-processing documents before indexing
Machine Learning	Required subscription !!

<https://www.elastic.co/guide/en/elasticsearch/reference/current/modules-node.html>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.


Elasticsearch Nodes

← → ⌂ ⓘ Not Secure | 35.240.161.188:9200/_cat/nodes?v&h=ip,name,node.role,master,heap.percent,ram.percent

ip	name	node.role	master	heap.percent	ram.percent
10.148.0.2	master	m	*	17	33
10.148.0.4	query	-	-	10	63
10.148.0.5	coordinator	-	-	9	78
10.148.0.3	data	d	-	13	63



Elasticsearch Nodes

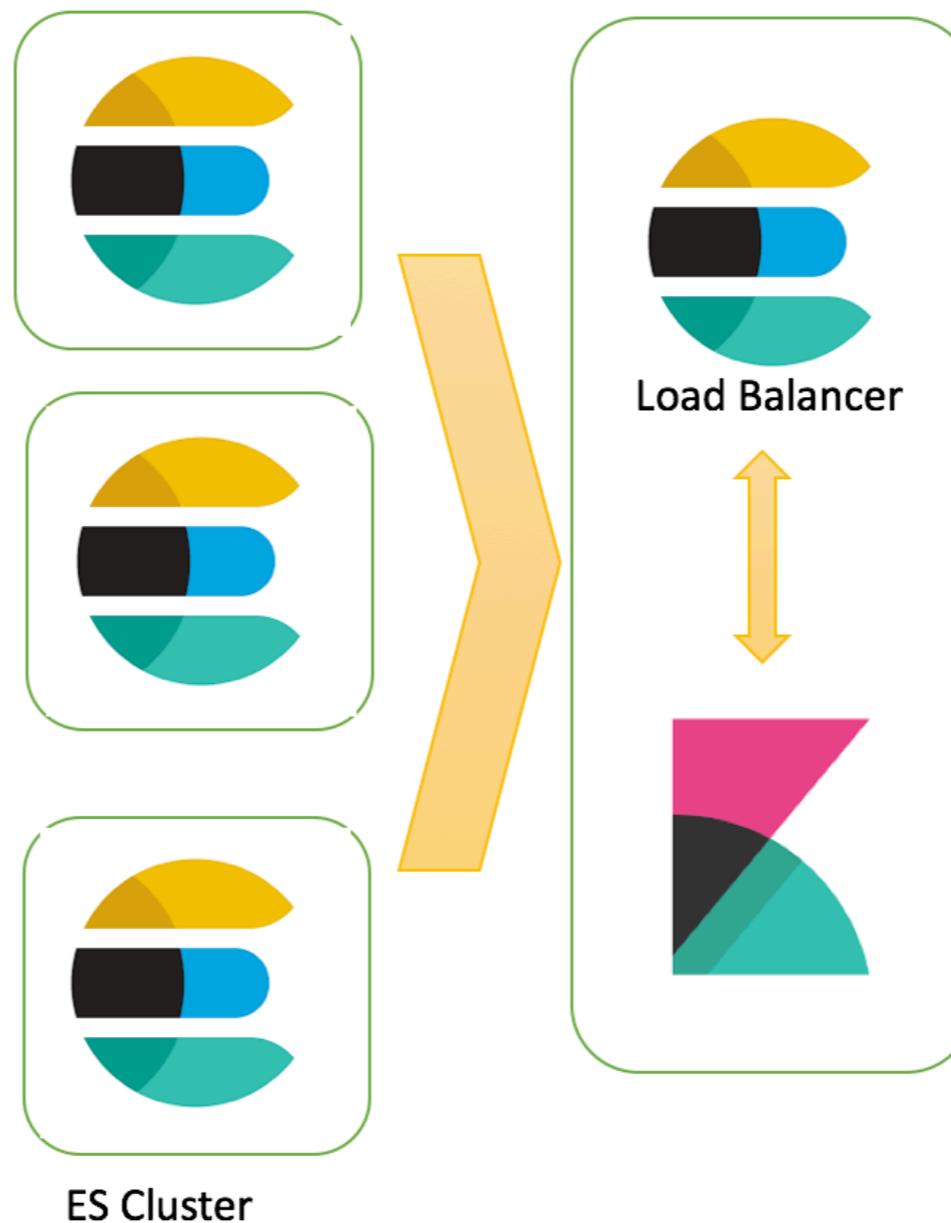

<https://www.elastic.co/guide/en/kibana/current/production.html#load-balancing>



ELK Stack

© 2017 - 2018 Siam Chamnkit Company Limited. All rights reserved.

Elasticsearch Nodes




Apache Lucene


<http://lucene.apache.org/>



Apache Lucene

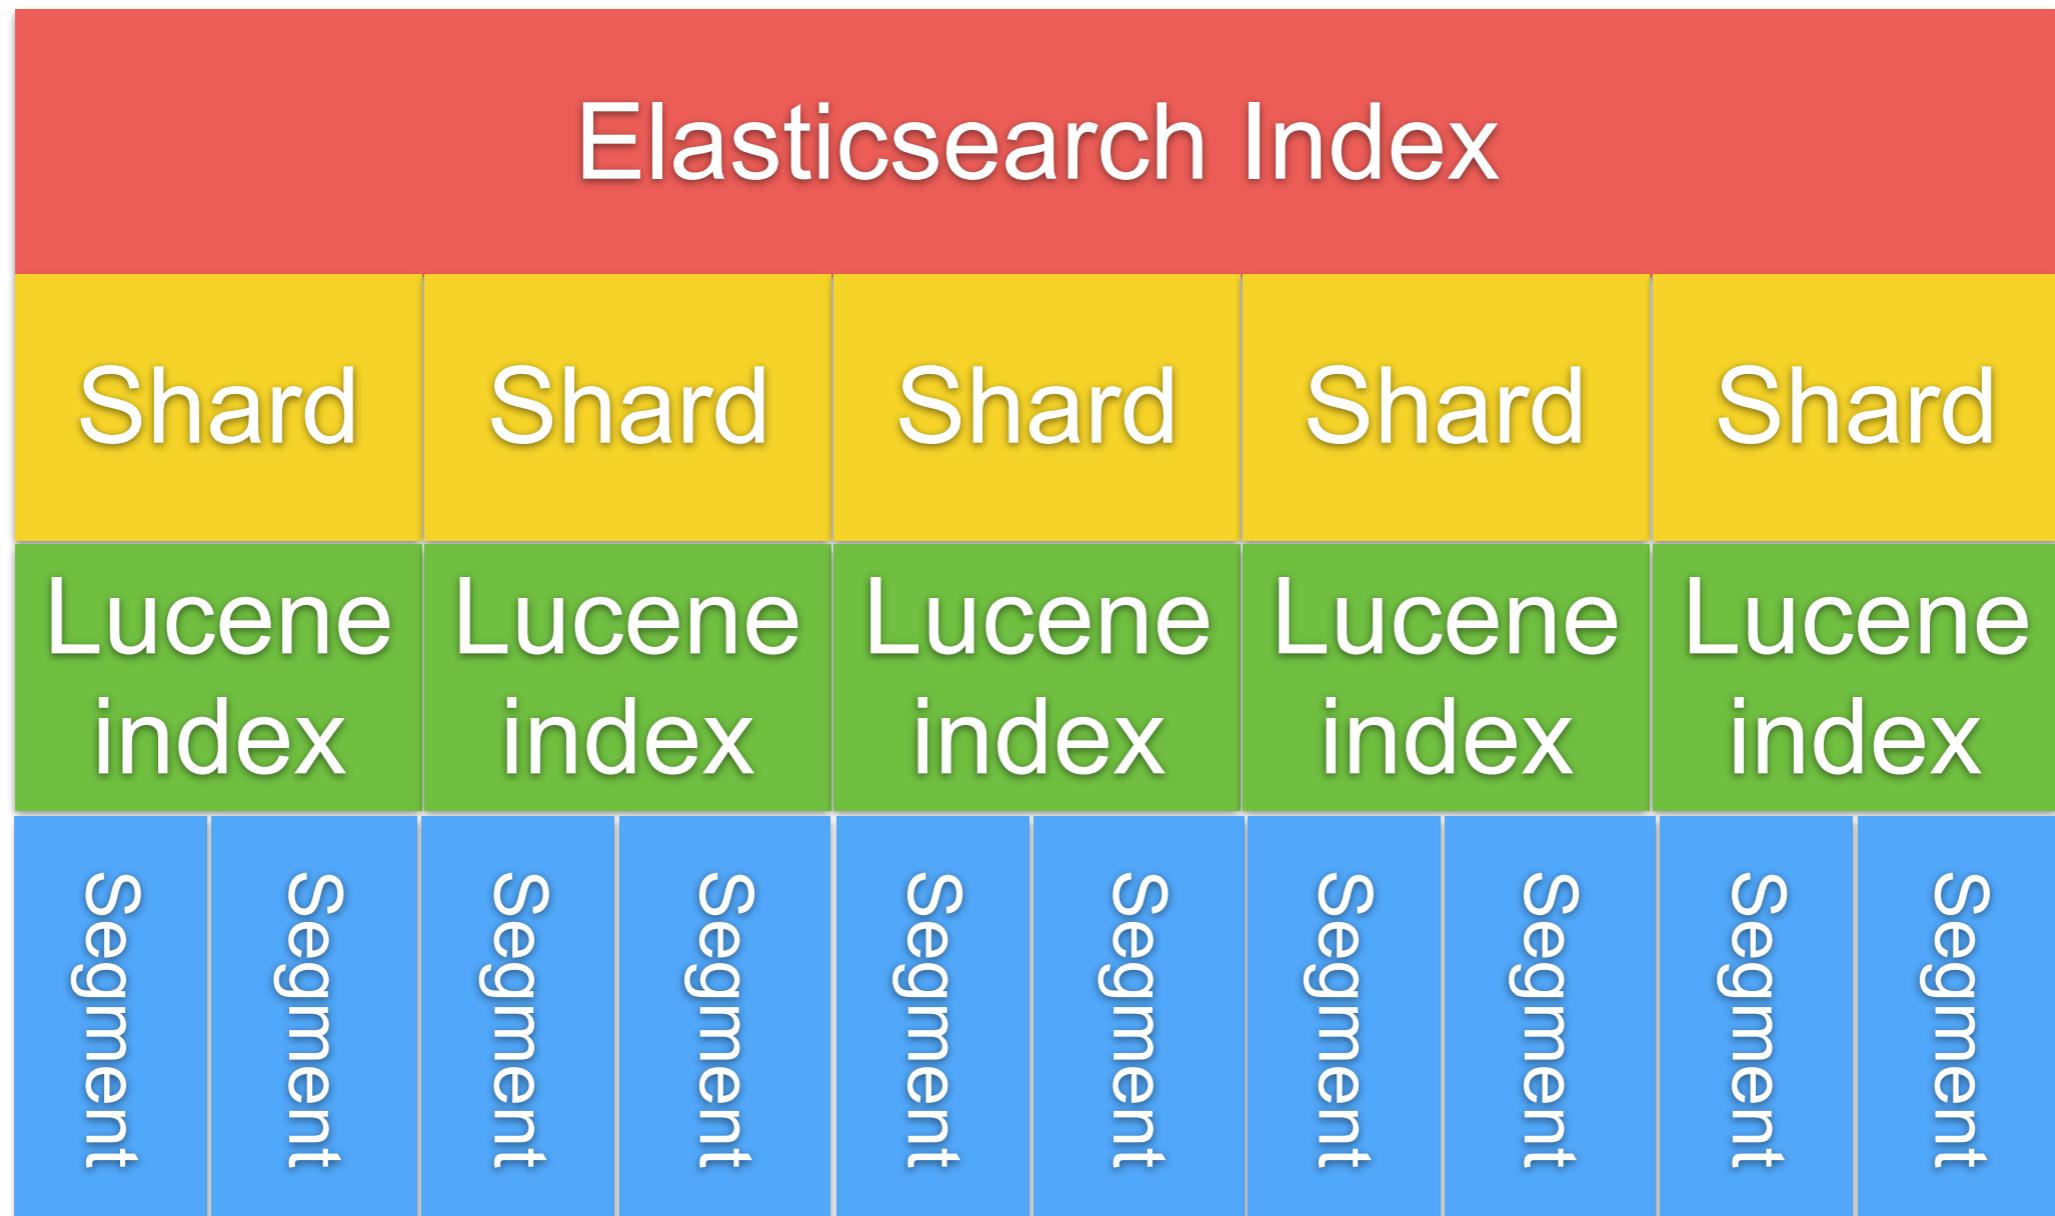


Apache Lucene

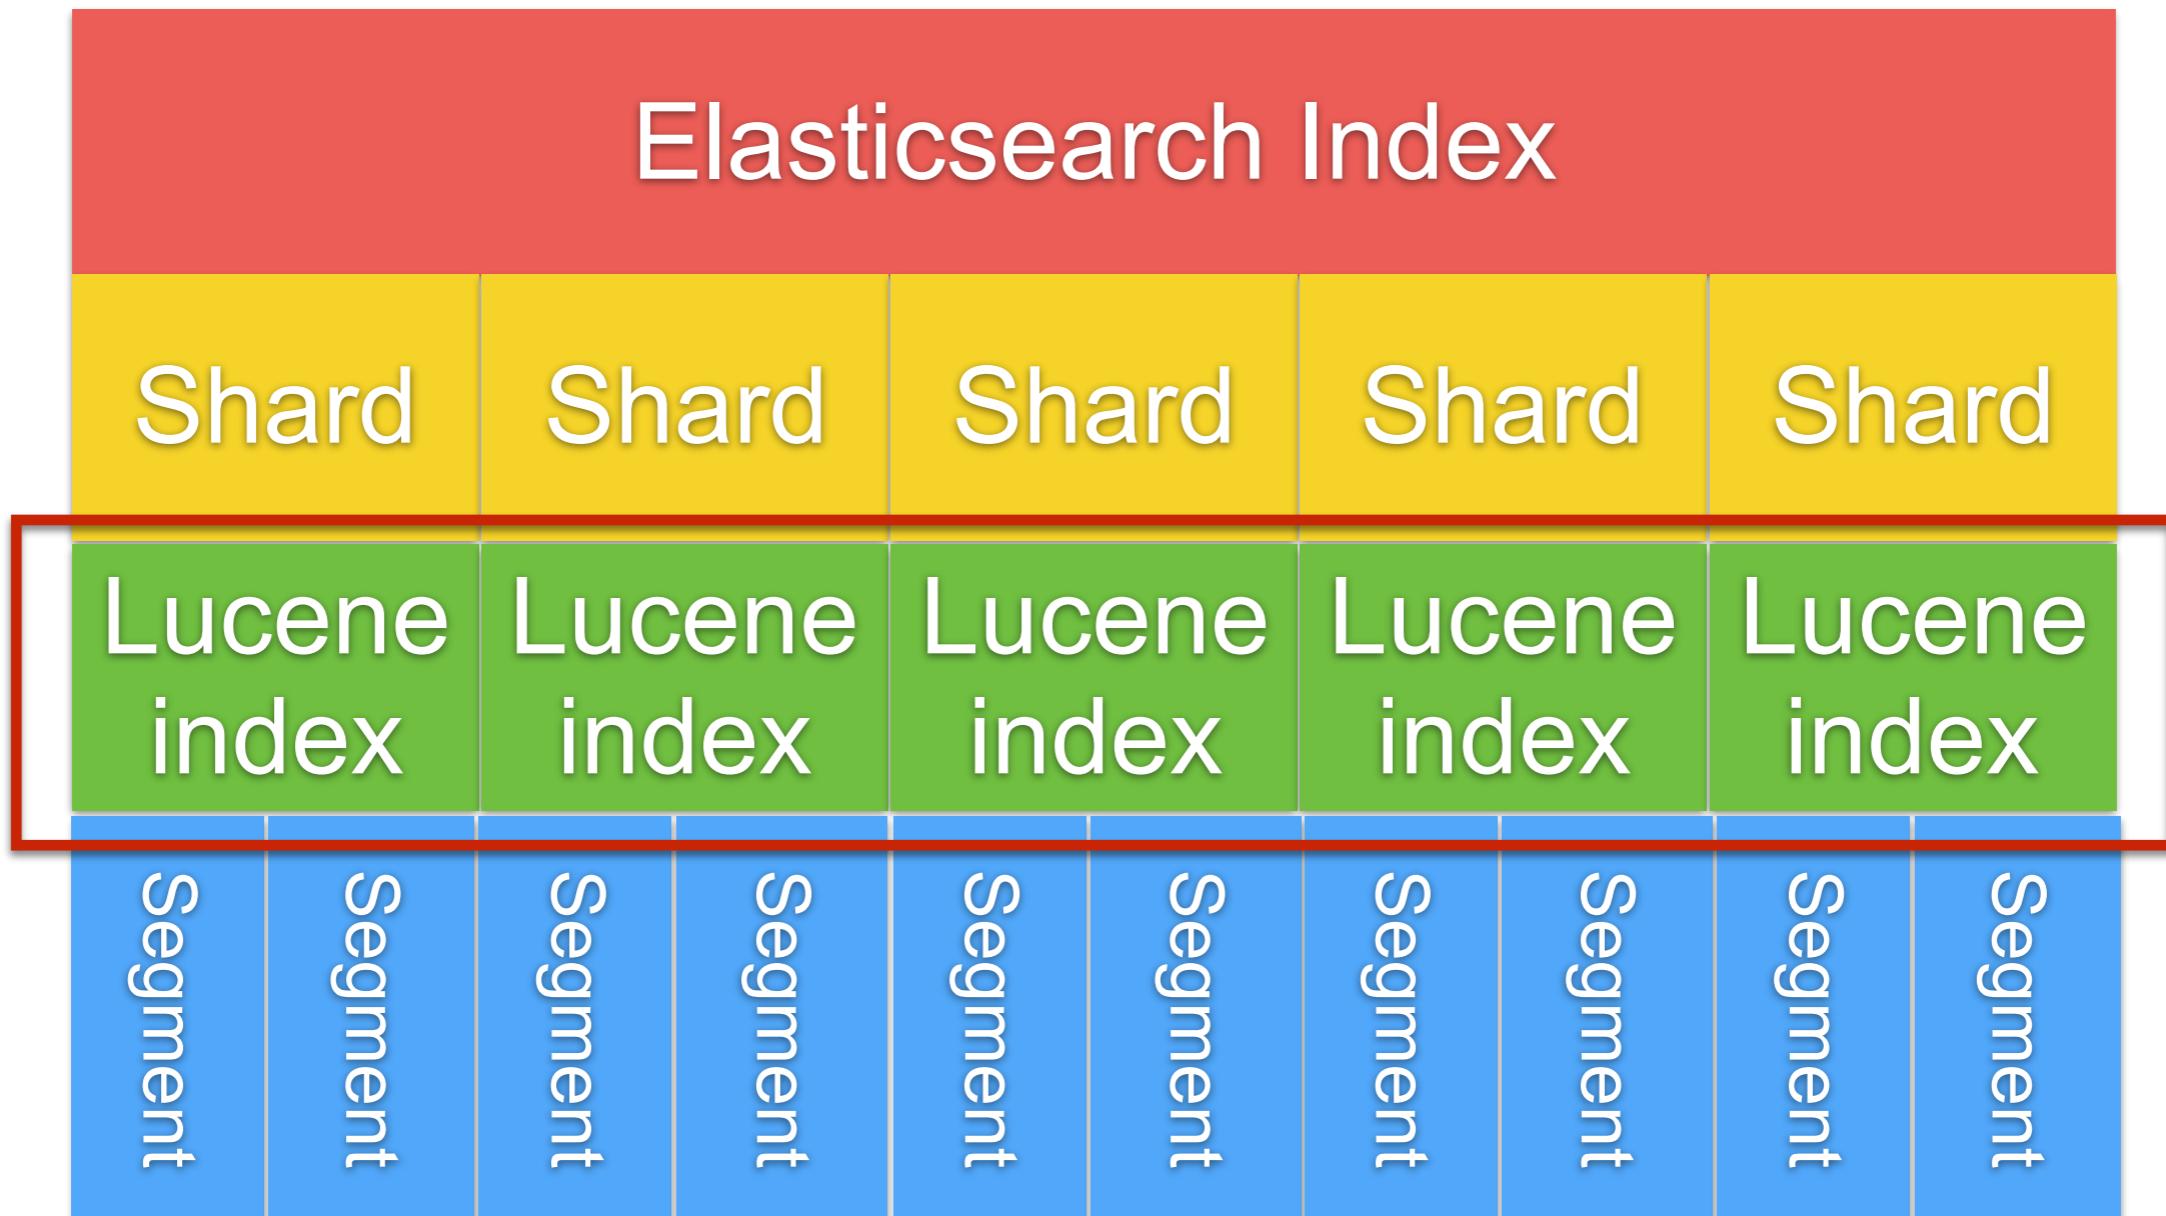

Max # of document of Lucene index = 2,147,483,519



Apache Lucene

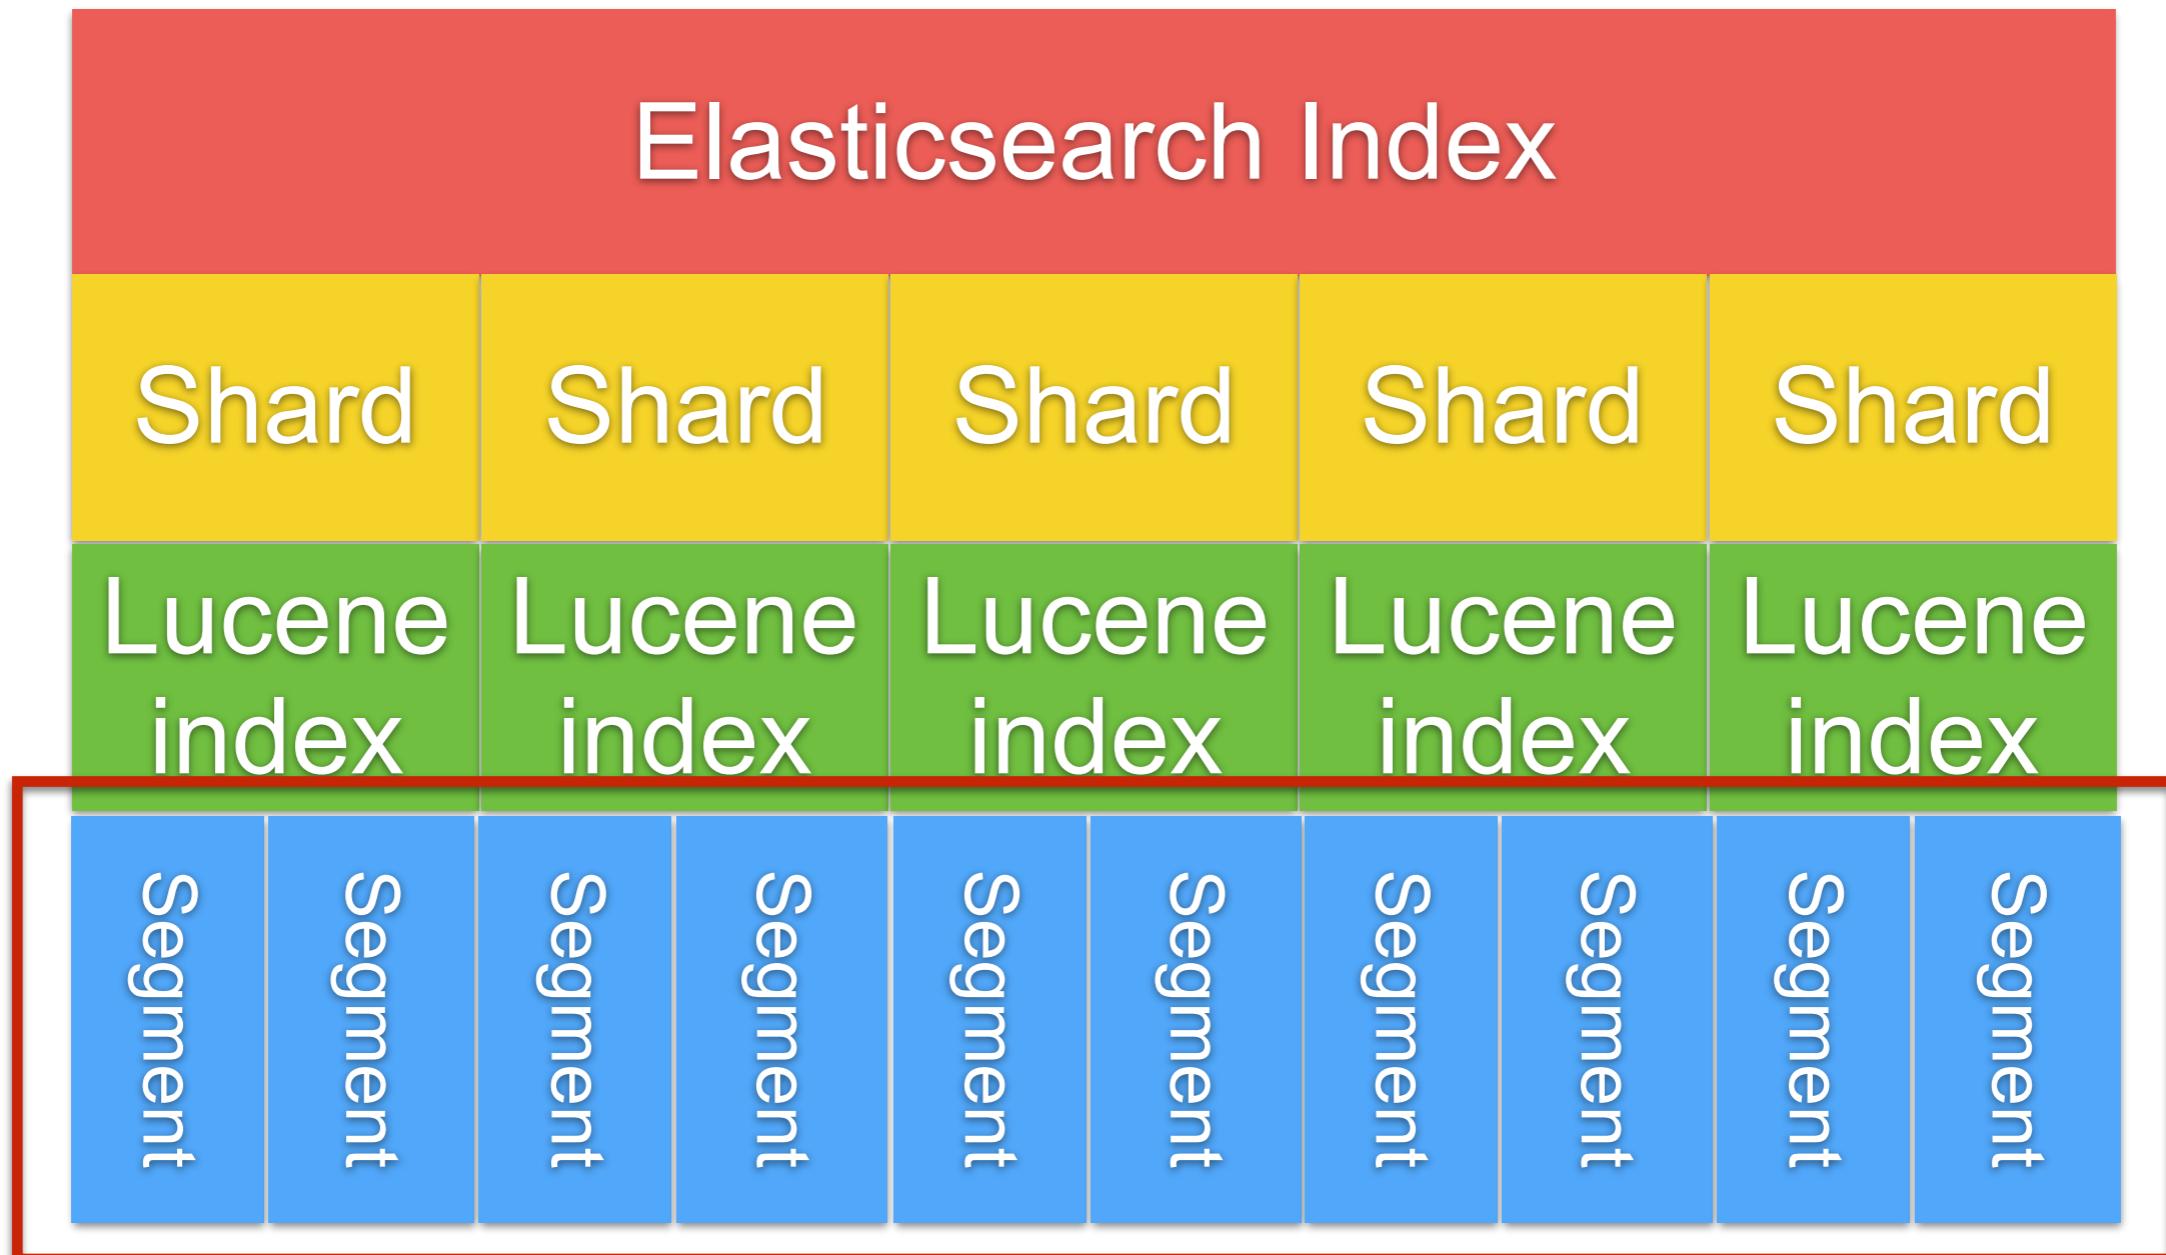

Segments are immutable




Segment

More shards, more segments

Documents are never delete !!

Lucene segment **merge** use more CPU/IO
Segments are immutable

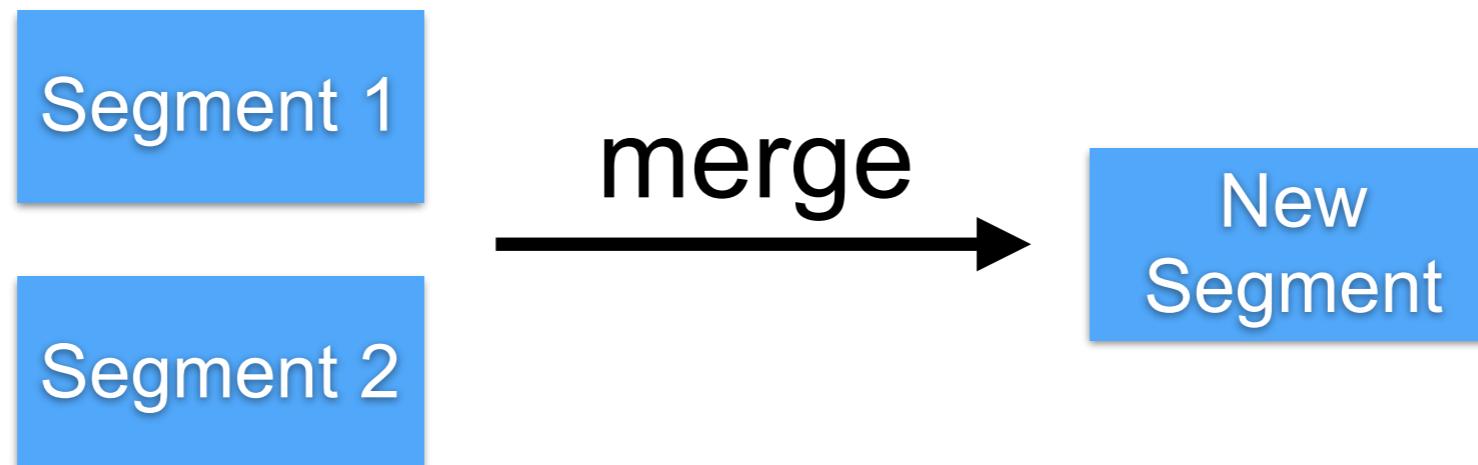

Hardware



Hardware

CPU
Memory
Network
Storage



Memory

Enable bootstrap.memorylock

Disable all swap files

Change `ES_HEAP_SIZE` (default 1G)

<https://www.elastic.co/guide/en/elasticsearch/reference/current/setup-configuration-memory.html>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

Design your index



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

244

Design your index

Sharding
Replication



Sharding

Elasticsearch divides the data in **logical** parts
of sharding is define when index created



How many shard ?



Need to know your size of data

Data Size	# of shard
< 3M	1
>3M <5M	2
>5M	(# of document / 5M) + 1



Sharding

Small shards on multiple nodes make the cluster recovery faster

Small shards on a lot of nodes solve memory mgt problem when query on large data



More shard, more Segment !!

Elasticsearch Index				
Shard	Shard	Shard	Shard	Shard
Lucene index	Lucene index	Lucene index	Lucene index	Lucene index
Segment	Segment	Segment	Segment	Segment

Need to config file descriptor

<https://www.elastic.co/guide/en/elasticsearch/reference/current/system-config.html>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

Don't create more shard than you need !!



Replication

Prevent data loss

Default = 1

```
# nodes = [(primary + # replication) /2 ] + 1
```



Problems with scaling

CPU consumption
Load average
Request rate
Search latency



Slow log

```
PUT /myindex/_settings
```

```
{  
  "index.search.slowlog.threshold.query.warn: 1s",  
  "index.search.slowlog.threshold.query.info: 500ms",  
  "index.search.slowlog.threshold.query.debug: 1500ms",  
  "index.search.slowlog.threshold.query.trace: 300ms",  
  "index.search.slowlog.threshold.fetch.warn: 500ms",  
  "index.search.slowlog.threshold.fetch.info: 400ms",  
  "index.search.slowlog.threshold.fetch.debug: 300ms",  
  "index.search.slowlog.threshold.fetch.trace: 200ms"  
}
```

If can't optimize then add more resources or rewrite

<https://www.elastic.co/guide/en/elasticsearch/reference/current/index-modules-slowlog.html>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

Indexing Data



Indexing data

Must be define data schema for your need
Default mapping == more cost (Memory/Disk)
Default for data is “text” + “keyword”
Understand analyzer and tokenizer
Use auto generated IDs if possible



Indexing data

Prefer bulk indexing

Change refresh interval

Time based index for log data

<https://www.elastic.co/guide/en/elasticsearch/reference/current/indices-update-settings.html>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

For Large data

Increase refresh interval
Decrease replica number

```
PUT /logstash-2015.05.20/_settings
{
  "index" : {
    "refresh_interval" : "-1",
    "number_of_replicas" : 0
  }
}
```

<https://www.elastic.co/guide/en/elasticsearch/reference/current/indices-update-settings.html>



Query Data



Query data

Use filters as much as possible

Use scan and scroll for dumping large data

Node query cache

Shard query cache

Retrieve only necessary fields

<https://www.elastic.co/guide/en/elasticsearch/reference/current/query-cache.html>




ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

Use cases



Event or Logging from Servers

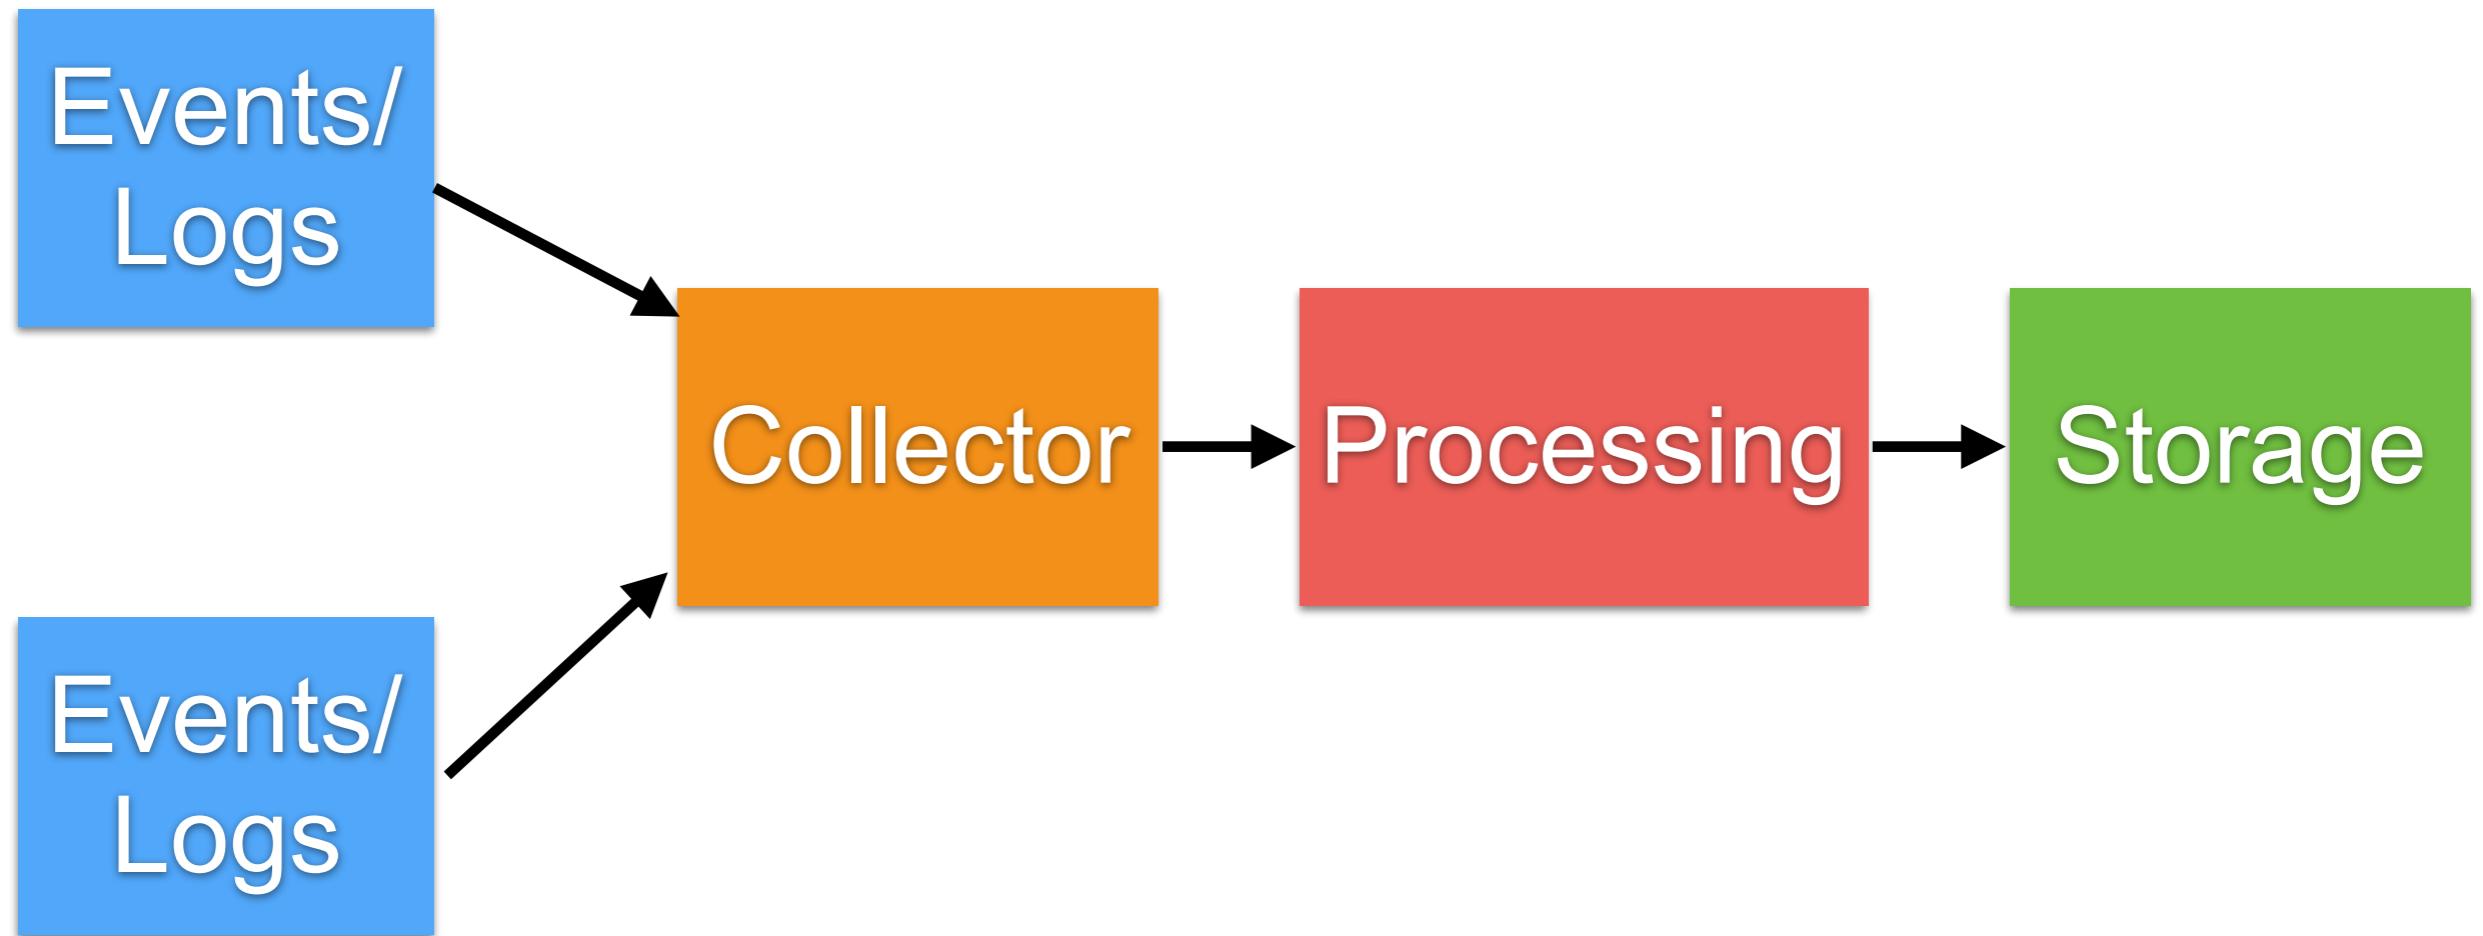

Event or Logging from Servers



Data
Collection


Data
Aggregation
& Processing

Indexing &
storage

Analysis &
visualization



Event or Logging from Servers

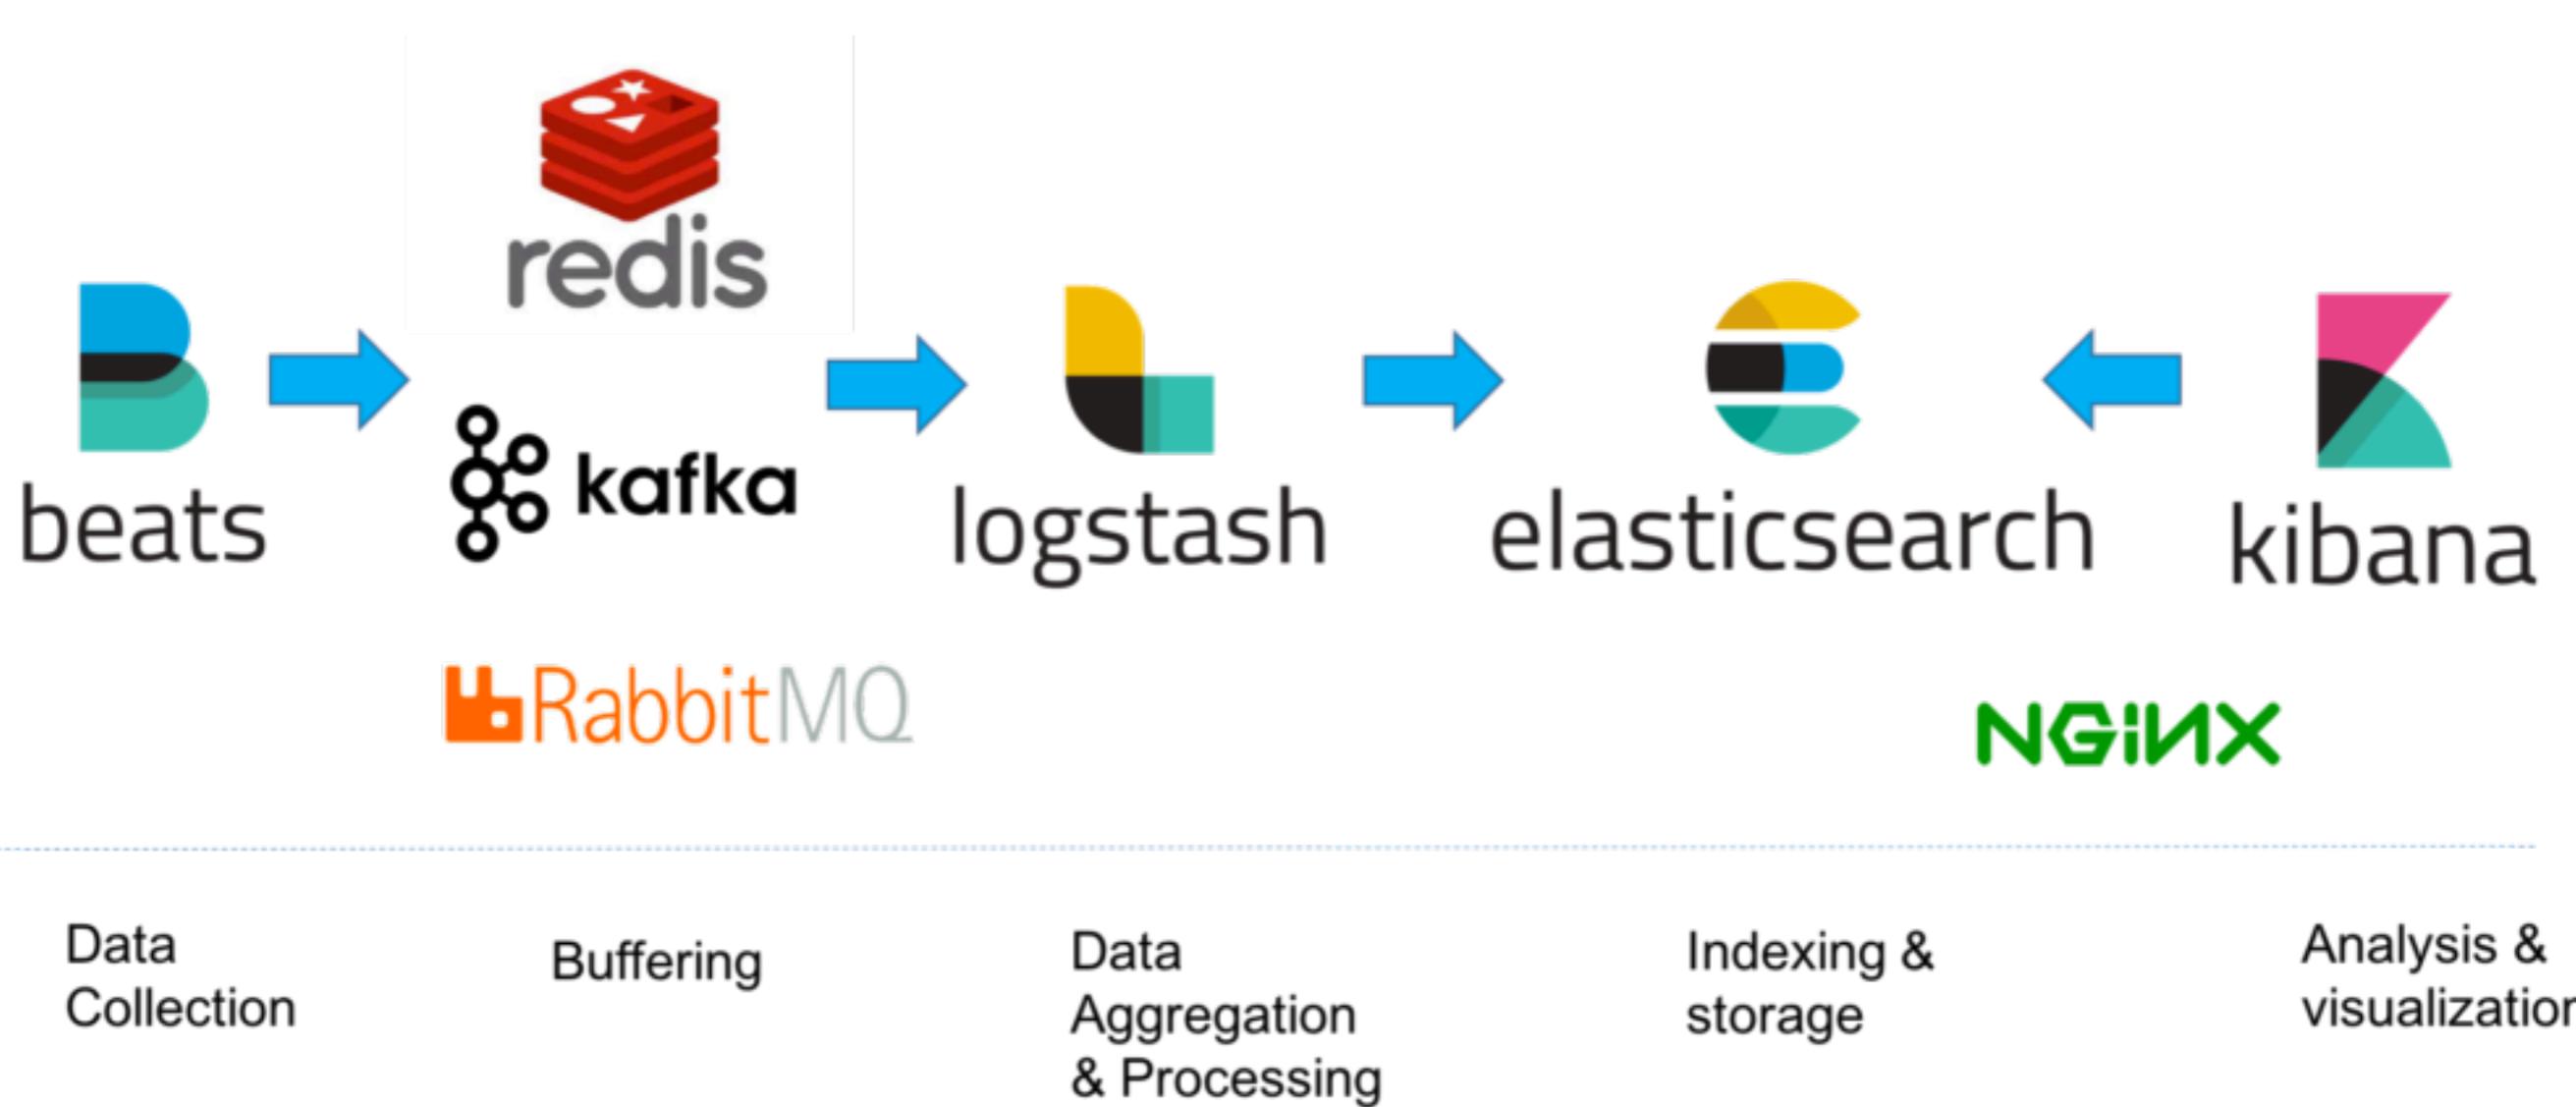

Monitoring



Collect data from ?

Elasticsearch nodes
Logstash nodes
Kibana instances


<https://www.elastic.co/guide/en/elasticsearch/guide/6.5/xpack-monitoring.html>




ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.


Recommend architecture

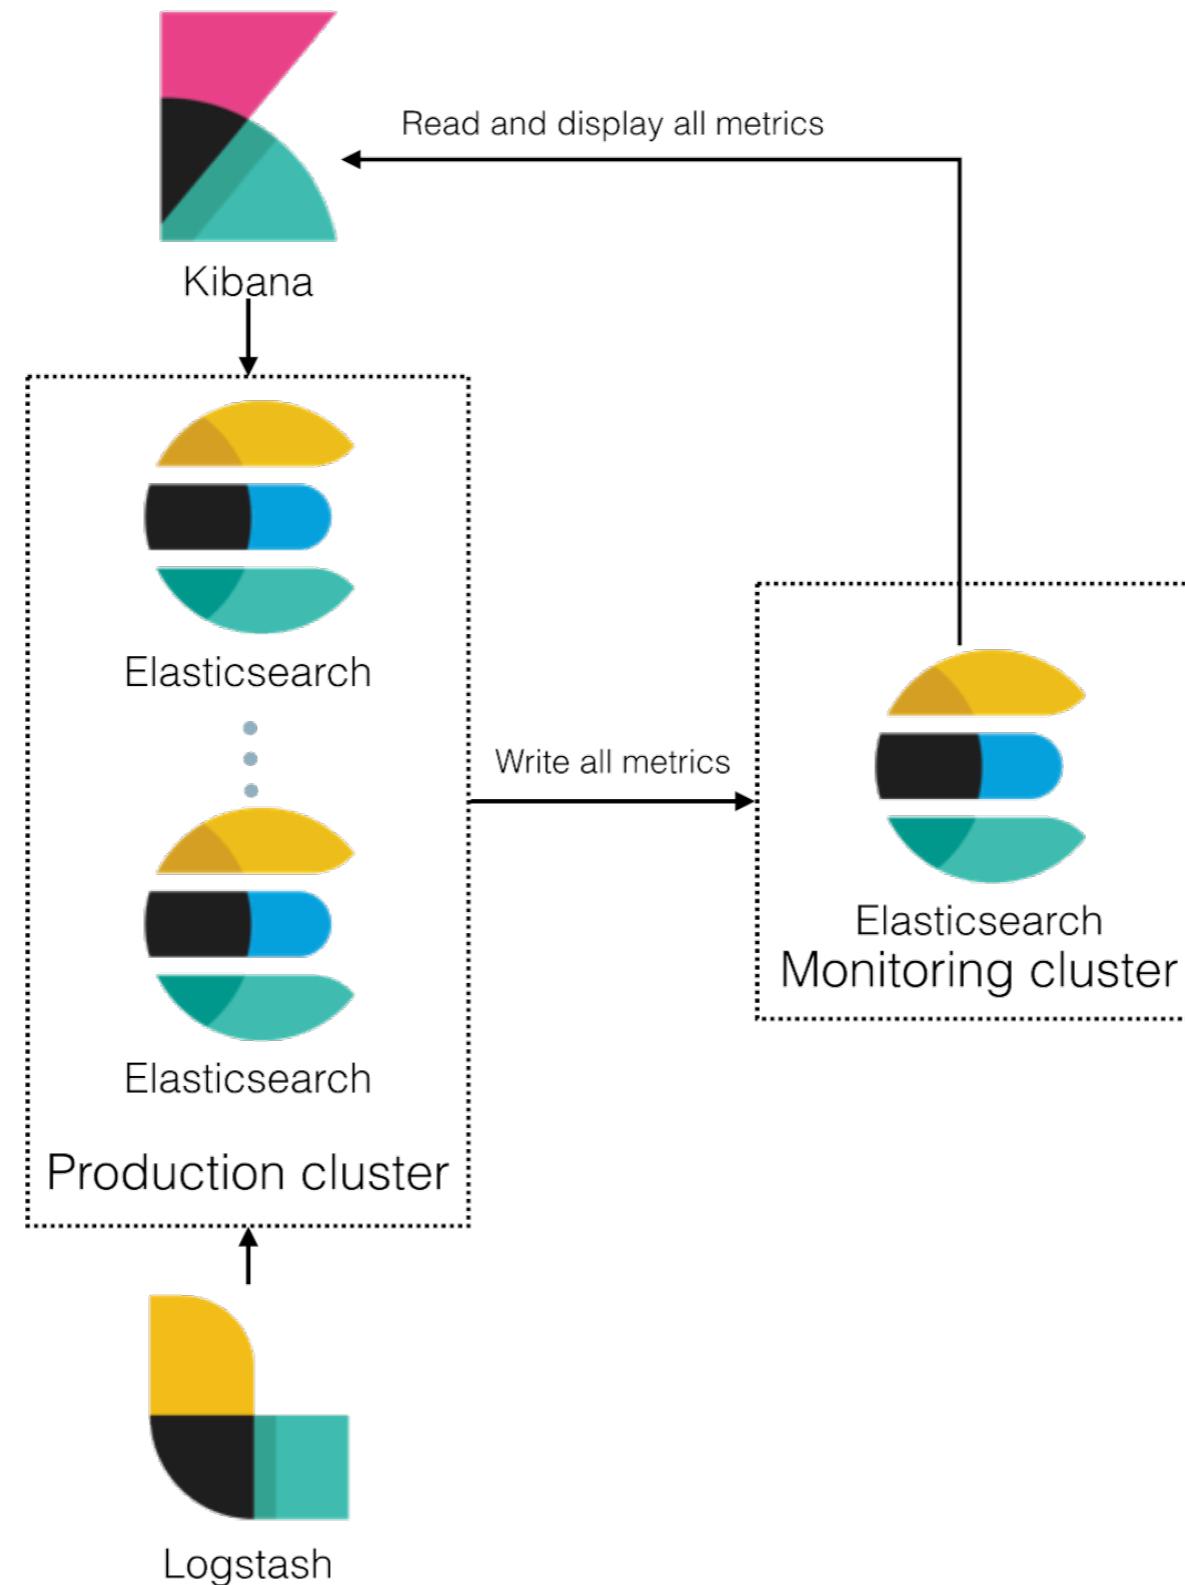

Elasticsearch 6.4 + (beta)

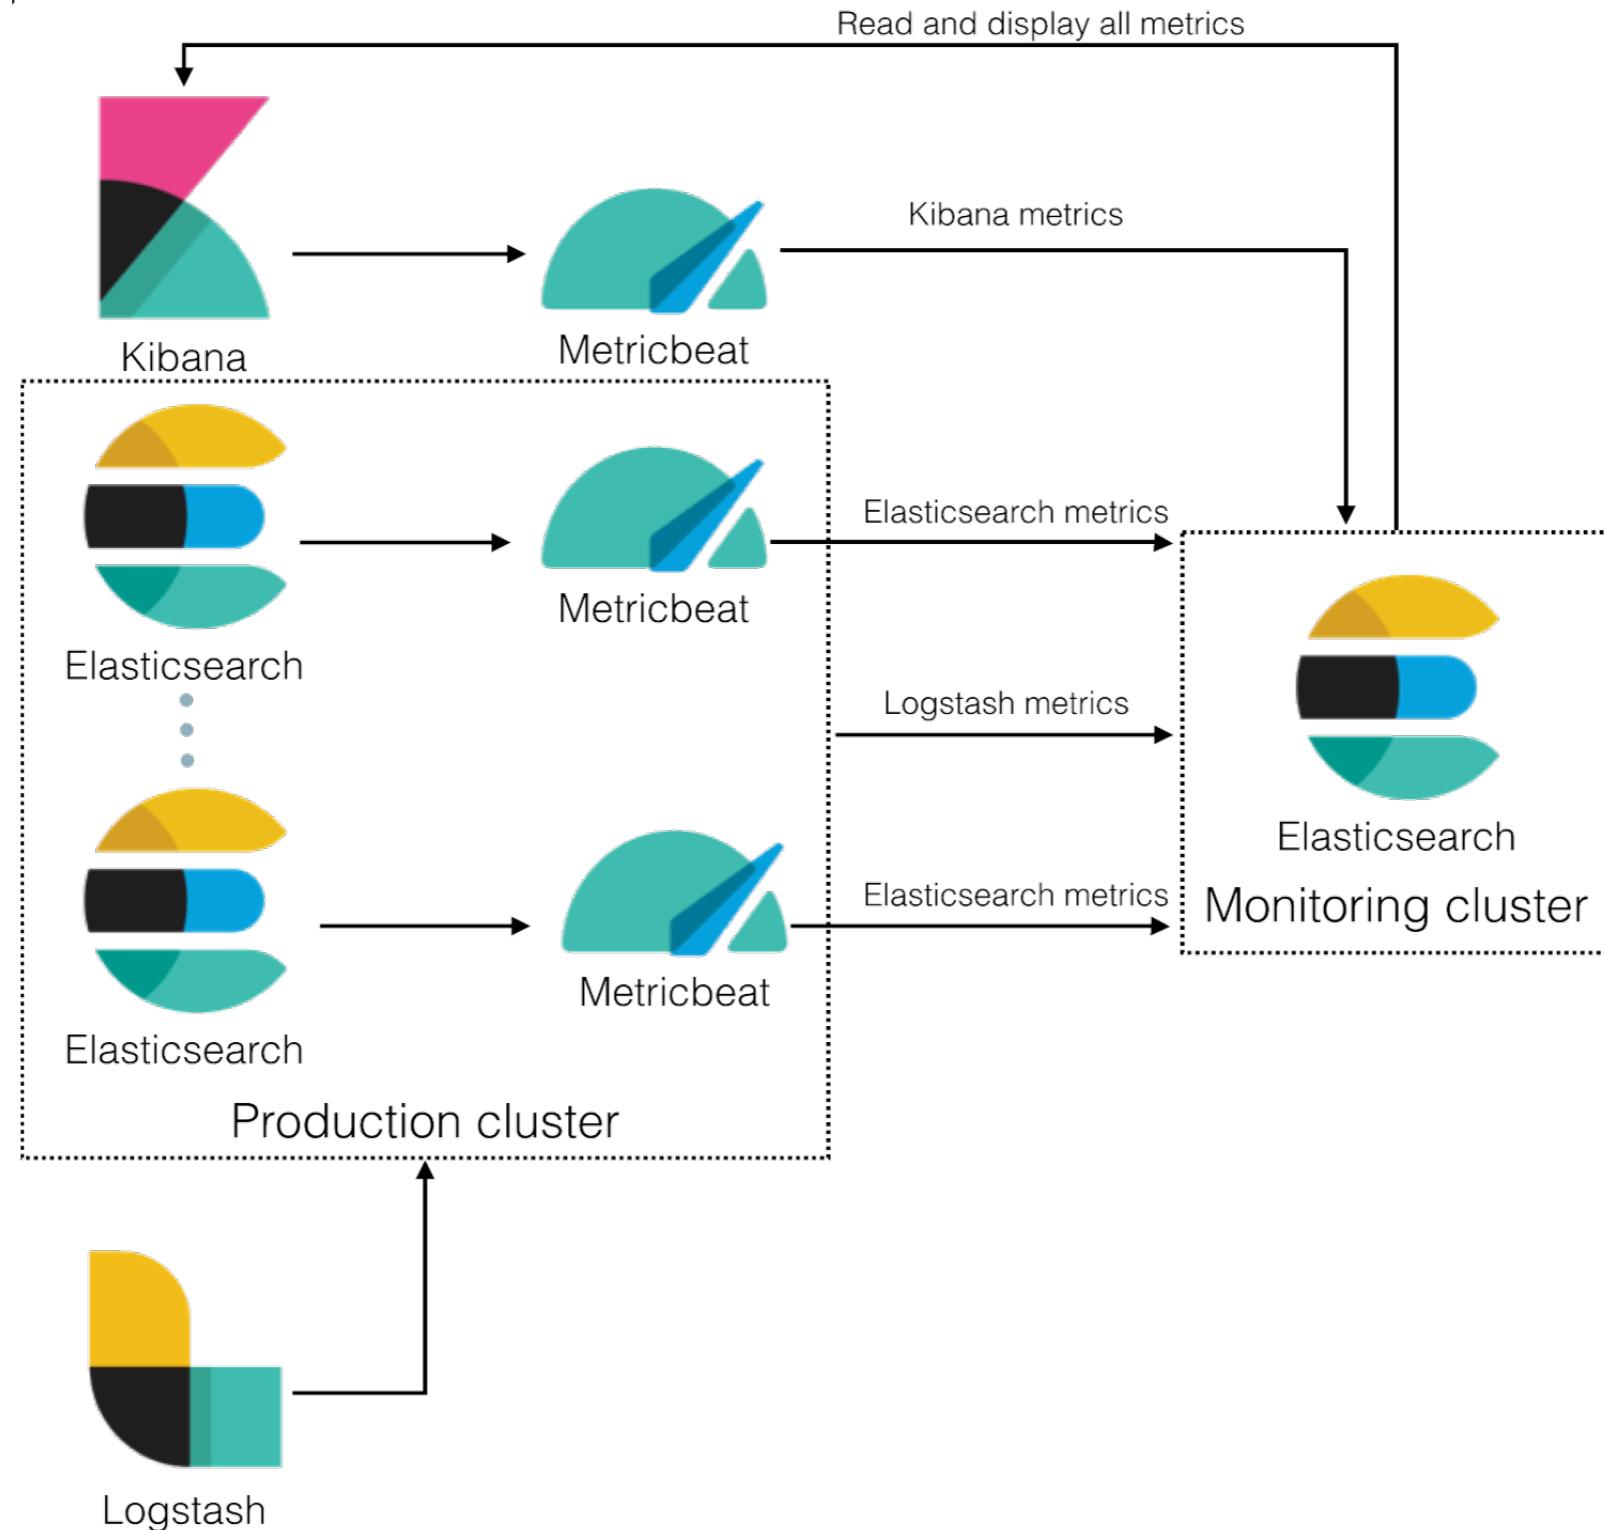

Try to separate kibana

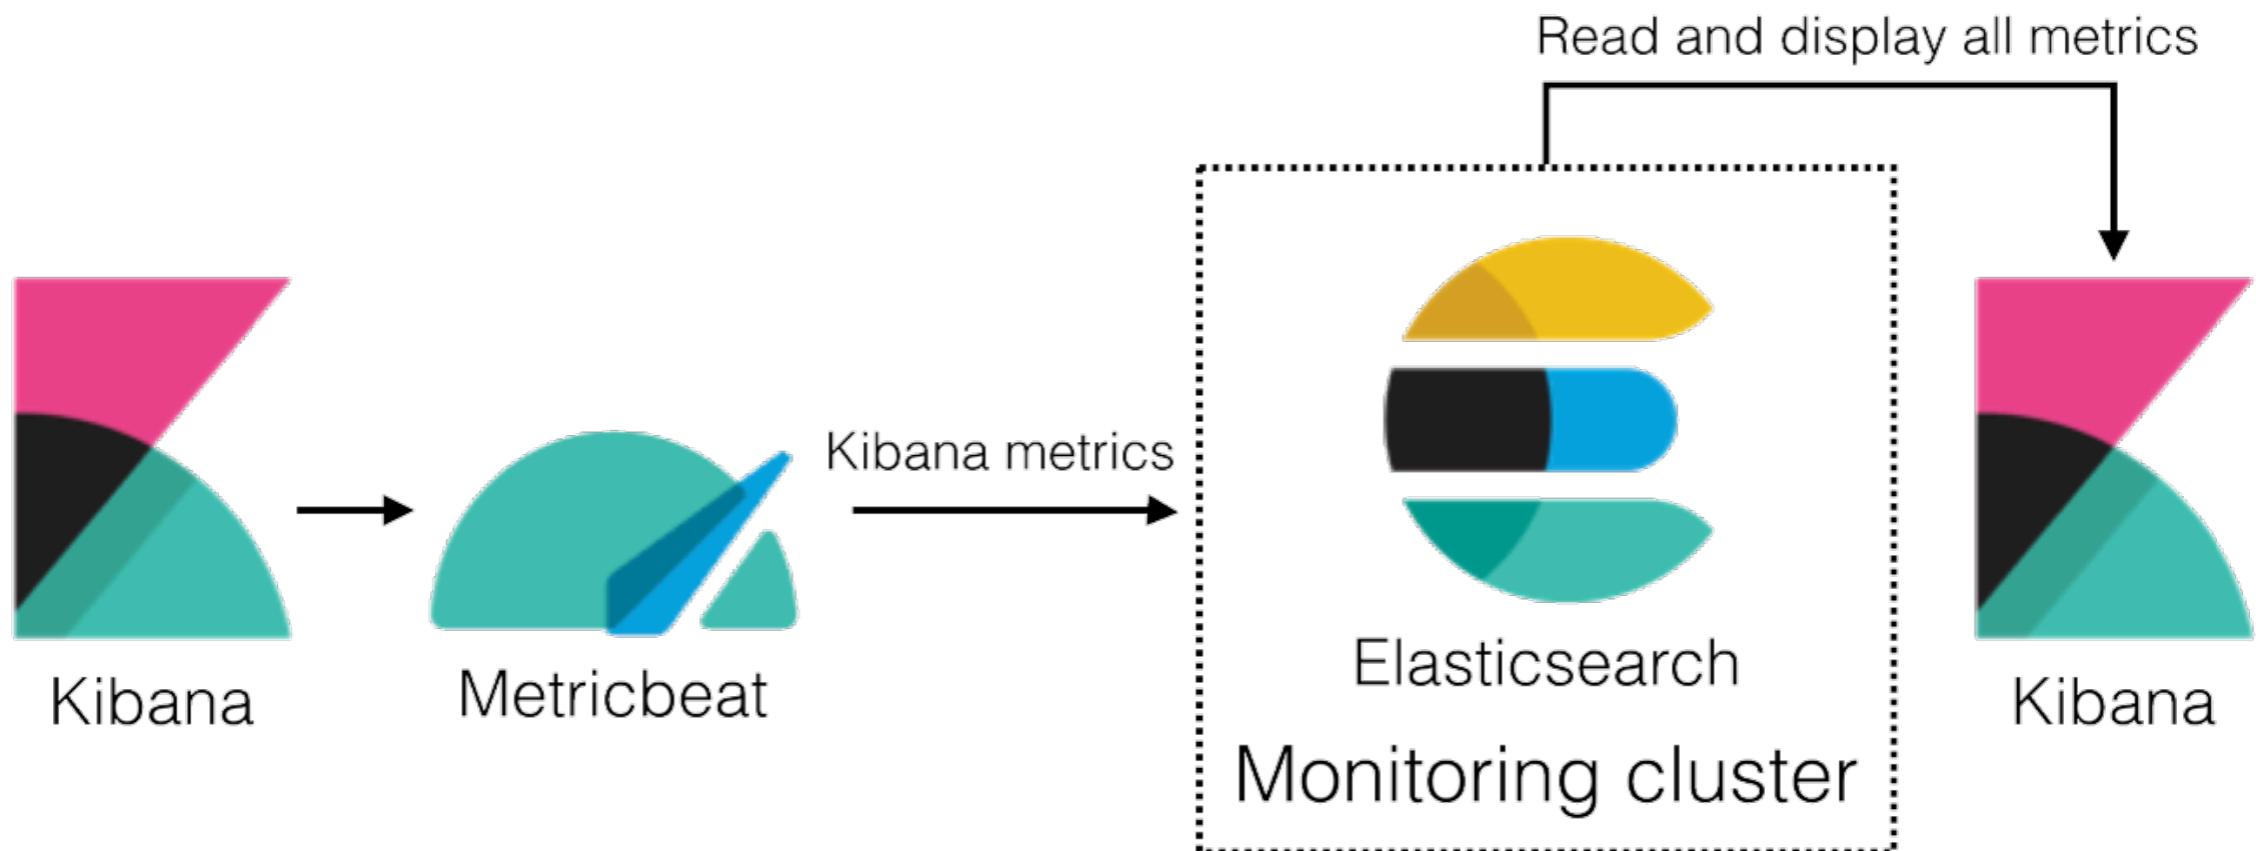

Metrics

workshop/prometheus-grafana



ELK Stack


© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

270

Sample Architecture



Sample Architecture

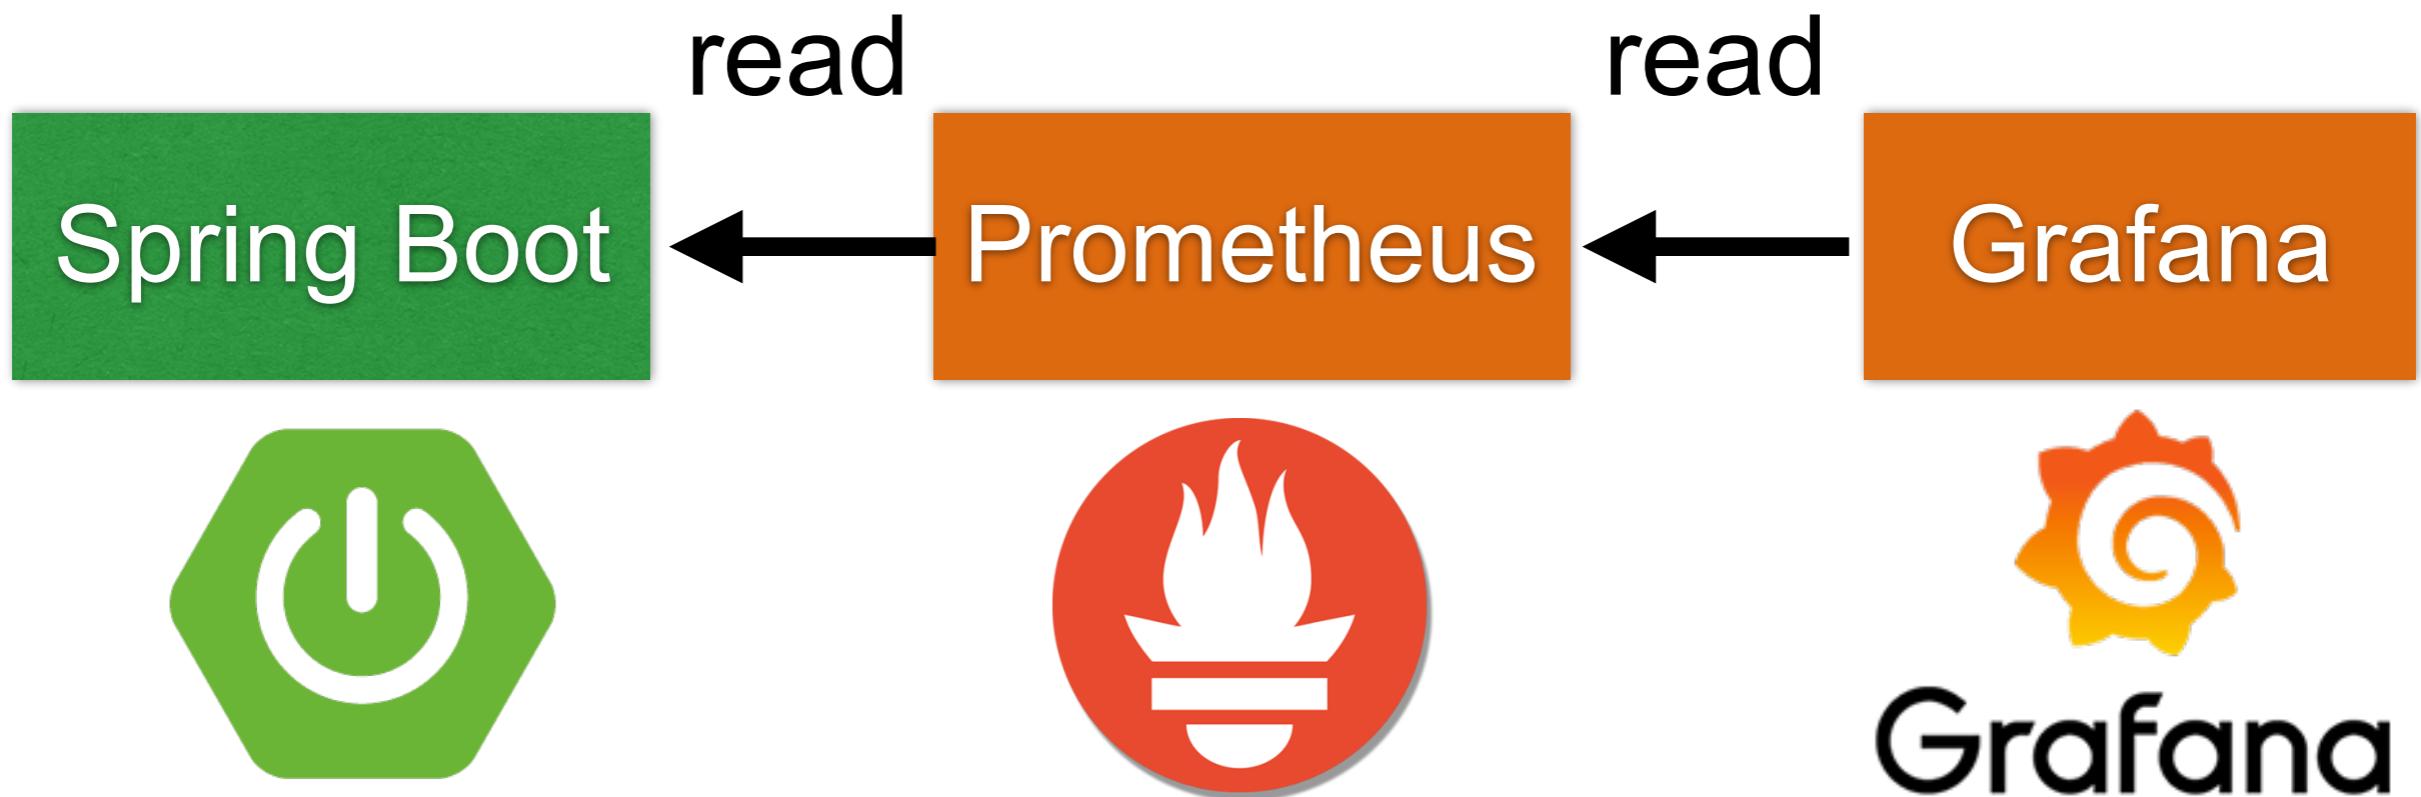

Metric in Spring Boot

Spring Boot Actuator for Spring Boot 1.x
MicroMeter for Spring Boot 2.0



Spring Boot Actuator (1)

Add library to pom.xml

```
<dependency>
    <groupId>org.springframework.boot</groupId>
    <artifactId>spring-boot-starter-actuator</artifactId>
</dependency>
```



Spring Boot Actuator (2)

Enabled endpoint in application.properties

```
info.app.name=Toy Store
```

```
info.app.description=This is my first spring boot application
```

```
info.app.version=1.0.0
```

```
management.endpoints.web.exposure.include=health,info,metrics,httptrace
```



Spring Boot Actuator (3)

List of endpoints = /actuator/

```
← → ⌂ ⓘ localhost:8080/actuator/
```

```
{  
  - _links: {  
    - self: {  
        href: "http://localhost:8080/actuator",  
        templated: false  
      },  
    - health: {  
        href: "http://localhost:8080/actuator/health",  
        templated: false  
      },  
    - info: {  
        href: "http://localhost:8080/actuator/info",  
        templated: false  
      },  
    - metrics-requiredMetricName: {  
        href: "http://localhost:8080/actuator/metrics/{requiredMetricName}",  
        templated: true  
      },  
    - metrics: {  
        href: "http://localhost:8080/actuator/metrics",  
        templated: false  
      },  
    - httptrace: {  
        href: "http://localhost:8080/actuator/httptrace",  
        templated: false  
      }  
  }  
}
```



Spring Boot Actuator (4)

Info endpoint = /actuator/info

```
← → ⌂ ⓘ localhost:8080/actuator/info

{
  - app: {
      name: "Toy Store",
      description: "This is my first spring boot application",
      version: "1.0.0"
    }
}
```



Spring Boot Actuator (5)

Info endpoint = /actuator/info

```
← → ⌂ ⓘ localhost:8080/actuator/info

{
  - app: {
      name: "Toy Store",
      description: "This is my first spring boot application",
      version: "1.0.0"
    }
}
```



Spring Boot Actuator (6)

Info endpoint = /actuator/httptrace

```
← → ⌂ ⓘ localhost:8080/actuator/httptrace

{
  - traces: [
    - {
      timestamp: "2018-03-06T13:33:02.800Z",
      principal: null,
      session: null,
      - request: {
        method: "GET",
        uri: "http://localhost:8080/prometheus",
        - headers: {
          - host: [
            "localhost:8080"
          ],
          - user-agent: [
            "Prometheus/2.0.0"
          ],
          - accept: [
            "text/plain;version=0.0.4;q=1,*/*;q=0.1"
          ],
          - accept-encoding: [
            "gzip"
          ],
          - x-prometheus-scrape-timeout-seconds: [
            "5.000000"
          ]
        },
        remoteAddress: null
      },
    }
  ]
}
```



Spring Boot Actuator (7)

List of metrics endpoint = /actuator/metrics

```
← → ⌂ ⓘ localhost:8080/actuator/metrics

{
  - names: [
    "jvm.buffer.memory.used",
    "jvm.memory.used",
    "jvm.gc.memory.allocated",
    "jvm.memory.committed",
    "http.server.requests",
    "jdbc.connections.min",
    "tomcat.sessions.created",
    "tomcat.sessions.expired",
    "hikaricp.connections.usage",
    "tomcat.global.request.max",
    "tomcat.global.error",
    "jvm.gc.max.data.size",
    "logback.events",
    "system.cpu.count",
    "jvm.memory.max",
    "jdbc.connections.active",
    "jvm.buffer.total.capacity",
    "jvm.buffer.count",
    "process.files.max",
    "jvm.threads.daemon",
```



Spring Boot Actuator (8)


/actuator/metrics/http.server.requests

```
← → ⌂ ⓘ localhost:8080/actuator/metrics/http.server.requests

{
  name: "http.server.requests",
  - measurements: [
    - {
      statistic: "COUNT",
      value: 269
    },
    - {
      statistic: "TOTAL_TIME",
      value: 1.1072010200000002
    },
    - {
      statistic: "MAX",
      value: 0.04373569
    }
  ],
  - availableTags: [
    - {
      tag: "exception",
      - values: [
        "None"
      ]
    },
    - {
      tag: "method",
      - values: [
        "GET"
      ]
    },
  ],
}
```



Spring Boot 2.0 with MicroMeter

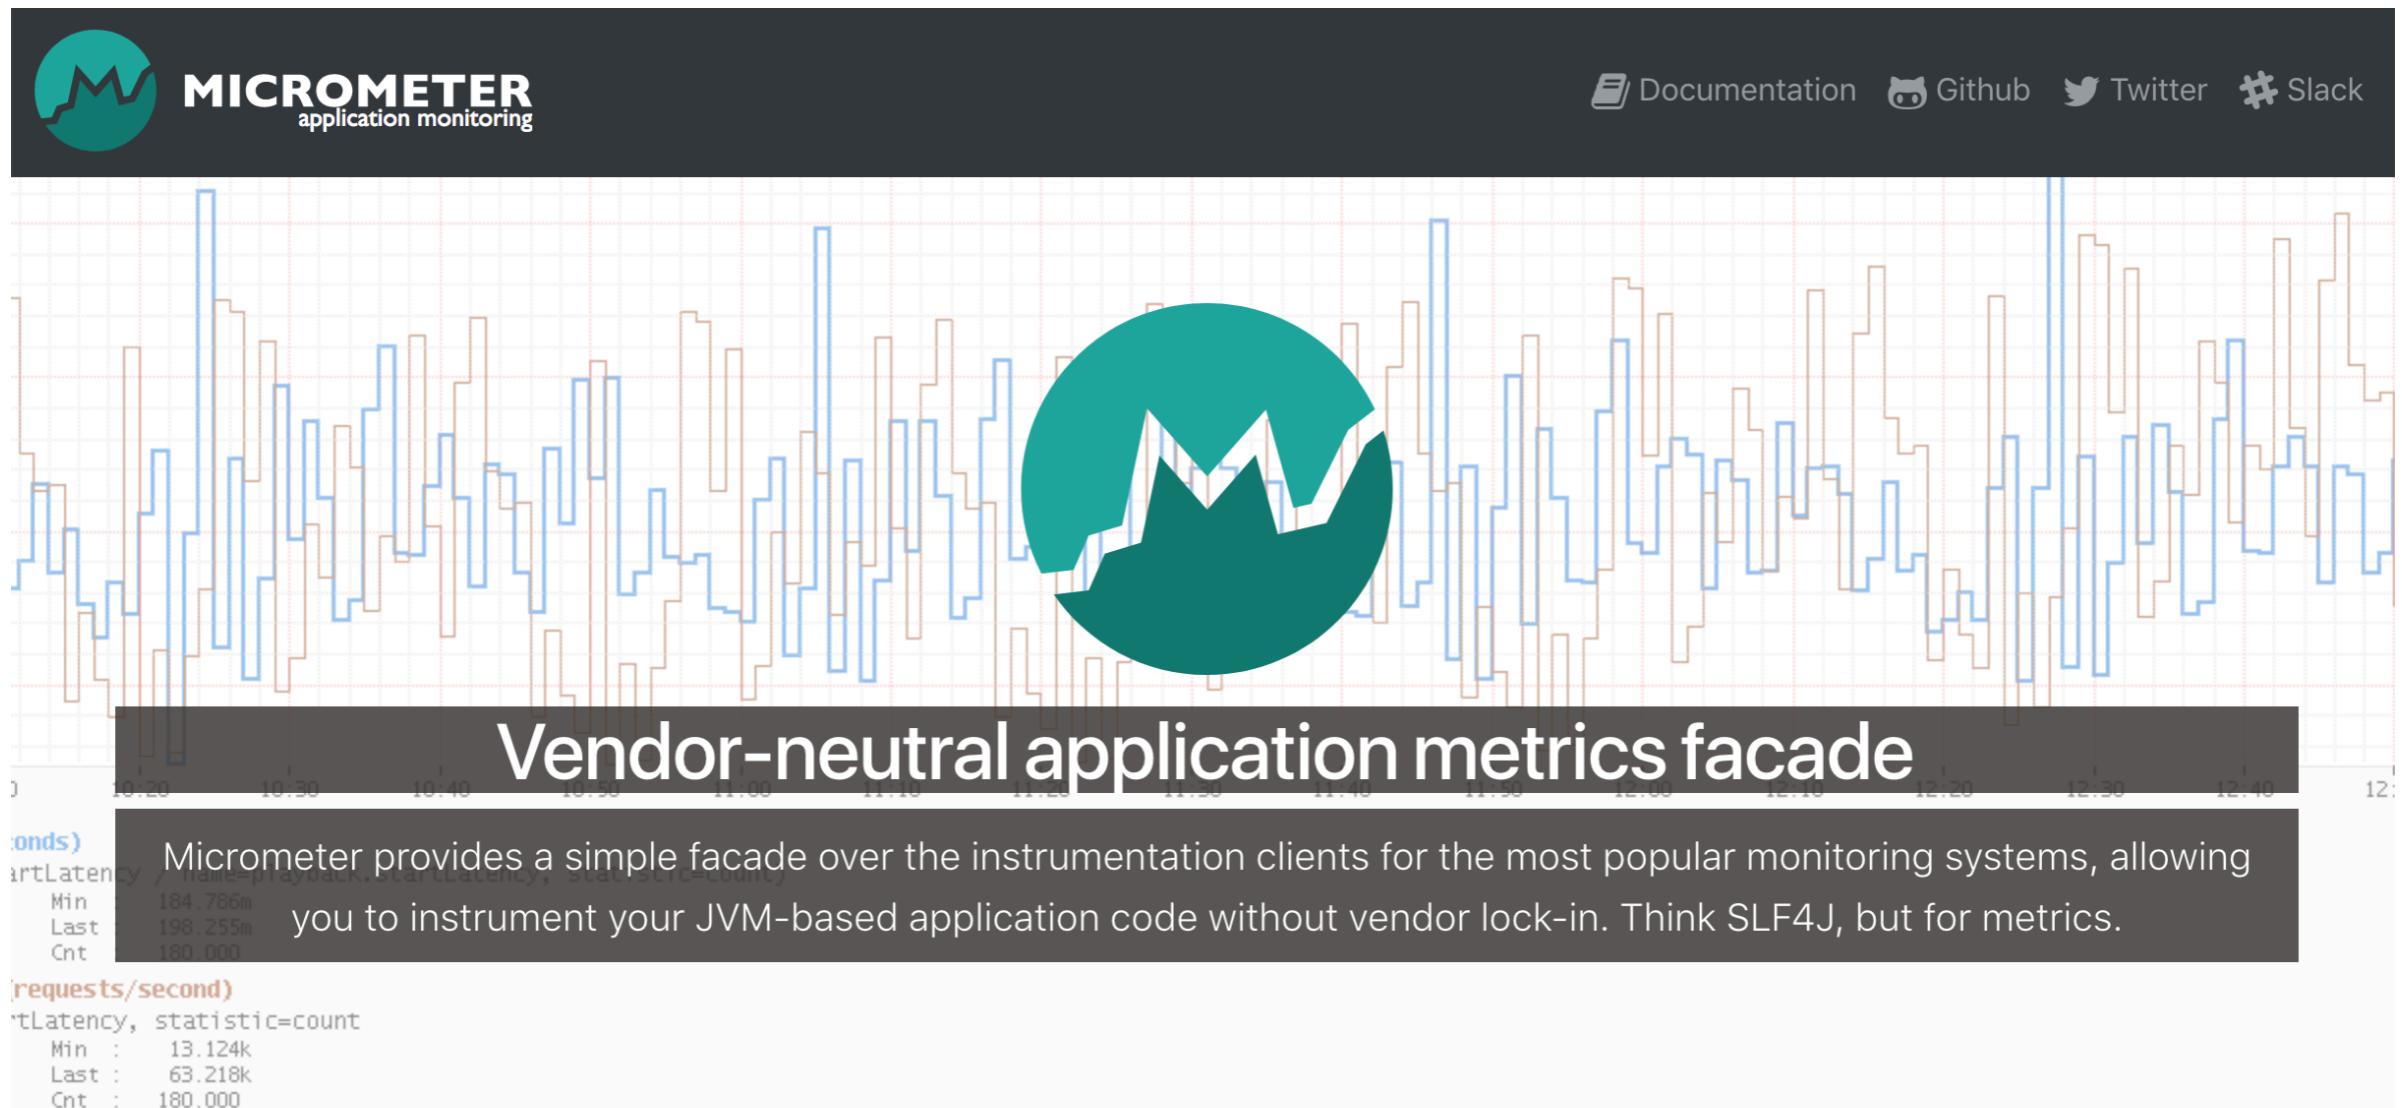

<https://micrometer.io/>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

Service metric for Prometheus



Enable Prometheus (1)

Add library to pom.xml

```
<dependency>
    <groupId>io.micrometer</groupId>
    <artifactId>micrometer-registry-prometheus</artifactId>
    <version>1.0.1</version>
</dependency>
```



Enable Prometheus (2)

Enabled endpoint in application.properties

```
management.endpoints.web.exposure.include  
=....,prometheus
```



Enable Prometheus (3)

New endpoint = actuator/prometheus

```
← → ⌂ ⓘ localhost:8080/actuator/prometheus

# HELP jvm_memory_used_bytes The amount of used memory
# TYPE jvm_memory_used_bytes gauge
jvm_memory_used_bytes{area="nonheap",id="Code Cache",} 1.49056E7
jvm_memory_used_bytes{area="nonheap",id="Metaspace",} 5.6766712E7
jvm_memory_used_bytes{area="nonheap",id="Compressed Class Space",} 7617096.0
jvm_memory_used_bytes{area="heap",id="PS Eden Space",} 1.7135864E7
jvm_memory_used_bytes{area="heap",id="PS Survivor Space",} 1.6235192E7
jvm_memory_used_bytes{area="heap",id="PS Old Gen",} 2.1936456E7
# HELP hikaricp_connections_idle Idle connections
# TYPE hikaricp_connections_idle gauge
hikaricp_connections_idle{pool="HikariPool-1",} NaN
# HELP tomcat_threads_config_max
# TYPE tomcat_threads_config_max gauge
tomcat_threads_config_max{name="http-nio-8080",} 200.0
# HELP tomcat_servlet_error_total
# TYPE tomcat_servlet_error_total counter
tomcat_servlet_error_total{name="default",} 0.0
# HELP jvm_threads_peak The peak live thread count since the Java virtual machine start
# TYPE jvm_threads_peak gauge
jvm_threads_peak 28.0
# HELP hikaricp_connections_pending Pending threads
# TYPE hikaricp_connections_pending gauge
hikaricp_connections_pending{pool="HikariPool-1",} NaN
# HELP system_cpu_count The number of processors available to the Java virtual machine
```



Keep data in Prometheus

<https://prometheus.io/>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

Prometheus



Prometheus

DOCS

DOWNLOAD

COMMUNITY

BLOG



From metrics to insight

Power your metrics and alerting with a leading
open-source monitoring solution.

GET STARTED

DOWNLOAD

Prometheus v2.0 is available now — [Read the announcement blog post!](#)

<https://prometheus.io/>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

288

Prometheus

PUBLIC | AUTOMATED BUILD

[prom/prometheus](#) 

Last pushed: 17 hours ago


[Repo Info](#) [Tags](#) [Dockerfile](#) [Build Details](#)

Short Description

Short description is empty for this repo.

Full Description

Prometheus 

Visit prometheus.io for the full documentation, examples and guides.

Prometheus is a systems and service monitoring system. It collects metrics

Docker Pull Command

`docker pull prom/prometheus`

Owner



prom

Source Repository

 [prometheus/prometheus](#)

<https://hub.docker.com/r/prom/prometheus/>



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

289

Create container of Prometheus

```
$ docker container run --rm  
  -p 9090:9090  
  -v $(pwd)/prometheus.yml:/etc/prometheus/  
prometheus.yml  
  --name monitor prom/prometheus
```



Check Data in Prometheus

http://localhost:9090/

The screenshot shows the Prometheus web interface at the URL `localhost:9090/graph`. The top navigation bar includes links for Prometheus, Alerts, Graph, Status, and Help. A checkbox labeled "Enable query history" is checked. Below it is a text input field for the expression query, containing the placeholder "- insert metric at cursor -". The "Graph" tab is selected, while the "Console" tab is visible. A table below shows one row with the element "no data" and no value. At the bottom left is a blue button labeled "Add Graph".



Check Target in Prometheus

Status -> Targets

The screenshot shows the Prometheus web interface at the URL `localhost:9090/targets`. The top navigation bar includes links for Prometheus, Alerts, Graph, Status, and Help. The main section is titled "Targets" and features a checkbox labeled "Only unhealthy jobs" which is unchecked. Below this, a summary box displays "spring-boot (1/1 up)" with a "show less" button. A table lists one target endpoint:

Endpoint	State	Labels	Last Scrape	Error
http://10.10.99.59:8080/actuator/prometheus	UP	instance="10.10.99.59:8080"	2.355s ago	



ELK Stack

© 2017 - 2018 Siam Chamnankit Company Limited. All rights reserved.

Show data in Grafana

<https://grafana.com/>



Grafana

The screenshot shows the official Grafana website. At the top, there's a navigation bar with links for Plugins (currently installed), Grafana Labs, Panels, Data sources, Apps, Docs, Community, Events, GrafanaCon, Blog, and Log In. Below the navigation, a large central text area features the tagline "The open platform for beautiful analytics and monitoring" with a "Get Grafana" button. To the left, there are cards for "Grafana TestData" and "kubernetes". To the right, there are cards for "Kentik Connect Pro" and "NS1 for Grafana". At the bottom, there's a large "Get Grafana" button and the Grafana logo.

<https://grafana.com/>



Grafana

PUBLIC REPOSITORY

[grafana/grafana](#) 

Last pushed: 25 minutes ago

[Repo Info](#)

[Tags](#)

Short Description

The official Grafana docker container

Full Description

Grafana Docker image

This project builds a Docker image with the latest master build of Grafana.

Running your Grafana container

Start your container binding the external port 3000 .

```
docker run -d --name=grafana -p 3000:3000 grafana/grafana
```

Docker Pull Command

```
docker pull grafana/grafana
```

Owner



grafana

<https://hub.docker.com/r/grafana/grafana/>



ELK Stack

© 2017 - 2018 Siam Chamnkit Company Limited. All rights reserved.

295

Create container of Grafana

```
$docker container run  
--name=grafana  
-p 3000:3000 grafana/grafana
```



Grafana Dashboard

<https://grafana.com/dashboards/4701>

All dashboards » [JVM \(Micrometer\)](#)



JVM (Micrometer) by [mweirauch](#)

[DASHBOARD](#)

Dashboard for Micrometer instrumented applications (Java, Spring Boot)
Last updated: 21 days ago

[Overview](#) [Revisions](#)



Get this dashboard:

[4701](#) [Copy ID to Clipboard](#)

A dashboard for [Micrometer](#) instrumented applications (Java, Spring Boot).

Features

- JVM memory
- Process memory (provided by [micrometer-jvm-extras](#))
- CPU-Usage, Load, Threads, File Descriptors, Log Events
- JVM Memory Pools (Heap, Non-Heap)
- Garbage Collection

Dependencies:

 [GRAFANA 4.6.3](#)

 [GRAPH](#)

[Download JSON](#) [How do I import this dashboard?](#)



Take to your home

Always improve, always practice

