
## Python 入門

データベース接続①



## Python 入門

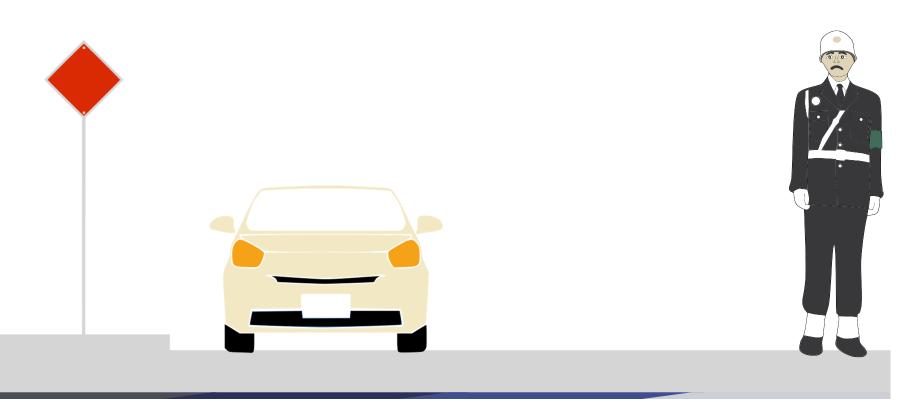

### Pythonの環境構築方法(VScode)

• VS CodeでPythonするために必要なこと https://www.atmarkit.co.jp/ait/articles/1805/22/news04 3.html

#### Pythonデータ解析入門~タイタニック編~

【Kaggle初心者入門編】タイタニック号で生き残るのは誰?

https://www.codexa.net/kaggle-titanic-beginner/


# データベースへの接続方法①






#### ターミナルソフトの導入


http://nanno.dip.jp/softlib/man/rlogin/

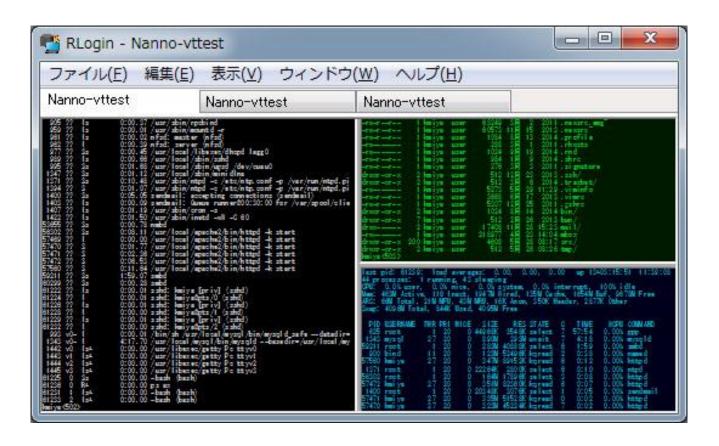


#### ターミナルソフトの設定

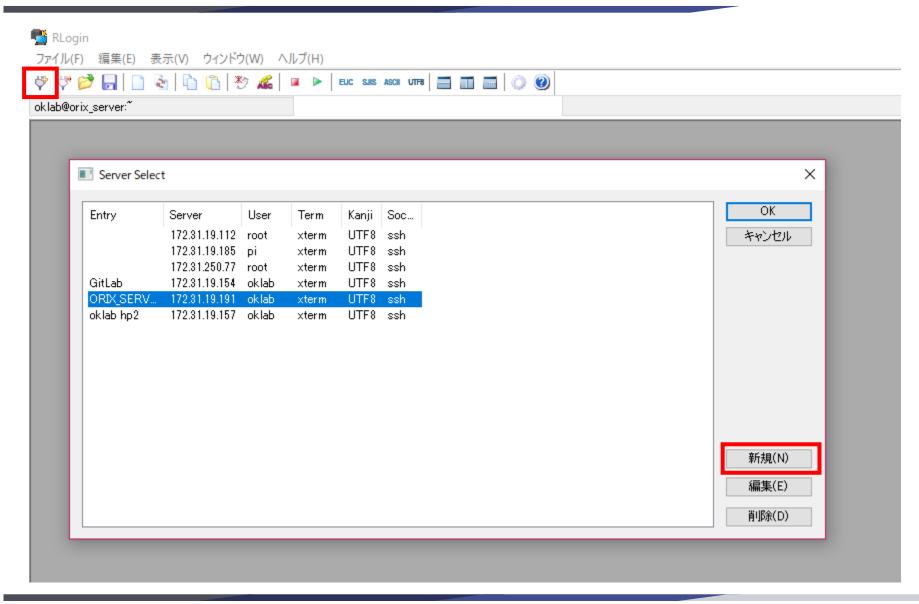


#### ターミナルソフトの設定

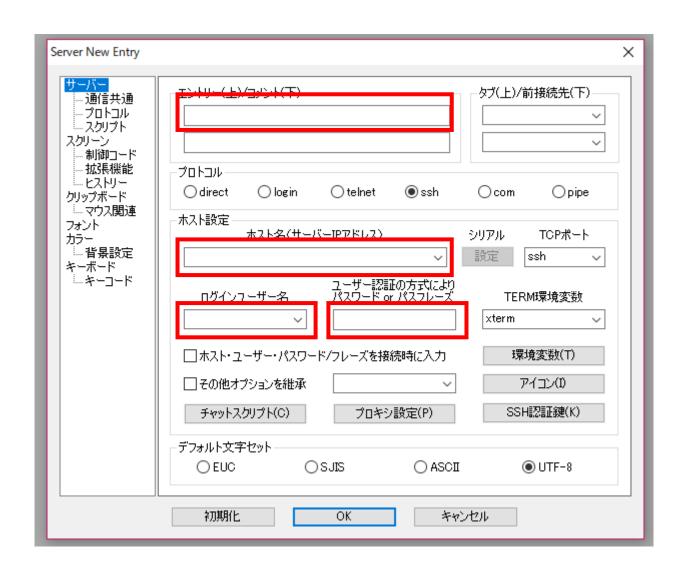

#### ターミナルソフトの設定

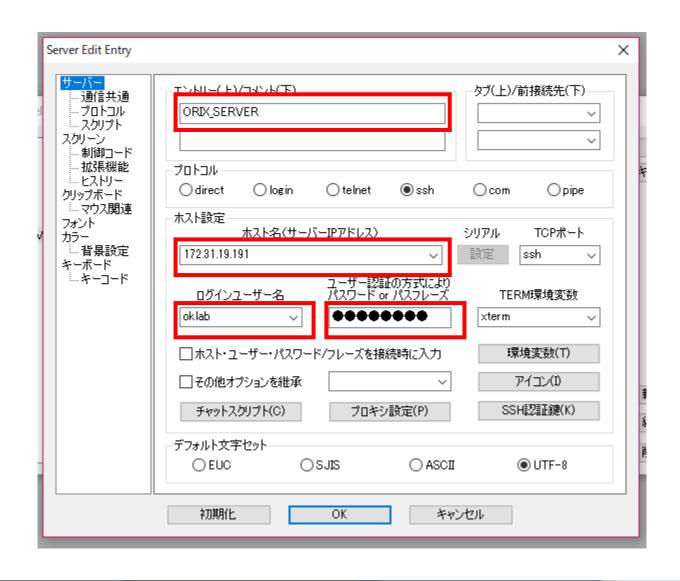

#### サーバーへ接続

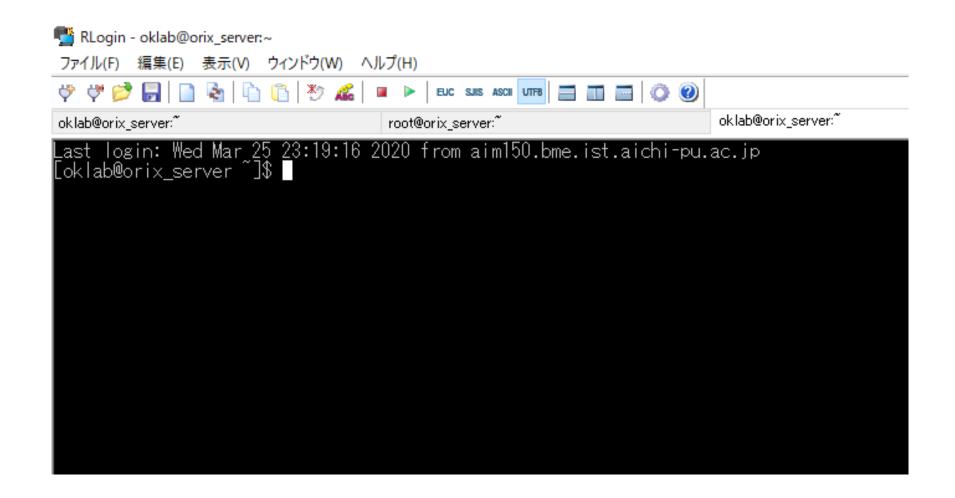


#### データベースの起動確認

```
oklab@orix server ~1$ sudo systemctl status mariadb
 sudo] oklabのバスワード:
  mariadb.service - MariaDB 10.3.14 database server
   Loaded: loaded (/usr/lib/systemd/system/mariadb.service; enabled; vendor preset: disabled)
  Drop-In: /etc/systemd/system/mariadb.service.d
                 ∟migrated-from-my.cnf-settings.conf
   Active: active (running) since 7K 2020-03-25 23:31:35 JST; 31min ago
      Docs: man:mysqld(8)
                https://mariadb.com/kb/en/library/systemd/
  Process: 17093 ExecStartPost=/bin/sh -c systemctl unset-environment _WSREP_START_POSITION (code=exited, status=0/SUCCESS)
  Process: 17033 ExecStartPre=/bin/sh -c [ ! -e /usr/bin/galera_recovery ] && VAR= || VAR=`/usr/bin/galera_recovery`; [ $? -eq 0 _ && systemet! set-environment _WSREP_START_POSITION=$VAR || exit 1 (code=exited, status=0/SUCCESS)
 Process: 17028 ExecStartPre=/bin/sh -c systemctl unset-environment _WSREP_START_POSITION (code=exited, status=0/SUCCESS)
Main PID: 17054 (mysqld)
   Status: "Taking your SQL requests now..."
     Tasks: 30
   CGroup: /system.slice/mariadb.service
-17054 /usr/sbin/mysqld
      25 23:31:35 orix_server mysqld[17054]: 2020-03-25 23:31:35 0 [Note] Recovering after a crash using tc.log
       25 23:31:35 orix server mysqld[17054]: 2020-03-25 23:31:35 0 [Note] Starting crash recovery...
     25 23:31:35 orix_server mysqld[17054]: 2020-03-25 23:31:35 0 [Note] Crash recovery finished.
25 23:31:35 orix_server mysqld[17054]: 2020-03-25 23:31:35 0 [Note] Server socket created on IP: '::'.
25 23:31:35 orix_server mysqld[17054]: 2020-03-25 23:31:35 0 [Note] InnoDB: Buffer pool(s) load completed at 200325 23:31:35
25 23:31:35 orix_server mysqld[17054]: 2020-03-25 23:31:35 0 [Note] Reading of all Master_info entries succeded
25 23:31:35 orix_server mysqld[17054]: 2020-03-25 23:31:35 0 [Note] Added new Master_info '' to hash table
25 23:31:35 orix_server mysqld[17054]: 2020-03-25 23:31:35 0 [Note] /usr/sbin/mysqld: ready for connections.
25 23:31:35 orix_server mysqld[17054]: Version: '10.3.14-MariaDB' socket: '/home/mysql/mysql.sock' port: 3306 Mari...Server
      25 23:31:35 orix_server systemd[1]: Started MariaDB 10.3.14 database server.
Hint: Some lines were ellipsized, use -I to show in full.
 oklab@orix server ~7$
```

#### Activeであることを確認

#### 自分のPCのブラウザからデータベースへ接続

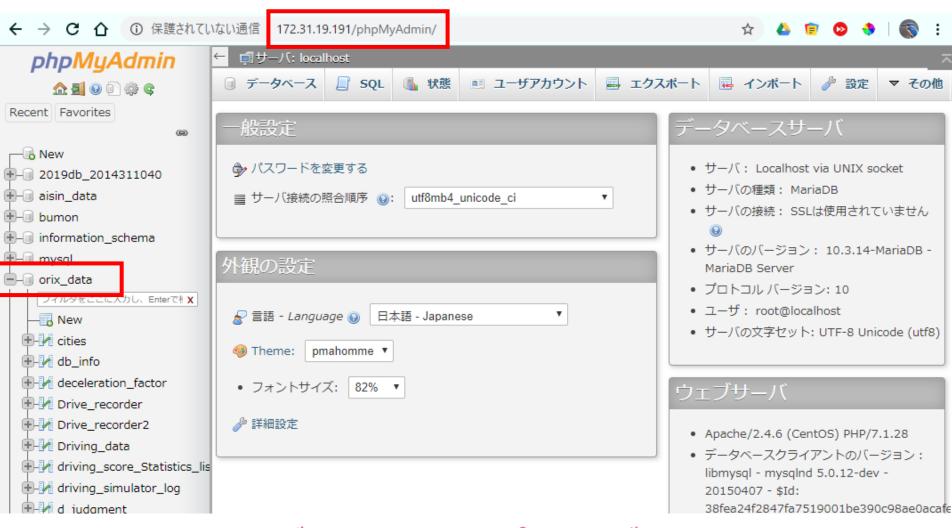

ユーザー:root, パス:ぜろぐり




SQLのタブに移動, 構文を入力

#### 構文

SELECT `DATE`, `velocity\_kmh` FROM

`Drive\_recorder` WHERE `sub`=6 AND

DATE\_FORMAT(`DATE`, '%Y%m%d')=20180319

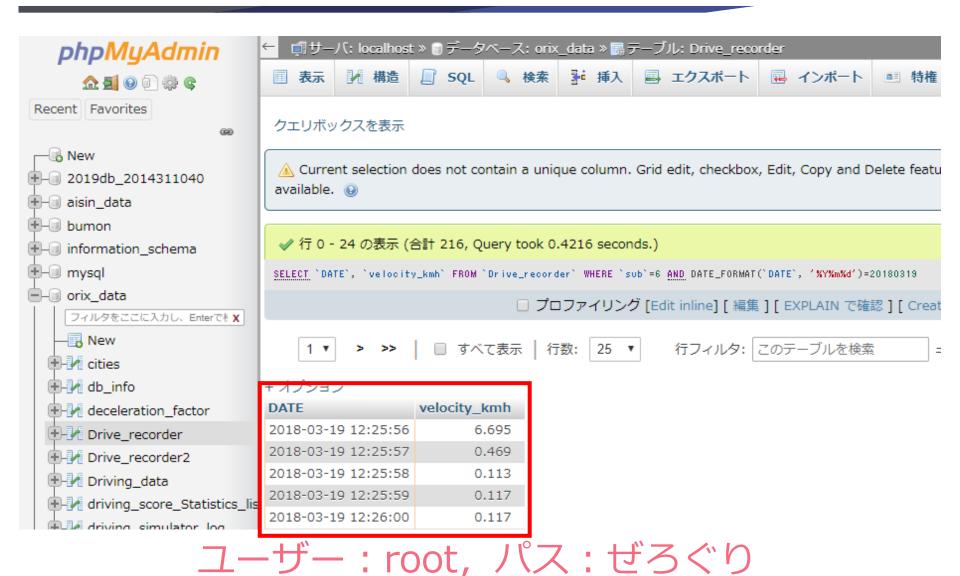



取得するカラム名 テーブル名

取得する条件





WHERE `sub`=6 AND DATE\_FORMAT(`DATE`, '%Y%m%d')=20180319

Sub6を取得する 2018年3月19日のデータを取得


2010 00 10 12,20,17	1111110
2018-03-19 12:26:18	45.622
2018-03-19 12:26:19	45.578
2018-03-19 12:26:20	46.148



#### クエリ結果操作

🔒 印刷 👫 クリップボードにコピー 🔜 エクスポート ᇜ グラフで表示する 🗟 ビューを作成する

#### 簡易的なグラフ描画

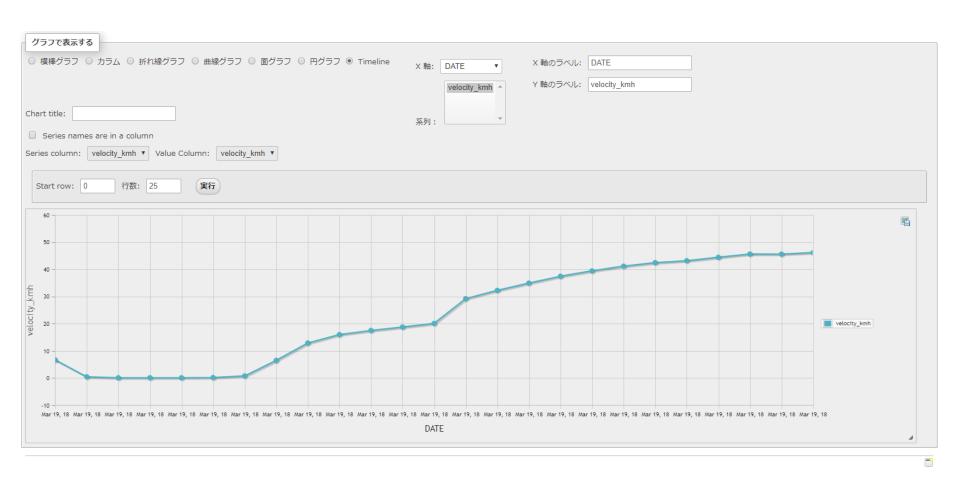

#### 課題①

- ・被験者ごとのデータ数を一覧で取得
- ↓イメージ図

1/1/////	+	7	ブ	゚シ	$\exists$	$\geq$
----------	---	---	---	----	-----------	--------

sub	COUNT('sub')
1	377329
2	327211
3	72574
5	532044
6	567829
101	3246767
102	2273830
103	3308418
104	885983
106	904842
108	116943
1000	816

#### 課題①~答え

 <u>SELECT</u> `sub`, <u>COUNT</u>(`sub`) FROM `Drive\_recorder` group BY `sub`



#### 課題②

- ・被験者No3の日付,速度,経度,緯度を取得
- ・日付は20018年01月21

#### 課題②~答え

<u>SELECT</u> `DATE`, `velocity\_kmh`, `longitude`, `latitude` FRO M `Drive\_recorder` WHERE `sub`=3 <u>AND</u> DATE\_FORMAT(`DATE`, '%Y%m%d')=20180121

