

BLUEPRINT OF VICTORY



The Little MongoDB Schema Design Book

Christian Kvalheim



The Little Mongo DB Schema Design Book

Christian Kvalheim

This book is for sale at <http://leanpub.com/mongodbschemadesign>

This version was published on 2015-10-09



*

This is a [Leanpub](#) book. Leanpub empowers authors and publishers with the Lean Publishing process. [Lean Publishing](#) is the act of publishing an in-progress ebook using lightweight tools and many iterations to get reader feedback, pivot until you have the right book and build traction once you do.

*

© 2014 - 2015 Christian Kvalheim ISBN for EPUB version: 978-1-943846-77-1

ISBN for MOBI version: 978-1-943846-77-1

Table of Contents

[Introduction](#)

[Schema Basics](#)

[One-To-One \(1:1\)](#)

[Model](#)

[One-To-Many \(1:N\)](#)

[Model](#)

[Many-To-Many \(N:M\)](#)

[Two Way Embedding](#)

[One Way Embedding](#)

[MMAP Storage Engine](#)

[Overview](#)

[Memory Mapped Files](#)

[Allocation](#)

[Locking](#)

[WiredTiger Storage Engine](#)

[Overview of WiredTiger](#)

[Essentials](#)

[Tuning](#)

[When to use WiredTiger](#)

[Indexes](#)

[Single field indexes](#)

[Compound indexes](#)

[Multi key indexes](#)

[Geo-spatial indexes](#)

[Text indexes](#)

[Sparse indexes](#)

[Unique indexes](#)

[Time To Live indexes](#)
[Covered Index Queries](#)

[Sharding](#)

[Sharding Topology](#)
[When to Shard](#)
[Choosing a Shard Key](#)
[Routing Shard Keys](#)
[Inbox Example](#)
[Multiple Identities Example](#)
[Sharding Anti-Patterns](#)

[Schema Design](#)

[Read Ratio to Write Ratio](#)
[Avoid Application Joins](#)
[Pre-aggregate Data](#)
[Avoid Growing Documents \(MMAP\)](#)
[Avoid Updating Whole Documents \(MMAP\)](#)
[Pre-allocated Documents \(MMAP\)](#)
[Field Names Take up Space \(MMAP\)](#)
[Over Eager Indexing](#)
[Custom _id Field](#)
[Covered Indexes](#)

[Queue](#)

[Schema Observations](#)
[Schema](#)
[Operations](#)
[Indexes](#)
[Scaling](#)
[Performance](#)
[Notes](#)

[Topics](#)

[Schema Observations](#)
[Schema](#)
[Operations](#)
[Indexes](#)
[Scaling](#)

[Performance](#)
[Notes](#)

[Metadata](#)

[Schema Observations](#)
[Schema](#)
[Operations](#)
[Indexes](#)
[Scaling](#)
[Performance](#)
[Notes](#)

[Materialized Path Category Hierarchy](#)

[Schema Observations](#)
[Schema](#)
[Operations](#)
[Indexes](#)
[Covered Index Queries](#)
[Scaling](#)
[Performance](#)
[Notes](#)

[Shopping Cart with Product Reservation](#)

[Schema Observations](#)
[Schema](#)
[Operations](#)
[Indexes](#)
[Scaling](#)
[Performance](#)
[Notes](#)

[Shopping Cart with No Product Reservation](#)

[Schema Observations](#)
[Schema](#)
[Operations](#)
[Indexes](#)
[Scaling](#)
[Performance](#)
[Notes](#)

[Theater Reservation](#)

[Schema Observations](#)
[Schema](#)
[Operations](#)
[Indexes](#)
[Scaling](#)
[Performance](#)
[Notes](#)

[Account Transactions](#)

[Schema Observations](#)
[Schema](#)
[Operations](#)
[Indexes](#)
[Scaling](#)
[Performance](#)
[Notes](#)

[Time Series](#)

[Schema Observations](#)
[Schema](#)
[Operations](#)
[Indexes](#)
[Scaling](#)
[Performance](#)
[Notes](#)

[Array Slice Cache](#)

[Schema Observations](#)
[Schema](#)
[Operations](#)
[Indexes](#)
[Scaling](#)
[Performance](#)
[Notes](#)

[Internationalization](#)

[Schema Observations](#)
[Schema](#)

[Operations](#)

[Indexes](#)

[Scaling](#)

[Performance](#)

[Notes](#)

Introduction

One of the questions that comes up very often from new users of MongoDB and document databases is how to do schema design. The concepts of embedding and linking documents combined with many years of working with relational models means there is a learning process involved in moving to a document database.

As the product has matured over time, some patterns of schema design have emerged. This book is an attempt to distill that knowledge into actionable information you can use for your own applications.

We will cover basics of MongoDB schema design, how MongoDB works under the covers and look at a series of schema design patterns that aim to solve specific issues that you might run into while working on your application.

That said, this is not the end all of schema design for MongoDB. If you come up with other brilliant schema design patterns feel free to drop me an email at christkv@gmail.com or send me a tweet to @christkv

I hope you enjoy the book and find the information useful.

Christian Amor Kvalheim


Schema Basics

Before exploring the more advanced schemas in this book it's important to revisit schema basics. In this chapter we will explore the basic relationships from traditional relational databases and how they relate to the document model in MongoDB.

We will start with a look at the One-To-One (1:1) relationship then moving on to the One-To-Many (1:N) and finally the Many-To-Many (N:M).

One-To-One (1:1)

The *1:1* relationship describes a relationship between two entities. In this case the *Author* has a single *Address* relationship where an *Author* lives at a single *Address* and an *Address* only contains a single *Author*.

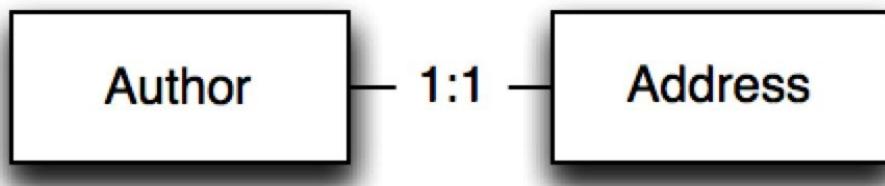

A One to One Relational Example

The *1:1* relationship can be modeled in two ways using MongoDB. The first is to embed the relationship as a document, the second is as a link to a document in a separate collection. Let's look at both ways of modeling the one to one relationship using the following two documents:

Model

An example User document

```
1 {  
2   name: "Peter Wilkinson",  
3   age: 27  
4 }
```

An example Address document

```
1 {  
2   street: "100 some road",  
3   city: "Nevermore"  
4 }
```

Embedding

The first approach is simply to embed the *Address* document as an embedded document in the *User* document.

An example User document with Embedded Address

```
1 {
2   name: "Peter Wilkinson",
3   age: 27,
4   address: {
5     street: "100 some road",
6     city: "Nevermore"
7   }
8 }
```

The strength of embedding the *Address* document directly in the *User* document is that we can retrieve the user and its addresses in a single read operation versus having to first read the user document and then the address documents for that specific user. Since addresses have a strong affinity to the user document the embedding makes sense here.

Linking

The second approach is to link the address and user document using a **foreign key**.

An example User document

```
1 {
2   _id: 1,
3   name: "Peter Wilkinson",
4   age: 27
5 }
```

An example Address document with Foreign Key

```
1 {
2   user_id: 1,
3   street: "100 some road",
4   city: "Nevermore"
5 }
```

This is similar to how traditional relational databases would store the data. It is important to note that MongoDB does not enforce any foreign key constraints so the relation only exists as part of the application level schema.




Embedding Preferred

In the one to one relationship Embedding is the preferred way to model the relationship as it's more efficient to retrieve the document.

One-To-Many (1:N)

The $1:N$ relationship describes a relationship where one side can have more than one relationship while the reverse relationship can only be single sided. An example is a *Blog* where a blog might have many *Comments* but a *Comment* is only related to a single *Blog*.

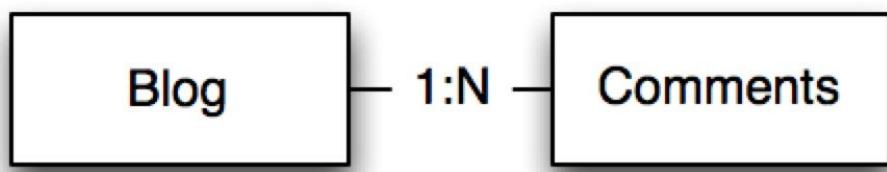

A One to Many Relational Example

The $1:N$ relationship can be modeled in several different ways using MongoDB. In this chapter we will explore three different ways of modeling the $1:N$ relationship. The first is embedding, the second is linking and the third is a bucketing strategy that is useful for cases like time series. Let's use the model of a Blog Post and its Comments.

Model

An example Blog Post document

```
1 {
2   title: "An awesome blog",
3   url: "http://awesomeblog.com",
4   text: "This is an awesome blog we have just started"
5 }
```

A Blog Post is a single document that describes one specific blog post.

Some example Comment documents

```
1 {
2   name: "Peter Critic",
```

```
3   created_on: ISODate("2014-01-01T10:01:22Z"),
4   comment: "Awesome blog post"
5 }
6
7 {
8   name: "John Page",
9   created_on: ISODate("2014-01-01T11:01:22Z"),
10  comment: "Not so awesome blog"
11 }
```

For each Blog Post we can have one or more Comments.

Embedding

The first approach is to embed the Comments in the Blog Post.

A Blog Post with Embedded documents

```
1 {
2   title: "An awesome blog",
3   url: "http://awesomeblog.com",
4   text: "This is an awesome blog we have just started",
5   comments: [{
6     name: "Peter Critic",
7     created_on: ISODate("2014-01-01T10:01:22Z"),
8     comment: "Awesome blog post"
9   }, {
10    name: "John Page",
11    created_on: ISODate("2014-01-01T11:01:22Z"),
12    comment: "Not so awesome blog"
13  }]
14 }
```

The embedding of the comments in the *Blog* post means we can easily retrieve all the comments belong to a particular *Blog* post. Adding new comments is as simple as appending the new comment document to the end of the comments array.

However, there are three potential problems associated with this approach that one should be aware off.

- The first is that the comments array might grow larger than the maximum document size of 16 MB.
- The second aspects relates to write performance. As comments get added to Blog Post over time, it becomes hard for MongoDB to predict the correct document padding to apply when a new document is created. MongoDB

would need to allocate new space for the growing document. In addition, it would have to copy the document to the new memory location and update all indexes. This could cause a lot more IO load and could impact overall write performance.



It's important to note that this only matters for *high write* traffic and might not be a problem for smaller applications. What might not be acceptable for a *high write* volume application might be tolerable for an application with *low write* load.

- The third problem is exposed when one tries to perform pagination of the comments. There is no way to limit the comments returned from the `Blog Post` using normal finds so we will have to retrieve the whole blog document and filter the comments in our application.

Linking

The second approach is to link comments to the `Blog Post` using a more traditional `foreign key`.

An example `Blog Post` document

```
1 {
2   _id: 1,
3   title: "An awesome blog",
4   url: "http://awesomeblog.com",
5   text: "This is an awesome blog we have just started"
6 }
```

Some example Comment documents with Foreign Keys

```
1 {
2   blog_entry_id: 1,
3   name: "Peter Critic",
4   created_on: ISODate("2014-01-01T10:01:22Z"),
5   comment: "Awesome blog post"
6 }
7
8 {
9   blog_entry_id: 1,
10  name: "John Page",
11  created_on: ISODate("2014-01-01T11:01:22Z"),
12  comment: "Not so awesome blog"
13 }
```

An advantage this model has is that additional comments will not grow the original Blog Post document, making it less likely that the applications will run in the maximum document size of 16 MB. It's also much easier to return paginated comments as the application can slice and dice the comments more easily. On the downside if we have 1000 comments on a blog post, we would need to retrieve all 1000 documents causing a lot of reads from the database.

Bucketing

The third approach is a hybrid of the two above. Basically, it tries to balance the rigidity of the embedding strategy with the flexibility of the linking strategy. For this example, we will split the comments into buckets with a maximum of 50 comments in each bucket.

An example Blog Post document

```
1 {
2   _id: 1,
3   title: "An awesome blog",
4   url: "http://awesomeblog.com",
5   text: "This is an awesome blog we have just started"
6 }
```

Some example Comment buckets

```
1 {
2   blog_entry_id: 1,
3   page: 1,
4   count: 50,
5   comments: [
6     {
7       name: "Peter Critic",
8       created_on: ISODate("2014-01-01T10:01:22Z"),
9       comment: "Awesome blog post"
10    },
11    ...
12  ],
13  blog_entry_id: 1,
14  page: 2,
15  count: 1,
16  comments: [
17    {
18      name: "John Page",
19      created_on: ISODate("2014-01-01T11:01:22Z"),
20      comment: "Not so awesome blog"
21    }
22 }
```

The main benefit of using buckets in this case is that we can perform a single read to fetch 50 comments at a time, allowing for efficient pagination.




When to use bucketing

When you have the possibility of splitting up your documents into discreet batches, it makes sense to consider bucketing to speed up document retrieval.

Typical cases where bucketing is appropriate are ones such as bucketing data by hours, days or number of entries on a page (like comments pagination).

Many-To-Many (N:M)

An *N:M* relationship is an example of a relationship between two entities where they both might have many relationships between each other. An example might be a *Book* that was written by many *Authors*. At the same time an *Author* might have written many *Books*.

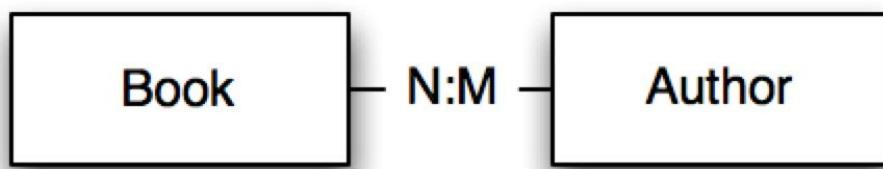

A Many to Many Relational Example

N:M relationships are modeled in the relational database by using a join table. A good example is the relationship between books and authors.

- An author might have authored multiple books (1:N).
- A book might have multiple authors (1:M).

This leads to an *N:M* relationship between authors of books. Let's look at how this can be modeled.

Two Way Embedding

Embedding the books in an Author document

Model

In Two Way Embedding we will include the *Book* foreign keys under the *books* field.

Some example Author documents

```
1 {
2   _id: 1,
3   name: "Peter Standford",
4   books: [1, 2]
5 }
6
7 {
8   _id: 2,
9   name: "Georg Peterson",
10  books: [2]
11 }
```

Mirroring the *Author* document, for each *Book* we include the *Author* foreign keys under the *Author* field.

Some example Book documents

```
1 {
2   _id: 1,
3   title: "A tale of two people",
4   categories: ["drama"],
5   authors: [1, 2]
6 }
7
8 {
9   _id: 2,
10  title: "A tale of two space ships",
11  categories: ["scifi"],
12  authors: [1]
13 }
```

Queries

Example 1: Fetch books by a specific author

```
1 var db = db.getSisterDB("library");
2 var booksCollection = db.books;
3 var authorsCollection = db.authors;
4
5 var author = authorsCollection.findOne({name: "Peter Standford"});
6 var books = booksCollection.find({_id: {$in: author.books}}).toArray\
7 ();
```

Example 2: Fetch authors by a specific book

```
1 var db = db.getSisterDB("library");
2 var booksCollection = db.books;
3 var authorsCollection = db.authors;
4
5 var book = booksCollection.findOne({title: "A tale of two space ship\
6 s"});
```

```
7 var authors = authorsCollection.find({_id: {$in: book.authors}}).toA\
8 rray();
```

As can be seen, we have to perform two queries in both directions. The first is to find either the author or the book and the second is to perform a \$in query to find the books or authors.



Uneven n:m relationships

Let's take the category `drama` that might have thousands of books in it and with many new books consistently being added and removed. This makes it impracticable to embed all the books in a category document. Each book, however, can easily have categories embedded within it, as the rate of change of categories for a specific book might be very low.

In this case we should consider one way embedding as a strategy.

One Way Embedding

The One Way Embedding strategy chooses to optimize the read performance of a *N:M* relationship by embedding the references in one side of the relationship. An example might be where several books belong to a few categories but a couple categories have many books. Let's look at an example, pulling the categories out into a separate document.

Model

A Category document

```
1 {
2   _id: 1,
3   name: "drama"
4 }
```

A Book with Foreign Keys for Categories

```
1 {
2   _id: 1,
3   title: "A tale of two people",
4   categories: [1],
5   authors: [1, 2]
6 }
```

The reason we choose to embed all the references to categories in the books is due to there being lot more books in the drama category than categories in a book. If one embeds the books in the category document it's easy to foresee that one could break the 16MB max document size for certain broad categories.

Queries

Example 3: Fetch categories for a specific book

```
1 var db = db.getSiblingDB("library");
2 var booksCol = db.books;
3 var categoriesCol = db.categories;
4
5 var book = booksCol.findOne({title: "A tale of two space ships"});
6 var categories = categoriesCol.find({_id: {$in: book.categories}}).t\
7 oArray();
```

Example 4: Fetch books for a specific category

```
1 var db = db.getSiblingDB("library");
2 var booksCollection = db.books;
3 var categoriesCollection = db.categories;
4
5 var category = categoriesCollection.findOne({name: "drama"});
6 var books = booksCollection.find({categories: category.id}).toArray(\
7 );
```



Establish Relationship Balance

Establish the maximum size of N and the size of M . For example if N is a maximum of 3 categories for a book and M is a maximum of 500000 books in a category you should pick One Way Embedding. If N is a maximum of 3 and M is a maximum of 5 then Two Way Embedding might work well.

MMAP Storage Engine


The main storage engine in MongoDB is the Memory Mapped Storage Engine or MMAP for short. The MMAP storage engine uses memory mapped files as its storage engine.

Overview

- Uses memory mapped files to store data
- Allocates memory using power of 2 byte sizes (32, 64, 128, 256, ... 2MB)
- In place updates are fast
- Db level locking from MongoDB 2.2, Collection level locking from 3.0
- Benefits from preallocation strategy
- Can cause fragmentation
- No compression available (stores documents with all keys)

Memory Mapped Files

The MMAP Storage engine uses memory mapped files to store its data (A memory-mapped file is a segment of virtual memory which has been assigned a direct byte-for-byte correlation with some portion of a file).

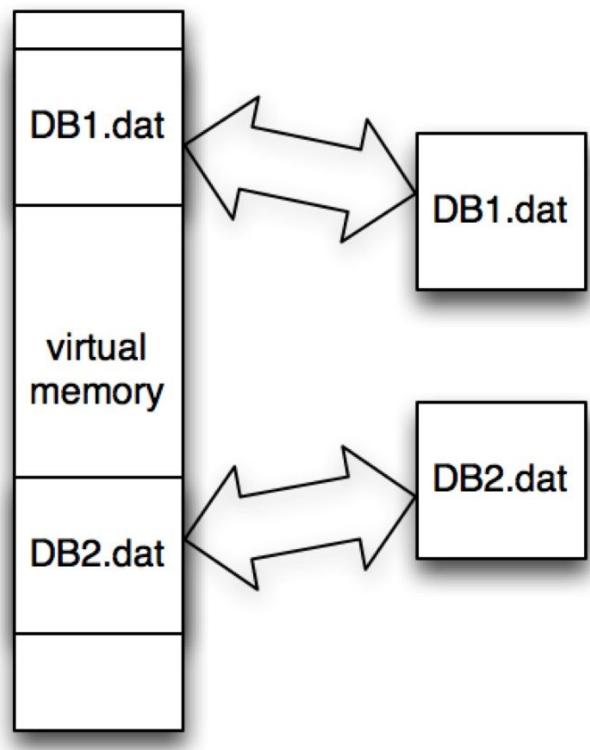

A General Example Of How Memory Mapped Files Work

Memory mapped files allow MongoDB to delegate the handling of Virtual Memory to the operating system instead of explicitly managing memory itself. Since the Virtual Address Space is much larger than any physical RAM (Random Access Memory) installed in a computer there is contention about what parts of the Virtual Memory is kept in RAM at any given point in time. When the operating system runs out of RAM and an application requests something that's not currently in RAM, it will swap out memory to disk to make space for the newly requested data. Most operating systems will do this using a Least Recently Used (LRU) strategy where the oldest data is swapped to disk first.

When reading up on MongoDB, you'll most likely run into the words "Working Set". This is the data that your application is constantly requesting. If your "Working Set" all fits in RAM, then all access will be fast because the operating system will not have to swap back and forth from disk as often. However, if your "Working Set" does not fit in RAM, you suffer performance penalties as the

operating system needs to swap one part of your “Working Set” to disk, in order to access another part of it.

This is usually a sign that it’s time to consider either increasing the amount of RAM in your machine or to shard your MongoDB system so more of your “Working Set” can be kept in memory (sharding splits your “Working Set” across multiple machines RAM resources).



Determine if the Working Set is too big

You can get an indication of if your working set fits in memory by looking at the number of page faults over time. If it’s rapidly increasing it might mean your Working Set does not fit in memory.

```
use mydb
db.serverStatus().extra_info.page_faults
```

Allocation

From MongoDB 2.6 the default allocation method in MongoDB the power of two sized memory blocks. This means that it allocates blocks in the following byte sizes (32, 64, 128, 256, 512 ... up to 2MB).

Before 2.6 MongoDB would allocate blocks of memory that were the size of the document as well as some additional free space at the end of it to allow the document to grow. This was called the padding factor. Unfortunately there were several pathological MongoDB usage scenarios that could cause inefficient reuse of these allocated blocks slowly increasing fragmentation. A typical one was a heavy insert/update/delete cycle with random sized documents.

An example is below.



```
1 Documents inserted with different sizes
2
3     Doc 1: 24 bytes
4     Doc 2: 12 bytes
5
6 Documents are growing constantly requiring new allocations
7
8     Doc 1: 34 bytes, then 64 bytes, then 234 bytes
9     Doc 2: 450 bytes, then 1034, then 233 bytes
10
```

```
11 Documents are then removed from the database
12
13 As new documents are inserted the server cannot reuse the non uniform
14 memory allocations.
15
16 Doc 3: 333 bytes requires new allocation
```

Over time this could cause memory allocations, which could not be reused by the server leading to memory fragmentation in the memory mapped files.

Fragmentation

When documents move around or are removed they leave holes. MongoDB tries to reuse these holes for new documents whenever possible, but over time it will slowly and steadily find itself having a lot of holes that cannot be reused because documents cannot fit into them. This effect is called fragmentation and is common in all systems that allocate memory including your operating system.

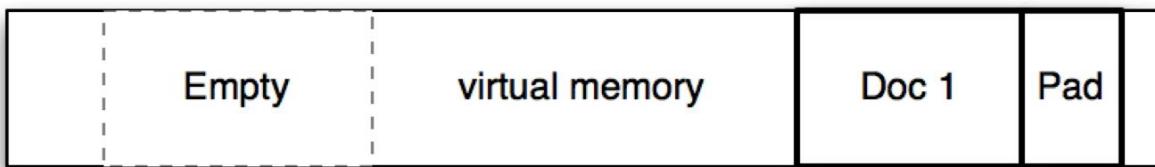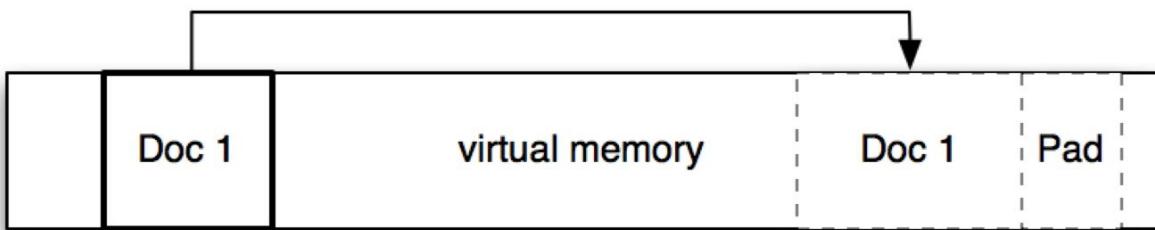

Document With Padding

The effect of fragmentation is to waste space. Due to the fact that MongoDB uses memory mapped files, any fragmentation will be reflected as fragmentation in RAM. This has the effect of reducing the “Working Set” that fits in RAM and causes more swapping to disk degrading performance.



How to determine the fragmentation

You can get a good indication of fragmentation by

```
use mydb
var s = db.my_collection.stats()
var frag = s.storageSize / (s.size + s.totalIndexSize)
```

A `frag` value larger than 1 indicates some level of fragmentation

There are three main ways of avoiding or limiting fragmentation for your MongoDB data.

The first one is to use the `compact` command on MongoDB to rewrite the data thus remove the fragmentation.

Power of 2 Allocation

Power of 2 allocations is a trade off between the higher likelihood of being able to reuse allocated blocks of memory, against potentially underutilization of those blocks. Let's look at two examples, one optimal for power of 2 allocation and one that causes a lot of underutilized blocks of memory.

The first scenario

```
1 User writes document of 510 bytes
2 Each document fit nicely in a 512 bytes allocation slot
3 Only 2 bytes per document is left unused in an allocation slot
```

The second scenario

```
1 User writes document of 513 bytes
2 The document only fits in the 1024 byte allocation
3 For each document 510 bytes are left unused in the allocation slot
```

As we can see, there are some drastic edge cases. However, this is outweighed by the fact that documents which outgrow their allocation can easily be moved to a either a new allocation or an existing empty one of bigger size.

The Power of 2 allocations feature also reduces the level of fragmentation possible, as there is a bigger chance of allocation reuse than the previous method

used in MongoDB.

Exact fit (no padding) allocation strategy (MongoDB 3.0)

MongoDB 3.0 introduces the possibility of using an exact fit allocation strategy. This disables the power of 2 allocation strategy and is useful if your workload is inserts only, with no updates or removals of the document. This can be enabled by using the server collMod command with the noPadding flag set to true or when creating a new collection using the createCollection command in the shell with the noPadding option set to true.

Preallocation strategy

Preallocation is a strategy to minimize the amount of times a document moves. It aims to avoid the situation where a document is moved in memory as it grows in size. Let's look at an example of the behavior we are trying to avoid.

```
1 Document 1 is written as a 123 byte document and put in a 128 byte allocation
2 1location
3 Document 1 grows by 10 bytes and is copied to a 256 byte allocation
```

This can cause a lot of pointless work, requiring MongoDB to spend most of its time copying data causing the write and read performance to drop.

In many cases we might have documents that are in fact uniformly sized. Let's take the example of a time series where we are counting the number of times a web page is viewed.

```
1 {
2     , minute: {
3         "0": 1
4     }
5 }
```

When we register a measurement for a new second in the minute, the document gets another field added to the embedded document in the minute field.

```
1 {
2     , minute: {
3         "0": 1, "1": 1
4     }
5 }
```

But since we know there are only 60 entries in the minute embedded document we can ensure that it does not grow by preallocating an empty document that has the maximum size the document will be. So we can insert a full size document for each minute.

```
1 {
2     , minute: {
3         "0": 0, "1": 0, "2": 0....., "59": 0
4     }
5 }
```

This would avoid updates to the document growing it, This means all the updates would be in place ensuring the highest write performance the MMAP engine can provide.

Locking

MongoDB 2.6 introduced database level locking in 2.2 and improves on this in 3.0 with collection level locking. The lock references the write lock. When MongoDB only supported database level locking there could only be a single writer in a database. Let's look at an example.

```
1 Driver Writes Document 1 to database test
2 Driver Writes Document 2 to database test
```

When a write happens under database level locking no other reads or writes can happen concurrently until the first write finishes. In the example above Document 2 has to wait until Document 1 has been completely written before it can begin. The constant write lock will starve any readers of the database.

A strategy to circumvent this is to ensure that write heavy operations go to different databases than read heavy operations. For example, there might be an application with the following scenario.

```
1 Analytics are written to the analytics database
2 User information and preferences are in the users database
```

This would ensure that operations against the users database would not be impacted by the heavy write operation against the analytics database.



MongoDB 3.0 introduced collection level locking reducing the contention in a database by moving the lock level down to the individual collection. If we have heavy write to `collection1` this does not cause locks for reads/writes to `collection2`.

WiredTiger Storage Engine

MongoDB 3.0 introduced an internal storage API, allowing for new storage engines to be added to MongoDB. MongoDB 3.0 included the new WiredTiger storage engine as an option. The WiredTiger storage engine brings a whole new set of possibilities when it comes to scaling MongoDB vertically. WiredTiger introduces document level locking and efficient CPU scaling. In this chapter, we provide an overview of the main aspects of the new storage engine.

Overview of WiredTiger

- Highly concurrent and vertically scalable
- Document level locking
- Allows for more tuning of storage engine than MMAP
- Compression
- On-line compaction
- Write-ahead transaction log for the journal
- Does not support in place updates

Essentials

The WiredTiger storage engine brings document level locking to MongoDB, meaning that writes no longer block a collection or database. While MMAP in 3.0 brought collection level locking, multiple writes to the same collection will still cause the writes to be applied serially and can starve reads from the collection as reads have to wait for the writes to finish. WiredTiger gets rid of the limitation allowing multiple writes to happen concurrently against the same collection. This means that writes and reads scale with the CPU, whereas in MMAP there was a low ceiling for CPU scaling as the locks reduced the throughput.

Another feature WiredTiger introduces, is on-disk compression supporting snappy and zlib. This allows the user to trade off CPU usage, for higher data compression.

Compression

Methods

snappy	Balances the compression ratio with low CPU usage
zlib	Very good compression but comes at the cost of higher CPU usage than snappy

Compression is one of the major benefits of the WiredTiger engine, as it reduces the amount of data that needs to be written or read from the disk. This lowers the IO operations needed, and allows for better usage of the storage IO bandwidth available.

It also goes a far towards solving one of the main issues with MMAP which is the cost of storing all the document field names in each stored document as these are efficiently compressed. Indexes are also compressed using prefix compression, which allows for more of the index to be stored in RAM.

Although WiredTiger accepts two different on disk formats MongoDB officially only supports the Record Store engine in 3.0. The Record Store engine is a B+ tree and is optimized for read workloads.

Keep in mind is that WiredTiger does not support in place updates. In place updates will cause the whole document to be rewritten. Even though it does not allow for in place updates, it could still perform better than MMAP for many workloads. The additional vertical scalability might still offset the cost of writing the new documents.

For durability, WiredTiger uses a write ahead transaction log where a checkpoint is taken every 60 seconds or if 2GB are written. This is analogous to the MMAP disk flushing. In the worst case, if the `mongodb` process does you'll lose up to 60 seconds of data or 2GB.

Tuning

WiredTiger allows for tuning some of the storage engine parameters. The 3 most important to consider are the cache size, checkpoint interval and logging.

Cache Size

The cache size is the WiredTiger working set size. Initially it defaults to 50% or 1 GB which ever is the higher value.

Tuning the parameter can have a big impact on performance.

Checkpoint interval

The default checkpoint thresholds is 60 seconds, or 2GB data, whichever comes first. This setting can be changed to allow for more frequent, or less frequent checkpoints depending on the needs of the application, and what kind of durability guarantees you need.

Logging

WiredTiger uses a write-ahead log for the journaling that provides immediate write durability, with no need for crash recovery. One of the main things to keep in mind, is that the write-ahead log is not needed for crash recovery. Crash recovery is handled by the checkpoints mechanism. This stands in contrasts to MMAP where the journal is essential when performing crash recovery.




If you are using a replicaset you might decide to turn off logging because replication is a good enough durability guarantee for your application.

When to use WiredTiger

This is one where it's best to benchmark your specific application, as it will vary depending on what kind of write and read patterns your application uses, as well as the available hardware. For some workloads you might find that WiredTiger is a huge improvement, while for others there is no improvement, or even performance degradation. The schema simulator tool was specifically written to help you model and try your workload against MongoDB.

Indexes

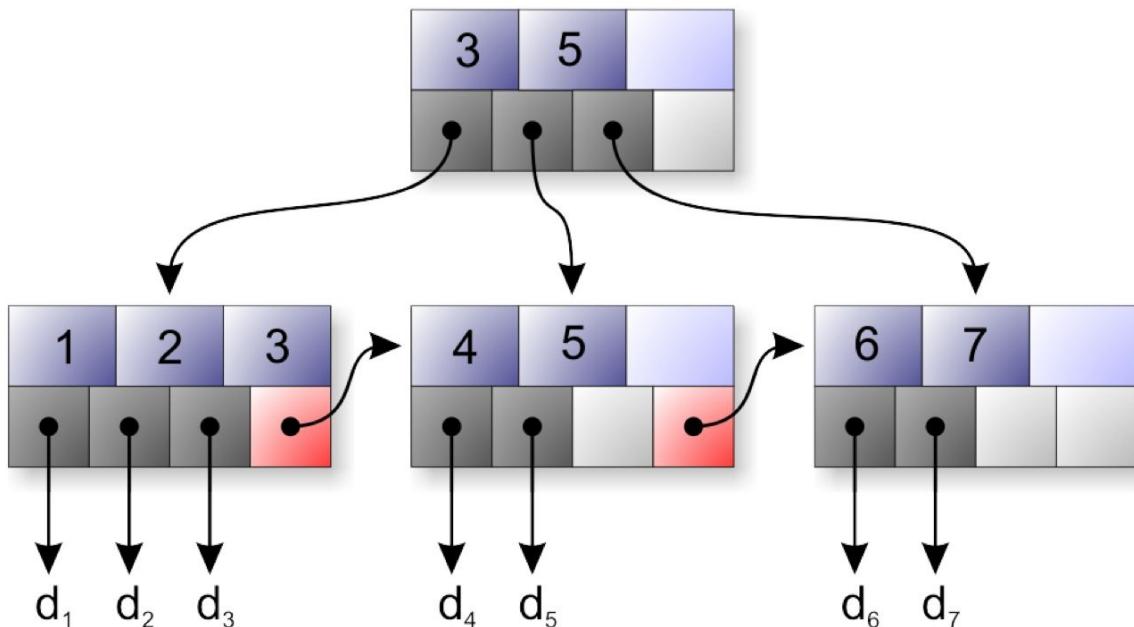

A Btree Example, <http://commons.wikimedia.org/wiki/File:Btree.png>

Indexes are key to achieving high performance in MongoDB, as they allow the database to search through less documents to satisfy a query. Without an index MongoDB has to scan through all of the documents in a collection to fulfill the query.

An index increases the amount of storage needed to represent a document and the time it takes to insert a document. Indexes trade off faster queries against storage space.

One of the principal things to remember about indexes, is that they are **inclusive**. Inclusive means they can only answer questions about documents that have been included in the index.



Gotchas

`$nin` and `$ne` queries cannot be answered by indexes, and force collection scans. If you need to use these ensure you are filtering down using indexes as much as possible and leaving the `$nin` and `$ne` terms to the very last part of the query selector.

MongoDB has several types of indexes

- Single field indexes
- Compound indexes
- Multi key indexes
- Geo-spatial indexes
- Text indexes

It also supports a couple of variations of the above indexes

- Sparse indexes
- Unique indexes
- Time To Live indexes
- Covered Index Queries

Single field indexes

Take the following document

An example document

```
1 {
2   _id: ObjectId("523cba3c73a8049bcd6007"),
3   name: 'Peter Jackson',
4   age: 50,
5   nationality: "New Zealand",
6   address: {
7     street: "Some Street 22"
8   },
9   department: {
10    floor: 1,
11    building: 1
12  }
13 }
```

Let's look at some different ways we can apply a single field index

Example 1: A single field index

```
1 var values = db.getSiblingDB("indexes").values;
2 values.ensureIndex({name: 1});
```

This indexes the name field in ascending order.

Example 2: A single embedded field index

```
1 var values = db.getSiblingDB("indexes").values;
2 values.ensureIndex({"address.street": 1});
```

This indexes the street field, in the embedded document, under the address field.

Example 3: A embedded document field index

```
1 var values = db.getSiblingDB("indexes").values;
2 values.ensureIndex({department: 1});
```

This indexes the department embedded document, allowing for strict equality matches on the it. It will only match on the query for a embedded document, that contains all the fields in the indexed embedded document.

Example 4: Embedded document match

```
1 var values = db.getSiblingDB("indexes").values;
2 values.findOne({department: {floor: 1, building: 1}});
```

Compound indexes

A compound index is an index that contains references to multiple fields within a document.

Example 5: Create compound index

```
1 var values = db.getSiblingDB("indexes").values;
2 values.ensureIndex({nationality: 1, age: -1, name: 1});
```

The compound indexes have some interesting properties. The index is usable if you have a query that includes nationality, age and name. But it's also able to answer other queries using the index.

1. Any query starting with nationality
2. Any query starting with nationality and age
3. Any query starting with nationality, age and name
4. Any query starting with nationality and name

For compound indexes order matters as we match from left to right. For example if you reverse a query to start with name and age, it will not match the order of fields in the compound index, and MongoDB will not be able to use the index to speed up the query.



Compound Index Field Order

Always make sure the order of fields in a compound index matches the order of fields in the queries you want to execute against the collection.

One thing to note about using a compound index is sorting. The ordering and direction of the fields in a compound index not only decide if it's possible to use the index in the query, but are also used for sorting.

Given the index `{nationality: 1, age: -1, name: 1}`, we can support the following sorting leveraging the index.

Example 6: Create compound index

```
1 var values = db.getSiblingDB("indexes").values;
2 values.find().sort({nationality: 1, age: -1}).toArray();
3 values.find().sort({nationality: -1, age: 1}).toArray();
4 values.find().sort({nationality: -1, age: 1, name: -1}).toArray();
5 values.find().sort({nationality: 1, age: -1, name: 1}).toArray();
```

Sorting can only use the index if they match the order specified or the exact reverse order specified.

Multi key indexes

Multi key indexes lets MongoDB index arrays of values. Take the following example document.

Sample document

```
1 {
2   "title": "Superman",
3   "tags": ["comic", "action", "xray"],
4   "issues": [
5     {
6       "number": 1,
7       "published_on": "June 1938"
8     }
```

```
9     ]
10 }
```

Multi key indexes lets us search on the values in the tags array, as well as in the issues array. Let's create two indexes to cover both.

Example 7: Create Multikey fields

```
1 var comics = db.getSiblingDB("store").comics;
2 comics.ensureIndex({tags: 1});
3 comics.ensureIndex({issues: 1});
```

The two indexes lets you do exact matches on values in the tags and issues arrays of values.

Example 8: Query using Multikey indexes

```
1 var comics = db.getSiblingDB("store").comics;
2 comics.find({tags: "action"});
3 comics.find({issues: {number: 1, published_on: "June 1938"}}).toArray()
4 y();
```

The first query will use the index on tags to return the document. The second will use the index on issues to return the document. The second query is dependent on the order of the fields in the documents indexed. If the number and published_on on fields changed order, the second query would fail.

If the document changes structure over time, it would be better to create a specific compound index on the fields needed in the embedded documents. A better index would be:

Example 9: Create Embedded Array Compound Index

```
1 var comics = db.getSiblingDB("store").comics;
2 comics.ensureIndex({"issues.number":1, "issues.published_on":1});
```

To leverage the index, the second query can be written as follows.

Example 10: Query using the Compound Multikey index

```
1 var comics = db.getSiblingDB("store").comics;
2 comics.find({
3   "issues.number":1,
4   "issues.published_on": "June 1938"}).toArray()
```

Geo-spatial indexes

MongoDB offers several Geo-spatial index types. These indexes make it possible to perform efficient Geo-spatial queries.



GEO JSON

MongoDB supports GEO JSON (<http://geojson.org>) for performing GEO location queries.

Specialized 2d Sphere index

The 2d Geo-spatial Sphere index, allows applications to perform queries on an earth-like sphere, making for higher accuracy in matching locations.

Take the following example document.

A Simple document with location information

```
1 {
2   loc: {
3     type: "Point",
4     coordinates: [60, 79]
5   },
6   type: "house"
7 }
```

Create a 2dsphere index.

Example 11: Create 2dsphere compound index

```
1 var locations = db.getSiblingDB("geo").locations;
2 locations.ensureIndex({loc: "2dsphere", house: 1});
```

Query the index using a GEO JSON type.

Example 12: Query using 2dsphere index

```
1 var locations = db.getSiblingDB("geo").locations;
2 locations.find({loc: {
3   $geoWithin: {
4     $geometry: {
5       type: "Polygon",
6       coordinates: [
7         [ [ 0, 0 ], [ 0, 80 ], [ 80, 80 ], [ 80, 0 ], [ 0, 0 ] ]
8       ]
9     }
10   }
}})
```

```
11      }
12  }).toArray();
```



Gotchas 2dsphere

The 2d sphere index is a pure GeoSpatial index and is limited to the ranges for latitude (-90 to 90) and longitude (-180 to 180). It also only accepts \$geometry queries. In return it's faster and more accurate than the general 2d index.

General 2d index

The 2d index is a flat index that does not take into consideration any projection. One of the benefits of the 2d index is that it allows for fixed lower and upper bounds for the coordinate system as well as the search resolution. This makes for a more general 2d index.

Let's add a sample document.

A Simple document with location information

```
1 var houses = db.getSiblingDB("2d").houses;
2 houses.insert({
3   price_rooms: [10000, 3],
4   type: "house"
5 });
```

Notice that the `price_rooms` is just an array. This is because the 2d index is not inherently tied to the GeoJSON format in the same way as the 2dsphere index.

Let's create a 2d index.

Example 13: Create 2d index

```
1 var houses = db.getSiblingDB("2d").houses;
2 houses.ensureIndex({price_rooms: "2d"}, { min: 0, max: 200000, bits:\n3   32 });
```

Now let's look for all houses that fall inside the range of 2000 to 20000 in price and have 0 to 5 rooms.

Example 14: Query for matching houses

```
1 db.houses.find( { price_rooms :
2   { $geowithin : {
```

```
3         $box : [ [ 2000 , 0 ] , [ 20000 , 5 ] ]
4     }
5 }
6 }).toArray();
```



2d indexes

The `min` and `max` values let you project any 2d data with numeric values into a 2d index, where you can use geo queries like `$near`, `$box` etc to cut and slice the data. Once one realizes it's a generalized 2d index, it becomes quite useful for a range of queries not easily achieved with the standard query operators.

Text indexes

Text search is integrated into the MongoDB query language from version 2.6 (In 2.4 it was available as beta command). It relies on an underlying text index.

Let's insert some sample documents.

Insert some sample documents

```
1 var entries = db.getSiblingDB("blogs").entries;
2 entries.insert( {
3     title : "my blog post",
4     text : "I'm writing a blog. yay",
5     site: "home",
6     language: "english" });
7 entries.insert( {
8     title : "my 2nd post",
9     text : "this is a new blog I'm typing. yay",
10    site: "work",
11    language: "english" });
12 entries.insert( {
13     title : "knives are Fun",
14     text : "this is a new blog I'm writing. yay",
15     site: "home",
16     language: "english" });
```

Let's create the text index.

Example 14: Create text index

```
1 var entries = db.getSiblingDB("blogs").entries;
2 entries.ensureIndex({title: "text", text: "text"}, { weights: {
3     title: 10,
4     text: 5
```

```
5     },
6     name: "TextIndex",
7     default_language: "english",
8     language_override: "language" });
```

The example shows how weights can be used to control the weighing of fields in subsequent queries against the index. In this case any search that matches title will be ranked higher than a match in the text field.

We also passed a name option that allows us to give the index a custom name.

The default_language option specifies that any document missing a specific language field should default to english.

The option language_override tells the text index to look for individual documents language definition under the language field. If the language field for a specific document is set to for example Spanish, MongoDB will index it using the Spanish stop list and stemming.

Now let's query for all the blog entries that contain the blog word, and filter by the site field.

Example 15: Query using text index

```
1 var entries = db.getSiblingDB("blogs").entries;
2 entries.find({$text: {$search: "blog"}, site: "home"})
```

The query matches all the documents, that contain the word blog in either the title or text field, and then filters them by the site field. If you wish to retrieve the search score for each matching document, modify the query slightly.

Example 16: Query using text index

```
1 var entries = db.getSiblingDB("blogs").entries;
2 entries.find({$text: {$search: "blog"}, site: "home"},
3   {score: {$meta: "textScore"}}).sort({score: {$meta: "textScore"}});
```

The query includes the score given to the individual matched documents and sorts them in descending order by the score.



Text Indexes Can Get Big

Text indexes can grow to be bigger than the actual stored documents, and can take a while to build if the collection is big. They also add additional overhead to writes, compared to simpler indexes.

Sparse indexes

Sparse indexes are indexes, where no values are included for fields that do not exist. Look at the following two documents.

Sample documents

```
1 var sparse = db.getSiblingDB("indexes").sparse;
2 sparse.insert({ hello: "world", number: 1 });
3 sparse.insert({ hello: "world" });
```

A non-sparse index for the field `number`, will contain an entry for both documents in the index. A sparse index will contain only the documents that contain the `number` field. Sparse indexes can be an efficient way of indexing fields that only occur in a certain percentage of documents in a collection, saving disk IO and memory.

To create a sparse index:

Example 17: Create Sparse Index

```
1 var sparse = db.getSiblingDB("indexes").sparse;
2 sparse.ensureIndex({number: 1}, {sparse: true});
```

Unique indexes

An unique index is different from a normal index in that it only allows a single document to exist for a field value.

Example 18: Create Unique Index

```
1 var unique = db.getSiblingDB("indexes").unique;
2 unique.ensureIndex({number: 1}, {unique: true});
```

Now let's try to insert some documents

Sample documents

```
1 var unique = db.getSiblingDB("indexes").unique;
2 unique.insert({ hello: "world", number: 1 });
3 unique.insert({ hello: "world", number: 1 });
```

The second insert fails, due to the existing document with the field `number` set to 1.

Time To Live indexes

Time to live indexes (TTL) are a special type of index that will remove documents that fail to meet the index condition. One use for TTL indexes is to model a cache where documents expire after a set amount of time, allowing old documents to be gradually removed by MongoDB. This avoids the need of performing bulk deletes of documents using an external application or script.

Let's insert some documents.

Sample documents

```
1 var ttl = db.getSiblingDB("indexes").ttl;
2 ttl.insert({ created_on: new Date() });
```

Let's define an a TTL index on `created_on` with an expire time of 1000 seconds in the future.

Example 19: Create TTL index

```
1 var ttl = db.getSiblingDB("indexes").ttl;
2 ttl.ensureIndex({created_on: 1}, {expireAfterSeconds: 1000});
```

The TTL will delete any documents where the `created_on` field is older than 1000 seconds.



Notes about TTL

The `expireAfterSeconds` is not a hard limit. MongoDB will remove any expired documents some time after they have met the condition.

It's important to note that Time to Live indexes only with *Date* based fields.

Covered Index Queries

Covered index queries are queries that can be answered using only the information stored in the index. Basically MongoDB answers the query using the fields stored in an index, never actually materializing the document into memory. Let's look at an example usage of covered queries.

Sample documents

```
1 var covered = db.getSiblingDB("indexes").covered;
2 covered.insert({ text: "hello", site: "home"});
3 covered.insert({ text: "hello", site: "work" });
```

Let's define the covered index first.

Example 20: Create Covered index

```
1 var covered = db.getSiblingDB("indexes").covered;
2 covered.ensureIndex({text: 1, site: 1});
```

Next perform a covered index query.

Example 21: Query using Covered Index

```
1 var covered = db.getSiblingDB("indexes").covered;
2 covered.find({text: "hello"}, {_id: 0, text:1, site:1});
```

Let's retrieve the query plan.

Example 22: Query with Explain

```
1 var covered = db.getSiblingDB("indexes").covered;
2 covered.find({text: "hello"}, {_id: 0, text:1, site:1}).explain();
```

This returns a result with all the details about the query plan executed for this query.

Query plan example, field removed for brevity

```
1 {
2   "cursor" : "BtreeCursor text_1_site_1",
3   "isMultiKey" : false,
4   "n" : 2,
5   "nscannedObjects" : 0,
6   "nscanned" : 2,
7   "nscannedObjectsAllPlans" : 0,
8   "nscannedAllPlans" : 2,
9   "scanAndOrder" : false,
10  "indexOnly" : true,
11  "nYields" : 0,
12  "nChunkSkips" : 0,
13  "millis" : 0,
14  ...
```

```
15     "server" : "christkv.local:27017"  
16 }
```

Notice how the query plan result includes `indexOnly` set to `true`. This means that the query was completely covered by the index and MongoDB never touched the documents.



Covered Index Gotchas


Notice how `{_id: 0, text:1, site:1}` excludes `_id`. A covered index query cannot include the `_id` field.

Sharding

Sharding is one of the more complex features provided by MongoDB and getting comfortable with it can take some time. Sharding is a mechanism for scaling writes by distributing them across multiple shards. Each document contains an associated shard key field that decides on which shard the document lives.

Sharding Topology

In MongoDB sharding happens at the collection level. That is to say you can have a combination of sharded and unsharded collections. Let's look at a simple example topology.

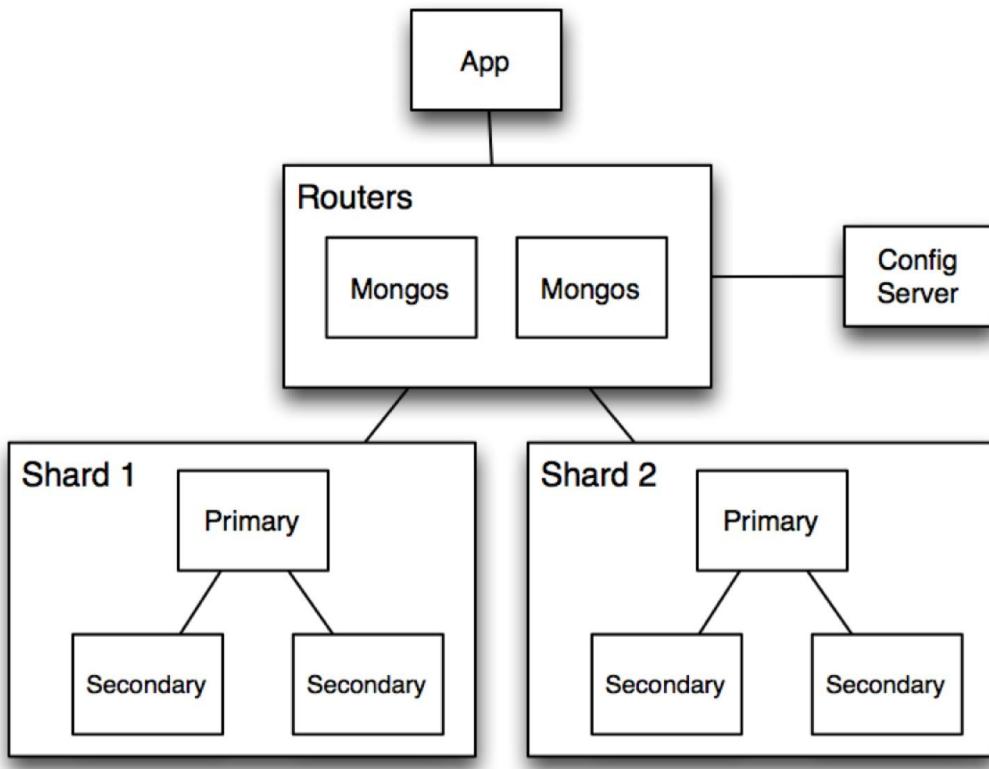

Simple Two Shard Topology

The application does not directly talk to the shards but instead talks through the sharding proxy *Mongos*. *Mongos* is responsible for the routing of writes and queries to the shards.

When to Shard

One of the typical errors people commit is to shard too early. The reason this can be a problem, is that sharding requires the developer to pick a shard key for distribution of the writes and it's easy to pick the wrong key early on due to not knowing how the data will be accessed over time.

This can lead reads to be inefficiently spread out across shards causing unnecessary IO and CPU usage in order to retrieve the data. Once the collection is sharded, it can be very time consuming to undo it, as all the data will have to be migrated from one sharded collection to another by reinserting all the documents into the new collection.

That said, let's look at some reason you might want to Shard.

1. Your Working Set no longer fits in the memory of your server. In this case, sharding can help make more of your Working Set stay in memory by pooling the RAM of all the shards. If you have a 20GB Working Set on a 16GB machine, sharding can split this across 2 machines for a total of 32GB of RAM available, potentially keeping all of the data in RAM and avoiding disk IO.
2. Scaling the write IO. You need to perform more write operations than what a single server can handle. By Sharding you can scale out the writes across multiple computers, increasing the total write throughput.

Choosing a Shard Key

It's important to pick a Shard key based on the actual read/write profile of your application to avoid inefficient queries and write patterns. There are a couple of tips that can help in the quest to identify the right shard key.

Easily Divisible Shard Key (Cardinality)

When discussing cardinality in the context of MongoDB, we refer to the ability to partition data into chunks distributed across all the shards. Let's look at some example shard keys.

Picking the state field as a shard key

In our documents the state field contains the US state for a specific address. This field is considered low cardinality, as all documents containing the same state will have to reside on the same shard. Since the key space for states is a limited set of values, MongoDB might end up distributing the data unevenly across a small set of fixed chunks. This might cause some unintentional side effects.

- It could lead to un-splittable chunks that could cause migration delays and unnecessary IO due to MongoDB attempting to split and migrate chunks.
- The un-splittable chunks might make it difficult to keep the shards balanced, causing load distribution to be uneven across the shards.
- If the number of values map to a maximum of un-splittable chunks, adding more shards might not help as there are fewer chunks available than shards. Due to the chunks being un-splittable, we cannot leverage the additional shards.

Picking the post code field as a shard key

If we pick the post code field as a shard key, the number of possible post codes is higher than when using the state state field. So the shard key is considered to have a higher cardinality than when using the state field. However the number of post codes does not completely mitigate the situation of un-splittable chunks. As one can imagine, one post code has a lot more associated addresses, which could make that specific chunk un-splittable.

Picking the phone number field as a shard key

The phone number field has high cardinality as there might be few users mapping to a specific phone number. This will make it easy for MongoDB to split chunks, as chunks won't be made up of documents that map to the same shard key, avoiding the possible problem of using the state field.



Cardinality

Always consider the number of values your shard key can express. A sharding key that has only 50 possible values, is considered low cardinality, while one that might be able to express several million values might be considered a high cardinality key. High cardinality keys are preferable to low cardinality keys to avoid un-splittable chunks.

High Randomness Shard Key (Write Scaling)

A key with high randomness will evenly distribute the writes and reads across all the shards. This works well if documents are self contained entities such as Users. However queries for ranges of documents, such as all users with ages less than 35 years will require a scatter gather query where all shards are queried and a merge sort is done on Mongos.

Single Shard Targeted Key (Query Isolation)

Picking a shard key, that groups the documents together will make most of the queries go to a specific Shard. This can avoid scatter gather queries. One possible example might be a Geo application for the UK, where the first part of the key includes the postcode and the second is the address. Due to the first part of the shard key being the postcode, all documents for that particular sort key will end up on the same Shard, meaning all queries for a specific postcode will be routed to a single Shard.

The UK postcode works as it has a lot of possible values due to the resolution of postcodes in the UK. This means there will only be a limited amount of documents in each chunk for a specific postcode. However, if we were to do this for a US postcode we might find that each postcode includes a lot of addresses causing the chunks to be hard to split into new ranges. The effect is that MongoDB is less able to spread out the documents and in the end this impacts performance.

Routing Shard Keys

Depending on your Shard key the routing will work differently. This is important to keep in mind as it will impact performance.


Type Of Operation	Query Topology
Insert	Must have the Shard key
Update	Can have the Shard key
Query with Shard Key	Routed to nodes
Query without Shard Key	Scatter gather
Indexed/Sorted Query with Shard Key	Routed in order
Indexed/Sorted Query without Shard Key	Distributed sort merge

Inbox Example

Imagine a social Inbox. In this case we have two main goals

1. Send new messages to its recipients efficiently
2. Read the Inbox efficiently

We want to ensure we meet two specific goals. The first one is to write to multiple recipients on separate shards thus leveraging the write scalability. For a user to read their email box, one wants to read from a single shard avoid scatter/gather queries.

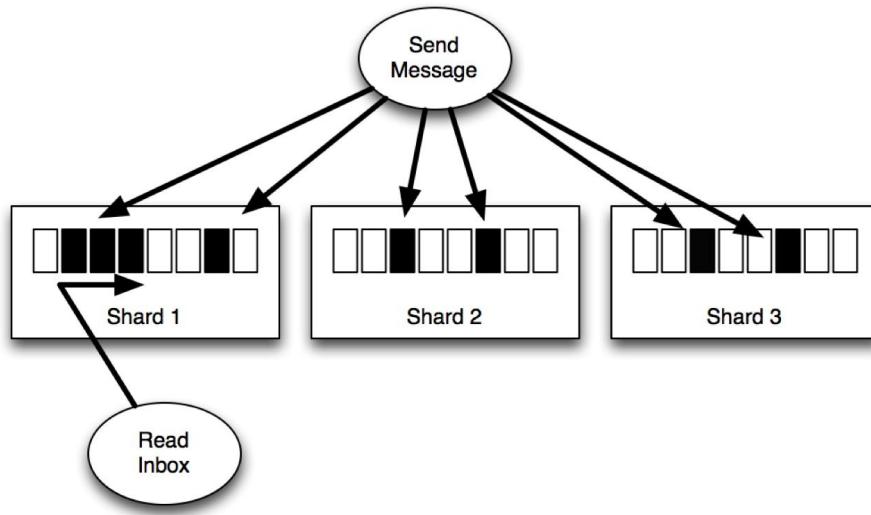

Fan out write, Single shard Read

How does one go about getting the correct shard key? Let's assume we have two collections `inbox` and `users`, in our social database.

Example 1: Shard the social collections

```

1 var db = db.getSisterDB('social');
2 db.shardCollection('social.inbox', {owner: 1, sequence: 1});
3 db.shardCollection('social.users', {user_name: 1});

```

Let's write and read to the collections with some test data to show how we can leverage the sharding.

Example 2: Write Email, Read Inbox

```

1 var db = db.getSisterDB('social');
2 var msg = {
3   from: 'Christian',
4   to: ['Peter', 'Paul'],
5   sent_on: new Date(),
6   message: 'Hello world'
7 }
8
9 for(var i = 0; i < msg.to.length; i++) {
10   var result = db.users.findAndModify({
11     query: { user_name: msg.to[i] },
12     update: { '$inc': {msg_count: 1} },
13     upsert: true,
14     new: true

```

```
15    })
16
17  var count = result.msg_count;
18  var sequence_number = Math.floor(count/50);
19  db.inbox.update({ owner: msg.to[i], sequence: sequence} ),
20    { $push: {messages: msg} },
21    { upsert:true });
22 }
23
24 db.inbox.find({owner: 'Peter'})
25   .sort({sequence: -1})
26   .limit(2);
```

The first part delivers the message to all its recipients. First, it updates the message count for the recipient and then pushes the message to the recipient's mailbox (which is an embedded document). The combination of the Shard key being `{owner: 1, sequence: 1}`, means that all new messages get written to the same chunk for a specific owner. The `Math.floor(count/50)` generation will split up the inbox into buckets of 50 messages in each.

This last aspect means that the read will be routed directly to a single chunk on a single Shard, avoiding scatter/gather and speeding up retrieval.

Multiple Identities Example

What if we need to lookup documents by multiple different identities like a user name, or an email address?

Take the following document:

Sample document

```
1 var db = db.getSisterDB('users');
2 db.users.insert({
3   _id: 'peter',
4   email: 'peter@example.com'
5 })
```

If we shard by `_id`, it means that only `_id` queries will be routed directly to the right shard. If we wish to query by email we have to perform a scatter/gather query.

There is a possible solution called document per identity. Let's look at a different way of representing the information.

Example 3: Set up Identities

```
1 var db = db.getSisterDB('users');
2
3 db.identities.ensureIndex({ identifier: 1 }, { unique: true });
4
5 db.identities.insert({
6   identifier: {user: 'peter'}, id: 'peter'});
7
8 db.identities.insert({
9   identifier: {email: 'peter@example.com', user: 'peter'},
10  id: 'peter'});
11
12 db.shardCollection('users.identities', {identifier: 1});
13 db.users.ensureIndex({ _id: 1}, { unique: true });
14 db.shardCollection('users.users'. { _id: 1});
```

We create a unique index for the `identities` table to ensure we cannot map two entries into the same identity space. Using the new compound shard key we can retrieve a user by its email by performing two queries. Let's see how we can look up the `user` document of the user with the email address of `peter@example.com`.

Example 4: Set up Identities

```
1 var db = db.getSisterDB('users');
2
3 var identity = db.identities.findOne({
4   identifier: {
5     email: 'peter@example.com'}});
6
7 var user = db.users.find({ _id: identity.id });
```

The first query locates the identity using the email, which is a routed query to a single shard. The second query uses the returned `identity.id` field to retrieve the user by the shard key.

Sharding Anti-Patterns

There are a couple of sharding anti-patterns that you should keep in mind to avoid some of the more common pitfalls.

Monotonically increasing shard key

A monotonically increasing shard key, is an increasing function such as a counter or an `ObjectId`. When writing documents to a sharded system using an incrementing counter as it's shard key, all documents will be written to the same

shard and chunk until MongoDB splits the chunk and attempts to migrate it to a different shard. There are two possible simple solutions to avoid this issue.

Hashing the shard key

From MongodDB 2.4, we can tell MongoDB to automatically hash all of the shard key values. If we wanted to create documents where the shard key is `_id` with an ObjectId, we could shard the collection using the following options.

Example 5: Shard using hashed `_id`

```
1 sh.shardCollection( "users.users", { _id: "hashed" } )
```

Pre-split the chunks

The second alternative is to pre-split the shard key ranges and migrate the chunks manually, ensuring that writes will be distributed. Say you wanted to use a date timestamp as a shard key. Everyday you set up a new sharded system to collect data and then crunch the data into aggregated numbers before throwing away the original data.

We could pre-split the key range so each chunk represented a single minute of data.

Example 6: Shard using `_id` field

```
1 / first switch to the data DB
2 use data;
3 // now enable sharding for the data DB
4 sh.enableSharding("data");
5 // enable sharding on the relevant collection
6 sh.shardCollection("data.data", {"_id" : 1});
7 // Disable the balancer
8 sh.stopBalancer();
```

Let's split the data by minutes.

Example 7: Pre-split

```
1 / first switch to the admin db
2 use admin;
3 // 60 minutes in one hour, 24 hours in a day
4 var numberofMinutesInDay = 60*24;
5 var date = new Date();
6 date.setHours(0);
7 date.setMinutes(0)
8 date.setSeconds(0);
9
10 // Pre-split the collection
```

```
11 for(var i = 0; i < numberOfMinutesInDay; i++) {  
12     db.runCommand({ split: "data.data",  
13         middle: {_id: date}  
14     });  
15  
16     date.setMinutes(date.getMinutes() + 1);  
17 }
```

Finally re-enable the balancer and allow MongoDB to start balancing the chunks to the shards.


Example 8: Enable balancer

```
1 // Enable the balancer  
2 sh.startBalancer();
```

You can monitor the migrations by connecting to mongos, using the mongo shell and executing the sh.status() command helper to view the current status of the sharded system.

The goal of pre-splitting the ranges is to ensure the writes are distributed across all the shards even though we are using a monotonically increasing number.

Schema Design

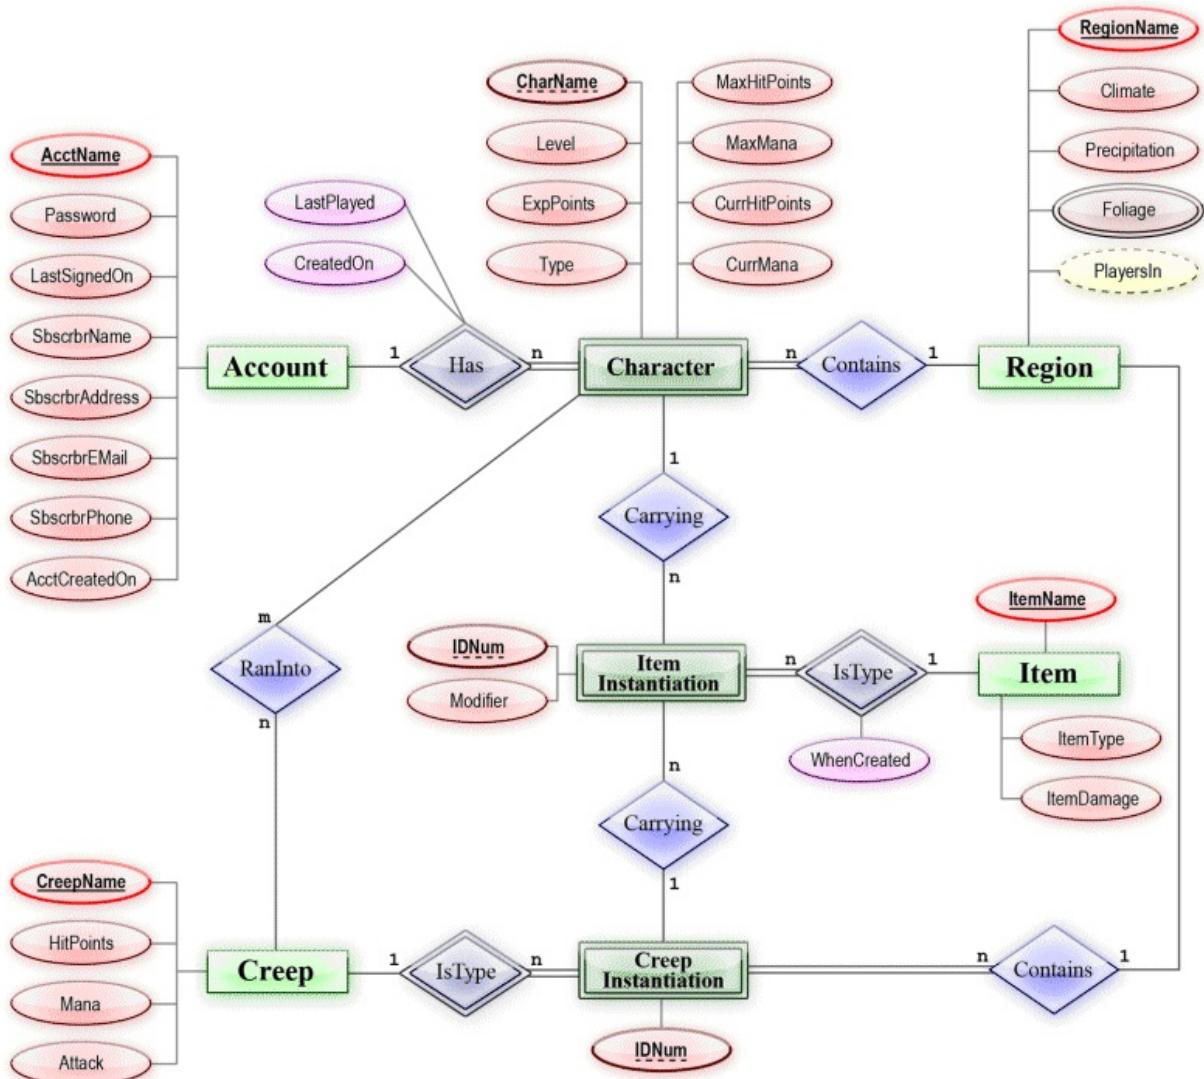

A Schema, http://upload.wikimedia.org/wikipedia/commons/7/72/ER_Diagram_MMORPG.png

There are several things to keep in mind when designing a schema for your application.

Read Ratio to Write Ratio

Determining if your application is read heavy or write heavy will lead to how you design your schema. If your application is read heavy, you might want to

choose a schema that minimizes the amount of reads from MongoDB.

As an example consider an auction type website. As most operations are read operations caused by people browsing the catalog, it might make sense to use a denormalized schema for the product including as much relevant information as needed to render the entire product page.

Similarly if your application is write heavy, you might want to ensure that you use a schema that maximizes MongoDB write throughput.

Avoid Application Joins

MongoDB does not support server side joins. All joins have to be performed in the application itself. The performance can suffer if you are pulling back and joining a lot of data due to all the round-trips required to bring back all the data and the time it takes to perform the in application join. If you find your schema is depending on a lot of joins, it might make sense to denormalize the schema in order to reduce the number of joins.

Pre-aggregate Data

Additionally, if you find you are aggregating data in a lot of application queries, you might want to consider pre-aggregating. One example might be a page view counter. Instead of summing up the number of views for a particular page on request, we can increment a view counter for that page each time the page is viewed and use this counter to show the number of page views.

Avoid Growing Documents (MMAP)

If, you find that your schema design creates documents that are constantly growing in size, it will have impact on your disk IO and database performance. Using document buckets and document pre-allocation will help address the issues for the MMAP storage engine.

Avoid Updating Whole Documents (MMAP)

MongoDB provides for atomic operators that let you modify fields in an existing document, and in most cases will cause an in-place update when using the MMAP storage engine. This ensures we spend as little time as possible re-allocating documents in memory and improves write performance.

Pre-allocated Documents (MMAP)

If your schema grows to a known size you can avoid document moves by pre-allocating the maximum size of the document causing all operations on the document to be in-place updates.

Field Names Take up Space (MMAP)

In some cases documents can contain more space allocated for the field names than the actual data stored. For this case you may want to consider compressing your field names if you are using MMAP or switch to using WiredTiger that supports compression using snappy or zlib.

Over Eager Indexing

You might get tempted to add all kinds of indexes to your schema. You have to keep in mind, that each index will impact performance, as they will need to be updated when documents change and the more indexes you have on a collection the more overhead there will be for each write operation. Each index also takes up space and memory so keep in mind that over eager indexing can cause your storage size to balloon.


Custom _id Field

You can save some space and additional indexes by overriding the meaning of the _id field. The only requirement is that _id is a unique field for the collection. For example you might have a structure that contains a timestamp, userid and machineid allowing you to use the _id index to query for those fields without having to create an additional index.

Covered Indexes

If your application can leverage covered indexes, it might help performance given that a query might be completely answerable using the data stored in the index without materializing the underlying documents.

Queue

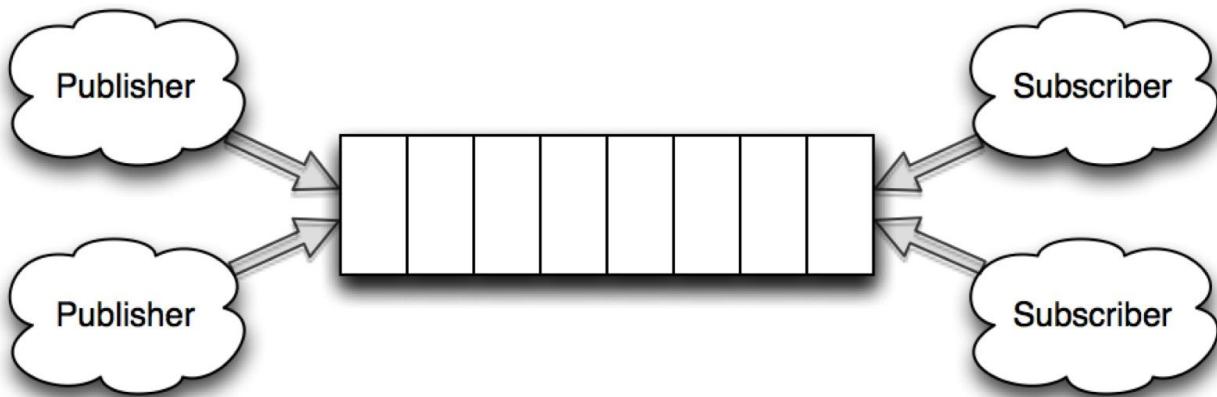

A Queue With Publishers and Subscribers

A queue in the setting of MongoDB, means a collection where inserted documents are kept in an order, either by the creation date of the document or by a priority assigned to the document. Multiple publishers can be inserting new documents into the queue at the same time, but each document can only be delivered to a single listener.

The queue schema introduced in this chapter is a work queue that is used to enqueue work for a set of listening processes. A job is represented by a document and can be dequeued either in FIFO (first in first out) order or by priority.

Schema Observations

- Efficient retrieval of queue jobs.
- Flexible.
- Easily adaptable to increased performance using an index.
- Relies on `findAndModify`, which means it's imperative that the query aspect of the operation is as efficient as possible in order to minimize write locks (less of an issue with WiredTiger).
- Potentially read and write intensive.

Schema

Schema Attributes	Optimized For	Write/Read Performance
-------------------	---------------	------------------------

The schema expressed here only contains the minimal set of fields needed to represent work items. One of the things omitted, is the ability to identify what process is working on a specific item. There is also no additional meta data provided about the work item itself.

Example 1: The fields in a job document and their types

```
1 {
2   'startTime': date
3   , 'endTime': date
4   , 'createdOn': date
5   , 'priority': number
6   , 'payload': object
7 }
```

For this schema we will use the following fields.

Field	Description
startTime	The time the job was started
endTime	The time the job ended
createdOn	The time the document was created
priority	A numeric priority where a higher value is higher priority
payload	An embedded document that is the work payload

One could easily extend the schema by adding a `process_id` field that could contain the information about what listener picked up the document.

Operations

Let's look at the different operations we can perform on the queue schema.

Inserting a Job

Inserting a job into the work queue is fairly simple and straight forward using the shell as an example.

Example 2: Insert a sample job document

```
1 var col = db.getSiblingDB("work").queue;
2 col.insert({
3     'startTime': null
4     , 'endTime': null
5     , 'createdOn': new Date()
6     , 'priority': 1
7     , 'payload': {
8         'type': 'convertImage'
9         , 'source': 'imagesimage.png'
10        , 'output': 'imagesimage.jpg'
11    }
12});
```

In this example, we insert a new job that converts images from one type to another.

Return the next FIFO Job

If we wish to fetch the next item using FIFO, we can do this in the following way.

Example 3: Fetch a job FIFO style

```
1 var col = db.getSiblingDB("work").queue;
2 var job = col.findAndModify({
3     query: {startTime: null}
4     , sort: {createdOn: 1}
5     , update: {$set: {startTime: new Date()}}
6     , new: true
7});
```

This query will retrieve the document with the oldest createdOn data, and set the startTime field to the current Date, before returning the updated document.



findAndModify

One thing to remember is that `findAndModify` takes a write lock for the duration of the operation. What this means in practice, is that it will not allow concurrent writes to happen while the operation is in process. The impact of this lock depends on the version of MongoDB.

MongoDB 2.6 and earlier have a db level lock that will block the database for write operations. MongoDB 3.0 improves on this for the MMAP engine by making it a collection level lock. If you use the WiredTiger storage engine it only requires a document level lock.

It's important to ensure there is an index on `createdOn` to reduce the total time the `findAndModify` operation takes to execute.

Return the Highest Priority Job

To fetch a job sorted by the highest priority and created date, we perform a slightly different query to the FIFO one.

Example 4: Fetch the next highest priority job

```
1 var col = db.getSiblingDB("work").queue;
2 var job = col.findAndModify({
3     query: {startTime: null}
4     , sort: {priority: -1, createdOn: 1}
5     , update: {$set: {startTime: new Date()}}
6     , new: true
7 });


```

This query differs from the FIFO one in a particular way. First, we sort by priority and then perform a secondary sorting on `createdOn`.

Finishing a Job

When we have finished processing a job we simply update the job `endTime`, signaling that the job was done.

Example 5: Set a job as finished

```
1 var col = db.getSiblingDB("work").queue;
2 col.update({_id: job._id}, {$set: {endTime: new Date()}});

```

We look up the job by using the `job._id` field and set the `endTime` field to the current data and time.

Indexes

There are a couple of indexes that we can create to help performance with this schema. Let's look at what kind of queries we are performing for the queue schema.

Return the next FIFO Job

The query is `{startTime: null}` and we sort by `{createdOn: 1}`. To effectively use an index, we can create a composite index featuring the two fields. This allows both the query and sort to each use an index.

Example 6: Create the FIFO index

```
1 var col = db.getSiblingDB("work").queue;
2 col.ensureIndex({startTime: 1, createdOn: 1});
```

When executing the query part of the `findAndModify` with the `explain` command:

Example 7: Query with query plan

```
1 var col = db.getSiblingDB("work").queue;
2 col.find({startTime: null}).sort({createdOn: 1}).explain()
```

The result field `cursor` contains the text `BtreeCursor` showing that the query has executed using an index. In our case the cursor field looked like this.

```
"cursor" : "BtreeCursor startTime_1_createdOn_1"
```

This is the expected outcome, as we wish to avoid performing a collection level scan. Here, the worst case scenario is an index scan for all entries where `startTime` is `null`.

Return the highest Priority Job

The query is slightly different from the FIFO one, as we involve three different fields. The query is `{startTime: null}` is the same as the FIFO query, but the sort includes both the `priority` and `createdOn` fields `{priority: -1, createdOn: 1}`. This particular query benefits from a compound index containing all three fields. Let's create the index using `ensureIndex`.

Example 8: Create the FIFO index

```
1 var col = db.getSiblingDB("work").queue;
2 col.ensureIndex({startTime: 1, priority: -1, createdOn: 1});
```

Execute the query part of the findAndModify with explain

Example 9: Query with query plan

```
1 var col = db.getSiblingDB("work").queue;
2 col.find({startTime: null}).sort({priority: -1, createdOn: 1}).expla\
3 in()
```

Just as with the FIFO query, we see that the cursor field returned contains the word `BtreeCursor`. In our case it comes back looking like this.

```
"cursor" : "BtreeCursor startTime_1_priority_-1_createdOn_1"
```

This is the expected outcome as we wish to avoid performing a collection level scan. Here, the worst case scenario is an index scan for all entries where `startTime` is null.

TTL Indexes

MongoDB 2.4 or higher has a new type of index called TTL, that lets the server remove documents gradually over time. Let's look at an example document.

Example 10: An example job document

```
{  
    'startTime': ISODate("2014-01-01T10:02:22Z")  
    , 'endTime': ISODate("2014-01-01T10:06:22Z")  
    , 'createdOn': ISODate("2014-01-01T10:01:22Z")  
    , 'priority': 1  
    , 'payload': {  
        'type': 'convertImage'  
        , 'source': '/images/image.png'  
        , 'output': '/images/image.jpg'  
    }  
}
```

We want to only keep the last 24 hours worth of jobs once they are finished. Before MongoDB 2.4 the only way to accomplish this would be to perform a batch remove using a script or application.

With the introduction of the TTL index, we can let MongoDB perform the deletion of documents for us avoiding additional code and the possible interruptions to write performance bulk deletes might cause. Creating the TTL index is very straightforward.

Example 11: Add a TTL index to collection

```
1 var db = db.getSiblingDB("data");
2 var numberofSeconds = 60 * 60 * 24; // 60 sec 60 min 24 hours
3 db.expire.ensureIndex({ "endTime": 1}, {expireAfterSeconds: numberof\
4 Seconds })
```

This creates a TTL index on the endTime field that will remove any documents where the endTime field is older than 24 hours.



Time To Live Indexes (TTL)

The TTL index is not a hard real-time limit. It only guarantees that documents will be expired some time after they hit the expire threshold, but this period will vary depending on the load on MongoDB and other currently running operations.

Scaling

Secondary Reads

All the operations against the queue are write operations so secondary reads are not useful for this schema.

Sharding

Both the FIFO and priority based queues use `findAndModify` querying on `startTime` equal to null. If we used `startTime` as the shard key the `findAndModify` will fail as it attempts to set the `startTime` field which is immutable as it's the shard key. There is no real way around this so sharding does not make sense for this particular schema.

If you wish to scale the schema, you can do this by creating multiple collections and assigning the collections to separate shards thus spreading the writes across multiple MongoDb servers.

Performance

Performance is limited to the amount of time it takes for the `findAndModify` to finish. With the MMAP storage engine the lock level is db level in 2.6 and

collection level in 3.0. For `WiredTiger` the document level locking means that performance is less impacted by `findAndModify`.

A simple exploration of the performance on a single machine with MongoDB 3.0 shows the difference between `MMAP` and `WiredTiger` for a narrow simulation using the schema simulation framework `mongodb-schema-simulator`.

Scenario

https://github.com/christkv/mongodb-schema-simulator/blob/master/examples/simulations/queue_fifo_simulation.js

MongoDb runs locally on a MacBook Pro Retina 2015 with ssd and 16 gb ram. The simulation runs with the following parameters against a single `mongodb` instance under osx 10.10 Yosemite.

Parameters

processes	4
poolSize per process	50
type	linear
Resolution in milliseconds	1000
Iterations run	25
Total number of users publishing per iteration	1000
Total number of users reading per iteration	300
Execution strategy	slicetime

Warning




This is not a performance benchmark

The graphs here are shown to give an understanding of the difference between the two storage engines available and **IS NOT** indicative of the performance obtained on a real production system. Furthermore more it's important to understand that MongoDB is not optimized for osx.

The `mongodb-schema-simulator` tool was made expressively so you can simulate these schemas yourself on your own hardware.

MMAP

The MMAP engine is run using the default settings on MongoDB 3.0.1.

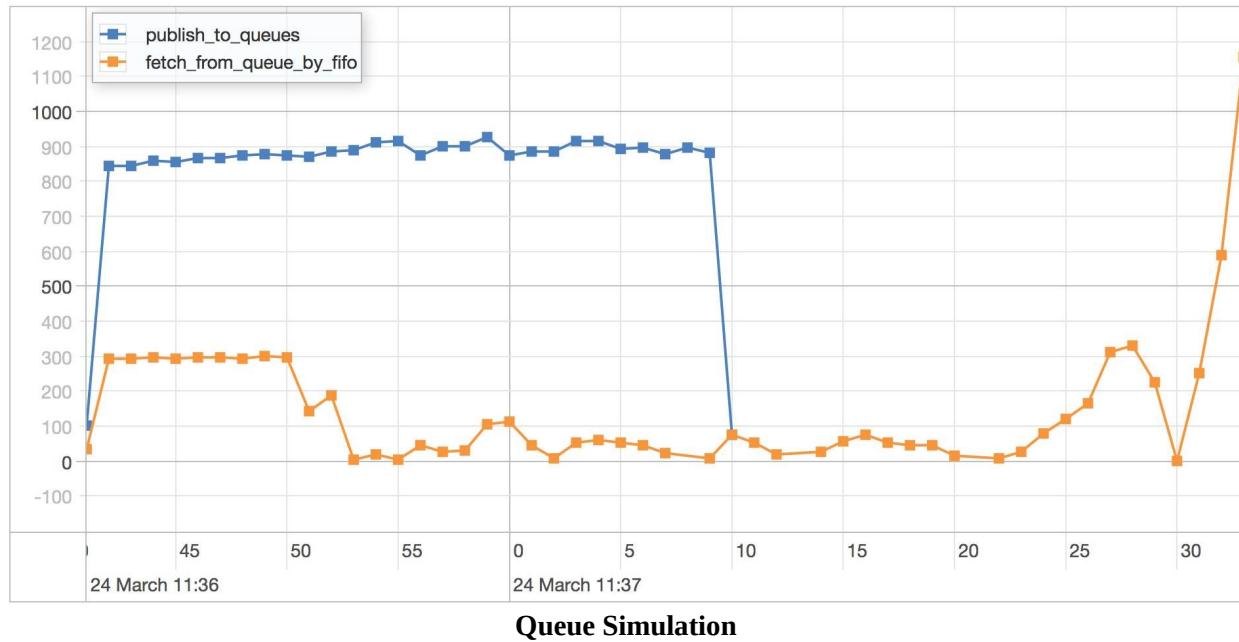

publish_to_queues scenario results

Statistics

Runtime	52.289 seconds
Mean	31.288 milliseconds
Standard Deviation	21.479 milliseconds
75 percentile	48.616 milliseconds
95 percentile	55.736 milliseconds
99 percentile	59.138 milliseconds
Minimum	0.401 milliseconds
Maximum	77.987 milliseconds

fetch_from_queue_by_fifo scenario results


Statistics

Runtime	52.289 seconds
Mean	15195.361 milliseconds
Standard Deviation	13526.237 milliseconds
75 percentile	28049.003 milliseconds
95 percentile	33552.295 milliseconds
99 percentile	35403.374 milliseconds
Minimum	1.233 milliseconds
Maximum	37248.023 milliseconds

What we can observe here is the cost of the collection level write lock in `MMAP` as all the writes get priority over the reads swamping the server and limiting read throughput. As the writes tail off, the queued reads start getting through but due to the large backlog the average time of the reads increases dramatically in comparison to the writes.

WiredTiger

The `WiredTiger` engine is run using the default settings on MongoDB 3.0.1.

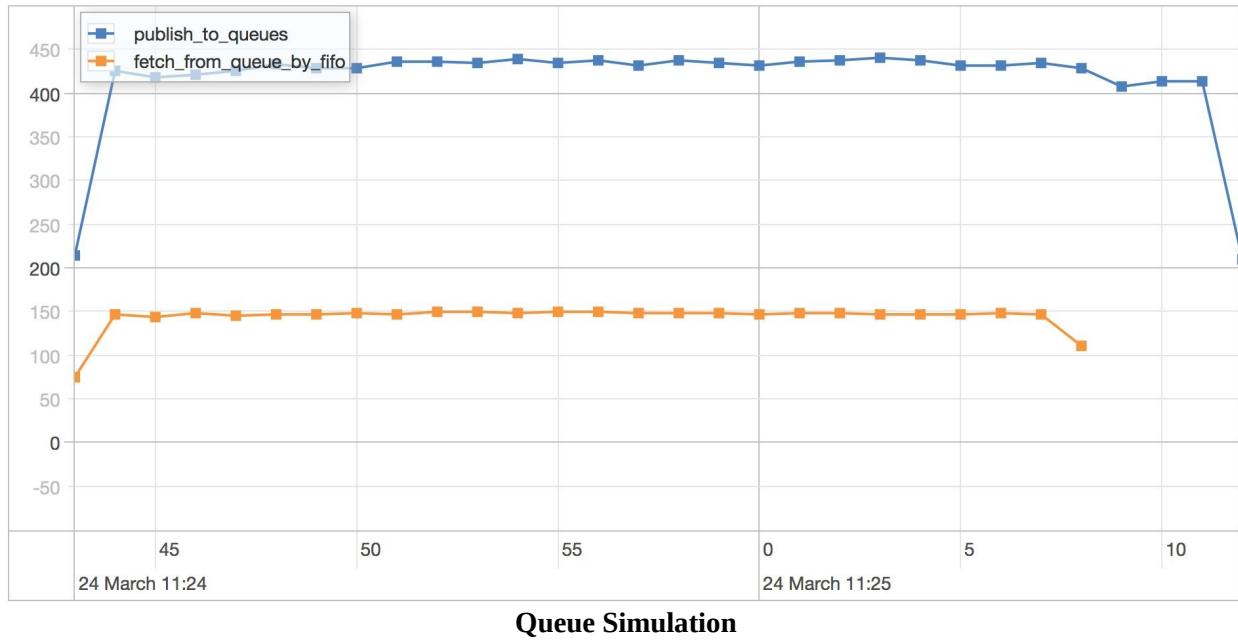

publish_to_queues scenario results

Statistics

Runtime	31.113 seconds
Mean	32.455 milliseconds
Standard Deviation	44.732 milliseconds
75 percentile	51.322 milliseconds
95 percentile	127.275 milliseconds
99 percentile	188.452 milliseconds
Minimum	0.412 milliseconds
Maximum	312.698 milliseconds

fetch_from_queue_by_fifo scenario results

Statistics

Runtime	31.113 seconds
Mean	48.493 milliseconds
Standard Deviation	718.43 milliseconds
75 percentile	5.873 milliseconds
95 percentile	10.658 milliseconds
99 percentile	29.38 milliseconds
Minimum	1.329 milliseconds
Maximum	19499.33 milliseconds

We can see the benefit of document level locking here as the writes are spread out more evenly across the whole runtime when `WiredTiger` yields to reads. However, the improvement is not huge and it comes with a much bigger cpu overhead. `WiredTiger` does not support inplace updates and has to copy the data for each `findAndModify` that is performed.

Notes

Picking the right storage engine for the schema is imperative. Although `WiredTiger` is somewhat faster in this scenario it's important to consider its higher cpu usage and the fact that it does not support in place updates which could impact performance depending on the size of the document.

```

<code class="p">{</code>

    <code class="s">"time"</code><code class="o">:</code> <code
class="n">ISODate</code><code class="p">(</code><code class="s">"2014-
01-01T10:01:22Z"</code><code class="p">)</code>

    <code class="s">"ticker"</code><code class="o">:</code> <code
class="s">"PIP"</code><code class="p">,</code>

    <code class="s">"price"</code><code class="o">:</code> <code
class="s">"4.45"</code>

<code class="p">}</code>

<code class="lineno">1</code> <code class="kd">var</code> <code
class="nx">db</code> <code class="o">=</code> <code class="nx">db</code>
<code class="p">.</code><code class="nx">getSisterDB</code><code
class="p">(</code><code class="s2">"finance"</code><code class="p">);
</code>

<code class="lineno">2</code> <code class="nx">db</code><code class="p">.
</code><code class="nx">createCollection</code><code class="p">(</code>
<code class="s2">"ticker"</code><code class="p">,</code> <code class="p">
{</code><code class="nx">capped</code><code class="o">:</code><code
class="kc">true</code><code class="p">,</code> <code
class="nx">size</code><code class="o">:</code><code
class="mi">100000</code><code class="p">,</code> <code
class="nx">max</code><code class="o">:</code> <code
class="mi">100000</code><code class="o">}</code>

<code class="lineno">3</code> <code class="p">})</code>

<code class="lineno"> 1</code> <code class="kd">var</code> <code
class="nx">db</code> <code class="o">=</code> <code class="nx">db</code>
<code class="p">.</code><code class="nx">getSisterDB</code><code
class="p">(</code><code class="s2">"finance"</code><code class="p">);
</code>

<code class="lineno"> 2</code> <code class="k">while</code><code

```

```
class="p">>(</code><code class="kc">true</code><code class="p">)</code>
<code class="p">{</code>

<code class="lineno"> 3</code> <code class="nx">db</code><code
class="p">.</code><code class="nx">ticker</code><code class="p">.</code>
<code class="nx">insert</code><code class="p">({</code>

<code class="lineno"> 4</code> <code class="nx">time</code><code
class="o">:</code> <code class="k">new</code> <code
class="nb">Date</code><code class="p">(),</code>

<code class="lineno"> 5</code> <code class="nx">ticker</code><code
class="o">:</code> <code class="s2">"PIP"</code><code class="p">,</code>

<code class="lineno"> 6</code> <code class="nx">price</code><code
class="o">:</code> <code class="mi">100</code> <code class="o">*</code>
<code class="nb">Math</code><code class="p">.</code><code
class="nx">random</code><code class="p">(</code><code
class="mi">1000</code><code class="p">)</code>

<code class="lineno"> 7</code> <code class="p">})</code>

<code class="lineno"> 8</code>

<code class="lineno"> 9</code> <code class="nx">sleep</code><code
class="p">(</code><code class="mi">1000</code><code class="p">);</code>

<code class="lineno">10</code> <code class="p">}</code>

<code class="lineno">1</code> <code class="kd">var</code> <code
class="nx">db</code> <code class="o">=</code> <code class="nx">db</code>
<code class="p">.</code><code class="nx">getSisterDB</code><code
class="p">(</code><code class="s2">"finance"</code><code class="p">);
</code>

<code class="lineno">2</code> <code class="kd">var</code> <code
class="nx">cursor</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">ticker</code><code class="p">.</code><code
class="nx">find</code><code class="p">({</code><code
```

```
class="nx">>time</code><code class="o">:</code> <code class="p">{</code>
<code class="nx">$gte</code><code class="o">:</code> <code
class="k">new</code> <code class="nb">Date</code><code class="p">(){}).</code><code class="nx">addOption</code><code class="p">(</code><code
class="nx">DB</code><code class="o">|\</code>

<code class="lineno">3</code> <code class="nx">Query</code><code
class="p">.</code><code class="nx">Option</code><code class="p">.</code>
<code class="nx">tailable</code><code class="p">).</code><code
class="nx">addOption</code><code class="p">(</code><code
class="nx">DBQuery</code><code class="p">.</code><code
class="nx">Option</code><code class="p">.</code><code
class="nx">awaitData</code><code class="p">)</code>

<code class="lineno">4</code>

<code class="lineno">5</code> <code class="k">while</code><code
class="p">(</code><code class="nx">cursor</code><code class="p">.</code>
<code class="nx">hasNext</code><code class="p">)</code> <code class="p">
{</code>

<code class="lineno">6</code> <code class="nx">print</code><code
class="p">(</code><code class="nx">JSON</code><code class="p">.</code>
<code class="nx">stringify</code><code class="p">(</code><code
class="nx">cursor</code><code class="p">.</code><code
class="nx">next</code><code class="p">(),</code> <code
class="kc">null</code><code class="p">,</code> <code class="mi">2</code>
<code class="p">))</code>

<code class="lineno">7</code> <code class="p">}</code>

<code class="lineno">1</code> <code class="kd">var</code> <code
class="nx">col</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"finance"</code><code class="p">).</code><code
class="nx">ticker</code><code class="p">;</code>

<code class="lineno">2</code> <code class="nx">col</code><code
class="p">.</code><code class="nx">ensureIndex</code><code class="p">
```

```
({</code><code class="nx">time</code><code class="o">:</code> <code class="mi">1</code><code class="p">});</code>
```

Scaling

Secondary Reads

Secondary reads can help scale the number of subscribers. This allows an application to increase the number of listeners by distributing the read load across multiple secondaries.

Sharding

Capped collections do not support sharding.

Performance

Capped collections are in-memory collections and are limited to the speed of memory. Unfortunately, there is a performance limit caused by the way tailing cursors are currently implemented. As you add more and more tailing cursors, the MongoDB cpu usage increases markedly. This means that it's important to keep the number of listeners low to get better throughput.

If you are just pulling data off the topic, and not performing any modifications to the documents using secondary reads with a replicaset might help scale the number of listeners you can deploy without creating undue cpu usage on the servers.

A simple exploration of the performance on a single machine with MongoDB 3.0 shows the difference between `MMAP` and `WiredTiger` for a narrow simulation using the schema simulation framework `mongodb-schema-simulator`.

Scenario

https://github.com/christkv/mongodb-schema-simulator/blob/master/examples/simulations/topic_simulation.js

MongoDb runs locally on a MacBook Pro Retina 2015 with ssd and 16 gb ram. The simulation runs with the following parameters against a single `mongod`


instance under osx 10.10 Yosemite.

Parameters

processes	4
poolSize per process	50
type	linear
Resolution in milliseconds	1000
Iterations run	25
Total number of users publishing per iteration	1000
Total number of users listening to topic	40
Execution strategy	slicetime, custom

MMAP

The MMAP engine is run using the default settings on MongoDB 3.0.1.

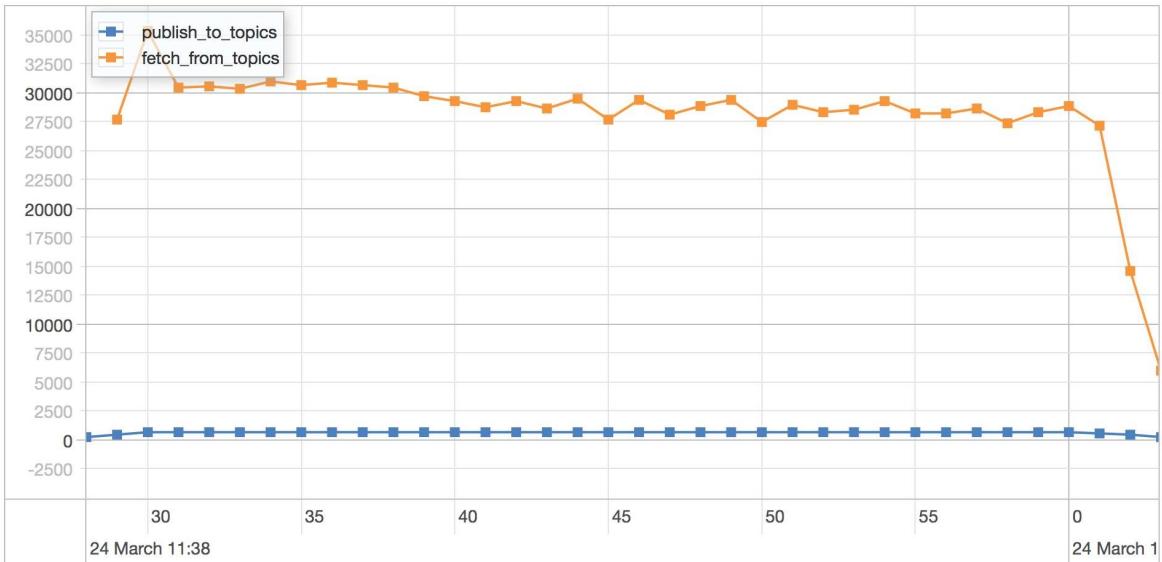

Topics Simulation

publish_to_topics scenario results

Statistics

Runtime	44.39 seconds
Mean	2.616 milliseconds
Standard Deviation	7.824 milliseconds
75 percentile	2.318 milliseconds
95 percentile	5.523 milliseconds
99 percentile	21.792 milliseconds
Minimum	0.703 milliseconds
Maximum	420.747 milliseconds

fetch_from_topics scenario results

Statistics

Runtime	44.39 seconds
Mean	0.001 milliseconds
Standard Deviation	0.003 milliseconds
75 percentile	0.002 milliseconds
95 percentile	0.004 milliseconds
99 percentile	0.02 milliseconds


Minimum	~0.00 milliseconds
Maximum	0.323 milliseconds

There doesn't seem to much to note here. The writes per second is pretty much exactly 1000, mirroring the number of concurrent users we have defined in the simulation. As the capped collection is in-memory, the writing speed is limited only to MongoDB's lock handling and memory performance.

One thing to keep in mind, is that before MongoDB 3.0 the MMAP engine only supported db level locking which meant it was better to place a high throughput capped collection in its own separate database. In MongoDB 3.0 the MMAP engine lowers the lock level to collection level which means it can coexist with other collections in the same database without impacting other collections with lock contention.

WiredTiger

The `WiredTiger` engine is run using the default settings on MongoDB 3.0.1.

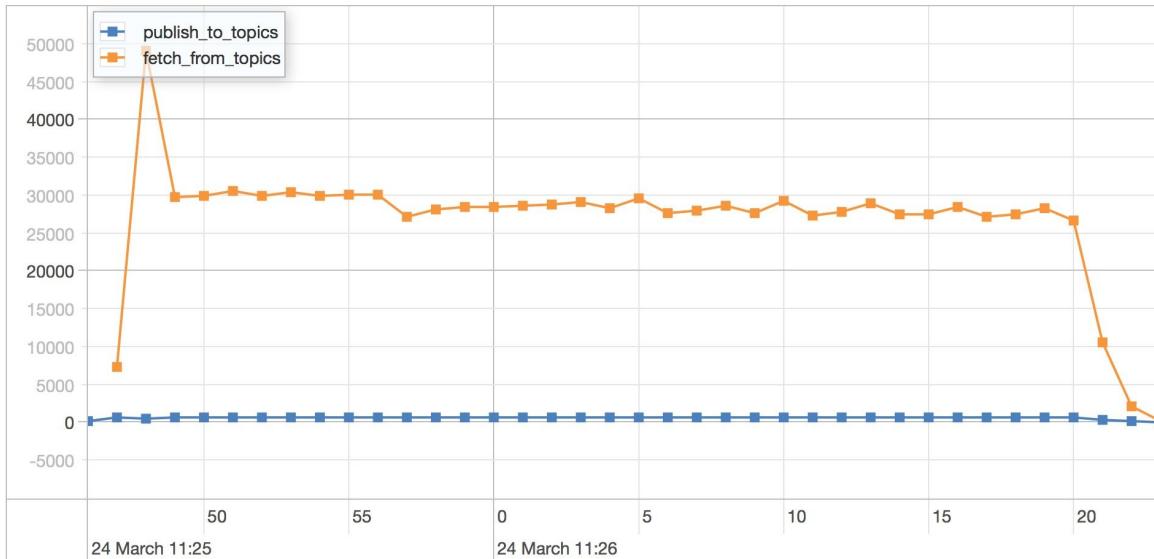

Topics Simulation

publish_to_topics scenario results

Statistics

Runtime	45.39 seconds
Mean	2.848 milliseconds
Standard Deviation	11.15 milliseconds
75 percentile	2.432 milliseconds
95 percentile	5.699 milliseconds
99 percentile	22.597 milliseconds
Minimum	0.740 milliseconds
Maximum	522.21 milliseconds

fetch_from_topics scenario results

Statistics

Runtime	45.39 seconds
Mean	0.001 milliseconds
Standard Deviation	0.004 milliseconds
75 percentile	0.002 milliseconds
95 percentile	0.004 milliseconds
99 percentile	0.020 milliseconds

Minimum	~0.00 milliseconds
Maximum	0.363 milliseconds

WiredTiger does not really make a big difference here compared to MMAP as the back end storage system is memory and not disk. Remember that WiredTiger supports document level locking. So there is no need to take into consideration placing the capped collection in its own separate db to avoid lock contention, as for MMAP pre MongoDB 3.0.

Notes

Capped collection can be extremely useful to create topic like systems, where you have multiple publishers and subscribers. However due to the current limitations on how tailed cursors work in MongoDB currently, it's important to balance the number of active listeners with the cpu usage.

```
<code class="lineno"> 1</code> <code class="p">{</code>

<code class="lineno"> 2</code> <code class="s">"metadata"</code><code
class="o">:</code> <code class="p">[</code>

<code class="lineno"> 3</code> <code class="p">{</code><code
class="s">"key"</code><code class="o">:</code> <code class="s">"File
Name"</code><code class="p">,</code> <code class="s">"value"</code>
<code class="o">:</code> <code class="s">"img_1771.jpg"</code><code
class="p">},</code>

<code class="lineno"> 4</code> <code class="p">{</code><code
class="s">"key"</code><code class="o">:</code> <code class="s">"File size"
</code><code class="p">,</code> <code class="s">"value"</code><code
class="o">:</code> <code class="mi">32764</code><code class="p">},
</code>

<code class="lineno"> 5</code> <code class="p">{</code><code
class="s">"key"</code><code class="o">:</code> <code class="s">"MIME
type"</code><code class="p">,</code> <code class="s">"value"</code><code
class="o">:</code> <code class="s">"image/jpeg"</code><code class="p">},
</code>

<code class="lineno"> 6</code> <code class="p">{</code><code
class="s">"key"</code><code class="o">:</code> <code class="s">"Image
size"</code><code class="p">,</code> <code class="s">"value"</code><code
class="o">:</code> <code class="p">{</code><code class="s">"width"</code>
<code class="o">:</code> <code class="mi">480</code><code class="p">,
</code> <code class="s">"height"</code><code class="o">:</code> <code
class="mi">360</code><code class="p">},</code>

<code class="lineno"> 7</code> <code class="p">{</code><code
class="s">"key"</code><code class="o">:</code> <code class="s">"Camera
make"</code><code class="p">,</code> <code class="s">"value"</code><code
class="o">:</code> <code class="s">"Canon"</code><code class="p">},
</code>

<code class="lineno"> 8</code> <code class="p">{</code><code
class="s">"key"</code><code class="o">:</code> <code class="s">"Camera
```

```
model"</code><code class="p">,</code> <code class="s">"value"</code>
<code class="o">:</code> <code class="s">"Canon PowerShot S40"</code>
<code class="p">},</code>

<code class="lineno"> 9</code> <code class="p">{</code><code
class="s">"key"</code><code class="o">:</code> <code class="s">"Image
timestamp"</code><code class="p">,</code> <code class="s">"value"</code>
<code class="o">:</code> <code class="n">ISODate</code><code class="p">
(</code><code class="s">"2014-01-01T10:01:00</code>

<code class="lineno">10</code> <code class="s">Z"</code><code
class="p">},</code>

<code class="lineno">11</code> <code class="p">{</code><code
class="s">"key"</code><code class="o">:</code> <code class="s">"Image
number"</code><code class="p">,</code> <code class="s">"value"</code>
<code class="o">:</code> <code class="s">"117-1771"</code><code
class="p">},</code>

<code class="lineno">12</code> <code class="p">{</code><code
class="s">"key"</code><code class="o">:</code> <code class="s">"Exposure
time"</code><code class="p">,</code> <code class="s">"value"</code><code
class="o">:</code> <code class="s">"1/500 s"</code><code class="p">},
</code>

<code class="lineno">13</code> <code class="p">{</code><code
class="s">"key"</code><code class="o">:</code> <code class="s">"Aperture"
</code><code class="p">,</code> <code class="s">"value"</code><code
class="o">:</code> <code class="s">"F4.9"</code><code class="p">},</code>

<code class="lineno">14</code> <code class="p">{</code><code
class="s">"key"</code><code class="o">:</code> <code class="s">"Exposure
bias"</code><code class="p">,</code> <code class="s">"value"</code><code
class="o">:</code> <code class="s">"0 EV"</code><code class="p">},</code>

<code class="lineno">15</code> <code class="p">{</code><code
class="s">"key"</code><code class="o">:</code> <code class="s">"Flash"
</code><code class="p">,</code> <code class="s">"value"</code><code
class="o">:</code> <code class="s">"No, auto"</code><code class="p">}
</code>
```

```
<code class="lineno">16</code> <code class="p">]</code>

<code class="lineno">17</code> <code class="p">}</code>

<code class="lineno">1</code> <code class="kd">var</code> <code
class="nx">col</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"supershot"</code><code class="p">).</code><code
class="nx">images</code><code class="p">;</code>

<code class="lineno">2</code> <code class="nx">col</code><code
class="p">.</code><code class="nx">findOne</code><code class="p">
({</code><code class="nx">tags</code><code class="o">:</code> <code
class="p">{</code><code class="nx">$all</code><code class="o">:</code>
<code class="p">[</code> <code class="s2">"appliance"</code><code
class="p">,</code> <code class="s2">"school"</code><code class="p">,
</code> <code class="s2">"book"</code> <code class="p">]{});</code>

<code class="lineno">1</code> <code class="kd">var</code> <code
class="nx">col</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"supershot"</code><code class="p">).</code><code
class="nx">images</code><code class="p">;</code>

<code class="lineno">2</code> <code class="nx">col</code><code
class="p">.</code><code class="nx">findOne</code><code class="p">
({</code><code class="nx">metadata</code><code class="o">:</code> <code
class="p">{</code><code class="nx">$elemMatch</code><code class="o">:
</code> <code class="p">{</code><code class="nx">key</code><code
class="o">:</code> <code class="s2">"File Name"</code><code class="p">,
</code> <code class="nx">value</code><code class="o">:</code> <code
class="s2">"img_1"</code>

<code class="lineno">3</code> <code class="s2">771.jpg"</code><code
class="p">});</code>

<code class="lineno">1</code> <code class="kd">var</code> <code
class="nx">col</code> <code class="o">=</code> <code
```

```

class="nx">>db</code><code class="p">.</code><code
class="nx">>getSisterDB</code><code class="p">(</code><code
class="s2">"supershot"</code><code class="p">).</code><code
class="nx">>images</code><code class="p">;</code>

<code class="lineno">2</code> <code class="nx">>col</code><code
class="p">.</code><code class="nx">>find</code><code class="p">({</code>
<code class="nx">>metadata</code><code class="o">:</code> <code class="p">
{</code> <code class="nx">>$all</code><code class="o">:</code> <code
class="p">[</code>

<code class="lineno">3</code> <code class="p">{</code> <code
class="s2">"$elemMatch"</code> <code class="o">:</code> <code class="p">
{</code> <code class="nx">>key</code> <code class="o">:</code> <code
class="s2">"MIME type"</code><code class="p">,</code> <code
class="nx">>value</code><code class="o">:</code> <code
class="s2">"image/jpeg"</code>

<code class="lineno">4</code> <code class="s2">"</code> <code class="p">}<
</code> <code class="p">},</code>

<code class="lineno">5</code> <code class="p">{</code> <code
class="s2">"$elemMatch"</code> <code class="o">:</code> <code class="p">
{</code> <code class="nx">>key</code><code class="o">:</code> <code
class="s2">"Flash"</code><code class="p">,</code> <code
class="nx">>value</code><code class="o">:</code> <code class="s2">"No,
auto"</code> <code class="p">}</code> <code class="p">}</code>

<code class="lineno">6</code> <code class="p">]}</code>

<code class="lineno">7</code> <code class="p">}).</code><code
class="nx">>toArray</code><code class="p">();</code>

<code class="lineno">1</code> <code class="n">var</code> <code
class="n">col</code> <code class="o">=</code> <code class="n">db</code>
<code class="p">.</code><code class="n">getSisterDB</code><code
class="p">(</code><code class="s">"supershot"</code><code class="p">).
</code><code class="n">images</code><code class="p">;</code>

<code class="lineno">2</code> <code class="n">db</code><code class="p">.

```

```
</code><code class="n">images</code><code class="p">.</code><code
class="n">ensureIndex</code><code class="p">({</code><code
class="s">"metadata.key"</code><code class="o">:</code> <code
class="mi">1</code><code class="p">,</code> <code
class="s">"metadata.value"</code><code class="o">:</code> <code
class="mi">1</code><code class="p">});</code>

<code class="lineno"> 1</code> <code class="p">{</code>

<code class="lineno"> 2</code> <code class="p">,</code> <code
class="s2">"userId"</code><code class="o">:</code> <code
class="s2">"olepeteraaa1"</code>

<code class="lineno"> 3</code> <code class="p">,</code> <code
class="s2">"metadata"</code><code class="o">:</code> <code class="p">
[</code>

<code class="lineno"> 4</code> <code class="p">{</code><code
class="s2">"key"</code><code class="o">:</code> <code class="s2">"File
Name"</code><code class="p">,</code> <code class="s2">"value"</code>
<code class="o">:</code> <code class="s2">"img_1771.jpg"</code><code
class="p">},</code>

<code class="lineno"> 5</code> <code class="p">{</code><code
class="s2">"key"</code><code class="o">:</code> <code class="s2">"File
size"</code><code class="p">,</code> <code class="s2">"value"</code><code
class="o">:</code> <code class="mi">32764</code><code class="p">},
</code>

<code class="lineno"> 6</code> <code class="p">{</code><code
class="s2">"key"</code><code class="o">:</code> <code class="s2">"MIME
type"</code><code class="p">,</code> <code class="s2">"value"</code><code
class="o">:</code> <code class="s2">"image/jpeg"</code><code class="p">},
</code>

<code class="lineno"> 7</code> <code class="p">{</code><code
class="s2">"key"</code><code class="o">:</code> <code class="s2">"Image
size"</code><code class="p">,</code> <code class="s2">"value"</code><code
class="o">:</code> <code class="p">{</code><code class="s2">"width"
</code><code class="o">:</code> <code class="mi">480</code><code
```

```
class="p">>,</code> <code class="s2">"height"</code><code class="o">:</code> <code class="mi">360</code><code class="p">}&gt;},</code>

<code class="lineno"> 8</code> <code class="p">{</code><code class="s2">"key"</code><code class="o">:</code> <code class="s2">"Camera make"</code><code class="p">,</code> <code class="s2">"value"</code><code class="o">:</code> <code class="s2">"Canon"</code><code class="p">},</code>

<code class="lineno"> 9</code> <code class="p">{</code><code class="s2">"key"</code><code class="o">:</code> <code class="s2">"Camera model"</code><code class="p">,</code> <code class="s2">"value"</code><code class="o">:</code> <code class="s2">"Canon PowerShot S40"</code><code class="p">},</code>

<code class="lineno">10</code> <code class="p">{</code><code class="s2">"key"</code><code class="o">:</code> <code class="s2">"Image timestamp"</code><code class="p">,</code> <code class="s2">"value"</code><code class="o">:</code> <code class="nx">ISODate</code><code class="p">(</code><code class="s2">"2014-01-01T10:01:00"</code>

<code class="lineno">11</code> <code class="s2">"Z"</code><code class="p">}&gt;},</code>

<code class="lineno">12</code> <code class="p">{</code><code class="s2">"key"</code><code class="o">:</code> <code class="s2">"Image number"</code><code class="p">,</code> <code class="s2">"value"</code><code class="o">:</code> <code class="s2">"117-1771"</code><code class="p">},</code>

<code class="lineno">13</code> <code class="p">{</code><code class="s2">"key"</code><code class="o">:</code> <code class="s2">"Exposure time"</code><code class="p">,</code> <code class="s2">"value"</code><code class="o">:</code> <code class="s2">"1/500 s"</code><code class="p">},</code>

<code class="lineno">14</code> <code class="p">{</code><code class="s2">"key"</code><code class="o">:</code> <code class="s2">"Aperture"</code><code class="p">,</code> <code class="s2">"value"</code><code class="o">:</code> <code class="s2">"F4.9"
```

```

</code><code class="p">},</code>

<code class="lineno">15</code> <code class="p">{</code><code
class="s2">"key"</code><code class="o">:</code> <code
class="s2">"Exposure bias"</code><code class="p">,</code> <code
class="s2">"value"</code><code class="o">:</code> <code class="s2">"0 EV"
</code><code class="p">},</code>

<code class="lineno">16</code> <code class="p">{</code><code
class="s2">"key"</code><code class="o">:</code> <code class="s2">"Flash"
</code><code class="p">,</code> <code class="s2">"value"</code><code
class="o">:</code> <code class="s2">"No, auto"</code><code class="p">
</code>

<code class="lineno">17</code> <code class="p">]</code>

<code class="lineno">18</code> <code class="p">}</code>

```

Using the `userId` as the shard key will ensure user specific images will be located on the same shard.

Performance

A simple exploration of the performance on a single machine with MongoDB 3.0 shows the difference between `MMAP` and `WiredTiger` for a narrow simulation using the schema simulation framework `mongodb-schema-simulator`.

Scenario

https://github.com/christkv/mongodb-schema-simulator/blob/master/examples/scripts/single_or_replset/metadata_access_scenario

MongoDb runs on a MacBook Pro Retina 2013 with 512 GB ssd and 16 gb ram. The simulation runs with the following parameters against a single `mongodb` instance under `osx 10.10 Yosemite`.


Parameters

<code>processes</code>	4
<code>poolSize per process</code>	50

type	linear
Resolution in milliseconds	1000
Iterations run	25
Number of users querying using metadata per iteration	1000
Execution strategy	slicetime

MMAP

The MMAP engine is run using the default settings on MongoDB 3.0.1.

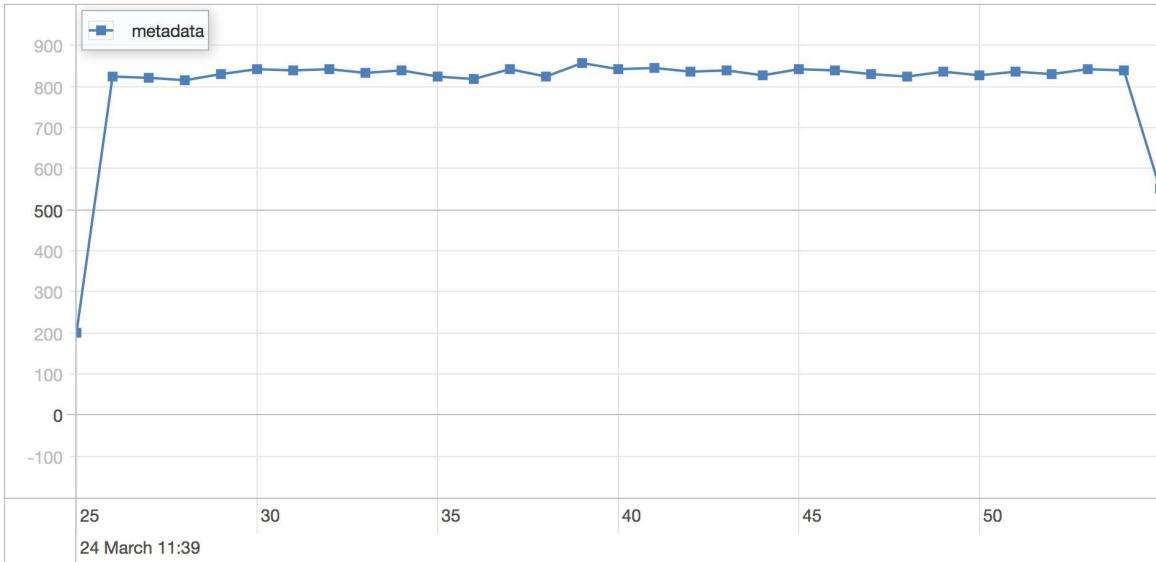

Metadata Read Simulation

metadata scenario results


Statistics

Runtime	40.874 seconds
Mean	0.954 milliseconds
Standard Deviation	0.291 milliseconds
75 percentile	1.187 milliseconds
95 percentile	1.367 milliseconds
99 percentile	1.619 milliseconds
Minimum	0.441 milliseconds
Maximum	4.885 milliseconds

As we can see the 1000 users a second impacts the minimum and maximum as well as the average query time a fair bit.

WiredTiger

The `WiredTiger` engine is run using the default settings on MongoDB 3.0.1.

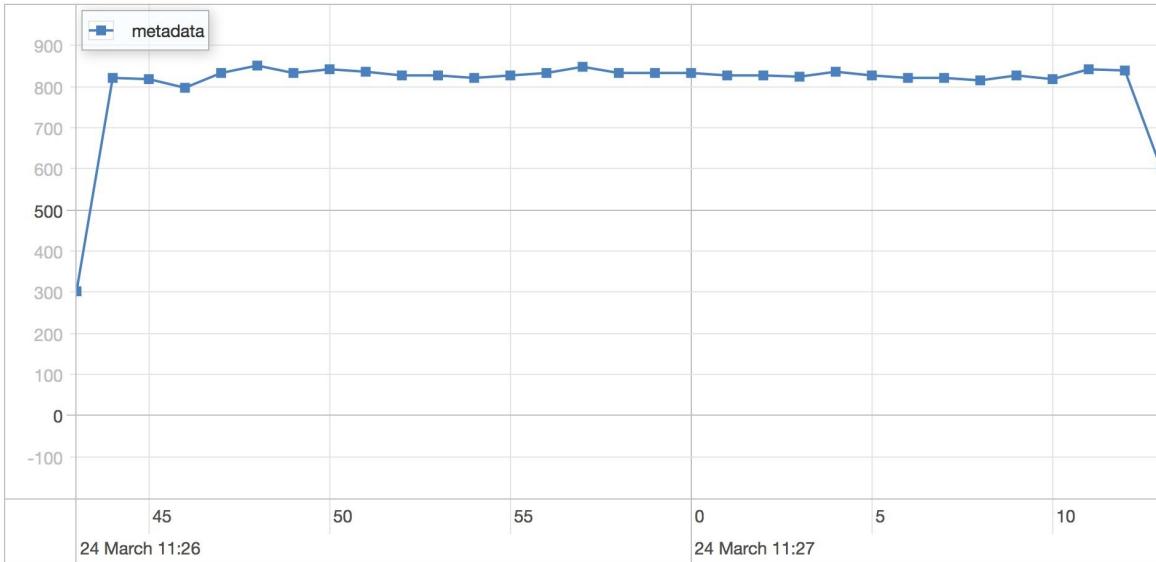

Metadata Read Simulation

metadata scenario results

Statistics

Runtime	40.01 seconds
Mean	0.992 milliseconds
Standard Deviation	0.318 milliseconds
75 percentile	1.232 milliseconds
95 percentile	1.431 milliseconds
99 percentile	1.706 milliseconds
Minimum	0.484 milliseconds
Maximum	9.827 milliseconds

As expected there is not much difference between the `MMAP` and `WiredTiger` storage engines since this is mainly a read only workload.

Notes

Runtime versus Iterations

The number of iterations here is 25 meaning that every 1000 milliseconds we start up another 1000 users attempting to read metadata. We can see that the total runtime is around ~40 seconds instead of 25 seconds, which means we have

surpassed the maximum continuous read capacity of the MongoDB instance on the used hardware. If we adjusted down the simulation load until the Runtime of the scenario was around ~25 seconds, we could estimate the maximum load our topology can handle.

```
<code class="lineno">1</code> <code class="p">{</code>

<code class="lineno">2</code> <code class="s2">"_id"</code><code
class="o">:</code> <code class="nx">ObjectId</code><code class="p">
(</code><code class="s2">"54fd7392742abeef6186a68e"</code><code
class="p">)</code>

<code class="lineno">3</code> <code class="p">,</code> <code
class="s2">"name"</code><code class="o">:</code> <code
class="s2">"embedded"</code>

<code class="lineno">4</code> <code class="p">,</code> <code
class="s2">"parent"</code><code class="o">:</code> <code
class="s2">"electronics"</code>

<code class="lineno">5</code> <code class="p">,</code> <code
class="s2">"category"</code><code class="o">:</code> <code
class="s2">"electronicsembedded"</code>

<code class="lineno">6</code> <code class="p">}</code>

<code class="lineno">1</code> <code class="p">{</code>

<code class="lineno">2</code> <code class="s2">"_id"</code><code
class="o">:</code> <code class="nx">ObjectId</code><code class="p">
(</code><code class="s2">"54fd7392742abeef6186a68e"</code><code
class="p">)</code>

<code class="lineno">3</code> <code class="p">,</code> <code
class="s2">"name"</code><code class="o">:</code> <code
class="s2">"Arduino"</code>

<code class="lineno">4</code> <code class="p">,</code> <code
class="s2">"cost"</code><code class="o">:</code> <code
class="mi">125</code>

<code class="lineno">5</code> <code class="p">,</code> <code
class="s2">"currency"</code><code class="o">:</code> <code
class="s2">"USD"</code>
```

```

<code class="lineno">6</code> <code class="p">,</code> <code
class="s2">"categories"</code><code class="o">:</code> <code class="p">
[</code><code class="s2">"electronicsembedded"</code><code class="p">]
</code>

<code class="lineno">7</code> <code class="p">}</code>

<code class="lineno">1</code> <code class="kd">var</code> <code
class="nx">col</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"catalog"</code><code class="p">).</code><code
class="nx">categories</code><code class="p">;</code>

<code class="lineno">2</code> <code class="kd">var</code> <code
class="nx">categories</code> <code class="o">=</code> <code
class="nx">col</code><code class="p">.</code><code
class="nx">find</code><code class="p">({</code><code
class="nx">parent</code><code class="o">:</code> <code
class="sr">/^\\electronics$</code><code class="p">});</code>

<code class="lineno">1</code> <code class="kd">var</code> <code
class="nx">col</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"catalog"</code><code class="p">).</code><code
class="nx">categories</code><code class="p">;</code>

<code class="lineno">2</code> <code class="kd">var</code> <code
class="nx">categories</code> <code class="o">=</code> <code
class="nx">col</code><code class="p">.</code><code
class="nx">find</code><code class="p">({</code><code
class="nx">parent</code><code class="o">:</code> <code
class="sr">/^\\electronics</code><code class="p">});</code>

<code class="lineno">1</code> <code class="kd">var</code> <code
class="nx">col</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code

```

```

class="s2">"catalog"</code><code class="p">).</code><code
class="nx">products</code><code class="p">;</code>

<code class="lineno">2</code> <code class="kd">var</code> <code
class="nx">products</code> <code class="o">=</code> <code
class="nx">col</code><code class="p">.</code><code
class="nx">find</code><code class="p">({</code><code
class="nx">categories</code><code class="o">:</code> <code
class="s2">"electronicsarduino"</code><code class="p">});</code>

<code class="lineno"> 1</code> <code class="kd">var</code> <code
class="nx">elements</code> <code class="o">=</code> <code
class="s1">'electronicsembedded/arduino'</code><code class="p">.</code>
<code class="nx">split</code><code class="p">(</code><code
class="s1">''<code><code class="p">);</code>

<code class="lineno"> 2</code> <code class="kd">var</code> <code
class="nx">paths</code> <code class="o">=</code> <code class="p">[];</code>

<code class="lineno"> 3</code>

<code class="lineno"> 4</code> <code class="k">for</code><code class="p">
(</code><code class="kd">var</code> <code class="nx">i</code> <code
class="o">=</code> <code class="mi">0</code><code class="p">;</code>
<code class="nx">i</code> <code class="o"><</code> <code
class="nx">elements</code><code class="p">.</code><code
class="nx">length</code> <code class="o">-</code> <code
class="mi">1</code><code class="p">;</code> <code class="nx">i</code>
<code class="o">++</code><code class="p">)</code> <code class="p">
{</code>

<code class="lineno"> 5</code> <code class="nx">elements</code><code
class="p">.</code><code class="nx">pop</code><code class="p">();</code>

<code class="lineno"> 6</code> <code class="nx">paths</code><code
class="p">.</code><code class="nx">push</code><code class="p">(</code>
<code class="nx">elements</code><code class="p">.</code><code
class="nx">join</code><code class="p">(</code><code class="s1">''<code>
<code class="p">));</code>

```

```
<code class="lineno"> 7</code> <code class="p">}</code>

<code class="lineno"> 8</code>

<code class="lineno"> 9</code> <code class="nx">paths</code><code
class="p">.</code><code class="nx">push</code><code class="p">(</code>
<code class="s1">"<code><code class="p">);</code>

<code class="lineno">10</code> <code class="nx">paths</code><code
class="p">.</code><code class="nx">reverse</code><code class="p">();</code>

<code class="lineno">11</code>

<code class="lineno">12</code> <code class="kd">var</code> <code
class="nx">col</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"catalog"</code><code class="p">).</code><code
class="nx">categories</code><code class="p">;</code>

<code class="lineno">13</code> <code class="kd">var</code> <code
class="nx">products</code> <code class="o">=</code> <code
class="nx">col</code><code class="p">.</code><code
class="nx">find</code><code class="p">({</code> <code
class="nx">name</code><code class="o">:</code> <code class="p">{</code>
<code class="nx">$in</code><code class="o">:</code> <code
class="nx">paths</code> <code class="p">}</code> <code class="p">});</code>

<code class="lineno">1</code> <code class="kd">var</code> <code
class="nx">c</code> <code class="o">=</code> <code class="nx">db</code>
<code class="p">.</code><code class="nx">getSisterDB</code><code
class="p">(</code><code class="s2">"catalog"</code><code class="p">).</code><code class="nx">categories</code><code class="p">;</code>

<code class="lineno">2</code> <code class="kd">var</code> <code
class="nx">p</code> <code class="o">=</code> <code class="nx">db</code>
<code class="p">.</code><code class="nx">getSisterDB</code><code
class="p">(</code><code class="s2">"catalog"</code><code class="p">).</code>
```

```

</code><code class="nx">products</code><code class="p">;</code>

<code class="lineno">3</code> <code class="kd">var</code> <code
class="nx">categories</code> <code class="o">=</code> <code
class="nx">c</code><code class="p">.</code><code class="nx">find</code>
<code class="p">({</code><code class="nx">parent</code><code class="o">:
</code> <code class="sr">/^electronics$</code><code class="p">}).</code>
<code class="nx">map</code><code class="p">(</code><code
class="kd">function</code><code class="p">(</code><code
class="nx">x</code><code class="p">)</code><code class="o">|\</code>

<code class="lineno">4</code> <code class="p">{</code>

<code class="lineno">5</code> <code class="k">return</code> <code
class="nx">x</code><code class="p">.</code><code
class="nx">category</code><code class="p">;</code>

<code class="lineno">6</code> <code class="p">});</code>

<code class="lineno">7</code> <code class="kd">var</code> <code
class="nx">products</code> <code class="o">=</code> <code
class="nx">p</code><code class="p">.</code><code class="nx">find</code>
<code class="p">({</code> <code class="nx">categories</code><code
class="o">:</code> <code class="p">{</code> <code class="nx">$in</code>
<code class="o">:</code> <code class="nx">categories</code> <code
class="p">}</code> <code class="p">});</code>

<code class="lineno">1</code> <code class="kd">var</code> <code
class="nx">c</code> <code class="o">=</code> <code class="nx">db</code>
<code class="p">.</code><code class="nx">getSisterDB</code><code
class="p">(</code><code class="s2">"catalog"</code><code class="p">).
</code><code class="nx">categories</code><code class="p">;</code>

<code class="lineno">2</code> <code class="kd">var</code> <code
class="nx">p</code> <code class="o">=</code> <code class="nx">db</code>
<code class="p">.</code><code class="nx">getSisterDB</code><code
class="p">(</code><code class="s2">"catalog"</code><code class="p">).
</code><code class="nx">products</code><code class="p">;</code>

<code class="lineno">3</code> <code class="kd">var</code> <code

```

```
class="nx">>categories</code> <code class="o">=</code> <code
class="nx">c</code><code class="p">.</code><code class="nx">find</code>
<code class="p">({</code><code class="nx">parent</code><code class="o">:
</code> <code class="sr">/\electronics</code><code class="p">}).</code>
<code class="nx">map</code><code class="p">(</code><code
class="kd">function</code><code class="p">(</code><code
class="nx">x</code><code class="p">)</code> <code class="p">{ </code>
<code class="lineno">4</code> <code class="k">return</code> <code
class="nx">x</code><code class="p">.</code><code
class="nx">category</code><code class="p">;</code>
<code class="lineno">5</code> <code class="p">});</code>
<code class="lineno">6</code> <code class="kd">var</code> <code
class="nx">products</code> <code class="o">=</code> <code
class="nx">p</code><code class="p">.</code><code class="nx">find</code>
<code class="p">({</code> <code class="nx">categories</code><code
class="o">:</code> <code class="p">{ </code> <code class="nx">$in</code>
<code class="o">:</code> <code class="nx">categories</code> <code
class="p">}</code> <code class="p">});</code>
<code class="lineno">1</code> <code class="kd">var</code> <code
class="nx">col</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"catalog"</code><code class="p">).</code><code
class="nx">categories</code><code class="p">;</code>
<code class="lineno">2</code> <code class="nx">col</code><code
class="p">.</code><code class="nx">ensureIndex</code><code class="p">
({</code><code class="nx">category</code><code class="o">:</code><code
class="mi">1</code><code class="p">});</code>
<code class="lineno">1</code> <code class="kd">var</code> <code
class="nx">col</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"catalog"</code><code class="p">).</code><code
```

```
class="nx">categories</code><code class="p">;</code>

<code class="lineno">2</code> <code class="nx">col</code><code
class="p">.</code><code class="nx">ensureIndex</code><code class="p">
({</code><code class="nx">parent</code><code class="o">:</code><code
class="mi">1</code><code class="p">});</code>

<code class="lineno">1</code> <code class="kd">var</code> <code
class="nx">col</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"catalog"</code><code class="p">).</code><code
class="nx">products</code><code class="p">;</code>

<code class="lineno">2</code> <code class="nx">col</code><code
class="p">.</code><code class="nx">ensureIndex</code><code class="p">
({</code><code class="nx">categories</code><code class="o">:</code><code
class="mi">1</code><code class="p">});</code>

<code class="lineno">1</code> <code class="kd">var</code> <code
class="nx">col</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"catalog"</code><code class="p">).</code><code
class="nx">categories</code><code class="p">;</code>

<code class="lineno">2</code> <code class="nx">col</code><code
class="p">.</code><code class="nx">ensureIndex</code><code class="p">
({</code><code class="nx">parent</code><code class="o">:</code><code
class="mi">1</code><code class="p">,</code> <code
class="nx">name</code><code class="o">:</code> <code
class="mi">1</code><code class="p">});</code>

<code class="lineno">1</code> <code class="kd">var</code> <code
class="nx">col</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"catalog"</code><code class="p">).</code><code
class="nx">categories</code><code class="p">;</code>
```

```

<code class="lineno">2</code> <code class="nx">col</code><code
class="p">.</code><code class="nx">find</code><code class="p">({</code>
<code class="nx">parent</code><code class="o">:</code> <code
class="sr">/\electronics$</code><code class="p">},</code> <code
class="p">{</code><code class="nx">_id</code><code class="o">:</code>
<code class="mi">0</code><code class="p">,</code> <code
class="nx">parent</code><code class="o">:</code><code
class="mi">1</code><code class="p">,</code> <code
class="nx">name</code><code class="o">:</code><code class="mi">1</code>
<code class="p">}).</code><code class="nx">exp</code><code class="o">\
</code>

<code class="lineno">3</code> <code class="nx">lain</code><code
class="p">();</code>

<code class="lineno">1</code> <code class="kd">var</code> <code
class="nx">col</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"catalog"</code><code class="p">).</code><code
class="nx">categories</code><code class="p">;</code>

<code class="lineno">2</code> <code class="kd">var</code> <code
class="nx">categories</code> <code class="o">=</code> <code
class="nx">col</code><code class="p">.</code><code
class="nx">find</code><code class="p">({</code><code
class="nx">parent</code><code class="o">:</code> <code
class="sr">/\electronics</code><code class="p">},</code> <code class="p">
{</code><code class="nx">_id</code><code class="o">:</code><code
class="mi">0</code><code class="p">,</code> <code
class="nx">parent</code><code class="o">|</code>

<code class="lineno">3</code> <code class="o">:</code><code
class="mi">1</code><code class="p">,</code> <code
class="nx">name</code><code class="o">:</code><code class="mi">1</code>
<code class="p">});</code>

<code class="lineno">1</code> <code class="nx">col</code><code
class="p">.</code><code class="nx">find</code><code class="p">({</code>

```

```

<code class="nx">parent</code><code class="o">:</code> <code
class="sr"/>^electronics</code><code class="p">},</code> <code class="p">
{</code><code class="nx">_id</code><code class="o">:</code><code
class="mi">0</code><code class="p">,</code> <code
class="nx">parent</code><code class="o">:</code><code
class="mi">1</code><code class="p">,</code> <code
class="nx">name</code><code class="o">:</code><code class="mi">1</code>
<code class="p">}.</code><code class="nx">expl</code><code class="o">\
</code>

<code class="lineno">2</code> <code class="nx">ain</code><code class="p">
()</code>

<code class="lineno">1</code> <code class="nx">col</code><code
class="p">.</code><code class="nx">find</code><code class="p">({</code>
<code class="nx">parent</code><code class="o">:</code> <code
class="sr"/>^electronics</code><code class="p">},</code> <code class="p">
{</code><code class="nx">_id</code><code class="o">:</code><code
class="mi">0</code><code class="p">,</code> <code
class="nx">parent</code><code class="o">:</code><code
class="mi">1</code><code class="p">,</code> <code
class="nx">name</code><code class="o">:</code><code class="mi">1</code>
<code class="p">}.</code><code class="nx">exp</code><code class="o">\
</code>

<code class="lineno">2</code> <code class="nx">lain</code><code
class="p">()</code>

```

If you can live with not retrieving the whole document for your category tree queries the covered indexes will allow you to avoid materializing the actual category documents into memory as the queries can be answered with the fields stored in the index itself.

```
<code class="lineno"> 1</code> <code class="p">{</code>

<code class="lineno"> 2</code> <code class="s2">"_id"</code><code
class="o">:</code> <code class="nx">ObjectId</code><code class="p">
(</code><code class="s2">"54fd7392742abeef6186a68e"</code><code
class="p">)</code>

<code class="lineno"> 3</code> <code class="p">,</code> <code
class="s2">"state"</code><code class="o">:</code> <code class="s2">"active"
</code>

<code class="lineno"> 4</code> <code class="p">,</code> <code
class="s2">"modifiedOn"</code><code class="o">:</code> <code
class="nx">ISODate</code><code class="p">(</code><code
class="s2">"2015-03-11T12:03:42.615Z"</code><code class="p">)</code>

<code class="lineno"> 5</code> <code class="p">,</code> <code
class="s2">"products"</code><code class="o">:</code> <code class="p">
[</code>

<code class="lineno"> 6</code> <code class="s2">"_id"</code><code
class="o">:</code> <code class="nx">ObjectId</code><code class="p">
(</code><code class="s2">"54fd7392742abeef6186a68e"</code><code
class="p">)</code>

<code class="lineno"> 7</code> <code class="p">,</code> <code
class="s2">"quantity"</code><code class="o">:</code> <code
class="mi">1</code>

<code class="lineno"> 8</code> <code class="p">,</code> <code
class="s2">"name"</code><code class="o">:</code> <code class="s2">"JC
Sneaker"</code>

<code class="lineno"> 9</code> <code class="p">,</code> <code
class="s2">"price"</code><code class="o">:</code> <code
class="mi">100</code>

<code class="lineno">10</code> <code class="p">}]</code>
```

```
<code class="lineno">11</code> <code class="p">}</code>

<code class="lineno">1</code> <code class="p">{</code>

<code class="lineno">2</code> <code class="s2">"_id"</code><code
class="o">:</code> <code class="nx">ObjectId</code><code class="p">
(</code><code class="s2">"54fd7392742abeef6186a68e"</code><code
class="p">)</code>

<code class="lineno">3</code> <code class="p">,</code> <code
class="s2">"quantity"</code><code class="o">:</code> <code
class="mi">999</code>

<code class="lineno">4</code> <code class="p">,</code> <code
class="s2">"reservations"</code><code class="o">:</code> <code class="p">
[</code>

<code class="lineno">5</code> <code class="s2">"_id"</code><code
class="o">:</code> <code class="nx">ObjectId</code><code class="p">
(</code><code class="s2">"54fd7392742abeef6186a68e"</code><code
class="p">)</code>

<code class="lineno">6</code> <code class="p">,</code> <code
class="s2">"quantity"</code><code class="o">:</code> <code
class="mi">1</code>

<code class="lineno">7</code> <code class="p">,</code> <code
class="s2">"createdOn"</code><code class="o">:</code> <code
class="nx">ISODate</code><code class="p">(</code><code
class="s2">"2015-03-11T12:03:42.615Z"</code><code class="p">)</code>

<code class="lineno">8</code> <code class="p">}</code>

<code class="lineno">9</code> <code class="p">}</code>

<code class="lineno">1</code> <code
class="nx">totalAvailableProduct</code> <code class="o">=</code> <code
class="mi">99</code> <code class="o">+</code> <code class="mi">1</code>
<code class="p">;</code>
```

```
<code class="lineno">2</code> <code
class="nx">totalReservedProduct</code> <code class="o">=</code> <code
class="mi">1</code><code class="p">;</code>

<code class="lineno">1</code> <code class="p">{</code>

<code class="lineno">2</code> <code class="s2">"_id"</code><code
class="o">:</code> <code class="nx">ObjectId</code><code class="p">
(</code><code class="s2">"54fd7392742abeef6186a68e"</code><code
class="p">)</code>

<code class="lineno">3</code> <code class="p">,</code> <code
class="s2">"name"</code><code class="o">:</code> <code class="s2">"JC
Sneaker"</code>

<code class="lineno">4</code> <code class="p">,</code> <code
class="s2">"properties"</code><code class="o">:</code> <code class="p">{}<
/>
```

```
<code class="lineno"> 6</code> <code class="p">,</code> <code
class="s2">"products"</code><code class="o">:</code> <code class="p">
[{:</code>

<code class="lineno"> 7</code> <code class="s2">"_id"</code><code
class="o">:</code> <code class="nx">ObjectId</code><code class="p">
(</code><code class="s2">"54fd7392742abeef6186a68e"</code><code
class="p">)</code>

<code class="lineno"> 8</code> <code class="p">,</code> <code
class="s2">"quantity"</code><code class="o">:</code> <code
class="mi">1</code>

<code class="lineno"> 9</code> <code class="p">,</code> <code
class="s2">"name"</code><code class="o">:</code> <code class="s2">"JC
Sneaker"</code>

<code class="lineno">10</code> <code class="p">,</code> <code
class="s2">"price"</code><code class="o">:</code> <code
class="mi">100</code>

<code class="lineno">11</code> <code class="p">}]</code>

<code class="lineno">12</code> <code class="p">}</code>

<code class="lineno"> 1</code> <code class="kd">var</code> <code
class="nx">quantity</code> <code class="o">=</code> <code
class="mi">1</code><code class="p">;</code>

<code class="lineno"> 2</code> <code class="kd">var</code> <code
class="nx">userId</code> <code class="o">=</code> <code
class="mi">1</code><code class="p">;</code>

<code class="lineno"> 3</code> <code class="kd">var</code> <code
class="nx">productId</code> <code class="o">=</code> <code
class="s2">"111445GB3"</code><code class="p">;</code>

<code class="lineno"> 4</code>

<code class="lineno"> 5</code> <code class="kd">var</code> <code
```

```
class="nx">>col</code> <code class="o">=</code> <code
class="nx">>db</code><code class="p">.</code><code
class="nx">>getSisterDB</code><code class="p">(</code><code
class="s2">"shop"</code><code class="p">).</code><code
class="nx">>carts</code><code class="p">;</code>

<code class="lineno"> 6</code> <code class="nx">>col</code><code
class="p">.</code><code class="nx">>update</code><code class="p">(</code>
<code class="lineno"> 7</code> <code class="p">{ </code> <code
class="nx">>_id</code><code class="o">:</code> <code
class="nx">>userId</code><code class="p">,</code> <code
class="nx">>state</code><code class="o">:</code> <code
class="s1">'active'</code> <code class="p">}</code>

<code class="lineno"> 8</code> <code class="p">,</code> <code class="p">
{</code>

<code class="lineno"> 9</code> <code class="nx">>$set</code><code
class="o">:</code> <code class="p">{ </code> <code
class="nx">>modifiedOn</code><code class="o">:</code> <code
class="k">new</code> <code class="nb">Date</code><code class="p">()
</code> <code class="p">}</code>

<code class="lineno">10</code> <code class="p">,</code> <code
class="nx">>$push</code><code class="o">:</code> <code class="p">{ </code>
<code class="nx">>products</code><code class="o">:</code> <code class="p">
{</code>

<code class="lineno">11</code> <code class="nx">>_id</code><code
class="o">:</code> <code class="nx">>productId</code>

<code class="lineno">12</code> <code class="p">,</code> <code
class="nx">>quantity</code><code class="o">:</code> <code
class="nx">>quantity</code>

<code class="lineno">13</code> <code class="p">,</code> <code
class="nx">>name</code><code class="o">:</code> <code
class="s2">"Simsong Mobile"</code>
```

```
<code class="lineno">14</code> <code class="p">,</code> <code
class="nx">price</code><code class="o">:</code> <code
class="mi">1000</code>

<code class="lineno">15</code> <code class="p">}>}</code>

<code class="lineno">16</code> <code class="p">},</code> <code
class="kc">true</code><code class="p">);</code>

<code class="lineno"> 1</code> <code class="kd">var</code> <code
class="nx">userId</code> <code class="o">=</code> <code
class="mi">1</code><code class="p">;</code>

<code class="lineno"> 2</code> <code class="kd">var</code> <code
class="nx">quantity</code> <code class="o">=</code> <code
class="mi">1</code><code class="p">;</code>

<code class="lineno"> 3</code>

<code class="lineno"> 4</code> <code class="kd">var</code> <code
class="nx">col</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">. </code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"shop"</code><code class="p">). </code><code
class="nx">inventories</code><code class="p">;</code>

<code class="lineno"> 5</code> <code class="nx">col</code><code
class="p">. </code><code class="nx">update</code><code class="p">
({</code>

<code class="lineno"> 6</code> <code class="nx">_id</code><code
class="o">:</code> <code class="nx">productId</code><code class="p">,
</code> <code class="nx">quantity</code><code class="o">:</code> <code
class="p">{</code> <code class="nx">$gte</code><code class="o">:</code>
<code class="nx">quantity</code> <code class="p">}</code>

<code class="lineno"> 7</code> <code class="p">},</code> <code class="p">
{</code>

<code class="lineno"> 8</code> <code class="nx">$inc</code><code
```

```
class="o">>:</code> <code class="p">{</code> <code
class="nx">quantity</code><code class="o">>:</code> <code class="o">-
</code><code class="nx">quantity</code> <code class="p">}</code>

<code class="lineno"> 9</code> <code class="p">,</code> <code
class="nx">$push</code><code class="o">>:</code> <code class="p">{</code>

<code class="lineno">10</code> <code class="nx">reservations</code><code
class="o">>:</code> <code class="p">{</code>

<code class="lineno">11</code> <code class="nx">quantity</code><code
class="o">>:</code> <code class="nx">quantity</code><code class="p">,
</code> <code class="nx">_id</code><code class="o">>:</code> <code
class="nx">userId</code><code class="p">,</code> <code
class="nx">createdOn</code><code class="o">>:</code> <code
class="k">new</code> <code class="nb">Date</code><code class="p">()
</code>

<code class="lineno">12</code> <code class="p">}</code>

<code class="lineno">13</code> <code class="p">}</code>

<code class="lineno">14</code> <code class="p">});</code>

<code class="lineno"> 1</code> <code class="kd">var</code> <code
class="nx">userId</code> <code class="o">>=</code> <code
class="mi">1</code><code class="p">;</code>

<code class="lineno"> 2</code> <code class="kd">var</code> <code
class="nx">quantity</code> <code class="o">>=</code> <code
class="mi">1</code><code class="p">;</code>

<code class="lineno"> 3</code> <code class="kd">var</code> <code
class="nx">productId</code> <code class="o">>=</code> <code
class="s2">"111445GB3"</code><code class="p">;</code>

<code class="lineno"> 4</code>

<code class="lineno"> 5</code> <code class="kd">var</code> <code
class="nx">col</code> <code class="o">>=</code> <code
```

```
class="nx">>db</code><code class="p">.</code><code  
class="nx">>getSisterDB</code><code class="p">(</code><code  
class="s2">"shop"</code><code class="p">).</code><code  
class="nx">>carts</code><code class="p">;</code>  
  
<code class="lineno"> 6</code> <code class="nx">>col</code><code  
class="p">.</code><code class="nx">>update</code><code class="p">  
({</code>  
  
<code class="lineno"> 7</code> <code class="nx">>_id</code><code  
class="o">:</code> <code class="nx">>userId</code>  
  
<code class="lineno"> 8</code> <code class="p">},</code> <code class="p">  
{</code>  
  
<code class="lineno"> 9</code> <code class="nx">>$set</code><code  
class="o">:</code> <code class="p">{</code> <code  
class="nx">>modifiedOn</code><code class="o">:</code> <code  
class="k">new</code> <code class="nb">Date</code><code class="p">()  
</code> <code class="p">}</code>  
  
<code class="lineno">10</code> <code class="p">,</code> <code  
class="nx">>$pull</code><code class="o">:</code> <code class="p">{</code>  
<code class="nx">>products</code><code class="o">:</code> <code class="p">  
{</code> <code class="nx">>_id</code><code class="o">:</code> <code  
class="nx">>productId</code> <code class="p">}</code>  
  
<code class="lineno">11</code> <code class="p">})</code>  
  
<code class="lineno"> 1</code> <code class="kd">var</code> <code  
class="nx">>userId</code> <code class="o">=</code> <code  
class="mi">1</code><code class="p">;</code>  
  
<code class="lineno"> 2</code> <code class="kd">var</code> <code  
class="nx">>newQuantity</code> <code class="o">=</code> <code  
class="mi">2</code><code class="p">;</code>  
  
<code class="lineno"> 3</code> <code class="kd">var</code> <code  
class="nx">>productId</code> <code class="o">=</code> <code  
class="s2">"111445GB3"</code><code class="p">;</code>
```

```

<code class="lineno"> 4</code>

<code class="lineno"> 5</code> <code class="kd">var</code> <code
class="nx">col</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"shop"</code><code class="p">).</code><code
class="nx">carts</code><code class="p">);</code>

<code class="lineno"> 6</code> <code class="kd">var</code> <code
class="nx">cart</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">findOne</code><code class="p">({</code>

<code class="lineno"> 7</code> <code class="nx">_id</code><code
class="o">:</code> <code class="nx">userId</code>

<code class="lineno"> 8</code> <code class="p">,</code> <code
class="s2">"products._id"</code><code class="o">:</code> <code
class="nx">productId</code>

<code class="lineno"> 9</code> <code class="p">,</code> <code
class="nx">status</code><code class="o">:</code> <code class="s2">"active"
</code><code class="p">});</code>

<code class="lineno">10</code> <code class="kd">var</code> <code
class="nx">oldQuantity</code> <code class="o">=</code> <code
class="mi">0</code><code class="p">;</code>

<code class="lineno">11</code>

<code class="lineno">12</code> <code class="k">for</code><code class="p">
(</code><code class="kd">var</code> <code class="nx">i</code> <code
class="o">=</code> <code class="mi">0</code><code class="p">;</code>
<code class="nx">i</code> <code class="o"><</code> <code
class="nx">cart</code><code class="p">.</code><code
class="nx">products</code><code class="p">.</code><code
class="nx">length</code><code class="p">;</code> <code
class="nx">i</code><code class="o">++</code><code class="p">)</code>
<code class="p">{</code>

```

```
<code class="lineno">13</code> <code class="k">if</code><code class="p">
(</code><code class="nx">cart</code><code class="p">.</code><code
class="nx">products</code><code class="p">[</code><code
class="nx">i</code><code class="p">].</code><code class="nx">_id</code>
<code class="o">==</code> <code class="nx">productId</code><code
class="p">)</code> <code class="p">{</code>

<code class="lineno">14</code> <code class="nx">oldQuantity</code> <code
class="o">=</code> <code class="nx">cart</code><code class="p">.</code>
<code class="nx">products</code><code class="p">[</code><code
class="nx">i</code><code class="p">].</code><code
class="nx">quantity</code><code class="p">;</code>

<code class="lineno">15</code> <code class="p">}</code>

<code class="lineno">16</code> <code class="p">}</code>

<code class="lineno">17</code>

<code class="lineno">18</code> <code class="kd">var</code> <code
class="nx">delta</code> <code class="o">=</code> <code
class="nx">newQuantity</code> <code class="o">-</code> <code
class="nx">oldQuantity</code><code class="p">;</code>

<code class="lineno">19</code>

<code class="lineno">20</code> <code class="nx">col</code><code
class="p">.</code><code class="nx">update</code><code class="p">
({</code>

<code class="lineno">21</code> <code class="nx">_id</code><code
class="o">:</code> <code class="nx">userId</code>

<code class="lineno">22</code> <code class="p">,</code> <code
class="s2">"products._id"</code><code class="o">:</code> <code
class="nx">productId</code>

<code class="lineno">23</code> <code class="p">,</code> <code
class="nx">status</code><code class="o">:</code> <code class="s2">"active"
</code>
```

```
<code class="lineno">24</code> <code class="p">},</code> <code class="p">
{</code>

<code class="lineno">25</code> <code class="nx">$set</code><code
class="o">:</code> <code class="p">{</code>

<code class="lineno">26</code> <code class="nx">modifiedOn</code><code
class="o">:</code> <code class="k">new</code> <code
class="nb">Date</code><code class="p">()</code>

<code class="lineno">27</code> <code class="p">,</code> <code
class="s2">"products.$.quantity"</code><code class="o">:</code> <code
class="nx">newQuantity</code>

<code class="lineno">28</code> <code class="p">}</code>

<code class="lineno">29</code> <code class="p">});</code>

<code class="lineno"> 1</code> <code class="kd">var</code> <code
class="nx">userId</code> <code class="o">=</code> <code
class="mi">1</code><code class="p">;</code>

<code class="lineno"> 2</code> <code class="kd">var</code> <code
class="nx">newQuantity</code> <code class="o">=</code> <code
class="mi">2</code><code class="p">;</code>

<code class="lineno"> 3</code> <code class="kd">var</code> <code
class="nx">productId</code> <code class="o">=</code> <code
class="s2">"111445GB3"</code><code class="p">;</code>

<code class="lineno"> 4</code>

<code class="lineno"> 5</code> <code class="kd">var</code> <code
class="nx">col</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"shop"</code><code class="p">).</code><code
class="nx">products</code><code class="p">;</code>

<code class="lineno"> 6</code> <code class="nx">col</code><code
```

```
class="p">>.</code><code class="nx">update</code><code class="p">
({</code>

<code class="lineno"> 7</code> <code class="nx">_id</code><code
class="o">:</code> <code class="nx">productId</code>

<code class="lineno"> 8</code> <code class="p">,</code> <code
class="s2">"reservations._id"</code><code class="o">:</code> <code
class="nx">userId</code>

<code class="lineno"> 9</code> <code class="p">,</code> <code
class="nx">quantity</code><code class="o">:</code> <code class="p">
{</code>

<code class="lineno">10</code> <code class="nx">$gte</code><code
class="o">:</code> <code class="nx">delta</code>

<code class="lineno">11</code> <code class="p">}</code>

<code class="lineno">12</code> <code class="p">},</code> <code class="p">
{</code>

<code class="lineno">13</code> <code class="p">,</code> <code
class="nx">$inc</code><code class="o">:</code> <code class="p">{</code>
<code class="nx">quantity</code><code class="o">:</code> <code class="o">-
</code><code class="nx">delta</code> <code class="p">}</code>

<code class="lineno">14</code> <code class="nx">$set</code><code
class="o">:</code> <code class="p">{</code>

<code class="lineno">15</code> <code class="s2">"reservations.$.quantity"
</code><code class="o">:</code> <code class="nx">newQuantity</code>
<code class="p">,</code> <code class="nx">modifiedOn</code><code
class="o">:</code> <code class="k">new</code> <code
class="nb">Date</code><code class="p">()</code>

<code class="lineno">16</code> <code class="p">}</code>

<code class="lineno">17</code> <code class="p">})</code>
```

```
<code class="lineno"> 1</code> <code class="kd">var</code> <code
class="nx">userId</code> <code class="o">=</code> <code
class="mi">1</code><code class="p">;</code>

<code class="lineno"> 2</code> <code class="kd">var</code> <code
class="nx">oldQuantity</code> <code class="o">=</code> <code
class="mi">1</code><code class="p">;</code>

<code class="lineno"> 3</code> <code class="kd">var</code> <code
class="nx">productId</code> <code class="o">=</code> <code
class="s2">"111445GB3"</code><code class="p">;</code>

<code class="lineno"> 4</code>

<code class="lineno"> 5</code> <code class="kd">var</code> <code
class="nx">col</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"shop"</code><code class="p">).</code><code
class="nx">carts</code><code class="p">;</code>

<code class="lineno"> 6</code> <code class="nx">col</code><code
class="p">.</code><code class="nx">update</code><code class="p">
({</code>

<code class="lineno"> 7</code> <code class="nx">_id</code><code
class="o">:</code> <code class="nx">userId</code>

<code class="lineno"> 8</code> <code class="p">,</code> <code
class="s2">"products._id"</code><code class="o">:</code> <code
class="nx">productId</code>

<code class="lineno"> 9</code> <code class="p">,</code> <code
class="nx">status</code><code class="o">:</code> <code class="s2">"active"
</code>

<code class="lineno">10</code> <code class="p">},</code> <code class="p">
{</code>

<code class="lineno">11</code> <code class="nx">$set</code><code
```

```
class="o">>:</code> <code class="p">{</code>

<code class="lineno">12</code> <code class="nx">modifiedOn</code><code
class="o">>:</code> <code class="k">new</code> <code
class="nb">Date</code><code class="p">()</code>

<code class="lineno">13</code> <code class="p">,</code> <code
class="s2">"products.$.quantity"</code><code class="o">>:</code> <code
class="nx">oldQuantity</code>

<code class="lineno">14</code> <code class="p">}</code>

<code class="lineno">15</code> <code class="p">});</code>

<code class="lineno"> 1</code> <code class="kd">var</code> <code
class="nx">cutOffDate</code> <code class="o">>=</code> <code
class="k">new</code> <code class="nb">Date</code><code class="p">();</code>

<code class="lineno"> 2</code> <code class="nx">cutOffDate</code><code
class="p">.</code><code class="nx">setMinutes</code><code class="p">
(</code><code class="nx">cutOffDate</code><code class="p">.</code><code
class="nx">getMinutes</code><code class="p">()</code> <code class="o">>-
</code> <code class="mi">30</code><code class="p">);</code>

<code class="lineno"> 3</code>

<code class="lineno"> 4</code> <code class="kd">var</code> <code
class="nx">cartsCol</code> <code class="o">>=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"shop"</code><code class="p">).</code><code
class="nx">carts</code><code class="p">;</code>

<code class="lineno"> 5</code> <code class="kd">var</code> <code
class="nx">productCol</code> <code class="o">>=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"shop"</code><code class="p">).</code><code
class="nx">products</code><code class="p">;</code>
```

```
<code class="lineno">6</code>

<code class="lineno">7</code> <code class="kd">var</code> <code
class="nx">carts</code> <code class="o">=</code> <code
class="nx">cartsCol</code><code class="p">.</code><code
class="nx">find</code><code class="p">({</code>

<code class="lineno">8</code> <code class="nx">modifiedOn</code><code
class="o">:</code> <code class="p">{</code> <code class="nx">$lte</code>
<code class="o">:</code> <code class="nx">cutOffDate</code> <code
class="p">},</code> <code class="nx">state</code><code class="o">:</code>
<code class="s1">'active'</code>

<code class="lineno">9</code> <code class="p">});</code>

<code class="lineno">10</code>

<code class="lineno">11</code> <code class="k">while</code><code
class="p">(</code><code class="nx">carts</code><code class="p">.</code>
<code class="nx">hasNext</code><code class="p">()</code> <code
class="p">{</code>

<code class="lineno">12</code> <code class="kd">var</code> <code
class="nx">cart</code> <code class="o">=</code> <code
class="nx">carts</code><code class="p">.</code><code
class="nx">next</code><code class="p">();</code>

<code class="lineno">13</code>

<code class="lineno">14</code> <code class="k">for</code><code class="p">
(</code><code class="kd">var</code> <code class="nx">i</code> <code
class="o">=</code> <code class="mi">0</code><code class="p">;</code>
<code class="nx">i</code> <code class="o"><</code> <code
class="nx">cart</code><code class="p">.</code><code
class="nx">products</code><code class="p">.</code><code
class="nx">length</code><code class="p">;</code> <code
class="nx">i</code><code class="o">++</code><code class="p">)</code>
<code class="p">{</code>

<code class="lineno">15</code> <code class="kd">var</code> <code
```

```
class="nx">>product</code> <code class="o">=</code> <code
class="nx">>cart</code><code class="p">.</code><code
class="nx">>products</code><code class="p">[</code><code
class="nx">>i</code><code class="p">];</code>

<code class="lineno">16</code>

<code class="lineno">17</code> <code class="nx">>productCol</code><code
class="p">.</code><code class="nx">>update</code><code class="p">
({</code>

<code class="lineno">18</code> <code class="nx">>_id</code><code
class="o">:</code> <code class="nx">>product</code><code class="p">.
</code><code class="nx">>_id</code>

<code class="lineno">19</code> <code class="p">,</code> <code
class="s2">"reservations._id"</code><code class="o">:</code> <code
class="nx">>cart</code><code class="p">.</code><code class="nx">>_id</code>

<code class="lineno">20</code> <code class="p">,</code> <code
class="s2">"reservations.quantity"</code><code class="o">:</code> <code
class="nx">>product</code><code class="p">.</code><code
class="nx">>quantity</code>

<code class="lineno">21</code> <code class="p">},</code> <code class="p">
{</code>

<code class="lineno">22</code> <code class="nx">>$inc</code><code
class="o">:</code> <code class="p">{</code> <code
class="nx">>quantity</code><code class="o">:</code> <code
class="nx">>product</code><code class="p">.</code><code
class="nx">>quantity</code> <code class="p">}</code>

<code class="lineno">23</code> <code class="p">,</code> <code
class="nx">>$pull</code><code class="o">:</code> <code class="p">{</code>
<code class="nx">>reservations</code><code class="o">:</code> <code
class="p">{</code> <code class="nx">>_id</code><code class="o">:</code>
<code class="nx">>cart</code><code class="p">.</code><code
class="nx">>_id</code> <code class="p">}</code>
```

```
<code class="lineno">24</code> <code class="p">} );</code>

<code class="lineno">25</code> <code class="p">}</code>

<code class="lineno">26</code>

<code class="lineno">27</code> <code class="nx">cartsCol</code><code
class="p">.</code><code class="nx">update</code><code class="p">
({</code>

<code class="lineno">28</code> <code class="nx">_id</code><code
class="o">:</code> <code class="nx">cart</code><code class="p">.</code>
<code class="nx">_id</code>

<code class="lineno">29</code> <code class="p">},</code> <code class="p">
{</code>

<code class="lineno">30</code> <code class="nx">$set</code><code
class="o">:</code> <code class="p">{</code> <code class="nx">status</code>
<code class="o">:</code> <code class="s1">'expired'</code> <code
class="p">}</code>

<code class="lineno">31</code> <code class="p">});</code>

<code class="lineno">32</code> <code class="p">}</code>

<code class="lineno"> 1</code> <code class="kd">var</code> <code
class="nx">userId</code> <code class="o">=</code> <code
class="mi">1</code><code class="p">;</code>

<code class="lineno"> 2</code>

<code class="lineno"> 3</code> <code class="kd">var</code> <code
class="nx">cartsCol</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"shop"</code><code class="p">).</code><code
class="nx">carts</code><code class="p">;</code>

<code class="lineno"> 4</code> <code class="kd">var</code> <code
```

```
class="nx">>productCol</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"shop"</code><code class="p">).</code><code
class="nx">products</code><code class="p">;</code>

<code class="lineno"> 5</code> <code class="kd">var</code> <code
class="nx">orderCol</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"shop"</code><code class="p">).</code><code
class="nx">orders</code><code class="p">;</code>

<code class="lineno"> 6</code>

<code class="lineno"> 7</code> <code class="kd">var</code> <code
class="nx">cart</code> <code class="o">=</code> <code
class="nx">cartsCol</code><code class="p">.</code><code
class="nx">findOne</code><code class="p">({</code> <code
class="nx">_id</code><code class="o">:</code> <code
class="nx">userId</code><code class="p">,</code> <code
class="nx">state</code><code class="o">:</code> <code
class="s1">'active'</code> <code class="p">});</code>

<code class="lineno"> 8</code>

<code class="lineno"> 9</code> <code class="nx">orderCol</code><code
class="p">.</code><code class="nx">insert</code><code class="p">({</code>
<code class="lineno">10</code> <code class="nx">created_on</code><code
class="o">:</code> <code class="k">new</code> <code
class="nb">Date</code><code class="p">()</code>

<code class="lineno">11</code> <code class="p">,</code> <code
class="nx">shipping</code><code class="o">:</code> <code class="p">
{</code>

<code class="lineno">12</code> <code class="nx">name</code><code
class="o">:</code> <code class="s2">"Joe Dow"</code>
```

```
<code class="lineno">13</code> <code class="p">,</code> <code
class="nx">address</code><code class="o">:</code> <code class="s2">"Some
street 1, NY 11223"</code>

<code class="lineno">14</code> <code class="p">}</code>

<code class="lineno">15</code> <code class="p">,</code> <code
class="nx">payment</code><code class="o">:</code> <code class="p">
{</code> <code class="nx">method</code><code class="o">:</code> <code
class="s2">"visa"</code><code class="p">,</code> <code
class="nx">transaction_id</code><code class="o">:</code> <code
class="s2">"2312213312XXXTD"</code> <code class="p">}</code>

<code class="lineno">16</code> <code class="p">,</code> <code
class="nx">products</code><code class="o">:</code> <code
class="nx">cart</code><code class="p">.</code><code
class="nx">products</code>

<code class="lineno">17</code> <code class="p">});</code>

<code class="lineno">18</code>

<code class="lineno">19</code> <code class="nx">cartsCol</code><code
class="p">.</code><code class="nx">update</code><code class="p">
({</code>

<code class="lineno">20</code> <code class="p">{</code> <code
class="nx">_id</code><code class="o">:</code> <code
class="nx">userId</code> <code class="p">}</code>

<code class="lineno">21</code> <code class="p">},</code> <code class="p">
{</code>

<code class="lineno">22</code> <code class="nx">$set</code><code
class="o">:</code> <code class="p">{</code> <code class="nx">status</code>
<code class="o">:</code> <code class="s1">'complete'</code> <code
class="p">}</code>

<code class="lineno">23</code> <code class="p">});</code>
```

```

<code class="lineno">24</code>

<code class="lineno">25</code> <code class="nx">productCol</code><code
class="p">.</code><code class="nx">update</code><code class="p">
({</code>

<code class="lineno">26</code> <code class="s2">"reservations._id"</code>
<code class="o">:</code> <code class="nx">userId</code>

<code class="lineno">27</code> <code class="p">},</code> <code class="p">
{</code>

<code class="lineno">28</code> <code class="nx">$pull</code><code
class="o">:</code> <code class="p">{</code> <code
class="nx">reservations</code><code class="o">:</code> <code class="p">
{</code><code class="nx">_id</code><code class="o">:</code> <code
class="nx">userId</code> <code class="p">}</code>

<code class="lineno">29</code> <code class="p">},</code> <code
class="kc">false</code><code class="p">,</code> <code
class="kc">true</code><code class="p">);</code>

<code class="lineno">1</code> <code class="kd">var</code> <code
class="nx">col</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"catalog"</code><code class="p">).</code><code
class="nx">carts</code><code class="p">;</code>

<code class="lineno">2</code> <code class="nx">col</code><code
class="p">.</code><code class="nx">ensureIndex</code><code class="p">
({</code><code class="nx">state</code><code class="o">:</code><code
class="mi">1</code><code class="p">});</code>

<code class="lineno">1</code> <code class="kd">var</code> <code
class="nx">col</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"catalog"</code><code class="p">).</code><code
class="nx">inventories</code><code class="p">;</code>

```

```

<code class="lineno">2</code> <code class="nx">col</code><code
class="p">.</code><code class="nx">ensureIndex</code><code class="p">
({</code><code class="s2">"reservations._id"</code><code class="o">:
</code><code class="mi">1</code><code class="p">});</code>

<code class="kd">var</code> <code class="nx">admin</code> <code
class="o">=</code> <code class="nx">db</code><code class="p">.</code>
<code class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"admin"</code><code class="p">);</code>

<code class="nx">db</code><code class="p">.</code><code
class="nx">runCommand</code><code class="p">({</code><code
class="nx">enableSharding</code><code class="o">:</code><code
class="s1">'shop'</code><code class="p">});</code>

<code class="nx">db</code><code class="p">.</code><code
class="nx">runCommand</code><code class="p">({</code>
<code class="nx">shardCollection</code><code class="o">:</code> <code
class="s1">'shop.carts'</code>

<code class="p">,</code> <code class="nx">key</code><code class="o">:
</code> <code class="p">{</code><code class="nx">_id</code><code
class="o">:</code><code class="s1">'hashed'</code><code class="p">}
</code>

<code class="p">});</code>

```

Performance

A simple exploration of the performance on a single machine with MongoDb 3.0 shows the difference between `MMAP` and `WiredTiger` for a narrow simulation using the schema simulation framework `mongodb-schema-simulator`.

Scenario

https://github.com/christkv/mongodb-schema-simulator/blob/master/examples/scripts/single_or_replset/cart_reservation/cart_5

MongoDb runs locally on a MacBook Pro Retina 2015 with ssd and 16 gb ram.


The simulation runs with the following parameters against a single mongodb instance under osx 10.10 Yosemite.

successfully checkout cart parameters

Parameters	
processes	4
poolSize per process	50
type	linear
Resolution in milliseconds	1000
Iterations run	25
Number of products in cart	5
Size of each product in bytes	1024
Number of users	1000
Execution strategy	slicetime

MMAP

The MMAP engine is run using the default settings on MongoDB 3.0.1.

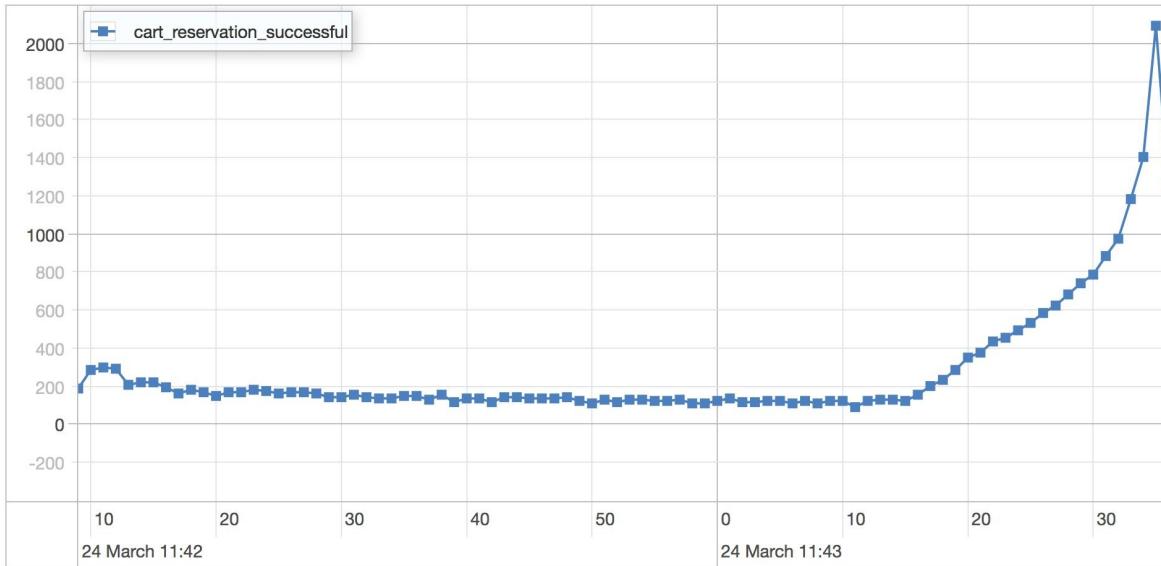

Successfully Checkout Cart


successfully checkout cart

Statistics

Runtime	88.241 seconds
Mean	46416.268 milliseconds
Standard Deviation	21937.134 milliseconds
75 percentile	62873.337 milliseconds
95 percentile	67818.018 milliseconds
99 percentile	70497.126 milliseconds
Minimum	20.034 milliseconds
Maximum	74220.014 milliseconds

WiredTiger

The WiredTiger engine is run using the default settings on MongoDB 3.0.1.

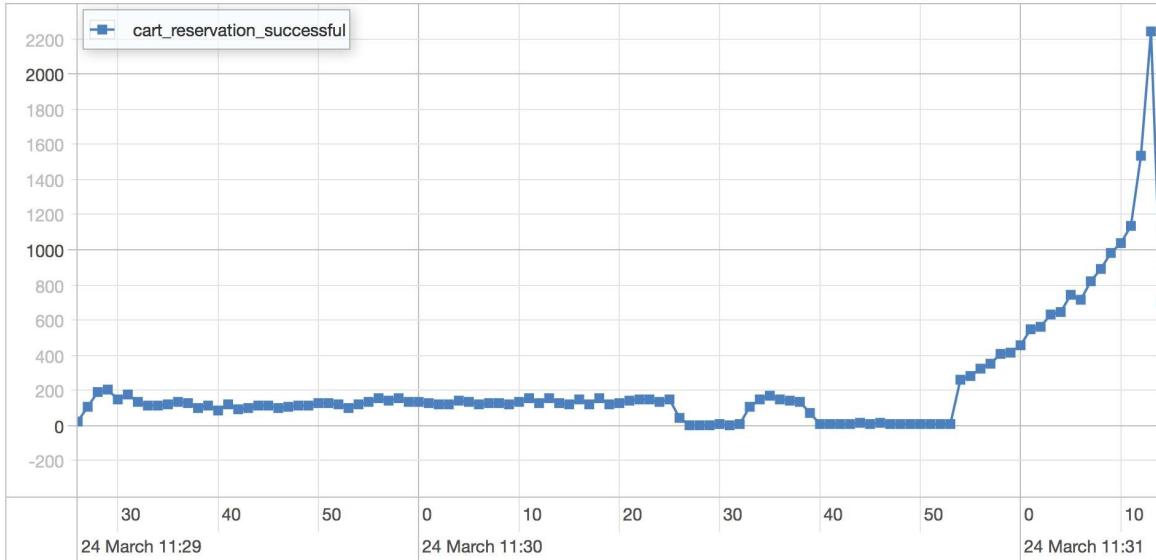

Successfully Checkout Cart

successfully checkout cart

Statistics

Runtime	108.916 seconds
Mean	63597.036 milliseconds
Standard Deviation	27672.244 milliseconds
75 percentile	83614.989 milliseconds
95 percentile	87405.772 milliseconds
99 percentile	89546.218 milliseconds
Minimum	41.414 milliseconds
Maximum	93681.381 milliseconds

This is an update heavy schema and this impacts WiredTiger more than MMAP due to a lack of in place updates in WiredTiger. Also note that the total runtime is higher than the 25 seconds of load we apply, pointing to the fact that the system is overloaded for this hardware configuration.

Notes

The reservation of items using an embedded array in an inventory document could lead to the size of the document growing a fair bit if there are a lot of shoppers reserving the same product at the same time. In these cases, we

recommend the optimistic shopping cart pattern reviewed in the next chapter.

```
<code class="lineno"> 1</code> <code class="p">{</code>

<code class="lineno"> 2</code> <code class="s2">"_id"</code><code
class="o">:</code> <code class="nx">ObjectId</code><code class="p">
(</code><code class="s2">"54fd7392742abeef6186a68e"</code><code
class="p">)</code>

<code class="lineno"> 3</code> <code class="p">,</code> <code
class="s2">"state"</code><code class="o">:</code> <code class="s2">"active"
</code>

<code class="lineno"> 4</code> <code class="p">,</code> <code
class="s2">"modifiedOn"</code><code class="o">:</code> <code
class="nx">ISODate</code><code class="p">(</code><code
class="s2">"2015-03-11T12:03:42.615Z"</code><code class="p">)</code>

<code class="lineno"> 5</code> <code class="p">,</code> <code
class="s2">"products"</code><code class="o">:</code> <code class="p">
[</code>

<code class="lineno"> 6</code> <code class="s2">"_id"</code><code
class="o">:</code> <code class="nx">ObjectId</code><code class="p">
(</code><code class="s2">"54fd7392742abeef6186a68e"</code><code
class="p">)</code>

<code class="lineno"> 7</code> <code class="p">,</code> <code
class="s2">"quantity"</code><code class="o">:</code> <code
class="mi">1</code>

<code class="lineno"> 8</code> <code class="p">,</code> <code
class="s2">"name"</code><code class="o">:</code> <code class="s2">"JC
Sneaker"</code>

<code class="lineno"> 9</code> <code class="p">,</code> <code
class="s2">"price"</code><code class="o">:</code> <code
class="mi">100</code>

<code class="lineno">10</code> <code class="p">}]</code>
```

```
<code class="lineno">11</code> <code class="p">}</code>

<code class="lineno">1</code> <code class="p">{</code>

<code class="lineno">2</code> <code class="s2">"_id"</code><code
class="o">:</code> <code class="nx">ObjectId</code><code class="p">
(</code><code class="s2">"54fd7392742abeef6186a68e"</code><code
class="p">)</code>

<code class="lineno">3</code> <code class="p">,</code> <code
class="s2">"quantity"</code><code class="o">:</code> <code
class="mi">999</code>

<code class="lineno">4</code> <code class="p">,</code> <code
class="s2">"reservations"</code><code class="o">:</code> <code class="p">
[</code>

<code class="lineno">5</code> <code class="s2">"_id"</code><code
class="o">:</code> <code class="nx">ObjectId</code><code class="p">
(</code><code class="s2">"54fd7392742abeef6186a68e"</code><code
class="p">)</code>

<code class="lineno">6</code> <code class="p">,</code> <code
class="s2">"quantity"</code><code class="o">:</code> <code
class="mi">1</code>

<code class="lineno">7</code> <code class="p">,</code> <code
class="s2">"createdOn"</code><code class="o">:</code> <code
class="nx">ISODate</code><code class="p">(</code><code
class="s2">"2015-03-11T12:03:42.615Z"</code><code class="p">)</code>

<code class="lineno">8</code> <code class="p">}</code>

<code class="lineno">9</code> <code class="p">}</code>

<code class="lineno">1</code> <code class="p">{</code>

<code class="lineno">2</code> <code class="s2">"_id"</code><code
class="o">:</code> <code class="nx">ObjectId</code><code class="p">
(</code><code class="s2">"54fd7392742abeef6186a68e"</code><code
```

```
class="p">)</code>

<code class="lineno">3</code> <code class="p">,</code> <code
class="s2">"name"</code><code class="o">:</code> <code class="s2">"JC
Sneaker"</code>

<code class="lineno">4</code> <code class="p">,</code> <code
class="s2">"properties"</code><code class="o">:</code> <code class="p">{}<
/>
```

```
<code class="lineno">5</code> <code class="p">}</code>

<code class="lineno"> 1</code> <code class="p">{</code>

<code class="lineno"> 2</code> <code class="s2">"_id"</code><code
class="o">:</code> <code class="nx">ObjectId</code><code class="p">
(</code><code class="s2">"54fd7392742abeef6186a68e"</code><code
class="p">)</code>

<code class="lineno"> 3</code> <code class="p">,</code> <code
class="s2">"total"</code><code class="o">:</code> <code
class="mi">100</code>

<code class="lineno"> 4</code> <code class="p">,</code> <code
class="s2">"shipping"</code><code class="o">:</code> <code class="p">{}<
/>
```

```
<code class="lineno"> 5</code> <code class="p">,</code> <code
class="s2">"payment"</code><code class="o">:</code> <code class="p">{}<
/>
```

```
<code class="lineno"> 6</code> <code class="p">,</code> <code
class="s2">"products"</code><code class="o">:</code> <code class="p">
[</code>

<code class="lineno"> 7</code> <code class="s2">"_id"</code><code
class="o">:</code> <code class="nx">ObjectId</code><code class="p">
(</code><code class="s2">"54fd7392742abeef6186a68e"</code><code
class="p">)</code>
```

```
<code class="lineno"> 8</code> <code class="p">,</code> <code
class="s2">"quantity"</code><code class="o">:</code> <code
class="mi">1</code>

<code class="lineno"> 9</code> <code class="p">,</code> <code
class="s2">"name"</code><code class="o">:</code> <code class="s2">"JC
Sneaker"</code>

<code class="lineno">10</code> <code class="p">,</code> <code
class="s2">"price"</code><code class="o">:</code> <code
class="mi">100</code>

<code class="lineno">11</code> <code class="p">}]</code>

<code class="lineno">12</code> <code class="p">}</code>

<code class="lineno"> 1</code> <code class="kd">var</code> <code
class="nx">quantity</code> <code class="o">=</code> <code
class="mi">1</code><code class="p">;</code>

<code class="lineno"> 2</code> <code class="kd">var</code> <code
class="nx">userId</code> <code class="o">=</code> <code
class="mi">1</code><code class="p">;</code>

<code class="lineno"> 3</code> <code class="kd">var</code> <code
class="nx">productId</code> <code class="o">=</code> <code
class="s2">"111445GB3"</code><code class="p">;</code>

<code class="lineno"> 4</code>

<code class="lineno"> 5</code> <code class="kd">var</code> <code
class="nx">col</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"shop"</code><code class="p">).</code><code
class="nx">carts</code><code class="p">;</code>

<code class="lineno"> 6</code> <code class="nx">col</code><code
class="p">.</code><code class="nx">update</code><code class="p">(</code>
```

```
<code class="lineno"> 7</code> <code class="p">{</code> <code
class="nx">_id</code><code class="o">:</code> <code
class="nx">userId</code><code class="p">,</code> <code
class="nx">state</code><code class="o">:</code> <code
class="s1">'active'</code> <code class="p">}</code>

<code class="lineno"> 8</code> <code class="p">,</code> <code class="p">
{</code>

<code class="lineno"> 9</code> <code class="nx">$set</code><code
class="o">:</code> <code class="p">{</code> <code
class="nx">modifiedOn</code><code class="o">:</code> <code
class="k">new</code> <code class="nb">Date</code><code class="p">()
</code> <code class="p">}</code>

<code class="lineno">10</code> <code class="p">,</code> <code
class="nx">$push</code><code class="o">:</code> <code class="p">{</code>
<code class="nx">products</code><code class="o">:</code> <code class="p">
{</code>

<code class="lineno">11</code> <code class="nx">_id</code><code
class="o">:</code> <code class="nx">productId</code>

<code class="lineno">12</code> <code class="p">,</code> <code
class="nx">quantity</code><code class="o">:</code> <code
class="nx">quantity</code>

<code class="lineno">13</code> <code class="p">,</code> <code
class="nx">name</code><code class="o">:</code> <code
class="s2">"Simsong Mobile"</code>

<code class="lineno">14</code> <code class="p">,</code> <code
class="nx">price</code><code class="o">:</code> <code
class="mi">1000</code>

<code class="lineno">15</code> <code class="p">}</code> }</code>

<code class="lineno">16</code> <code class="p">},</code> <code
class="kc">true</code><code class="p">);</code>
```

```
<code class="lineno"> 1</code> <code class="kd">var</code> <code
class="nx">quantity</code> <code class="o">=</code> <code
class="mi">2</code><code class="p">;</code>

<code class="lineno"> 2</code> <code class="kd">var</code> <code
class="nx">userId</code> <code class="o">=</code> <code
class="mi">1</code><code class="p">;</code>

<code class="lineno"> 3</code> <code class="kd">var</code> <code
class="nx">productId</code> <code class="o">=</code> <code
class="s2">"111445GB3"</code><code class="p">;</code>

<code class="lineno"> 4</code>

<code class="lineno"> 5</code> <code class="kd">var</code> <code
class="nx">col</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"shop"</code><code class="p">).</code><code
class="nx">carts</code><code class="p">;</code>

<code class="lineno"> 6</code> <code class="nx">col</code><code
class="p">.</code><code class="nx">update</code><code class="p">(</code>
<code class="lineno"> 7</code> <code class="p">{</code> <code
class="nx">_id</code><code class="o">:</code> <code
class="nx">userId</code><code class="p">,</code> <code
class="s2">"products._id"</code><code class="o">:</code> <code
class="nx">productId</code><code class="p">,</code> <code
class="nx">state</code><code class="o">:</code> <code
class="s1">'active'</code> <code class="p">}</code>

<code class="lineno"> 8</code> <code class="p">,</code> <code class="p">
{</code>

<code class="lineno"> 9</code> <code class="nx">$set</code><code
class="o">:</code> <code class="p">{</code>

<code class="lineno">10</code> <code class="nx">modifiedOn</code><code
class="o">:</code> <code class="k">new</code> <code
```

```
class="nb">Date</code><code class="p">()</code>

<code class="lineno">11</code> <code class="p">,</code> <code
class="s2">"products.$.quantity"</code><code class="o">:</code> <code
class="nx">quantity</code>

<code class="lineno">12</code> <code class="p">}</code>

<code class="lineno">13</code> <code class="p">}</code>

<code class="lineno">14</code> <code class="p">},</code> <code
class="kc">true</code><code class="p">);</code>

<code class="lineno"> 1</code> <code class="kd">var</code> <code
class="nx">userId</code> <code class="o">=</code> <code
class="mi">1</code><code class="p">;</code>

<code class="lineno"> 2</code>

<code class="lineno"> 3</code> <code class="kd">var</code> <code
class="nx">inventories</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"shop"</code><code class="p">).</code><code
class="nx">inventories</code><code class="p">;</code>

<code class="lineno"> 4</code> <code class="kd">var</code> <code
class="nx">carts</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"shop"</code><code class="p">).</code><code
class="nx">carts</code><code class="p">;</code>

<code class="lineno"> 5</code> <code class="kd">var</code> <code
class="nx">orders</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"shop"</code><code class="p">).</code><code
class="nx">orders</code><code class="p">;</code>
```

```
<code class="lineno"> 6</code>

<code class="lineno"> 7</code> <code class="kd">var</code> <code
class="nx">cart</code> <code class="o">=</code> <code
class="nx">carts</code><code class="p">.</code><code
class="nx">find</code><code class="p">({</code><code
class="nx">_id</code><code class="o">:</code> <code
class="nx">userId</code><code class="p">});</code>

<code class="lineno"> 8</code> <code class="kd">var</code> <code
class="nx">success</code> <code class="o">=</code> <code class="p">[];</code>

<code class="lineno"> 9</code> <code class="kd">var</code> <code
class="nx">failed</code> <code class="o">=</code> <code class="p">[];</code>

<code class="lineno">10</code>

<code class="lineno">11</code> <code class="k">for</code><code class="p">
(</code><code class="kd">var</code> <code class="nx">i</code> <code
class="o">=</code> <code class="mi">0</code><code class="p">);</code>
<code class="nx">i</code> <code class="o"><</code> <code
class="nx">cart</code><code class="p">.</code><code
class="nx">products</code><code class="p">.</code><code
class="nx">length</code><code class="p">;.</code> <code
class="nx">i</code><code class="o">++</code><code class="p">)</code>
<code class="p">{</code>

<code class="lineno">12</code> <code class="kd">var</code> <code
class="nx">product</code> <code class="o">=</code> <code
class="nx">cart</code><code class="p">.</code><code
class="nx">products</code><code class="p">[</code><code
class="nx">i</code><code class="p">];</code>

<code class="lineno">13</code>

<code class="lineno">14</code> <code class="kd">var</code> <code
class="nx">result</code> <code class="o">=</code> <code
class="nx">inventories</code><code class="p">.</code><code
```

```
class="nx">>update</code><code class="p">({</code>
<code class="lineno">15</code> <code class="nx">_id</code><code
class="o">:</code> <code class="nx">product</code><code class="p">.
</code><code class="nx">_id</code><code class="p">, </code> <code
class="nx">quantity</code><code class="o">:</code> <code class="p">
{</code><code class="nx">$gte</code><code class="o">:</code> <code
class="nx">product</code><code class="p">. </code><code
class="nx">quantity</code> <code class="p">}</code>

<code class="lineno">16</code> <code class="p">}, </code> <code class="p">
{</code>

<code class="lineno">17</code> <code class="nx">$inc</code><code
class="o">:</code> <code class="p">{</code><code
class="nx">quantity</code><code class="o">:</code> <code class="o">-
</code><code class="nx">product</code><code class="p">. </code><code
class="nx">quantity</code><code class="p">}</code>

<code class="lineno">18</code> <code class="p">, </code> <code
class="nx">$push</code><code class="o">:</code> <code class="p">{</code>

<code class="lineno">19</code> <code class="nx">reservations</code><code
class="o">:</code> <code class="p">{</code>

<code class="lineno">20</code> <code class="nx">quantity</code><code
class="o">:</code> <code class="nx">product</code><code class="p">.
</code><code class="nx">quantity</code><code class="p">, </code> <code
class="nx">_id</code><code class="o">:</code> <code
class="nx">cart</code><code class="p">. </code><code class="nx">_id</code>
<code class="p">, </code> <code class="nx">createdOn</code><code
class="o">:</code> <code class="k">new</code> <code class="o">\</code>

<code class="lineno">21</code> <code class="nb">Date</code><code
class="p">()</code>

<code class="lineno">22</code> <code class="p">}</code>

<code class="lineno">23</code> <code class="p">}</code>
```

```
<code class="lineno">24</code> <code class="p">} )</code>

<code class="lineno">25</code>

<code class="lineno">26</code> <code class="k">if</code><code class="p">
(</code><code class="nx">result</code><code class="p">. </code><code
class="nx">nModified</code> <code class="o">==</code> <code
class="mi">0</code><code class="p">)</code> <code
class="nx">failed</code><code class="p">. </code><code
class="nx">push</code><code class="p">(</code><code
class="nx">product</code><code class="p">);</code>

<code class="lineno">27</code> <code class="k">else</code> <code
class="nx">success</code><code class="p">. </code><code
class="nx">push</code><code class="p">(</code><code
class="nx">product</code><code class="p">);</code>

<code class="lineno">28</code> <code class="p">}</code>

<code class="lineno"> 1</code> <code class="k">if</code><code class="p">
(</code><code class="nx">failed</code><code class="p">. </code><code
class="nx">length</code> <code class="o">></code> <code
class="mi">0</code><code class="p">)</code> <code class="p">{ </code>

<code class="lineno"> 2</code> <code class="k">for</code><code class="p">
(</code><code class="kd">var</code> <code class="nx">i</code> <code
class="o">=</code> <code class="mi">0</code><code class="p">;</code>
<code class="nx">i</code> <code class="o"><</code> <code
class="nx">success</code><code class="p">. </code><code
class="nx">length</code><code class="p">;</code> <code
class="nx">i</code><code class="o">++</code><code class="p">)</code>
<code class="p">{ </code>

<code class="lineno"> 3</code> <code class="nx">inventories</code><code
class="p">. </code><code class="nx">update</code><code class="p">
({ </code>

<code class="lineno"> 4</code> <code class="nx">_id</code><code
class="o">:</code> <code class="nx">success</code><code class="p">
[</code><code class="nx">i</code><code class="p">]. </code><code
```

```
class="nx">>_id</code>

<code class="lineno"> 5</code> <code class="p">, </code> <code
class="s2">"reservations._id"</code><code class="o">:</code> <code
class="nx">cart</code><code class="p">. </code><code class="nx">_id</code>

<code class="lineno"> 6</code> <code class="p">}, </code> <code class="p">
{</code>

<code class="lineno"> 7</code> <code class="nx">$inc</code><code
class="o">:</code> <code class="p">{ </code> <code
class="nx">quantity</code><code class="o">:</code> <code
class="nx">success</code><code class="p">[ </code><code
class="nx">i</code><code class="p">]. </code><code
class="nx">quantity</code> <code class="p">}</code>

<code class="lineno"> 8</code> <code class="p">, </code> <code
class="nx">$pull</code><code class="o">:</code> <code class="p">{ </code>
<code class="nx">reservations</code><code class="o">:</code> <code
class="p">{ </code> <code class="nx">_id</code><code class="o">:</code>
<code class="nx">cart</code><code class="p">. </code><code
class="nx">_id</code> <code class="p">} }</code>

<code class="lineno"> 9</code> <code class="p">})</code>

<code class="lineno">10</code> <code class="p">}</code>

<code class="lineno">11</code>

<code class="lineno">12</code> <code class="k">return</code>

<code class="lineno">13</code> <code class="p">}</code>

<code class="lineno"> 1</code> <code class="nx">orders</code><code
class="p">. </code><code class="nx">insert</code><code class="p">({ </code>
<code class="lineno"> 2</code> <code class="nx">created_on</code><code
class="o">:</code> <code class="k">new</code> <code
class="nb">Date</code><code class="p">()</code>
```

```
<code class="lineno"> 3</code> <code class="p">,</code> <code
class="nx">shipping</code><code class="o">:</code> <code class="p">
{</code>

<code class="lineno"> 4</code> <code class="nx">name</code><code
class="o">:</code> <code class="s2">"Joe Dow"</code>

<code class="lineno"> 5</code> <code class="p">,</code> <code
class="nx">address</code><code class="o">:</code> <code class="s2">"Some
street 1, NY 11223"</code>

<code class="lineno"> 6</code> <code class="p">}</code>

<code class="lineno"> 7</code> <code class="p">,</code> <code
class="nx">payment</code><code class="o">:</code> <code class="p">
{</code> <code class="nx">method</code><code class="o">:</code> <code
class="s2">"visa"</code><code class="p">,</code> <code
class="nx">transaction_id</code><code class="o">:</code> <code
class="s2">"2312213312XXXTD"</code> <code class="p">}</code>

<code class="lineno"> 8</code> <code class="p">,</code> <code
class="nx">products</code><code class="o">:</code> <code
class="nx">cart</code><code class="p">.</code><code
class="nx">products</code>

<code class="lineno"> 9</code> <code class="p">});</code>

<code class="lineno">10</code>

<code class="lineno">11</code> <code class="nx">carts</code><code
class="p">.</code><code class="nx">update</code><code class="p">
{</code>

<code class="lineno">12</code> <code class="nx">_id</code><code
class="o">:</code> <code class="nx">cart</code><code class="p">.</code>
<code class="nx">_id</code><code class="p">,</code> <code
class="nx">state</code><code class="o">:</code> <code
class="s1">'active'</code>

<code class="lineno">13</code> <code class="p">},</code> <code class="p">
```

```

{</code>

<code class="lineno">14</code> <code class="nx">$set</code><code
class="o">:</code> <code class="p">{</code> <code class="nx">state</code>
<code class="o">:</code> <code class="s1">'completed'</code> <code
class="p">}</code>

<code class="lineno">15</code> <code class="p">});</code>

<code class="lineno">16</code>

<code class="lineno">17</code> <code class="nx">inventories</code><code
class="p">.</code><code class="nx">update</code><code class="p">
({</code>

<code class="lineno">18</code> <code class="s2">"reservations._id"</code>
<code class="o">:</code> <code class="nx">cart</code><code class="p">.
</code><code class="nx">_id</code>

<code class="lineno">19</code> <code class="p">},</code> <code class="p">
{</code>

<code class="lineno">20</code> <code class="nx">$pull</code><code
class="o">:</code> <code class="p">{</code> <code
class="nx">reservations</code><code class="o">:</code> <code class="p">
{</code> <code class="nx">_id</code><code class="o">:</code> <code
class="nx">cart</code><code class="p">.</code><code class="nx">_id</code>
<code class="p">}</code> <code class="p">}</code>

<code class="lineno">21</code> <code class="p">},</code> <code
class="kc">false</code><code class="p">,</code> <code
class="kc">true</code><code class="p">);</code>

<code class="lineno"> 1</code> <code class="kd">var</code> <code
class="nx">cutOffDate</code> <code class="o">=</code> <code
class="k">new</code> <code class="nb">Date</code><code class="p">();</code>

<code class="lineno"> 2</code> <code class="nx">cutOffDate</code><code
class="p">.</code><code class="nx">setMinutes</code><code class="p">

```

```

(</code><code class="nx">cutOffDate</code><code class="p">.</code><code
class="nx">getMinutes</code><code class="p">()</code> <code class="o">-
</code> <code class="mi">30</code><code class="p">);</code>

<code class="lineno"> 3</code>

<code class="lineno"> 4</code> <code class="kd">var</code> <code
class="nx">cartsCol</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"shop"</code><code class="p">).</code><code
class="nx">carts</code><code class="p">;</code>

<code class="lineno"> 5</code> <code class="kd">var</code> <code
class="nx">productCol</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"shop"</code><code class="p">).</code><code
class="nx">products</code><code class="p">;</code>

<code class="lineno"> 6</code>

<code class="lineno"> 7</code> <code class="kd">var</code> <code
class="nx">carts</code> <code class="o">=</code> <code
class="nx">cartsCol</code><code class="p">.</code><code
class="nx">find</code><code class="p">({</code>

<code class="lineno"> 8</code> <code class="nx">modifiedOn</code><code
class="o">:</code> <code class="p">{ </code> <code class="nx">$lte</code>
<code class="o">:</code> <code class="nx">cutOffDate</code> <code
class="p">},</code> <code class="nx">state</code><code class="o">:</code>
<code class="s1">'active'</code>

<code class="lineno"> 9</code> <code class="p">});</code>

<code class="lineno">10</code>

<code class="lineno">11</code> <code class="k">while</code><code
class="p">(</code><code class="nx">carts</code><code class="p">.</code>
<code class="nx">hasNext</code><code class="p">())</code> <code

```

```
class="p">>{</code>

<code class="lineno">12</code> <code class="kd">var</code> <code
class="nx">cart</code> <code class="o">=</code> <code
class="nx">carts</code><code class="p">.</code><code
class="nx">next</code><code class="p">();</code>

<code class="lineno">13</code>

<code class="lineno">14</code> <code class="k">for</code><code class="p">
(</code><code class="kd">var</code> <code class="nx">i</code> <code
class="o">=</code> <code class="mi">0</code><code class="p">;</code>
<code class="nx">i</code> <code class="o"><</code> <code
class="nx">cart</code><code class="p">.</code><code
class="nx">products</code><code class="p">.</code><code
class="nx">length</code><code class="p">;</code> <code
class="nx">i</code><code class="o">++</code><code class="p">)</code>
<code class="p">{</code>

<code class="lineno">15</code> <code class="kd">var</code> <code
class="nx">product</code> <code class="o">=</code> <code
class="nx">cart</code><code class="p">.</code><code
class="nx">products</code><code class="p">[</code><code
class="nx">i</code><code class="p">];</code>

<code class="lineno">16</code>

<code class="lineno">17</code> <code class="nx">productCol</code><code
class="p">.</code><code class="nx">update</code><code class="p">
({</code>

<code class="lineno">18</code> <code class="nx">_id</code><code
class="o">:</code> <code class="nx">product</code><code class="p">.
</code><code class="nx">_id</code>

<code class="lineno">19</code> <code class="p">,</code> <code
class="s2">"reservations._id"</code><code class="o">:</code> <code
class="nx">cart</code><code class="p">.</code><code class="nx">_id</code>

<code class="lineno">20</code> <code class="p">,</code> <code
```

```
class="s2">"reservations.quantity"</code><code class="o">:</code> <code
class="nx">product</code><code class="p">.</code><code
class="nx">quantity</code>

<code class="lineno">21</code> <code class="p">},</code> <code class="p">
{</code>

<code class="lineno">22</code> <code class="nx">$inc</code><code
class="o">:</code> <code class="p">{</code> <code
class="nx">quantity</code><code class="o">:</code> <code
class="nx">product</code><code class="p">.</code><code
class="nx">quantity</code> <code class="p">}</code>

<code class="lineno">23</code> <code class="p">,</code> <code
class="nx">$pull</code><code class="o">:</code> <code class="p">{</code>
<code class="nx">reservations</code><code class="o">:</code> <code
class="p">{</code> <code class="nx">_id</code><code class="o">:</code>
<code class="nx">cart</code><code class="p">.</code><code
class="nx">_id</code> <code class="p">}<}</code>

<code class="lineno">24</code> <code class="p">});</code>

<code class="lineno">25</code> <code class="p">}</code>

<code class="lineno">26</code>

<code class="lineno">27</code> <code class="nx">cartsCol</code><code
class="p">.</code><code class="nx">update</code><code class="p">
{</code>

<code class="lineno">28</code> <code class="nx">_id</code><code
class="o">:</code> <code class="nx">cart</code><code class="p">.</code>
<code class="nx">_id</code>

<code class="lineno">29</code> <code class="p">},</code> <code class="p">
{</code>

<code class="lineno">30</code> <code class="nx">$set</code><code
class="o">:</code> <code class="p">{</code> <code class="nx">status</code>
<code class="o">:</code> <code class="s1">'expired'</code> <code
```

```
class="p">>}</code>

<code class="lineno">31</code> <code class="p">});</code>

<code class="lineno">32</code> <code class="p">}</code>

<code class="lineno">1</code> <code class="kd">var</code> <code
class="nx">col</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.;</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"catalog"</code><code class="p">).;</code><code
class="nx">carts</code><code class="p">(;</code>

<code class="lineno">2</code> <code class="nx">col</code><code
class="p">.</code><code class="nx">ensureIndex</code><code class="p">
({</code><code class="nx">state</code><code class="o">:</code><code
class="mi">1</code><code class="p">});</code>

<code class="lineno">1</code> <code class="kd">var</code> <code
class="nx">col</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.;</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"catalog"</code><code class="p">).;</code><code
class="nx">inventories</code><code class="p">(;</code>

<code class="lineno">2</code> <code class="nx">col</code><code
class="p">.</code><code class="nx">ensureIndex</code><code class="p">
({</code><code class="s2">"reservations._id"</code><code class="o">:
</code><code class="mi">1</code><code class="p">});</code>

<code class="kd">var</code> <code class="nx">admin</code> <code
class="o">=</code> <code class="nx">db</code><code class="p">.</code>
<code class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"admin"</code><code class="p">);</code>

<code class="nx">db</code><code class="p">.</code><code
class="nx">runCommand</code><code class="p">({</code><code
class="nx">enableSharding</code><code class="o">:</code><code
class="s1">'shop'</code><code class="p">});</code>
```

```

<code class="nx">db</code><code class="p">. </code><code
class="nx">runCommand</code><code class="p">({</code>
<code class="nx">shardCollection</code><code class="o">:</code> <code
class="s1">'shop.carts'</code>
<code class="p">,</code> <code class="nx">key</code><code class="o">:
</code> <code class="p">{</code><code class="nx">_id</code><code
class="o">:</code><code class="s1">'hashed'</code><code class="p">}
</code>
<code class="p">});</code>

```

Performance

A simple exploration of the performance on a single machine with MongoDb 3.0 shows the difference between MMAP and WiredTiger for a narrow simulation using the schema simulation framework `mongodb-schema-simulator`.

Scenario

https://github.com/christkv/mongodb-schema-simulator/blob/master/examples/scripts/single_or_replset/cart_no_reservation/callout.js

MongoDb runs locally on a MacBook Pro Retina 2015 with ssd and 16 gb ram. The simulation runs with the following parameters against a single `mongodb` instance under `osx 10.10 Yosemite`.

successfully checkout cart parameters


Parameters

processes	4
poolSize per process	50
type	linear
Resolution in milliseconds	1000
Iterations run	25
Number of products in cart	5
Size of each product in bytes	1024

Number of users	1000
Execution strategy	slicetime

MMAP

The `MMAP` engine is run using the default settings on MongoDB 3.0.1.

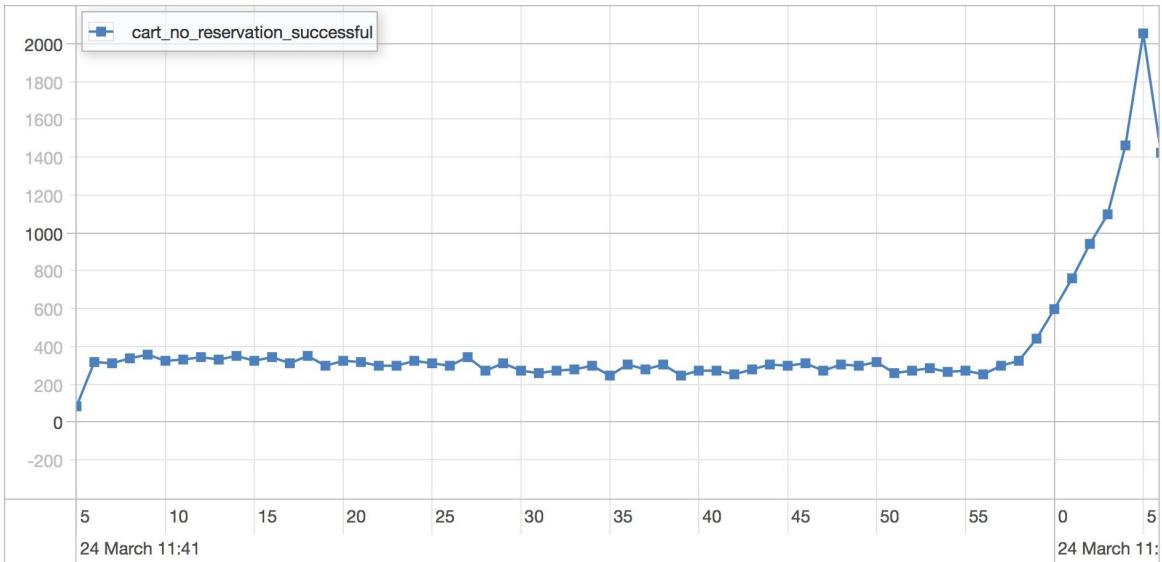

Successfully Checkout Cart


successfully checkout cart

Statistics

Runtime	61.878 seconds
Mean	23696.635 milliseconds
Standard Deviation	12515.697 milliseconds
75 percentile	35072.337 milliseconds
95 percentile	38497.619 milliseconds
99 percentile	40150.439 milliseconds
Minimum	21.637 milliseconds
Maximum	43277.439 milliseconds

WiredTiger

The WiredTiger engine is run using the default settings on MongoDB 3.0.1.

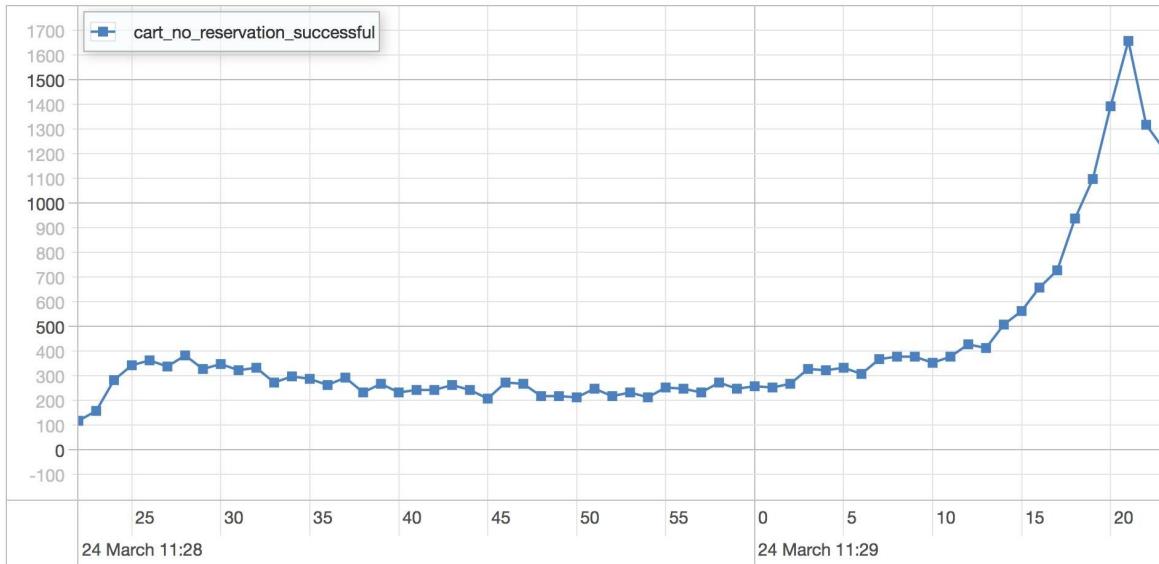

Successfully Checkout Cart

successfully checkout cart

Statistics

Runtime	62.607 seconds
Mean	26075.901 milliseconds
Standard Deviation	12410.047 milliseconds
75 percentile	36122.769 milliseconds
95 percentile	39481.372 milliseconds
99 percentile	41308.47 milliseconds
Minimum	20.228 milliseconds
Maximum	44646.7 milliseconds

This is an update heavy schema and this impacts WiredTiger more than MMAP due to the need to rewrite the document on each update in WiredTiger. Also note that the total runtime is higher than the 25 seconds of load we apply, pointing to the fact that the system is overloaded for this hardware configuration.

Notes

This seems to be a fairly common pattern for shopping carts now as it simplifies the scaling of the shopping cart by avoiding any inventory validation until the

user actually intends to checkout the reserved products. It avoids inventory being locked up in carts that are abandoned.


```
</code> <code class="mi">0</code> <code class="p">]</code> <code
class="p">]</code>

<code class="lineno"> 1</code> <code class="p">{</code>

<code class="lineno"> 2</code> <code class="s2">"_id"</code> <code
class="o">:</code> <code class="nx">ObjectId</code><code class="p">
(</code><code class="s2">"5500632d2dc02be024ba5c66"</code><code
class="p">)</code>

<code class="lineno"> 3</code> <code class="p">,</code> <code
class="s2">"theaterId"</code> <code class="o">:</code> <code
class="mi">1</code>

<code class="lineno"> 4</code> <code class="p">,</code> <code
class="s2">"name"</code> <code class="o">:</code> <code
class="s2">"Action Movie 5"</code>

<code class="lineno"> 5</code> <code class="p">,</code> <code
class="s2">"description"</code> <code class="o">:</code> <code
class="s2">"Another action movie"</code>

<code class="lineno"> 6</code> <code class="p">,</code> <code
class="s2">"start"</code> <code class="o">:</code> <code
class="nx">ISODate</code><code class="p">(</code><code
class="s2">"2015-03-11T15:45:49.103Z"</code><code class="p">)</code>

<code class="lineno"> 7</code> <code class="p">,</code> <code
class="s2">"end"</code> <code class="o">:</code> <code
class="nx">ISODate</code><code class="p">(</code><code
class="s2">"2015-03-11T15:45:49.103Z"</code><code class="p">)</code>

<code class="lineno"> 8</code> <code class="p">,</code> <code
class="s2">"price"</code> <code class="o">:</code> <code
class="mi">10</code>

<code class="lineno"> 9</code> <code class="p">,</code> <code
class="s2">"seatsAvailable"</code> <code class="o">:</code> <code
class="mi">80</code>
```



```
[</code> <code class="p">{</code>

<code class="lineno">16</code> <code class="s2">"_id"</code><code
class="o">:</code> <code class="nx">ObjectId</code><code class="p">
(</code><code class="s2">"5500632d2dc02be024ba5c66"</code><code
class="p">)</code>

<code class="lineno">17</code> <code class="p">,</code> <code
class="s2">"seats"</code><code class="o">:</code> <code class="p">[</code>
<code class="p">[</code> <code class="mi">1</code><code class="p">,
</code> <code class="mi">5</code> <code class="p">],</code> <code
class="p">[</code> <code class="mi">1</code><code class="p">,</code>
<code class="mi">6</code> <code class="p">],</code> <code class="p">
[</code> <code class="mi">1</code><code class="p">,</code> <code
class="mi">7</code> <code class="p">]</code> <code class="p">]</code>

<code class="lineno">18</code> <code class="p">,</code> <code
class="s2">"price"</code> <code class="o">:</code> <code
class="mi">10</code>

<code class="lineno">19</code> <code class="p">,</code> <code
class="s2">"total"</code> <code class="o">:</code> <code
class="mi">30</code>

<code class="lineno">20</code> <code class="p">}</code> <code class="p">]
</code>

<code class="lineno">21</code> <code class="p">}</code>

<code class="lineno"> 1</code> <code class="p">{</code>

<code class="lineno"> 2</code> <code class="s2">"_id"</code> <code
class="o">:</code> <code class="mi">1</code>

<code class="lineno"> 3</code> <code class="p">,</code> <code
class="s2">"state"</code> <code class="o">:</code> <code
class="s2">"canceled"</code>

<code class="lineno"> 4</code> <code class="p">,</code> <code
class="s2">"total"</code> <code class="o">:</code> <code
```

```
class="mi">30</code>

<code class="lineno"> 5</code> <code class="p">,</code> <code
class="s2">"reservations"</code> <code class="o">:</code> <code class="p">
[</code> <code class="p">{</code>

<code class="lineno"> 6</code> <code class="s2">"sessionId"</code> <code
class="o">:</code> <code class="nx">ObjectId</code><code class="p">
(</code><code class="s2">"5500632d2dc02be024ba5c66"</code><code
class="p">)</code>

<code class="lineno"> 7</code> <code class="p">,</code> <code
class="s2">"seats"</code> <code class="o">:</code> <code class="p">
[</code> <code class="p">[</code> <code class="mi">1</code><code
class="p">,</code> <code class="mi">5</code> <code class="p">],</code>
<code class="p">[</code> <code class="mi">1</code><code class="p">,
</code> <code class="mi">6</code> <code class="p">],</code> <code
class="p">[</code> <code class="mi">1</code><code class="p">,</code>
<code class="mi">7</code> <code class="p">]</code> <code class="p">]
</code>

<code class="lineno"> 8</code> <code class="p">,</code> <code
class="s2">"price"</code> <code class="o">:</code> <code
class="mi">10</code>

<code class="lineno"> 9</code> <code class="p">,</code> <code
class="s2">"total"</code> <code class="o">:</code> <code
class="mi">30</code>

<code class="lineno">10</code> <code class="p">}</code> <code class="p">]
</code>

<code class="lineno">11</code> <code class="p">,</code> <code
class="s2">"modifiedOn"</code> <code class="o">:</code> <code
class="nx">ISODate</code><code class="p">(</code><code
class="s2">"2015-03-11T15:45:49.105Z"</code><code class="p">)</code>

<code class="lineno">12</code> <code class="p">,</code> <code
class="s2">"createdOn"</code> <code class="o">:</code> <code
class="nx">ISODate</code><code class="p">(</code><code
```

```
class="s2">"2015-03-11T15:45:49.104Z"</code><code class="p">)</code>

<code class="lineno">13</code> <code class="p">}</code>

<code class="lineno"> 1</code> <code class="kd">var</code> <code
class="nx">theaterId</code> <code class="o">=</code> <code
class="mi">1</code><code class="p">;</code>

<code class="lineno"> 2</code>

<code class="lineno"> 3</code> <code class="kd">var</code> <code
class="nx">theaters</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"booking"</code><code class="p">).</code><code
class="nx">theaters</code><code class="p">;</code>

<code class="lineno"> 4</code> <code class="kd">var</code> <code
class="nx">sessions</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"booking"</code><code class="p">).</code><code
class="nx">sessions</code><code class="p">;</code>

<code class="lineno"> 5</code>

<code class="lineno"> 6</code> <code class="kd">var</code> <code
class="nx">theater</code> <code class="o">=</code> <code
class="nx">theaters</code><code class="p">.</code><code
class="nx">findOne</code><code class="p">({</code><code class="s2">"_id"
</code><code class="o">:</code> <code class="nx">theaterId</code><code
class="p">});</code>

<code class="lineno"> 7</code> <code class="nx">sessions</code><code
class="p">.</code><code class="nx">insert</code><code class="p">({</code>

<code class="lineno"> 8</code> <code class="p">,</code> <code
class="s2">"name"</code> <code class="o">:</code> <code
class="s2">"Action Movie 5"</code>
```

```
<code class="lineno">9</code> <code class="p">,</code> <code
class="s2">"description"</code> <code class="o">:</code> <code
class="s2">"Another action movie"</code>

<code class="lineno">10</code> <code class="p">,</code> <code
class="s2">"start"</code> <code class="o">:</code> <code
class="nx">ISODate</code><code class="p">(</code><code
class="s2">"2015-03-11T15:00:00.000Z"</code><code class="p">)</code>

<code class="lineno">11</code> <code class="p">,</code> <code
class="s2">"end"</code> <code class="o">:</code> <code
class="nx">ISODate</code><code class="p">(</code><code
class="s2">"2015-03-11T16:00:00.000Z"</code><code class="p">)</code>

<code class="lineno">12</code> <code class="p">,</code> <code
class="s2">"price"</code> <code class="o">:</code> <code
class="mi">10</code>

<code class="lineno">13</code> <code class="p">,</code> <code
class="s2">"seatsAvailable"</code> <code class="o">:</code> <code
class="nx">theater</code><code class="p">.</code><code
class="nx">seatsAvailable</code>

<code class="lineno">14</code> <code class="p">,</code> <code
class="s2">"seats"</code> <code class="o">:</code> <code
class="nx">theater</code><code class="p">.</code><code
class="nx">seats</code>

<code class="lineno">15</code> <code class="p">,</code> <code
class="s2">"reservations"</code> <code class="o">:</code> <code class="p">
[]</code>

<code class="lineno">16</code> <code class="p">});</code>

<code class="lineno">1</code> <code class="p">{</code>

<code class="lineno">2</code> <code class="p">...</code>

<code class="lineno">3</code> <code class="p">,</code> <code
class="s2">"seats"</code> <code class="o">:</code> <code class="p">
```



```
<code class="lineno"> 1</code> <code class="kd">var</code> <code
class="nx">sessionId</code> <code class="o">=</code> <code
class="mi">1</code><code class="p">;</code>

<code class="lineno"> 2</code> <code class="kd">var</code> <code
class="nx">cartId</code> <code class="o">=</code> <code
class="mi">1</code><code class="p">;</code>

<code class="lineno"> 3</code>

<code class="lineno"> 4</code> <code class="kd">var</code> <code
class="nx">seats</code> <code class="o">=</code> <code class="p">
[[</code><code class="mi">1</code><code class="p">,</code> <code
class="mi">5</code><code class="p">],</code> <code class="p">[</code>
<code class="mi">1</code><code class="p">,</code> <code
class="mi">6</code><code class="p">]];</code>

<code class="lineno"> 5</code> <code class="kd">var</code> <code
class="nx">seatsQuery</code> <code class="o">=</code> <code class="p">[];</code>

<code class="lineno"> 6</code> <code class="kd">var</code> <code
class="nx">setSeatsSelection</code> <code class="o">=</code> <code
class="p">{};</code>

<code class="lineno"> 7</code>

<code class="lineno"> 8</code> <code class="kd">var</code> <code
class="nx">sessions</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"booking"</code><code class="p">).</code><code
class="nx">sessions</code><code class="p">;</code>

<code class="lineno"> 9</code> <code class="kd">var</code> <code
class="nx">session</code> <code class="o">=</code> <code
class="nx">sessions</code><code class="p">.</code><code
class="nx">find</code><code class="p">({</code><code
class="nx">_id</code><code class="o">:</code> <code
class="nx">sessionId</code><code class="p">});</code>
```

```

<code class="lineno">10</code>

<code class="lineno">11</code> <code class="k">for</code><code class="p">
(</code><code class="kd">var</code> <code class="nx">i</code> <code
class="o">=</code> <code class="mi">0</code><code class="p">;</code>
<code class="nx">i</code> <code class="o"><</code> <code
class="nx">seats</code><code class="p">.</code><code
class="nx">length</code><code class="p">*</code> <code
class="nx">i</code><code class="o">++</code><code class="p">)</code>
<code class="p">{</code>

<code class="lineno">12</code> <code class="kd">var</code> <code
class="nx">seatSelector</code> <code class="o">=</code> <code class="p">
{};</code>

<code class="lineno">13</code> <code class="kd">var</code> <code
class="nx">seatSelection</code> <code class="o">=</code> <code
class="s1">'seats.'</code> <code class="o">+</code> <code
class="nx">seats</code><code class="p">[</code><code class="nx">i</code>
<code class="p">][</code><code class="mi">0</code><code class="p">]
</code> <code class="o">+</code> <code class="s1">'.</code> <code
class="o">+</code> <code class="nx">seats</code><code class="p">[</code>
<code class="nx">i</code><code class="p">][</code><code
class="mi">1</code><code class="p">];</code>

<code class="lineno">14</code> <code class="c1">// Part of $and query to
check if seat is free</code>

<code class="lineno">15</code> <code class="nx">seatSelector</code><code
class="p">[</code><code class="nx">seatSelection</code><code class="p">]
</code> <code class="o">=</code> <code class="mi">0</code><code
class="p">;</code>

<code class="lineno">16</code> <code class="nx">seatsQuery</code><code
class="p">.</code><code class="nx">push</code><code class="p">(</code>
<code class="nx">seatSelector</code><code class="p">);</code>

<code class="lineno">17</code> <code class="c1">// Part of $set operation to
set seat as occupied</code>

```

```
<code class="lineno">18</code> <code class="nx">setSeatsSelection</code>
<code class="p">[</code><code class="nx">seatSelection</code><code
class="p">]</code> <code class="o">=</code> <code class="mi">1</code>
<code class="p">;</code>

<code class="lineno">19</code> <code class="p">}</code>

<code class="lineno">20</code>

<code class="lineno">21</code> <code class="kd">var</code> <code
class="nx">result</code> <code class="o">=</code> <code
class="nx">sessions</code><code class="p">.</code><code
class="nx">update</code><code class="p">({</code>

<code class="lineno">22</code> <code class="nx">_id</code><code
class="o">:</code> <code class="nx">sessionId</code>

<code class="lineno">23</code> <code class="p">,</code> <code
class="nx">$and</code><code class="o">:</code> <code
class="nx">seatsQuery</code>

<code class="lineno">24</code> <code class="p">},</code> <code class="p">
{</code>

<code class="lineno">25</code> <code class="nx">$set</code><code
class="o">:</code> <code class="nx">setSeatsSelection</code>

<code class="lineno">26</code> <code class="p">,</code> <code
class="nx">$inc</code><code class="o">:</code> <code class="p">{</code>
<code class="nx">seatsAvailable</code><code class="o">:</code> <code
class="o">-</code><code class="nx">seats</code><code class="p">.</code>
<code class="nx">length</code> <code class="p">}</code>

<code class="lineno">27</code> <code class="p">,</code> <code
class="nx">$push</code><code class="o">:</code> <code class="p">{</code>

<code class="lineno">28</code> <code class="nx">reservations</code><code
class="o">:</code> <code class="p">{</code>

<code class="lineno">29</code> <code class="nx">_id</code><code
```

```
class="o">>:</code> <code class="nx">cartId</code>

<code class="lineno">30</code> <code class="p">,</code> <code
class="nx">seats</code><code class="o">>:</code> <code
class="nx">seats</code>

<code class="lineno">31</code> <code class="p">,</code> <code
class="nx">price</code><code class="o">>:</code> <code
class="nx">session</code><code class="p">>.</code><code
class="nx">price</code>

<code class="lineno">32</code> <code class="p">,</code> <code
class="nx">total</code><code class="o">>:</code> <code
class="nx">session</code><code class="p">>.</code><code
class="nx">price</code> <code class="o">>*</code> <code
class="nx">seats</code><code class="p">>.</code><code
class="nx">length</code>

<code class="lineno">33</code> <code class="p">>}</code>

<code class="lineno">34</code> <code class="p">>}</code>

<code class="lineno">35</code> <code class="p">>});</code>

<code class="lineno">36</code>

<code class="lineno">37</code> <code class="c1">// Failed to reserve
seats</code>

<code class="lineno">38</code> <code class="k">if</code><code class="p">
(</code><code class="nx">result</code><code class="p">>.</code><code
class="nx">nModified</code> <code class="o">>==</code> <code
class="mi">>0</code><code class="p">>)</code> <code class="p">>...</code>

<code class="lineno">39</code> <code class="c1">// Reservation was
successful</code>

<code class="lineno">40</code> <code class="k">if</code><code class="p">
(</code><code class="nx">result</code><code class="p">>.</code><code
class="nx">nModified</code> <code class="o">>==</code> <code
```

```
class="mi">1</code><code class="p">)</code> <code class="p">...</code>

<code class="lineno"> 1</code> <code class="nx">sessions</code><code
class="p">.</code><code class="nx">update</code><code class="p">
({</code>

<code class="lineno"> 2</code> <code class="nx">_id</code><code
class="o">:</code> <code class="mi">1</code>

<code class="lineno"> 3</code> <code class="p">,</code> <code
class="nx">$and</code><code class="o">:</code> <code class="p">[ {</code>
<code class="s1">'seats.1.5'</code><code class="o">:</code> <code
class="mi">0</code><code class="p">},</code> <code class="p">{</code>
<code class="s1">'seats.1.6'</code><code class="o">:</code> <code
class="mi">0</code><code class="p">} ]</code>

<code class="lineno"> 4</code> <code class="p">},</code> <code class="p">
{</code>

<code class="lineno"> 5</code> <code class="nx">$set</code><code
class="o">:</code> <code class="p">{</code><code
class="s1">'seats.1.5'</code><code class="o">:</code> <code
class="mi">1</code><code class="p">,</code> <code
class="s1">'seats.1.6'</code><code class="o">:</code> <code
class="mi">1</code><code class="p">} </code>

<code class="lineno"> 6</code> <code class="p">,</code> <code
class="nx">$inc</code><code class="o">:</code> <code class="p">{</code>
<code class="nx">seatsAvailable</code><code class="o">:</code> <code
class="mi">2</code> <code class="p">} </code>

<code class="lineno"> 7</code> <code class="p">,</code> <code
class="nx">$push</code><code class="o">:</code> <code class="p">{</code>

<code class="lineno"> 8</code> <code class="nx">reservations</code><code
class="o">:</code> <code class="p">{</code>

<code class="lineno"> 9</code> <code class="nx">_id</code><code
class="o">:</code> <code class="mi">1</code>
```

```
<code class="lineno">10</code> <code class="p">,</code> <code
class="nx">seats</code><code class="o">:</code> <code class="p">[[</code>
<code class="mi">1</code><code class="p">,</code> <code
class="mi">5</code><code class="p">],</code> <code class="p">[</code>
<code class="mi">1</code><code class="p">,</code> <code
class="mi">6</code><code class="p">]]</code>

<code class="lineno">11</code> <code class="p">,</code> <code
class="nx">price</code><code class="o">:</code> <code
class="mi">10</code>

<code class="lineno">12</code> <code class="p">,</code> <code
class="nx">total</code><code class="o">:</code> <code
class="mi">20</code>

<code class="lineno">13</code> <code class="p">}</code>

<code class="lineno">14</code> <code class="p">}</code>

<code class="lineno">15</code> <code class="p">});</code>

<code class="lineno"> 1</code> <code class="kd">var</code> <code
class="nx">sessionId</code> <code class="o">=</code> <code
class="mi">1</code><code class="p">;</code>

<code class="lineno"> 2</code> <code class="kd">var</code> <code
class="nx">cartId</code> <code class="o">=</code> <code
class="mi">1</code><code class="p">;</code>

<code class="lineno"> 3</code>

<code class="lineno"> 4</code> <code class="kd">var</code> <code
class="nx">seats</code> <code class="o">=</code> <code class="p">
[[</code><code class="mi">1</code><code class="p">,</code> <code
class="mi">5</code><code class="p">],</code> <code class="p">[</code>
<code class="mi">1</code><code class="p">,</code> <code
class="mi">6</code><code class="p">]];</code>

<code class="lineno"> 5</code> <code class="kd">var</code> <code
class="nx">seatsQuery</code> <code class="o">=</code> <code class="p">[];
```

```

</code>

<code class="lineno"> 6</code> <code class="kd">var</code> <code
class="nx">setSeatsSelection</code> <code class="o">=</code> <code
class="p">{};</code>

<code class="lineno"> 7</code>

<code class="lineno"> 8</code> <code class="kd">var</code> <code
class="nx">sessions</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"booking"</code><code class="p">).</code><code
class="nx">sessions</code><code class="p">(;</code>

<code class="lineno"> 9</code> <code class="kd">var</code> <code
class="nx">carts</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"booking"</code><code class="p">).</code><code
class="nx">carts</code><code class="p">(;</code>

<code class="lineno">10</code> <code class="kd">var</code> <code
class="nx">session</code> <code class="o">=</code> <code
class="nx">sessions</code><code class="p">.</code><code
class="nx">find</code><code class="p">({</code><code
class="nx">_id</code><code class="o">:</code> <code
class="nx">sessionId</code><code class="p">});</code>

<code class="lineno">11</code>

<code class="lineno">12</code> <code class="kd">var</code> <code
class="nx">result</code> <code class="o">=</code> <code
class="nx">carts</code><code class="p">.</code><code
class="nx">update</code><code class="p">({</code>

<code class="lineno">13</code> <code class="nx">_id</code><code
class="o">:</code> <code class="nx">cartId</code>

<code class="lineno">14</code> <code class="p">},</code> <code class="p">

```

```
{</code>

<code class="lineno">15</code> <code class="nx">$push</code><code
class="o">:</code> <code class="p">{</code>

<code class="lineno">16</code> <code class="nx">reservations</code><code
class="o">:</code> <code class="p">{</code>

<code class="lineno">17</code> <code class="nx">sessionId</code><code
class="o">:</code> <code class="nx">sessionId</code>

<code class="lineno">18</code> <code class="p">,</code> <code
class="nx">seats</code><code class="o">:</code> <code
class="nx">seats</code>

<code class="lineno">19</code> <code class="p">,</code> <code
class="nx">price</code><code class="o">:</code> <code
class="nx">session</code><code class="p">. </code><code
class="nx">price</code>

<code class="lineno">20</code> <code class="p">,</code> <code
class="nx">total</code><code class="o">:</code> <code
class="nx">session</code><code class="p">. </code><code
class="nx">price</code> <code class="o">*</code> <code
class="nx">seats</code><code class="p">. </code><code
class="nx">length</code>

<code class="lineno">21</code> <code class="p">}</code>

<code class="lineno">22</code> <code class="p">}</code>

<code class="lineno">23</code> <code class="p">,</code> <code
class="nx">$inc</code><code class="o">:</code> <code class="p">{</code>
<code class="nx">total</code><code class="o">:</code> <code
class="nx">session</code><code class="p">. </code><code
class="nx">price</code> <code class="o">*</code> <code
class="nx">seats</code><code class="p">. </code><code
class="nx">length</code> <code class="p">}</code>

<code class="lineno">24</code> <code class="p">,</code> <code
```

```
class="nx">$set</code><code class="o">:</code> <code class="p">{</code>
<code class="nx">modifiedOn</code><code class="o">:</code> <code
class="k">new</code> <code class="nb">Date</code><code class="p">()
</code> <code class="p">}</code>

<code class="lineno">25</code> <code class="p">})</code>

<code class="lineno">26</code>

<code class="lineno">27</code> <code class="c1">// Failed to add reservation
to cart</code>

<code class="lineno">28</code> <code class="k">if</code><code class="p">
(</code><code class="nx">result</code><code class="p">.</code><code
class="nx">nModified</code> <code class="o">==</code> <code
class="mi">0</code><code class="p">)</code> <code class="p">...</code>

<code class="lineno">29</code> <code class="c1">// Successfully added
reservation to cart</code>

<code class="lineno">30</code> <code class="k">if</code><code class="p">
(</code><code class="nx">result</code><code class="p">.</code><code
class="nx">nModified</code> <code class="o">==</code> <code
class="mi">1</code><code class="p">)</code> <code class="p">...</code>

<code class="lineno"> 1</code> <code class="kd">var</code> <code
class="nx">sessionId</code> <code class="o">=</code> <code
class="mi">1</code><code class="p">;</code>

<code class="lineno"> 2</code> <code class="kd">var</code> <code
class="nx">cartId</code> <code class="o">=</code> <code
class="mi">1</code><code class="p">;</code>

<code class="lineno"> 3</code>

<code class="lineno"> 4</code> <code class="kd">var</code> <code
class="nx">seats</code> <code class="o">=</code> <code class="p">
[[</code><code class="mi">1</code><code class="p">,</code> <code
class="mi">5</code><code class="p">],</code> <code class="p">[</code>
<code class="mi">1</code><code class="p">,</code> <code
```

```
class="mi">6</code><code class="p">]];</code>

<code class="lineno"> 5</code> <code class="kd">var</code> <code
class="nx">setSeatsSelection</code> <code class="o">=</code> <code
class="p">{};</code>

<code class="lineno"> 6</code>

<code class="lineno"> 7</code> <code class="k">for</code><code class="p">
(</code><code class="kd">var</code> <code class="nx">i</code> <code
class="o">=</code> <code class="mi">0</code><code class="p">););
<code class="nx">i</code> <code class="o"><</code> <code
class="nx">seats</code><code class="p">.</code><code
class="nx">length</code><code class="p">););
<code class="nx">i</code><code class="o">++</code><code class="p">)</code>
<code class="p">{</code>

<code class="lineno"> 8</code> <code class="nx">setSeatsSelection</code>
<code class="p">[</code><code class="s1">'seats.'</code> <code class="o">+
</code> <code class="nx">seats</code><code class="p">[</code><code class="mi">0</code>
<code class="p">]</code> <code class="o">+</code> <code
class="s1">'.</code> <code class="o">+</code> <code
class="nx">seats</code><code class="p">[</code><code class="nx">i</code>
<code class="p">][</code><code class="mi">1</code><code class="p">]];
</code> <code class="o">=</code> <code class="mi">0</code><code
class="p">);</code>

<code class="lineno"> 9</code> <code class="p">}</code>

<code class="lineno">10</code>

<code class="lineno">11</code> <code class="kd">var</code> <code
class="nx">sessions</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"booking"</code><code class="p">).</code><code
class="nx">sessions</code><code class="p">;</code>

<code class="lineno">12</code> <code class="kd">var</code> <code
```

```
class="nx">result</code> <code class="o">=</code> <code
class="nx">sessions</code><code class="p">.</code><code
class="nx">update</code><code class="p">({</code>

<code class="lineno">13</code> <code class="nx">_id</code><code
class="o">:</code> <code class="nx">sessionId</code>

<code class="lineno">14</code> <code class="p">},</code> <code class="p">
{</code>

<code class="lineno">15</code> <code class="nx">$set</code><code
class="o">:</code> <code class="nx">setSeatsSelection</code>

<code class="lineno">16</code> <code class="p">,</code> <code
class="nx">$pull</code><code class="o">:</code> <code class="p">{</code>
<code class="nx">reservations</code><code class="o">:</code> <code
class="p">{</code> <code class="nx">_id</code><code class="o">:</code>
<code class="nx">cartId</code> <code class="p">}</code> <code class="p">
}</code>

<code class="lineno">17</code> <code class="p">});</code>

<code class="lineno">18</code>

<code class="lineno">19</code> <code class="c1">// Failed to release
reservation</code>

<code class="lineno">20</code> <code class="k">if</code><code class="p">
(</code><code class="nx">result</code><code class="p">.</code><code
class="nx">nModified</code> <code class="o">==</code> <code
class="mi">0</code><code class="p">)</code> <code class="p">...</code>

<code class="lineno">21</code> <code class="c1">// Succeeded in releasing
reservation</code>

<code class="lineno">22</code> <code class="k">if</code><code class="p">
(</code><code class="nx">result</code><code class="p">.</code><code
class="nx">nModified</code> <code class="o">==</code> <code
class="mi">1</code><code class="p">)</code> <code class="p">...</code>
```

```

<code class="lineno"> 1</code> <code class="kd">var</code> <code
class="nx">cartId</code> <code class="o">=</code> <code
class="mi">1</code><code class="p">;</code>

<code class="lineno"> 2</code>

<code class="lineno"> 3</code> <code class="kd">var</code> <code
class="nx">carts</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"booking"</code><code class="p">).</code><code
class="nx">carts</code><code class="p">;</code>

<code class="lineno"> 4</code> <code class="kd">var</code> <code
class="nx">receipts</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"booking"</code><code class="p">).</code><code
class="nx">receipts</code><code class="p">;</code>

<code class="lineno"> 5</code>

<code class="lineno"> 6</code> <code class="kd">var</code> <code
class="nx">cart</code> <code class="o">=</code> <code
class="nx">carts</code><code class="p">.</code><code
class="nx">findOne</code><code class="p">({</code><code
class="nx">_id</code><code class="o">:</code> <code
class="nx">cartId</code><code class="p">});</code>

<code class="lineno"> 7</code>

<code class="lineno"> 8</code> <code class="nx">receipts</code><code
class="p">.</code><code class="nx">insert</code><code class="p">({</code>
<code class="lineno"> 9</code> <code class="nx">createdOn</code><code
class="o">:</code> <code class="k">new</code> <code
class="nb">Date</code><code class="p">()</code>

<code class="lineno">10</code> <code class="p">,</code> <code
class="nx">reservations</code><code class="o">:</code> <code

```

```

class="nx">>cart</code><code class="p">.</code><code
class="nx">>reservations</code>

<code class="lineno">11</code> <code class="p">,</code> <code
class="nx">>total</code><code class="o">:</code> <code
class="nx">>cart</code><code class="p">.</code><code
class="nx">>total</code>

<code class="lineno">12</code> <code class="p">});</code>

<code class="lineno">1</code> <code class="kd">var</code> <code
class="nx">>cartId</code> <code class="o">=</code> <code
class="mi">1</code><code class="p">;</code>

<code class="lineno">2</code>

<code class="lineno">3</code> <code class="kd">var</code> <code
class="nx">>sessions</code> <code class="o">=</code> <code
class="nx">>db</code><code class="p">.</code><code
class="nx">>getSisterDB</code><code class="p">(</code><code
class="s2">"booking"</code><code class="p">).</code><code
class="nx">>sessions</code><code class="p">;</code>

<code class="lineno">4</code> <code class="nx">>session</code><code
class="p">.</code><code class="nx">>update</code><code class="p">
({</code>

<code class="lineno">5</code> <code class="s1">'reservations._id'</code>
<code class="o">:</code> <code class="nx">>cartId</code>

<code class="lineno">6</code> <code class="p">},</code> <code class="p">
{</code>

<code class="lineno">7</code> <code class="nx">>$pull</code><code
class="o">:</code> <code class="p">{</code> <code
class="nx">>reservations</code><code class="o">:</code> <code class="p">
{</code> <code class="nx">>_id</code><code class="o">:</code> <code
class="nx">>id</code> <code class="p">}</code> <code class="p">}</code>

<code class="lineno">8</code> <code class="p">},</code> <code

```

```
class="kc">>false</code><code class="p">,</code> <code
class="kc">>true</code><code class="p">);</code>

<code class="lineno">1</code> <code class="kd">var</code> <code
class="nx">cartId</code> <code class="o">=</code> <code
class="mi">1</code><code class="p">;</code>

<code class="lineno">2</code>

<code class="lineno">3</code> <code class="kd">var</code> <code
class="nx">carts</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"booking"</code><code class="p">).</code><code
class="nx">carts</code><code class="p">;</code>

<code class="lineno">4</code> <code class="nx">carts</code><code
class="p">.</code><code class="nx">update</code><code class="p">
({</code>

<code class="lineno">5</code> <code class="nx">_id</code><code
class="o">:</code> <code class="nx">cartId</code>

<code class="lineno">6</code> <code class="p">},</code> <code class="p">
{</code>

<code class="lineno">7</code> <code class="nx">$set</code><code
class="o">:</code> <code class="p">{</code> <code class="nx">state</code>
<code class="o">:</code> <code class="s1">'done'</code> <code class="p">}</code>

<code class="lineno">8</code> <code class="p">});</code>

<code class="lineno"> 1</code> <code class="kd">var</code> <code
class="nx">cutOffDate</code> <code class="o">=</code> <code
class="k">new</code> <code class="nb">Date</code><code class="p">();</code>

<code class="lineno"> 2</code> <code class="nx">cutOffDate</code><code
class="p">.</code><code class="nx">setMinutes</code><code class="p">
```

```

(</code><code class="nx">cutOffDate</code><code class="p">.</code><code
class="nx">getMinutes</code><code class="p">()</code> <code class="o">-
</code> <code class="mi">30</code><code class="p">);</code>

<code class="lineno"> 3</code>

<code class="lineno"> 4</code> <code class="kd">var</code> <code
class="nx">cartsCol</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"booking"</code><code class="p">).</code><code
class="nx">carts</code><code class="p">;</code>

<code class="lineno"> 5</code> <code class="kd">var</code> <code
class="nx">sessionsCol</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"booking"</code><code class="p">).</code><code
class="nx">sessions</code><code class="p">;</code>

<code class="lineno"> 6</code>

<code class="lineno"> 7</code> <code class="kd">var</code> <code
class="nx">carts</code> <code class="o">=</code> <code
class="nx">cartsCol</code><code class="p">.</code><code
class="nx">find</code><code class="p">({</code>

<code class="lineno"> 8</code> <code class="nx">modifiedOn</code><code
class="o">:</code> <code class="p">{ </code> <code class="nx">$lte</code>
<code class="o">:</code> <code class="nx">cutOffDate</code> <code
class="p">},</code> <code class="nx">state</code><code class="o">:</code>
<code class="s1">'active'</code>

<code class="lineno"> 9</code> <code class="p">});</code>

<code class="lineno">10</code>

<code class="lineno">11</code> <code class="c1">// Process all carts</code>

<code class="lineno">12</code> <code class="k">while</code><code

```

```
class="p">>(</code><code class="nx">carts</code><code class="p">.</code>
<code class="nx">hasNext</code><code class="p">()</code> <code
class="p">{</code>

<code class="lineno">13</code> <code class="kd">var</code> <code
class="nx">cart</code> <code class="o">=</code> <code
class="nx">carts</code><code class="p">.</code><code
class="nx">next</code><code class="p">();</code>

<code class="lineno">14</code>

<code class="lineno">15</code> <code class="c1">// Process all reservations in
the cart</code>

<code class="lineno">16</code> <code class="k">for</code><code class="p">
(</code><code class="kd">var</code> <code class="nx">i</code> <code
class="o">=</code> <code class="mi">0</code><code class="p">;</code>
<code class="nx">i</code> <code class="o"><</code> <code
class="nx">cart</code><code class="p">.</code><code
class="nx">reservations</code><code class="p">.</code><code
class="nx">length</code><code class="p">;</code> <code
class="nx">i</code><code class="o">++</code><code class="p">)</code>
<code class="p">{</code>

<code class="lineno">17</code> <code class="kd">var</code> <code
class="nx">reservation</code> <code class="o">=</code> <code
class="nx">cart</code><code class="p">.</code><code
class="nx">reservations</code><code class="p">[</code><code
class="nx">i</code><code class="p">];</code>

<code class="lineno">18</code> <code class="kd">var</code> <code
class="nx">seats</code> <code class="o">=</code> <code
class="nx">reservation</code><code class="p">.</code><code
class="nx">seats</code><code class="p">;</code>

<code class="lineno">19</code> <code class="kd">var</code> <code
class="nx">setSeatsSelection</code> <code class="o">=</code> <code
class="p">{};</code>

<code class="lineno">20</code>
```

```

<code class="lineno">21</code> <code class="k">for</code><code class="p">
(</code><code class="kd">var</code> <code class="nx">i</code> <code
class="o">=</code> <code class="mi">0</code><code class="p">;</code>
<code class="nx">i</code> <code class="o"><</code> <code
class="nx">seats</code><code class="p">.</code><code
class="nx">length</code><code class="p">.</code> <code
class="nx">i</code><code class="o">++</code><code class="p">)</code>
<code class="p">{</code>

<code class="lineno">22</code> <code class="nx">setSeatsSelection</code>
<code class="p">[</code><code class="s1">'seats.'</code> <code class="o">+
</code> <code class="nx">seats</code><code class="p">[</code><code class="nx">i</code><code class="p">][</code><code class="mi">0</code>
<code class="p">]</code> <code class="o">+</code> <code
class="s1">'.</code> <code class="o">+</code> <code
class="nx">seats</code><code class="p">[</code><code class="nx">i</code>
<code class="p">][</code><code class="mi">1</code><code class="p">]]
</code> <code class="o">\</code>

<code class="lineno">23</code> <code class="o">=</code> <code
class="mi">0</code><code class="p">;</code>

<code class="lineno">24</code> <code class="p">}</code>

<code class="lineno">25</code>

<code class="lineno">26</code> <code class="c1">// Release seats and remove
reservation</code>

<code class="lineno">27</code> <code class="nx">sessionsCol</code><code
class="p">.</code><code class="nx">update</code><code class="p">
({</code>

<code class="lineno">28</code> <code class="nx">_id</code><code
class="o">:</code> <code class="nx">reservation</code><code class="p">.
</code><code class="nx">_id</code>

<code class="lineno">29</code> <code class="p">},</code> <code class="p">
{</code>

```

```
<code class="lineno">30</code> <code class="nx">$set</code><code
class="o">:</code> <code class="nx">setSeatsSelection</code>

<code class="lineno">31</code> <code class="p">,</code> <code
class="nx">$pull</code><code class="o">:</code> <code class="p">{</code>
<code class="nx">reservations</code><code class="o">:</code> <code
class="p">{</code> <code class="nx">_id</code><code class="o">:</code>
<code class="nx">cart</code><code class="p">.</code><code
class="nx">_id</code> <code class="p">}<}</code>

<code class="lineno">32</code> <code class="p">});</code>

<code class="lineno">33</code> <code class="p">}</code>

<code class="lineno">34</code>

<code class="lineno">35</code> <code class="c1">// Set the cart to
expired</code>

<code class="lineno">36</code> <code class="nx">cartsCol</code><code
class="p">.</code><code class="nx">update</code><code class="p">
({</code>

<code class="lineno">37</code> <code class="nx">_id</code><code
class="o">:</code> <code class="nx">cart</code><code class="p">.</code>
<code class="nx">_id</code>

<code class="lineno">38</code> <code class="p">},</code> <code class="p">
{</code>

<code class="lineno">39</code> <code class="nx">$set</code><code
class="o">:</code> <code class="p">{</code> <code class="nx">status</code>
<code class="o">:</code> <code class="s1">'expired'</code> <code
class="p">}</code>

<code class="lineno">40</code> <code class="p">});</code>

<code class="lineno">41</code> <code class="p">}</code>

<code class="lineno">1</code> <code class="kd">var</code> <code
```

```

class="nx">>col</code> <code class="o">=</code> <code
class="nx">>db</code><code class="p">.</code><code
class="nx">>getSisterDB</code><code class="p">(</code><code
class="s2">"booking"</code><code class="p">).</code><code
class="nx">>carts</code><code class="p">;</code>

<code class="lineno">2</code> <code class="nx">>col</code><code
class="p">.</code><code class="nx">>ensureIndex</code><code class="p">
({</code><code class="nx">>state</code><code class="o">:</code><code
class="mi">1</code><code class="p">});</code>

<code class="lineno">1</code> <code class="kd">var</code> <code
class="nx">>col</code> <code class="o">=</code> <code
class="nx">>db</code><code class="p">.</code><code
class="nx">>getSisterDB</code><code class="p">(</code><code
class="s2">"booking"</code><code class="p">).</code><code
class="nx">>sessions</code><code class="p">;</code>

<code class="lineno">2</code> <code class="nx">>col</code><code
class="p">.</code><code class="nx">>ensureIndex</code><code class="p">
({</code><code class="s2">"reservations._id"</code><code class="o">:
</code><code class="mi">1</code><code class="p">});</code>

<code class="kd">var</code> <code class="nx">>admin</code> <code
class="o">=</code> <code class="nx">>db</code><code class="p">.</code>
<code class="nx">>getSisterDB</code><code class="p">(</code><code
class="s2">"admin"</code><code class="p">);</code>

<code class="nx">>db</code><code class="p">.</code><code
class="nx">>runCommand</code><code class="p">({</code><code
class="nx">>enableSharding</code><code class="o">:</code><code
class="s1">'booking'</code><code class="p">});</code>

<code class="nx">>db</code><code class="p">.</code><code
class="nx">>runCommand</code><code class="p">({</code>
<code class="nx">>shardCollection</code><code class="o">:</code> <code
class="s1">'booking.carts'</code>

<code class="p">,</code> <code class="nx">>key</code><code class="o">:

```

```

</code> <code class="p">{</code><code class="nx">_id</code><code
class="o">:</code><code class="s1">'hashed'</code><code class="p">
</code>
<code class="p">});</code>

```

You could also shard the theater and sessions as they are self-contained documents. A good key here would be the hashed _id key.

Performance

A simple exploration of the performance on a single machine with MongoDB 3.0 shows the difference between `MMAP` and `WiredTiger` for a narrow simulation using the schema simulation framework `mongodb-schema-simulator`.

Scenario

https://github.com/christkv/mongodb-schema-simulator/blob/master/examples/scripts/single_or_replset/theater/theater_reserve

MongoDb runs locally on a MacBook Pro Retina 2015 with ssd and 16 gb ram. The simulation runs with the following parameters against a single mongodb instance under osx 10.10 Yosemite.


successfully checkout cart parameters

Parameters

processes	4
poolSize per process	50
type	linear
Resolution in milliseconds	1000
Iterations run	25
Number of users	1000
Number of tickets in each cart	5
Execution strategy	slicetime

MMAP

The MMAP engine is run using the default settings on MongoDB 3.0.1.

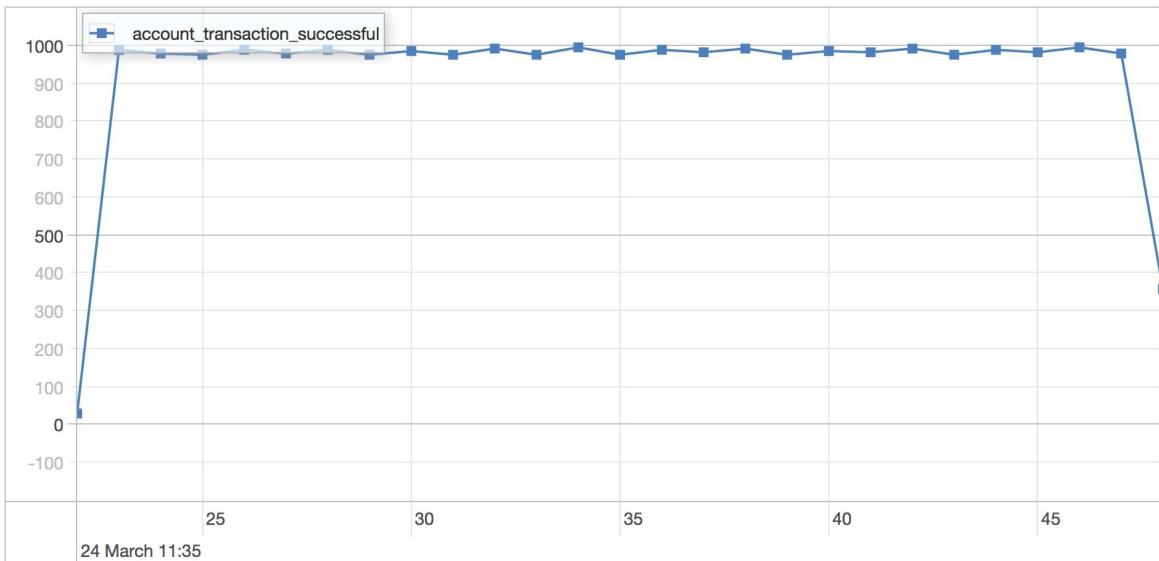

Successfully Checkout Cart


successfully checkout cart

Statistics

Runtime	124.397 seconds
Mean	2292.494 milliseconds
Standard Deviation	1527.972 milliseconds
75 percentile	2916.34 milliseconds
95 percentile	5211.314 milliseconds
99 percentile	7884.857 milliseconds
Minimum	149.741 milliseconds
Maximum	14779.998 milliseconds

WiredTiger

The `WiredTiger` engine is run using the default settings on MongoDB 3.0.1.

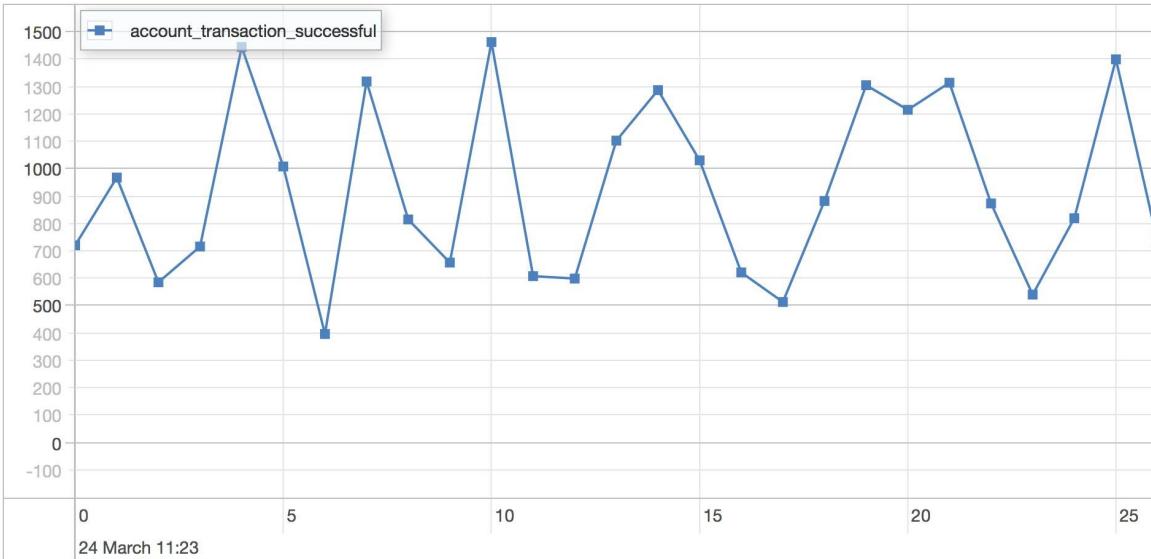

Successfully Checkout Cart

successful cart checkout

Statistics

Runtime	112.994 seconds
Mean	2302.15 milliseconds
Standard Deviation	2052.946 milliseconds
75 percentile	3145.921 milliseconds
95 percentile	6451.251 milliseconds
99 percentile	9608.811 milliseconds
Minimum	19.081 milliseconds
Maximum	17122.854 milliseconds

This is an update heavy schema and this impacts WiredTiger more than MMAP, due to the need to rewrite the full document on each update when using WiredTiger. Also note that the total runtime is higher than the 25 seconds of load we apply, pointing to the fact that the system is overloaded for this hardware configuration.

Notes

The difference here is sizable between the WiredTiger and MMAP storage engines reflecting the cost of rewriting the documents in WiredTiger due to the lack of in

place update support.

Account Transactions



Metadata, courtesy of <http://www.flickr.com/photos/68751915@N05/6629034769>

MongoDB 3.0 supports any notion of a transaction across one or more documents. It does, however, guarantee atomic write operations on single documents. This allows us to implement a Two-Phase commit strategy using

double bookkeeping to simulate transactions. However, it's important to note that due to only single document operations being atomic, MongoDB can only offer transaction-like semantics. It's still possible for applications to return intermediate results during the two-phase commit or rollback.

In this chapter, we will use two collections to simulate a bank account system. The first collection is **accounts** and contains all the customer accounts, while the second one is **transactions** and is our bookkeeping collection. The goal is to transfer 100 from Joe to Peter using a two-phase commit.

Schema Observations

- Simple.
- Requires background processes to manage unfinished transactions.
- Can still cause intermediate results during a two-phase commit or rollback.

Schema

In our simplified schema, we will only keep the basic necessary fields needed to perform the account transaction.

Let's look at an example document representing an account.

```
1 {  
2     "_id": ObjectId("54fd7392742abeff6186a68e")  
3     , "name": "Joe Moneylender"  
4     , "balance": 1000  
5     , "pendingTransactions": []  
6 }
```

Schema Attributes

name	Name of the account owner (name is used for simplicities sake)
balance	The account balance in a magic universal currency.
pendingTransactions	Contains any pending transactions on the account

A transaction document example would look something like.

```
1 {
2     "_id": ObjectId("54fd7392742abeff6186a68e")
3     , "source": "Joe Moneylender"
4     , "destination": "Peter Bum"
5     , "balance": 200
6     , "state": "initial"
7 }
```

Schema Attributes

source	Name of the source bank account
destination	Name of the destination bank account
balance	Contains the amount of the transaction
state	The state of the transaction. Can be one of initial, pending, committed, done and canceled

Operations

Performing a successful Transfer

Create two accounts for Joe and Peter, crediting them each with an initial balance of 1000.

Example 1: Create two accounts

```
1 var col = db.getSiblingDB("bank").accounts;
2 col.insert({name: "Joe Moneylender", balance: 1000, pendingTransactions: []});
3 col.insert({name: "Peter Bum", balance: 1000, pendingTransactions: []});
4
```

We are going perform a transfer from Joe to Peter of 100. We start by creating a new transaction and setting its state to `initial`.

Example 2: Setup initial transaction

```
1 var col = db.getSiblingDB("bank").transactions;
2 col.insert({source: "Joe", destination: "Peter", amount: 100, state: "initial"});
3
```

After successfully creating the initial transaction, we are going to attempt to apply it to both accounts. First we need to flip the transaction state to `pending` in order to signal that we are attempting to apply it to both accounts.

Example 3: Update transaction to pending

```
1 var col = db.getSiblingDB("bank").transactions;
2 var transaction = col.findOne({state: "initial"});
3 col.update({_id: transaction._id}, {$set: {state: "pending"}});
```

Next, we attempt to apply the transaction to the source account. The transaction variable represents the previously created transaction document.

Example 4: Debit source account

```
1 var col = db.getSiblingDB("bank").accounts;
2 col.update({
3     name: transaction.source, pendingTransactions: {$ne: transaction\
4     ._id}, balance: { $gte: amount}
5 }, {
6     $inc: {balance: -transaction.amount}, $push: {pendingTransaction\
7 s: transaction._id}
8});
```

The update will only succeed if the transaction is not already present on the account and there is enough money to cover the attempted transaction (there is no concept of credit in this world).

If the criteria are met, we push the transaction id to the pendingTransactions embedded array and deduct the amount from the account balance.

After applying the transaction successfully to the source account, we credit the destination account with the transfer amount requested.

Example 5: Credit destination account

```
1 var col = db.getSiblingDB("bank").accounts;
2 col.update({
3     name: transaction.destination, pendingTransactions: {$ne: transaction\
4     ._id}, balance: { $gte: amount}
5 }, {
6     $inc: {balance: transaction.amount}, $push: {pendingTransaction\
7 s: transaction._id}
8});
```

As with the source we ensure the transaction does not already exist on the destination account to guard against applying the same transaction multiple times.

Once we have successfully applied the transaction to the source and the destination accounts, our account documents will look something like the

following (the pendingTransactions ObjectId entries will vary).

Example 6: Source account

```
1 {  
2     "_id": ObjectId("54fd7392742abee6186a68e")  
3     , "name": "Joe Moneylender"  
4     , "balance": 900  
5     , "pendingTransactions": [ObjectId("54fd7392742abee6186a68e")]  
6 }
```

Example 7: Destination account

```
1 {  
2     "_id": ObjectId("54fd7392742abee6186a68e")  
3     , "name": "Joe Moneylender"  
4     , "balance": 900  
5     , "pendingTransactions": [ObjectId("54fd7392742abee6186a68e")]  
6 }
```

After having applied the transaction to the account, we need to update the transaction state to committed.

Example 8: Update transaction to committed

```
1 var col = db.getSiblingDB("bank").transactions;  
2 var transaction = col.findOne({state: "pending"});  
3 col.update({_id: transaction._id}, {$set: {state: "committed"}});
```

Once the transaction is in committed state, we need to clean up the source and destination accounts by removing the transaction from both accounts. Let's start by removing it from the source account.

Example 9: Remove the transaction from source account

```
1 var col = db.getSiblingDB("bank").transactions;  
2 col.update({name: transaction.source}, {$pull: {pendingTransactions:\  
3   transaction._id}});
```

After removing it from the source account, we remove it from the destination account.

Example 10: Remove the transaction from destination account

```
1 var col = db.getSiblingDB("bank").transactions;  
2 col.update({name: transaction.destination}, {$pull: {pendingTransactions:\  
3   transaction._id}});
```

Finally, we set the transaction to the done state, signaling the transfer has been completed.

Example 11: Update transaction to done

```
1 var col = db.getSiblingDB("bank").transactions;
2 var transaction = col.findOne({state: "pending"});
3 col.update({_id: transaction._id}, {$set: {state: "done"}});


---


```

That wraps up the successful transfer of an amount between two accounts. Next, we need to look at potential failure scenarios.

Transaction failure between initial and pending

If there is a failure while flipping the transaction state to pending, the recovery process is to set the transaction state to canceled.

Example 12: Cancel transaction

```
1 var col = db.getSiblingDB("bank").transactions;
2 var transaction = col.findOne({state: "initial"});
3 col.update({_id: transaction._id}, {$set: {state: "cancel"}});


---


```

Transaction failure between pending and committed

We have a partially applied transaction, leaving the transaction in an unfinished state. In this case we need to reverse the transaction.

First reverse the debit of the source account.

Example 13: Reverse debit

```
1 var col = db.getSiblingDB("bank").accounts;
2 col.update({
3     name: transaction.source, pendingTransactions: {$in: [transactio\
4 n._id]}
5 }, {
6     $inc: {balance: transaction.amount}, $pull: {pendingTransactions\
7 : transaction._id}
8 });


---


```

Then, reverse the credit to the destination account.

Example 14: Reverse credit

```
1 var col = db.getSiblingDB("bank").accounts;
2 col.update({
3     name: transaction.destination, pendingTransactions: {$in: [transactio\
4 n._id]}
5 }, {
6     $inc: {balance: -transaction.amount}, $pull: {pendingTransactions\
7 : transaction._id}
8 });


---


```

Finally, set the transaction itself to the canceled state.

Example 12: Cancel transaction

```
1 var col = db.getSiblingDB("bank").transactions;
2 var transaction = col.findOne({state: "initial"});
3 col.update({_id: transaction._id}, {$set: {state: "cancel"}});
```

Transaction failure between committed and done

If the transaction fails between the state of committed and done we need to clean up the state of the accounts.

Example 13: Remove the transaction from source account

```
1 var col = db.getSiblingDB("bank").transactions;
2 col.update({name: transaction.source}, {$pull: {pendingTransactions:\n3   transaction._id}});
```

After removing it from the source account remove it from the destination account.

Example 14: Remove the transaction from destination account

```
1 var col = db.getSiblingDB("bank").transactions;
2 col.update({name: transaction.source}, {$pull: {pendingTransactions:\n3   transaction._id}});
```

Finally retry changing the transaction state to done.



Recovery Process

It's helpful to have a process running in the background that will look for any transactions left in pending or committed state. To determine the time a transaction has been sitting in an interrupted state, it might be helpful to add a `createdAt` timestamp to all transaction documents.

Undoing/Rolling back a transaction

For some cases you might need to undo (rollback) a transaction due to the application canceling the transaction or because it cannot be recovered (for example, if the one of the accounts does not exist during the transaction).

There are two points in the two-phase commit we can rollback.

1. If you have applied the transaction to the accounts, you should not rollback. Instead, create a new transaction based on the existing transaction and switch the original source and destination fields.
2. If you have created the transaction but have not yet applied it, you can use the following steps.

First set the transaction state to canceling

Example 15: Set transaction state to canceling

```
1 var col = db.getSiblingDB("bank").transactions;  
2 col.update({_id: transaction._id}, {$set: {state: "canceling"}});
```

Next, let's undo the transaction. Notice that a non-applied transaction means the transaction `_id` has not yet been removed from the `pendingTransactions` array. Let's undo the transaction on the source account.

Example 16: Undo the source account transaction

```
1 var col = db.getSiblingDB("bank").accounts;  
2 col.update({  
3     name: transaction.source, pendingTransactions: transaction._id  
4 }, {  
5     $inc: {balance: transaction.value}, $pull: {pendingTransactions:\  
6 transaction._id}  
7 });
```

Next undo the transaction on the destination account.

Example 17: Undo the destination account transaction

```
1 var col = db.getSiblingDB("bank").accounts;  
2 col.update({  
3     name: transaction.destination, pendingTransactions: transaction.\_id  
4 }, {  
5     $inc: {balance: -transaction.value}, $pull: {pendingTransaction\_id:  
6 transaction._id}  
7 });
```

Finally set the transaction state to canceled

Example 18: Set transaction state to canceled

```
1 var col = db.getSiblingDB("bank").transactions;  
2 col.update({_id: transaction._id}, {$set: {state: "canceled"}});
```

Concurrent Transaction Application

Let's imagine applications A1 and A2 that both start processing the single transaction, T1 while the transaction is still in the initial` state.

1. A1 can apply T1 before A2 starts
2. A2 will then apply T1 again because it does not appear as pending in the accounts documents.

You can avoid this by explicitly stating in the transaction which application is handling it.

Example 19: Ensuring application isolation

```
1 var col = db.getSiblingDB("bank").transactions;
2 col.findAndModify({
3     query: {state: "initial", application: {$exists: 0}}
4     , update: {$set: {state: "pending", application: "A1"}}
5     , new: true});
```

`findAndModify` will retrieve and update the document in one atomic operation. This guarantees that only a single application can tag a transaction that is being processed by it. In this case, a transaction in the `initial` state, is marked as being processed by A1 should the `application` field not exist.

If the transaction fails or needs to be rolled back, you can retrieve the pending transactions for the specific application, A1.

Example 20: Retrieve pending transactions for A1

```
1 var col = db.getSiblingDB("bank").transactions;
2 col.transactions.find({application: "A1", state: "pending"});
```

Indexes

Since we are retrieving transactions by the `_id` field we do not need any additional indexes for the `transactions` collection. For the `accounts` collection we are retrieving the accounts by the `name` field.

Example 21: Create the bank account name index

```
1 var col = db.getSiblingDB("bank").accounts;
2 col.ensureIndex({name:1});
```

If you have processes looking up transactions that are unfinished and are still in the committed or pending states, continuing to either apply the transactions to

the accounts or to roll them back, an additional index on the transaction state field will make retrieval of transactions more efficient.

Example 21: Create the transaction account state index

```
1 var col = db.getSiblingDB("bank").transactions;
2 col.ensureIndex({state:1});
```

Scaling

Secondary Reads

All the operations against the queue are write operations so secondary reads are not useful for this schema.

Sharding

In this case we can shard the accounts collection by the name field and use a hashed index for the field to ensure even distribution across all out shards.

Example 22: Shard by accounts name key

```
var admin = db.getSiblingDB("admin");
db.runCommand({enableSharding: 'bank'});
db.runCommand({
    shardCollection: 'bank.accounts'
    , key: {name: 'hashed'}
});
```

For the transactions collection we will hash the _id field as we are looking up transactions mostly by _id. Looking up the transaction by the state field is a rare case that we can let incur a scatter gather query.

Example 23: Shard by transactions _id key

```
var admin = db.getSiblingDB("admin");
db.runCommand({enableSharding: 'bank'});
db.runCommand({
    shardCollection: 'bank.transactions'
    , key: {_id: 'hashed'}
});
```

Performance

A simple exploration of the performance on a single machine with MongoDb 3.0 shows the difference between MMAP and WiredTiger for a narrow simulation using the schema simulation framework `mongodb-schema-simulator`.

Scenario

https://github.com/christkv/mongodb-schema-simulator/blob/master/examples/scripts/single_or_replset/account/account_100_s


MongoDb runs on a MacBook Pro Retina 2013 with 512 GB ssd and 16 gb ram.
The simulation runs with the following parameters against a single mongodb instance under osx 10.10 Yosemite.

Parameters

processes	4
poolSize per process	50
type	linear
Resolution in milliseconds	1000
Iterations run	25
Number of users querying using metadata per iteration	1000
Execution strategy	slicetime

MMAP

The MMAP engine is run using the default settings on MongoDB 3.0.1.

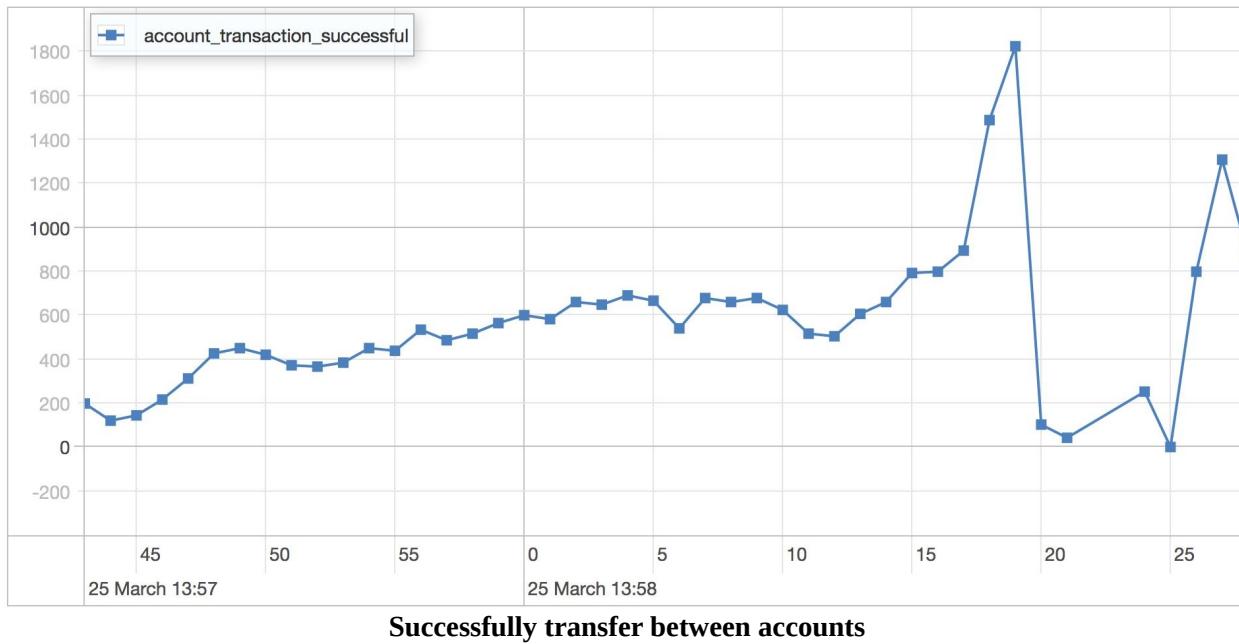


Successfully transfer between accounts

Statistics

Runtime	48.086 seconds
Mean	9951.659 milliseconds
Standard Deviation	7131.847 milliseconds
75 percentile	12220.925 milliseconds
95 percentile	25750.843 milliseconds
99 percentile	34520.997 milliseconds
Minimum	65.398 milliseconds
Maximum	41428.625 milliseconds

WiredTiger

The WiredTiger engine is run using the default settings on MongoDB 3.0.1.

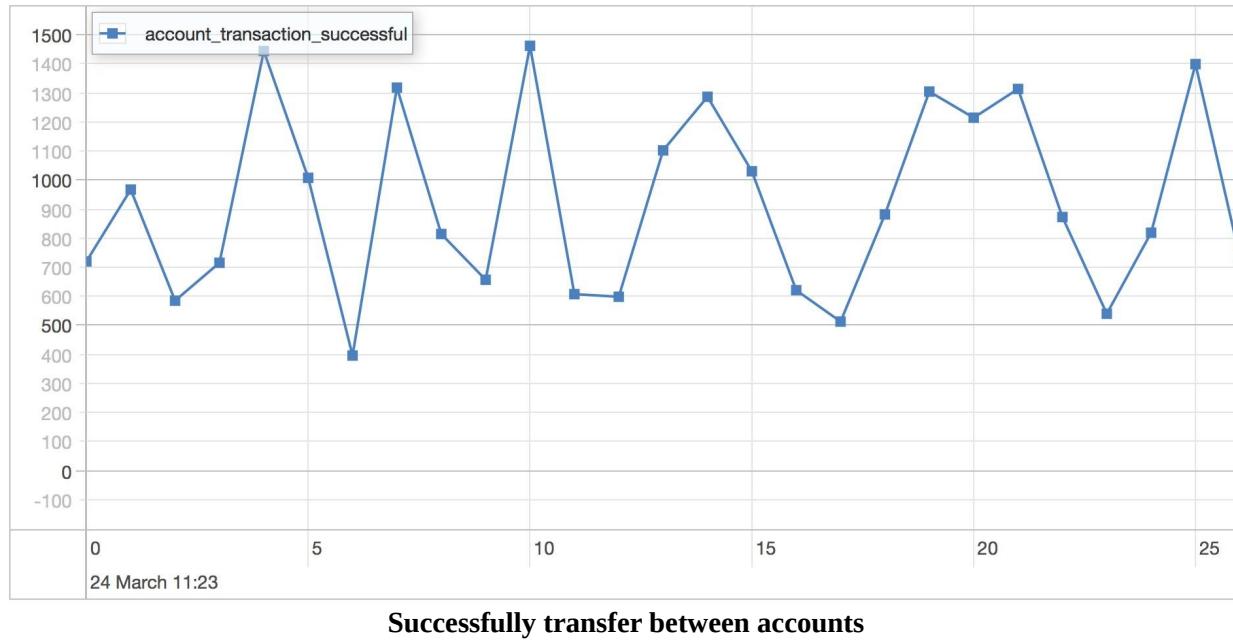

Successfully transfer between accounts

Statistics

Runtime	46.653 seconds
Mean	8655.022 milliseconds
Standard Deviation	5743.181 milliseconds
75 percentile	11037.199 milliseconds
95 percentile	19937.439 milliseconds
99 percentile	29972.029 milliseconds
Minimum	77.812 milliseconds
Maximum	40603.657 milliseconds

The two storage engines MMAP and WiredTiger are fairly close in performance, as the document actually changes are small and thus do not adversely affect WiredTiger performance.

Notes



Notes

Real world applications will likely be more complex and require updating more than just the balance of the accounts. The application might need to update pending credits, pending debits and other details.

If these fields are part of the account document they can still occur within a single update, ensuring an atomic update of all the fields.

```
<code class="p">{</code>

    <code class="s">"page"</code><code class="o">:</code> <code
class="s">"index.htm"</code><code class="p">,</code>

    <code class="s">"timestamp"</code><code class="o">:</code> <code
class="n">ISODate</code><code class="p">(</code><code class="s">"2014-
01-01T10:01:00Z"</code><code class="p">),</code>

    <code class="s">"totalViews"</code><code class="o">:</code> <code
class="mi">0</code><code class="p">,</code>

    <code class="s">"seconds"</code><code class="o">:</code> <code
class="p">{</code>

        <code class="s">"0"</code><code class="o">:</code> <code
class="mi">0</code>

        <code class="p">}</code>

<code class="p">}</code>

<code class="lineno">1</code> <code class="kd">var</code> <code
class="nx">col</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"timeseries"</code><code class="p">).</code><code
class="nx">pageViews</code><code class="p">;</code>

<code class="lineno">2</code> <code class="kd">var</code> <code
class="nx">secondInMinute</code> <code class="o">=</code> <code
class="mi">2</code><code class="p">;</code>

<code class="lineno">3</code> <code class="kd">var</code> <code
class="nx">updateStatement</code> <code class="o">=</code> <code
class="p">{</code><code class="nx">$inc</code><code class="o">:</code>
<code class="p">{}</code>};</code>

<code class="lineno">4</code> <code class="nx">updateStatement</code>
```

```

<code class="p">[</code><code class="s2">"$inc"</code><code class="p">]
[</code><code class="s2">"seconds."</code> <code class="o">+</code>
<code class="nx">secondInMinute</code><code class="p">]</code> <code
class="o">=</code> <code class="mi">1</code><code class="p">;</code>

<code class="lineno">5</code>

<code class="lineno">6</code> <code class="nx">col</code><code
class="p">.</code><code class="nx">update</code><code class="p">
({</code>

<code class="lineno">7</code> <code class="nx">page</code><code
class="o">:</code> <code class="s2">"index.htm"</code><code class="p">,
</code>

<code class="lineno">8</code> <code class="nx">timestamp</code><code
class="o">:</code> <code class="nx">ISODate</code><code class="p">
(</code><code class="s2">"2014-01-01T10:01:00Z"</code><code class="p">)
</code>

<code class="lineno">9</code> <code class="p">},</code> <code
class="nx">updateStatement</code><code class="p">,</code> <code
class="kc">true</code><code class="p">)</code>

<code class="lineno">1</code> <code class="kd">var</code> <code
class="nx">col</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"timeseries"</code><code class="p">).</code><code
class="nx">pageViews</code><code class="p">;</code>

<code class="lineno">2</code> <code class="nx">pageViews</code><code
class="p">.</code><code class="nx">findOne</code><code class="p">
({</code>

<code class="lineno">3</code> <code class="nx">page</code><code
class="o">:</code> <code class="s2">"index.htm"</code><code class="p">,
</code>

<code class="lineno">4</code> <code class="nx">timestamp</code><code

```

```
class="o">>:</code> <code class="nx">ISODate</code><code class="p">
(</code><code class="s2">"2014-01-01T10:01:00Z"</code><code class="p">)
</code>

<code class="lineno">5</code> <code class="p">});</code>

<code class="lineno"> 1</code> <code class="kd">var</code> <code
class="nx">preAllocateHour</code> <code class="o">=</code> <code
class="kd">function</code><code class="p">(</code><code
class="nx">coll</code><code class="p">, </code> <code
class="nx">pageName</code><code class="p">, </code> <code
class="nx">timestamp</code><code class="p">)</code> <code class="p">
{</code>

<code class="lineno"> 2</code> <code class="k">for</code><code class="p">
(</code><code class="kd">var</code> <code class="nx">i</code> <code
class="o">=</code> <code class="mi">0</code><code class="p">;</code>
<code class="nx">i</code> <code class="o"><</code> <code
class="mi">60</code><code class="p">;</code> <code class="nx">i</code>
<code class="o">++</code><code class="p">)</code> <code class="p">
{</code>

<code class="lineno"> 3</code> <code class="nx">coll</code><code
class="p">.</code><code class="nx">insert</code><code class="p">({</code>

<code class="lineno"> 4</code> <code class="s2">"page"</code><code
class="o">:</code> <code class="nx">pageName</code><code class="p">,
</code>

<code class="lineno"> 5</code> <code class="s2">"timestamp"</code> <code
class="o">:</code> <code class="nx">timestamp</code><code class="p">,
</code>

<code class="lineno"> 6</code> <code class="s2">"seconds"</code> <code
class="o">:</code> <code class="p">{</code>

<code class="lineno"> 7</code> <code class="s2">"0"</code><code
class="o">:</code><code class="mi">0</code><code class="p">;</code><code
class="s2">"1"</code><code class="o">:</code><code class="mi">0</code>
<code class="p">;</code><code class="s2">"2"</code><code class="o">:
```



```
<code class="lineno">21</code> <code class="nx">timestamp</code><code
class="p">.</code><code class="nx">setMinutes</code><code class="p">
(</code><code class="nx">timestamp</code><code class="p">.</code><code
class="nx">getMinutes</code><code class="p">()</code> <code class="o">+
</code> <code class="mi">1</code><code class="p">);</code>

<code class="lineno">22</code> <code class="p">}</code>

<code class="lineno">23</code> <code class="p">}</code>

<code class="lineno">1</code> <code class="kd">var</code> <code
class="nx">col</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"analytics"</code><code class="p">).</code><code
class="nx">pageViews</code><code class="p">;</code>

<code class="lineno">2</code> <code class="nx">preAllocateHour</code>
<code class="p">(</code><code class="nx">col</code><code class="p">,
</code> <code class="s2">"index.htm"</code><code class="p">,</code> <code
class="nx">ISODate</code><code class="p">(</code><code
class="s2">"2014-01-01T10:00:00Z"</code><code class="p">));</code>

<code class="lineno">1</code> <code class="kd">var</code> <code
class="nx">col</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"analytics"</code><code class="p">).</code><code
class="nx">pageViews</code><code class="p">;</code>

<code class="lineno">2</code> <code class="nx">col</code><code
class="p">.</code><code class="nx">find</code><code class="p">({</code>
<code class="nx">timestamp</code><code class="o">:</code> <code
class="p">{</code><code class="nx">$gte</code><code class="o">:</code>
<code class="nx">ISODate</code><code class="p">(</code><code
class="s2">"2014-01-01T10:00:00Z"</code><code class="p">)},</code><code
class="nx">timesta</code><code class="o">|\</code>

<code class="lineno">3</code> <code class="nx">mp</code><code
class="o">:</code> <code class="p">{</code><code class="nx">$lt</code>
```

```
<code class="o">:</code> <code class="nx">ISODate</code><code class="p">(</code><code class="s2">"2014-01-01T11:00:00Z"</code><code class="p">}</code> <code class="p">}.</code><code class="nx">count</code><code class="p">()</code>

<code class="lineno">1</code> <code class="kd">var</code> <code class="nx">col</code> <code class="o">=</code> <code class="nx">db</code><code class="p">.</code><code class="nx">getSisterDB</code><code class="p">(</code><code class="s2">"timeseries"</code><code class="p">).</code><code class="nx">pageViews</code><code class="p">;</code>

<code class="lineno">2</code> <code class="nx">col</code><code class="p">.</code><code class="nx">ensureIndex</code><code class="p">({</code><code class="nx">page</code><code class="o">:</code><code class="mi">1</code><code class="p">,</code> <code class="nx">tstamp</code><code class="o">:</code> <code class="mi">1</code><code class="p">});</code>

<code class="kd">var</code> <code class="nx">admin</code> <code class="o">=</code> <code class="nx">db</code><code class="p">.</code><code class="nx">getSisterDB</code><code class="p">(</code><code class="s2">"admin"</code><code class="p">);</code>

<code class="nx">db</code><code class="p">.</code><code class="nx">runCommand</code><code class="p">({</code><code class="nx">enableSharding</code><code class="o">:</code><code class="s1">'timeseries'</code><code class="p">});</code>

<code class="nx">db</code><code class="p">.</code><code class="nx">runCommand</code><code class="p">({</code>
<code class="nx">shardCollection</code><code class="o">:</code> <code class="s1">'timeseries.pageViews'</code>
<code class="p">,</code> <code class="nx">key</code><code class="o">:</code> <code class="p">{</code><code class="nx">page</code><code class="o">:</code><code class="mi">1</code><code class="p">,</code> <code class="nx">tstamp</code><code class="o">:</code><code class="mi">1</code><code class="p">}</code>
```

```
<code class="p">});</code>
```

The benefit of using this shard key is that we can still aggregate all the values for a specific page on one shard without forcing a scatter-gather query.

Performance

A simple exploration of the performance on a single machine with MongoDb 3.0 shows the difference between `MMAP` and `WiredTiger` for a narrow simulation using the schema simulation framework `mongodb-schema-simulator`.

Scenario

https://github.com/christkv/mongodb-schema-simulator/blob/master/examples/scripts/single_or_replset/timeseries/exercise_tin


MongoDb runs locally on a MacBook Pro Retina 2015 with ssd and 16 gb ram. The simulation runs with the following parameters against a single `mongodb` instance under `osx 10.10 Yosemite`.

Parameters

processes	4
poolSize per process	50
type	linear
Resolution in milliseconds	1000
Iterations run	25
Number of users updating timeseries per iteration	1000
Execution strategy	slicetime

MMAP

The `MMAP` engine is run using the default settings on MongoDB 3.0.1.

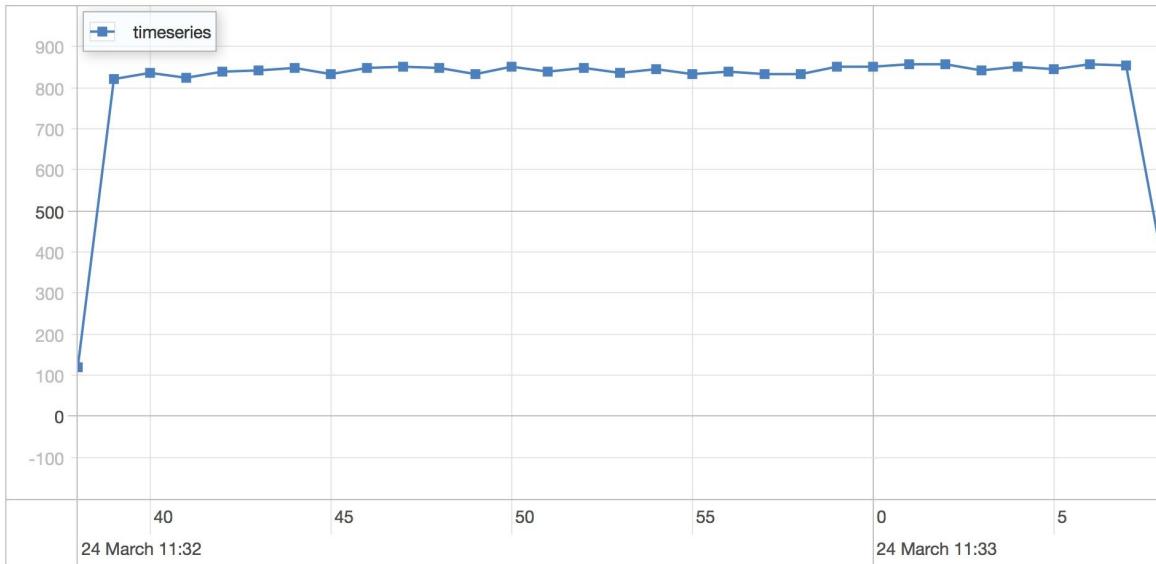

Timeseries Simulation

timeseries scenario results


Statistics

Runtime	30.253 seconds
Mean	1.06 milliseconds
Standard Deviation	1.588 milliseconds
75 percentile	1.246 milliseconds
95 percentile	1.502 milliseconds
99 percentile	1.815 milliseconds
Minimum	0.448 milliseconds
Maximum	57.48 milliseconds

Notice that the 2000 users per second impacts the minimum and maximum as well as the average query time quite a bit.

WiredTiger

The `WiredTiger` engine is run using the default settings on MongoDB 3.0.1.

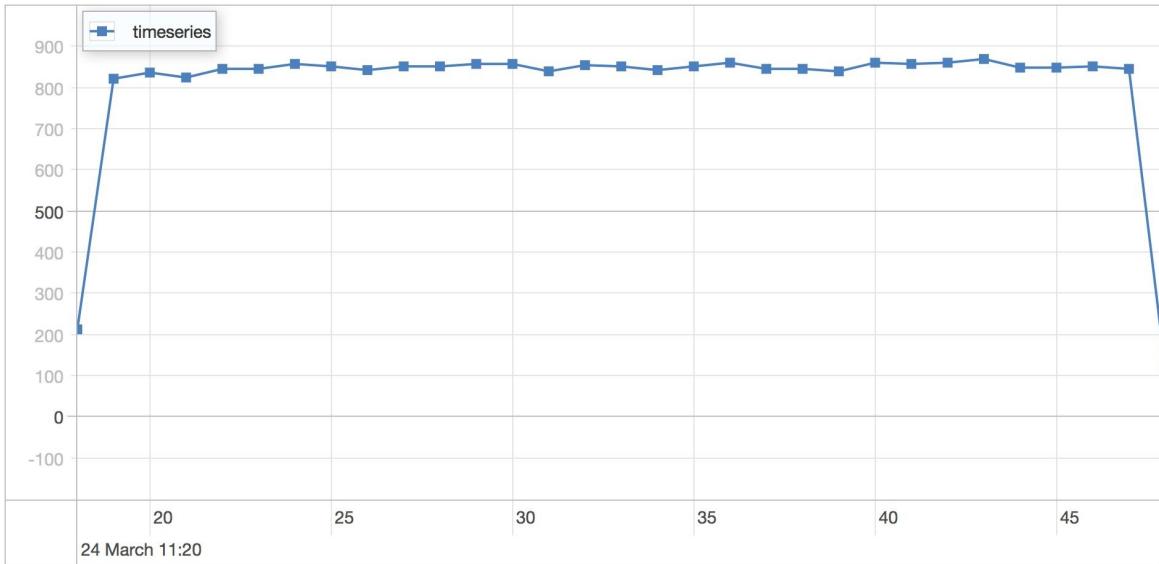

Timeseries Simulation

metadata scenario results

Statistics

Runtime	30.08 seconds
Mean	1.108 milliseconds
Standard Deviation	0.401 milliseconds
75 percentile	1.341 milliseconds
95 percentile	1.871 milliseconds
99 percentile	2.477 milliseconds
Minimum	0.513 milliseconds
Maximum	5.481 milliseconds

As expected there is not much difference between the `MMAP` and `WiredTiger` storage engines when it's a read only workload.

Notes

Preallocating documents helps MongoDB minimize the document moves in memory, reduce disk IO, and lower fragmentation on disk and in memory. This is especially true for the `MMAP` storage engine.


```
[</code> <code class="mi">89</code><code class="p">,</code> <code class="mi">90</code><code class="p">,</code> <code class="mi">100</code> <code class="p">]</code>

<code class="lineno"> 1</code> <code class="p">{</code>

<code class="lineno"> 2</code> <code class="s2">"_id"</code><code class="o">:</code> <code class="nx">ObjectId</code><code class="p">(</code><code class="s2">"54fd7392742abeef6186a68e"</code><code class="p">)</code>

<code class="lineno"> 3</code> <code class="p">,</code> <code class="s2">"blogId"</code><code class="o">:</code> <code class="nx">ObjectId</code><code class="p">(</code><code class="s2">"54fd7392742abeef6186a68e"</code><code class="p">)</code>

<code class="lineno"> 4</code> <code class="p">,</code> <code class="s2">"createdOn"</code><code class="o">:</code> <code class="nx">ISODate</code><code class="p">(</code><code class="s2">"2015-03-11T12:03:42.615Z"</code><code class="p">)</code>

<code class="lineno"> 5</code> <code class="p">,</code> <code class="s2">"publishedOn"</code><code class="o">:</code> <code class="nx">ISODate</code><code class="p">(</code><code class="s2">"2015-03-11T12:03:42.615Z"</code><code class="p">)</code>

<code class="lineno"> 6</code> <code class="p">,</code> <code class="s2">"title"</code><code class="o">:</code> <code class="s2">"Awesome blog post"</code>

<code class="lineno"> 7</code> <code class="p">,</code> <code class="s2">"content"</code><code class="o">:</code> <code class="s2">"Testing this blog software"</code>

<code class="lineno"> 8</code> <code class="p">,</code> <code class="s2">"latestComments"</code><code class="o">:</code> <code class="p">[<code>

<code class="lineno"> 9</code> <code class="s2">"_id"</code><code class="o">:</code> <code class="nx">ObjectId</code><code class="p">
```

```
(</code><code class="s2">"54fd7392742abeef6186a68e"</code><code class="p">)</code>

<code class="lineno">10</code> <code class="p">,</code> <code class="s2">"publishedOn"</code><code class="o">:</code> <code class="nx">ISODate</code><code class="p">(</code><code class="s2">"2015-03-11T12:03:42.615Z"</code><code class="p">)</code>

<code class="lineno">11</code> <code class="p">,</code> <code class="s2">"message"</code><code class="o">:</code> <code class="s2">"Awesome post"</code>

<code class="lineno">12</code> <code class="p">}]</code>

<code class="lineno">13</code> <code class="p">}</code>

<code class="lineno">1</code> <code class="p">{</code>

<code class="lineno">2</code> <code class="s2">"_id"</code><code class="o">:</code> <code class="nx">ObjectId</code><code class="p">(</code><code class="s2">"54fd7392742abeef6186a68e"</code><code class="p">)</code>

<code class="lineno">3</code> <code class="p">,</code> <code class="s2">"postId"</code><code class="o">:</code> <code class="nx">ObjectId</code><code class="p">(</code><code class="s2">"54fd7392742abeef6186a68e"</code><code class="p">)</code>

<code class="lineno">4</code> <code class="p">,</code> <code class="s2">"publishedOn"</code><code class="o">:</code> <code class="nx">ISODate</code><code class="p">(</code><code class="s2">"2015-03-11T12:03:42.615Z"</code><code class="p">)</code>

<code class="lineno">5</code> <code class="p">,</code> <code class="s2">"message"</code><code class="o">:</code> <code class="s2">"Awesome post"</code>

<code class="lineno">6</code> <code class="p">}</code>

<code class="lineno">1</code> <code class="kd">var</code> <code
```

```
class="nx">>postId</code> <code class="o">=</code> <code
class="mi">1</code><code class="p">;</code>

<code class="lineno"> 2</code> <code class="kd">var</code> <code
class="nx">>posts</code> <code class="o">=</code> <code
class="nx">>db</code><code class="p">.</code><code
class="nx">>getSisterDB</code><code class="p">(</code><code
class="s2">"blog"</code><code class="p">).</code><code
class="nx">>posts</code><code class="p">;</code>

<code class="lineno"> 3</code> <code class="kd">var</code> <code
class="nx">>comments</code> <code class="o">=</code> <code
class="nx">>db</code><code class="p">.</code><code
class="nx">>getSisterDB</code><code class="p">(</code><code
class="s2">"blog"</code><code class="p">).</code><code
class="nx">>comments</code><code class="p">;</code>

<code class="lineno"> 4</code>

<code class="lineno"> 5</code> <code class="kd">var</code> <code
class="nx">>comment</code> <code class="o">=</code> <code class="p">
{</code>

<code class="lineno"> 6</code> <code class="s2">"_id"</code><code
class="o">:</code> <code class="nx">>ObjectId</code><code class="p">
(</code><code class="s2">"54fd7392742abeef6186a68e"</code><code
class="p">)</code>

<code class="lineno"> 7</code> <code class="p">,</code> <code
class="s2">"postId"</code><code class="o">:</code> <code
class="nx">>postId</code>

<code class="lineno"> 8</code> <code class="p">,</code> <code
class="s2">"publishedOn"</code><code class="o">:</code> <code
class="nx">>ISODate</code><code class="p">(</code><code
class="s2">"2015-03-11T12:03:42.615Z"</code><code class="p">)</code>

<code class="lineno"> 9</code> <code class="p">,</code> <code
class="s2">"message"</code><code class="o">:</code> <code
class="s2">"Awesome post"</code>
```

```
<code class="lineno">10</code> <code class="p">};</code>

<code class="lineno">11</code>

<code class="lineno">12</code> <code class="nx">comments</code><code
class="p">.</code><code class="nx">insert</code><code class="p">(</code>
<code class="nx">comment</code><code class="p">);</code>

<code class="lineno">13</code>

<code class="lineno">14</code> <code class="nx">posts</code><code
class="p">.</code><code class="nx">update</code><code class="p">
({</code>

<code class="lineno">15</code> <code class="s2">"_id"</code><code
class="o">:</code> <code class="nx">postId</code>

<code class="lineno">16</code> <code class="p">},</code> <code class="p">
{</code>

<code class="lineno">17</code> <code class="nx">latestComments</code>
<code class="o">:</code> <code class="p">{</code>

<code class="lineno">18</code> <code class="nx">$each</code><code
class="o">:</code> <code class="p">[</code><code
class="nx">comment</code><code class="p">]</code>

<code class="lineno">19</code> <code class="p">,</code> <code
class="nx">$slice</code><code class="o">:</code> <code class="o">-</code>
<code class="mi">10</code>

<code class="lineno">20</code> <code class="p">}</code>

<code class="lineno">21</code> <code class="p">});</code>

<code class="kd">var</code> <code class="nx">admin</code> <code
class="o">=</code> <code class="nx">db</code><code class="p">.</code>
<code class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"admin"</code><code class="p">);</code>
```

```
<code class="nx">db</code><code class="p">.</code><code
class="nx">runCommand</code><code class="p">({</code><code
class="nx">enableSharding</code><code class="o">:</code><code
class="s1">'blogs'</code><code class="p">});</code>

<code class="nx">db</code><code class="p">.</code><code
class="nx">runCommand</code><code class="p">({</code>
<code class="nx">shardCollection</code><code class="o">:</code> <code
class="s1">'blogs.posts'</code>

<code class="p">,</code> <code class="nx">key</code><code class="o">:
</code> <code class="p">{</code><code class="nx">blogId</code><code
class="o">:</code><code class="mi">1</code><code class="p">,</code>
<code class="nx">_id</code><code class="o">:</code><code
class="mi">1</code><code class="p">}</code>

<code class="p">});</code>

<code class="kd">var</code> <code class="nx">admin</code> <code
class="o">=</code> <code class="nx">db</code><code class="p">.</code>
<code class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"admin"</code><code class="p">);</code>

<code class="nx">db</code><code class="p">.</code><code
class="nx">runCommand</code><code class="p">({</code><code
class="nx">enableSharding</code><code class="o">:</code><code
class="s1">'blogs'</code><code class="p">});</code>

<code class="nx">db</code><code class="p">.</code><code
class="nx">runCommand</code><code class="p">({</code>
<code class="nx">shardCollection</code><code class="o">:</code> <code
class="s1">'blogs.comments'</code>

<code class="p">,</code> <code class="nx">key</code><code class="o">:
</code> <code class="p">{</code><code class="nx">postId</code><code
class="o">:</code><code class="mi">1</code><code class="p">,</code>
<code class="nx">_id</code><code class="o">:</code><code
class="mi">1</code><code class="p">}</code>
```

```
<code class="p">});</code>
```

Performance

Performance is good here as the `$slice` update operator ensures we do mostly in place updates. In the case of the blog example, we might get more document moves as the size of `latestComments` might change due to different comment sizes. In cases where we use uniform sized documents, we will not incur any additional document moves.

T Preallocate T T If we have uniform sized documents to be inserted into the document level line cache we can avoid document moves by pre-allocating the embedded document by filling it with empty documents of the expected size, meaning the document will not be moved around once we start pushing documents into the cache.

A simple exploration of the performance on a single machine with MongoDB 3.0 shows the difference between `MMAP` and `WiredTiger` for a narrow simulation using the schema simulation framework `mongodb-schema-simulator`.

Scenario

https://github.com/christkv/mongodb-schema-simulator/blob/master/examples/scripts/single_or_replset/array_slice/cache_slice
https://github.com/christkv/mongodb-schema-simulator/blob/master/examples/scripts/single_or_replset/array_slice/pre_allocate

MongoDb runs locally on a MacBook Pro Retina 2015 with ssd and 16 gb ram. The simulation runs with the following parameters against a single mongodb instance under osx 10.10 Yosemite.

Preallocated slice cache

Parameters

processes	4
poolSize per process	50
type	linear
Resolution in milliseconds	1000

Iterations run	25
Number of users	1000
Execution strategy	slicetime


Slice cache no pre-allocation

Parameters

processes	4
poolSize per process	50
type	linear
Resolution in milliseconds	1000
Iterations run	25
Number of users	1000
Execution strategy	slicetime

MMAP

The MMAP engine is run using the default settings on MongoDB 3.0.1.

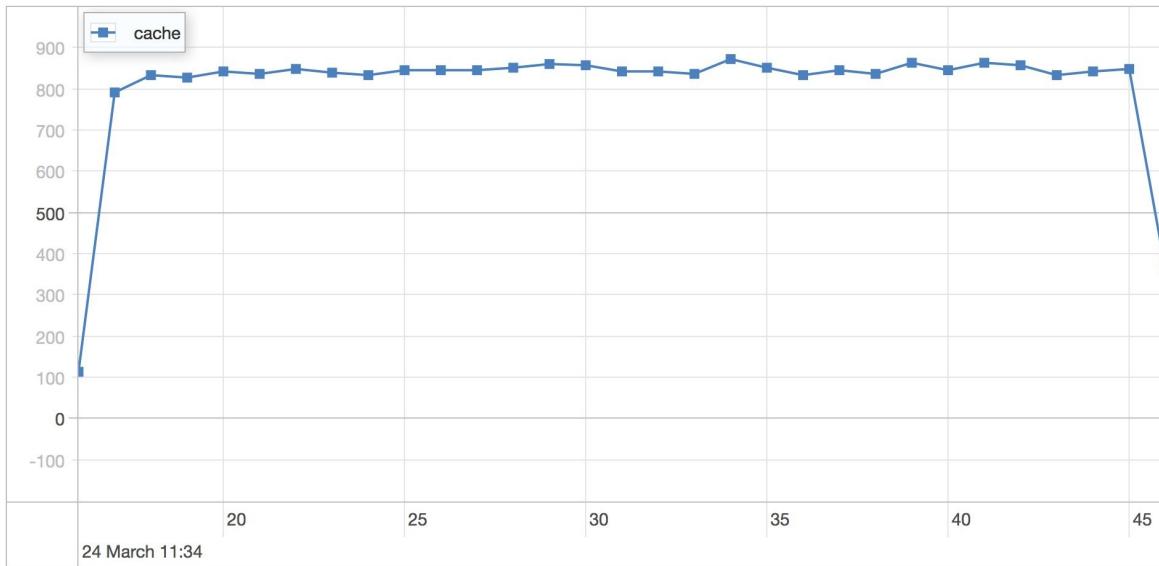


Preallocated cache

Preallocated slice cache

Statistics

Runtime	30.98 seconds
Mean	0.668 milliseconds
Standard Deviation	0.163 milliseconds
75 percentile	0.715 milliseconds
95 percentile	0.874 milliseconds
99 percentile	1.155 milliseconds
Minimum	0.361 milliseconds
Maximum	5.799 milliseconds

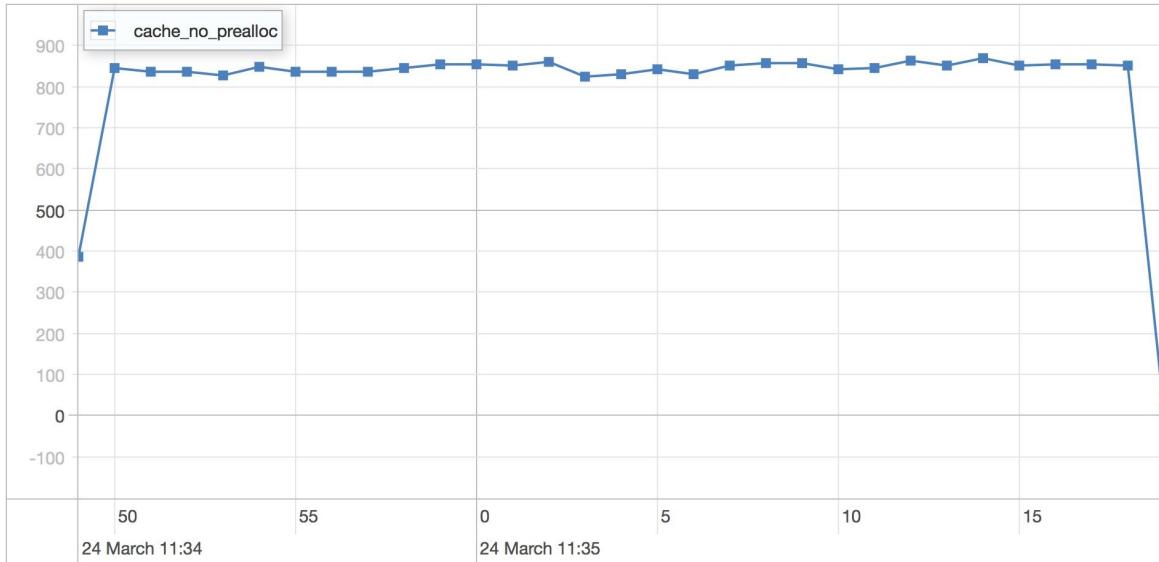

Slice cache no pre-allocation


Slice cache no pre-allocation

Statistics

Runtime	30.507 seconds
Mean	0.663 milliseconds
Standard Deviation	0.155 milliseconds
75 percentile	0.715 milliseconds
95 percentile	0.86 milliseconds
99 percentile	1.088 milliseconds
Minimum	0.365 milliseconds
Maximum	8.494 milliseconds

WiredTiger

The WiredTiger engine is run using the default settings on MongoDB 3.0.1.

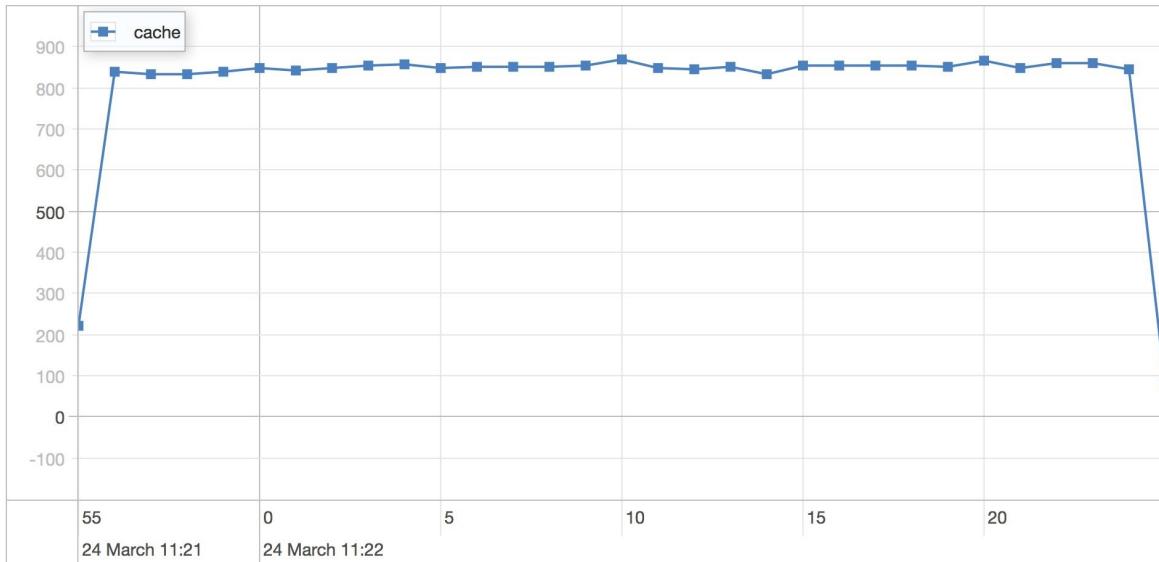


Preallocated cache

Preallocated slice cache

Statistics

Runtime	30.606 seconds
Mean	0.756 milliseconds
Standard Deviation	0.199 milliseconds
75 percentile	0.812 milliseconds
95 percentile	1.085 milliseconds
99 percentile	1.418 milliseconds
Minimum	0.408 milliseconds
Maximum	5.627 milliseconds

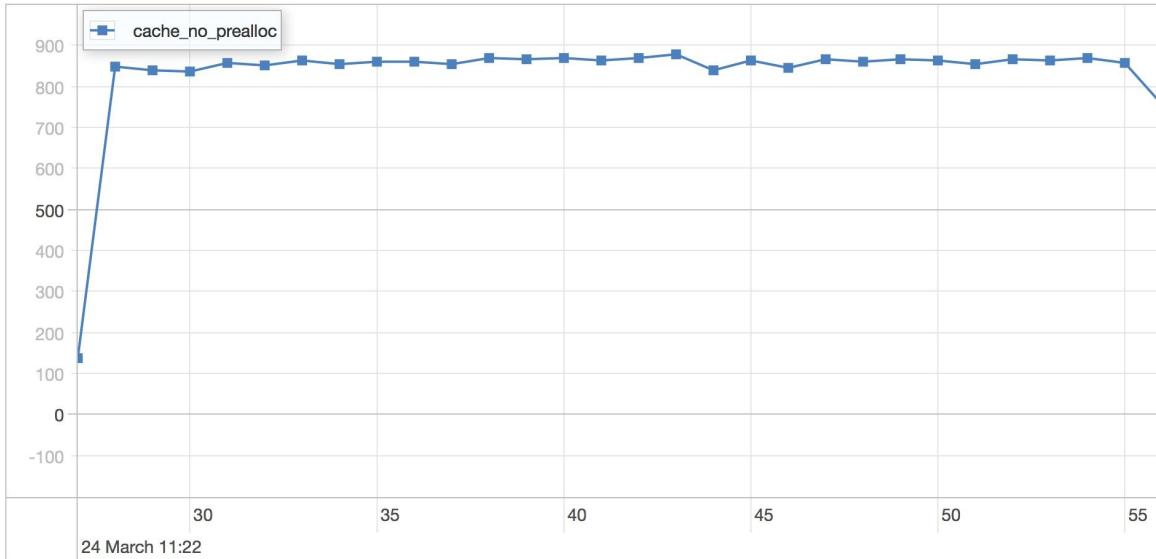

Slice cache no pre-allocation

Slice cache no pre-allocation

Statistics

Runtime	30.033 seconds
Mean	1.012 milliseconds
Standard Deviation	0.4 milliseconds
75 percentile	1.234 milliseconds
95 percentile	1.783 milliseconds
99 percentile	2.185 milliseconds
Minimum	0.417 milliseconds
Maximum	8.582 milliseconds

The variance between MMAP and WiredTiger is minor in both cases. The small difference between pre-allocation and no pre-allocation is mostly due to the fact that we have a uniform object size in this test. If the cache document size is fairly big, it will impact WiredTiger since it needs to rewrite more data on each update.

Notes

This is an effective way cache results in the main document without incurring the side effects of unbound growing embedded documents. It's a strategy that is

useful when you wish to optimize for single document reads for specific web or application views. In this specific example, we can imagine a web page view showing a blog post with its ten latest comments.

```
<code class="lineno">1</code> <code class="p">{</code>

<code class="lineno">2</code> <code class="s2">"_id"</code> <code
class="o">:</code> <code class="mi">1</code>

<code class="lineno">3</code> <code class="p">,</code> <code
class="s2">"names"</code> <code class="o">:</code> <code class="p">
{</code>

<code class="lineno">4</code> <code class="s2">"en-us"</code> <code
class="o">:</code> <code class="s2">"car"</code>

<code class="lineno">5</code> <code class="p">}</code>

<code class="lineno">6</code> <code class="p">}</code>

<code class="lineno"> 1</code> <code class="p">{</code>

<code class="lineno"> 2</code> <code class="s2">"_id"</code> <code
class="o">:</code> <code class="mi">1</code>

<code class="lineno"> 3</code> <code class="p">,</code> <code
class="s2">"name"</code> <code class="o">:</code> <code class="s2">"car"
</code>

<code class="lineno"> 4</code> <code class="p">,</code> <code
class="s2">"cost"</code> <code class="o">:</code> <code
class="mi">100</code>

<code class="lineno"> 5</code> <code class="p">,</code> <code
class="s2">"currency"</code> <code class="o">:</code> <code
class="s2">"usd"</code>

<code class="lineno"> 6</code> <code class="p">,</code> <code
class="s2">"categories"</code> <code class="o">:</code> <code class="p">
[</code>

<code class="lineno"> 7</code> <code class="s2">"_id"</code> <code
class="o">:</code> <code class="mi">1</code>
```

```
<code class="lineno"> 8</code> <code class="p">,</code> <code
class="s2">"names"</code> <code class="o">:</code> <code class="p">
{</code> <code class="s2">"en-us"</code> <code class="o">:</code> <code
class="s2">"car"</code> <code class="p">}</code>

<code class="lineno"> 9</code> <code class="p">}</code> <code class="p">]
</code>

<code class="lineno">10</code> <code class="p">}</code>

<code class="lineno"> 1</code> <code class="kd">var</code> <code
class="nx">categoryId</code> <code class="o">=</code> <code
class="mi">1</code><code class="p">;</code>

<code class="lineno"> 2</code>

<code class="lineno"> 3</code> <code class="kd">var</code> <code
class="nx">categories</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"shop"</code><code class="p">).</code><code
class="nx">categories</code><code class="p">;</code>

<code class="lineno"> 4</code> <code class="kd">var</code> <code
class="nx">products</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"shop"</code><code class="p">).</code><code
class="nx">products</code><code class="p">;</code>

<code class="lineno"> 5</code>

<code class="lineno"> 6</code> <code class="nx">categories</code><code
class="p">.</code><code class="nx">update</code><code class="p">
({</code>

<code class="lineno"> 7</code> <code class="nx">_id</code><code
class="o">:</code> <code class="nx">categoryId</code>

<code class="lineno"> 8</code> <code class="p">},</code> <code class="p">
```

```
{</code>

<code class="lineno">9</code> <code class="nx">$set</code><code
class="o">:</code> <code class="p">{</code>

<code class="lineno">10</code> <code class="s2">"categories.$.names.de-de"
</code><code class="o">:</code> <code class="s1">'auto'</code>

<code class="lineno">11</code> <code class="p">}</code>

<code class="lineno">12</code> <code class="p">});</code>

<code class="lineno">13</code>

<code class="lineno">14</code> <code class="nx">products</code><code
class="p">.</code><code class="nx">update</code><code class="p">
({</code>

<code class="lineno">15</code> <code class="s2">"categories._id"</code>
<code class="o">:</code> <code class="nx">categoryId</code>

<code class="lineno">16</code> <code class="p">},</code> <code class="p">
{</code>

<code class="lineno">17</code> <code class="nx">$set</code><code
class="o">:</code> <code class="p">{</code>

<code class="lineno">18</code> <code class="s2">"categories.$.names.de-de"
</code><code class="o">:</code> <code class="s1">'auto'</code>

<code class="lineno">19</code> <code class="p">}</code>

<code class="lineno">20</code> <code class="p">});</code>

<code class="lineno">1</code> <code class="kd">var</code> <code
class="nx">categoryId</code> <code class="o">=</code> <code
class="mi">1</code><code class="p">;</code>

<code class="lineno">2</code>

<code class="lineno">3</code> <code class="kd">var</code> <code
```

```
class="nx">categories</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"shop"</code><code class="p">).</code><code
class="nx">categories</code><code class="p">;</code>

<code class="lineno"> 4</code> <code class="kd">var</code> <code
class="nx">products</code> <code class="o">=</code> <code
class="nx">db</code><code class="p">.</code><code
class="nx">getSisterDB</code><code class="p">(</code><code
class="s2">"shop"</code><code class="p">).</code><code
class="nx">products</code><code class="p">;</code>

<code class="lineno"> 5</code>

<code class="lineno"> 6</code> <code class="nx">categories</code><code
class="p">.</code><code class="nx">update</code><code class="p">
({</code>

<code class="lineno"> 7</code> <code class="nx">_id</code><code
class="o">:</code> <code class="nx">categoryId</code>

<code class="lineno"> 8</code> <code class="p">},</code> <code class="p">
{</code>

<code class="lineno"> 9</code> <code class="nx">$unset</code><code
class="o">:</code> <code class="p">{</code>

<code class="lineno">10</code> <code class="s2">"categories.$.names.de-de"
</code><code class="o">:</code> <code class="s1">'auto'</code>

<code class="lineno">11</code> <code class="p">}</code>

<code class="lineno">12</code> <code class="p">});</code>

<code class="lineno">13</code>

<code class="lineno">14</code> <code class="nx">products</code><code
class="p">.</code><code class="nx">update</code><code class="p">
({</code>
```

```

<code class="lineno">15</code> <code class="s2">"categories._id"</code>
<code class="o">:</code> <code class="nx">categoryId</code>

<code class="lineno">16</code> <code class="p">},</code> <code class="p">
{</code>

<code class="lineno">17</code> <code class="nx">$unset</code><code
class="o">:</code> <code class="p">{</code>

<code class="lineno">18</code> <code class="s2">"categories.$.names.de-de"
</code><code class="o">:</code> <code class="s1">'auto'</code>

<code class="lineno">19</code> <code class="p">}</code>

<code class="lineno">20</code> <code class="p">})</code>

```

Just as when adding it, the only change is that we are using the `$unset` update operator to remove the field from the embedded documents.

Indexes

In this example there are special indexes used other than the `_id` index.

Scaling

Secondary Reads

If the site is read heavy (say a product catalog), it might make sense to offload reads to secondary servers to scale reading. It comes down to the application's acceptable latency level as there might be some delay between a write happening on a primary until it's been replicated across to the secondary.

Sharding

The multi language pattern does not really benefit from sharding. It's more likely that you would shard the collections based on other criteria.

Performance

There is a very obvious trade off being made here. We are exchanging the costs of updating all the products each time we add or remove a local against the need to perform multiple reads on the categories collection. Since adding new translations are not likely to happen constantly, the added updates to the products collection are insignificant against the benefit of performing single document reads when retrieving the product documents.

A simple exploration of the performance on a single machine with MongoDb 3.0 shows the difference between MMAP and WiredTiger for a narrow simulation using the schema simulation framework `mongodb-schema-simulator`.

Scenario

https://github.com/christkv/mongodb-schema-simulator/blob/master/examples/scripts/single_or_replset/multilanguage/multilan
https://github.com/christkv/mongodb-schema-simulator/blob/master/examples/scripts/single_or_replset/multilanguage/multilan

MongoDb runs locally on a MacBook Pro Retina 2015 with ssd and 16 gb ram. The simulation runs with the following parameters against a single mongodb instance under osx 10.10 Yosemite.

Add a local to a category

Parameters

processes	4
poolSize per process	50
type	linear
Resolution in milliseconds	1000
Iterations run	25
Number of users adding locals to category iteration	1000
Execution strategy	slicetime

Remove a local from a category


Parameters

processes	4
------------------	---

poolSize per process	50
type	linear
Resolution in milliseconds	1000
Iterations run	25
Number of users adding locals to category iteration	1000
Execution strategy	slicetime

MMAP

The MMAP engine is run using the default settings on MongoDB 3.0.1.

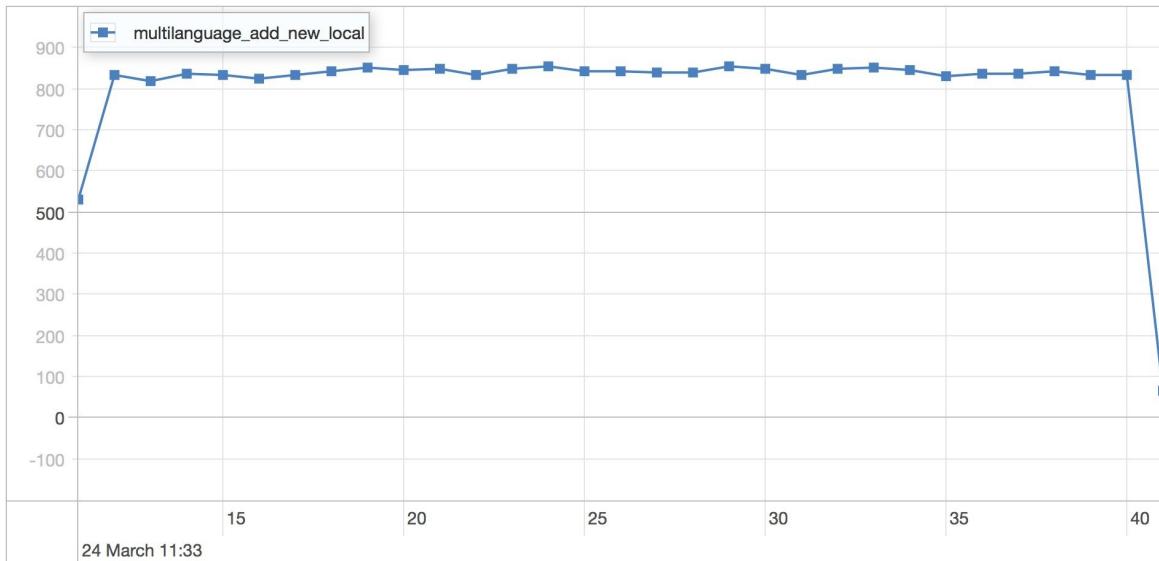


Add Local to Category Simulation

add local to category scenario results

Statistics

Runtime	30.898 seconds
Mean	0.676 milliseconds
Standard Deviation	0.202 milliseconds
75 percentile	0.716 milliseconds
95 percentile	0.865 milliseconds
99 percentile	1.446 milliseconds
Minimum	0.391 milliseconds
Maximum	6.839 milliseconds

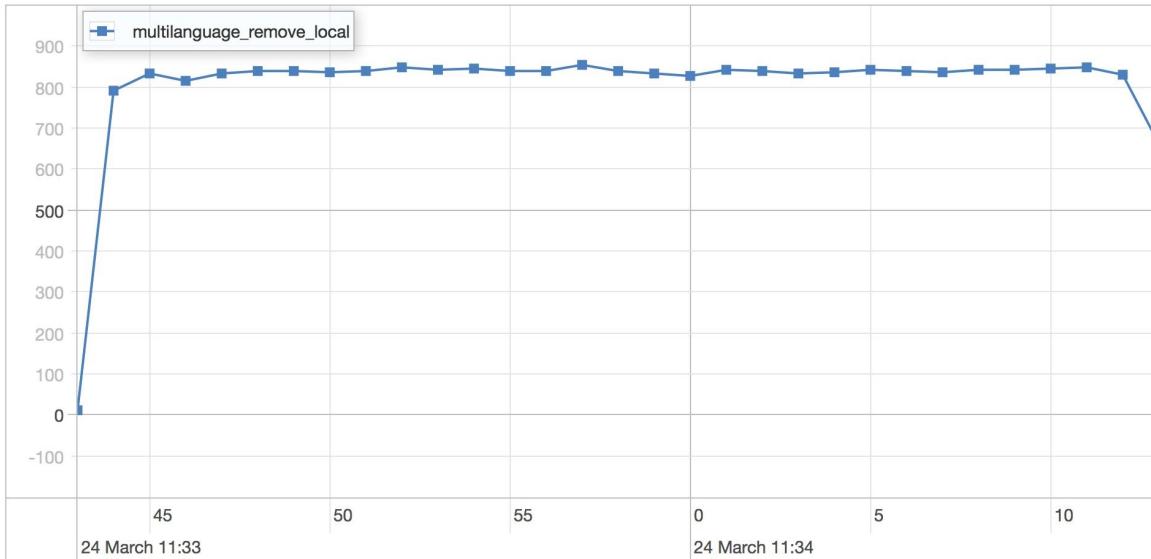

Remove Local from Category Simulation

remove local from category scenario results


Statistics

Runtime	31.037 seconds
Mean	0.675 milliseconds
Standard Deviation	0.185 milliseconds
75 percentile	0.715 milliseconds
95 percentile	0.867 milliseconds
99 percentile	1.418 milliseconds
Minimum	0.403 milliseconds
Maximum	5.882 milliseconds

As expected the performance is similar because the patterns are similar. We would expect the performance to be tied to the amount of documents that need to be updated when a new local is added to a category.

WiredTiger

The `WiredTiger` engine is run using the default settings on MongoDB 3.0.1.

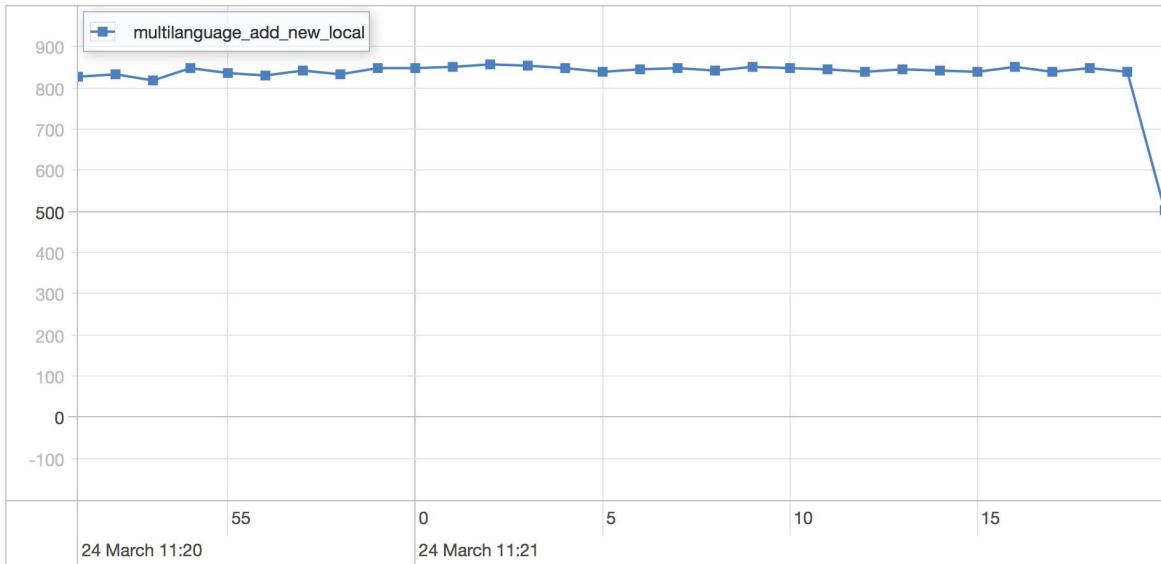


Add Local to Category Simulation

add local to category scenario results

Statistics

Runtime	30.681 seconds
Mean	0.693 milliseconds
Standard Deviation	0.219 milliseconds
75 percentile	0.73 milliseconds
95 percentile	0.889 milliseconds
99 percentile	1.582 milliseconds
Minimum	0.409 milliseconds
Maximum	7.157 milliseconds

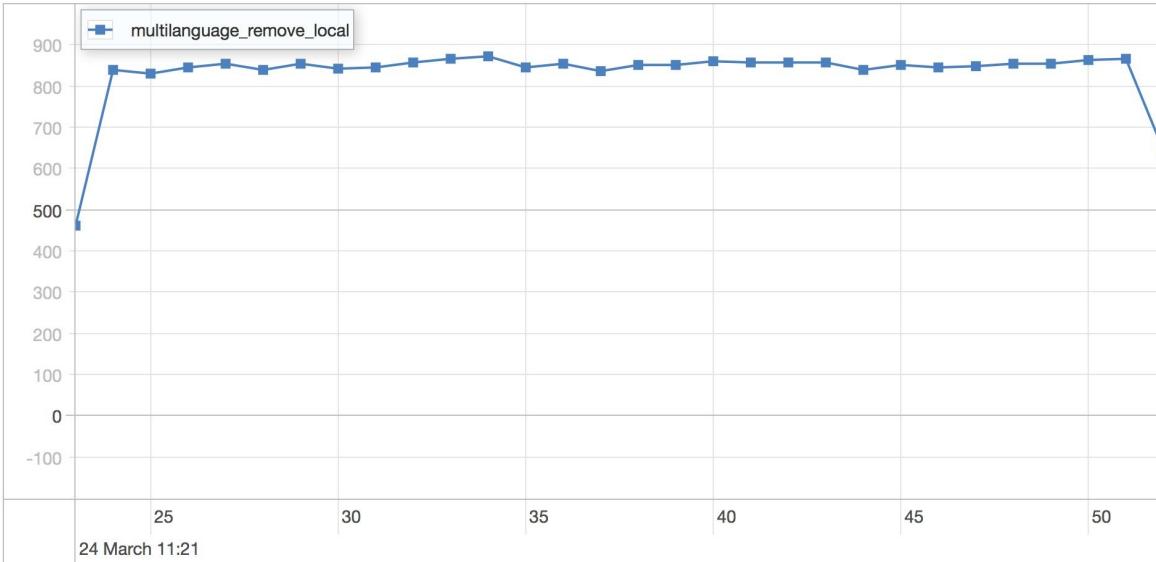

Remove Local from Category Simulation

remove local from category scenario results

Statistics

Runtime	30.404 seconds
Mean	0.913 milliseconds
Standard Deviation	0.337 milliseconds
75 percentile	1.145 milliseconds
95 percentile	1.316 milliseconds
99 percentile	1.763 milliseconds
Minimum	0.409 milliseconds
Maximum	7.938 milliseconds

WiredTiger is a bit slower than MMAP for this schema as it involves a lot of in place updates that causes the storage engine to rewrite the entire document.

Notes

It's important to consider the trade off of caching vs performing multiple queries. In this case it's pretty obvious the caching strategy will pay off but there might be situations where it doesn't.

Let's say you are caching stock ticker prices in a portfolio object where the stock

ticker is constantly changing. The constant changes and required writes will offset any benefit of caching the latest stock prices in the portfolio document. In this case, it's better to fetch the latest stock prices from a the `prices` collections instead.

High rate of change

One more thing to consider is that if you find your application is constantly adding new categories or translations it might be beneficial to duplicate the product information making an identical document for each language allowing for single document reads for any language and avoiding massive updates across all possible products.