ECVOL-bench: An Open, Identity-Controlled Benchmark for Multimodal Earnings-Call Volatility Prediction

Anonymous Author(s)

Abstract

For about a decade, researchers have tried to predict how much a company's stock will move in the weeks after its quarterly earnings call, using what executives say on the call and how they sound. Many papers report that such models beat classical forecasts built from past price swings. We find that the shared test files behind these claims cannot support them. The files leave no gap between the training and test periods even though every target looks 30 days ahead, 44–80% of their test calls come from companies the model also saw in training, and they place "day zero" on the day of the call although most companies release their numbers before the market opens that morning. We built ECVOL-bench to fix this. It adds company names and dates to a public audio corpus that ships without them, times each earnings release from SEC filings, provides targets under both horizon definitions in use, gives splits that keep training and test apart in time and in company, and includes a set of identity checks that run on any file of predictions. With these checks in place, modern open text and audio models add nothing to a forecast built from past volatility alone. Text embeddings mostly identify which company is talking (89.5% probe accuracy), audio features do no better than a constant, and combining the two helps in one horizon out of eight. When we rerun the field's own models on their own data, the text models lose 12–82% in accuracy once test companies are unseen, while price-only models do not move. Scoring the frozen pipeline on 475 calls from late 2025, after every model's training cutoff, changes none of this. All code, metadata, splits, targets, features and result tables are released.

1 Introduction

An earnings call is the one regular occasion on which a company's managers speak at length about their business. Since Qin and Yang (2019), a line of papers has used both the transcript and the audio of these calls to predict how volatile the stock will be over the following 3 to 30 trading days. HTML (Yang et al., 2020), MAEC (Li et al., 2020), VolTAGE (Sawhney et al., 2020a), DialogueGAT (Sang and Bao, 2022), KeFVP (Niu et al., 2023) and ECC Analyzer (Cao et al., 2024) all report beating classical forecasts. Two findings cast doubt on that. Yu et al. (2025) showed that transcript representations mostly tell the model *which company* is speaking, and that a simple forecast from the company's own past volatility beats every transcript model. A survey of financial NLP found that only about 14% of reported results could be reproduced (Tatarinov et al., 2025).

We think both problems trace back to the same place. Nearly every paper in this line is scored on one set of label and split files, handed down from paper to paper. We audited those files (§2). They leave no gap between training and test dates even though each target runs 30 days past its call; most test calls come from companies that are also in training, and no paper reports what happens when they are not; they define horizons in calendar days, which later papers describe as trading days; and they put day 0 on the date of the call, although most companies publish their results before the market opens that day. The only open corpus with raw audio, FinCall-Surprise (Shu et al., 2026a), has no ticker, date or speaker fields at all, so the checks that would expose the company-identity problem cannot even be run on it. Its successor, MM-FinEval (Shu et al., 2026b), adds tickers and dates but none of the checks.

What we contribute. (1) **ECVOL-bench**: company identities and dates recovered for FinCall-Surprise (92.9% of calls; a 60-call manual audit passes 60/60), release times from 8-K filings, three target families under both horizon definitions, splits with a 30-session gap and company-disjoint splits, checksums for every file, and a harness in which every table comes from one command (§2). (2) **An audit** of the shared label and split files (Table 1). (3) **Identity checks** (ticker probes, same-company and random content swaps, company-disjoint evaluation), released as a command that works on *any* prediction file. (4) **Results** for modern open-weight text and audio models against strong baselines (§4). (5) **A reproduction study** of the five runnable models in this line, on their own data, with the same checks, plus a code-availability audit of seventeen papers. (6) **A post-cutoff test** of the frozen pipeline on 475 calls from late 2025. Stages, checks and confirmatory tests were fixed in a public decision log before any model was run.

Related work. Four known pitfalls shaped the design: company-identity leakage (Yu et al., 2025), which language models reproduce even on transcripts with names removed (Lopez-Lira et al., 2025); lookahead bias in language models, for which diagnostics and cutoff-bounded models exist (Gao et al., 2025; Yan

Benchmark / split	calls	overlap	embargo	label defect
EC (Qin & Yang)	560	80.4%	0 / 0 d	137 zeros
MAEC-15 (KeFVP files)	765	44.2%	0 / 0 d	binary cols
MAEC-16 (KeFVP files)	1400	55.7%	0 / 3 d	binary cols
ours: FinCall temporal	2200	91.3%	47 / 47 d	—
ours: FinCall ticker-disjoint	2433	**0.0%**	n/a	—
ours: MAEC temporal	2264	79.4%	101 / 48 d	—
ours: MAEC ticker-disjoint	2688	**0.0%**	n/a	—

Table 1: Audit of the shared benchmark files (Result Table 5R, regenerated by `ecvol audit substrate` from checksummed copies of the VolTAGE and KeFVP files, which are identical). Overlap is the share of test calls whose company is in training; embargo is the gap train→val / val→test. Every time-ordered split allows overlap, ours included; no paper in this line reports the disjoint case. Shipped MAEC labels correlate 0.52–0.87 with our recomputed calendar-day, call-date-anchored targets at $\tau \geq 7$.

et al., 2026; Benhenda, 2026); weak baselines, since persistence, GARCH and HAR-RV (Corsi, 2009) are hard to beat (Gu et al., 2020); and gender bias in audio features (Wang et al., 2024; Lin et al., 2024). Yu et al. (2026) time earnings releases from 8-K filings to predict returns; nobody had audited the volatility label sets. The strongest recent positive results (Chen et al., 2025; Cao et al., 2024) report no identity checks and release no code.

2 The Shared Test Files and the Benchmark

What the field evaluates on. The EarningsCall (EC) benchmark of Qin and Yang (2019) and the two MAEC cohorts are scored on split and label files that VolTAGE and KeFVP redistribute. We audited those files (Table 1). The VolTAGE and KeFVP test files are byte for byte the same file, so the whole line of work shares one label set that was never recomputed from prices. Every boundary between training, validation and test has a zero-day gap while the targets reach 30 days past each call. On the time-ordered splits the field reports, 80.4% (EC), 44.2% (MAEC-15) and 55.7% (MAEC-16) of test calls are from companies that also appear in training. Any time-ordered split allows that; the problem is that no paper reports the company-disjoint case, so the confound of Yu et al. (2025) has never been measured on these benchmarks. The original paper defines its horizons in calendar days, but most later work describes them as trading days (21 sessions rather than 30 at τ=30). Finally, the shipped MAEC labels correlate only 0.52–0.87 with calendar-day targets we recompute from prices under the same call-date anchor (0.25–0.66 at τ=3); we could not reproduce them under any single stated rule.

Corpora and company identity. **FinCall-Surprise** (Shu et al., 2026a) (primary; 2,688 calls from 2019–2021 with MP3 audio, transcripts and slides) ships four fields per record and no ticker, date, CIK or speaker names. We recover the company and the date from the transcript text and the slide metadata, check them against price data, and release the table with its 80 manual corrections. 2,496 calls resolve (92.9%; 95.3% of the earnings-type calls), and a 60-call manual audit passes 60/60. **MAEC** (Li et al., 2020) (secondary; about 3,443 calls from 2015–2018 with sentence-aligned audio features but no raw audio) and **Earnings25** (Jiang et al., 2026) (514 S&P 500 calls from July–December 2025, webcast MP3 at 64 kbps for 281 calls and at most 24 kbps for 232) complete the set. Earnings25 postdates every model's training data; 475 of its calls map to a ticker and join to prices.

Targets. Daily adjusted prices come from a free source and were checked against Tiingo on 50 tickers. Let r_t be the return on session t, counted from day 0, the last session before the call's information is public. The main target is $v_{\text{post}}(\tau) = \ln \sqrt{\frac{1}{n}\sum_{t=1}^{n}(r_t - \bar{r})^2}$ for $\tau \in \{3, 7, 15, 30\}$, and $v_{\text{pre}}(\tau)$ is the same quantity over the sessions ending at day 0. Under the **trading-day** definition $n = \tau$. Under the **calendar-day** definition of Qin and Yang (2019) the window holds every session within τ calendar days, so $n \approx 0.7\tau$, and at τ=3 a Thursday or Friday call has at most one session. We drop any window with fewer than two sessions and record the reason; that removes 42.5% of FinCall's calls at τ=3 calendar days, for which the released label sets still carry a value. The two definitions are not interchangeable: v_{post} correlates only 0.78 between them at τ=3, and the persistence MSE is 44–63% higher there under calendar days, so a published MSE means little unless its definition is stated (Appendix Table 9). Every result below uses trading days, and the definition is a column in every result table. We add two targets that are harder to game with company identity: the **change** $\Delta v = v_{\text{post}} - v_{\text{pre}}$, which subtracts the company's own level, and the **HAR-residual**. After joining to prices, FinCall has 2,433 calls with a target (97.5%) and MAEC 2,688 (78.6%; the rest were delisted).

When the information became public. Almost no transcript states a clock time, so we take the moment the information became public from EDGAR: the acceptance time of the earliest 8-K filing with Item 2.02 (the earnings release) within three days before to one day after the call. That covers 89.3% of FinCall, 68.6% of MAEC and 99.8% of Earnings25; the rest fall back, in recorded order, to Earnings25's call-start time, the before/after-market flag of Yu et al. (2025), and an after-hours assumption. A release before the open makes the call date itself day 1. Compared with the call-date anchor that every released label set uses, **day 0 moves for 53% of FinCall, 56% of MAEC and 72% of Earnings25 calls**, almost always one session earlier: under

the published anchor, the session in which the market reacts sits in the *pre* window for most calls. On the measured anchor the persistence MSE is up to 11% higher on FinCall, 25% on MAEC and 27% on Earnings25, and Δv gains a positive mean (on FinCall $+0.52$ at τ=3, $+0.10$ at τ=30). The call-date targets ship as a labelled variant.

Splits and release. *Temporal* splits (about 70/10/20 in date order) leave a 30-trading-day gap between segments so that no target window crosses a boundary. *ticker-disjoint* splits keep every validation and test company out of training; overlap is 0.0%, against 91.3% (FinCall) and 79.4% (MAEC) on our own temporal splits. The harness fails any feature that reads price data after the call's as-of time, and leakage assertions run in CI. The release contains all of the above, the derived-feature archives, the harness, and every result CSV with its run record (resolved config, git commit, seeds, file hash). Raw audio and transcripts are never redistributed.

3 Models, Protocol and Checks

Models, from simplest to richest. We organise our own models in stages. **Stage 0** holds the classical forecasts: persistence ($\hat{v} = v_{\text{pre}}$), the training-set mean of the target (a constant), EWMA (λ=0.94), HAR-RV (Corsi, 2009) and GARCH(1,1). **Stage 1** is a LightGBM model on past-volatility features, transcript length, number of Q&A turns and a **company fixed effect**, our identity-only baseline. **Stage 2** uses the transcript: BGE-M3 (BAAI, 2024) embeddings pooled per section (1024-d), FinBERT (ProsusAI, 2019) sentiment aggregates and surface statistics. **Stage 3** uses the audio, resampled to 16 kHz mono: eGeMAPSv02 functionals (Eyben et al., 2010), and WavLM-Large (Chen et al., 2021) and emotion2vec+ (Ma et al., 2023) embeddings over 30-second windows, averaged per call. **Stage 4** combines modalities by gated fusion or by stacking (a ridge over the text, audio and Stage-1 predictions, fit on the validation set). From Stage 2 on, every model is reported with and without a block of past-volatility features (v_{pre} at all horizons plus the HAR-RV inputs). The prediction heads are a ridge regression, with its penalty chosen on validation, and a small MLP run with five seeds. The MLPs are unstable across seeds (standard deviation of R^2_{OOS} up to 6.8), so the main grid uses one deterministic model per stage, chosen before the results were known; MLP cells are in Appendix A.

Metrics and tests. We report MSE on log realised volatility and, as the headline metric, R^2_{OOS} relative to persistence (Gu et al., 2020), defined as $1 - \sum(y - \hat{y})^2 / \sum(y - \hat{y}_{\text{persist}})^2$. Because Δv has a positive mean on the measured anchor, persistence (which predicts Δv=0) is a weak reference there, so every Δv claim is also compared with the constant model. Diebold–Mariano tests (Diebold and Mariano, 1995) with the small-sample correction compare per-call squared errors against persistence and against the previous stage. The confirmatory comparisons (each stage against Stage 1 on Δv across horizons, Stage 4 against the best single modality, and the published split against the controlled split for each reproduced model) are Holm-corrected; all other analyses are exploratory.

Identity checks. We use four. (1) A *company-only* model predicts each company's training mean. (2) A *same-company swap* gives each test call the transcript or audio of another call by the same company, and a *random swap* gives it any other call. A model that does not change under the first is reading identity; one that does not change under the second is reading nothing. (3) A linear *probe* tries to recover the ticker from the frozen call embedding. (4) Every table shows ticker-disjoint results next to temporal ones. The command `ecvol audit predictions` runs the prediction-side versions of these checks, plus split integrity, seen-versus-unseen companies, the between-company share of prediction variance and company-clustered significance, on any file with one row per (call, ticker, date, split, horizon, truth, prediction), so a published result can be checked from the one file its authors already have.

Reproductions and post-cutoff tests. Of seventeen papers in this line, one releases code that runs as released (Same-Company-Same-Signal), seven release code that needs repairs or inputs that were never shipped, and nine release nothing usable (Table 15). We rerun the five with usable code (HTML, KeFVP, Same-Company-Same-Signal, Sawhney et al., 2020b, DialogueGAT) *on their own data*, using the authors' code wherever it can be made to start and a line-by-line port where it cannot (every patch is in a released ledger), first against the published number and then under a gapped split and a ticker-disjoint split of the same data. Earnings25 allows two more tests: the frozen Stage-3 audio models rerun by bitrate, and the whole FinCall-trained pipeline scored, with no retraining, on calls that postdate every model's training cutoff.

4 Results

The tables in this section use FinCall-Surprise, the Δv target and the trading-day definition. MAEC, the level target, MSE, the calendar-day definition and every other model are in Appendix A, regenerated from the released CSVs.

The baseline to beat. Table 2 sets it. HAR-RV is strong everywhere except one cell. On the FinCall temporal split at τ=30, the training period includes the

Model	τ=3	τ=7	τ=15	τ=30
Temporal split (n=483)				
S0 train mean	0.165	0.158	0.060	0.088
S0 HAR-RV	0.444	0.372	0.138	−0.285
S0′ past-vol ridge	0.412	0.314	0.094	0.113
S1 GBDT (ticker FE)	0.340	0.249	−0.126	−0.948
S2 text ridge + vol	0.333	0.285	0.080*	−0.077*
S3 WavLM ridge + vol	0.353	0.268	0.033*	0.050*
S4 stack fusion	0.406*	0.347*	0.066*	0.100*
ticker-disjoint split (n=484)				
S0 train mean	0.200	0.201	0.132	0.035
S0 HAR-RV	0.570	0.491	0.349	0.345
S0′ past-vol ridge	0.552	0.469	0.345	0.318
S1 GBDT (ticker FE)	0.494	0.440	0.292	0.237
S2 text ridge + vol	0.399†	0.375	0.256	0.301
S3 WavLM ridge + vol	0.442	0.364	0.241	0.217
S4 stack fusion	0.531	0.465	0.340	0.396*

Table 2: The ladder on FinCall-Surprise. R^2_{OOS} vs. persistence on Δv (test); persistence is 0 by construction, the train-mean intercept is the featureless floor. One pre-registered canonical model per stage; ∗/†: Holm-corrected Diebold–Mariano better/worse than Stage 1 ($p < 0.05$). Adding text or audio to the past-volatility ridge (S0′) lowers R^2_{OOS} in every cell. Full grid, MAEC, level-v, MSE and MLP heads: Appendix A.

Identity probe (linear, frozen call embedding)	accuracy	×chance
BGE-M3 text, FinCall (357 tickers)	89.5%	319×
BGE-M3 text, MAEC (902 tickers)	53.9%	487×
WavLM audio, FinCall (356 tickers)	76.3%	271×
emotion2vec+ audio, FinCall (356 tickers)	29.4%	105×

Content swap (R^2_{OOS} on Δv)	τ=3	τ=7	τ=15	τ=30
Text ridge, temporal split				
real	0.182	0.202	0.044	−0.133
same-company swap	0.174	0.194	0.047	−0.110
random swap	0.145	0.110	0.008	−0.152
Text ridge, ticker-disjoint split				
real	0.195	0.217	0.195	0.169
same-company swap	0.176	0.175	0.076	−0.322
random swap	0.161	0.128	0.016	−0.410
WavLM ridge + past-vol, ticker-disjoint split				
real	0.456	0.390	0.267	0.222
same-company swap	0.453	0.373	0.229	0.152
random swap	0.453	0.323	0.164	0.099

Table 3: Identity checks. Top: frozen embeddings identify the company far above chance. Bottom: where companies recur (temporal), giving a test call another call by the *same* company barely changes the text model, while a random call hurts; on the ticker-disjoint split the text model's remaining signal at $\tau \geq 15$ sits below the past-volatility baseline of Table 2.

COVID spike and the test year (2021) is calm, so every long-horizon forecast of the volatility level, ours and every content model, does worse than persistence. The same models do fine on the ticker-disjoint split and on MAEC, so we treat this as a regime effect and note it. On the measured anchor a constant (the training mean) already scores 0.17, 0.16, 0.06 and 0.09 on the temporal split and 0.20, 0.20, 0.13 and 0.04 on the ticker-disjoint split; that is the reference for every Δv claim below.

Text models read the company, not the call (Table 3). The text-only ridge scores about the same as the constant on both splits and never comes within 0.09 of HAR-RV; the MLPs overfit. Adding text features to the past-volatility ridge makes it *worse* in all eight cells. A linear probe recovers the ticker from the frozen call embedding 89.5% of the time on FinCall and 53.9% on MAEC. On the temporal split, where test companies also appear in training, giving each test call the transcript of *another call by the same company* changes the score by at most 0.02, while a random transcript hurts; the model is reading which company is speaking. On the ticker-disjoint split the same-company swap does hurt at $\tau \geq 15$, so there is some call-specific signal for companies the model has never seen, but it stays below the past-volatility baseline and disappears once past volatility is in the model (0.301 against 0.318 at τ=30). MAEC shows the same pattern.

Audio adds nothing to past volatility. Audio-only ridges on eGeMAPS, WavLM-Large and emotion2vec+ stay within 0.10 of the constant at every horizon on both splits and never beat it by more than 0.02. Adding WavLM to the past-volatility ridge makes it worse in all eight cells. In the audio-swap check (Table 3, bottom), the model with past volatility keeps its score at τ=3 when every test call is given a *random other company's* audio (0.456 to 0.453); at longer horizons the swap costs more, but the model with real audio is still below the ridge with past volatility alone, so whatever the audio contributes does not add to the baseline. A probe still recovers the ticker from pooled WavLM embeddings 76.3% of the time. A gender check (dominant-speaker pitch proxy) finds no error gap (test MSE 0.243 against 0.239). Rerun on Earnings25 by bitrate, the gain from real over randomly swapped audio never exceeds 0.03, is negative in 7 of 12 cells, and is no larger at 64 kbps than at lower bitrates (Appendix Table 13); the FinCall result is not an artefact of its 40 kbps audio.

Combining modalities. Gated fusion is worse than its inputs everywhere. The stacking model is the best content model but stays below HAR-RV in six of eight cells. It beats HAR-RV only in the COVID cell (0.100, still below the past-volatility ridge at 0.113) and at ticker-disjoint τ=30 (0.396 against 0.345; Holm p=0.003 against Stage 1, with no pre-registered test against HAR-RV). It beats the text and audio stages in seven of eight cells but not the past-volatility stage. So a multimodal model is not better than the best single-input model when that input is past volatility, and the condition we set in advance for a positive paper (gains surviving the checks on at least two of four horizons) was not met.

The field's own models (Table 4). Among the five papers we could run, the results that reproduce be-

Model (data), change in test MSE	τ=3	τ=7	τ=15	τ=30
Companies held out (ticker-disjoint vs. the model's own split)				
HTML text (EC)	+18%	+55%	+55%	+82%
HTML text+audio (EC)	+20%	+44%	+61%	+70%
Sawhney ensemble, val-tuned (EC)	+13%	+28%	+41%	+38%
SCSS TMLP, text (DEC)	+12%	+23%	+25%	+27%
SCSS TSMixer, price (DEC)	+7%	+5%	−6%	−8%
KeFVP, text+price (MAEC-15)	−3%	+4%	+3%	−1%
KeFVP, text+price (MAEC-16)	−9%	−3%	−10%	−4%
30-session embargo vs. the model's own split				
HTML text (EC)	+10%	+3%	−3%	+11%
Sawhney ensemble (EC)	+5%	−6%	−2%	−9%
SCSS TMLP (DEC)	−4%	+1%	0%	+3%
HTML text, transcript replaced by (own split, 97 calls)				
another call, *same* company	+1%	+4%	+3%	+2%
a call of a *different* company	+9%	+11%	+21%	+23%

Table 4: The field's runnable models under our controls (Result Table 6R-C). Each row keeps the configuration of Appendix Table 11 and changes only the split. Holding companies out costs every text model 12–82% and leaves the price-dominated models unchanged, with held-out training sets as large (EC) or cut by the same third (DEC, MAEC). Absolute values: Appendix Table 12.

Model	cutoff	τ=3	τ=7	τ=15	τ=30
S0 train mean	before	0.36	0.14	−0.37	−1.05
	after	0.58	0.47	0.15	−0.29
S0 HAR-RV	before	0.44	0.37	0.14	−0.29
	after	0.60	0.54	0.35	0.08
S2 text ridge + vol	before	0.43	0.34	0.03	−0.45
	after	0.57	0.50	0.25	−0.20
S3 WavLM ridge + vol	before	0.38	0.24	−0.09	−0.66
	after	0.57	0.43	0.15	−0.32
S4 fusion ridge + vol	before	0.41	0.32	−0.02	−0.63
	after	0.50	0.46	0.20	−1.93

Table 5: Frozen-pipeline post-cutoff evaluation (Result Table 7). Heads fit once on FinCall's training split, scored unchanged in-cutoff (the 2021 FinCall test year) and post-cutoff (475 Earnings25 calls, late 2025); level-v, R^2_{OOS} vs. persistence. The ordering survives the cutoff; bootstrap CIs and Δv rows are in the released CSV.

long to price-only or same-company models (Appendix A.3). Same-Company-Same-Signal reproduces from its shipped data: TSMixer to 10^{-5}, TMLP within 0.02 (including their own within-company swap result), and its training-free same-company history comes within 0.05 of KeFVP's published MSE at every horizon on EC and MAEC-15 with no text and no training, a model that has no meaning once companies are held out. KeFVP, a price-series model conditioned on text with its audio branch disabled in its own code, reproduces seven of eight MAEC cells within one published standard deviation; its EC row, run without the knowledge-enhanced embeddings that are no longer available, is above all four published cells and we do not count it. HTML's released driver shuffles features and labels independently without a seed, so it cannot have produced the published table, and with the authors' model classes unchanged the published recipe underfits at $\tau \geq 15$ on every split. The published ensemble of Sawhney et al. (2020b) can be reached only because its untrained text and audio branches act as an intercept on a finance SVR whose mixing weights the code tunes on the test set. Under our checks (Table 4), holding companies out costs the three text models 12–82% in MSE while TSMixer and KeFVP do not move, although their training sets are as large (EC) or cut by the same third (DEC, MAEC); the gap between training and test moves models by at most 13%; and HTML's own trained model changes by at most 4% when a test transcript is swapped for another call by the same company, against 9–23% for a different company's call. What HTML reads from a transcript is which company is speaking.

After the cutoff (Table 5). We scored the FinCall-trained models, unchanged, on 475 Earnings25 calls from late 2025, after every model's training cutoff and on companies none had seen. On the level target, no model that was competitive before the cutoff got worse: HAR-RV rose from 0.44, 0.37, 0.14 and −0.29 to 0.60, 0.54, 0.35 and 0.08, and the content ridges rose with it (only the fusion ridge is unstable, at τ=30). Levels are not comparable across the cutoff (different years and companies), but the ordering is, and it holds: HAR-RV beats every content model at every horizon, and no content model that was competitive before the cutoff collapses after it. Under the call-date anchor of the published label sets, the same frozen models collapse before the cutoff (text plus past volatility on Δv: −1.7 to −3.6; Appendix Table 14), because the reaction session then sits inside the past-volatility features.

5 Discussion and Conclusion

Four things hold across the whole set of models. Classical volatility forecasts are hard to beat, and measuring against persistence exposes a regime failure that raw MSE hides. Text features add nothing to past volatility, and we can see why: the embeddings identify the company, and where companies recur in training, swapping in another call by the same company changes nothing. Audio features add nothing either, at 40 kbps or 64 kbps, even though they too identify the company, and combining them does not help. None of this could be seen with the files the field has been using, and the same checks on the field's own code and data give the same answer: what reproduces is price-only models or same-company history, and the text models lose their edge as soon as the company is new. The strongest recent positive results (Chen et al., 2025; Cao et al., 2024) report no identity checks and release no code; `audit predictions` makes the check cheap. We do not claim that transcripts and audio carry no information about a company's risk. We claim that the benchmarks in use cannot tell that information apart from knowing which company is speaking, and that once they can, nothing yet built beats a forecast from past volatility.

Limitations

One post-cutoff quarter. The lookahead test rests on 475 calls from a single calm quarter and a different universe from the training corpus, so it bounds contamination in the ordering of models, not in their absolute scores. **Reproductions run on their own data**, not on ECVOL-bench, to keep "the model fails" separable from "the model does not transfer"; two carry known costs (KeFVP's released EC embeddings are unavailable upstream; DialogueGAT's corpus was never released and our port stops at its protocol). **MLP heads are seed-unstable** (across-seed R^2_{OOS} std up to 6.8 on level-v, 1.1 on Δv), which is why the grid uses deterministic canonicals; MLP cells in the appendix are seed means with that caveat. **Short-horizon R^2_{OOS} inflation.** The persistence denominator is noisiest at τ=3 (MSE $\sim$2.8$\times$ that at τ=7), so short-horizon gains are easier to show. **Timestamps.** 10.7% of FinCall and 31.4% of MAEC calls have no Item 2.02 filing in the window and keep a flagged after-hours fallback; intraday releases are treated as after-hours; results under the call-date anchor of prior label sets are not interchangeable with ours and are shipped as a variant. **Regime sensitivity.** FinCall-Surprise spans COVID; the temporal τ=30 failure shows long-horizon level forecasts are regime-sensitive, which is why we emphasise Δv and per-year breakdowns. **MAEC coverage.** Its 78.6% price-join rate (2015–2018 delistings) makes it a secondary corpus, and it ships no raw audio. **Source audio.** Every FinCall file is a 40 kbps MP3 transcode and Earnings25 is 64 kbps or lower, so no result here is established on lossless audio. **No diarisation**; audio is pooled per call, and the gender analysis uses a dominant-speaker F0 proxy. **Identity reconstruction is imperfect**: 7.1% of FinCall calls remain unresolved and are excluded with a reason code.

Ethics Statement

Data and licensing. We use openly licensed corpora (FinCall-Surprise, Apache-2.0; MAEC, CC-BY-SA-4.0; Earnings25, CC-BY-4.0) and open-weight models; derived features inherit and state their upstream license, and raw audio or transcripts from sources with unclear terms (EC, DEC, the reproduced repositories) are never redistributed. Calls are public corporate disclosures; we release no speaker-level audio or identity, only pooled per-call features. **Gender confound.** Audio features encode speaker gender and female executives are underrepresented in these corpora (Wang et al., 2024; Lin et al., 2024; Mathur et al., 2022); we report a gender-confound diagnostic rather than silently propagate the bias. **Intended use.** This is a forecasting-research benchmark, not investment advice; predictions are noisy and regime-sensitive and should not drive automated trading. **Reproducibility.** Given the documented reproducibility crisis in financial NLP (Tatarinov et al., 2025), the environment is pinned, every data file is checksummed, and every result table regenerates byte-identically from committed artifacts with a run manifest.

References

BAAI. BGE-M3 sentence embeddings. Hugging Face (MIT), 2024. URL https://huggingface.co/BAAI/bge-m3.

Mostapha Benhenda. Look-ahead-bench: a standardized benchmark of look-ahead bias in point-in-time LLMs for finance. arXiv:2601.13770, 2026. URL https://arxiv.org/abs/2601.13770.

Yupeng Cao et al. ECC analyzer: Extracting trading signal from earnings conference calls using large language models for stock volatility prediction. In *Proceedings of the 5th ACM International Conference on AI in Finance (ICAIF)*, 2024. URL https://arxiv.org/abs/2404.18470.

Sanyuan Chen et al. WavLM: Large-scale self-supervised pre-training for full stack speech processing. Hugging Face (MIT): microsoft/wavlm-large, 2021. URL https://huggingface.co/microsoft/wavlm-large.

Xiaoliang Chen et al. The sound of risk: A multimodal physics-informed acoustic model for forecasting market volatility and enhancing market interpretability. arXiv:2508.18653, 2025. URL https://arxiv.org/abs/2508.18653.

Fulvio Corsi. A simple approximate long-memory model of realized volatility. *Journal of Financial Econometrics*, 2009. doi: 10.1093/jjfinec/nbp001.

Francis X. Diebold and Roberto S. Mariano. Comparing predictive accuracy. *Journal of Business & Economic Statistics*, 1995. doi: 10.1080/07350015.1995.10524599.

Florian Eyben, Martin Wöllmer, and Björn Schuller. openSMILE / eGeMAPS acoustic feature extraction. github.com/audeering/opensmile-python, 2010. URL https://github.com/audeering/opensmile-python.

Zhenyu Gao, Wenxi Jiang, and Yutong Yan. Detecting lookahead bias in LLM forecasts. arXiv:2512.23847, 2025. URL https://arxiv.org/abs/2512.23847.

Shihao Gu, Bryan Kelly, and Dacheng Xiu. Empirical asset pricing via machine learning. *The Review of Financial Studies*, 2020. doi: 10.1093/rfs/hhaa009.

Denglin Jiang, Haoran Zhou, Anshul Wadhawan, Brendan Fahy, Vinay Ramesh, David Weisberg, Dmitriy Derkachevskiy, Helen Sheehan, Srivas Prasad, and

Michele Franceschini. Earnings25: A comprehensive 500-hour speech benchmark for finance. Interspeech 2026; arXiv:2607.23813; Zenodo record 10.5281/zenodo.18762168 (CC-BY-4.0), 2026.

Jiazheng Li, Linyi Yang, Barry Smyth, and Ruihai Dong. MAEC: A multimodal aligned earnings conference call dataset for financial risk prediction. In *Proceedings of the 29th ACM International Conference on Information and Knowledge Management (CIKM)*, 2020. doi: 10.1145/3340531.3412879.

Yi-Cheng Lin et al. Emo-bias: A large scale evaluation of social bias on speech emotion recognition. arXiv:2406.05065, 2024. URL https://arxiv.org/abs/2406.05065.

Alejandro Lopez-Lira, Yuehua Tang, and Mingyin Zhu. The memorization problem: Can we trust LLMs' economic forecasts? arXiv:2504.14765, 2025. URL https://arxiv.org/abs/2504.14765.

Ziyang Ma et al. emotion2vec: Self-supervised pre-training for speech emotion representation. Hugging Face: emotion2vec/emotion2vec_plus_large, 2023. URL https://huggingface.co/emotion2vec/emotion2vec_plus_large.

Puneet Mathur et al. DocFin: Multimodal financial prediction and bias mitigation using semi-structured documents. In *Findings of the Association for Computational Linguistics: EMNLP 2022*, 2022. URL https://aclanthology.org/2022.findings-emnlp.139/.

Hao Niu et al. KeFVP: Knowledge-enhanced financial volatility prediction. In *Findings of the Association for Computational Linguistics: EMNLP 2023*, 2023. URL https://aclanthology.org/2023.findings-emnlp.770/.

ProsusAI. FinBERT: Financial sentiment analysis with bert. Hugging Face, 2019. URL https://huggingface.co/ProsusAI/finbert.

Yu Qin and Yi Yang. What you say and how you say it matters: Predicting stock volatility using verbal and vocal cues. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics (ACL)*, 2019. URL https://aclanthology.org/P19-1038/.

Yunxin Sang and Yang Bao. DialogueGAT: A graph attention network for financial risk prediction by modeling the dialogues in earnings conference calls. In *Findings of the Association for Computational Linguistics: EMNLP 2022*, 2022. URL https://aclanthology.org/2022.findings-emnlp.117/.

Ramit Sawhney, Piyush Khanna, Arshiya Aggarwal, Taru Jain, Puneet Mathur, and Rajiv Ratn Shah. VolTAGE: Volatility forecasting via text audio fusion with graph convolution networks for earnings calls. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, 2020a. URL https://aclanthology.org/2020.emnlp-main.643/.

Ramit Sawhney, Puneet Mathur, Ayush Mangal, Piyush Khanna, Rajiv Ratn Shah, and Roger Zimmermann. Multimodal multi-task financial risk forecasting. In *Proceedings of the 28th ACM International Conference on Multimedia (MM)*, 2020b. doi: 10.1145/3394171.3413752.

Dong Shu, Yanguang Liu, Huopu Zhang, and Mengnan Du. FinCall-Surprise: A large scale multi-modal benchmark for earning surprise prediction. In *Proceedings of the 64th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 13357–13370, 2026a. URL https://aclanthology.org/2026.acl-long.610/. Data: github.com/Tizzzzy/FinCall-Surprise (Apache-2.0).

Dong Shu, Yanguang Liu, Huopu Zhang, Saisai Hu, Haiyan Zhao, Hekun Huang, and Mengnan Du. MM-FinEval: A multi-task multimodal benchmark for real-world financial forecasting. arXiv:2609.38523, 2026b. URL https://arxiv.org/abs/2609.38523.

Nikita Tatarinov et al. Language modeling for the future of finance: A survey into metrics, tasks, and data opportunities. arXiv:2504.07274, 2025. URL https://arxiv.org/abs/2504.07274.

Wang et al. AMA-LSTM: Pioneering robust and fair financial audio analysis for stock volatility prediction. NAACL 2024 Industry Track; arXiv:2407.18324, 2024. URL https://arxiv.org/abs/2407.18324.

Yutong Yan et al. DatedGPT: Preventing lookahead bias in large language models with time-aware pretraining. arXiv:2603.11838, 2026. URL https://arxiv.org/abs/2603.11838.

Linyi Yang, Tin Lok James Ng, Barry Smyth, and Ruihai Dong. HTML: Hierarchical transformer-based multi-task learning for volatility prediction. In *Proceedings of The Web Conference (WWW)*, 2020.

Ding Yu, Zhuo Liu, and Hangfeng He. Same company, same signal: The role of identity in earnings call transcripts. In *Findings of the Association for Computational Linguistics: ACL 2025*, pages 18403–18422, 2025. URL https://aclanthology.org/2025.findings-acl.946/.

Ding Yu, Zhuo Liu, Hao Zhang, and Hangfeng He. Fast numbers, slow language: Bridging quantitative and qualitative earnings signals. arXiv:2606.29734,

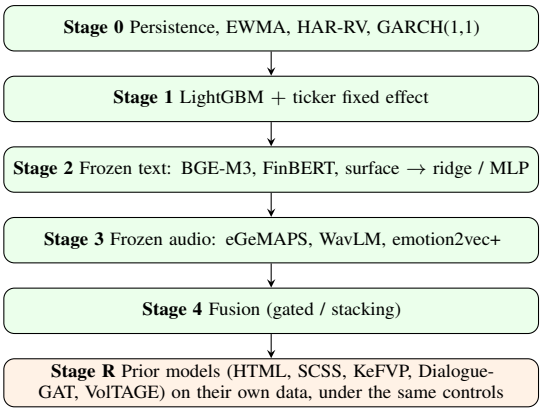


Figure 1: The modelling ladder. From Stage 2 up, every model also carries past-volatility covariates (and is reported with them ablated). Every stage runs through the identity-control suite. Green = complete, orange = pending.

Model	τ=3	τ=7	τ=15	τ=30
Temporal split (n=483)				
Persistence	0.000	0.000	0.000	0.000
EWMA	0.465*	0.389*	0.259*	0.019
HAR-RV	0.444*	0.372*	0.138*	-0.285*
GARCH(1,1)	0.472*	0.463*	0.298*	0.023
GBDT (ticker FE)	0.340*	0.249*	-0.126	-0.948*
Ticker-disjoint split (n=484)				
Persistence	0.000	0.000	0.000	0.000
EWMA	0.520*	0.379*	0.142*	0.112*
HAR-RV	0.570*	0.491*	0.349*	0.345*
GARCH(1,1)	0.561*	0.484*	0.334*	0.298*
GBDT (ticker FE)	0.494*	0.440*	0.292*	0.237*

Table 6: Baselines. R^2_{OOS} vs. persistence on the Δv target, FinCall-Surprise (test). HAR-RV is strong except on the COVID-regime temporal τ=30 cell. $*$: Diebold–Mariano significant vs. persistence ($p < 0.05$).

2026. URL https://arxiv.org/abs/2606.29734.

A Extended Results

This appendix holds the full head set behind each headline table, the horizon convention delta, the reproduction study in detail, the Earnings25 bitrate study, the anchor-sensitivity variant of the post-cutoff test, the code-availability audit, and the complete generated grids. Every table regenerates from a committed result CSV with a run manifest (`ecvol report`; `REPRODUCE.md` lists one command per table).

A.1 Stages 0–3: all heads

Tables 6, 7 and 8 give the full Stage-0/1, Stage-2 and Stage-3 head sets on the Δv target, including the past-vol-only and MLP heads omitted from Table 2.

Model	τ=3	τ=7	τ=15	τ=30
Temporal split (n=483)				
Ridge (text)	0.182*	0.202	0.044*	-0.133*
Ridge (past-vol)	0.412*	0.314*	0.094*	0.113*
Ridge (text+vol)	0.333	0.285	0.080*	-0.077*
MLP (text)	0.013*	0.069*	-0.253	-1.202
Ticker-disjoint split (n=484)				
Ridge (text)	0.195*	0.217*	0.195*	0.169
Ridge (past-vol)	0.552*	0.469	0.345	0.318*
Ridge (text+vol)	0.399*	0.375	0.256	0.301
MLP (past-vol)	0.577*	0.508*	0.381*	0.356*

Table 7: Text content (Stage 2). R^2_{OOS} vs. persistence on the Δv target, FinCall-Surprise (test). The text-only head does not separate from the past-volatility head; adding text to past-vol does not help. $*$: Diebold–Mariano significant vs. the Stage-1 ticker-FE GBDT ($p < 0.05$). Full head set in Appendix A.

A.2 Horizon convention

A.3 Reproduction study

Table 10 is the first entry of the study: the HTML head over our frozen BGE-M3 chunk sequences on EC under the published split, an embargoed split and a ticker-disjoint split with identical labels. Table 11 re-runs the five papers with usable code on their own data with the authors' code wherever it runs and a line-by-line port where it cannot; the released fidelity ledger records every patch and substitution. Table 12 gives the absolute values behind Table 4, and Table 15 the code-availability audit of the seventeen papers.

Same-Company-Same-Signal reproduces: its TSMixer baseline matches the 76 published cells to a median 10^{-5} from the shipped data alone, its TMLP text model on the authors' OpenAI embeddings matches per-window means within 0.01 and recovers the paper's finding that embeddings shuffled within a company do as well as the real ones, and its training-free baselines on EC and MAEC reproduce all 48 published cells at the notebook's rounding. **HTML** does not: the released driver splits features and labels with three independent unseeded shuffles, and with the authors' model classes verbatim on rebuilt inputs the published recipe (ten epochs, learning rate 2×10^{-5}, raw log-volatility targets) is still converging at epoch ten; it beats the paper only at τ=3 on a random split with dropout 0, never reaches persistence at $\tau \geq 15$ on any split, and on the VolTAGE split every later paper inherited it is worse than persistence at every horizon. Its text+audio row reproduces under the shipped code's random split and under no other. **Sawhney et al.** cannot run as released (an unshipped call inventory, price files and lexicons, a TensorFlow 2.1 stack); ported, the finance SVR alone gives 0.712/0.370/0.218/0.154, the text and audio branches are untrained after the two and one epochs the scripts prescribe, and the published ensemble is reproduced because the released code tunes the mixing weights on the

Model	τ=3	τ=7	τ=15	τ=30
Temporal split (n=483)				
Ridge (eGeMAPS)	0.163*	0.156*	0.059*	0.079*
Ridge (WavLM)	0.156*	0.148*	-0.027	-0.008*
Ridge (emotion2vec+)	0.155*	0.129*	0.022*	0.027*
Ridge (WavLM+past-vol)	0.357	0.262	-0.044	0.052*
Ticker-disjoint split (n=484)				
Ridge (eGeMAPS)	0.203*	0.119*	0.137*	0.044*
Ridge (WavLM)	0.178*	0.192*	0.131*	0.026*
Ridge (emotion2vec+)	0.181*	0.185*	0.122*	0.047*
Ridge (WavLM+past-vol)	0.456	0.390	0.267	0.222
Audio-shuffle control of WavLM+past-vol (ticker-disjoint)				
Real audio	0.456	0.390	0.267	0.222
Within-ticker shuffle	0.453	0.373	0.229	0.152
Global shuffle	0.453	0.323	0.164	0.099

Table 8: Audio content (Stage 3). R^2_{OOS} vs. persistence on the Δv target, FinCall-Surprise (test). Audio-only heads match the train-mean intercept (0.165/0.158/0.060/0.088 temporal; 0.200/0.201/0.132/0.035 ticker-disjoint) to within 0.01; the past-vol-augmented head is below the past-vol-only ridge (Table 7) in every cell, and at $\tau \leq 7$ keeps its score when every test call receives a *random other company's* audio (global shuffle, bottom block), so past volatility, not audio content, carries it. $*$: Diebold–Mariano significant vs. the Stage-1 ticker-FE GBDT ($p < 0.05$; read direction from the value). Full head set in Appendix A.

	τ=3	τ=7	
Targets (FinCall, calls ok under both conventions)			
Sessions in calendar window (mean)	2.4	4.9	
Calls with $\geq$2 sessions (of 2,433)	1,398	2,433	
Corr($v^{\mathrm{trad}}_{\mathrm{post}}, v^{\mathrm{cal}}_{\mathrm{post}}$)	0.784	0.942	
Corr($\Delta v^{\mathrm{trad}}, \Delta v^{\mathrm{cal}}$)	0.751	0.887	
Persistence MSE, level-v, temporal test (trading / calendar)			
FinCall	1.270 / 2.071	0.448 / 0.612	0.211
MAEC	1.774 / 2.553	0.712 / 0.986	0.356
HAR-RV R^2_{OOS} vs. persistence, level-v, temporal test (trading / calendar)			
FinCall	0.444 / 0.419	0.372 / 0.402	0.138
MAEC	0.603 / 0.562	0.486 / 0.502	0.321

Table 9: Horizon convention delta. The calendar-day windows of Qin and Yang (2019) hold $\sim 0.7\tau$ sessions; at τ=3 43% of the calls have at most one post-call session and are excluded. Persistence MSE (the leaderboard's metric) rises by 44–63% at τ=3 under the calendar convention, so published MSE values are not comparable across conventions; the FinCall temporal τ=30 deficit of HAR-RV against persistence (the COVID-regime cell, §4) holds under both conventions (-0.285 / -0.053). Full model $\times$ horizon views under both conventions: `data/results/result_table_1.tex`.

test set, where an untrained branch's near-constant output acts as an intercept. **DialogueGAT**'s corpus and labels were never released; ported onto FinCall's speaker turns under the paper's per-year protocol it beats persistence at short horizons and collapses on the 2020 split. **KeFVP**'s released script needed six import-level repairs before it would start; its MAEC rows use sentence embeddings regenerated with the authors' own generator because the released ones were never published, and seven of eight cells fall within one published standard deviation (the eighth, MAEC-16 at τ=15, is the row of their table that does not average to its own stated mean). On EC the released KePt embeddings are unavailable upstream (the linked folder is empty); with BERT-large pooler embeddings from the same generator, KeFVP without its knowledge-enhanced pre-training, the mean test MSE is 0.651/0.302/0.194/0.127 against the published 0.610/0.291/0.183/0.114, within one of our repeat standard deviations but above all four published means, so the row is not counted as reproduced.

Under the controls, the 30-session embargo removes half to two thirds of KeFVP's MAEC training calls, so those rows cannot separate leakage from data loss and are left to the ledger; DialogueGAT's port (one seed, 42–60 held-out calls per year) shows no consistent direction under either control.

A.4 Audio by bitrate on Earnings25

A.5 Post-cutoff evaluation under the call-date anchor

Table 14 repeats the post-cutoff evaluation with day 0 anchored on the call date on both sides of the cutoff, the anchor every released label set uses. HAR-RV barely moves, but the ridge heads that carry a learned past-volatility block collapse in-cutoff under that anchor, consistent with the block absorbing the reaction session that the after-hours rule leaves inside the pre-window for before-open calls. On Δv at τ=30 the frozen WavLM+vol head is the only one whose post-cutoff CI excludes zero under the measured anchor (0.18, CI 0.14–0.24, against HAR's 0.08), a single-quarter observation without a DM test that we report as exploratory.

A.6 Code availability

Condition (EC)	model	τ=3	τ=7	τ=15	τ=30
paper, published split, published labels	HTML (text, WWM-BERT)	1.175	0.372	0.153	0.133
published split, published labels	HTML head (BGE-M3)	0.769	0.436	0.285	0.223
	persistence	1.485	0.570	0.340	0.202
published split, our labels	HTML head (BGE-M3)	0.760	0.420	0.285	0.214
	persistence	1.826	0.590	0.333	0.183
embargoed temporal, our labels	HTML head (BGE-M3)	0.778	0.448	0.278	0.265
	persistence	1.948	0.629	0.353	0.192
ticker-disjoint, our labels	HTML head (BGE-M3)	**0.773**	**0.503**	**0.394**	**0.291**
	persistence	1.670	0.728	0.418	0.213

Table 10: Reproduced prior model under leakage-proof evaluation (Result Table 6R, first entry). The HTML head reproduces the paper's ordering against price baselines at τ=3 (and beats the published number) but not the published τ=15 and τ=30 values, which lie *below the persistence floor* of the shipped labels themselves; at τ=30 every condition is worse than persistence. Moving the same head and labels from the published split to a ticker-disjoint split raises test MSE by 2% / 20% / 38% / 36%; the embargoed temporal split costs 2% / 7% / $-$2% / 24%.

Paper / setting	what ran	ours τ=3	7	15	30	published τ=3	7	15	30
HTML (Yang et al., 2020), EC — authors' model classes verbatim, inputs rebuilt (WWM-BERT layer −2), driver corrected									
code: random 70/10/20, dropout 0	text	0.660	0.336	0.253	0.160	1.175	0.372	0.153	0.133
paper: chronological 7:1:2, dropout 0.5	text	0.972	0.439	0.406	0.248				
published split (VolTAGE), dropout 0.5	text	1.231	1.122	1.063	1.479				
persistence on the shipped labels	—	1.485	0.570	0.340	0.202				
code: random 70/10/20, dropout 0	text + 27 Praat	0.658	0.347	0.244	0.165	0.845	0.349	0.251	0.158
paper: chronological 7:1:2, dropout 0.5	text + 27 Praat	0.876	0.520	0.291	0.239				
published split (VolTAGE), dropout 0.5	text + 27 Praat	2.701	1.195	1.436	1.411				
Same-Company-Same-Signal (Yu et al., 2025), DEC — authors' `run.py`, per-window means over 19 rolling quarters									
TSMixer (price history only)	76 cells	0.561	0.252	0.210	0.257	0.561	0.252	0.211	0.256
TMLP on OpenAI embeddings	76 cells	0.608	0.285	0.215	0.202	0.587	0.283	0.211	0.205
TMLP, embeddings shuffled within ticker	76 cells	0.572	0.276	0.213	0.209	0.565	0.273	0.204	0.200
TMLP, embeddings shuffled across all	76 cells	0.646	0.315	0.259	0.249	0.637	0.319	0.255	0.247
Same-Company-Same-Signal, EC / MAEC — authors' notebook, training-free, augmented same-ticker earnings history									
EC, Aug_STPEV	no training	0.569	0.293	0.201	0.122	0.569	0.293	0.201	0.122
MAEC-15, Aug_STPEV	no training	0.443	0.214	0.130	0.112	0.443	0.214	0.130	0.112
MAEC-16, Aug_STPEV	no training	0.470	0.238	0.168	0.113	0.470	0.238	0.168	0.113
KeFVP (Niu et al., 2023) — authors' `final_series_infer.py` (six import-level release defects patched), 10 repeats									
MAEC-15, regenerated BERT-base embeddings	text + price	0.419	0.185	0.123	0.086	0.418	0.187	0.122	0.087
MAEC-16, regenerated BERT-base embeddings	text + price	0.442	0.288	0.363	0.188	0.445	0.279	0.303	0.177
EC, regenerated BERT-large embeddings (no KePt)	text + price	0.651	0.302	0.194	0.127	0.610	0.291	0.183	0.114
Sawhney et al. (2020b), EC — PyTorch port of the released scripts (their labels, split, branches); 5 seeds									
finance SVR (30 past volatilities)	port	0.712	0.370	0.218	0.154				
text BiLSTM, their 2 epochs	port	2.135	1.580	1.384	1.401				
aligned audio, their 1 epoch	port	6.514	5.295	5.368	5.130				
ensemble, (α, β) tuned on test (theirs)	port	0.639	0.298	0.175	0.102	0.601	0.308	0.181	0.119
ensemble, (α, β) tuned on validation	port	0.686	0.324	0.187	0.117				
persistence on their labels	—	1.491	0.563	0.345	0.205				
DialogueGAT (Sang and Bao, 2022) — PyG port on FinCall turns (role-typed speakers); published cells are on their unreleased corpus									
FinCall 2019 (their 2015 protocol)	port	0.694	0.320	0.206	0.134	0.453	0.324	0.190	—
persistence	—	1.429	0.566	0.289	0.139				
FinCall 2020 (their 2016 protocol)	port	0.621	0.350	0.392	0.270	0.455	0.288	0.181	—
persistence	—	1.409	0.335	0.184	0.101				
FinCall 2021 (their 2017–18 protocol)	port	0.794	0.344	0.182	0.082	0.409	0.289	0.204	—
persistence	—	1.301	0.465	0.225	0.118				

Table 11: Reproductions with the authors' own code and data (Result Table 6R-F, T6R.3). Every cell regenerates from one `ecvol reproduce` command; the fidelity ledger lists what is verbatim, patched, substituted or reason-coded per paper. Three of the five reproduce (TSMixer to 10^{-5}; TMLP within single-seed noise, including the paper's real ≈ ticker-shuffled finding; KeFVP on MAEC within one published standard deviation on seven of eight cells, with regenerated sentence embeddings; on EC, whose released KePt embeddings are unavailable upstream, the regenerated BERT-large row sits within one of our repeat standard deviations of the published means but above all four, and is not counted). HTML's text-only recipe does not reach its published long-horizon cells on any split, while its text+audio row reproduces at $\tau \geq 7$ under the shipped-code condition (random split, dropout 0) and on no other; Sawhney's published ensemble is reachable with untrained text and audio branches acting as an intercept on the finance SVR once the mixing weights are tuned on the test set, as the released code does.

Model / condition	n_{tr}	n_{te}	τ=3	7	15	30
HTML, authors' classes (EC; seeds 0–2)						
text — shipped-code random split (anchor)	≈390	112	0.660	0.336	0.253	0.160
text — embargoed	285	101	0.726	0.347	0.246	0.178
text — ticker-disjoint	386	109	0.777	0.522	0.393	0.291
persistence on the ticker-disjoint test set	—	109	1.452	0.550	0.327	0.188
text+audio — anchor	≈390	112	0.658	0.347	0.244	0.165
text+audio — embargoed	285	101	0.684	0.345	0.232	0.186
text+audio — ticker-disjoint	386	109	0.789	0.500	0.394	0.281
transcript shuffle, anchor split, the 97 test calls whose company has another call						
text — real transcript	≈390	97	0.683	0.348	0.262	0.165
text — another call of the *same* company	≈390	97	0.693	0.361	0.269	0.169
text — a call of a *different* company	≈390	97	0.745	0.386	0.318	0.203
text+audio — real / same company / different company, τ=3	≈390	97	0.675 / 0.692 / 0.784			
Sawhney et al., port — ensemble with (α, β) tuned on validation (EC; 5 seeds)						
their split (anchor)	328	110	0.686	0.324	0.187	0.117
embargoed	283	100	0.719	0.306	0.184	0.107
ticker-disjoint	383	109	0.775	0.416	0.263	0.161
its own finance SVR, ticker-disjoint	383	109	0.700	0.365	0.256	0.158
Same-Company-Same-Signal, authors' `run.py` (DEC; seed 2021; means over 19 rolling quarters)						
TMLP (text) — paired anchor	900	30	0.591	0.288	0.224	0.211
TMLP (text) — ticker-disjoint	600	30	0.660	0.354	0.280	0.267
TMLP (text) — embargoed (vs anchor 0.608 / 0.285 / 0.215 / 0.202)	895	90	0.585	0.287	0.216	0.208
TSMixer (price) — paired anchor	900	30	0.519	0.241	0.206	0.252
TSMixer (price) — ticker-disjoint	600	30	0.556	0.254	0.194	0.233
persistence on the held-out calls	—	30	1.258	0.457	0.252	0.224
KeFVP, authors' script (MAEC, regenerated BERT-base embeddings; 3 repeats)						
MAEC-15 — paired anchor	535	48	0.470	0.192	0.145	0.114
MAEC-15 — ticker-disjoint	353	48	0.458	0.199	0.150	0.113
MAEC-16 — paired anchor	980	92	0.416	0.248	0.347	0.186
MAEC-16 — ticker-disjoint	661	92	0.378	0.241	0.312	0.178
persistence on the MAEC-16 held-out calls	—	92	0.622	0.265	0.170	0.116

Table 12: The reproduced models under our controls (Result Table 6R-C, T6R.4). Each block keeps the configuration of Table 11 and changes only the split; paired anchors score the unchanged model on exactly the ticker-disjoint test calls. Removing same-company history costs the three text models 12–82% (HTML, Sawhney, TMLP; TMLP is worse in 16–18 of 19 quarters) and leaves both price-dominated models unchanged (TSMixer, KeFVP), although the ticker-disjoint training sets are as large (EC) or cut by the same third (DEC, MAEC) in both groups. The 30-session embargo moves HTML, Sawhney and SCSS by at most 13% in either direction; KeFVP's embargoed MAEC re-splits keep only a half or a third of its training calls, cannot separate leakage from data loss, and are reported in the ledger, not here. DialogueGAT (one seed, 42–60 held-out calls per year) shows no consistent direction and is also left to the ledger.

Stratum	calls (test)		τ=3	τ=7	τ=15	τ=30
All	514 (95)	real	0.435	0.328	0.171	0.220
		global shuffle	0.454	0.327	0.141	0.206
		increment	**−0.019**	**0.001**	**0.030**	**0.014**
64 kbps	281 (39)	real	0.370	0.250	0.109	0.310
		global shuffle	0.383	0.266	0.133	0.303
		increment	**−0.013**	**−0.016**	**−0.024**	**0.007**
$\leq$24 kbps	232 (55)	real	0.343	0.328	0.174	0.145
		global shuffle	0.443	0.354	0.174	0.128
		increment	**−0.100**	**−0.026**	**−0.001**	**0.018**

Table 13: Audio on Earnings25 by bitrate stratum (T9.4; R^2_{OOS} vs. persistence, Δv, ridge on WavLM + past-vol, ticker-disjoint test). The within-ticker shuffle is the identity here (one call per company), so the global shuffle is the control. Call counts are inventory calls with audio at that bitrate (one call at 32 kbps sits in neither stratum); the heads see the 475 admitted, priced calls, and the test count is their ticker-disjoint segment. The audio increment never exceeds 0.03, is negative in 7 of the 12 cells, and has no consistent sign across strata; the 64 kbps stratum is not better than the $\leq$24 kbps one. Full grid (eGeMAPS, emotion2vec+, fusion, MLP heads, all targets): `result_table_3_earnings25.csv`.

Head	seg.	τ=3	τ=7	τ=15	τ=30
HAR-RV	in	$0.44 \to 0.46$	$0.37 \to 0.41$	$0.14 \to 0.21$	$-0.29 \to -0.28$
	post	$0.60 \to 0.56$	$0.54 \to 0.51$	$0.35 \to 0.33$	$0.08 \to -0.12$
text + past-vol	in	$0.33 \to -1.71$	$0.28 \to -3.12$	$0.08 \to -3.62$	$-0.08 \to -0.47$
	post	$0.31 \to 0.28$	$0.33 \to 0.27$	$0.23 \to 0.15$	$0.12 \to -0.09$
WavLM + past-vol	in	$0.36 \to 0.26$	$0.26 \to -1.02$	$-0.04 \to -2.01$	$0.05 \to -0.56$
	post	$0.50 \to 0.43$	$0.43 \to 0.32$	$0.15 \to 0.06$	$0.18 \to 0.05$
fusion + past-vol	in	$0.29 \to -1.73$	$0.22 \to -3.13$	$0.04 \to -0.34$	$-0.11 \to -0.45$
	post	$-0.83 \to -9.97$	$0.32 \to -2.29$	$0.19 \to 0.02$	$0.01 \to -0.28$

Table 14: Anchor sensitivity: the same frozen heads with day 0 on the call date (the literature's anchor) (Δv, R^2_{OOS} vs. persistence; each cell reads measured $\to$ call-date). Ordering on level-v in the CSV.

Paper	venue	probe (date)	verdict	reason
Qin & Yang, What You Say and How You Say It Matters	ACL 2019	200, 0.0 code files, pushed 2022-08-04 (2026-09-09)	partial	dataset released (Driv
Yang et al., HTML	WWW 2020	200, 15.0 code files, pushed 2024-01-05 (2026-09-09)	partial	model classes run ve set_random_seed and dent unseeded shuffle dead Drive links — re
Sawhney et al., multimodal financial forecasting	ACM MM 2020	200, 112.0 code files, pushed 2020-10-26 (2026-09-09)	partial	TF 2.1 / Keras 2.3.1 ventory, price files an record; no multi-task Torch (T6R.3)
Sawhney et al., VolTAGE	EMNLP 2020	200, 5.0 code files, pushed 2021-11-16 (2026-09-09)	partial	ships the EC split/lab embeddings as .pkl; n
Niu et al., KeFVP	EMNLP Findings 2023	200, 42.0 code files, pushed 2024-01-28 (2026-09-09)	partial	requirements.txt does import-level repairs (names, a dropped cla imports); MAEC emb generator); EC KePt p
DialogueGAT	Findings of EMNLP 2022	200, 6.0 code files, pushed 2023-06-12 (2026-09-09)	partial	MIT code, tau<=15 or labels never released onto FinCall turns (T
Yu, Liu & He, Same Company, Same Signal	Findings of ACL 2025	200, 38.0 code files, pushed 2026-08-13 (2026-09-09)	runnable	MIT; ships DEC with mals, TSMixer 76 cel on the authors' embed
Yang et al., FinTrust	ACL 2023 short	200, 4.0 code files, pushed 2024-01-22 (2026-09-09)	partial	perturbation harness volatility model
Sound of Risk	2025	200, 0.0 code files, pushed 2025-08-26 (2026-09-09)	none	repository holds figu corpus
DeFVP	2024	409 (2026-09-09)	none	repository exists but i
ECHO-GL	2024	200, 3.0 code files, pushed 2024-02-26 (2026-09-09)	none	README states the volatility
ECC Analyzer	2024	no_url	none	no code released; GP
RiskLabs	2024	no_url	none	no code released; GP
NumHTML	AAAI 2022	no_url	none	paper promises code;
GNA-Vol		no_url	none	artefact URL returns
AMA-LSTM		no_url	none	10-byte stub repositor
AT-FinGPT		no_url	none	paywalled; no artefac

Table 15: Code-availability audit of the ECC volatility literature (T6R.2/T6R.3; regenerated by `ecvol audit code`, live GitHub probe on the date shown). One of seventeen papers ships code that runs as released; seven ship code with a broken environment, missing data, or defects that must be repaired before it starts (HTML's driver imports TensorFlow-1 symbols and decorrelates features from labels; KeFVP needs six import-level repairs); nine ship nothing usable. The reason column records what the faithful-reproduction sprint (Table 11) did with each.

Model	τ=3	τ=7	τ=15	τ=30
Persistence	0.000	0.000	0.000	0.000
Train mean	0.361*	0.141	-0.367*	-1.048*
EWMA	0.465*	0.389*	0.259*	0.019
HAR-RV	0.444*	0.372*	0.138*	-0.285*
GARCH(1,1)	0.472*	0.463*	0.298*	0.023
GBDT (ticker FE)	0.353*	0.244*	-0.097	-0.881*

Table 16: fincall — temporal split — level-v — R^2_OOS vs persistence (test) (n=483).

Model	τ=3	τ=7	τ=15	τ=30
Persistence	0.000	0.000	0.000	0.000
Train mean	0.535*	0.353*	0.072	0.097
EWMA	0.520*	0.379*	0.142*	0.112*
HAR-RV	0.570*	0.491*	0.349*	0.345*
GARCH(1,1)	0.561*	0.484*	0.334*	0.298*
GBDT (ticker FE)	0.501*	0.440*	0.292*	0.242*

Table 17: fincall — ticker_disjoint split — level-v — R^2_OOS vs persistence (test) (n=484).

A.7 Generated grids

The tables below are generated byte-identically by `ecvol report` from the committed result CSVs and are the source of truth for every curated table above. They span both corpora, the level-v and Δv targets, R^2_{OOS} and MSE, and the temporal and ticker-disjoint splits at all horizons; Result Table 1 carries both horizon conventions and the train-mean intercept, Tables 2–4 the trading-day convention with Diebold–Mariano p-values against persistence, the preceding stage and the train-mean intercept.

Stage-0/1 baselines (Result Table 1)

Model	τ=3	τ=7	τ=15	τ=30
Persistence	0.000	0.000	0.000	0.000
Train mean	0.165*	0.158*	0.060	0.088*
EWMA	0.465*	0.389*	0.259*	0.019
HAR-RV	0.444*	0.372*	0.138*	-0.285*
GARCH(1,1)	0.472*	0.463*	0.298*	0.023
GBDT (ticker FE)	0.340*	0.249*	-0.126	-0.948*

Table 18: fincall — temporal split — Δv — R^2_OOS vs persistence (test) (n=483).

Model	τ=3	τ=7	τ=15	τ=30
Persistence	0.000	0.000	0.000	0.000
Train mean	0.200*	0.201*	0.132*	0.035*
EWMA	0.520*	0.379*	0.142*	0.112*
HAR-RV	0.570*	0.491*	0.349*	0.345*
GARCH(1,1)	0.561*	0.484*	0.334*	0.298*
GBDT (ticker FE)	0.494*	0.440*	0.292*	0.237*

Table 19: fincall — ticker_disjoint split — Δv — R^2_OOS vs persistence (test) (n=484).

Model	τ=3	τ=7	τ=15	τ=30
Persistence	0.000	0.000	0.000	0.000
Train mean	0.557*	0.342*	0.024	-0.264*
EWMA	0.562*	0.389*	0.223*	0.087*
HAR-RV	0.603*	0.486*	0.321*	0.221*
GARCH(1,1)	0.596*	0.505*	0.325*	0.049
GBDT (ticker FE)	0.563*	0.429*	0.240*	0.113*

Table 20: maec — temporal split — level-v — R^2_OOS vs persistence (test) (n=529).

Model	τ=3	τ=7	τ=15	τ=30
Persistence	0.000	0.000	0.000	0.000
Train mean	0.511*	0.267*	0.004	-0.277*
EWMA	0.557*	0.388*	0.276*	0.073*
HAR-RV	0.574*	0.447*	0.332*	0.183*
GARCH(1,1)	0.593*	0.481*	0.403*	0.181*
GBDT (ticker FE)	0.483*	0.339*	0.221*	0.091

Table 21: maec — ticker_disjoint split — level-v — R^2_OOS vs persistence (test) (n=532).

Model	τ=3	τ=7	τ=15	τ=30
Persistence	0.000	0.000	0.000	0.000
Train mean	0.254*	0.251*	0.187*	0.090*
EWMA	0.562*	0.389*	0.223*	0.087*
HAR-RV	0.603*	0.486*	0.321*	0.221*
GARCH(1,1)	0.596*	0.505*	0.325*	0.049
GBDT (ticker FE)	0.562*	0.420*	0.254*	0.150*

Table 22: maec — temporal split — Δv — R^2_OOS vs persistence (test) (n=529).

Model	τ=3	τ=7	τ=15	τ=30
Persistence	0.000	0.000	0.000	0.000
Train mean	0.265*	0.254*	0.210*	0.105*
EWMA	0.557*	0.388*	0.276*	0.073*
HAR-RV	0.574*	0.447*	0.332*	0.183*
GARCH(1,1)	0.593*	0.481*	0.403*	0.181*
GBDT (ticker FE)	0.477*	0.361*	0.250*	0.095*

Table 23: maec — ticker_disjoint split — Δv — R^2_OOS vs persistence (test) (n=532).

Model	τ=3	τ=7	τ=15	τ=30
Persistence	1.270	0.448	0.211	0.115
Train mean	0.811*	0.384	0.288*	0.235*
EWMA	0.679*	0.274*	0.156*	0.113
HAR-RV	0.706*	0.281*	0.182*	0.148*
GARCH(1,1)	0.671*	0.240*	0.148*	0.112
GBDT (ticker FE)	0.821*	0.338*	0.231	0.216*

Table 24: fincall — temporal split — level-v — MSE (test) (n=483).

Model	τ=3	τ=7	τ=15	τ=30
Persistence	1.368	0.477	0.248	0.262
Train mean	0.637*	0.309*	0.230	0.236
EWMA	0.657*	0.297*	0.213*	0.232*
HAR-RV	0.589*	0.243*	0.162*	0.171*
GARCH(1,1)	0.602*	0.245*	0.164*	0.184*
GBDT (ticker FE)	0.683*	0.267*	0.176*	0.198*

Table 25: fincall — ticker_disjoint split — level-v — MSE (test) (n=484).

Model	τ=3	τ=7	τ=15	τ=30
Persistence	1.270	0.448	0.211	0.115
Train mean	1.060*	0.377*	0.198	0.105*
EWMA	0.679*	0.274*	0.156*	0.113
HAR-RV	0.706*	0.281*	0.182*	0.148*
GARCH(1,1)	0.671*	0.240*	0.148*	0.112
GBDT (ticker FE)	0.838*	0.336*	0.237	0.224*

Table 26: fincall — temporal split — Δv — MSE (test) (n=483).

Model	τ=3	τ=7	τ=15	τ=30
Persistence	1.368	0.477	0.248	0.262
Train mean	1.095*	0.381*	0.216*	0.253*
EWMA	0.657*	0.297*	0.213*	0.232*
HAR-RV	0.589*	0.243*	0.162*	0.171*
GARCH(1,1)	0.602*	0.245*	0.164*	0.184*
GBDT (ticker FE)	0.692*	0.267*	0.176*	0.200*

Table 27: fincall — ticker_disjoint split — Δv — MSE (test) (n=484).

Model	τ=3	τ=7	τ=15	τ=30
Persistence	1.774	0.712	0.356	0.201
Train mean	0.787*	0.469*	0.347	0.253*
EWMA	0.778*	0.435*	0.276*	0.183*
HAR-RV	0.705*	0.366*	0.242*	0.156*
GARCH(1,1)	0.717*	0.352*	0.240*	0.191
GBDT (ticker FE)	0.775*	0.406*	0.270*	0.178*

Table 28: maec — temporal split — level-v — MSE (test) (n=529).

Model	τ=3	τ=7	τ=15	τ=30
Persistence	1.709	0.632	0.326	0.161
Train mean	0.836*	0.463*	0.324	0.206*
EWMA	0.756*	0.387*	0.236*	0.149*
HAR-RV	0.730*	0.350*	0.218*	0.132*
GARCH(1,1)	0.695*	0.328*	0.194*	0.132*
GBDT (ticker FE)	0.884*	0.417*	0.254*	0.147

Table 29: maec — ticker_disjoint split — level-v — MSE (test) (n=532).

Model	τ=3	τ=7	τ=15	τ=30
Persistence	1.774	0.712	0.356	0.201
Train mean	1.323*	0.533*	0.289*	0.183*
EWMA	0.778*	0.435*	0.276*	0.183*
HAR-RV	0.705*	0.366*	0.242*	0.156*
GARCH(1,1)	0.717*	0.352*	0.240*	0.191
GBDT (ticker FE)	0.778*	0.413*	0.265*	0.171*

Table 30: maec — temporal split — Δv — MSE (test) (n=529).

Model	τ=3	τ=7	τ=15	τ=30
Persistence	1.709	0.632	0.326	0.161
Train mean	1.256*	0.471*	0.257*	0.144*
EWMA	0.756*	0.387*	0.236*	0.149*
HAR-RV	0.730*	0.350*	0.218*	0.132*
GARCH(1,1)	0.695*	0.328*	0.194*	0.132*
GBDT (ticker FE)	0.894*	0.404*	0.244*	0.146*

Table 31: maec — ticker_disjoint split — Δv — MSE (test) (n=532).

Model	τ=3	τ=7	τ=15	τ=30
Persistence	0.000	0.000	0.000	0.000
Train mean	0.376*	0.234*	-0.079	-0.718*
EWMA	0.404*	0.420*	0.328*	0.145*
HAR-RV	0.419*	0.402*	0.275*	-0.053
GARCH(1,1)	0.388*	0.484*	0.399*	0.145*
GBDT (ticker FE)	0.249*	0.278*	0.105	-0.368*

Table 32: fincall — temporal split — level-v — R^2_OOS vs persistence (test) — calendar-day τ (n=483).

Model	τ=3	τ=7	τ=15	τ=30
Persistence	0.000	0.000	0.000	0.000
Train mean	0.503*	0.486*	0.206*	-0.015
EWMA	0.470*	0.476*	0.258*	0.036
HAR-RV	0.534*	0.559*	0.418*	0.289*
GARCH(1,1)	0.520*	0.546*	0.409*	0.262*
GBDT (ticker FE)	0.472*	0.498*	0.340*	0.213*

Table 33: fincall — ticker_disjoint split — level-v — R^2_OOS vs persistence (test) — calendar-day τ (n=484).

Model	τ=3	τ=7	τ=15	τ=30
Persistence	0.000	0.000	0.000	0.000
Train mean	0.062	0.205*	0.104*	0.064*
EWMA	0.404*	0.420*	0.328*	0.145*
HAR-RV	0.419*	0.402*	0.275*	-0.053
GARCH(1,1)	0.388*	0.484*	0.399*	0.145*
GBDT (ticker FE)	0.225*	0.270*	0.101	-0.389*

Table 34: fincall — temporal split — Δv — R^2_OOS vs persistence (test) — calendar-day τ (n=483).

Model	τ=3	τ=7	τ=15	τ=30
Persistence	0.000	0.000	0.000	0.000
Train mean	0.124*	0.235*	0.189*	0.075*
EWMA	0.470*	0.476*	0.258*	0.036
HAR-RV	0.534*	0.559*	0.418*	0.289*
GARCH(1,1)	0.520*	0.546*	0.409*	0.262*
GBDT (ticker FE)	0.464*	0.503*	0.319*	0.212*

Table 35: fincall — ticker_disjoint split — Δv — R^2_OOS vs persistence (test) — calendar-day τ (n=484).

Model	τ=3	τ=7	τ=15	τ=30
Persistence	0.000	0.000	0.000	0.000
Train mean	0.508*	0.412*	0.198*	-0.148
EWMA	0.566*	0.412*	0.311*	0.169*
HAR-RV	0.562*	0.502*	0.400*	0.265*
GARCH(1,1)	0.579*	0.497*	0.428*	0.203*
GBDT (ticker FE)	0.513*	0.450*	0.357*	0.172*

Table 36: maec — temporal split — level-v — R^2_OOS vs persistence (test) — calendar-day τ (n=529).

Model	τ=3	τ=7	τ=15	τ=30
Persistence	0.000	0.000	0.000	0.000
Train mean	0.626*	0.379*	0.139*	-0.153
EWMA	0.653*	0.445*	0.337*	0.172*
HAR-RV	0.661*	0.498*	0.396*	0.233*
GARCH(1,1)	0.663*	0.515*	0.452*	0.284*
GBDT (ticker FE)	0.575*	0.416*	0.292*	0.139*

Table 37: maec — ticker_disjoint split — level-v — R^2_OOS vs persistence (test) — calendar-day τ (n=532).

Model	τ=3	τ=7	τ=15	τ=30
Persistence	0.000	0.000	0.000	0.000
Train mean	0.247*	0.245*	0.224*	0.135*
EWMA	0.566*	0.412*	0.311*	0.169*
HAR-RV	0.562*	0.502*	0.400*	0.265*
GARCH(1,1)	0.579*	0.497*	0.428*	0.203*
GBDT (ticker FE)	0.515*	0.442*	0.370*	0.186*

Table 38: maec — temporal split — Δv — R^2_OOS vs persistence (test) — calendar-day τ (n=529).

Model	τ=3	τ=7	τ=15	τ=30
Persistence	0.000	0.000	0.000	0.000
Train mean	0.297*	0.281*	0.229*	0.154*
EWMA	0.653*	0.445*	0.337*	0.172*
HAR-RV	0.661*	0.498*	0.396*	0.233*
GARCH(1,1)	0.663*	0.515*	0.452*	0.284*
GBDT (ticker FE)	0.576*	0.420*	0.319*	0.144*

Table 39: maec — ticker_disjoint split — Δv — R^2_OOS vs persistence (test) — calendar-day τ (n=532).

Model	τ=3	τ=7	τ=15	τ=30
Persistence	2.071	0.612	0.298	0.152
Train mean	1.293*	0.469*	0.322	0.262*
EWMA	1.234*	0.355*	0.200*	0.130*
HAR-RV	1.204*	0.366*	0.216*	0.161
GARCH(1,1)	1.271*	0.316*	0.179*	0.130*
GBDT (ticker FE)	1.555*	0.442*	0.267	0.209*

Table 40: fincall — temporal split — level-v — MSE (test) — calendar-day τ (n=483).

Model	τ=3	τ=7	τ=15	τ=30
Persistence	2.550	0.738	0.321	0.220
Train mean	1.268*	0.379*	0.255*	0.223
EWMA	1.352*	0.387*	0.238*	0.212
HAR-RV	1.189*	0.325*	0.186*	0.156*
GARCH(1,1)	1.227*	0.334*	0.188*	0.162*
GBDT (ticker FE)	1.347*	0.371*	0.212*	0.173*

Table 41: fincall — ticker_disjoint split — level-v — MSE (test) — calendar-day τ (n=484).

Model	τ=3	τ=7	τ=15	τ=30
Persistence	2.071	0.612	0.298	0.152
Train mean	1.942	0.486*	0.267*	0.143*
EWMA	1.234*	0.355*	0.200*	0.130*
HAR-RV	1.204*	0.366*	0.216*	0.161
GARCH(1,1)	1.271*	0.316*	0.179*	0.130*
GBDT (ticker FE)	1.606*	0.447*	0.268	0.212*

Table 42: fincall — temporal split — Δv — MSE (test) — calendar-day τ (n=483).

Model	τ=3	τ=7	τ=15	τ=30
Persistence	2.550	0.738	0.321	0.220
Train mean	2.233*	0.565*	0.260*	0.203*
EWMA	1.352*	0.387*	0.238*	0.212
HAR-RV	1.189*	0.325*	0.186*	0.156*
GARCH(1,1)	1.227*	0.334*	0.188*	0.162*
GBDT (ticker FE)	1.366*	0.367*	0.218*	0.173*

Table 43: fincall — ticker_disjoint split — Δv — MSE (test) — calendar-day τ (n=484).

Model	τ=3	τ=7	τ=15	τ=30
Persistence	2.553	0.986	0.492	0.263
Train mean	1.256*	0.579*	0.395*	0.302
EWMA	1.109*	0.579*	0.339*	0.219*
HAR-RV	1.119*	0.491*	0.295*	0.194*
GARCH(1,1)	1.075*	0.496*	0.282*	0.210*
GBDT (ticker FE)	1.243*	0.542*	0.317*	0.218*

Table 44: maec — temporal split — level-v — MSE (test) — calendar-day τ (n=529).

Model	τ=3	τ=7	τ=15	τ=30
Persistence	2.494	0.910	0.426	0.229
Train mean	0.933*	0.565*	0.366*	0.264
EWMA	0.867*	0.505*	0.282*	0.189*
HAR-RV	0.845*	0.457*	0.258*	0.175*
GARCH(1,1)	0.840*	0.441*	0.233*	0.164*
GBDT (ticker FE)	1.059*	0.531*	0.302*	0.197*

Table 45: maec — ticker_disjoint split — level-v — MSE (test) — calendar-day τ (n=532).

Model	τ=3	τ=7	τ=15	τ=30
Persistence	2.553	0.986	0.492	0.263
Train mean	1.924*	0.744*	0.382*	0.228*
EWMA	1.109*	0.579*	0.339*	0.219*
HAR-RV	1.119*	0.491*	0.295*	0.194*
GARCH(1,1)	1.075*	0.496*	0.282*	0.210*
GBDT (ticker FE)	1.237*	0.550*	0.310*	0.214*

Table 46: maec — temporal split — Δv — MSE (test) — calendar-day τ (n=529).

Model	τ=3	τ=7	τ=15	τ=30
Persistence	2.494	0.910	0.426	0.229
Train mean	1.753*	0.654*	0.328*	0.193*
EWMA	0.867*	0.505*	0.282*	0.189*
HAR-RV	0.845*	0.457*	0.258*	0.175*
GARCH(1,1)	0.840*	0.441*	0.233*	0.164*
GBDT (ticker FE)	1.056*	0.528*	0.290*	0.196*

Table 47: maec — ticker_disjoint split — Δv — MSE (test) — calendar-day τ (n=532).

Model	τ=3	τ=7	τ=15	τ=30
Ridge (text)	0.430*	0.322*	-0.007	-0.539*
MLP (text)	0.153*	-0.235*	-1.156*	-2.782*
Ridge (past-vol)	0.407*	0.314*	0.079*	-0.382*
MLP (past-vol)	0.439*	0.352*	0.116*	-0.459*
Ridge (text+vol)	0.435*	0.339*	0.034*	-0.454*
MLP (text+vol)	0.219*	-0.115*	-0.918*	-2.504*

Table 48: fincall — temporal split — level-v — R^2_OOS vs persistence (test) (n=483).

Model	τ=3	τ=7	τ=15	τ=30
Ridge (text)	0.549*	0.449	0.254	0.199
MLP (text)	0.177*	-0.484*	-1.491*	-1.354*
Ridge (past-vol)	0.543	0.467	0.341	0.284
MLP (past-vol)	0.571*	0.512*	0.365*	0.327
Ridge (text+vol)	0.552*	0.464	0.293	0.278
MLP (text+vol)	0.209*	-0.348*	-1.277*	-1.166*

Table 49: fincall — ticker_disjoint split — level-v — R^2_OOS vs persistence (test) (n=484).

Stage-2 text heads (Result Table 2)

Model	τ=3	τ=7	τ=15	τ=30
Ridge (text)	0.182*	0.202	0.044*	-0.133*
MLP (text)	0.013*	0.069*	-0.253	-1.202
Ridge (past-vol)	0.412*	0.314*	0.094*	0.113*
MLP (past-vol)	0.441*	0.330*	0.086*	-0.401*
Ridge (text+vol)	0.333	0.285	0.080*	-0.077*
MLP (text+vol)	0.275	0.222	-0.108	-0.855

Table 50: fincall — temporal split — Δv — R^2_OOS vs persistence (test) (n=483).

Model	τ=3	τ=7	τ=15	τ=30
Ridge (text)	0.195*	0.217*	0.195*	0.169
MLP (text)	0.046*	-0.024*	-0.108*	-0.061*
Ridge (past-vol)	0.552*	0.469	0.345	0.318*
MLP (past-vol)	0.577*	0.508*	0.381*	0.356*
Ridge (text+vol)	0.399*	0.375	0.256	0.301
MLP (text+vol)	0.423*	0.352*	0.165*	0.224

Table 51: fincall — ticker_disjoint split — Δv — R^2_OOS vs persistence (test) (n=484).

Model	τ=3	τ=7	τ=15	τ=30
Ridge (text)	0.515	0.304*	0.002*	-0.303*
MLP (text)	-0.174*	-1.142*	-2.602*	-5.867*
Ridge (past-vol)	0.575	0.441	0.322*	0.242*
MLP (past-vol)	0.605*	0.470	0.324*	0.240*
Ridge (text+vol)	0.516	0.348*	0.165	0.010*
MLP (text+vol)	-0.116*	-1.036*	-1.853*	-4.494*

Table 52: maec — temporal split — level-v — R^2_OOS vs persistence (test) (n=529).

Model	τ=3	τ=7	τ=15	τ=30
Ridge (text)	0.556*	0.355	0.116	-0.115*
MLP (text)	0.233*	-0.523*	-1.583*	-3.321*
Ridge (past-vol)	0.530	0.364	0.230	0.159
MLP (past-vol)	0.537	0.389	0.239	0.184
Ridge (text+vol)	0.563*	0.390	0.274	0.133
MLP (text+vol)	0.103*	-0.670*	-1.556*	-3.281*

Table 53: maec — ticker_disjoint split — level-v — R^2_OOS vs persistence (test) (n=532).

Model	τ=3	τ=7	τ=15	τ=30
Ridge (text)	0.247*	0.148*	0.191	0.098
MLP (text)	0.110*	0.003*	-0.287*	-0.288*
Ridge (past-vol)	0.581	0.444	0.323*	0.242*
MLP (past-vol)	0.615*	0.494*	0.349*	0.258*
Ridge (text+vol)	0.438*	-0.015*	0.233	0.152
MLP (text+vol)	0.407*	0.291*	0.109*	-0.174*

Table 54: maec — temporal split — Δv — R^2_OOS vs persistence (test) (n=529).

Model	τ=3	τ=7	τ=15	τ=30
Ridge (text)	0.276*	0.267*	0.221	0.113
MLP (text)	0.245*	0.177*	0.070*	-0.112*
Ridge (past-vol)	0.530	0.364	0.230	0.159
MLP (past-vol)	0.559*	0.436*	0.318*	0.182
Ridge (text+vol)	0.453	0.340	0.235	0.093
MLP (text+vol)	0.457	0.322	0.168	-0.070*

Table 55: maec — ticker_disjoint split — Δv — R^2_OOS vs persistence (test) (n=532).

Model	τ=3	τ=7	τ=15	τ=30
Ridge (text)	0.724*	0.304*	0.212	0.177*
MLP (text)	1.075*	0.553*	0.455*	0.434*
Ridge (past-vol)	0.752*	0.307*	0.194*	0.159*
MLP (past-vol)	0.713*	0.290*	0.186*	0.168*
Ridge (text+vol)	0.718*	0.296*	0.204*	0.167*
MLP (text+vol)	0.992*	0.499*	0.404*	0.402*

Table 56: fincall — temporal split — level-v — MSE (test) (n=483).

Model	τ=3	τ=7	τ=15	τ=30
Ridge (text)	0.617*	0.263	0.185	0.210
MLP (text)	1.125*	0.708*	0.619*	0.616*
Ridge (past-vol)	0.626	0.254	0.163	0.187
MLP (past-vol)	0.587*	0.233*	0.158*	0.176
Ridge (text+vol)	0.613*	0.256	0.176	0.189
MLP (text+vol)	1.082*	0.643*	0.565*	0.567*

Table 57: fincall — ticker_disjoint split — level-v — MSE (test) (n=484).

Model	τ=3	τ=7	τ=15	τ=30
Ridge (text)	1.039*	0.357	0.202*	0.130*
MLP (text)	1.253*	0.417*	0.264	0.253
Ridge (past-vol)	0.746*	0.307*	0.191*	0.102*
MLP (past-vol)	0.710*	0.300*	0.193*	0.161*
Ridge (text+vol)	0.847	0.320	0.194*	0.124*
MLP (text+vol)	0.921	0.348	0.234	0.213

Table 58: fincall — temporal split — Δv — MSE (test) (n=483).

Model	τ=3	τ=7	τ=15	τ=30
Ridge (text)	1.101*	0.374*	0.200*	0.217
MLP (text)	1.306*	0.489*	0.275*	0.278*
Ridge (past-vol)	0.613*	0.254	0.163	0.178*
MLP (past-vol)	0.578*	0.235*	0.154*	0.168*
Ridge (text+vol)	0.822*	0.298	0.185	0.183
MLP (text+vol)	0.790*	0.309*	0.207*	0.203

Table 59: fincall — ticker_disjoint split — Δv — MSE (test) (n=484).

Model	τ=3	τ=7	τ=15	τ=30
Ridge (text)	0.861	0.495*	0.355*	0.261*
MLP (text)	2.082*	1.525*	1.281*	1.377*
Ridge (past-vol)	0.755	0.398	0.241*	0.152*
MLP (past-vol)	0.701*	0.377	0.240*	0.152*
Ridge (text+vol)	0.859	0.464*	0.297	0.198*
MLP (text+vol)	1.981*	1.450*	1.015*	1.102*

Table 60: maec — temporal split — level-v — MSE (test) (n=529).

Model	τ=3	τ=7	τ=15	τ=30
Ridge (text)	0.758*	0.408	0.288	0.180*
MLP (text)	1.310*	0.962*	0.841*	0.697*
Ridge (past-vol)	0.802	0.402	0.251	0.136
MLP (past-vol)	0.791	0.386	0.248	0.132
Ridge (text+vol)	0.746*	0.385	0.236	0.140
MLP (text+vol)	1.532*	1.055*	0.833*	0.690*

Table 61: maec — ticker_disjoint split — level-v — MSE (test) (n=532).

Model	τ=3	τ=7	τ=15	τ=30
Ridge (text)	1.336*	0.607*	0.288	0.181
MLP (text)	1.578*	0.710*	0.458*	0.258*
Ridge (past-vol)	0.744	0.396	0.241*	0.152*
MLP (past-vol)	0.684*	0.360*	0.231*	0.149*
Ridge (text+vol)	0.997*	0.723*	0.273	0.170
MLP (text+vol)	1.052*	0.505*	0.317*	0.235*

Table 62: maec — temporal split — Δv — MSE (test) (n=529).

Model	τ=3	τ=7	τ=15	τ=30
Ridge (text)	1.237*	0.463*	0.254	0.143
MLP (text)	1.291*	0.520*	0.303*	0.179*
Ridge (past-vol)	0.802	0.402	0.251	0.136
MLP (past-vol)	0.753*	0.357*	0.222*	0.132
Ridge (text+vol)	0.934	0.417	0.249	0.146
MLP (text+vol)	0.929	0.428	0.271	0.172*

Table 63: maec — ticker_disjoint split — Δv — MSE (test) (n=532).

Model	τ=3	τ=7	τ=15	τ=30
ridge eGeMAPS	0.361	0.144*	-0.370*	-1.159*
mlp eGeMAPS	-10.085	-20.164	-38.738	-61.570
ridge eGeMAPS +vol	0.374	0.260	-0.067	-0.677
mlp eGeMAPS +vol	-7.831	-17.515	-37.949	-50.038
ridge WavLM	0.357	0.084*	-0.507*	-1.106*
mlp WavLM	-0.072*	-0.808*	-2.505*	-5.253*
ridge WavLM +vol	0.378	0.245	-0.094	-0.665*
mlp WavLM +vol	0.016*	-0.582*	-1.882*	-4.053*
ridge emotion2vec+	0.354	0.152*	-0.320*	-0.967
mlp emotion2vec+	-0.270*	-1.582*	-3.692*	-6.470*
ridge emotion2vec+ +vol	0.396	0.305*	0.071*	0.398*
mlp emotion2vec+ +vol	-0.313*	-1.580*	-3.559*	-6.632*
ridge WavLM+eGeMAPS	0.354	0.139*	-0.411*	-1.114*
mlp WavLM+eGeMAPS	-1.847	-5.053	-9.675	-14.344
ridge WavLM+eGeMAPS +vol	0.367	0.259	-0.119	-0.763
mlp WavLM+eGeMAPS +vol	-2.005	-5.365	-10.910	-16.691
ridge WavLM+text +vol	0.427*	0.332*	-0.007	-0.527*
mlp WavLM+text +vol	0.213*	-0.050*	-0.823*	-2.165*

Table 64: fincall — temporal split — level-v — R^2_OOS vs persistence (test) (n=483).

Model	τ=3	τ=7	τ=15	τ=
ridge eGeMAPS	0.535	0.320*	0.073*	0.06
mlp eGeMAPS	-7.712	-26.589	-52.220	-53.9
ridge eGeMAPS +vol	0.544	0.426	0.310	0.2
mlp eGeMAPS +vol	-7.149	-21.128	-47.690	-46.8
ridge WavLM	0.514	0.320*	-0.022*	-0.0
mlp WavLM	-0.020*	-0.939*	-2.346*	-2.2
ridge WavLM +vol	0.521	0.401	0.243	0.2
mlp WavLM +vol	-0.074*	-1.072*	-2.573*	-2.3
ridge emotion2vec+	0.533	0.357*	0.085*	0.1
mlp emotion2vec+	-1.783	-4.890	-10.950	-9.6
ridge emotion2vec+ +vol	0.540	0.463	0.335	0.2
mlp emotion2vec+ +vol	-1.860	-5.254	-11.588	-11.1
ridge WavLM+eGeMAPS	0.516	0.305*	-0.071*	-0.0
mlp WavLM+eGeMAPS	-1.442	-4.849	-10.335	-9.3
ridge WavLM+eGeMAPS +vol	0.522	0.389	0.230	0.2
mlp WavLM+eGeMAPS +vol	-1.676	-5.476	-11.476	-10.3
ridge WavLM+text +vol	0.539	0.448	0.276	0.2
mlp WavLM+text +vol	0.228*	-0.288*	-1.033*	-0.86

Table 65: fincall — ticker_disjoint split — level-v — R^2_OOS vs persistence (test) (n=484).

Stage-3 audio heads (Result Table 3)

FinCall-Surprise only (MAEC ships no raw audio).

Model	τ=3	τ=7	τ=15	τ=
ridge eGeMAPS	0.163*	0.156*	0.059*	0.07
mlp eGeMAPS	-0.096*	-0.004*	-0.228	-0.5
ridge eGeMAPS +vol	0.373	0.268	0.074*	0.10
mlp eGeMAPS +vol	0.319	-0.212	-0.901	-3.6
ridge WavLM	0.156*	0.148*	-0.027	-0.00
mlp WavLM	0.045*	-0.108*	-0.433*	-1.1
ridge WavLM +vol	0.357	0.262	-0.044	0.05
mlp WavLM +vol	0.295	0.087*	-0.387*	-1.27
ridge emotion2vec+	0.155*	0.129*	0.022*	0.02
mlp emotion2vec+	0.006*	-0.029*	-0.337*	-1.0
ridge emotion2vec+ +vol	0.403*	0.307	0.095*	0.06
mlp emotion2vec+ +vol	0.186*	0.107*	-0.218	-0.9
ridge WavLM+eGeMAPS	0.155*	0.145*	0.015*	-0.00
mlp WavLM+eGeMAPS	-0.010*	-0.180*	-0.550*	-1.1
ridge WavLM+eGeMAPS +vol	0.353	0.268	0.033*	0.05
mlp WavLM+eGeMAPS +vol	0.140	-0.014*	-0.581*	-1.49
ridge WavLM+text +vol	0.311	0.237	0.050*	-0.10
mlp WavLM+text +vol	0.323	0.269	-0.103	-0.9

Table 66: fincall — temporal split — Δv — R^2_OOS vs persistence (test) (n=483).

Model	τ=3	τ=7	τ=15	τ=30
ridge eGeMAPS	0.203*	0.119*	0.137*	0.044*
mlp eGeMAPS	0.093*	-0.037*	0.038*	-0.004*
ridge eGeMAPS +vol	0.524	0.431	0.201	0.138*
mlp eGeMAPS +vol	0.328	0.169*	0.179*	0.139*
ridge WavLM	0.178*	0.192*	0.115*	0.025*
mlp WavLM	0.026*	0.011*	-0.140*	0.119*
ridge WavLM +vol	0.456	0.390	0.267	0.232
mlp WavLM +vol	0.424*	0.346*	0.139*	0.050*
ridge emotion2vec+	0.181*	0.185*	0.122*	0.047*
mlp emotion2vec+	0.077*	0.032*	-0.188*	0.210*
ridge emotion2vec+ +vol	0.541*	0.464	0.340	0.317
mlp emotion2vec+ +vol	0.431*	0.323*	0.123*	0.029*
ridge WavLM+eGeMAPS	0.181*	0.194*	0.136*	0.041*
mlp WavLM+eGeMAPS	0.033*	-0.007*	-0.131*	0.119*
ridge WavLM+eGeMAPS +vol	0.442	0.364*	0.244	0.217
mlp WavLM+eGeMAPS +vol	0.327*	0.154*	-0.152*	0.136*
ridge WavLM+text +vol	0.369*	0.348*	0.228	0.201
mlp WavLM+text +vol	0.404*	0.315*	0.128*	0.103*

Table 67: fincall — ticker_disjoint split — Δv — R^2_OOS vs persistence (test) (n=484).

Model	τ=3	τ=7	τ=15	τ=30
ridge eGeMAPS	0.636	0.325*	0.230*	0.246*
mlp eGeMAPS	11.919	13.169	13.212	14.372
ridge eGeMAPS +vol	0.624	0.274	0.171	0.192
mlp eGeMAPS +vol	11.149	10.562	12.088	12.512
ridge WavLM	0.664	0.325*	0.254*	0.266*
mlp WavLM	1.396*	0.926*	0.831*	0.861*
ridge WavLM +vol	0.655	0.286	0.188	0.197
mlp WavLM +vol	1.470*	0.989*	0.887*	0.882*
ridge emotion2vec+	0.639	0.307*	0.227*	0.231*
mlp emotion2vec+	3.808	2.812	2.967	2.799
ridge emotion2vec+ +vol	0.630	0.256	0.165	0.188
mlp emotion2vec+ +vol	3.912	2.985	3.125	3.171
ridge WavLM+eGeMAPS	0.663	0.332*	0.266*	0.270*
mlp WavLM+eGeMAPS	3.340	2.792	2.814	2.700
ridge WavLM+eGeMAPS +vol	0.653	0.291	0.191	0.199
mlp WavLM+eGeMAPS +vol	3.661	3.091	3.097	2.975
ridge WavLM+text +vol	0.631	0.263	0.180	0.191
mlp WavLM+text +vol	1.056*	0.615*	0.505*	0.487*

Table 69: fincall — ticker_disjoint split — level-v — MSE (test) (n=484).

Model	τ=3	τ=7	τ=15	τ=30
ridge eGeMAPS	0.811	0.383*	0.289*	0.248*
mlp eGeMAPS	14.075	9.472	8.379*	7.196*
ridge eGeMAPS +vol	0.795	0.331	0.225	0.193*
mlp eGeMAPS +vol	11.213	8.287	8.213*	5.862*
ridge WavLM	0.816	0.410*	0.318*	0.242*
mlp WavLM	1.361*	0.809*	0.739*	0.718*
ridge WavLM +vol	0.789	0.338	0.231	0.191*
mlp WavLM +vol	1.250*	0.708*	0.608*	0.580*
ridge emotion2vec+	0.821	0.380*	0.278*	0.226
mlp emotion2vec+	1.612*	1.156*	0.989*	0.858*
ridge emotion2vec+ +vol	0.766	0.311*	0.196*	0.161*
mlp emotion2vec+ +vol	1.667*	1.154*	0.961*	0.877*
ridge WavLM+eGeMAPS	0.820	0.386*	0.298*	0.243*
mlp WavLM+eGeMAPS	3.615	2.709	2.251*	1.763*
ridge WavLM+eGeMAPS +vol	0.804	0.332	0.236	0.203*
mlp WavLM+eGeMAPS +vol	3.815	2.849	2.511*	2.033*
ridge WavLM+text +vol	0.727*	0.299*	0.212*	0.175*
mlp WavLM+text +vol	1.000*	0.470*	0.384*	0.364*

Table 68: fincall — temporal split — level-v — MSE (test) (n=483).

Model	τ=3	τ=7	τ=15	τ=30
ridge eGeMAPS	1.062*	0.378*	0.198*	0.106*
mlp eGeMAPS	1.391*	0.449*	0.259	0.180
ridge eGeMAPS +vol	0.797	0.328	0.195*	0.102*
mlp eGeMAPS +vol	0.865	0.543	0.401	0.535
ridge WavLM	1.072*	0.381*	0.217	0.116*
mlp WavLM	1.212*	0.496*	0.302*	0.248
ridge WavLM +vol	0.817	0.330	0.220	0.109*
mlp WavLM +vol	0.895	0.409*	0.292*	0.261*
ridge emotion2vec+	1.074*	0.390*	0.206*	0.112*
mlp emotion2vec+	1.263*	0.461*	0.282*	0.230
ridge emotion2vec+ +vol	0.757*	0.310	0.191*	0.108*
mlp emotion2vec+ +vol	1.033*	0.400*	0.257	0.229
ridge WavLM+eGeMAPS	1.073*	0.383*	0.208*	0.116*
mlp WavLM+eGeMAPS	1.283*	0.528*	0.327*	0.244
ridge WavLM+eGeMAPS +vol	0.822	0.327	0.204*	0.109*
mlp WavLM+eGeMAPS +vol	1.091	0.454*	0.333*	0.286*
ridge WavLM+text +vol	0.875	0.342	0.200*	0.127*
mlp WavLM+text +vol	0.860	0.327	0.233	0.228

Table 70: fincall — temporal split — Δv — MSE (test) (n=483).

Model	τ=3	τ=7	τ=15	τ=30
ridge eGeMAPS	1.091*	0.420*	0.214*	0.250*
mlp eGeMAPS	1.241*	0.495*	0.239*	0.273*
ridge eGeMAPS +vol	0.652	0.272	0.176	0.187
mlp eGeMAPS +vol	0.920	0.397*	0.204*	0.212
ridge WavLM	1.125*	0.386*	0.216*	0.255*
mlp WavLM	1.333*	0.472*	0.283*	0.313*
ridge WavLM +vol	0.745	0.291	0.182	0.204
mlp WavLM +vol	0.788*	0.312*	0.214*	0.246*
ridge emotion2vec+	1.121*	0.389*	0.218*	0.249*
mlp emotion2vec+	1.263*	0.462*	0.295*	0.317*
ridge emotion2vec+ +vol	0.628*	0.256	0.164	0.179
mlp emotion2vec+ +vol	0.778*	0.323*	0.218*	0.254*
ridge WavLM+eGeMAPS	1.120*	0.385*	0.214*	0.233*
mlp WavLM+eGeMAPS	1.323*	0.481*	0.281*	0.312*
ridge WavLM+eGeMAPS +vol	0.764	0.304*	0.188	0.205
mlp WavLM+eGeMAPS +vol	0.921*	0.404*	0.286*	0.313*
ridge WavLM+text +vol	0.863*	0.311*	0.189	0.183
mlp WavLM+text +vol	0.815*	0.327*	0.217*	0.211

Table 71: fincall — ticker_disjoint split — Δv — MSE (test) (n=484).

Stage	τ=3	τ=7	τ=15	τ=30
Persistence	0.000	0.000	0.000	0.000
Train mean	0.361	0.141	-0.367	-1.048
HAR-RV	0.444	0.372	0.138	-0.285
GBDT (ticker FE)	0.353	0.244	-0.097	-0.881
Text (BGE+vol)	0.435	0.339	0.034	-0.454
Audio (WavLM+eG+vol)	0.367	0.259	-0.119	-0.763
Fusion (stack)	0.442	0.390	0.164	-0.227

Table 72: fincall — temporal split — level-v — R^2_OOS vs persistence (test) (n=483).

Stage	τ=3	τ=7	τ=15	τ=30
Persistence	0.000	0.000	0.000	0.000
Train mean	0.535	0.353	0.072	0.097
HAR-RV	0.570	0.491	0.349	0.345
GBDT (ticker FE)	0.501	0.440	0.292	0.242
Text (BGE+vol)	0.552	0.464	0.293	0.278
Audio (WavLM+eG+vol)	0.522	0.389	0.230	0.239
Fusion (stack)	0.556	0.466	0.319	0.365

Table 73: fincall — ticker_disjoint split — level-v — R^2_OOS vs persistence (test) (n=484).

Consolidated ablation grid (Result Table 4)

One pre-registered canonical model per stage; $*$ marks Holm-corrected significance vs. Stage-1 within the Δv confirmatory family (two-sided; read direction from the value).

Stage	τ=3	τ=7	τ=15	τ=30
Persistence	0.000	0.000	0.000	0.000
Train mean	0.165	0.158	0.060	0.088
HAR-RV	0.444	0.372	0.138	-0.285
GBDT (ticker FE)	0.340	0.249	-0.126	-0.948
Text (BGE+vol)	0.333	0.285	0.080*	-0.077*
Audio (WavLM+eG+vol)	0.353	0.268	0.033*	0.050*
Fusion (stack)	0.406*	0.347*	0.066*	0.100*

Table 74: fincall — temporal split — Δv — R^2_OOS vs persistence (test) (n=483).

Stage	τ=3	τ=7	τ=15	τ=30
Persistence	0.000	0.000	0.000	0.000
Train mean	0.200	0.201	0.132	0.035
HAR-RV	0.570	0.491	0.349	0.345
GBDT (ticker FE)	0.494	0.440	0.292	0.237
Text (BGE+vol)	0.399*	0.375	0.256	0.301
Audio (WavLM+eG+vol)	0.442	0.364	0.241	0.217
Fusion (stack)	0.531	0.465	0.340	0.396*

Table 75: fincall — ticker_disjoint split — Δv — R^2_OOS vs persistence (test) (n=484).

Stage	τ=3	τ=7	τ=15	τ=30
Persistence	0.000	0.000	0.000	0.000
Train mean	0.557	0.342	0.024	-0.264
HAR-RV	0.603	0.486	0.321	0.221
GBDT (ticker FE)	0.563	0.429	0.240	0.113
Text (BGE+vol)	0.516	0.348	0.165	0.010
Audio (WavLM+eG+vol)	—	—	—	—
Fusion (stack)	—	—	—	—

Table 76: maec — temporal split — level-v — R^2_OOS vs persistence (test) (n=529).

Stage	τ=3	τ=7	τ=15	τ=30
Persistence	0.000	0.000	0.000	0.000
Train mean	0.511	0.267	0.004	-0.277
HAR-RV	0.574	0.447	0.332	0.183
GBDT (ticker FE)	0.483	0.339	0.221	0.091
Text (BGE+vol)	0.563	0.390	0.274	0.133
Audio (WavLM+eG+vol)	—	—	—	—
Fusion (stack)	—	—	—	—

Table 77: maec — ticker_disjoint split — level-v — R^2_OOS vs persistence (test) (n=532).

Stage	τ=3	τ=7	τ=15	τ=30
Persistence	0.000	0.000	0.000	0.000
Train mean	0.254	0.251	0.187	0.090
HAR-RV	0.603	0.486	0.321	0.121
GBDT (ticker FE)	0.562	0.420	0.254	0.130
Text (BGE+vol)	0.438*	-0.015*	0.233	0.152
Audio (WavLM+eG+vol)	—	—	—	—
Fusion (stack)	—	—	—	—

Table 78: maec — temporal split — Δv — R^2_OOS vs persistence (test) (n=529).

Stage	τ=3	τ=7	τ=15	τ=30
Persistence	1.270	0.448	0.211	0.115
Train mean	1.060	0.377	0.198	0.105
HAR-RV	0.706	0.281	0.182	0.148
GBDT (ticker FE)	0.838	0.336	0.237	0.224
Text (BGE+vol)	0.847	0.320	0.194*	0.124*
Audio (WavLM+eG+vol)	0.822	0.327	0.204*	0.109*
Fusion (stack)	0.755*	0.292*	0.197*	0.103*

Table 82: fincall — temporal split — Δv — MSE (test) (n=483).

Stage	τ=3	τ=7	τ=15	τ=30
Persistence	0.000	0.000	0.000	0.000
Train mean	0.265	0.254	0.210	0.105
HAR-RV	0.574	0.447	0.332	0.181
GBDT (ticker FE)	0.477	0.361	0.250	0.095
Text (BGE+vol)	0.453	0.340	0.235	0.093
Audio (WavLM+eG+vol)	—	—	—	—
Fusion (stack)	—	—	—	—

Table 79: maec — ticker_disjoint split — Δv — R^2_OOS vs persistence (test) (n=532).

Stage	τ=3	τ=7	τ=15	τ=30
Persistence	1.368	0.477	0.248	0.262
Train mean	1.095	0.381	0.216	0.253
HAR-RV	0.589	0.243	0.162	0.171
GBDT (ticker FE)	0.692	0.267	0.176	0.200
Text (BGE+vol)	0.822*	0.298	0.185	0.183
Audio (WavLM+eG+vol)	0.764	0.304	0.188	0.205
Fusion (stack)	0.642	0.255	0.164	0.158*

Table 83: fincall — ticker_disjoint split — Δv — MSE (test) (n=484).

Stage	τ=3	τ=7	τ=15	τ=30
Persistence	1.270	0.448	0.211	0.115
Train mean	0.811	0.384	0.288	0.235
HAR-RV	0.706	0.281	0.182	0.148
GBDT (ticker FE)	0.821	0.338	0.231	0.216
Text (BGE+vol)	0.718	0.296	0.204	0.167
Audio (WavLM+eG+vol)	0.804	0.332	0.236	0.203
Fusion (stack)	0.708	0.273	0.176	0.141

Table 80: fincall — temporal split — level-v — MSE (test) (n=483).

Stage	τ=3	τ=7	τ=15	τ=30
Persistence	1.774	0.712	0.356	0.201
Train mean	0.787	0.469	0.347	0.253
HAR-RV	0.705	0.366	0.242	0.156
GBDT (ticker FE)	0.775	0.406	0.270	0.178
Text (BGE+vol)	0.859	0.464	0.297	0.198
Audio (WavLM+eG+vol)	—	—	—	—
Fusion (stack)	—	—	—	—

Table 84: maec — temporal split — level-v — MSE (test) (n=529).

Stage	τ=3	τ=7	τ=15	τ=30
Persistence	1.368	0.477	0.248	0.262
Train mean	0.637	0.309	0.230	0.236
HAR-RV	0.589	0.243	0.162	0.171
GBDT (ticker FE)	0.683	0.267	0.176	0.198
Text (BGE+vol)	0.613	0.256	0.176	0.189
Audio (WavLM+eG+vol)	0.653	0.291	0.191	0.199
Fusion (stack)	0.607	0.255	0.169	0.166

Table 81: fincall — ticker_disjoint split — level-v — MSE (test) (n=484).

Stage	τ=3	τ=7	τ=15	τ=30
Persistence	1.709	0.632	0.326	0.161
Train mean	0.836	0.463	0.324	0.206
HAR-RV	0.730	0.350	0.218	0.132
GBDT (ticker FE)	0.884	0.417	0.254	0.147
Text (BGE+vol)	0.746	0.385	0.236	0.140
Audio (WavLM+eG+vol)	—	—	—	—
Fusion (stack)	—	—	—	—

Table 85: maec — ticker_disjoint split — level-v — MSE (test) (n=532).

Stage	τ=3	τ=7	τ=15	τ=30
Persistence	1.774	0.712	0.356	0.201
Train mean	1.323	0.533	0.289	0.183
HAR-RV	0.705	0.366	0.242	0.156
GBDT (ticker FE)	0.778	0.413	0.265	0.171
Text (BGE+vol)	0.997*	0.723*	0.273	0.170
Audio (WavLM+eG+vol)	—	—	—	—
Fusion (stack)	—	—	—	—

Table 86: maec — temporal split — Δv — MSE (test) (n=529).

Stage	τ=3	τ=7	τ=15	τ=30
Persistence	1.709	0.632	0.326	0.161
Train mean	1.256	0.471	0.257	0.144
HAR-RV	0.730	0.350	0.218	0.132
GBDT (ticker FE)	0.894	0.404	0.244	0.146
Text (BGE+vol)	0.934	0.417	0.249	0.146
Audio (WavLM+eG+vol)	—	—	—	—
Fusion (stack)	—	—	—	—

Table 87: maec — ticker_disjoint split — Δv — MSE (test) (n=532).

Substrate audit and reproduction grids

The per-file substrate audit behind Table 1 is released as `result_table_5r.csv` and `result_table_5r_labels.csv` with the lineage mirror manifest; the reproduction grids as `result_table_6r*.csv` (HTML on EC with three seeds and persistence per cell; Same-Company-Same-Signal on DEC per rolling quarter; the faithful runs and their controls per paper).