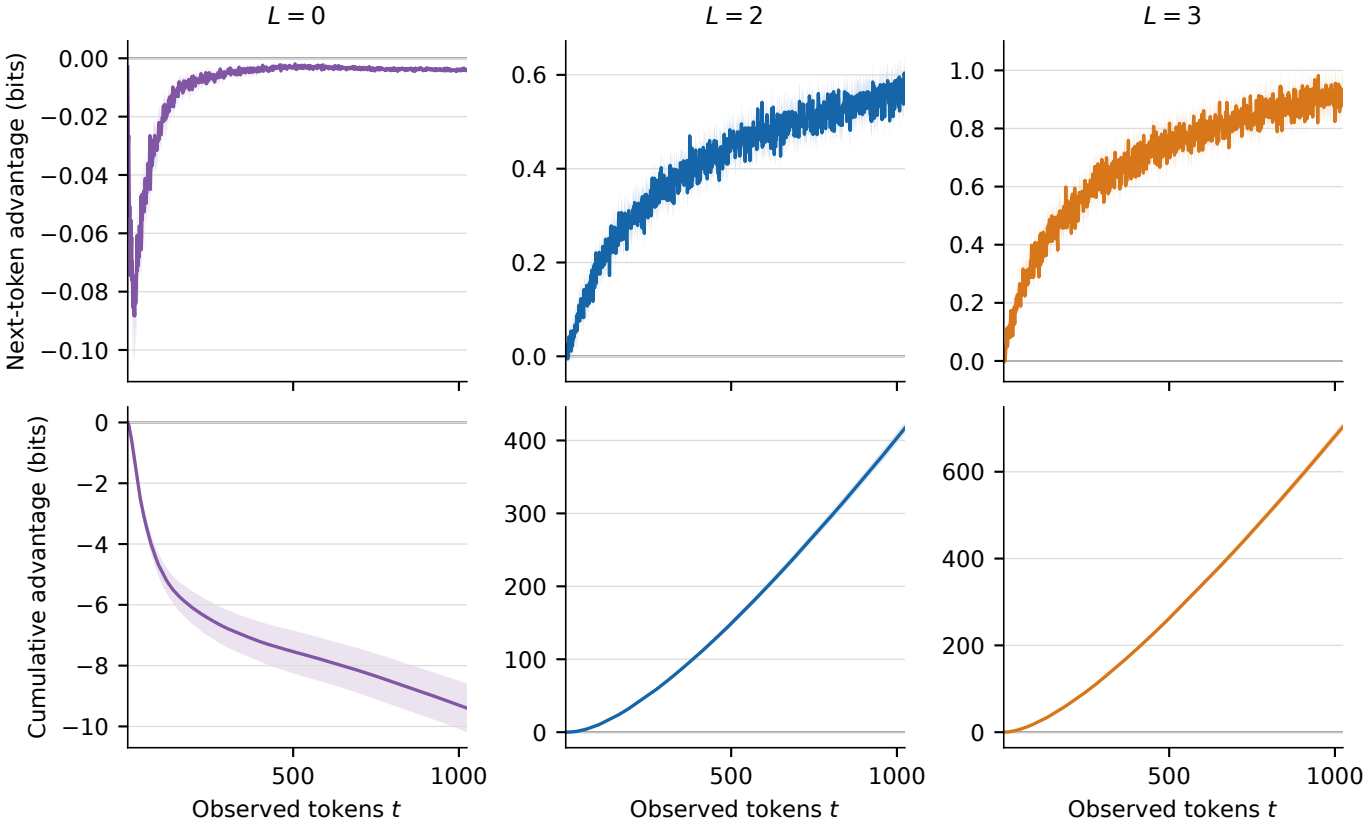

Training run 1; positive values favour ordered training
$L = 0$
$L = 2$
$L = 3$
Next-token advantage (bits)
Cumulative advantage (bits)
Observed tokens t
Observed tokens t
Observed tokens t