Delft University of Technology

User Manual

UrbanSearch

Authors: Tom Brunner Marko Mališ Gijs Reichert Piet van Agtmaal Supervisor: Claudia Hauff Clients: Evert Meijers Antoine Peris

July 4, 2017



1

User Manual

This is the user manual for the UrbanSearch Web Interface. Here we will discuss the various interfaces that are available in the UrbanSearch system. The manual is meant for new users of the system.

1.1 General remarks

The UrbanSearch Web Interface can be accessed by visiting http://citynetworks.bk.tudelft.nl/. Visiting this URL will open an interactive map on which intercity relations are visualised. The front-end of the UrbanSearch system consists of several interfaces listed below. In the coming sections we will dive deeper into the functionalities offered by the different interfaces.

Interactive Map with cities and relations visualised

Classification interface use to extend the training data

Classifier interface to train the classifier and get info about the data sets

.

1.2 Interactive Map

To display the extracted and processed data in our system, we use an interactive map(figure 1.1). The map is implemented with use of Google Maps. This means the typical map controls, like zooming for instance, are the same as on any Google Maps map.

Furthermore the map contains several entities which are used to convey information to the user and to interact with/manipulate the available data.

Below we will discuss the different entities available on the map.



Figure 1.1: The interactive map with one relation selected

1.2.1 Cities

Cities are represented by circles which are drawn on the map and placed in the correct position using the latitude/longitude properties belonging to the city. We scale the circle based on the size of the population of the city. An example of a city on the map is show in figure 1.2.



Figure 1.2: Hovering over a city will display extra information about the city

When a user hovers over a city on the map, a pop up will appear with extra information about that city.

If a city is clicked the relations to other visible cities are shown. Clicking on a selected city toggles the visibility of the previously displayed relations. To make clear for the user which cities are selected and which are not, we lower the opacity of selected cities.

1.2.2 Relations

Relations between cities are visualised using Google Maps Polylines¹. Relations for a particular city are shown when a city node is selected as described in 1.2.1.

¹https://developers.google.com/maps/documentation/javascript/3.exp/reference#Polyline



Figure 1.3: Selected city showing relations to other visible cities

Clicking on a relation opens up a new card containing information about this relation. The details about this card are discussed in 1.2.3.

The opacity of a relation indicates the relative strength of the relation compared to the relation with the highest score in the system. An example is given in figure 1.4.



Figure 1.4: A higher opacity indicates a weaker relative total strength of the relation. So Groningen has a stronger connection with Amsterdam then Assen.

1.2.3 Sidemenu

The side-menu displayed in figure 1.5 allows the user to control the information that is displayed on the map. It is also the . The basic layout of the sidemenu is displayed in figure 1.5. First we will discuss the elements that are always available in the sidemenu. Finally we will discuss dynamic content that can be added and removed from the sidemenu.

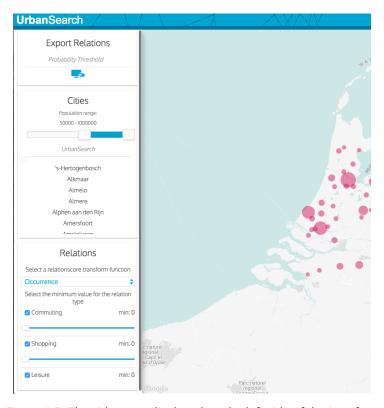


Figure 1.5: The sidemenu displayed on the left side of the interface

City Controls

The city controls displayed in figure 1.6 allow users to control the visibility of cities and city relations

The population slider can be used to set the visibility of cities. All cities with a population size that is in the selected range are displayed on the map.

The search input allows the user to search a list of visible cities. When a city in the list is clicked, the relations for this city are shown on the map.




Figure 1.6: The city control card

Relation Controls

Using the relation controls displayed in figure ?? an user can manipulate how intercity relations are displayed.

First of all the user can select several "transforms" from the drop-down that is available in the relation controls card. These transforms calculate a new value for the relation strengths based on the original values of the relations (which basically means the count of documents per category gets transformed for every relation). After the transform new totals and opacities are calculated for every relation. This way an user can quickly asses the difference of intercity relations for several relative measures.

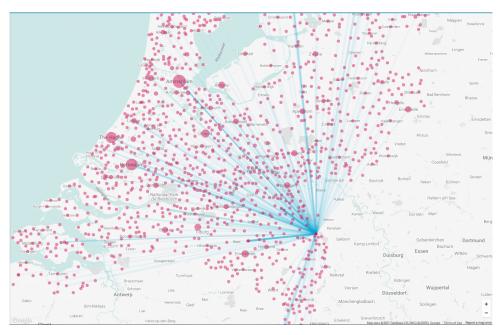


Figure 1.7: Opacity scaling based on total occurrences

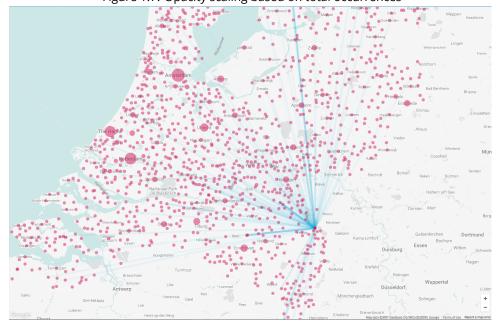


Figure 1.8: Opacity scaling based on total occurrences over minimum population size of a relation

Using the sliders for each category a user can set a minimum threshold for a relation category strength. For example if the value for the category "education" is set to 25 all relations that have a score lower than 25 on "education" are hidden. Finally relation categories can be selected and deselected. This triggers an update of the total relation strengths, respectively adding to or subtracting from the total relation score the score of the toggled category.

Export

In the export card an user can download all the relations in the system in CSV format. If the user provides an threshold

PIET ZEG FF WAT ER PRECIES GEBEURT

Export Relations

Probability Threshold

Figure 1.9: the export card

Relation Information

When clicking on a relation an extra window in the menu will be opened. This contains all information about the relation between the two cities. The strength of the relations (amount of documents found for the relation between those cities) will be displayed, as well as the strength of the relations per relation type (such as commuting, shopping, leisure, ..). To check how these relationships were found the option on the lower end of this window can be used to open up another window displaying all documents that connect those two cities.

Scores for Relation	
Amsterdam - Rotterdam	
From	Amsterdam
То	Rotterdam
Commuting	270
Shopping	5162
Leisure	12413
Residential_mobility	1277
Education	1193
Collaboration	2822
Transportation	1285
Other	104747

Figure 1.10: Relations scores between two cities

1.3 Classification Interface 7

Relation Documents

In this new window all documents will be displayed. For each document the type of relation to which the document fits and the probability this documents fits to that relation is displayed. If a document does not fit to the relation types (and is thus labelled other), it is not displayed here. The documents can be downloaded in a text file by clicking on them.



Figure 1.11: Documents included in relations

1.3 Classification Interface

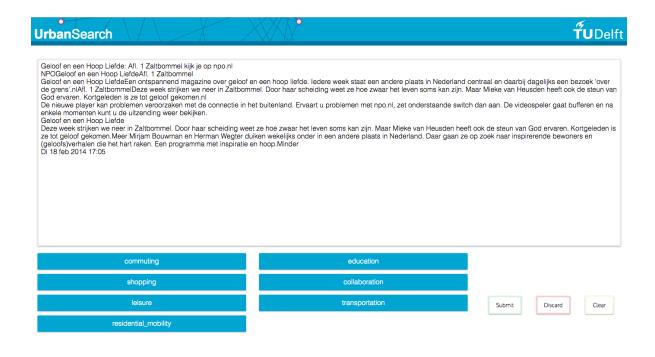


Figure 1.12: The classification interface

1.4 Classifier Interface 8

1.4 Classifier Interface

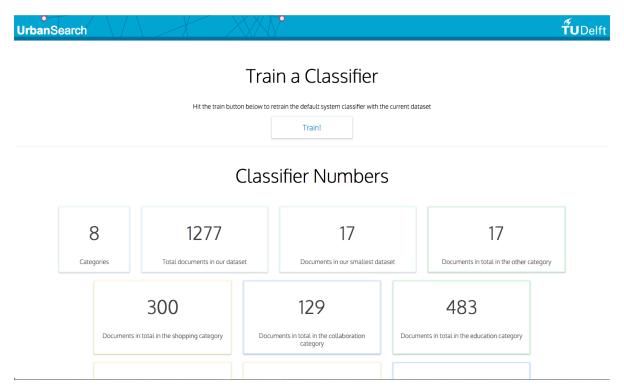


Figure 1.13: The classifier interface