



Xraster PLUGIN FOR QGIS

Multidimensional Raster GIS

USERS MANUAL

This plugin works only with **Windows 10 (version 2009) or Windows 11**
and requires additional Python libraries.

version: 0.4
December 2025

Table of Contents

1. INTRODUCTION	3
2. INSTALLATION	6
1. QGIS VERSION	
2. Xraster INSTALLATION PROCEDURE	
3. Xraster GENERAL PRESENTATION	
1. START AND QUIT THE TOOL IN QGIS	9
2. TOOL STRUCTURE AND FUNCTIONS	10
3. TYPICAL WORKFLOWS IN Xraster	13
4. QGIS LAYERS USED IN Xraster	19
5. PLOTS, SAVE AND EXPORT PLOT	21
6. PLOT CUSTOMISATION	24
7. EXPORT GEOTIFF RASTERS	24
8. EXPORT TEXT FILES	25
4. USING Xraster (Tabs)	
1. Data	26
2. Subset	31
3. Figures	40
4. Statistics	43
5. Extract/Cross	45
6. Group by time	48
7. Clip/Merge	49
8. GIS	52


INTRODUCTION

Xraster is designed for the analysis and processing of multidimensional raster data, where the primary dimension is time. This characteristic differentiates it from multispectral satellite images, where the third dimension of rasters represents the position on the wavelength axis (channels). Both types of data are based on a two-dimensional raster – 2D (with x and y axes in length units) as understood in GIS.

These data can exist as three-dimensional data, forming a time series of 2D rasters, or as four-dimensional data, where for each moment in time, there is an additional depth dimension (a separate 2D raster for each depth and time).

Such data constitute the most important source of information about the state of the atmosphere and oceans, both past and present. These data are provided by various organizations and scientific institutions (e.g., the Copernicus Programme of the European Union) in the **NetCDF** format, which is one of the primary formats for such data and is supported by **Xraster**. The primary tools for spatial data analysis are Geographic Information Systems (GIS). **Xraster** is embedded as a [plugin](#) in the [QGIS](#) software, enabling bidirectional integration in data processing. The plugin uses raster and point layers created in QGIS and generates data (raster layers and text data) that can be utilized within the program, creating a simple raster-based multidimensional GIS.

Xraster is built upon the functionality of the Python library (module) **xarray**. It serves as an interface to this module, allowing the entire process of data processing and analysis to occur without the need for programming.

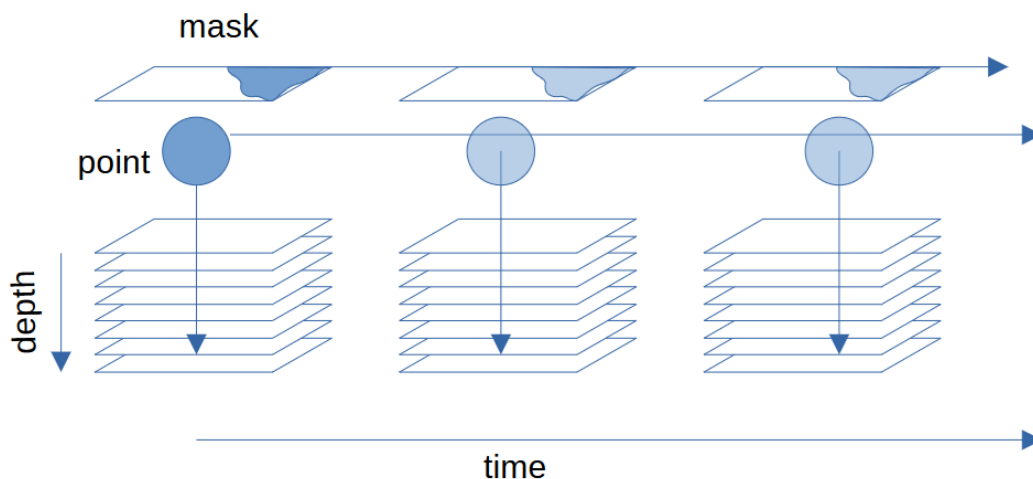


The analysis process in this module, which serves as the engine for **Xraster**, is based on creating data subsets. The diagram above illustrates the structure of multidimensional raster data with two accompanying elements: a mask raster and a point layer. If the raster is defined only on the surface, we will have 3-dimensional rasters (x, y of the primary raster and time). If the rasters are also defined for different depths (or heights), we will have 4-dimensional rasters (x, y of the basic raster, time, and depth or height).

Simplifying the entire process, geoprocessing involves two stages: creating a data subset and analyzing it. The type of subset determines the possibilities for data visualization and analysis.

Subset creation is based on 3 or 4 dimensions. In each dimension, a slice (a portion of the original space) or a time period can be defined. A subset corresponding to a specific point in space or a moment on the time axis can also be designated. Different types of data subsets allow for various visualization methods (e.g., histogram, map, time series, vertical profile, depth-time cross-section) and statistical analysis.

Working with the program involves creating subsets, visualizing them, and conducting statistical analysis. The results of these analyses can be visualized as described above or saved as raster or text layers.

The plugin consists of several tabs, each dedicated to a specific stage of working with the program. The program includes the following tabs,

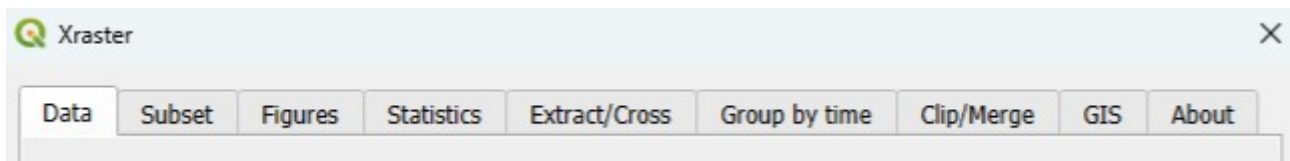

which perform the following tasks.

Data

- Import of 3-dimensional (x, y, time) and 4-dimensional (x, y, z, time) data in NetCDF (.nc) format and obtaining their description.
- Changing the spatial resolution of the 2D raster.
- Import of a raster mask (zone map) used for data analysis.
- Create an additional variable representing the surface area of cells in the 2D raster. This is used with geographic coordinates to calculate areas (e.g., ice cover) or as a weight for calculating weighted averages.
- Flattens 4D oceanographic data into 3D data creating a variable on the bottom; additionally, it creates a variable describing depth.

Subset

- Selection of the variable to be analyzed.
- Recalculation of the variable using an algebraic expression.
- Creation of a subset of the imported data using the selected variable, spatial range (x, y), time, depth (z), mask zones, and specified months.

Figures

- Depending on the selected subset, the following data visualizations are possible: histogram, map (x, y), vertical profile, depth-time cross-section, and time series (visualizations can be saved as high-resolution .jpg files).
- Maps can be exported as GeoTIFF rasters. Histogram, profile, time series, and cross-section data can be exported as CSV text files.
- For data with geographic coordinates, visualization is possible using the Polar Stereographic projection, including the addition of coastline lines on maps.

Statistics

- For a subset, spatial statistics (Spatial Summary) can be calculated for each day across the entire space (x, y, z) or for areas defined by mask zones (Zonal Statistics). Results are presented as a line chart over time and saved as text files.
- Temporal statistics for a given surface (x, y) produce a map, while at a point, they create an average vertical profile. Maps can be saved as GeoTIFF files.
- For data with a depth dimension, statistical maps of the seabed can be created.

Extract/Cross

- Extracting data from a subset to a dataset at specific points as a text file.
- Creating special raster subsets representing cross-sections, where the 2D raster uses the horizontal axis and depth.

Group by time

- Aggregation of data into groups (e.g., by months, years, climate seasons, or days) and calculation of statistics for each group. For each group, a map (at a specified depth) or a histogram of any statistic can be created.
- Groups can also be visualized as time series of a given statistic or as depth-time cross-sections. Time series and depth-time cross-sections can be saved as text files.

Clip/Merge

- The program offers a range of tools for transforming .nc files. These files can be efficiently cropped and merged. The created data subset can be saved as a new .nc file.

GIS

- Calculate a time series of the mean value of the variable within a specified water body. The calculation process uses weights that account for different water-layer surface areas and their varying thicknesses.
- Groups spatially and temporally connected cells, assigning unique region IDs and creating spatio-temporal region groups. It then performs their visualization and analysis.

About

- It contains basic information about the program and allows you to open the manual.

INSTALLATION

1. QGIS VERSION

The **Xraster** tool is a plugin within QGIS. QGIS software is available from this site: <https://qgis.org/> . The minimum version of QGIS required to run **Xraster** is 3.20 (the tool was designed and tested in version 3.34). The efficiency of working with the plugin depends on the computer's capabilities, particularly the available RAM (ideally 16-30 GB). However, the program can also run with 8 GB of RAM. The plugin operates on the Windows operating system.

QGIS may be installed using either the standalone installer or the OSGeo4W installer. **To use Xraster, you must use the OSGeo4W installer, which allows the addition of Python libraries used by the tool.** If you have QGIS installed via the standalone installer, you should first remove the software and download OSGeo4W. If you have QGIS installed via OSGeo4W, you do not need to remove QGIS. Next:


- **Run** osgeo4w-setup
- **Choose** Express install
- **Select Packages** : QGIS and GDAL (at least)
- Continue installation

After installing the program, you should switch to the English language version (recommended).

2. Xraster INSTALLATION PROCEDURE


The installation process of **Xraster** in QGIS follows these steps:

- You need to download the packaged plugin **xraster_gis_?.zip** from the website: <https://github.com/urbanskigis/Xraster> to any directory.
- Open QGIS 3.xx (minimum version 3.20)
- Open "Plugin" menu from the top bar

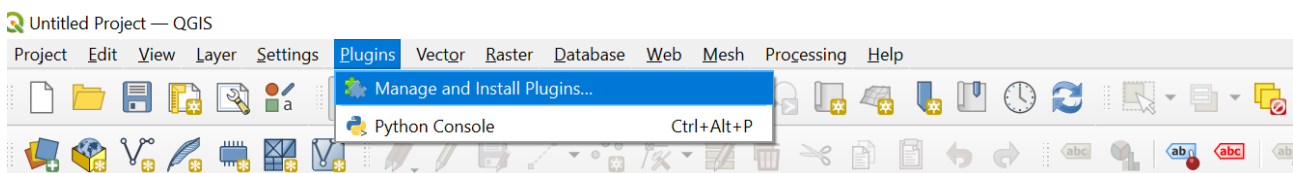


- Select "Manage and Install Plugins..."
- Go to "Install from ZIP"
- Select **xraster_gis_?.zip**

- Click install

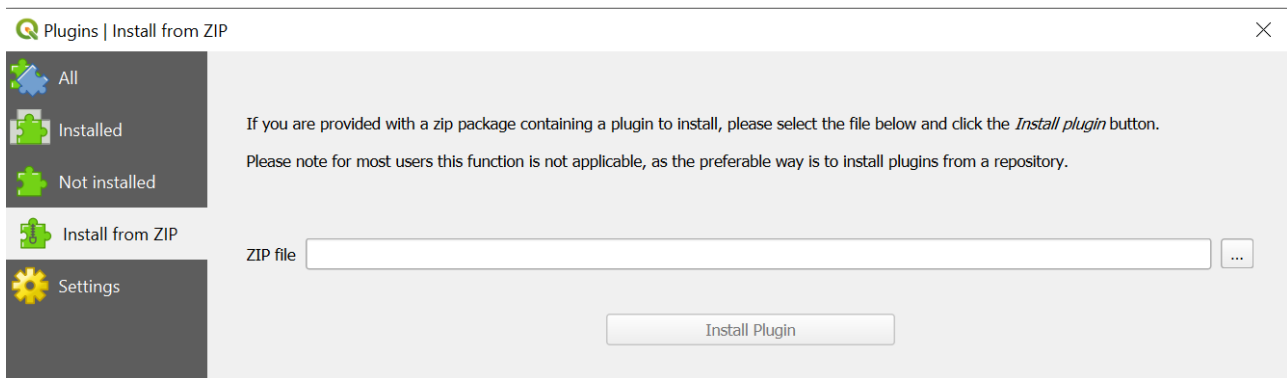


Since the plugin requires additional Python libraries that are not installed by default, if they are not found, a message will be displayed,

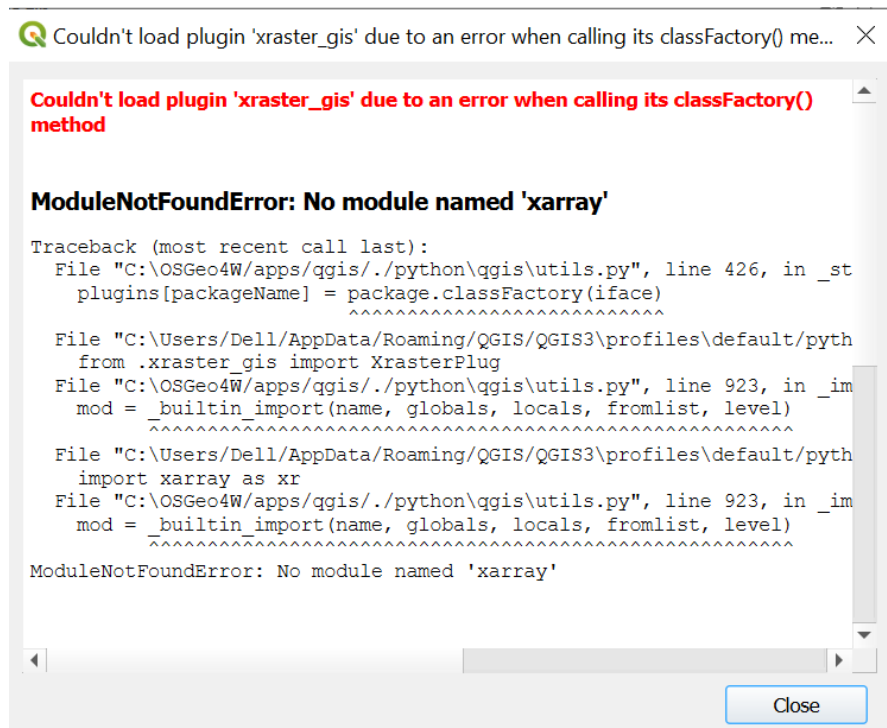

In such a case, you should:

- Go to the **C: /OSGeo4W** directory where the OSGeo installer has installed QGIS
- Run **OSGeo4W.bat**
- Check with **pip list** packages installed

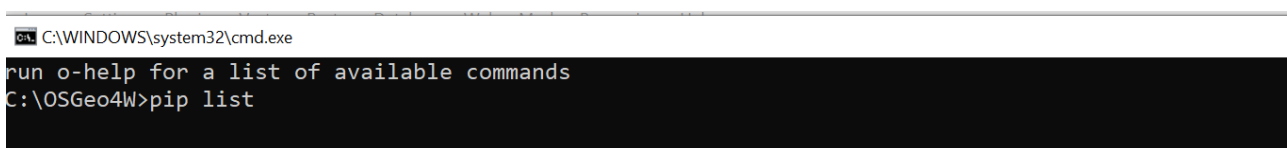

You need to install the packages: **xarray**, **netCDF4**, **h5netcdf**, **scipy** (**NEW in version 4**) and **Cartopy** using the following four commands executed in sequence:

```
C:\OSGeo4W>pip install xarray_
```


```
C:\OSGeo4W>pip install netCDF4_
```

```
C:\OSGeo4W>pip install h5netcdf
```

```
C:\OSGeo4W>pip install scipy|
```

```
C:\OSGeo4W>pip install Cartopy|
```

Launch again QGIS and the plugin installation should run fine. When the installation is complete, the **Xraster** tool appears in the installed plugin list (The current version of the program is best checked on the About tab, page 5) ,

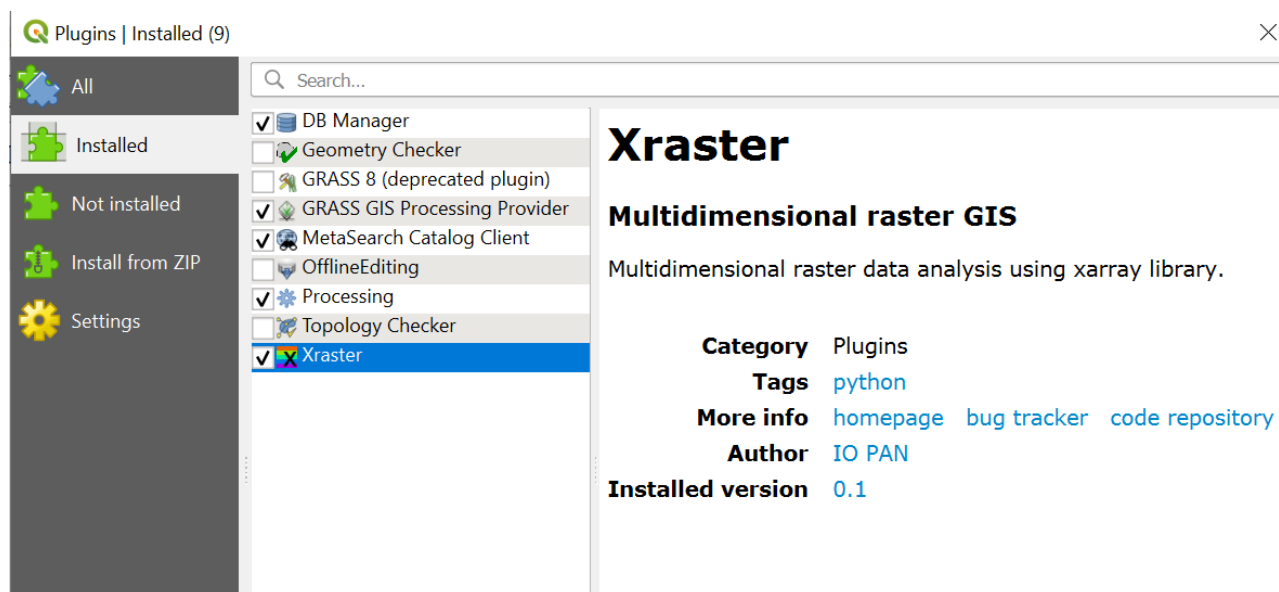

[\[TOC\]](#)


Xraster GENERAL PRESENTATION

1. START AND QUIT THE TOOL IN QGIS

After the installation, **Xraster** is made available in the tool bar by showing this button with the icon:



To start **Xraster** click on this button. If the button is not displayed, the tool can be selected in the plugin top bar menu. To quit the tool click **Close** click the button at the bottom of the window. **In QGIS, plugin windows may be hidden beneath the main program window, but they are visible on the bar at the bottom of the screen, from where they can be brought to the front.**

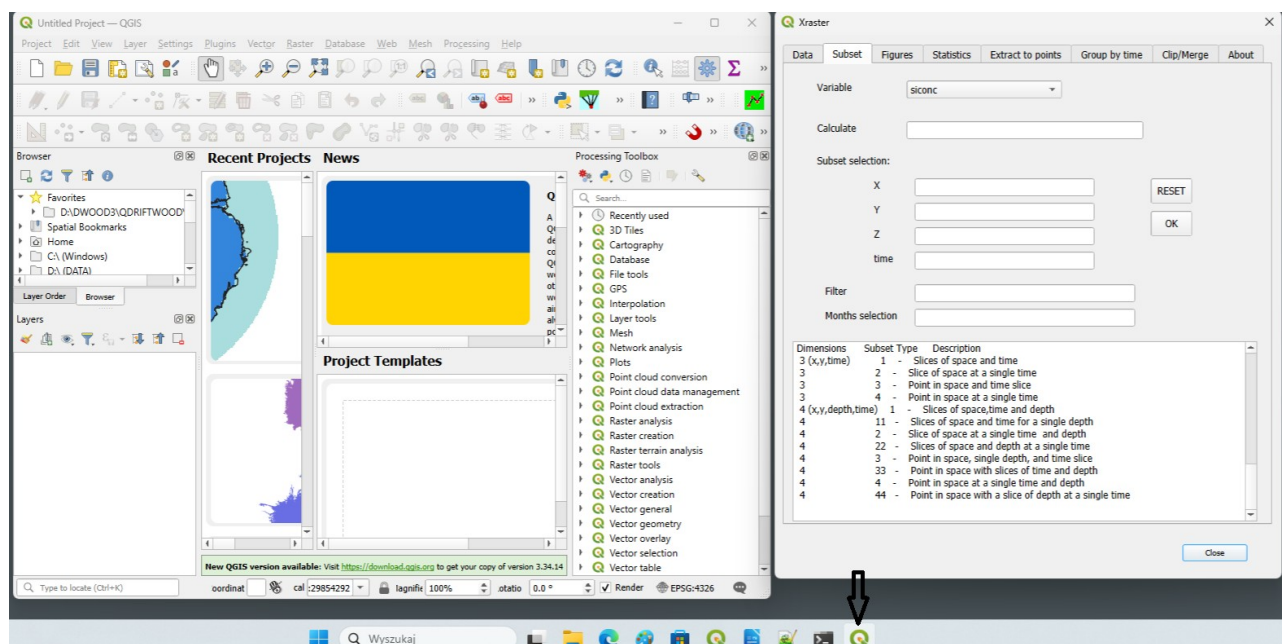


[\[TOC\]](#)

2. TOOL STRUCTURE AND FUNCTIONS


The **Xraster** plugin consists of seven tabs that implement different groups of functions of the software.

(Currently, Clip/Join has been replaced by Clip/Merge.)

and a common **Close** button on the right side at the bottom for exiting the program.

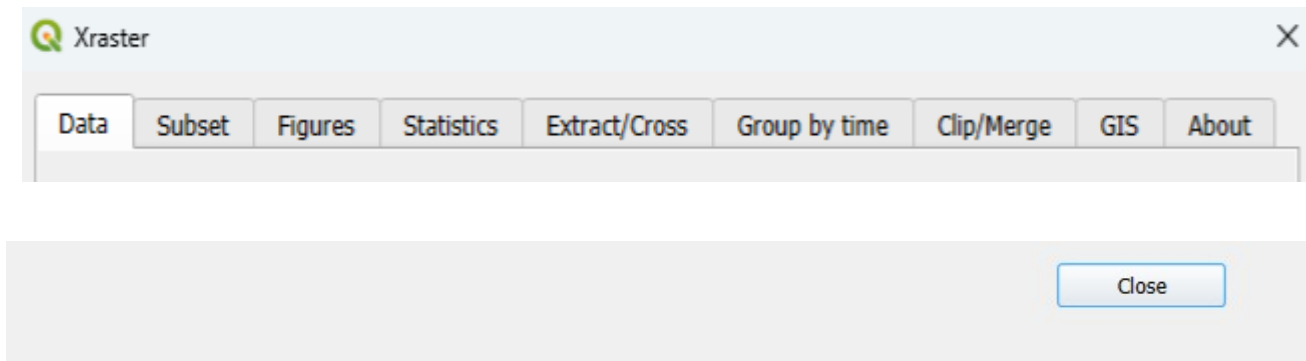

The structure of the program is presented below,

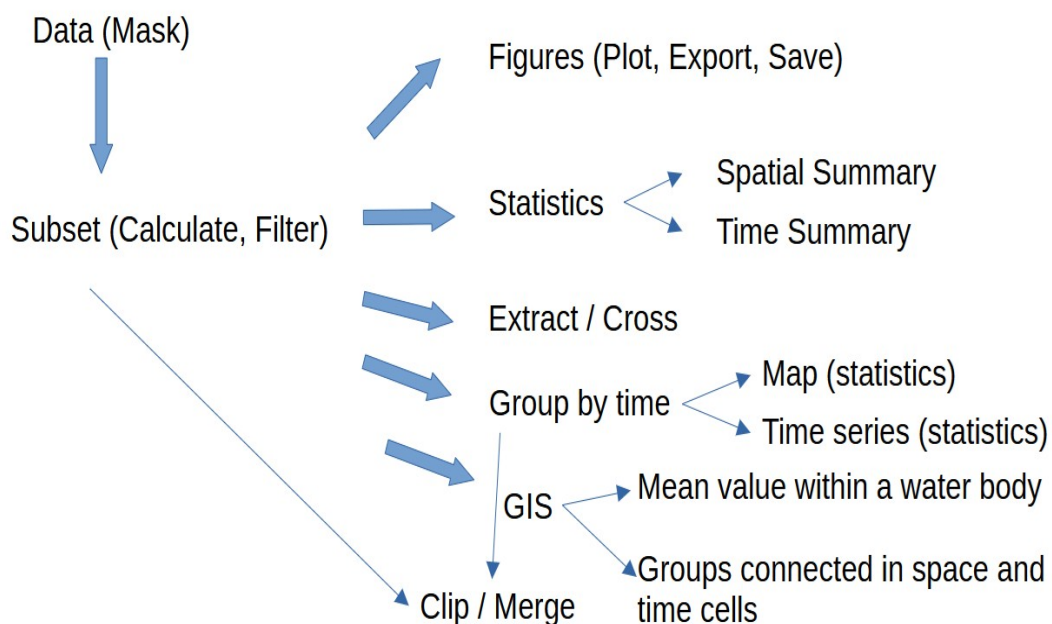

The first tab **Data** is used for inputting data into the program. The program uses data in NetCDF (.nc) format and also uses raster masks in .tif format with georeferencing. The next tab **Subset** plays a fundamental role in the analysis process by creating a data subset. The primary dimensions of the data are the geographic coordinates defining a surface on the Earth (x, y), time (t), and depth (z). The input data can contain 3 (x, y,

t) or 4 (x, y, z, t) dimensions. The defined data subset can refer to a surface or a point. It can pertain to a specific period of time or a particular moment in time. It may encompass a certain range of depths or a selected level. Additionally, when defining the data subset, it is possible to limit the data to a specific area and specific months using a mask. As a result, the data subset can take very different forms, which will determine the methods for its visualization and analysis. In searching for answers to a specific question, it is essential to first create the appropriate data subset.

Exploratory data analysis takes place in the **Figures** tab. Depending on the defined data subset, a specific graphical representation is created. The map, which represents the spatial distribution of the data, can be exported as a raster layer. The data used to create figures (e.g., vertical profile or time series) can be saved as text files. Specifically for data in polar regions, the possibility of visualization using the polar stereographic projection has been created (it can also be applied at other latitudes).

There are two tabs dedicated to statistical analysis of the data subset: **Statistics** and **Group by Time**. The **Statistics** tab is used to calculate both spatial and temporal statistics. In the spatial analysis, a typical GIS function called Summary Statistics is performed, which computes statistics for a variable from a given area at a specified moment in time. The area can be defined using a mask. It is also possible to calculate statistics simultaneously for multiple mask zones (Zonal Statistics). Statistics are computed separately for each time point in the data subset and are saved as a text file. Temporal statistics are calculated separately for corresponding pixels in the subset, resulting in a map or vertical profile of the statistics.

The **Group by Time** tab groups data into categories based on a relevant key defined as a period on the timeline. This could be, for example, years or months. For each group, a statistic is calculated. It is possible to create maps or histograms of statistics for each group separately, or to create charts for all time periods (e.g., as time series).

The **Extract/Cross** tab performs two distinct tasks.

1. **Extract** – This function extracts variables from a data subset to points defined in a QGIS vector point layer. It corresponds to a typical GIS function that extracts raster data to points. The result is a text file containing variable values along with a complete set of coordinates assigned to each point.
2. **Cross** – This function is used for subsets with a depth dimension. It generates a cross-section of a reservoir along a specified segment (defined using a vector point layer containing two points: the start and end of the segment) on its surface. Cross-sections are created for each time step, replacing the current data subset. This enables statistical analysis tools (**Statistics** and **Group by time**) to be applied to the generated cross-sections.

The **GIS** tab performs two separate tasks.

1. **Computation of a time series of mean values for a selected variable within a specified water body.**

The water body, defined by a mask and depth range in the raster model, is represented at each time step as a sequence of layers with varying surface areas and thicknesses that together define its volume. For each layer, the mean value of the variable is computed separately. A volume-weighted average is then calculated from these layer means.

2. Introduction of the concept of a *temporal region group* and tools for its computation and analysis.

This is an extension of existing 2D GIS functions (e.g., *region group*), which assign unique IDs to spatially contiguous sets of raster cells with the same value. Temporal region groups maintain contiguity not only in space but also over time.

The **Clip/Merge** tab is a separate subprogram designed to assist in creating .nc files for analysis in Xraster. Downloaded NetCDF (.nc) files may cover large areas, contain numerous variables, and be downloaded for separate time periods or individual days. As a result, they are often impractical for use in the program. Effective analysis requires combining the files into one while simultaneously minimizing its size. This can be achieved by limiting the area and the number of variables. The tab performs four functions:


1. **Organizing File Paths:** It allows you to organize paths to downloaded files into a single text file, assuming the files may be stored across multiple directories.
2. **Area Clipping and Variable Selection:** It enables you to clip the area of interest, select the required variables, and merge them into a single file. The spatial extent (clipping) of the data is taken from the current extent defined in the Subset tab.
3. **Merging by Variables:** It facilitates merging files with different variables but a common time dimension into a single .nc file.
4. **Saving Subsets:** It allows saving the current subset created in the Subset or Group by Time tab as a new NetCDF (.nc) file.

[\[TOC\]](#)

3. TYPICAL WORKFLOWS IN Xraster

Working with the **Xraster** program can proceed in two primary ways: **data analysis** and **data engineering**.


Data analysis begins with data input, examining the data structure, and optionally obtaining a mask.

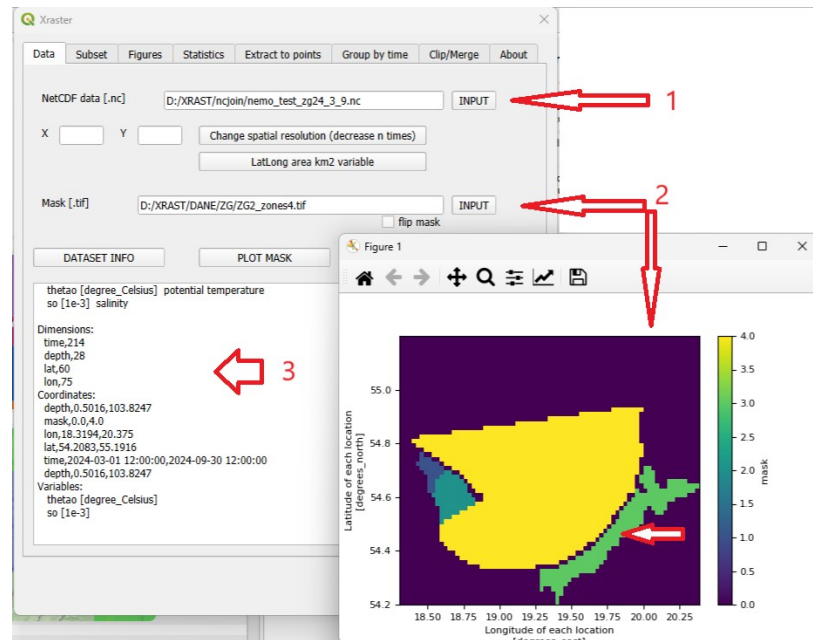


The first step is **data input** (1) and, if needed, **inputting a mask** to designate analysis zones (2). A description of the data will then be displayed (3). Our data dimensions are area (60 x 75 cells), depth (28 levels), and time (214 days). Each data cell contains two variables: temperature and salinity. The depth range is from 0.5 to 103 meters. The data represent conditions from March 1 to September 30, 2024. The primary data structure is a two-dimensional array (represented in GIS as a raster with dimensions 60 x 75). In total, the dataset contains 2 variables x 28 depth levels x 214 days = 11,984 rasters organized by depth and time. The input mask (if not applied, the analysis will cover the entire area or a selected point) enables the definition of geographical analysis areas. The displayed interactive mask map shows that the Vistula Lagoon has an identifier of 3.

After data input, the second step is typically **exploratory data analysis**. In this step, we aim to familiarize ourselves with our data by performing various visualizations. Each analysis process will be based on the defined data subset in the **Subset tab**.


a. We select surface temperature for the months of June, July, and August.

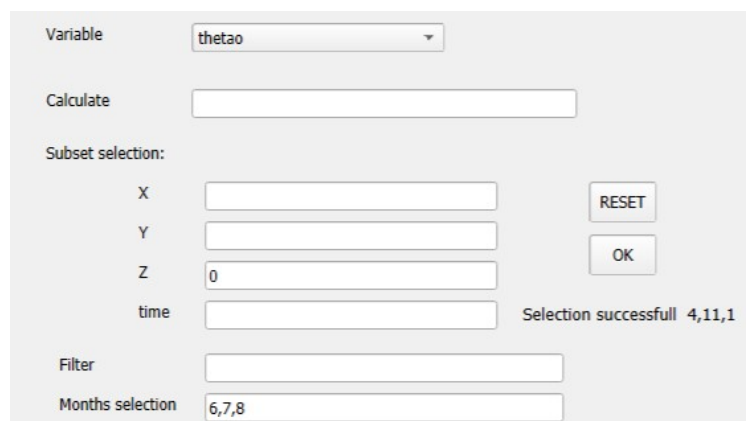


b. Display a histogram (Plot from the **Figures** tab) of surface temperature values.

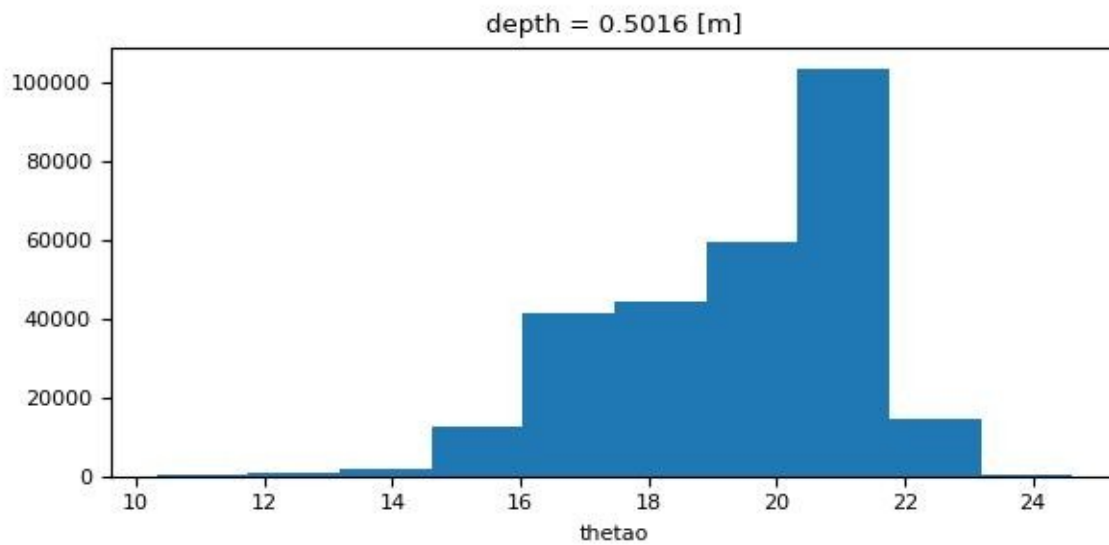

c. Display the average temperature distribution map for the entire time period (Plot - **mean** from the **Statistics** tab).

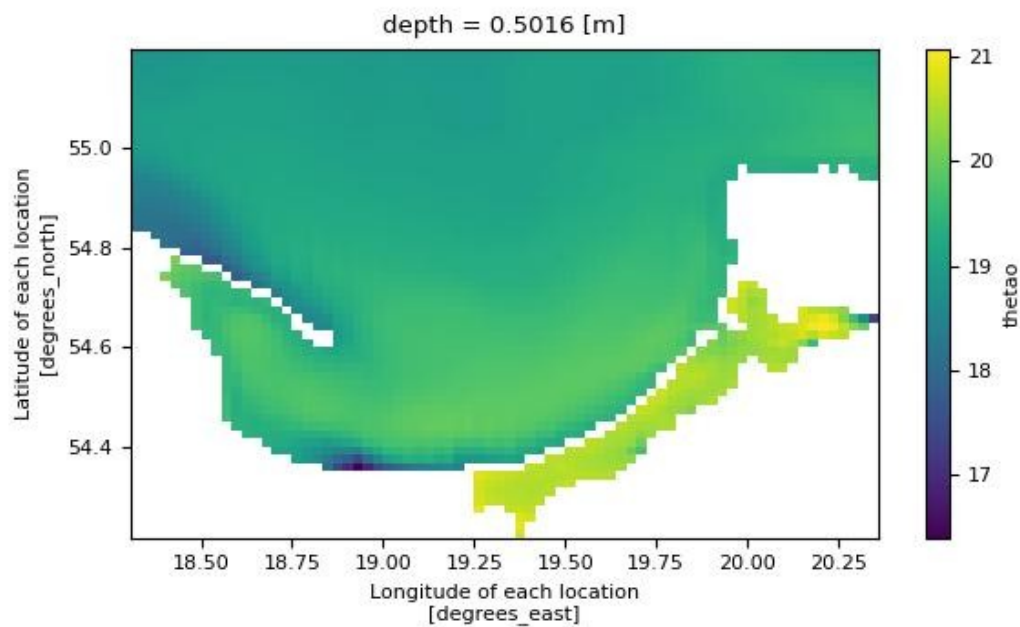

d. Display the map of minimum surface temperature (Plot - **min** from the **Statistics** tab).

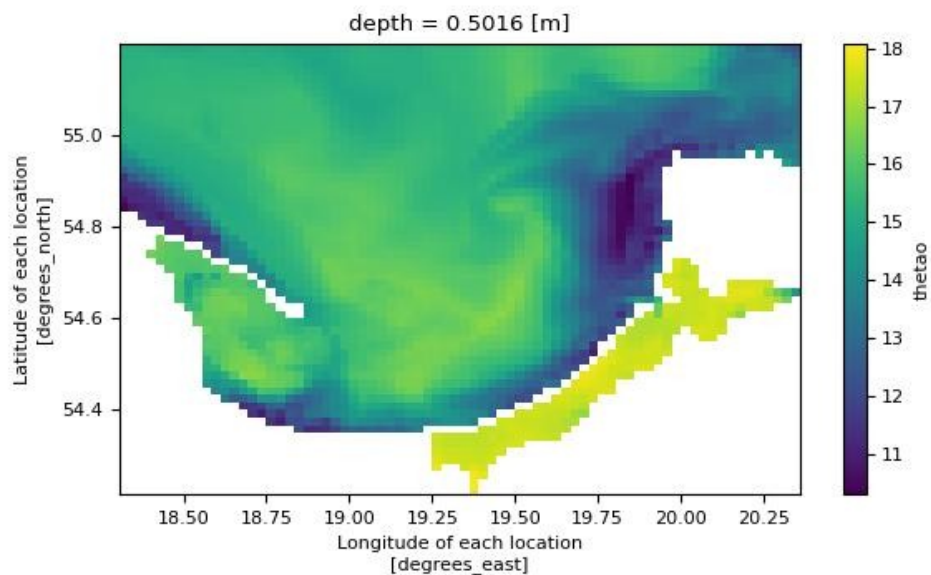

e. Checking how the temperature has changed over time at coordinates 54.88N, 19.83E. I am modifying the data subset (**Subset** tab).

Variable:

Calculate:

Subset selection:

X:

Y:

Z:

time:

Filter:


Months selection:

RESET

OK

Selection successfull 4,3,1


and plotting a time series (Plot from the **Figures** tab).

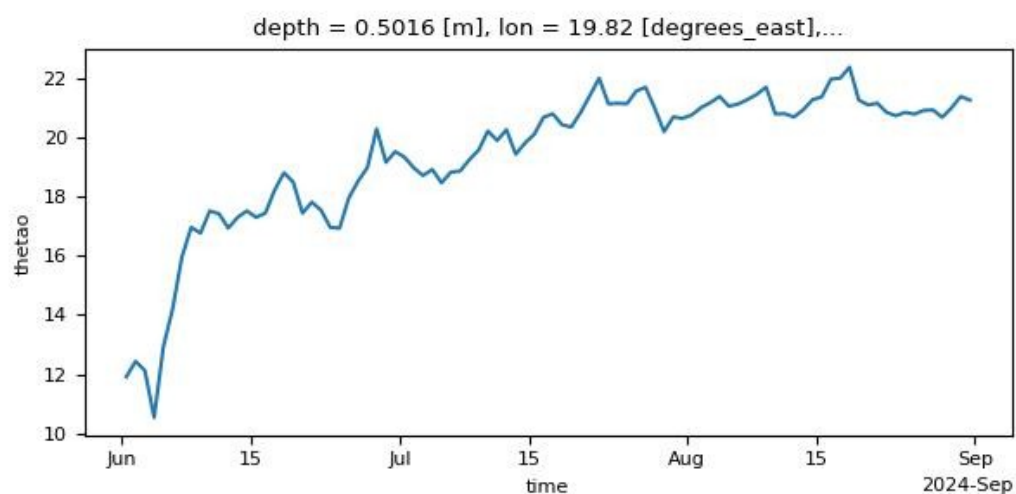

In a similar way, you can continue exploring the data.

Data analysis is based on defined queries. For example, I would like to know how many days the average surface water temperature of the Vistula Lagoon (mask ID = 3) was above 22 degrees during the period from June 21 to September 22 (summer). I am interested in which specific days these were and what the longest continuous period of this phenomenon was.


We define a new data subset (**Subset** tab).

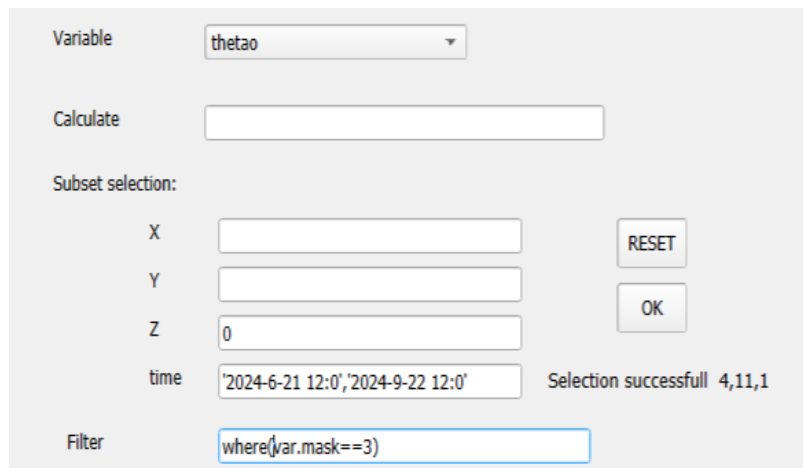

A required time range is specified. The filter retains only the data that meet the condition: Zone 3 (Vistula Lagoon). In the **Statistics** tab, there are two options for calculating and presenting spatial statistics, separately for each moment (day) within the specified time range. The first method involves calculating a specific statistic and generating a chart of its variation over time.



On the resulting chart, the temperature axis can be set to start at 22 degrees. As a result, we obtain:

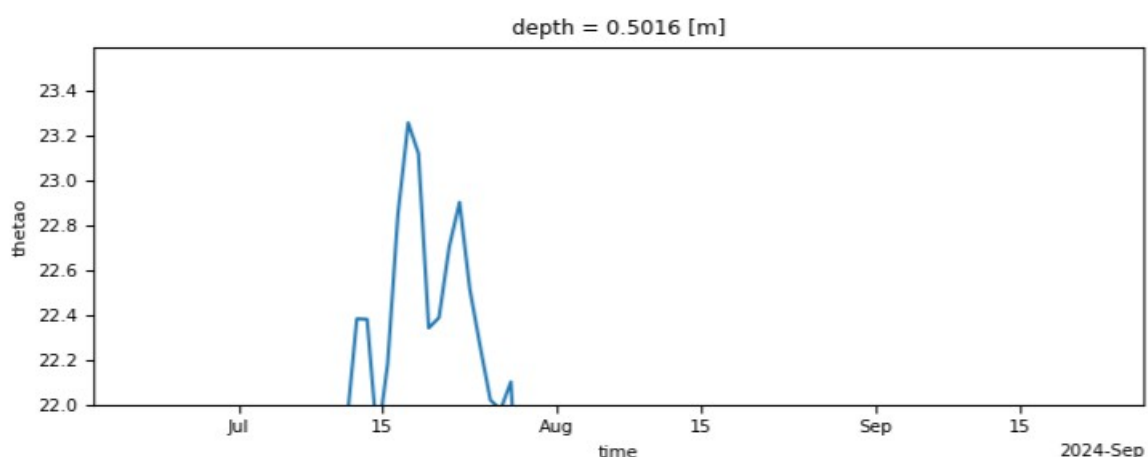

The figure shows that such a situation occurred in the second half of July. More detailed results can be obtained using the **Zonal Statistics** function (for Zone 3 only), which generates a text file with calculated statistics for each day of the analyzed period.

SPATIAL SUMMARY: (for single time use time slice with the same date)

☐ Summary statistics

☒ Zonal statistics *

Zones list 3

RUN


The result is a text file that can be analyzed in other programs.

1	zone	time	mean	min	max	median	std
2	3	2024-06-21 12:00:00	19.1301	17.9176	19.8132	19.1887	0.2763
3	3	2024-06-22 12:00:00	18.9035	17.6225	19.7632	18.9386	0.3971
4	3	2024-06-23 12:00:00	18.0806	16.9108	19.0385	18.1087	0.3491
5	3	2024-06-24 12:00:00	17.6978	16.3191	18.7195	17.6035	0.3674
6	3	2024-06-25 12:00:00	18.381	16.9448	19.5094	18.3451	0.3212
7	3	2024-06-26 12:00:00	19.4606	17.9824	20.6486	19.4588	0.3156
8	3	2024-06-27 12:00:00	20.635	19.0013	22.2339	20.6055	0.3791
9	3	2024-06-28 12:00:00	21.3244	19.6767	23.6299	21.2773	0.4491
10	3	2024-06-29 12:00:00	21.5457	20.0523	22.6589	21.5124	0.3412
11	3	2024-06-30 12:00:00	21.7714	20.2585	22.7662	21.7176	0.322
12	3	2024-07-01 12:00:00	21.7912	19.8334	22.8084	21.7887	0.3923
13	3	2024-07-02 12:00:00	20.754	19.1984	21.4251	20.7988	0.3048
14	3	2024-07-03 12:00:00	19.5977	18.5387	20.3986	19.6071	0.2696
15	3	2024-07-04 12:00:00	19.3826	17.9182	20.0618	19.4113	0.2577

Data engineering in the **Xraster** program is used to prepare data for analysis and is performed in the **Clip/Merge** tab. The data available for download can vary in nature. Some data may be processed almost to a ready-to-use form before download. If tools like the [Copernicus Marine Toolbox](#) are used to generate the data, further transformation may not be necessary.


In other cases, it's possible to select a spatial and temporal window and choose specific variables as needed. Some data, when using the simplest methods, may only be downloadable for the entire area with all variables, as separate files for each day. This requires subsequent extraction of the desired area and selection of relevant variables. A crucial aspect of data preparation is optimizing its size, as data handling efficiency is closely linked to data volume.

Let's assume that the available data is downloaded in full for each day.

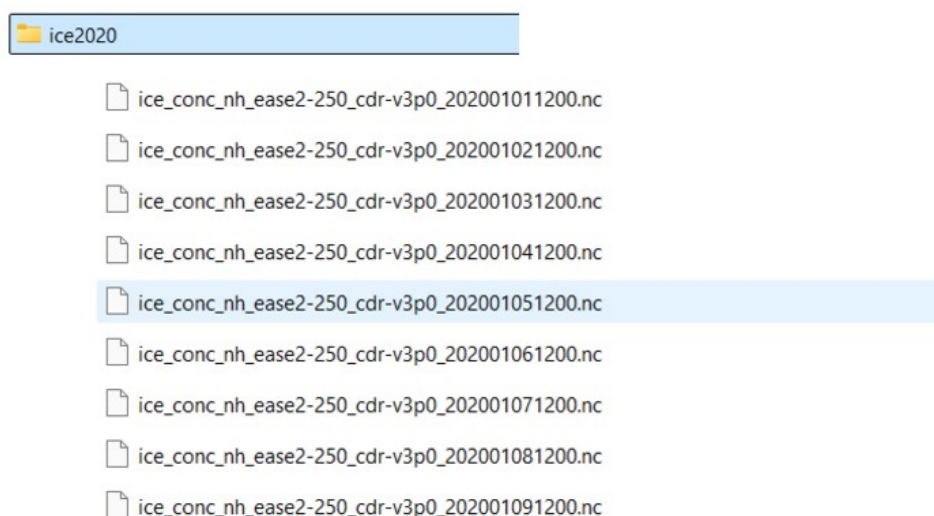

The first step is to create a text file listing all .nc files (with full paths) located in the specified directory. All subdirectories within this directory structure are also searched.

The next step is to load a single data file and display it to select the area to be clipped. You can define both the area of interest (indicated by a red rectangle) and, if necessary, the required depth range. Then, a map of the clipped area is displayed. The process will proceed as follows:

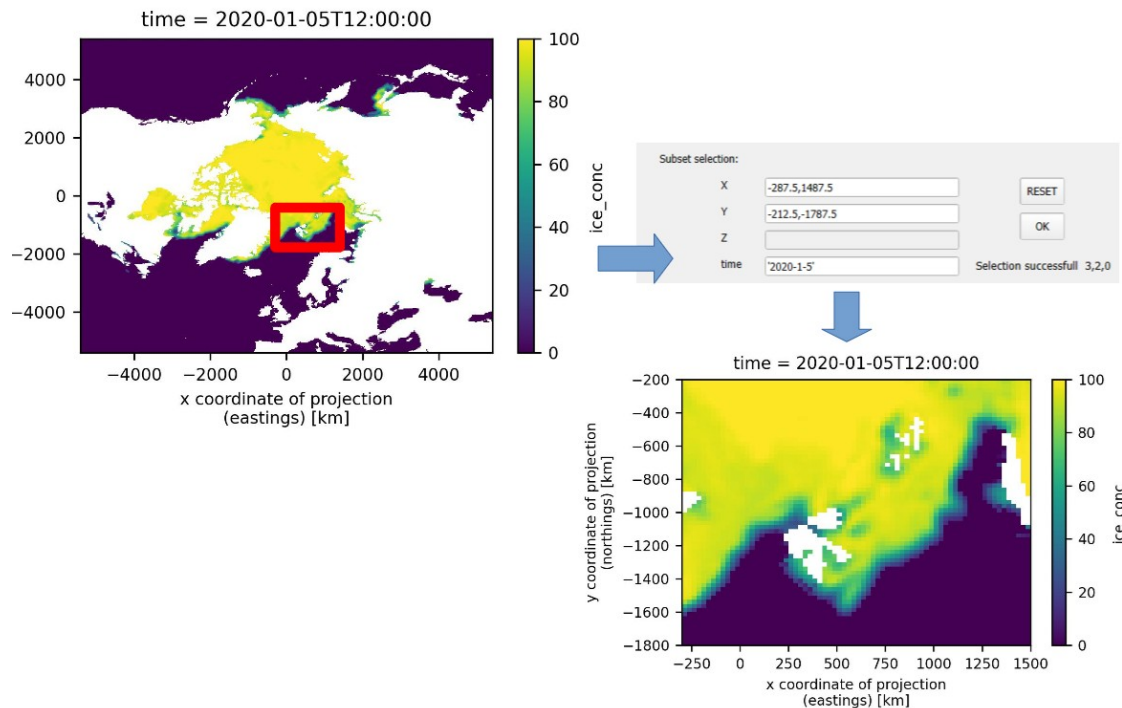

The selection parameters will be used to create subsets from individual files before they are merged. In the final step, we choose the variables we need from the available ones and perform the clipping and merging operation.


The screenshot shows a software interface for file management. At the top, there's a field 'Text file with .nc' containing 'D:/XRAST/DANE/SvalDATA/ice_N2020B.csv' and a 'New' button. Below this is a checkbox 'Sort using regex pattern' and a 'Create' button. A section titled 'CLIP IN SPACE AND MERGE TIME to one .nc *' contains a 'Select variables' dropdown menu with 'ice_conc' selected, and a text field also containing 'ice_conc'. There are radio buttons for 'merge by time' (selected) and 'merge variables to one .nc'. To the right are 'Add', 'Add all', and 'Clear' buttons. Below this is a 'Merge to .nc file' field containing 'D:/XRAST/DANE/SvalDATA/sea_ice_concN_2020C2.nc' and an ellipsis button. At the bottom, there's a progress bar at '100%' and a 'Join' button.

[\[TOC\]](#)

4. QGIS LAYERS USED IN Xraster

A raster mask representing the analysis zones

Xraster uses two types of GIS layers. An important role is played by the raster mask layer, which defines spatial zones for analysis. The mask is created as a raster layer (.tif), with the same coordinate system and the same number of rows and columns as the surface (x, y) layer in the NetCDF (.nc) data. The analysis zones are marked with identifiers having fixed values (though the mask itself can be of either integer or float type). An example of a mask for the Gdańsk Bay is shown below.

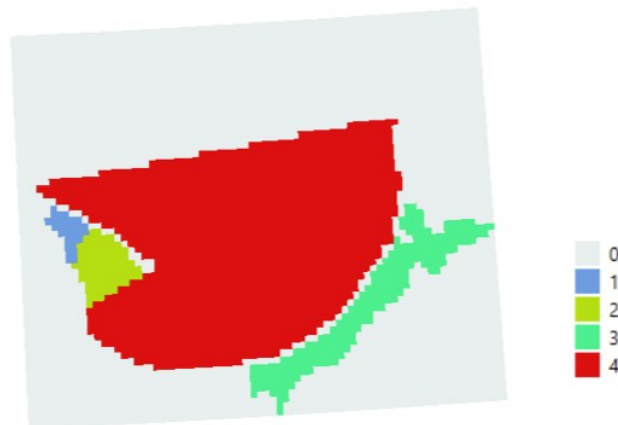

The mask is originally in the GCS coordinate system, but it has been displayed in the UTM 33N coordinate system. It contains four zones corresponding to specific geographic areas. Areas outside the zones have an identifier of zero. It is best not to use NoData values on the mask and replace them with zeros. The mask is used in the program as,

- in the **Subset** tab to define a data subset, taking the zones into account,
- for performing the Zonal Statistics function in the **Statistics** tab,
- in all map exports to raster as .tif files (the mask is used as the source of georeferencing).

Vector point layer

This layer is used for data extraction at specific points.



The figure also shows it with a polygon layer outlining the Gdańsk Bay. The first field in the attribute table must be of integer type and contain a unique point identifier (the field name is arbitrary).

ID	
1	10
2	11
3	12
4	13
5	14
6	15
7	16

Similarly to the mask, the point layer must have the same coordinate system as the NetCDF (.nc) data.


[\[TOC\]](#)

5. PLOTS, SAVE AND EXPORT PLOT


Images generated by Xraster

Xraster generates images using the methods and capabilities of the xarray package. The xarray package selects the type of image based on a subset defined by selection or analysis results. The following types of images are created;


Histogram,

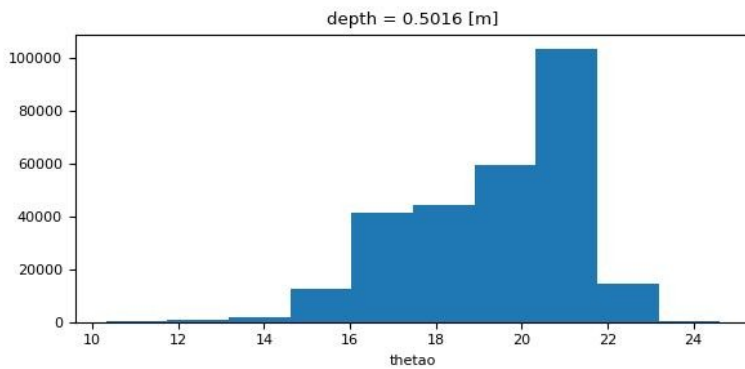


Map,

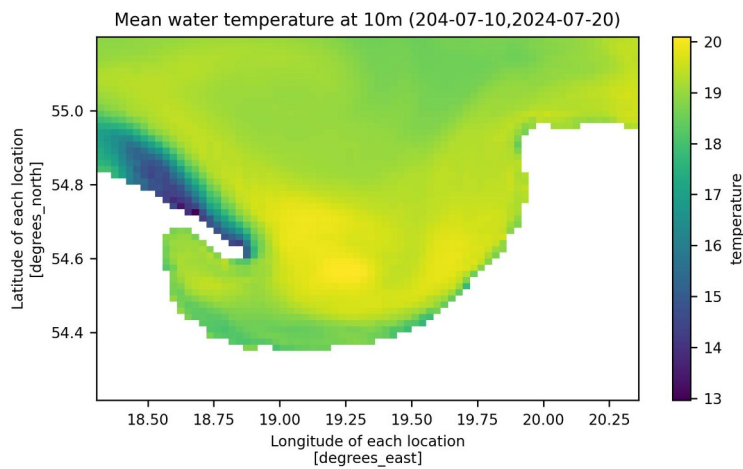


Time series,

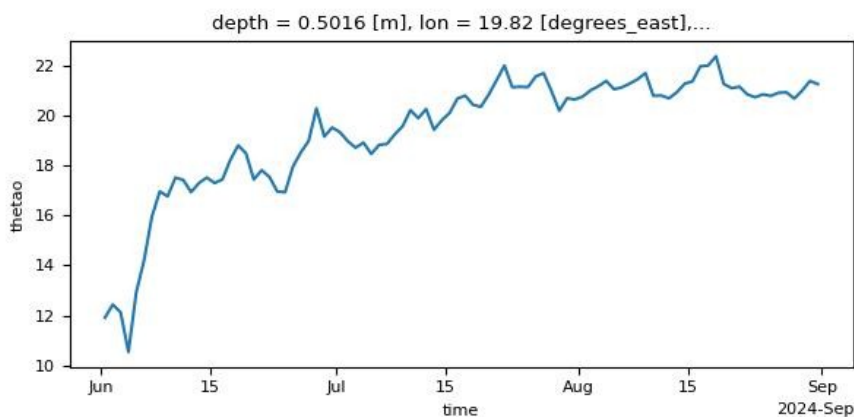


Depth-time-cross-section,

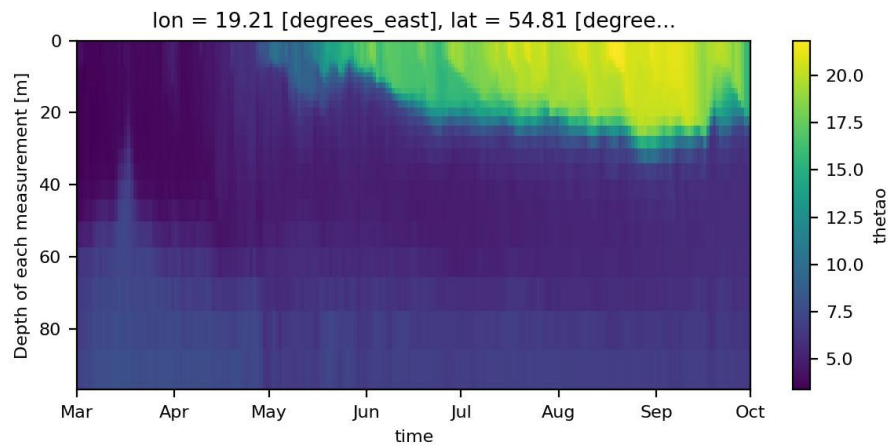


Vertical profile,

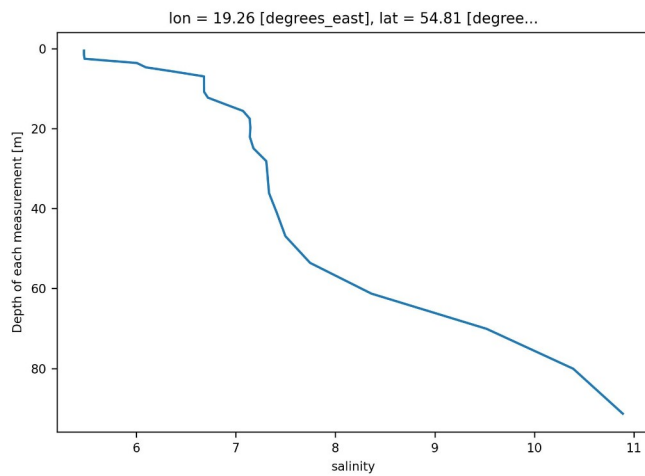


Cross section,

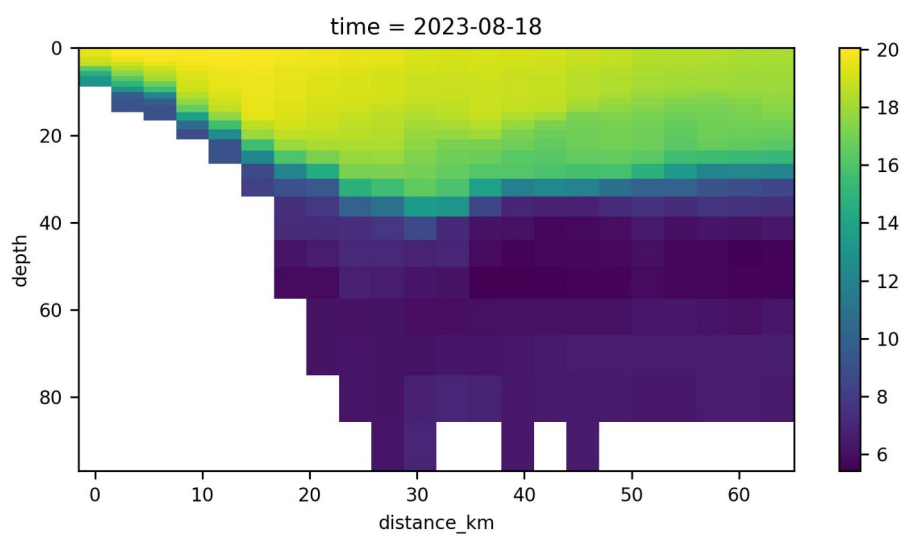

To display images in QGIS, the Matplotlib GUI window is used.

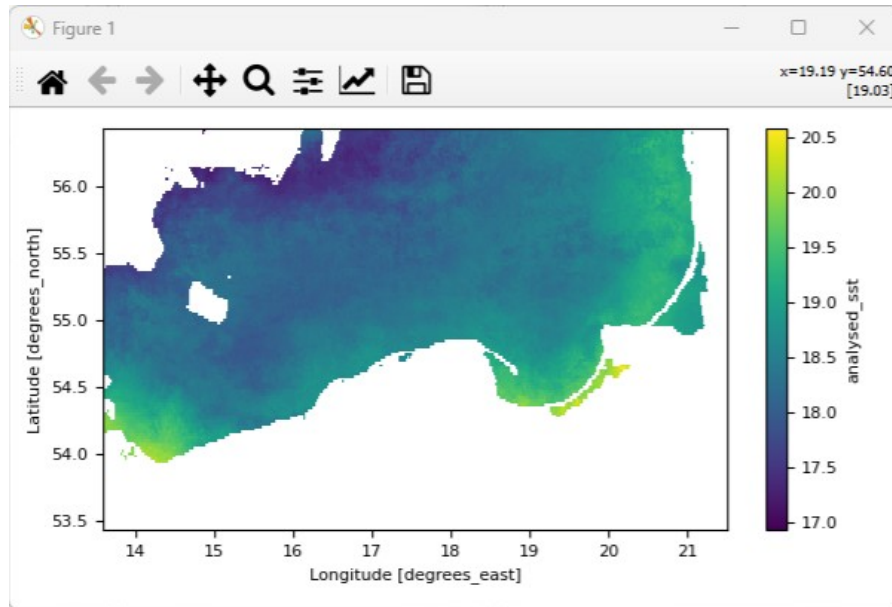

This window displays the image along with axis labels and a color scale with descriptions. The top toolbar includes icons for interacting with the image, as well as coordinates for the cursor position on the image and the corresponding variable value.



The first five icons are used for navigation: return to the original view (1), previous or next image (2, 3), panning (4), and zooming with a rectangular selection (5).

Save and Export plot

The last icon, number 8 (a floppy disk), allows you to save the image in several formats at screen resolution. Images can also be exported as .jpg files at higher resolutions and with specific parameters, such as size, aspect ratio, font size, and dpi, which are defined on the **Figures** tab.

Size	3
Aspect	2.0
Font size	8
Figure dpi	300


This is done using a separate 'Save plot (file)' option in the program.

Save plot file	D:/XRAST/opis1/Figure_1A.jpg	...
----------------	---	------------------------------------

[\[\[TOC\]\]](#)

6. PLOT CUSTOMISATION

The Matplotlib GUI window allows customization of created images. The penultimate icon enables editing of axis labels, titles, and the styling of lines and rasters. Below are methods for customizing maps, though this process applies to all types of images

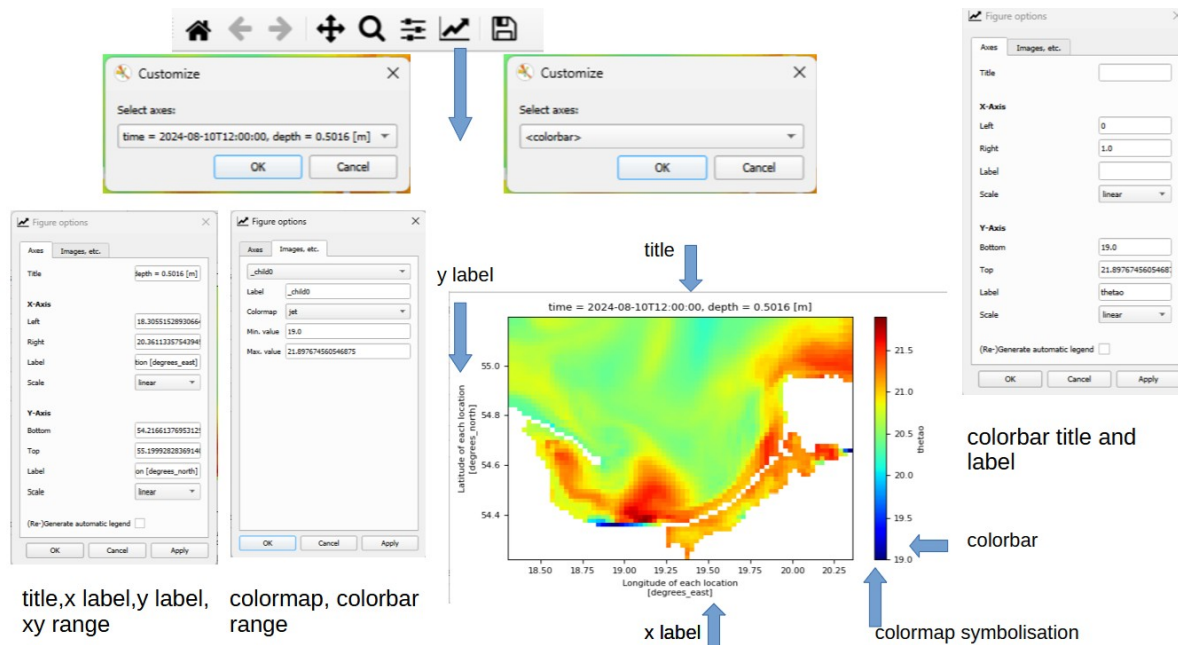

We begin the process by selecting the first option (the window on the left). Here, it's possible to change the map title and labels for both axes. For maps, you can also define the color scale (colormap) and its range. The second option adjusts based on the first selection and allows you to add a description to the color scale. Customization applies to both image-saving options.

[TOC]

7. EXPORT GEOTIFF RASTERS

Exporting a two-dimensional map to a raster layer is possible after creating the map in the **Figures**, **Statistics**, and **Group by Time** tabs.



This option will only be active if the map was created using PLOT or PLOT AT BOTTOM, and if a mask was previously applied.

* A mask must be applied to the current dataset.

The size of the created raster layer and its georeferencing are derived from the mask.

[TOC]

8. EXPORT TEXT FILES


Exporting text files (.csv) occurs in the following situations:

- Exporting data from images to a text file occurs for the following types: time series, vertical profile, depth-time cross-section (**Figures, Statistics, Group by Time**).
- Eksport rezultatów spatial summary: summary statistics i zonal statistics. Dla każdego czasu obliczone są statystyki i zapisywane w pliku tekstowym. W przypadku zonal statistics dodatkowo zapisywany jest numer strefy.
- Exporting data in the **Extract to Points** tab exports point data along with all its dimensions.
- The **Clip/Merge** tab creates a text file containing all NetCDF (.nc) files in a given directory, including subdirectories. Additionally, the data can be sorted by time.

[TOC]

USING Xraster (Tabs)

1. Data

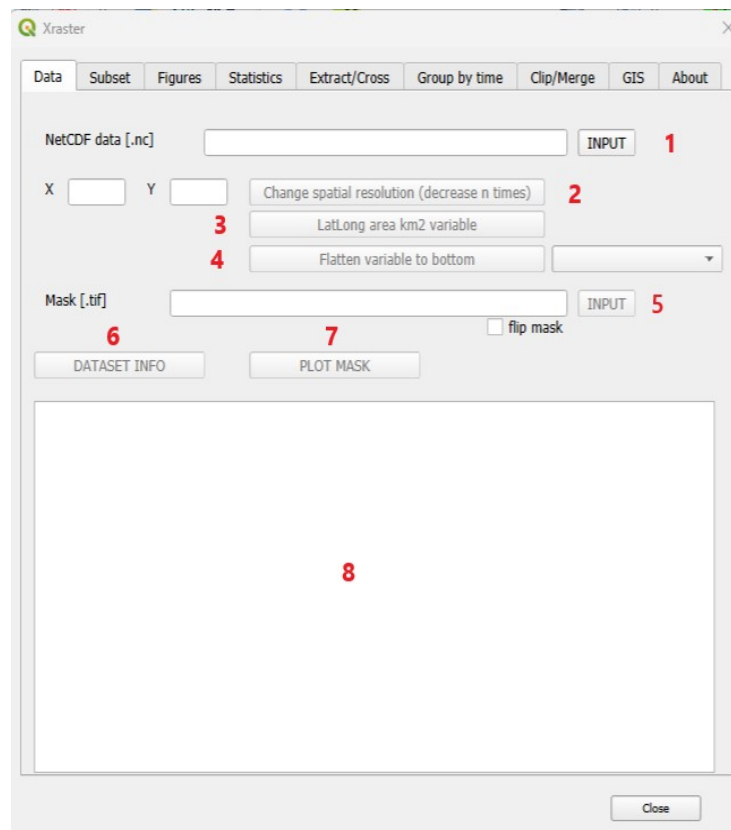

Basic operation.

(1) The process starts by importing a NetCDF (.nc) file into the program. If an invalid file is imported, the text field (8) will display the message: **!!!! Not valid NetCDF [.nc] file or no time dimension !!!!!**. After importing the file, the text field will show information about the file. Once the data is loaded, you can proceed to the next step by navigating to the **Subset** tab.



Dimensions refer to the names of the coordinate axes of the input data. In the example, we have a basic raster with dimensions of 60x70 cells (axes: lat, lon). There is a time axis with 214 time points (time axis). At

each time point, there are 28 depth levels (depth axis). In total, our data structure consists of $214 \times 28 = 5,992$ basic rasters (similar to those in GIS), oriented by time and depth.

Coordinates refer to the assignment of labels. The displayed information provides the minimum and maximum values for each coordinate. In the example, the coordinate names correspond to the axis names. However, this is not always the case. Axes without assigned labels can exist, and coordinates may not correspond to axes. Nonetheless, coordinate ranges often provide information about the value ranges along the axes.

As a rule of thumb, dimensions answer the question: *Along which axes does my data vary?* and coordinates answer: *What are the actual values along those axes?*

Variables represent the variables within the spatial structure defined by the axes. These are the values found in each cell of the basic rasters. In the example, there are two variables: temperature and salinity. Variable names include metadata, usually describing the variable and its unit of measurement.

All additional options in the tab, except the PLOT MASK button, will become active. Once the data is loaded, you can proceed to the next step by navigating to the **Subset** tab.


Additional options.

The additional options include:

- **Changing the resolution of the basic raster (2):** Allows for adjusting the size or scale of the raster grid.
- **Creating a km2 variable (3):** For geographic coordinates, this generates a variable containing the surface area (in square kilometers) of each cell.
- **Flatten variable to bottom (4):** Flattens four-dimensional data (x, y, z, t) into three-dimensional data (x, y, t), using the variable's values at the bottom. Creates a new variable and an additional variable containing the depth.
- **Introducing a mask (5):** Enables the application of a mask to the data for filtering or limiting specific regions.

The resolution of the basic raster (defined by the x and y axes) is **changed** by entering values into the X and Y fields. These values specify the divisor by which the current number of cells along each axis will be divided.

- Entering 1 in both fields will result in no change to the resolution.
- After specifying the desired values, press the **Change spatial resolution (2)** button to apply the changes.



Pressing the DATASET INFO button again will redisplay the information about the dataset. The size of the basic raster will reflect the updated resolution.

```
Dimensions:
time,214
depth,28
lat,30
lon,37
```



To revert to the previous resolution, the data must be reloaded **(1)**.


Reducing the resolution is necessary when using the Polar Stereographic projection. Due to the interactivity of the Matplotlib GUI window, the program's performance significantly slows down after creating a plot with this projection. In practice, the data should be reduced to resolutions smaller than 300 x 300 cells in the basic raster. The reduction values for the X and Y axes do not need to be equal.

The **km2** variable is a new variable that can be useful for geographic coordinates in the basic raster. This variable represents the area of a cell in square kilometers. Since the cell area varies depending on the location in rasters with geographic coordinates, this variable can be used for surface area calculations and for determining weighted averages (e.g., the weighted average temperature in geographic coordinates). To create this variable press the LatLong km2 VARIABLE **(3)** button. After pressing the DATASET INFO button, the new **km2** variable will appear in the list of variables.

```
Variables:
thetao [degree_Celsius] potential temperature
so [1e-3] salinity
km2 [km2] Area of cell
```




The figure below illustrates how the **km2** variable can be utilized:

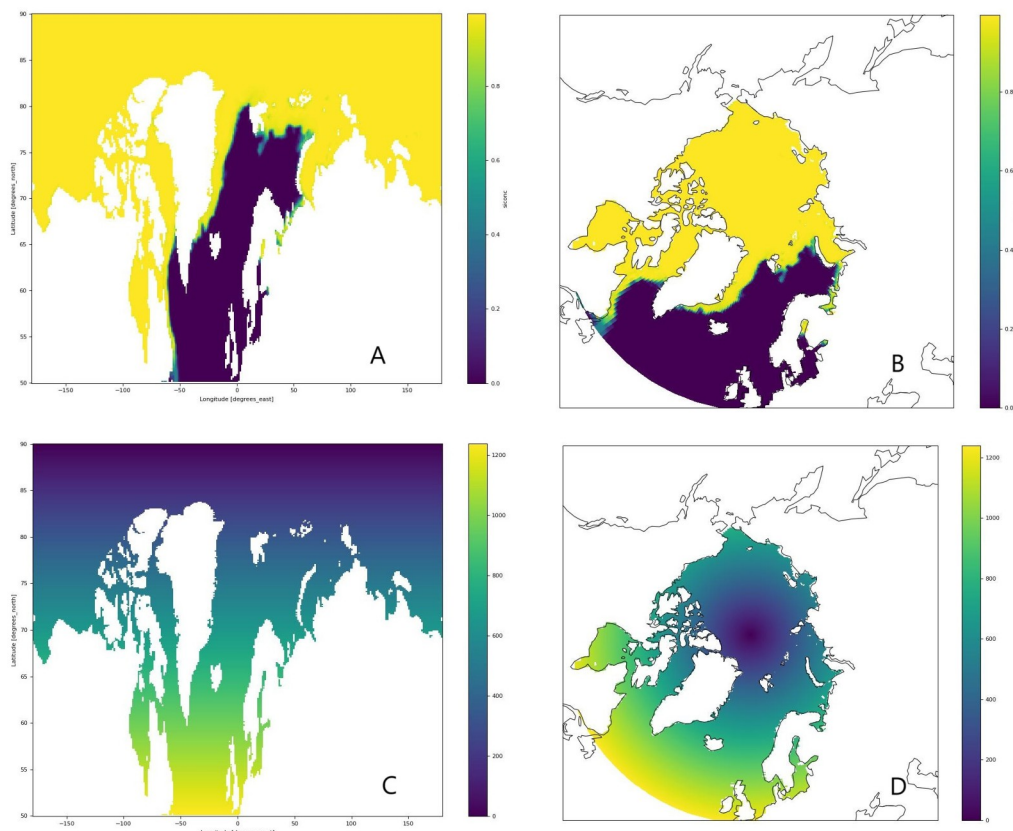

- **Figure A:** Displays ice concentration data (values ranging from 0 to 1) in geographic coordinates.
- **Figure B:** Shows a map of the same ice concentration data projected using the Polar Stereographic projection.
- **Figure C:** Depicts the **km2** variable in geographic coordinates, representing the surface area of raster cells (ranging from 0 to 1200 km²).
- **Figure D:** Shows a map of the **km2** variable using the same Polar Stereographic projection.

To calculate the **total ice-covered area (in km²)** from the data in **raster A**, multiply **raster A** by **raster C** and sum the values across the entire resulting raster.

Flatten variable to bottom (4) creates two new variables. The tool works with variables that have a depth dimension. A new variable (without the depth dimension) is created to represent values at the bottom. In addition, a variable describing depth values is created. To use the tool, select a variable and click the *Flatten variable to bottom* button. This operation can be performed for multiple variables; the depth variable is saved only once. Below, the operation was performed for two variables (so and thetao).

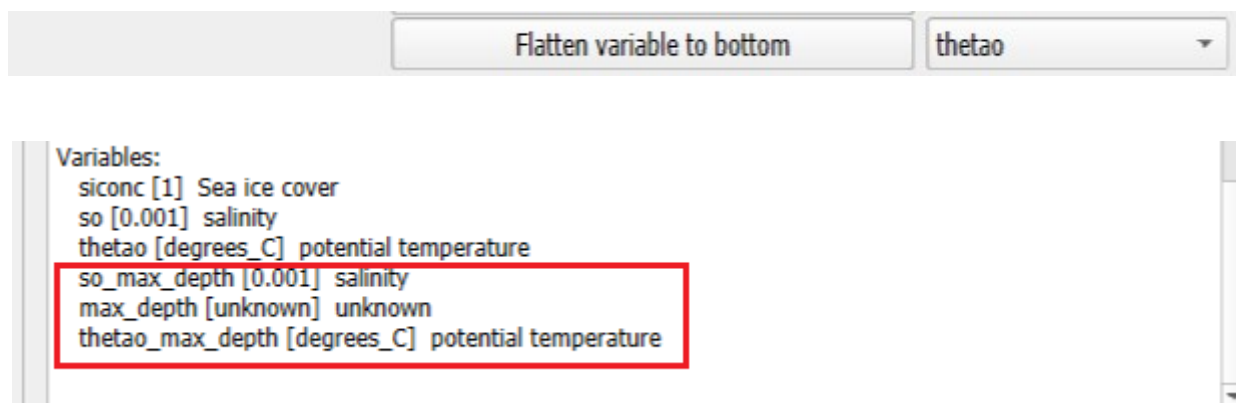

Introducing the mask is optional (5).




Its introduction enables:

- Using it when creating subsets (**Subset**).
- Exporting surface maps to raster layers in GIS as GeoTIFF (**Figures, Statistics, Group by time**).
- Applying zonal statistics operations (**Statistics**).

The mask must have the same number of rows and columns, as well as the same georeferencing, as the surface data (x, y) in the input data (.nc). If the number of rows and columns do not match, an error message will appear:

- !!!! Not valid mask [.tif] file. !!!!
- !!!! Mask has different dimension x=75, y=60 !!!!

After entering a valid mask, it can be displayed using the PLOT MASK (6) button. Pressing DATASET INFO (5) again will show that the mask has been added to the coordinates. The mask contains values ranging from 0 to 4. Zero represents the background, while the other values define the zones (areas of interest).

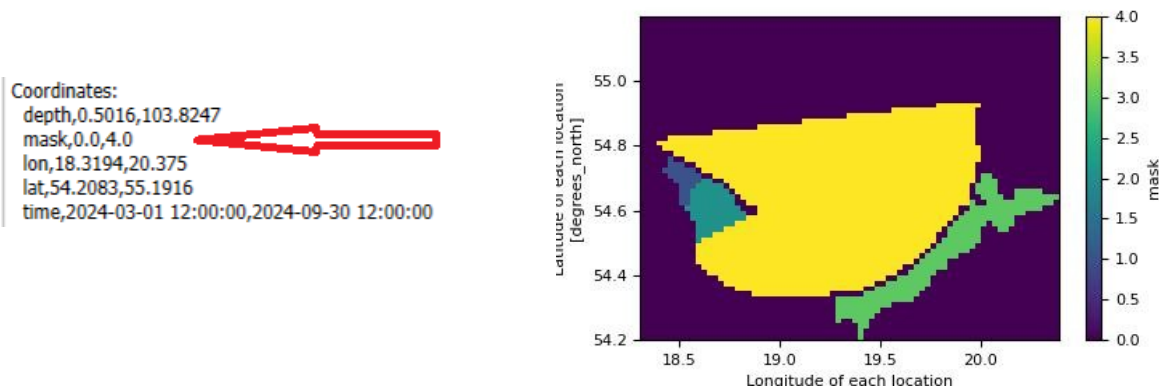

The introduction of the mask includes an option to **flip** it. To do so, you need to check the **flip mask** box located below the mask name field. This modification is sometimes necessary due to the different orientations of the Y axis.

[\[TOCTabs\]](#)

2. Subset

Creating a data subset is a key stage of analysis. The data subset is created for a selected variable. This variable, even in a four-dimensional dataset, can have a three-dimensional nature (e.g., referring exclusively to the sea surface).

Dimensions	Subset Type	Description
3 (x,y,time)	1	- Slices of space and time
3	2	- Slice of space at a single time
3	3	- Point in space and time slice
3	4	- Point in space at a single time
4 (x,y,depth,time)	1	- Slices of space,time and depth
4	11	- Slices of space and time for a single depth
4	2	- Slice of space at a single time and depth
4	22	- Slices of space and depth at a single time
4	3	- Point in space, single depth, and time slice
4	33	- Point in space with slices of time and depth
4	4	- Point in space at a single time and depth
4	44	- Point in space with a slice of depth at a single time

The basic principles of creating subsets are presented in the text window. The program works with three-dimensional data (surface defined by x and y dimensions and time) and four-dimensional data (surface defined by x and y dimensions, depth, and time).

The primary method of defining a subset is by specifying intervals (slices) in space. This applies to the surface (restriction defined by coordinates), depth range, and time interval. It is also possible to define a subset at a surface point, at a given depth, and at a specific moment in time. If data is unavailable at a given surface point, depth, or time, the closest available data will be used.


In addition to spatial operations, data filtering is possible. Filtering can apply to a variable or use a mask. It can also utilize all variables. This allows the creation of a subset of data located only within a specific geographic area. Additionally, filtering by months is available, enabling the selection of data from specific months only.

In the program, the type of subset is defined by a code in which the first digit represents the data dimension, and the second digit specifies the method of defining the dimension. For three-dimensional data, four subset types are possible, while for four-dimensional data, eight types are available.

Description	Subset Type
Slices of space and time	3-1
Slice of space at a single time	3-2
Point in space and time slice	3-3
Point in space at a single time	3-4
Slices of space,time and depth	4-1
Slices of space and time for a single depth	4-11
Slice of space at a single time and depth	4-2
Slices of space and depth at a single time	4-22
Point in space, single depth, and time slice	4-3
Point in space with slices of time and depth	4-33
Point in space at a single time and depth	4-4
Point in space with a slice of depth at a single time	4-44


Three dimensions (x, y, time).

For three-dimensional data, the most general subset is a time series of basic rasters (**3.1 Slices of space and time**). It is possible to select a portion of the basic raster (x and y axes) and choose a specific time range.

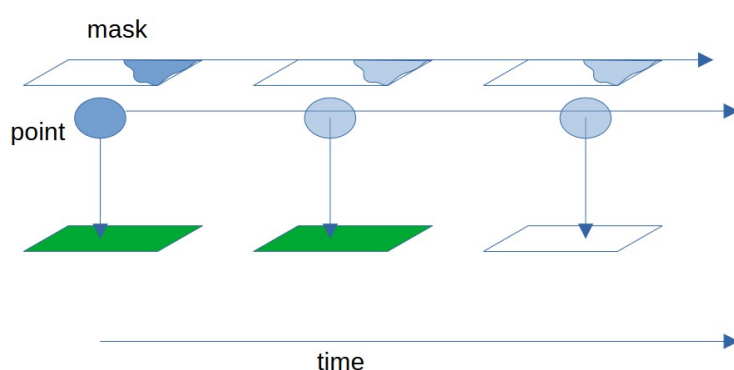


An example of such data is a time series of rainfall over a specific area during a defined period. Using filtering, the data can be further restricted to specific months, such as the summer months.


A three-dimensional subset can be defined for a specific moment in time (**3.2 Slice of space at a single time**). In this case, there is only a single basic raster, corresponding to a raster in GIS. Of course, the analysis can focus on a portion of the raster, defined by the x and y range or a mask.

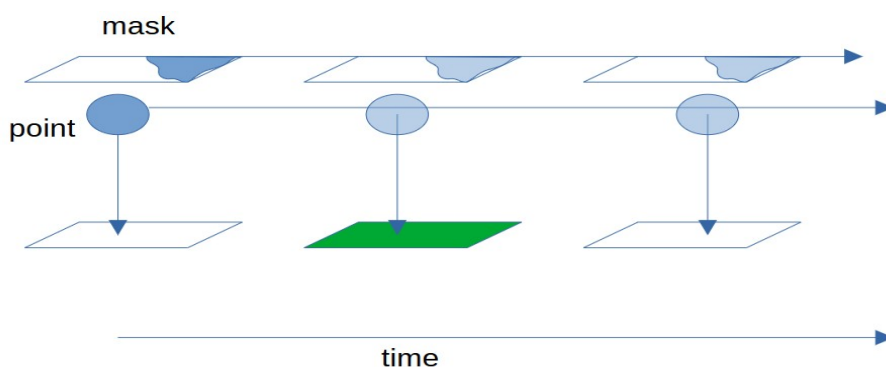

The next two subsets are defined at a specific point (x, y) . This means that from each basic raster, the variable at this point is extracted. The extracted values can form a time series of the variable, such as daily air temperature in a given city (defined as a point). This corresponds to **3.3 Point in space and time slice**.

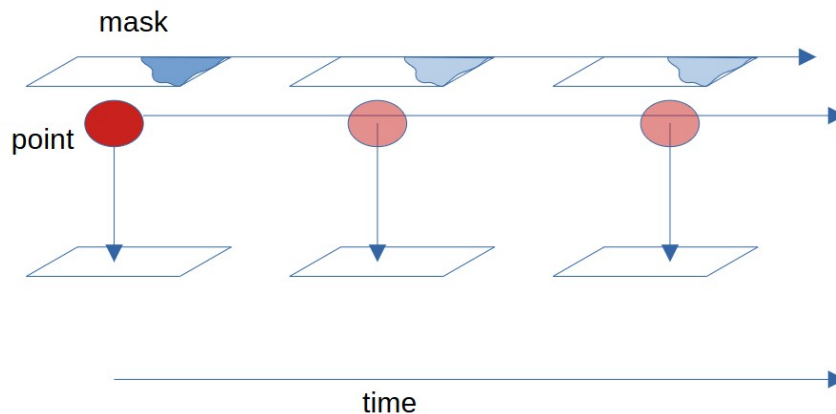


The extreme case is when a variable is extracted at a specific point for a given moment in time (**3.4 Point in space at a single time**). In this case, we obtain a single value of the variable.

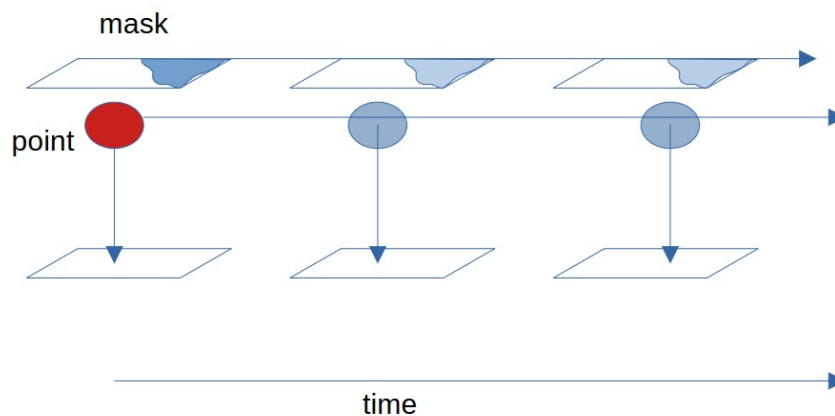

Four dimensions $(x, y, \text{time}, \text{depth})$.


Four-dimensional data provide more possibilities for defining subset sizes.

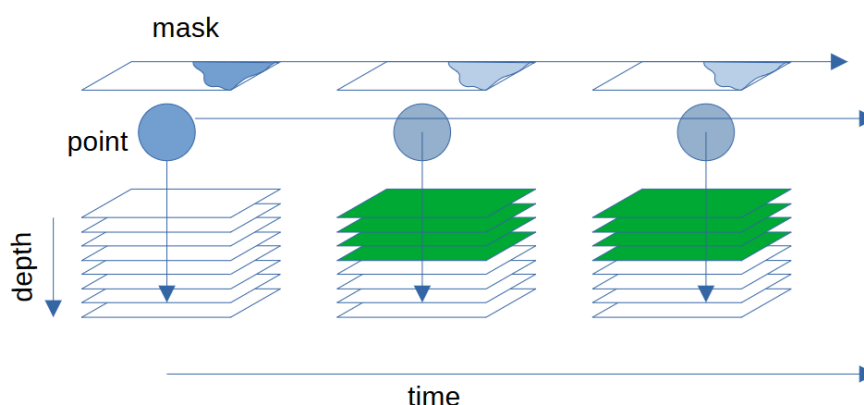

The most general subset is defined across all dimensions (**4.1 Slices of space, time, and depth**). For different moments in time, there are corresponding basic rasters (x, y) at each depth within the depth range, or portions of these rasters.


An example is an oceanographic variable changing with depth, such as a monthly (t) temperature field (x, y) over a certain area for a range of depths.

The primary way to restrict a four-dimensional subset is to limit it to a single depth (**4.11 Slices of space and time for a single depth**). This creates a subset analogous to **3.1**.

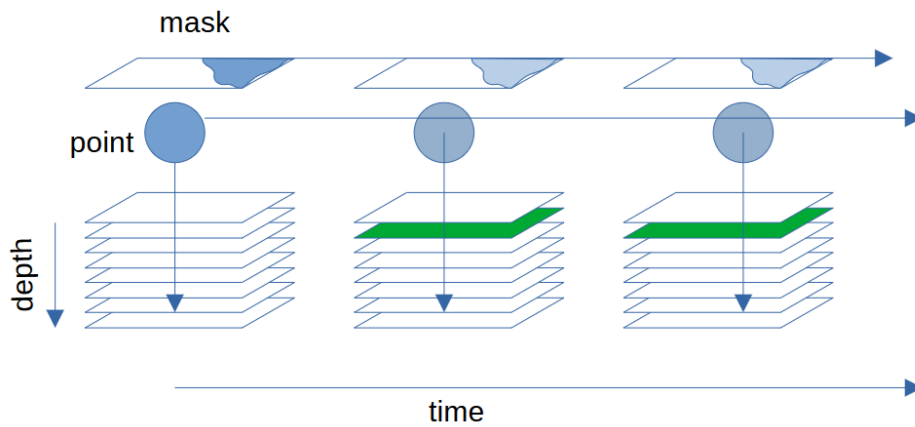


An example could be a subset from the previous example limited to a depth of 10 meters.

Restricting a four-dimensional subset to a specific moment in time and depth results in a single basic raster (x, y) (**4.2 Slices of space at a single time and depth**). As a result, we obtain a single basic raster, similar to **3.2**.

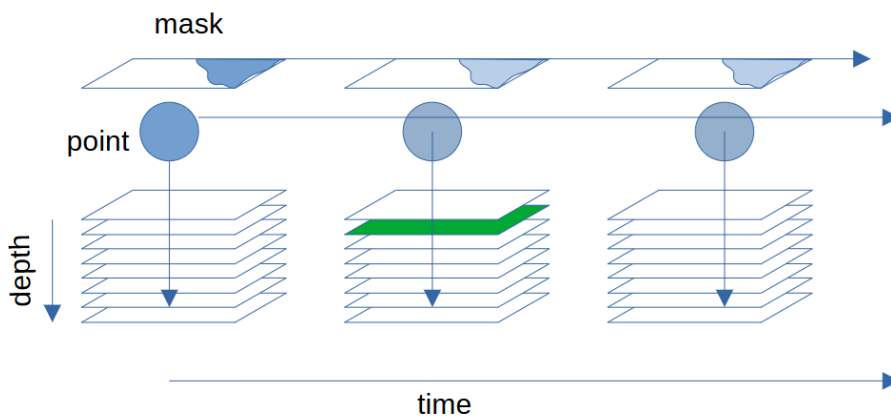


The last variant of the four-dimensional subset, which includes basic rasters (x, y), is to restrict it to a single moment in time (**4.22 Slices of space and depth at a single time**).

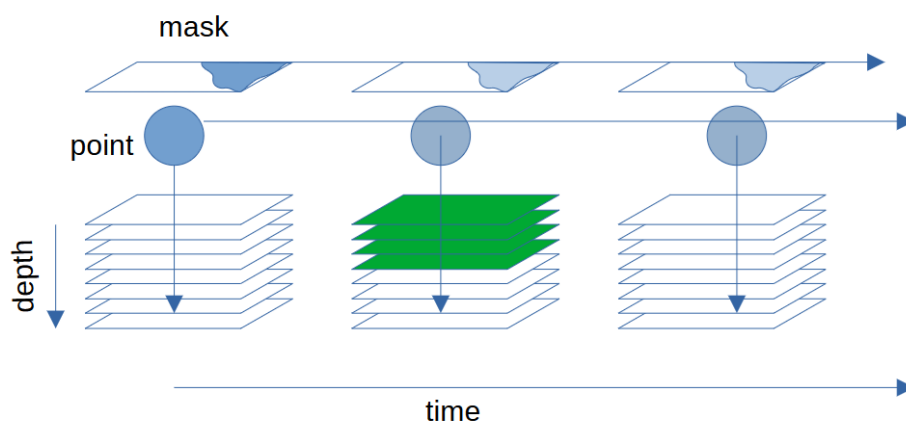


As a result, we obtain a series of basic rasters, each corresponding to a different depth within the depth range. An example of such data could be the average salinity field in a given area for a range of depths on a specific day.

The remaining subsets will be obtained similarly to those in three-dimensional data, for specific points. The analogue of subset **3.3** would be the subset **(4.3 Point in space, single depth, and time slice)**.

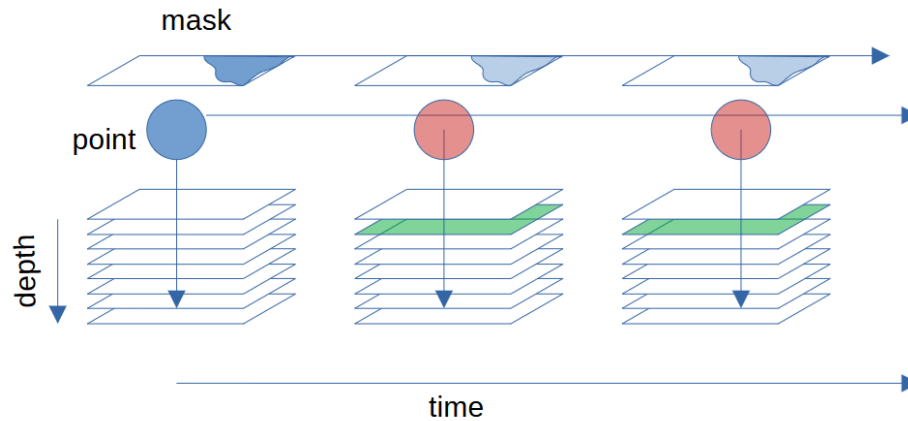


From each basic raster, the variable at a specific point will be extracted, creating a time series of data, such as salinity for each moment in time.

If we include data at different depths for each point, we obtain a subset that, for each time, will contain data for the point at each depth (**4.33 Point in space with slices of time and depth**).

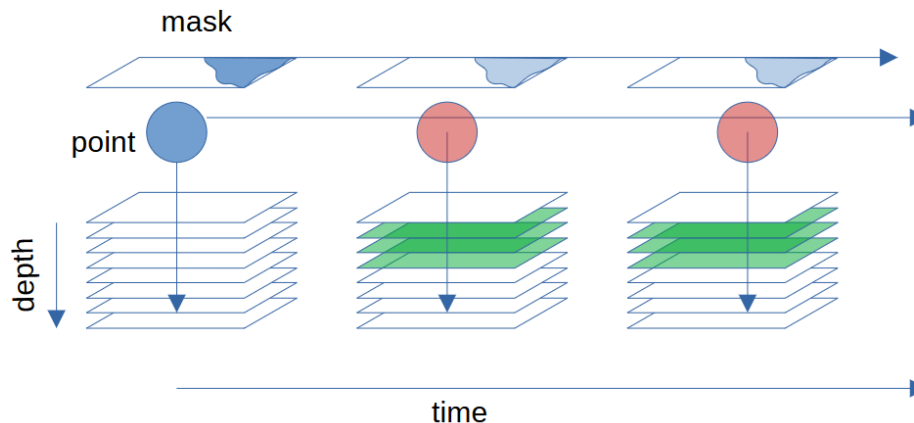


The resulting subset of data can be represented as a **depth-time cross-section**.

Restricting the data extraction at a point to a single moment in time and depth (**4.4 Point in space at a single time and depth**) will, similarly to **3.4**, yield a single value of the variable.

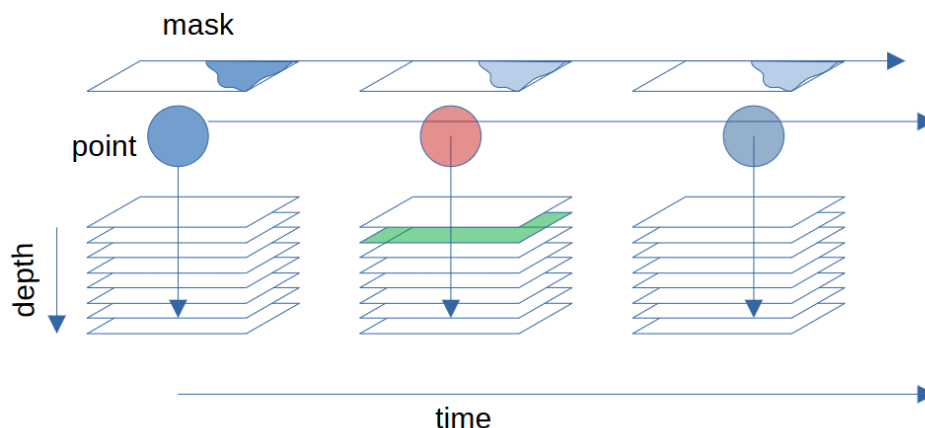

The final option is to extract data at a point at a specific moment in time from different depths (**4.44 Point in space with a slice of depth at a single time**). As a result, data will be retrieved that forms a **vertical profile**.

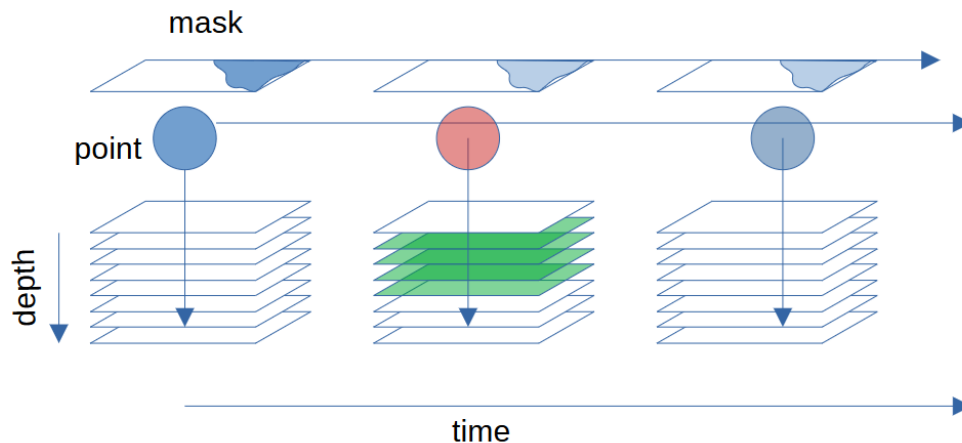


Additionally, when creating a subset, a third digit (1/0) is used to indicate the presence or absence of a mask. This notation is then used in analytical functions to inform about their availability for a specific type of data.

The fields defining the subset are described below, with the first two used to specify the variable and its modification:

- **Variable** – The variable is selected from a dropdown list. The variable **km2** will not appear on the list if it has been created, but access to it in the **Calculate** and **Filter** fields, as well as other variables, is provided by the syntax **ds2.variable_name**, e.g., **ds2.km2**. This variable is referred to below as **var**.
- **Calculate** – This field recalculates the current variable using an expression in the form of **variable rest_of_expression** (where only **rest_of_expression** is entered). **Calculate** also allows the inclusion of another variable from the retrieved data set, referred to as **ds2**, with the variable as **ds2.variable_name**. This variable syntax can also be used in filtering. The expression (**rest_of_expression**) takes the form of a Python expression using algebraic operators, comparison, and logical operators. If the field is left empty, the expression **variable * 1** is executed. Below are several examples of expressions entered into the **Calculate** field and their applications. The examples are taken from videos demonstrating the use of the **Xraster** plugin.

For data of types 3-1 and 4-11, that is, three-dimensional data with a time dimension, it is possible to transform a variable into its anomaly relative to the mean value for each grid cell separately. To do this, the checkbox must be selected (for other data types, selecting it does not trigger any action).



Expression	Application
- 273.5	conversion of Kelvin degrees to Celsius degrees
* 32/100	the conversion of oxygen concentration in water from mmol/m ³ (or µmol/L) to mg/L
* 80e3	total rainfall in m ³ per pixel with an area of 80 km ² over an 24-hour period (using daily rainfall variable in mm), 1[mm]*10 ⁻³ m * 80[km ²]* 10 ⁶ m ² = 80000 m ³
(Starting an expression by multiplying by zero assigns the variable var a value of zero, which allows for the creation of more complex expressions. If there is a need to use a selected variable in these expressions, we proceed as with other variables by prefixing the variable name with ds2.)	
* 0 + 1	changing all variable values to 1 (NoData remains NoData)
* 0 + (ds2.tx >= 35)	ds2.tx represents the variable tx, if the condition is met, the result will be 1, otherwise 0
* 0 + (ds2.o2 * 32 / 100 < 2)	ds2.o2 represents the concentration of oxygen in water in mmol/m ³ (or µmol/L), the expression converts the unit to mg/L and assigns a value of 1 if the concentration is less than 2, or 0 if it is greater than or equal to 2, this is useful for identifying hypoxia zones
* 0 + (ds2.o2 * 32 / 100 < 2) * 4	similar to the previous case, but it assigns a value of 4 (representing an area of 4 km ²) , to the cell if the condition is met; otherwise, the cell value is 0, summing the values provides the total area of hypoxia zones
* 0 + ds2.km2	ds2.km2 represents the area of a cell in km ² , a reference map of cell areas can be created to assess how much their sizes vary.
* 0 + (ds2.t2m - 273.15) * ds2.km2/1.33e7	ds2.t2m represents the temperature in Kelvin, the expression is used to calculate the weighted average temperature, where the weight is the cell area (ds2.km2), the weighted average value is obtained by summing the values across all cells (optionally filtered using a mask), the cell area values are divided by the total area (1.33e7) and then summed.

In raster GIS terminology, Calculate performs the functionality of both Raster Calculator and Reclassify.

- **X, Y, Z**

X – The x-coordinate range is entered as: Xstart, Xend (e.g., 18.2345, 19.0), or for a single point using a single value (e.g., 18.2345). If no value is entered, the entire range is used. The full range can be reset using the **RESET** button. Note that a comma is required when entering a range of values.

Y, Z – Follow the same rules as **X**.

Input format,

X	18.5, 19
Y	54.4, 54.8
Z	0.5016

There are situations where the X, Y range must be entered from a higher value to a lower value (e.g., for negative coordinates). You can check the input rule using RESET. If, after entering the values and resetting, you receive "Selection failed," you should reverse the signs, for example:

Change -89.9375, 89.9375 to 89.9375, -89.9375.

A similar issue may occur when entering Z as 0, particularly when depths start from a value like 0.5. In this case, you should provide any valid value within the relevant range.

- **time**

The time is entered in the following format: 'YYYY-M-D', where: **YYYY** represents the full year, **M** represents the month without a leading zero, **D** represents the day without a leading zero. For example: A time range: '2004-7-1', '2004-7-31', A single time: '2004-7-1'.

To enter the time correctly, ensure that the year, month, and day are provided in this format, without leading zeros for the month and day.

time	'2024-3-1 12:0'
------	-----------------

To use certain program functionalities, for a subset at a single point in time, it may be necessary to enter the time as, for example: '2004-7-1', '2004-7-1'. This format represents the same date as both the start and end time.

- **Filter**

The filter function uses the **where()** function along with comparison and logical operators (e.g., **|** for OR, **&** for AND). It can refer to the variable **var**, its mask **var.mask**, or any variable **ds2.variable**. Here are some example applications:

where((var.mask == 1) | (var.mask == 2)) This filters the area where the mask value is either 1 or 2.

where(var <= 5) This filters the variable for values less than or equal to 5.

where(ds2.variable_name > 3) This filters the ds2.variable_name where the value is greater than 3.

Input format,

Filter	where(var.mask==2)
--------	--------------------

- **Month selection**

Month selection limits data to only the months specified in the list. The input format for selecting data from December, January, February, and March would be:

Months selection

Selection is made by pressing the **OK** button. A message will appear with a code corresponding to the subset type, for example:

Selection successfull 4,2,1

For **four dimensions, type 2** – this represents the area at a specific depth at a given time (there is a mask for the data).

If the selection process fails, the subset will contain all the data from the dataset, and a message will appear, such as:

Selection failed


Creating a new subset by pressing the **OK** button results in displaying information about the **data type** below the **OK** button (in the form of a code and description), and above the **RESET** button, information about the **total area of all cells in km²** (if the km2 variable has been created) and the **total number of cells**. In the example below (one level and one time step), the area corresponds to the area of the selected region. The **RESET** button does not remove this information, so it can be used in the **Calculate** field.

Subset selection:		Area in km2	374.05
		Cells number	113.0
X	17.9856,20.6244	RESET OK Selection successfull 4,2,1 Slice of space at a single time and depth	
Y	54.0083,55.6916		
Z	0		
time	'2019-1-1 0:0'		

[\[TOCTabs\]](#)

3. Figures


This tab is used for visualizing a data subset and conducting exploratory data analysis. It also allows for the export of any subset area (x, y) to a GIS raster layer (a mask is required) and the saving of data from the drawing as text files (for histograms, time series, vertical profiles, and depth-time cross-sections).

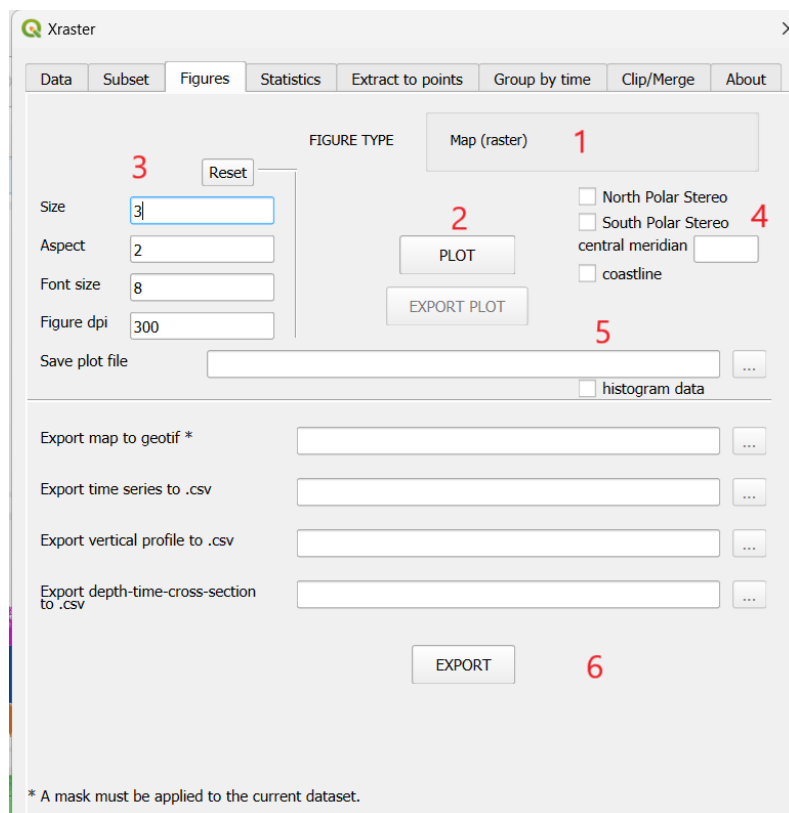

After selecting the data and creating its subset, the FIGURE TYPE panel (1) will determine the type of plot based on the created data subset. The types of subsets, their codes, and the corresponding plot types are summarized in a table at the end of the subsection. To generate the plot, click PLOT (2). The plot will be created in the Matplotlib GUI window with default parameters (3) described in the fields: **Size**, **Aspect**, and **Font size**. Size and Aspect can be changed by resizing the window or modifying values in the fields. Font size can only be adjusted by changing the value in the font size field. All values can be reset to their default settings using the RESET button. The plot can be saved either in the GUI window (diskette icon) at the resolution displayed on the screen, or by entering a name in the **Save plot file** field and clicking **EXPORT PLOT** (5) to save it with a higher resolution defined in the **Figure dpi** field. Additional customization of the plot is described in section 3.6.

When saving the histogram plot, there is an option to save the data from which the histogram was created (by checking the **histogram data** checkbox). The text file will contain 10,000 randomly selected data points (or fewer) and will be named after the entered histogram filename with the suffix **_data** (e.g., if the histogram is saved as *histzg_ice.jpg*, the data will be saved as *histzg_ice_data.csv*). The data will be saved with 100 numbers per row, separated by commas (up to 100 rows).

If the data has geographical coordinates, map visualizations can be performed using the **Polar Stereographic projection** (4) (for both the northern and southern hemispheres - select the corresponding checkbox). You must specify the central meridian (if not provided, it will default to 0). Additionally, you can check the **coastline** box to add the coastline. The map below shows the geographical coordinates and the Polar Stereographic projection with the coastline added.

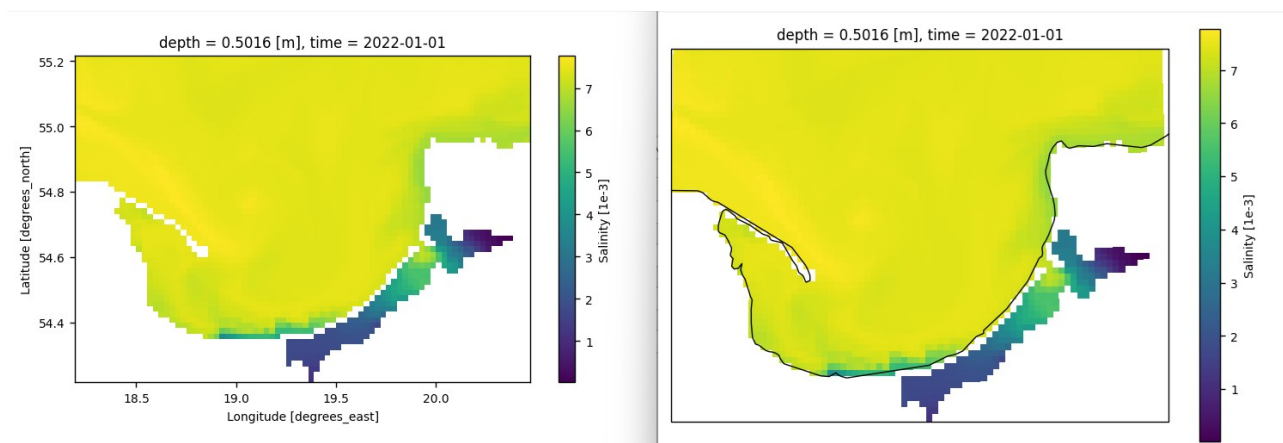

The above option has been introduced for the visualization of polar regions. Some of the data from these areas is provided in geographical coordinates and cannot be effectively visualized without applying the appropriate projection.

There is a significant limitation with this solution. Interaction with the plot is effective for raster sizes up to 400 x 400 pixels. For larger rasters, the Matplotlib GUI requires a long waiting time. It is best not to work with rasters larger than 200 x 200 pixels. The raster size can be adjusted after input in the Data tab.

At the bottom of the tab, there are four export fields along with buttons for entering the file name. Only the fields that are applicable at the given moment are active. You need to enter the file name and click the EXPORT (6) button.

- **Export map to geotif** – If the plot is a map (xy surface) and a mask has been applied, it can be exported as a raster layer in .tif format (in the original coordinate system).
- **Export time series to .csv** – If the plot is a Time Series, the data can be exported to a .csv file in the following format:

```
time,thetao
2024-03-01 12:00:00,4.0354
2024-03-02 12:00:00,4.2373
2024-03-03 12:00:00,4.3542
2024-03-04 12:00:00,3.5257
2024-03-05 12:00:00,3.449
2024-03-06 12:00:00,3.5584
.....
```

- **Export vertical profile to .csv** – If the plot is a Vertical Profile, the data can be exported to a .csv file in the following format,

```
depth,thetao,
0.5,19.9852
1.52,19.9852
2.55,19.9852
```

3.6,19.9851
 4.68,19.985
 5.8,19.9848
 6.96,19.9847

- **Export depth-time-cross-section to .csv** – If the plot is a Depth-time-cross-section, the data can be exported to a . CSV file in the following format:

time,depth,thetao
 2024-08-01 12:00:00,0.5,19.8857
 2024-08-01 12:00:00,1.52,19.8849
 2024-08-01 12:00:00,2.55,19.8833
 2024-08-01 12:00:00,3.6,19.8809
 2024-08-01 12:00:00,4.68,19.8701
 2024-08-01 12:00:00,5.8,19.8446
 2024-08-01 12:00:00,6.96,19.8138
 2024-08-01 12:00:00,8.17,19.7778
 2024-08-01 12:00:00,9.45,19.7678
 2024-08-01 12:00:00,10.81,19.7648
 2024-08-01 12:00:00,12.27,19.762
 2024-08-01 12:00:00,13.86,19.7502
 2024-08-01 12:00:00,15.6,19.6345

Types of subsets, codes, and their corresponding plot types:

Description of subset	Subset Type	Figure
Slices of space and time	3-1	Histogram
Slice of space at a single time	3-2	Map (basic raster)
Point in space and time slice	3-3	Time series
Point in space at a single time	3-4	-
Slices of space,time and depth	4-1	Histogram
Slices of space and time for a single depth	4-11	Histogram
Slice of space at a single time and depth	4-2	Map (basic raster)
Slices of space and depth at a single time	4-22	Histogram
Point in space, single depth, and time slice	4-3	Time series
Point in space with slices of time and depth	4-33	Depth-time-cross-section
Point in space at a single time and depth	4-4	-
Point in space with a slice of depth at a single time	4-44	Vertical profile

[\[TOCTabs\]](#)

4. Statistics

In raster GIS terminology, this tab is used, among other things, to implement the functionality of **Zonal Statistics** and **Cell Statistics**. It calculates statistics in space (**SPATIAL SUMMARY**) and time (**TIME SUMMARY**). Spatial statistics are calculated from the data of the entire space (x, y, z), possibly limited through filtering, separately for each time point. Time statistics calculate statistics separately for each location in space from time-varying data (similar to **Cell Statistics** in ArcGIS and **r.series** in QGIS).

The screenshot shows the 'Statistics' tab in the Xraster software interface. The dialog box has several sections and controls:

- SPATIAL SUMMARY:** (for single time use time slice with the same date)
 - 1 ☐ Summary statistics
 - ☐ Zonal statistics *
 - 2 Zones list
 - 3 RUN button
- TIME SUMMARY:**
 - 4 Statistics dropdown menu (set to 'mean')
 - 5 PLOT Spat Summ Stat button
 - 6 PLOT button
 - 7 PLOT AT BOTTOM button
 - 8 SAVE PLOT button
- Save plot file
- Export map to geotif *
- Export vertical profile to .csv
- 9 EXPORT button
- Progress bar showing 0%
- Footnote: * A mask must be applied to the current dataset.

Summary statistics (1) analyzes all the data from the subset for a given time point and calculates statistics for them. The results are saved separately for each time point in a text file in the following format:

time,mean,min,max,median,std,sum

2024-07-01 12:00:00,5.7482,4.781,7.2044,5.6085,0.5863, 43967.62

2024-07-02 12:00:00,5.738,4.7833,7.1345,5.6021,0.574, 43889.88

2024-07-03 12:00:00,5.7299,4.7878,7.1024,5.5954,0.5684, 43828.16

2024-07-04 12:00:00,5.7415,4.7964,9.2777,5.6069,0.5875, 43916.54

2024-07-05 12:00:00,5.7397,4.8054,8.4586,5.6072,0.5876, 43903.03

So, if we have data x, y, z (e.g., temperature in a reservoir for a given day, at different depth levels), the average temperature will be calculated from all the data (x, t, z). You need to specify the file name to be created in field (1) and click **RUN (3)**.

The **SUMMARY STATISTICS** results can be presented as a time series. To do this, select the desired statistic from the dropdown menu (4) and press the PLOT SPAT SUMM STAT button (5) (note that this option does not work for quantiles). This will generate a plot showing the selected summary statistic over time.


Similarly, **Zonal Statistics** (2) works by dividing the data into zones based on a mask. In the **Zones list** field,



you need to enter the zone numbers for which calculations will be performed. The result is in the following format:

```
zone,time,mean,min,max,median,std,sum
1,2024-07-01 12:00:00,20.2142,18.2626,21.2628,20.2573,0.6859, 2587.42
1,2024-07-02 12:00:00,19.5465,17.6327,20.4764,19.5872,0.6289, 2501.95
1,2024-07-03 12:00:00,18.8658,17.8467,19.6353,18.7756,0.4766, 2414.82
1,2024-07-04 12:00:00,18.5177,17.6609,19.1908,18.5182,0.3849, 2370.27
1,2024-07-05 12:00:00,18.3142,17.9012,18.9311,18.2979,0.2801, 2344.22
2,2024-07-01 12:00:00,17.3837,8.2579,19.9589,18.1639,2.2035, 16896.95
.....
3,2024-07-04 12:00:00,19.3774,17.845,20.0618,19.4105,0.2616, 9184.88
3,2024-07-05 12:00:00,19.0395,17.7076,19.7524,19.0459,0.2543, 9024.71
```

TIME SUMMARY allows for the calculation of statistics over time from the surface data (x, y, time) and from the points (z, time). The following statistics (4) can be selected:




The first option (from the surface) generates a map, while the second one creates a vertical profile. Both products can be created using the PLOT (6) button. The map and vertical profile can be saved as an image with a specified resolution (on the **Figures** tab) using the SAVE PLOT (8) button. Additionally, the map can be exported to a GIS raster layer in tif format (**Export map to geotif**), and the data from the vertical profile can be saved to a text file (**Export vertical profile to .csv**) using the EXPORT (9) button.

There is also an additional option to create maps of the variable statistics at the bottom from data of type (4-1). This option works exclusively for the following statistics: mean, median, std, min, max. Calculations are triggered by the PLOT AT BOTTOM (7) button. Similar to the map, the result can be saved as an image (SAVE PLOT) or exported (EXPORT) to a GIS raster layer.

[TOCTabs]

5. Extract/Cross

The tool performs two types of operations, both of which involve the input of a vector point file. **Extract** carries out a common GIS operation—extracting (retrieving) data from rasters at specific points. Due to the multidimensional nature of the data, this operation is more complex.

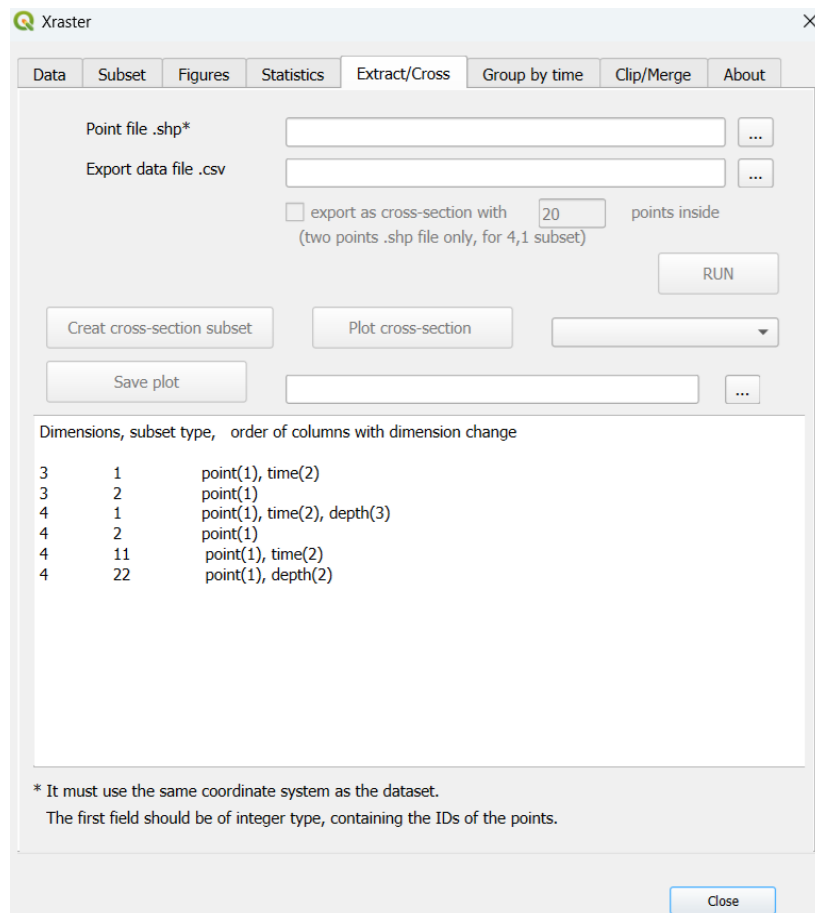

Two fields are used for data input. The *Point file (.shp)* is for entering point data—locations where data extraction from the dataset subset will occur. The point layer must have the same coordinate system as the dataset. The first field (with a name of your choice) must be an integer type and contain a unique identifier for each point. The second field is for entering the name of the output text file. This text file will have columns with the point number, followed by all dimensions of the given data type. For example, an extraction from data type 4-11, representing *slices of space and time for a single depth*, will yield a file formatted as follows:

```
IDpoint,X,Y,time,depth,thetao
10,18.9664,54.7731,2024-07-01 12:00:00,0.5,18.7793
10,18.9664,54.7731,2024-07-02 12:00:00,0.5,18.4781
10,18.9664,54.7731,2024-07-03 12:00:00,0.5,18.2965
10,18.9664,54.7731,2024-07-04 12:00:00,0.5,18.7907
.....
11,18.5127,54.7078,2024-07-01 12:00:00,0.5,20.6068
```

11,18.5127,54.7078,2024-07-02 12:00:00,0.5,20.067

11,18.5127,54.7078,2024-07-03 12:00:00,0.5,18.9485

.....

In the first column, the point number is listed, followed by its coordinates. For each point, subsequent columns contain the variable's value for each date. The structure of the output text files is summarized in the table below. This format can be applied to all subsets except those specific to a single point. A schematic of the text file format is also presented on the panel of the interface.

Subset description	Subset Type	Order of columns with dimension change
Slices of space and time	3-1	point(1), time(2)
Slice of space at a single time	3-2	point(1)
Slices of space,time and depth	4-1	point(1), time(2), depth(3)
Slices of space and time for a single depth	4-11	point(1), time(2)
Slice of space at a single time and depth	4-2	point(1)
Slices of space and depth at a single time	4-22	point(1), depth(2)


Cross is used to create a subset of cross-sections from data in the current subset of type 4.1 (slice of space, time, and depth). The created cross-section subset forms two-dimensional rasters with spatial dimensions of depth (in km) and length along the line defined by points in the input point layer. The point layer must contain exactly two points for the tool to be activated **(1)**. The point file must meet the same conditions as mentioned above. The cross-section starts at the first point and ends at the last point.

To begin creating the subset, a .csv file **(2)** is generated similarly to the previous process, with the "export as cross section" option selected **(3)** and a specified number of points **(4)** that will be distributed along the line between the first and second points of the input vector layer. For this generated set of points, an extraction operation will be performed (by pressing RUN **(5)**), similar to the first type of operation on this tool. At the same time, the "Create cross-section subset" button **(6)** will be activated.

Clicking this button replaces the existing subset with a new cross-section subset consisting of a series of two-dimensional rasters for each time step. The dates of the created rasters will be displayed in the selection field **(8)**, where a specific date can be chosen. To display the cross-section for the selected date, use button **(7)**, and to save it, use button **(9)**.

Since cross-sections are stored as a subset format, they can be analyzed using tools available in the Plot (Histogram), Statistics (Spatial Summary - Summary statistics, Time Summary - Statistics Plot), and Group by Time (Map for time period and statistics) tabs. This provides additional analytical capabilities for cross-sections.

To return to a previously selected subset, it must be redefined in the Subset tab.

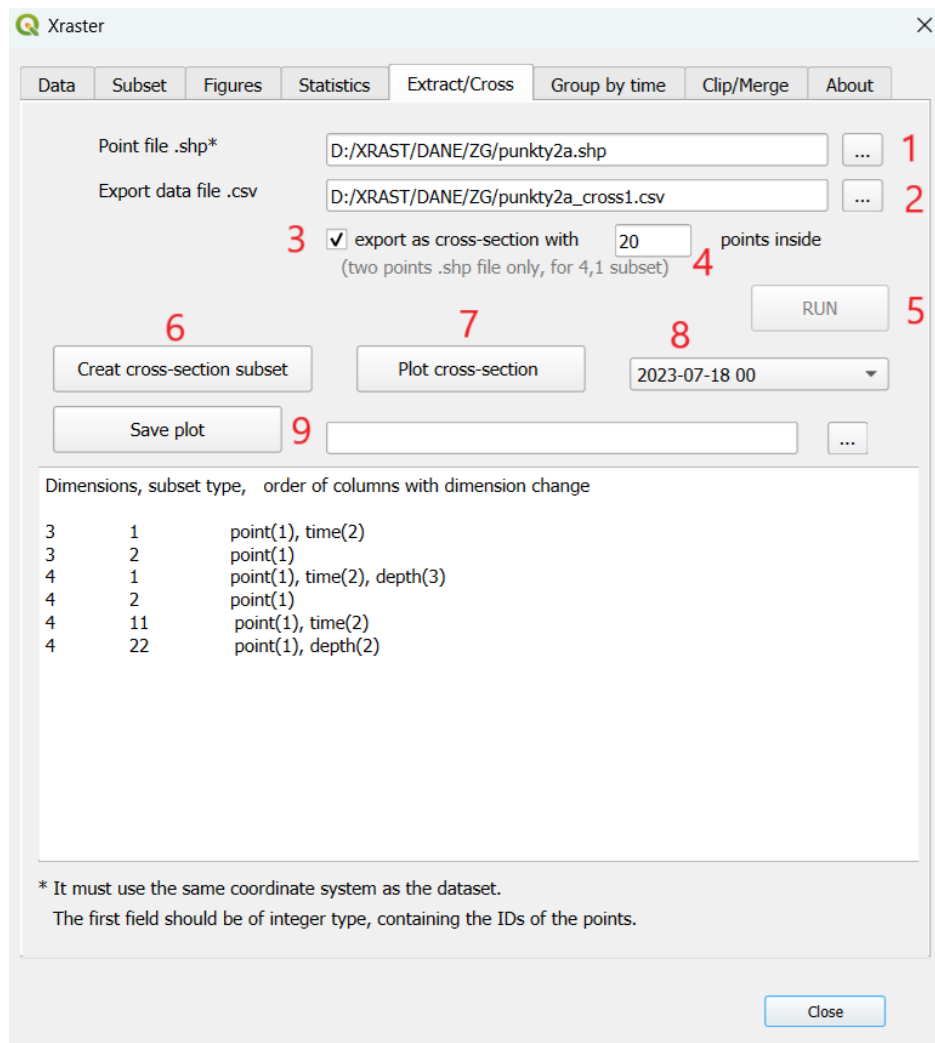

[TOCTabs]

6. Group by time

The time dimension in GIS allows for the grouping of data. The key for this grouping can be based on the year, month, or climate season. Each group is then assigned a selected statistical measure, resulting in its statistical representation. It is possible to analyze the statistics of each group separately or combine them into a new data structure. This type of analysis is suitable for time series of basic rasters or full four-dimensional data.

The card consists of three parts and performs statistical analysis for groups defined by years, months, days, or climate seasons (JJA – June-August, SON – September-November, DJF – December-February, MAM – March-May). Separate groups are created from a data subset based on their keys (e.g., individual months), and then statistics (mean, median, standard deviation, minimum, maximum, sum) are calculated for each group separately. After computing the statistics, the keys with the calculated values are combined into a single subset, which can then be visualized and exported.

The screenshot shows the 'Group by time' dialog box in the Xraster software. The dialog is divided into three main sections, each with a red number indicating its order of use:

- Section 1 (Top):** Contains the 'Time period' dropdown menu (set to 'month'), the 'Statistics' dropdown menu (set to 'mean'), a 'RUN' button, and a note 'Only for 3-1, 4-1, 4-11'.
- Section 2 (Middle):** Contains the title 'MAP (3-1, 4-11) OR HISTOGRAM (4-1)', a 'Time' dropdown menu (set to '3'), a 'Save plot' text field, an 'Export map to geotif' text field, and buttons for 'PLOT', 'SAVE PLOT', and 'EXPORT'.
- Section 3 (Bottom):** Contains the title 'TIME SERIES (3-1,4-11) OR DEPTH-TIME-CROSS-SECTION (4-1)', a 'Save plot' text field, an 'Export time series or cross-section to csv' text field, and buttons for 'PLOT', 'SAVE PLOT', and 'EXPORT'.

A 'Close' button is located at the bottom right of the dialog.

Grouping can be performed for data subsets such as slices of space and time for three-dimensional data and slices of space, time, and depth or slices of space and time for a single depth for four-dimensional data. The analysis always begins with the top section of the card **(1)**, where the grouping key is defined using the **Time period** option, and the desired statistic is selected under **Statistics**. After pressing the RUN button, a subset consisting of grouped data is created. In the middle section of the card **(2)**, under the **Time** field, all generated groups (e.g., statistics calculated for each month) will be displayed.

In the second part of the **middle section**, a **map or histogram** can be created using the **PLOT** button for the selected group in the **Time** field. The generated map or histogram can be saved using SAVE PLOT. If a mask is applied, the map can also be exported to a GIS raster layer via the EXPORT button.


In the bottom section of the card **(3)**, visualization of the analysis results is created for all groups together. For three-dimensional data and data at a specified depth (types **3-1**, **4-11**), this visualization takes the form of time series. For four-dimensional data (4-1), it generates a depth-time cross-section (this is not created for climate seasons, and in the case of a single group, it will be a vertical profile). The visualizations can be saved using SAVE PLOT, and the data can be exported to text files with the EXPORT button.

[\[TOCTabs\]](#)

7. Clip/Merge

This module carries out a range of tasks related to the preparation and storage of NetCDF (.nc) data. In general, it performs data engineering on NetCDF data. The tasks include:

1. Preparing a NetCDF file tailored to a specific project from the collected data
2. Saving the current data subset (in Xraster) in NetCDF format (always with a single variable)
3. Merging saved subsets (for different variables) from the previous task into a single NetCDF file
4. Saving a "group by time" subset as a NetCDF file (for opening and working in QGIS)

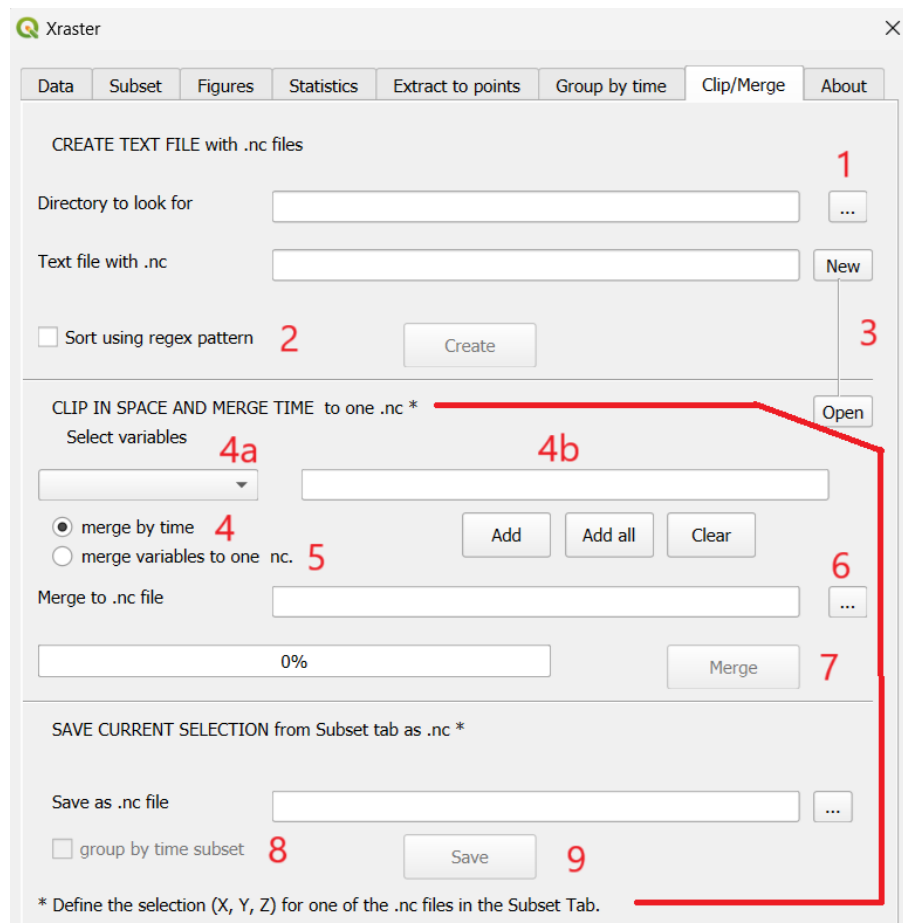

1. Preparing a NetCDF file tailored to a specific project from the collected data

Depending on the method used, the data retrieval process can result in different outcomes. When using the *Copernicus Marine Toolbox*, we obtain a ready-to-analyze dataset in the form of a NetCDF (.nc) file. However, other methods may produce files that cover large areas, contain numerous variables, or be retrieved for separate time periods (days, hours). As a result, these files are not practical for direct use in a program.

Effective analysis requires merging these files into a single one while minimizing its size. This can be achieved by limiting the spatial extent and the number of variables. The module carries out these tasks in three steps:

1. The first step compiles the file paths of the retrieved data into a single text file, assuming they may be stored in a directory structure.

2. The second step extracts the area of interest and selects the necessary variables.
3. The third step merges them into a single file.

The spatial extent (clipping) of the data is taken from the current extent defined in the **Subset** module.

CREATE TEXT FILE with .nc file (first step)

The purpose of this section is to create a text file with paths to the subsequently downloaded files (.nc). Additionally, they should be sorted by time (starting from the oldest). Sorting can be done manually or automatically using the **Sort using regex pattern (2)** option.

A **regex pattern** is an abbreviation for **regular expression**, which is a sequence of characters that defines a match pattern in text. It is used to detect the date, after which the files are sorted by date. This option is experimental—if it does not work, an empty file is created.

We start by entering the directory under which (including all subdirectories) the required .nc files are located. This is done in the **Directory to look for (1)** field. Then, we enter the name of the text file in the **Text file with .nc** field using the **NEW (3)** button, where these files will be stored along with their full paths. They may require manual sorting.

If we select the **Sort using regex pattern (2)** option, a file with the same name plus the suffix "**_sort**" will be created next to the previously generated text file. This file will contain the time-sorted files (or be empty if sorting fails).

The text file is created using the **CREATE** button.

CLIP IN SPACE AND MERGE IN TIME to one .nc (second and third steps)

The purpose of this section is to download the prepared text file with time-sorted .nc files, select the required variables, trim the data to the needed dimension range, and create a single output file.

We start by selecting the option **merge by time (4)**. The file is loaded in the **Text file with .nc** field using the **OPEN (3)** button. The next step is to select variables in the **Select variables (4a)** field. We select the required variables and add them to the right-side field **(4b)**, under which there are buttons **Add**, **Add all**, **Clear**. These buttons are used to create a list of required variables (names separated by commas). The list can also be edited manually.


It is also necessary to define the area and possibly the depth range in the output data. These ranges are defined in the **Subset** panel, using one of the downloaded files for merging. Selection must be confirmed by clicking **OK** in the **Subset** panel.

We enter the name of the new file (.nc) **(6)** and click the **MERGE (7)** button.

2. Saving the current data subset (in Xraster) in NetCDF format (always with a single variable)

Saves the current selection as a new NetCDF (.nc) file. Enter the file name and press the **SAVE (9)** button.

If you want to save a subset for a single point in time, create a time interval with the same value at the start and end, e.g.,



3. Merging saved subsets (for different variables) from the previous task into a single NetCDF file

Xraster saves subsets with a single variable. If there is a need to merge them into one file, proceed as follows:

Prepare a text file containing the files to be merged (with full paths).

e.g.

D:\XRAST\temp\iconc_zg.nc

D:\XRAST\temp\sal_zg.nc

D:\XRAST\temp\temp_zg.nc

The file is loaded in the **Text file with .nc** field using the OPEN **(3)** button. Select the **merge variables to one .nc (5)** option. Enter the name of the new .nc file **(6)** and click the MERGE **(7)** button.

The merged files must have the same size (in space and time) and coordinate system.

4. Saving a "group by time" subset as a NetCDF file (for opening and working in QGIS)

The main issue with using NetCDF data in QGIS is that, although they can be opened, they often contain hundreds or even thousands of rasters, making processing extremely difficult. The solution is to reduce their number through grouping.

Grouping by time (years, months, climate seasons) using the required statistics in Xraster allows for preparing a NetCDF file optimized for easy analysis in QGIS. For example, 365 daily air temperature rasters can be aggregated into 12 monthly average rasters, which can be processed in QGIS without difficulty.

In the **Group By time** panel, create a group by clicking the **RUN** button. Then, check the **group by time subset (8)** option. Enter the file name and press the SAVE **(9)** button.

[\[TOC\]](#)

8. GIS

This tab contains two tools for the spatial analysis of **marine multidimensional raster data**. The second tool can also be used in the analysis of **climate data**.


The first tool allows calculation of the **mean value of a variable within a water body**. The second introduces the concept of **spatial-temporal region groups** and enables their identification and analysis.

Calculating the mean value of an oceanographic variable within a specified water body for defined time periods.

Calculating the mean value of a variable (temperature, salinity, etc.) in a sea area defined by a mask over a given time period poses two problems. The first arises from **different layer thicknesses** in the data, and the second from **different cell areas at different depths**.

The solution used consists in calculating a **mean value weighted by water volume**. The idea of this approach is illustrated in the figure below.


1.

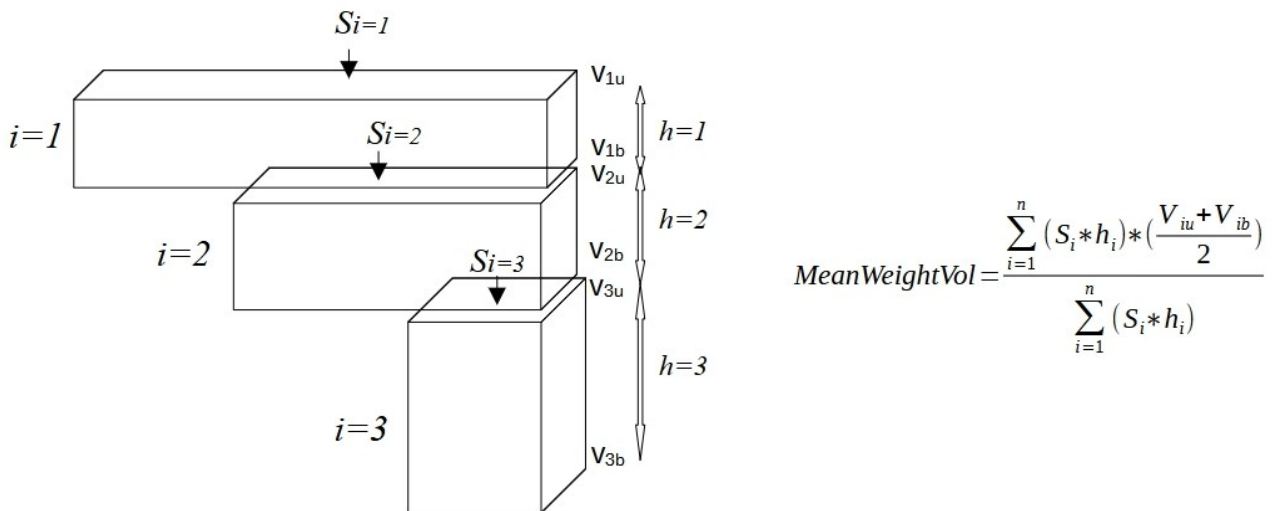

The reservoir model consists of i layers of rectangular prisms with area S and vertical thickness h . Each layer has a specified mean value of the variable V on the upper and lower surfaces (u – upper, b – bottom). From these values, the mean value within the layer is determined. A **weighted mean** is then calculated, where the weights are the **volumes of the layers**.

The current implementation of the algorithm assumes the **area from the upper level of the layer**, and the **layer variable value** is taken as the average of the values at the upper and lower levels.

The means are calculated for specific time periods defined by grouping and make use of two products obtained from the grouping process (**Group by Time** tab).

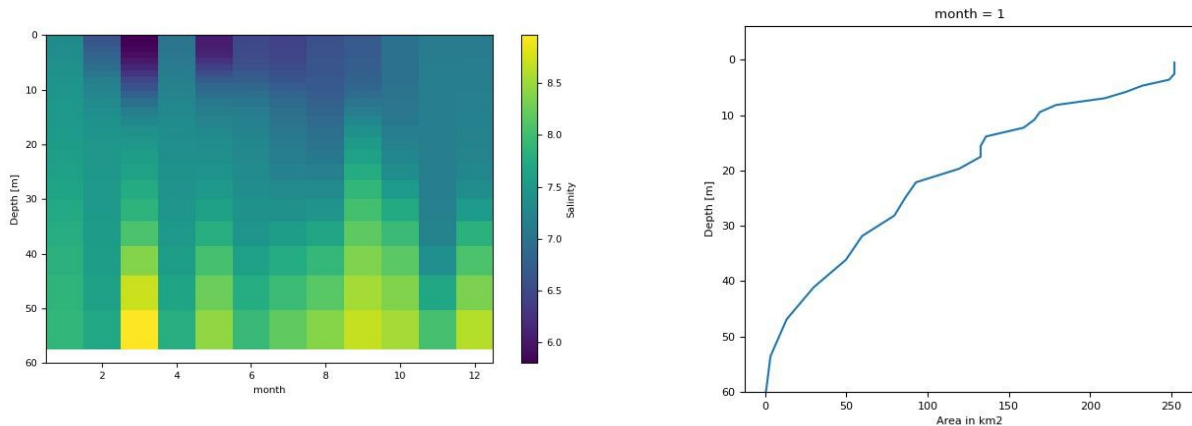

The first product is the **Depth–Time Cross-Section file** (figure on the left). This file contains **mean values of the analyzed variable for each depth** and has the following form (in the case of monthly means).

```
month,depth,so
1,0.5,7.3228
1,1.52,7.3278
1,2.55,7.3361
1,3.6,7.3537
.....
1,103.82,nan
1,117.62,nan
1,132.67,nan
2,0.5,6.6276
2,1.52,6.6334
```

The second file is also created as a **Depth–Time Cross-Section file**, but for a **single time step** it describes the **areas corresponding to individual depths** (figure on the right). It is created from the **km2 variable as a sum of areas**. It can also be created by summing **cell areas in rectangular coordinates**. It has the following form,

```
month,depth,so
1,0.5,251.8685
1,1.52,251.8685
1,2.55,251.8685
1,3.6,248.5549
1,4.68,232.0092
.....
1,46.91,13.2685
1,53.59,3.3171
1,61.28,0.0
1,70.08,0.0
```

The result of the tool is an **output text file** of the following form,

area: 251.87km2 volume: 5.468km3 mean depth: 21.7m

time,mean

1,7.516

2,7.231

3,7.0042

.....

10,7.2533

11,7.1743

12,7.3017

In the first row, the calculated values are given: the **area of the region**, the **volume**, and the **mean depth** of the analyzed area. The second line describes two columns: **time** (in the example shown, these are months from 1 to 12) and the **mean value of the variable**.

The tool has the following form,

Mean value of the variable within a specified water body (time series)

Depth-time-cross section .csv ... **1**

Area in km2 at each depth .csv ... **2**

Output data file .csv ... **3**

4 This script uses two CSV files:
1. A Depth-Time-Cross-Section file created using "Group by Time."
2. A CSV file containing the surface area at each depth (in km²). This second file can be obtained by using "Group by Time" for a single day and applying the "Sum" function. The selected day must be repeated to create a subset of type 4.1. For a geographic coordinate system, the expression in the

5 RUN

The panel in the tool includes a Help section with instructions on how to prepare the files. (**4**):

This script uses two CSV files:

1. A Depth-Time-Cross-Section file created using "Group by Time."
2. A CSV file containing the surface area at each depth (in km²). This second file can be obtained by using "Group by Time" for a single day and applying the "Sum" function. The selected day must be repeated to create a subset of type 4.1. For a geographic coordinate system, the expression in the Calculate tool should be: `\*0 + ds2.km2`. For a rectangular coordinate system, use: `\*0 + cell\_size\_in\_km2`

The result is a time series (CSV) showing the average value for a specified water volume for each year or month, taking into account variable depth intervals and varying depths in water body.

The tool operates as follows. According to the instructions above, two text files must be prepared and selected in the tool (**1, 2**). Both files should be prepared for the same maximum depth. Clicking the **RUN** button (**5**) generates the output file.

Spatial-temporal region groups and their use in oceanography.

Region groups in GIS analyses of two-dimensional raster layers allow the identification of **spatially continuous subsets of raster cells** representing geographic objects. For example, in a raster mask layer with land (1) and water (0), each island represented by connected land cells is assigned a **unique ID** (as an integer) that separately identifies each island. This is a fundamental method for dividing raster space into discrete objects. Calculating their area (e.g., using **Zonal Geometry** in ArcGIS) enables, through **reclassification**, the removal of islands below a certain size threshold from the mask.

In **ArcGIS**, the **Region Group** tool identifies connected cells that share the same value and groups them into **unique regions or zones**, assigning a new ID to each region. Other GIS software offer equivalent operations but may use different names. In **QGIS**, the equivalent is:

- **SAGA** → **Raster Tools** → **Connected Component Labeling** (using the SAGA toolbox)
- **GRASS** → **r.clump** (available via the GRASS provider in QGIS)

Both perform the same function: assigning unique IDs to contiguous zones of equal value.

In the **scientific Python library SciPy (NumPy)**, the direct equivalent is **scipy.ndimage.label()**, which labels connected components in an array, assigning unique IDs to each contiguous region.

Spatial-temporal region groups

Definition

Spatial-temporal region groups (ST region groups) are an extension of the concept of **region groups** from two-dimensional raster space to three-dimensional space that also includes **time**.

ST region groups are created based on the following principles:

1. Groups maintain **continuity in both space and time**.
2. Each group is assigned a **unique ID**.
3. A group retains its ID across a time step if its new location **partially overlaps** with its previous position.
4. When **connected groups with different IDs merge**, the resulting group takes the ID of the group that contributed the **largest area**.
5. A group can **split**, forming a **multi-element group**.

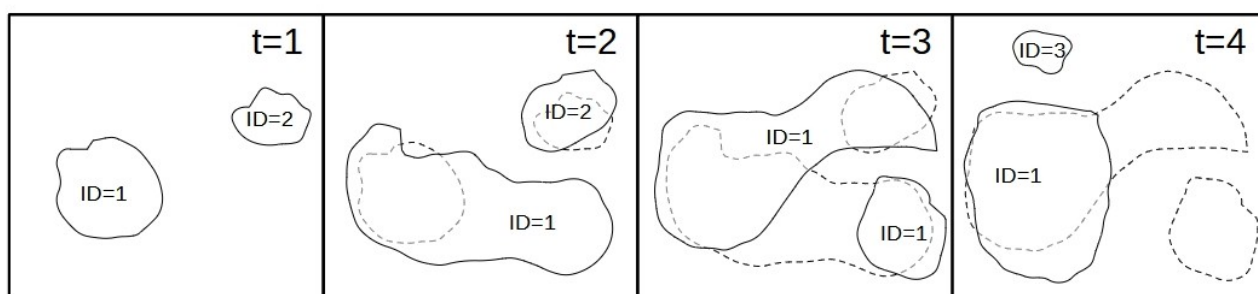


Fig. 1 Process of defining **spatial-temporal region groups**. Successive time steps are labeled as $t = 1, 2, 3, 4$. The **dashed line** indicates the position of the groups in the previous time step.

- In the first time step ($t = 1$), groups are defined solely based on **spatial continuity**.
- In subsequent steps:
 - ($t = 2$) Both groups change in **size and shape**. Since they **overlap with the previous groups**, they retain their IDs.
 - ($t = 3$) Groups **ID = 1** and **ID = 2** merge into a single group. Group **ID = 1** has the **larger area contribution**, so the new group takes its ID. A **separate group** splits off from group **ID = 1**; although it has no **spatial continuity**, its location corresponds to the location of group **ID = 1** in the previous time step, so it retains its ID (**temporal continuity**). The group labeled **ID = 2** ceases to exist.
 - ($t = 4$) Group **ID = 1** **reduces in area**, and a **new group** appears with **no temporal continuity** from the previous step, assigned **ID = 3**.

Xraster tool for spatial-temporal region grouping

The tool for defining **spatial-temporal region groups** is located in the **GIS** tab and has the following form,

Groups connected in space and time cells assigns unique region IDs (for only 0 and 1 var values sets)

Output region results files .csv **1** ...

2

time **3** region ID **4**

5 **6** **7** **8**

Save plot file ... **9**

Export map to geotif * ... **10**

Export region area/time to .csv ... **11**


* A mask must be applied to the current dataset.

12 **13**

The preliminary step is to **prepare the data**, which should contain only values **0** and **1** and be **limited to a single level**. Groups will be identified from the **1 values**, while **0 values** represent the background.

Data **reclassification** is performed when defining the subset. For example, if the data represent **oxygen concentration at the bottom** (o2_max_depth [mmol l m^{-3}]), reclassification into **hypoxia zones (1)** (below 2 ml/L) and the **rest of the bottom (0)** can be done using an expression in the **Calculate** field (Subset tab):


$*0+(\text{ds2.o2_max_depth}*32/1000<2)$. As a result, the **data histogram** will have the following form,

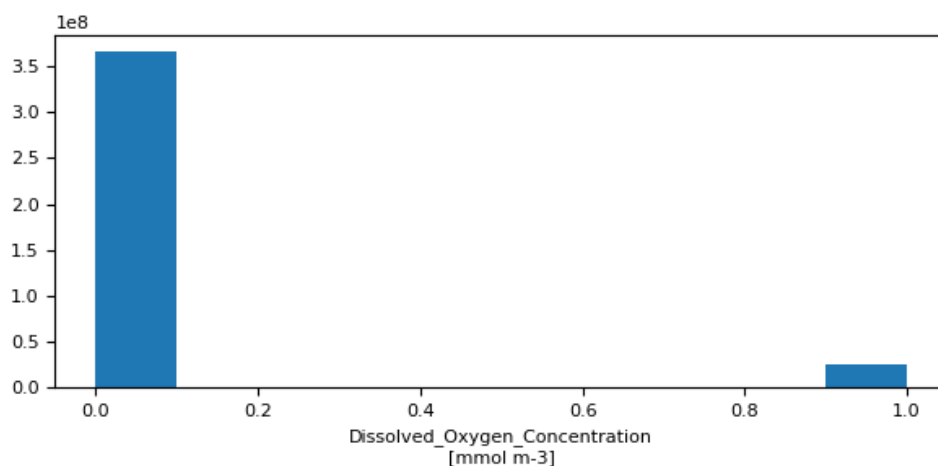

The data contain only values **0**, **1**, and optionally **NoData**.

The tool for creating groups is located at the **bottom of the GIS tab**. Clicking the **Create Regions Subset** button (2) transforms the data subset into a **region-groups subset** as defined above. Groups are assigned **unique identifiers** (as consecutive integers) to replace the previous value of 1.


During this process, a **text file** is created, which is later used in the group analysis process. The file contains **three columns**: date, group ID, and group area expressed as the number of raster cells. In the first step, the **name of this file** should be specified (1). For example



After entering the file name, clicking the button (2) will start the **group creation process**. The progress of the process is displayed both **graphically and numerically**. Depending on the size of the data, this may be a time-consuming process (potentially several minutes).

NOTE: Performing any other actions on the computer may freeze the progress bar display, but it **does not interrupt the calculation process**. Once the calculation is complete, the progress bar will be fully updated (**numerically – 100%**).

The data now contain **group IDs**, and the histogram will have the following form. **To return to the original data, the Subset must be recreated.**

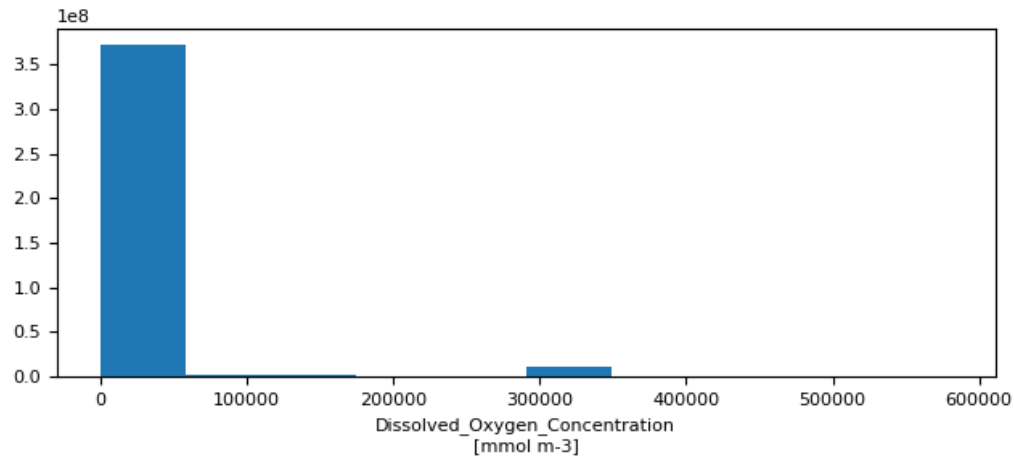

After the groups are created, a **text file describing the groups** is generated. The file has the **same name as the one entered (1)** with the addition of **_sum** (in the example described, the file will be **hypoxG3_sum.csv**).

The file has the following form:

```
id,max_number_of_cells,date_start,date_end,date_of_max
344509,12528,2019-05-03,2023-12-30,2023-10-13
1,10372,2023-12-31,2023-12-31,2023-12-31
57,6351,2009-01-01,2012-05-14,2009-12-18
89850,3765,2011-01-30,2015-04-02,2013-01-26
128264,3580,2012-05-28,2016-03-31,2014-01-12
408239,2831,2020-07-19,2021-09-25,2021-07-09
47,2809,2009-01-01,2011-05-30,2009-11-15
428555,1747,2020-10-31,2021-01-24,2021-01-11
120,1679,2009-01-01,2009-11-23,2009-09-23
181483,1520,2013-06-18,2015-02-08,2014-08-19
```

The file contains a **description of the groups sorted by area**, with each column providing the following information.

```
id,max_number_of_cells,date_start,date_end,date_of_max
```

```
344509,12528,2019-05-03,2023-12-30,2023-10-13
```

344509 - Identifier (Region ID)

12528 - Maximum group area in raster cells

2019-05-03 - Time of group formation

2023-12-30 - Time of group termination

2023-10-13 - Time of the largest area of the group

This file is used to select identifiers (ID) and the point in time (time) at which we want to visualize groups.

There are four possible methods of group analysis, each of which allows saving the obtained results using a selected identifier (ID) or time.

1. PLOT regs map (time) (5)
2. PLOT reg map (ID/time) (6)
3. PLOT days map (ID) (7)
4. PLOT fig are/time (ID) (8)

The analysis answers the following questions: Which groups were identified on a given day? What does a group (with a given ID on a given day) look like—in the form of a mask? How long did a given group persist in space? How did the area of a given group change over time?

1. PLOT regs map (time) (5)

This command creates a map of all groups at a given point in time. The groups have their own identifiers. The time must be entered in field (3) in the format: 2009-7-5 (or 2009-07-05).

We select the date from the record: 2013-01-26 (and enter it in field (3)).


```
id,max_number_of_cells,date_start,date_end,date_of_max
.....
89850,3765,2011-01-30,2015-04-02,2013-01-26
```

We click button (5) and obtain a map of all groups at that point in time (2013-01-26).

As with other maps, we can save the map from its window (the floppy disk icon), save it at a higher resolution using **Save plot file (9)** + **SAVE PLOT (12)**, and export the map to GeoTIFF using **Export map to geotiff (10)** + **EXPORT (13)**.


From the map (with the help of the `_sum` file), we can read that the IDs of the two largest groups are:

ID = 89850 i ID = 128264.

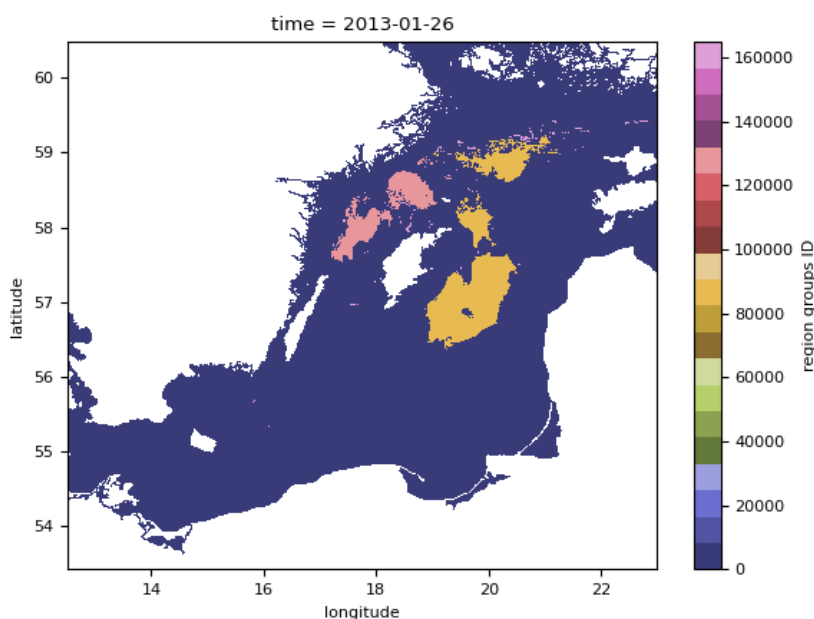


2. PLOT reg map (ID/time) (6)

This allows creating a map for a specific ID at a given point in time. We enter the time in field (3) and the ID in field (4). The map titles have been modified.

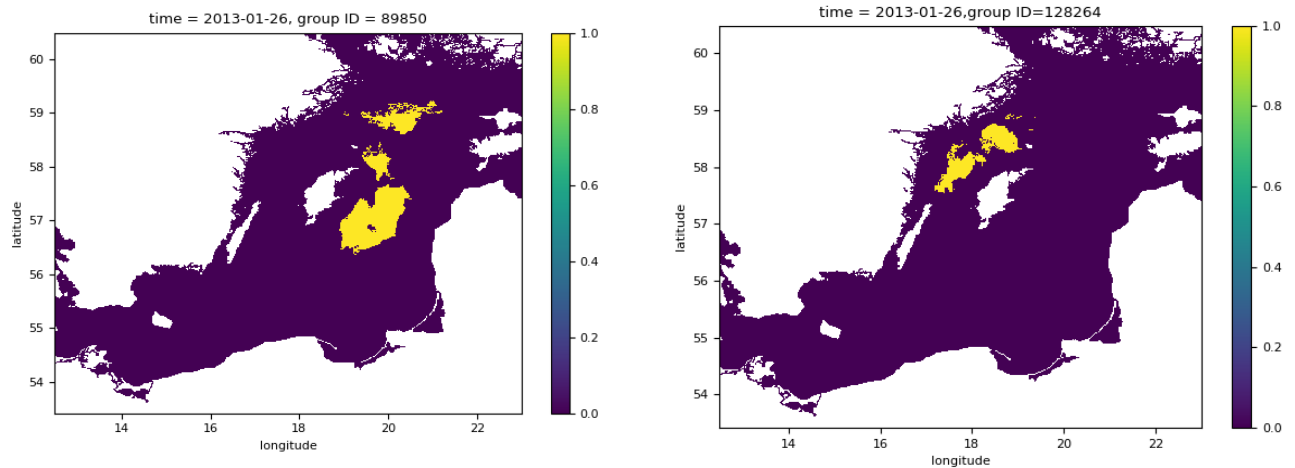


3. PLOT days map (ID) (7)

Based on the ID entered in field (4), this creates a map showing the number of days the given group existed for each map cell. The title by default includes the lifetime of the group. The remaining descriptions on the maps have been modified.

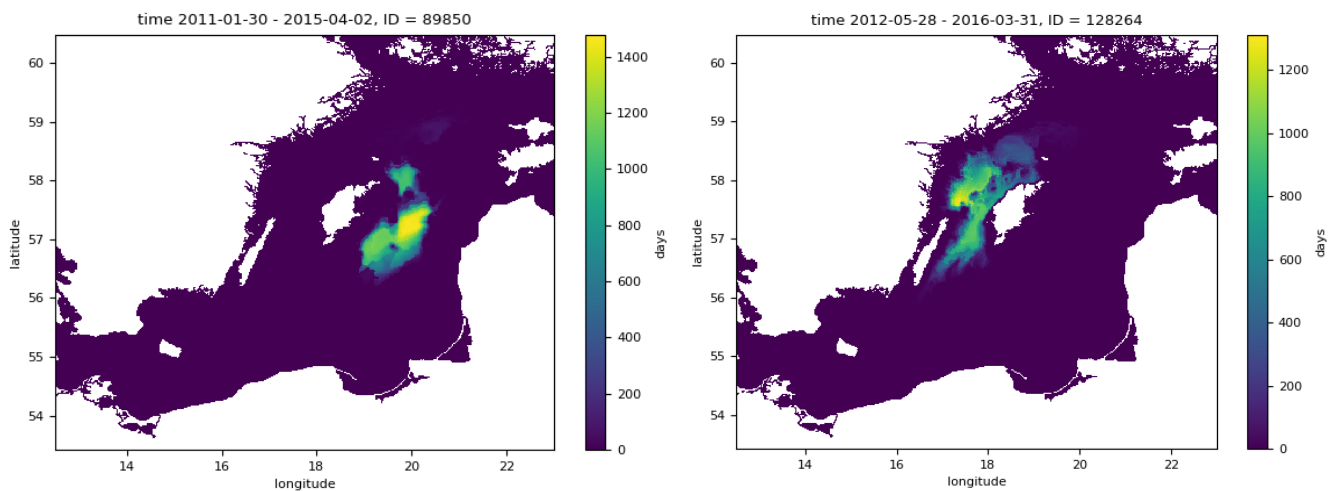

4. PLOT fig are/time (ID) (8)

Based on the ID entered in field (4), this creates a plot showing changes in the group's area over time.

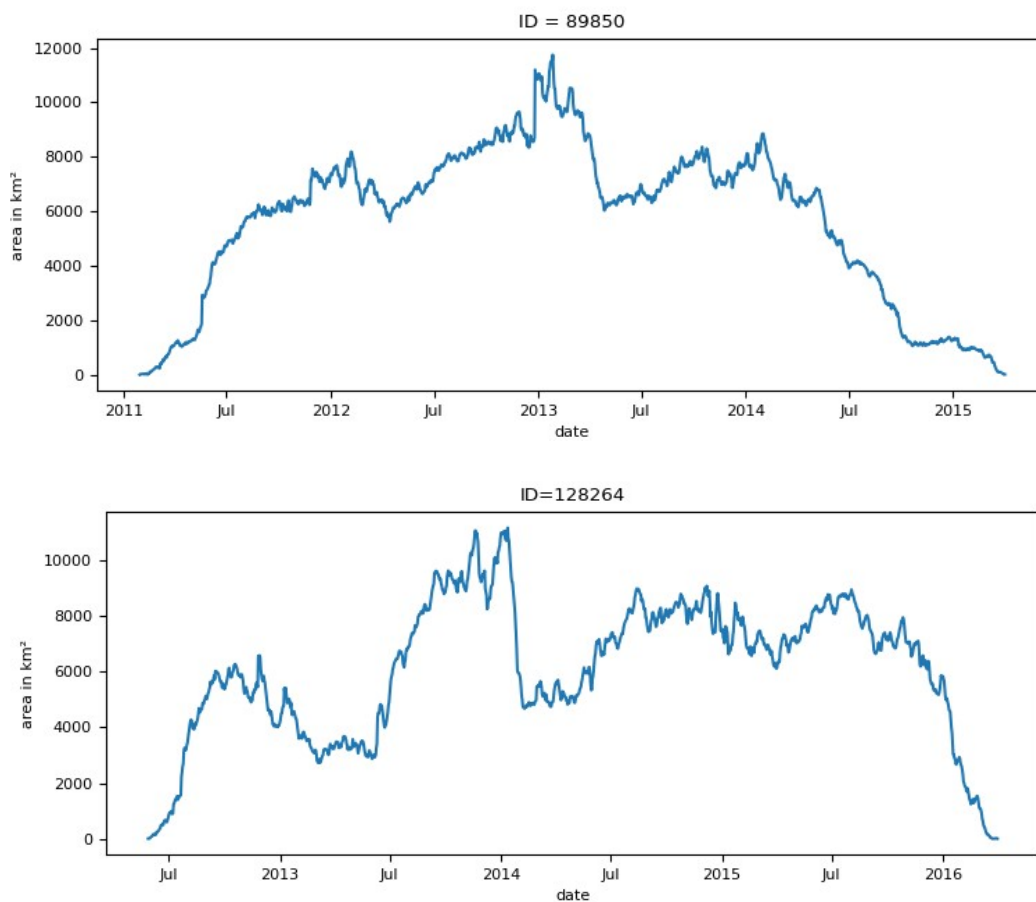

The group areas are given as the number of raster cells, or in km² if the *km2* variable has been created in the **Data** tab. The area is calculated based on the average area of a cell of the given raster.

The figure can be saved at a higher resolution using **Save plot file (9)** + **SAVE PLOT (12)**. The data from the figure can also be saved as a text file using **Export region area/time to .csv (11)** + **EXPORT (13)**, in the following form,

```
date,area_in_km2
2012-05-28,3.12
2012-05-29,3.12
2012-05-30,9.36
.....
2012-06-08,131.04
2012-06-09,137.28
2012-06-10,152.88
2012-06-11,243.36
.....
```

Case studies using spatial–temporal region groups:

1. Analysis of marine heatwaves on the sea surface.

Marine heatwaves are periods of persistently anomalously warm ocean temperatures, which can have significant impacts on marine life as well as coastal communities and economies.

In this project, heatwaves were identified for the Baltic Sea in 2025 (defined as spatially and temporally continuous areas on the sea surface with temperatures above 22 °C). Flooded areas (three lagoons on the southern coast of the Baltic Sea) were excluded from the analysis.

Data from *Baltic Sea – Sea Surface Temperature Analysis L4* (SST_BAL_SST_L4_NRT_OBSERVATIONS_010_007_b) from the Copernicus Marine Data Store (<https://data.marine.copernicus.eu/products>) were used.

For the purposes of the project, heatwaves were defined as areas with a maximum size greater than 1,000 cells (2,700 km²) and a duration longer than 5 days.

In the first step, a subset was created from the sea surface temperature variable with the following dimensions:

Dimensions:

time,153

latitude,631

longitude,1000

Coordinates:

longitude,10.02,30.0

latitude,53.4,66.0

time,2025-05-01 00:00:00,2025-09-30 00:00:00

Variables:

analysed_sst [kelvin] analysed sea surface temperature


Areas with temperatures above 22 °C were assigned a value of 1, while the background was left as 0 using the expression:

```
*0 + (ds2.analysed_sst - 272.15 >= 22)
```

A subset of region groups was created using the tool described above and then analyzed.

The results were presented on a map that also included time series in the form of plots.

The entire workflow was carried out in QGIS using Xraster.

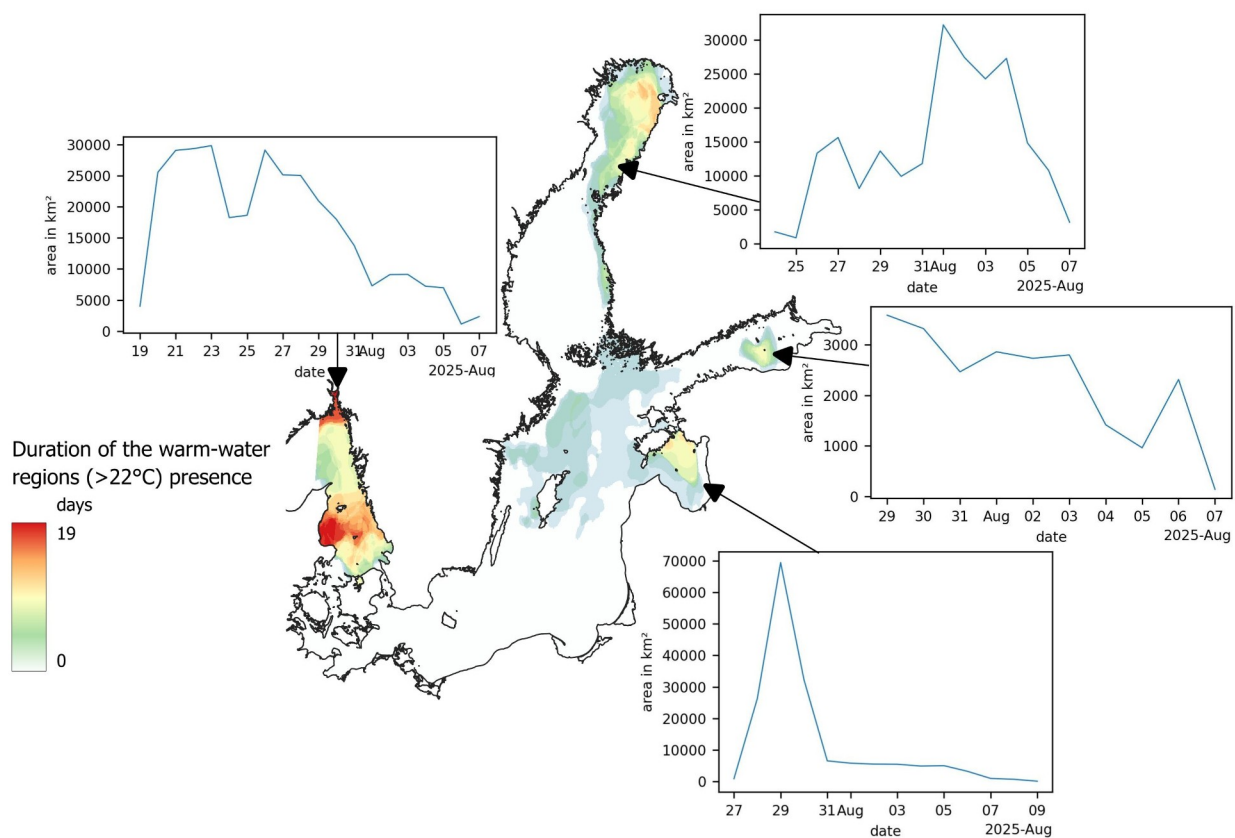

Four heatwaves were identified, each with a maximum area exceeding 30,000 km² and a maximum duration of 19 days.

2. Analysis of hypoxia zones on the sea bottom

Hypoxia at the sea bottom refers to low oxygen levels in bottom waters (less than 2 mg/L), creating "dead zones" where most marine life cannot survive.

In this project, hypoxia zones on the bottom of the Baltic Sea were analyzed for the years 2009–2023, focusing on the areas with the highest frequency of occurrence.

Data preparation:

In this study, we used the physics and biochemistry reanalysis products (BALTICSEA_REANALYSIS_PHY_003_011, BALTICSEA_REANALYSIS_BIO_003_012) from the Baltic Monitoring Forecasting Centre of the Copernicus Marine Environment Monitoring Service (BALMFCCMEMS) (www.marine.copernicus.eu).

Due to the large data size, the data were downloaded in 6-month periods each year (each approximately 5 GB) in the following example form:

Dimensions:

depth,46
latitude,426
longitude,378
time,181


Coordinates:

depth,0.5016,472.6059
longitude,12.5136,22.9855
latitude,53.4083,60.4915
time,2023-01-01 00:00:00,2023-06-30 00:00:00

Variables:

o2 [mmol m-3] Dissolved_Oxygen_Concentration

The data were flattened to the sea bottom using the **Flatten variable to bottom** tool in the **Data** tab.

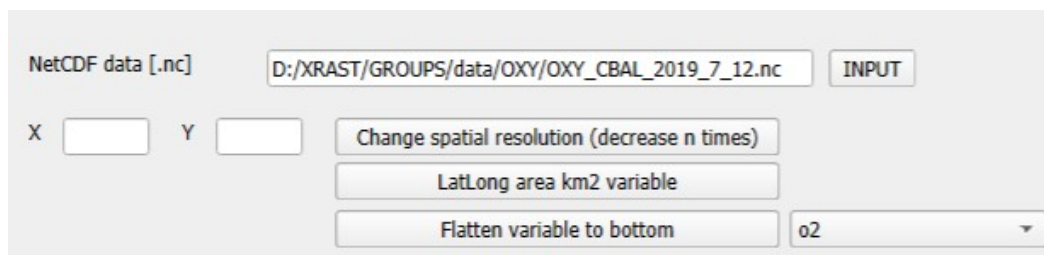

The screenshot shows a software interface for processing NetCDF data. At the top, there is a label 'NetCDF data [.nc]' followed by a text input field containing the file path 'D:/XRAST/GROUPS/data/OXY/OXY_CBAL_2019_7_12.nc' and an 'INPUT' button. Below this, there are two empty input boxes labeled 'X' and 'Y'. To the right of these boxes is a button labeled 'Change spatial resolution (decrease n times)'. Below that is another button labeled 'LatLong area km2 variable'. At the bottom, there is a button labeled 'Flatten variable to bottom' and a dropdown menu currently showing 'o2'.

Uzyskano nowe zmienne w postaci,

Variables:

o2 [mmol m-3] Dissolved_Oxygen_Concentration
o2_max_depth [mmol m-3] Dissolved_Oxygen_Concentration
max_depth [unknown] unknown

The variable **o2_max_depth** was saved as a new .nc file (using **SAVE CURRENT SELECTION** from the **Subset** tab as .nc). This procedure was performed for each half-year period.

Then, the files were combined into a single file (using **CLIP IN SPACE AND MERGE TIME to one .nc**)

in the **Clip/Merge** tab, resulting in a three-dimensional dataset for the entire time period (with a final size of 3.4 GB):

Dimensions:

time,5478

latitude,426

longitude,378

Coordinates:

longitude,12.5136,22.9855

latitude,53.4083,60.4915

time,2009-01-01 00:00:00,2023-12-31 00:00:00

Variables:

o2_max_depth [mmol m-3] Dissolved_Oxygen_Concentration


To identify hypoxia zones, the following expression was used:

$*0 + (ds2.o2_max_depth * 32 / 1000 < 2)$

A subset of region groups was created using the tool described above and then analyzed.

The results were presented on a map that also included time series in the form of plots.

The entire workflow was carried out in QGIS using Xraster.

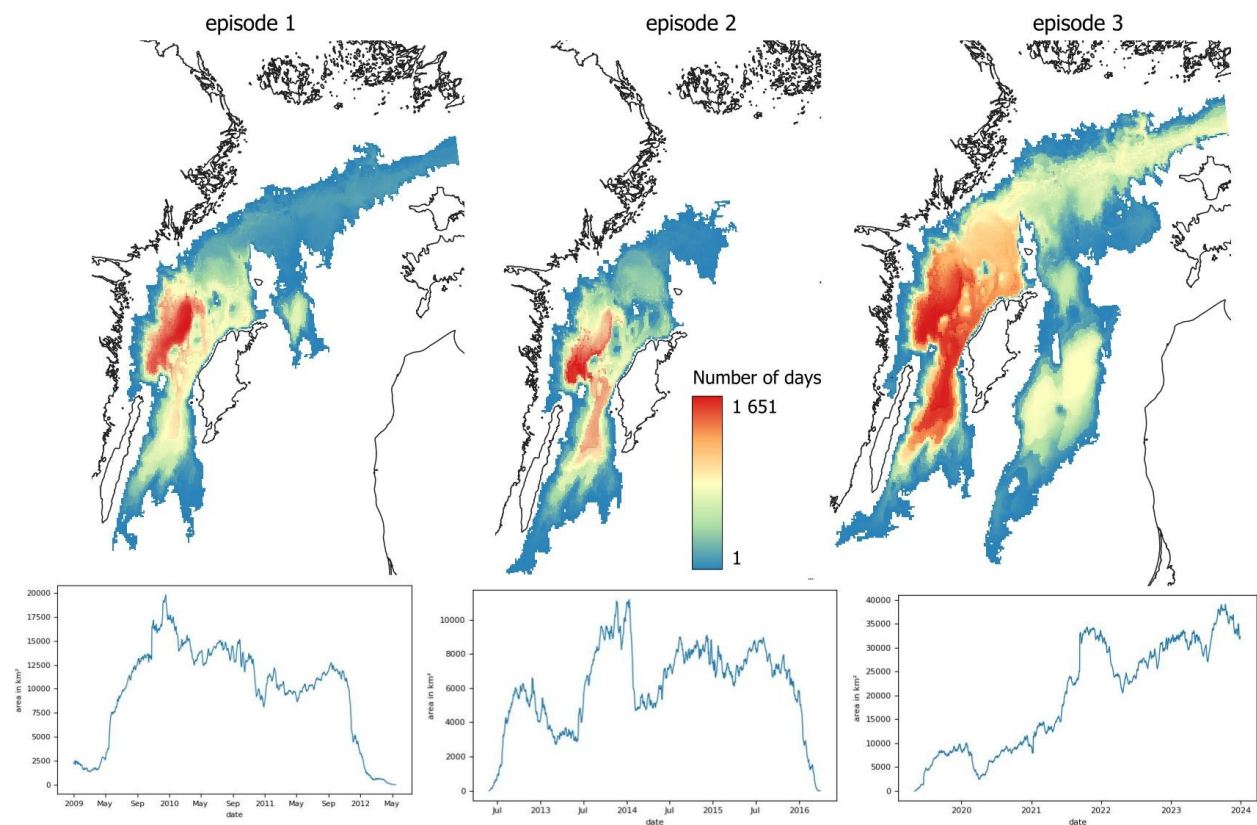

Three main hypoxia episodes that occurred during the analyzed period were described.

[\[TOC\]](#)