

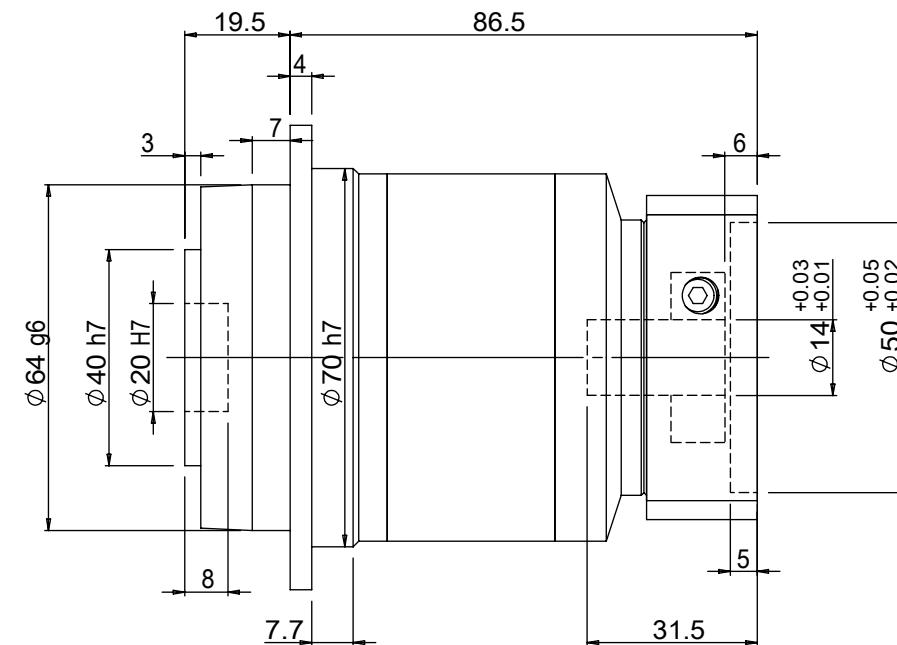


## 輸出端(output)

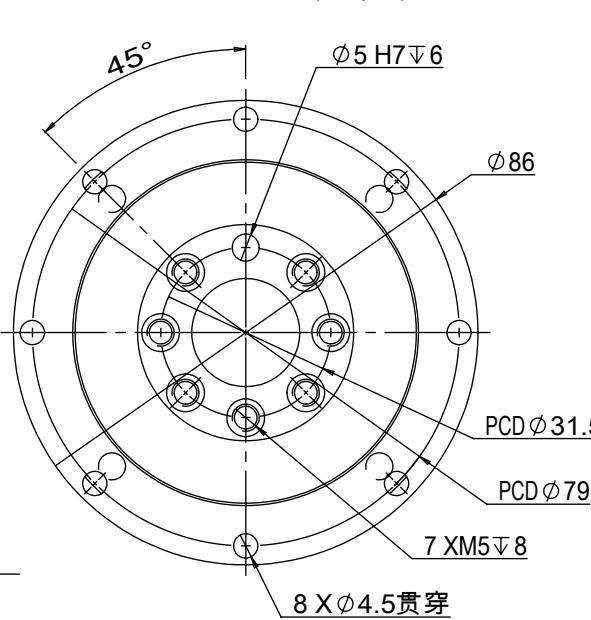

## 輸入端(input)

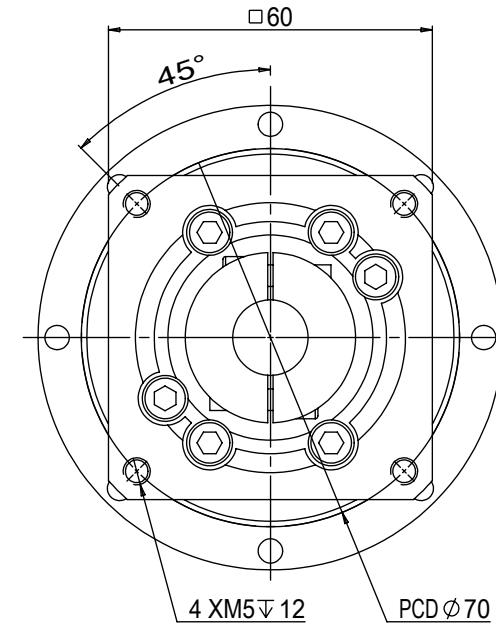

急停扭矩 (Emergency Stop Torque)	3倍額定輸出力矩 (3 times rated output torque)	
額定輸入轉速 (Rated input speed)	5000rpm	
最大輸入轉速 (Maximum input speed)	10000rpm	

背隙 (Dorsal gap)	P1	$\leq 5\text{arcmin}$
	P2	$\leq 8\text{arcmin}$

最大彎曲力矩 (maxi bending torque)	125Nm	
---------------------------------	-------	--

容許軸向力 (Allowable axial force)	1050N	
使用壽命 (Service life)	20000hr	

效率 (Efficiency)	$\geq 94\%$	
使用溫度範圍 (Operating temperature range)	$-10^\circ\text{C} \sim 90^\circ\text{C}$	

防護等級 (protection class)	IP65	
噪音值 (Noise value)	$\leq 58\text{dB}$	

安裝方式 (Installation DIRECTION)	任意(Arbitrarily)	
1	2	3

減速比 (Speed ratio)	20	25	35	40	50	70	100
額定輸出力矩 (Rated output torque)	48Nm	60Nm	50Nm	48Nm	60Nm	50Nm	40Nm

---	2021-2-1	00初版	陳國棟
改版 SYM	年月日 DATE	變更事項 REVISIONS	設計 BY
			備注 NOTE

制圖 PRAWN	設計 DESIGNED	品名: TITLE	精密行星減速機 Precision Planetary Gear Reducer
-------------	----------------	--------------	---

規格: SPEC	GPD064-L2-(14-50-70-M5)
 吉嘉精密科技有限公司 GIGA Precision Technology Co., Ltd	A4