Conditional Generation with Classically Trainable IQP Circuits

Author names withheld pending team verification

Affiliations withheld pending team verification

Conditional generation asks one model to produce a family of probability laws indexed by an external condition. We formalize a restrictive quantum version of this task: the condition changes only a product-state input to one compiled instantaneous quantum polynomial-time (IQP) circuit, while the diagonal gate sequence and all trained phases remain fixed. We call the model classically trainable in the operational sense that selected Pauli observables, a Conditional maximum mean discrepancy objective, and its phase gradients admit classical estimators; we do not claim an efficient classical evaluator or sampler for the full output law. We record finite response-support and observable-filter propositions as specializations and syntheses of established quantum-circuit Fourier and IQP theory. On an archived 19-qubit Gaussian Hamming-profile benchmark, paired ten-seed intervals support conditional control and aggregate interpolation to four unseen interior conditions: dense conditioning improves mean profile total variation distance over endpoint-only training by 0.0893 (95% interval $[0.0762, 0.1007]$) and over adjacent-condition lookup by 0.0284 ($[0.0268, 0.0302]$). Lookup nevertheless wins at one condition, and no bitstring-level interpolation advantage is detected. A preregistered 16-qubit Ising extension stopped at its representability screen (median exact bitstring TVD 0.512, threshold 0.25), before tuning or primary comparisons. The present evidence therefore establishes the product-state conditioning mechanism on a task-appropriate profile statistic, but not full-bitstring Ising conditional generation.

1 Introduction

Conditional generative models represent a family $q_\theta(x \mid c)$ rather than a single probability law. In a circuit Born machine, the condition can be introduced by recompiling gates, by modulating trained phases, or by changing the prepared input. This paper studies the last and most restrictive deployment setting: every condition uses one gate sequence and one trained phase vector; only a product-state preparation changes.

This restriction separates two questions that are easily conflated. First, can a fixed quantum circuit respond usefully to a condition encoded in its input? Second, can the quantities used during optimization be estimated classically? The second question does not answer whether the final bitstring law can be evaluated or sampled efficiently on a classical computer. Probabilistic simulation of selected observables is weaker than strong simulation of the full output distribution [1, 2]. Conversely, sampling-hardness results for IQP circuits rely on separate complexity assumptions and do not follow from the experiments here [3, 4].

The key construction is illustrated in Fig. 1. A scalar or vector condition is mapped to local R_Y angles, followed by one fixed IQP circuit. The product input supplies a tractable reference distribution for selected Pauli estimators and a Fourier implementation of Conditional MMD. Established results on quantum data encodings imply that such responses have finite Fourier support [5–7]; the known IQP active-generator expansion further restricts selected observable responses [8]. We use these facts as an explanatory boundary, not as a theorem-novelty claim.

We make three scoped contributions. First, we define product-state-conditioned IQP generation and audit the invariant compiled circuit explicitly. Second, we state the exact operational scope of classical training signals, including the Hamming-kernel mask law and gradient estimator. Third,

we recompute paired uncertainty intervals for an archived Gaussian Hamming-profile study and preregister a compact 16-qubit Ising protocol with exact full-law evaluation. The Gaussian evidence is positive for profile control and aggregate interpolation. The Ising protocol stops before its primary study because a Separate-model representability screen fails its frozen thresholds.

We use *conditional generalization* once in a narrow operational sense: interpolation to unseen conditions strictly inside the training interval. Hereafter we use *interpolation*. Extrapolation and broader distribution shift are outside scope.

2 Product-state-conditioned IQP generation

Let $g_j \in \{0,1\}^n$ identify a diagonal Pauli string $Z_{g_j} = \bigotimes_i Z_i^{g_{j,i}}$. For a fixed ordered generator bank $G = (g_1, \ldots, g_m)$ and trained phases $\theta \in \mathbb{R}^m$, define

$$D_Z(\theta) = \prod_{j=1}^{m} \exp(i\theta_j Z_{g_j}). \tag{1}$$

The conditional Born law is

$$q_\theta(x \mid c) = \left| \langle x | H^{\otimes n} D_Z(\theta) H^{\otimes n} \times \bigotimes_{i=1}^{n} R_Y(\alpha_i(c)) |0\rangle \right|^2. \tag{2}$$

We use an affine encoding $\alpha(c) = b + Wc$. The compiled sequence, G, and θ are identical at every condition. A deployment-signature test hashes the coefficient vector, generator matrix, effective phases, and input angles condition by condition; the fixed-input family must have invariant generators and phases and non-invariant inputs.

We compare Eq. (2) with two parameter-matched shared models. The *no-condition* control fixes the input at the anchor condition. The *phase-conditioned* comparator also fixes the input but multiplies the 136 phases by a preregistered balanced feature bank containing 68 constant and 68 linear features. It quantifies the cost of strict fixed deployment; the fixed-input model is not required to beat it. Separate models are used only as a representability screen.

3 Classical training signals

Our use of *classically trainable* is deliberately operational. It means that selected Pauli-Z expectations, the sampled Conditional MMD objective, and phase gradients of that objective can be estimated with classical probabilistic IQP methods for the declared finite budgets [1, 8, 9]. It does not mean that all output probabilities are efficiently computable, that the final output is efficiently sampleable classically, or that optimization has a favorable landscape.

For the Hamming radial basis kernel $k_\sigma(x,y) = \exp[-d_H(x,y)/(2\sigma^2)]$, draw a mask $a \in \{0,1\}^n$ with independent coordinates

$$a_i \sim \text{Bernoulli}(q_\sigma), \qquad q_\sigma = \frac{1 - e^{-1/(2\sigma^2)}}{2}. \tag{3}$$

Then

$$k_\sigma(x,y) = \mathbb{E}_a\left[(-1)^{a\cdot x}(-1)^{a\cdot y}\right]. \tag{4}$$

Equation (4) converts squared MMD into an average of Pauli-character discrepancies. Independent model/reference samples give the usual unbiased U-statistic construction [10]; automatic differentiation of the finite sample expression gives phase gradients. Operator masks, model-reference samples, target samples, minibatches, and validation streams use separately derived seeds.

4 Known response structure

The following propositions collect established structure in the notation of Eq. (2). Complete derivations are supplied in the supplement.

Proposition 1 (Affine product-input support)**.** *For fixed G, θ, b, W and output x, the support of $c \mapsto q_\theta(x \mid c)$ is contained in*

$$\Omega_{\text{full}}(W) = \left\{ \sum_{i=1}^{n} s_i w_i : s_i \in \{-1, 0, 1\} \right\}, \tag{5}$$

where w_i^T is row i of W.

This is a direct specialization of multivariate circuit-Fourier theory [5–7]. It is an inclusion: coincident frequencies and coefficient cancellations can shrink the realized support. It gives no efficient procedure for evaluating the coefficients.

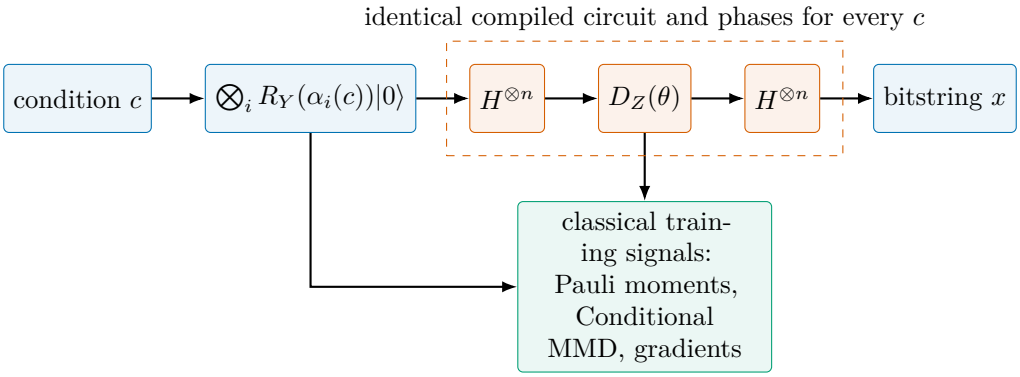


Figure 1: Product-state-conditioned IQP generation. The condition changes the input angles but not the IQP generator bank, gate order, or trained phases. Classical estimability of selected training signals is not a classical full-output sampling claim.

Proposition 2 (Observable filter)**.** *For the Pauli response $F_a(c) = \langle Z_a \rangle_c$, only generators with $a \cdot g_j = 1 \pmod 2$ enter the known IQP active-generator expansion. Grouping their subsets by binary XOR mask h, a term survives on the real R_Y product input only if $h \wedge a = 0$. Its condition frequencies are signed sums of rows w_i with $i \in \mathrm{supp}(a) \cup \mathrm{supp}(h)$.*

This combines the active-generator formula of Ref. [8] with the local identity $\langle Y_i \rangle = 0$. It explains why a training observable can have a smaller response spectrum than a full output probability. For fixed W both spaces remain finite dimensional, so fixed width is not universally dense in continuous conditional laws.

5 Experiments

5.1 Gaussian Hamming-profile benchmark

The archived experiment uses 19 visible qubits and ten optimizer seeds. Its targets are condition-indexed Gaussian profiles over Hamming weight; states within each weight shell are exchangeable. The primary task metric is therefore profile TVD. Full bitstring TVD is also reported and is markedly larger, exposing variation within shells that the task metric intentionally quotients out.

The interpolation study trains a dense condition grid and evaluates four unseen angles strictly between training angles. Baselines are endpoint-only training and an exact adjacent-condition lookup that chooses the better of the two neighboring training-target laws. We regenerated every legacy metric exactly, then paired methods by optimizer seed and bootstrapped the ten paired seed means 10,000 times.

Figure 2 summarizes the paired evidence. At the two training conditions, product-state conditioning improves mean profile TVD over the no-condition control by 0.2751 with 95% interval $[0.2667, 0.2855]$. On held-out conditions, dense conditioning improves mean profile TVD over endpoint-only training by 0.0893 ($[0.0762, 0.1007]$) and over adjacent lookup by 0.0284 ($[0.0268, 0.0302]$). These are aggregate claims: lookup has lower median profile TVD at 0.15625π. For full bitstrings, the paired dense-minus-lookup advantage is absent: baseline-minus-dense is -0.0002 with interval $[-0.0026, 0.0026]$.

5.2 Preregistered 16-qubit Ising study

The compact Ising benchmark uses exactly enumerated Gibbs laws of periodic 4×4 random-coupling models. Five training inverse temperatures are 0.15, $0.241\overline{6}$, $1/3$, $0.441\overline{6}$, and 0.55; the four held-out conditions are adjacent midpoints. Development seeds are 606 and 707, primary seeds are 666, 101, 202, and 303, and seeds 404 and 505 are unused reserves. For each active instance and training condition, independent categorical draws provide 5,000 training and 2,000 validation strings. No held-out training strings are generated.

All shared families use 16 visible qubits and the Complete 2-local bank of 136 trainable phases. The estimator audit tests equal operator/reference budgets $128, 256, 512, 1024$. The smallest budget, 128, passes all frozen criteria: at $n = 8$ its absolute loss bias is 0.0070, mean

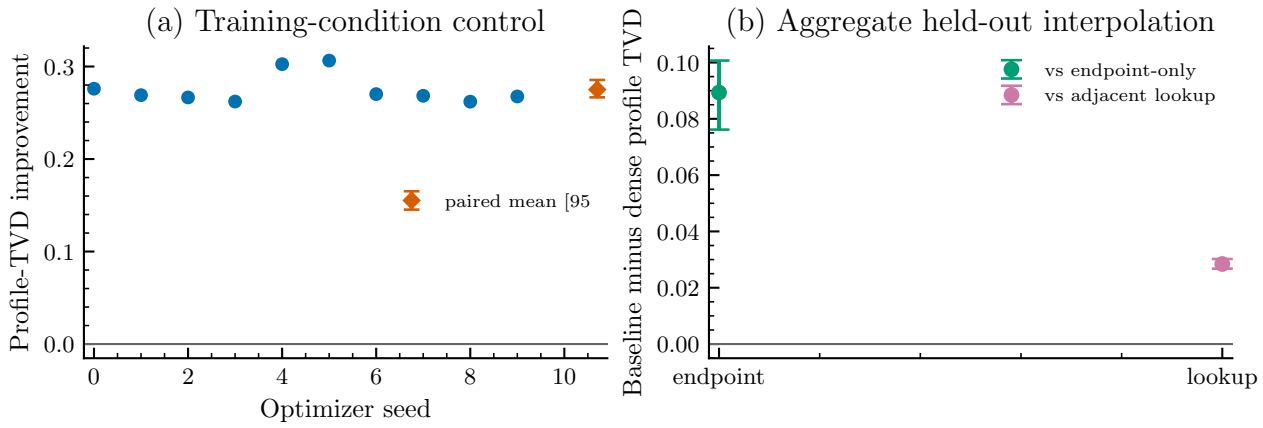


Figure 2: Gaussian Hamming-profile evidence. (a) Paired seed-level improvement over the no-condition control at training conditions. (b) Aggregate held-out profile-TVD improvement of dense conditioning over endpoint-only training and adjacent lookup. Error bars are 95% paired bootstrap intervals over ten optimizer seeds.

gradient cosine 0.985, and normalized gradient RMSE 0.061; at $n = 16$ its repeated-loss coefficient of variation is 0.079 and median pairwise gradient cosine 0.950. A 100-update preflight projects 14.95 seconds per 1,000-update run with 0.454 GB peak RSS on the audit host, below the one-hour and 28-GiB limits. These host measurements are feasibility observations, not portable performance guarantees.

Before shared-family tuning, 12 Separate models test two development instances, low/anchor/high conditions, and two optimizer seeds. The frozen gate requires median exact full-bitstring TVD at most 0.25 and every run at most 0.35. Figure 3 shows that the median is 0.512 and the maximum 0.866. The gate therefore fails. In accordance with the manifest, no tuning run, primary run, held-out checkpoint evaluation, or Ising publication test was executed. This benchmark supplies a reproducible negative boundary, not evidence that the proposed model works for the Ising family.

6 Limitations and reproducibility

The strongest limitation is empirical: the compact Ising design fails before the primary experiment, so this draft does not demonstrate full-bitstring conditional generation on the intended physical benchmark. The positive Gaussian result concerns an exchangeable Hamming profile; bitstring TVD is substantially less favorable and does not beat adjacent lookup in aggregate. The experiments cover interpolation only. The fixed finite response space also rules out universal conditional expressivity at fixed width.

The complete protocol is frozen in `configs/arxiv_foundations_v1.json`. Its manifest digest, role-tagged dataset hashes, estimator decision, runtime record, run reservations, checkpoints, and exact-TVD rows are stored under `results/arxiv-foundations-v1`. The planner declares exactly 12 representability, 12 tuning, and 36 primary runs; failed predecessors make the latter 48 identities ineligible. Tests cover cardinalities, seed separation, exact-draw determinism, role isolation, circuit signatures, estimator boundaries, exact TVD, bootstrap pairing, gate boundaries, and a tiny complete run. Supplementary material gives commands, proofs, and full protocol tables.

7 Conclusion

Product-state conditioning provides a precise way to turn one compiled IQP circuit into a conditional generator while retaining classical access to selected observable-based training signals. Established Fourier and IQP structure explains both why condition responses are controlled and why this access does not extend to full-output classical simulation. On Gaussian Hamming profiles, paired evidence supports conditional control and aggregate within-range interpolation, with an explicit per-condition failure and no bitstring-level advantage over lookup. The preregistered Ising extension does not pass its representability screen. The immediate research direction is therefore to

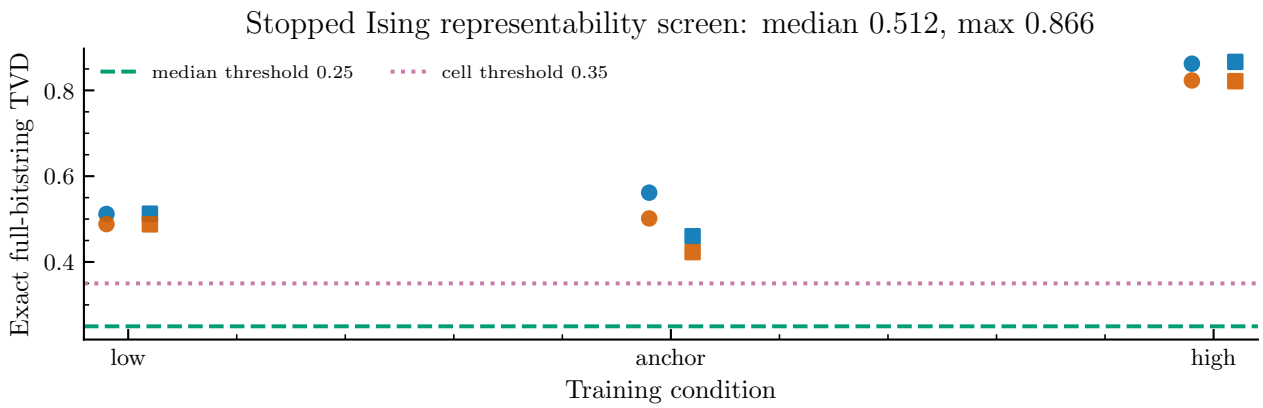


Figure 3: Exact full-bitstring TVD for the 12-run Separate-model representability screen. Color identifies the two development instances and marker shape the two optimizer seeds. Both the median and every-cell requirements are violated, so the preregistered study stops before tuning.

Table 1: Claim summary. Positive statements are restricted to the archived Gaussian Hamming-profile task. All intervals are paired 95% bootstrap intervals over optimizer seeds.

Claim	Statistic	Decision	Disclosure
Gaussian profile conditional control	No-condition minus conditioned: 0.2751 [0.2667, 0.2855]	Supported	Two training conditions; ten seeds
Gaussian aggregate profile interpolation	Endpoint: 0.0893 [0.0762, 0.1007]; lookup: 0.0284 [0.0268, 0.0302]	Supported	Lookup wins at 0.15625π
Gaussian bitstring interpolation over lookup	-0.0002 $[-0.0026, 0.0026]$	Not supported	Profile result does not imply full-law advantage
Ising full-bitstring conditional generation	Screen median 0.512; max 0.866	Blocked	Frozen limits 0.25/0.35; zero tuning and primary runs
Classical full-output sampling	Not tested or derived	Not claimed	Classical training signals have narrower scope

diagnose full-law representability under a new, separately versioned protocol before making any broader conditional-generation claim.

Data and code availability

Source code, manifests, tests, and immutable numerical evidence are included with this internal draft. No external upload has been performed.

Release metadata

Verified author names, affiliations, contribution statements, competing interests, arXiv category and license, and final human proof approval have not yet been supplied. This document is not upload-ready.

References

[1] Maarten Van den Nest. Simulating quantum computers with probabilistic methods. *Quantum Information and Computation*, 11 (9–10):784–812, 2011.

[2] Xiaotong Ni and Maarten Van den Nest. Commuting quantum circuits: Efficient classical simulations versus hardness results, 2012.

[3] Michael J. Bremner, Richard Jozsa, and Dan J. Shepherd. Classical simulation

of commuting quantum computations implies collapse of the polynomial hierarchy. *Proceedings of the Royal Society A*, 467(2126):459–472, 2011. DOI: 10.1098/rspa.2010.0301.

[4] Michael J. Bremner, Ashley Montanaro, and Dan J. Shepherd. Average-case complexity versus approximate simulation of commuting quantum computations. *Physical Review Letters*, 117(8):080501, 2016. DOI: 10.1103/PhysRevLett.117.080501.

[5] Francisco Javier Gil Vidal and Dirk Oliver Theis. Input redundancy for parameterized quantum circuits. *Frontiers in Physics*, 8: 297, 2020. DOI: 10.3389/fphy.2020.00297.

[6] Maria Schuld, Ryan Sweke, and Johannes Jakob Meyer. The effect of data encoding on the expressive power of variational quantum-machine-learning models. *Physical Review A*, 103(3):032430, 2021. DOI: 10.1103/PhysRevA.103.032430.

[7] Berta Casas and Alba Cervera-Lierta. Multidimensional fourier series with quantum circuits. *Physical Review A*, 107(6):062612, 2023. DOI: 10.1103/PhysRevA.107.062612.

[8] Erik Recio-Armengol, Shahnawaz Ahmed, and Joseph Bowles. Train on classical, deploy on quantum: Scaling generative quantum machine learning to a thousand qubits, 2026.

[9] Erik Recio-Armengol and Joseph Bowles. IQPopt: Fast optimization of instantaneous quantum polynomial circuits in JAX, 2025.

[10] Arthur Gretton, Karsten M. Borgwardt, Malte J. Rasch, Bernhard Schölkopf, and Alexander Smola. A kernel two-sample test. *Journal of Machine Learning Research*, 13: 723–773, 2012. URL https://jmlr.org/papers/v13/gretton12a.html.

A Analytical details

This appendix derives the response and estimator statements used in the main text. The derivations specialize established circuit-Fourier and probabilistic-IQP results to the product-state-conditioned notation; they are not presented as new central theorems.

A.1 Full-probability response support

One encoded qubit has density operator

$$\begin{aligned}\rho_i(\alpha_i) &= R_Y(\alpha_i)|0\rangle\langle 0|R_Y(\alpha_i)^\dagger \\ &= \tfrac{1}{2}\left(I + \sin\alpha_i X + \cos\alpha_i Z\right).\end{aligned} \tag{6}$$

Every entry of Eq. (6) is a linear combination of angle frequencies $-1, 0, +1$. Tensoring and substituting $\alpha_i(c) = b_i + w_i^\mathsf{T} c$ gives fixed matrices A_s such that

$$\rho(c) = \sum_{s\in\{-1,0,1\}^n} A_s e^{i\sum_i s_i b_i} e^{i(\sum_i s_i w_i)^\mathsf{T} c}. \tag{7}$$

For a fixed unitary U and outcome x, $q(x \mid c) = \mathrm{Tr}[U^\dagger|x\rangle\langle x|U\rho(c)]$ is a fixed linear functional of $\rho(c)$ and introduces no new condition frequency. This proves the inclusion in Eq. (5). Zero encoding rows, coincident sums, and coefficient cancellations can only shrink the realized support. The trace coefficient can still require exponential work to evaluate.

A.2 Pauli observable filter

The final Hadamards map the measured Z_a to X_a. A diagonal generator Z_{g_j} with $a \cdot g_j = 0 \pmod 2$ commutes with X_a and cancels. For an active generator,

$$e^{-i\theta_j Z_{g_j}} X_a e^{i\theta_j Z_{g_j}} = X_a e^{2i\theta_j Z_{g_j}}. \tag{8}$$

Since the diagonal generators commute,

$$D_Z(\theta)^\dagger X_a D_Z(\theta) = X_a \prod_{j:a\cdot g_j=1} \left[\cos(2\theta_j) I + i\sin(2\theta_j) Z_{g_j}\right]. \tag{9}$$

Expanding the product groups active subsets by the binary mask $h = \bigoplus_{j\in S} g_j$. Conjugating $X_a Z_h$ through the first Hadamards produces local $Z_a X_h$ factors. On the real product input,

$$\langle X_i\rangle = \sin\alpha_i, \qquad \langle Z_i\rangle = \cos\alpha_i, \qquad \langle Y_i\rangle = 0. \tag{10}$$

Thus every term with $h \wedge a \neq 0$ vanishes. Surviving terms factor into sines and cosines on $\mathrm{supp}(a) \cup \mathrm{supp}(h)$, and expanding them into exponentials yields only signed sums of the corresponding encoding rows.

A.3 Hamming-kernel mask identity

For one bit, let $a \sim \mathrm{Bernoulli}(q)$. Then

$$\mathbb{E}_a[(-1)^{a(x-y)}] = \begin{cases} 1, & x = y, \\ 1-2q, & x \neq y. \end{cases} \tag{11}$$

Choosing $q = q_\sigma$ from Eq. (3) makes $1 - 2q = e^{-1/(2\sigma^2)}$. Independence across bits therefore gives Eq. (4). Let $\phi_a(x) = (-1)^{a\cdot x}$. For target samples $y_1, \ldots, y_T$ and model samples $x_1, \ldots, x_R$, the fixed-mask unbiased squared discrepancy is

$$\begin{aligned}\widehat{\Delta}_a^2 = &\frac{1}{R(R-1)} \sum_{r\neq r'} \phi_a(x_r)\phi_a(x_{r'}) \\ &+ \frac{1}{T(T-1)} \sum_{t\neq t'} \phi_a(y_t)\phi_a(y_{t'}) \\ &- \frac{2}{RT} \sum_{r,t} \phi_a(x_r)\phi_a(y_t).\end{aligned} \tag{12}$$

Averaging Eq. (12) over masks, bandwidths, and conditions gives the sampled Conditional MMD objective. Differentiation acts only on the model expectation because the target and mask laws do not depend on the phase parameters. This establishes estimator accessibility, not a lower bound on gradient magnitude or an optimizer-convergence guarantee.

B Gaussian reanalysis

All archived Gaussian metrics were regenerated from the ten JSON/NPZ run pairs. The regenerated per-angle medians and aggregate medians agree exactly with the existing machine-readable audit. For each comparison we then averaged the four held-out conditions within each optimizer seed, preserved the method pairing, and resampled ten seed identities with replacement 10,000 times using seed 20260811.

The aggregate profile interval against lookup is positive even though lookup has lower median profile TVD at the held-out angle 0.15625π. This is why the main text states an aggregate result and discloses the condition-level failure. The bitstring interval against lookup contains zero and cannot support a bitstring interpolation claim.

Table 2: Paired Gaussian improvements. Positive values favor product-state conditioning or dense-grid training.

Metric	Comparison	Paired mean	95% interval
Training profile TVD	no-condition − conditioned	0.27510	[0.26667, 0.28548]
Training bitstring TVD	no-condition − conditioned	0.16500	[0.15561, 0.17328]
Held-out profile TVD	endpoint-only − dense	0.08935	[0.07617, 0.10069]
Held-out profile TVD	adjacent lookup − dense	0.02843	[0.02678, 0.03021]
Held-out bitstring TVD	endpoint-only − dense	0.01923	[0.00670, 0.03338]
Held-out bitstring TVD	adjacent lookup − dense	−0.00022	[−0.00261, 0.00255]

C Frozen compact Ising protocol

The versioned manifest has digest

`076f694fa1b84221e6bd733e4746d4f3`
`5fea0afd81fa75a1c8e155b45cb4347b`

Its run allocation is non-transferable: 12 representability, 12 tuning, and 36 primary runs. A separate 100-update runtime identity is not charged to those 60 study runs.

The two tuning schedules are $0.003 \to 0.0003$ and $0.01 \to 0.001$. Every non-preflight run uses 1,000 Adam updates with cosine decay, 256 samples per condition per minibatch, validation every 50 updates, and the lowest validation Conditional MMD checkpoint. The phase comparator uses the balanced constant/slope bank. If tuning were eligible, each family would select its schedule by median validation Conditional MMD, with candidate identifier as the deterministic tie-breaker.

Exact Gibbs laws are enumerated over all 65,536 bitstrings. Categorical draws use separate derived seeds for training and validation. Archives contain 5,000 training and 2,000 validation strings for each active instance and training condition. Held-out sample generation is forbidden; exact held-out laws are exposed only to the evaluation-facing interface after checkpoint selection. Development, primary, and reserve instance sets are disjoint.

The estimator selector evaluates equal operator/reference budgets $128, 256, 512, 1024$. A candidate passes only if all five frozen metrics pass; the selector stops if no candidate passes and always chooses the smallest passing budget. At eight repetitions, all four passed and budget 128 was selected. The screen result in Fig. 3 uses exact TVD after each validation-selected checkpoint. Its median 0.51222 and maximum 0.86644 violate both preregistered limits, creating an immutable failed decision that makes the tuning and primary planners ineligible.

Had the primary study been released, every frozen model would have been evaluated at all five training and four held-out inverse temperatures. The binding conditional-control rule required fixed-input median training TVD at most 0.35, a positive 95% lower bound for no-condition minus fixed-input TVD, and wins in at least 75% of the 20 instance–training-condition cells after optimizer-seed averaging. The interpolation rule required positive lower bounds against both no-condition and exact adjacent-target lookup, wins in at least 75% of the 16 instance–held-out cells, and lookup improvement in at least three of four instance means. These rules were implemented and tested but not evaluated on absent primary results.

D Reproduction and integrity checks

From the repository root, first run `uv run pytest -q` and `uv run ruff check src scripts tests`. Regenerate the Gaussian and figure evidence with `uv run python` followed by `scripts/reanalyze_foundations_gaussian.py` and `scripts/plot_foundations_evidence.py`, respectively.

The data, estimator audit, and stopped stages were produced with `uv run python` and, in order, `scripts/prepare_foundations_campaign.py`, `scripts/run_foundations_estimator.py`, and `scripts/run_foundations_study.py` with arguments `runtime` and `representability`. Rerunning a completed immutable command refuses to rewrite its artifact. The campaign store rejects undeclared identities, foreign manifest digests, duplicate reservations, missing checkpoint state, and partial result reuse. The failed representability record blocks

Table 3: Compact Ising run matrix and observed release state.

Stage	Instances	Optimizer seeds / candidates	Declared runs	State
Runtime preflight	606	fixed-input, seed 0	1	passed
Representability	606, 707	low/anchor/high × seeds 0,1	12	failed
Tuning	606, 707	3 families × 2 LR schedules	12	blocked, zero run
Primary	666, 101, 202, 303	3 seeds × 3 families	36	blocked, zero run

both `run_foundations_study.py tuning` and `run_foundations_study.py primary` before a new reservation is made.

To compile the manuscript in a clean temporary directory, copy `paper/main.tex`, `paper/supplement.tex`, `paper/references.bib`, the `quantumarticle` class files, and the two PDFs in `paper/foundations_figures`; then run `latexmk -pdf main.tex`. The automated build additionally uses nonstop and halt-on-error flags. The arXiv source archive additionally includes a checksum manifest and excludes auxiliary build products.