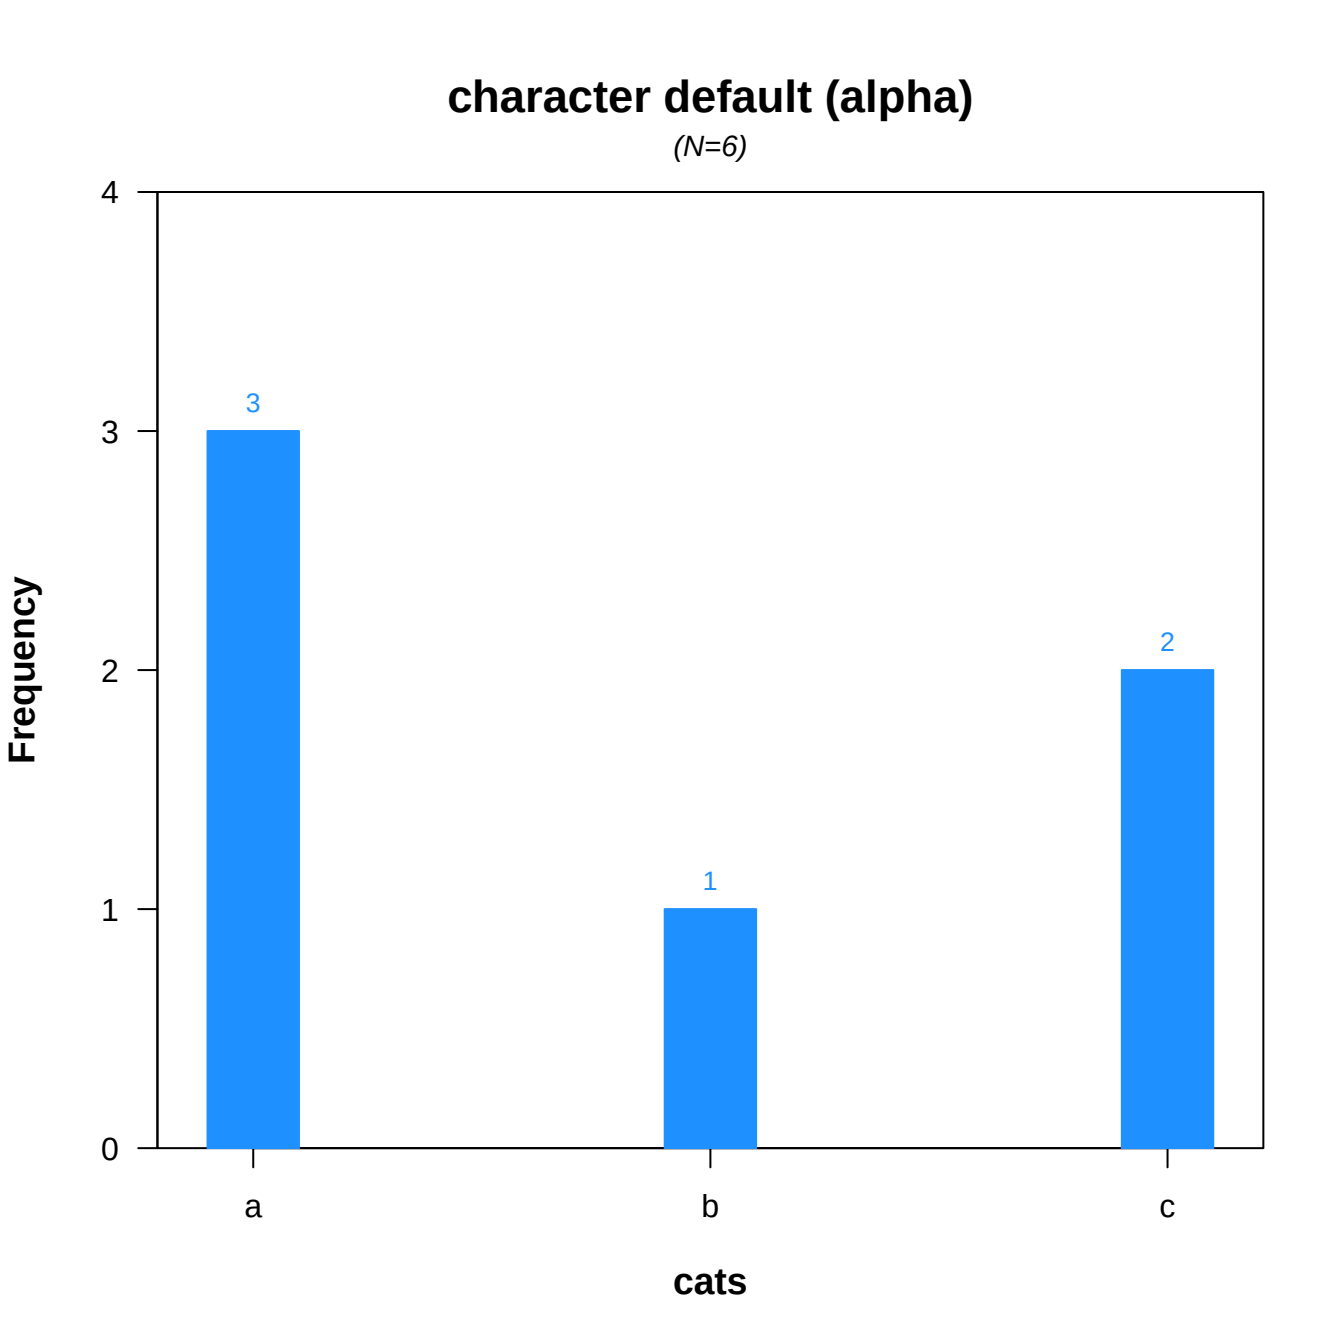
character default (alpha)
(N=6)
Frequency
4
3
2
1
0
3
1
2
a
b
c
cats

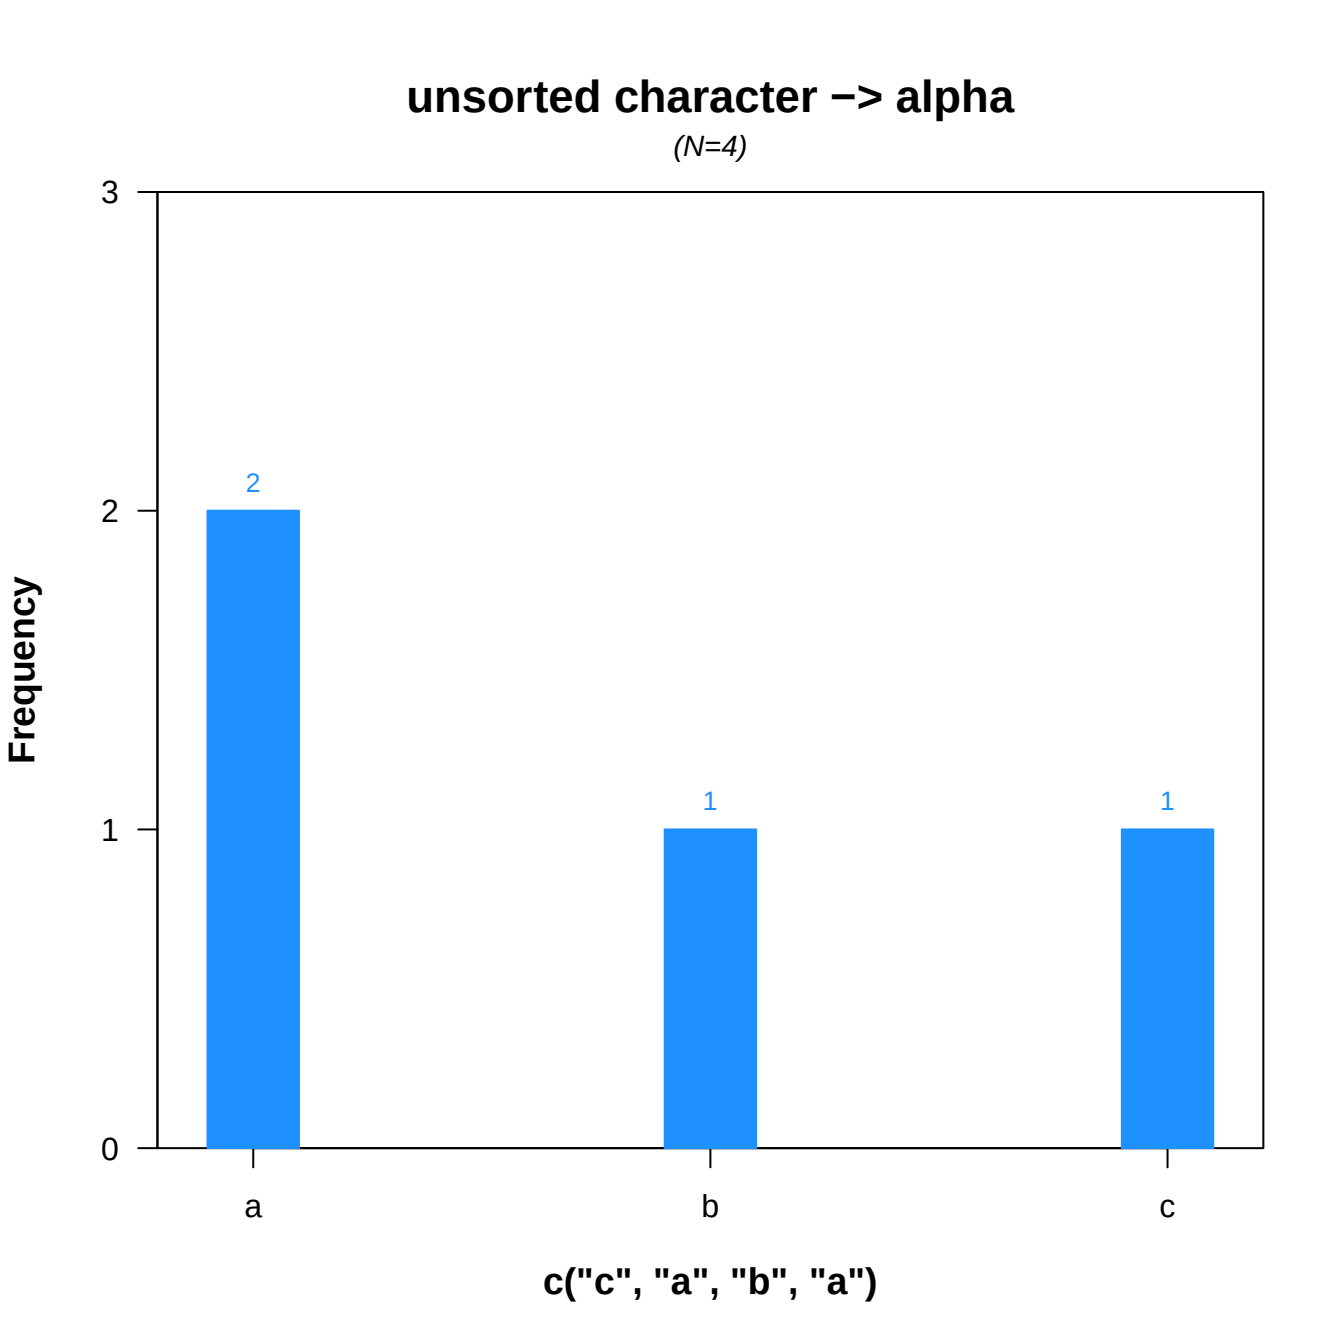
unsorted character −> alpha
(N=4)
Frequency
3
2
1
0
2
1
1
a
b
c
c("c", "a", "b", "a")

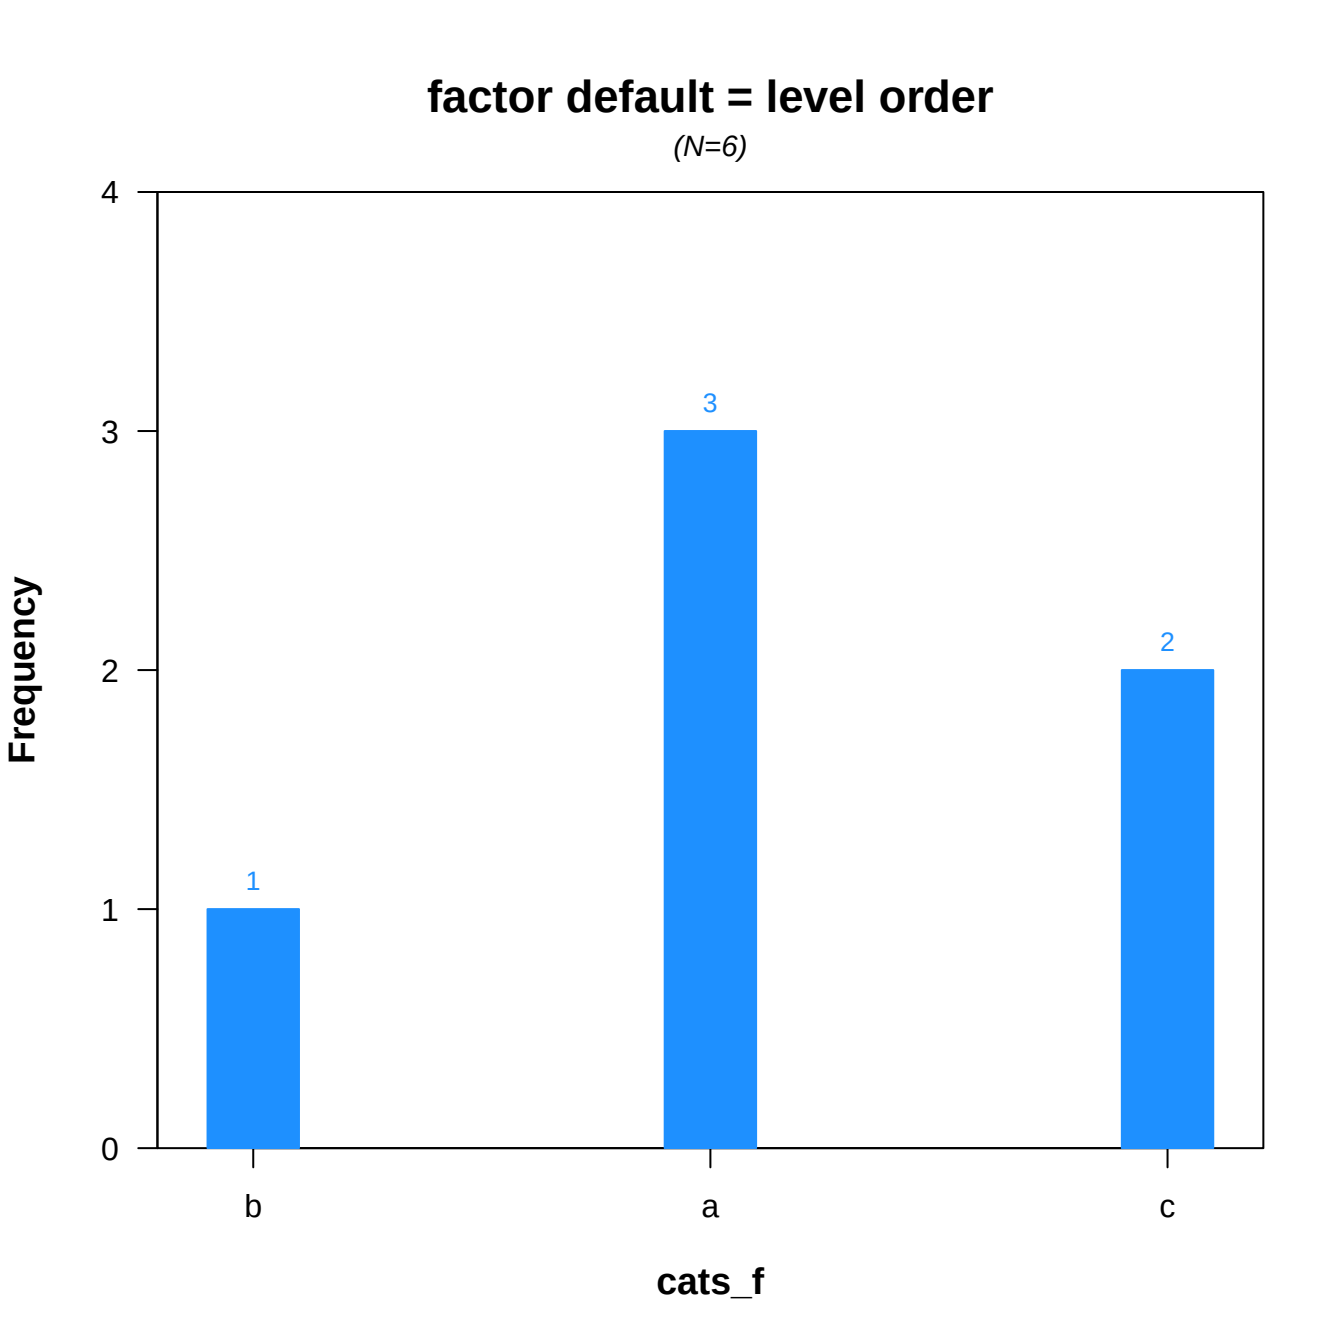
factor default = level order
(N=6)
Frequency
4
3
2
1
0
1
3
2
b
a
c
cats_f

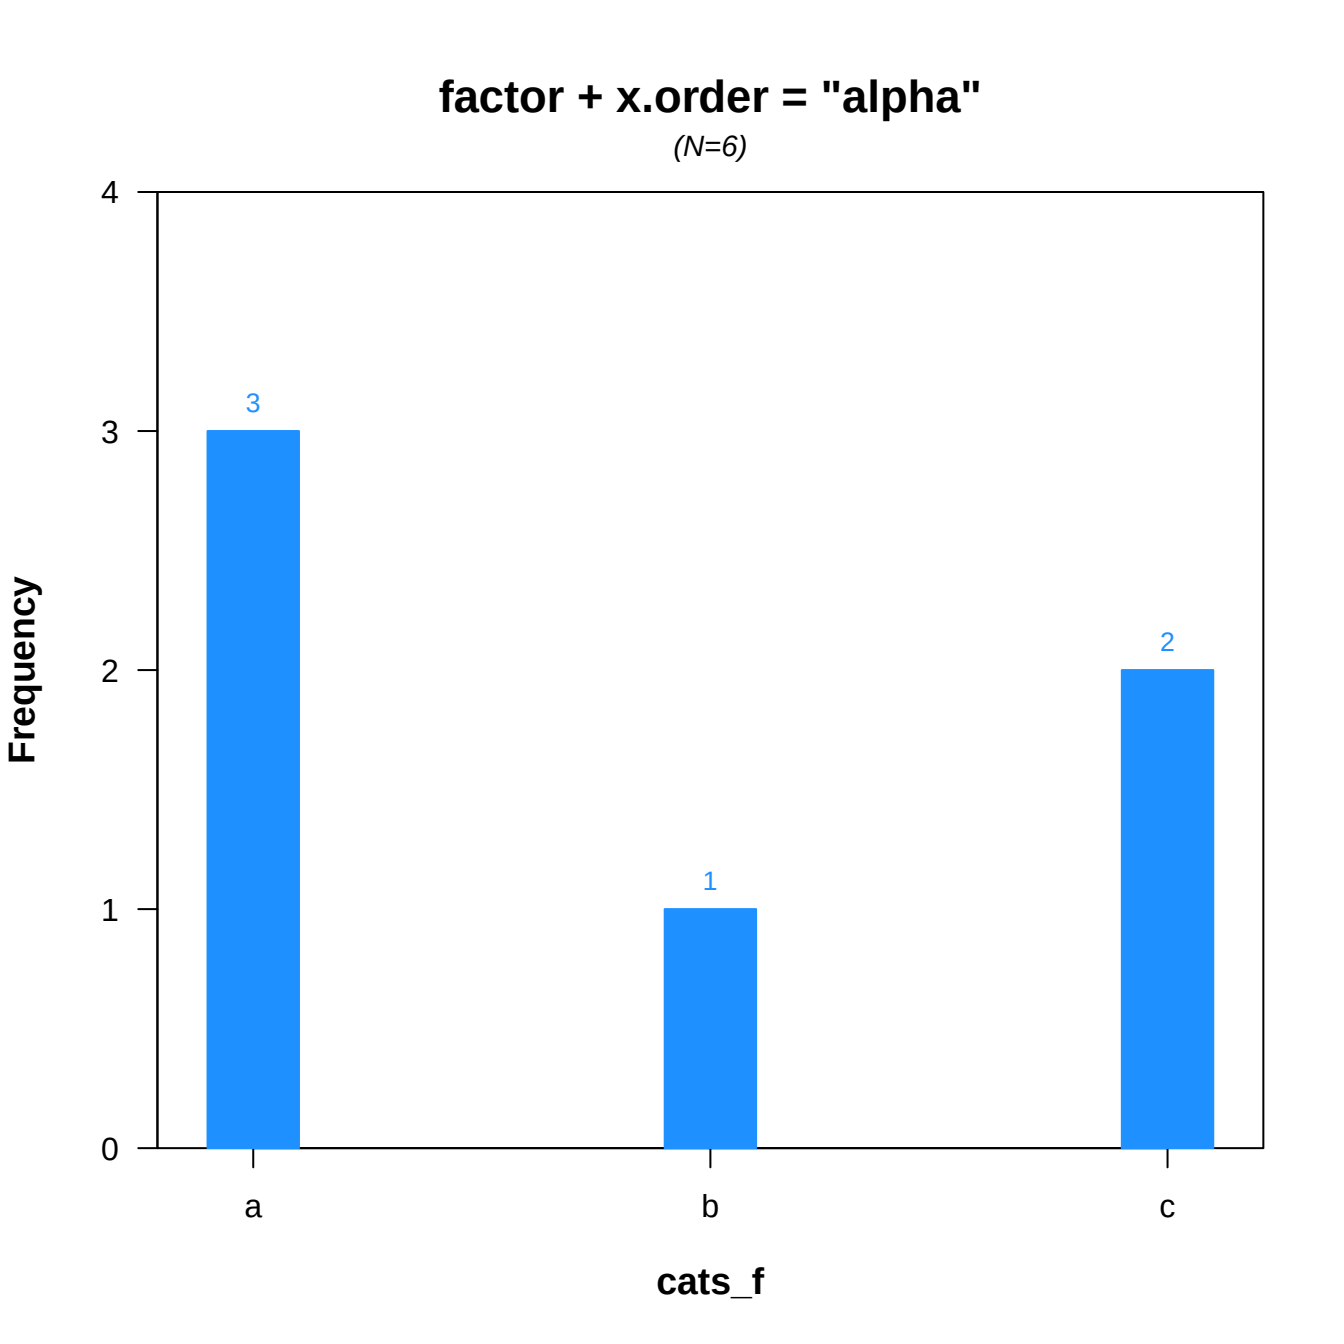
factor + x.order = "alpha"
(N=6)
Frequency
4
3
2
1
0
3
1
2
a
b
c
cats_f

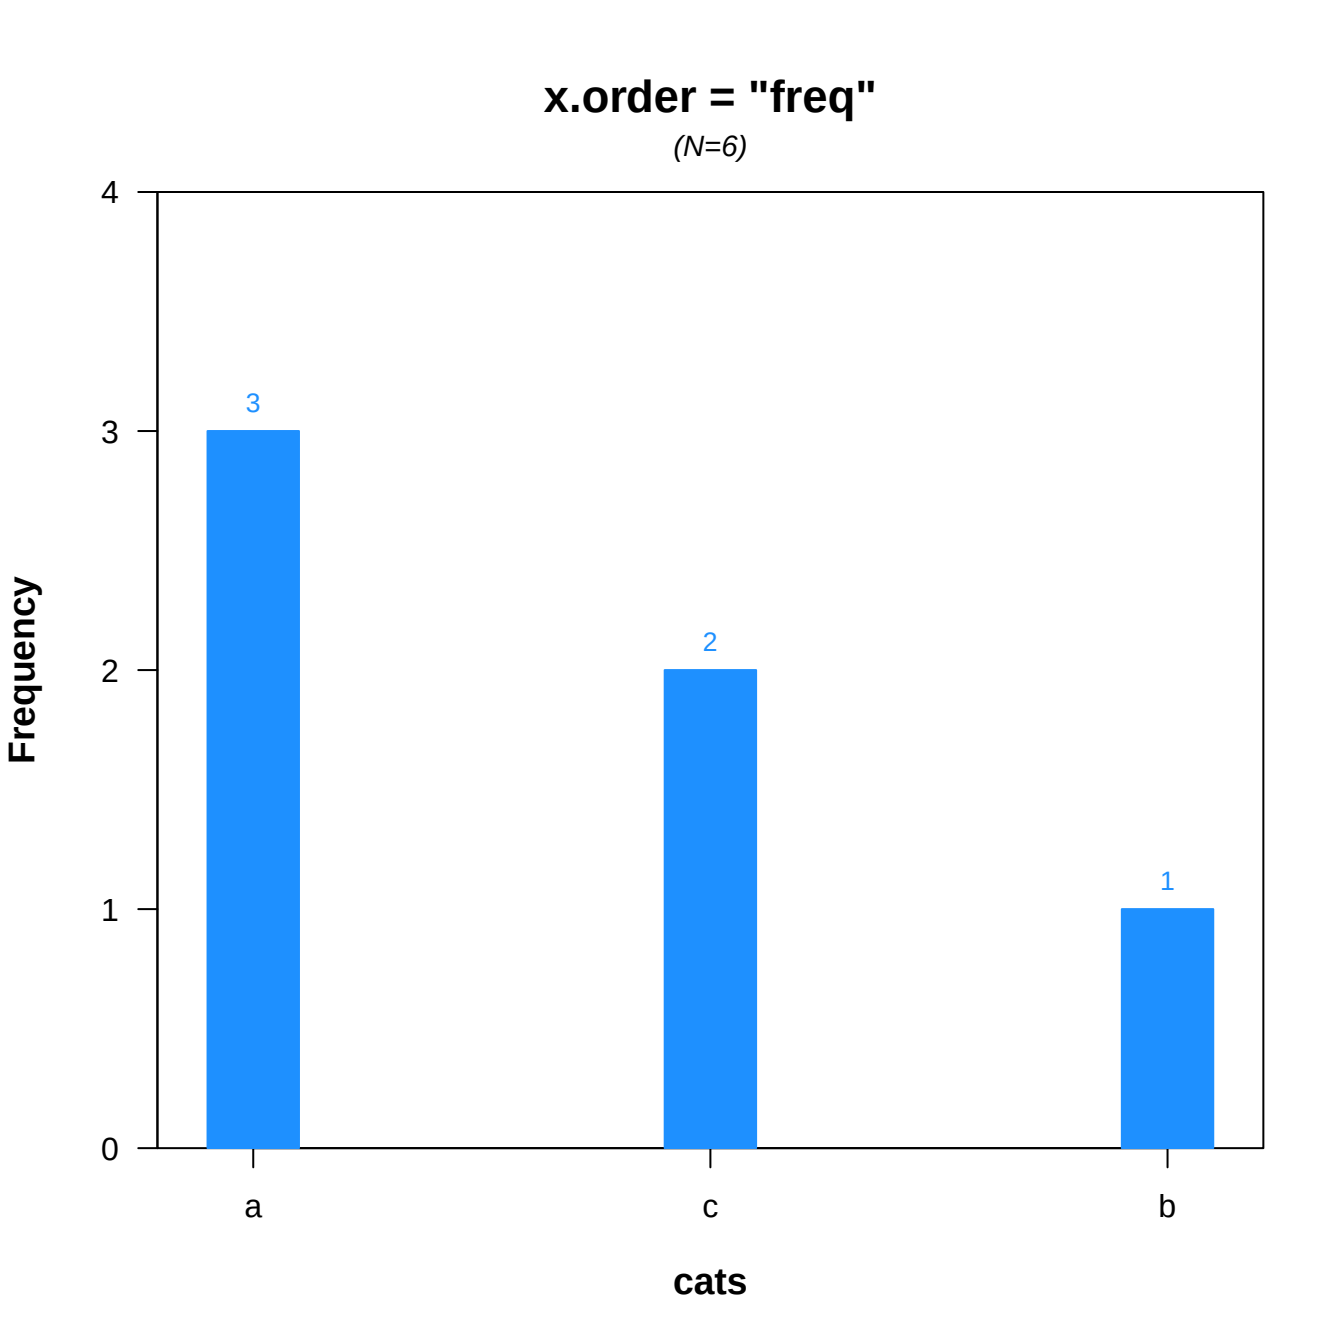
x.order = "freq"
(N=6)
Frequency
4
3
2
1
0
3
2
1
a
c
b
cats

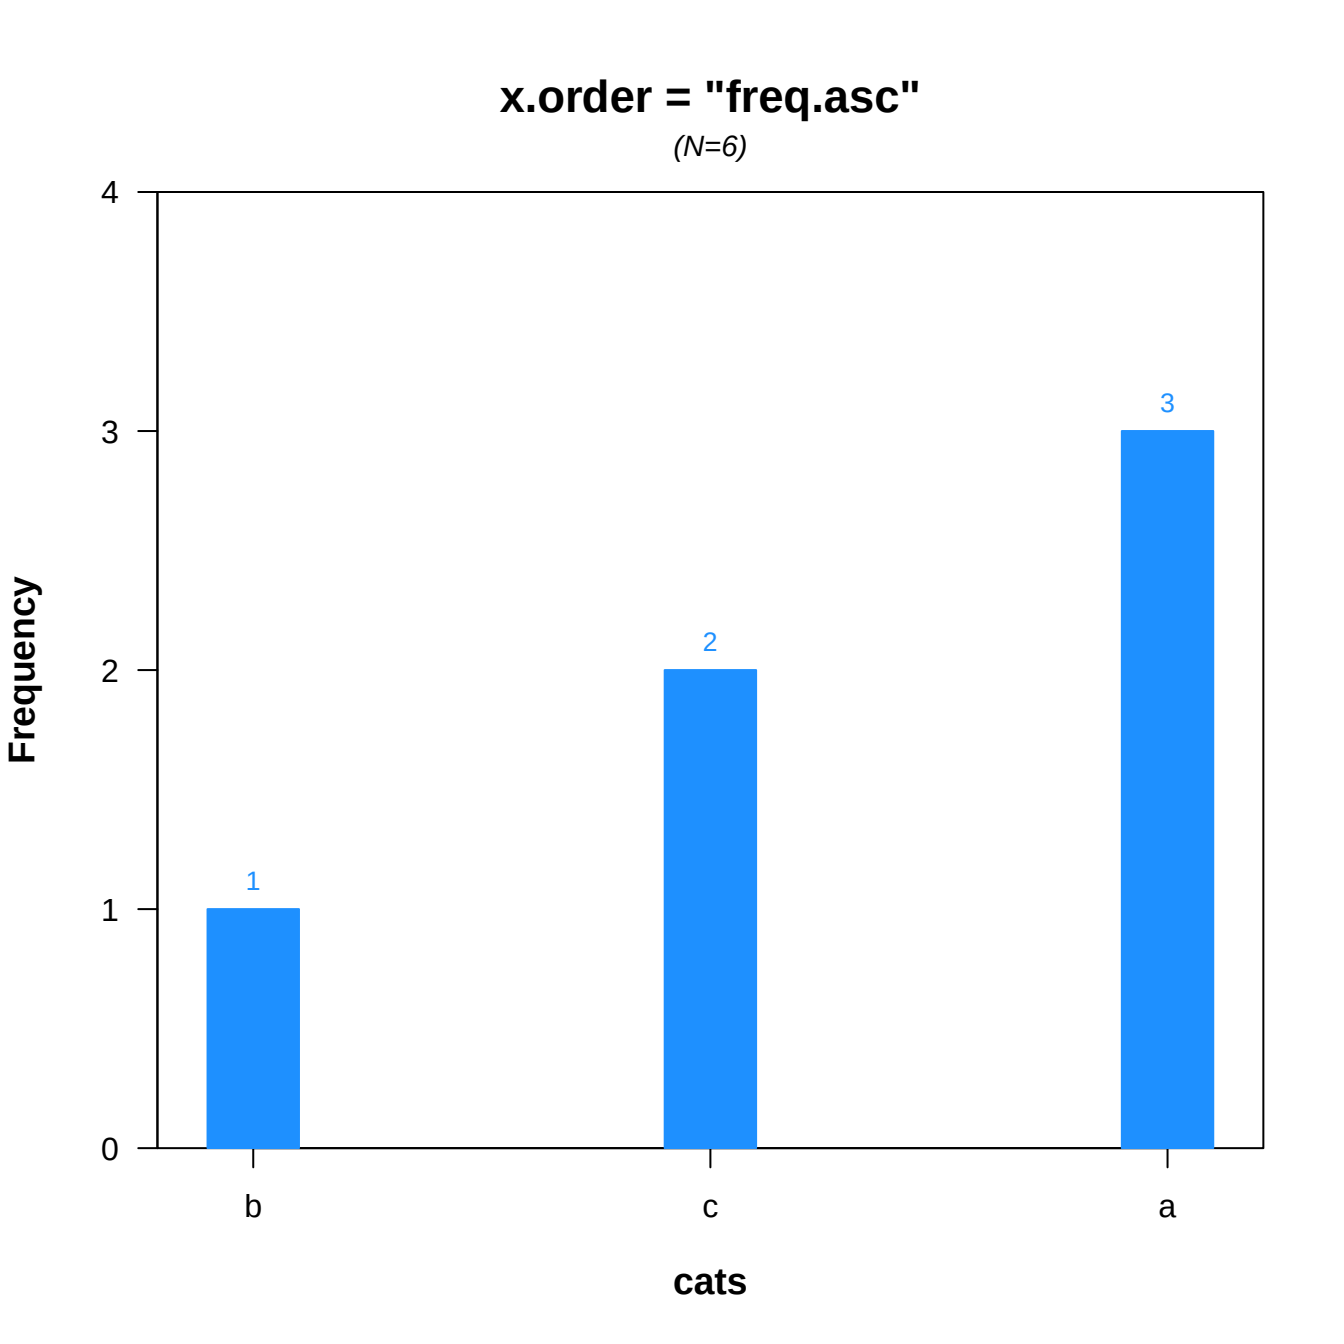
x.order = "freq.asc"
(N=6)
Frequency
4
3
2
1
0
1
2
3
b
c
a
cats

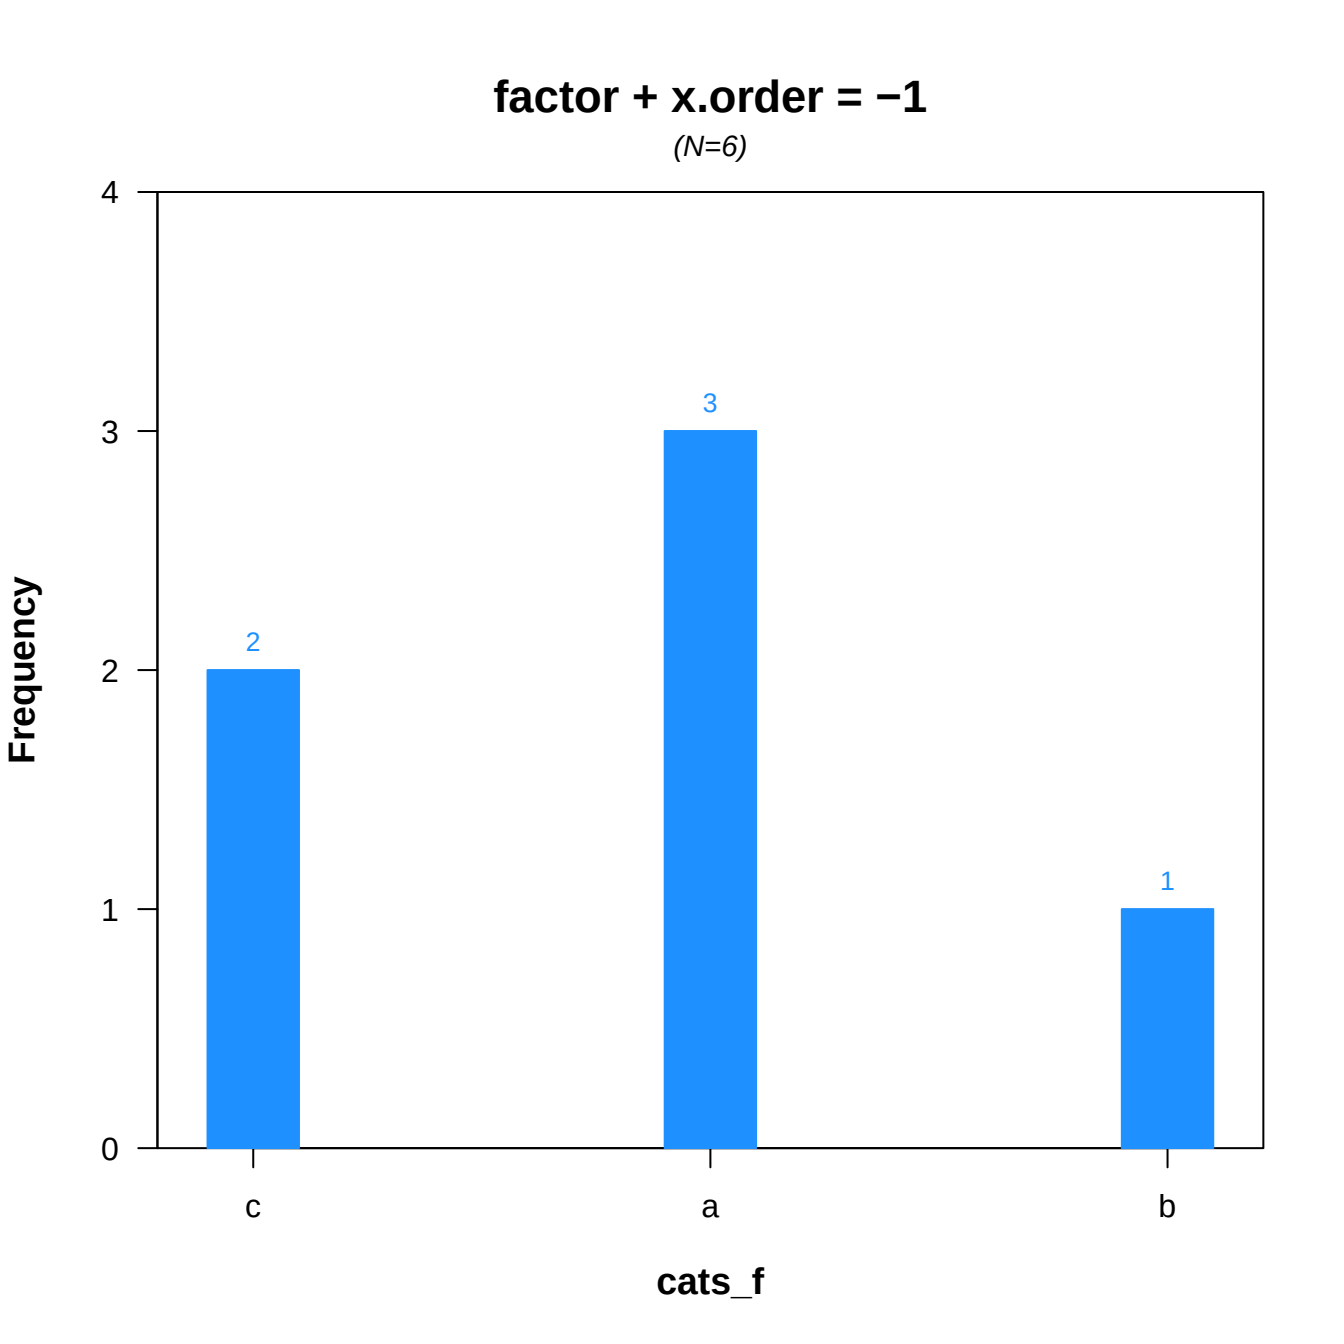
factor + x.order = −1
(N=6)
Frequency
4
3
2
1
0
2
3
1
c
a
b
cats_f

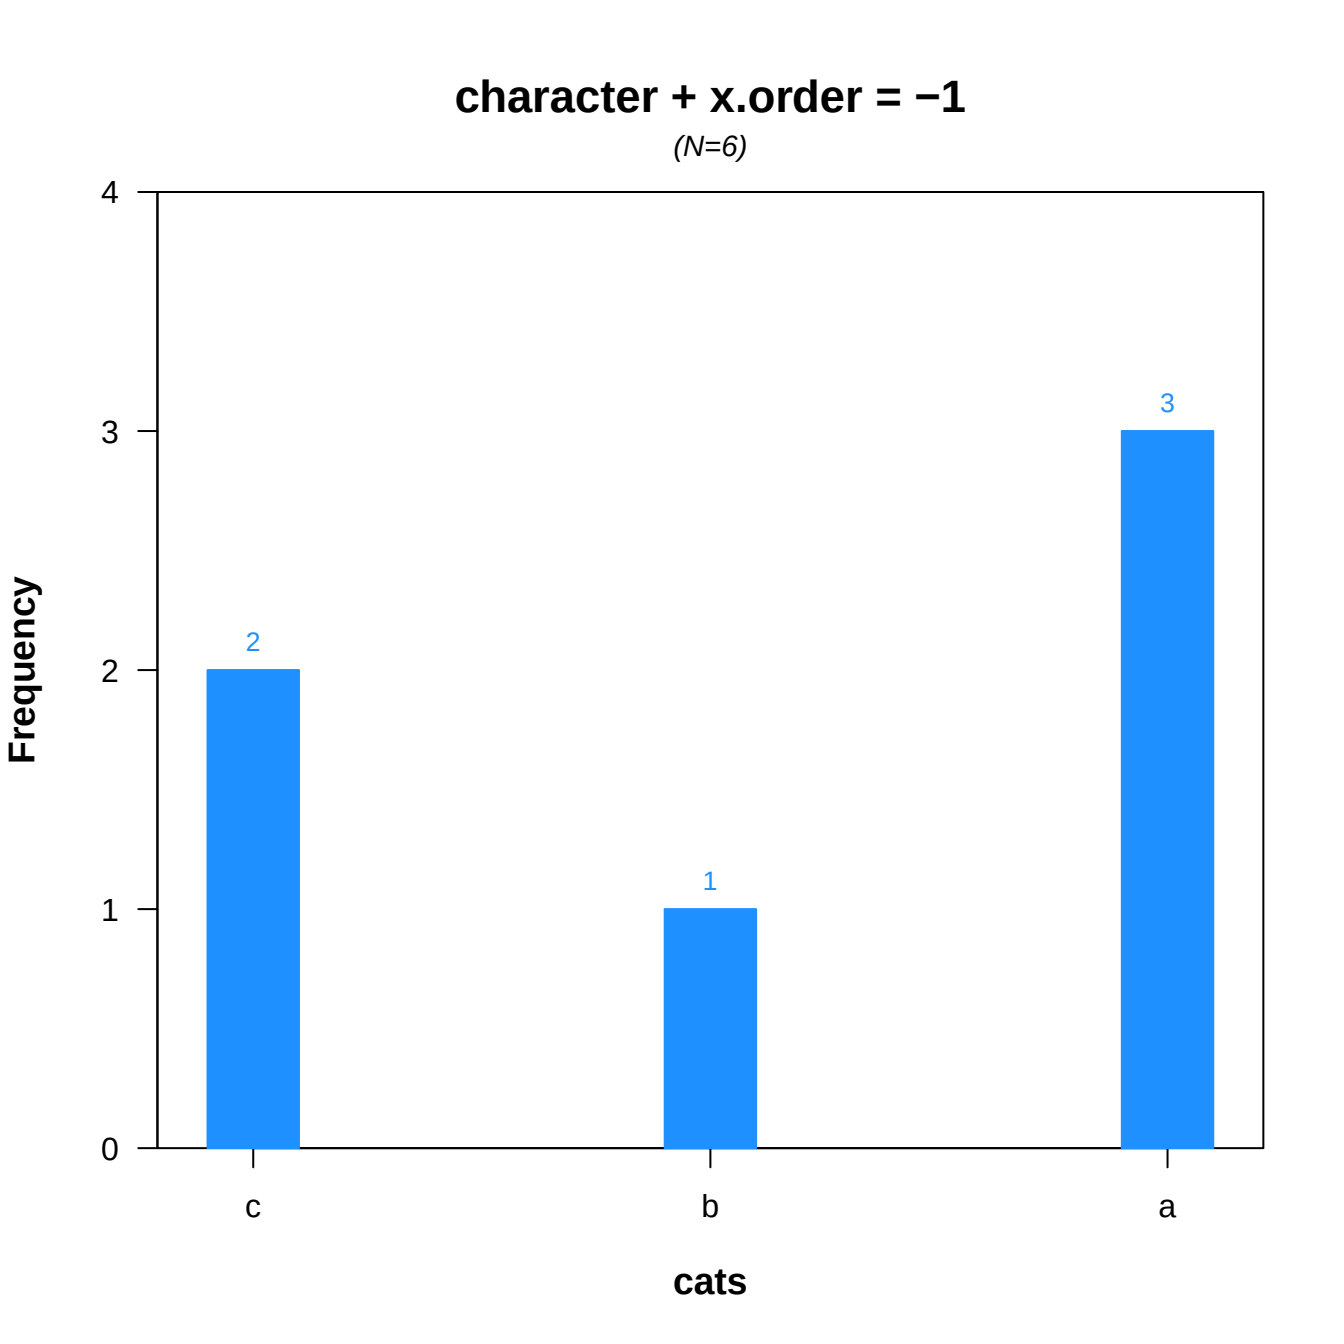
character + x.order = −1
(N=6)
Frequency
4
3
2
1
0
2
1
3
c
b
a
cats

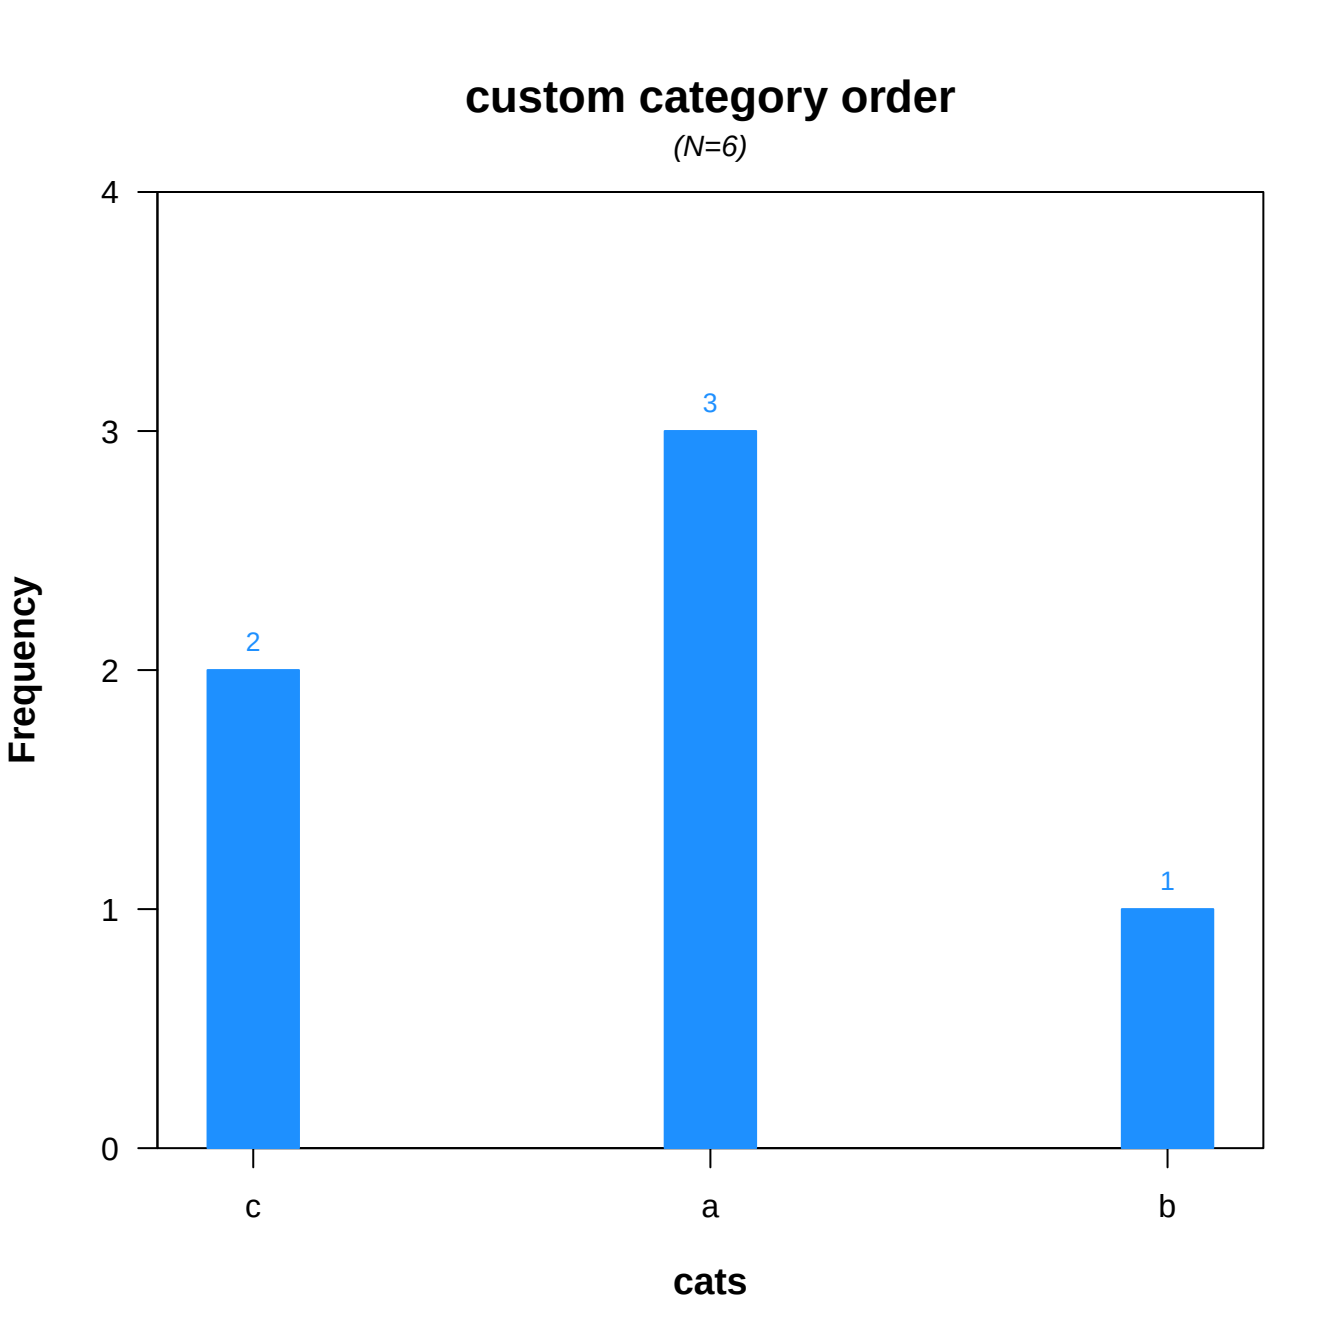
custom category order
(N=6)
Frequency
4
3
2
1
0
2
3
1
c
a
b
cats

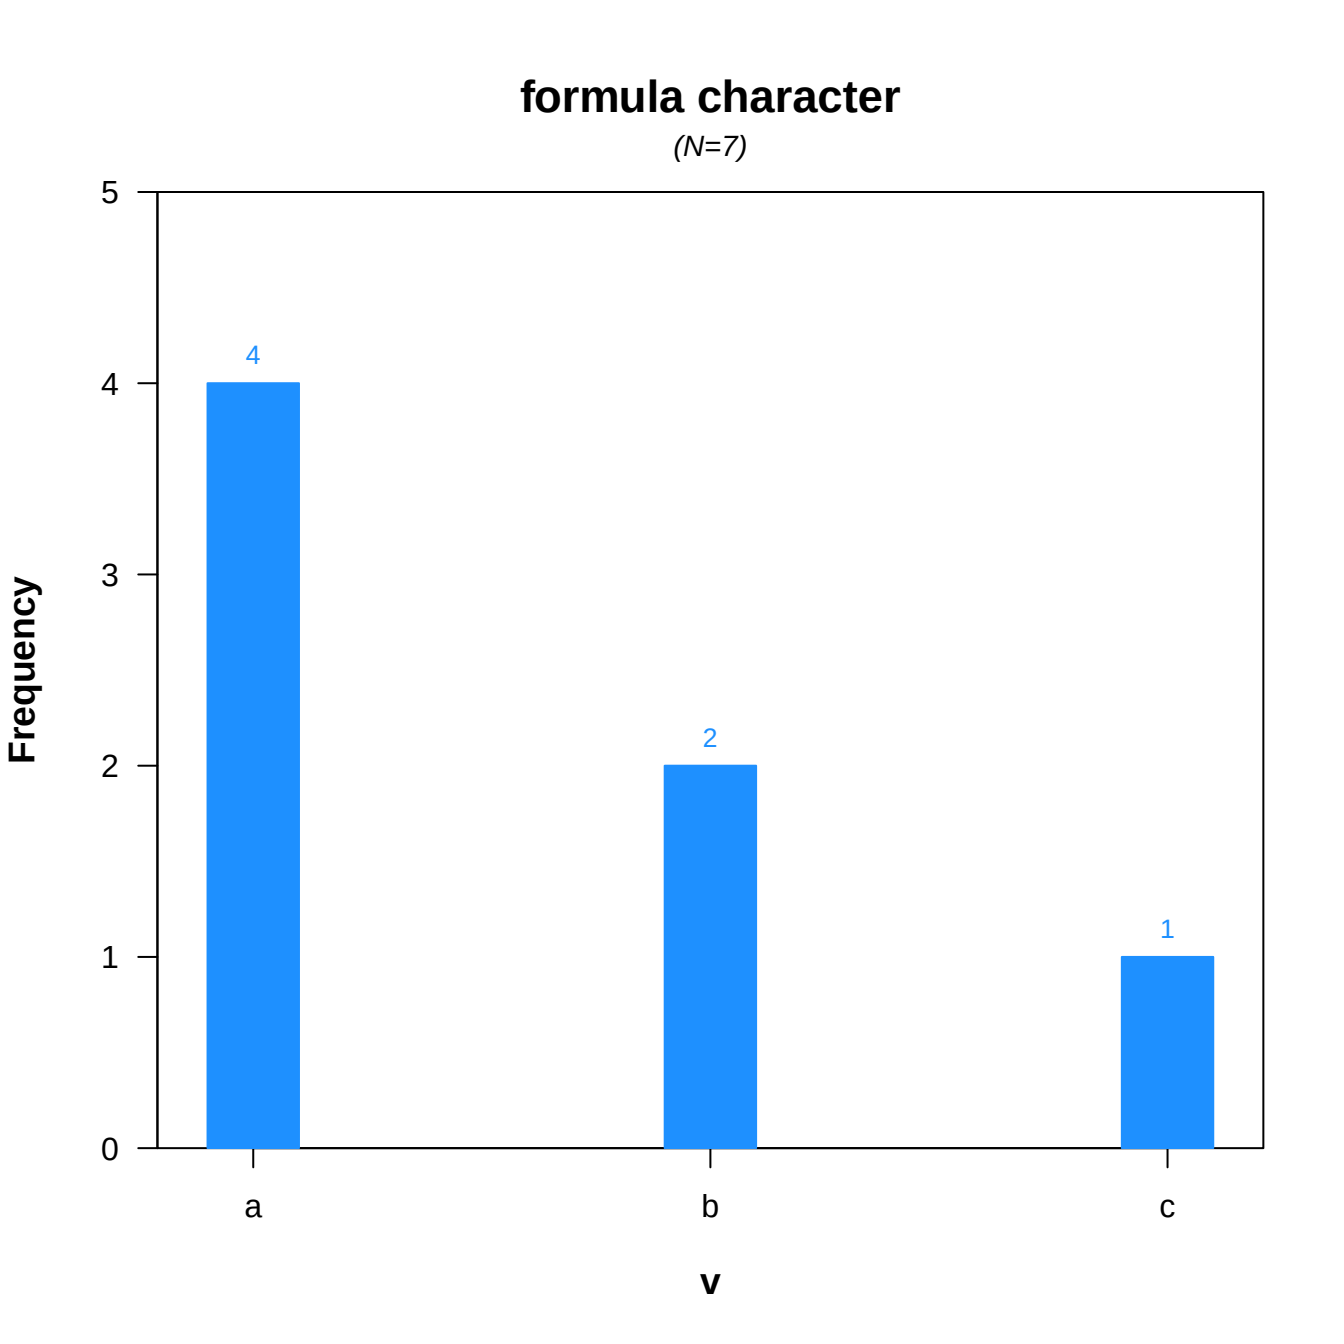
formula character
(N=7)
Frequency
5
4
3
2
1
0
4
2
1
a
b
c
v

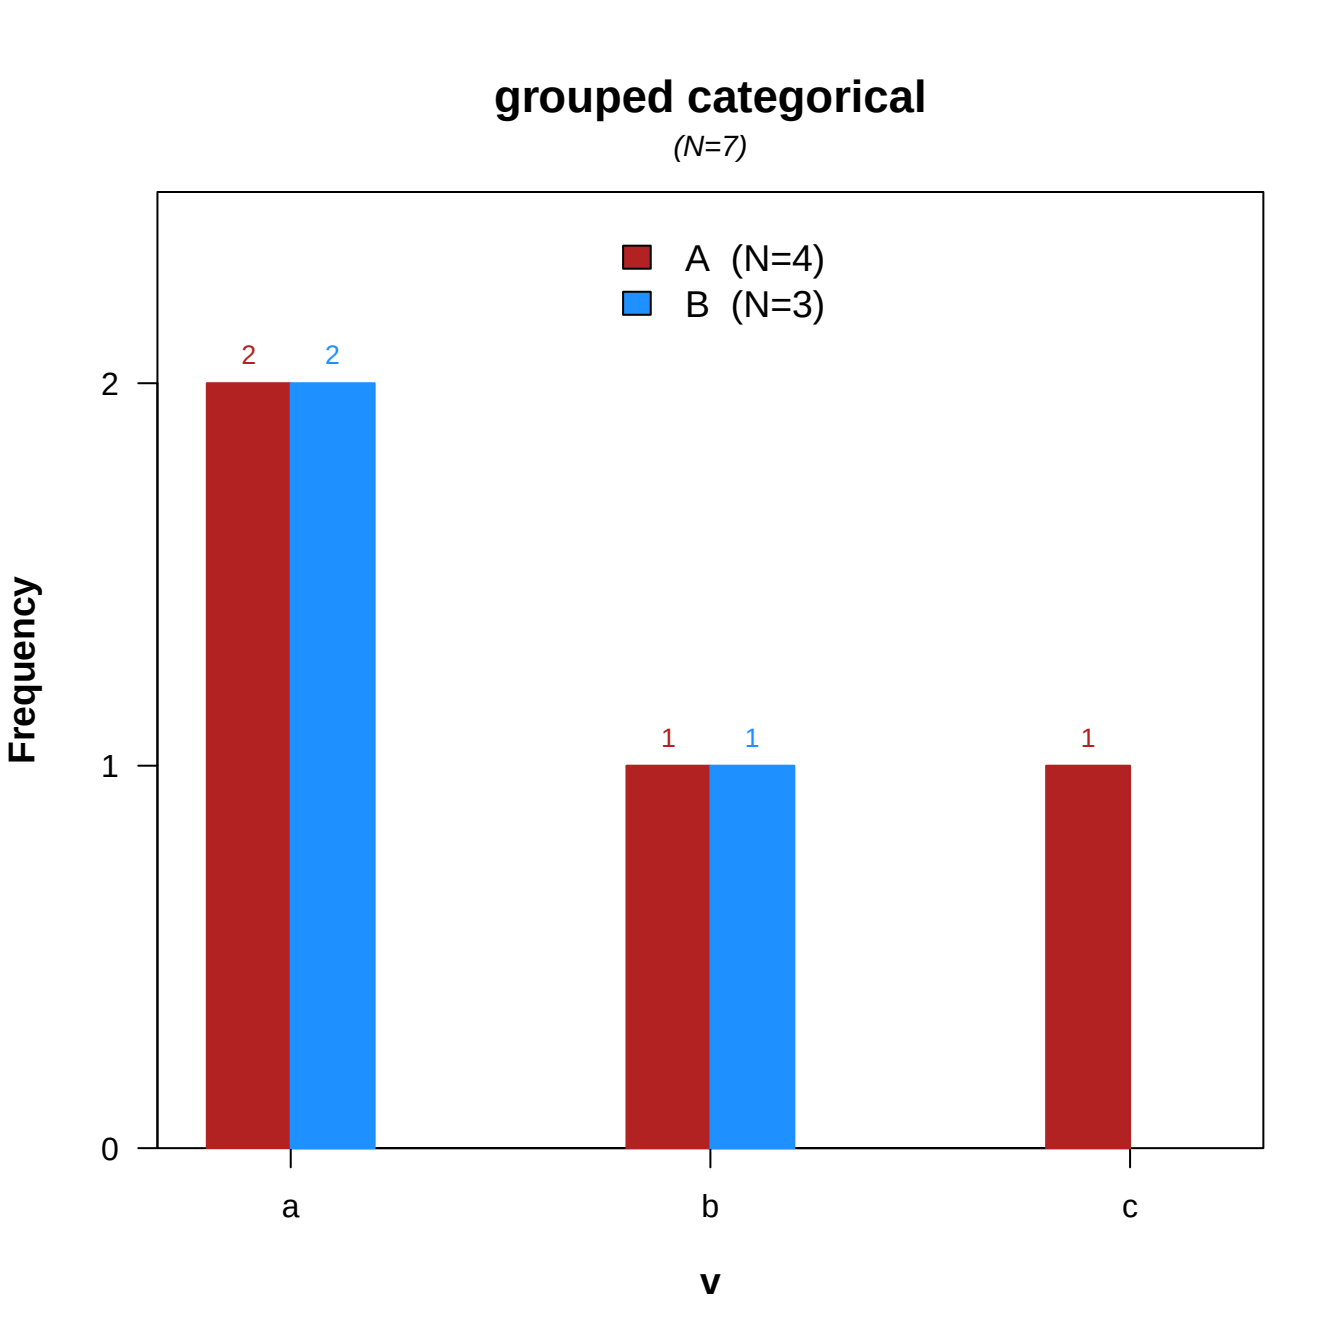
grouped categorical
(N=7)
A (N=4)
B (N=3)
Frequency
2
1
0
2
2
1
1
1
a
b
c
v

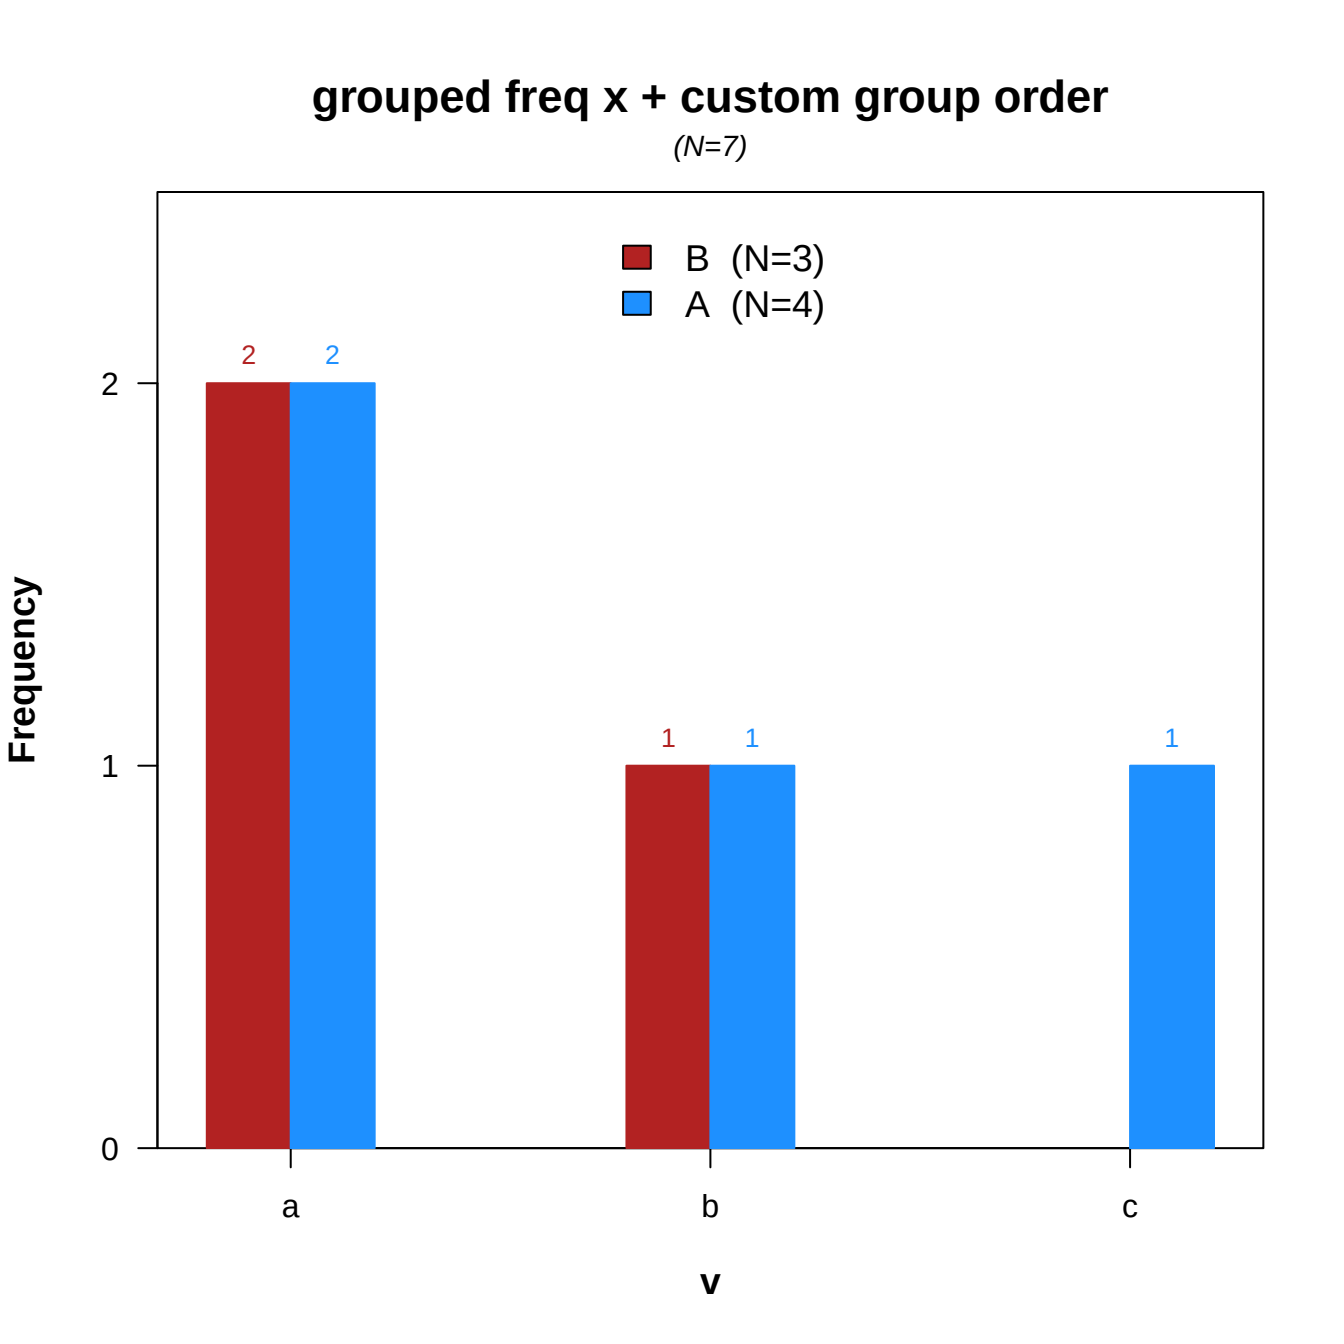
grouped freq x + custom group order
(N=7)
B (N=3)
A (N=4)
2
2
1
1
1
2
1
0
Frequency
a
b
c
v

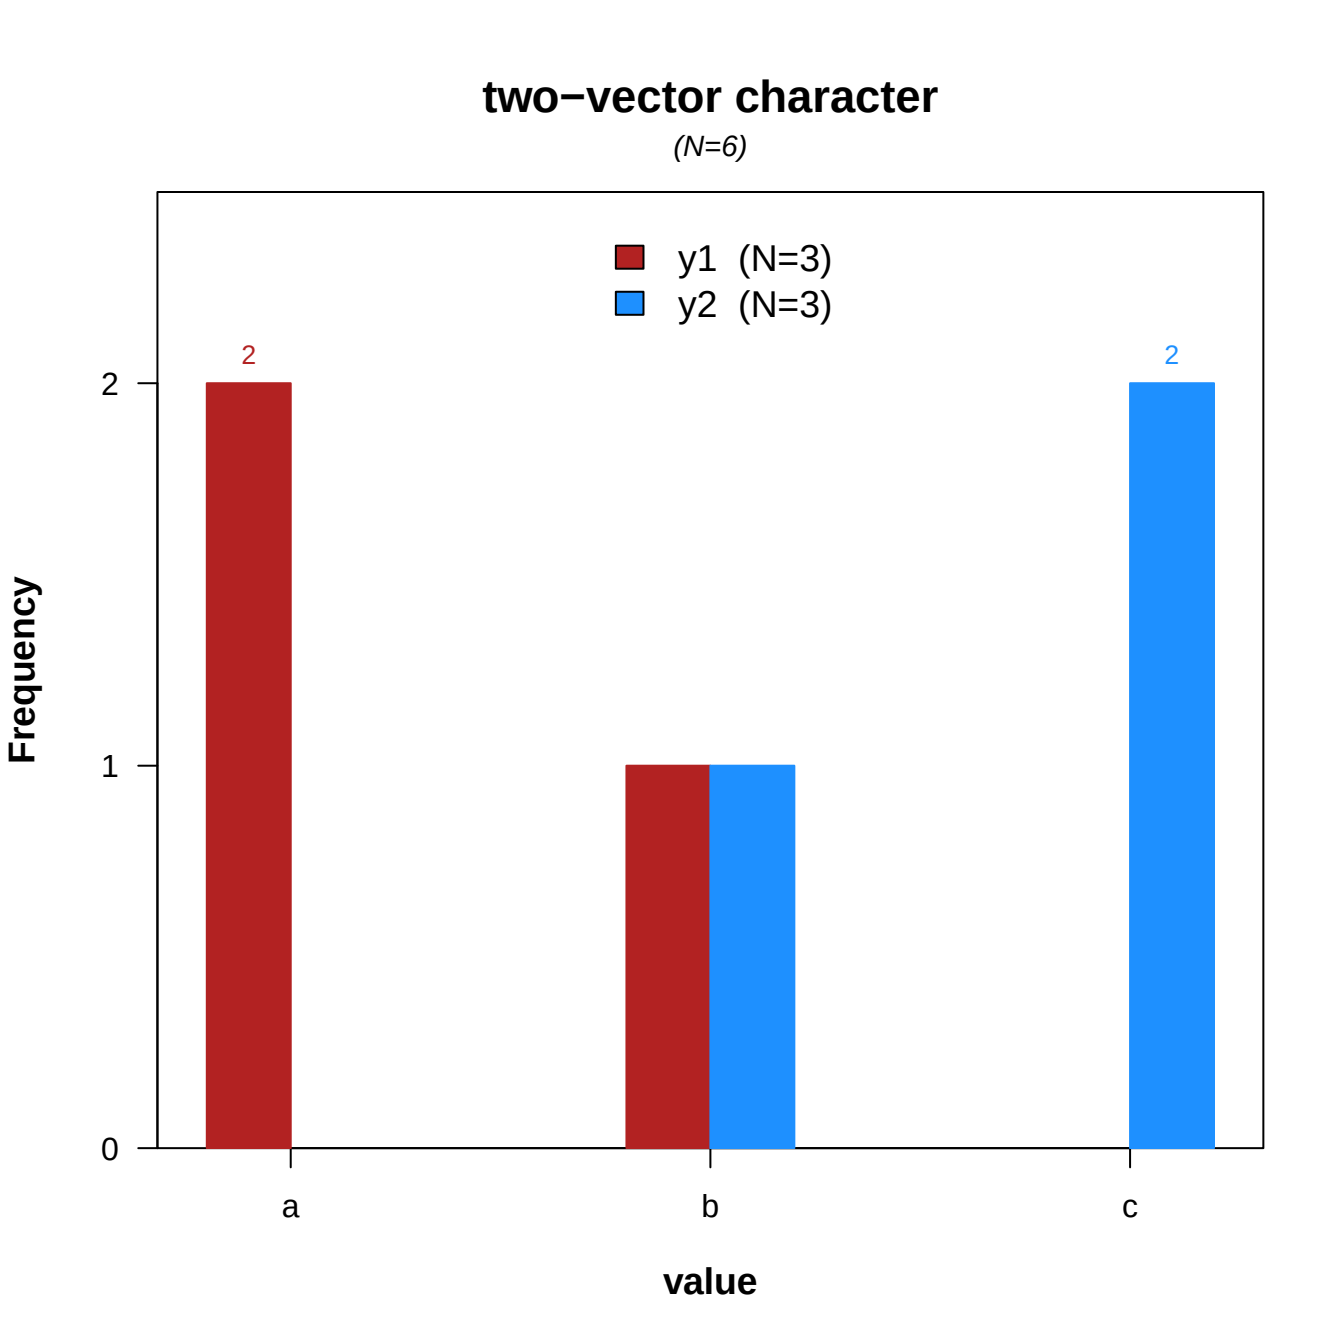
two−vector character
(N=6)
y1 (N=3)
y2 (N=3)
2
2
Frequency
2
1
0
a
b
c
value

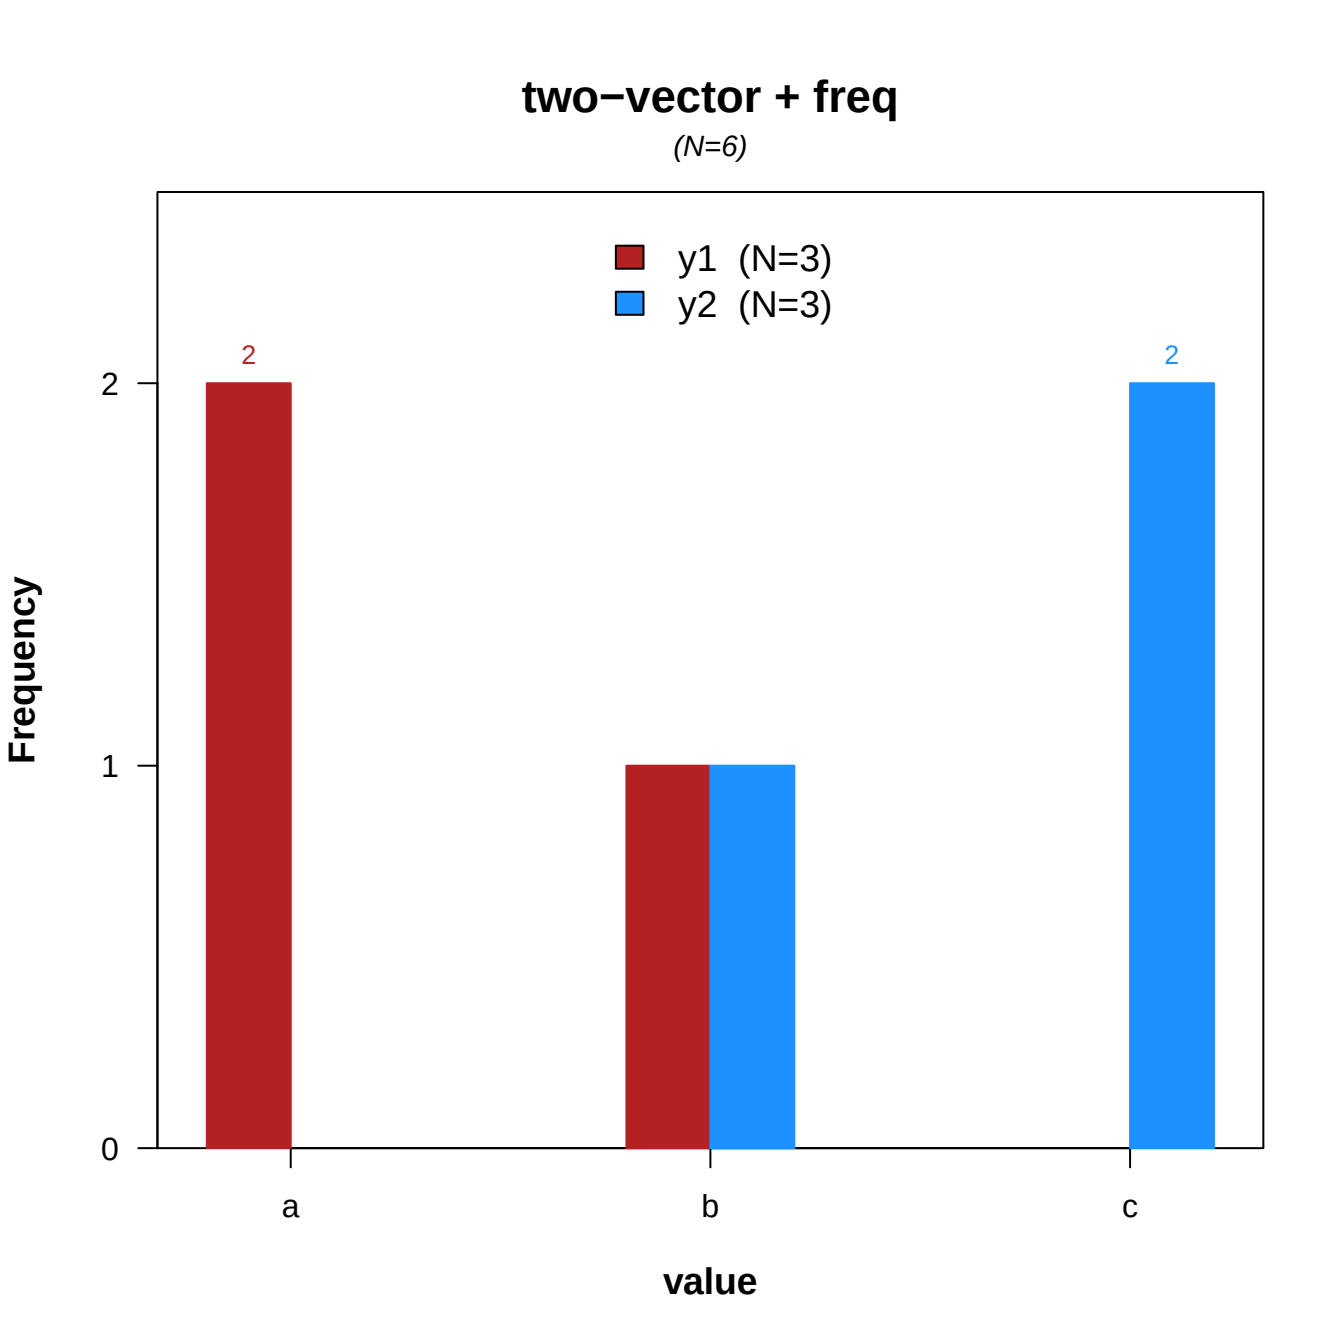
two−vector + freq
(N=6)
y1 (N=3)
y2 (N=3)
2
2
Frequency
2
1
0
a
b
c
value

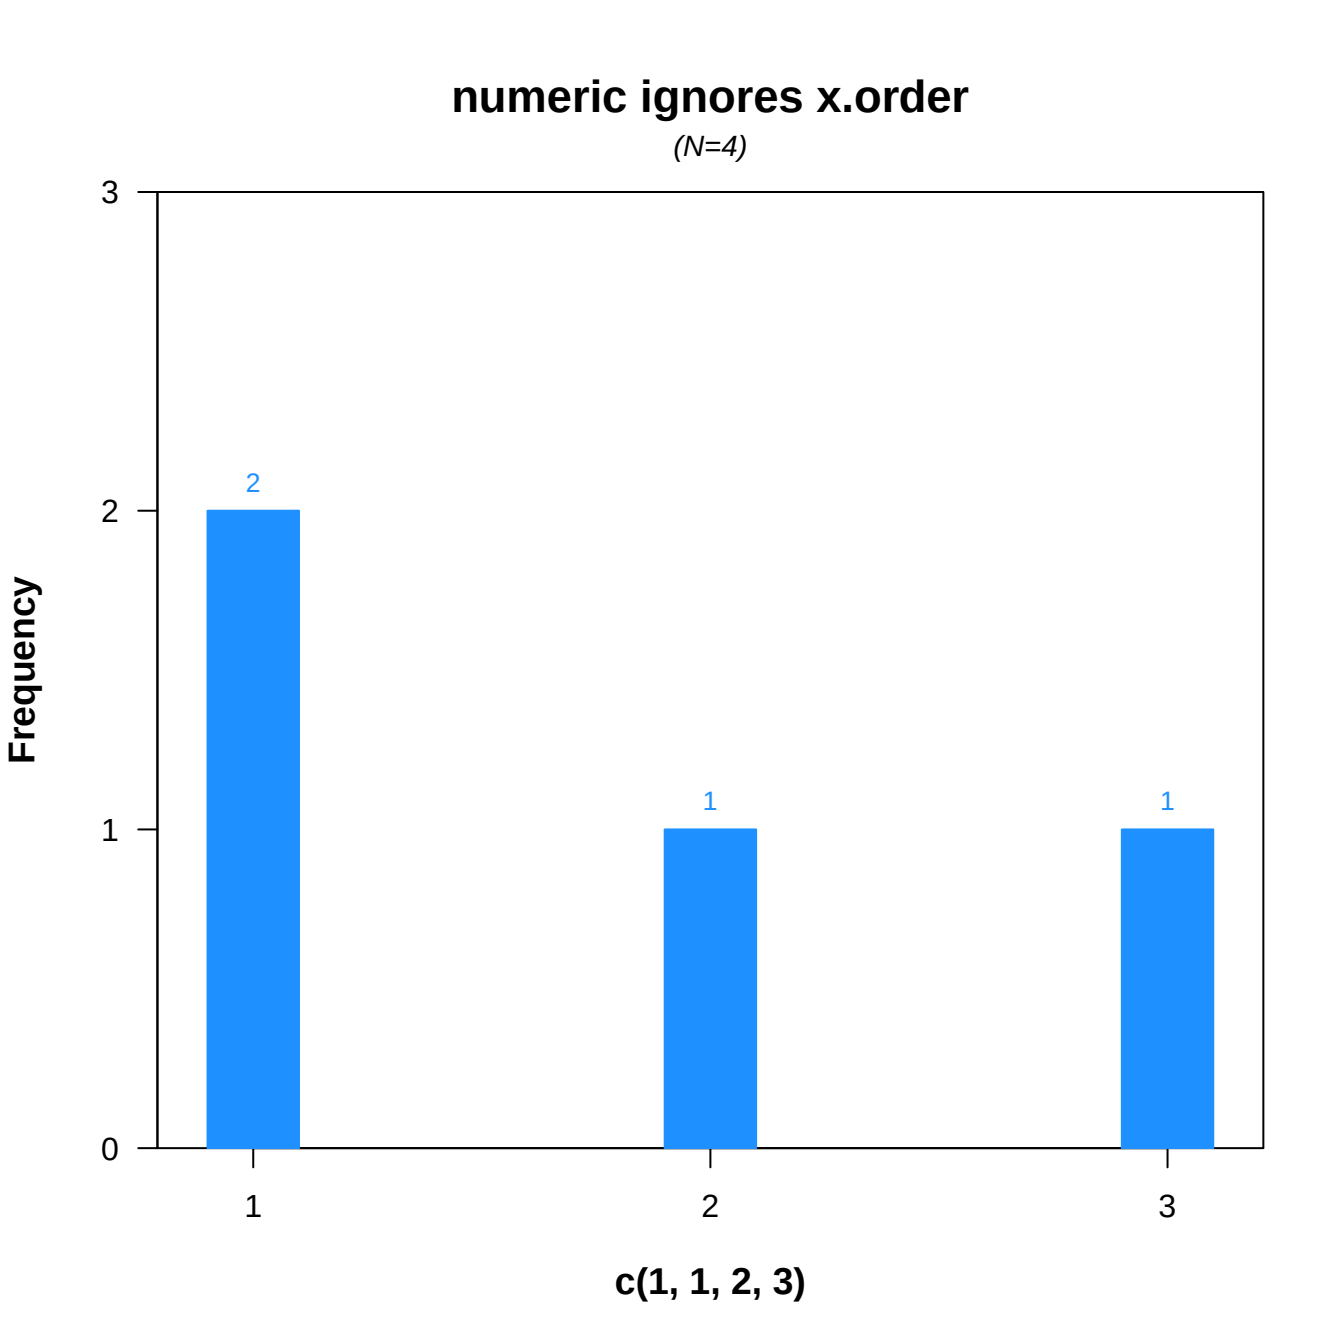
numeric ignores x.order
(N=4)
Frequency
3
2
1
0
2
1
1
1
2
3
c(1, 1, 2, 3)