Koneru Lakshmaiah Education Foundation
(Deemed to be University estd. u/s. 3 of the UGC Act, 1956)
Off-Campus: Bachupally-Gandimaisamma Road, Bowrampet, Hyderabad, Telangana - 500 043.
Phone No: 7815926816, www.klh.edu.in

Department of CSE

B.Tech. CSE Trimester -5

2520030030
Upputuri Rohit Sai

Cloud Infrastructure and Services

25CS2206E


LAB RECORD

2026

Practical – session 2


a) Enabling Multi-Factor Authentication to Secure Your Access

Registering a passkey as the MFA device for the AWS account; the console confirms that the passkey was successfully assigned.

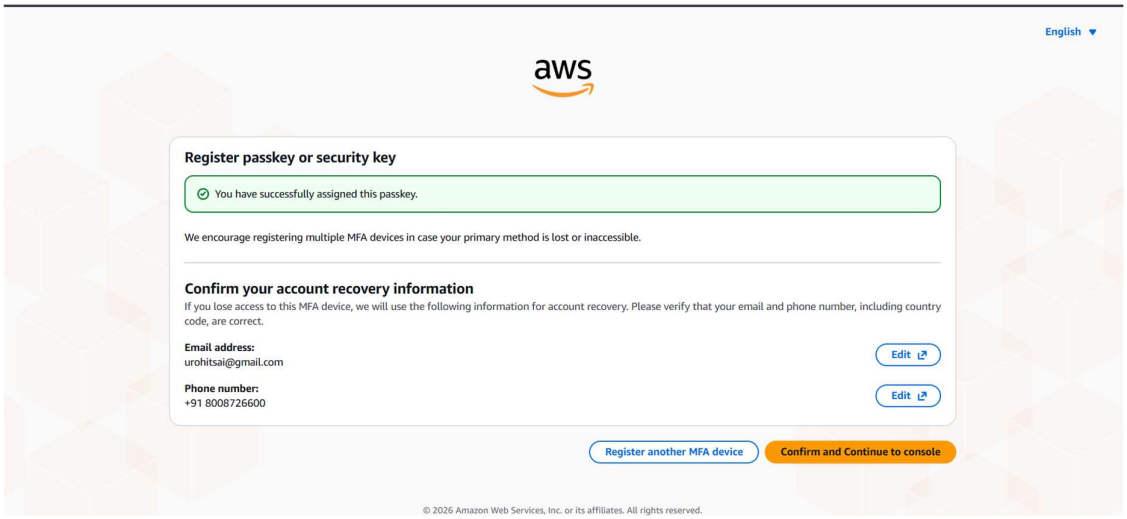


b) Creating First Linux Instance


Launching a new EC2 instance by specifying the instance name (CDIS_Instance).

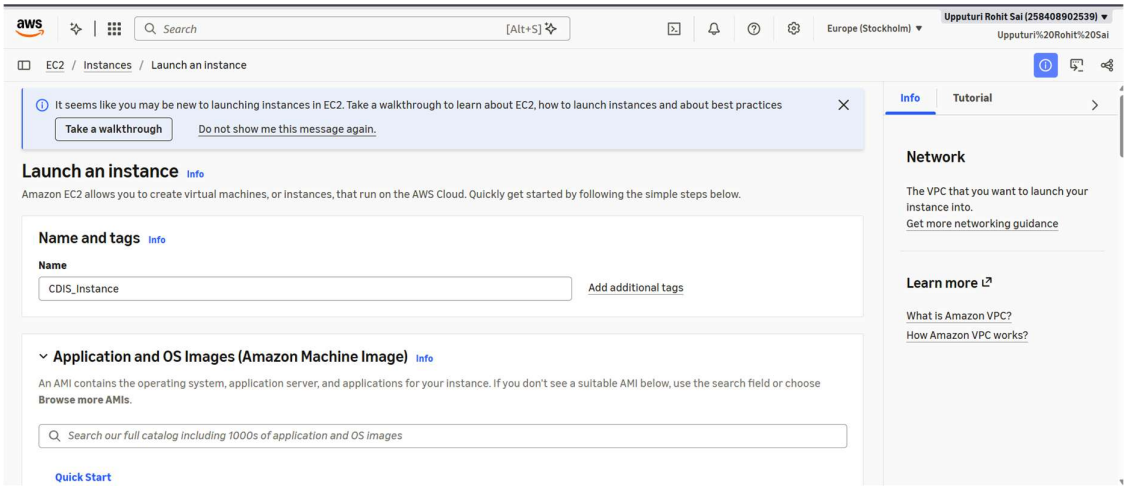


Selecting Amazon Linux in the Quick Start list; the Amazon Linux 2023 AMI (free tier eligible) is chosen.

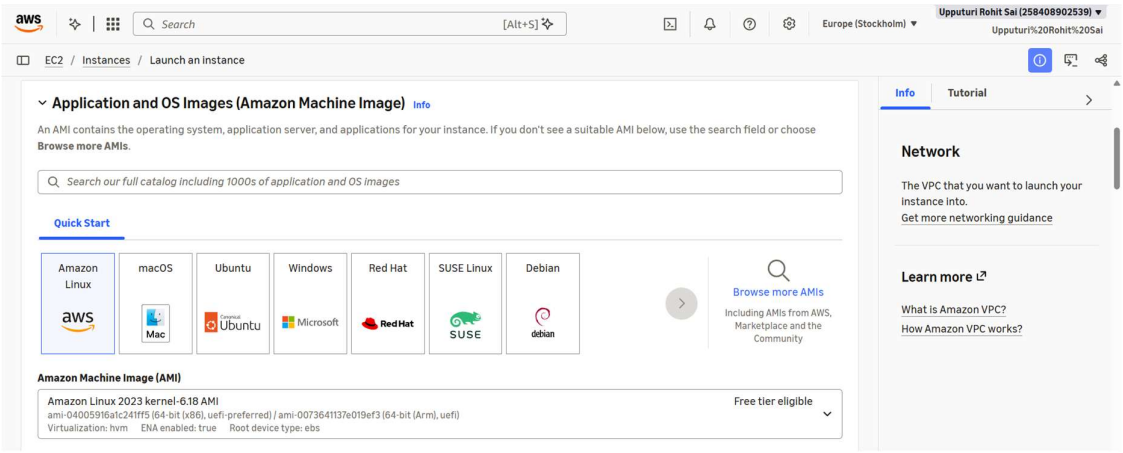


Reviewing the AMI details (64-bit x86, username ec2-user) and selecting the t3.micro (free tier eligible) instance type.

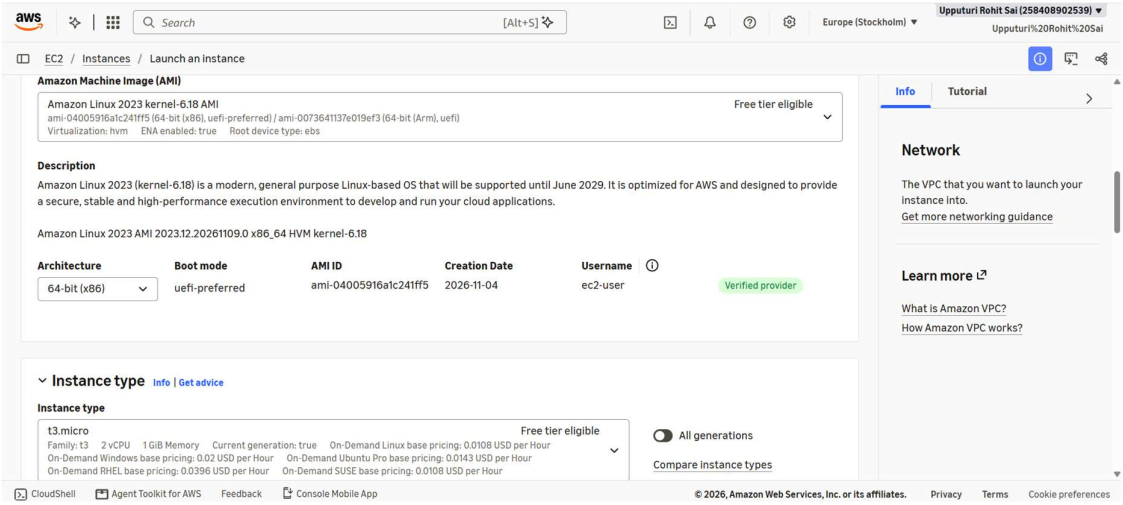


Selecting the key pair and setting up the network configuration: default VPC, auto-assign public IP enabled and a new security group.

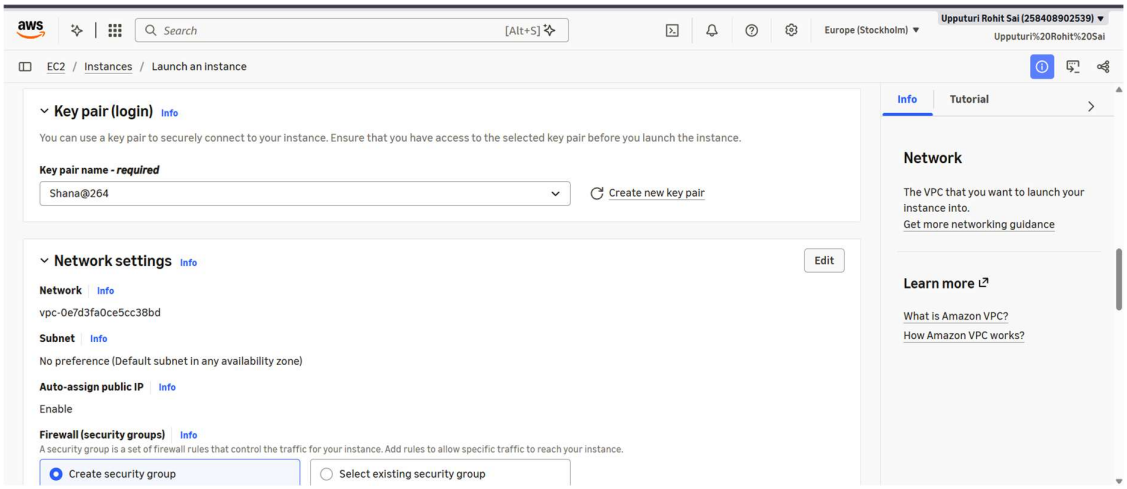


Security group and storage configuration: SSH traffic allowed from anywhere (0.0.0.0/0) and a 1x 8 GiB gp3 root volume.

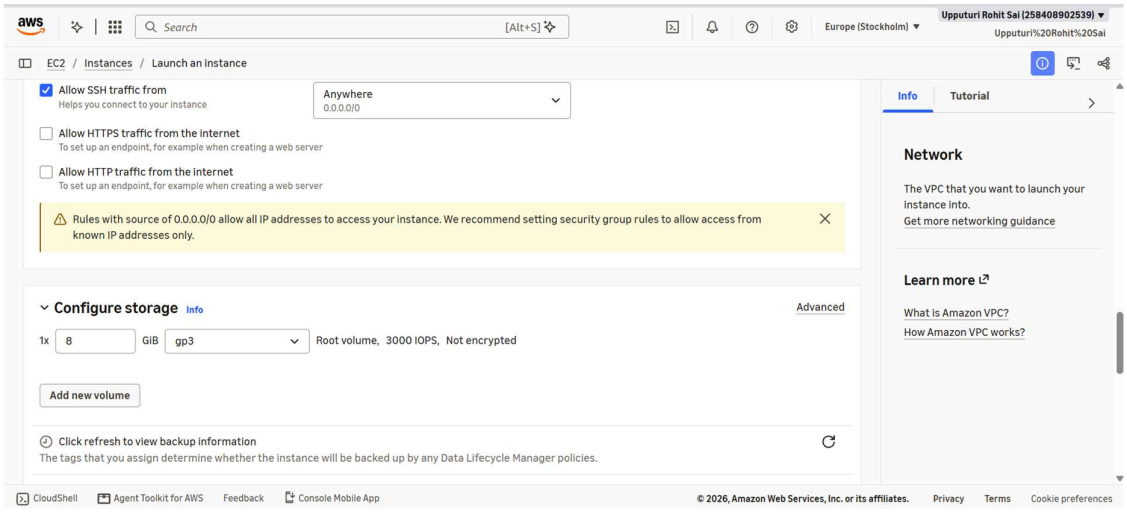


Reviewing the launch summary: Amazon Linux 2023 AMI, t3.micro instance type, new security group and 1 volume of 8 GiB, before launching the instance.

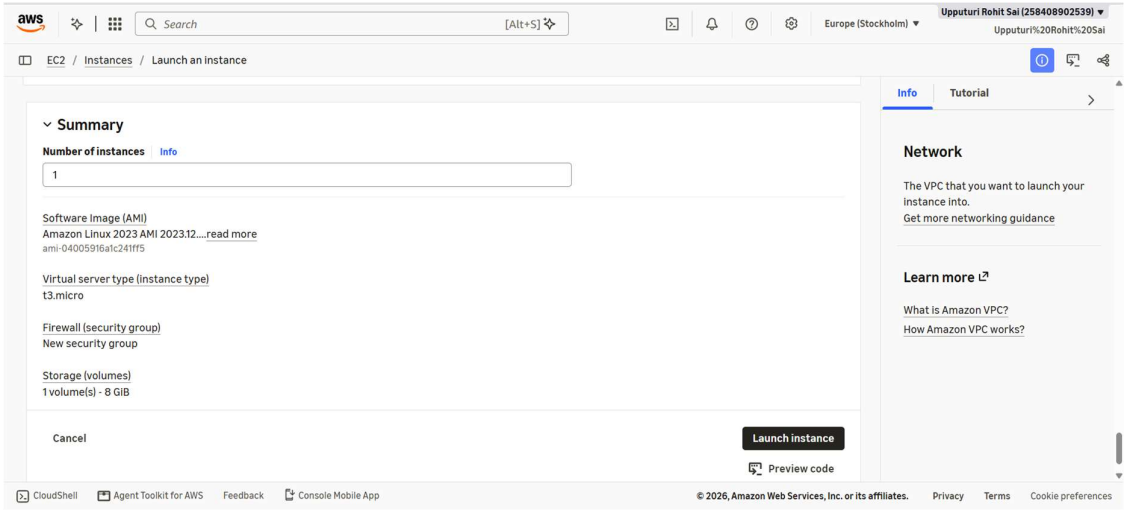


Successful launch of the EC2 instance: CDIS_Instance is in the Running state with 3/3 status checks passed.

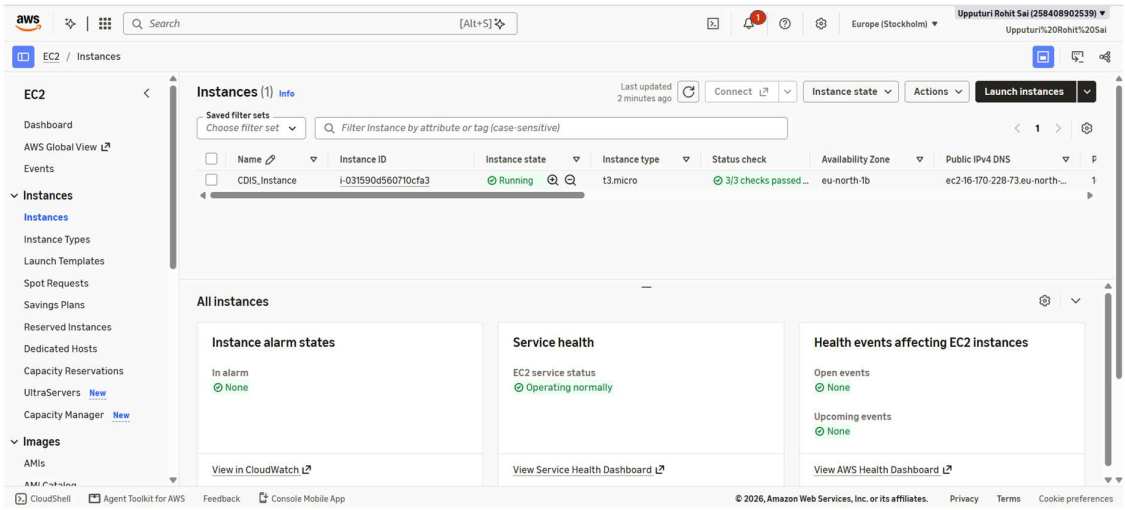


Instance summary showing the instance ID, public and private IPv4 addresses, and the Running state.

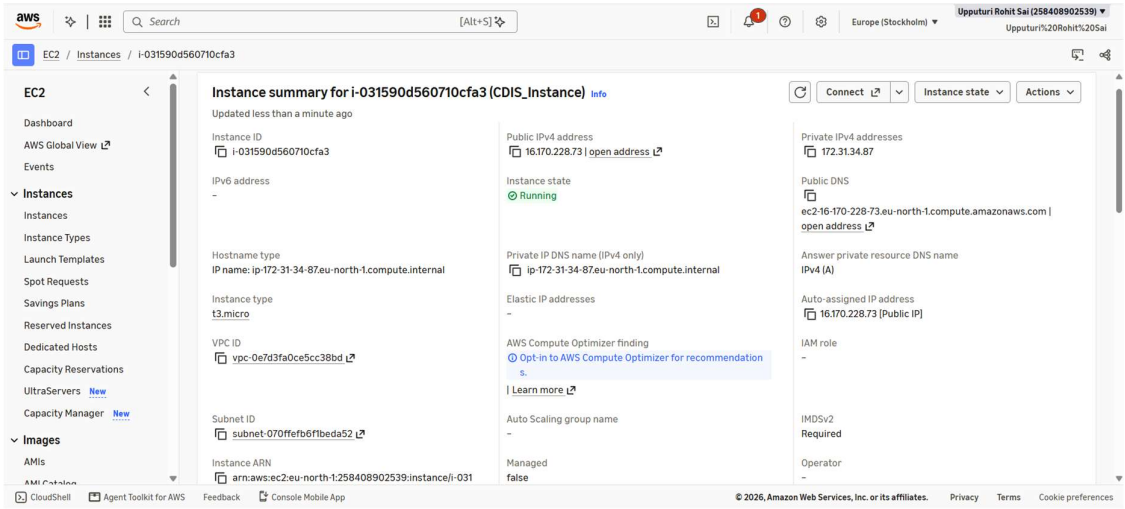

Connecting to the instance using EC2 Instance Connect from the web browser, with the public IPv4 address selected.

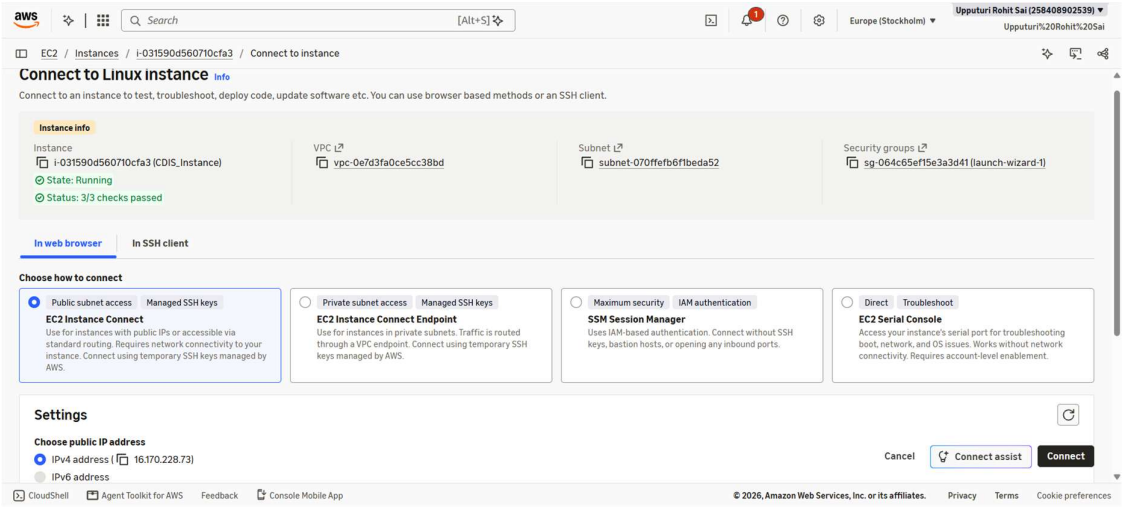


Executing basic Linux commands (pwd, ls, mkdir test1, ls, history) in the terminal to verify access and explore the command-line environment.

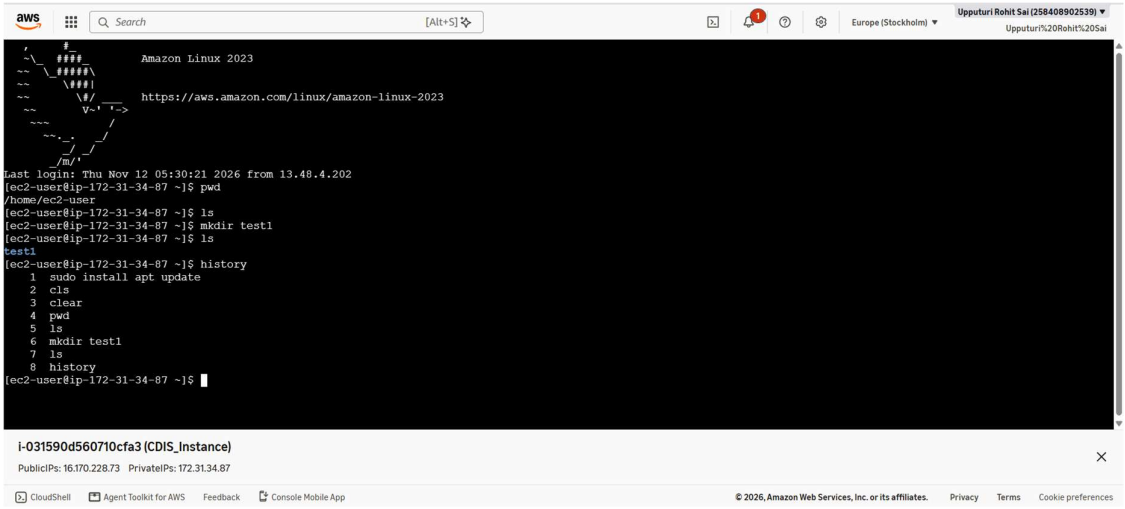


c) S3 Bucket Creation and Upload Objects

I. Create an S3 Bucket for file storage


Configuring a new Amazon S3 bucket: general purpose bucket type in the Asia Pacific (Mumbai) region, with the bucket name prefix set to demobucket.

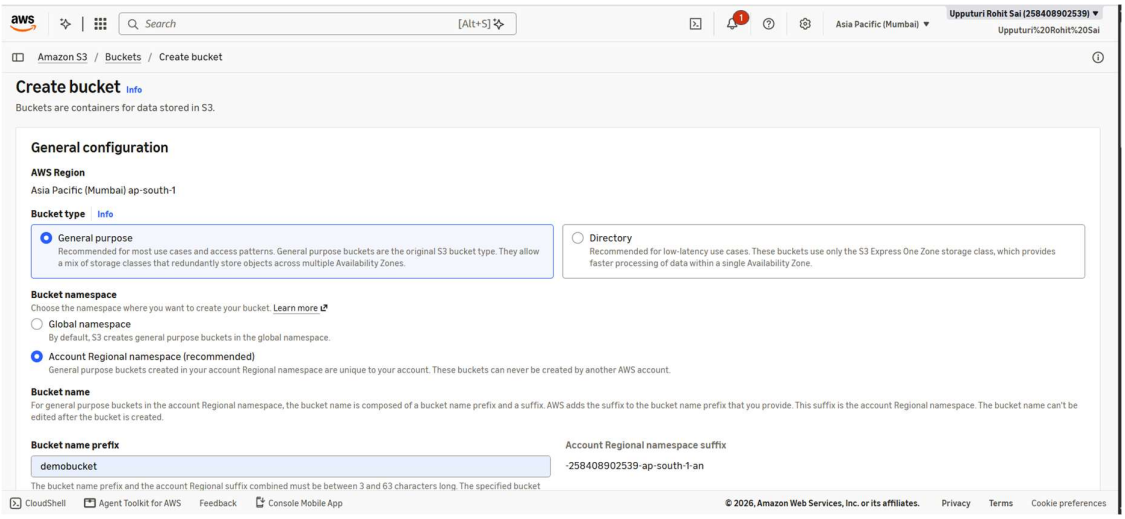

Bucket settings: Object Ownership set to ACLs disabled (bucket owner enforced) and the Block Public Access options turned off, with the acknowledgement checkbox ticked.

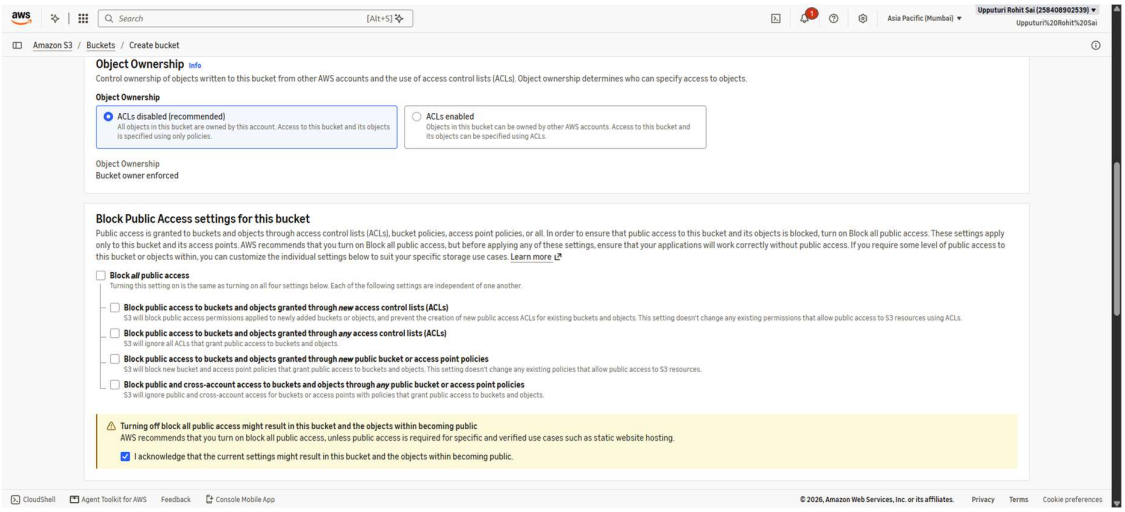


Successful creation of the S3 bucket, confirmed by the success message in the Amazon S3 console.




II. Upload objects to the S3 bucket


Upload page of bucket demobucket-258408902539-ap-south-1-an with a file selected for upload (.docx, 117.0 KB).

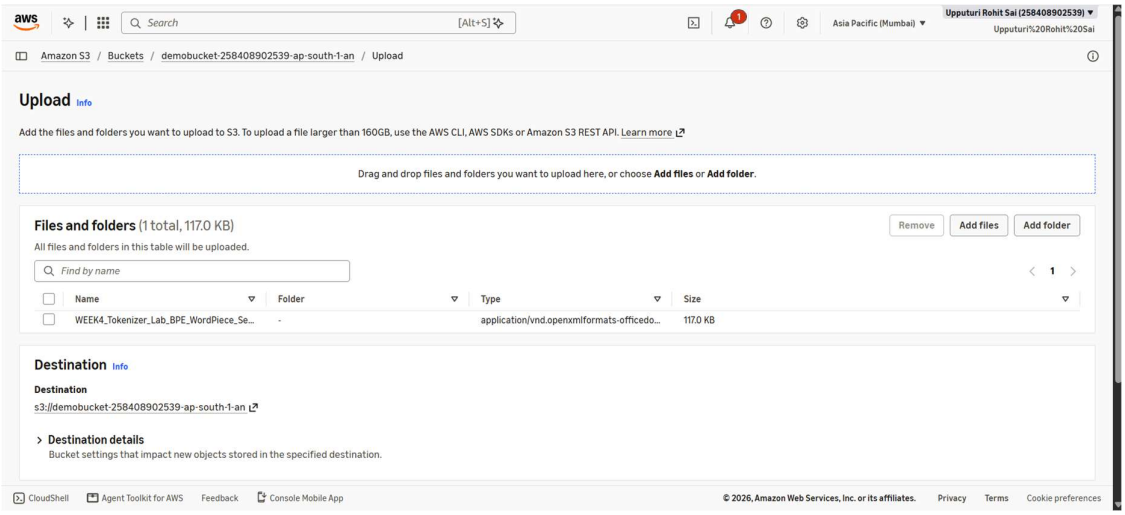


Upload succeeded: 1 file (117.0 KB) uploaded to the bucket, with 0 failures.

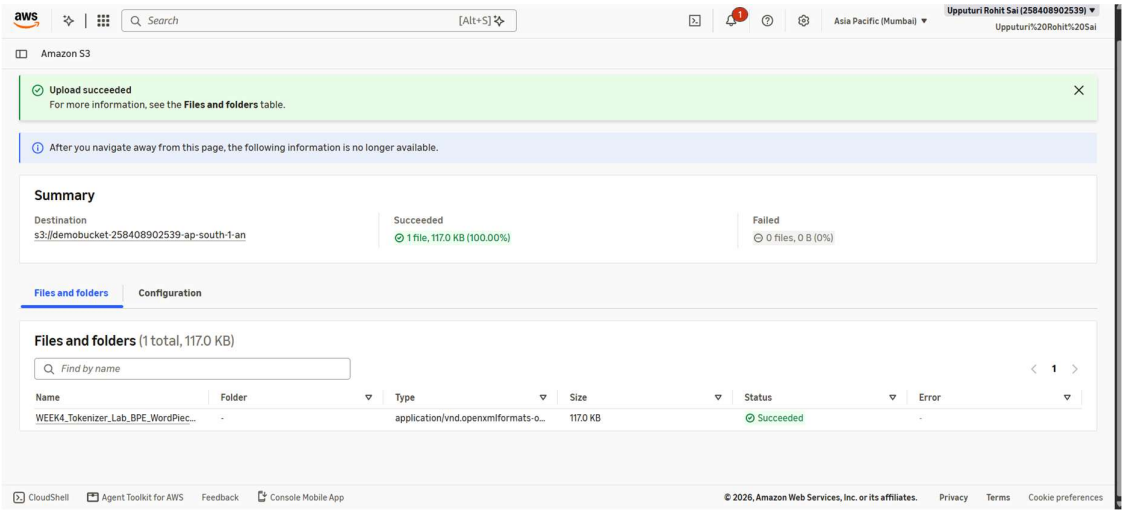


Verifying the uploaded object in the S3 bucket: the .docx object overview shows its S3 URI, ARN and Object URL.

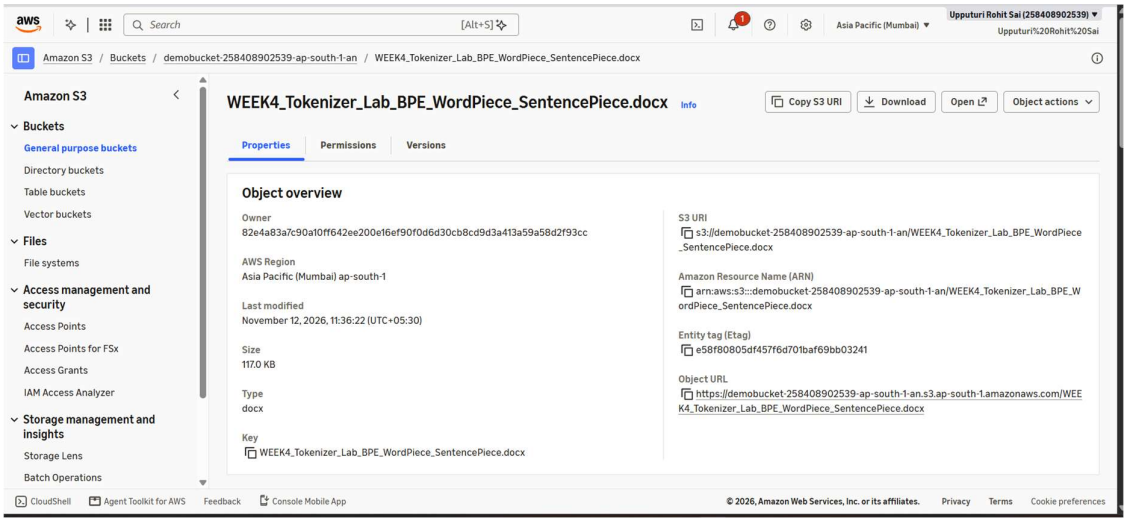

Sharing the uploaded object with a presigned URL, which grants time-limited access to the object.

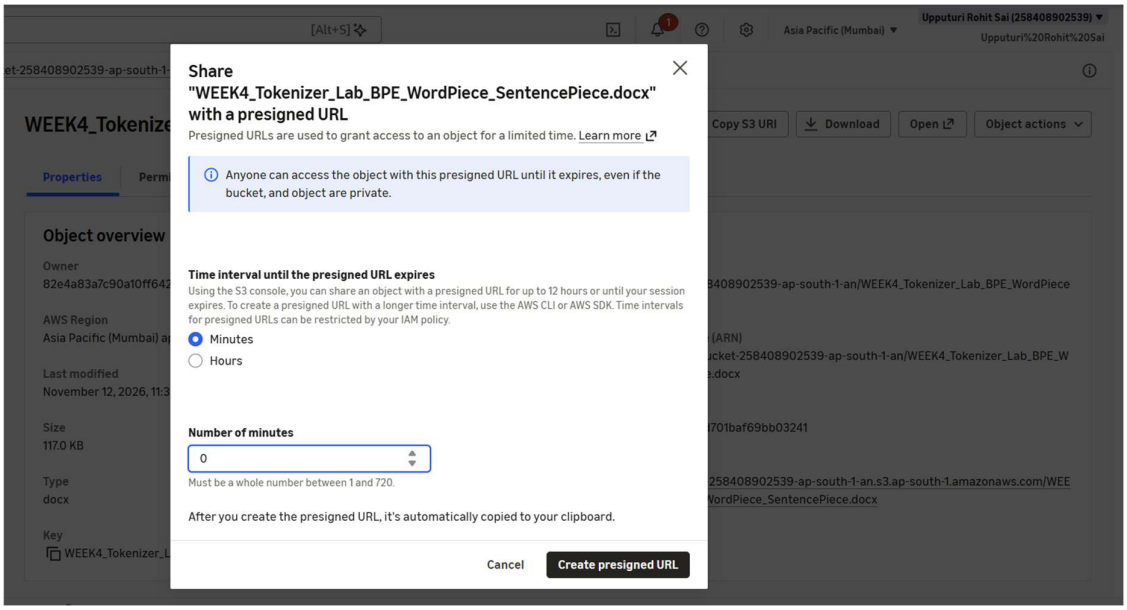

Confirmation that the presigned URL was created and copied to the clipboard.

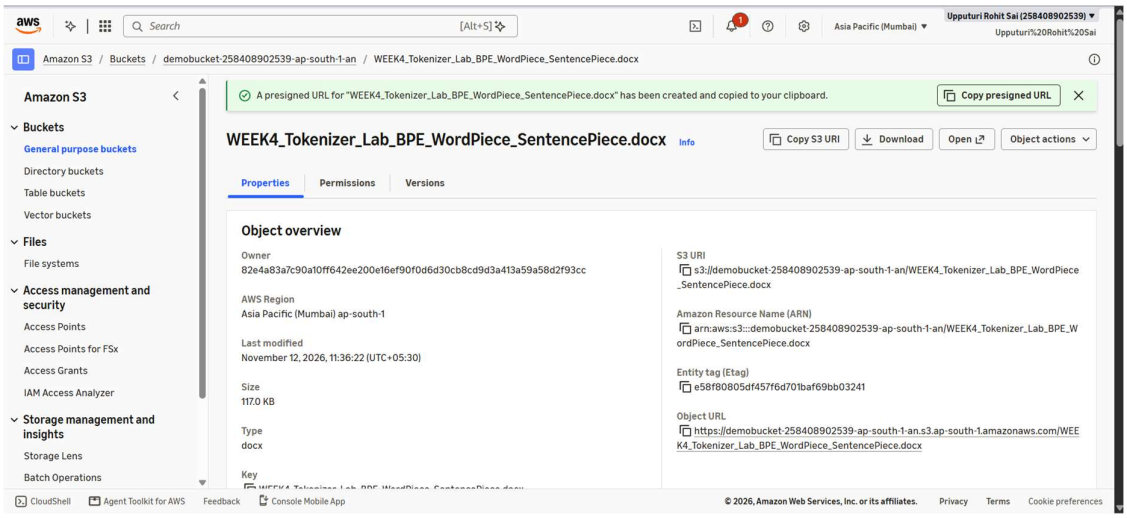

Opening the link in an incognito tab: the browser prompts to save the uploaded .docx file, showing that the object is accessible and downloadable.

