

Usama Rao 161120 Sami Ahmed 161132

CarPool

Bachelor of Science in Computer Science

Supervisor: Shoaib Malik

Co-Supervisor: Dr. Tauseef

Department of Computer Science

Air University, Islamabad

June 2020

Certificate

We accept the work contained in the report titled 'CarPool', written by Mr. Usama Rao AND Mr. Sami Ahmed as a confirmation to the required standard for the partial fulfillment of the degree of Bachelor of Science in Computer Science.

Approved by:
Supervisor:
Internal Examiner:
External Examiner:
Project Coordinator:
Head of the Department:

June, 2020

Table of Contents

\mathbf{A}	Abstract					vi	
\mathbf{A}	ckno	wledgr	nents				vii
1	Intr	oducti	ion				1
	1.1	Projec	et Backgr	ound/Review			1
	1.2	v	_	$\operatorname{ption}^{'}$			2
	1.3		-	ives			2
	1.4						2
	1.5		-	Project Report			2
2	${ m Lit}\epsilon$	erature	Review	r			4
	2.1	Defini	tion and	general principle			4
	2.2	Carpo	oling Typ	pes			5
		2.2.1	Regular				5
		2.2.2	Occasion	nal			5
		2.2.3	Eventua	d			5
	2.3	Advar	itages and	disadvantages of carpooling applications			5
		2.3.1		ages of carpooling			5
		2.3.2	Disadva	ntages of carpooling			6
3	Rec	_l uirem	ent Spec	cifications			7
		3.0.1	Existing	System for carpooling			7
		3.0.2		S			7
		3.0.3	Mobile .	Applications			7
	3.1	Propo		m			8
	3.2	Requi	rement S _J	pecifications			8
		3.2.1	Function	nal Requirements			8
			3.2.1.1	Table 1: Functional Requirement - 01			8
			3.2.1.2	Table 2: Functional Requirement - 02			8
			3.2.1.3	Table 3: Functional Requirement - 03			9
			3.2.1.4	Table 4: Functional Requirement - 04			9
			3.2.1.5	Table 5: Functional Requirement - 05			9
			3.2.1.6	Table 6: Functional Requirement - 06			10
			3.2.1.7	Table 7: Functional Requirement - 07			10
			3.2.1.8	Table 8: Functional Requirement - 08			10
			3.2.1.9	Table 9: Functional Requirement - 09			11

		3.2.2	Non-Fun	ctional Requirements	11
			3.2.2.1	Table 10: Non-Functional Requirement - 01	11
			3.2.2.2	Table 11: Non-Functional Requirement - 02	11
			3.2.2.3	Table 12: Non-Functional Requirement - 03	11
			3.2.2.4	Table 13: Non-Functional Requirement - 04	11
			3.2.2.5	Table 14: Non-Functional Requirement - 05	11
			3.2.2.6	Table 15: Non-Functional Requirement - 06	12
			3.2.2.7	Table 16: Non-Functional Requirement - 07	12
	3.3	Use C	ases		12
		3.3.1	Use Case	e Diagram	12
		3.3.2	Use Case	e Description	13
			3.3.2.1	Table 17: Use Case - 01	13
			3.3.2.2	Table 18: Use Case - 02	13
			3.3.2.3	Table 19: Use Case - 03	14
			3.3.2.4	Table 20: Use Case - 04	14
			3.3.2.5	Table 21: Use Case - 05	15
			3.3.2.6	Table 22: Use Case - 06	15
			3.3.2.7	Table 23: Use Case - 07	16
			3.3.2.8	Table 24: Use Case - 08	16
			3.3.2.9	Table 25: Use Case - 09	17
			3.3.2.10	Table 26: Use Case - 10	17
			3.3.2.11	Table 27: Use Case - 11	18
4	Daa	•			19
4	Des		A 7.		
	11	Syston	n Architoc		- 1 ()
	4.1				19 10
		4.1.1	High Lev	vel Context Diagram	19
	4.2	4.1.1 Design	High Lev Constrai	vel Context Diagram	19 19
	4.2 4.3	4.1.1 Design Design	High Lev Constrai Methodo	vel Context Diagram	19 19 20
	4.2	4.1.1 Design Design High-I	High Leven Constrain Methodo Level Desi	vel Context Diagram	19 19 20 21
	4.2 4.3	4.1.1 Design Design High-I 4.4.1	High Leval Constraint Methodo Level Designation Conceptus	vel Context Diagram	19 19 20 21 21
	4.2 4.3	4.1.1 Design Design High-I 4.4.1 4.4.2	High Leval Constraint Methodo Level Design Conceptor Process 1	vel Context Diagram	19 19 20 21 21 22
	4.2 4.3	4.1.1 Design Design High-I 4.4.1 4.4.2 4.4.3	High Level Constraint Methodo Level Desi Conceptor Process I	vel Context Diagram	19 19 20 21 21 22 23
	4.2 4.3	4.1.1 Design Design High-I 4.4.1 4.4.2	High Leval Constraint Methodo Level Design Conceptor Process I Physical Modules	vel Context Diagram	19 19 20 21 21 22 23 23
	4.2 4.3	4.1.1 Design Design High-I 4.4.1 4.4.2 4.4.3	High Level Constraint Methodo Level Design Concepts Process I Physical Modules 4.4.4.1	vel Context Diagram	19 19 20 21 21 22 23 23 23
	4.2 4.3	4.1.1 Design Design High-I 4.4.1 4.4.2 4.4.3	High Leval Constraint Methodo Level Desi Conceptor Process I Physical Modules 4.4.4.1 4.4.4.2	vel Context Diagram	19 20 21 21 22 23 23 23 23
	4.2 4.3	4.1.1 Design Design High-I 4.4.1 4.4.2 4.4.3 4.4.4	High Level Constraint Methodo Level Designation Process In Physical Modules 4.4.4.1 4.4.4.2 4.4.4.3	vel Context Diagram	19 19 20 21 21 22 23 23 23 24
	4.2 4.3 4.4	4.1.1 Design Design High-I 4.4.1 4.4.2 4.4.3 4.4.4	High Level Constraint Methodo Level Desi Conceptor Process I Physical Modules 4.4.4.1 4.4.4.2 4.4.4.3 Security	vel Context Diagram	19 19 20 21 21 22 23 23 23 24 24
	4.2 4.3 4.4	4.1.1 Design Design High-I 4.4.1 4.4.2 4.4.3 4.4.4 4.4.5 Low L	High Leval Constraint Methodo Level Design Concepts Process In Physical Modules 4.4.4.1 4.4.4.2 4.4.4.3 Security evel Design	vel Context Diagram	19 19 20 21 21 22 23 23 23 24 24 24
	4.2 4.3 4.4	4.1.1 Design Design High-I 4.4.1 4.4.2 4.4.3 4.4.4 4.4.5 Low L Datab	High Level Constraint Methodo Level Designation Process In Physical Modules 4.4.4.1 4.4.4.2 4.4.4.3 Security evel Designase Designation of the Constraint Process In Modules 4.4.4.1 4.4.2 4.4.4.3 Security evel Designase Designation of the Constraint Process In Methodological Pro	rel Context Diagram nts nts ology gn ual or Logical: UML Package diagram Interaction Diagram Deployment Diagram User Registration Driver Rider	19 19 20 21 21 22 23 23 23 24 24 24 24 25
	4.2 4.3 4.4	4.1.1 Design Design High-I 4.4.1 4.4.2 4.4.3 4.4.4 4.4.5 Low L Datab GUI I	High Level Constraint Methodo Level Designation Process In Physical Modules 4.4.4.1 4.4.4.2 4.4.4.3 Security evel Designate Designate Designation in Construction In Construct	rel Context Diagram nts nts ology gn ual or Logical: UML Package diagram Interaction Diagram Deployment Diagram User Registration Driver Rider	19 19 20 21 21 22 23 23 23 24 24 24 25 25
	4.2 4.3 4.4	4.1.1 Design Design High-I 4.4.1 4.4.2 4.4.3 4.4.4 4.4.5 Low L Datab GUI I 4.7.1	High Level Constraint Methodo Level Designation Process In Process In Physical Modules 4.4.4.1 4.4.4.2 4.4.4.3 Security evel Designate Designate Designation of the Process In International	rel Context Diagram nts nts logy gn ual or Logical: UML Package diagram Interaction Diagram Deployment Diagram User Registration Driver Rider Interface	19 19 20 21 22 23 23 23 24 24 24 25 25 26
	4.2 4.3 4.4	4.1.1 Design Design High-I 4.4.1 4.4.2 4.4.3 4.4.4 4.4.5 Low L Datab GUI I 4.7.1 4.7.2	High Level Constraint Methodo Level Designation Process In Process In Physical Modules 4.4.4.1 4.4.4.2 4.4.4.3 Security evel Designate Designate Designation Melcome Authentical Authentical Process In International In Process In International In International In International In International Intern	rel Context Diagram nts nts ology gn ual or Logical: UML Package diagram Interaction Diagram Deployment Diagram User Registration Driver Rider Interface cation Interfaces	19 19 20 21 21 22 23 23 23 24 24 24 25 26 26
	4.2 4.3 4.4	4.1.1 Design Design High-I 4.4.1 4.4.2 4.4.3 4.4.4 4.4.5 Low L Datab GUI I 4.7.1 4.7.2 4.7.3	High Level Constraint Methodo Level Designation Process In Process In Physical Modules 4.4.4.1 4.4.4.2 4.4.4.3 Security evel Designate Designate Designation in Welcome Authentic Type Sw	rel Context Diagram nts nts logy gn al or Logical: UML Package diagram Interaction Diagram Deployment Diagram User Registration Driver Rider Rider Interface cation Interfaces itching Interface	19 19 20 21 21 23 23 23 24 24 24 25 26 26 28
	4.2 4.3 4.4	4.1.1 Design Design High-I 4.4.1 4.4.2 4.4.3 4.4.4 4.4.5 Low L Datab GUI I 4.7.1 4.7.2	High Level Constraint Methodo Level Designation Process In Process In Physical Modules 4.4.4.1 4.4.4.2 4.4.4.3 Security evel Designate Designate Designate Authentic Type Sw. Rider International Physical Research Procession Research Procession Research Research Procession Research Process International Research Process In	rel Context Diagram nts logy gn lal or Logical: UML Package diagram Interaction Diagram Deployment Diagram User Registration Driver Rider Interface cation Interfaces itching Interface cerfaces	19 19 20 21 21 22 23 23 23 24 24 24 25 26 26 28 28

5	Syst	tem Implementation	32
	5.1	System Architecture	32
	5.2	Work Environment	32
		5.2.1 Hardware platforms	32
		5.2.2 Software platforms	33
		5.2.3 Work Tools	33
		5.2.4 Programming languages:	33
		5.2.5 Frameworks used:	34
	5.3	Database Management System	35
	5.4	Tools and Technology	36
	5.5	System requirements	36
	5.6	Security	36
	5.7	Rules	37
6	Syet	tem Testing and Evaluation	38
U	6.1	Graphical user interface testing	38
	0.1	6.1.0.1 Table 28: user interface testing	38
	6.2	Graphical user interface testing	38
	0.2	6.2.0.1 Table 29: Usability testing	39
	6.3	Software performance testing	40
	0.0	6.3.0.1 Table 30: user interface testing	40
	6.4	Compatibility testing	40
	0.1	6.4.0.1 Table 31: Compatibility testing	40
	6.5	Exception handling	41
	0.0	6.5.0.1 Table 32: Exception handling	41
	6.6	Security testing	41
	0.0	6.6.0.1 Table 33: Security testing	41
	6.7	Installation testing	42
	0.1	6.7.0.1 Table 34: Installation testing	42
			12
7		clusions	43
	7.1	Conclusion	43
	7.2	Future Work	44
Bi	bliog	graphy	45
\mathbf{A}	App	olication Workflow	47
В	Inte	erviews	48
\mathbf{C}	Stee	eple Analysis	50

List of Figures

3.1	Use Case Diagram	12
4.1	Context Diagram	19
4.2	Sub System	20
4.3	Package Diagram	21
4.4	Process Interaction Diagram	22
4.5	Deployment Diagram	23
4.6	Low Level Design	24
5.1	System Architecture	32
5.2	Example of a user mode in database	35

Abstract

In general, people have a hard time conciliating their schedules because of the way they move from one location to another. and students suffer from this the most especially since transportation between cities is not that great, As students, we think there should exist more suitable transportation solutions to places where transportation networks are short and cheap and helpful for students.

This report proposes a platform to help improve students mobility through carpooling, a way for vehicle owning students to share their private vehicle with non vehicle owning students in order to splitting and reducing costs. carpooling may be one of the best solutions when there is no other mean of transportation to a specific location but naturally it is not the only one. mobile applications take more and more part of everyone's lives, different services for carpooling with different features begin to compete with existing transportation solutions. some people start to prefer using new carpooling services over the traditional services represented by taxi services. carPool aims to promote carpooling by targeting students making it easier for them to adhere and use this system. by targeting students people will more likely join the service since its users are primarily other people form the same environment, to put the carpooling system in place, we have designed and developed an android mobile application with backend servers for users to access the carpooling service through their smartphones, additionally the application involves some features that are critical to the service. by using android development tools and libraries and efficient backend solutions we have managed to make the application simple but powerful as well, which makes this application very useful for the students to use.

The combination of the smart phone and the internet service is the trend of the future information development and software applications. mobile phones are the most commonly used communication tools. using mobile phones to obtain information is not only quick, but also more convenient shortcut to improve people's lives. in the paper, we propose the software development architecture based on web services. this framework introduces the three-layer architecture of web development into mobile phone software development. based on the three-layer architecture, the android based carPool system is developed.

Our app CarPool will be a unique carpooling application that would take benefits of the advantages of carpooling and try to improve and eliminate the disadvantages, all while focusing on making it a good carpooling experience for students. the realization of our project will go through the conceptual phase and then development phase. since making a good application requires good planning first.

Acknowledgments

We wish to thank various people for their contribution to this project.we would like to express our deep gratitude to Sir Shoaib Malik, our Project supervisor, for their patient guidance, enthusiastic encouragement and useful critiques of this project work. we would also like to thank Dr Touseef, our project co-supervisor for his advice and assistance in keeping our progress on schedule. we would also like to extend our thanks to the librarians of the Air University for their help in offering us the resources in running the program.

Finally, we wish to thanks our parents for their support and encouragement throughout our study.

USAMA, SAMI AHMED MALIK Islamabad, Pakistan

June 2020

Chapter 1

Introduction

What is CarPool?

1.1 Project Background/Review

Carpooling (also car-sharing, ride-sharing and lift-sharing) is the sharing of car journeys so that more than one person travels in a car, and prevents the need for others to have to drive to a location themselves.

Drivers and passengers offer and search for journeys through one of the several mediums available. after finding a match they contact each other to arrange any details for the journey(s). costs, meeting points and other details like space for luggage are agreed on. they then meet and carry out their shared car journey(s) as planned.

By having more people using one vehicle, carpooling reduces each person's travel costs such fuel costs, tolls and the stress of driving. authorities often encourage carpooling, especially during periods of high pollution or high fuel prices. car sharing is a good way to use up the full seating capacity of a car, which would otherwise remain unused if it were just the driver using the car.

In 2009, carpooling represented 43.5% of all trips in the United States and 10% of commute trips. the majority of carpool commutes (over 60%) are "fam-pools" with family members. in 2011, an organization called Greenock created a campaign to encourage others to use this form of transportation in order to reduce their own carbon footprint.

Carpooling, or car sharing as it is called in British English, is promoted by a national UK charity, carplus, whose mission is to promote responsible car use in order to alleviate financial, environmental and social costs of motoring today, and encourage new approaches to car dependency in the UK. carplus is supported by transport for London, the British government initiative to reduce congestion and parking pressure and contribute to relieving the burden on the environment and to the reduction of traffic related air-pollution.

Cabbing All the Way is a book written by author Jatin Kuberkar that narrates a success story of a carpool with twelve people on board. based in the city of Hyderabad, India, the book is a real-life narration and highlights the potential benefits of having a carpool

1.2 Problem description

Many vehicle-owning Students who commute on daily basis often have unoccupied seats in their vehicles. many non-vehicle owning students find it very difficult sometimes to find ride for travelling to and from university.

1.3 Project Objectives

Objective

- To Allow vehicle owning students to share their rides with other students for traveling to and from their institutes and cut down their fuel bills.
- To facilitate non-vehicle owning students for travelling to and from university easier and cheaper.

Goals

- Cost Effective: much Cheaper than cab services.
- Ease of getting ride: riders are easy approachable, which reduces the tension of finding and catching of local transport right on time.
- Fewer Cars on the road will have reduced fuel consumption which will make environment eco-friendly.

1.4 Project Scope

This project (CarPool) aims to develop an android based application for carpooling for students, this application allows vehicle owning students to submit rides for specific targets and allows passengers to reserve/request rides from drivers all while being secure and having a simple interface.

This application will help students save money and also reduce the pollution of the environment and effects of vehicles, this application focuses on serving needs of students. CarPool will be intended for the students in Air University and it will support android phones and tablets, users will need internet connection to use the application to offer or find a common route to travel.

The application will have a simple and easy interface, Users must register at first before using the application, after that they must choose between a driver or a passenger, a driver can offer a drive to a specific location while a passenger can find or request a ride to a location.

1.5 The Degree of Project Report

In our FYP-1, we presented our idea that how CarPool would be beneficial. the only purpose of FYP-1 was to present and defend the idea. We have completed both tasks successfully and we also developed some mockup screens to present our

idea.

However, in fyp-2, the task assigned to us was to develop a working application for two users: driver and rider along with the implementation of the core feature of our application, which was location tracking of driver and rider, fetching current location, use firebase it's real-time database which is a NoSQL fast database and displaying that location on the map using Google Map API.

Chapter 2

Literature Review

Carpooling

2.1 Definition and general principle

Carpooling (also car-sharing, ride-sharing and lift-sharing) is the sharing of car journeys so that more than one person travels in a car, and prevents the need for others to have to drive to a location themselves.

By having more people using one vehicle, carpooling reduces each person's travel costs such as: fuel costs, tolls, and the stress of driving. carpooling is also a more environmentally friendly and sustainable way to travel as sharing journeys reduces air pollution, carbon emissions, traffic congestion on the roads, and the need for parking spaces. authorities often encourage carpooling, especially during periods of high pollution or high fuel prices. car sharing is a good way to use up the full seating capacity of a car, which would otherwise remain unused if it were just the driver using the car.

In 2009, carpooling represented 43.5% of all trips in the United States and 10% of commute trips. the majority of carpool commutes (over 60%) are "fam-pools" with family members.

Carpool commuting is more popular for people who work in places with more jobs nearby, and who live in places with higher residential densities. carpooling is significantly correlated with transport operating costs, including fuel prices and commute length, and with measures of social capital, such as time spent with others, time spent eating and drinking and being unmarried. however, carpooling is significantly less likely among people who spend more time at work, elderly people, and homeowners.

Carpooling usually means to divide the travel expenses equally between all the occupants of the vehicle (driver or passenger). the driver does not try to earn money, but to share with several people the cost of a trip he would do anyway. the expenses to be divided basically include the fuel and possible tolls. But if we include in the calculation the depreciation of the vehicle purchase and maintenance, insurance and taxes paid by the driver, we get a cost around 20RS/km. There are platforms that facilitate carpooling by connecting people seeking respectively passengers and drivers. usually there is a fare set up by the car driver and accepted by passengers

because they get an agreement before trip start.

2.2 Carpooling Types

2.2.1 Regular

The car is often perceived as an extension of the personal space, the driver, alone in his vehicle is in a closed space; he is free to do what he likes: listen to the radio, sing, call with headsets etc. carpooling regularly is to share a dialogue, experiences, stories. in the United States an intermediate concept has developed between carpooling and the public transport line: the vanpool. These are minibuses chartered by an employer, a public authority or a private company and made available to a group of people who regularly make the same journey.

2.2.2 Occasional

This type of carpooling is mainly used for leisure or last minute departures. the linking is often done through websites or mobile applications, which can significantly reduce travel costs, but usually requires to carpool with one or more unknown. this type of carpooling is mainly used for leisure or last minute departures. the linking is often done through websites or mobile applications, which can significantly reduce travel costs, but usually requires to carpool with one or more unknown.

2.2.3 Eventual

Participants in an event (music festival, sporting event, wedding, associative or institutional meeting ...) can organize to carpool to the venue of the event. this one-time carpool has a special feature: all participants travel to the same place on the same date.carpooling is also used for departures on holidays or weekends, savings on a trip being even larger than the trip is long. So carpooling becomes an alternative of affordable and accessible transportation.

There are also "cultural" carpooling platforms to visit a cultural site: castles, museums, exhibitions, artists' studios, religious places, festivals, etc.

2.3 Advantages and disadvantages of carpooling applications

2.3.1 Advantages of carpooling

- The main advantage of rideshare solutions is cost saving, of course. depending on the agreement, a ride can be twice as cheap than traveling by conventional way.
- The car is not a gas cost only. there are some cost items for the maintenance, repair, parts replacement in your vehicle. If you reduce the time of car utilization, you reduce these costs.

- A fewer number of cars on the road can reduce the CO2 emission in the roads and make the air we breathe cleaner.
- Saving time. fewer cars fewer traffic jams. that is to say, it is possible to reach a destination point faster and find a parking place.
- Meeting new people. traveling together allows you to find good friends.

2.3.2 Disadvantages of carpooling

- Indecent passengers. some people can try to discount the price or even ask the driver to visit the place that is not on the scheduled route. and it is important to screen out such individuals at the very beginning of traveling.
- Indecent drivers. unfortunately, some drivers can play an unfair game as well. for example, drivers who take 5-6 people in a small car and ask for a high price.
- In some cases, a driver has to pick up each companion separately. it increases the time of traveling.
- Passengers can be not satisfied with the driving style of a car owner. in turn, the driver can be annoyed with an excessive volubility of companions, their untidiness or lack of manners

Chapter 3

Requirement Specifications

3.0.1 Existing System for carpooling

Many carpoolings applications and websites have been developed around the world. a similar carpooling system was developed in Massey University New Zealand by a group of students to allow students of Massey University, Albany campus to share their vehicle with non-vehicle owning students.

Following some examples of carpooling systems around the globe :

3.0.2 Websites

- New Zealand: https://www.asa.ac.nz/carpool
- Algeria: www.nroho.com, www.m3aya.com, www.nsogo.net
- Europe: BlaBlaCar.com, carpooling.com, GoMore.com
- France: covoiturage.fr
- USA: car.ma, www.rdvouz.com
- World: Outpost.travel, joinntravel.com, www.letsride.in

3.0.3 Mobile Applications

- New Zealand: ASA
- Algeria: YAssir, Nsogo, AMIR
- World: Uber, sRide, RideShare,
- USA: Uber, Lyft
- France: Karos, Wever, BlaBlaCar, OuiHop

3.1 Proposed System

Our purposed system is a "Carpool" application which is a ride sharing application designed just for students. students can login or signup to this application only via university email id to make sure that only enrolled students in a university used this application.

Vehicle owning students can share their rides with other students for traveling to and from their institutes and earn money.

3.2 Requirement Specifications

It involves functional and non-functional functionalities that must be performed by the system:

3.2.1 Functional Requirements

3.2.1.1 Table 1: Functional Requirement - 01

Identifier	FR-01
Title	Create Account
Requirement	Registered New User
Source	Supervisor, M. Shoaib Malik
Rationale	To registered new users
Restrictions and Risk	User can only be registered via university email
Dependencies	Android phone, Google API, Firebase server, Firebase Authentication
Priority	High

3.2.1.2 Table 2: Functional Requirement - 02

Identifier	FR-02
Title	Sign In
Requirement	Already registered
Source	Supervisor, M. Shoaib Malik
Rationale	It's essential to use this application
Restrictions and Risk	User must be registered on this application
Dependencies	Google API, Firebase server, Firebase Authentication
Priority	High

3.2.1.3 Table 3: Functional Requirement - 03

Identifier	FR-03
Title	Reset Password
Requirement	Already registered on this application.
Source	Supervisor, M. Shoaib Malik
Rationale	Reset user account password
Restrictions and Risk	Have access to university email
Dependencies	Firebase server, Firebase Authentication, Google Map Api
Priority	Low

3.2.1.4 Table 4: Functional Requirement - 04

Identifier	FR-04
Title	Switch to Driver / Rider
Requirement	Sign In
Source	Supervisor, M. Shoaib Malik
Rationale	Confirm the role of user
Restrictions and Risk	User have to choose only one role at a time.
Dependencies	Firebase server
Priority	Medium

3.2.1.5 Table 5: Functional Requirement - 05

Identifier	FR-05
Title	Vehicle Details (Driver)
Requirement	Choose vehicle type car / bike
Source	Supervisor, M. Shoaib Malik
Rationale	To make sure the vehicle type and detail
Restrictions and Risk	Nil
Dependencies	Firebase server
Priority	Medium

3.2.1.6 Table 6: Functional Requirement - 06

Identifier	FR-06
Title	Create Ride (Driver)
Requirement	Choose role of a driver
Source	Supervisor, M. Shoaib Malik
Rationale	Select riders from list
Restrictions and Risk	Driver have to choose only certain number of riders according to free seating capacity.
Dependencies	Firebase server, Google Map Api
Priority	Medium

3.2.1.7 Table 7: Functional Requirement - 07

Identifier	FR-07
Title	End Ride (Driver)
Requirement	Driver ends the ride.
Source	Supervisor, M. Shoaib Malik
Rationale	To make sure all riders dropped.
Restrictions and Risk	Nill
Dependencies	firebase server, Google Api
Priority	Medium

3.2.1.8 Table 8: Functional Requirement - 08

Identifier	FR-08
Title	Book Ride (Rider)
Requirement	Choose role of a rider.
Source	Supervisor, M. Shoaib Malik
Rationale	Select destination and pickup point
Restrictions and Risk	Rider have to choose only available pickup point.
Dependencies	Firebase server, Google Map Api
Priority	Medium

3.2.1.9 Table 9: Functional Requirement - 09

Identifier	FR-09
Title	Ride End (Rider)
Requirement	Driver pick the rider
Source	Supervisor, M. Shoaib Malik
Rationale	To make sure that driver drops a rider to destination.
Restrictions and Risk	Nil
Dependencies	Firebase server
Priority	Medium

3.2.2 Non-Functional Requirements

3.2.2.1 Table 10: Non-Functional Requirement - 01

Identifier	NFR-01
Title	User Authentication
Requirement	User must be registered via university email id

3.2.2.2 Table 11: Non-Functional Requirement - 02

Identifier	NFR-02
Title	Real time location tracking
Requirement	Mobile phone must be provide accurate GPS location of device.

3.2.2.3 Table 12: Non-Functional Requirement - 03

Identifier	NFR-03
Title	Multi-user system
Requirement	Efficient use of the system when the user increases.

3.2.2.4 Table 13: Non-Functional Requirement - 04

Identifier	NFR-04
Title	Internet connection
Requirement	User device must have a internet connection.

3.2.2.5 Table 14: Non-Functional Requirement - 05

Identifier	NFR-05
Title	Device compatibility
Requirement	Use of latest APIs and application must support most of android phone versions

3.2.2.6 Table 15: Non-Functional Requirement - 06

Identifier	NFR-06
Title	User friendly application
Requirement	Easy interface of application, not makes a user to think twice.

3.2.2.7 Table 16: Non-Functional Requirement - 07

Identifier	NFR-07
Title	Application limited to university students
Requirement	Only students with university email able to use bus system

3.3 Use Cases

3.3.1 Use Case Diagram

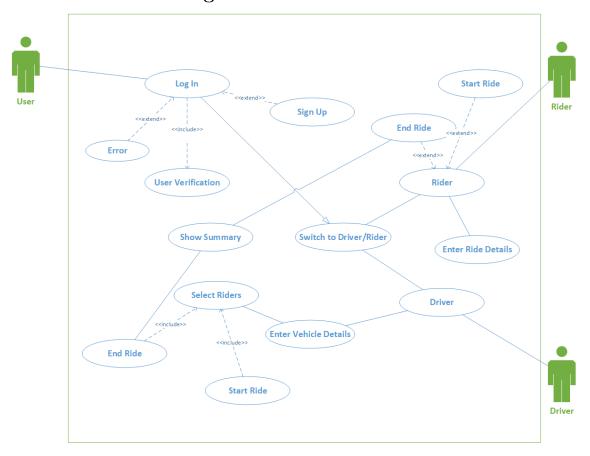


Figure 3.1: Use Case Diagram

3.3.2 Use Case Description

3.3.2.1 Table 17: Use Case - 01

Use Case ID:	UC-01
Use Case Name:	Login
Actors:	Rider, driver
Description:	Signing in to use the application
Trigger:	Perform certain tasks based on user type
Preconditions:	Splash screen
Postconditions:	Home screen based on user type
Normal Flow:	Successful sign in
Alternative Flows:	Sign in failed, try again or reset password
Exceptions:	The account doesn't exist
Includes:	Verify password
Assumptions:	User has an account
Notes and Issues:	nil

3.3.2.2 Table 18: Use Case - 02

Use Case ID:	UC-02
Use Case Name:	Sign Up
Actors:	Driver, Rider
Description:	To use this application registration is required
Trigger:	Registered on this application
Preconditions:	Enrolled in a university
Postconditions:	Have access to university email for account verification
Normal Flow:	Log in to application
Alternative Flows:	Not eligible for registration
Exceptions:	II.iit. Fit is not soulf of
Exceptions:	University Email is not verified
Includes:	Must have access to university email
A	TT : 41 1 · · · ·
Assumptions:	User is enrolled in a university
Notes and Issues:	User can be registered only via university email

3.3.2.3 Table 19: Use Case - 03

Use Case ID:	UC-03
Use Case Name:	Select User Type
Actors:	Driver, Rider
Description:	Switch according to your need
Trigger:	User Switch to particular user type
Preconditions:	Login
Postconditions:	User either act as a rider or driver
Normal Flow:	Switch to splash screen according to user type
Alternative Flows:	Nil
Exceptions:	Nil
Includes:	over mare to encode over type
Assumptions:	Both type users are university students.
Notes and Issues:	Nil

3.3.2.4 Table 20: Use Case - 04

Use Case ID:	UC-04
Use Case Name:	Driver
Actors:	Driver
Description:	User can acts as a driver
Trigger:	User acts as a driver
Preconditions:	User type switch screen
Postconditions:	User select riders
Normal Flow:	User is now acts as a driver
Alternative Flows:	Nil
Exceptions:	Nil
Includes:	User must have vehicle
Assumptions:	Driver must be student
Notes and Issues:	Nil

3.3.2.5 Table 21: Use Case - 05

Use Case ID:	UC-05
Use Case Name:	Rider
Actors:	Rider
Description:	User can acts as a rider
Trigger:	User acts as a rider
Preconditions:	User type switch screen
Postconditions:	Enter ride details
Normal Flow:	Now user acts as a driver
Alternative Flows:	Nil
Exceptions:	Nil
Includes:	addit to not remote or many person
Assumptions:	
Notes and Issues:	Nil

3.3.2.6 Table 22: Use Case - 06

Use Case ID:	UC-06
Use Case Name:	Enter vehicle details
Actors:	Driver
Description:	User acts as a driver and enter the vehicle detail
Trigger:	Enter vehicle details
Preconditions:	Switch to driver
Postconditions:	Select riders
Normal Flow:	Select vehicle type and enter vehicle details
Alternative Flows:	Nil
Exceptions:	Nil
Includes:	User vehicle details update to database server
Assumptions:	Nil
Notes and Issues:	Nil

3.3.2.7 Table 23: Use Case - 07

Use Case ID:	UC-07
Use Case Name:	Enter ride detail
Actors:	Rider
Description:	Show current location of rider and rider have to select pickup point and drop off points.
Trigger:	Display user current location on map and pickup points list .
Preconditions:	User switch to rider mode.
Postconditions:	Wait for driver
Normal Flow:	Display current location from GPS and show list of drop off and pick up points.
Alternative Flows:	Nil
Exceptions:	Device GPS location access not given by user
Includes:	Loading current location from GPS and update data to server
	Nil
Notes and Issues:	Nil

3.3.2.8 Table 24: Use Case - 08

Use Case ID:	UC-08
Use Case Name:	Start ride (Driver)
Actors:	Driver
Description:	After selection of passengers, driver has to start a ride
Trigger:	Start ride
Preconditions:	Select riders from list
Postconditions:	Drop riders and end ride
Normal Flow:	Ride is start and notified detail of driver to riders
Alternative Flows:	Ride cancel
Exceptions:	Riders not available
Includes:	Must have to select riders to start ride
Assumptions:	Riders available
Notes and Issues:	Nil

3.3.2.9 Table 25: Use Case - 09

Use Case ID:	UC-09
Use Case Name:	Start Ride (Rider)
Actors:	Rider
Description:	Start ride when driver pick up the rider
Trigger:	Start ride
Preconditions:	Enter ride details
Postconditions:	End ride
Normal Flow:	Start ride and display driver details to rider
Alternative Flows:	Nil
Exceptions:	Driver is not availabe
Includes:	Must enter ride details
Assumptions:	Driver available
Notes and Issues:	Nil

3.3.2.10 Table 26: Use Case - 10

Use Case ID:	UC-10
Use Case Name:	End ride (Driver)
Actors:	Driver
Description:	After drops the riders end the ride and summary of current ride is shown.
Trigger:	Ride End and show summary
Preconditions:	Start Ride
Postconditions:	Show summary
Normal Flow:	Successfully end ride and show summary of current ride
Alternative Flows:	Nil
Exceptions:	Nil
Includes:	Driver drops all riders to their drop off locations
Assumptions:	Nil
Notes and Issues:	Nil

3.3.2.11 Table 27: Use Case - 11

Use Case ID:	UC-11
Use Case Name:	End ride (Rider)
Actors:	Rider
Description:	Ride is end by rider and show the summary of ride
Trigger:	End ride and show ride details
Preconditions:	Pick up by driver
Postconditions:	Show summary of ride
Normal Flow:	Successfully ride End and show summary of ride.
Alternative Flows:	Nil
Exceptions:	Nil
Includes:	Driver drops the rider to their drop off location
Assumptions:	Nil
Notes and Issues:	Nil

Chapter 4

Design

4.1 System Architecture

4.1.1 High Level Context Diagram

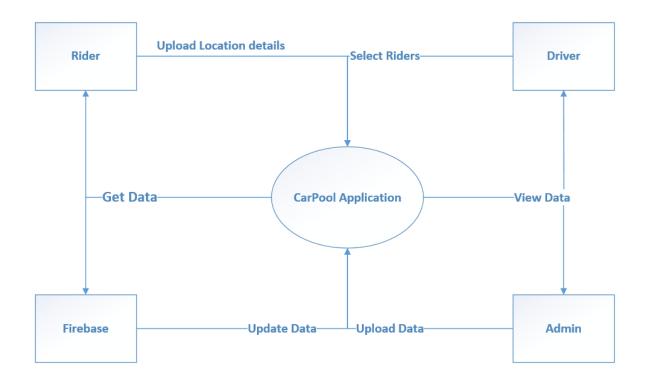


Figure 4.1: Context Diagram

4.2 Design Constraints

In our application we add a list of pick up points for the ease of drivers. This is made easier when clients can select pick up points and drivers reach the destination

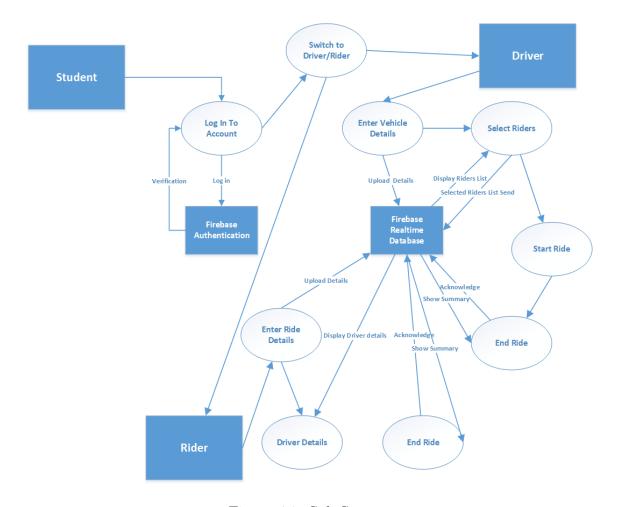


Figure 4.2: Sub System

without hassle. due to the COVID-19 pandemic, we could not be supervised and guided properly. hence this process was not added and executed.

4.3 Design Methodology

The design of a project is important for the structure of the application by using UML (Unified Modeling Language) which is a general purpose modelling language, that aims to define a standard way to visualize the way a system has been designed. It is quite similar to blueprints used in other fields of engineering.

Reasons to use UML for project analysis and design are:

- Complex applications need collaboration and planning from multiple teams and hence require a clear and concise way to communicate amongst them.
- A lot of time is saved down the line when teams are able to visualize processes, user interactions and static structure of the system. these project designs will try and make the overall idea of the project more understandable and clear by identifying actors and functional / non-functional needs, and also all the diagrams needed to give a clear view about this project.

4.4 High-Level Design

4.4.1 Conceptual or Logical: UML Package diagram

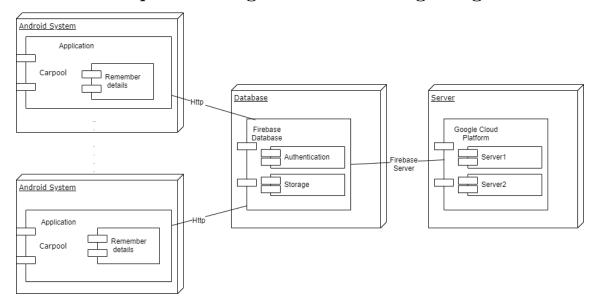


Figure 4.3: Package Diagram

4.4.2 Process Interaction Diagram

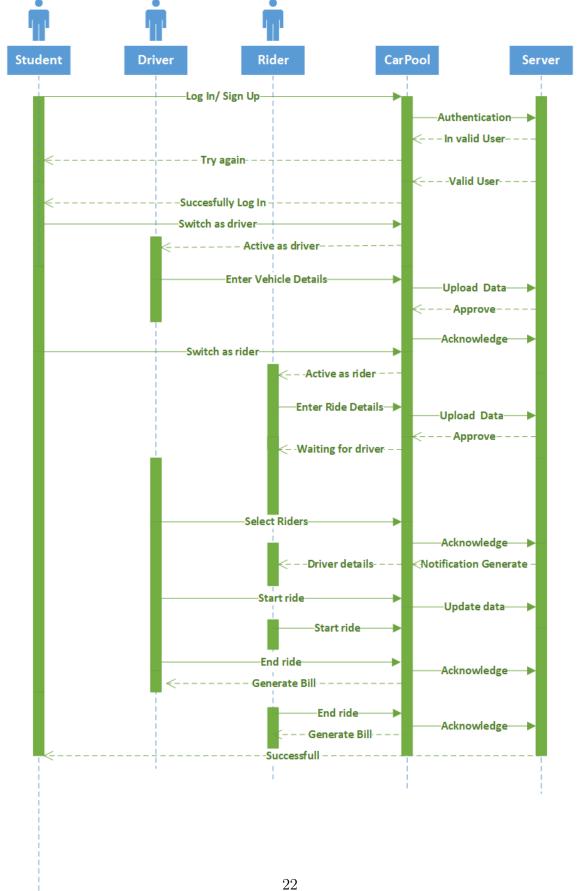


Figure 4.4: Process Interaction Diagram

4.4.3 Physical Deployment Diagram

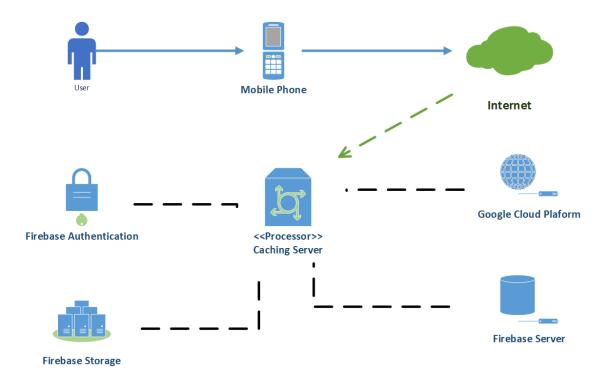


Figure 4.5: Deployment Diagram

4.4.4 Modules

The application is divided into three modules

- User Registration
- Driver
- Rider

4.4.4.1 User Registration

In this module, the user must register their credentials to use this application. users should be student and currently enrolled in Air University. the user should enter the details first name, last Name, student email, university registration id, contact no, password. so user using these registration details will be able to use application. this authentication process to avoid someone malpractice as this application is verifying student details.

4.4.4.2 Driver

In this module, the user acts as a driver. this module is consist of 8 activities which contains 2 fragments (map, passenger list), the driver can use the map fragment to see the passenger pickup points and current location and passenger list fragment to see the list of passengers. driver module also contains the activities of enter vehicle details, summary of ride.

4.4.4.3 Rider

In this module, the user acts as a rider. this module is consist of 4 activities which contains 2 fragments (map, driver details), the passenger can use the map fragment to see the pickup point and current location and driver detail fragment to see the detail of driver. rider module also contains the activities to enter trip detail, summary of ride.

4.4.5 Security

This application should never disclose any personal information of any user, and should collect no personal information from it's own users.

4.5 Low Level Design

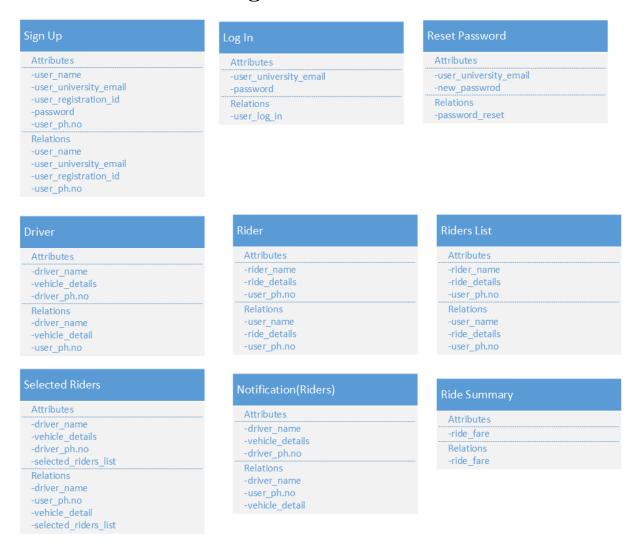


Figure 4.6: Low Level Design

4.6 Database Design


Firebase platform provides a cloud-hosted realtime database. It is a NoSQL cloud database. data synchronizes among all clients and stays available even when the app goes offline. as it is a NoSQL database, so its functionality is different as compared to a relational database. the data is stored in the form of collections and documents. there is no relationship between classes, so there won't be any schema of our database. data gets stored as JSON objects, it is more like a cloud-hosted JSON tree, when a person adds data to the JSON tree, it becomes a node in the existing JSON structure with an associated key, the best method is to use the denormalization technique; using which we split data into separate paths, it becomes easier to download the data in separate calls as required.

4.7 GUI Design

Our application contains more than fifteen screens, different screens based on user type are:

4.7.1 Welcome Interface


This is the interface that shows up to the user when he's open the application, this interface is composed of the application's name, a logo and a slang which describe the application alongside an "Get Started" button which lets the user to log in screen.

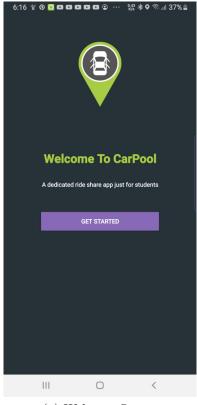

(a) Welcome Screen

4.7.2 Authentication Interfaces

The authentication interface is made as simple as possible while also being very beautiful and professional, it utilizes firebase auth as a backend which allows for a secure connection to the database plus encrypted passwords for extra security, this interface also contains options to recover password in case the user has forgotten their password.

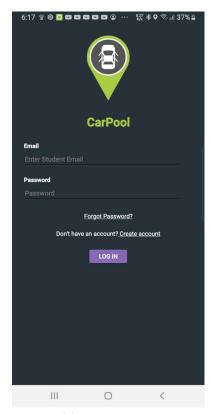

Register Yourself

Name University Card Name

ID University ID

Email Student Email

Phone Contact No.

Password Minimum 8 character

Read Agreement

Accept

SUBMIT

(a) Login Screen


(b) Signup Screen



(a) Forgot Password Screen

4.7.3 Type Switching Interface


This is the interface that shows up to the user when he's logged in into the application, this interface is composed of the application's name and a logo alongside a switch button, which lets the user to their selected user type interface.

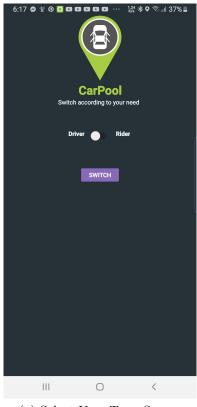


(a) Select User Type Screen

4.7.4 Rider Interfaces

These interfaces are used by the passengers to post a ride details for drivers to see and select riders, these interfaces is extremely customizable and professional, by using Google Places API, Google Direction API, Google Map API in these interfaces. we have created a very organized and efficient algorithm to optimize the results when Passengers search for a driver, when rider picks an origin and a destination using Places AutoComplete API, the algorithm uses a combination of Geolocation and Places API to find the full address, city and sub city, then it converts the city into a number and saves all the information in the trip object for it to be saved into the database later.

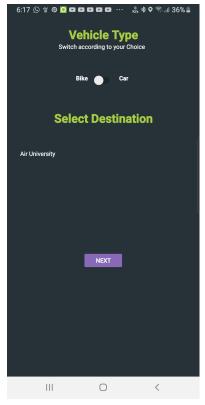


(a) Enter Ride Detail Screen

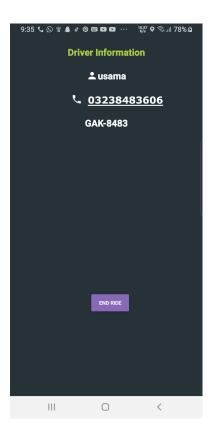

(a) Driver Detail Screen




(b) Map Screen

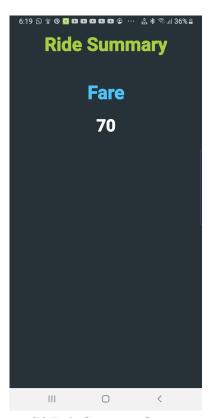


(b) Ride Summary Screen

4.7.5 Driver Interfaces


These interfaces are used by rider to enter vehicle detail, see and select the passengers for trip, these form is extremely customizable and professional, by using Google Places API in this interface we have created a very organized and efficient algorithm to optimize the results, When the driver select riders using Places AutoComplete API, the algorithm uses a combination of Geolocation and Places API to find the full address, city and sub city, then it converts the city into a number and saves all the information in the trip object for it to be saved into the database later.

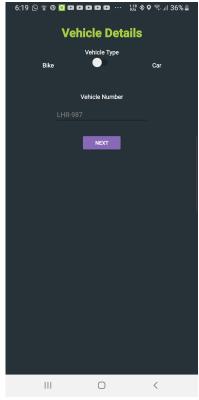


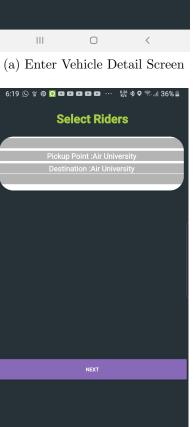

6:19 🕓 🕏 🕡 🖸 🖸 🗗 🗗 🗗 🕦 🕶 🕶 😘 🖠 🕈 🗣 🛸 제 36% 🖺 SECTOR W COLONY COLONY COLONY صدیق کالونی Y BLOCK BLOCK X Street 3 Str BAHAR COLONY BAHAR COLONY NABI PURA شادمان كالونى SHADMAN MIRAN-JE TOWN III0

(b) Driver Map Screen

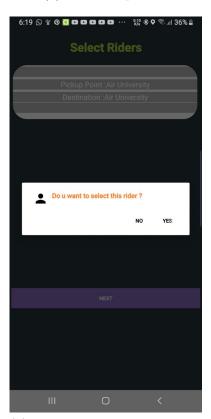


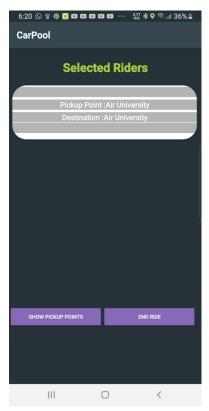

(a) Selected Passengers Screen



(b) Passengers Pickup Points Screen

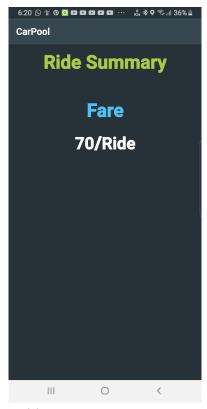

(a) Driver Summary Screen

Chapter 5

System Implementation

5.1 System Architecture

application architecture is a set of technologies and models for the development of fully-structured mobile programs based on industry and vendor-specific standards. as we develop the architecture of our application, we also consider programs that work on wireless devices such as smartphones and tablets.

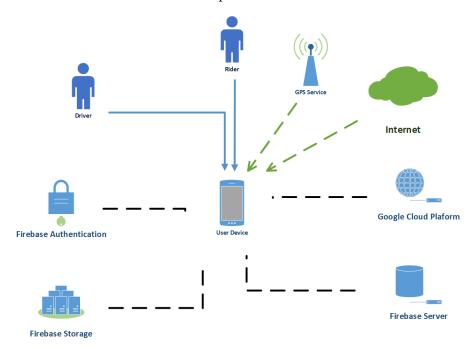


Figure 5.1: System Architecture

5.2 Work Environment

5.2.1 Hardware platforms

For the development of this application we have used an Hp Elitebook workstation 8460w it fairly powerful and could handle the usage of multiple emulators at once.

Full specifications:

• Processor : Intel® Core™ i7-2630QM Processor (2.0 GHz, 6 MB L3 Cache)

• Memory: 12GB 1333 MHz DDR3 SDRAM (2D)

• Graphics : AMD FirePro[™] M3900 w/1 GB gDDR3

• HDD Drive : 1TB

For the testing of the application on a real device we have used an android phone Samsung Galaxy Note 8, Huawei Mate 10 Pro.

5.2.2 Software platforms

As for the software part of the work environment we have used several tools and frameworks alongside different versions of android.

5.2.3 Work Tools

• Operating System : Windows

• IDE: Android Studio 3.2.1

• Emulators: Pixel 3 Android 9 / Nexus 5 Android 6

• Real Device OS: Android 9 Pie (Samsung Galaxy Note 8)

• Backend Management: Firebase Platform

• Places and Map Tools: Google Cloud Platform

5.2.4 Programming languages:

• Application Programming : Java

Motivation: Java code is inherently safer than Kotlin code because it prevents common programming mistakes by design, resulting in fewer system failures and application crashes. when using Kotlin, certain error causes are more likely to occur again.

• Layout Design : XML

• Database Language : NoSQL

5.2.5 Frameworks used:

- **Firebase Auth**: this framework that lets you implement easy authentication in this application email and phone number authentication was used.
- Firebase Real-time Database: this framework is used as our main database for this application it lets you read and write data from firebase in a NoSQL structure.
- Firebase Storage: this framework is used to upload and download data such as photos and videos, this is used to store user pictures for our database.
- **Firebase Messaging**: a framework that makes real time messaging easy and possible using firebase, it's also used for push notifications, this used for our messaging function between users in our application.
- Google Maps API a great API used for MapView that enables the application to show places on the map like the origin and destination and the way between them, it's used in the map to trace the destination on the map for users.
- Google Places API: a very powerful API used to give information about places in the application and used to AutoComplete search queries, it's used to auto complete search queries for our users for easier searching, it's also used to optimize our search function.
- Material Design Library: material design Library with all of its components such as material buttons, material EditText etc.
- RuntimePermission: a small library to help manage android permissions with no problems.
- **DxLoadingButton**: a small library with a loading button used for authentication.
- StfalconImageViewer: a simple and customizable android full-screen image viewer with shared image transition support, "pinch to zoom" and "swipe to dismiss" gestures.
- Spinner: a styleable drop down menu for android using the old spinner style.
- **Tooltip**: simple to use customizable android Tooltips library based on popup window.
- EasyValidation: a text and input validation library in Java for android. used to validate user input info.
- Retrofit: type-safe HTTP for android and Java.

5.3 Database Management System

To manage the backend of our application we decided to use firebase real-time database alongside with firebase Auth and Firebase Storage.

• Firebase Real-time Database

it's a database structured in a NoSQL way, it's usage is very easy and very fast, we have used this database to store User objects which contain all the information about the user such as name, email, number etc., we have also used it to store trip and trip request objects . **example of the user node in the database**

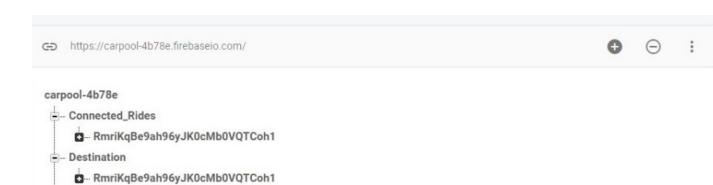


Figure 5.2: Example of a user mode in database

• Real-time Database Usage

■ PpkDXPpaFLhNtQbidyBO90t5SAx2
■ RmriKqBe9ah96yJK0cMb0VQTCoh1

For the usage of this database a separate database class was made on Java this class contains all database related functions the functions require a listener interface that has onStart(), onSuccess(), onFailed(), the interface is used to listen to changes in other classes.

The reason for creating a separate class with a listener interface is to make migration to another database easier. If we ever decide to switch to another database we will only change the content of the database class which would make changes faster, more professional and effective.

Firebase's real-time database allows you to use different query methods to fetch data from its Database:

The first method is using addListenerForSingleValueEvent, this method listens to changes in data for one time and does not trigger until it's called again, this is good for fetching data only once.

The second method is using addValueEventListener, this method listens to data every time it changes and it also triggers every time it changes this is

good for things like messages and real time updates.

We have decided to use addListenerForSingleValueEvent for most of our data fetching, the reason is each time data has been read, Firebase charges for it, which means it the less data is fetched the better, for this we have avoided using addValueEventListener instead we fetch the data once and save it locally, when the data is changed the user is required to refresh the page to get updates. however in cases where it's important to get updates in real time like in messages we have used addValueEventListener.

5.4 Tools and Technology

- Android
- Firebase Platform
- Google Cloud Platform
- Android Studio
- Java Language
- Google Maps API
- Google Direction API
- Google Places API

5.5 System requirements

- Android phone with Minimum SDK android API 19 Kit Kat
- Google Play Services
- GPS service
- Internet Connection

5.6 Security

• Firebase Authentication

Firebase authentication is a very fast and secure way to sign users into our application it is used to log in and register users into our database in our case we are using the email verification, a user must verify his email to complete the registration.

• Authentication Usage

When a user registers, his basic information (Name, Email, Password) are registered in the Auth database but not the real time Database, after that users are welcomed with a finish registration activity, in this activity they have to verify their email using EMAIL verification, this method is used to prevent spam and multiple account creations, after verification and filling other information user data is saved on the real time database. as for the log in the system checks data and logs users if it's correct.

5.7 Rules

Some of the restriction and rules are mentioned below:

- User can be used one account for both driver and rider.
- Users cannot modify anyone else's data except theirs.
- Only the admin can modify the data of other users.
- The driver cannot select more than three riders.
- The rider can only contact with their driver.
- A rider have to select pick up and drop off points.
- Driver, rider cannot use the app until their accounts are verified.

Chapter 6

System Testing and Evaluation

6.1 Graphical user interface testing

6.1.0.1 Table 28: user interface testing

No	Test Objective	Test Step	Expected Result	Result
1.	Check the color and	Make boundaries	Buttons size and	Affirmative
	size of buttons on the	visible after activating	color must be same	
	home screens of	developer mode in your	in all user	
	different users.	android phone	dashboards	
		Open all the users		
		home screen one by one		
		and you will feel the		
		difference		
2.	Make sure that icons	1) Open your app on the	Icons appearance	Affirmative
	pixels won't fall when	screen of different sizes.	would be the same	
	the app would be		on all screens.	
	opened on different			
	screen sizes.			
3.	Ensure the ripple	1) Check by pressing all	Ripple effect will	Affirmative
	effect working on all	the buttons added in-app.	generate when you	
	buttons.		will press button	
4.	Is text visible on	1) Open the app on small	The text is readable	Affirmative
	smaller screens?	screens.	by the user.	
5.	Buttons must be	1) Press the buttons that	The user was able to	Affirmative
	separated by some	are placed together or	press the desired	
	distance so the user	have little distance	button with his	
	won't press the wrong		thumb	
	button.			

6.2 Graphical user interface testing

6.2.0.1 Table 29: Usability testing

No	Test Objective	Test Step	Expected Result	Result
1.	To check registered on	1) Press the sign up	User will be able to	Affirmative
	CarPool .	button.	use this application.	
		Fill the form. Accept only university		
		email for sign up.		
		4) Send verification email		
		on email.		
		5) After verification		
		process account has been		
2.	Forgot Passwrod ?	created. 1) Click the forgot	Account password	Affirmative
<u> </u>	roigoti asswiou :	password button.	reset.	Allilliative
		Text box will appear		
		enter registered email.		
		Press reset button email		
		has been sent to your		
		email. 4) Check your email and		
		set your new password.		
		, ,		
3.	Login to Carpool	Enter registered email.	User login to	Affirmative
	application.	Enter account	application	
		password. 3) Press login button.		
4.	Select user type driver.	Login in to the	User act as a driver.	Affirmative
"		application.		
		Switch button to driver		
		type.		
		Enter vehicle details and press next button to		
		update details in database.		
5.	Check as If a driver	Login as a driver.	Riders selected and	Affirmative
	can select riders.	Enter vehicle details.	send driver details to	
		Show riders list.	riders.	
\sqsubseteq		4) Select riders.	<u> </u>	
6.	Check can driver see	Select riders. Display list of selected	Driver will be able	Affirmative
٥.	pick up points of	riders on screen.	to see the pickup	Ammanve
	selected riders ?	Press button show pick	points of riders.	
		up points.		
		Display pick up points		
	D	of riders on map.	D:1 1 00	V 00 1.
7.	Drop off riders on different location.	Select rider pop up will appear.	Rider drop off on their location.	Affirmative
	different focation.	2) Press drop off.	aicii iocatioii.	
		Rider eliminate from		
		pick up list		
8.	Ride summary	Drop off all riders one	Display ride	Affirmative
	display.	by one or press the end	summary.	
		ride button . 2) Ride summary will		
		appear.		
9.	Select user type rider.	1) Login in to the	User act as a rider.	Affirmative
		application.		
		Switch button to rider		
		type.		
		Rider have to select		
		destination and pick up point.		
		4) Press next button and		
		user current location, drop		
		off and pick up point		
I		display on map.		

10.	Notify details of driver to rider.	1) After enter ride details a waiting screen will display. 2) When rider select by driver details of driver will be display on rider screen. 3) When driver pick up rider press start ride	Details of driver will be shown to rider.	Affirmative
11.	Show summary of ride to rider.	button. 1) when driver drop off rider press end ride button. 2) Ride summary display on screen.	Show ride summary.	Affirmative

6.3 Software performance testing

6.3.0.1 Table 30: user interface testing

No	Test Objective	Test Step	Expected Result	Result
1.	To check as if the app	Create multiple	The speed of the app	Affirmative
	would work smoothly	accounts and put ride	won't be affected.	
	when multiple riders	details.		
	selected by a driver.	Select by single driver.		
2.	Check the speed of the		The speed of the app	Affirmative
	app after registered	it used to work with	won't be affected.	
	multiple accounts.	twenty complaints.		
3.	To check firebase	Ask multiple drivers to	App performance	Affirmative
	cloud speed.	enter vehicle details and	won't be affected.	
		select riders from list.		
		Ask multiple riders to		
		enter ride details and		
		selected by drivers].		

6.4 Compatibility testing

6.4.0.1 Table 31: Compatibility testing

ľ	Vо	Test Objective	Test Step	Expected Result	Result
]		To check as if the location of the user	Sign in to the driver and rider account.	It will keep on updating the current	Affirmative
		keeps on updating when user is moving.		location.	
2		Ensure the readability of text on different screens.	Open your app in different screen sizes.	able to read the text on small screens	Affirmative
a,	١.	Push Notifications keep on coming on different mobile devices.	Using the app on different android versions.	Notifications would display on the notification screen.	Affirmative

6.5 Exception handling

6.5.0.1 Table 32: Exception handling

No	Test Objective	Test Step	Expected Result	Result
1.	Only university email format required for signup; Invalid email won't be accepted.	Enter the email while registering your account.	Registration successful.	Affirmative
2.	If email is not verified by, the user won't be able to sign in the app.	Verification email has been sent to email, when he registers an account.	Account verification done.	Affirmative
3.	An invalid phone number is not allowed.	Write a valid number.	The phone number verified.	Affirmative
4.	Users not allowed to enter the same email twice.	Enter a new email if you want to register your account.	The unique email entered and account approval request sent to admin.	Affirmative
5.	The app won't crash if user do not allow location permission.	Application ask to access the user current location.	App working fine.	Affirmative
6.	Users can't edit roll number or email after signup.	Register your account.	Unable to edit email or roll number.	Affirmative
7.	Only selected riders will be notify by driver details.	Select riders from list and send detail of driver to specific riders only.	Notify the details of drivers to selected riders.	Affirmative

6.6 Security testing

6.6.0.1 Table 33: Security testing

No	Test Objective	Test Step	Expected Result	Result
1.	Eliminate the risk of password leakage when someone tries to guess the password of the user.	Try to guess the password of some random user.	It won't work as the user was forced to create a strong password involving numbers and symbols during the signup process.	Affirmative
2.	Prevention of a denial of service attack by an attacker.	Detect vulnerabilities in the application layer.	Denial of service attack passed.	Affirmative
3.	Reduce the risk of SQL injection.	User is unable to write a query in any text box with the use of proper validation in different forms.	Validations stopped the execution of the query.	Affirmative
4.	To validate an attacker from accessing sensitive data.	Try to extract extra data from the admin side.	Data won't be extracted with the proper use of validations.	Affirmative
5.	To analyze the vulnerability of file system interactions.	Allowing the user to only add jpg/png files while uploading fees challan.	Malicious data won't get uploaded.	Affirmative

6.7 Installation testing

6.7.0.1 Table 34: Installation testing

No	Test Objective	Test Step	Expected Result	Result
1.	Install the app on different android versions starting from 4.4 to 9.0.	Install the app using the apk file.	The app would be installed successfully.	Affirmative
2.	To check as if an app installed with all resources.	Open the app.	App working as explained by the developer.	Affirmative
3.	Try uninstalling the app from the android phone.	Click on uninstall option		Affirmative

Chapter 7

Conclusions

7.1 Conclusion

The implementation from a concept to a real application was extremely challenging but it was very effective and full of experience, the final application turned out to be very professional and organized, it contained all necessary features to make both the driver and the passenger feel comfortable using it from design to backend features everything is checked. after a lot of testing and bug fixes the application finally reached a final state with no known bugs.

We have implemented all functional needs and non-functional needs and some of the optional needs, some additional features were added to make the application more usable but the core concept stayed the same since it offers all the mentioned features and needs in the project description it also respects the optimization needs such as good code design style, small application size (9mb) and targeting as many android devices as possible.

By using Java which is the official programming language for android we have made sure that the code was well structured as well as optimized, since android itself is built on Java, there are plenty of Java libraries to your aid. also, Java has a wide open-source ecosystem. Java apps are lighter and more compact, even when compared to Kotlin apps, resulting in a faster app experience. Java yields a faster build process too, letting you code more in less time. Thanks to the accelerated assembly with gradle, assembling large projects becomes easier in Java.

As for the backend my best choice was firebase because it's very powerful and simple to use especially for beginners, it also contains a free usage tier with good performance. the application does its best to optimize the backend for both database usage and user experience. firebase provided all necessary backend functions which made making a professional application in time possible.

By using all the tools and libraries available and by using all knowledge of data structures and object-oriented programming we were able to make a well-designed application that could be used with no problems and didn't lack any important features, this implementation was definitely helpful to my career since implementing a concept into a real Application gives good knowledge of the development environment.

7.2 Future Work

There are many ways in which this application could be improved upon. some of the features for the application which are not yet present, but could be implemented in future development. Our group has primarily been focusing on the functionality and simplicity of this application. If time allows, we will try to make the GUI more colourful and elegant, but there will always be room for betterment in this segment. there can also emerge other technologies in the future which can be useful in enhancing the performance of this application.

Registering application with Google service and uploading it into Google Play Store.

Final Conclusion

By the time the application was finished we can look back and tell how much we have learned from this project. so many things that should have been done differently in terms of implementation and design concept, so many additional features that an application like this has to have to be useful and competitive.

When the application was first being designed there were so many concerns that were not considered and by the time the testing happened and after all that time developing it we have realized that we learned so many things in terms of concept design and code optimizations and because of that we modified so many things since we started working on the implementation just to make the application more efficient and optimized. this proves that working on this project made us learn so many things about software development in general, not only that but we also learned how to make better conceptual design and learned how to turn an idea into a real application.

Building the application from the ground up was a great experience, the most important thing that we learned and after doing so much work is, in this type of software/product it is difficult to reach a final state so it is very important to deliver and get a first raw version and then fast and optimize and develop side features later. Some decisions were even based on this premise, having in mind that some choices are for the short-medium term rather than the long term are just faster to deliver that way, but finally we have ended up with a satisfying application that checks the main qualities of an application, these qualities being, good design, secure and efficient backend, and finally a clean and optimized coding design style.

Bibliography

- [1] Wikipedia https://en.wikipedia.org/wiki/Carpool/
- [2] Google Maps documentation https://developers.google.com/maps/documentation~uno/abcde.html
- [3] Firebase Database https://console.firebase.google.com/
- [4] Android API documentation https://developer.android.com/reference

Appendix A

Application Workflow

The user downloads and installs the application in an android device. the user opens the application then he is welcomed with a Login/Register. new user register via the register form (name, university email, university registration id, contact no, password) The user must confirm the registration via email.

After confirmation the user enters the application and chooses between driver/rider if the user is a driver he can enter vehicle detail and select riders from list of passengers. Riders can enter trip details and request a ride, after selected by driver display the details of driver to passenger.

After completion of ride both driver and rider can see the summary of ride.

Appendix B

Interviews

The interviewees were three students from different departments of Air University.

Student 1

Name: Hassan Siddiqui

Age: 21 Sex: Male

Interview date: 10.02.2020

Duration of interview: 10 minutes Place of interview: AUSOM building

Method: Note taking and no recording as we believe recording would make interviewees uncomfortable.

Notes from interview: The interviewee owns a Samsng Galaxy S9 smart-phone which runs android 9.0, he is not familiar with concept of programming for mobile devices but he believes it is a very interesting concept. Hassan believes our app is very handy and he would even liked to install our prototype, on his own smart-phone and become one of our test users. the interviewee would like easier access to travel to and from university he believes it is not easy to find out local transportation. he mentioned that he would be even happier that he can share their ride expenses and cut their fuel bills.

Student 2

Name: Ahmed Shahid

Age: 29 Sex: Male

Interview date: 10.02.2020

Duration of interview: 8 minutes

Place of interview: Department of Mechatronics

Method: Note taking and no recording as we believe recording would make interviewees uncomfortable.

Notes from interview: The interviewee owns a iPhone 7 smart-phone which runs IOS. he is not familiar with concept of programming for mobile devices but he believes it is a very interesting concept. Ahmed believes our app is very useful and he wishes a similar application for iPhone. The interviewee would like to use this application through cell phone, or his future iPad. he specially would like to share ride with non-vehicle owning students.

Student 3

Nickname: Amna Asim

Age: 19

Sex: Female

Interview date: 10.02.2020

Place of interview: Department of Electrical Engineering

Duration of interview: 5 minutes

Method: Note taking and no recording as we believe recording would make interviewees uncomfortable.

Notes from interview: The interviewee owns a Oppo K1 smart-phone which runs Android 8.1. she is not familiar with concept of programming for mobile devices and she believes it is a very interesting that someone finally is doing this for students. she complained a lot about the local transportation in Islamabad which frustrate her every time she wants to travel to and from university. she believes also that it is a good idea to share ride with other non-vehicle owning students. she also mention that include the feature that facilitate female students to share ride with only female students.

Appendix C

Steeple Analysis

Social

- Increase social interaction and solidarity.
- Meet new people during rides and make new friends.
- Driving with people is better than driving alone since it involves less stress.

Technology

- Smartphone penetration is increasing day after day.
- Use of technology to create matches between drivers and passengers.
- The application is accessible from anywhere using a smartphone real time communication between actors.

Environmental

- Increase of high occupancy vehicles which will lead to a decrease of CO2 emissions.
- Less cars on the roads that leads to safer roads and fluent traffic.

Economical

• Savings as the price of gas and highways is shared among the travelers in a context of an increasing gas price.

Political

• Increase of support for initiatives that decreases greenhouse gas emission support from government thank to the benefits of carpooling.

Legal

- Insurances of drivers and passengers: In case of accidents, if the owner of the car have insurance it covers any medical expense. carpool more than other racial and ethnic groups.
- Ride sharing serves an important role in enhancing mobility in low-income, hostel students who are more likely to be unable to afford personal automobiles.

Ethical

• Client confidentiality should be kept: all information related to trips' history should only be communicated to their respective use.