


Freezing the readout improves Facebook probe access, but is not a consistent model rescue

Frozen – freely trained: 18 new models, 3 sources $\times$ 3 seeds $\times$ 2 conditions; 2,500 updates each.
Each treatment pair starts identically and consumes identical full input tensors. All other weights adapt.

● Ukraine ● Hong Kong ● COVID ● Seed 0 ■ Seed 1 ▲ Seed 2

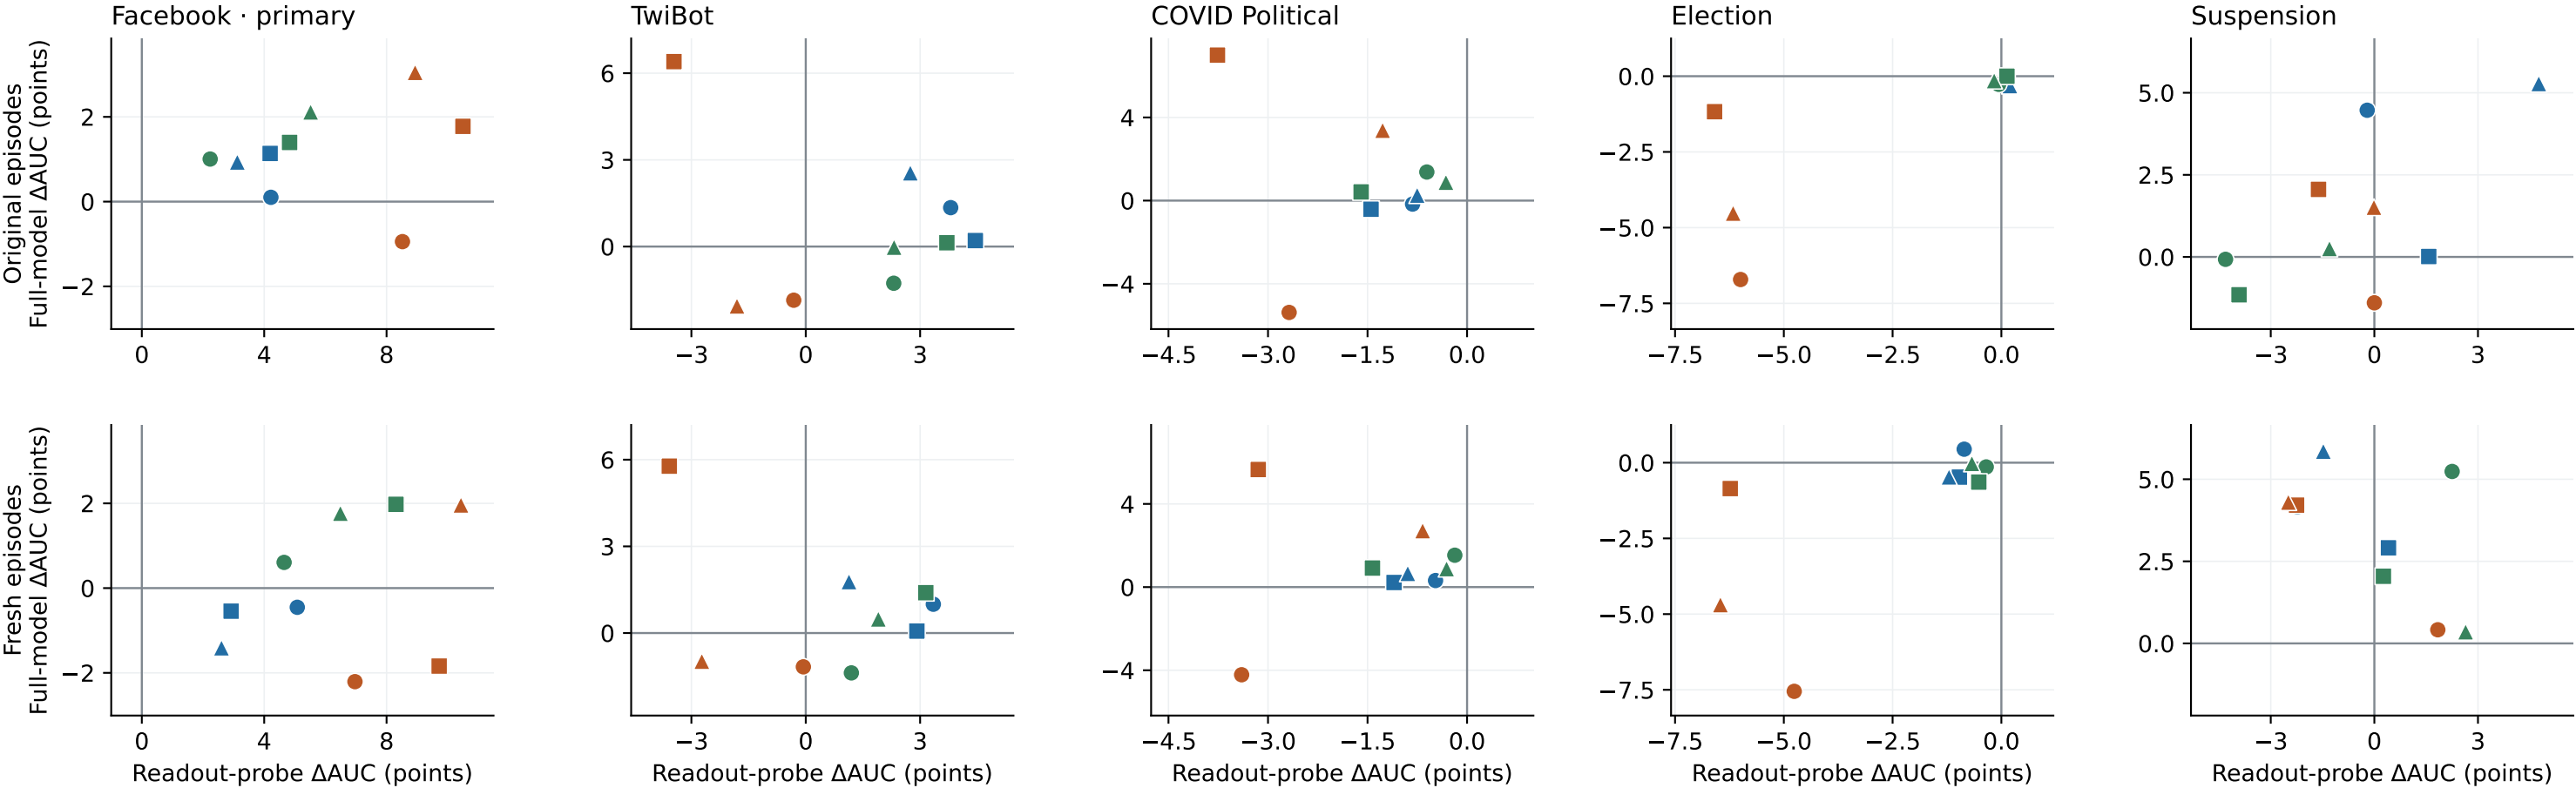

Prespecified Facebook full-model consistency criterion: FAILED. The probe improves in all 9 pairs on both streams.
Upper-right means both improve; every source/seed is shown. Axis ranges differ by target, but match across streams.
Two episode streams are not independent domains. Same-seed free controls differ from earlier runs; that audit is retained.