


The corrected sampler does not resolve TwiBot's training mismatch

Every source improves the pooled probe from 100 to 2,500 updates; every full model declines, on both streams.

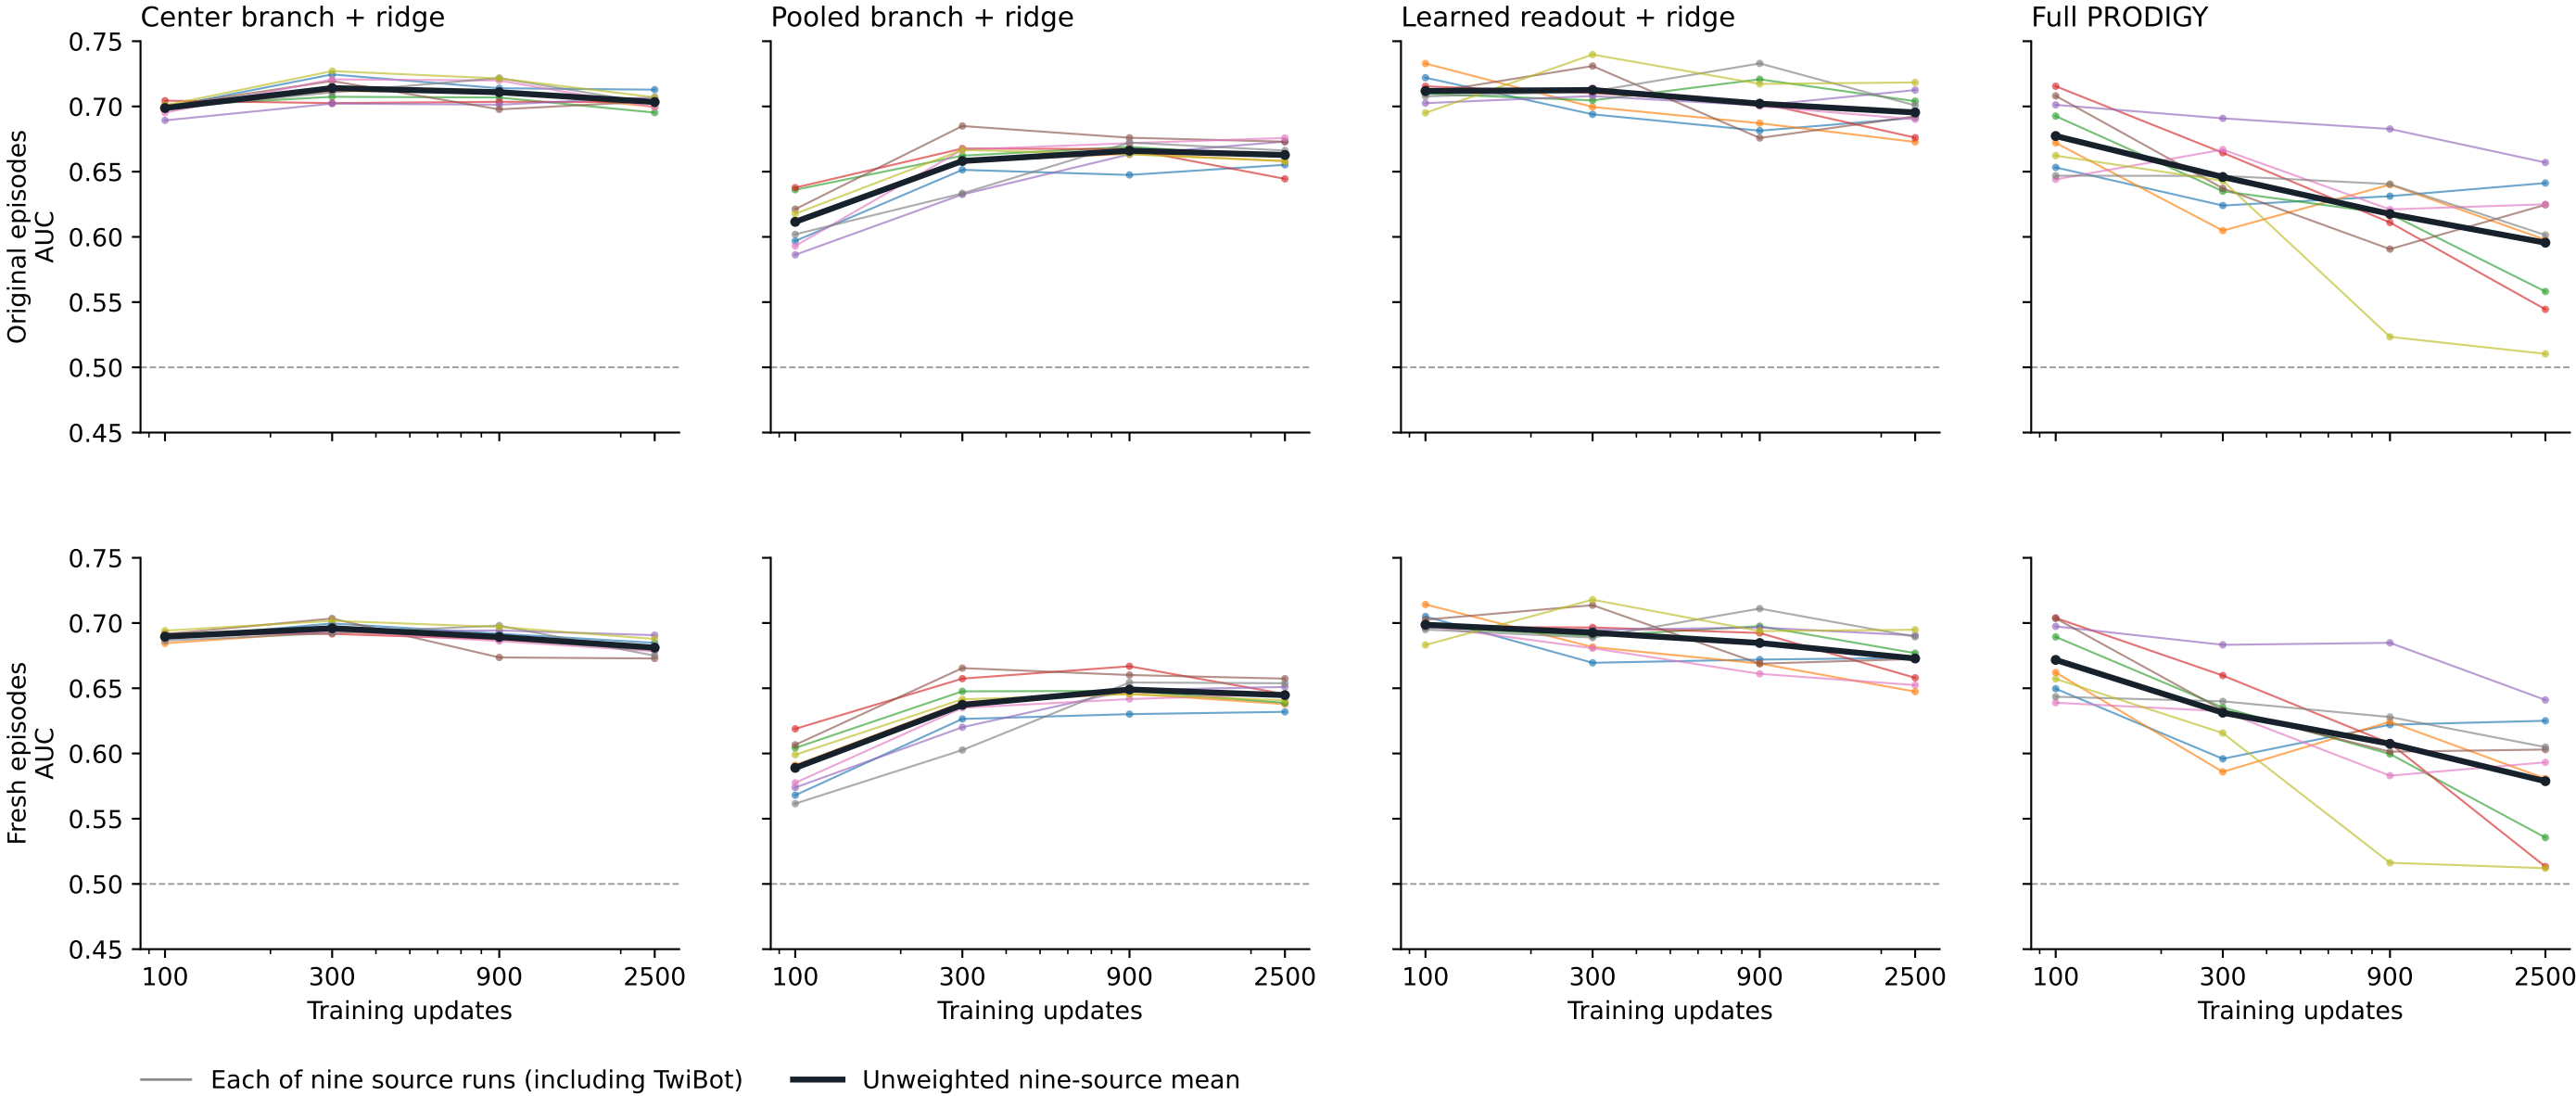

One training seed; four fixed saved checkpoints; identical test inputs across sources and updates. No checkpoint selection.
Center and pooled branches are parallel, not serial stages. Probe accessibility is not an information-theoretic or causal decomposition.
The corrected recipe jointly changes retention, role order and randomness; these curves do not isolate those changes.