
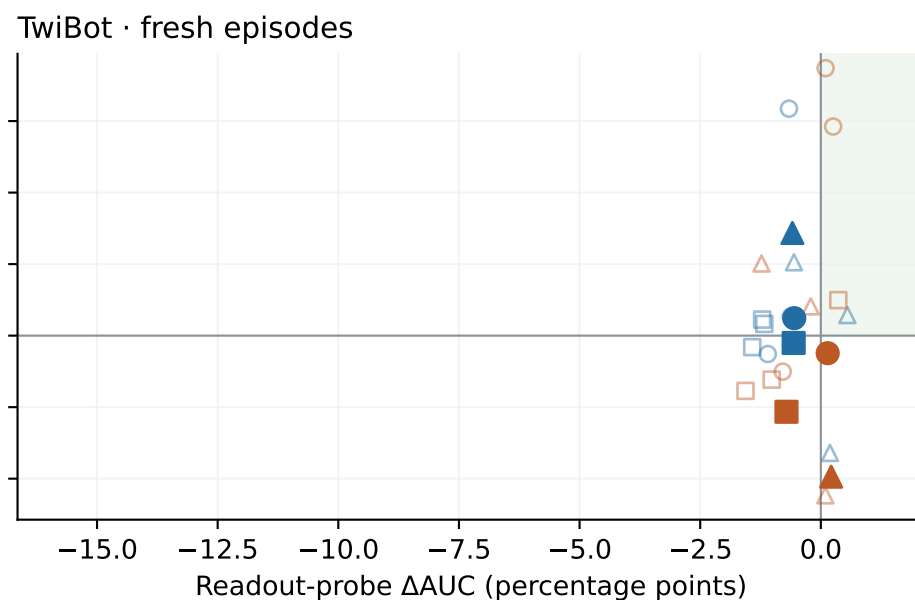
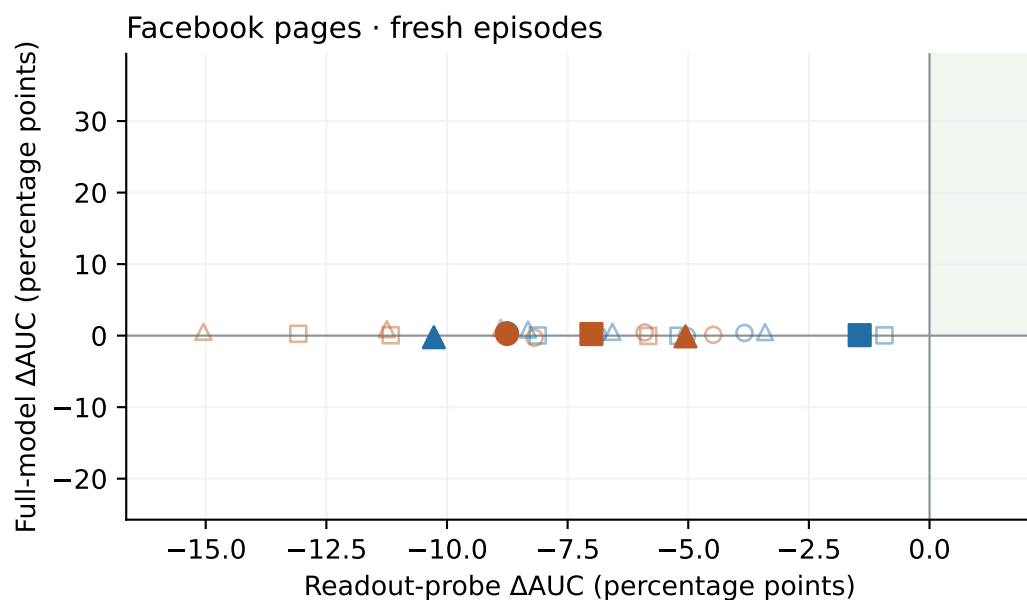
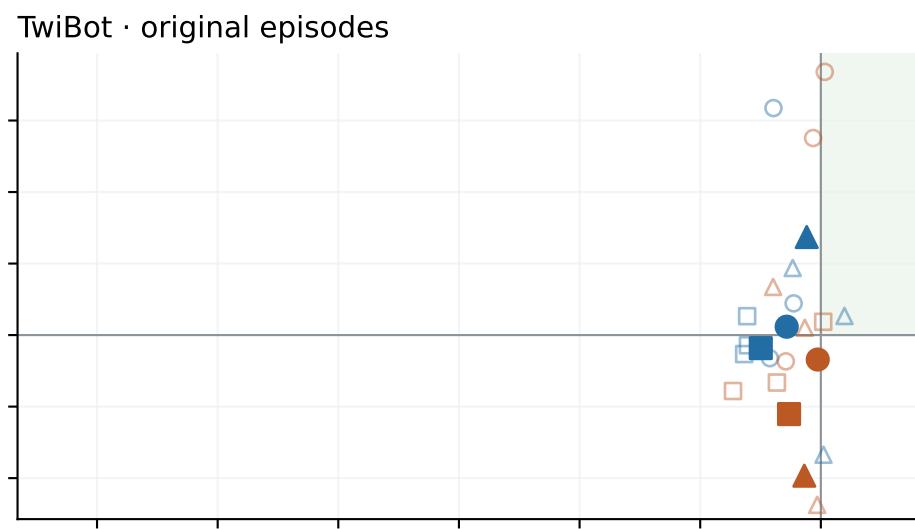


Implanting the trained readout depends on the target and source

Only four readout tensors change; all other weights and inputs match the exact initial model.

● Ukraine ● Hong Kong ● Seed 0 ■ Seed 1 ▲ Seed 2

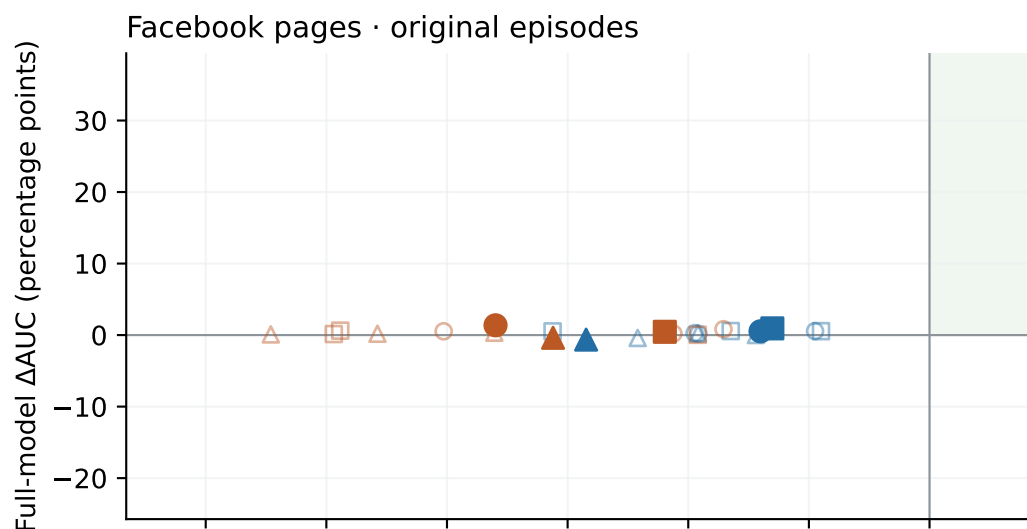

Filled: original lowest-ID/sorted policy. Hollow: all three alternative policies; no models omitted.
Upper-right means both improve. A probe gain alone is not a full-model gain. Each point is one model,
not an independent domain or confidence interval. Both swap directions and all five targets are retained in the data.