

PSU Server/Engine

Set-PSUCache Var1 'Set across all browsers/api/jobs'

Browser/Client

\$session:var1='Fred'

Tab1

PSUPage=Home
\$page:var1='Barney'

Tab2

PSUPage=Home
\$page:var1='Wilma'

Tab3


PSUPage=DetailPage
\$page:var1='Betty'

Refresh

Tab3 (refresh of the tab)

PSUPage=DetailPage
\$page:var1 not set

PSU Server/Engine
Set-PSUCache Var1 'Set across all browsers/api/jobs'

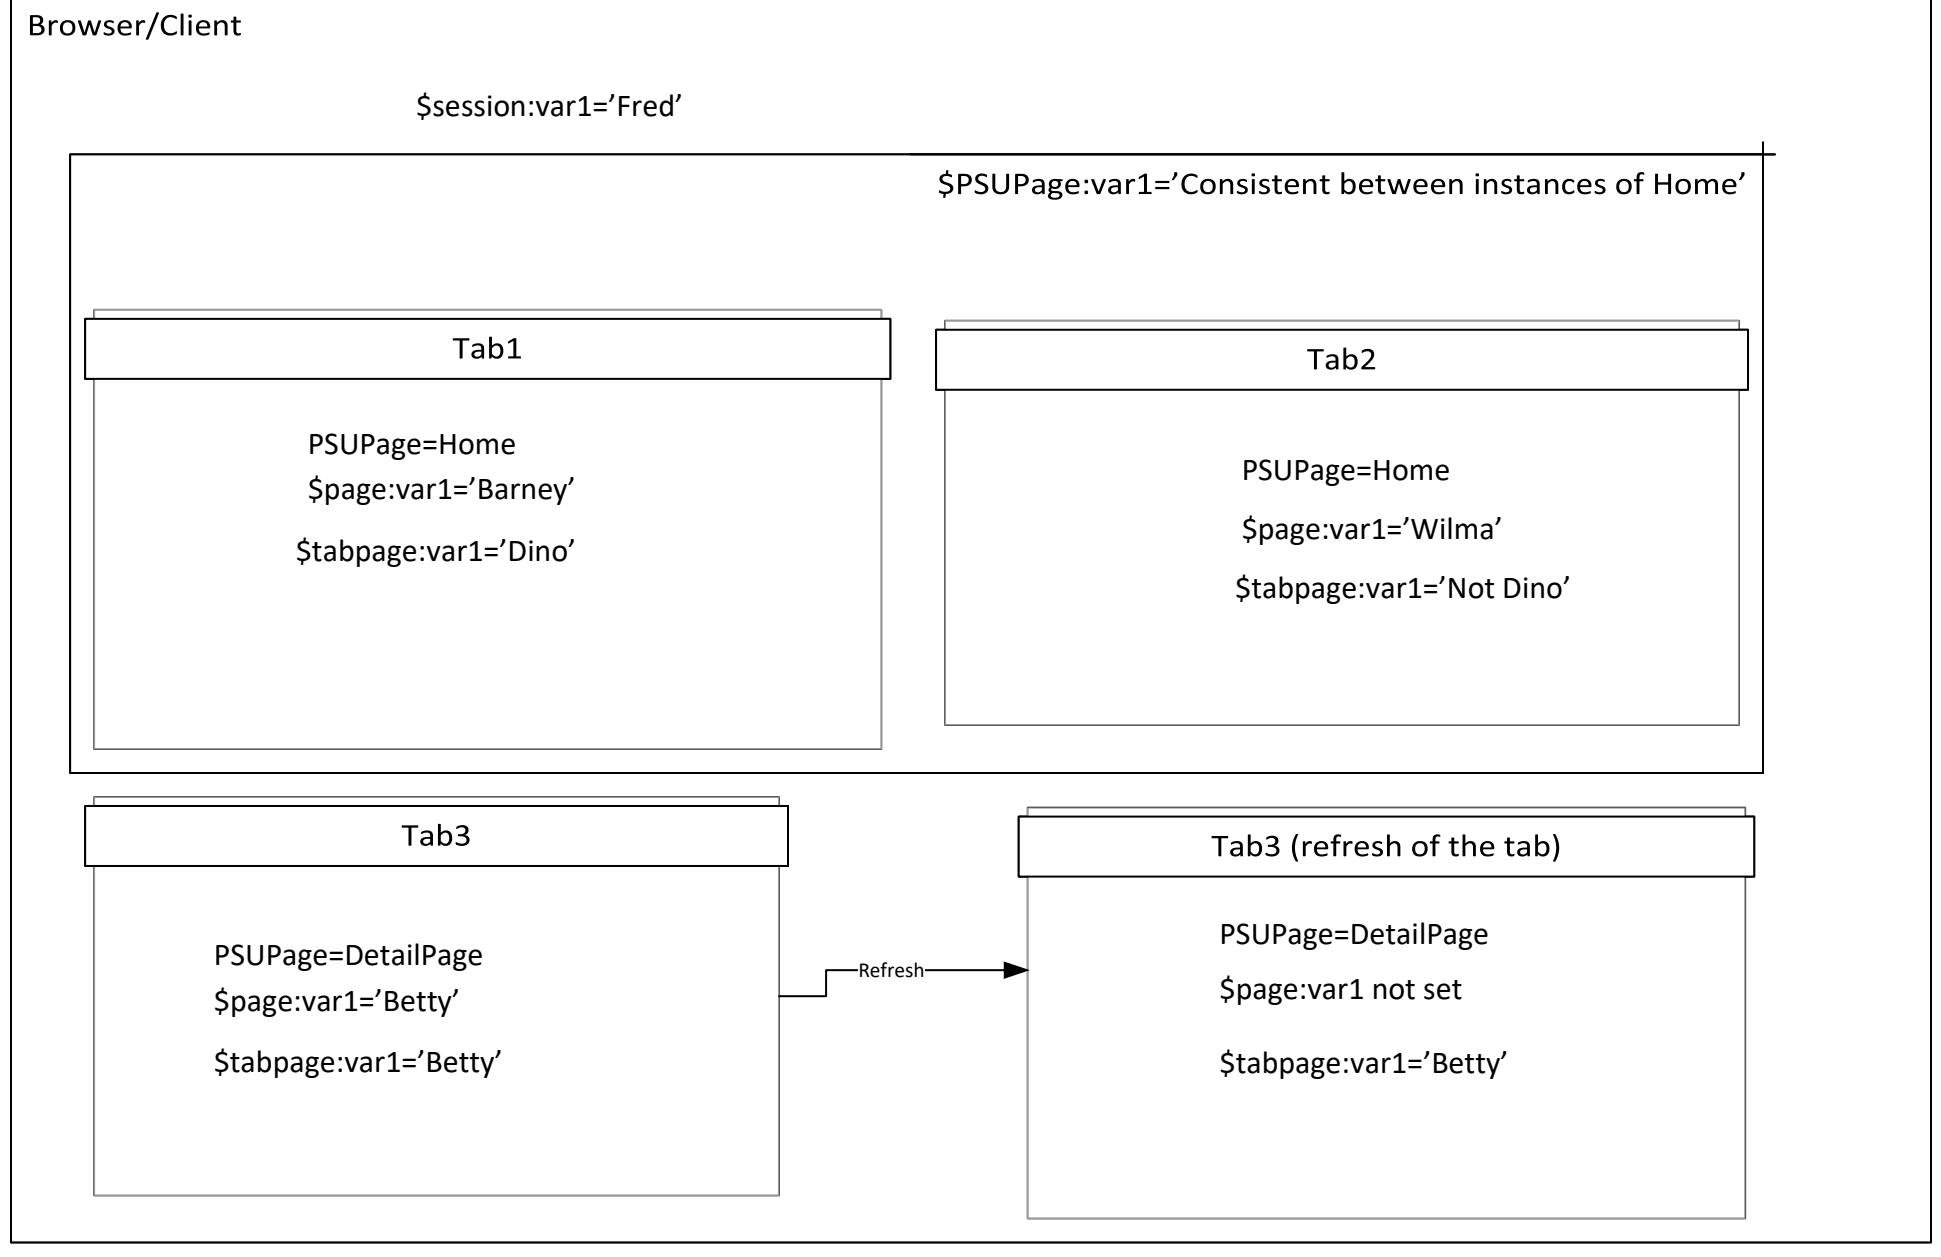

New Scopes:
\$PSUPage – session-scoped to the same PSU Page (across instances/tabs)
\$tabPage – similar to \$page, but persists with refresh