


KONFIGURASI SHARE HOSTING SERVER DI LINUX DEBIAN 11

Share hosting adalah jenis layanan web hosting, dimana dalam satu server terdapat beberapa website. Jenis hosting ini umumnya lebih murah dibandingkan yang lainnya, selain karena spesifikasinya (RAM, Processor, dll) lebih rendah, servernya juga dipakai oleh beberapa pengguna atau pemilik website.

Langkah-langkah konfigurasi share hosting server pada linux debian 11 :

SERVER :

1. Clone master Debian 11 dengan nama sharehosting_NamaAnda
2. Setting adapter 1 mesin sharehosting dengan = NAT, sedangkan untuk adapter 2 = host only adapter

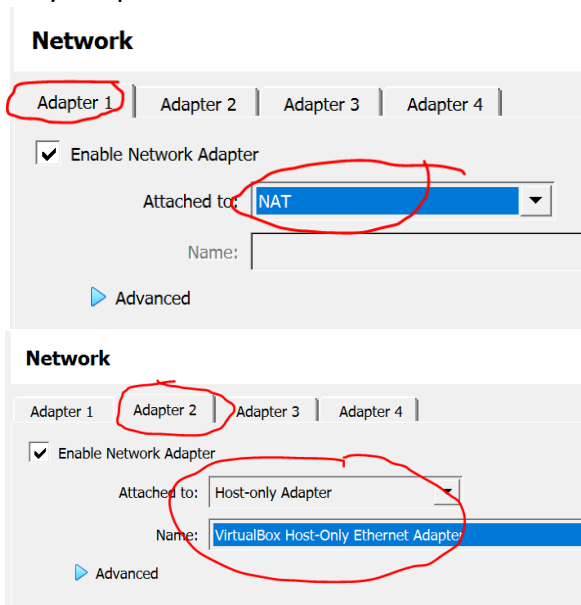

3. Konfigurasi IP pada mesin sharehosting

- Cek keberadaan ethernet dan IP dengan perintah **ip a**


```
root@debian:/home/master# ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc pfifo_fast state UP group default qlen 1000
    link/ether 08:00:27:fa:75:fc brd ff:ff:ff:ff:ff:ff
    inet 10.0.2.15/24 brd 10.0.2.255 scope global dynamic noprefixroute enp0s3
        valid_lft 84238sec preferred_lft 84238sec
    inet6 fe80::a00:27ff:fefa:75fc/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
3: enp0s8: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc pfifo_fast state UP group default qlen 1000
    link/ether 08:00:27:05:53:52 brd ff:ff:ff:ff:ff:ff
```

Pastikan ada dua enp0s yang terbaca. Dari gambar di atas terlihat ada enp0s3 dan enp0s8. Lihat enp0s yang memiliki IP 10.0.4.15/24, enp0s tersebut adalah enp0s yang adaptornya kita setting NAT di awal tadi, yang akan menyebabkan mesin sharehosting dapat otomatis terhubung dengan internet, asalkan PC Host nya sudah terhubung dengan internet.

Pastikan mesin sharehosting anda mendapatkan nomor IP 10.x.x.x, jika belum mendapatkan IP tersebut, maka disable adapter 1, dan aktifkan adapter 3 atau 4 sebagai NAT nya.

- Isi IP 192.168.10.1 pada enp0s yang bukan IP nya 10.0.4.15, pada contoh ini adalah enp0s8.

```
root@10:/home/debian# nano /etc/network/interfaces
```

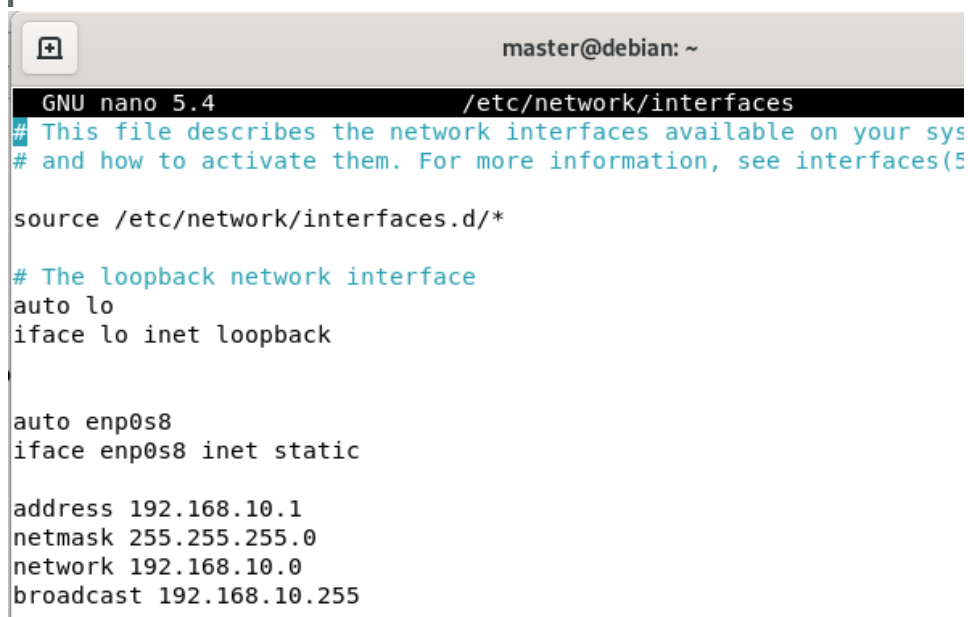

```
master@debian: ~
GNU nano 5.4 /etc/network/interfaces
# This file describes the network interfaces available on your system
# and how to activate them. For more information, see interfaces(5)

source /etc/network/interfaces.d/*

# The loopback network interface
auto lo
iface lo inet loopback

auto enp0s8
iface enp0s8 inet static

address 192.168.10.1
netmask 255.255.255.0
network 192.168.10.0
broadcast 192.168.10.255
```

Kemudian ctrl +O enter, ctrl + X

sudo service networking restart

- Cek dengan perintah ip a, untuk melihat apakah IP yang kita masukkan sudah ada
- ```
2: enp0s8: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc pfifo_fast state UP
group default qlen 1000
 link/ether 08:00:27:14:f2:48 brd ff:ff:ff:ff:ff:ff
 inet 192.168.10.1/24 brd 192.168.10.255 scope global enp0s8
 valid_lft forever preferred_lft forever
```

4. Ping ke google.com, pastikan dapat terhubung.

```
root@10:/home/debian# ping google.com
PING forcesafesearch.google.com (216.239.38.120) 56(84) bytes of data:
64 bytes from any-in-2678.1e100.net (216.239.38.120): icmp_seq=1 ttl=116 time=16
.2 ms
64 bytes from any-in-2678.1e100.net (216.239.38.120): icmp_seq=2 ttl=116 time=16
.0 ms
64 bytes from any-in-2678.1e100.net (216.239.38.120): icmp_seq=3 ttl=116 time=16
.0 ms
^C
--- forcesafesearch.google.com ping statistics ---
3 packets transmitted, 3 received, 0% packet loss, time 2002ms
rtt min/avg/max/mdev = 16.045/16.115/16.238/0.087 ms
root@10:/home/debian#
```

5. Buat IP bayangan untuk adapter enp0s8, yaitu 192.168.10.2

```
auto enp0s8:1
iface enp0s8:1 inet static

address 192.168.10.2
netmask 255.255.255.0
network 192.168.10.0
broadcast 192.168.10.255
```

Kemudian ctrl + O enter, ctrl + X


**sudo service networking restart**

6. Download file ehcp, kemudian install dan konfigurasi hingga dapat login ke dalam admin cpanel EHCP melalui browser server debian




## CLIENT :

7. Buka Network Connections pada control panel, pilih virtual box host only ethernet

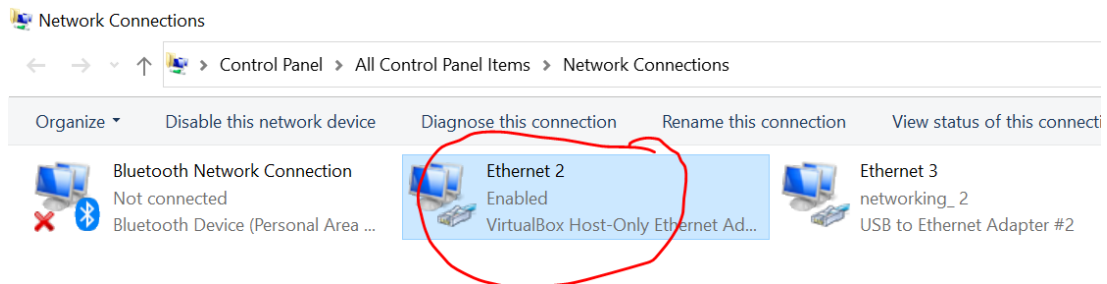

8. Isi dengan IP yang satu jaringan dengan IP utama server sharehosting, untuk gateway dan dns isi dengan IP utama dari server sharehosting.

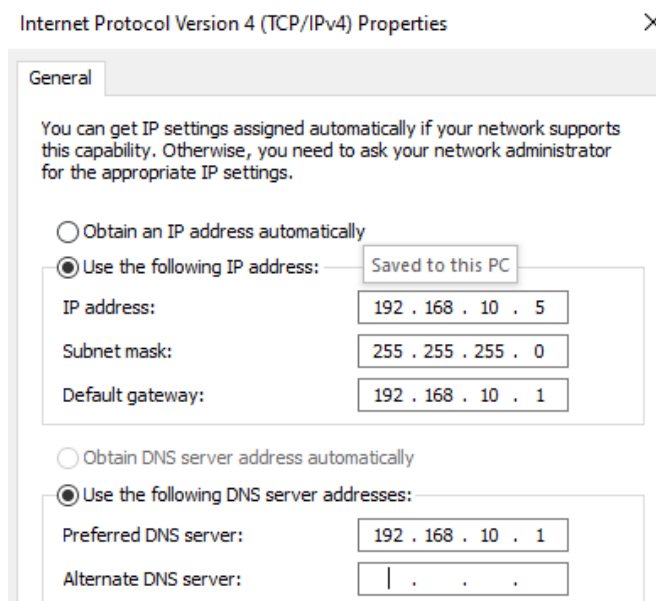

9. Dari PC Host, coba ping ke IP utama server sharehosting, sedangkan dari server sharehosting silahkan ping ke PC Host, pastikan dapat saling terhubung.

```
Command Prompt
Microsoft Windows [Version 10.0.19045.4780]
(c) Microsoft Corporation. All rights reserved.

C:\Users\PC SERVER LAB1>ping 192.100.10.1

Pinging 192.100.10.1 with 32 bytes of data:
Reply from 192.100.10.1: bytes=32 time<1ms TTL=64
Reply from 192.100.10.1: bytes=32 time<1ms TTL=64
Reply from 192.100.10.1: bytes=32 time<1ms TTL=64
Reply from 192.100.10.1: bytes=32 time<1ms TTL=64

Ping statistics for 192.100.10.1:
 Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
 Approximate round trip times in milli-seconds:
 Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```

root@debian:/etc/bind# ping 192.168.10.5
PING 192.168.10.5 (192.168.10.5) 56(84) bytes of data.
64 bytes from 192.168.10.5: icmp_seq=1 ttl=128 time=0.216 ms
64 bytes from 192.168.10.5: icmp_seq=2 ttl=128 time=0.532 ms
64 bytes from 192.168.10.5: icmp_seq=3 ttl=128 time=0.535 ms
^C
--- 192.168.10.5 ping statistics ---
3 packets transmitted, 3 received, 0% packet loss, time 2049ms
rtt min/avg/max/mdev = 0.216/0.427/0.535/0.149 ms

```


10. Buka browser PC client, kemudian tuliskan IP utama server sharehosting pada address bar, login dan masuk ke dalam cpanel EHCP

11. Buat 3 buah domain menggunakan cpanel EHCP yaitu :

192.168.10.1 → percik.com

192.168.10.1 → percik.net

192.168.10.2 → percik.id

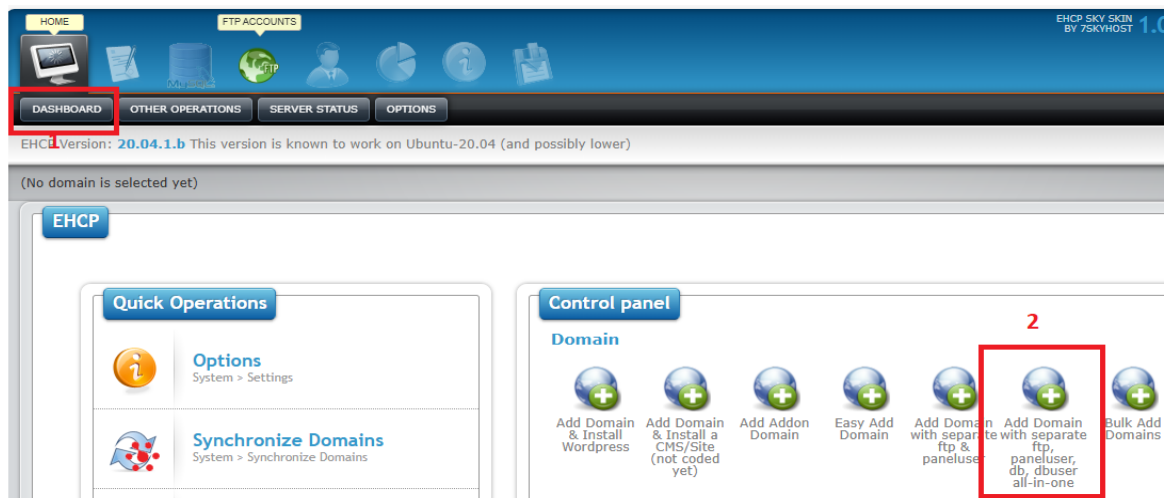

EHCP

Undefined input control: add\_domain\_db  
Normally, do not write www. only yourdom.com forexample:

|                    |                                                              |
|--------------------|--------------------------------------------------------------|
| domainname         | percik.com                                                   |
| Panel username     | percik                                                       |
| Paneluser password | 1 <span>Generate:</span>                                     |
| Ftp username       | percik                                                       |
| Ftp Password       | 1 <span>Generate:</span>                                     |
| New DB name        | percik                                                       |
| db username        | percik                                                       |
| db user Password   | 1 <span>Generate:</span>                                     |
| Quota (Mb)         | 1000000                                                      |
| Upload bw(kb/s)    | 200                                                          |
| Download bw(kb/s)  | 200                                                          |
| email              | tori@percik.com                                              |
| Timeout Date       | 2024-12-12 (2019-mm-dd) Date at which domain will be expired |

Submit

EHCP

Undefined input control: add\_domain\_db

Normally, do not write www. only yourdom.com forexample:

domainname

percik.net

Panel username

percik2

Paneluser password

1

Generate:

Ftp username

percik2

Ftp Password

1

Generate:

New DB name

percik2

db username

percik2

db user Password

1

Generate:

Quota (Mb)

1000000

Upload bw(kb/s)

200

Download bw(kb/s)

200

email

tori2@percik.net

Timeout Date

2024-12-12

(2019-mm-dd)

Submit

EHCP

Undefined input control: add\_domain\_db

Normally, do not write www. only yourdom.com forexample:

domainname

percik.id

Panel username

percik3

Paneluser password

1

Generate:

Ftp username

percik3

Ftp Password

1

Generate:

New DB name

percik3

db username

percik3

db user Password

1

Generate:

Quota (Mb)

1000000

Upload bw(kb/s)

200

Download bw(kb/s)

200

email

tori3@percik.id


Timeout Date


2024-12-12

(2019-mm-dd) Da

Submit

## 12. Lihat hasil pembuatan domainnya

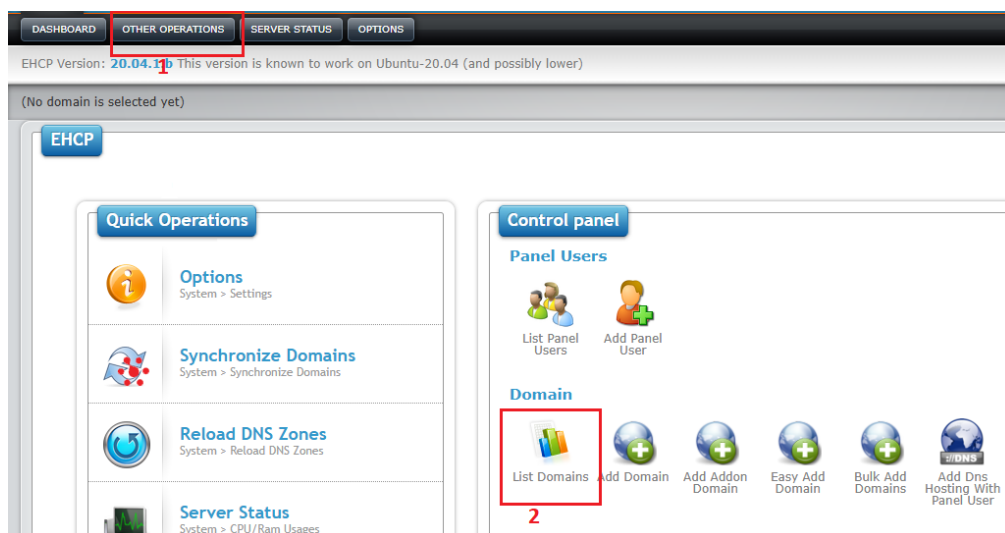



## SERVER :

13. Setting DNS pada server share hosting agar cpanel EHCP dapat diakses dari PC Host/PC client

- Masuk ke direktori bind, kemudian lihat isinya

```
root@debian:/home# cd /etc/bind
root@debian:/etc/bind# ls
bind.keys db.local named_ehcp.conf rndc.key
db.0 named.conf percik.com zones.rfc1918
db.127 named.conf.default-zones percik.id
db.255 named.conf.local percik.net
db.empty named.conf.options percik.sch
root@debian:/etc/bind#
```

- Buka file percik.com, edit isinya menjadi seperti dibawah ini

```
GNU nano 5.4 percik.com *
86400) ; Minimum

percik.com. IN NS ns.percik.com.
ns.percik.com. IN A 192.168.10.1
ns1.percik.com. IN A 192.168.10.1
ns2.percik.com. IN A 192.168.10.1
dns.percik.com. IN A 192.168.10.1
dns1.percik.com. IN A 192.168.10.1
dns2.percik.com. IN A 192.168.10.1
percik.com. IN A 192.168.10.1
mail.percik.com. IN A 192.168.10.1
smtp.percik.com. IN A 192.168.10.1
imap.percik.com. IN A 192.168.10.1
webmail.percik.com. IN A 192.168.10.1
ftp.percik.com. IN CNAME percik.com.
www.percik.com. IN CNAME percik.com.
percik.com. IN MX 10 mail.percik.com.
percik.com. IN TXT "v=spf1 a mx ~all"

* IN A 192.168.10.1
```

- Kunci file percik.com agar tidak dapat berubah/diganti, dengan perintah :  
**chattr +i /etc/bind/percik.com**

Jika berhasil, maka akan muncul seperti pada gambar di bawah ini jika file percik.com dibuka.

```
mail.percik.com. IN A 192.168.10.1
smtp.percik.com. IN A 192.168.10.1
imap.percik.com. IN A 192.168.10.1
webmail.percik.com. IN A 192.168.10.1
ftp.percik.com. IN CNAME percik.com.
www.percik.com. IN CNAME percik.com.
[File 'percik.com' is unwritable]

^G Help ^O Write Out ^W Where Is ^K Cut ^T Execute ^C Location
^X Exit ^R Read File ^_ Replace ^U Paste ^J Justify ^_ Go To Line
```

- Berlakukan hal yang sama untuk file percik.net dan percik.id, sesuaikan IP nya

```
GNU nano 5.4 percik.net *
86400) ; Minimum

percik.net. IN NS ns.percik.net.
ns.percik.net. IN A 192.168.10.1
ns1.percik.net. IN A 192.168.10.1
ns2.percik.net. IN A 192.168.10.1
dns.percik.net. IN A 192.168.10.1
dns1.percik.net. IN A 192.168.10.1
dns2.percik.net. IN A 192.168.10.1
percik.net. IN A 192.168.10.1
mail.percik.net. IN A 192.168.10.1
smtp.percik.net. IN A 192.168.10.1
imap.percik.net. IN A 192.168.10.1
webmail.percik.net. IN A 192.168.10.1
ftp.percik.net. IN CNAME percik.net.
www.percik.net. IN CNAME percik.net.
percik.net. IN MX 10 mail.percik.net.
percik.net. IN TXT "v=spf1 a mx ~all"

* IN A 192.168.10.1
```

```
GNU nano 5.4 percik.id *
86400) ; Minimum

percik.id. IN NS ns.percik.id.
ns.percik.id. IN A 192.168.10.2
ns1.percik.id. IN A 192.168.10.2
ns2.percik.id. IN A 192.168.10.2
dns.percik.id. IN A 192.168.10.2
dns1.percik.id. IN A 192.168.10.2
dns2.percik.id. IN A 192.168.10.2
percik.id. IN A 192.168.10.2
mail.percik.id. IN A 192.168.10.2
smtp.percik.id. IN A 192.168.10.2
imap.percik.id. IN A 192.168.10.2
webmail.percik.id. IN A 192.168.10.2
ftp.percik.id. IN CNAME percik.id.
www.percik.id. IN CNAME percik.id.
percik.id. IN MX 10 mail.percik.id.
percik.id. IN TXT "v=spf1 a mx ~all"

* IN A 192.168.10.2
```



- Buka file db.local, kemudian edit isinya menjadi seperti di bawah ini → **nano db.local**

```
GNU nano 5.4 db.local
;
; BIND data file for local loopback interface
;
$TTL 604800
@ IN SOA localhost. root.localhost. (
 2 ; Serial
 604800 ; Refresh
 86400 ; Retry
 2419200 ; Expire
 604800) ; Negative Cache TTL
;
@ IN NS localhost.
@ IN A 192.168.10.1
@ IN A 192.168.10.2
```

- Buka file resolv.conf, kemudian edit isinya seperti di bawah ini → **nano /etc/resolv.conf**

```
GNU nano 5.4 /etc/resolv.conf
Generated by NetworkManager
nameserver 192.168.10.1
nameserver 192.168.10.2
```

- Kunci file resolv.conf tersebut dengan perintah → **chattr +i /etc/resolv.conf**
- Restart bind, apache, dan ehcp  
**sudo service bind9 restart**  
**sudo service apache2 restart**  
**sudo service ehcp restart**
- Cek dengan nslookup, pastikan ketiga domain tersebut sudah sesuai dengan IP yang ditentukan sebelumnya

```
root@debian:/etc/bind# nslookup percik.net
Server: 192.168.10.1
Address: 192.168.10.1#53

Name: percik.net
Address: 192.168.10.1

root@debian:/etc/bind# nslookup percik.id
Server: 192.168.10.1
Address: 192.168.10.1#53


Name: percik.id
Address: 192.168.10.2

root@debian:/home/master# nslookup percik.com
Server: 192.168.10.1
Address: 192.168.10.1#53

Name: percik.com
Address: 192.168.10.1
```

CLIENT :

14. Klik pada list domain tersebut untuk melihat hasil website nya

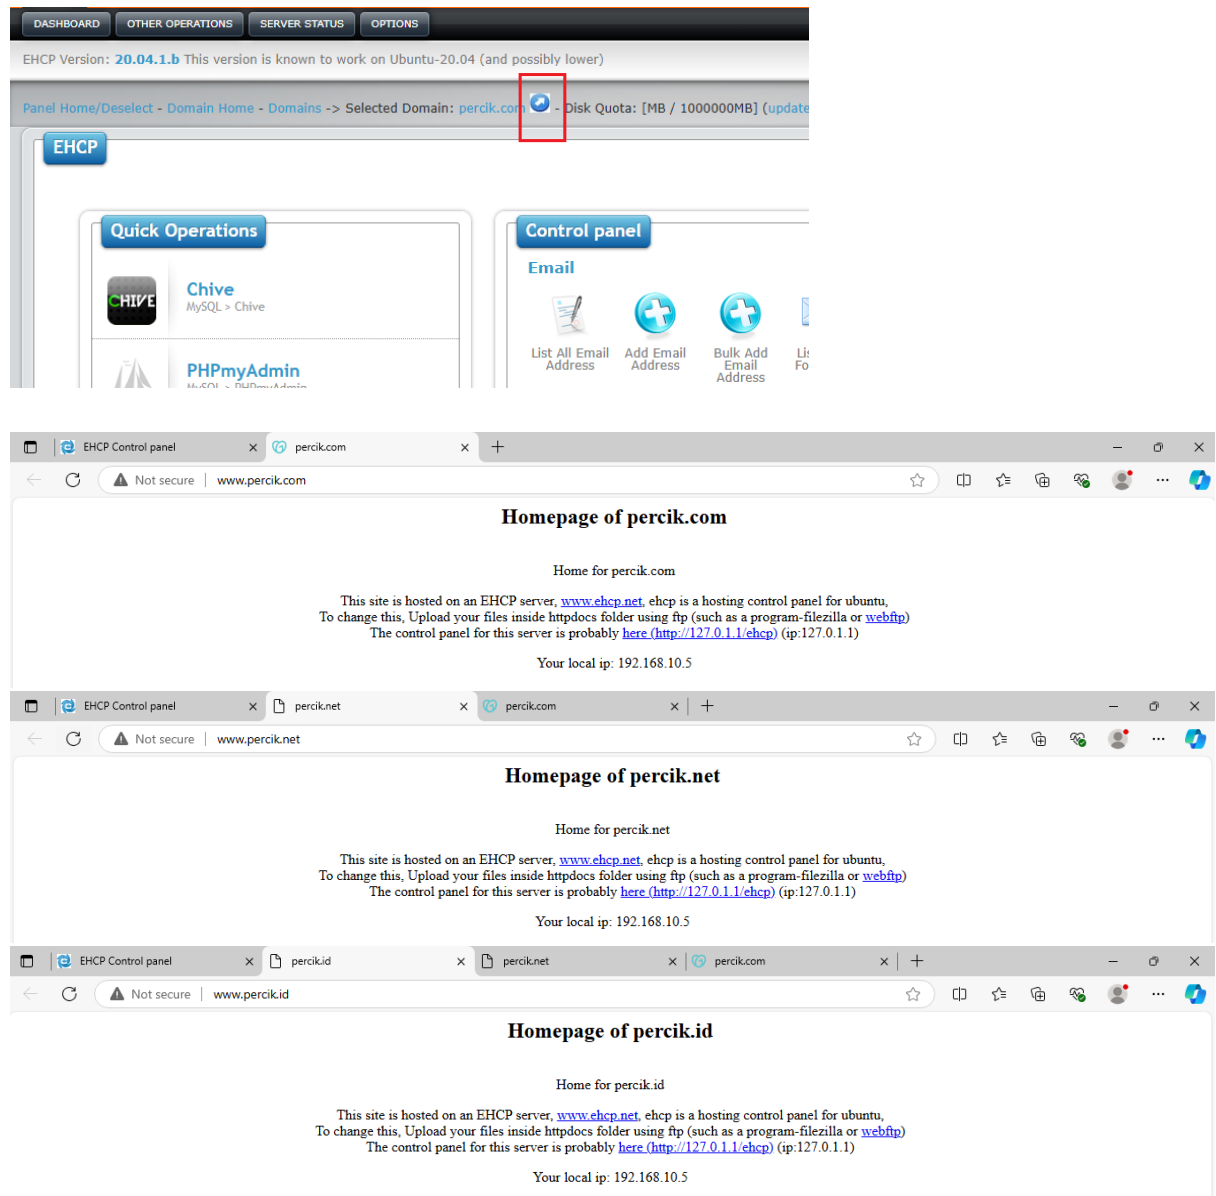

## SERVER :

15. Edit isi ketiga website tersebut, sesuai dengan kreasi anda

- Masuk ke direktori vhosts, pastikan ada 3 direktori website yang sudah kita buat sebelumnya

```
root@debian:/home# cd /var/www/vhosts
root@debian:/var/www/vhosts# ls
percik percik2 percik3 percik4
```

- Masuk ke direktori website tersebut

```
root@debian:/var/www/vhosts# cd percik
root@debian:/var/www/vhosts/percik# ls
percik.com
```

- Masuk ke file index.php, kemudian edit isi file nya untuk mengubah tampilan website.

```
root@debian:/var/www/vhosts/percik# cd percik.com
root@debian:/var/www/vhosts/percik/percik.com# ls
httpdocs index.php logs phptmpdir UPLOAD_SITE_FILES_TO httpdocs_FOLDER
root@debian:/var/www/vhosts/percik/percik.com# cd httpdocs
root@debian:/var/www/vhosts/percik/percik.com/httpdocs# ls
ehcpinfo.html error_page.html index.php webstats
root@debian:/var/www/vhosts/percik/percik.com/httpdocs# nano index.php
```



The screenshot shows the nano 5.4 text editor editing the file index.php. The content of the file is as follows:

```
GNU nano 5.4 index.php
<div style="text-align: center">
 <h2>Homepage of percik.com ----- tori fahrina </h2>

 Home for percik.com
 <p>This site is hosted on an EHCP server, w
 To change this, Upload your files inside httpdocs folder using ftp (suc
 The control panel for this server is probably
 (ip:127.0.1.1)</p>
 Your local ip: <?php echo getenv('REMOTE_ADDR'); ?>

</div>

<script type="text/javascript"><!--
google_ad_client = "pub-0768633782379013";
/* ehcp.net 468x60, created 2/12/08 */
google_ad_slot = "2130773422";
google_ad_width = 468;
google_ad_height = 60;
//-->
</script>
<script type="text/javascript"
src="http://pagead2.googlesyndication.com/pagead/show_ads.js">
</script>
```

At the bottom of the editor, it says "[ Wrote 23 lines ]".

- Simpan file nya, kemudian restart bind, apache, dan ehcp  
**sudo service bind9 restart**  
**sudo service apache2 restart**  
**sudo service ehcp restart**

- Berlakukan hal yang sama untuk percik.net dan percik.id

**CLIENT :**

## 16. Cek hasilnya di komputer client

