


KONFIGURASI EHCP DI LINUX DEBIAN 11

EHCP (*Easy Hosting Control Panel*) adalah aplikasi *opensource* yang sangat *effective* digunakan untuk *Control Panel Hosting* yang menawarkan Anda untuk meng-host situs web, membuat *account* ftp, *account* email, sub domain dan sebagainya. Ehcp adalah control panel hosting yang pertama ditulis dengan menggunakan bahasa pemrograman PHP dan tersedia secara gratis.

Langkah-langkah konfigurasi EHCP pada linux debian 11 :

1. Clone master Debian 11 dengan nama ehcp_NamaAnda
2. Setting adapter 1 mesin ehcp dengan = NAT, sedangkan untuk adapter 2 = host only adapter

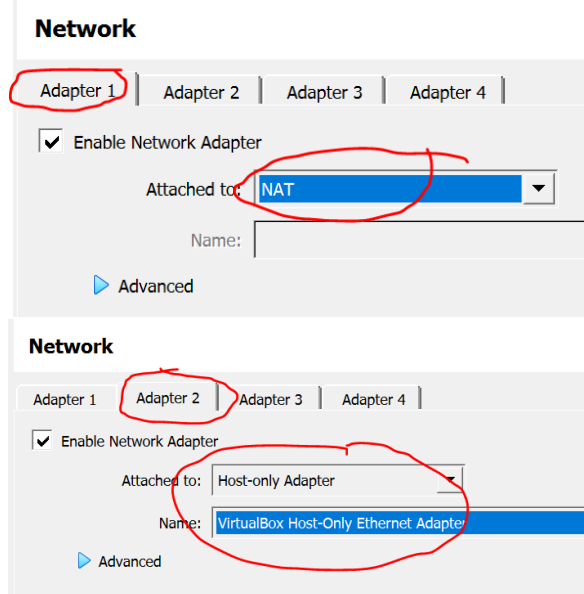

3. Konfigurasi IP pada mesin ehcp = 192.168.x.1 (dimana x adalah nomor absen anda), dengan cara :
 - Cek keberadaan ethernet dan IP dengan perintah **ip a**

```

root@debian:/home/master# ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc pfifo_fast state UP group default qlen 1000
    link/ether 08:00:27:fa:75:fc brd ff:ff:ff:ff:ff:ff
    inet 10.0.2.15/24 brd 10.0.2.255 scope global dynamic noprefixroute enp0s3
        valid_lft 86238sec preferred_lft 84238sec
    inet6 fe80::a00:27ff:fefa:75fc/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
3: enp0s8: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc pfifo_fast state UP group default qlen 1000
    link/ether 08:00:27:05:53:52 brd ff:ff:ff:ff:ff:ff

```

Pastikan ada dua enpos yang terbaca. Dari gambar di atas terlihat ada enpos3 dan enpos8. Lihat enpos yang memiliki IP 10.0.4.15/24, enpos tersebut adalah enpos yang adaptornya kita setting NAT di awal tadi, yang akan menyebabkan mesin ehcp dapat otomatis terhubung dengan internet asalkan PC Host nya sudah terhubung dengan internet.

Pastikan mesin ehcp anda mendapatkan nomor IP 10.x.x.x, jika belum mendapatkan IP tersebut, maka disable adapter 1, dan aktifkan adapter 3 sebagai NAT nya.

- Isi IP 192.100.x.1 pada enpos yang bukan IP nya 10.0.4.15, pada contoh ini adalah enpos8.

```

root@10:/home/debian# nano /etc/network/interfaces
GNU nano 5.4 /etc/network/interfaces
# This file describes the network interfaces available on your system
# and how to activate them. For more information, see interfaces(5).

source /etc/network/interfaces.d/*

# The loopback network interface
auto lo
iface lo inet loopback

auto enp0s8
iface enp0s8 inet static

address 192.100.10.1
netmask 255.255.0.0
network 192.100.0.0
broadcast 192.100.255.255

```

Kemudian ctrl +O enter, ctrl + X
sudo service networking restart


- Cek dengan perintah ip a, untuk melihat apakah IP yang kita masukkan sudah ada

```
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc pfifo_
group default qlen 1000
    link/ether 08:00:27:fa:75:fc brd ff:ff:ff:ff:ff:ff
    inet 10.0.2.15/24 brd 10.0.2.255 scope global dynamic noprefi
        valid_lft 79775sec preferred_lft 79775sec
    inet6 fe80::a00:27ff:fefa:75fc/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
3: enp0s8: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc pfifo_
group default qlen 1000
    link/ether 08:00:27:05:53:52 brd ff:ff:ff:ff:ff:ff
    inet 192.100.10.1/16 brd 192.100.255.255 scope global enp0s8
        valid_lft forever preferred_lft forever
```

4. Ping ke google.com, pastikan dapat terhubung.

```
root@10:/home/debian# ping google.com
PING forcesafesearch.google.com (216.239.38.120) 56(84) bytes of data.
64 bytes from any-in-2678.1e100.net (216.239.38.120): icmp_seq=1 ttl=116 time=16
.2 ms
64 bytes from any-in-2678.1e100.net (216.239.38.120): icmp_seq=2 ttl=116 time=16
.0 ms
64 bytes from any-in-2678.1e100.net (216.239.38.120): icmp_seq=3 ttl=116 time=16
.0 ms
^C
--- forcesafesearch.google.com ping statistics ---
3 packets transmitted, 3 received, 0% packet loss, time 2002ms
rtt min/avg/max/mdev = 16.045/16.115/16.238/0.087 ms
root@10:/home/debian#
```

5. Buka Network Connections pada control panel, pilih virtual box host only ethernet

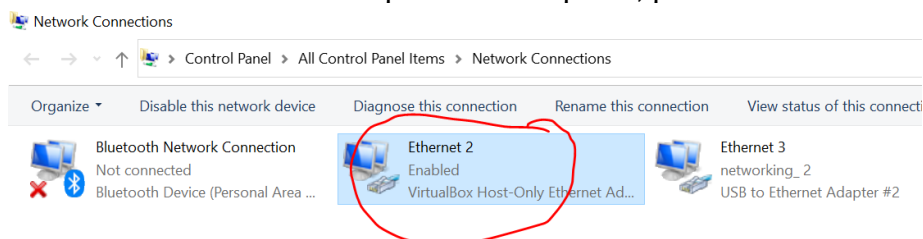

Isi dengan IP yang satu jaringan dengan mesin virtual ehcp, untuk gateway isi dengan IP dari mesin ehcp.

Internet Protocol Version 4 (TCP/IPv4) Properties

General

You can get IP settings assigned automatically if your network supports this capability. Otherwise, you need to ask your network administrator for the appropriate IP settings.

☐ Obtain an IP address automatically

☒ Use the following IP address:

IP address:

Subnet mask:

Default gateway:

6. Dari PC Host, coba ping ke IP mesin ehcp, sedangkan dari mesin ehcp silahkan ping ke PC Host, pastikan dapat saling terhubung.

```
Command Prompt
Microsoft Windows [Version 10.0.19045.4780]
(c) Microsoft Corporation. All rights reserved.

C:\Users\PC SERVER LAB1>ping 192.100.10.1

Pinging 192.100.10.1 with 32 bytes of data:
Reply from 192.100.10.1: bytes=32 time<1ms TTL=64
Reply from 192.100.10.1: bytes=32 time<1ms TTL=64
Reply from 192.100.10.1: bytes=32 time<1ms TTL=64
Reply from 192.100.10.1: bytes=32 time<1ms TTL=64

Ping statistics for 192.100.10.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
root@debian:/home/master# ping 192.100.10.3
PING 192.100.10.3 (192.100.10.3) 56(84) bytes of data.
64 bytes from 192.100.10.3: icmp_seq=1 ttl=128 time=0.204 ms
64 bytes from 192.100.10.3: icmp_seq=2 ttl=128 time=0.534 ms
64 bytes from 192.100.10.3: icmp_seq=3 ttl=128 time=0.553 ms
64 bytes from 192.100.10.3: icmp_seq=4 ttl=128 time=0.533 ms
64 bytes from 192.100.10.3: icmp_seq=5 ttl=128 time=0.517 ms
^C
--- 192.100.10.3 ping statistics ---
5 packets transmitted, 5 received, 0% packet loss, time 4087ms
rtt min/avg/max/mdev = 0.204/0.468/0.553/0.132 ms
```

7. Download file ehcp
wget www.ehcp.net/ehcp_2004.tgz
8. Pastikan file nya sudah ada : **ls**
9. Ekstrak file ehcp : **tar -xzf ehcp_2004.tgz**
Tunggu hingga prosesnya selesai. Cek apakah ekstrak nya berhasil, ditandai dengan munculnya folder yang bernama ehcp.

```
root@10:/home/debian# ls
Desktop  Documents  Downloads  ehcp  ehcp_latest.tgz  Music  Pictures  Public
```

10. Ubah hak akses folder ehcp menjadi full akses untuk semua user, yaitu dengan perintah **chmod 777 ehcp**

```
root@10:/home/debian# chmod 777 ehcp
root@10:/home/debian#
```

11. Masuk ke dalam folder ehcp : **cd ehcp**
12. Masukkan DVD Debian 11
13. Lakukan proses instalasi ehcp : **./install**

```
debian@10: ~  
  
STAGE 1  
-----  
-----EHCP PRE-INSTALLER 20.04.1.b -----  
-----Easy Hosting Control Panel for Ubuntu, Debian and alikes-----  
-----www.ehcp.net-----  
-----  
  
Now, ehcp pre-installer begins, a series of operations will be performed and main installer will  
If any problem occurs, refer to www.ehcp.net forum section, or contact us, mail: info@ehcp.net  
Ehcp is specifically tested for Ubuntu, but should also work on many Debian based distros.  
  
For automated installs, use ./install.sh unattended (passwords are default in this case)  
Note that, this is just a utility.. use at your own risk.  
Ehcp also sends your email and some usage data (including running services) to developer for  
purposes, and for informing you of our Services  
Please be patient, press enter to continue
```

```
debian@10: ~  
purposes, and for informing you of our Services  
Please be patient, press enter to continue  
  
Note that ehcp can only be installed automatically on Debian based Linux OS'es or Linux'es with apt-get  
Ubuntu, Kubuntu, Debian and so on) Do not try to install ehcp with this installer on redhat, centos and  
's... To use ehcp on non-debian systems, you need to manually install..  
This installer is for installing onto a clean, newly installed Ubuntu/Debian. If you install it on ex  
some existing packages will be removed after prompting, if they conflict with packages that are used i  
areful to answer yes/no when using in non-new system  
Note that, this is just a utility.. use at your own risk.  
Ehcp also sends your email and some usage data (including running services) to developer for statisti  
purposes, and for informing you of our Services  
  
Outline of install process:  
1- Update apt-get repo info (apt-get update)  
2- Install Php (That will run Main installer)  
3- Run Main installer (Run install_1.php and install_2.php to install other server related software,  
mysql, apache, nginx, etc.)  
Press enter to continue
```

Tunggu hingga proses download nya selesai, proses ini akan membutuhkan waktu yang lumayan lama.

Kemudian akan muncul tampilan seperti di bawah ini :

```
debian@debian: ~  
E: Package 'php-mysqldb' has no installation candidate  
ehcp: Mysql/Mariadb seems running. this is good.  
  
=====
```

EHCP INSTALL - INPUTS/SETTINGS SECTION:

THIS SECTION IS VERY IMPORTANT FOR YOUR EHCP SECURITY AND PASSWORD SETTINGS.
PLEASE ANSWER ALL QUESTIONS CAREFULLY

Please enter your name:tori
Please enter your admin email (used to send your panel info, ehcp news)- Enter an already working email:tory.fahryna@gmail.com
mysql root pass being checked ...

Your mysql root pass is identified as empty. Enter NEW PASSWORD for mysql user of `ehcp` (default 1234):
Please pay attention that, you cannot use sign # in your password:12345678
Enter ehcp panel admin NEW PASSWORD (default 1234):12345678
Enter ehcp panel admin NEW PASSWORD AGAIN:12345678

```
debian@debian: ~  
localutils.php: file written successfully: /etc/ehcp/ehcp.conf, mode:w  
  
-----  
Your hostname seems to be debian, if it is different, enter it now, leave blank if correct  
  
Hostname is set as debian  
Your ip seems to be 192.168.99.1, if it is different or you want to use a different (external) ip, enter it now, leave blank if correct  
  
ip is set as (192.168.99.1) in ehcp, (Your server's actual ip is not changed)  
  
LANGUAGE SELECTION:  
  
ehcp currently supports English,Turkish,German,Spanish,French (some of these partial) except installation  
enter language file you want to use (en/tr/german/spanish/nl/fr/lv/pt_br [default en]) en  
  
Do you want to install some additional programs which are not essential but useful for a hosting environment, such as ffmpeg,... etc.. ? Answer no if you have small ram or you need a light/fast system (y/[n])  
n
```

Package configuration

Configuring roundcube-core

The roundcube package must have a database installed and configured before it can be used. This can be optionally handled with dbconfig-common.

If you are an advanced database administrator and know that you want to perform this configuration manually, or if your database has already been installed and configured, you should refuse this option. Details on what needs to be done should most likely be provided in /usr/share/doc/roundcube.

Otherwise, you should probably choose this option.

Configure database for roundcube with dbconfig-common?

☒ Yes
 ☐ No

Configuring roundcube-core

Please provide a password for roundcube to register with the database server. If left blank, a random password will be generated.

MySQL application password for roundcube:

Password mysql : 12345678

Configuring roundcube-core

Password confirmation:

Configuring phpmyadmin


The phpmyadmin package must have a database installed and configured before it can be used. This can be optionally handled with dbconfig-common.

If you are an advanced database administrator and know that you want to perform this configuration manually, or if your database has already been installed and configured, you should refuse this option. Details on what needs to be done should most likely be provided in /usr/share/doc/phpmyadmin.



Otherwise, you should probably choose this option.

Configure database for phpmyadmin with dbconfig-common?

☒ Yes
 ☐ No

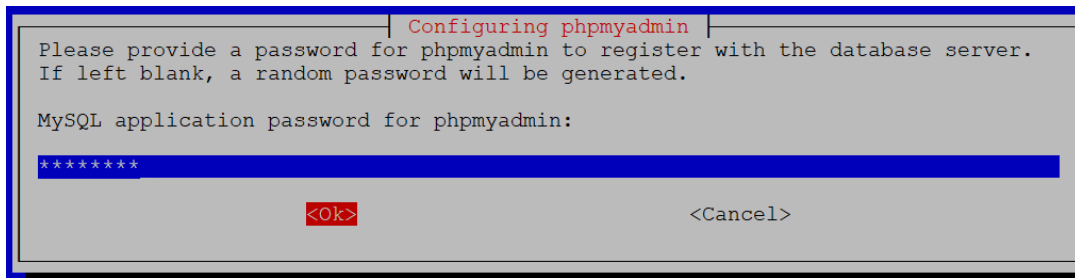


Password phpmyadmin = 12345678

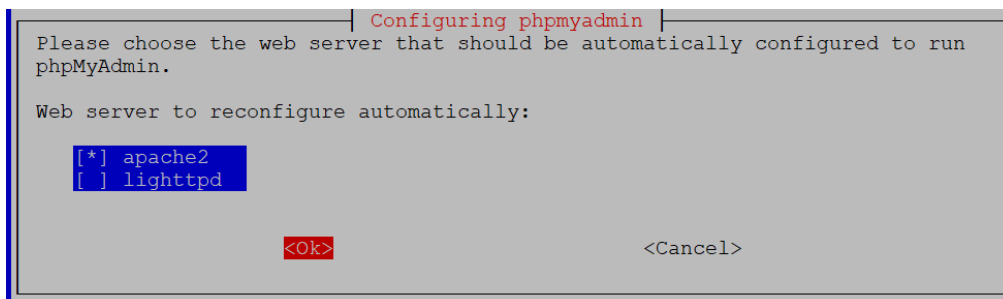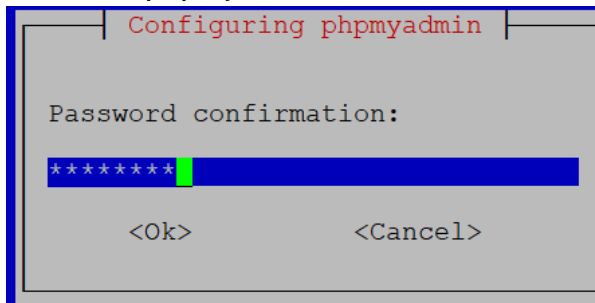


Pilih apache2 dengan cara tekan spasi untuk memberi tanda bintang, kemudian tekan tab.

Tunggu hingga proses selesai.

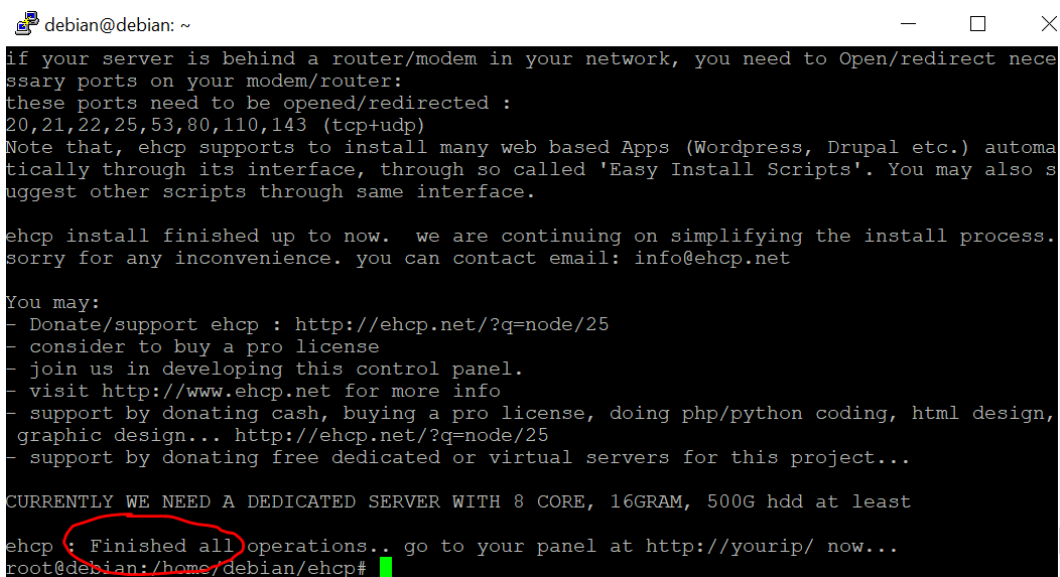

Setelah proses selesai, buka chrome pada PC Host, kemudian tuliskan di address bar IP dari mesin ehcp, yaitu 192.168.x.1 (x adalah no absen anda), kemudian akan muncul halaman login ehcp.

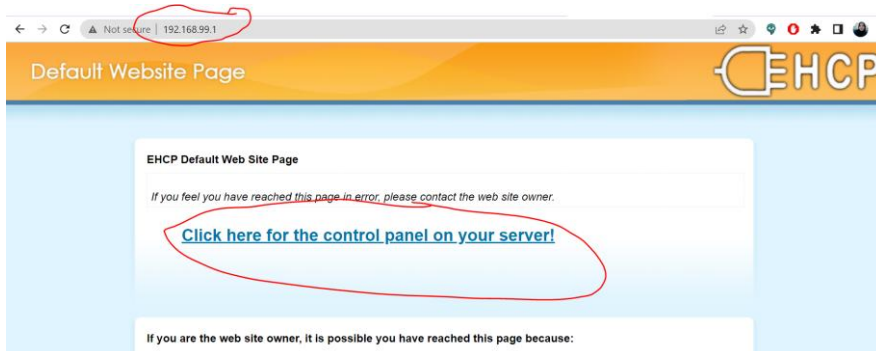

Login menggunakan username admin, dan password yang telah dibuat sebelumnya, yaitu 12345678. Maka akan muncul ke halaman utama ehcp.

