

KONFIGURASI VPS DI LINUX DEBIAN 11


VPS (Virtual Private Server) identik dengan teknologi server side tentang sistem operasi dan perangkat lunak yang menjadikan sebuah mesin dengan kapasitas besar dibagi ke beberapa VM (Virtual Machine), dimana setiap VM dapat diinstall sistem operasi tersendiri.

Langkah-langkah konfigurasi VPS pada linux debian 11 :


1. Clone master Debian 11 dengan nama vps_NamaAnda
2. Setting adapter 1 mesin vps dengan = NAT, sedangkan untuk adapter 2 = host only adapter
3. Konfigurasi IP untuk adapter 2 pada mesin vps = 192.168.44.1
4. Ping ke google.com, pastikan dapat terhubung.

```
root@10:/home/debian# ping google.com
PING forcesafesearch.google.com (216.239.38.120) 56(84) bytes of data.
64 bytes from any-in-2678.1e100.net (216.239.38.120): icmp_seq=1 ttl=116 time=16
.2 ms
64 bytes from any-in-2678.1e100.net (216.239.38.120): icmp_seq=2 ttl=116 time=16
.0 ms
64 bytes from any-in-2678.1e100.net (216.239.38.120): icmp_seq=3 ttl=116 time=16
.0 ms
^C
--- forcesafesearch.google.com ping statistics ---
3 packets transmitted, 3 received, 0% packet loss, time 2002ms
rtt min/avg/max/mdev = 16.045/16.115/16.238/0.087 ms
root@10:/home/debian#
```

5. Buka Network Connections pada control panel, pilih virtual box host only ethernet

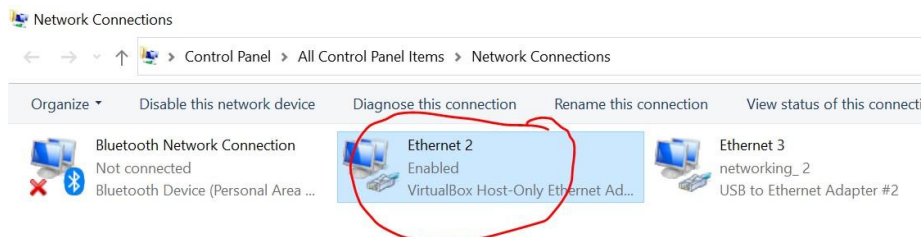

Isi dengan IP yang satu jaringan dengan mesin virtual vps, untuk gateway isi dengan IP dari mesin vps.

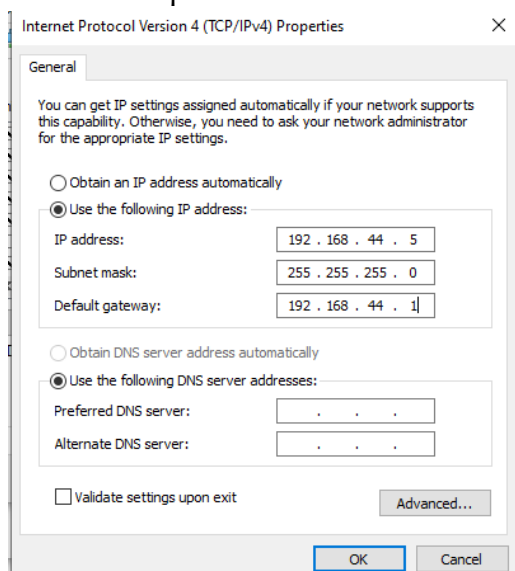

Dari PC Host, coba ping ke IP mesin vps, sedangkan dari mesin vps silahkan ping ke PC Host, pastikan dapat saling terhubung.

6. Install dan set up database mariadb server dan client

apt-get install mariadb-server

apt-get install mariadb-client

Set up database mariadb :

mysql_secure_installation

jika minta password, tekan enter saja, kemudian ikuti langkah di bawah ini :

Switch to unix_socket authentication [Y/n] - tekan n

Set root password? [Y/n] - tekan y untuk membuat password pada database kalian

Remove anonymous users? [Y/n] - tekan y

Disallow root login remotely? [Y/n] - tekan y

Remove test database and access to it? [Y/n] - tekan y

Reload privilege tables now? [Y/n] - tekan y

7. Install dan konfigurasi web server apache2 :

apt-get install apache2

nano /etc/apache2/sites-available/000-default.conf

kemudian tambahkan seperti pada gambar di bawah ini

```
<VirtualHost *:80>
    # The ServerName directive sets the request scheme, hostname and port that
    # the server uses to identify itself. This is used when creating
    # redirection URLs. In the context of virtual hosts, the ServerName
    # specifies what hostname must appear in the request's Host: header to
    # match this virtual host. For the default virtual host (this file) this
    # value is not decisive as it is used as a last resort host regardless.
    # However, you must set it for any further virtual host explicitly.
    #ServerName www.example.com

    ServerAdmin webmaster@localhost
    DocumentRoot /var/www/wordpress

    # Available loglevels: trace8, ..., trace1, debug, info, notice, warn,
    # error, crit, alert, emerg.
```

Aktifkan file 000-default.conf : **sudo a2ensite 000-default.conf**

Restart apache2 : **sudo service apache2 restart**

8. Masuk ke direktori www kemudian download wordpress : **cd /var/www && wget <http://wordpress.org/latest.tar.gz>**

Ekstrak file yang sudah di download tadi :

tar xf latest.tar.gz

9. Install dan konfigurasi layanan file transfer proftpd :

apt-get install proftpd

Buka file konfigurasi proftpd : **nano /etc/proftpd/proftpd.conf**

Kemudian edit seperti pada gambar di bawah ini pada bagian DefaultRoot :

```
GNU nano 5.4 /etc/proftpd/proftpd.conf *
ServerType standalone
DeferWelcome off

# Disable MultilineRFC2228 per https://github.com/proftpd/proftpd/issues/1085
# MultilineRFC2228on
DefaultServer on
ShowSymlinks on

TimeoutNoTransfer 600
TimeoutStalled 600
TimeoutIdle 1200

DisplayLogin welcome.msg
DisplayChdir .message true
ListOptions "-l"

DenyFilter \ *.*

# Use this to jail all users in their homes
DefaultRoot ~
```

Restart proftpd : **sudo service proftpd restart**

Buat user baru : **sudo adduser tori**

10. Install phpMyAdmin : **apt-get install phpmyadmin**

```
Configuring phpmyadmin
Please choose the web server that should be automatically configured to
run phpMyAdmin.

Web server to reconfigure automatically:

[*] apache2
[ ] lighttpd

<Ok>
```

```
Configuring phpmyadmin

The phpmyadmin package must have a database installed and configured
before it can be used. This can be optionally handled with
dbconfig-common.

If you are an advanced database administrator and know that you want to
perform this configuration manually, or if your database has already
been installed and configured, you should refuse this option. Details on
what needs to be done should most likely be provided in
/usr/share/doc/phpmyadmin.

Otherwise, you should probably choose this option.

Configure database for phpmyadmin with dbconfig-common?

<Yes> <No>
```

11. Install PHP :


**apt -y install php php-cgi php-mysqli php-pear php-mbstring libapache2-mod-php
php-common php-phpseclib php-mysql**

12. Buka browser pada PC Host, pada address bar tuliskan ip server/phpmyadmin :
192.168.44.1/phpmyadmin
Login dengan username : root, dan password yang sebelumnya sudah dibuat.




The image shows the phpMyAdmin login page. At the top is the phpMyAdmin logo with a sailboat icon and the text "Welcome to phpMyAdmin". Below this is a "Language" section with a dropdown menu set to "English". Underneath is a "Log in" section with fields for "Username:" (containing "root") and "Password:" (containing four asterisks). A "Go" button is located at the bottom right of the login section.

Jika berhasil login, maka akan beralih ke halaman seperti di bawah ini :

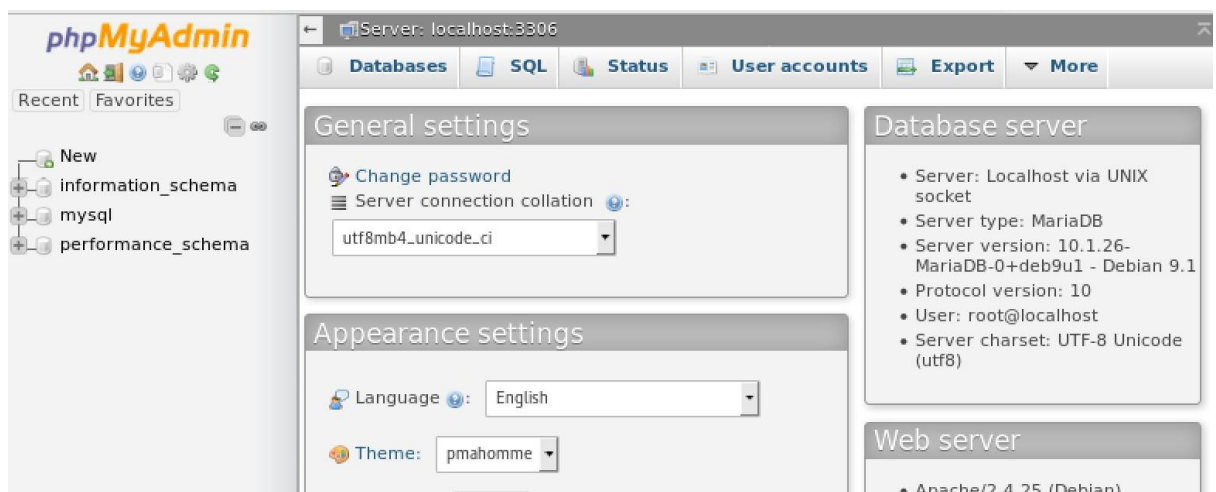


Setelah itu ikuti langkah-langkah seperti pada gambar di bawah ini :

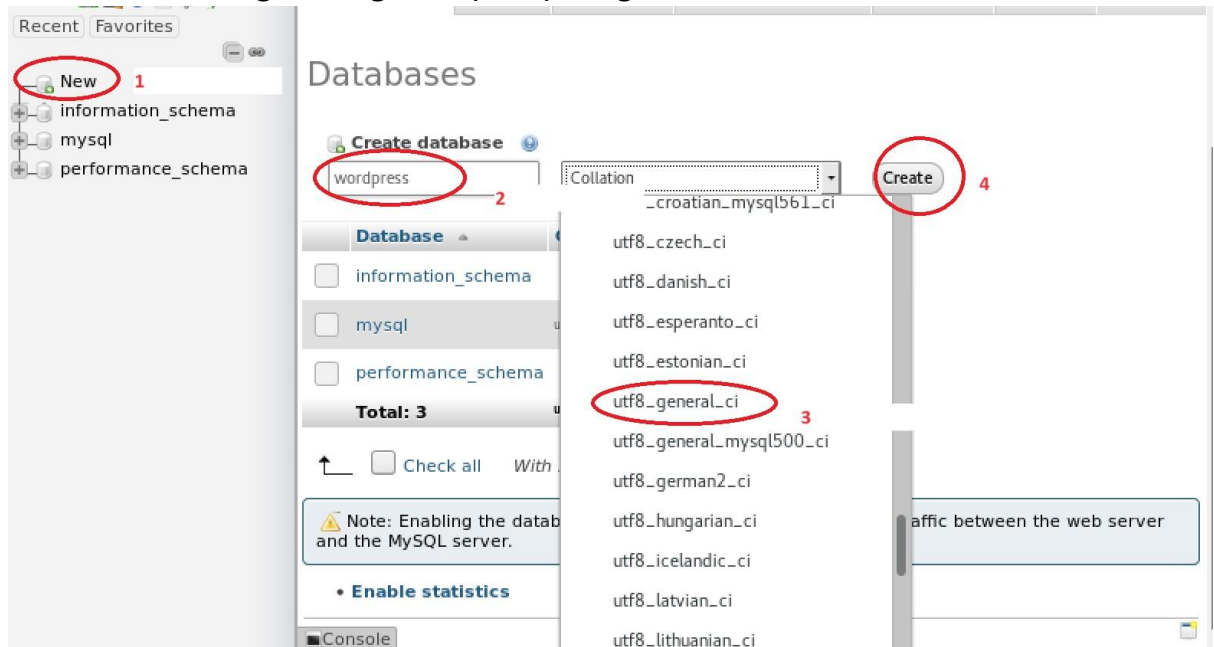

Akan muncul database wordpress yang telah dibuat



13. Buka tab baru pada browser PC Host, pada address bar tuliskan ip server, sehingga akan muncul tampilan seperti di bawah ini :

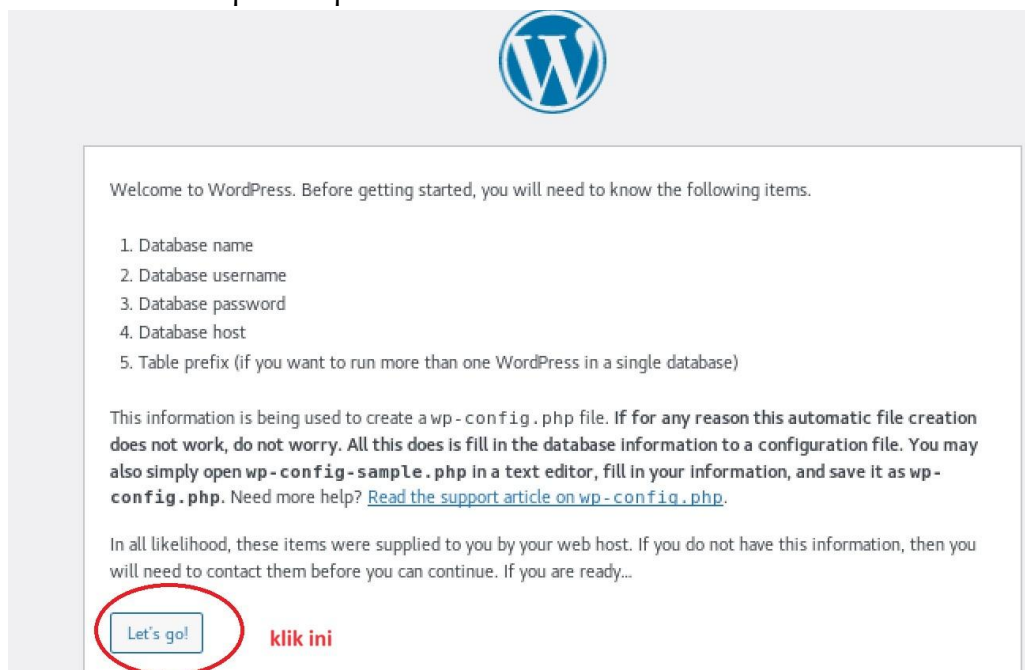

Database Name
The name of the database you want to use with WordPress.

Username
Your database username.

Password
Your database password.

Database Host
You should be able to get this info from your web host, if localhost does not work.

Table Prefix
If you want to run multiple WordPress installations in a single database, change this.

Copy ke notepad teks yang di blok, kemudian simpan dengan nama : **wp-config.php**


Unable to write to wp-config.php file.

You can create the wp-config.php file manually and paste the following text into it.


Configuration rules for wp-config.php:

```
<?php
/**
 * The base configuration for WordPress
 *
 * The wp-config.php creation script uses this file during the installation.
 * You don't have to use the web site, you can copy this file to "wp-config.php"
 * and fill in the values.
 *
 * This file contains the following configurations:
 *
 * * Database settings
 * * Secret keys
 * * Database table prefix
 * * ABSPATH
 */
```

14. Buka aplikasi filezilla

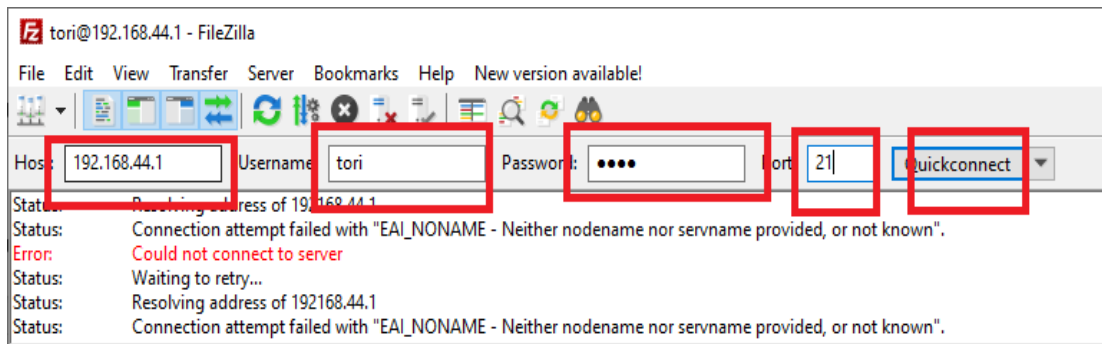

Cari file wp-config.php yang tadi, kemudian drag pindahkan ke sebelah kanan.

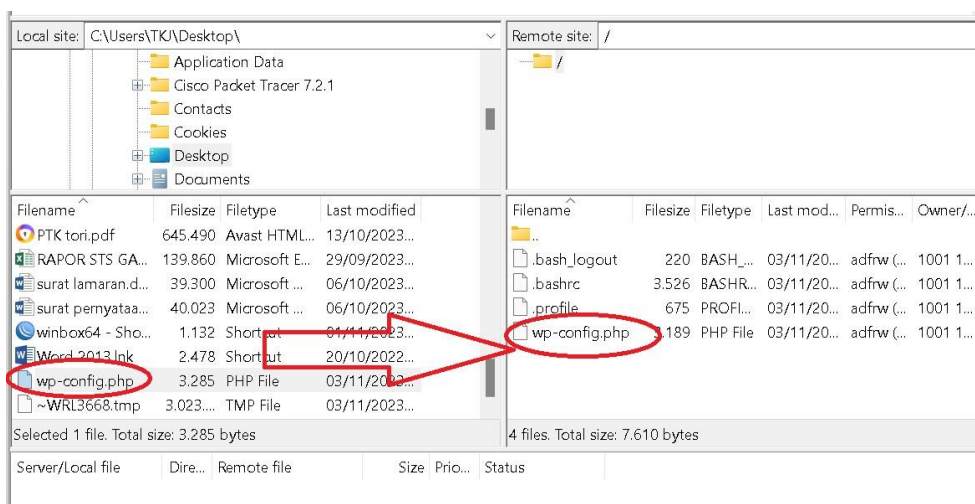

15. Pada terminal debian, masuk ke direktori home, kemudian masuk ke folder user yang sudah dibuat sebelumnya, kemudian copy file wp-config.php ke folder wordpress

```
root@debian:/etc/proftpd# cd /home
root@debian:/home# ls
debian tori
root@debian:/home# cd tori
root@debian:/home/tori# ls
wp-config.php
root@debian:/home/tori# cp wp-config.php /var/www/wordpress
```

16. Pada halaman ini klik **run the installation**

Configuration rules for `wp-config.php`:

```
<?php
/**
 * The base configuration for WordPress
 *
 * The wp-config.php creation script uses this file during the installation.
 * You don't have to use the web site, you can copy this file to "wp-config.php"
 * and fill in the values.
 *
 * This file contains the following configurations:
 *
 * * Database settings
 * * Secret keys
 * * Database table prefix
 * * ABSPATH
 */
```

After you've done that, click "Run the installation".

Run the installation

Isi informasi yang dibutuhkan, kemudian klik **install wordpress**

Information needed

Please provide the following information. Do not worry, you can always change these settings later.

Site Title	TKJ SMK 3 PERCIK
Username	tori Usernames can have only alphanumeric characters, spaces, underscores, hyphens, periods, and the @ symbol.
Password	tori1234 Very weak Important: You will need this password to log in. Please store it in a secure location. ☒ Confirm use of weak password
Confirm Password	
Your Email	tory.fahrina@gmail.com Double-check your email address before continuing.
Search engine visibility	☒ Discourage search engines from indexing this site It is up to search engines to honor this request.
Install WordPress	

Success!

WordPress has been installed. Thank you, and enjoy!

Username *tori*

Password *Your chosen password.*

[Log In](#)

Username or Email Address

Password

☐ Remember Me

TKJ SMK 3 PERCIK

New

Howdy, tori

Dashboard

Home

Updates

Posts

Media

Pages

Comments

Appearance

Plugins

Users

Tools

Settings

Collapse menu

Dashboard

Welcome to WordPress!

[Learn more about the 6.3.2 version.](#)

Author rich content with blocks and patterns

Block patterns are pre-configured block layouts. Use them to get inspired or create new pages in a flash.
[Add a new page](#)

Customize your entire site with block themes

Design everything on your site — from the header down to the footer, all using blocks and patterns.
[Open site editor](#)

Switch up your site's look & feel with Styles

Tweak your site, or give it a whole new look! Get creative — how about a new color palette or font?
[Edit styles](#)

PHP Update Required

Your site is running on an outdated version of PHP (7.0.30-0+deb9u1), which does not receive security updates and soon will not be supported by WordPress. Ensure that PHP is updated

Quick Draft

Title

Search

ENG US

13:07 03/11/2023

Buka tab baru, ketikkan ip server, akan muncul tampilan seperti di bawah ini

