NAMALA USHODAYA

23BTRCL225

Jain University

2027

11/10/2026

Title : AWS Cloud & Data Engineering

1. Amazon S3




Raw data
Employees.csv

2. Glue Crawler




- Scan S3 data
- detects schema
- infers data type

3. Data Catalog



database_training_gdb
- Table row, 5 column
- status, employee_id, Name, dept, salary, City

4. Glue visual ETL



employee_job
- catalog source, transform, S3
- Built with Basics

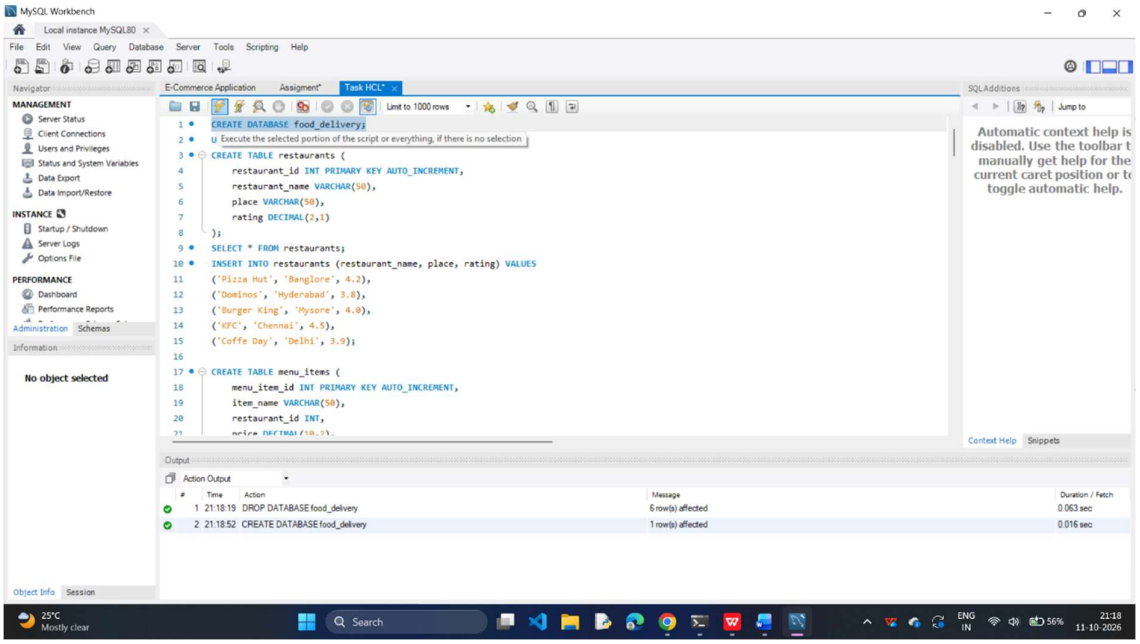
5. Transformation
- Drop file
- Rename the City Column
- other column pass through

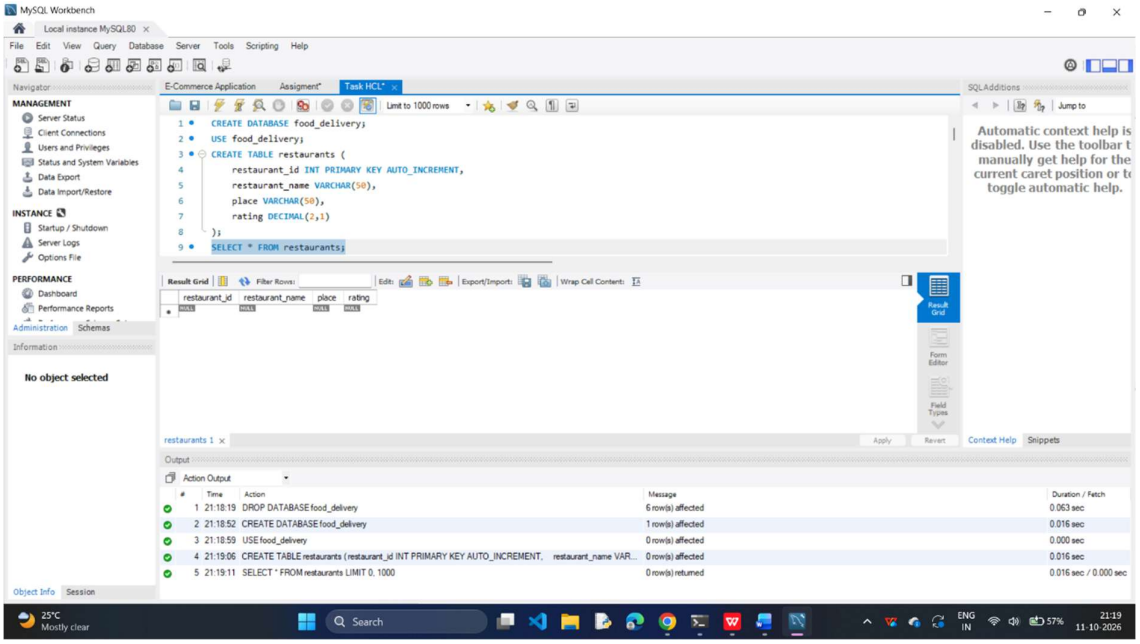
6. Amazon S3

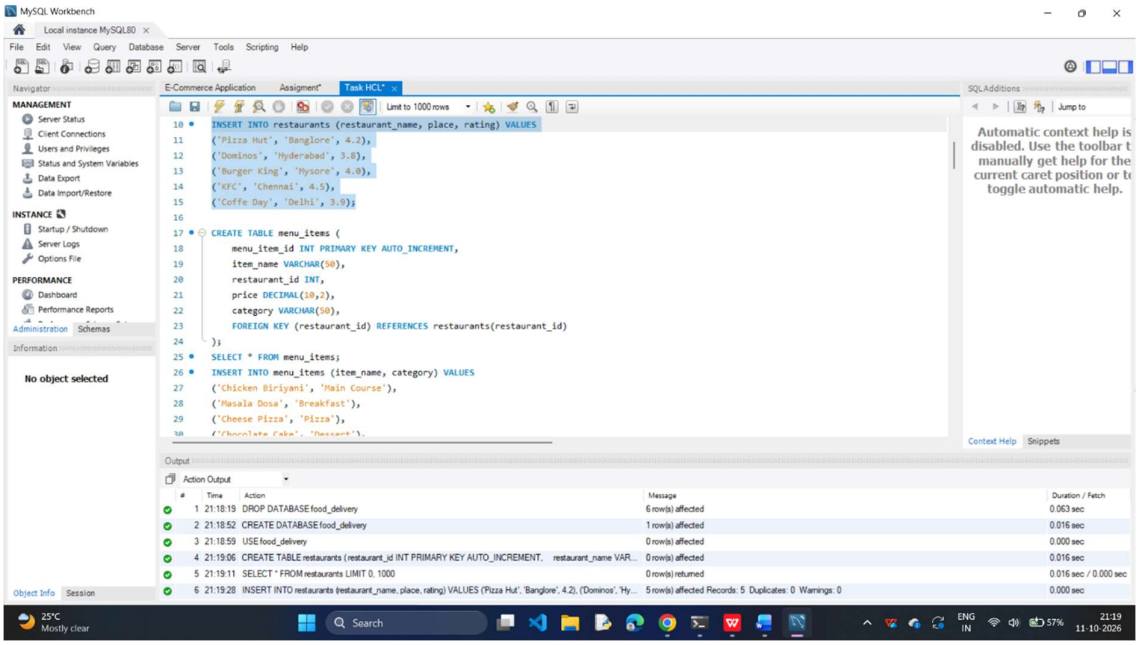


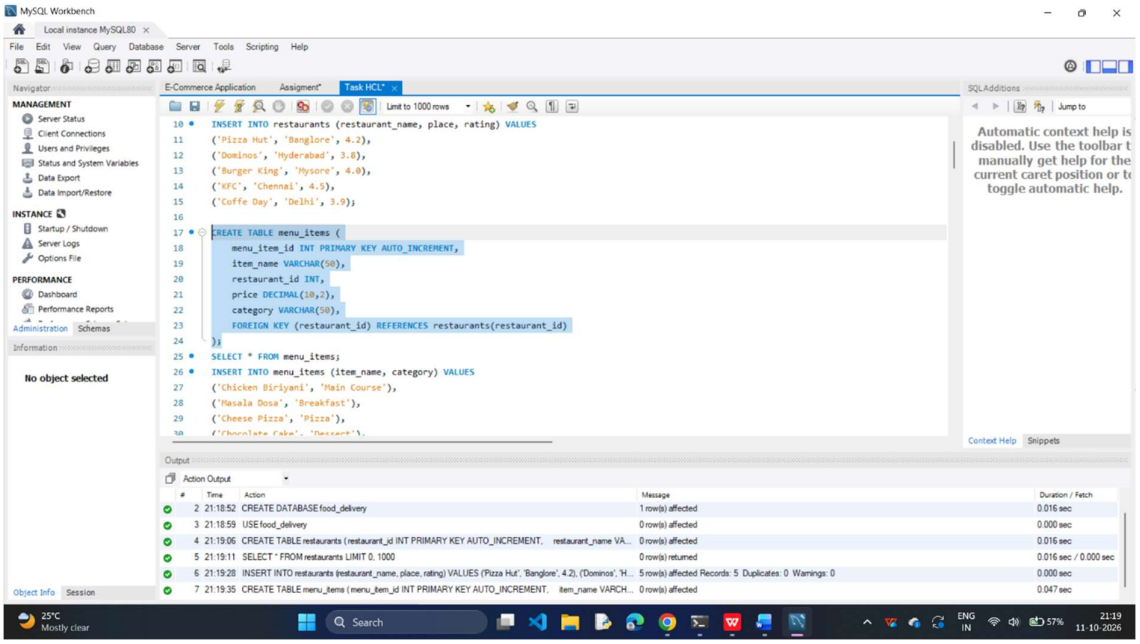
Curated / error
- parquet with snappy
- job status : succeeded
employee_id name

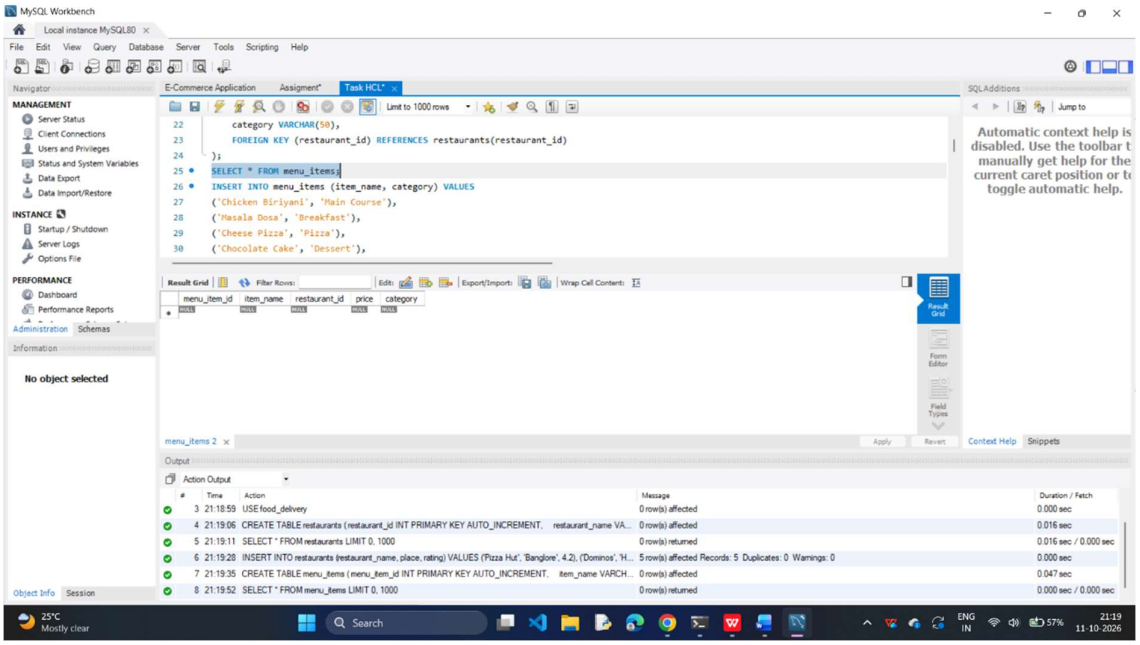
SQL Practice:

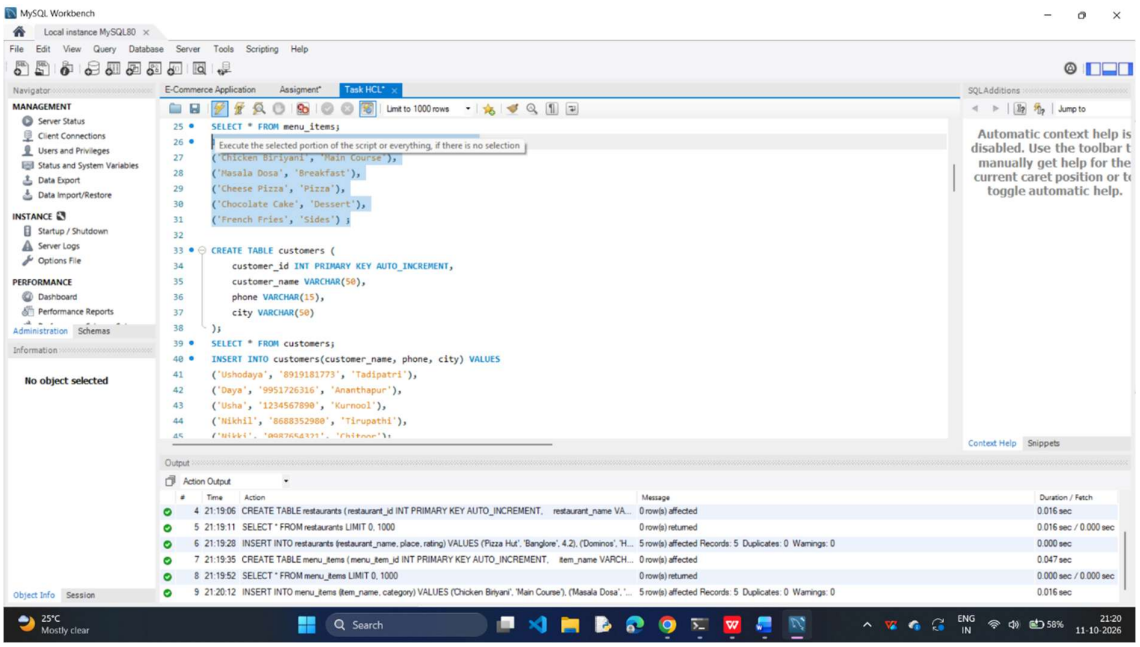


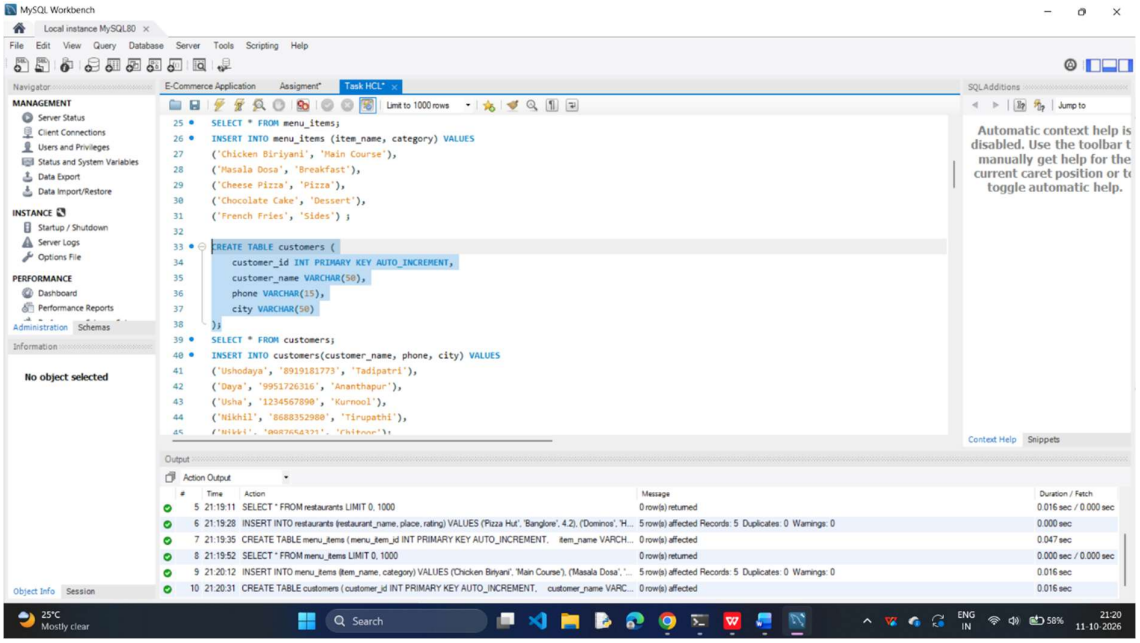


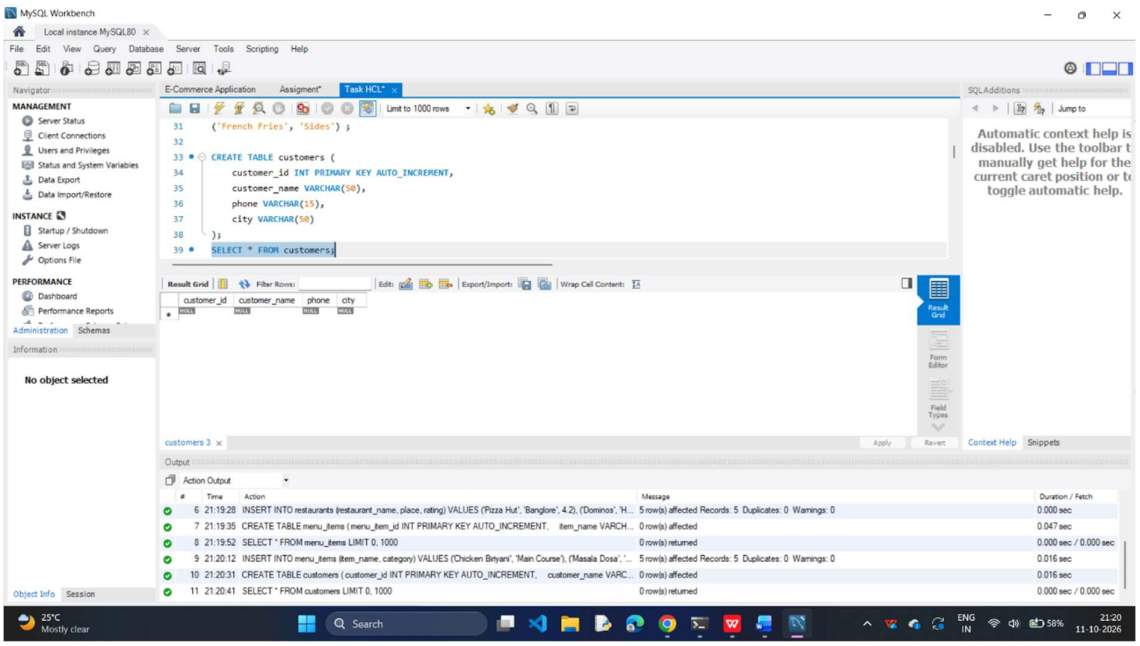

MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
Navigator
MANAGEMENT
Server Status
Client Connections
Users and Privileges
Status and System Variables
Data Export
Data Import/Restore
INSTANCE
Startup / Shutdown
Server Logs
Options File
PERFORMANCE
Dashboard
Performance Reports
Administration Schemas
Information
No object selected
Object Info Session
E-Commerce Application Assigment* Task HCL*
Limit to 1000 rows
INSERT INTO restaurants (restaurant_name, place, rating) VALUES
('Pizza Hut', 'Banglore', 4.2),
('Dominos', 'Hyderabad', 3.8),
('Burger King', 'Mysore', 4.0),
('KFC', 'Chennai', 4.5),
('Coffe Day', 'Delhi', 3.9);
CREATE TABLE menu_items (
menu_item_id INT PRIMARY KEY AUTO_INCREMENT,
item_name VARCHAR(50),
restaurant_id INT,
price DECIMAL(10,2),
category VARCHAR(50),
FOREIGN KEY (restaurant_id) REFERENCES restaurants(restaurant_id)
);
SELECT * FROM menu_items;
INSERT INTO menu_items (item_name, category) VALUES
('Chicken Biriyani', 'Main Course'),
('Masala Dosa', 'Breakfast'),
('Cheese Pizza', 'Pizza'),
SQLAdditions
Jump to
Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or t toggle automatic help.
Context Help Snippets
Output
Action Output
Time Action Message Duration / Fetch
1 21:18:19 DROP DATABASE food_delivery 6 row(s) affected 0.063 sec
2 21:18:52 CREATE DATABASE food_delivery 1 row(s) affected 0.016 sec
3 21:18:59 USE food_delivery 0 row(s) affected 0.000 sec
4 21:19:06 CREATE TABLE restaurants (restaurant_id INT PRIMARY KEY AUTO_INCREMENT, restaurant_name VAR... 0 row(s) affected 0.016 sec
5 21:19:11 SELECT * FROM restaurants LIMIT 0, 1000 0 row(s) returned 0.016 sec / 0.000 sec
6 21:19:28 INSERT INTO restaurants (restaurant_name, place, rating) VALUES ('Pizza Hut', 'Banglore', 4.2), ('Dominos', 'Hy... 5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0 0.000 sec
25°C Mostly clear
Search
ENG IN
57%
21:19 11-10-2026

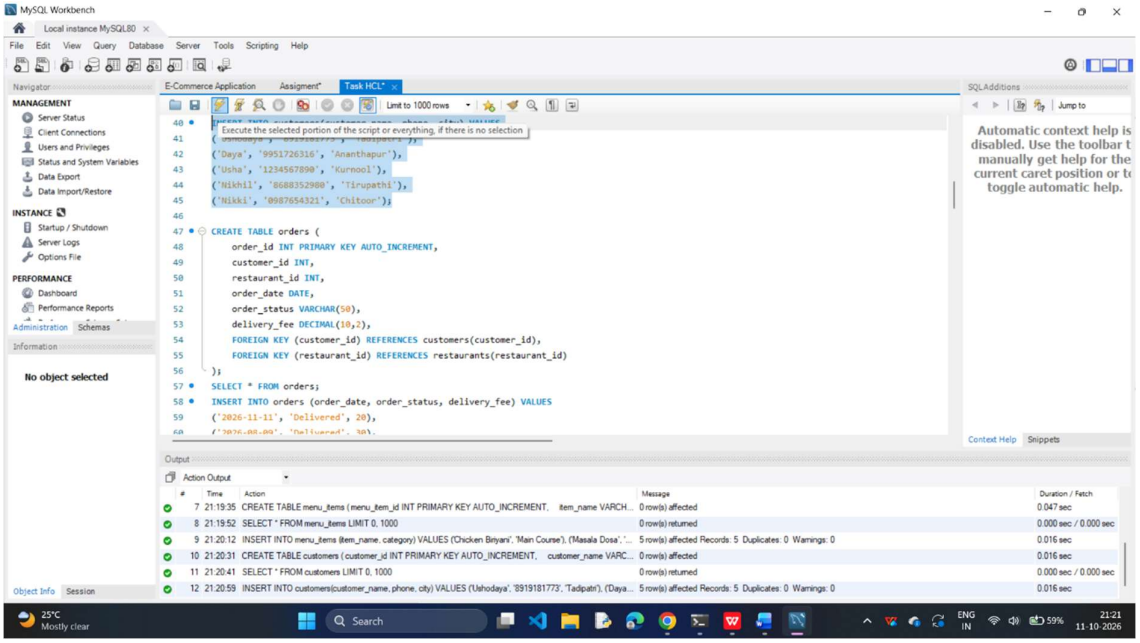

MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
Navigator
MANAGEMENT
Server Status
Client Connections
Users and Privileges
Status and System Variables
Data Export
Data Import/Restore
INSTANCE
Startup / Shutdown
Server Logs
Options File
PERFORMANCE
Dashboard
Performance Reports
Administration Schemas
Information
No object selected
Object Info Session
E-Commerce Application Assigment* Task HCL*
Limit to 1000 rows
INSERT INTO restaurants (restaurant_name, place, rating) VALUES
('Pizza Hut', 'Banglore', 4.2),
('Dominos', 'Hyderabad', 3.8),
('Burger King', 'Mysore', 4.0),
('KFC', 'Chennai', 4.5),
('Coffe Day', 'Delhi', 3.9);
CREATE TABLE menu_items (
menu_item_id INT PRIMARY KEY AUTO_INCREMENT,
item_name VARCHAR(50),
restaurant_id INT,
price DECIMAL(10,2),
category VARCHAR(50),
FOREIGN KEY (restaurant_id) REFERENCES restaurants(restaurant_id)
);
SELECT * FROM menu_items;
INSERT INTO menu_items (item_name, category) VALUES
('Chicken Biriyani', 'Main Course'),
('Masala Dosa', 'Breakfast'),
('Cheese Pizza', 'Pizza'),
SQLAdditions
Jump to
Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or t toggle automatic help.
Context Help Snippets
Output
Action Output
Time Action Message Duration / Fetch
2 21:18:52 CREATE DATABASE food_delivery 1 row(s) affected 0.016 sec
3 21:18:59 USE food_delivery 0 row(s) affected 0.000 sec
4 21:19:06 CREATE TABLE restaurants (restaurant_id INT PRIMARY KEY AUTO_INCREMENT, restaurant_name VA... 0 row(s) affected 0.016 sec
5 21:19:11 SELECT * FROM restaurants LIMIT 0, 1000 0 row(s) returned 0.016 sec / 0.000 sec
6 21:19:28 INSERT INTO restaurants (restaurant_name, place, rating) VALUES ('Pizza Hut', 'Banglore', 4.2), ('Dominos', 'H... 5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0 0.000 sec
7 21:19:35 CREATE TABLE menu_items (menu_item_id INT PRIMARY KEY AUTO_INCREMENT, item_name VARCH... 0 row(s) affected 0.047 sec
25°C Mostly clear
Search
ENG IN
57%
21:19 11-10-2026

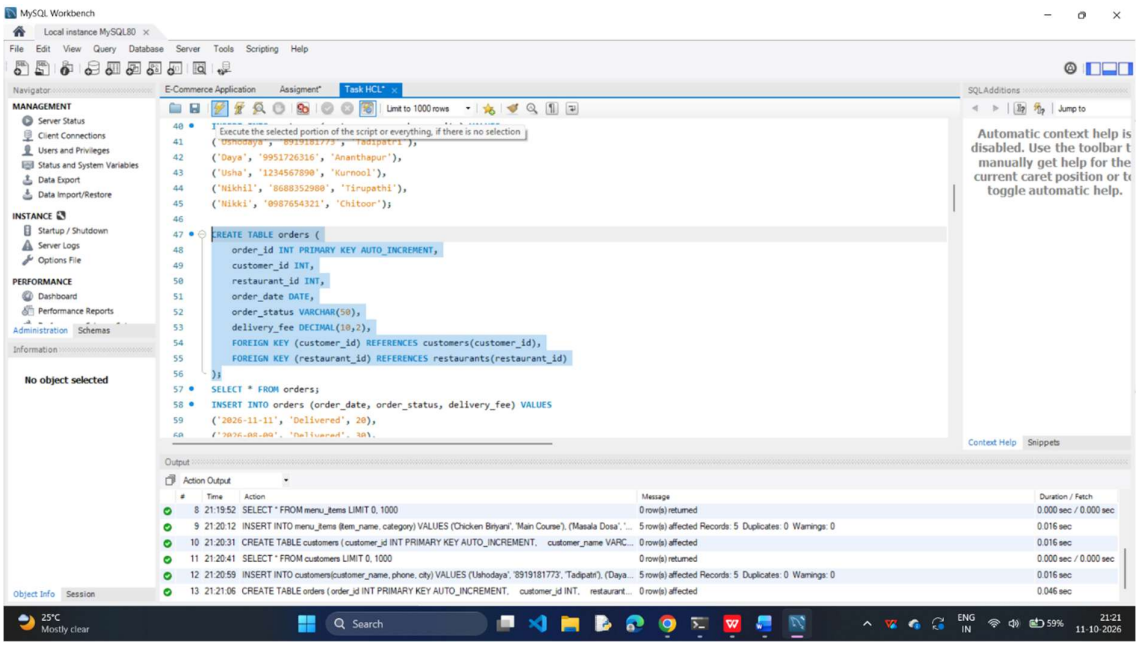

MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
E-Commerce Application Assigment* Task HCL*
Limit to 1000 rows
22 category VARCHAR(50),
23 FOREIGN KEY (restaurant_id) REFERENCES restaurants(restaurant_id)
24);
25 SELECT * FROM menu_items;
26 INSERT INTO menu_items (item_name, category) VALUES
27 ('Chicken Biriyani', 'Main Course'),
28 ('Masala Dosa', 'Breakfast'),
29 ('Cheese Pizza', 'Pizza'),
30 ('Chocolate Cake', 'Dessert'),
Result Grid
menu_item_id item_name restaurant_id price category
Output
Action Output
Time Action Message Duration / Fetch
3 21:18:59 USE food_delivery 0 row(s) affected 0.000 sec
4 21:19:06 CREATE TABLE restaurants (restaurant_id INT PRIMARY KEY AUTO_INCREMENT, restaurant_name VA... 0 row(s) affected 0.016 sec
5 21:19:11 SELECT * FROM restaurants LIMIT 0, 1000 0 row(s) returned 0.016 sec / 0.000 sec
6 21:19:28 INSERT INTO restaurants (restaurant_name, place, rating) VALUES ('Pizza Hut', 'Banglore', 4.2), ('Dominos', 'H... 5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0 0.000 sec
7 21:19:35 CREATE TABLE menu_items (menu_item_id INT PRIMARY KEY AUTO_INCREMENT, item_name VARCH... 0 row(s) affected 0.047 sec
8 21:19:52 SELECT * FROM menu_items LIMIT 0, 1000 0 row(s) returned 0.000 sec / 0.000 sec
No object selected
Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or t toggle automatic help.
25°C Mostly clear
Search
ENG IN
57%
21:19 11-10-2026

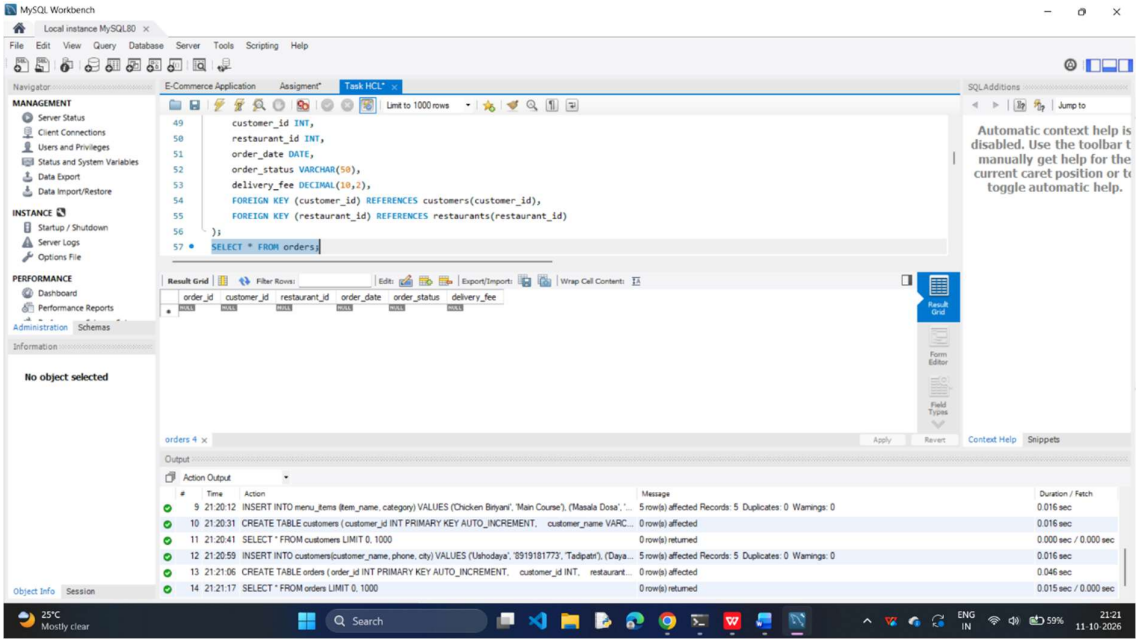

MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
E-Commerce Application Assigment* Task HCL*
Limit to 1000 rows
25 SELECT * FROM menu_items;
26 Execute the selected portion of the script or everything, if there is no selection
27 ('Chicken Biriyani', 'Main Course'),
28 ('Masala Dosa', 'Breakfast'),
29 ('Cheese Pizza', 'Pizza'),
30 ('Chocolate Cake', 'Dessert'),
31 ('French Fries', 'Sides') ;
32
33 CREATE TABLE customers (
34 customer_id INT PRIMARY KEY AUTO_INCREMENT,
35 customer_name VARCHAR(50),
36 phone VARCHAR(15),
37 city VARCHAR(50)
38);
39 SELECT * FROM customers;
40 INSERT INTO customers(customer_name, phone, city) VALUES
41 ('Ushodaya', '8919181773', 'Tadipatri'),
42 ('Daya', '9951726316', 'Ananthapur'),
43 ('Usha', '1234567890', 'Kurnool'),
44 ('Nikhil', '8688352980', 'Tirupathi'),
Output
Action Output
Time Action Message Duration / Fetch
4 21:19:06 CREATE TABLE restaurants (restaurant_id INT PRIMARY KEY AUTO_INCREMENT, restaurant_name VA... 0 row(s) affected 0.016 sec
5 21:19:11 SELECT * FROM restaurants LIMIT 0, 1000 0 row(s) returned 0.016 sec / 0.000 sec
6 21:19:28 INSERT INTO restaurants (restaurant_name, place, rating) VALUES ('Pizza Hut', 'Banglore', 4.2), ('Dominos', 'H... 5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0 0.000 sec
7 21:19:35 CREATE TABLE menu_items (menu_item_id INT PRIMARY KEY AUTO_INCREMENT, item_name VARCH... 0 row(s) affected 0.047 sec
8 21:19:52 SELECT * FROM menu_items LIMIT 0, 1000 0 row(s) returned 0.000 sec / 0.000 sec
9 21:20:12 INSERT INTO menu_items (item_name, category) VALUES ('Chicken Biriyani', 'Main Course'), ('Masala Dosa', '... 5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0 0.016 sec
No object selected
Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or t toggle automatic help.
25°C Mostly clear
Search
ENG IN
58%
21:20 11-10-2026

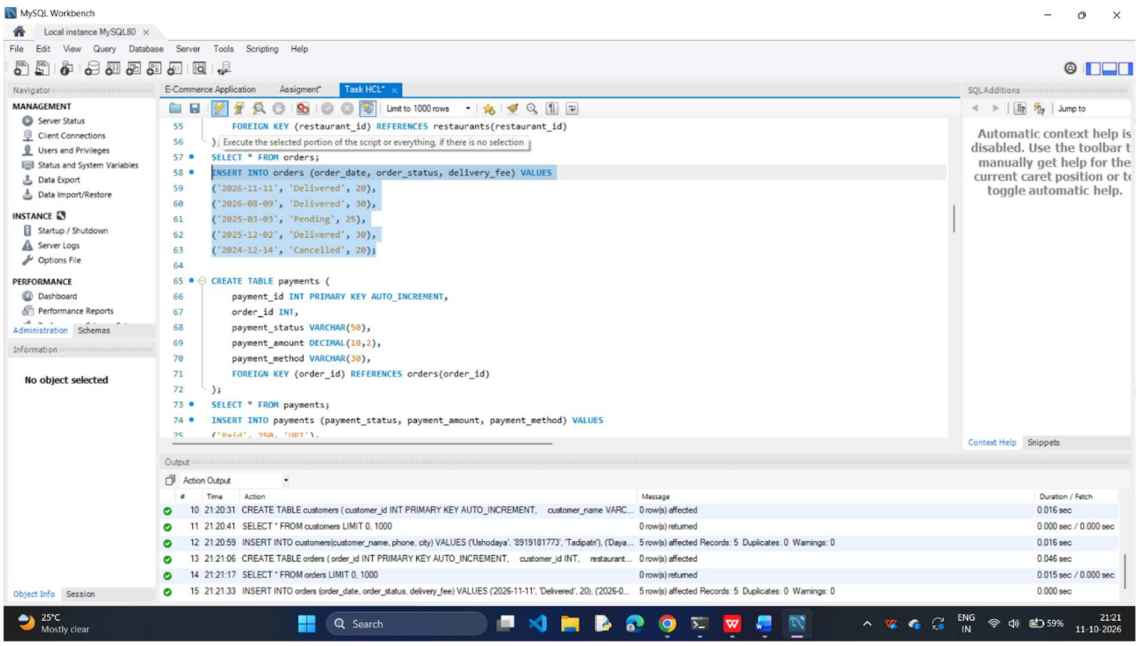

MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
E-Commerce Application
Assigment*
Task HCL*
Limit to 1000 rows
SELECT * FROM menu_items;
INSERT INTO menu_items (item_name, category) VALUES
('Chicken Biriyani', 'Main Course'),
('Masala Dosa', 'Breakfast'),
('Cheese Pizza', 'Pizza'),
('Chocolate Cake', 'Dessert'),
('French Fries', 'Sides') ;
CREATE TABLE customers (
customer_id INT PRIMARY KEY AUTO_INCREMENT,
customer_name VARCHAR(50),
phone VARCHAR(15),
city VARCHAR(50)
);
SELECT * FROM customers;
INSERT INTO customers(customer_name, phone, city) VALUES
('Ushodaya', '8919181773', 'Tadipatri'),
('Daya', '9951726316', 'Ananthapur'),
('Usha', '1234567890', 'Kurnool'),
('Nikhil', '8688352980', 'Tirupathi'),
Navigator
MANAGEMENT
Server Status
Client Connections
Users and Privileges
Status and System Variables
Data Export
Data Import/Restore
INSTANCE
Startup / Shutdown
Server Logs
Options File
PERFORMANCE
Dashboard
Performance Reports
Administration Schemas
Information
No object selected
Object Info Session
SQLAdditions
Jump to
Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or t toggle automatic help.
Context Help Snippets
Output
Action Output
Time Action Message Duration / Fetch
5 21:19:11 SELECT * FROM restaurants LIMIT 0, 1000 0 row(s) returned 0.016 sec / 0.000 sec
6 21:19:28 INSERT INTO restaurants (restaurant_name, place, rating) VALUES ('Pizza Hut', 'Banglore', 4.2), ('Dominos', 'H... 5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0 0.000 sec
7 21:19:35 CREATE TABLE menu_items (menu_item_id INT PRIMARY KEY AUTO_INCREMENT, item_name VARCH... 0 row(s) affected 0.047 sec
8 21:19:52 SELECT * FROM menu_items LIMIT 0, 1000 0 row(s) returned 0.000 sec / 0.000 sec
9 21:20:12 INSERT INTO menu_items (item_name, category) VALUES ('Chicken Biriyani', 'Main Course'), ('Masala Dosa', '... 5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0 0.016 sec
10 21:20:31 CREATE TABLE customers (customer_id INT PRIMARY KEY AUTO_INCREMENT, customer_name VARC... 0 row(s) affected 0.016 sec
25°C Mostly clear
Search
ENG IN
58%
21:20 11-10-2026

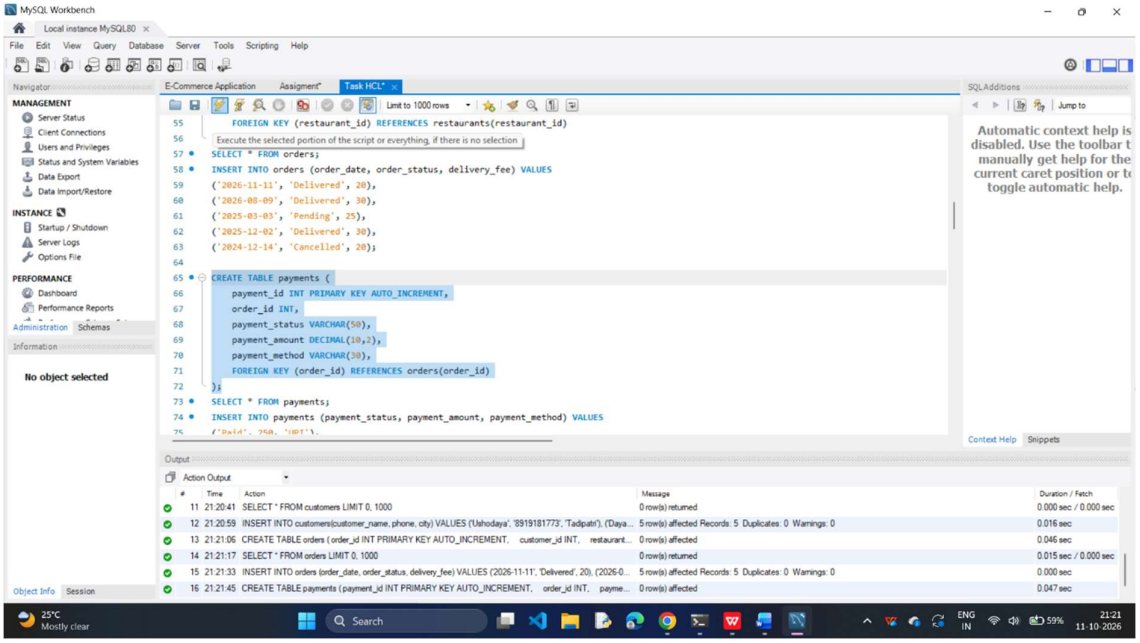

MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
E-Commerce Application
Assigment*
Task HCL*
Limit to 1000 rows
('French Fries', 'Sides') ;
CREATE TABLE customers (
customer_id INT PRIMARY KEY AUTO_INCREMENT,
customer_name VARCHAR(50),
phone VARCHAR(15),
city VARCHAR(50)
);
SELECT * FROM customers;
Result Grid
Filter Rows:
Edit:
Export/Import:
Wrap Cell Content:
customer_id customer_name phone city
NULL NULL NULL NULL
Result Grid
Form Editor
Field Types
customers 3
Apply
Revert
Navigator
MANAGEMENT
Server Status
Client Connections
Users and Privileges
Status and System Variables
Data Export
Data Import/Restore
INSTANCE
Startup / Shutdown
Server Logs
Options File
PERFORMANCE
Dashboard
Performance Reports
Administration Schemas
Information
No object selected
Object Info Session
SQLAdditions
Jump to
Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or t toggle automatic help.
Context Help Snippets
Output
Action Output
Time Action Message Duration / Fetch
6 21:19:28 INSERT INTO restaurants (restaurant_name, place, rating) VALUES ('Pizza Hut', 'Banglore', 4.2), ('Dominos', 'H... 5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0 0.000 sec
7 21:19:35 CREATE TABLE menu_items (menu_item_id INT PRIMARY KEY AUTO_INCREMENT, item_name VARCH... 0 row(s) affected 0.047 sec
8 21:19:52 SELECT * FROM menu_items LIMIT 0, 1000 0 row(s) returned 0.000 sec / 0.000 sec
9 21:20:12 INSERT INTO menu_items (item_name, category) VALUES ('Chicken Biriyani', 'Main Course'), ('Masala Dosa', '... 5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0 0.016 sec
10 21:20:31 CREATE TABLE customers (customer_id INT PRIMARY KEY AUTO_INCREMENT, customer_name VARC... 0 row(s) affected 0.016 sec
11 21:20:41 SELECT * FROM customers LIMIT 0, 1000 0 row(s) returned 0.000 sec / 0.000 sec
25°C Mostly clear
Search
ENG IN
58%
21:20 11-10-2026

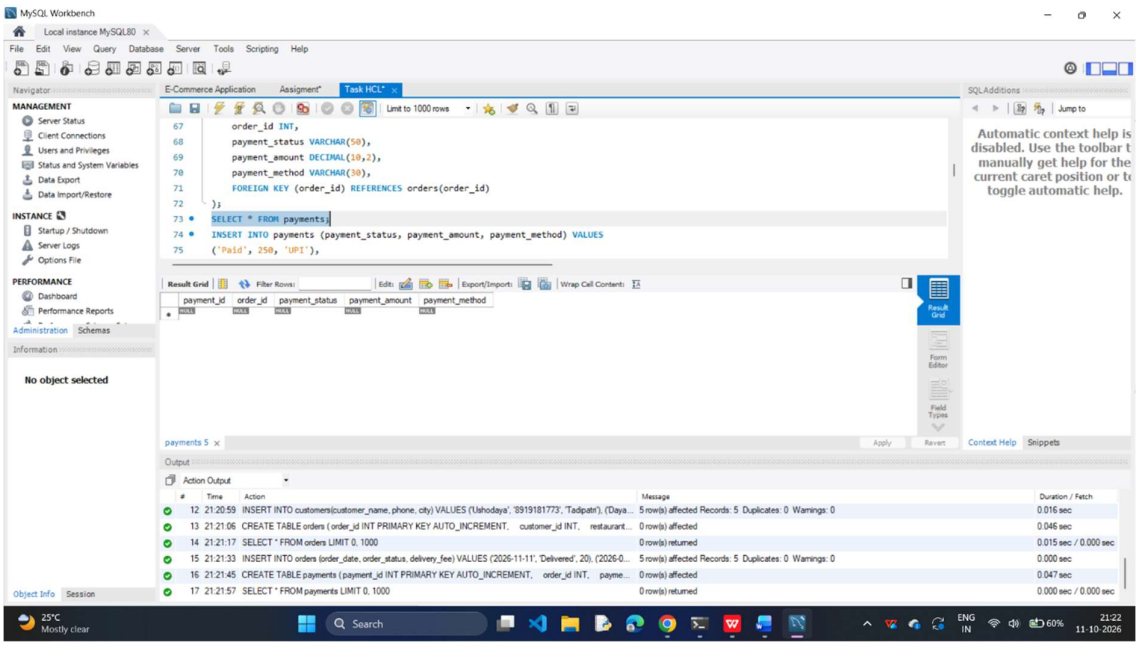

MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
Navigator
MANAGEMENT
Server Status
Client Connections
Users and Privileges
Status and System Variables
Data Export
Data Import/Restore
INSTANCE
Startup / Shutdown
Server Logs
Options File
PERFORMANCE
Dashboard
Performance Reports
Administration Schemas
Information
No object selected
Object Info Session
E-Commerce Application Assigment* Task HCL*
Limit to 1000 rows
Execute the selected portion of the script or everything, if there is no selection
('Daya', '9951726316', 'Ananthapur'),
('Usha', '1234567890', 'Kurnool'),
('Nikhil', '8688352980', 'Tirupathi'),
('Nikki', '0987654321', 'Chitoor');
CREATE TABLE orders (
order_id INT PRIMARY KEY AUTO_INCREMENT,
customer_id INT,
restaurant_id INT,
order_date DATE,
order_status VARCHAR(50),
delivery_fee DECIMAL(10,2),
FOREIGN KEY (customer_id) REFERENCES customers(customer_id),
FOREIGN KEY (restaurant_id) REFERENCES restaurants(restaurant_id)
);
SELECT * FROM orders;
INSERT INTO orders (order_date, order_status, delivery_fee) VALUES
('2026-11-11', 'Delivered', 20),
SQLAdditions
Jump to
Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or t toggle automatic help.
Context Help Snippets
Output
Action Output
Time Action Message Duration / Fetch
7 21:19:35 CREATE TABLE menu_items (menu_item_id INT PRIMARY KEY AUTO_INCREMENT, item_name VARCH... 0 row(s) affected 0.047 sec
8 21:19:52 SELECT * FROM menu_items LIMIT 0, 1000 0 row(s) returned 0.000 sec / 0.000 sec
9 21:20:12 INSERT INTO menu_items (item_name, category) VALUES ('Chicken Biryani', 'Main Course'), ('Masala Dosa', '... 5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0 0.016 sec
10 21:20:31 CREATE TABLE customers (customer_id INT PRIMARY KEY AUTO_INCREMENT, customer_name VARC... 0 row(s) affected 0.016 sec
11 21:20:41 SELECT * FROM customers LIMIT 0, 1000 0 row(s) returned 0.000 sec / 0.000 sec
12 21:20:59 INSERT INTO customers(customer_name, phone, city) VALUES ('Ushodaya', '8919181773', 'Tadipatri'), ('Daya... 5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0 0.016 sec
25°C Mostly clear
Search
ENG IN
59%
21:21 11-10-2026

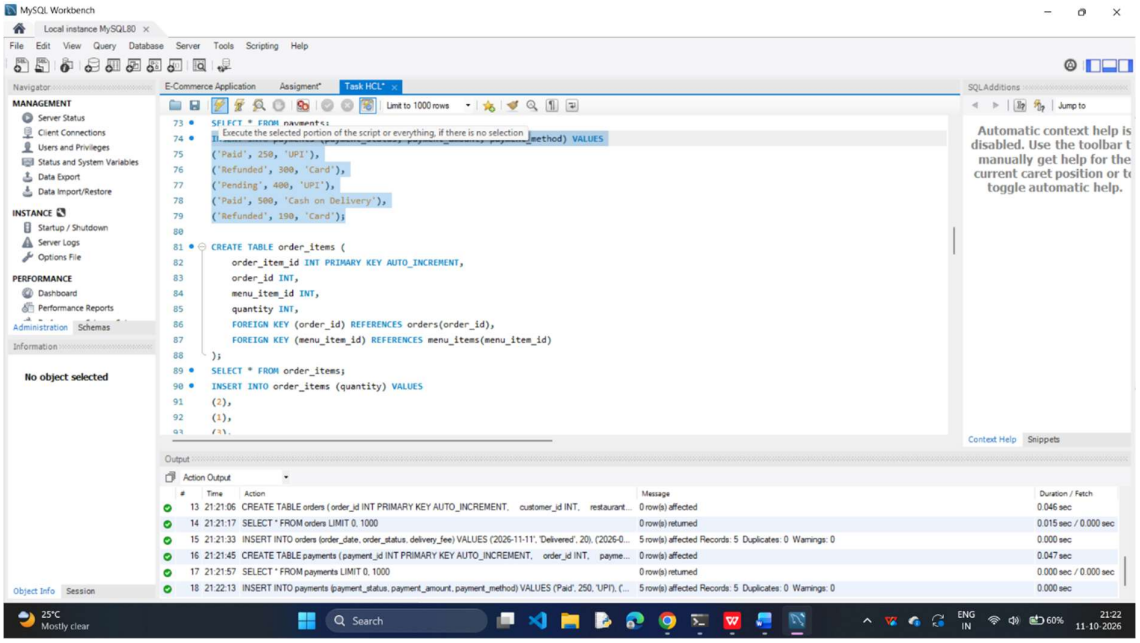

MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
Navigator
MANAGEMENT
Server Status
Client Connections
Users and Privileges
Status and System Variables
Data Export
Data Import/Restore
INSTANCE
Startup / Shutdown
Server Logs
Options File
PERFORMANCE
Dashboard
Performance Reports
Administration Schemas
Information
No object selected
Object Info Session
E-Commerce Application Assigment* Task HCL*
Limit to 1000 rows
Execute the selected portion of the script or everything, if there is no selection
('Ushodaya', '8919181773', 'Tadipatri'),
('Daya', '9951726316', 'Ananthapur'),
('Usha', '1234567890', 'Kurnool'),
('Nikhil', '8688352980', 'Tirupathi'),
('Nikki', '0987654321', 'Chitoor');
CREATE TABLE orders (
order_id INT PRIMARY KEY AUTO_INCREMENT,
customer_id INT,
restaurant_id INT,
order_date DATE,
order_status VARCHAR(50),
delivery_fee DECIMAL(10,2),
FOREIGN KEY (customer_id) REFERENCES customers(customer_id),
FOREIGN KEY (restaurant_id) REFERENCES restaurants(restaurant_id)
);
SELECT * FROM orders;
INSERT INTO orders (order_date, order_status, delivery_fee) VALUES
('2026-11-11', 'Delivered', 20),
SQLAdditions
Jump to
Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or t toggle automatic help.
Context Help Snippets
Output
Action Output
Time Action Message Duration / Fetch
8 21:19:52 SELECT * FROM menu_items LIMIT 0, 1000 0 row(s) returned 0.000 sec / 0.000 sec
9 21:20:12 INSERT INTO menu_items (item_name, category) VALUES ('Chicken Biryani', 'Main Course'), ('Masala Dosa', '... 5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0 0.016 sec
10 21:20:31 CREATE TABLE customers (customer_id INT PRIMARY KEY AUTO_INCREMENT, customer_name VARC... 0 row(s) affected 0.016 sec
11 21:20:41 SELECT * FROM customers LIMIT 0, 1000 0 row(s) returned 0.000 sec / 0.000 sec
12 21:20:59 INSERT INTO customers(customer_name, phone, city) VALUES ('Ushodaya', '8919181773', 'Tadipatri'), ('Daya... 5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0 0.016 sec
13 21:21:06 CREATE TABLE orders (order_id INT PRIMARY KEY AUTO_INCREMENT, customer_id INT, restaurant... 0 row(s) affected 0.046 sec
25°C Mostly clear
Search
ENG IN
59%
21:21 11-10-2026

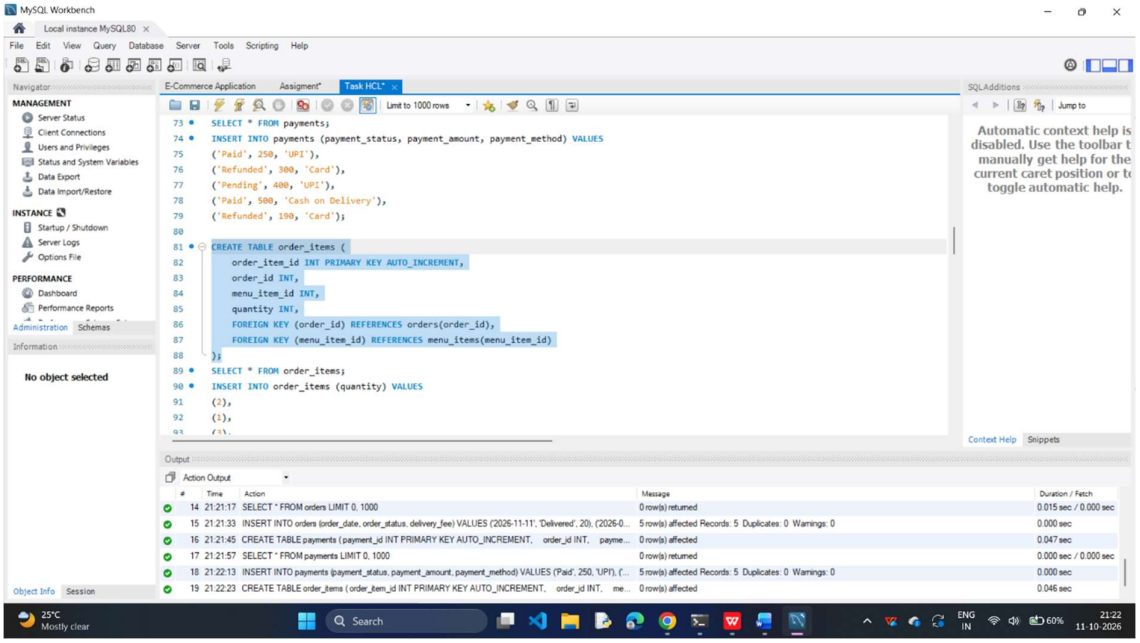

MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
E-Commerce Application
Assignment*
Task HCL*
Limit to 1000 rows
customer_id INT,
restaurant_id INT,
order_date DATE,
order_status VARCHAR(50),
delivery_fee DECIMAL(10,2),
FOREIGN KEY (customer_id) REFERENCES customers(customer_id),
FOREIGN KEY (restaurant_id) REFERENCES restaurants(restaurant_id)
);
SELECT * FROM orders;
Result Grid
order_id customer_id restaurant_id order_date order_status delivery_fee
No object selected
Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or t toggle automatic help.
Output
Action Output
9 21:20:12 INSERT INTO menu_items (item_name, category) VALUES ('Chicken Biryani', 'Main Course'), ('Masala Dosa', '... 5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0 0.016 sec
10 21:20:31 CREATE TABLE customers (customer_id INT PRIMARY KEY AUTO_INCREMENT, customer_name VARC... 0 row(s) affected 0.016 sec
11 21:20:41 SELECT * FROM customers LIMIT 0, 1000 0 row(s) returned 0.000 sec / 0.000 sec
12 21:20:59 INSERT INTO customers(customer_name, phone, city) VALUES ('Ushodaya', '8919181773', 'Tadipatri'), ('Daya... 5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0 0.016 sec
13 21:21:06 CREATE TABLE orders (order_id INT PRIMARY KEY AUTO_INCREMENT, customer_id INT, restaurant... 0 row(s) affected 0.046 sec
14 21:21:17 SELECT * FROM orders LIMIT 0, 1000 0 row(s) returned 0.015 sec / 0.000 sec
25°C Mostly clear
Search
ENG IN
59%
21:21 11-10-2026

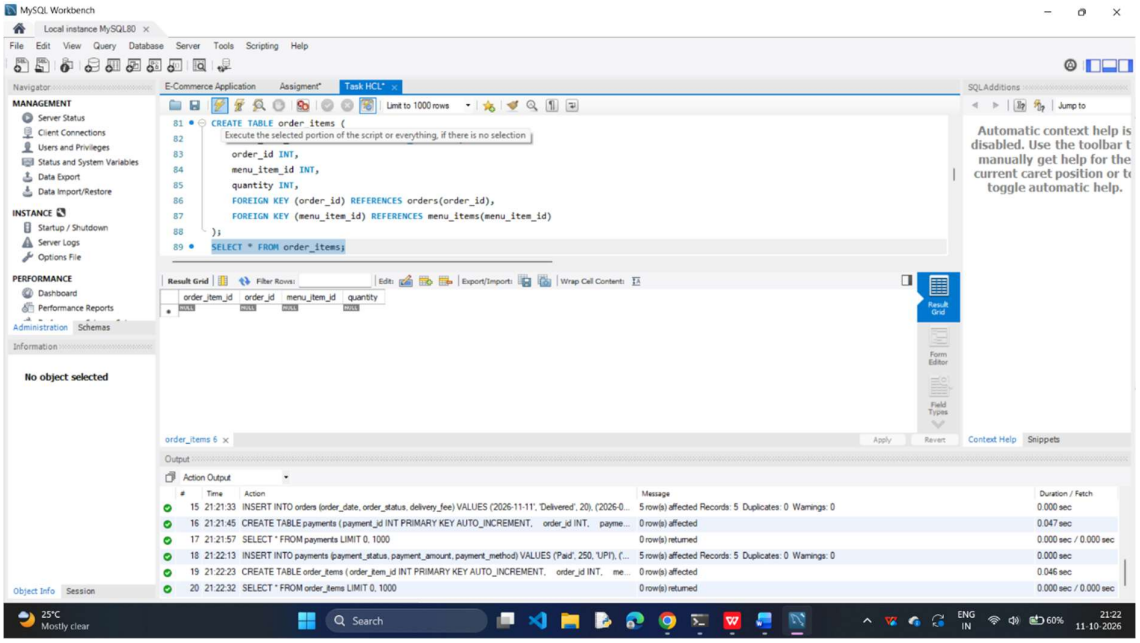

MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
E-Commerce Application
Assignment*
Task HCL*
Limit to 1000 rows
FOREIGN KEY (restaurant_id) REFERENCES restaurants(restaurant_id)
);
Execute the selected portion of the script or everything, if there is no selection
SELECT * FROM orders;
INSERT INTO orders (order_date, order_status, delivery_fee) VALUES
('2026-11-11', 'Delivered', 20),
('2026-08-09', 'Delivered', 30),
('2025-03-03', 'Pending', 25),
('2025-12-02', 'Delivered', 30),
('2024-12-14', 'Cancelled', 20);
CREATE TABLE payments (
payment_id INT PRIMARY KEY AUTO_INCREMENT,
order_id INT,
payment_status VARCHAR(50),
payment_amount DECIMAL(10,2),
payment_method VARCHAR(30),
FOREIGN KEY (order_id) REFERENCES orders(order_id)
);
SELECT * FROM payments;
INSERT INTO payments (payment_status, payment_amount, payment_method) VALUES
No object selected
Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or t toggle automatic help.
Output
Action Output
10 21:20:31 CREATE TABLE customers (customer_id INT PRIMARY KEY AUTO_INCREMENT, customer_name VARC... 0 row(s) affected 0.016 sec
11 21:20:41 SELECT * FROM customers LIMIT 0, 1000 0 row(s) returned 0.000 sec / 0.000 sec
12 21:20:59 INSERT INTO customers(customer_name, phone, city) VALUES ('Ushodaya', '8919181773', 'Tadipatri'), ('Daya... 5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0 0.016 sec
13 21:21:06 CREATE TABLE orders (order_id INT PRIMARY KEY AUTO_INCREMENT, customer_id INT, restaurant... 0 row(s) affected 0.046 sec
14 21:21:17 SELECT * FROM orders LIMIT 0, 1000 0 row(s) returned 0.015 sec / 0.000 sec
15 21:21:33 INSERT INTO orders (order_date, order_status, delivery_fee) VALUES ('2026-11-11', 'Delivered', 20), ('2026-0... 5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0 0.000 sec
25°C Mostly clear
Search
ENG IN
59%
21:21 11-10-2026

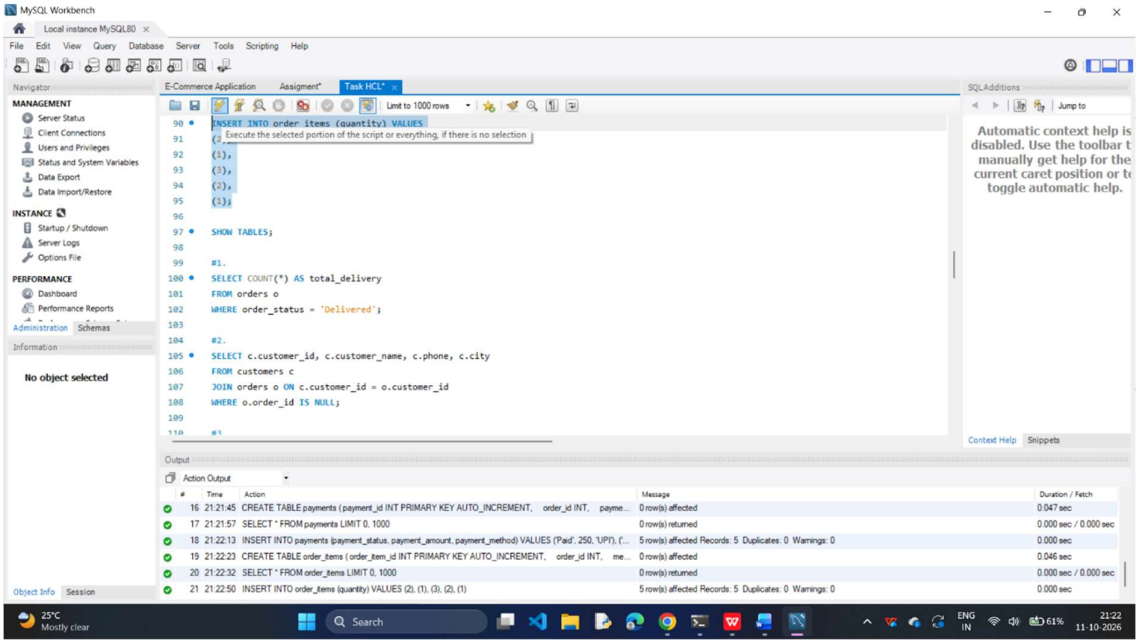

MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
Navigator
MANAGEMENT
Server Status
Client Connections
Users and Privileges
Status and System Variables
Data Export
Data Import/Restore
INSTANCE
Startup / Shutdown
Server Logs
Options File
PERFORMANCE
Dashboard
Performance Reports
Administration Schemas
Information
No object selected
Object Info Session
E-Commerce Application Assigment* Task HCL*
Limit to 1000 rows
55 FOREIGN KEY (restaurant_id) REFERENCES restaurants(restaurant_id)
56
Execute the selected portion of the script or everything, if there is no selection
57 SELECT * FROM orders;
58 INSERT INTO orders (order_date, order_status, delivery_fee) VALUES
59 ('2026-11-11', 'Delivered', 20),
60 ('2026-08-09', 'Delivered', 30),
61 ('2025-03-03', 'Pending', 25),
62 ('2025-12-02', 'Delivered', 30),
63 ('2024-12-14', 'Cancelled', 20);
64
65 CREATE TABLE payments (
66 payment_id INT PRIMARY KEY AUTO_INCREMENT,
67 order_id INT,
68 payment_status VARCHAR(50),
69 payment_amount DECIMAL(10,2),
70 payment_method VARCHAR(30),
71 FOREIGN KEY (order_id) REFERENCES orders(order_id)
72);
73 SELECT * FROM payments;
74 INSERT INTO payments (payment_status, payment_amount, payment_method) VALUES
SQLAdditions
Jump to
Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or t toggle automatic help.
Context Help Snippets
Output
Action Output
Time Action Message Duration / Fetch
11 21:20:41 SELECT * FROM customers LIMIT 0, 1000 0 row(s) returned 0.000 sec / 0.000 sec
12 21:20:59 INSERT INTO customers(customer_name, phone, city) VALUES ('Ushodaya', '8919181773', 'Tadipatri'), ('Daya... 5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0 0.016 sec
13 21:21:06 CREATE TABLE orders (order_id INT PRIMARY KEY AUTO_INCREMENT, customer_id INT, restaurant... 0 row(s) affected 0.046 sec
14 21:21:17 SELECT * FROM orders LIMIT 0, 1000 0 row(s) returned 0.015 sec / 0.000 sec
15 21:21:33 INSERT INTO orders (order_date, order_status, delivery_fee) VALUES ('2026-11-11', 'Delivered', 20), ('2026-0... 5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0 0.000 sec
16 21:21:45 CREATE TABLE payments (payment_id INT PRIMARY KEY AUTO_INCREMENT, order_id INT, payme... 0 row(s) affected 0.047 sec
25°C Mostly clear
Search
ENG IN
59%
21:21 11-10-2026

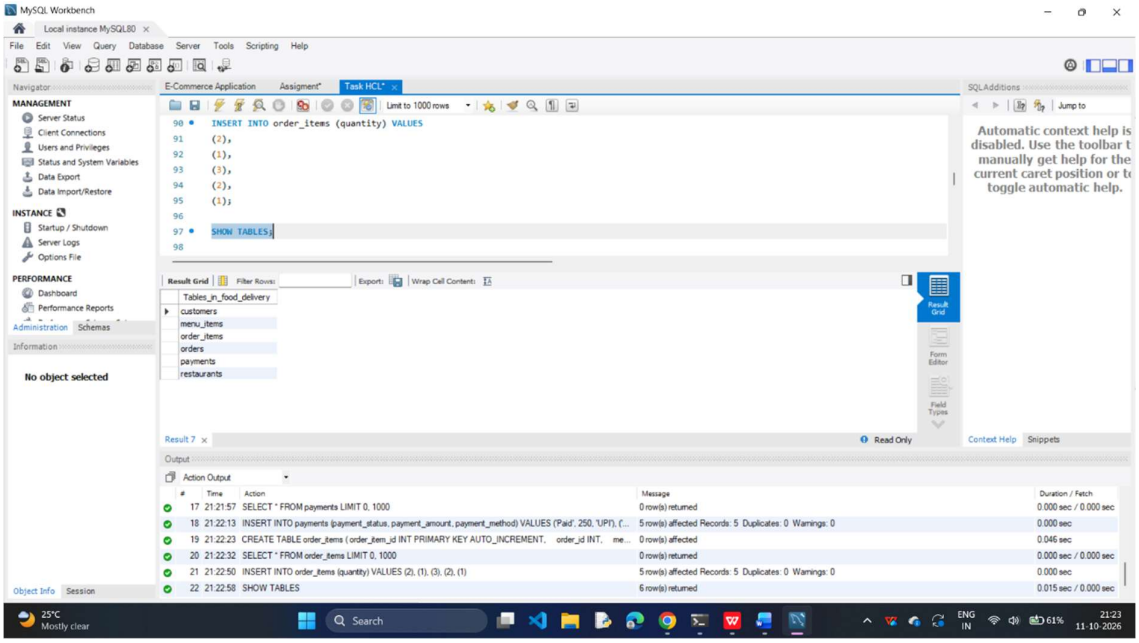

MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
Navigator
MANAGEMENT
Server Status
Client Connections
Users and Privileges
Status and System Variables
Data Export
Data Import/Restore
INSTANCE
Startup / Shutdown
Server Logs
Options File
PERFORMANCE
Dashboard
Performance Reports
Administration Schemas
Information
No object selected
Object Info Session
E-Commerce Application Assigment* Task HCL*
Limit to 1000 rows
67 order_id INT,
68 payment_status VARCHAR(50),
69 payment_amount DECIMAL(10,2),
70 payment_method VARCHAR(30),
71 FOREIGN KEY (order_id) REFERENCES orders(order_id)
72);
73 SELECT * FROM payments;
74 INSERT INTO payments (payment_status, payment_amount, payment_method) VALUES
75 ('Paid', 250, 'UPI'),
Result Grid Filter Rows: Edit: Export/Import: Wrap Cell Content:
payment_id order_id payment_status payment_amount payment_method
NULL NULL NULL NULL NULL
payments 5
Apply Revert
SQLAdditions
Jump to
Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or t toggle automatic help.
Context Help Snippets
Output
Action Output
Time Action Message Duration / Fetch
12 21:20:59 INSERT INTO customers(customer_name, phone, city) VALUES ('Ushodaya', '8919181773', 'Tadipatri'), ('Daya... 5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0 0.016 sec
13 21:21:06 CREATE TABLE orders (order_id INT PRIMARY KEY AUTO_INCREMENT, customer_id INT, restaurant... 0 row(s) affected 0.046 sec
14 21:21:17 SELECT * FROM orders LIMIT 0, 1000 0 row(s) returned 0.015 sec / 0.000 sec
15 21:21:33 INSERT INTO orders (order_date, order_status, delivery_fee) VALUES ('2026-11-11', 'Delivered', 20), ('2026-0... 5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0 0.000 sec
16 21:21:45 CREATE TABLE payments (payment_id INT PRIMARY KEY AUTO_INCREMENT, order_id INT, payme... 0 row(s) affected 0.047 sec
17 21:21:57 SELECT * FROM payments LIMIT 0, 1000 0 row(s) returned 0.000 sec / 0.000 sec
25°C Mostly clear
Search
ENG IN
60%
21:22 11-10-2026

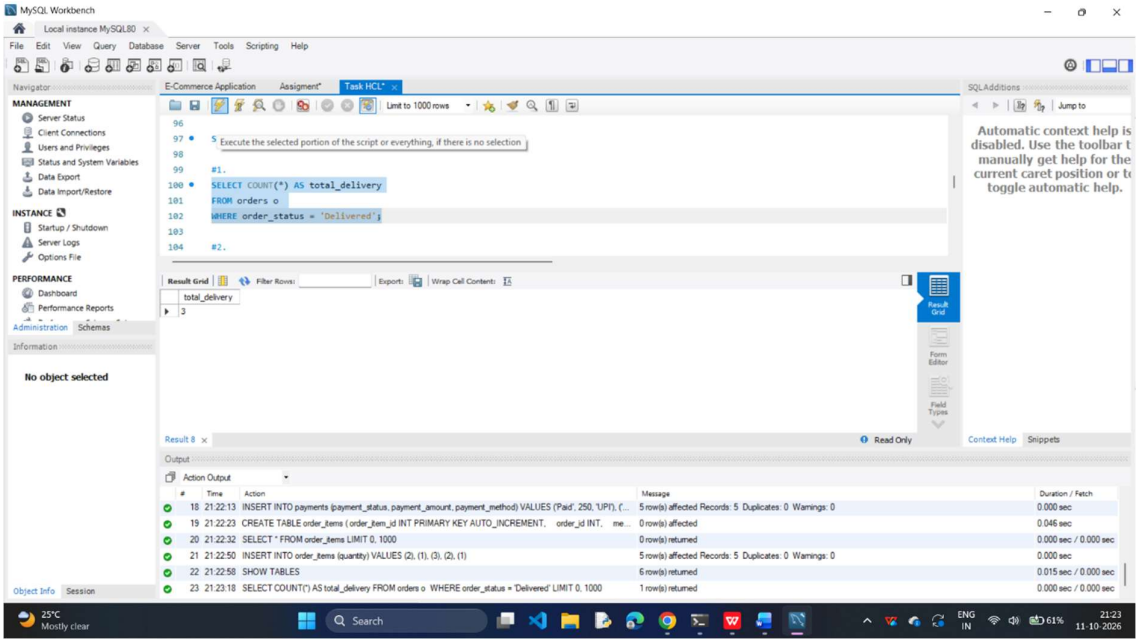

MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
Navigator
MANAGEMENT
Server Status
Client Connections
Users and Privileges
Status and System Variables
Data Export
Data Import/Restore
INSTANCE
Startup / Shutdown
Server Logs
Options File
PERFORMANCE
Dashboard
Performance Reports
Administration Schemas
Information
No object selected
Object Info Session
E-Commerce Application Assigment* Task HCL*
Limit to 1000 rows
Execute the selected portion of the script or everything, if there is no selection
SELECT * FROM payments;
INSERT INTO payments (payment_status, payment_amount, payment_method) VALUES
('Paid', 250, 'UPI'),
('Refunded', 300, 'Card'),
('Pending', 400, 'UPI'),
('Paid', 500, 'Cash on Delivery'),
('Refunded', 190, 'Card');
CREATE TABLE order_items (
order_item_id INT PRIMARY KEY AUTO_INCREMENT,
order_id INT,
menu_item_id INT,
quantity INT,
FOREIGN KEY (order_id) REFERENCES orders(order_id),
FOREIGN KEY (menu_item_id) REFERENCES menu_items(menu_item_id)
);
SELECT * FROM order_items;
INSERT INTO order_items (quantity) VALUES
(2),
(1),
SQLAdditions
Jump to
Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or t toggle automatic help.
Context Help Snippets
Output
Action Output
Time Action Message Duration / Fetch
13 21:21:06 CREATE TABLE orders (order_id INT PRIMARY KEY AUTO_INCREMENT, customer_id INT, restaurant... 0 row(s) affected 0.046 sec
14 21:21:17 SELECT * FROM orders LIMIT 0, 1000 0 row(s) returned 0.015 sec / 0.000 sec
15 21:21:33 INSERT INTO orders (order_date, order_status, delivery_fee) VALUES (2026-11-11', 'Delivered', 20), ('2026-0... 5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0 0.000 sec
16 21:21:45 CREATE TABLE payments (payment_id INT PRIMARY KEY AUTO_INCREMENT, order_id INT, payme... 0 row(s) affected 0.047 sec
17 21:21:57 SELECT * FROM payments LIMIT 0, 1000 0 row(s) returned 0.000 sec / 0.000 sec
18 21:22:13 INSERT INTO payments (payment_status, payment_amount, payment_method) VALUES ('Paid', 250, 'UPI'), ('... 5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0 0.000 sec
25°C Mostly clear
Search
ENG IN
60%
21:22 11-10-2026

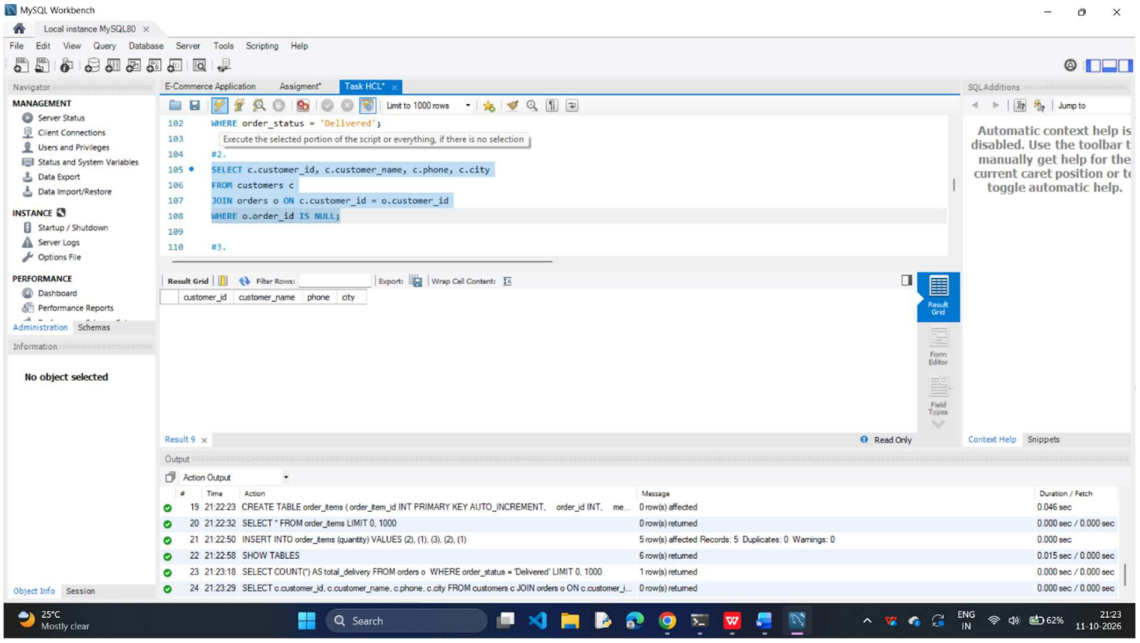

MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
Navigator
MANAGEMENT
Server Status
Client Connections
Users and Privileges
Status and System Variables
Data Export
Data Import/Restore
INSTANCE
Startup / Shutdown
Server Logs
Options File
PERFORMANCE
Dashboard
Performance Reports
Administration Schemas
Information
No object selected
Object Info Session
E-Commerce Application Assigment* Task HCL*
Limit to 1000 rows
SELECT * FROM payments;
INSERT INTO payments (payment_status, payment_amount, payment_method) VALUES
('Paid', 250, 'UPI'),
('Refunded', 300, 'Card'),
('Pending', 400, 'UPI'),
('Paid', 500, 'Cash on Delivery'),
('Refunded', 190, 'Card');
CREATE TABLE order_items (
order_item_id INT PRIMARY KEY AUTO_INCREMENT,
order_id INT,
menu_item_id INT,
quantity INT,
FOREIGN KEY (order_id) REFERENCES orders(order_id),
FOREIGN KEY (menu_item_id) REFERENCES menu_items(menu_item_id)
);
SELECT * FROM order_items;
INSERT INTO order_items (quantity) VALUES
(2),
(1),
SQLAdditions
Jump to
Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or t toggle automatic help.
Context Help Snippets
Output
Action Output
Time Action Message Duration / Fetch
14 21:21:17 SELECT * FROM orders LIMIT 0, 1000 0 row(s) returned 0.015 sec / 0.000 sec
15 21:21:33 INSERT INTO orders (order_date, order_status, delivery_fee) VALUES (2026-11-11', 'Delivered', 20), ('2026-0... 5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0 0.000 sec
16 21:21:45 CREATE TABLE payments (payment_id INT PRIMARY KEY AUTO_INCREMENT, order_id INT, payme... 0 row(s) affected 0.047 sec
17 21:21:57 SELECT * FROM payments LIMIT 0, 1000 0 row(s) returned 0.000 sec / 0.000 sec
18 21:22:13 INSERT INTO payments (payment_status, payment_amount, payment_method) VALUES ('Paid', 250, 'UPI'), ('... 5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0 0.000 sec
19 21:22:23 CREATE TABLE order_items (order_item_id INT PRIMARY KEY AUTO_INCREMENT, order_id INT, me... 0 row(s) affected 0.046 sec
25°C Mostly clear
Search
ENG IN
60%
21:22 11-10-2026

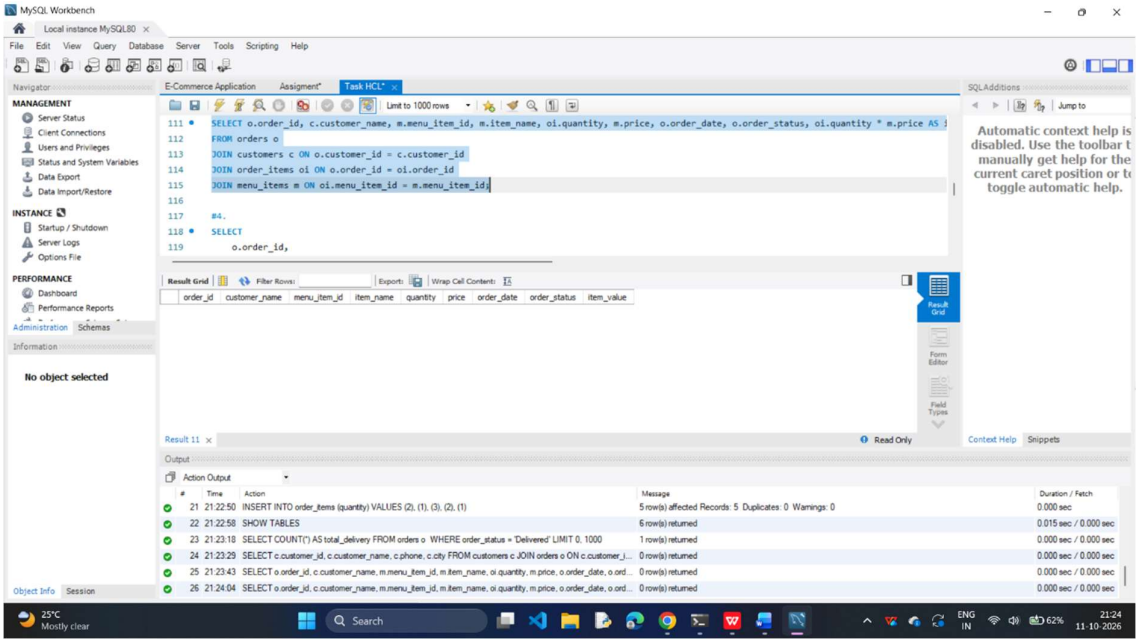

MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
E-Commerce Application Assignment* Task HCL*
Limit to 1000 rows
CREATE TABLE order_items (
Execute the selected portion of the script or everything, if there is no selection
order_id INT,
menu_item_id INT,
quantity INT,
FOREIGN KEY (order_id) REFERENCES orders(order_id),
FOREIGN KEY (menu_item_id) REFERENCES menu_items(menu_item_id)
);
SELECT * FROM order_items;
Result Grid
order_item_id order_id menu_item_id quantity
Output
Action Output
15 21:21:33 INSERT INTO orders (order_date, order_status, delivery_fee) VALUES ('2026-11-11', 'Delivered', 20), ('2026-0... 5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0 0.000 sec
16 21:21:45 CREATE TABLE payments (payment_id INT PRIMARY KEY AUTO_INCREMENT, order_id INT, payme... 0 row(s) affected 0.047 sec
17 21:21:57 SELECT * FROM payments LIMIT 0, 1000 0 row(s) returned 0.000 sec / 0.000 sec
18 21:22:13 INSERT INTO payments (payment_status, payment_amount, payment_method) VALUES ('Paid', 250, 'UPI'), (... 5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0 0.000 sec
19 21:22:23 CREATE TABLE order_items (order_item_id INT PRIMARY KEY AUTO_INCREMENT, order_id INT, me... 0 row(s) affected 0.046 sec
20 21:22:32 SELECT * FROM order_items LIMIT 0, 1000 0 row(s) returned 0.000 sec / 0.000 sec
Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or t toggle automatic help.
25°C Mostly clear
Search
ENG IN
60%
21:22 11-10-2026

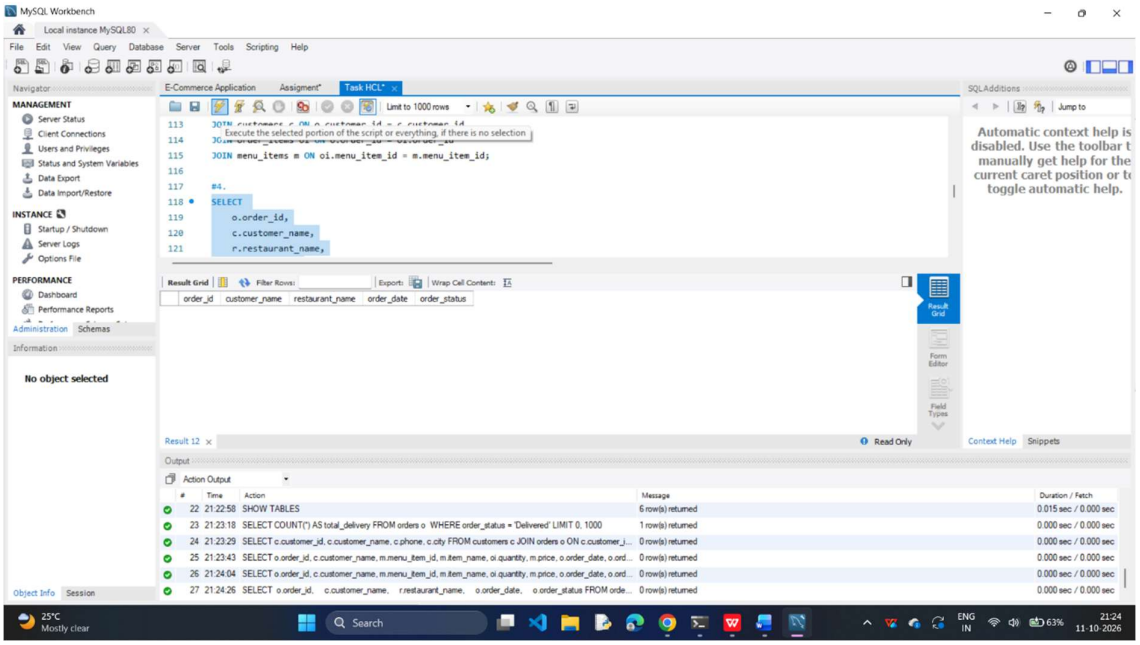

MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
E-Commerce Application Assignment* Task HCL*
Limit to 1000 rows
INSERT INTO order_items (quantity) VALUES
Execute the selected portion of the script or everything, if there is no selection
(1),
(3),
(2),
(1);
SHOW TABLES;
#1.
SELECT COUNT(*) AS total_delivery
FROM orders o
WHERE order_status = 'Delivered';
#2.
SELECT c.customer_id, c.customer_name, c.phone, c.city
FROM customers c
JOIN orders o ON c.customer_id = o.customer_id
WHERE o.order_id IS NULL;
Output
Action Output
16 21:21:45 CREATE TABLE payments (payment_id INT PRIMARY KEY AUTO_INCREMENT, order_id INT, payme... 0 row(s) affected 0.047 sec
17 21:21:57 SELECT * FROM payments LIMIT 0, 1000 0 row(s) returned 0.000 sec / 0.000 sec
18 21:22:13 INSERT INTO payments (payment_status, payment_amount, payment_method) VALUES ('Paid', 250, 'UPI'), (... 5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0 0.000 sec
19 21:22:23 CREATE TABLE order_items (order_item_id INT PRIMARY KEY AUTO_INCREMENT, order_id INT, me... 0 row(s) affected 0.046 sec
20 21:22:32 SELECT * FROM order_items LIMIT 0, 1000 0 row(s) returned 0.000 sec / 0.000 sec
21 21:22:50 INSERT INTO order_items (quantity) VALUES (2), (1), (3), (2), (1) 5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0 0.000 sec
Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or t toggle automatic help.
25°C Mostly clear
Search
ENG IN
61%
21:22 11-10-2026

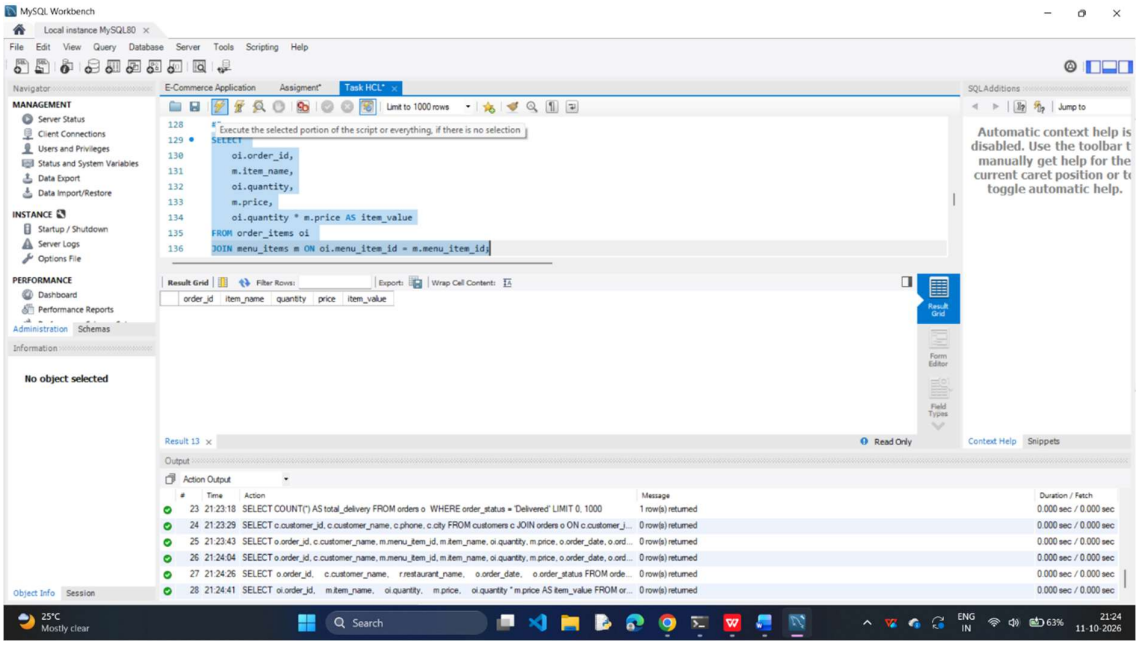

MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
Navigator
MANAGEMENT
Server Status
Client Connections
Users and Privileges
Status and System Variables
Data Export
Data Import/Restore
INSTANCE
Startup / Shutdown
Server Logs
Options File
PERFORMANCE
Dashboard
Performance Reports
Administration Schemas
Information
No object selected
Object Info Session
E-Commerce Application Assigment* Task HCL*
Limit to 1000 rows
90 INSERT INTO order_items (quantity) VALUES
91 (2),
92 (1),
93 (3),
94 (2),
95 (1);
96
97 SHOW TABLES;
98
Result Grid Filter Rows: Export: Wrap Cell Content:
Tables_in_food_delivery
customers
menu_items
order_items
orders
payments
restaurants
Result 7
Read Only
SQLAdditions
Jump to
Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or t toggle automatic help.
Context Help Snippets
Output
Action Output
Time Action Message Duration / Fetch
17 21:21:57 SELECT * FROM payments LIMIT 0, 1000 0 row(s) returned 0.000 sec / 0.000 sec
18 21:22:13 INSERT INTO payments (payment_status, payment_amount, payment_method) VALUES ('Paid', 250, 'UPI'), (... 5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0 0.000 sec
19 21:22:23 CREATE TABLE order_items (order_item_id INT PRIMARY KEY AUTO_INCREMENT, order_id INT, me... 0 row(s) affected 0.046 sec
20 21:22:32 SELECT * FROM order_items LIMIT 0, 1000 0 row(s) returned 0.000 sec / 0.000 sec
21 21:22:50 INSERT INTO order_items (quantity) VALUES (2), (1), (3), (2), (1) 5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0 0.000 sec
22 21:22:58 SHOW TABLES 6 row(s) returned 0.015 sec / 0.000 sec
25°C Mostly clear
Search
ENG IN
61%
21:23 11-10-2026

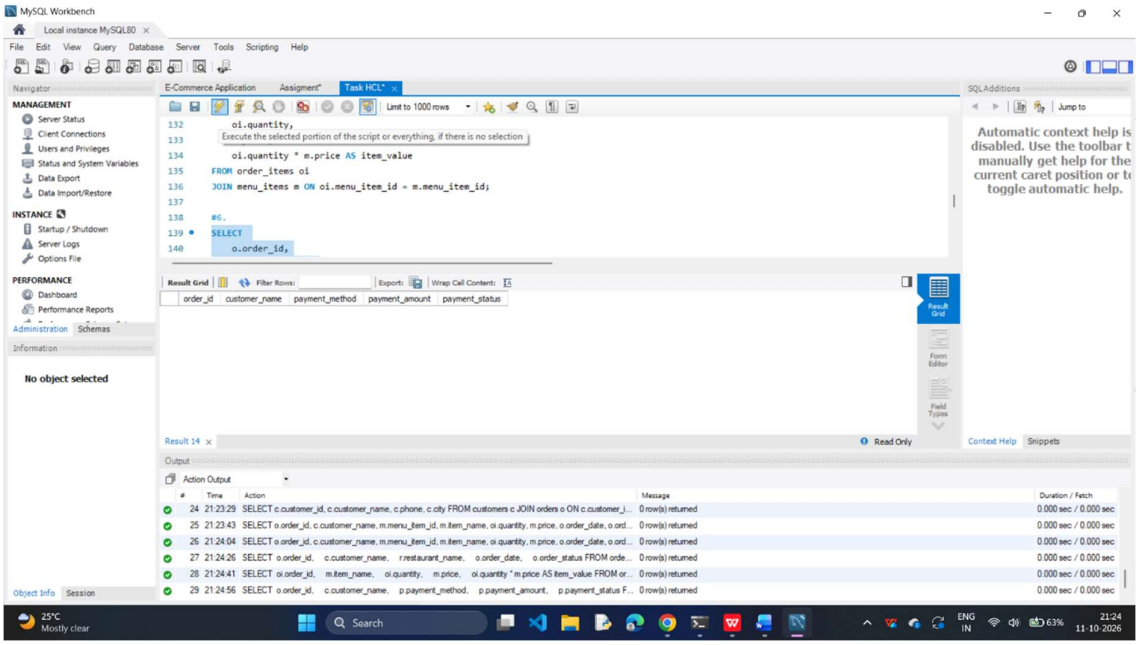

MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
Navigator
MANAGEMENT
Server Status
Client Connections
Users and Privileges
Status and System Variables
Data Export
Data Import/Restore
INSTANCE
Startup / Shutdown
Server Logs
Options File
PERFORMANCE
Dashboard
Performance Reports
Administration Schemas
Information
No object selected
Object Info Session
E-Commerce Application Assigment* Task HCL*
Limit to 1000 rows
Execute the selected portion of the script or everything, if there is no selection
96
97 S
98
99 #1.
100 SELECT COUNT(*) AS total_delivery
101 FROM orders o
102 WHERE order_status = 'Delivered';
103
104 #2.
Result Grid Filter Rows: Export: Wrap Cell Content:
total_delivery
3
Result 8
Read Only
SQLAdditions
Jump to
Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or t toggle automatic help.
Context Help Snippets
Output
Action Output
Time Action Message Duration / Fetch
18 21:22:13 INSERT INTO payments (payment_status, payment_amount, payment_method) VALUES ('Paid', 250, 'UPI'), (... 5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0 0.000 sec
19 21:22:23 CREATE TABLE order_items (order_item_id INT PRIMARY KEY AUTO_INCREMENT, order_id INT, me... 0 row(s) affected 0.046 sec
20 21:22:32 SELECT * FROM order_items LIMIT 0, 1000 0 row(s) returned 0.000 sec / 0.000 sec
21 21:22:50 INSERT INTO order_items (quantity) VALUES (2), (1), (3), (2), (1) 5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0 0.000 sec
22 21:22:58 SHOW TABLES 6 row(s) returned 0.015 sec / 0.000 sec
23 21:23:18 SELECT COUNT(*) AS total_delivery FROM orders o WHERE order_status = 'Delivered' LIMIT 0, 1000 1 row(s) returned 0.000 sec / 0.000 sec
25°C Mostly clear
Search
ENG IN
61%
21:23 11-10-2026

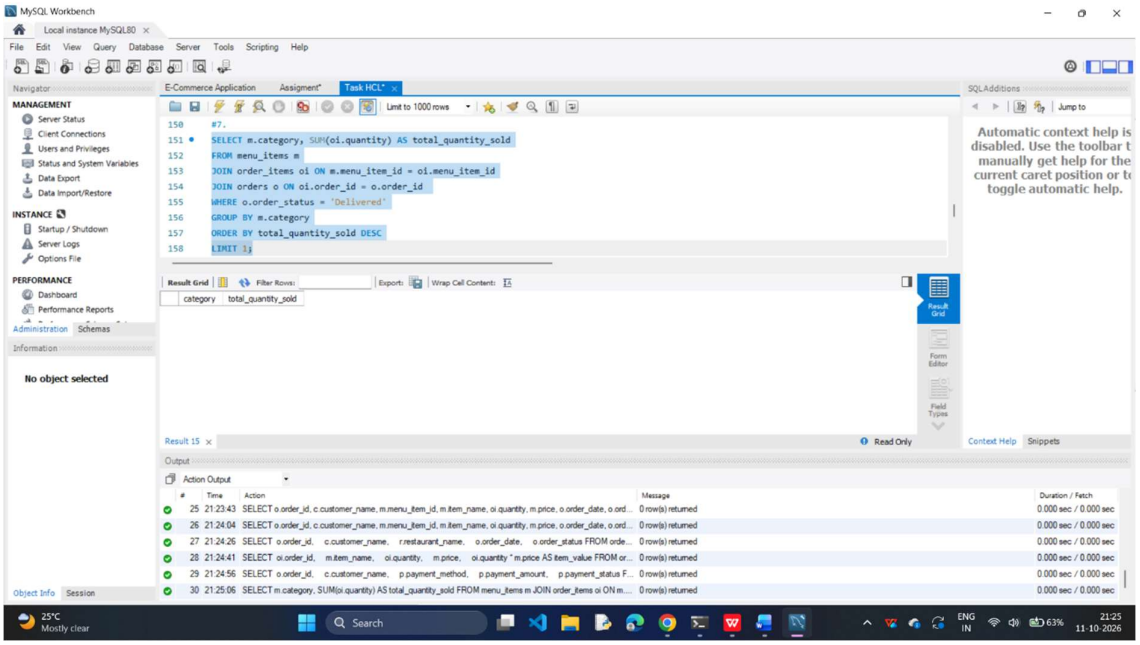

MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
Navigator
MANAGEMENT
Server Status
Client Connections
Users and Privileges
Status and System Variables
Data Export
Data Import/Restore
INSTANCE
Startup / Shutdown
Server Logs
Options File
PERFORMANCE
Dashboard
Performance Reports
Administration Schemas
Information
No object selected
Object Info Session
E-Commerce Application Assigment* Task HCL*
Limit to 1000 rows
WHERE order_status = 'Delivered';
#2.
SELECT c.customer_id, c.customer_name, c.phone, c.city
FROM customers c
JOIN orders o ON c.customer_id = o.customer_id
WHERE o.order_id IS NULL;
#3.
Result Grid
customer_id customer_name phone city
Result 9
Read Only
SQLAdditions
Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or t toggle automatic help.
Context Help Snippets
Output
Action Output
Time Action Message Duration / Fetch
19 21:22:23 CREATE TABLE order_items (order_item_id INT PRIMARY KEY AUTO_INCREMENT, order_id INT, me... 0 row(s) affected 0.046 sec
20 21:22:32 SELECT * FROM order_items LIMIT 0, 1000 0 row(s) returned 0.000 sec / 0.000 sec
21 21:22:50 INSERT INTO order_items (quantity) VALUES (2), (1), (3), (2), (1) 5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0 0.000 sec
22 21:22:58 SHOW TABLES 6 row(s) returned 0.015 sec / 0.000 sec
23 21:23:18 SELECT COUNT(*) AS total_delivery FROM orders o WHERE order_status = 'Delivered' LIMIT 0, 1000 1 row(s) returned 0.000 sec / 0.000 sec
24 21:23:29 SELECT c.customer_id, c.customer_name, c.phone, c.city FROM customers c JOIN orders o ON c.customer_i... 0 row(s) returned 0.000 sec / 0.000 sec
25°C Mostly clear
Search
ENG IN
62%
21:23
11-10-2026

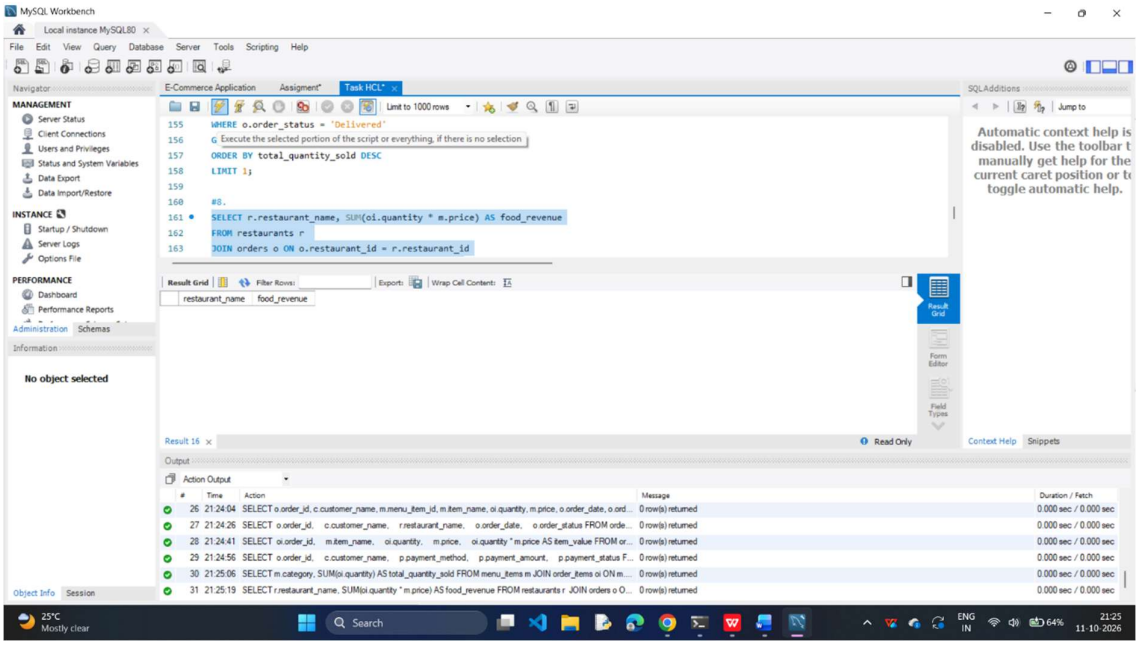

MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
Navigator
MANAGEMENT
Server Status
Client Connections
Users and Privileges
Status and System Variables
Data Export
Data Import/Restore
INSTANCE
Startup / Shutdown
Server Logs
Options File
PERFORMANCE
Dashboard
Performance Reports
Administration Schemas
Information
No object selected
Object Info Session
E-Commerce Application Assigment* Task HCL*
Limit to 1000 rows
SELECT o.order_id, c.customer_name, m.menu_item_id, m.item_name, oi.quantity, m.price, o.order_date, o.order_status, oi.quantity * m.price AS
FROM orders o
JOIN customers c ON o.customer_id = c.customer_id
JOIN order_items oi ON o.order_id = oi.order_id
JOIN menu_items m ON oi.menu_item_id = m.menu_item_id;
#4.
SELECT
o.order_id,
Result Grid
order_id customer_name menu_item_id item_name quantity price order_date order_status item_value
Result 11
Read Only
SQLAdditions
Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or t toggle automatic help.
Context Help Snippets
Output
Action Output
Time Action Message Duration / Fetch
21 21:22:50 INSERT INTO order_items (quantity) VALUES (2), (1), (3), (2), (1) 5 row(s) affected Records: 5 Duplicates: 0 Warnings: 0 0.000 sec
22 21:22:58 SHOW TABLES 6 row(s) returned 0.015 sec / 0.000 sec
23 21:23:18 SELECT COUNT(*) AS total_delivery FROM orders o WHERE order_status = 'Delivered' LIMIT 0, 1000 1 row(s) returned 0.000 sec / 0.000 sec
24 21:23:29 SELECT c.customer_id, c.customer_name, c.phone, c.city FROM customers c JOIN orders o ON c.customer_i... 0 row(s) returned 0.000 sec / 0.000 sec
25 21:23:43 SELECT o.order_id, c.customer_name, m.menu_item_id, m.item_name, oi.quantity, m.price, o.order_date, o.ord... 0 row(s) returned 0.000 sec / 0.000 sec
26 21:24:04 SELECT o.order_id, c.customer_name, m.menu_item_id, m.item_name, oi.quantity, m.price, o.order_date, o.ord... 0 row(s) returned 0.000 sec / 0.000 sec
25°C Mostly clear
Search
ENG IN
62%
21:24
11-10-2026

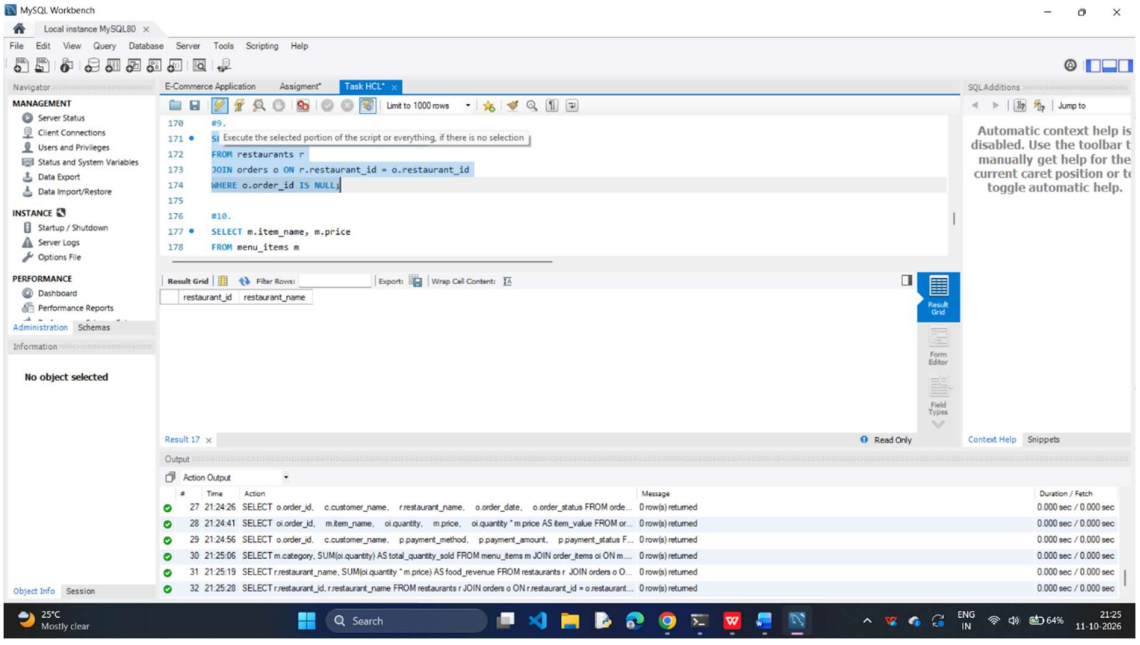

MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
E-Commerce Application
Assignment*
Task HCL*
Limit to 1000 rows
JOIN menu_items m ON oi.menu_item_id = m.menu_item_id;
#4.
SELECT
o.order_id,
c.customer_name,
r.restaurant_name,
Result Grid
order_id customer_name restaurant_name order_date order_status
No object selected
Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or t toggle automatic help.
Result 12
Read Only
Output
Action Output
Time Action Message Duration / Fetch
22 21:22:58 SHOW TABLES 6 row(s) returned 0.015 sec / 0.000 sec
23 21:23:18 SELECT COUNT(*) AS total_delivery FROM orders o WHERE order_status = 'Delivered' LIMIT 0, 1000 1 row(s) returned 0.000 sec / 0.000 sec
24 21:23:29 SELECT c.customer_id, c.customer_name, c.phone, c.city FROM customers c JOIN orders o ON c.customer_i... 0 row(s) returned 0.000 sec / 0.000 sec
25 21:23:43 SELECT o.order_id, c.customer_name, m.menu_item_id, m.item_name, oi.quantity, m.price, o.order_date, o.ord... 0 row(s) returned 0.000 sec / 0.000 sec
26 21:24:04 SELECT o.order_id, c.customer_name, m.menu_item_id, m.item_name, oi.quantity, m.price, o.order_date, o.ord... 0 row(s) returned 0.000 sec / 0.000 sec
27 21:24:26 SELECT o.order_id, c.customer_name, r.restaurant_name, o.order_date, o.order_status FROM orde... 0 row(s) returned 0.000 sec / 0.000 sec
25°C Mostly clear
Search
ENG IN
63%
21:24 11-10-2026

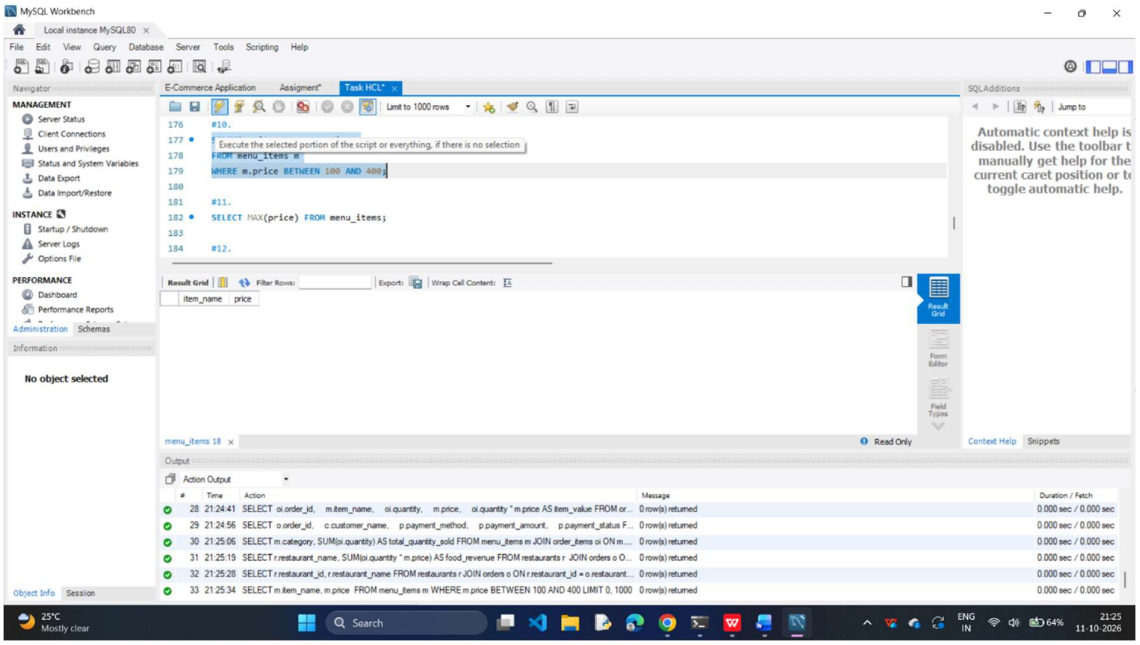

MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
E-Commerce Application
Assignment*
Task HCL*
Limit to 1000 rows
SELECT
oi.order_id,
m.item_name,
oi.quantity,
m.price,
oi.quantity * m.price AS item_value
FROM order_items oi
JOIN menu_items m ON oi.menu_item_id = m.menu_item_id;
Result Grid
order_id item_name quantity price item_value
No object selected
Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or t toggle automatic help.
Result 13
Read Only
Output
Action Output
Time Action Message Duration / Fetch
23 21:23:18 SELECT COUNT(*) AS total_delivery FROM orders o WHERE order_status = 'Delivered' LIMIT 0, 1000 1 row(s) returned 0.000 sec / 0.000 sec
24 21:23:29 SELECT c.customer_id, c.customer_name, c.phone, c.city FROM customers c JOIN orders o ON c.customer_i... 0 row(s) returned 0.000 sec / 0.000 sec
25 21:23:43 SELECT o.order_id, c.customer_name, m.menu_item_id, m.item_name, oi.quantity, m.price, o.order_date, o.ord... 0 row(s) returned 0.000 sec / 0.000 sec
26 21:24:04 SELECT o.order_id, c.customer_name, m.menu_item_id, m.item_name, oi.quantity, m.price, o.order_date, o.ord... 0 row(s) returned 0.000 sec / 0.000 sec
27 21:24:26 SELECT o.order_id, c.customer_name, r.restaurant_name, o.order_date, o.order_status FROM orde... 0 row(s) returned 0.000 sec / 0.000 sec
28 21:24:41 SELECT oi.order_id, m.item_name, oi.quantity, m.price, oi.quantity * m.price AS item_value FROM or... 0 row(s) returned 0.000 sec / 0.000 sec
25°C Mostly clear
Search
ENG IN
63%
21:24 11-10-2026

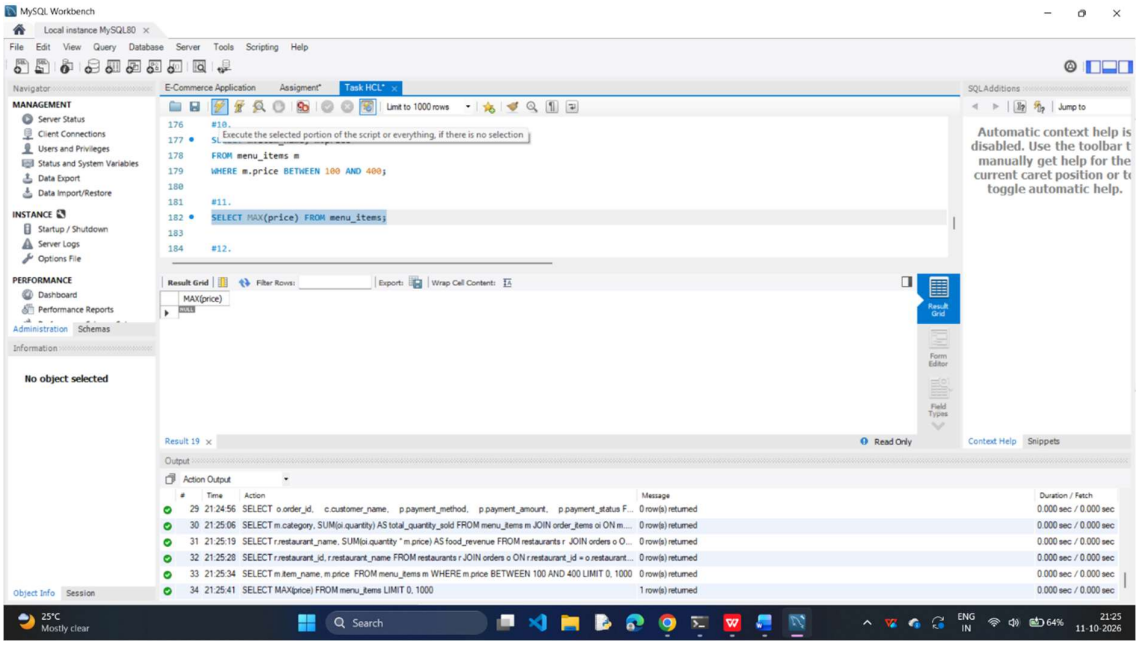

MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
E-Commerce Application
Assignment*
Task HCL*
Limit to 1000 rows
oi.quantity,
Execute the selected portion of the script or everything, if there is no selection
oi.quantity * m.price AS item_value
FROM order_items oi
JOIN menu_items m ON oi.menu_item_id = m.menu_item_id;
#6.
SELECT
o.order_id,
Result Grid
Filter Rows:
Export:
Wrap Cell Content:
order_id
customer_name
payment_method
payment_amount
payment_status
Result 14
Read Only
Output
Action Output
Time
Action
Message
Duration / Fetch
24 21:23:29 SELECT c.customer_id, c.customer_name, c.phone, c.city FROM customers c JOIN orders o ON c.customer_i... 0 row(s) returned 0.000 sec / 0.000 sec
25 21:23:43 SELECT o.order_id, c.customer_name, m.menu_item_id, m.item_name, oi.quantity, m.price, o.order_date, o.ord... 0 row(s) returned 0.000 sec / 0.000 sec
26 21:24:04 SELECT o.order_id, c.customer_name, m.menu_item_id, m.item_name, oi.quantity, m.price, o.order_date, o.ord... 0 row(s) returned 0.000 sec / 0.000 sec
27 21:24:26 SELECT o.order_id, c.customer_name, r.restaurant_name, o.order_date, o.order_status FROM orde... 0 row(s) returned 0.000 sec / 0.000 sec
28 21:24:41 SELECT oi.order_id, m.item_name, oi.quantity, m.price, oi.quantity * m.price AS item_value FROM or... 0 row(s) returned 0.000 sec / 0.000 sec
29 21:24:56 SELECT o.order_id, c.customer_name, p.payment_method, p.payment_amount, p.payment_status F... 0 row(s) returned 0.000 sec / 0.000 sec
No object selected
Object Info
Session
25°C
Mostly clear
Search
ENG
IN
63%
21:24
11-10-2026

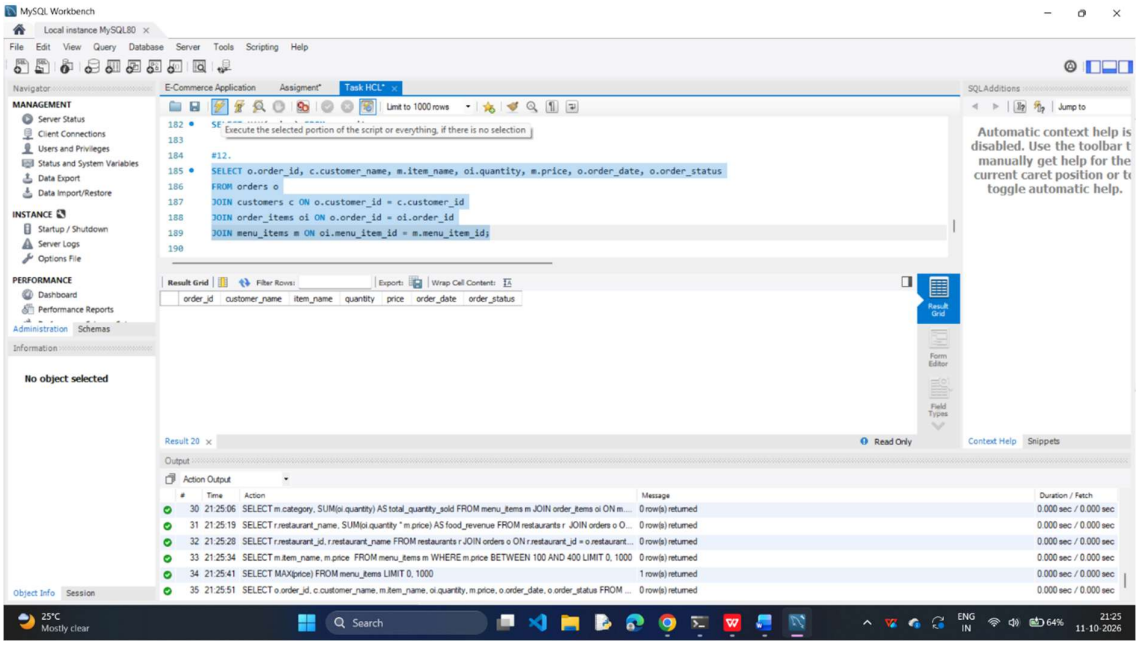

MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
E-Commerce Application
Assignment*
Task HCL*
Limit to 1000 rows
#7.
SELECT m.category, SUM(oi.quantity) AS total_quantity_sold
FROM menu_items m
JOIN order_items oi ON m.menu_item_id = oi.menu_item_id
JOIN orders o ON oi.order_id = o.order_id
WHERE o.order_status = 'Delivered'
GROUP BY m.category
ORDER BY total_quantity_sold DESC
LIMIT 1;
Result Grid
Filter Rows:
Export:
Wrap Cell Content:
category
total_quantity_sold
Result 15
Read Only
Output
Action Output
Time
Action
Message
Duration / Fetch
25 21:23:43 SELECT o.order_id, c.customer_name, m.menu_item_id, m.item_name, oi.quantity, m.price, o.order_date, o.ord... 0 row(s) returned 0.000 sec / 0.000 sec
26 21:24:04 SELECT o.order_id, c.customer_name, m.menu_item_id, m.item_name, oi.quantity, m.price, o.order_date, o.ord... 0 row(s) returned 0.000 sec / 0.000 sec
27 21:24:26 SELECT o.order_id, c.customer_name, r.restaurant_name, o.order_date, o.order_status FROM orde... 0 row(s) returned 0.000 sec / 0.000 sec
28 21:24:41 SELECT oi.order_id, m.item_name, oi.quantity, m.price, oi.quantity * m.price AS item_value FROM or... 0 row(s) returned 0.000 sec / 0.000 sec
29 21:24:56 SELECT o.order_id, c.customer_name, p.payment_method, p.payment_amount, p.payment_status F... 0 row(s) returned 0.000 sec / 0.000 sec
30 21:25:06 SELECT m.category, SUM(oi.quantity) AS total_quantity_sold FROM menu_items m JOIN order_items oi ON m.... 0 row(s) returned 0.000 sec / 0.000 sec
No object selected
Object Info
Session
25°C
Mostly clear
Search
ENG
IN
63%
21:25
11-10-2026

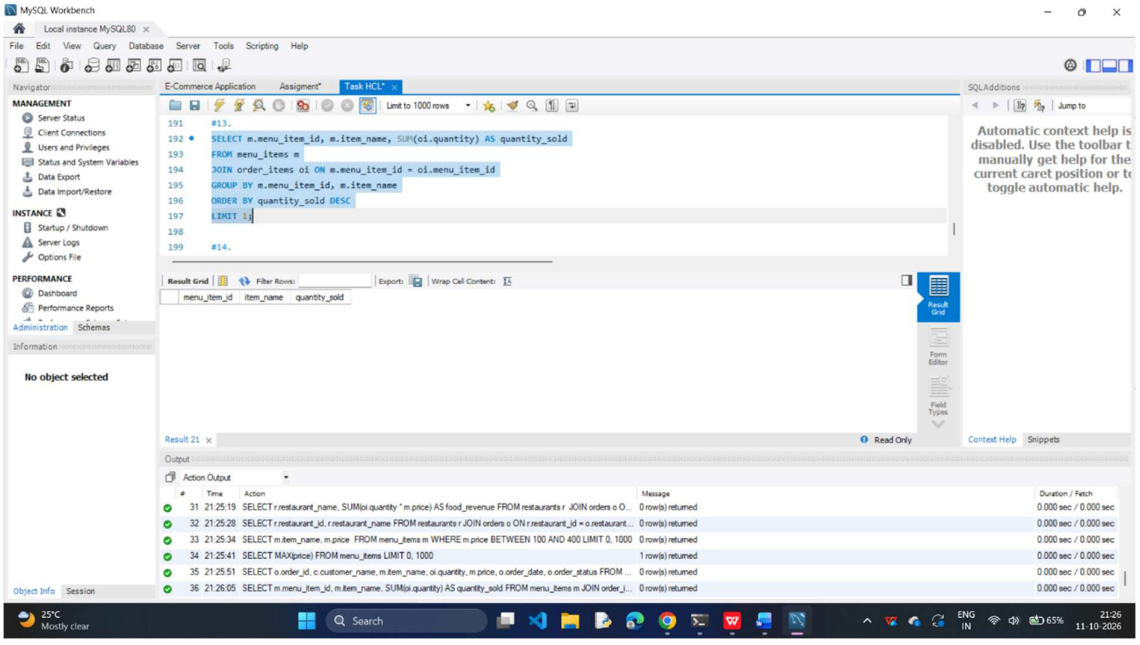

MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
E-Commerce Application
Assignment*
Task HCL*
Limit to 1000 rows
155 WHERE o.order_status = 'Delivered'
156 G
157 ORDER BY total_quantity_sold DESC
158 LIMIT 1;
159
160 #8.
161 SELECT r.restaurant_name, SUM(oi.quantity * m.price) AS food_revenue
162 FROM restaurants r
163 JOIN orders o ON o.restaurant_id = r.restaurant_id
Execute the selected portion of the script or everything, if there is no selection
Result Grid
Filter Rows:
Export:
Wrap Cell Content:
restaurant_name
food_revenue
Result 16
Read Only
Output
Action Output
Time Action Message Duration / Fetch
26 21:24:04 SELECT o.order_id, c.customer_name, m.menu_item_id, m.item_name, oi.quantity, m.price, o.order_date, o.ord... 0 row(s) returned 0.000 sec / 0.000 sec
27 21:24:26 SELECT o.order_id, c.customer_name, r.restaurant_name, o.order_date, o.order_status FROM orde... 0 row(s) returned 0.000 sec / 0.000 sec
28 21:24:41 SELECT oi.order_id, m.item_name, oi.quantity, m.price, oi.quantity * m.price AS item_value FROM or... 0 row(s) returned 0.000 sec / 0.000 sec
29 21:24:56 SELECT o.order_id, c.customer_name, p.payment_method, p.payment_amount, p.payment_status F... 0 row(s) returned 0.000 sec / 0.000 sec
30 21:25:06 SELECT m.category, SUM(oi.quantity) AS total_quantity_sold FROM menu_items m JOIN order_items oi ON m... 0 row(s) returned 0.000 sec / 0.000 sec
31 21:25:19 SELECT r.restaurant_name, SUM(oi.quantity * m.price) AS food_revenue FROM restaurants r JOIN orders o O... 0 row(s) returned 0.000 sec / 0.000 sec
Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or t toggle automatic help.
Context Help
Snippets
Object Info
Session
No object selected
25°C Mostly clear
Search
ENG IN
64%
21:25 11-10-2026

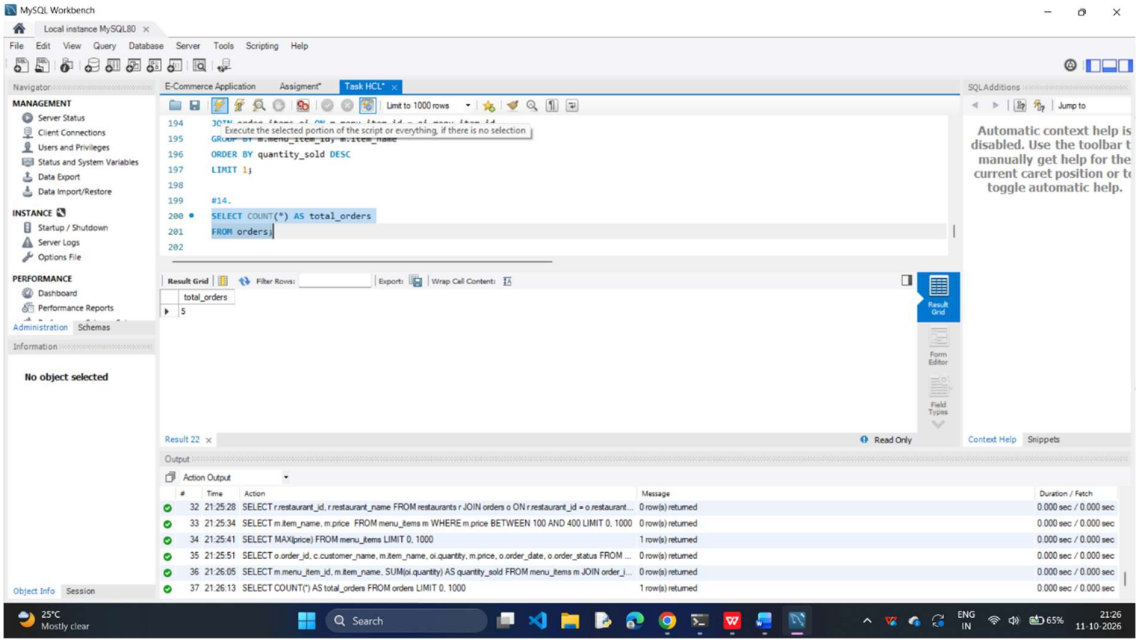

MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
E-Commerce Application
Assignment*
Task HCL*
Limit to 1000 rows
170 #9.
171 SI
172 FROM restaurants r
173 JOIN orders o ON r.restaurant_id = o.restaurant_id
174 WHERE o.order_id IS NULL;
175
176 #10.
177 SELECT m.item_name, m.price
178 FROM menu_items m
Execute the selected portion of the script or everything, if there is no selection
Result Grid
Filter Rows:
Export:
Wrap Cell Content:
restaurant_id
restaurant_name
Result 17
Read Only
Output
Action Output
Time Action Message Duration / Fetch
27 21:24:26 SELECT o.order_id, c.customer_name, r.restaurant_name, o.order_date, o.order_status FROM orde... 0 row(s) returned 0.000 sec / 0.000 sec
28 21:24:41 SELECT oi.order_id, m.item_name, oi.quantity, m.price, oi.quantity * m.price AS item_value FROM or... 0 row(s) returned 0.000 sec / 0.000 sec
29 21:24:56 SELECT o.order_id, c.customer_name, p.payment_method, p.payment_amount, p.payment_status F... 0 row(s) returned 0.000 sec / 0.000 sec
30 21:25:06 SELECT m.category, SUM(oi.quantity) AS total_quantity_sold FROM menu_items m JOIN order_items oi ON m... 0 row(s) returned 0.000 sec / 0.000 sec
31 21:25:19 SELECT r.restaurant_name, SUM(oi.quantity * m.price) AS food_revenue FROM restaurants r JOIN orders o O... 0 row(s) returned 0.000 sec / 0.000 sec
32 21:25:28 SELECT r.restaurant_id, r.restaurant_name FROM restaurants r JOIN orders o ON r.restaurant_id = o.restaurant... 0 row(s) returned 0.000 sec / 0.000 sec
Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or t toggle automatic help.
Context Help
Snippets
Object Info
Session
No object selected
25°C Mostly clear
Search
ENG IN
64%
21:25 11-10-2026

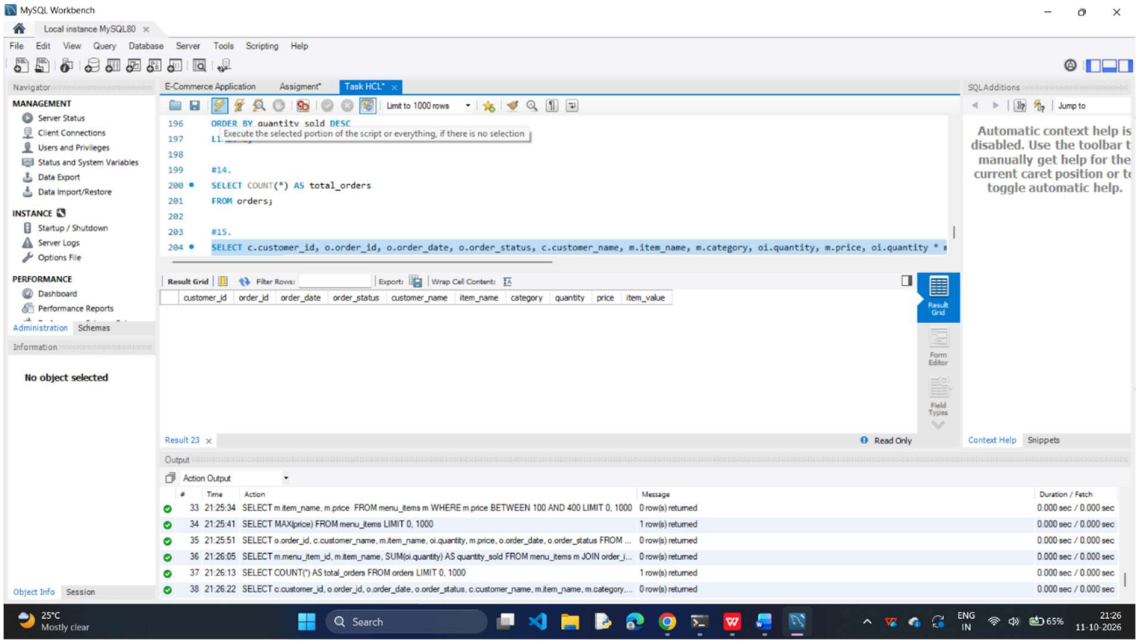

MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
E-Commerce Application Assigment* Task HCL*
Limit to 1000 rows
#10.
Execute the selected portion of the script or everything, if there is no selection
FROM menu_items m
WHERE m.price BETWEEN 100 AND 400;
#11.
SELECT MAX(price) FROM menu_items;
#12.
Result Grid Filter Rows: Export: Wrap Cell Content:
item_name price
No object selected
Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or t toggle automatic help.
Output
Action Output
Time Action Message Duration / Fetch
28 21:24:41 SELECT oi.order_id, m.item_name, oi.quantity, m.price, oi.quantity * m.price AS item_value FROM or... 0 row(s) returned 0.000 sec / 0.000 sec
29 21:24:56 SELECT o.order_id, c.customer_name, p.payment_method, p.payment_amount, p.payment_status F... 0 row(s) returned 0.000 sec / 0.000 sec
30 21:25:06 SELECT m.category, SUM(oi.quantity) AS total_quantity_sold FROM menu_items m JOIN order_items oi ON m.... 0 row(s) returned 0.000 sec / 0.000 sec
31 21:25:19 SELECT r.restaurant_name, SUM(oi.quantity * m.price) AS food_revenue FROM restaurants r JOIN orders o O... 0 row(s) returned 0.000 sec / 0.000 sec
32 21:25:28 SELECT r.restaurant_id, r.restaurant_name FROM restaurants r JOIN orders o ON r.restaurant_id = o.restaurant... 0 row(s) returned 0.000 sec / 0.000 sec
33 21:25:34 SELECT m.item_name, m.price FROM menu_items m WHERE m.price BETWEEN 100 AND 400 LIMIT 0, 1000 0 row(s) returned 0.000 sec / 0.000 sec
25°C Mostly clear
Search
ENG IN
64%
21:25 11-10-2026


MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
E-Commerce Application Assigment* Task HCL*
Limit to 1000 rows
#10.
Execute the selected portion of the script or everything, if there is no selection
FROM menu_items m
WHERE m.price BETWEEN 100 AND 400;
#11.
SELECT MAX(price) FROM menu_items;
#12.
Result Grid Filter Rows: Export: Wrap Cell Content:
MAX(price)
No object selected
Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or t toggle automatic help.
Output
Action Output
Time Action Message Duration / Fetch
29 21:24:56 SELECT o.order_id, c.customer_name, p.payment_method, p.payment_amount, p.payment_status F... 0 row(s) returned 0.000 sec / 0.000 sec
30 21:25:06 SELECT m.category, SUM(oi.quantity) AS total_quantity_sold FROM menu_items m JOIN order_items oi ON m.... 0 row(s) returned 0.000 sec / 0.000 sec
31 21:25:19 SELECT r.restaurant_name, SUM(oi.quantity * m.price) AS food_revenue FROM restaurants r JOIN orders o O... 0 row(s) returned 0.000 sec / 0.000 sec
32 21:25:28 SELECT r.restaurant_id, r.restaurant_name FROM restaurants r JOIN orders o ON r.restaurant_id = o.restaurant... 0 row(s) returned 0.000 sec / 0.000 sec
33 21:25:34 SELECT m.item_name, m.price FROM menu_items m WHERE m.price BETWEEN 100 AND 400 LIMIT 0, 1000 0 row(s) returned 0.000 sec / 0.000 sec
34 21:25:41 SELECT MAX(price) FROM menu_items LIMIT 0, 1000 1 row(s) returned 0.000 sec / 0.000 sec
25°C Mostly clear
Search
ENG IN
64%
21:25 11-10-2026

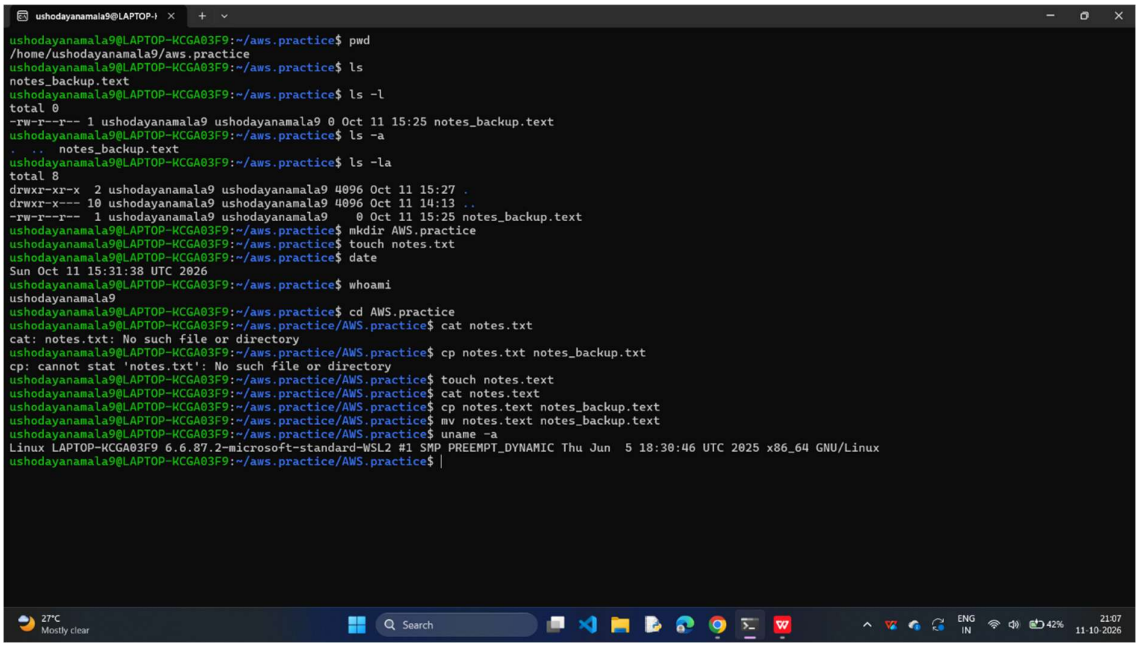

MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
E-Commerce Application
Assignment*
Task HCL*
Limit to 1000 rows
Execute the selected portion of the script or everything, if there is no selection
#12.
SELECT o.order_id, c.customer_name, m.item_name, oi.quantity, m.price, o.order_date, o.order_status
FROM orders o
JOIN customers c ON o.customer_id = c.customer_id
JOIN order_items oi ON o.order_id = oi.order_id
JOIN menu_items m ON oi.menu_item_id = m.menu_item_id;
Result Grid
order_id customer_name item_name quantity price order_date order_status
Result 20
Read Only
Output
Action Output
30 21:25:06 SELECT m.category, SUM(oi.quantity) AS total_quantity_sold FROM menu_items m JOIN order_items oi ON m... 0 row(s) returned 0.000 sec / 0.000 sec
31 21:25:19 SELECT r.restaurant_name, SUM(oi.quantity * m.price) AS food_revenue FROM restaurants r JOIN orders o O... 0 row(s) returned 0.000 sec / 0.000 sec
32 21:25:28 SELECT r.restaurant_id, r.restaurant_name FROM restaurants r JOIN orders o ON r.restaurant_id = o.restaurant... 0 row(s) returned 0.000 sec / 0.000 sec
33 21:25:34 SELECT m.item_name, m.price FROM menu_items m WHERE m.price BETWEEN 100 AND 400 LIMIT 0, 1000 0 row(s) returned 0.000 sec / 0.000 sec
34 21:25:41 SELECT MAX(price) FROM menu_items LIMIT 0, 1000 1 row(s) returned 0.000 sec / 0.000 sec
35 21:25:51 SELECT o.order_id, c.customer_name, m.item_name, oi.quantity, m.price, o.order_date, o.order_status FROM ... 0 row(s) returned 0.000 sec / 0.000 sec
No object selected
Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or t toggle automatic help.
25°C Mostly clear
Search
ENG IN
64%
21:25 11-10-2026

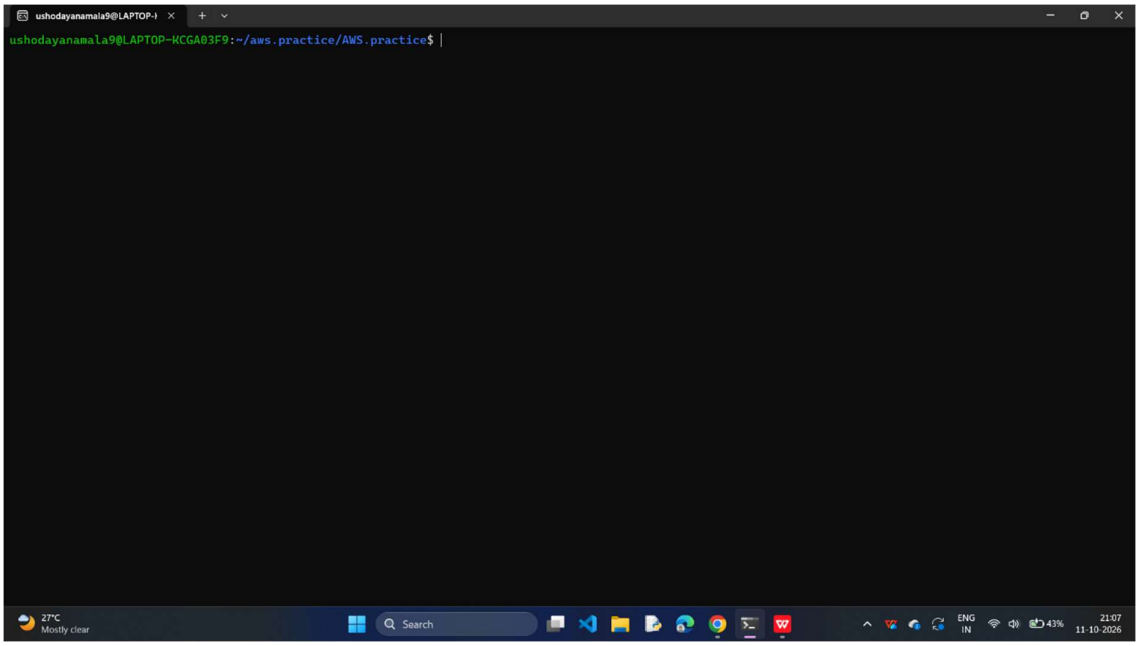

MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
E-Commerce Application
Assignment*
Task HCL*
Limit to 1000 rows
#13.
SELECT m.menu_item_id, m.item_name, SUM(oi.quantity) AS quantity_sold
FROM menu_items m
JOIN order_items oi ON m.menu_item_id = oi.menu_item_id
GROUP BY m.menu_item_id, m.item_name
ORDER BY quantity_sold DESC
LIMIT 1;
#14.
Result Grid
menu_item_id item_name quantity_sold
Result 21
Read Only
Output
Action Output
31 21:25:19 SELECT r.restaurant_name, SUM(oi.quantity * m.price) AS food_revenue FROM restaurants r JOIN orders o O... 0 row(s) returned 0.000 sec / 0.000 sec
32 21:25:28 SELECT r.restaurant_id, r.restaurant_name FROM restaurants r JOIN orders o ON r.restaurant_id = o.restaurant... 0 row(s) returned 0.000 sec / 0.000 sec
33 21:25:34 SELECT m.item_name, m.price FROM menu_items m WHERE m.price BETWEEN 100 AND 400 LIMIT 0, 1000 0 row(s) returned 0.000 sec / 0.000 sec
34 21:25:41 SELECT MAX(price) FROM menu_items LIMIT 0, 1000 1 row(s) returned 0.000 sec / 0.000 sec
35 21:25:51 SELECT o.order_id, c.customer_name, m.item_name, oi.quantity, m.price, o.order_date, o.order_status FROM ... 0 row(s) returned 0.000 sec / 0.000 sec
36 21:26:05 SELECT m.menu_item_id, m.item_name, SUM(oi.quantity) AS quantity_sold FROM menu_items m JOIN order_i... 0 row(s) returned 0.000 sec / 0.000 sec
No object selected
Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or t toggle automatic help.
25°C Mostly clear
Search
ENG IN
65%
21:26 11-10-2026


MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
E-Commerce Application
Assignment*
Task HCL*
Limit to 1000 rows
ORDER BY quantity_sold DESC
LIMIT 1;
#14.
SELECT COUNT(*) AS total_orders
FROM orders;
Result Grid
total_orders
5
Result 22
Read Only
Output
Action Output
32 21:25:28 SELECT r.restaurant_id, r.restaurant_name FROM restaurants r JOIN orders o ON r.restaurant_id = o.restaurant... 0 row(s) returned 0.000 sec / 0.000 sec
33 21:25:34 SELECT m.item_name, m.price FROM menu_items m WHERE m.price BETWEEN 100 AND 400 LIMIT 0, 1000 0 row(s) returned 0.000 sec / 0.000 sec
34 21:25:41 SELECT MAX(price) FROM menu_items LIMIT 0, 1000 1 row(s) returned 0.000 sec / 0.000 sec
35 21:25:51 SELECT o.order_id, c.customer_name, m.item_name, oi.quantity, m.price, o.order_date, o.order_status FROM ... 0 row(s) returned 0.000 sec / 0.000 sec
36 21:26:05 SELECT m.menu_item_id, m.item_name, SUM(oi.quantity) AS quantity_sold FROM menu_items m JOIN order_i... 0 row(s) returned 0.000 sec / 0.000 sec
37 21:26:13 SELECT COUNT(*) AS total_orders FROM orders LIMIT 0, 1000 1 row(s) returned 0.000 sec / 0.000 sec
No object selected
Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or t toggle automatic help.
25°C Mostly clear
Search
ENG IN
65%
21:26 11-10-2026


MySQL Workbench
Local instance MySQL80
File Edit View Query Database Server Tools Scripting Help
E-Commerce Application
Assignment*
Task HCL*
Limit to 1000 rows
ORDER BY quantity_sold DESC
LIMIT 1;
#14.
SELECT COUNT(*) AS total_orders
FROM orders;
#15.
SELECT c.customer_id, o.order_id, o.order_date, o.order_status, c.customer_name, m.item_name, m.category, oi.quantity, m.price, oi.quantity * m
Result Grid
customer_id order_id order_date order_status customer_name item_name category quantity price item_value
Result 23
Read Only
Output
Action Output
33 21:25:34 SELECT m.item_name, m.price FROM menu_items m WHERE m.price BETWEEN 100 AND 400 LIMIT 0, 1000 0 row(s) returned 0.000 sec / 0.000 sec
34 21:25:41 SELECT MAX(price) FROM menu_items LIMIT 0, 1000 1 row(s) returned 0.000 sec / 0.000 sec
35 21:25:51 SELECT o.order_id, c.customer_name, m.item_name, oi.quantity, m.price, o.order_date, o.order_status FROM ... 0 row(s) returned 0.000 sec / 0.000 sec
36 21:26:05 SELECT m.menu_item_id, m.item_name, SUM(oi.quantity) AS quantity_sold FROM menu_items m JOIN order_i... 0 row(s) returned 0.000 sec / 0.000 sec
37 21:26:13 SELECT COUNT(*) AS total_orders FROM orders LIMIT 0, 1000 1 row(s) returned 0.000 sec / 0.000 sec
38 21:26:22 SELECT c.customer_id, o.order_id, o.order_date, o.order_status, c.customer_name, m.item_name, m.category,... 0 row(s) returned 0.000 sec / 0.000 sec
No object selected
Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or t toggle automatic help.
25°C Mostly clear
Search
ENG IN
65%
21:26 11-10-2026

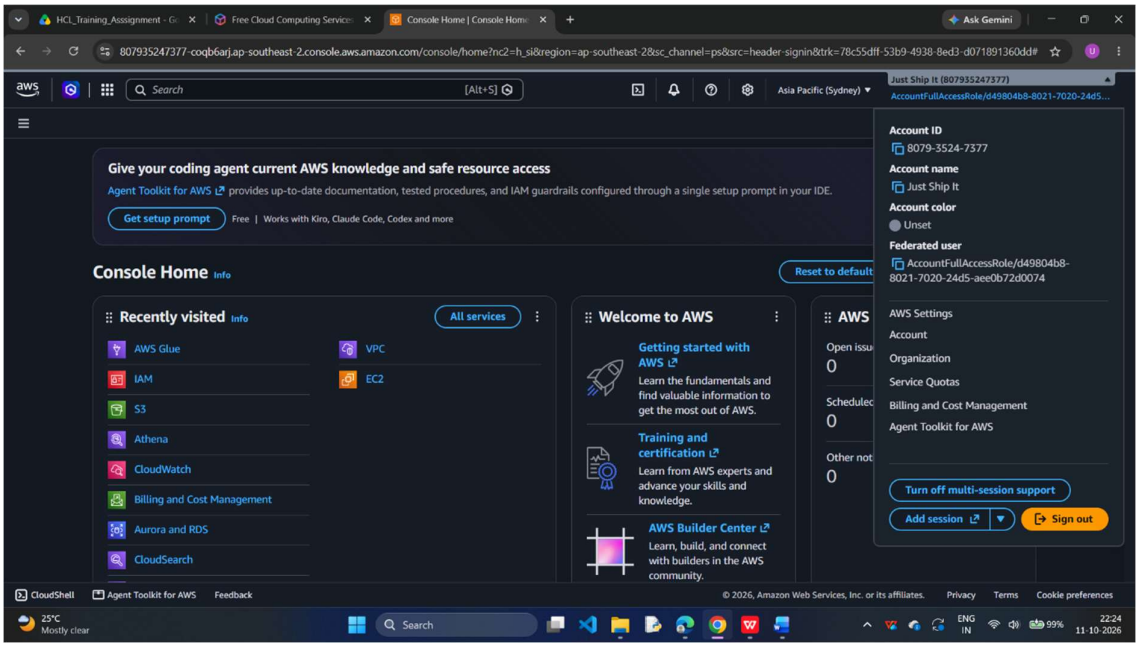
Linux Practice:

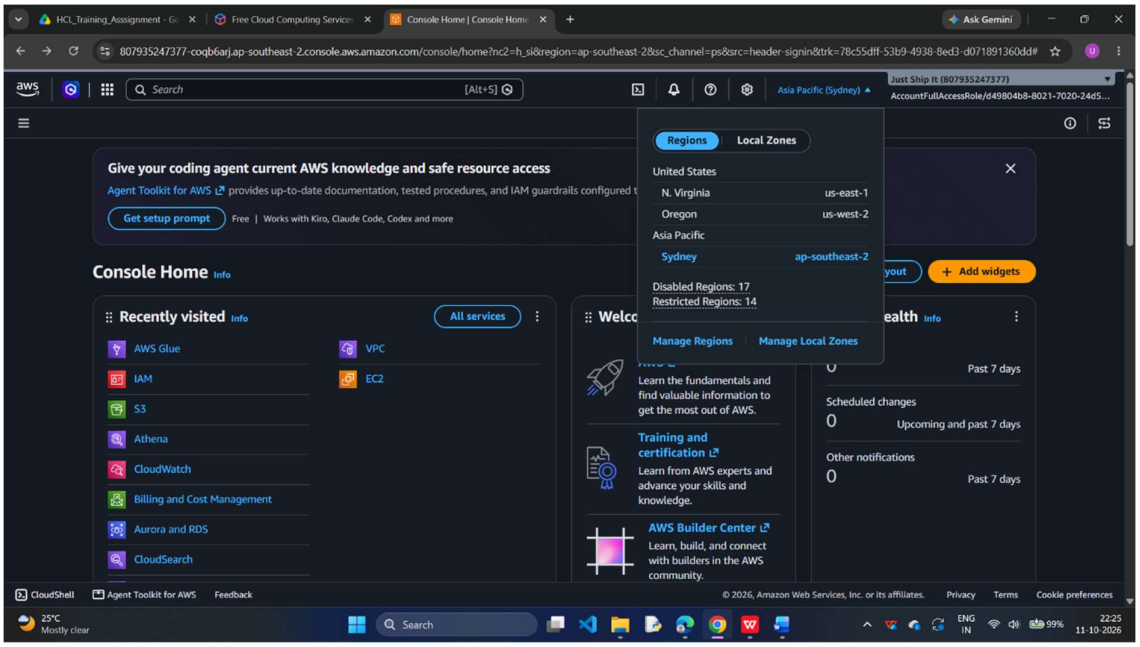




AWS Account/Region:

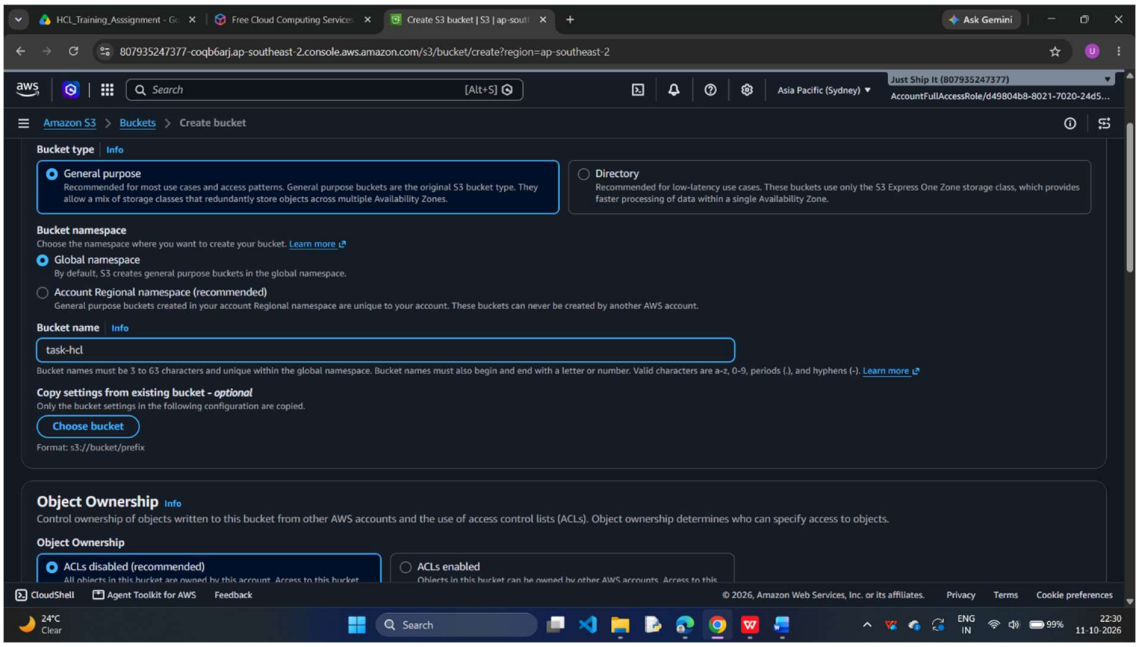
AWS Console:

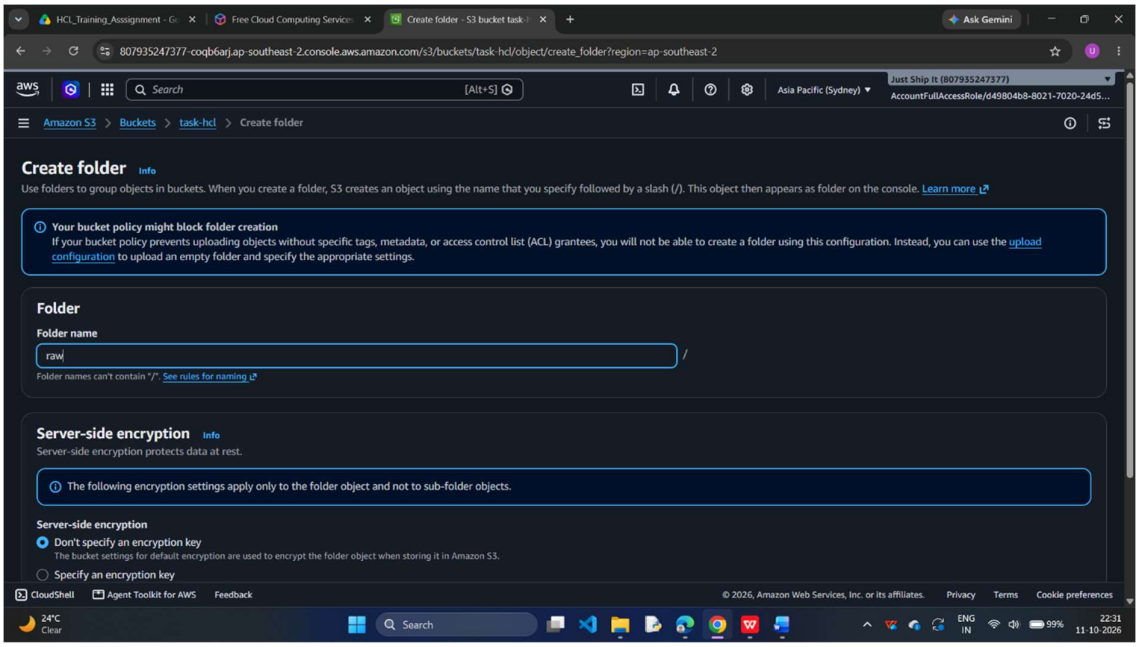


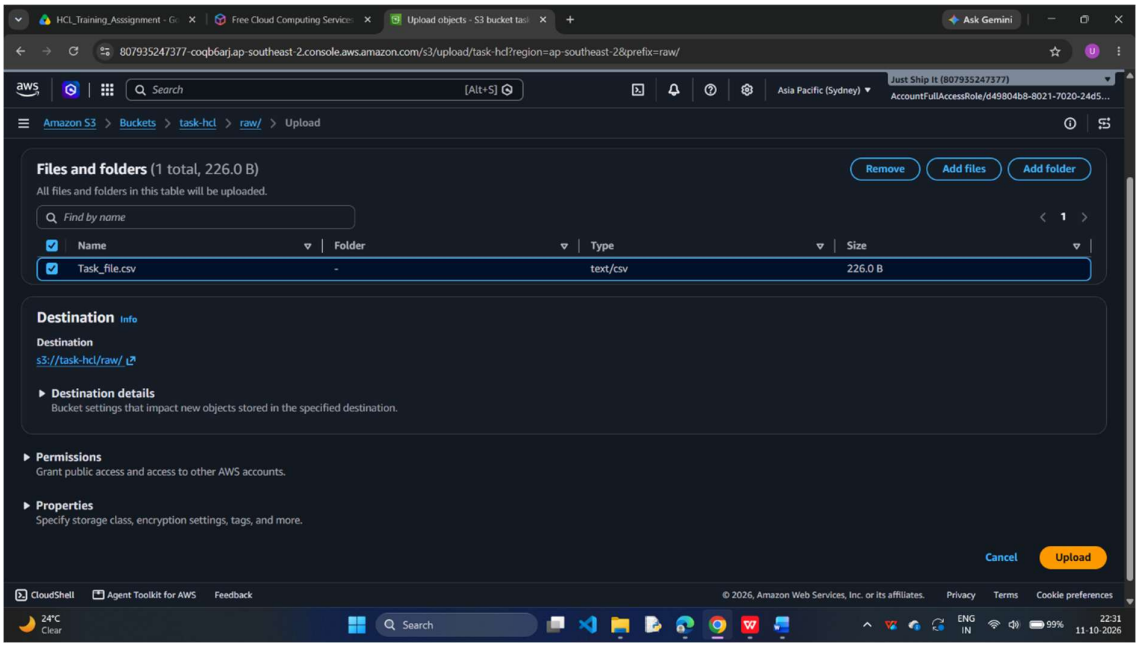


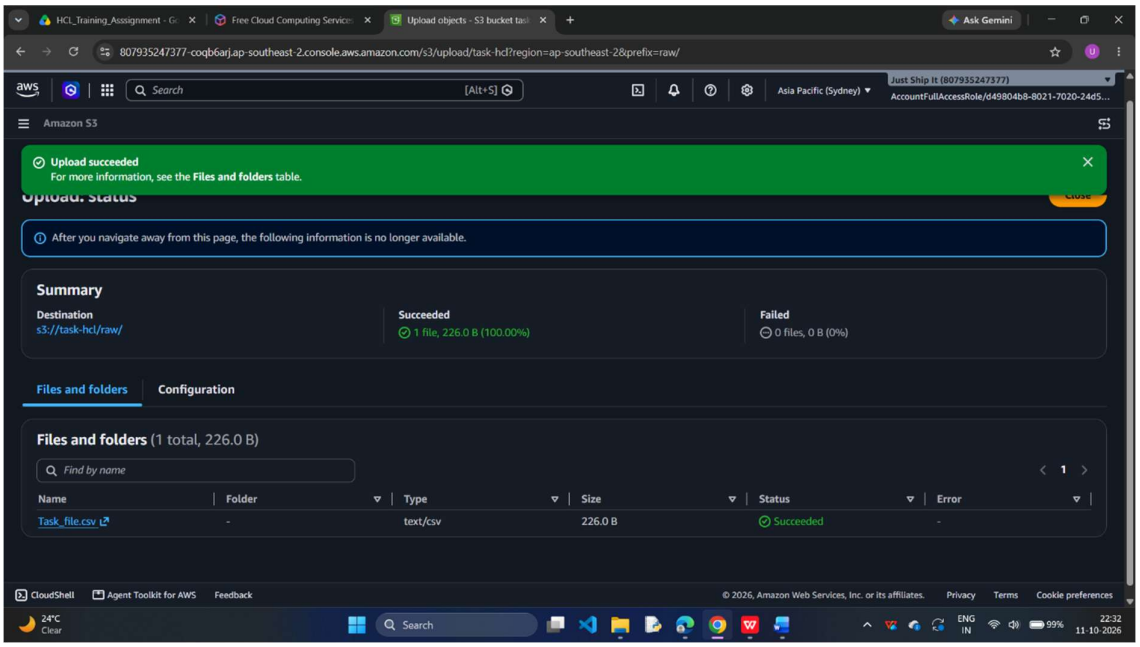
Amazon S3:

Create S3 Bucket:



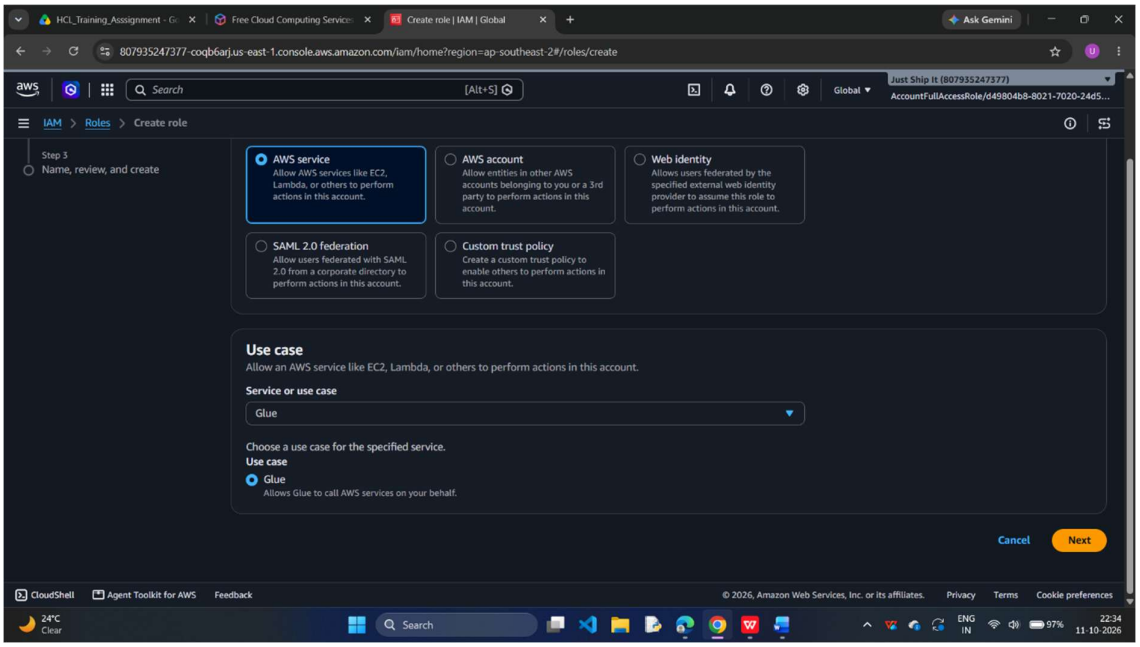


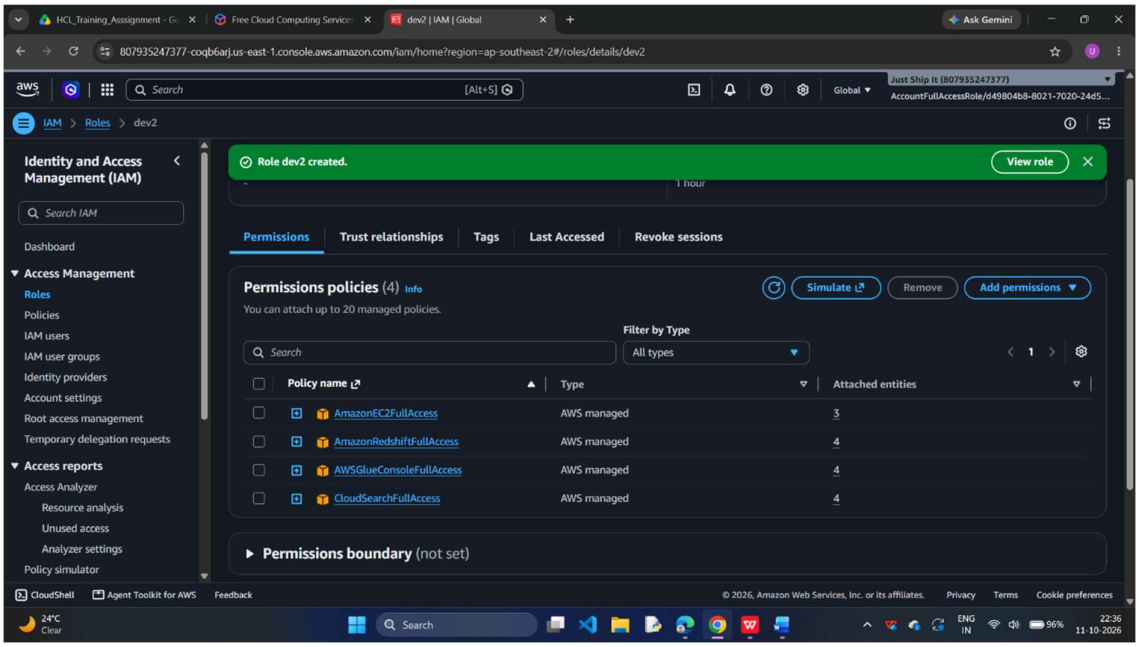

HCL_Training_Assignment - G
Free Cloud Computing Service
Upload objects - S3 bucket task
Ask Gemini
807935247377-coqb6arj.ap-southeast-2.console.aws.amazon.com/s3/upload/task-hcl?region=ap-southeast-2&prefix=raw/
Search
[Alt+S]
Asia Pacific (Sydney)
Just Ship It (807935247377)
AccountFullAccessRole/d49804b8-8021-7020-24d5...
Amazon S3 > Buckets > task-hcl > raw/ > Upload
Files and folders (1 total, 226.0 B)
All files and folders in this table will be uploaded.
Remove
Add files
Add folder
Find by name
1
Name
Folder
Type
Size
Task_file.csv
-
text/csv
226.0 B
Destination Info
Destination
s3://task-hcl/raw/
Destination details
Bucket settings that impact new objects stored in the specified destination.
Permissions
Grant public access and access to other AWS accounts.
Properties
Specify storage class, encryption settings, tags, and more.
Cancel
Upload
CloudShell
Agent Toolkit for AWS
Feedback
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
24°C
Clear
Search
ENG
IN
99%
22:31
11-10-2026

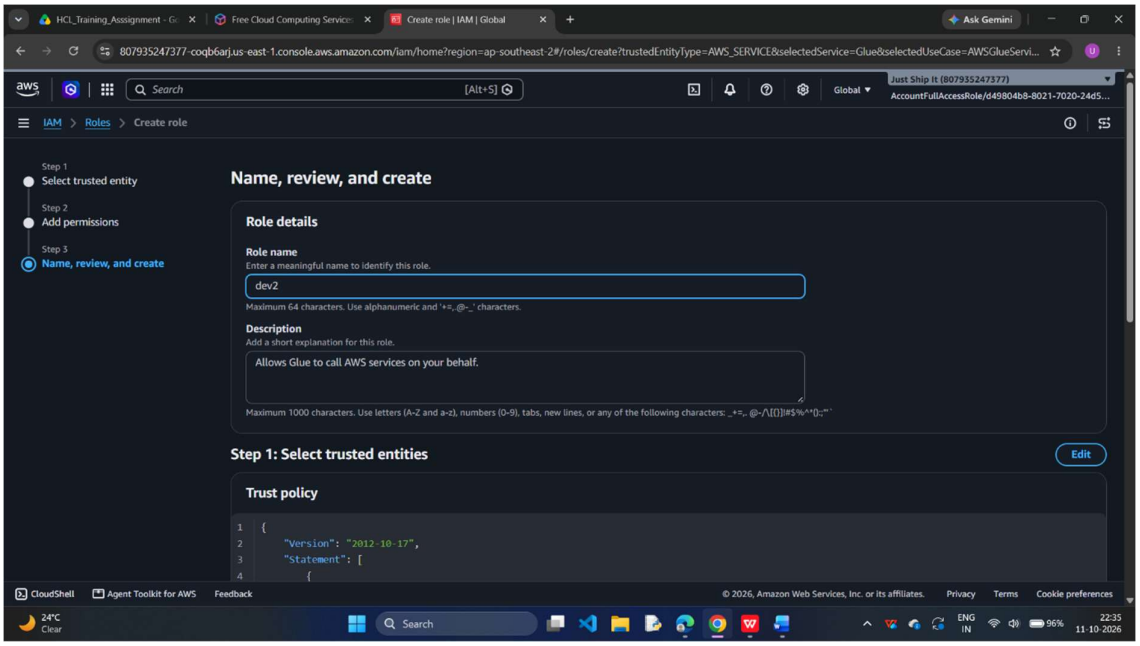

HCL_Training_Assignment - G
Free Cloud Computing Service
Upload objects - S3 bucket task
Ask Gemini
807935247377-coqb6arj.ap-southeast-2.console.aws.amazon.com/s3/upload/task-hcl?region=ap-southeast-2&prefix=raw/
Search
[Alt+S]
Asia Pacific (Sydney)
Just Ship It (807935247377)
AccountFullAccessRole/d49804b8-8021-7020-24d5...
Amazon S3
Upload succeeded
For more information, see the Files and folders table.
After you navigate away from this page, the following information is no longer available.
Summary
Destination
s3://task-hcl/raw/
Succeeded
1 file, 226.0 B (100.00%)
Failed
0 files, 0 B (0%)
Files and folders
Configuration
Files and folders (1 total, 226.0 B)
Find by name
1
Name
Folder
Type
Size
Status
Error
Task_file.csv
-
text/csv
226.0 B
Succeeded
-
CloudShell
Agent Toolkit for AWS
Feedback
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
24°C
Clear
Search
ENG
IN
99%
22:32
11-10-2026

IAM

IAM Role used for AWS Glue:

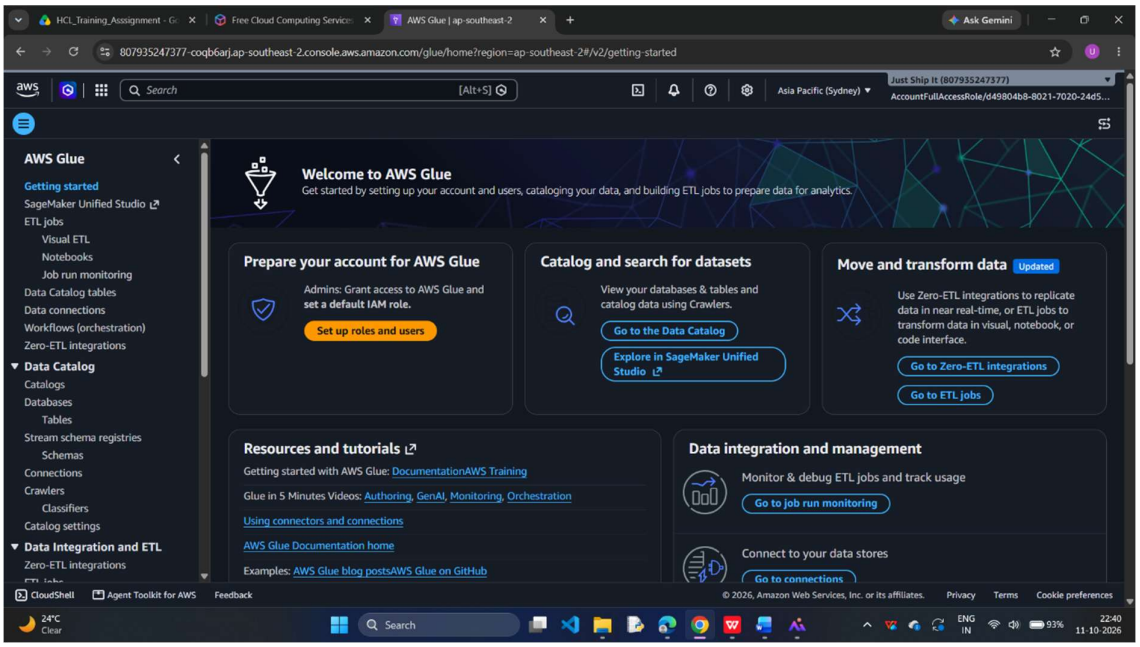




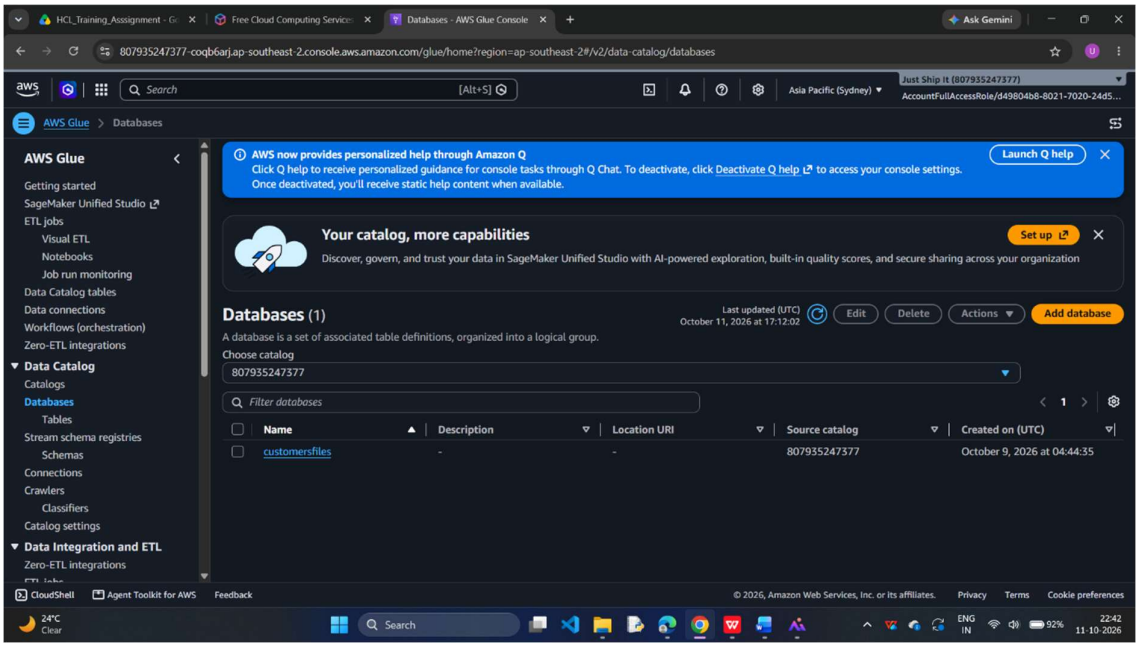


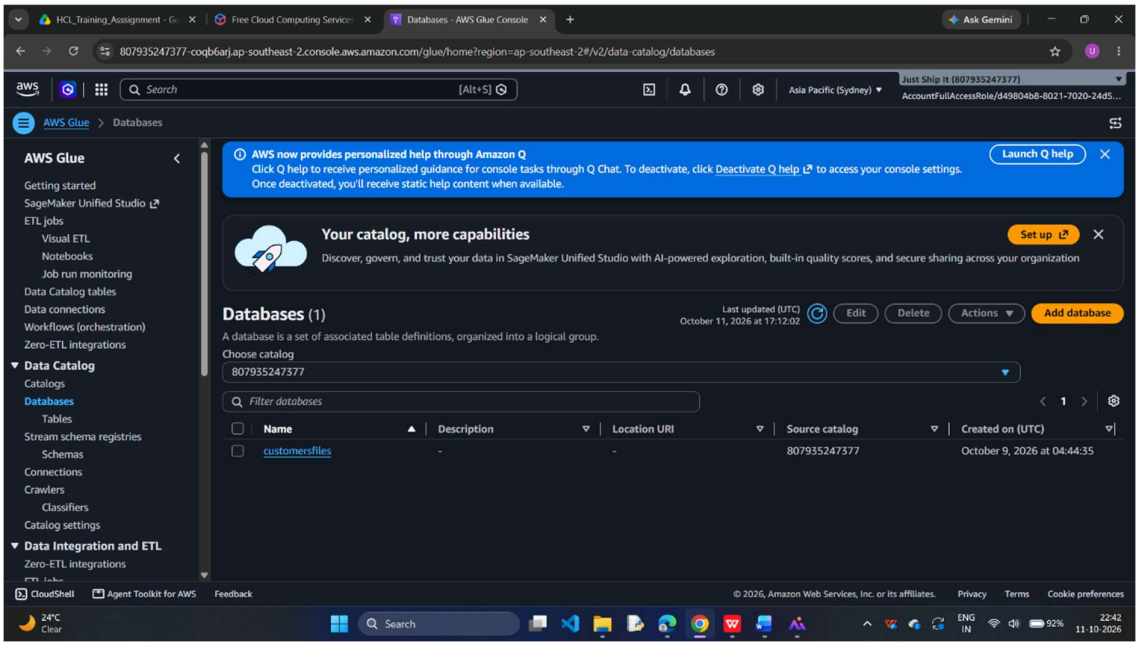
AWS Glue Database

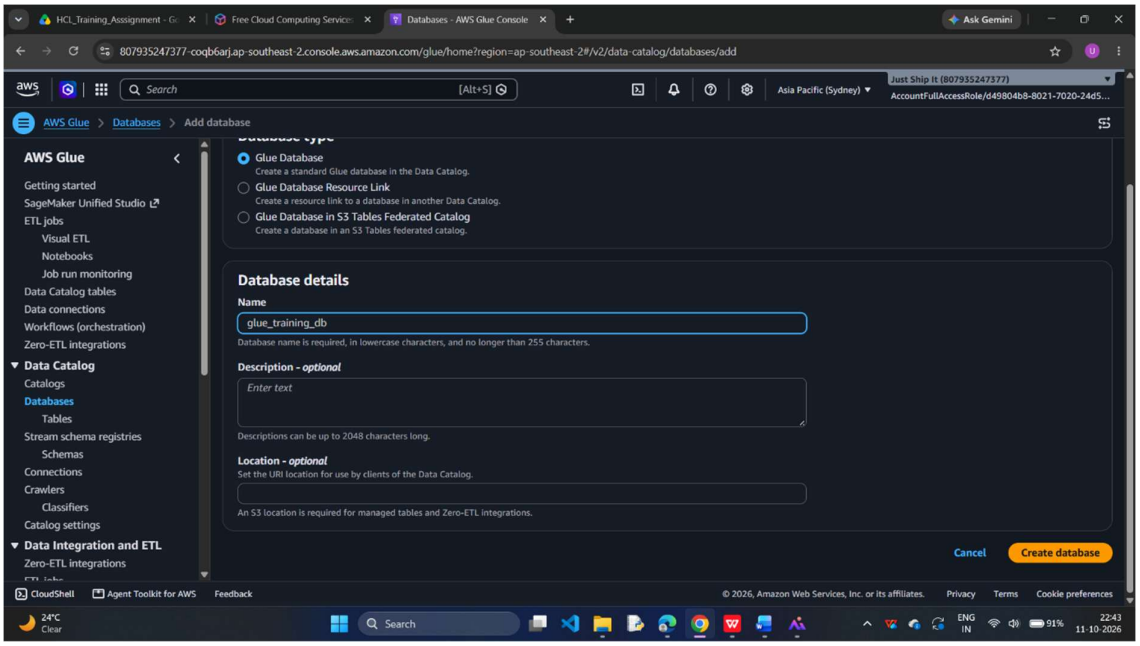
AWS Glue Console:

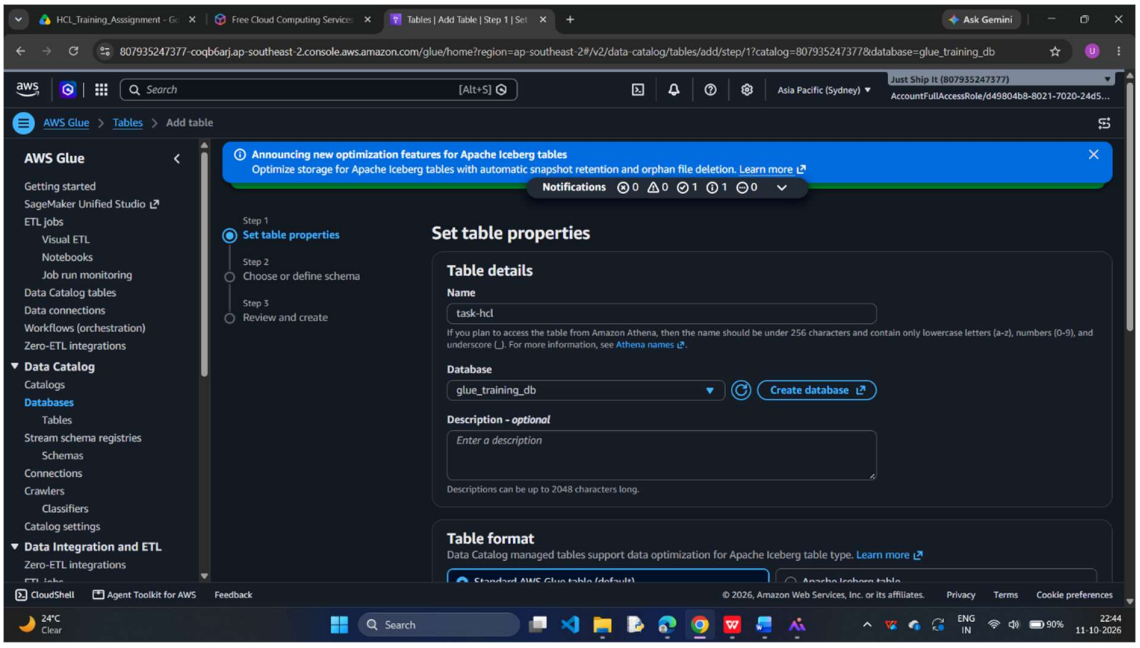


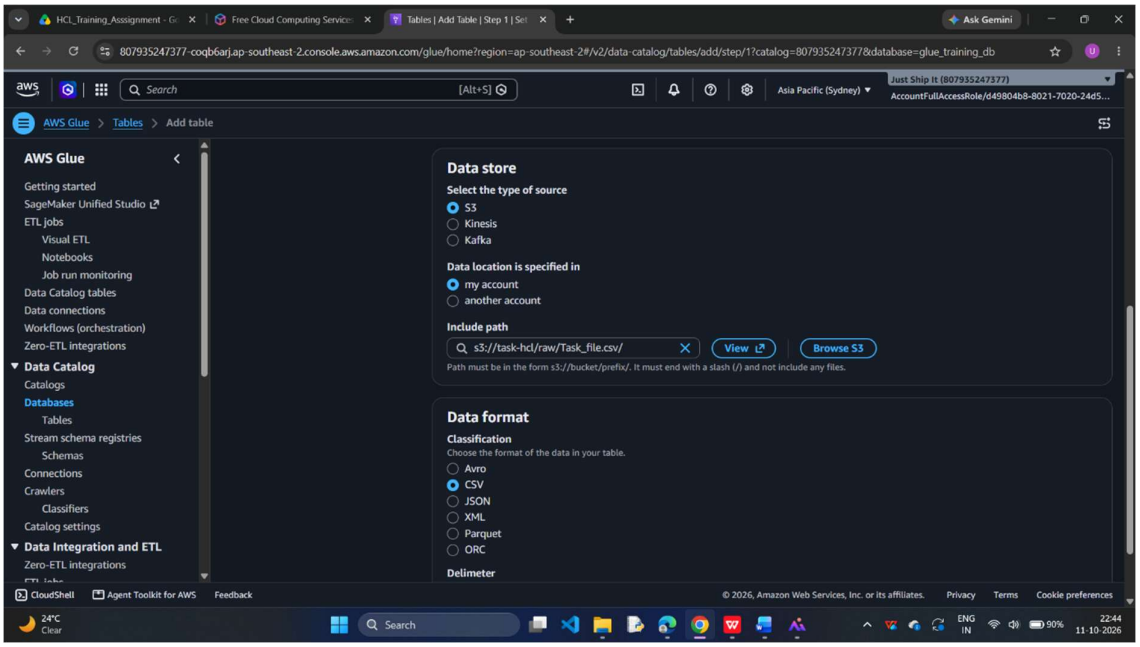
Data Catalog:

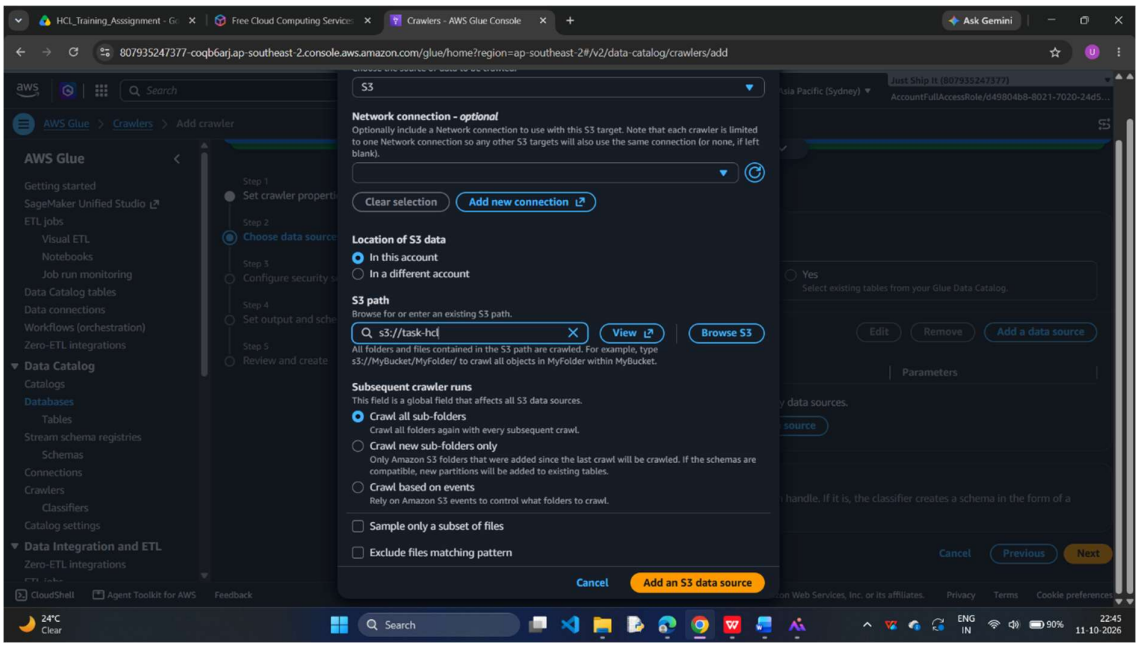


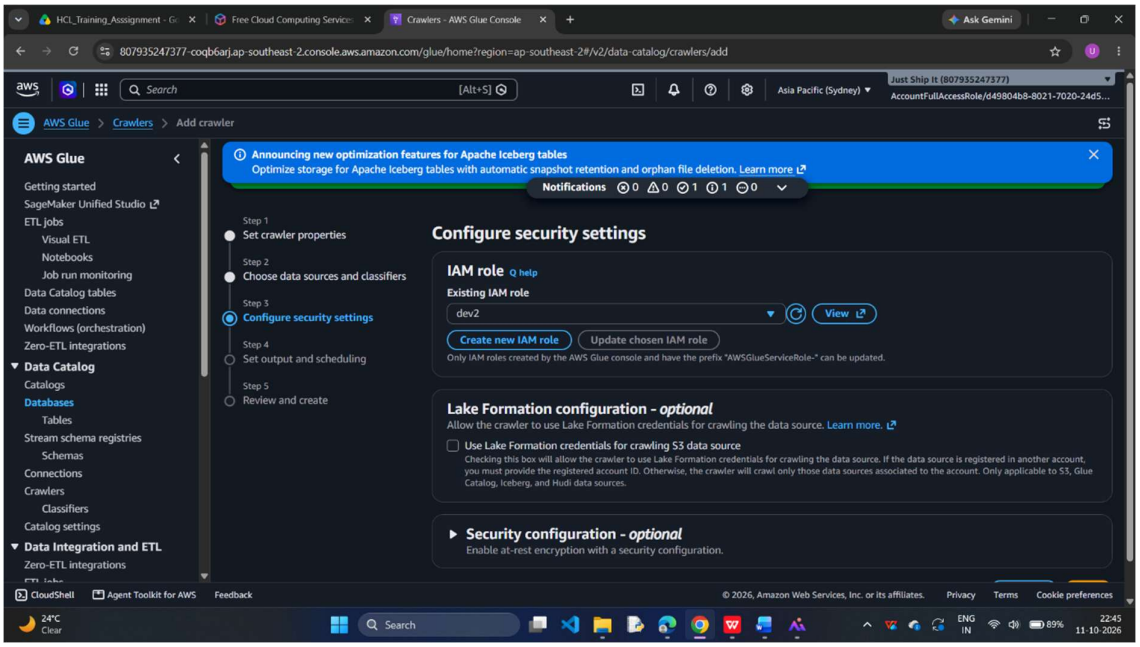


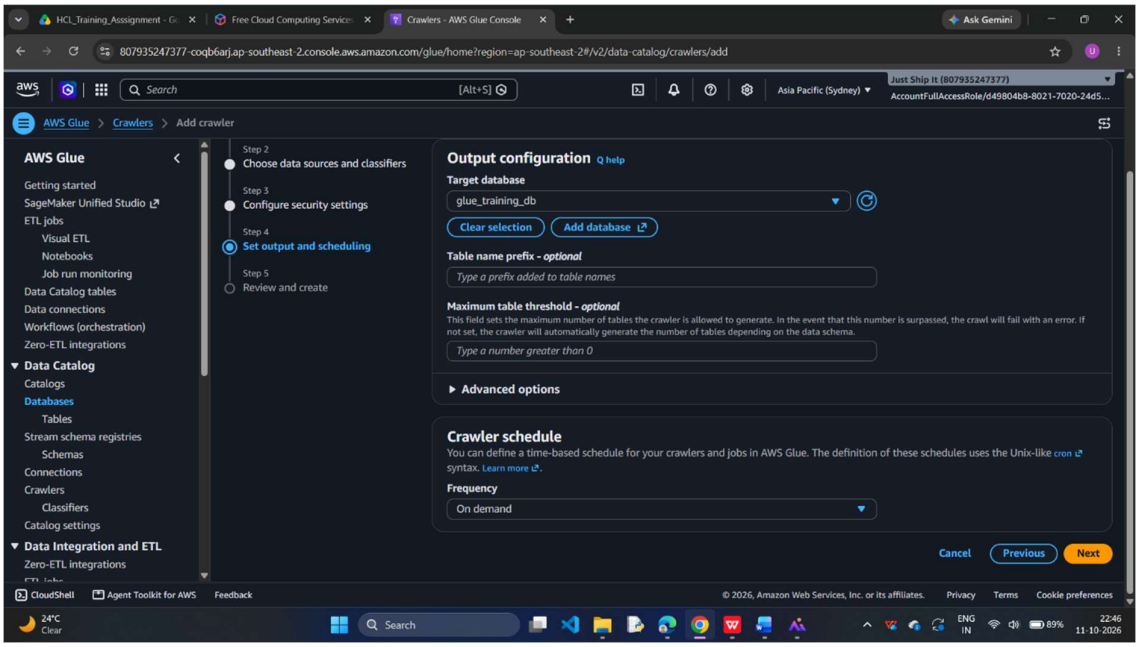

HCL_Training_Assignment - G
Free Cloud Computing Service
Databases - AWS Glue Console
Ask Gemini
807935247377-coqb6arj.ap-southeast-2.console.aws.amazon.com/glue/home?region=ap-southeast-2#/v2/data-catalog/databases/add
Search
[Alt+S]
Asia Pacific (Sydney)
Just Ship It (807935247377)
AccountFullAccessRole/d49804b8-8021-7020-24d5...
AWS Glue > Databases > Add database
AWS Glue
Getting started
SageMaker Unified Studio
ETL jobs
Visual ETL
Notebooks
Job run monitoring
Data Catalog tables
Data connections
Workflows (orchestration)
Zero-ETL integrations
Data Catalog
Catalogs
Databases
Tables
Stream schema registries
Schemas
Connections
Crawlers
Classifiers
Catalog settings
Data Integration and ETL
Zero-ETL integrations
Glue Database
Create a standard Glue database in the Data Catalog.
Glue Database Resource Link
Create a resource link to a database in another Data Catalog.
Glue Database in S3 Tables Federated Catalog
Create a database in an S3 Tables federated catalog.
Database details
Name
glue_training_db
Database name is required, in lowercase characters, and no longer than 255 characters.
Description - optional
Enter text
Descriptions can be up to 2048 characters long.
Location - optional
Set the URI location for use by clients of the Data Catalog.
An S3 location is required for managed tables and Zero-ETL integrations.
Cancel
Create database
CloudShell
Agent Toolkit for AWS
Feedback
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
24°C
Clear
Search
ENG
IN
91%
22:43
11-10-2026

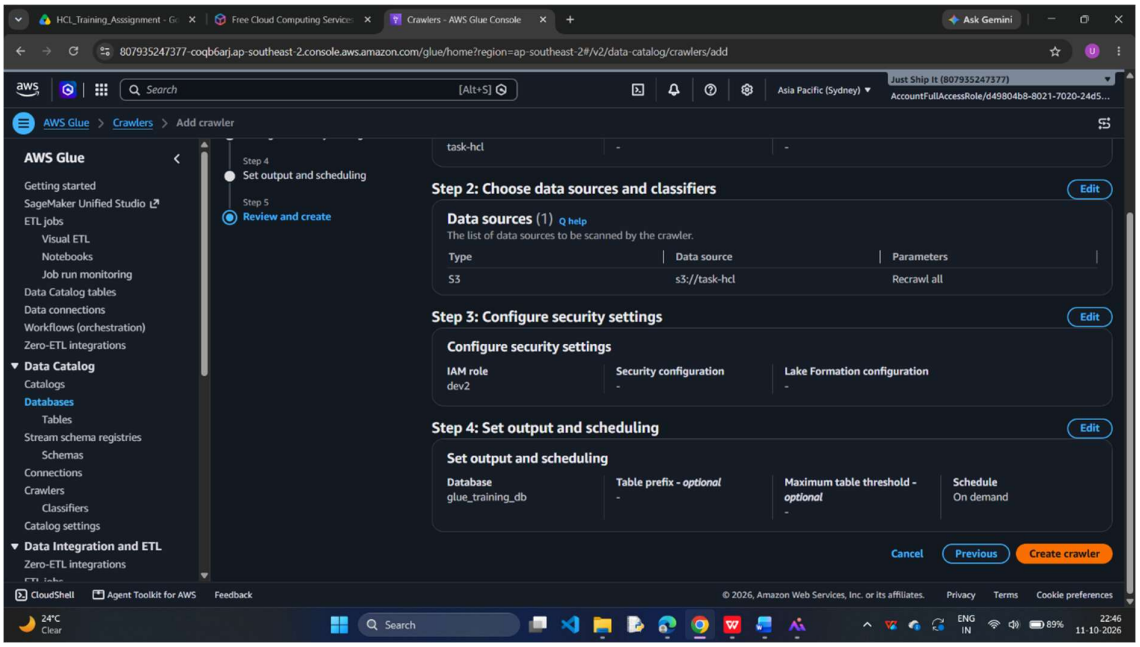

HCL_Training_Assignment - G
Free Cloud Computing Service
Tables | Add Table | Step 1 | Set
Ask Gemini
807935247377-coqb6arj.ap-southeast-2.console.aws.amazon.com/glue/home?region=ap-southeast-2#/v2/data-catalog/tables/add/step/1?catalog=807935247377&database=glue_training_db
Search
[Alt+S]
Asia Pacific (Sydney)
Just Ship It (807935247377)
AccountFullAccessRole/d49804b8-8021-7020-24d5...
AWS Glue > Tables > Add table
AWS Glue
Getting started
SageMaker Unified Studio
ETL jobs
Visual ETL
Notebooks
Job run monitoring
Data Catalog tables
Data connections
Workflows (orchestration)
Zero-ETL integrations
Data Catalog
Catalogs
Databases
Tables
Stream schema registries
Schemas
Connections
Crawlers
Classifiers
Catalog settings
Data Integration and ETL
Zero-ETL integrations
Announcing new optimization features for Apache Iceberg tables
Optimize storage for Apache Iceberg tables with automatic snapshot retention and orphan file deletion. Learn more
Notifications 0 0 1 1 0
Step 1
Set table properties
Step 2
Choose or define schema
Step 3
Review and create
Set table properties
Table details
Name
task-hcl
If you plan to access the table from Amazon Athena, then the name should be under 256 characters and contain only lowercase letters (a-z), numbers (0-9), and underscore (_). For more information, see Athena names.
Database
glue_training_db
Create database
Description - optional
Enter a description
Descriptions can be up to 2048 characters long.
Table format
Data Catalog managed tables support data optimization for Apache Iceberg table type. Learn more
CloudShell
Agent Toolkit for AWS
Feedback
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
24°C
Clear
Search
ENG
IN
90%
22:44
11-10-2026

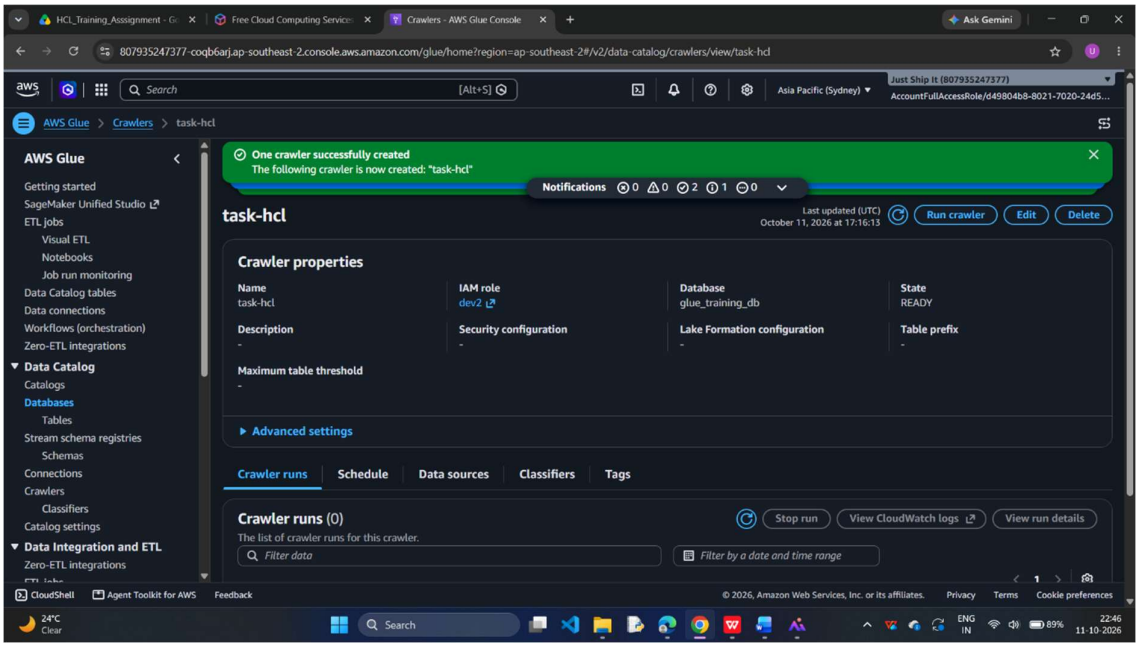

Tables | Add Table | Step 1 | Set
Ask Gemini
807935247377-coqb6arj.ap-southeast-2.console.aws.amazon.com/glue/home?region=ap-southeast-2#/v2/data-catalog/tables/add/step/1?catalog=807935247377&database=glue_training_db
Search
[Alt+S]
Asia Pacific (Sydney)
AccountFullAccessRole/d49804b8-8021-7020-24d5...
AWS Glue > Tables > Add table
AWS Glue
Getting started
SageMaker Unified Studio
ETL jobs
Visual ETL
Notebooks
Job run monitoring
Data Catalog tables
Data connections
Workflows (orchestration)
Zero-ETL integrations
Data Catalog
Catalogs
Databases
Tables
Stream schema registries
Schemas
Connections
Crawlers
Classifiers
Catalog settings
Data Integration and ETL
Zero-ETL integrations
Data store
Select the type of source
S3
Kinesis
Kafka
Data location is specified in
my account
another account
Include path
s3://task-hcl/raw/Task_file.csv/
View
Browse S3
Path must be in the form s3://bucket/prefix/. It must end with a slash (/) and not include any files.
Data format
Classification
Choose the format of the data in your table.
Avro
CSV
JSON
XML
Parquet
ORC
Delimeter
CloudShell
Agent Toolkit for AWS
Feedback
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
24°C
Clear
Search
ENG
IN
90%
22:44
11-10-2026

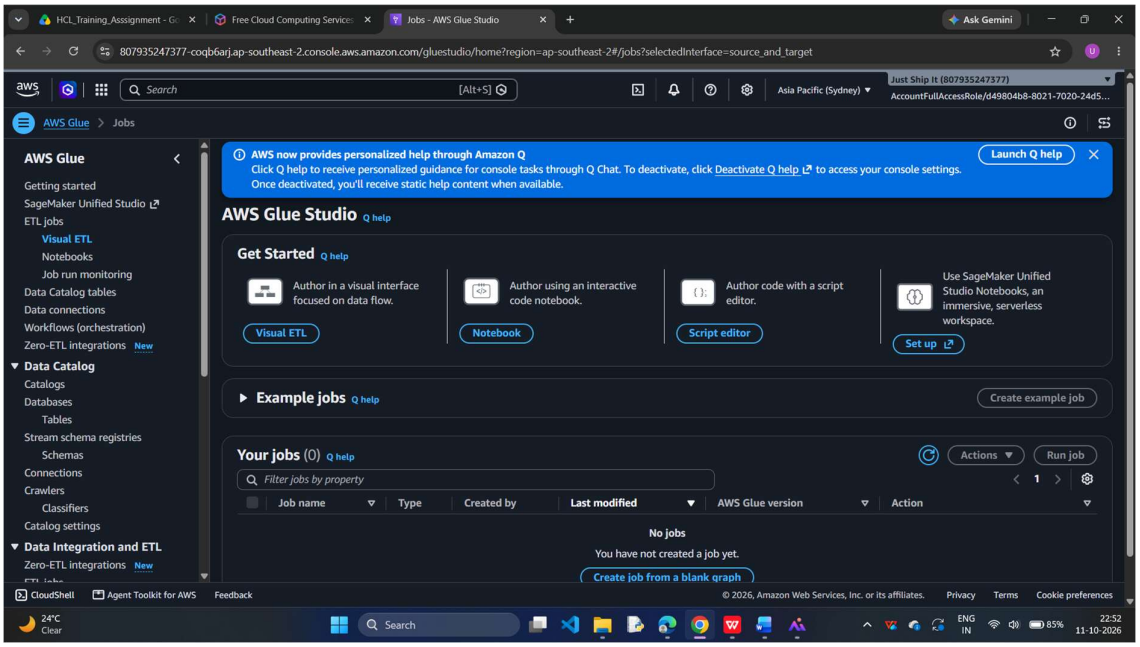

Crawlers - AWS Glue Console
Ask Gemini
807935247377-coqb6arj.ap-southeast-2.console.aws.amazon.com/glue/home?region=ap-southeast-2#/v2/data-catalog/crawlers/add
AWS Glue > Crawlers > Add crawler
S3
Network connection - optional
Optionally include a Network connection to use with this S3 target. Note that each crawler is limited to one Network connection so any other S3 targets will also use the same connection (or none, if left blank).
Clear selection
Add new connection
Location of S3 data
In this account
In a different account
S3 path
Browse for or enter an existing S3 path.
s3://task-hcl
View
Browse S3
All folders and files contained in the S3 path are crawled. For example, type s3://MyBucket/MyFolder/ to crawl all objects in MyFolder within MyBucket.
Subsequent crawler runs
This field is a global field that affects all S3 data sources.
Crawl all sub-folders
Crawl all folders again with every subsequent crawl.
Crawl new sub-folders only
Only Amazon S3 folders that were added since the last crawl will be crawled. If the schemas are compatible, new partitions will be added to existing tables.
Crawl based on events
Rely on Amazon S3 events to control what folders to crawl.
Sample only a subset of files
Exclude files matching pattern
Cancel
Add an S3 data source
Edit
Remove
Add a data source
Parameters
Cancel
Previous
Next
CloudShell
Agent Toolkit for AWS
Feedback
Privacy
Terms
Cookie preferences
24°C
Clear
Search
ENG
IN
90%
22:45
11-10-2026

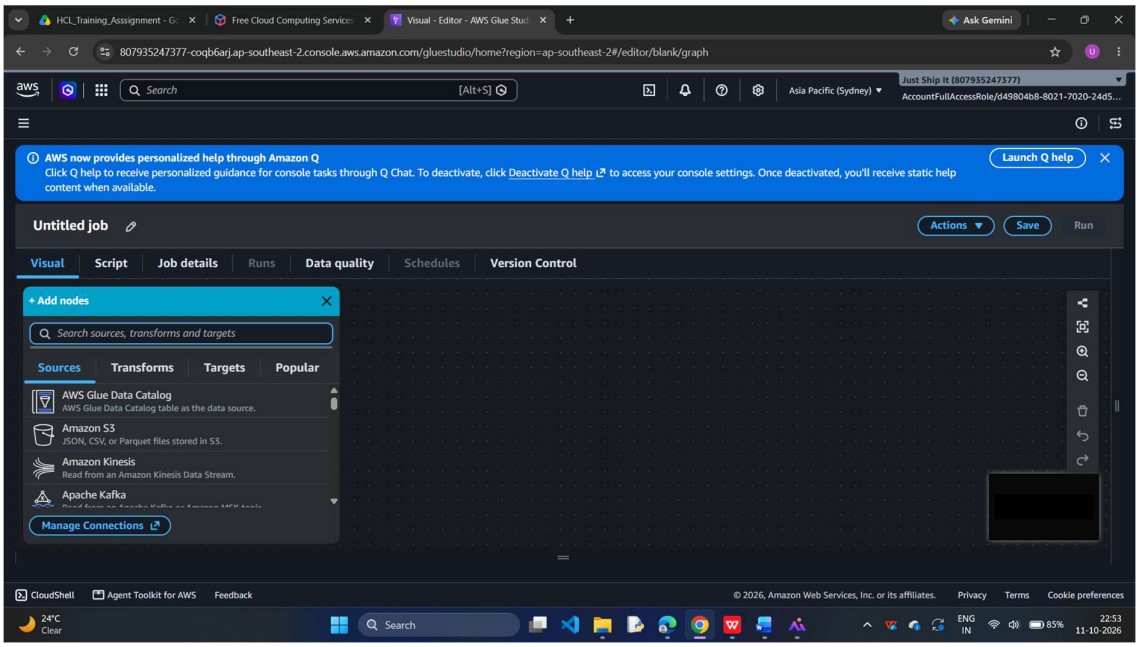

HCL_Training_Assignment - G
Free Cloud Computing Service
Crawlers - AWS Glue Console
Ask Gemini
807935247377-coqb6arj.ap-southeast-2.console.aws.amazon.com/glue/home?region=ap-southeast-2#/v2/data-catalog/crawlers/add
Search [Alt+S]
Asia Pacific (Sydney)
Just Ship It (807935247377)
AccountFullAccessRole/d49804b8-8021-7020-24d5...
AWS Glue > Crawlers > Add crawler
AWS Glue
Getting started
SageMaker Unified Studio
ETL jobs
Visual ETL
Notebooks
Job run monitoring
Data Catalog tables
Data connections
Workflows (orchestration)
Zero-ETL integrations
Data Catalog
Catalogs
Databases
Tables
Stream schema registries
Schemas
Connections
Crawlers
Classifiers
Catalog settings
Data Integration and ETL
Zero-ETL integrations
Announcing new optimization features for Apache Iceberg tables
Optimize storage for Apache Iceberg tables with automatic snapshot retention and orphan file deletion. Learn more
Notifications 0 0 1 1 0
Step 1 Set crawler properties
Step 2 Choose data sources and classifiers
Step 3 Configure security settings
Step 4 Set output and scheduling
Step 5 Review and create
Configure security settings
IAM role Q help
Existing IAM role
dev2
View
Create new IAM role
Update chosen IAM role
Only IAM roles created by the AWS Glue console and have the prefix "AWSGlueServiceRole-" can be updated.
Lake Formation configuration - optional
Allow the crawler to use Lake Formation credentials for crawling the data source. Learn more.
Use Lake Formation credentials for crawling S3 data source
Checking this box will allow the crawler to use Lake Formation credentials for crawling the data source. If the data source is registered in another account, you must provide the registered account ID. Otherwise, the crawler will crawl only those data sources associated to the account. Only applicable to S3, Glue Catalog, Iceberg, and Hudi data sources.
Security configuration - optional
Enable at-rest encryption with a security configuration.
CloudShell
Agent Toolkit for AWS
Feedback
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
24°C Clear
Search
ENG IN
89%
22:45 11-10-2026


HCL_Training_Assignment - G
Free Cloud Computing Service
Crawlers - AWS Glue Console
Ask Gemini
807935247377-coqb6arj.ap-southeast-2.console.aws.amazon.com/glue/home?region=ap-southeast-2#/v2/data-catalog/crawlers/add
Search [Alt+S]
Asia Pacific (Sydney)
Just Ship It (807935247377)
AccountFullAccessRole/d49804b8-8021-7020-24d5...
AWS Glue > Crawlers > Add crawler
AWS Glue
Getting started
SageMaker Unified Studio
ETL jobs
Visual ETL
Notebooks
Job run monitoring
Data Catalog tables
Data connections
Workflows (orchestration)
Zero-ETL integrations
Data Catalog
Catalogs
Databases
Tables
Stream schema registries
Schemas
Connections
Crawlers
Classifiers
Catalog settings
Data Integration and ETL
Zero-ETL integrations
Step 2 Choose data sources and classifiers
Step 3 Configure security settings
Step 4 Set output and scheduling
Step 5 Review and create
Output configuration Q help
Target database
glue_training_db
Clear selection
Add database
Table name prefix - optional
Type a prefix added to table names
Maximum table threshold - optional
This field sets the maximum number of tables the crawler is allowed to generate. In the event that this number is surpassed, the crawl will fail with an error. If not set, the crawler will automatically generate the number of tables depending on the data schema.
Type a number greater than 0
Advanced options
Crawler schedule
You can define a time-based schedule for your crawlers and jobs in AWS Glue. The definition of these schedules uses the Unix-like cron syntax. Learn more.
Frequency
On demand
Cancel
Previous
Next
CloudShell
Agent Toolkit for AWS
Feedback
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
24°C Clear
Search
ENG IN
89%
22:46 11-10-2026


Crawlers - AWS Glue Console
807935247377-coqb6arj.ap-southeast-2.console.aws.amazon.com/glue/home?region=ap-southeast-2#/v2/data-catalog/crawlers/add
AWS Glue > Crawlers > Add crawler
Step 4
Set output and scheduling
Step 5
Review and create
task-hcl
Step 2: Choose data sources and classifiers
Edit
Data sources (1)
The list of data sources to be scanned by the crawler.
Type
Data source
Parameters
S3
s3://task-hcl
Recrawl all
Step 3: Configure security settings
Edit
Configure security settings
IAM role
dev2
Security configuration
Lake Formation configuration
Step 4: Set output and scheduling
Edit
Set output and scheduling
Database
glue_training_db
Table prefix - optional
Maximum table threshold - optional
Schedule
On demand
Cancel
Previous
Create crawler


Crawlers - AWS Glue Console
807935247377-coqb6arj.ap-southeast-2.console.aws.amazon.com/glue/home?region=ap-southeast-2#/v2/data-catalog/crawlers/view/task-hcl
AWS Glue > Crawlers > task-hcl
One crawler successfully created
The following crawler is now created: "task-hcl"
Notifications
task-hcl
Last updated (UTC)
October 11, 2026 at 17:16:13
Run crawler
Edit
Delete
Crawler properties
Name
task-hcl
IAM role
dev2
Database
glue_training_db
State
READY
Description
Security configuration
Lake Formation configuration
Table prefix
Maximum table threshold
Advanced settings
Crawler runs
Schedule
Data sources
Classifiers
Tags
Crawler runs (0)
The list of crawler runs for this crawler.
Stop run
View CloudWatch logs
View run details
Filter data
Filter by a date and time range


Jobs - AWS Glue Studio
807935247377-coqb6arj.ap-southeast-2.console.aws.amazon.com/gluestudio/home?region=ap-southeast-2#/jobs?selectedInterface=source_and_target
AWS Glue
Jobs
AWS now provides personalized help through Amazon Q
Launch Q help
AWS Glue Studio
Get Started
Author in a visual interface focused on data flow.
Visual ETL
Author using an interactive code notebook.
Notebook
Author code with a script editor.
Script editor
Use SageMaker Unified Studio Notebooks, an immersive, serverless workspace.
Set up
Example jobs
Create example job
Your jobs (0)
Actions
Run job
Job name
Type
Created by
Last modified
AWS Glue version
Action
No jobs
You have not created a job yet.
Create job from a blank graph
CloudShell
Agent Toolkit for AWS
Feedback
Privacy
Terms
Cookie preferences


Visual - Editor - AWS Glue Studio
807935247377-coqb6arj.ap-southeast-2.console.aws.amazon.com/gluestudio/home?region=ap-southeast-2#/editor/blank/graph
AWS now provides personalized help through Amazon Q
Launch Q help
Untitled job
Actions
Save
Run
Visual
Script
Job details
Runs
Data quality
Schedules
Version Control
+ Add nodes
Search sources, transforms and targets
Sources
Transforms
Targets
Popular
AWS Glue Data Catalog
AWS Glue Data Catalog table as the data source.
Amazon S3
JSON, CSV, or Parquet files stored in S3.
Amazon Kinesis
Read from an Amazon Kinesis Data Stream.
Apache Kafka
Manage Connections
CloudShell
Agent Toolkit for AWS
Feedback
Privacy
Terms
Cookie preferences

Final Explanation:

1.Amazon S3Amazon S3 is the storage layer of this workflow. We use a bucket with a raw folder and a curated folder. The employee CSV file is uploaded into the raw folder. The raw folder keeps the original data as it is. The curated folder is kept for the cleaned output.

2. Glue Crawler

A Glue crawler scans the data stored in S3. Our crawler reads the raw folder using an IAM role. It identifies the

file format and the column names. It also detects the data type of each column. These details are written to the

Glue Data Catalog.

3. Glue Data Catalog

The Data Catalog stores details about the data, not the data itself. It holds the database glue_training_db. The

crawler creates a table inside this database. Its columns are employee_id, name, department, salary and city.

Glue uses this table as the source of the ETL job.

4. Glue Visual ETL

Glue Visual ETL is used to build the job by connecting boxes. The source box reads the table from the Data

Catalog. The next box transforms the data. The last box writes the result to S3. The job is saved as

employee-job and needs no hand-written code.

5. Transformation

Drop Fields is the transformation used in this job. It removes the city column, which is not needed in the output.

The remaining columns move to the next box unchanged. This gives a smaller and cleaner dataset. The cleaned

data is then sent to the S3 target.

6. S3 Curated Data

The S3 target box writes the output to the curated folder. The output format is Parquet with Snappy

compression. When employee-job runs, the status shows Succeeded. A Parquet file is created in the curated

folder. This file can be used for further analysis and reporting.