

FiPy Manual

Release 3.4.4+8.gfc6e8a3fb

Jonathan E. Guyer
Daniel Wheeler
James A. Warren

Materials Science and Engineering Division
and the Center for Theoretical and Computational Materials Science
Material Measurement Laboratory

Dec 14, 2023

This software was developed by employees of the National Institute of Standards and Technology (NIST), an agency of the Federal Government and is being made available as a public service. Pursuant to title 17 United States Code Section 105, works of NIST employees are not subject to copyright protection in the United States. This software may be subject to foreign copyright. Permission in the United States and in foreign countries, to the extent that NIST may hold copyright, to use, copy, modify, create derivative works, and distribute this software and its documentation without fee is hereby granted on a non-exclusive basis, provided that this notice and disclaimer of warranty appears in all copies.

THE SOFTWARE IS PROVIDED "AS IS" WITHOUT ANY WARRANTY OF ANY KIND, EITHER EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING, BUT NOT LIMITED TO, ANY WARRANTY THAT THE SOFTWARE WILL CONFORM TO SPECIFICATIONS, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND FREEDOM FROM INFRINGEMENT, AND ANY WARRANTY THAT THE DOCUMENTATION WILL CONFORM TO THE SOFTWARE, OR ANY WARRANTY THAT THE SOFTWARE WILL BE ERROR FREE. IN NO EVENT SHALL NIST BE LIABLE FOR ANY DAMAGES, INCLUDING, BUT NOT LIMITED TO, DIRECT, INDIRECT, SPECIAL OR CONSEQUENTIAL DAMAGES, ARISING OUT OF, RESULTING FROM, OR IN ANY WAY CONNECTED WITH THIS SOFTWARE, WHETHER OR NOT BASED UPON WARRANTY, CONTRACT, TORT, OR OTHERWISE, WHETHER OR NOT INJURY WAS SUSTAINED BY PERSONS OR PROPERTY OR OTHERWISE, AND WHETHER OR NOT LOSS WAS SUSTAINED FROM, OR AROSE OUT OF THE RESULTS OF, OR USE OF, THE SOFTWARE OR SERVICES PROVIDED HEREUNDER.

Certain commercial firms and trade names are identified in this document in order to specify the installation and usage procedures adequately. Such identification is not intended to imply recommendation or endorsement by the National Institute of Standards and Technology, nor is it intended to imply that related products are necessarily the best available for the purpose.

Contents

I Introduction	1
1 Overview	3
2 Installation	7
3 Git practices	15
4 Continuous Integration	17
5 Conda Lockfiles	19
6 Making a Release	21
7 Solvers	25
8 Viewers	29
9 Using FiPy	31
10 Frequently Asked Questions	49
11 Efficiency	59
12 Theoretical and Numerical Background	61
13 Design and Implementation	69
14 Virtual Kinetics of Materials Laboratory	75
15 Contributors	77
16 Publications	79
17 Presentations	81
18 Change Log	83
19 Glossary	107

II Examples	111
20 Selected Examples	115
III fipy Package Documentation	119
21 How to Read the Modules Documentation	121
22 fipy	125
23 examples	919
Bibliography	1177
Python Module Index	1179
Index	1185

Part I

Introduction

Chapter 1

Overview



FiPy is an object oriented, partial differential equation (PDE) solver, written in *Python*, based on a standard finite volume (FV) approach. The framework has been developed in the Materials Science and Engineering Division (**MSED**) and Center for Theoretical and Computational Materials Science (**CTCMS**), in the Material Measurement Laboratory (**MML**) at the National Institute of Standards and Technology (**NIST**).

The solution of coupled sets of PDEs is ubiquitous to the numerical simulation of science problems. Numerous PDE solvers exist, using a variety of languages and numerical approaches. Many are proprietary, expensive and difficult to customize. As a result, scientists spend considerable resources repeatedly developing limited tools for specific problems. Our approach, combining the FV method and *Python*, provides a tool that is extensible, powerful and freely available. A significant advantage to *Python* is the existing suite of tools for array calculations, sparse matrices and data rendering.

The *FiPy* framework includes terms for transient diffusion, convection and standard sources, enabling the solution of arbitrary combinations of coupled elliptic, hyperbolic and parabolic PDEs. Currently implemented models include phase field [1] [2] [3] treatments of polycrystalline, dendritic, and electrochemical phase transformations, as well as drug eluting stents [4], reactive wetting [5], photovoltaics [6] and a level set treatment of the electrodeposition process [7].

The latest information about *FiPy* can be found at <http://www.ctcms.nist.gov/fipy/>.

See the latest updates in the [Change Log](#).

1.1 Even if you don't read manuals...

...please read *Installation*, *Using FiPy* and *Frequently Asked Questions*, as well as `examples.diffusion.mesh1D`.

1.2 Download and Installation

Please refer to *Installation* for details on download and installation. *FiPy* can be redistributed and/or modified freely, provided that any derivative works bear some notice that they are derived from it, and any modified versions bear some notice that they have been modified.

1.3 Support

We offer several modes to communicate with the *FiPy* developers and with other users.

1.3.1 Contact

In order to discuss *FiPy* with other users and with the developers, we encourage you to use one of the following modes of communication. We monitor all of these, so there is no need to post to more than one of them.

You may want to read the following resource about asking effective questions: <http://www.catb.org/~esr/faqs/smart-questions.html>

If you are having trouble, we are able to offer much more effective help if you provide a [minimal reproducible example](#).

GitHub Discussions

<https://github.com/usnistgov/fipy/discussions>

Suitable for open-ended conversations, troubleshooting, showing off...

If a discussion highlights a bug or feature request, it's easy for us to migrate *GitHub Discussions* to *GitHub Issues*.

GitHub Issues

<https://github.com/usnistgov/fipy/issues>

Suitable for bug reports, feature requests, and patch submissions.

StackOverflow

<https://stackoverflow.com/questions/tagged/fipy>

Suitable for questions that (probably) have definitive answers ("How do I...?"). It doesn't work so well for back-and-forth conversations, which are better suited to *GitHub Discussions*. Further, it's [bad at math](#) and they tend to delete answers that link to our existing documentation, meaning that we'd need to expend considerable effort, using an inferior tool, to duplicate things we've already written.

Seriously, use *GitHub Discussions*.

Mailing List

Attention: The mailing list is deprecated. Please use [GitHub Discussions](#), instead.

You can sign up for the mailing list by sending a subscription email to <<mailto:fipy+subscribe@list.nist.gov>>.

Once you are subscribed, you can post messages to the list simply by addressing email to <<mailto:fipy@list.nist.gov>>.

To get off the list, send a message to <<mailto:fipy+unsubscribe@list.nist.gov>>.

Send a message to <<mailto:fipy+help@list.nist.gov>> to learn other mailing list configurations you can change.

The list is hosted as a Google group. If you are subscribed with a Google account, you can interact with the list, configure your subscription, and see the archives at <https://list.nist.gov/fipy>.

List Archive

<https://www.mail-archive.com/fipy@list.nist.gov/>

Copies of messages sent to fipy@list.nist.gov are stored at [The Mail Archive](#).

Older messages are archived at <https://www.mail-archive.com/fipy@nist.gov/>.

(note: we have also historically sent copies to <http://dir.gmane.org/gmane.comp.python.fipy>, but the GMANE site now appears to be [defunct](#).)

We welcome collaborative efforts on this project.

1.4 Conventions and Notation

FiPy is driven by *Python* script files than you can view or modify in any text editor. *FiPy* sessions are invoked from a command-line shell, such as **tcsh** or **bash**.

Throughout, text to be typed at the keyboard will appear like `this`. Commands to be issued from an interactive shell will appear:

`$ like this`

where you would enter the text ("like this") following the shell prompt, denoted by "\$".

Text blocks of the form:

```
>>> a = 3 * 4
>>> a
12
>>> if a == 12:
...     print "a is twelve"
...
a is twelve
```

are intended to indicate an interactive session in the *Python* interpreter. We will refer to these as “interactive sessions” or as “doctest blocks”. The text “>>>” at the beginning of a line denotes the *primary prompt*, calling for input of a *Python* command. The text “...” denotes the *secondary prompt*, which calls for input that continues from the line above, when required by *Python* syntax. All remaining lines, which begin at the left margin, denote output from the *Python* interpreter. In all cases, the prompt is supplied by the *Python* interpreter and should not be typed by you.

Warning: *Python* is sensitive to indentation and care should be taken to enter text exactly as it appears in the examples.

When references are made to file system paths, it is assumed that the current working directory is the *FiPy* distribution directory, referred to as the “base directory”, such that:

```
examples/diffusion/steadyState/mesh1D.py
```

will correspond to, *e.g.*:

```
/some/where/FiPy-X.Y/examples/diffusion/steadyState/mesh1D.py
```

Paths will always be rendered using POSIX conventions (path elements separated by “/”). Any references of the form:

```
examples.diffusion.steadyState.mesh1D
```

are in the *Python* module notation and correspond to the equivalent POSIX path given above.

We may at times use a

Note: to indicate something that may be of interest

or a

Warning: to indicate something that could cause serious problems.

Chapter 2

Installation

The *FiPy* finite volume PDE solver relies on several third-party packages. It is *best to obtain and install those first* before attempting to install *FiPy*. This document explains how to install *FiPy*, not how to use it. See [Using FiPy](#) for details on how to use *FiPy*.

Note: It may be useful to set up a [Development Environment](#) before beginning the installation process.

2.1 Pre-Installed on Binder

A full *FiPy* installation is available for basic exploration on [Binder](#). The default notebook gives a rudimentary introduction to *FiPy* syntax and, like any [Jupyter Notebook](#) interface, tab completion will help you explore the package interactively.

2.2 Recommended Method

Anaconda.org 3.4.4

Attention: There are many ways to obtain the software packages necessary to run *FiPy*, but the most expedient way is with the `conda` package manager. In addition to the scientific `Python` stack, `conda` also provides virtual environment management. Keeping separate installations is useful *e.g.* for comparing `Python 2` and `Python 3` software stacks, or when the user does not have sufficient privileges to install software system-wide.

In addition to the default packages, many other developers provide “channels” to distribute their own builds of a variety of software. These days, the most useful channel is `conda-forge`, which provides everything necessary to install *FiPy*.

2.2.1 Install conda

Install conda or [install micromamba](#) on your computer.

2.2.2 Create a conda environment

Use one of the following methods to create a self-contained `conda` environment and then download and populate the environment with the prerequisites for [FiPy](#) from the `conda-forge` channel at <https://anaconda.org>. See [this discussion](#) of the merits of and relationship between the different methods.

- `Conda` environment files

This option is the most upgradable in the future and probably the best for development.

```
$ conda env create --name <MYFIPYENV> \
    --file environments/<SOLVER>-environment.yml
```

Note: You can try to include multiple solver suites using `conda env update`, but be aware that different suites may have incompatible requirements, or may restrict installation to obsolete versions of Python. Given that [FiPy](#) can only use one solver suite during a run, installing more than one solver in an environment isn't necessary.

Attention: Successively updating an environment can be unpredictable, as later packages may conflict with earlier ones. Unfortunately, `conda env create` [does not support multiple environment files](#).

Alternatively, combine the different `environments/<SOLVER>-environment.yml` files you wish to use, along with `environment.yml` files for any other packages you are interested in (`conda-merge` may prove useful). Then execute:

```
$ conda env create --name <MYFIPYENV> --file <MYMERGEDENVIRONMENT>.yml
```

-
- `conda-lock` lockfiles

This option will pin all the packages, so is the most reproducible, but not particularly upgradable. For most, this is the safest way to generate a FiPy environment that consistently works.

```
$ conda-lock install --name <MYFIPYENV> \
    environments/locks/conda-<SOLVER>-lock.yml
```

or, to be really explicit (and obviating the need for `conda-lock`):

```
$ conda create --name <MYFIPYENV> \
    --file environments/locks/conda-<SOLVER>-<PLATFORM>.lock
```

- Directly from `conda-forge`, picking and choosing desired packages

This option is the most flexible, but has the highest risk of missing or incompatible packages.

e.g.:

```
$ conda create --name <MYFIPYENV> --channel conda-forge \
    python=3 numpy scipy matplotlib-base future packaging mpich \
    mpi4py petsc4py mayavi "gmsh <4.0|>=4.5.2"
```

or:

```
$ conda create --name <MYFIPYENV> --channel conda-forge \
    python=2.7 numpy scipy matplotlib-base future packaging \
    pysparse mayavi "traitsui<7.0.0" "gmsh<4.0"
```

Attention: Bit rot has started to set in for Python 2.7. One consequence is that *VTKViewers* can raise errors (probably other uses of *Mayavi*, too). Hence, the constraint of “*traitsui<7.0.0*”.

2.2.3 Install FiPy

```
$ conda install --name <MYFIPYENV> --channel conda-forge fipy
```

Note: The *fipy* *conda-forge* package used to be “batteries included”, but we found this to be too fragile. It now only includes the bare minimum for *FiPy* to function.

2.2.4 Enable conda environment

Enable your new environment with:

```
$ conda activate <MYFIPYENV>
```

or:

```
$ source activate <MYFIPYENV>
```

or, on *Windows*:

```
$ activate <MYFIPYENV>
```

You’re now ready to move on to *Using FiPy*.

Note: *conda* can be *quite slow* to resolve all dependencies when performing an installation. You may wish to consider using the alternative *mamba* installation manager to speed things up.

Note: On *Linux* and *Mac OS X*, you should have a pretty complete system to run and visualize *FiPy* simulations. On *Windows*, there are fewer packages available via *conda*, particularly amongst the sparse matrix *Solvers*, but the system still should be functional. Significantly, you will need to download and install *Gmsh* manually when using Python 2.7.

Attention: When installed via *conda* or *pip*, *FiPy* will not include its *examples*. These can be obtained by *cloning the repository* or downloading a compressed archive.

2.3 Obtaining FiPy

FiPy is freely available for download via [Git](#) or as a compressed archive. Please see [Git usage](#) for instructions on obtaining *FiPy* with [Git](#).

Warning: Keep in mind that if you choose to download the [compressed archive](#) you will then need to preserve your changes when upgrades to *FiPy* become available (upgrades via [Git](#) will handle this issue automatically).

2.4 Installing FiPy

Details of the [Required Packages](#) and links are given below, but for the courageous and the impatient, *FiPy* can be up and running quickly by simply installing the following prerequisite packages on your system:

- [Python](#)
- [NumPy](#)
- At least one of the *Solvers*
- At least one of the *Viewers* (*FiPy*'s tests will run without a viewer, but you'll want one for any practical work)

Other [Optional Packages](#) add greatly to *FiPy*'s capabilities, but are not necessary for an initial installation or to simply run the test suite.

It is not necessary to formally install *FiPy*, but if you wish to do so and you are confident that all of the requisite packages have been installed properly, you can install it by typing:

```
$ python -m pip install fipy
```

or by unpacking the archive and typing:

```
$ python setup.py install
```

at the command line in the base *FiPy* directory. You can also install *FiPy* in “development mode” by typing:

```
$ python setup.py develop
```

which allows the source code to be altered in place and executed without issuing further installation commands.

Alternatively, you may choose not to formally install *FiPy* and to simply work within the base directory instead. In this case or if you are making a non-standard install (without admin privileges), read about setting up your [Development Environment](#) before beginning the installation process.

2.5 Required Packages

2.5.1 Python

<http://www.python.org/>

FiPy is written in the [Python](#) language and requires a [Python](#) installation to run. [Python](#) comes pre-installed on many operating systems, which you can check by opening a terminal and typing `python`, e.g.:

```
$ python
Python 2.7.15 | ...
...
Type "help", "copyright", "credits" or "license" for more information.
>>>
```

If necessary, you can [download](#) and install it for your platform <<http://www.python.org/download>>.

Note: *FiPy* requires at least version 2.7.x of *Python*.

Python along with many of *FiPy*'s required and optional packages is available with one of the following distributions.

2.5.2 NumPy

<http://numpy.scipy.org>

Obtain and install the *NumPy* package. *FiPy* requires at least version 1.0 of *NumPy*.

2.6 Optional Packages

2.6.1 Gmsh

<http://www.geuz.org/gmsh/>

Gmsh is an application that allows the creation of irregular meshes. When running in parallel, *FiPy* requires a version of *Gmsh* ≥ 2.5 and < 4.0 or $\geq 4.5.2$.

2.6.2 SciPy

<http://www.scipy.org/>

SciPy provides a large collection of functions and tools that can be useful for running and analyzing *FiPy* simulations. Significantly improved performance has been achieved with the judicious use of C language inlining (see the *Command-line Flags and Environment Variables* section for more details), via the *weave* module.

2.7 Level Set Packages

To use the level set ([8]) components of *FiPy* one of the following is required.

2.7.1 Scikit-fmm

<http://packages.python.org/scikit-fmm/>

Scikit-fmm is a python extension module which implements the fast marching method.

2.7.2 LSMLIB

<http://ktchu.serendipityresearch.org/software/lsmlib/index.html>

The Level Set Method Library (**LSMLIB**) provides support for the serial and parallel simulation of implicit surface and curve dynamics in two- and three-dimensions.

Install **LSMLIB** as per the instructions on the website. Additionally **PyLSMLIB** is required. To install, follow the instructions on the website, <https://github.com/ktchu/LSMLIB/tree/master/pylsmlib#pylsmlib>.

2.8 Development Environment

It is often preferable to not formally install packages in the system directories. The reasons for this include:

- developing or altering the package source code,
- trying out a new package along with its dependencies without violating a working system,
- dealing with conflicting packages and dependencies,
- or not having admin privileges.

To avoid tampering with the system *Python* installation, you can employ one of the utilities that manage packages and their dependencies independently of the system package manager and the system directories. These utilities include **conda**, **Nix**, **Stow**, **Virtualenv** and **Buildout**, amongst others. **Conda** and **Nix** are only ones of these we have the resources to support.

Create a conda environment for development, followed by:

```
$ source activate <MYFIPYENV>
$ python -m pip install scikit-fmm
$ git clone https://github.com/usnistgov/fipy.git
$ cd fipy
$ python setup.py develop
```

2.9 Git usage

All stages of *FiPy* development are archived in a Git repository at **GitHub**. You can browse through the code at <https://github.com/usnistgov/fipy> and, using a *Git client*, you can download various tagged revisions of *FiPy* depending on your needs.

Attention: Be sure to follow *Installation* to obtain all the prerequisites for *FiPy*.

2.9.1 Git client

A `git` client application is needed in order to fetch files from our repository. This is provided on many operating systems (try executing `which git`) but needs to be installed on many others. The sources to build Git, as well as links to various pre-built binaries for different platforms, can be obtained from <http://git-scm.com/>.

2.9.2 Git branches

In general, most users will not want to download the very latest state of *FiPy*, as these files are subject to active development and may not behave as desired. Most users will not be interested in particular version numbers either, but instead with the degree of code stability. Different branches are used to indicate different stages of *FiPy* development. For the most part, we follow a [successful Git branching model](#). You will need to decide on your own risk tolerance when deciding which stage of development to track.

A fresh copy of the *FiPy* source code can be obtained with:

```
$ git clone https://github.com/usnistgov/fipy.git
```

An existing Git checkout of FiPy can be shifted to a different `<branch>` of development by issuing the command:

```
$ git checkout <branch>
```

in the base directory of the working copy. The main branches for FiPy are:

`master`

designates the (ready to) release state of FiPy. This code is stable and should pass all of the tests (or should be documented that it does not).

Past releases of FiPy are tagged as

`x.y.z`

Any released version of FiPy will be designated with a fixed tag: The current version of FiPy is 3.4.4+8.gfc6e8a3fb. (Legacy version-`x_y_z` tags are retained for historical purposes, but won't be added to.)

Tagged releases can be found with:

```
$ git tag --list
```

Any other branches will not generally be of interest to most users.

Note: For some time now, we have done all significant development work on branches, only merged back to `master` when the tests pass successfully. Although we cannot guarantee that `master` will never be broken, you can always check our [Continuous Integration](#) status to find the most recent revision that it is running acceptably.

Historically, we merged to `develop` before merging to `master`. We no longer do this, although for time being, `develop` is kept synchronized with `master`. In a future release, we will remove the `develop` branch altogether.

For those who are interested in learning more about Git, a wide variety of online sources are available, starting with the [official Git website](#). The [Pro Git book](#) [9] is particularly instructive.

2.10 Nix

2.10.1 Nix Installation

Fipy now has a [Nix](#) expression for installing *Fipy* using [Nix](#). [Nix](#) is a powerful package manager for Linux and other Unix systems that makes package management reliable and reproducible. The recipe works on both Linux and Mac OS X.

Getting Started with Nix

There are a number of tutorials on getting started with [Nix](#). The page that I used when getting started is on the Blog of the HPC team of GRICAD,

<https://gricad.github.io/calcul/nix/tuto/2017/07/04/nix-tutorial.html>

I also made my own notes,

<https://github.com/wd15/nixes/blob/master/NIX-NOTES.md>

which are a succinct steps that I use when setting up a new system with Nix.

Installing

Once you have a working Nix installation use:

```
$ nix-shell --pure
```

in the base *Fipy* directory to install *Fipy* with Python 3 by default. Modify the *shell.nix* file to use another version of Python. *nix-shell* drops the user into a shell with a working version of *Fipy*. To test your installation use:

```
$ nix-shell --pure --command "python setup.py test"
```

Note: *Trilinos* is currently not available as part of the Nix *Fipy* installation.

Additional Packages

To install additional packages available from [Nixpkgs](#) include them in the *nativeBuildInputs* list in *shell.nix*.

Using Pip

Packages unavailable from Nix can be installed using [Pip](#). In this case, the installation has been set up so that the Nix shell knows about a `.local` directory in the base *Fipy* directory used by [Pip](#) for installation. So, for example, to install the `toolz` package from within the Nix shell use:

```
$ python -m pip install --user toolz
```

The `.local` directory will persist after the Nix shell has been closed.

Chapter 3

Git practices

Refer to [Git usage](#) for the current branching conventions.

3.1 Branches

Whether fixing a bug or adding a feature, all work on FiPy should be conducted on a branch and submitted as a [pull request](#). If there is already a reported [GitHub issue](#), name the branch accordingly:

```
$ BRANCH=issue12345-Summary_of_what_branch_addresses  
$ git checkout -b $BRANCH master
```

Edit and add to branch:

```
$ emacs ...  
$ git commit -m "refactoring_stage_A"  
$ emacs ...  
$ git commit -m "refactoring_stage_B"
```

3.1.1 Merging changes from master to the branch

Make sure `master` is up to date:

```
$ git fetch origin
```

Merge updated state of `master` to the branch:

```
$ git diff origin/master  
$ git merge origin/master
```

Resolve any conflicts and test:

```
$ python setup.py test
```

3.1.2 Submit branch for code review

If necessary, fork the [fipy](#) repository.

Add a “remote” link to your fork:

```
$ git remote add <MYFORK> <MYFORKURL>
```

Push the code to your fork on [GitHub](#):

```
$ git push <MYFORK> $BRANCH
```

Now create a pull request from your `$BRANCH` against the `master` branch of [usnistgov/fipy](#). The pull request should initiate automated testing. Check the [Continuous Integration](#) status. Fix (or, if absolutely necessary, document) any failures.

Note: If your branch is still in an experimental state, but you would like to check its impact on the tests, you may prepend “`WIP:`” to your pull request title. This will prevent your branch from being merged before it’s complete, but will allow the automated tests to run.

Please be respectful of the [Continuous Integration](#) resources and do the bulk of your testing on your local machine or against your own [Continuous Integration](#) accounts (if you have a lot of testing to do, before you create a pull request, push your branch to your own fork and enable the [Continuous Integration](#) services there).

You can avoid testing individual commits by adding “[skip ci]” to the commit message title.

When your pull request is ready and successfully passes the tests, you can request a pull request review or send a message to the mailing list about it if you like, but the FiPy developers should automatically see the pull request and respond to it without further action on your part.

3.1.3 Refactoring complete: merge branch to master

Attention: Administrators Only!

Use the [GitHub](#) interface to merge the pull request.

Note: Particularly for branches with a long development history, consider doing a [Squash and merge](#).

Chapter 4

Continuous Integration



We use the *Azure* and *GitHub Actions* cloud services for *Continuous Integration* (CI). These CIs are configured in `FiPySource/.azure/pipelines.yml`, `FiPySource/.github/workflows/NISTtheDocs2Death.yml`, and `FiPySource/.github/workflows/nix.yml`.

Chapter 5

Conda Lockfiles

The `conda-lock` lockfiles in `environments/locks/` can be updated with:

```
$ for solver in petsc pysparse scipy trilinos
do
    conda-lock lock \
        --file environments/${solver}-environment.yml \
        --lockfile environments/locks/conda-${solver}-lock.yml
    conda-lock render \
        --filename-template environments/locks/conda-${solver}-{{platform}}.lock \
        environments/locks/conda-${solver}-lock.yml
done
```

Attention: Do not merge new lockfiles to `master` without validating that everything still works.

Chapter 6

Making a Release

Attention: Administrators Only!

6.1 Source

Make sure master is ready for release:

```
$ git checkout master
```

Check the `issue` list and update the *Change Log*:

```
$ git commit CHANGELOG.txt -m "REL: update new features for release"
```

Note: You can use:

```
$ python setup.py changelog --after=<x.y>
```

or:

```
$ python setup.py changelog --milestone=<x.z>
```

to obtain a ReST-formatted list of every `GitHub pull request` and `issue` closed since the last release.

Particularly for major and feature releases, be sure to curate the output so that it's clear what's a big deal about this release. Sometimes a `pull request` will be redundant to an `issue`, e.g., "Issue123 blah blah". If the `pull request` fixes a bug, preference is given to the corresponding `issue` under **Fixes**. Alternatively, if the `pull request` adds a new feature, preference is given to the item under **Pulls** and corresponding `issue` should be removed from **Fixes**. If appropriate, be sure to move the "Thanks to @mention" to the appropriate `issue` to recognize outside contributors.

Attention: Requires `PyGithub` and `Pandas`.

Attention: If *Continuous Integration* doesn't show all green boxes for this release, make sure to add appropriate notes in `README.txt` or `INSTALLATION.txt`!

6.2 Release from master

```
$ git checkout master
```

Resolve any conflicts and tag the release as appropriate (see *Git practices* above):

```
$ git tag --annotate x.y master
```

Push the tag to [GitHub](#):

```
$ git push --tags origin master
```

Upon successful completion of the *Continuous Integration* systems, fetch the tagged build products from [Azure Artifacts](#) and place in `FiPySource/dist/`:

- `dist-Linux/FiPy-x.y-none-any.whl`
- `dist-Linux/FiPy-x.y.tar.gz`
- `dist-Windows_NT/FiPy-x.y.zip`
- `dist-docs/FiPy-x.y.pdf`
- `dist-docs/html-x.y.tar.gz`

From the `FiPySource` directory, unpack `dist/html-x.y.tar.gz` into `docs/build` with:

```
$ tar -xzf dist/html-{x.y}.tar.gz -C docs/build
```

6.3 Upload

Attach

- `dist/FiPy-x.y-none-any.whl`
- `dist/FiPy-x.y.tar.gz`
- `dist/FiPy-x.y.zip`
- `dist/FiPy-x.y.pdf`

to a [GitHub release](#) associated with tag `x.y`.

Upload the build products to PyPI with `twine`:

```
$ twine upload dist/FiPy-${FIPY_VERSION}.*
```

Upload the web site to CTCMS

```
$ export FIPY_WWWHOST=bunter:/u/WWW/wd15/fipy
$ export FIPY_WWWACTIVATE=updatewww
$ python setup.py upload_products --html
```

Warning: Some versions of `rsync` on Mac OS X have caused problems when they try to upload erroneous `\rsrc` directories. Version 2.6.2 does not have this problem.

6.4 Update conda-forge feedstock

Once you push the tag to [GitHub](#), the `fipy-feedstock` should automatically receive a pull request. Review and amend this pull request as necessary and ask the [feedstock maintainers](#) to merge it.

This automated process only runs once an hour, so if you don't wish to wait (or it doesn't trigger for some reason), you can manually generate a pull request to update the `fipy-feedstock` with:

- revised version number
- revised sha256 (use `openssl dgst -sha256 /path/to/fipy-x.y.tar.gz`)
- reset build number to 0

6.5 Announce

Make an announcement to fipy@list.nist.gov

Solvers

Fipy requires either *Pysparse*, *SciPy* or *Trilinos* to be installed in order to solve linear systems. From our experiences, *Fipy* runs most efficiently in serial when *Pysparse* is the linear solver. *Trilinos* is the most complete of the three solvers due to its numerous preconditioning and solver capabilities and it also allows *Fipy* to *run in parallel*. Although less efficient than *Pysparse* and less capable than *Trilinos*, *SciPy* is a very popular package, widely available and easy to install. For this reason, *SciPy* may be the best linear solver choice when first installing and testing *Fipy* (and it is the only viable solver under Python 3.x).

Fipy chooses the solver suite based on system availability or based on the user supplied *Command-line Flags and Environment Variables*. For example, passing --no-pysparse:

```
$ python -c "from fipy import *; print DefaultSolver" --no-pysparse
<class 'fipy.solvers.trilinos.linearGMRESSolver.LinearGMRESSolver'>
```

uses a *Trilinos* solver. Setting *FIPY_SOLVERS* to *scipy*:

```
$ FIPY_SOLVERS=scipy
$ python -c "from fipy import *; print DefaultSolver"
<class 'fipy.solvers.scipy.linearLUSolver.LinearLUSolver'>
```

uses a *SciPy* solver. Suite-specific solver classes can also be imported and instantiated overriding any other directives. For example:

```
$ python -c "from fipy.solvers.scipy import DefaultSolver; \
>   print DefaultSolver" --no-pysparse
<class 'fipy.solvers.scipy.linearLUSolver.LinearLUSolver'>
```

uses a *SciPy* solver regardless of the command line argument. In the absence of *Command-line Flags and Environment Variables*, *Fipy*'s order of precedence when choosing the solver suite for generic solvers is *Pysparse* followed by *Trilinos*, *PyAMG* and *SciPy*.

7.1 PETSc

<https://www.mcs.anl.gov/petsc>

PETSc (the Portable, Extensible Toolkit for Scientific Computation) is a suite of data structures and routines for the scalable (parallel) solution of scientific applications modeled by partial differential equations. It employs the *MPI* standard for all message-passing communication (see *Solving in Parallel* for more details).

Attention: *PETSc* requires the *petsc4py* and *mpi4py* interfaces.

Note: *FiPy* does not implement any preconditioner objects for *PETSc*. Simply pass one of the *PCType* strings in the *precon=* argument when declaring the solver.

7.2 Pysparse

<http://pysparse.sourceforge.net>

Pysparse is a fast serial sparse matrix library for *Python*. It provides several sparse matrix storage formats and conversion methods. It also implements a number of iterative solvers, preconditioners, and interfaces to efficient factorization packages. The only requirement to install and use Pysparse is *NumPy*.

Warning: *FiPy* requires version 1.0 or higher of *Pysparse*.

7.3 SciPy

<http://www.scipy.org/>

The `scipy.sparse` module provides a basic set of serial Krylov solvers, but no preconditioners.

7.4 PyAMG

<http://code.google.com/p/pyamg/>

The *PyAMG* package provides adaptive multigrid preconditioners that can be used in conjunction with the *SciPy* solvers.

7.5 pyamgx

<https://pyamgx.readthedocs.io/>

The *pyamgx* package is a *Python* interface to the NVIDIA *AMGX* library. *pyamgx* can be used to construct complex solvers and preconditioners to solve sparse sparse linear systems on the GPU.

7.6 Trilinos

<http://trilinos.sandia.gov>

Trilinos provides a more complete set of solvers and preconditioners than either *Pysparse* or *SciPy*. *Trilinos* preconditioning allows for iterative solutions to some difficult problems that *Pysparse* and *SciPy* cannot solve, and it enables parallel execution of *FiPy* (see *Solving in Parallel* for more details).

Attention: Be sure to build or install the *PyTrilinos* interface to *Trilinos*.

Attention: *FiPy* runs more efficiently when *Pysparse* is installed alongside *Trilinos*.

Attention: *Trilinos* is a large software suite with its own set of prerequisites, and can be difficult to set up. It is not necessary for most problems, and is **not** recommended for a basic install of *FiPy*.

Attention: *Trilinos* must be compiled with *MPI* support for *Solving in Parallel*.

Tip: *Trilinos* parallel efficiency is greatly improved by also installing *Pysparse*. If *Pysparse* is not installed, be sure to use the --no-pysparse flag.

Note: *Trilinos* solvers frequently give intermediate output that *FiPy* cannot suppress. The most commonly encountered messages are

Gen_Prolongator warning : Max eigen <= 0.0
which is not significant to *FiPy*.

Aztec status AZ_loss: loss of precision
which indicates that there was some difficulty in solving the problem to the requested tolerance due to precision limitations, but usually does not prevent the solver from finding an adequate solution.

Aztec status AZ_ill_cond: GMRES hessenberg ill-conditioned
which indicates that GMRES is having trouble with the problem, and may indicate that trying a different solver or preconditioner may give more accurate results if GMRES fails.

Aztec status AZ_breakdown: numerical breakdown
which usually indicates serious problems solving the equation which forced the solver to stop before reaching an adequate solution. Different solvers, different preconditioners, or a less restrictive tolerance may help.

Chapter 8

Viewers

A viewer is required to see the results of *FiPy* calculations. *Matplotlib* is by far the most widely used *Python* based viewer and the best choice to get *FiPy* up and running quickly. *Matplotlib* is also capable of publication quality plots. *Matplotlib* has only rudimentary 3D capability, which *FiPy* does not attempt to use. *Mayavi* is required for 3D viewing.

8.1 Matplotlib

<http://matplotlib.sourceforge.net>

Matplotlib is a *Python* package that displays publication quality results. It displays both 1D X-Y type plots and 2D contour plots for both structured and unstructured data, but does not display 3D data. It works on all common platforms.

8.2 Mayavi

<http://code.enthought.com/projects/mayavi/>

The *Mayavi* Data Visualizer is a free, easy to use scientific data visualizer. It displays 1D, 2D and 3D data. It is the only *FiPy* viewer available for 3D data. *Matplotlib* is probably a better choice for 1D or 2D viewing.

Mayavi requires *VTK*, which can be difficult to build from source.

Note: MayaVi 1 is no longer supported.

Chapter 9

Using FiPy

This document explains how to use *FiPy* in a practical sense. To see the problems that *FiPy* is capable of solving, you can run any of the scripts in the *examples*.

Note: We strongly recommend you proceed through the *examples*, but at the very least work through *examples.diffusion.mesh1D* to understand the notation and basic concepts of *FiPy*.

We exclusively use either the UNIX command line or *IPython* to interact with *FiPy*. The commands in the *examples* are written with the assumption that they will be executed from the command line. For instance, from within the main *FiPy* directory, you can type:

```
$ python examples/diffusion/mesh1D.py
```

A viewer should appear and you should be prompted through a series of examples.

Note: From within *IPython*, you would type:

```
>>> run examples/diffusion/mesh1D.py
```

In order to customize the examples, or to develop your own scripts, some knowledge of Python syntax is required. We recommend you familiarize yourself with the excellent [Python tutorial](#) [10] or with [Dive Into Python](#) [11]. Deeper insight into Python can be obtained from the [12].

As you gain experience, you may want to browse through the [Command-line Flags and Environment Variables](#) that affect *FiPy*.

9.1 Logging

Diagnostic information about a *FiPy* run can be obtained using the `logging` module. For example, at the beginning of your script, you can add:

```
>>> import logging
>>> log = logging.getLogger("fipy")
>>> console = logging.StreamHandler()
>>> console.setLevel(logging.INFO)
>>> log.addHandler(console)
```

in order to see informational messages in the terminal. To have more verbose debugging information save to a file:

```
>>> logfile = logging.FileHandler(filename="fipy.log")
>>> logfile.setLevel(logging.DEBUG)
>>> log.addHandler(logfile)

>>> log.setLevel(logging.DEBUG)
```

To restrict logging to, e.g., information about the *PETSc* solvers:

```
>>> petsc = logging.Filter('fipy.solvers.petsc')
>>> logfile.addFilter(petsc)
```

More complex configurations can be specified by setting the `FIPY_LOG_CONFIG` environment variable. In this case, it is not necessary to add any logging instructions to your own script. Example configuration files can be found in `FiPySource/fipy/tools/logging/`.

If *Solving in Parallel*, the `mpilogging` package enables reporting which MPI rank each log entry comes from. For example:

```
>>> from mpilogging import MPIScatteredFileHandler
>>> mpilog = MPIScatteredFileHandler(filepattern="fipy.%({mpirank})d_of_%({mpisize})d.log"
>>> mpilog.setLevel(logging.DEBUG)
>>> log.addHandler(mpilog)
```

will generate a unique log file for each MPI rank.

9.2 Testing FiPy

For a general installation, *FiPy* can be tested by running:

```
$ python -c "import fipy; fipy.test()"
```

This command runs all the test cases in *FiPy's modules*, but doesn't include any of the tests in *FiPy's examples*. To run the test cases in both *modules* and *examples*, use:

```
$ python setup.py test
```

Note: You may need to first run:

```
$ python setup.py egg_info
```

for this to work properly.

in an unpacked *FiPy* archive. The test suite can be run with a number of different configurations depending on which solver suite is available and other factors. See *Command-line Flags and Environment Variables* for more details.

FiPy will skip tests that depend on *Optional Packages* that have not been installed. For example, if *Mayavi* and *Gmsh* are not installed, *FiPy* will warn something like:

```
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!  
Skipped 131 doctest examples because `gmsh` cannot be found on the $PATH  
Skipped 42 doctest examples because the `vtk` package cannot be imported  
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
```

Although the test suite may show warnings, there should be no other errors. Any errors should be investigated or reported on the [issue tracker](#). Users can see if there are any known problems for the latest *FiPy* distribution by checking *FiPy*'s [Continuous Integration](#) dashboard.

Below are a number of common *Command-line Flags* for testing various *FiPy* configurations.

9.2.1 Parallel Tests

If *FiPy* is configured for *Solving in Parallel*, you can run the tests on multiple processor cores with:

```
$ mpirun -np {# of processors} python setup.py test --trilinos
```

or:

```
$ mpirun -np {# of processors} python -c "import fipy; fipy.test('--trilinos')"
```

9.3 Command-line Flags and Environment Variables

FiPy chooses a default run time configuration based on the available packages on the system. The *Command-line Flags* and *Environment Variables* sections below describe how to override *FiPy*'s default behavior.

9.3.1 Command-line Flags

You can add any of the following case-insensitive flags after the name of a script you call from the command line, e.g.:

```
$ python myFiPyScript --someflag
```

--inline

Causes many mathematical operations to be performed in C, rather than Python, for improved performance.
Requires the *weave* package.

--cache

Causes lazily evaluated *FiPy Variable* objects to retain their value.

--no-cache

Causes lazily evaluated *FiPy Variable* objects to always recalculate their value.

The following flags take precedence over the *FIPY_SOLVERS* environment variable:

--pysparse

Forces the use of the *Pysparse* solvers.

--trilinos

Forces the use of the *Trilinos* solvers, but uses *Pysparse* to construct the matrices.

--no-pysparse

Forces the use of the *Trilinos* solvers without any use of *Pysparse*.

--scipy

Forces the use of the *SciPy* solvers.

--pyamg

Forces the use of the *PyAMG* preconditioners in conjunction with the *SciPy* solvers.

--pyamgx

Forces the use of the *pyamgx* solvers.

--lsmlib

Forces the use of the *LSMLIB* level set solver.

--skfmm

Forces the use of the *Scikit-fmm* level set solver.

9.3.2 Environment Variables

You can set any of the following environment variables in the manner appropriate for your shell. If you are not running in a shell (*e.g.*, you are invoking *FiPy* scripts from within *IPython* or IDLE), you can set these variables via the `os.environ` dictionary, but you must do so before importing anything from the `fipy` package.

FIPY_DISPLAY_MATRIX

If present, causes the graphical display of the solution matrix of each equation at each call of `solve()` or `sweep()`. Setting the value to “terms” causes the display of the matrix for each *Term* that composes the equation. Requires the *Matplotlib* package. Setting the value to “print” causes the matrix to be printed to the console.

FIPY_INLINE

If present, causes many mathematical operations to be performed in C, rather than Python. Requires the *weave* package.

FIPY_INLINE_COMMENT

If present, causes the addition of a comment showing the Python context that produced a particular piece of *weave* C code. Useful for debugging.

FIPY_LOG_CONFIG

Specifies a *JSON*-formatted logging configuration file, suitable for passing to `logging.config.dictConfig()`. Example configuration files can be found in *FiPySource/fipy/tools/logging/*.

FIPY_SOLVERS

Forces the use of the specified suite of linear solvers. Valid (case-insensitive) choices are “petsc”, “scipy”, “pysparse”, “trilinos”, “no-pysparse”, and “pyamg”.

FIPY_VERBOSE_SOLVER

If present, causes the *LinearGeneralSolver* to print a variety of diagnostic information. All other solvers should use *Logging* and *FIPY_LOG_CONFIG*.

FIPY_VIEWER

Forces the use of the specified viewer. Valid values are any *<viewer>* from the *fipy.viewers.<viewer>* modules. The special value of *dummy* will allow the script to run without displaying anything.

FIPY_INCLUDE_NUMERICX_ALL

If present, causes the inclusion of all functions and variables of the *numerix* module in the *fiPy* namespace.

FIPY_CACHE

If present, causes lazily evaluated *FiPy Variable* objects to retain their value.

PETSC_OPTIONS

PETSc configuration options. Set to “*-help*” and run a script with *PETSc* solvers in order to see what options are possible. Ignored if solver is not *PETSc*.

9.4 Solving in Parallel

FiPy can use *PETSc* or *Trilinos* to solve equations in parallel. Most mesh classes in *fiPy.meshes* can solve in parallel. This includes all “*...Grid...*” and “*...Gmsh...*” class meshes. Currently, the only remaining serial-only meshes are *Tri2D* and *SkewedGrid2D*.

Attention: *FiPy* requires *mpi4py* to work in parallel.

Tip: You are strongly advised to force the use of only one *OpenMP* thread with *Trilinos*:

```
$ export OMP_NUM_THREADS=1
```

See *OpenMP Threads vs. MPI Ranks* for more information.

Note: *Trilinos 12.12* has support for Python 3, but PyTrilinos on conda-forge presently only provides 12.10, which is limited to Python 2.x. *PETSc* is available for both *Python 3* and *Python 2.7*.

It should not generally be necessary to change anything in your script. Simply invoke:

```
$ mpirun -np {# of processors} python myScript.py --petsc
```

or:

```
$ mpirun -np {# of processors} python myScript.py --trilinos
```

instead of:

```
$ python myScript.py
```

The following plot shows the scaling behavior for multiple processors. We compare solution time vs number of Slurm tasks (available cores) for a Method of Manufactured Solutions Allen-Cahn problem.

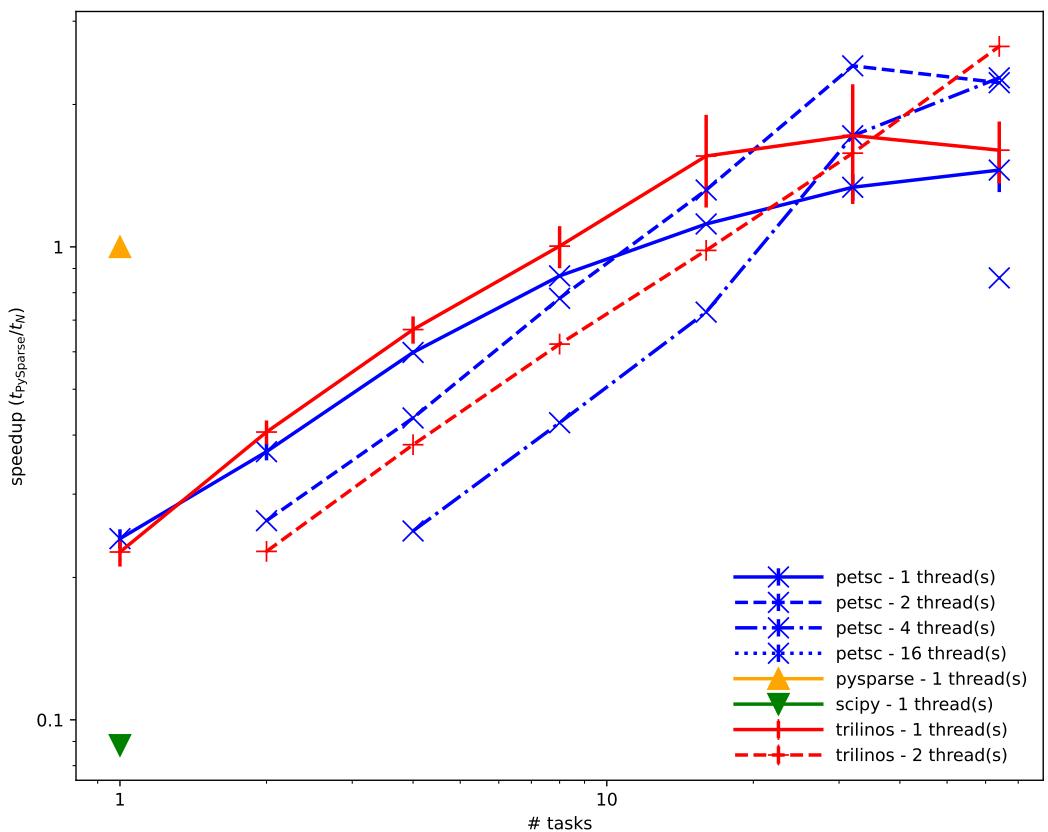


Fig. 1: Scaling behavior of different solver packages

“Speedup” relative to *Pysparse* (bigger numbers are better) versus number of tasks (processes) on a log-log plot. The number of threads per *MPI* rank is indicated by the line style (see legend). *OpenMP* threads \times *MPI* ranks = Slurm tasks.

A few things can be observed in this plot:

- Both *PETSc* and *Trilinos* exhibit power law scaling, but the power is only about 0.7. At least one source of this poor scaling is that our “...Grid...” meshes parallelize by dividing the mesh into slabs, which leads to more communication overhead than more compact partitions. The “...Gmsh...” meshes partition more efficiently, but carry more overhead in other ways. We’ll be making efforts to improve the partitioning of the “...Grid...” meshes in a future release.
- *PETSc* and *Trilinos* have fairly comparable performance, but lag *Pysparse* by a considerable margin. The *SciPy* solvers are even worse. Some of this discrepancy may be because the different packages are not all doing the same thing. Different solver packages have different default solvers and preconditioners. Moreover, the meaning of the solution tolerance depends on the normalization the solver uses and it is not always obvious which of several possibilities a particular package employs. We will endeavor to normalize the normalizations in a future release.
- *PETSc* with one thread is faster than with two threads until the number of tasks reaches about 10 and is faster than with four threads until the number of tasks reaches more than 20. *Trilinos* with one thread is faster than with two threads until the number of tasks is more than 30. We don’t fully understand the reasons for this, but there may be a *modest* benefit, *when using a large number of cpus*, to allow two to four *OpenMP* threads per *MPI* rank. See *OpenMP Threads vs. MPI Ranks* for caveats and more information.

These results are likely both problem and architecture dependent. You should develop an understanding of the scaling behavior of your own codes before doing “production” runs.

The easiest way to confirm that *FiPy* is properly configured to solve in parallel is to run one of the examples, e.g.:

```
$ mpirun -np 2 examples/diffusion/mesh1D.py
```

You should see two viewers open with half the simulation running in one of them and half in the other. If this does not look right (e.g., you get two viewers, both showing the entire simulation), or if you just want to be sure, you can run a diagnostic script:

```
$ mpirun -np 3 python examples/parallel.py
```

which should print out:

mpi4py	PyTrilinos	petsc4py	FiPy
processor 0 of 3 :: processor 0 of 3 :: processor 0 of 3 :: 5 cells on processor 0 of 3			
processor 1 of 3 :: processor 1 of 3 :: processor 1 of 3 :: 7 cells on processor 1 of 3			
processor 2 of 3 :: processor 2 of 3 :: processor 2 of 3 :: 6 cells on processor 2 of 3			

If there is a problem with your parallel environment, it should be clear that there is either a problem importing one of the required packages or that there is some problem with the *MPI* environment. For example:

mpi4py	PyTrilinos	petsc4py	FiPy
processor 0 of 3 :: processor 0 of 1 :: processor 0 of 3 :: 10 cells on processor 0 of 1			
[my.machine.com:69815] WARNING: There were 4 Windows created but not freed.			
processor 1 of 3 :: processor 0 of 1 :: processor 1 of 3 :: 10 cells on processor 0 of 1			
[my.machine.com:69814] WARNING: There were 4 Windows created but not freed.			
processor 2 of 3 :: processor 0 of 1 :: processor 2 of 3 :: 10 cells on processor 0 of 1			
[my.machine.com:69813] WARNING: There were 4 Windows created but not freed.			

indicates *mpi4py* is properly communicating with *MPI* and is running in parallel, but that *Trilinos* is not, and is running three separate serial environments. As a result, *FiPy* is limited to three separate serial operations, too. In this instance,

the problem is that although *Trilinos* was compiled with *MPI* enabled, it was compiled against a different *MPI* library than is currently available (and which *mpi4py* was compiled against). The solution, in this instance, is to solve with *PETSc* or to rebuild *Trilinos* against the active *MPI* libraries.

When solving in parallel, *FiPy* essentially breaks the problem up into separate sub-domains and solves them (somewhat) independently. *FiPy* generally “does the right thing”, but if you find that you need to do something with the entire solution, you can use `var.globalValue`.

Note: One option for debugging in parallel is:

```
$ mpirun -np {# of processors} xterm -hold -e "python -m ipdb myScript.py"
```

9.4.1 OpenMP Threads vs. MPI Ranks

By default, *PETSc* and *Trilinos* spawn as many *OpenMP* threads as there are cores available. This may very well be an intentional optimization, where they are designed to have one *MPI* rank per node of a cluster, so each of the child threads would help with computation but would not compete for I/O resources during ghost cell exchanges and file I/O. However, Python’s *Global Interpreter Lock* (GIL) binds all of the child threads to the same core as their parent! So instead of improving performance, each core suffers a heavy overhead from managing those idling threads.

The solution to this is to force these solvers to use only one *OpenMP* thread:

```
$ export OMP_NUM_THREADS=1
```

Because this environment variable affects all processes launched in the current session, you may prefer to restrict its use to *FiPy* runs:

```
$ OMP_NUM_THREADS=1 mpirun -np {# of processors} python myScript.py --trilinos
```

The difference can be extreme. We have observed the *FiPy* test suite to run in just over two minutes when `OMP_NUM_THREADS=1`, compared to over an hour and 23 minutes when *OpenMP* threads are unrestricted. We don’t know why, but other platforms do not suffer the same degree of degradation.

Conceivably, allowing these parallel solvers unfettered access to *OpenMP* threads with no *MPI* communication at all could perform as well or better than purely *MPI* parallelization. The plot below demonstrates this is not the case. We compare solution time vs number of *OpenMP* threads for fixed number of slots for a Method of Manufactured Solutions Allen-Cahn problem. *OpenMP* threading always slows down FiPy performance.

“Speedup” relative to one thread (bigger numbers are better) versus number of threads for 32 Slurm tasks on a log-log plot. *OpenMP* threads \times *MPI* ranks = Slurm tasks.

See <https://www.mail-archive.com/fipy@nist.gov/msg03393.html> for further analysis.

It may be possible to configure these packages to use only one *OpenMP* thread, but this is not the configuration of the version available from conda-forge and building Trilinos, at least, is NotFun™.

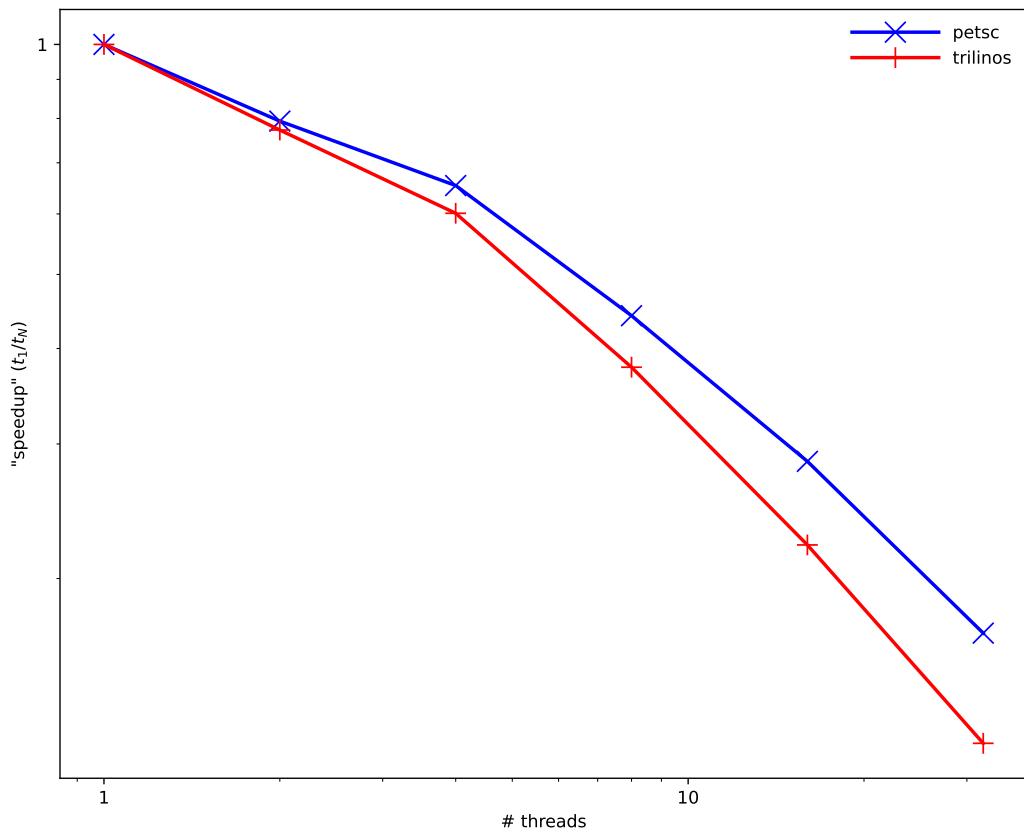


Fig. 2: Effect of having more *OpenMP* threads for each *MPI* rank

9.5 Meshing with Gmsh

FiPy works with arbitrary polygonal meshes generated by *Gmsh*. *FiPy* provides two wrappers classes (*Gmsh2D* and *Gmsh3D*) enabling *Gmsh* to be used directly from python. The classes can be instantiated with a set of *Gmsh* style commands (see `examples.diffusion.circle`). The classes can also be instantiated with the path to either a *Gmsh* geometry file (.geo) or a *Gmsh* mesh file (.msh) (see `examples.diffusion.anisotropy`).

As well as meshing arbitrary geometries, *Gmsh* partitions meshes for parallel simulations. Mesh partitioning automatically occurs whenever a parallel communicator is passed to the mesh on instantiation. This is the default setting for all meshes that work in parallel including *Gmsh2D* and *Gmsh3D*.

Note: *FiPy* solution accuracy can be compromised with highly non-orthogonal or non-conjunctional meshes.

9.6 Coupled and Vector Equations

Equations can now be coupled together so that the contributions from all the equations appear in a single system matrix. This results in tighter coupling for equations with spatial and temporal derivatives in more than one variable. In *FiPy* equations are coupled together using the & operator:

```
>>> eqn0 = ...
>>> eqn1 = ...
>>> coupledEqn = eqn0 & eqn1
```

The `coupledEqn` will use a combined system matrix that includes four quadrants for each of the different variable and equation combinations. In previous versions of *FiPy* there has been no need to specify which variable a given term acts on when generating equations. The variable is simply specified when calling `solve` or `sweep` and this functionality has been maintained in the case of single equations. However, for coupled equations the variable that a given term operates on now needs to be specified when the equation is generated. The syntax for generating coupled equations has the form:

```
>>> eqn0 = Term00(coeff=..., var=var0) + Term01(coeff..., var=var1) == source0
>>> eqn1 = Term10(coeff=..., var=var0) + Term11(coeff..., var=var1) == source1
>>> coupledEqn = eqn0 & eqn1
```

and there is now no need to pass any variables when solving:

```
>>> coupledEqn.solve(dt=..., solver=...)
```

In this case the matrix system will have the form

$$\left(\begin{array}{c|c} \text{Term00} & \text{Term01} \\ \hline \text{Term10} & \text{Term11} \end{array} \right) \left(\begin{array}{c} \text{var0} \\ \hline \text{var1} \end{array} \right) = \left(\begin{array}{c} \text{source0} \\ \hline \text{source1} \end{array} \right)$$

FiPy tries to make sensible decisions regarding each term's location in the matrix and the ordering of the variable column array. For example, if `Term01` is a transient term then `Term01` would appear in the upper left diagonal and the ordering of the variable column array would be reversed.

The use of coupled equations is described in detail in `examples.diffusion.coupled`. Other examples that demonstrate the use of coupled equations are `examples.phase.binaryCoupled`, `examples.phase.polyxtalCoupled` and `examples.cahnHilliard.mesh2DCoupled`. As well as coupling equations, true vector equations can now be written in *FiPy*.

Attention: Coupled equations are not compatible with *Higher Order Diffusion* terms. This is not a practical limitation, as any higher order terms can be decomposed into multiple 2nd-order equations. For example, the pair of coupled Cahn-Hilliard & Allen-Cahn 4th- and 2nd-order equations

$$\begin{aligned}\frac{\partial C}{\partial t} &= \nabla \cdot \left[M \nabla \left(\frac{\partial f(c, \phi)}{\partial C} - \kappa_C \nabla^2 C \right) \right] \\ \frac{\partial \phi}{\partial t} &= -L \left(\frac{\partial f(c, \phi)}{\partial \phi} - \kappa_\phi \nabla^2 \phi \right)\end{aligned}$$

can be decomposed to three 2nd-order equations

$$\begin{aligned}\frac{\partial C}{\partial t} &= \nabla \cdot (M \nabla \mu) \\ \mu &= \frac{\partial f(c, \phi)}{\partial C} - \kappa_C \nabla^2 C \\ \frac{\partial \phi}{\partial t} &= -L \left(\frac{\partial f(c, \phi)}{\partial \phi} - \kappa_\phi \nabla^2 \phi \right)\end{aligned}$$

9.7 Boundary Conditions

9.7.1 Default boundary conditions

If no constraints are applied, solutions are conservative, i.e., all boundaries are zero flux. For the equation

$$\frac{\partial \phi}{\partial t} = \nabla \cdot (\vec{a} \phi) + \nabla \cdot (b \nabla \phi)$$

the condition on the boundary S is

$$\hat{n} \cdot (\vec{a} \phi + b \nabla \phi) = 0 \quad \text{on } S.$$

9.7.2 Applying fixed value (Dirichlet) boundary conditions

To apply a fixed value boundary condition use the `constrain()` method. For example, to fix `var` to have a value of 2 along the upper surface of a domain, use

```
>>> var.constrain(2., where=mesh.facesTop)
```

Note: The old equivalent `FixedValue` boundary condition is now deprecated.

9.7.3 Applying fixed gradient boundary conditions (Neumann)

To apply a fixed Gradient boundary condition use the `faceGrad.constrain()` method. For example, to fix `var` to have a gradient of $(0,2)$ along the upper surface of a 2D domain, use

```
>>> var.faceGrad.constrain((0,), (2,), where=mesh.facesTop)
```

If the gradient normal to the boundary (*e.g.*, $\hat{n} \cdot \nabla \phi$) is to be set to a scalar value of 2, use

```
>>> var.faceGrad.constrain(2 * mesh.faceNormals, where=mesh.exteriorFaces)
```

9.7.4 Applying fixed flux boundary conditions

Generally these can be implemented with a judicious use of `faceGrad.constrain()`. Failing that, an exterior flux term can be added to the equation. Firstly, set the terms' coefficients to be zero on the exterior faces,

```
>>> diffCoeff.constrain(0., mesh.exteriorFaces)
>>> convCoeff.constrain(0., mesh.exteriorFaces)
```

then create an equation with an extra term to account for the exterior flux,

```
>>> eqn = (TransientTerm() + ConvectionTerm(convCoeff)
...      == DiffusionCoeff(diffCoeff)
...      + (mesh.exteriorFaces * exteriorFlux).divergence)
```

where `exteriorFlux` is a rank 1 `FaceVariable`.

Note: The old equivalent `FixedFlux` boundary condition is now deprecated.

9.7.5 Applying outlet or inlet boundary conditions

Convection terms default to a no flux boundary condition unless the exterior faces are associated with a constraint, in which case either an inlet or an outlet boundary condition is applied depending on the flow direction.

9.7.6 Applying spatially varying boundary conditions

The use of spatially varying boundary conditions is best demonstrated with an example. Given a 2D equation in the domain $0 < x < 1$ and $0 < y < 1$ with boundary conditions,

$$\phi = \begin{cases} xy & \text{on } x > 1/2 \text{ and } y > 1/2 \\ \vec{n} \cdot \vec{F} = 0 & \text{elsewhere} \end{cases}$$

where \vec{F} represents the flux. The boundary conditions in `FiPy` can be written with the following code,

```
>>> X, Y = mesh.faceCenters
>>> mask = ((X < 0.5) | (Y < 0.5))
>>> var.faceGrad.constrain(0, where=mesh.exteriorFaces & mask)
>>> var.constrain(X * Y, where=mesh.exteriorFaces & ~mask)
```

then

```
>>> eqn.solve(...)
```

Further demonstrations of spatially varying boundary condition can be found in `examples.diffusion.mesh20x20` and `examples.diffusion.circle`

9.7.7 Applying Robin boundary conditions

The Robin condition applied on the portion of the boundary S_R

$$\hat{n} \cdot (\vec{a}\phi + b\nabla\phi) = g \quad \text{on } S_R$$

can often be substituted for the flux in an equation

$$\begin{aligned} \frac{\partial\phi}{\partial t} &= \nabla \cdot (\vec{a}\phi) + \nabla \cdot (b\nabla\phi) \\ \int_V \frac{\partial\phi}{\partial t} dV &= \int_S \hat{n} \cdot (\vec{a}\phi + b\nabla\phi) dS \\ \int_V \frac{\partial\phi}{\partial t} dV &= \int_{S \notin S_R} \hat{n} \cdot (\vec{a}\phi + b\nabla\phi) dS + \int_{S \in S_R} g dS \end{aligned}$$

At faces identified by `mask`,

```
>>> a = FaceVariable(mesh=mesh, value=..., rank=1)
>>> a.setValue(0., where=mask)
>>> b = FaceVariable(mesh=mesh, value=..., rank=0)
>>> b.setValue(0., where=mask)
>>> g = FaceVariable(mesh=mesh, value=..., rank=0)
>>> eqn = (TransientTerm() == PowerLawConvectionTerm(coeff=a)
...     + DiffusionTerm(coeff=b)
...     + (g * mask * mesh.faceNormals).divergence)
```

When the Robin condition does not exactly map onto the boundary flux, we can attempt to apply it term by term. The Robin condition relates the gradient at a boundary face to the value on that face, however *FiPy* naturally calculates variable values at cell centers and gradients at intervening faces. Using a first order upwind approximation, the boundary value of the variable at face f can be written in terms of the value at the neighboring cell P and the normal gradient at the boundary:

$$\begin{aligned} \phi_f &\approx \phi_P + (\vec{d}_{Pf} \cdot \nabla\phi)_f \\ &\approx \phi_P + (\hat{n} \cdot \nabla\phi)_f (\vec{d}_{Pf} \cdot \hat{n})_f \end{aligned} \tag{9.1}$$

where \vec{d}_{Pf} is the distance vector to the center of the face f from the center of the adjoining cell P . The approximation $(\vec{d}_{Pf} \cdot \nabla\phi)_f \approx (\hat{n} \cdot \nabla\phi)_f (\vec{d}_{Pf} \cdot \hat{n})_f$ is most valid when the mesh is orthogonal.

Substituting this expression into the Robin condition:

$$\begin{aligned} \hat{n} \cdot (\vec{a}\phi + b\nabla\phi)_f &= g \\ \hat{n} \cdot \left[\vec{a}\phi_P + \vec{a}(\hat{n} \cdot \nabla\phi)_f (\vec{d}_{Pf} \cdot \hat{n})_f + b\nabla\phi \right]_f &\approx g \\ (\hat{n} \cdot \nabla\phi)_f &\approx \frac{g_f - (\hat{n} \cdot \vec{a})_f \phi_P}{(\vec{d}_{Pf} \cdot \vec{a})_f + b_f} \end{aligned} \tag{9.2}$$

we obtain an expression for the gradient at the boundary face in terms of its neighboring cell. We can, in turn, substitute this back into (9.1)

$$\begin{aligned}\phi_f &\approx \phi_P + \frac{g_f - (\hat{n} \cdot \vec{a})_f \phi_P}{(\vec{d}_{Pf} \cdot \vec{a})_f + b_f} (\vec{d}_{Pf} \cdot \hat{n})_f \\ &\approx \frac{g_f (\hat{n} \cdot \vec{d}_{Pf})_f + b_f \phi_P}{(\vec{d}_{Pf} \cdot \vec{a})_f + b_f}\end{aligned}\quad (9.3)$$

to obtain the value on the boundary face in terms of the neighboring cell.

Substituting (9.2) into the discretization of the *DiffusionTerm*:

$$\begin{aligned}\int_V \nabla \cdot (\Gamma \nabla \phi) dV &= \int_S \Gamma \hat{n} \cdot \nabla \phi S \\ &\approx \sum_f \Gamma_f (\hat{n} \cdot \nabla \phi)_f A_f \\ &= \sum_{f \notin S_R} \Gamma_f (\hat{n} \cdot \nabla \phi)_f A_f + \sum_{f \in S_R} \Gamma_f (\hat{n} \cdot \nabla \phi)_f A_f \\ &\approx \sum_{f \notin S_R} \Gamma_f (\hat{n} \cdot \nabla \phi)_f A_f + \sum_{f \in S_R} \Gamma_f \frac{g_f - (\hat{n} \cdot \vec{a})_f \phi_P}{(\vec{d}_{Pf} \cdot \vec{a})_f + b_f} A_f\end{aligned}$$

An equation of the form

```
>>> eqn = TransientTerm() == DiffusionTerm(coeff=Gamma0)
```

can be constrained to have a Robin condition at faces identified by `mask` by making the following modifications

```
>>> Gamma = FaceVariable(mesh=mesh, value=Gamma0)
>>> Gamma.setValue(0., where=mask)
>>> dPf = FaceVariable(mesh=mesh,
...                      value=mesh._faceToCellDistanceRatio * mesh.cellDistanceVectors)
>>> n = mesh.faceNormals
>>> a = FaceVariable(mesh=mesh, value=..., rank=1)
>>> b = FaceVariable(mesh=mesh, value=..., rank=0)
>>> g = FaceVariable(mesh=mesh, value=..., rank=0)
>>> RobinCoeff = (mask * Gamma0 * n / (dPf.dot(a) + b))
>>> eqn = (TransientTerm() == DiffusionTerm(coeff=Gamma) + (RobinCoeff * g).divergence
...          - ImplicitSourceTerm(coeff=(RobinCoeff * n.dot(a)).divergence)
```

Similarly, for a *ConvectionTerm*, we can substitute (9.3):

$$\begin{aligned}\int_V \nabla \cdot (\vec{u} \phi) dV &= \int_S \hat{n} \cdot \vec{u} \phi dS \\ &\approx \sum_f (\hat{n} \cdot \vec{u})_f \phi_f A_f \\ &= \sum_{f \notin S_R} (\hat{n} \cdot \vec{u})_f \phi_f A_f + \sum_{f \in S_R} (\hat{n} \cdot \vec{u})_f \frac{g_f (\hat{n} \cdot \vec{d}_{Pf})_f + b_f \phi_P}{(\vec{d}_{Pf} \cdot \vec{a})_f + b_f} A_f\end{aligned}$$

Note: An expression like the heat flux convection boundary condition $-k \nabla T \cdot \hat{n} = h(T - T_\infty)$ can be put in the form of the Robin condition used above by letting $\vec{a} \equiv h \hat{n}$, $b \equiv k$, and $g \equiv h T_\infty$.

9.7.8 Applying internal “boundary” conditions

Applying internal boundary conditions can be achieved through the use of implicit and explicit sources.

Internal fixed value

An equation of the form

```
>>> eqn = TransientTerm() == DiffusionTerm()
```

can be constrained to have a fixed internal value at a position given by `mask` with the following alterations

```
>>> eqn = (TransientTerm() == DiffusionTerm())
...
...     - ImplicitSourceTerm(mask * largeValue)
...     + mask * largeValue * value)
```

The parameter `largeValue` must be chosen to be large enough to completely dominate the matrix diagonal and the RHS vector in cells that are masked. The `mask` variable would typically be a `CellVariable` Boolean constructed using the cell center values.

Internal fixed gradient

An equation of the form

```
>>> eqn = TransientTerm() == DiffusionTerm(coeff=Gamma0)
```

can be constrained to have a fixed internal gradient magnitude at a position given by `mask` with the following alterations

```
>>> Gamma = FaceVariable(mesh=mesh, value=Gamma0)
>>> Gamma[mask.value] = 0.
>>> eqn = (TransientTerm() == DiffusionTerm(coeff=Gamma)
...
...     + DiffusionTerm(coeff=largeValue * mask)
...     - ImplicitSourceTerm(mask * largeValue * gradient
...                           * mesh.faceNormals).divergence)
...     ...)
```

The parameter `largeValue` must be chosen to be large enough to completely dominate the matrix diagonal and the RHS vector in cells that are masked. The `mask` variable would typically be a `FaceVariable` Boolean constructed using the face center values.

Internal Robin condition

Nothing different needs to be done when *applying Robin boundary conditions* at internal faces.

Note: While we believe the derivations for *applying Robin boundary conditions* are “correct”, they often do not seem to produce the intuitive result. At this point, we think this has to do with the pathology of “internal” boundary conditions, but remain open to other explanations. `FiPy` was designed with diffuse interface treatments (phase field and level set) in mind and, as such, internal “boundaries” do not come up in our own work and have not received much attention.

Warning: The constraints mechanism is not designed to constrain internal values for variables that are being solved by equations. In particular, one must be careful to distinguish between constraining internal cell values during the solve step and simply applying arbitrary constraints to a `CellVariable`. Applying a constraint,

```
>>> var.constrain(value, where=mask)
```

simply fixes the returned value of `var` at `mask` to be `value`. It does not have any effect on the implicit value of `var` at the `mask` location during the linear solve so it is not a substitute for the source term machinations described above. Future releases of *FiPy* may implicitly deal with this discrepancy, but the current release does not.

A simple example can be used to demonstrate this:

```
>>> m = Grid1D(nx=2, dx=1.)
>>> var = CellVariable(mesh=m)
```

We wish to solve $\nabla^2\phi = 0$ subject to $\phi|_{\text{right}} = 1$ and $\phi|_{x < 1} = 0.25$. We apply a constraint to the faces for the right side boundary condition (which works).

```
>>> var.constrain(1., where=m.facesRight)
```

We create the equation with the source term constraint described above

```
>>> mask = m.x < 1.
>>> largeValue = 1e+10
>>> value = 0.25
>>> eqn = DiffusionTerm() - ImplicitSourceTerm(largeValue * mask) + largeValue * mask *
    >>> value
```

and the expected value is obtained.

```
>>> eqn.solve(var)
>>> print var
[ 0.25  0.75]
```

However, if a constraint is used without the source term constraint an unexpected solution is obtained

```
>>> var.constrain(0.25, where=mask)
>>> eqn = DiffusionTerm()
>>> eqn.solve(var)
>>> print var
[ 0.25  1. ]
```

although the left cell has the expected value as it is constrained.

FiPy has simply solved $\nabla^2\phi = 0$ with $\phi|_{\text{right}} = 1$ and (by default) $\hat{n} \cdot \nabla\phi|_{\text{left}} = 0$, giving $\phi = 1$ everywhere, and then subsequently replaced the cells $x < 1$ with $\phi = 0.25$.

9.8 Running under Python 2

Thanks to the `future` package and to the contributions of `pya` and `woodscn`, *FiPy* runs under both `Python 3` and `Python 2.7`, without conversion or modification.

Because `Python` itself will drop support for `Python 2.7` on January 1, 2020 and many of the prerequisites for *FiPy* have pledged to drop support for `Python 2.7` no later than 2020, we have prioritized adding support for better `Python 3` solvers, starting with `petsc4py`.

Because the faster `PySparse` and `Trilinos` solvers are not available under `Python 3`, we will maintain `Python 2.x` support

as long as practical. Be aware that the `conda-forge` packages that *FiPy* depends upon are not well-maintained on *Python* 2.x and our support for that configuration is rapidly becoming impractical, despite the present performance benefits. Hopefully, we will learn how to optimize our use of *PETSc* and/or *Trilinos* 12.12 will become available on `conda-forge`.

9.9 Manual

You can view the manual online at <<http://pages.nist.gov/fipy>>. Alternatively, it may be possible to build a fresh copy by issuing the following command in the `docs/` directory:

```
$ make html
```

or:

```
$ make latexpdf
```

Note: This mechanism is intended primarily for the developers. At a minimum, you will need `Sphinx`, plus all of its prerequisites. We are currently building with Sphinx v7.0. Python 2.7 probably won't work.

We install via conda:

```
$ conda install --channel conda-forge sphinx
```

Bibliographic citations require the `sphinxcontrib-bibtex` package:

```
$ python -m pip install sphinxcontrib-bibtex
```

Some documentation uses `numpydoc` styling:

```
$ python -m pip install numpydoc
```

Some embeded figures require `matplotlib`, `pandas`, and `imagemagick`:

```
$ conda install --channel conda-forge matplotlib pandas imagemagick
```

The PDF file requires `SUnits.sty` available, e.g., from `texlive-science`.

Spelling is checked automatically in the course of *Continuous Integration*. If you wish to check manually, you will need `pyspelling`, `hunspell`, and the `libreoffice` dictionaries:

```
$ conda install --channel conda-forge hunspell
$ python -m pip install pyspelling
$ wget -O en_US.aff https://cgit.freedesktop.org/libreoffice/dictionaries/plain/en/en_<red>US.aff?id=a4473e06b56bfe35187e302754f6baaa8d75e54f
$ wget -O en_US.dic https://cgit.freedesktop.org/libreoffice/dictionaries/plain/en/en_US.<red>.dic?id=a4473e06b56bfe35187e302754f6baaa8d75e54f
```

Chapter 10

Frequently Asked Questions

10.1 How do I represent an equation in FiPy?

As explained in *Theoretical and Numerical Background*, the canonical governing equation that can be solved by *FiPy* for the dependent *CellVariable* ϕ is

$$\underbrace{\frac{\partial(\rho\phi)}{\partial t}}_{\text{transient}} + \underbrace{\nabla \cdot (\vec{u}\phi)}_{\text{convection}} = \underbrace{[\nabla \cdot (\Gamma_i \nabla)]^n \phi}_{\text{diffusion}} + \underbrace{S_\phi}_{\text{source}}$$

and the individual terms are discussed in *Discretization*.

A physical problem can involve many different coupled governing equations, one for each variable. Numerous specific examples are presented in Part *Examples*.

10.1.1 Is there a way to model an anisotropic diffusion process or more generally to represent the diffusion coefficient as a tensor so that the diffusion term takes the form $\partial_i \Gamma_{ij} \partial_j \phi$?

Terms of the form $\partial_i \Gamma_{ij} \partial_j \phi$ can be posed in *FiPy* by using a list, tuple rank 1 or rank 2 *FaceVariable* to represent a vector or tensor diffusion coefficient. For example, if we wished to represent a diffusion term with an anisotropy ratio of 5 aligned along the x-coordinate axis, we could write the term as,

```
>>> DiffusionTerm([[5, 0], [0, 1]])
```

which represents $5\partial_x^2 + \partial_y^2$. Notice that the tensor, written in the form of a list, is contained within a list. This is because the first index of the list refers to the order of the term not the first index of the tensor (see *Higher Order Diffusion*). This notation, although succinct can sometimes be confusing so a number of cases are interpreted below.

```
>>> DiffusionTerm([5, 1])
```

This represents the same term as the case examined above. The vector notation is just a short-hand representation for the diagonal of the tensor. Off-diagonals are assumed to be zero.

```
>>> DiffusionTerm([5, 1])
```

This simply represents a fourth order isotropic diffusion term of the form $5(\partial_x^2 + \partial_y^2)^2$.

```
>>> DiffusionTerm([[1, 0], [0, 1]])
```

Nominally, this should represent a fourth order diffusion term of the form $\partial_x^2 \partial_y^2$, but *FiPy* does not currently support anisotropy for higher order diffusion terms so this may well throw an error or give anomalous results.

```
>>> x, y = mesh.cellCenters
>>> DiffusionTerm(CellVariable(mesh=mesh,
...                                value=[[x**2, x * y], [-x * y, -y**2]]))
```

This represents an anisotropic diffusion coefficient that varies spatially so that the term has the form $\partial_x(x^2 \partial_x + xy \partial_y) + \partial_y(-xy \partial_x - y^2 \partial_y) \equiv x\partial_x - y\partial_y + x^2\partial_x^2 - y^2\partial_y^2$.

Generally, anisotropy is not conveniently aligned along the coordinate axes; in these cases, it is necessary to apply a rotation matrix in order to calculate the correct tensor values, see [examples.diffusion.anisotropy](#) for details.

10.1.2 How do I represent a ... term that doesn't involve the dependent variable?

It is important to realize that, even though an expression may superficially resemble one of those shown in [Discretization](#), if the dependent variable *for that PDE* does not appear in the appropriate place, then that term should be treated as a source.

How do I represent a diffusive source?

If the governing equation for ϕ is

$$\frac{\partial \phi}{\partial t} = \nabla \cdot (D_1 \nabla \phi) + \nabla \cdot (D_2 \nabla \xi)$$

then the first term is a [TransientTerm](#) and the second term is a [DiffusionTerm](#), but the third term is simply an explicit source, which is written in Python as

```
>>> (D2 * xi.faceGrad).divergence
```

Higher order diffusive sources can be obtained by simply nesting the references to [faceGrad](#) and [divergence](#).

Note: We use [faceGrad](#), rather than [grad](#), in order to obtain a second-order spatial discretization of the diffusion term in ξ , consistent with the matrix that is formed by [DiffusionTerm](#) for ϕ .

How do I represent a convective source?

The convection of an independent field ξ as in

$$\frac{\partial \phi}{\partial t} = \nabla \cdot (\vec{u} \xi)$$

can be rendered as

```
>>> (u * xi.arithmeticFaceValue).divergence
```

when \vec{u} is a rank-1 [FaceVariable](#) (preferred) or as

```
>>> (u * xi).divergence
```

if \vec{u} is a rank-1 *CellVariable*.

How do I represent a transient source?

The time-rate-of change of an independent variable ξ , such as in

$$\frac{\partial(\rho_1\phi)}{\partial t} = \frac{\partial(\rho_2\xi)}{\partial t}$$

does not have an abstract form in *FiPy* and should be discretized directly, in the manner of Equation (12.3), as

```
>>> TransientTerm(coeff=rho1) == rho2 * (xi - xi.old) / timeStep
```

This technique is used in *examples.phase.anisotropy*.

10.1.3 What if my term involves the dependent variable, but not where FiPy puts it?

Frequently, viewing the term from a different perspective will allow it to be cast in one of the canonical forms. For example, the third term in

$$\frac{\partial\phi}{\partial t} = \nabla \cdot (D_1 \nabla \phi) + \nabla \cdot (D_2 \phi \nabla \xi)$$

might be considered as the diffusion of the independent variable ξ with a mobility $D_2\phi$ that is a function of the dependent variable ϕ . For *FiPy*'s purposes, however, this term represents the convection of ϕ , with a velocity $D_2\nabla\xi$, due to the counter-diffusion of ξ , so

```
>>> eq = TransientTerm() == (DiffusionTerm(coeff=D1)
...                               + <Specific>ConvectionTerm(coeff=D2 * xi.faceGrad))
```

Note: With the advent of *Coupled and Vector Equations* in FiPy 3.x, it is now possible to represent both terms with *DiffusionTerm*.

10.1.4 What if the coefficient of a term depends on the variable that I'm solving for?

A non-linear coefficient, such as the diffusion coefficient in $\nabla \cdot [\Gamma_1(\phi)\nabla\phi] = \nabla \cdot [\Gamma_0\phi(1-\phi)\nabla\phi]$ is not a problem for *FiPy*. Simply write it as it appears:

```
>>> diffTerm = DiffusionTerm(coeff=Gamma0 * phi * (1 - phi))
```

Note: Due to the nonlinearity of the coefficient, it will probably be necessary to “sweep” the solution to convergence as discussed in *Iterations, timesteps, and sweeps? Oh, my!*

10.2 How can I see what I'm doing?

10.2.1 How do I export data?

The way to save your calculations depends on how you plan to make use of the data. If you want to save it for “restart” (so that you can continue or redirect a calculation from some intermediate stage), then you’ll want to “pickle” the *Python* data with the *dump* module. This is illustrated in *examples.phase.anisotropy*, *examples.phase.impingement.mesh40x1*, *examples.phase.impingement.mesh20x20*, and *examples.levelSet.electroChem.howToWriteAScript*.

On the other hand, pickled *FiPy* data is of little use to anything besides *Python* and *FiPy*. If you want to import your calculations into another piece of software, whether to make publication-quality graphs or movies, or to perform some analysis, or as input to another stage of a multiscale model, then you can save your data as an ASCII text file of tab-separated-values with a *TSVViewer*. This is illustrated in *examples.diffusion.circle*.

10.2.2 How do I save a plot image?

Some of the viewers have a button or other mechanism in the user interface for saving an image file. Also, you can supply an optional keyword *filename* when you tell the viewer to *plot()*, e.g.

```
>>> viewer.plot(filename="myimage.ext")
```

which will save a file named *myimage.ext* in your current working directory. The type of image is determined by the file extension “.ext”. Different viewers have different capabilities:

Matplotlib

accepts “.eps,” “.jpg” (Joint Photographic Experts Group), and “.png” (Portable Network Graphics).

Attention: Actually, *Matplotlib* supports different extensions, depending on the chosen *backend*, but our *MatplotlibViewer* classes don’t properly support this yet.

What if I only want the saved file, with no display on screen?

To our knowledge, this is only supported by *Matplotlib*, as is explained in the *Matplotlib* FAQ on image backends. Basically, you need to tell *Matplotlib* to use an “image backend,” such as “Agg” or “Cairo.” Backends are discussed at <http://matplotlib.sourceforge.net/backends.html>.

10.2.3 How do I make a movie?

FiPy has no facilities for making movies. You will need to save individual frames (see the previous question) and then stitch them together into a movie, using one of a variety of different free, shareware, or commercial software packages. The guidance in the *Matplotlib* FAQ on movies should be adaptable to other *Viewers*.

10.2.4 Why doesn't the Viewer look the way I want?

FiPy's viewers are utilitarian. They're designed to let you see *something* with a minimum of effort. Because different plotting packages have different capabilities and some are easier to install on some platforms than on others, we have tried to support a range of *Python* plotters with a minimal common set of features. Many of these packages are capable of much more, however. Often, you can invoke the *Viewer* you want, and then issue supplemental commands for the underlying plotting package. The better option is to make a “subclass” of the *FiPy Viewer* that comes closest to producing the image you want. You can then override just the behavior you wan to change, while letting *FiPy* do most of the heavy lifting. See `examples.phase.anisotropy` and `examples.phase.polyxtal` for examples of creating a custom *Matplotlib Viewer* class; see `examples.cahnHilliard.sphere` for an example of creating a custom *Mayavi Viewer* class.

10.3 Iterations, timesteps, and sweeps? Oh, my!

Any non-linear solution of partial differential equations is an approximation. These approximations benefit from repetitive solution to achieve the best possible answer. In *FiPy* (and in many similar PDE solvers), there are three layers of repetition.

iterations

This is the lowest layer of repetition, which you'll generally need to spend the least time thinking about. *FiPy* solves PDEs by discretizing them into a set of linear equations in matrix form, as explained in *Discretization* and *Linear Equations*. It is not always practical, or even possible, to exactly solve these matrix equations on a computer. *FiPy* thus employs “iterative solvers”, which make successive approximations until the linear equations have been satisfactorily solved. *FiPy* chooses a default number of iterations and solution tolerance, which you will not generally need to change. If you do wish to change these defaults, you'll need to create a new *Solver* object with the desired number of iterations and solution tolerance, *e.g.*

```
>>> mySolver = LinearPCGSolver(iterations=1234, tolerance=5e-6)
:
:
>>> eq.solve(..., solver=mySolver, ...)
```

Note: The older *Solver* `steps=` keyword is now deprecated in favor of `iterations=` to make the role clearer.

Solver iterations are changed from their defaults in `examples.flow.stokesCavity` and `examples.updating.update0_1to1_0`.

sweeps

This middle layer of repetition is important when a PDE is non-linear (*e.g.*, a diffusivity that depends on concentration) or when multiple PDEs are coupled (*e.g.*, if solute diffusivity depends on temperature and thermal conductivity depends on concentration). Even if the *Solver* solves the *linear* approximation of the PDE to absolute perfection by performing an infinite number of iterations, the solution may still not be a very good representation of the actual *non-linear* PDE. If we resolve the same equation *at the same point in elapsed time*, but use the result of the previous solution instead of the previous timestep, then we can get a refined solution to the *non-linear* PDE in a process known as “sweeping.”

Note: Despite references to the “previous timestep,” sweeping is not limited to time-evolving problems. Non-linear sets of quasi-static or steady-state PDEs can require sweeping, too.

We need to distinguish between the value of the variable at the last timestep and the value of the variable at the last sweep (the last cycle where we tried to solve the *current* timestep). This is done by first modifying the way

the variable is created:

```
>>> myVar = CellVariable(..., hasOld=True)
```

and then by explicitly moving the current value of the variable into the “old” value only when we want to:

```
>>> myVar.updateOld()
```

Finally, we will need to repeatedly solve the equation until it gives a stable result. To clearly distinguish that a single cycle will not truly “solve” the equation, we invoke a different method “`sweep()`”:

```
>>> for sweep in range(sweeps):
...     eq.sweep(var=myVar, ...)
```

Even better than sweeping a fixed number of cycles is to do it until the non-linear PDE has been solved satisfactorily:

```
>>> while residual > desiredResidual:
...     residual = eq.sweep(var=myVar, ...)
```

Sweeps are used to achieve better solutions in `examples.diffusion.mesh1D`, `examples.phase.simple`, `examples.phase.binaryCoupled`, and `examples.flow.stokesCavity`.

timesteps

This outermost layer of repetition is of most practical interest to the user. Understanding the time evolution of a problem is frequently the goal of studying a particular set of PDEs. Moreover, even when only an equilibrium or steady-state solution is desired, it may not be possible to simply solve that directly, due to non-linear coupling between equations or to boundary conditions or initial conditions. Some types of PDEs have fundamental limits to how large a timestep they can take before they become either unstable or inaccurate.

Note: Stability and accuracy are distinctly different. An unstable solution is often said to “blow up”, with radically different values from point to point, often diverging to infinity. An inaccurate solution may look perfectly reasonable, but will disagree significantly from an analytical solution or from a numerical solution obtained by taking either smaller or larger timesteps.

For all of these reasons, you will frequently need to advance a problem in time and to choose an appropriate interval between solutions. This can be simple:

```
>>> timeStep = 1.234e-5
>>> for step in range(steps):
...     eq.solve(var=myVar, dt=timeStep, ...)
```

or more elaborate:

```
>>> timeStep = 1.234e-5
>>> elapsedTime = 0
>>> while elapsedTime < totalElapsedTime:
...     eq.solve(var=myVar, dt=timeStep, ...)
...     elapsedTime += timeStep
...     timeStep = SomeFunctionOfVariablesAndTime(myVar1, myVar2, elapsedTime)
```

A majority of the examples in this manual illustrate time evolving behavior. Notably, boundary conditions are made a function of elapsed time in `examples.diffusion.mesh1D`. The timestep is chosen based on the expected interfacial velocity in `examples.phase.simple`. The timestep is gradually increased as the kinetics slow down in `examples.cahnHilliard.mesh2DCoupled`.

Finally, we can (and often do) combine all three layers of repetition:

```
>>> myVar = CellVariable(..., hasOld=1)
:
:
>>> mySolver = LinearPCGSolver(iterations=1234, tolerance=5e-6)
:
:
>>> while elapsedTime < totalElapsedTime:
...     myVar.updateOld()
...     while residual > desiredResidual:
...         residual = eq.sweep(var=myVar, dt=timeStep, ...)
...         elapsedTime += timeStep
```

10.4 Why the distinction between CellVariable and FaceVariable coefficients?

FiPy solves field variables on the cell centers. Transient and source terms describe the change in the value of a field at the cell center, and so they take a *CellVariable* coefficient. Diffusion and convection terms involve fluxes *between* cell centers, and are calculated on the face between two cells, and so they take a *FaceVariable* coefficient.

Note: If you supply a *CellVariable* var when a *FaceVariable* is expected, *FiPy* will automatically substitute *var.arithmeticFaceValue*. This can have undesirable consequences, however. For one thing, the arithmetic face average of a non-linear function is not the same as the same non-linear function of the average argument, *e.g.*, for $f(x) = x^2$,

$$f\left(\frac{1+2}{2}\right) = \frac{9}{4} \neq \frac{f(1) + f(2)}{2} = \frac{5}{2}$$

This distinction is not generally important for smoothly varying functions, but can dramatically affect the solution when sharp changes are present. Also, for many problems, such as a conserved concentration field that cannot be allowed to drop below zero, a harmonic average is more appropriate than an arithmetic average.

If you experience problems (unstable or wrong results, or excessively small timesteps), you may need to explicitly supply the desired *FaceVariable* rather than letting *FiPy* assume one.

10.5 How do I represent boundary conditions?

See the *Boundary Conditions* section for more details.

10.6 What does this error message mean?

ValueError: frames are not aligned

This error most likely means that you have provided a *CellVariable* when *FiPy* was expecting a *FaceVariable* (or vice versa).

MA.MA.MAError: Cannot automatically convert masked array to Numeric because data is masked in one or more locations.

This not-so-helpful error message could mean a number of things, but the most likely explanation is that the solution has become unstable and is diverging to $\pm\infty$. This can be caused by taking too large a timestep or by using explicit terms instead of implicit ones.

repairing catalog by removing key

This message (not really an error, but may cause test failures) can result when using the `weave` package via the `--inline` flag. It is due to a bug in *SciPy* that has been patched in their source repository: <http://www.scipy.org/mailingslists/mailman?fn=scipy-dev/2005-June/003010.html>.

numerix Numeric 23.6

This is neither an error nor a warning. It's just a sloppy message left in *SciPy*: <http://thread.gmane.org/gmane.comp.python.scientific.user/4349>.

10.7 How do I change FiPy's default behavior?

FiPy tries to make reasonable choices, based on what packages it finds installed, but there may be times that you wish to override these behaviors. See the *Command-line Flags and Environment Variables* section for more details.

10.8 How can I tell if I'm running in parallel?

See *Solving in Parallel*.

10.9 Why don't my scripts work anymore?

FiPy has experienced three major API changes. The steps necessary to upgrade older scripts are discussed in *Updating FiPy*.

10.10 What if my question isn't answered here?

Please post your question to the mailing list <<http://www.ctcms.nist.gov/fipy/mail.html>> or file an issue at <<https://github.com/usnistgov/fipy/issues/new>>.

Chapter 11

Efficiency

This section will present results and discussion of efficiency evaluations with *FiPy*. Programming in *Python* allows greater efficiency when designing and implementing new code, but it has some intrinsic inefficiencies during execution as compared with the C or FORTRAN programming languages. These inefficiencies can be minimized by translating sections of code that are used frequently into C.

FiPy has been tested against an in-house phase field code, written at NIST, to model grain growth and subsequent impingement. This problem can be executed by running:

```
$ examples/phase/impingement/mesh20x20.py \
> --numberOfElements=10000 --numberOfSteps=1000
```

from the base *FiPy* directory. The in-house code was written by Ryo Kobayashi and is used to generate the results presented in [13].

The raw CPU execution times for 10 time steps are presented in the following table. The run times are in seconds and the memory usage is in kilobytes. The Kobayashi code is given the heading of FORTRAN while *FiPy* is run with and without inlining. The memory usage is for *FiPy* simulations with the `--inline`. The `--no-cache` flag is on in all cases for the following table.

Ele- ments	FiPy (s)	FiPy (s)	--inline	FORTRAN (s)	FiPy (KiB)	memory	FORTRAN (KiB)	memory
100	0.77	0.30		0.0009	39316		772	
400	0.87	0.37		0.0031	39664		828	
1600	1.4	0.65		0.017	40656		1044	
6400	3.7	2.0		0.19	46124		1880	
25600	19	10		1.3	60840		5188	
102400	79	43		4.6	145820		18436	

The plain *Python* version of *FiPy*, which uses Numeric for all array operations, is around 17 times slower than the FORTRAN code. Using the `--inline` flag, this penalty is reduced to about 9 times slower.

It is hoped that in future releases of *FiPy* the process of C inlining for Variable objects will be automated. This may result in some efficiency gains, greater than we are seeing for this particular problem since all the Variable objects will be inlined. Recent analysis has shown that a Variable with multiple operations could be up to 6 times faster at calculating its value when inlined.

As presented in the above table, memory usage was also recorded for each *FiPy* simulation. From the table, once base memory usage is subtracted, each cell requires approximately 1.4 kilobytes of memory. The measurement of the maximum memory spike is hard with dynamic memory allocation, so these figures should only be used as a very rough guide. The FORTRAN memory usage is exact since memory is not allocated dynamically.

11.1 Efficiency comparison between --no-cache and --cache flags

This table shows results for efficiency tests when using the caching flags. Examples with more variables involved in complex expressions show the largest improvement in memory usage. The `--no-cache` option mainly prevents intermediate variables created due to binary operations from caching their values. This results in large memory gains while not effecting run times substantially. The table below is with `--inline` switched on and with 102400 elements for each case. The `--no-cache` flag is the default option.

Example	time per step --no-cache (s)	time per step --cache (s)	memory per cell --no-cache (KiB)	memory per cell --cache (KiB)
<code>examples.phase. impingement.mesh20x20</code>	4.3	4.1	1.4	2.3
<code>examples.phase.anisotropy</code>	3.5	3.2	1.1	1.9
<code>examples.cahnHilliard. mesh2D</code>	3.0	2.5	1.1	1.4
<code>examples.levelSet. electroChem. simpleTrenchSystem</code>	62	62	2.0	2.8

11.2 Efficiency discussion of Pysparse and Trilinos

Trilinos provides multigrid capabilities which are beneficial for some problems, but has significant overhead compared to Pysparse. The matrix-building step takes significantly longer in Trilinos, and the solvers also have more overhead costs in memory and performance than the equivalent Pysparse solvers. However, the multigrid preconditioning capabilities of Trilinos can, in some cases, provide enough of a speedup in the solution step to make up for the overhead costs. This depends greatly on the specifics of the problem, but is most likely in the cases when the problem is large and when Pysparse cannot solve the problem with an iterative solver and must use an LU solver, while Trilinos can still have success with an iterative method.

Chapter 12

Theoretical and Numerical Background

This chapter describes the numerical methods used to solve equations in the *FiPy* programming environment. *FiPy* uses the finite volume method (FVM) to solve coupled sets of partial differential equations (PDEs). For a good introduction to the FVM see Nick Croft's PhD thesis [14], Patankar [15] or Versteeg and Malalasekera [16].

Essentially, the FVM consists of dividing the solution domain into discrete finite volumes over which the state variables are approximated with linear or higher order interpolations. The derivatives in each term of the equation are satisfied with simple approximate interpolations in a process known as discretization. The (FVM) is a popular discretization technique employed to solve coupled PDEs used in many application areas (*e.g.*, Fluid Dynamics).

The FVM can be thought of as a subset of the Finite Element Method (FEM), just as the Finite Difference Method (FDM) is a subset of the FVM. A system of equations fully equivalent to the FVM can be obtained with the FEM using as weighting functions the characteristic functions of FV cells, *i.e.*, functions equal to unity [17]. Analogously, the discretization of equations with the FVM reduces to the FDM on Cartesian grids.

12.1 General Conservation Equation

The equations that model the evolution of physical, chemical and biological systems often have a remarkably universal form. Indeed, PDEs have proven necessary to model complex physical systems and processes that involve variations in both space and time. In general, given a variable of interest ϕ such as species concentration, pH, or temperature, there exists an evolution equation of the form

$$\frac{\partial \phi}{\partial t} = H(\phi, \lambda_i) \quad (12.1)$$

where H is a function of ϕ , other state variables λ_i , and higher order derivatives of all of these variables. Examples of such systems are wide ranging, but include problems that exhibit a combination of diffusing and reacting species, as well as such diverse problems as determination of the electric potential in heart tissue, of fluid flow, stress evolution, and even the Schrödinger equation.

A general conservation equation, solved using *FiPy*, can include any combination of the following terms,

$$\underbrace{\frac{\partial(\rho\phi)}{\partial t}}_{\text{transient}} + \underbrace{\nabla \cdot (\vec{u}\phi)}_{\text{convection}} = \underbrace{[\nabla \cdot (\Gamma_i \nabla)]^n \phi}_{\text{diffusion}} + \underbrace{S_\phi}_{\text{source}} \quad (12.2)$$

where ρ , \vec{u} and Γ_i represent coefficients in the transient, convection and diffusion terms, respectively. These coefficients can be arbitrary functions of any parameters or variables in the system. The variable ϕ represents the unknown quantity

in the equation. The diffusion term can represent any higher order diffusion-like term, where the order is given by the exponent n . For example, the diffusion term can represent conventional Fickian diffusion [*i.e.*, $\nabla \cdot (\Gamma \nabla \phi)$] when the exponent $n = 1$ or a Cahn-Hilliard term [*i.e.*, $\nabla \cdot (\Gamma_1 \nabla [\nabla \cdot \Gamma_2 \nabla \phi])$] [18] [19] [20]] when $n = 2$, or a phase field crystal term [*i.e.*, $\nabla \cdot (\Gamma_1 \nabla [\nabla \cdot \Gamma_2 \nabla \{\nabla \cdot \Gamma_3 \nabla \phi\}])$] [21]] when $n = 3$, although spectral methods are probably a better approach. Higher order terms ($n > 3$) are also possible, but the matrix condition number becomes quite poor.

12.2 Finite Volume Method

To use the FVM, the solution domain must first be divided into non-overlapping polyhedral elements or cells. A solution domain divided in such a way is generally known as a mesh (as we will see, a *Mesh* is also a *FiPy* object). A mesh consists of vertices, faces and cells (see Figure *Mesh*). In the FVM the variables of interest are averaged over control volumes (CVs). The CVs are either defined by the cells or are centered on the vertices.

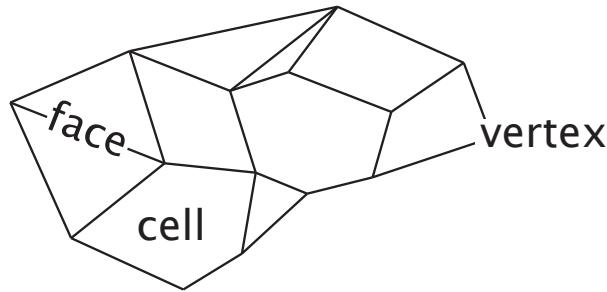


Fig. 1: Mesh

A mesh consists of cells, faces and vertices. For the purposes of *FiPy*, the divider between two cells is known as a face for all dimensions.

12.2.1 Cell Centered FVM (CC-FVM)

In the CC-FVM the CVs are formed by the mesh cells with the cell center “storing” the average variable value in the CV, (see Figure *CV structure for an unstructured mesh*). The face fluxes are approximated using the variable values in the two adjacent cells surrounding the face. This low order approximation has the advantage of being efficient and requiring matrices of low band width (the band width is equal to the number of cell neighbors plus one) and thus low storage requirement. However, the mesh topology is restricted due to orthogonality and conjunctionality requirements. The value at a face is assumed to be the average value over the face. On an unstructured mesh the face center may not lie on the line joining the CV centers, which will lead to an error in the face interpolation. *FiPy* currently only uses the CC-FVM.

Boundary Conditions

The natural boundary condition for CC-FVM is no-flux. For (12.2), the boundary condition is

$$\hat{n} \cdot [\vec{u}\phi - (\Gamma_i \nabla)^n] = 0$$

12.2.2 Vertex Centered FVM (VC-FVM)

In the VC-FVM, the CV is centered around the vertices and the cells are divided into sub-control volumes that make up the main CVs (see Figure [CV structure for an unstructured mesh](#)). The vertices “store” the average variable values over the CVs. The CV faces are constructed within the cells rather than using the cell faces as in the CC-FVM. The face fluxes use all the vertex values from the cell where the face is located to calculate interpolations. For this reason, the VC-FVM is less efficient and requires more storage (a larger matrix band width) than the CC-FVM. However, the mesh topology does not have the same restrictions as the CC-FVM. [FiPy](#) does not have a VC-FVM capability.

12.3 Discretization

The first step in the discretization of Equation (12.2) using the CC-FVM is to integrate over a CV and then make appropriate approximations for fluxes across the boundary of each CV. In this section, each term in Equation (12.2) will be examined separately.

12.3.1 Transient Term $\partial(\rho\phi)/\partial t$

For the transient term, the discretization of the integral \int_V over the volume of a CV is given by

$$\int_V \frac{\partial(\rho\phi)}{\partial t} dV \simeq \frac{(\rho_P\phi_P - \rho_P^{\text{old}}\phi_P^{\text{old}})V_P}{\Delta t} \quad (12.3)$$

where ϕ_P represents the average value of ϕ in a CV centered on a point P and the superscript “old” represents the previous time-step value. The value V_P is the volume of the CV and Δt is the time step size.

This term is represented in [FiPy](#) as

```
>>> TransientTerm(coeff=rho)
```

12.3.2 Convection Term $\nabla \cdot (\vec{u}\phi)$

The discretization for the convection term is given by

$$\begin{aligned} \int_V \nabla \cdot (\vec{u}\phi) dV &= \int_S (\vec{n} \cdot \vec{u})\phi dS \\ &\simeq \sum_f (\vec{n} \cdot \vec{u})_f \phi_f A_f \end{aligned} \quad (12.4)$$

where we have used the divergence theorem to transform the integral over the CV volume \int_V into an integral over the CV surface \int_S . The summation over the faces of a CV is denoted by \sum_f and A_f is the area of each face. The vector \vec{n} is the normal to the face pointing out of the CV into an adjacent CV centered on point A . When using a first order approximation, the value of ϕ_f must depend on the average value in adjacent cell ϕ_A and the average value in the cell of interest ϕ_P , such that

$$\phi_f = \alpha_f \phi_P + (1 - \alpha_f) \phi_A.$$

The weighting factor α_f is determined by the convection scheme, described in [Numerical Schemes](#).

This term is represented in [FiPy](#) as

```
>>> <SpecificConvectionTerm>(coeff=u)
```

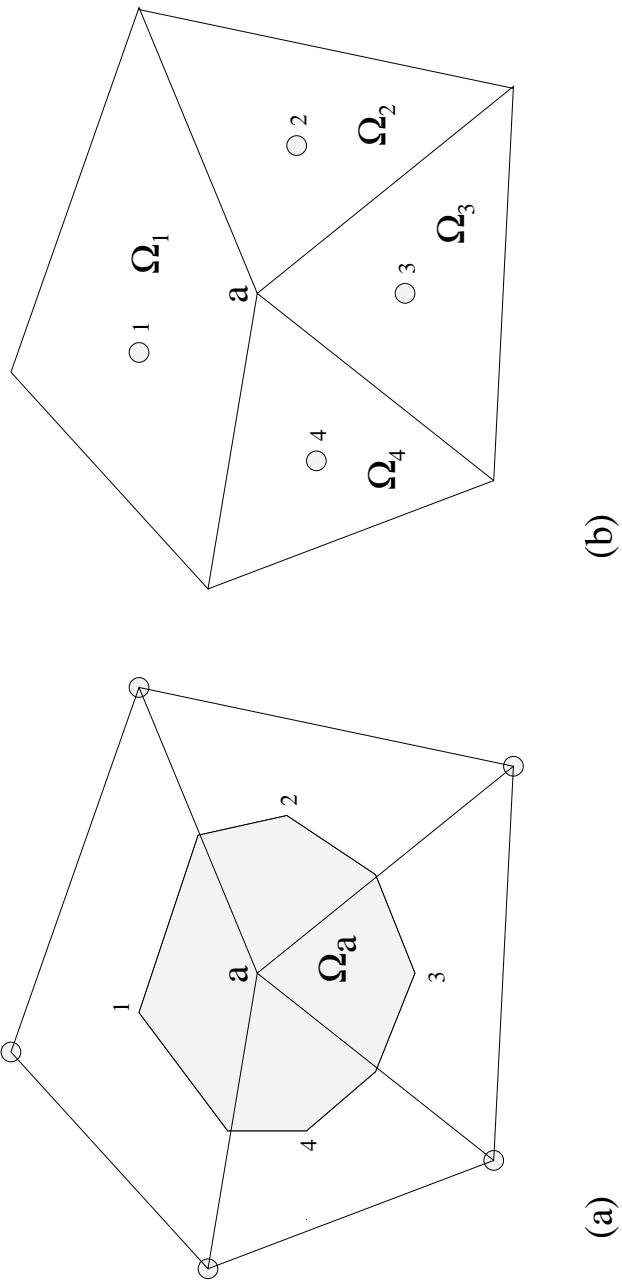


Fig. 2: CV structure for an unstructured mesh
 (a) Ω_a represents a vertex-based CV and (b) Ω_1 , Ω_2 , Ω_3 and Ω_4 represent cell centered CVs.

where `<SpecificConvectionTerm>` can be any of `CentralDifferenceConvectionTerm`, `ExponentialConvectionTerm`, `HybridConvectionTerm`, `PowerLawConvectionTerm`, `UpwindConvectionTerm`, `ExplicitUpwindConvectionTerm`, or `VanLeerConvectionTerm`. The differences between these convection schemes are described in Section [Numerical Schemes](#). The velocity coefficient u must be a rank-1 `FaceVariable`, or a constant vector in the form of a `Python` list or tuple, e.g. `((1,), (2,))` for a vector in 2D.

12.3.3 Diffusion Term $\nabla \cdot (\Gamma_1 \nabla \phi)$

The discretization for the diffusion term is given by

$$\begin{aligned} \int_V \nabla \cdot (\Gamma \nabla \{\dots\}) dV &= \int_S \Gamma(\vec{n} \cdot \nabla \{\dots\}) dS \\ &\simeq \sum_f \Gamma_f (\vec{n} \cdot \nabla \{\dots\})_f A_f \end{aligned} \quad (12.5)$$

$\{\dots\}$ indicates recursive application of the specified operation on ϕ , depending on the order of the diffusion term. The estimation for the flux, $(\vec{n} \cdot \nabla \{\dots\})_f$, is obtained via

$$(\vec{n} \cdot \nabla \{\dots\})_f \simeq \frac{\{\dots\}_A - \{\dots\}_P}{d_{AP}}$$

where the value of d_{AP} is the distance between neighboring cell centers. This estimate relies on the orthogonality of the mesh, and becomes increasingly inaccurate as the non-orthogonality increases. Correction terms have been derived to improve this error but are not currently included in `FiPy` [14].

This term is represented in `FiPy` as

```
>>> DiffusionTerm(coeff=Gamma1)
```

or

```
>>> ExplicitDiffusionTerm(coeff=Gamma1)
```

`ExplicitDiffusionTerm` is provided primarily for illustrative purposes, although `examples.diffusion.mesh1D` demonstrates its use in Crank-Nicolson time stepping. `ImplicitDiffusionTerm` is almost always preferred (`DiffusionTerm` is a synonym for `ImplicitDiffusionTerm` to reinforce this preference). One can also create an explicit diffusion term with

```
>>> (Gamma1 * phi.faceGrad).divergence
```

Higher Order Diffusion

Higher order diffusion expressions, such as $\nabla^4 \phi$ or $\nabla \cdot (\Gamma_1 \nabla (\nabla \cdot (\Gamma_2 \nabla \phi)))$ for Cahn-Hilliard are represented as

```
>>> DiffusionTerm(coeff=(Gamma1, Gamma2))
```

The number of elements supplied for `coeff` determines the order of the term.

Note: While this multiple-coefficient form is still supported, `Coupled and Vector Equations` are the recommended approach for higher order expressions.

12.3.4 Source Term

Any term that cannot be written in one of the previous forms is considered a source S_ϕ . The discretization for the source term is given by,

$$\int_V S_\phi dV \simeq S_\phi V_P. \quad (12.6)$$

Including any negative dependence of S_ϕ on ϕ increases solution stability. The dependence can only be included in a linear manner so Equation (12.6) becomes

$$V_P(S_0 + S_1\phi_P),$$

where S_0 is the source which is independent of ϕ and S_1 is the coefficient of the source which is linearly dependent on ϕ .

A source term is represented in *FiPy* essentially as it appears in mathematical form, *e.g.*, $3\kappa^2 + b \sin \theta$ would be written

```
>>> 3 * kappa**2 + b * numerix.sin(theta)
```

Note: Functions like `sin()` can be obtained from the `fipy.tools.numerix` module.

Warning: Generally, things will not work as expected if the equivalent function is used from the *NumPy* or *SciPy* library.

If, however, the source depends on the variable that is being solved for, it can be advantageous to linearize the source and cast part of it as an implicit source term, *e.g.*, $3\kappa^2 + \phi \sin \theta$ might be written as

```
>>> 3 * kappa**2 + ImplicitSourceTerm(coeff=sin(theta))
```

12.4 Linear Equations

The aim of the discretization is to reduce the continuous general equation to a set of discrete linear equations that can then be solved to obtain the value of the dependent variable at each CV center. This results in a sparse linear system that requires an efficient iterative scheme to solve. The iterative schemes available to *FiPy* are currently encapsulated in the *Pysparse* and *PyTrilinos* suites of solvers and include most common solvers such as the conjugate gradient method and LU decomposition.

Combining Equations (12.3), (12.4), (12.5) and (12.6), the complete discretization for equation (12.2) can now be written for each CV as

$$\begin{aligned} & \frac{\rho_P(\phi_P - \phi_P^{\text{old}})V_P}{\Delta t} + \sum_f (\vec{n} \cdot \vec{u})_f A_f [\alpha_f \phi_P + (1 - \alpha_f) \phi_A] \\ &= \sum_f \Gamma_f A_f \frac{(\phi_A - \phi_P)}{d_{AP}} + V_P(S_0 + S_1\phi_P). \end{aligned}$$

Equation (12.7) is now in the form of a set of linear combinations between each CV value and its neighboring values and can be written in the form

$$a_P \phi_P = \sum_f a_A \phi_A + b_P, \quad (12.7)$$

where

$$\begin{aligned} a_P &= \frac{\rho_P V_P}{\Delta t} + \sum_f (a_A + F_f) - V_P S_1, \\ a_A &= D_f - (1 - \alpha_f) F_f, \\ b_P &= V_P S_0 + \frac{\rho_P V_P \phi_P^{\text{old}}}{\Delta t}. \end{aligned}$$

The face coefficients, F_f and D_f , represent the convective strength and diffusive conductance respectively, and are given by

$$\begin{aligned} F_f &= A_f (\vec{u} \cdot \vec{n})_f, \\ D_f &= \frac{A_f \Gamma_f}{d_{AP}}. \end{aligned}$$

12.5 Numerical Schemes

The coefficients of equation (12.7) must remain positive, since an increase in a neighboring value must result in an increase in ϕ_P to obtain physically realistic solutions. Thus, the inequalities $a_A > 0$ and $a_A + F_f > 0$ must be satisfied. The Péclet number $P_f \equiv F_f/D_f$ is the ratio between convective strength and diffusive conductance. To achieve physically realistic solutions, the inequality

$$\frac{1}{1 - \alpha_f} > P_f > -\frac{1}{\alpha_f} \quad (12.8)$$

must be satisfied. The parameter α_f is defined by the chosen scheme, depending on Equation (12.8). The various differencing schemes are:

the central differencing scheme,

where

$$\alpha_f = \frac{1}{2} \quad (12.9)$$

so that $|P_f| < 2$ satisfies Equation (12.8). Thus, the central differencing scheme is only numerically stable for a low values of P_f .

the upwind scheme,

where

$$\alpha_f = \begin{cases} 1 & \text{if } P_f > 0, \\ 0 & \text{if } P_f < 0. \end{cases} \quad (12.10)$$

Equation (12.10) satisfies the inequality in Equation (12.8) for all values of P_f . However the solution over predicts the diffusive term leading to excessive numerical smearing (“false diffusion”).

the exponential scheme,

where

$$\alpha_f = \frac{(P_f - 1) \exp(P_f) + 1}{P_f(\exp(P_f) - 1)}. \quad (12.11)$$

This formulation can be derived from the exact solution, and thus, guarantees positive coefficients while not over predicting the diffusive terms. However, the computation of exponentials is slow and therefore a faster scheme is generally used, especially in higher dimensions.

the hybrid scheme,

where

$$\alpha_f = \begin{cases} \frac{P_f - 1}{P_f} & \text{if } P_f > 2, \\ \frac{1}{2} & \text{if } |P_f| < 2, \\ -\frac{1}{P_f} & \text{if } P_f < -2. \end{cases} \quad (12.12)$$

The hybrid scheme is formulated by allowing $P_f \rightarrow \infty$, $P_f \rightarrow 0$ and $P_f \rightarrow -\infty$ in the exponential scheme. The hybrid scheme is an improvement on the upwind scheme, however, it deviates from the exponential scheme at $|P_f| = 2$.

the power law scheme,

where

$$\alpha_f = \begin{cases} \frac{P_f - 1}{P_f} & \text{if } P_f > 10, \\ \frac{(P_f - 1) + (1 - P_f/10)^5}{P_f} & \text{if } 0 < P_f < 10, \\ \frac{(1 - P_f/10)^5 - 1}{P_f} & \text{if } -10 < P_f < 0, \\ -\frac{1}{P_f} & \text{if } P_f < -10. \end{cases} \quad (12.13)$$

The power law scheme overcomes the inaccuracies of the hybrid scheme, while improving on the computational time for the exponential scheme.

Warning: *VanLeerConvectionTerm* not mentioned and no discussion of explicit forms.

All of the numerical schemes presented here are available in *FiPy* and can be selected by the user.

Chapter 13

Design and Implementation

The goal of *FiPy* is to provide a highly customizable, open source code for modeling problems involving coupled sets of PDEs. *FiPy* allows users to select and customize modules from within the framework. *FiPy* has been developed to address model problems in materials science such as poly-crystals, dendritic growth and electrochemical deposition. These applications all contain various combinations of PDEs with differing forms in conjunction with other unusual physics (over varying length scales) and unique solution procedures. The philosophy of *FiPy* is to enable customization while providing a library of efficient modules for common objects and data types.

13.1 Design

13.1.1 Numerical Approach

The solution algorithms given in the *FiPy* examples involve combining sets of PDEs while tracking an interface where the parameters of the problem change rapidly. The phase field method and the level set method are specialized techniques to handle the solution of PDEs in conjunction with a deforming interface. *FiPy* contains several examples of both methods.

FiPy uses the well-known Finite Volume Method (FVM) to reduce the model equations to a form tractable to linear solvers.

13.1.2 Object Oriented Structure

FiPy is programmed in an object-oriented manner. The benefit of object oriented programming mainly lies in encapsulation and inheritance. Encapsulation refers to the tight integration between certain pieces of data and methods that act on that data. Encapsulation allows parts of the code to be separated into clearly defined independent modules that can be re-applied or extended in new ways. Inheritance allows code to be reused, overridden, and new capabilities to be added without altering the original code. An object is treated by its users as an abstraction; the details of its implementation and behavior are internal.

13.1.3 Test Based Development

FiPy has been developed with a large number of test cases. These test cases are in two categories. The lower level tests operate on the core modules at the individual method level. The aim is that every method within the core installation has a test case. The high level test cases operate in conjunction with example solutions and serve to test global solution algorithms and the interaction of various modules.

With this two-tiered battery of tests, at any stage in code development, the test cases can be executed and errors can be identified. A comprehensive test base provides reassurance that any code breakages will be clearly demonstrated with a broken test case. A test base also aids dissemination of the code by providing simple examples and knowledge of whether the code is working on a particular computer environment.

13.1.4 Open Source

In recent years, there has been a movement to release software under open source and associated unrestricted licenses, especially within the scientific community. These licensing terms allow users to develop their own applications with complete access to the source code and then either contribute back to the main source repository or freely distribute their new adapted version.

As a product of the National Institute of Standards and Technology, the *FiPy* framework is placed in the public domain as a matter of U. S. Federal law. Furthermore, *FiPy* is built upon existing open source tools. Others are free to use *FiPy* as they see fit and we welcome contributions to make *FiPy* better.

13.1.5 High-Level Scripting Language

Programming languages can be broadly lumped into two categories: compiled languages and interpreted (or scripting) languages. Compiled languages are converted from a human-readable text source file to a machine-readable binary application file by a sequence of operations generally referred to as “compiling” and “linking.” The binary application can then be run as many times as desired, but changes will provoke a new cycle of compiling and linking. Interpreted languages are converted from human-readable to machine-readable on the fly, each time the script is executed. Because the conversion happens every time¹, interpreted code is usually slower when running than compiled code. On the other hand, code development and debugging tends to be much easier and fluid when it’s not necessary to wait for compile and link cycles after every change. Furthermore, because the conversion happens in real time, it is possible to have interactive sessions in a scripting language that are not generally possible in compiled languages.

Another distinction, somewhat orthogonal, but closely related, to that between compiled and interpreted languages, is between low-level languages and high-level languages. Low-level languages describe actions in simple terms that are closer to the way the computer actually functions. High-level languages describe actions in more complex and abstract terms that are closer to the way the programmer thinks about the problem at hand. This increased complexity in the meaning of an expression renders simpler code, because the details of the implementation are hidden away in the language internals or in an external library. For example, a low-level matrix multiplication written in C might be rendered as

```
if (Acols != Brows)
    error "these matrix shapes cannot be multiplied";

C = (float *) malloc(sizeof(float) * Bcols * Arows);

for (i = 0; i < Bcols; i++) {
    for (j = 0; j < Arows; j++) {
        C[i][j] = 0;
        for (k = 0; k < Acols; k++) {
```

(continues on next page)

¹ ... neglecting such common optimizations as byte-code interpreters.

(continued from previous page)

```

        C[i][j] += A[i][k] * B[k][j];
    }
}
}
```

Note that the dimensions of the arrays must be supplied externally, as C provides no intrinsic mechanism for determining the shape of an array. An equivalent high-level construction might be as simple as

```
C = A * B
```

All of the error checking, dimension measuring, and space allocation is handled automatically by low-level code that is intrinsic to the high-level matrix multiplication operator. The high-level code “knows” that matrices are involved, how to get their shapes, and to interpret “`*`” as a matrix multiplier instead of an arithmetic one. All of this allows the programmer to think about the operation of interest and not worry about introducing bugs in low-level code that is not unique to their application.

Although it needn’t be true, for a variety of reasons, compiled languages tend to be low-level and interpreted languages tend to be high-level. Because low-level languages operate closer to the intrinsic “machine language” of the computer, they tend to be faster at running a given task than high-level languages, but programs written in them take longer to write and debug. Because running performance is a paramount concern, most scientific codes are written in low-level compiled languages like FORTRAN or C.

A rather common scenario in the development of scientific codes is that the first draft hard-codes all of the problem parameters. After a few (hundred) iterations of recompiling and relinking the application to explore changes to the parameters, code is added to read an input file containing a list of numbers. Eventually, the point is reached where it is impossible to remember which parameter comes in which order or what physical units are required, so code is added to, for example, interpret a line beginning with “`#`” as a comment. At this point, the scientist has begun developing a scripting language without even knowing it. Unfortunately for them, very few scientists have actually studied computer science or actually know anything about the design and implementation of script interpreters. Even if they have the expertise, the time spent developing such a language interpreter is time not spent actually doing research.

In contrast, a number of very powerful scripting languages, such as Tcl, Java, Python, Ruby, and even the venerable BASIC, have open source interpreters that can be embedded directly in an application, giving scientific codes immediate access to a high-level scripting language designed by someone who actually knew what they were doing.

We have chosen to go a step further and not just embed a full-fledged scripting language in the *FiPy* framework, but instead to design the framework from the ground up in a scripting language. While runtime performance is unquestionably important, many scientific codes are run relatively little, in proportion to the time spent developing them. If a code can be developed in a day instead of a month, it may not matter if it takes another day to run instead of an hour. Furthermore, there are a variety of mechanisms for diagnosing and optimizing those portions of a code that are actually time-critical, rather than attempting to optimize all of it by using a language that is more palatable to the computer than to the programmer. Thus *FiPy*, rather than taking the approach of writing the fast numerical code first and then dealing with the issue of user interaction, initially implements most modules in high-level scripting language and only translates to low-level compiled code those portions that prove inefficient².

² A discussion of efficiency issues can be found in [Efficiency](#).

13.1.6 Python Programming Language

Acknowledging that several scripting languages offer a number, if not all, of the features described above, we have selected *Python* for the implementation of *FiPy*. Python is

- an interpreted language that combines remarkable power with very clear syntax,
- freely usable and distributable, even for commercial use,
- fully object oriented,
- distributed with powerful automated testing tools (`doctest`, `unittest`),
- actively used and extended by other scientists and mathematicians (*SciPy*, *NumPy*, *ScientificPython*, *Pysparse*).
- easily integrated with low-level languages such as C (`weave`, `blitz`, *PyRex*).

13.2 Implementation

The *Python* classes that make up *FiPy* are described in detail in *fipy Package Documentation*, but we give a brief overview here. *FiPy* is based around three fundamental *Python* classes: *Mesh*, *Variable*, and *Term*. Using the terminology of *Theoretical and Numerical Background*:

A *Mesh* object

represents the domain of interest. *FiPy* contains many different specific mesh classes to describe different geometries.

A *Variable* object

represents a quantity or field that can change during the problem evolution. A particular type of *Variable*, called a *CellVariable*, represents ϕ at the centers of the cells of the *Mesh*. A *CellVariable* describes the values of the field ϕ , but it is not concerned with their geometry; that role is taken by the *Mesh*.

An important property of *Variable* objects is that they can describe dependency relationships, such that:

```
>>> a = Variable(value = 3)
>>> b = a * 4
```

does not assign the value 12 to *b*, but rather it assigns a multiplication operator object to *b*, which depends on the *Variable* object *a*:

```
>>> b
(Variable(value = 3) * 4)
>>> a.setValue(5)
>>> b
(Variable(value = 5) * 4)
```

The numerical value of the *Variable* is not calculated until it is needed (a process known as “lazy evaluation”):

```
>>> print b
20
```

A *Term* object

represents any of the terms in Equation (12.2) or any linear combination of such terms. Early in the development of *FiPy*, a distinction was made between *Equation* objects, which represented all of Equation (12.2), and *Term* objects, which represented the individual terms in that equation. The *Equation* object has since been eliminated as redundant. *Term* objects can be single entities such as a *DiffusionTerm* or a linear combination of other *Term* objects that build up to form an expression such as Equation (12.2).

Beyond these three fundamental classes of `Mesh`, `Variable`, and `Term`, *FiPy* is composed of a number of related classes.

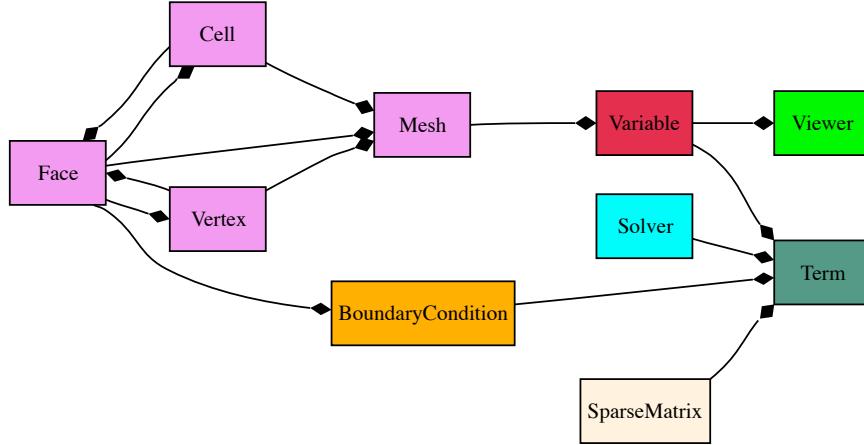


Fig. 1: Primary object relationships in *FiPy*.

A `Mesh` object is composed of cells. Each cell is defined by its bounding faces and each face is defined by its bounding vertices. A `Term` object encapsulates the contributions to the `_SparseMatrix` that defines the solution of an equation. `BoundaryCondition` objects are used to describe the conditions on the boundaries of the `Mesh`, and each `Term` interprets the `BoundaryCondition` objects as necessary to modify the `_SparseMatrix`. An equation constructed from `Term` objects can apply a unique `Solver` to invert its `_SparseMatrix` in the most expedient and stable fashion. At any point during the solution, a `Viewer` can be invoked to display the values of the solved `Variable` objects.

At this point, it will be useful to examine some of the example problems in `Examples`. More classes are introduced in the examples, along with illustrations of their instantiation and use.

Chapter 14

Virtual Kinetics of Materials Laboratory

The VKML is a set of simple *FiPy* examples that simulate basic aspects of kinetics of materials through an interactive Graphical User Interface. The seminal development by Michael Waters and Prof. R. Edwin Garcia of Purdue University includes four examples:

Poly-crystalline Growth and Coarsening

simulates the growth, impingement, and coarsening of a random distribution of crystallographically oriented nuclei. The user can control every aspect of the model such as the nuclei radius, the size of the simulation cell, and whether the grains are homogeneously dispersed or only on one wall of the simulation.

Dendritic Growth

simulates the anisotropic solidification of a single solid seed with an N-fold axis of crystallographic symmetry embedded in an undercooled liquid. The user can specify many material aspects of the solidification process, such as the thermal diffusivity and the strength of the surface tension anisotropy. Default values are physical but arbitrary. This model is based on the phase field method and an example shown in the *FiPy* manual.

Two-Dimensional Spinodal Decomposition

simulates the time-dependent segregation of two chemical components and its subsequent coarsening, as presented by John Cahn. The default values are physical but arbitrary.

Three-Dimensional Spinodal Decomposition

has the same functionality as the 2D version, but has an interactive Three-Dimensional viewer.

These modules provide a Graphical User Interface to *FiPy*, and allow you to perform simulations directly through your web browser. This approach to computing removes the need to install the software on your local machine (unless you really want to), allows you to assess current and potential *FiPy* applications and instead you only need a web browser to access it and run it. In other words, you can run these simulations (and simulations like this one) from a Windows machine, a Mac, or a Linux box, and you can also run the modules from Michigan, Boston, Japan, or England: from wherever you are. Moreover, if you close your web browser and leave your calculation running, when you come back a few hours later, your calculation will persist. Additionally, if there is something you want to share with a coworker, wherever he or she might be (e.g., the other side of the planet), you can grant him temporary access to your calculation so that the third party can directly see the output (or specify inputs directly into it, without having to travel to where you are). It is a great way to privately (or publicly) collaborate with other people, especially if the users are in different parts of the world.

The only requirement to run VKML is to register (registration is 100% free) in the [nanoHUB](#).

Chapter 15

Contributors

Jon Guyer

is a member of the research staff of the Materials Science and Engineering Division in the Material Measurement Laboratory at the National Institute of Standards and Technology. Jon's computational interests are in object-oriented design and in phase field modeling of electrochemistry.

Daniel Wheeler

is a guest researcher in the Materials Science and Engineering Division in the Material Measurement Laboratory at the National Institute of Standards and Technology. Daniel's interests are in numerical modeling, finite volume techniques, and level set treatments.

Jim Warren

is the leader of the Thermodynamics and Kinetics group in the Materials Science and Engineering Division and Director of the Center for Theoretical and Computational Materials Science of the Material Measurement Laboratory at the National Institute of Standards and Technology. Jim is interested in a variety of problems, including the phase field modeling of solidification, polycrystalline solids, and the electrochemical interface.

Alex Mont

developed the *PyxViewer* and the *Gmsh* import and export modules while he was a student at Montgomery Blair High School.

Katie Travis

developed the automated *--inline* optimization code for Variable objects while she was a SURF student from Smith College.

Max Gibiansky

added support for the *Trilinos* solvers while he was a SURF student from Harvey Mudd College

Andrew Reeve

added support for anisotropic diffusion coefficients while he was on sabbatical from the University of Maine.

Olivia Buzek

worked on adding *Trilinos* parallel computations while she was a SURF student from the University of Maryland

Daniel Stiles

worked on adding *Trilinos* parallel computations while he was a student at Montgomery Blair High School.

James O'Beirne

added full mesh partitioning using *Gmsh*. James also greatly improved the *Gmsh-FiPy* pipeline. Other contributions include updating *FiPy* to use properties pervasively, deployment of a *Buildbot* server to automate *FiPy* testing and a full refactor of the Mesh classes.

Chapter 16

Publications

Attention: If you use FiPy in your research, please cite:

J. E. Guyer, D. Wheeler & J. A. Warren, “FiPy: Partial Differential Equations with Python,” *Computing in Science & Engineering* **11** (3) pp. 6-15 (2009), doi:10.1109/MCSE.2009.52. (pdf)

Other publications that have used FiPy. Please contact us to add your work to this list.

- D. Wheeler, and J. A. Warren & W. J. Boettinger, “Modeling the early stages of reactive wetting” *Physical Review E* **82** (5) pp. 051601 (2010), doi:10.1103/PhysRevE.82.051601.
- R. R. Mohanty, J. E. Guyer & Y. H. Sohn, “Diffusion under temperature gradient: A phase-field model study” *Journal of Applied Physics* **106** (3) pp. 034912 (2009), doi:10.1063/1.3190607.
- J. A. Warren, T. Pusztai, L. Környei & L. Gránásy, “Phase field approach to heterogeneous crystal nucleation in alloys,” *Physical Review B* **79** 014204 (2009), doi:10.1103/PhysRevB.79.014204.
- T. P. Moffat, D. Wheeler, S.-K. Kim & D. Josell, “Curvature enhanced adsorbate coverage mechanism for bottom-up superfilling and bump control in Damascene processing,” *Electrochimica Acta* **53** (1) pp. 145-154 (2007), doi:10.1016/j.electacta.2007.03.025.
- W. J. Boettinger, J. E. Guyer, C. E. Campbell, G. B. McFadden, “Computation of the Kirkendall velocity and displacement fields in a one-dimensional binary diffusion couple with a moving interface,” *Proceedings of the Royal Society A: Mathematical, Physical & Engineering Sciences* **463** (2008) pp. 3347-3373 (2007), doi:10.1098/rspa.2007.1904.
- T. Cickovski, K. Aras, M. Swat, R. M. H. Merks, T. Glimm, H. G. E. Hentschel, M. S. Alber, J. A. Glazier, S. A. Newman & J. A. Izaguirre, “From Genes to Organisms Via the Cell: A Problem-Solving Environment for Multicellular Development,” *Computing in Science & Engineering* **9** (4) pp. 50-60 (2007), doi:10.1109/MCSE.2007.74.
- L. Gránásy, T. Pusztai, D. Saylor & J. A. Warren, “Phase Field Theory of Heterogeneous Crystal Nucleation,” *Physical Review Letters* **98** 035703 (2007) 10.1103/PhysRevLett.98.035703.
- J. Mazur, “Numerical Simulation of Temperature Field in Soil Generated by Solar Radiation,” *Journal de Physique IV France* **137** pp. 317-320 (2006), doi:10.1051/jp4:2006137061.
- T. P. Moffat, D. Wheeler, S. K. Kim & D. Josell, “Curvature enhanced adsorbate coverage model for electrodeposition,” *Journal of The Electrochemical Society* **153** (2) pp. C127-C132 (2006), 10.1149/1.2165580.

- D. Josell, D. Wheeler & T. P. Moffat, “Gold superfill in submicrometer trenches: Experiment and prediction,” *Journal of The Electrochemical Society* **153** (1) pp. C11-C18 (2006), [10.1149/1.2128765](https://doi.org/10.1149/1.2128765).

Chapter 17

Presentations

We were honored to be invited to deliver a keynote presentation on “[Modeling of Materials with Python](#)” at the [2009 Python for Scientific Computing Conference](#) at Caltech, August 2009.

Other invited talks about FiPy:

- “FiPy: An Open Source Finite Volume PDE Solver Implemented in Python” by J. E. Guyer at the George Mason University Department of Mathematical Sciences, October 2009.
- “FiPy: An Open-Source PDE Solver for Materials Science” by J. E. Guyer at the Center for Devices and Radio logical Health of the Food and Drug Administration, June 2009.
- “FiPy: An Open-Source PDE Solver for Materials Science” by J. E. Guyer at GE Global Research, June 2009.
- “FiPy: A PDE Solver for Materials Science” by J. E. Guyer at the SIAM Conference on Computational Science and Engineering, March 2009.
- “FiPy: An Open Source Finite Volume PDE Solver Implemented in Python” by J. E. Guyer in the Open Source Tools for Materials Research and Engineering session of the TMS 2009 Annual Meeting, February 2009.
- “FiPy: A Finite Volume PDE Solver Implemented in Python” by J. E. Guyer in the Computational Materials Research and Education Luncheon Roundtable of the TMS Annual Meeting, February 2009.
- “FiPy - An Object-Oriented Tool for Phase Transformation Simulations Using Python” by J. E. Guyer at Mi crostructology III, Birmingham, AL, May 2005.
- “FiPy - An Object-Oriented Tool for Phase Transformation Simulations Using Python” by J. E. Guyer at the 2004 MRS Fall Meeting, November 2004.

Chapter 18

Change Log

18.1 Version 3.4.4+8.gfc6e8a3fb

This maintenance release adds [Logging](#) and resolves compatibility issues with recent builds of [PETSc](#) and [NumPy](#).

18.1.1 Pulls

- Fix numpy 1.25 issues ([#930](#))
- Get CI working again ([#925](#))
- Discourage StackOverflow ([#876](#))
- Add Logging ([#875](#))
- Add tests for the Nix build ([#791](#))

18.1.2 Fixes

- [#896](#): Poor garbage collection with petsc4py 3.18.3 (was “Memory leak in `term.justErrorVector()`”, but this isn’t strictly a leak)

18.2 Version 3.4.3 - 2022-06-15

This maintenance release adds a new example contributed by [@Jon83Carvalho](#), clarifies many points in the documentation, migrates all [Continuous Integration](#) to [Azure](#), updates to using [wheels](#) for distribution, and substantially refactors matrices to work more consistently across solvers.

18.2.1 Pulls

- Update CI documentation to refer only to Azure (#863)
- Refine azure runs (#851)
- Debug CIs (#848)
- Collect contact information on single page (#847)
- Set up CI with Azure Pipelines (#822)
- Replace deprecated numpy types (#798)
- Move trilinos tests to Py3k (#797)
- Fix Python 2.7 conda environment (#795)
 - fix: stop divide by zero warning in LU solvers (#790)
- Introduce *SharedTemporaryFile* (bis) (#769)
- Raise *ImportError* before trying to unpack solvers (#768)
- Disable TVTK tests if its prerequisites aren't met (#764)
- Tabulate versions of FiPy dependencies when tests are run (#763)
- Debug CI failures (#749)
- Stokes Cavity - non-Newtonian (#748) Thanks to @Jon83Carvalho.
- Refactor matrices (#721)

18.2.2 Fixes

- #862: Could not load the Qt platform plugin “xcb”
- #858: CI issues
- #856: *FaceVariable* does not accumulate properly in parallel
- #850: Switch to wheels
- #849: *linux-py27-pysparse* fails
- #841: *Matplotlib2DViewer* should accept color map as string
- #836: Document that coupled and high-order diffusion terms are incompatible
- #833: *fipy.tools.dump* undocumented that it always gzips
- #828: *colorbar=True* no longer works Stokes flow example
- #826: Gmsh load issue
- #818: Document that *GridND* meshes are always Cartesian
- #811: In python 3.9 `__repr__` throws an exception with abs
- #801: CircleCI test-36-trilinos-serial extremely slow
- #800: CircleCI conda2_env is really slow and ends up installing FiPy 3.3
- #796: *examples.phase.polyxtal* freezes on CircleCI with Py3k and scipy solvers
- #792: *circleQuad* example fails with Gmsh > 4.4

- #781: *MatplotlibViewer.axes* property is not documented
- #778: Binder failed build
- #762: Equations on Website don't show right
- #742: No documentation for *Variable.mag*
- #735: *pip install fipy* fails
- #734: Document the residual
- #688: try-except not needed for circle Viewer
- #676: Default no-flux condition is not explicitly stated
- #609: Parallelizing of Gmsh meshes not clearly documented
- #400: Fix *FaceVariable.globalValue* method

18.3 Version 3.4.2.1 - 2020-08-01

This release fixes assorted viewer issues, fixes a problem with convection boundary conditions, and introduces spherical meshes.

Attention: There are known failures with the VTK viewers (bitrot has started to set in since the demise of Python 2.7). There's also a new parallel failure in *NonUniformGrid1D* that we need to figure out.

18.3.1 Pulls

- Move mailing list (#747)
- *Spherical1D* (*Uniform* and *NonUniform*) meshes (#732) Thanks to @klkuhlsm.
- fix Neumann BCs using constraints with convection terms (#719) Thanks to @atismer.
- Add vertex index inversions (#716)

18.3.2 Fixes

- #726: *MayaviClient* not compatible with Python 3
- #663: *datamin/datamax* argument ignored by viewer
- #662: Issues Scaling *Colorbar* with *Datamin* and *Datamax* Args

18.4 Version 3.4.1 - 2020-02-14

This release is primarily for compatibility with `numpy` 1.18.

18.4.1 Pulls

- Fix documentation (#711)
- build(nix): fix broken plm_rsh_agent error (#710)
- CIs error on deprecation warning (#708)

18.4.2 Fixes

- #703: FORTRAN array ordering is deprecated

18.5 Version 3.4 - 2020-02-06

This release adds support for the `PETSc` solvers for *Solving in Parallel*.

18.5.1 Pulls

- Add support for PETSc solvers (#701)
- Assorted fixes while supporting PETSc (#700) - Fix print statements for Py3k - Resolve Gmsh issues - Dump only on processor 0 - Only write *timetests* on processor 0 - Fix conda-forge link - Upload PDF - Document *print* option of `FIPY_DISPLAY_MATRIX` - Use legacy numpy formatting when testing individual modules - Switch to matplotlib's built-in symlog scaling - Clean up tests
- Assorted fixes for benchmark 8 (#699) - Stipulate `--force` option for `conda remove fipy` - Update Miniconda installation url - Replace `_CellVolumeAverageVariable` class with `Variable` expression - Fix output for bad call stack
- Make CircleCI build docs on Py3k (#698)
- Fix link to Nick Croft's thesis (#681)
- Fix NIST header footer (#680)
- Use Nixpkgs version of FiPy expression (#661)
- Update the Nix recipe (#658)

18.5.2 Fixes

- #692: Can't copy example scripts with the command line
- #669: `input()` deadlock on parallel runs
- #643: Automate release process

18.6 Version 3.3 - 2019-06-28

This release brings support for Python 2 and Python 3 from the same source, without any translation. Thanks to [@pya](#) and [@woodscn](#) for getting things started.

18.6.1 Pulls

- Automate spell check ([#657](#))
- Fix gmsh on windows ([#648](#))
- Fix sphinx documentation ([#647](#))
- Migrate to Py3k ([#645](#))
- *gmshMesh.py* compatibility with Gmsh > 3.0.6 ([#644](#)) Thanks to [@xfong](#).

18.6.2 Fixes

- [#655](#): When Python 2 and 3 are installed, Mayavi wont work. Thanks to [@Hendrik410](#).
- [#646](#): Deprecate develop branch
- [#643](#): Automate release process
- [#601](#): `contents.rst` and `manual.rst` are a recursive mess
- [#597](#): Use GitHub link for the compressed archive in documentation
- [#557](#): *faceGradAverage* is stupid
- [#552](#): documentation integration
- [#458](#): Documentation wrong for precedence of *Lx* and *dx* for *NonUniformGrids*
- [#457](#): Special methods are not included in Sphinx documentation
- [#432](#): Python 3 issues
- [#340](#): Don't upload packages to PyPI, just add the master url

18.7 Version 3.2 - 2019-04-22

This is predominantly a DevOps release. The focus has been on making FiPy easier to install with [conda](#). It's also possible to install a minimal set of prerequisites with [pip](#). Further, [FiPy](#) is automatically tested on all major platforms using cloud-based [Continuous Integration](#) (*linux* with [CircleCI](#), *macOS* with [TravisCI](#), and *Windows* with [AppVeyor](#)).

18.7.1 Pulls

- Make badges work in GitHub and pdf (#636)
- Fix Robin errors (#615)
- Issue555 inclusive license (#613)
- Update CIs (#607)
- Add CHANGELOG and tool to generate from issues and pull requests (#600)
- Explain where to get examples (#596)
- spelling corrections using en_US dictionary (#594)
- Remove *SmoothedAggregationSolver* (#593)
- Nix recipe for FiPy (#585)
- Point PyPI to github master tarball (#582)
- Revise Navier-Stokes expression in the viscous limit (#580)
- Update *stokesCavity.py* (#579) Thanks to @Rowin.
- Add *-inline* to TravisCI tests (#578)
- Add support for binder (#577)
- Fix *epetra vector not numarray* (#574)
- add Codacy badge (#572)
- Fix output when PyTrilinos or PyTrilinos version is unavailable (#570) Thanks to @shwina.
- Fix check for PyTrilinos (#569) Thanks to @shwina.
- Adding support for GPU solvers via pyamgx (#567) Thanks to @shwina.
- revise dedication to the public domain (#556)
- Fix tests that don't work in parallel (#550)
- add badges to index and readme (#546)
- Ensure vector is *dtype* float before matrix multiply (#544)
- Revert “Issue534 physical field mishandles compound units” (#536)
- Document boundary conditions (#532)
- Deadlocks and races (#524)
- Make max/min global (#520)
- Add a Gitter chat badge to README.rst (#516) Thanks to @gitter-badger.
- Add TravisCI build recipe (#489)

18.7.2 Fixes

- #631: Clean up INSTALLATION.rst
- #628: Problems with the viewer
- #627: Document OMP_NUM_THREADS
- #625: *setup.py* should not import fipy
- #623: Start using *versioneer*
- #621: Plot *FaceVariable* with matplotlib
- #617: Pick 1st Value and last Value of 1D *CellVariable* while running in parallel
- #611: The coefficient cannot be a *FaceVariable* ??
- #610: Anisotropy example: Contour plot displaying in legend of figure !?
- #608: *var.mesh*: *Property* object not callable... ?
- #603: Can't run basic test or examples
- #602: Revise build and release documentation
- #592: is *resources.rst* useful?
- #590: No module named *pyAMGSolver*
- #584: Viewers don't animate in jupyter notebook
- #566: Support for GPU solvers using pyamgx
- #565: pip install does not work on empty env
- #564: Get green boxes across the board
- #561: Cannot cast array data from *dtype('int64')* to *dtype('int32')* according to the rule *safe*
- #555: inclusive license
- #551: Sphinx spews many warnings:
- #545: Many Py3k failures
- #543: Epetra Vector can't be integer
- #539: *examples/diffusion/explicit/mixedElement.py* is a mess
- #538: badges
- #534: *PhysicalField* mishandles compound units
- #533: pip or conda installation don't make clear where to get examples
- #531: *drop_tol* argument to *scipy.sparse.linalg.splu* is gone
- #530: conda installation instructions not explicit about python version
- #528: scipy 1.0.0 incompatibilities
- #525: conda *guyer/pysparse* doesn't run on osx
- #513: Stokes example gives wrong equation
- #510: Weave, Scipy and *-inline*
- #509: Unable to use conda for installing FiPy in Windows
- #506: Error using spatially varying anisotropic diffusion coefficient

- #488: Gmsh 2.11 breaks *GmshGrids*
- #435: *pip install pysparse* fails with “fatal error: ‘spmatrix.h’ file not found”
- #434: *pip install fipy* fails with “*ImportError: No module named ez_setup*”

18.8 Version 3.1.3 - 2017-01-17

18.8.1 Fixes

- #502: gmane is defunct

18.9 Version 3.1.2 - 2016-12-24

18.9.1 Pulls

- remove *recvobj* from calls to *allgather*, require *sendobj* (#492)
- restore trailing whitespace to expected output of pysparse matrix tests (#485)
- Format version string for pep 440 (#483)
- Provide some documentation for what *_faceToCellDistanceRatio* is and why it’s scalar (#481)
- Strip all trailing white spaces and empty lines at EOF for .py and .r? (#479) Thanks to @pya.
- *fipy/meshes/uniformGrid3D.py*: fix *_cellToCellIDs* and more *concatenate()* calls (#478) Thanks to @pkgw.
- Remove incorrect *axis* argument to *concatenate* (#477)
- Updated to NumPy 1.10 (#472) Thanks to @pya.
- Some spelling corrections (#471) Thanks to @pkgw.
- Sort entry points by package name before testing. (#469)
- Update import syntax in examples (#466)
- Update links to prerequisites (#465)
- Correct implementation of *examples.cahnHilliard.mesh2DCoupled*. Fixes ? (#463)
- Fix typeset analytical solution (#460)
- Clear *pdflatex* build errors by removing *Python* from heading (#459)
- purge gist from viewers and optional module lists in *setup.py* (#456)
- Remove deprecated methods that duplicate NumPy ufuncs (#454)
- Remove deprecated Gmsh importers (#452)
- Remove deprecated getters and setters (#450)
- Update links for FiPy developers (#448)
- Render appropriately if in IPython notebook (#447)
- Plot contour in proper axes (#446)
- Robust Gmsh version checking with *distutils.version.StrictVersion* (#442)

- compare gmsh versions as tuples, not floats (#441)
- Corrected two tests (#439) Thanks to @alfrenardi.
- Issue426 fix robin example typo (#431) Thanks to @raybsmith.
- Issue426 fix robin example analytical solution (#429) Thanks to @raybsmith.
- Force *MatplotlibViewer* to display (#428)
- Allow for 2 periodic axes in 3D (#424)
- Bug with Matplotlib 1.4.0 is fixed (#419)

18.9.2 Fixes

- #498: nonlinear source term
- #496: *scipy.LinearBicgstabSolver* doesn't take arguments
- #494: Gmsh call errors
- #493: *Reviewable.io* has read-only access, can't leave comments
- #491: *globalValue* raises error from mpi4py
- #484: Pysparse tests fail
- #482: FiPy development version string not compliant with PEP 440
- #476: *setuptools* 18.4 breaks test suite
- #475: *Grid3D* broken by numpy 1.10
- #470: *Mesh3D cellToCellIDs* is broken
- #467: Out-of-sequence Viewer imports
- #462: GMSH version >= 2.10 incorrectly read by *gmshMesh.py*
- #455: *setup.py* gist warning
- #445: *DendriteViewer* puts contours over color bar
- #443: *MatplotlibViewer* still has problems in IPython notebook
- #440: Use github API to get nicely formatted list of issues
- #438: Failed tests on Mac OS X
- #437: Figure misleading in *examples.cahnHilliard.mesh2DCoupled*
- #433: Links to prerequisites are broken
- #430: Make develop the default branch on Github
- #427: *MatplotlibViewer* don't display
- #425: Links for Warren and Guyer are broken on the web page
- #421: The “limits” argument for *Matplotlib2DGridViewer* does not function
- #416: Updates to reflect move to Github

18.10 Version 3.1.1 - 2015-12-17

18.10.1 Fixes

- #415: *MatplotlibGrid2DViewer* error with Matplotlib version 1.4.0
- #414: *PeriodicGrid3D* supports Only 1 axes of periodicity or all 3, not 2
- #413: Remind users of different types of conservation equations
- #412: Pickling Communicators is unnecessary for Grids
- #408: Implement *PeriodicGrid3D*
- #407: Strange deprecation loop in *reshape()*
- #404: package never gets uploaded to PyPI
- #401: Vector equations are broken when *sweep* is used instead of *solve*.
- #295: Gmsh version must be ≥ 2.0 errors on *zizou*

18.11 Version 3.1 - 2013-09-30

The significant changes since version 3.0 are:

- Level sets are now handled by *LSMLIB* or *Scikit-fmm* solver libraries. These libraries are orders of magnitude faster than the original, *Python*-only prototype.
- The *Matplotlib* *streamplot()* function can be used to display vector fields.
- Version control was switched to the *Git* distributed version control system. This system should make it much easier for *FiPy* users to participate in development.

18.11.1 Fixes

- #398: Home page needs out-of-NIST redirects
- #397: Switch to *sphinxcontrib-bibtex*
- #396: enable google analytics
- #395: Documentation change for Ubuntu install
- #393: *CylindricalNonUniformGrid2D* doesn't make a *FaceVariable* for *exteriorFaces*
- #392: *exit_nist.cgi* deprecated
- #391: Péclet inequalities have the wrong sign
- #388: Windows 64 and numpy's *dtype=int*
- #384: Add support for Matplotlib *streamplot*
- #382: Neumann boundary conditions not clearly documented
- #381: numpy 1.7.1 test failures with *physicalField.py*
- #377: *VanLeerConvectionTerm* MinMod slope limiter is broken
- #376: testing *CommitTicketUpdater*

- #375: NumPy 1.7.0 doesn't have *_formatInteger*
- #373: Bug with numpy 1.7.0
- #372: convection problem with cylindrical grid
- #371: *examples/phase/binary.py* has problems
- #370: FIPY_DISPLAY_MATRIX is broken
- #368: Viewers don't inline well in IPython notebook
- #367: Change documentation to promote use of stackoverflow
- #366: *unOps* can't be pickled
- #365: Rename communicator instances
- #364: Parallel bug in non-uniform grids and conflicting mesh class and factory function names
- #360: NIST CSS changed
- #356: link to mailing list is wrong
- #353: Update Ohloh to point at git repo
- #352: *getVersion()* fails on Py3k
- #350: Gmsh importer can't read mesh elements with no tags
- #347: Include mailing list activity frame on front page
- #339: Fix for test failures on *loki*
- #337: Clean up interaction between dependencies and installation process
- #336: *fipy.test()* and *fipy/test.py* clash
- #334: Make the citation links go to the DOI links
- #333: Web page links seem to be broken
- #331: Assorted errors
- #330: *faceValue* as *FaceCenters* gives inline failures
- #329: Gmsh background mesh doesn't work in parallel
- #326: *Gmsh2D* does not respect background mesh
- #323: *getFaceCenters()* should return a *FaceVariable*
- #319: Explicit convection terms should fail when the equation has no *TransientTerm* (*dt=None*)
- #318: FiPy will not import
- #311: LSMLIB refactor
- #305: *mpirun -np 2 python -Wd setup.py test -trilinos* hanging on sandbox under buildbot
- #297: Remove deprecated gist and gnuplot support
- #291: efficiency_test chokes on *liquidVapor2D.py*
- #289: *diffusionTerm._test()* requires Pysparse
- #287: move FiPy to distributed version control
- #275: *mpirun -np 2 python setup.py test -no-pysparse* hangs on *bunter*
- #274: Epetra Norm2 failure in parallel

- #272: Error adding meshes
- #269: Rename *GridXD*
- #255: numpy 1.5.1 and masked arrays
- #253: Move the mail archive link to a more prominent place on web page.
- #245: Fix *fipy.terms._BinaryTerm* test failure in parallel
- #228: *-pysparse* configuration should never attempt MPI imports
- #225: Windows interactive plotting mostly broken
- #209: add Rhie-Chow correction term in stokes cavity example
- #180: broken arithmetic face to cell distance calculations
- #128: Trying to “solve” an integer *CellVariable* should raise an error
- #123: *numerix.dot* doesn’t support tensors
- #103: *subscriber()._markStale()* *AttributeError*
- #61: Move *ImplicitDiffusionTerm().solve(var) == 0* “failure” from *examples.phase.simple* to *examples.diffusion.meshID?*

18.12 Version 3.0.1 - 2012-10-03

18.12.1 Fixes

- #346: text in *trunk/examples/convection/source.py* is out of date
- #342: sign issues for equation with transient, convection and implicit terms
- #338: SvnToGit clean up

18.13 Version 3.0 - 2012-08-16

The bump in major version number reflects more on the substantial increase in capabilities and ease of use than it does on a break in compatibility with FiPy 2.x. Few, if any, changes to your existing scripts should be necessary.

The significant changes since version 2.1 are:

- *Coupled and Vector Equations* are now supported.
- A more robust mechanism for specifying *Boundary Conditions* is now used.
- Most *Meshes* can be partitioned by *Meshing with Gmsh*.
- *PyAMG* and *SciPy* have been added to the *Solvers*.
- FiPy is capable of running under *Python 3*.
- “getter” and “setter” methods have been pervasively changed to Python properties.
- The test suite now runs much faster.
- Tests can now be run on a full install using *fipy.test()*.
- The functions of the *numerix* module are no longer included in the *fipy* namespace. See *examples.updating.update2_0to3_0* for details.

- Equations containing a *TransientTerm*, must specify the timestep by passing a `dt=` argument when calling `solve()` or `sweep()`.

Warning: *FiPy* 3 brought unavoidable syntax changes from *FiPy* 2. Please see [*examples.updating.update2_0to3_0*](#) for guidance on the changes that you will need to make to your *FiPy* 2.x scripts.

18.13.1 Fixes

- #332: Inline failure on Ubuntu x86_64
- #324: constraining values with *ImplicitSourceTerm* not documented?
- #317: *gmshImport* tests fail on Windows due to shared file
- #316: changes to *gmshImport.py* caused *-inline* problems
- #313: Gmsh I/O
- #307: Failures on sandbox under buildbot
- #306: Add in parallel buildbot testing on more than 2 processors
- #302: *CellVariable.min()* broken in parallel
- #301: *Epetra.PyComm()* broken on Debian
- #300: *examples/cahnHilliard/mesh2D.py* broken with – trilinos
- #299: Viewers not working when plotting meshes with zero cells in parallel
- #298: Memory consumption growth with repeated meshing, especially with Gmsh
- #294: *-pysparse -inline* failures
- #293: *python examples/cahnHilliard/sphere.py -inline* segfaults on OS X
- #292: two *-scipy* failures
- #290: Improve test reporting to avoid inconsequential buildbot failures
- #288: gmsh importer and gmsh tests don't clean up after themselves
- #286: get running in Py3k
- #285: remove deprecated *viewers.make()*
- #284: remove deprecated *Variable.transpose()*
- #281: remove deprecated *NthOrderDiffusionTerm*
- #280: remove deprecated *diffusionTerm=* argument to *ConvectionTerm*
- #277: remove deprecated *steps=* from Solver
- #273: Make *DiffusionTermNoCorrection* the default
- #270: tests take *too* long!!!
- #267: Reduce the run times for chemotaxis tests
- #264: HANG in parallel test of *examples/chemotaxis/input2D.py* on some configurations
- #261: *GmshImport* should read element colors
- #260: *GmshImport* should support all element types

- #259: Introduce *mesh.x* as shorthand for *mesh.cellCenters[0]* etc
- #258: *GmshExport* is not tested and does not work
- #252: Include Benny's improved interpolation patch
- #250: TeX is wrong in *examples.phase.quaternary*
- #247: *diffusionTerm(var=var1).solver(var=var0)* should fail sensibly
- #243: close out reconstrain branch
- #242: update documentation
- #240: Profile and merge reconstrain branch
- #237: *-Trilinos -no-pysparse* uses Pysparse?!?
- #236: anisotropic diffusion and constraints don't mix
- #235: changed constraints don't propagate
- #231: *factoryMeshes.py* not up to date with respect to keyword arguments
- #223: mesh in FiPy name space
- #218: Absence of *enthought.tvtk* causes test failures
- #216: Fresh FiPy gives “*ImportError: No viewers found*”
- #213: PyPI is failing
- #206: *gnuplot1d* gives error on plot of *FaceVariable*
- #205: wrong cell to cell normal in periodic meshes
- #203: Give helpful error on - or / of meshes
- #202: mesh manipulation of periodic meshes leads to errors
- #201: Use physical velocity in the manual/FAQ
- #200: FAQ gives bad guidance for anisotropic diffusion
- #195: term multiplication changes result
- #163: Default time steps should be infinite
- #162: remove ones and zeros from *numerix.py*
- #130: tests should be run with *fipy.tests()*
- #86: Grids should take *Lx*, *Ly*, *Lz* arguments
- #77: *CellVariable.hasOld()* should set *self.old*
- #44: Navier-Stokes

18.14 Version 2.1.3 - 2012-01-17

18.14.1 Fixes

- #282: remove deprecated getters and setters
- #279: remove deprecated `fipy.meshes.numMesh` submodule
- #278: remove deprecated forms of Gmsh meshes
- #268: Set up *Zizou* as a working slave
- #262: issue with solvers
- #256: `Grid1D(dx=(1,2,3))` failure
- #251: parallel is broken
- #241: Set Sandbox up as a working slave
- #238: `_BinaryTerm.var` is not predictable
- #233: coupled convection-diffusion always treated as Upwind
- #224: “matrices are not aligned” errors in example test suite
- #222: Non-uniform `Grid3D` fails to `__add__`
- #221: Problem with fipy and gmsh
- #219: matforge css is hammer-headed
- #208: numpy 2.0: *arrays have a dot method*
- #207: numpy 2.0: *masked arrays cast right of product to ndarray*
- #196: Pysparse won’t import in Python 2.6.5 on Windows
- #152: (Re)Implement SciPy solvers
- #138: FAQ on boundary conditions
- #100: testing from the Windows dist using the ipython command line
- #80: Windows - testing - idle -*ipython*
- #46: Variable needs to consider boundary conditions
- #45: Slicing a vector Variable should produce a scalar Variable

18.15 Version 2.1.2 - 2011-04-20

The significant changes since version 2.1.1 are:

- *Trilinos* efficiency improvements
- Diagnostics of the parallel environment

18.15.1 Fixes

- #232: Mayavi broken on windows because it has no *SIGHUP*.
- #230: *factoryMeshes.py* not up to date with respect to keyword arguments
- #226: *MatplotlibViewer* fails if backend doesn't support *flush_events()*
- #225: Windows interactive plotting mostly broken
- #217: Gmsh *CellVariables* can't be unpickled
- #191: *sphereDaemon.py* missing in Fipy 2.1 and from trunk
- #187: Concatenated *Mesh* garbled by *dump.write/read*

18.16 Version 2.1.1 - 2010-10-05

The significant changes since version 2.1 are:

- *MatplotlibViewer* can display into an existing set of Matplotlib axes.
- *Pysparse* and *Trilinos* are now completely independent.

18.16.1 Fixes

- #199: dummy viewer results in “*NotImplementedError: can't instantiate abstract base class*”
- #198: bug problem with *CylindricalGrid1D*
- #197: How to tell if parallel is configured properly?
- #194: *FIPY_DISPLAY_MATRIX* on empty matrix with large b-vector throws *ValueError*
- #193: *FIPY_DISPLAY_MATRIX* raises *ImportError* in Fipy 2.1 and trunk
- #192: *FIPY_DISPLAY_MATRIX=terms* raises *TypeError* in Fipy 2.1 and trunk

18.17 Version 2.1 - 2010-04-01

The relatively small change in version number belies significant advances in *Fipy* capabilities. This release did not receive a “full” version increment because it is completely (er...¹) compatible with older scripts.

The significant changes since version 2.0.2 are:

- *Fipy* can use *Trilinos* for *Solving in Parallel*.
- We have switched from *MayaVi* 1 to *Mayavi* 2. This *Viewer* is an independent process that allows interaction with the display while a simulation is running.
- Documentation has been switched to *Sphinx*, allowing the entire manual to be available on the web and for our documentation to link to the documentation for packages such as *numpy*, *scipy*, *matplotlib*, and for *Python* itself.

¹ Only two examples from *Fipy* 2.0 fail when run with *Fipy* 2.1:

- *examples/phase/symmetry.py* fails because *Mesh* no longer provides a *getCells* method. The mechanism for enforcing symmetry in the updated example is both clearer and faster.
- *examples.levelSet.distanceFunction.circle* fails because of a change in the comparison of masked values.

Both of these are subtle issues unlikely to affect very many *Fipy* users.

18.17.1 Fixes

- #190: “matplotlib: list index out of range” when no title given, but only sometimes
- #182: $\sim binOp$ doesn’t work on branches/version-2_0
- #180: broken arithmetic face to cell distance calculations
- #179: *easy_install* instructions for Mac OS X are broken
- #177: broken *setuptools* url with python 2.6
- #169: The FiPy webpage seems to be broken on Internet Explorer
- #156: update the mayavi viewer to use mayavi 2
- #153: Switch documentation to use *:math:* directive

18.18 Version 2.0.3 - 2010-03-17

18.18.1 Fixes

- #188: *SMTPSenderRefused*: (553, “5.1.8 <trac@matdl-osi.org>... Domain of sender address trac@matdl-osi.org does not exist”, u“FiPy” <trac@matdl-osi.org>’)
- #184: *gmshExport.exportAsMesh()* doesn’t work
- #183: FiPy 2.0.2 *LinearJORSolver.__init__* calls *Solver* rather than *PysparseSolver*
- #181: Navier-Stokes again
- #151: update mayavi viewer to use mayavi2
- #13: Mesh refactor

18.19 Version 2.0.2 - 2009-06-11

18.19.1 Fixes

- #176: Win32 distribution test error
- #175: *Grid3D.getFaceCenters* incorrect when mesh is offset
- #170: *Variable* doesn’t implement *__invert__*

18.20 Version 2.0.1 - 2009-04-23

18.20.1 Fixes

- #154: Update manuals

18.21 Version 2.0 - 2009-02-09

Warning: *FiPy* 2 brings unavoidable syntax changes. Please see `examples.updating.update1_0to2_0` for guidance on the changes that you will need to make to your *FiPy* 1.x scripts.

The significant changes since version 1.2 are:

- `CellVariable` and `FaceVariable` objects can hold values of any rank.
- Much simpler syntax for specifying Cells for initial conditions and Faces for boundary conditions.
- Automated determination of the Péclet number and partitioning of `ImplicitSourceTerm` coefficients between the matrix diagonal and the right-hand-side-vector.
- Simplified `Viewer` syntax.
- Support for the `Trilinos` solvers.
- Support for anisotropic diffusion coefficients.
- #167: example showing how to go from 1.2 to 2.0
- #166: Still references to `VectorCell` and `VectorFace Variable` in manual
- #165: Edit the what's new section of the manual
- #149: Test viewers
- #143: Document syntax changes
- #141: enthought toolset?
- #140: easy_install fipy
- #136: Document anisotropic diffusion
- #135: Trilinos documentation
- #127: Examples can be very fragile with respect to floating point

18.22 Version 1.2.3 - 2009-01-0

18.22.1 Fixes

- #54: `python setup.py test` fails

18.23 Version 1.2.2 - 2008-12-30

18.23.1 Fixes

- #161: get pysparse working with python 2.4
- #160: Grid class
- #157: temp files on widows
- #155: fix some of the deprecation warnings appearing in the tests

- #150: PythonXY installation?
- #148: SciPy 0.7.0 solver failures on Macs
- #147: Disable CGS solver in pysparse
- #145: *Viewer* factory fails for rank-1 *CellVariable*
- #144: intermittent failure on *examples/diffusion/explicit/mixedelement.py -inline*
- #142: merge Viewers branch
- #139: Get a Windows Bitten build slave
- #137: Backport examples from manuscript
- #131: *MatplotlibViewer* doesn't properly report the supported file extensions
- #126: Variable, float, integer
- #125: Pickled test data embeds obsolete packages
- #124: Can't pickle a *binOp*
- #121: *simpleTrenchSystem.py*
- #120: mayavi display problems
- #118: Automatically handle casting of *Variable* from *int* to *float* when necessary.
- #117: *getFacesBottom*, *getFacesTop* etc. lack clear description in the reference
- #115: viewing 3D Cahn-Hilliard is broken
- #113: OS X (MacBook Pro; Intel) FiPy installation problems
- #112: *stokesCavity.py* doesn't display properly with matplotlib
- #111: Can't display *Grid2D* variables with matplotlib on Linux
- #110: "Numeric array value must be dimensionless" in ElPhF examples
- #109: doctest of *fipy.variables.variable.Variable.__array__*
- #108: *numerix.array * FaceVariable* is broken
- #107: Can't move matplotlib windows on Mac
- #106: Concatenation of *Grid1D* objects doesn't always work
- #105: useless broken *__array__* tests should be removed
- #102: viewer limits should just be set as arguments, rather than as a dict
- #99: *Matplotlib2DGridViewer* cannot update multiple views
- #97: Windows does not seem to handle NaN correctly.
- #96: broken tests with version 2.0 of gmsh
- #95: attached code breaks with *-inline*
- #92: Pygist is dead (it's official)
- #84: Test failures on Intel Mac
- #83: *ZeroDivisionError* for *CellTerm* when calling *getOld()* on its coefficient
- #79: *viewers.make()* to *viewers.Viewer()*
- #67: Mesh viewing and unstructured data.

- #43: *TSVViewer* doesn't always get the right shape for the var
- #34: float(&infinity&) issue on windows

18.24 Version 1.2.1 - 2008-02-08

18.24.1 Fixes

- #122: check argument types for meshes
- #119: max is broken for Variables
- #116: Linux: failed test, *TypeError: No array interface...* in solve()
- #104: Syntax error in *MatplotlibVectorViewer._plot()*
- #101: matplotlib 1D viewer autoscales when a limit is set to 0
- #93: Broken examples
- #91: update the examples to use *from fipy import **
- #76: *solve()* and *sweep()* accept *dt=CellVariable*
- #75: installation of fipy should auto include README as a docstring
- #74: Some combinations of *DiffusionTerm* and *ConvectionTerm* do not work
- #51: *__pos__* doesn't work for terms
- #50: Broken examples
- #39: matplotlib broken on mac with version 0.72.1
- #19: Péclet number
- #15: Boundary conditions and Terms

18.25 Version 1.2 - 2007-02-12

The significant changes since version 1.1 are:

- *-inline* automatically generates C code from *Variable* expressions.
- *FiPy* has been updated to use the *Python NumPy* module. *FiPy* no longer works with the older *Numeric* module.

18.25.1 Fixes

- #98: Windows patch for some broken test cases
- #94: *-inline* error for attached code
- #90: bug in matplotlib 0.87.7: *TypeError: only length-1 arrays can be converted to Python scalars.*
- #72: needless rebuilding of variables
- #66: PDF rendering issues for the guide on various platforms
- #62: fipy guide pdf bug: “*an unrecognized token 13c was found*”
- #55: Error for internal BCs

- #52: *FaceVariable * FaceVectorVariable* memory
- #48: Documentation is not inherited from &hidden& classes
- #42: *fipy.models.phase.phase.addOverFacesVariable* is gross
- #41: *EFFICIENCY.txt* example fails to make viewer
- #30: periodic boundary condition support
- #25: make phase field examples more explicit
- #23: sweep control, iterator object, error norms
- #21: Update FiPy to use numpy
- #16: Dimensions
- #12: Refactor viewers
- #1: Gnuplot doesn't display on windows

18.26 Version 1.1 - 2006-06-06

The significant changes since version 1.0 are:

- Memory efficiency has been improved in a number of ways, but most significantly by:
 - not caching all intermediate *Variable* values.
 - introducing *UniformGrid* classes that calculate geometric arrays on the fly.Details of these improvements are presented in [Efficiency](#).
- Installation on Windows has been made considerably easier by constructing executable installers for *FiPy* and its dependencies.
- The arithmetic for *Variable* subclasses now works, and returns sensible answers. For example, *VectorCellVariable * CellVariable* returns a *VectorCellVariable*.
- *PeriodicGrid* meshes have been implemented. Currently, however, there are no examples of their use in the manual.
- Many of the examples have been completely rewritten
 - A basic 1D diffusion problem now serves as a general tutorial for setting up any problem in *FiPy*.
 - Several more phase field examples have been added that should make it clearer how to get from the simple 1D case to the more elaborate multicomponent, multidimensional, and anisotropic models.
 - The “Superfill” examples have been substantially improved with better functionality and documentation.
 - An example of fluid flow with the classic Stokes moving lid has been added.
- A clear distinction has been made between solving an equation via *solve()* and iterating a non-linear equation to solution via *sweep()*. An extensive explanation of the concepts involved has been added to the [Frequently Asked Questions](#).
- Added a *MultiViewer* class that automatically groups several viewers together if the variables couldn't be displayed by a single viewer.
- The abbreviated syntax `from fipy import Class` or `from fipy import *` promised in version 1.0 actually works now. The examples all still use the fully qualified names.

- The repository has been converted from a CVS to a Subversion repository. Details on how to check out the new repository are given in [Installation](#).
- The *Fipy* repository has also been moved from Sourceforge to the Materials Digital Library Pathway.

18.27 Version 1.0 - 2005-09-16

Numerous changes have been made since *Fipy* 0.1 was released, but the most significant ones are:

- Equation objects no longer exist. PDEs are constructed from Term objects. Term objects can be added, subtracted, and equated to build up an equation.
- A true 1D grid class has been added: `fipy.meshes.grid1D.Grid1D`.
- A generic “factory” method `fipy.viewers.make()` has been added that will do a reasonable job of automatically creating a Viewer for the supplied Variable objects. The `FIPY_VIEWER` environment variable allows you to specify your preferred viewer.
- A simple TSVViewer has been added to allow display or export to a file of your solution data.
- It is no longer necessary to `transpose()` scalar fields in order to multiply them with vector fields.
- Better default choice of solver when convection is present.
- Better examples.
- A number of *NoiseVariable* objects have been added.
- A new viewer based on *Matplotlib* has been added.
- The *PyX* viewer has been removed.
- Considerably simplified the public interface to Fipy.
- Support for Python 2.4.
- Improved layout of the manuals.
- `getLaplacian()` method has been removed from *CellVariable* objects. You can obtain the same effect with `getFaceGrad().getDivergence()`, which provides better control.
- An import shorthand has been added that allows for:

```
from fipy import Class
```

instead of:

```
from fipy.some.deeply.nested.module.class import Class
```

This system is still experimental. Please tell us if you find situations that don’t work.

The syntax of *Fipy* 1.0 scripts is incompatible with earlier releases. A tutorial for updating your existing scripts can be found in `examples/updating/update0_1to1_0.py`.

18.27.1 Fixes

- #49: Documentation for many *ConvectionTerms* is wrong
- #47: Terms should throw an error on bad *coeff* type
- #40: broken levelset test case
- #38: multiple BCs on one face broken?
- #37: Better support for periodic boundary conditions
- #36: Gnuplot doesn't display the ~examples/levelSet/electroChem problem on windows.
- #35: gmsh write problem on windows
- #33: *DiffusionTerm(coeff = CellVariable)* functionality
- #32: conflict_handler = ignore not valid in Python 2.4
- #31: Support simple import notation
- #29: periodic boundary conditions are broken
- #28: invoke the == for terms
- #26: doctest extraction with python 2.4
- #24: Pysparse windows binaries
- #22: automated efficiency_test problems
- #20: Test with Python version 2.4
- #18: Memory leak for the leveling problem
- #17: *distanceVariable* is broken
- #14: Testing mailing list interface
- #11: Reconcile versions of pysparse
- #10: check phase field crystal growth
- #9: implement levelling surfactant equation
- #8: merge *depositionRateVar* and *extensionVelocity*
- #7: Automate FiPy efficiency test
- #6: FiPy breaks on windows with Numeric 23.6
- #5: axisymmetric 2D mesh
- #4: Windows installation wizard
- #3: Windows installation instructions
- #2: Some tests fail on windows XP

18.28 Version 0.1.1

18.29 Version 0.1 - 2004-11-05

Original release

Chapter 19

Glossary

AppVeyor

A cloud-based *Continuous Integration* tool. See <https://www.appveyor.com>.

Azure

A cloud-based *Continuous Integration* tool. See <https://dev.azure.com>.

Buildbot

The Buildbot is a system to automate the compile/test cycle required by most software projects to validate code changes. No longer used for *FiPy*. See <http://trac.buildbot.net/>.

CircleCI

A cloud-based *Continuous Integration* tool. See <https://circleci.com>.

conda

An open source package management system and environment management system that runs on Windows, macOS and Linux. Conda quickly installs, runs and updates packages and their dependencies. Conda easily creates, saves, loads and switches between environments on your local computer. It was created for Python programs, but it can package and distribute software for any language. See <https://conda.io>.

Continuous Integration

The practice of frequently testing and integrating one's new or changed code with the existing code repository. See https://en.wikipedia.org/wiki/Continuous_integration.

FiPy

The eponymous software package. See <http://www.ctcms.nist.gov/fipy>.

GitHub Actions

A cloud-based *Continuous Integration* tool. See <https://github.com/features/actions>.

Gmsh

A free and Open Source 3D (and 2D!) finite element grid generator. It also has a CAD engine and post-processor that *FiPy* does not make use of. See <http://www.geuz.org/gmsh>.

IPython

An improved *Python* shell that integrates nicely with *Matplotlib*. See <http://ipython.scipy.org/>.

JSON

JavaScript Object Notation. A text format suitable for storing structured information such as `dict` or `list`. See <https://www.json.org/>.

linux

An operating system. See <http://www.linux.org>.

macOS

An operating system. See <http://www.apple.com/macos>.

Matplotlib

`matplotlib` *Python* package displays publication quality results. It displays both 1D X-Y type plots and 2D contour plots for structured data. It does not display unstructured 2D data or 3D data. It works on all common platforms and produces publication quality hard copies. See <http://matplotlib.sourceforge.net> and [Matplotlib](#).

Mayavi

The `mayavi` Data Visualizer is a free, easy to use scientific data visualizer. It displays 1D, 2D and 3D data. It is the only *FiPy* viewer available for 3D data. Other viewers are probably better for 1D or 2D viewing. See <http://code.enthought.com/projects/mayavi> and [Mayavi](#).

MayaVi

The predecessor to *Mayavi*. Yes, it's confusing.

MPI

The Message Passing Interface is a standard that allows the use of multiple processors. See <http://www.mpi-forum.org>

mpi4py

MPI for Python provides bindings of the Message Passing Interface (*MPI*) standard for the Python programming language, allowing any Python program to exploit multiple processors. For *Solving in Parallel*, *FiPy* requires this package, in addition to *PETSc* or *Trilinos*. See <https://mpi4py.readthedocs.io>.

numarray

An archaic predecessor to *NumPy*.

Numeric

An archaic predecessor to *NumPy*.

NumPy

The `numpy` *Python* package provides array arithmetic facilities. See <http://www.scipy.org/NumPy>.

OpenMP

The Open Multi-Processing architecture is a specification for a set of compiler directives, library routines, and environment variables that can be used to specify high-level parallelism in Fortran and C/C++ programs. See <https://www.openmp.org>.

pandas

“Python Data Analysis Library” provides high-performance data structures for flexible, extensible analysis. See <http://pandas.pydata.org>.

PETSc

The Portable, Extensible Toolkit for Scientific Computation is a suite of data structures and routines for the scalable (parallel) solution of scientific applications modeled by partial differential equations. See <https://www.mcs.anl.gov/petsc> and *PETSc*.

petsc4py

Python wrapper for *PETSc*. See <https://petsc4py.readthedocs.io/>.

pip

“pip installs python” is a tool for installing and managing Python packages, such as those found in *PyPI*. See <http://www.pip-installer.org>.

PyAMG

A suite of python-based preconditioners. See <http://code.google.com/p/pyamg/> and *PyAMG*.

pyamgx

a *Python* interface to the NVIDIA *AMGX* library, which can be used to construct complex solvers and preconditioners to solve sparse sparse linear systems on the GPU. See <https://pyamgx.readthedocs.io/> and *pyamgx*.

PyPI

The Python Package Index is a repository of software for the *Python* programming language. See <http://pypi.python.org/pypi>.

Pyrex

A mechanism for mixing C and Python code. See <http://www.cosc.canterbury.ac.nz/greg.ewing/python/Pyrex/>.

Pysparse

The *pysparse* *Python* package provides sparse matrix storage, solvers, and linear algebra routines. See <http://pysparse.sourceforge.net> and *Pysparse*.

Python

The programming language that *FiPy* (and your scripts) are written in. See <http://www.python.org/>.

Python 3

The (likely) future of the *Python* programming language. Third-party packages are slowly being adapted, but many that *FiPy* uses are not yet available. See <http://docs.python.org/py3k/> and **PEP 3000**.

PyTrilinos

Python wrapper for *Trilinos*. See <http://trilinos.sandia.gov/packages/pytrilinos/>.

PyxViewer

A now defunct python viewer.

ScientificPython

A collection of useful utilities for scientists. See <http://dirac.cnrs-orleans.fr/plone/software/scientificpython>.

SciPy

The *scipy* package provides a wide range of scientific and mathematical operations. *FiPy* can use *Scipy*'s solver suite for linear solutions. See <http://www.scipy.org/>, and *SciPy*.

Sphinx

The tools used to generate the *FiPy* documentation. See <http://sphinx.pocoo.org/>.

TravisCI

A cloud-based *Continuous Integration* tool. See <https://travis-ci.org>.

Trilinos

This package provides sparse matrix storage, solvers, and preconditioners, and can be used instead of *Pysparse*. *Trilinos* preconditioning allows for iterative solutions to some difficult problems that *Pysparse* cannot solve. See <http://trilinos.sandia.gov> and *Trilinos*.

Weave

The weave package can enhance performance with C language inlining. See <https://github.com/scipy/weave>.

Windows

An operating system. See <http://www.microsoft.com/windows>.

Part II

Examples

Note: Any given module “example.something.input” can be found in the file “examples/something/input.py”.

These examples can be used in at least four ways:

- Each example can be invoked individually to demonstrate an application of *FiPy*:

```
$ python examples/something/input.py
```

- Each example can be invoked such that when it has finished running, you will be left in an interactive Python shell:

```
$ python -i examples/something/input.py
```

At this point, you can enter *Python* commands to manipulate the model or to make queries about the example’s variable values. For instance, the interactive Python sessions in the example documentation can be typed in directly to see that the expected results are obtained.

- Alternatively, these interactive *Python* sessions, known as *doctest* blocks, can be invoked as automatic tests:

```
$ python setup.py test --examples
```

In this way, the documentation and the code are always certain to be consistent.

- Finally, and most importantly, the examples can be used as a templates to design your own problem scripts.

Note: The examples shown in this manual have been written with particular emphasis on serving as both documentation and as comprehensive tests of the *FiPy* framework. As explained at the end of `examples/diffusion/steadyState/mesh1D.py`, your own scripts can be much more succinct, if you wish, and include only the text that follows the “>>>” and “...” prompts shown in these examples.

To obtain a copy of an example, containing just the script instructions, type:

```
$ python setup.py copy_script --From x.py --To y.py
```

In addition to those presented in this manual, there are dozens of other files in the `examples/` directory, that demonstrate other uses of *FiPy*. If these examples do not help you construct your own problem scripts, please [contact us](#).

Chapter 20

Selected Examples

Many *FiPy examples* are primarily used for integration testing. The following examples are curated to help with understanding how *FiPy* is used.

20.1 Diffusion Examples

Selected illustrations of diffusion problems.

- `examples.diffusion.mesh1D`
- `examples.diffusion.coupled`
- `examples.diffusion.mesh20x20`
- `examples.diffusion.circle`
- `examples.diffusion.electrostatics`
- `examples.diffusion.nthOrder.input4thOrder1D`
- `examples.diffusion.anisotropy`

20.2 Convection Examples

Selected illustrations of convection problems.

- `examples.convection.exponential1D.mesh1D`
- `examples.convection.exponential1DSource.mesh1D`
- `examples.convection.robin`
- `examples.convection.source`

20.3 Phase Field Examples

Selected illustrations of phase field (Allen-Cahn) moving interface problems.

- `examples.phase.simple`
- `examples.phase.binary`
- `examples.phase.binaryCoupled`
- `examples.phase.quaternary`
- `examples.phase.anisotropy`
- `examples.phase.impingement.mesh40x1`
- `examples.phase.impingement.mesh20x20`
- `examples.phase.polyxtal`
- `examples.phase.polyxtalCoupled`

20.4 Level Set Examples

Selected illustrations of level-set moving interface problems.

- `examples.levelSet.distanceFunction.mesh1D`
- `examples.levelSet.distanceFunction.circle`
- `examples.levelSet.advection.mesh1D`
- `examples.levelSet.advection.circle`

20.5 Cahn-Hilliard Examples

Selected illustrations of Cahn-Hilliard (spinodal decomposition) problems.

- `examples.cahnHilliard.mesh2DCoupled`
- `examples.cahnHilliard.sphere`

20.6 Fluid Flow Examples

Selected illustrations of fluid flow problems.

- `examples.flow.stokesCavity`

20.7 Reactive Wetting Examples

Selected illustrations of multi-phase evolution.

- `examples.reactiveWetting.liquidVapor1D`

20.8 Updating FiPy

Demonstrations of how to migrate from older versions of *FiPy*.

- `examples.updating.update2_0to3_0`
- `examples.updating.update1_0to2_0`
- `examples.updating.update0_1to1_0`

Part III

fipy Package Documentation

Chapter 21

How to Read the Modules Documentation

Each chapter describes one of the main sub-packages of the `fipy` package. The sub-package `fipy.package` can be found in the directory `fipy/package/`. In a few cases, there will be packages within packages, *e.g.* `fipy.package.subpackage` located in `fipy/package/subpackage/`. These sub-sub-packages will not be given their own chapters; rather, their contents will be described in the chapter for their containing package.

`package`

Each chapter describes one of the main sub-packages of the `fipy` package.

21.1 package

Each chapter describes one of the main sub-packages of the `fipy` package. The sub-package `fipy.package` can be found in the directory `fipy/package/`. In a few cases, there will be packages within packages, *e.g.* `fipy.package.subpackage` located in `fipy/package/subpackage/`. These sub-sub-packages will not be given their own chapters; rather, their contents will be described in the chapter for their containing package.

Modules

`package.subpackage`

Each chapter describes one of the main sub-packages of the `fipy` package.

21.1.1 `package.subpackage`

Each chapter describes one of the main sub-packages of the `fipy` package. The sub-package `fipy.package` can be found in the directory `fipy/package/`. In a few cases, there will be packages within packages, *e.g.* `fipy.package.subpackage` located in `fipy/package/subpackage/`. These sub-sub-packages will not be given their own chapters; rather, their contents will be described in the chapter for their containing package.

Modules

`package.subpackage.base`

This module can be found in the file `package/subpackage/base.py`. You make it available to your script by either::.

`package.subpackage.object`

`package.subpackage.base`

This module can be found in the file `package/subpackage/base.py`. You make it available to your script by either:

`import package.subpackage.base`

in which case you refer to it by its full name of `package.subpackage.base`, or:

`from package.subpackage import base`

in which case you can refer simply to `base`.

Classes

`Base()`

With very few exceptions, the name of a class will be the capitalized form of the module it resides in. Depending on how you imported the module above, you will refer to either `package.subpackage.object.Object` or `object.Object`. Alternatively, you can use::.

`class package.subpackage.base.Base`

Bases: `object`

With very few exceptions, the name of a class will be the capitalized form of the module it resides in. Depending on how you imported the module above, you will refer to either `package.subpackage.object.Object` or `object.Object`. Alternatively, you can use:

`from package.subpackage.object import Object`

and then refer simply to `Object`. For many classes, there is a shorthand notation:

`from fipy import Object`

`Python` is an object-oriented language and the FiPy framework is composed of objects or classes. Knowledge of object-oriented programming (OOP) is not necessary to use either Python or FiPy, but a few concepts are useful. OOP involves two main ideas:

encapsulation

an object binds data with actions or “methods”. In most cases, you will not work with an object’s data directly; instead, you will set, retrieve, or manipulate the data using the object’s methods.

Methods are functions that are attached to objects and that have direct access to the data of those objects. Rather than passing the object data as an argument to a function:

```
fn(data, arg1, arg2, ...)
```

you instruct an object to invoke an appropriate method:

```
object.meth(arg1, arg2, ...)
```

If you are unfamiliar with object-oriented practices, there probably seems little advantage in this reordering. You will have to trust us that the latter is a much more powerful way to do things.

inheritance

specialized objects are derived or inherited from more general objects. Common behaviors or data are defined in base objects and specific behaviors or data are either added or modified in derived objects. Objects that declare the existence of certain methods, without actually defining what those methods do, are called “abstract”. These objects exist to define the behavior of a family of objects, but rely on their descendants to actually provide that behavior.

Unlike many object-oriented languages, *Python* does not prevent the creation of abstract objects, but we will include a notice like

Attention: This class is abstract. Always create one of its subclasses.

for abstract classes which should be used for documentation but never actually created in a *FiPy* script.

method1()

This is one thing that you can instruct any object that derives from *Base* to do, by calling *myObjectDerivedFromBase.method1()*

Parameters

self (*object*) – This special argument refers to the object that is being created.

Attention: *self* is supplied automatically by the *Python* interpreter to all methods. You don’t need to (and should not) specify it yourself.

method2()

This is another thing that you can instruct any object that derives from *Base* to do.

package.subpackage.object

Classes

Object(arg1[, arg2, arg3])

This method, like all those whose names begin and end with “__” are special.

class package.subpackage.object.**Object**(arg1, arg2=None, arg3='string')

Bases: *Base*

This method, like all those whose names begin and end with “__” are special. You won’t ever need to call these methods directly, but *Python* will invoke them for you under certain circumstances, which are described in the [Python Reference Manual: Special Method Names](#).

As an example, the __init__() method is invoked when you create an object, as in:

```
obj = Object(arg1=something, arg3=somethingElse, ...)
```

Parameters

- **arg1** – this argument is required. *Python* supports named arguments, so you must either list the value for *arg1* first:

```
obj = Object(val1, val2)
```

or you can specify the arguments in any order, as long as they are named:

```
obj = Object(arg2=val2, arg1=val1)
```

- **arg2** – this argument may be omitted, in which case it will be assigned a default value of `None`. If you do not use named arguments (and we recommend that you do), all required arguments must be specified before any optional arguments.
- **arg3** – this argument may be omitted, in which case it will be assigned a default value of `'string'`.

method1()

This is one thing that you can instruct any object that derives from `Base` to do, by calling `myObjectDerivedFromBase.method1()`

Parameters

`self (object)` – This special argument refers to the object that is being created.

Attention: `self` is supplied automatically by the *Python* interpreter to all methods. You don't need to (and should not) specify it yourself.

method2()

`Object` provides a new definition for the behavior of `method2()`, whereas the behavior of `method1()` is defined by `Base`.

<code>fipy</code>	An object oriented, partial differential equation (PDE) solver
<code>examples</code>	Demonstration scripts and high-level tests of the <code>fipy</code> package

Chapter 22

fipy

An object oriented, partial differential equation (PDE) solver

Fipy is based on a standard finite volume (FV) approach. The framework has been developed in the Materials Science and Engineering Division ([MSED](#)) and Center for Theoretical and Computational Materials Science ([CTCMS](#)), in the Material Measurement Laboratory ([MML](#)) at the National Institute of Standards and Technology ([NIST](#)).

The solution of coupled sets of PDEs is ubiquitous to the numerical simulation of science problems. Numerous PDE solvers exist, using a variety of languages and numerical approaches. Many are proprietary, expensive and difficult to customize. As a result, scientists spend considerable resources repeatedly developing limited tools for specific problems. Our approach, combining the FV method and *Python*, provides a tool that is extensible, powerful and freely available. A significant advantage to *Python* is the existing suite of tools for array calculations, sparse matrices and data rendering.

The *Fipy* framework includes terms for transient diffusion, convection and standard sources, enabling the solution of arbitrary combinations of coupled elliptic, hyperbolic and parabolic PDEs. Currently implemented models include phase field [1] [2] [3] treatments of polycrystalline, dendritic, and electrochemical phase transformations, as well as drug eluting stents [4], reactive wetting [5], photovoltaics [6] and a level set treatment of the electrodeposition process [7].

Functions

`doctest_raw_input(prompt)`
`test(*args)`

Replacement for `raw_input()` that works in doctests
Test *Fipy*. Equivalent to::

`fipy.doctest_raw_input(prompt)`

Replacement for `raw_input()` that works in doctests

This routine attempts to be savvy about running in parallel.

`fipy.test(*args)`

Test *Fipy*. Equivalent to:

```
$ python setup.py test --modules
```

Use

```
>>> import fipy  
>>> fipy.test('--help')
```

for a full list of options. Options can be passed in the same way as they are appended at the command line. For example, to test *FiPy* with *Trilinos* and inlining switched on, use

```
>>> fipy.test('--trilinos', '--inline')
```

At the command line this would be:

```
$ python setup.py test --modules --trilinos --inline
```

Modules

<i>fipy.boundaryConditions</i>	Boundary conditions
<i>fipy.matrices</i>	Sparse matrices
<i>fipy.meshes</i>	Domain geometry and topology
<i>fipy.solvers</i>	Solving sparse linear systems
<i>fipy.stepplers</i>	(Obsolete) utilities for iterating time steps
<i>fipy.terms</i>	<i>Discretizations</i> of partial differential equation expressions
<i>fipy.testFiPy</i>	Test suite for <i>FiPy</i> modules
<i>fipy.tests</i>	Unit testing scripts
<i>fipy.tools</i>	Utility modules, functions, and values
<i>fipy.variables</i>	Collections of values supporting lazy evaluation
<i>fipy.viewers</i>	Tools for displaying the values of <i>Variable</i> objects

22.1 *fipy.boundaryConditions*

Boundary conditions

Modules

<i>fipy.boundaryConditions.boundaryCondition</i>	Boundary condition base class
<i>fipy.boundaryConditions.constraint</i>	Restriction on value of a <i>Variable</i>
<i>fipy.boundaryConditions.fixedFlux</i>	Boundary condition of order 1
<i>fipy.boundaryConditions.fixedValue</i>	Boundary condition of order 0
<i>fipy.boundaryConditions.nthOrderBoundaryCondition</i>	Boundary condition of specified derivative order
<i>fipy.boundaryConditions.test</i>	Test boundary conditions

22.1.1 fipy.boundaryConditions.boundaryCondition

Boundary condition base class

Classes

<code>BoundaryCondition(faces, value)</code>	Generic boundary condition base class.
--	--

```
class fipy.boundaryConditions.boundaryCondition.BoundaryCondition(faces, value)
```

Bases: `object`

Generic boundary condition base class.

Attention: This class is abstract. Always create one of its subclasses.

Parameters

- `faces` (`FaceVariable` or `bool`) – Mask of faces where this condition applies.
- `value` (`float`) – Value to impose.

`__repr__()`

Return `repr(self)`.

22.1.2 fipy.boundaryConditions.constraint

Restriction on value of a `Variable`

Classes

<code>Constraint(value[, where])</code>	Holds a <code>Variable</code> to <code>value</code> at <code>where</code>
---	---

```
class fipy.boundaryConditions.constraint.Constraint(value, where=None)
```

Bases: `object`

Holds a `Variable` to `value` at `where`

see `constrain()`

`__repr__()`

Return `repr(self)`.

22.1.3 fipy.boundaryConditions.fixedFlux

Boundary condition of order 1

Classes

<code>FixedFlux(faces, value)</code>	Adds a Neumann contribution to the system of equations.
--------------------------------------	---

`class fipy.boundaryConditions.fixedFlux(faces, value)`

Bases: *BoundaryCondition*

Adds a Neumann contribution to the system of equations.

Implements

$$\hat{n} \cdot \vec{J}|_{\text{faces}} = \text{value}$$

The contribution, given by *value*, is only added to entries corresponding to the specified *faces*, and is weighted by the face areas.

Parameters

- **faces** (*FaceVariable* or `bool`) – Mask of faces where this condition applies.
- **value** (`float`) – Value to impose.

`__repr__()`

Return `repr(self)`.

22.1.4 fipy.boundaryConditions.fixedValue

Boundary condition of order 0

Classes

<code>FixedValue(faces, value)</code>	Adds a Dirichlet contribution to the system of equations.
---------------------------------------	---

`class fipy.boundaryConditions.fixedValue.FixedValue(faces, value)`

Bases: *BoundaryCondition*

Adds a Dirichlet contribution to the system of equations.

Implements

$$\phi|_{\text{faces}} = \text{value}$$

The contributions are given by $-\text{value} \times G_{\text{face}}$ for the RHS vector and G_{face} for the coefficient matrix. The parameter G_{face} represents the term's geometric coefficient, which depends on the type of term and the mesh geometry.

Contributions are only added to entries corresponding to the specified faces.

Parameters

- **faces** (*FaceVariable* or *bool*) – Mask of faces where this condition applies.
- **value** (*float*) – Value to impose.

__repr__()

Return `repr(self)`.

22.1.5 fipy.boundaryConditions.nthOrderBoundaryCondition

Boundary condition of specified derivative order

Classes

<code>NthOrderBoundaryCondition(faces, value, order)</code>	Adds an appropriate contribution to the system of equations
---	---

```
class fipy.boundaryConditions.nthOrderBoundaryCondition.NthOrderBoundaryCondition(faces,
                                                                                     value,
                                                                                     order)
```

Bases: *BoundaryCondition*

Adds an appropriate contribution to the system of equations

Implements

$$\hat{n} \cdot \nabla^{\text{order}} \phi|_{\text{faces}} = \text{value}$$

This boundary condition is generally used in conjunction with a *ImplicitDiffusionTerm* that has multiple coefficients. It does not have any direct effect on the solution matrices, but its derivatives do.

Creates an *NthOrderBoundaryCondition*.

Parameters

- **faces** (*FaceVariable* or *bool*) – Mask of faces where this condition applies.
- **value** (*float*) – Value to impose.
- **order** (*int*) – Order of the boundary condition. An *order* of 0 corresponds to a *FixedValue* and an *order* of 1 corresponds to a *FixedFlux*. Even and odd orders behave like *FixedValue* and *FixedFlux* objects, respectively, but apply to higher order terms.

__repr__()

Return `repr(self)`.

22.1.6 fipy.boundaryConditions.test

Test boundary conditions

22.2 fipy.matrices

Sparse matrices

Modules

```
fipy.matrices.offsetSparseMatrix  
fipy.matrices.petscMatrix  
fipy.matrices.pysparseMatrix  
fipy.matrices.scipyMatrix  
fipy.matrices.sparseMatrix  
fipy.matrices.test  
fipy.matrices.trilinosMatrix
```

22.2.1 fipy.matrices.offsetSparseMatrix

Functions

OffsetSparseMatrix(SparseMatrix, ...)

`fipy.matrices.offsetSparseMatrix.OffsetSparseMatrix(SparseMatrix, numberOfVariables, numberofEquations)`

Used in binary terms. *equationIndex* and *varIndex* need to be set statically before instantiation.

22.2.2 fipy.matrices.petScMatrix

22.2.3 fipy.matrices.pysparseMatrix

22.2.4 fipy.matrices.scipyMatrix

22.2.5 fipy.matrices.sparseMatrix

22.2.6 fipy.matrices.test

22.2.7 fipy.matrices.trilinosMatrix

22.3 `fipy.meshes`

Domain geometry and topologies

Domain geometry and topology

Modules

<code>fipy.meshes.abstractMesh</code>	
<code>fipy.meshes.builders</code>	
<code>fipy.meshes.cylindricalGrid1D</code>	
<code>fipy.meshes.cylindricalGrid2D</code>	
<code>fipy.meshes.cylindricalNonUniformGrid1D</code>	1D Mesh
<code>fipy.meshes.cylindricalNonUniformGrid2D</code>	2D rectangular Mesh
<code>fipy.meshes.cylindricalUniformGrid1D</code>	1D Mesh
<code>fipy.meshes.cylindricalUniformGrid2D</code>	2D cylindrical rectangular Mesh with constant spacing in x and constant spacing in y
<code>fipy.meshes.factoryMeshes</code>	
<code>fipy.meshes.gmshMesh</code>	
<code>fipy.meshes.grid1D</code>	
<code>fipy.meshes.grid2D</code>	
<code>fipy.meshes.grid3D</code>	
<code>fipy.meshes.mesh</code>	
<code>fipy.meshes.mesh1D</code>	Generic mesh class using numerix to do the calculations
<code>fipy.meshes.mesh2D</code>	Generic mesh class using numerix to do the calculations
<code>fipy.meshes.nonUniformGrid1D</code>	1D Mesh
<code>fipy.meshes.nonUniformGrid2D</code>	2D rectangular Mesh
<code>fipy.meshes.nonUniformGrid3D</code>	
<code>fipy.meshes.periodicGrid1D</code>	Periodic 1D Mesh
<code>fipy.meshes.periodicGrid2D</code>	2D periodic rectangular Mesh
<code>fipy.meshes.periodicGrid3D</code>	3D periodic rectangular Mesh
<code>fipy.meshes.representations</code>	
<code>fipy.meshes.skewedGrid2D</code>	
<code>fipy.meshes.sphericalNonUniformGrid1D</code>	1D Mesh
<code>fipy.meshes.sphericalUniformGrid1D</code>	1D Mesh
<code>fipy.meshes.test</code>	Test implementation of the mesh
<code>fipy.meshes.topologies</code>	
<code>fipy.meshes.tri2D</code>	
<code>fipy.meshes.uniformGrid</code>	
<code>fipy.meshes.uniformGrid1D</code>	1D Mesh
<code>fipy.meshes.uniformGrid2D</code>	2D rectangular Mesh with constant spacing in x and constant spacing in y

continues on next page

Table 1 – continued from previous page

```
fipy.meshes.uniformGrid3D
```

22.3.1 fipy.meshes.abstractMesh

Classes

<code>AbstractMesh(communicator[, ...])</code>	A class encapsulating all commonalities among meshes in FiPy.
--	---

Exceptions

<code>MeshAdditionError</code>	<code>Exception</code> raised when meshes cannot be concatenated.
--------------------------------	---

```
class fipy.meshes.abstractMesh.AbstractMesh(communicator, _RepresentationClass=<class  
    'fipy.meshes.representations.abstractRepresentation._AbstractRepresentation'  
    '_TopologyClass=<class  
    'fipy.meshes.topologies.abstractTopology._AbstractTopology'>)
```

Bases: `object`

A class encapsulating all commonalities among meshes in FiPy.

`property VTKCellDataSet`

Returns a TVTK *DataSet* representing the cells of this mesh

`property VTKFaceDataSet`

Returns a TVTK *DataSet* representing the face centers of this mesh

`__add__(other)`

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D  
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)  
>>> print(baseMesh.cellCenters)  
[[ 0.5  1.5  0.5  1.5]  
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))  
>>> print(translatedMesh.cellCenters)  
[[ 5.5   6.5   5.5   6.5]  
 [10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                  0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                    1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

`__div__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`__getstate__()`

Helper for pickle.

`__radd__(other)`

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
...
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

__repr__()

Return repr(self).

__sub__(other)

Tests. >>> from fipy import * >>> m = Grid1D() >>> print((m - ((1,)).cellCenters) [[-0.5]] >>> ((1,)) - m
Traceback (most recent call last): ... TypeError: unsupported operand type(s) for -: 'tuple' and 'UniformGrid1D'

__truediv__(other)

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

property aspect2D

The physical y vs x aspect ratio of a 2D mesh

property cellCenters

Coordinates of geometric centers of cells

property cellFaceIDs

Topology properties

property facesBack

Return list of faces on back boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((6, 7, 8, 9, 10, 11),
...                           numerix.nonzero(mesh.facesBack)[0]))
True
>>> ignore = mesh.facesBack.value
```

property facesBottom

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesDown

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesFront

Return list of faces on front boundary of *3D Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((0, 1, 2, 3, 4, 5),
...                           numerix.nonzero(mesh.facesFront)[0]))
True
>>> ignore = mesh.facesFront.value
```

property facesLeft

Return face on left boundary of *Mesh* as list with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((21, 25),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((9, 13),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
```

property facesRight

Return list of faces on right boundary of *Mesh* with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((24, 28),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((12, 16),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
```

property facesTop

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property facesUp

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property x

Equivalent to using `cellCenters[0]`.

```
>>> from fipy import *
>>> print(Grid1D(nx=2).x)
[ 0.5  1.5]
```

property y

Equivalent to using `cellCenters[1]`.

```
>>> from fipy import *
>>> print(Grid2D(nx=2, ny=2).y)
[ 0.5  0.5  1.5  1.5]
>>> print(Grid1D(nx=2).y)
Traceback (most recent call last):
...
AttributeError: 1D meshes do not have a "y" attribute.
```

property z

Equivalent to using `cellCenters[2]`.

```
>>> from fipy import *
>>> print(Grid3D(nx=2, ny=2, nz=2).z)
```

(continues on next page)

(continued from previous page)

```
[ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]
>>> print(Grid2D(nx=2, ny=2).z)
Traceback (most recent call last):
...
AttributeError: 1D and 2D meshes do not have a "z" attribute.
```

exception fipy.meshes.abstractMesh.MeshAdditionErrorBases: `Exception``Exception` raised when meshes cannot be concatenated.**__cause__**

exception cause

__context__

exception context

__delattr__(name, /)

Implement delattr(self, name).

__getattribute__(name, /)

Return getattr(self, name).

__reduce__()

Helper for pickle.

__repr__()

Return repr(self).

__setattr__(name, value, /)

Implement setattr(self, name, value).

__str__()

Return str(self).

add_note()`Exception.add_note(note)` – add a note to the exception**with_traceback()**`Exception.with_traceback(tb)` – set self.__traceback__ to tb and return self.

22.3.2 fipy.meshes.builders

Modules

```
fipy.meshes.builders.abstractGridBuilder
```

```
fipy.meshes.builders.grid1DBuilder
```

```
fipy.meshes.builders.grid2DBuilder
```

```
fipy.meshes.builders.grid3DBuilder
```

```
fipy.meshes.builders.periodicGrid1DBuilder
```

```
fipy.meshes.builders.utilityClasses
```

fipy.meshes.builders.abstractGridBuilder

fipy.meshes.builders.grid1DBuilder

fipy.meshes.builders.grid2DBuilder

fipy.meshes.builders.grid3DBuilder

fipy.meshes.builders.periodicGrid1DBuilder

fipy.meshes.builders.utilityClasses

22.3.3 fipy.meshes.cylindricalGrid1D

22.3.4 fipy.meshes.cylindricalGrid2D

22.3.5 fipy.meshes.cylindricalNonUniformGrid1D

1D Mesh

Classes

```
CylindricalNonUniformGrid1D([dx, nx, ...])
```

Creates a 1D cylindrical grid mesh.

```
class fipy.meshes.cylindricalNonUniformGrid1D.CylindricalNonUniformGrid1D(dx=1.0, nx=None,  
origin=(0,),  
overlap=2,  
communicator=DummyComm(),  
*args, **kwargs)
```

Bases: *NonUniformGrid1D*

Creates a 1D cylindrical grid mesh.

```
>>> mesh = CylindricalNonUniformGrid1D(nx = 3)
>>> print(mesh.cellCenters)
[[ 0.5  1.5  2.5]]
```

```
>>> mesh = CylindricalNonUniformGrid1D(dx = (1, 2, 3))
>>> print(mesh.cellCenters)
[[ 0.5  2.   4.5]]
```

```
>>> print(numerix.allclose(mesh.cellVolumes, (0.5, 4., 13.5)))
True
```

```
>>> mesh = CylindricalNonUniformGrid1D(nx = 2, dx = (1, 2, 3))
Traceback (most recent call last):
...
IndexError: nx != len(dx)
```

```
>>> mesh = CylindricalNonUniformGrid1D(nx=2, dx=(1., 2.)) + ((1.,),)
>>> print(mesh.cellCenters)
[[ 1.5  3. ]]
>>> print(numerix.allclose(mesh.cellVolumes, (1.5, 6)))
True
```

property VTKCellDataSet

Returns a TVTK *DataSet* representing the cells of this mesh

property VTKFaceDataSet

Returns a TVTK *DataSet* representing the face centers of this mesh

__add__(other)

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [ 10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
```

(continues on next page)

(continued from previous page)

```
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

`__div__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`__getstate__()`

Helper for pickle.

`__mul__(factor)`

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3.  ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__radd__(other)`

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
```

(continues on next page)

(continued from previous page)

```
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5  6.5  5.5  6.5]
 [10.5 10.5 11.5 11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                         cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                  1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5 1.5 0.5 1.5 0.5 1.5 0.5 1.5 2.5]
 [ 0.5 0.5 1.5 1.5 0.5 0.5 1.5 1.5 0.5]
 [ 0.5 0.5 0.5 0.5 1.5 1.5 1.5 1.5 0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

__repr__()

Return repr(self).

__rmul__(factor)

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5 1.5 0.5 1.5]
 [ 0.5 0.5 1.5 1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5 4.5 1.5 4.5]
 [ 1.5 1.5 4.5 4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
```

(continues on next page)

(continued from previous page)

```
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3. ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

__sub__(other)

Tests. >>> from fipy import * >>> m = Grid1D() >>> print((m - ((1,)).cellCenters) [[-0.5]] >>> ((1,)) - m
Traceback (most recent call last): ... TypeError: unsupported operand type(s) for -: 'tuple' and 'UniformGrid1D'

__truediv__(other)

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplemented

property aspect2D

The physical y vs x aspect ratio of a 2D mesh

property cellCenters

Coordinates of geometric centers of cells

property cellFaceIDs

property facesBack

Return list of faces on back boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((6, 7, 8, 9, 10, 11),
...                           numerix.nonzero(mesh.facesBack)[0]))
True
>>> ignore = mesh.facesBack.value
```

property facesBottom

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesDown

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesFront

Return list of faces on front boundary of *3D Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((0, 1, 2, 3, 4, 5),
...                           numerix.nonzero(mesh.facesFront)[0]))
True
>>> ignore = mesh.facesFront.value
```

property facesLeft

Return face on left boundary of *Mesh* as list with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((21, 25),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((9, 13),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
```

property facesRight

Return list of faces on right boundary of *Mesh* with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((24, 28),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((12, 16),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
```

property facesTop

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property facesUp

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property x

Equivalent to using `cellCenters[0]`.

```
>>> from fipy import *
>>> print(Grid1D(nx=2).x)
[ 0.5  1.5]
```

property y

Equivalent to using `cellCenters[1]`.

```
>>> from fipy import *
>>> print(Grid2D(nx=2, ny=2).y)
[ 0.5  0.5  1.5  1.5]
>>> print(Grid1D(nx=2).y)
Traceback (most recent call last):
...
AttributeError: 1D meshes do not have a "y" attribute.
```

property z

Equivalent to using `cellCenters[2]`.

```
>>> from fipy import *
>>> print(Grid3D(nx=2, ny=2, nz=2).z)
```

(continues on next page)

(continued from previous page)

```
[ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]
>>> print(Grid2D(nx=2, ny=2).z)
Traceback (most recent call last):
...
AttributeError: 1D and 2D meshes do not have a "z" attribute.
```

22.3.6 fipy.meshes.cylindricalNonUniformGrid2D

2D rectangular Mesh

Classes

<code>CylindricalNonUniformGrid2D([dx, dy, nx, ...])</code>	Creates a 2D cylindrical grid mesh with horizontal faces numbered first and then vertical faces.
---	--

```
class fipy.meshes.cylindricalNonUniformGrid2D.CylindricalNonUniformGrid2D(dx=1.0, dy=1.0,
                                                               nx=None,
                                                               ny=None,
                                                               origin=((0,0),
                                                               (0,0)), overlap=2,
                                                               communicator=DummyComm(),
                                                               *args, **kwargs)
```

Bases: `NonUniformGrid2D`

Creates a 2D cylindrical grid mesh with horizontal faces numbered first and then vertical faces.

`property VTKCellDataSet`

Returns a TVTK *DataSet* representing the cells of this mesh

`property VTKFaceDataSet`

Returns a TVTK *DataSet* representing the face centers of this mesh

`__add__(other)`

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                  0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                    1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

`__div__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`__getstate__()`

Helper for pickle.

`__mul__(factor)`

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3. ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

__radd__(other)

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5.,), (10.,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [ 10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2.,), (0.,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3.,), (0.,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2.,), (2.,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1.,), (0.,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2.,), (0.,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                  0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
```

(continues on next page)

(continued from previous page)

```
...
    cellCenters))
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                  1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5 1.5 0.5 1.5 0.5 1.5 0.5 1.5 2.5]
 [ 0.5 0.5 1.5 1.5 0.5 0.5 1.5 1.5 0.5]
 [ 0.5 0.5 0.5 0.5 1.5 1.5 1.5 1.5 0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

__repr__()

Return repr(self).

__rmul__(factor)

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5 1.5 0.5 1.5]
 [ 0.5 0.5 1.5 1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5 4.5 1.5 4.5]
 [ 1.5 1.5 4.5 4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3. ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__sub__(other)`

Tests. >>> from fipy import * >>> m = Grid1D() >>> print((m - ((1,))).cellCenters) [[-0.5]] >>> ((1,)) - m
Traceback (most recent call last): ... TypeError: unsupported operand type(s) for -: 'tuple' and 'UniformGrid1D'

`__truediv__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`property aspect2D`

The physical y vs x aspect ratio of a 2D mesh

`property cellCenters`

Coordinates of geometric centers of cells

`property cellFaceIDs`

`extrude(extrudeFunc=<function Mesh2D.<lambda>>, layers=1)`

This function returns a new 3D mesh. The 2D mesh is extruded using the *extrudeFunc* and the number of layers.

```
>>> from fipy.meshes.nonUniformGrid2D import NonUniformGrid2D
>>> print(NonUniformGrid2D(nx=2, ny=2).extrude(layers=2).cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]]
```

```
>>> from fipy.meshes.tri2D import Tri2D
>>> print(Tri2D().extrude(layers=2).cellCenters.allclose([[ 0.83333333,  0.5,
   ↵   0.16666667,  0.5,      0.83333333,  0.5,
   ...
   ↵], [
   ...
   ↵ 0.83333333,  0.5,      0.16666667,  0.5,      0.83333333,
   ...
   ↵ 0.5,          0.5,      1.5,          1.5,      1.5,          1.5,
   ...
   ↵ 0.5,          0.5,      1.5,          1.5,      1.5,          1.5
   ...
   ↵]))
```

True

Parameters

- **extrudeFunc** (*function*) – Takes the vertex coordinates and returns the displaced values
- **layers** (*int*) – Number of layers in the extruded mesh (number of times *extrudeFunc* will be called)

property facesBack

Return list of faces on back boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((6, 7, 8, 9, 10, 11),
...                           numerix.nonzero(mesh.facesBack)[0]))
True
>>> ignore = mesh.facesBack.value
```

property facesBottom

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesDown

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesFront

Return list of faces on front boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((0, 1, 2, 3, 4, 5),
...                           numerix.nonzero(mesh.facesFront)[0]))
```

(continues on next page)

(continued from previous page)

```
True
>>> ignore = mesh.facesFront.value
```

property facesLeft

Return face on left boundary of *Mesh* as list with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((21, 25),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((9, 13),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
```

property facesRight

Return list of faces on right boundary of *Mesh* with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((24, 28),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((12, 16),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
```

property facesTop

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property facesUp

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property x

Equivalent to using `cellCenters[0]`.

```
>>> from fipy import *
>>> print(Grid1D(nx=2).x)
[ 0.5  1.5]
```

property y

Equivalent to using `cellCenters[1]`.

```
>>> from fipy import *
>>> print(Grid2D(nx=2, ny=2).y)
[ 0.5  0.5  1.5  1.5]
>>> print(Grid1D(nx=2).y)
Traceback (most recent call last):
...
AttributeError: 1D meshes do not have a "y" attribute.
```

property z

Equivalent to using `cellCenters[2]`.

```
>>> from fipy import *
>>> print(Grid3D(nx=2, ny=2, nz=2).z)
[ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]
>>> print(Grid2D(nx=2, ny=2).z)
Traceback (most recent call last):
...
AttributeError: 1D and 2D meshes do not have a "z" attribute.
```

22.3.7 fipy.meshes.cylindricalUniformGrid1D

1D Mesh

Classes

<code>CylindricalUniformGrid1D([dx, nx, origin, ...])</code>	Creates a 1D cylindrical grid mesh.
--	-------------------------------------

```
class fipy.meshes.cylindricalUniformGrid1D.CylindricalUniformGrid1D(dx=1.0, nx=1, origin=(0,),  
                      overlap=2, communicator=DummyComm(), *args,  
                      **kwargs)
```

Bases: `UniformGrid1D`

Creates a 1D cylindrical grid mesh.

```
>>> mesh = CylindricalUniformGrid1D(nx = 3)  
>>> print(mesh.cellCenters)  
[[ 0.5  1.5  2.5]]
```

property VTKCellDataSet

Returns a TVTK *DataSet* representing the cells of this mesh

property VTKFaceDataSet

Returns a TVTK *DataSet* representing the face centers of this mesh

__add__(other)

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D  
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)  
>>> print(baseMesh.cellCenters)  
[[ 0.5  1.5  0.5  1.5]  
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5.,), (10.,))  
>>> print(translatedMesh.cellCenters)  
[[ 5.5   6.5   5.5   6.5]  
 [10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2.,), (0.,)))  
>>> print(addedMesh.cellCenters)  
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]  
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
```

(continues on next page)

(continued from previous page)

```
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

`__div__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`__getstate__()`

Helper for pickle.

`__radd__(other)`

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [ 10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

`__repr__()`

Return repr(self).

__sub__(other)

Tests. >>> from fipy import * >>> m = Grid1D() >>> print((m - ((1,)).cellCenters) [[-0.5]] >>> ((1,)) - m
Traceback (most recent call last): ... TypeError: unsupported operand type(s) for -: 'tuple' and 'UniformGrid1D'

__truediv__(other)

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

property aspect2D

The physical y vs x aspect ratio of a 2D mesh

property cellCenters

Coordinates of geometric centers of cells

property cellFaceIDs

property exteriorFaces

property facesBack

Return list of faces on back boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((6, 7, 8, 9, 10, 11),
...                           numerix.nonzero(mesh.facesBack)[0]))
True
>>> ignore = mesh.facesBack.value
```

property facesBottom

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesDown

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
```

(continues on next page)

(continued from previous page)

```
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesFront

Return list of faces on front boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((0, 1, 2, 3, 4, 5),
...                           numerix.nonzero(mesh.facesFront)[0]))
True
>>> ignore = mesh.facesFront.value
```

property facesLeft

Return face on left boundary of *Mesh* as list with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((21, 25),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((9, 13),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
```

property facesRight

Return list of faces on right boundary of *Mesh* with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((24, 28),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((12, 16),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
```

property facesTop

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
```

(continues on next page)

(continued from previous page)

```
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property facesUp

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property x

Equivalent to using `cellCenters[0]`.

```
>>> from fipy import *
>>> print(Grid1D(nx=2).x)
[ 0.5  1.5]
```

property y

Equivalent to using `cellCenters[1]`.

```
>>> from fipy import *
>>> print(Grid2D(nx=2, ny=2).y)
[ 0.5  0.5  1.5  1.5]
>>> print(Grid1D(nx=2).y)
Traceback (most recent call last):
...
AttributeError: 1D meshes do not have a "y" attribute.
```

property z

Equivalent to using `cellCenters[2]`.

```
>>> from fipy import *
>>> print(Grid3D(nx=2, ny=2, nz=2).z)
[ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]
>>> print(Grid2D(nx=2, ny=2).z)
Traceback (most recent call last):
```

(continues on next page)

(continued from previous page)

```
...
AttributeError: 1D and 2D meshes do not have a "z" attribute.
```

22.3.8 fipy.meshes.cylindricalUniformGrid2D

2D cylindrical rectangular Mesh with constant spacing in x and constant spacing in y

Classes

<code>CylindricalUniformGrid2D([dx, dy, nx, ny, ...])</code>	Creates a 2D cylindrical grid in the radial and axial directions, appropriate for axial symmetry.
--	---

```
class fipy.meshes.cylindricalUniformGrid2D.CylindricalUniformGrid2D(dx=1.0, dy=1.0, nx=1,
                                                               ny=1, origin=((0,), (0,)),
                                                               overlap=2, communicator=DummyComm(), *args,
                                                               **kwargs)
```

Bases: `UniformGrid2D`

Creates a 2D cylindrical grid in the radial and axial directions, appropriate for axial symmetry.

property VTKCellDataSet

Returns a TVTK *DataSet* representing the cells of this mesh

property VTKFaceDataSet

Returns a TVTK *DataSet* representing the face centers of this mesh

__add__(other)

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5.,), (10.,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2.,), (0.,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
... 
```

(continues on next page)

(continued from previous page)

```
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

`__div__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`__getstate__()`

Helper for pickle.

`__radd__(other)`

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
```

(continues on next page)

(continued from previous page)

```
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

__repr__()

Return repr(self).

__sub__(other)

Tests. >>> from fipy import * >>> m = Grid1D() >>> print((m - ((1,)).cellCenters) [[-0.5]] >>> ((1,)) - m
Traceback (most recent call last): ... TypeError: unsupported operand type(s) for -: 'tuple' and 'UniformGrid1D'

__truediv__(other)

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

property aspect2D

The physical y vs x aspect ratio of a 2D mesh

property cellCenters

Coordinates of geometric centers of cells

property cellFaceIDs**property facesBack**

Return list of faces on back boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((6, 7, 8, 9, 10, 11),
...                           numerix.nonzero(mesh.facesBack)[0]))
True
>>> ignore = mesh.facesBack.value
```

property facesBottom

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesDown

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesFront

Return list of faces on front boundary of *3D Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((0, 1, 2, 3, 4, 5),
...                           numerix.nonzero(mesh.facesFront)[0]))
True
>>> ignore = mesh.facesFront.value
```

property facesLeft

Return face on left boundary of *Mesh* as list with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((21, 25),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((9, 13),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
```

property facesRight

Return list of faces on right boundary of *Mesh* with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((24, 28),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((12, 16),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
```

property facesTop

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property facesUp

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property x

Equivalent to using `cellCenters[0]`.

```
>>> from fipy import *
>>> print(Grid1D(nx=2).x)
[ 0.5  1.5]
```

property y

Equivalent to using `cellCenters[1]`.

```
>>> from fipy import *
>>> print(Grid2D(nx=2, ny=2).y)
[ 0.5  0.5  1.5  1.5]
>>> print(Grid1D(nx=2).y)
Traceback (most recent call last):
...
AttributeError: 1D meshes do not have a "y" attribute.
```

property z

Equivalent to using `cellCenters[2]`.

```
>>> from fipy import *
>>> print(Grid3D(nx=2, ny=2, nz=2).z)
```

(continues on next page)

(continued from previous page)

```
[ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]
>>> print(Grid2D(nx=2, ny=2).z)
Traceback (most recent call last):
...
AttributeError: 1D and 2D meshes do not have a "z" attribute.
```

22.3.9 fipy.meshes.factoryMeshes

Functions

<code>CylindricalGrid1D([dr, nr, Lr, dx, nx, Lx, ...])</code>	Create a 2D cylindrical mesh
<code>CylindricalGrid2D([dr, dz, nr, nz, Lr, Lz, ...])</code>	Create a 2D cylindrical mesh
<code>Grid1D([dx, nx, Lx, overlap, communicator])</code>	Create a 1D Cartesian mesh
<code>Grid2D([dx, dy, nx, ny, Lx, Ly, overlap, ...])</code>	Create a 2D Cartesian mesh
<code>Grid3D([dx, dy, dz, nx, ny, nz, Lx, Ly, Lz, ...])</code>	Create a 3D Cartesian mesh
<code>SphericalGrid1D([dr, nr, Lr, dx, nx, Lx, ...])</code>	Create a 1D spherical mesh

`fipy.meshes.factoryMeshes.CylindricalGrid1D(dr=None, nr=None, Lr=None, dx=1.0, nx=None, Lx=None, origin=(0,), overlap=2, communicator=DummyComm())`

Create a 2D cylindrical mesh

Factory function to select between `CylindricalUniformGrid1D` and `CylindricalNonUniformGrid1D`. If `Lr` is specified the length of the domain is always `Lr` regardless of `dr`, unless `dr` is a list of spacings, in which case `Lr` will be the sum of `dr`.

Parameters

- `dr (float)` – Grid spacing in the radial direction. Alternative: `dx`.
- `nr (int)` – Number of cells in the radial direction. Alternative: `nx`.
- `Lr (float)` – Domain length in the radial direction. Alternative: `Lx`.
- `overlap (int)` – the number of overlapping cells for parallel simulations. Generally 2 is adequate. Higher order equations or discretizations require more.
- `communicator (CommWrapper)` – MPI communicator to use. Select `serialComm` to create a serial mesh when running in parallel; mostly used for test purposes. (default: `parallelComm`).

`fipy.meshes.factoryMeshes.CylindricalGrid2D(dr=None, dz=None, nr=None, nz=None, Lr=None, Lz=None, dx=1.0, dy=1.0, nx=None, ny=None, Lx=None, Ly=None, origin=((0,), (0,)), overlap=2, communicator=DummyComm())`

Create a 2D cylindrical mesh

Factory function to select between `CylindricalUniformGrid2D` and `CylindricalNonUniformGrid2D`. If `Lr` is specified the length of the domain is always `Lr` regardless of `dr`, unless `dr` is a list of spacings, in which case `Lr` will be the sum of `dr`.

Parameters

- `dr (float)` – Grid spacing in the radial direction. Alternative: `dx`.

- **dz** (*float*) – grid spacing in the vertical direction. Alternative: *dy*.
- **nr** (*int*) – Number of cells in the radial direction. Alternative: *nx*.
- **nz** (*int*) – Number of cells in the vertical direction. Alternative: *ny*.
- **Lr** (*float*) – Domain length in the radial direction. Alternative: *Lx*.
- **Lz** (*float*) – Domain length in the vertical direction. Alternative: *Ly*.
- **overlap** (*int*) – the number of overlapping cells for parallel simulations. Generally 2 is adequate. Higher order equations or discretizations require more.
- **communicator** (*CommWrapper*) – MPI communicator to use. Select *serialComm* to create a serial mesh when running in parallel; mostly used for test purposes. (default: *parallelComm*).

```
fipy.meshes.factoryMeshes.Grid1D(dx=1.0, nx=None, Lx=None, overlap=2,
                                  communicator=DummyComm())
```

Create a 1D Cartesian mesh

Factory function to select between *UniformGrid1D* and *NonUniformGrid1D*. If *Lx* is specified the length of the domain is always *Lx* regardless of *dx*, unless *dx* is a list of spacings, in which case *Lx* will be the sum of *dx* and *nx* will be the count of *dx*.

Parameters

- **dx** (*float*) – Grid spacing in the horizontal direction
- **nx** (*int*) – Number of cells in the horizontal direction
- **Lx** (*float*) – Domain length in the horizontal direction
- **overlap** (*int*) – Number of overlapping cells for parallel simulations. Generally 2 is adequate. Higher order equations or discretizations require more.
- **communicator** (*CommWrapper*) – MPI communicator to use. Select *serialComm* to create a serial mesh when running in parallel; mostly used for test purposes. (default: *parallelComm*).

```
fipy.meshes.factoryMeshes.Grid2D(dx=1.0, dy=1.0, nx=None, ny=None, Lx=None, Ly=None, overlap=2,
                                  communicator=DummyComm())
```

Create a 2D Cartesian mesh

Factory function to select between *UniformGrid2D* and *NonUniformGrid2D*. If *L{x,y}* is specified, the length of the domain is always *L{x,y}* regardless of *d{x,y}*, unless *d{x,y}* is a list of spacings, in which case *L{x,y}* will be the sum of *d{x,y}* and *n{x,y}* will be the count of *d{x,y}*.

```
>>> print(Grid2D(Lx=3., nx=2).dx)
1.5
```

Parameters

- **dx** (*float*) – Grid spacing in the horizontal direction
- **dy** (*float*) – Grid spacing in the vertical direction
- **nx** (*int*) – Number of cells in the horizontal direction
- **ny** (*int*) – Number of cells in the vertical direction
- **Lx** (*float*) – Domain length in the horizontal direction
- **Ly** (*float*) – Domain length in the vertical direction

- **overlap** (*int*) – Number of overlapping cells for parallel simulations. Generally 2 is adequate. Higher order equations or discretizations require more.
- **communicator** (*CommWrapper*) – MPI communicator to use. Select *serialComm* to create a serial mesh when running in parallel; mostly used for test purposes. (default: *parallelComm*).

```
fipy.meshes.factoryMeshes.Grid3D(dx=1.0, dy=1.0, dz=1.0, nx=None, ny=None, nz=None, Lx=None,  
Ly=None, Lz=None, overlap=2, communicator=DummyComm())
```

Create a 3D Cartesian mesh

Factory function to select between *UniformGrid3D* and *NonUniformGrid3D*. If $L\{x,y,z\}$ is specified, the length of the domain is always $L\{x,y,z\}$ regardless of $d\{x,y,z\}$, unless $d\{x,y,z\}$ is a list of spacings, in which case $L\{x,y,z\}$ will be the sum of $d\{x,y,z\}$ and $n\{x,y,z\}$ will be the count of $d\{x,y,z\}$.

Parameters

- **dx** (*float*) – Grid spacing in the horizontal direction
- **dy** (*float*) – Grid spacing in the vertical direction
- **dz** (*float*) – Grid spacing in the depth direction
- **nx** (*int*) – Number of cells in the horizontal direction
- **ny** (*int*) – Number of cells in the vertical direction
- **nz** (*int*) – Number of cells in the depth direction
- **Lx** (*float*) – Domain length in the horizontal direction
- **Ly** (*float*) – Domain length in the vertical direction
- **Lz** (*float*) – Domain length in the depth direction
- **overlap** (*int*) – Number of overlapping cells for parallel simulations. Generally 2 is adequate. Higher order equations or discretizations require more.
- **communicator** (*CommWrapper*) – MPI communicator to use. Select *serialComm* to create a serial mesh when running in parallel; mostly used for test purposes. (default: *parallelComm*).

```
fipy.meshes.factoryMeshes.SphericalGrid1D(dr=None, nr=None, Lr=None, dx=1.0, nx=None, Lx=None,  
origin=(0,), overlap=2, communicator=DummyComm())
```

Create a 1D spherical mesh

Factory function to select between *SphericalUniformGrid1D* and *SphericalNonUniformGrid1D*. If Lr is specified the length of the domain is always Lr regardless of dr , unless dr is a list of spacings, in which case Lr will be the sum of dr .

Parameters

- **dr** (*float*) – Grid spacing in the radial direction. Alternative: *dx*.
- **nr** (*int*) – Number of cells in the radial direction. Alternative: *nx*.
- **Lr** (*float*) – Domain length in the radial direction. Alternative: *Lx*.
- **overlap** (*int*) – the number of overlapping cells for parallel simulations. Generally 2 is adequate. Higher order equations or discretizations require more.
- **communicator** (*CommWrapper*) – MPI communicator to use. Select *serialComm* to create a serial mesh when running in parallel; mostly used for test purposes. (default: *parallelComm*).

22.3.10 fipy.meshes.gmshMesh

Functions

<code>gmshVersion([communicator])</code>	Determine the version of Gmsh.
<code>openMSHFile(name[, dimensions, ...])</code>	Open a Gmsh <i>MSH</i> file
<code>openPOSFile(name[, communicator, mode])</code>	Open a Gmsh <i>POS</i> post-processing file

Classes

<code>Gmsh2D(arg[, coordDimensions, communicator, ...])</code>	Construct a 2D Mesh using Gmsh
<code>Gmsh2DIn3DSpace(arg[, communicator, ...])</code>	Create a topologically 2D Mesh in 3D coordinates using Gmsh
<code>Gmsh3D(arg[, communicator, overlap, background])</code>	Create a 3D Mesh using Gmsh
<code>GmshFile(filename, communicator, mode[, ...])</code>	Base class for Gmsh mesh storage files.
<code>GmshGrid2D([dx, dy, nx, ny, ...])</code>	Should serve as a drop-in replacement for <i>Grid2D</i>
<code>GmshGrid3D([dx, dy, dz, nx, ny, nz, ...])</code>	Should serve as a drop-in replacement for <i>Grid3D</i>
<code>MSHFile(filename, dimensions[, ...])</code>	Wrapper for Gmsh MSH storage files.
<code>POSFile(filename, communicator, mode[, ...])</code>	Wrapper for Gmsh POS mesh storage files.

Exceptions

<code>GmshException</code>	<code>Exception</code> raised for Gmsh error conditions.
<code>MeshExportError</code>	<code>Exception</code> raised when FiPy mesh cannot be exported to Gmsh.

`class fipy.meshes.gmshMesh.Gmsh2D(arg, coordDimensions=2, communicator=DummyComm(), overlap=1, background=None)`

Bases: `Mesh2D`

Construct a 2D Mesh using Gmsh

If called in parallel, the mesh will be partitioned based on the value of `parallelComm.Nproc`. If an *MSH* file is supplied, it must have been previously partitioned with the number of partitions matching `parallelComm.Nproc`.

```
>>> radius = 5.
>>> side = 4.
>>> squaredCircle = Gmsh2D('''
... // A mesh consisting of a square inside a circle inside a circle
...
... // define the basic dimensions of the mesh
...
... cellSize = 1;
... radius = %(radius)g;
... side = %(side)g;
...
... // define the compass points of the inner circle
...''')
```

(continues on next page)

(continued from previous page)

```
... Point(1) = {0, 0, 0, cellSize};  
... Point(2) = {-radius, 0, 0, cellSize};  
... Point(3) = {0, radius, 0, cellSize};  
... Point(4) = {radius, 0, 0, cellSize};  
... Point(5) = {0, -radius, 0, cellSize};  
  
... // define the compass points of the outer circle  
  
... Point(6) = {-2*radius, 0, 0, cellSize};  
... Point(7) = {0, 2*radius, 0, cellSize};  
... Point(8) = {2*radius, 0, 0, cellSize};  
... Point(9) = {0, -2*radius, 0, cellSize};  
  
... // define the corners of the square  
  
... Point(10) = {side/2, side/2, 0, cellSize/2};  
... Point(11) = {-side/2, side/2, 0, cellSize/2};  
... Point(12) = {-side/2, -side/2, 0, cellSize/2};  
... Point(13) = {side/2, -side/2, 0, cellSize/2};  
  
... // define the inner circle  
  
... Circle(1) = {2, 1, 3};  
... Circle(2) = {3, 1, 4};  
... Circle(3) = {4, 1, 5};  
... Circle(4) = {5, 1, 2};  
  
... // define the outer circle  
  
... Circle(5) = {6, 1, 7};  
... Circle(6) = {7, 1, 8};  
... Circle(7) = {8, 1, 9};  
... Circle(8) = {9, 1, 6};  
  
... // define the square  
  
... Line(9) = {10, 13};  
... Line(10) = {13, 12};  
... Line(11) = {12, 11};  
... Line(12) = {11, 10};  
  
... // define the three boundaries  
  
... Line Loop(1) = {1, 2, 3, 4};  
... Line Loop(2) = {5, 6, 7, 8};  
... Line Loop(3) = {9, 10, 11, 12};  
  
... // define the three domains  
  
... Plane Surface(1) = {2, 1};  
... Plane Surface(2) = {1, 3};  
... Plane Surface(3) = {3};
```

(continues on next page)

(continued from previous page)

```

.... // label the three domains
.... // attention: if you use any "Physical" labels, you *must* label
.... // all elements that correspond to FiPy Cells (Physical Surface in 2D
.... // and Physical Volume in 3D) or Gmsh will not include them and FiPy
.... // will not be able to include them in the Mesh.
.... // note: if you do not use any labels, all Cells will be included.
.... Physical Surface("Outer") = {1};
.... Physical Surface("Middle") = {2};
.... Physical Surface("Inner") = {3};
.... // label the "north-west" part of the exterior boundary
.... // note: you only need to label the Face elements
.... // (Physical Line in 2D and Physical Surface in 3D) that correspond
.... // to boundaries you are interested in. FiPy does not need them to
.... // construct the Mesh.
.... Physical Line("NW") = {5};
.... ''' % locals()

```

It can be easier to specify certain domains and boundaries within Gmsh than it is to define the same domains and boundaries with FiPy expressions.

Here we compare obtaining the same Cells and Faces using FiPy's parametric descriptions and Gmsh's labels.

```
>>> x, y = squaredCircle.cellCenters
```

```
>>> middle = ((x**2 + y**2 <= radius**2)
...           & ~(x > -side/2) & (x < side/2)
...           & (y > -side/2) & (y < side/2)))
```

```
>>> print((middle == squaredCircle.physicalCells["Middle"]).all())
True
```

```
>>> X, Y = squaredCircle.faceCenters
```

```
>>> NW = ((X**2 + Y**2 > (1.99*radius)**2)
...         & (X**2 + Y**2 < (2.01*radius)**2)
...         & (X <= 0) & (Y >= 0))
```

```
>>> print((NW == squaredCircle.physicalFaces["NW"]).all())
True
```

It is possible to direct Gmsh to give the mesh different densities in different locations

```
>>> geo = '''
... // A mesh consisting of a square
```

(continues on next page)

(continued from previous page)

```

...
... // define the corners of the square
...
... Point(1) = {1, 1, 0, 1};
... Point(2) = {0, 1, 0, 1};
... Point(3) = {0, 0, 0, 1};
... Point(4) = {1, 0, 0, 1};
...
... // define the square
...
... Line(1) = {1, 2};
... Line(2) = {2, 3};
... Line(3) = {3, 4};
... Line(4) = {4, 1};
...
... // define the boundary
...
... Line Loop(1) = {1, 2, 3, 4};
...
... // define the domain
...
... Plane Surface(1) = {1};
...
...

```

```
>>> from fipy import CellVariable, numerix
```

```

>>> error = []
>>> bkg = None
>>> from builtins import range
>>> for refine in range(4):
...     square = Gmsh2D(geo, background=bkg)
...     x, y = square.cellCenters
...     bkg = CellVariable(mesh=square, value=abs(x / 4) + 0.01)
...     error.append((2 * numerix.sqrt(square.cellVolumes) / bkg - 1)**2).
...     cellVolumeAverage)

```

Check that the mesh is (semi)monotonically approaching the desired density (the first step may increase, depending on the number of partitions)

```
>>> print(numerix.greater(error[:-1], error[1:]).all())
True
```

and that the final density is close enough to the desired density

```
>>> print(error[-1] < 0.02)
True
```

The initial mesh doesn't have to be from Gmsh

```
>>> from fipy import Tri2D
```

```
>>> trisquare = Tri2D(nx=1, ny=1)
>>> x, y = trisquare.cellCenters
>>> bkg = CellVariable(mesh=trisquare, value=abs(x / 4) + 0.01)
>>> std1 = (numerix.sqrt(2 * trisquare.cellVolumes) / bkg).std()
```

```
>>> square = Gmsh2D(geo, background=bkg)
>>> x, y = square.cellCenters
>>> bkg = CellVariable(mesh=square, value=abs(x / 4) + 0.01)
>>> std2 = (numerix.sqrt(2 * square.cellVolumes) / bkg).std()
```

```
>>> print(std1 > std2)
True
```

Parameters

- **arg** (*str*) – (i) the path to an *MSH* file, (ii) a path to a Gmsh geometry (*.geo*) file, or (iii) a Gmsh geometry script
- **coordDimensions** (*int*) – Dimension of shapes
- **overlap** (*int*) – The number of overlapping cells for parallel simulations. Generally 1 is adequate. Higher order equations or discretizations require more. If *overlap* is greater than one, communication reverts to serial, as Gmsh only provides one layer of ghost cells.
- **background** (*CellVariable*) – Specifies the desired characteristic lengths of the mesh cells

property VTKCellDataSet

Returns a TVTK *DataSet* representing the cells of this mesh

property VTKFaceDataSet

Returns a TVTK *DataSet* representing the face centers of this mesh

__add__(other)

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [ 10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
... 
```

(continues on next page)

(continued from previous page)

```
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

`__div__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`__getstate__()`

Helper for pickle.

`__mul__(factor)`

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3. ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__radd__(other)`

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [ 10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                         cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5 1.5 0.5 1.5 0.5 1.5 0.5 1.5 2.5]
 [ 0.5 0.5 1.5 1.5 0.5 0.5 1.5 1.5 0.5]
 [ 0.5 0.5 0.5 0.5 1.5 1.5 1.5 1.5 0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

__repr__()

Return repr(self).

__rmul__(factor)

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5 1.5 0.5 1.5]
 [ 0.5 0.5 1.5 1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5 4.5 1.5 4.5]
 [ 1.5 1.5 4.5 4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3. ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__sub__(other)`

Tests. `>>> from fipy import * >>> m = Grid1D() >>> print((m - ((1,))).cellCenters) [[-0.5]] >>> ((1,)) - m`
 Traceback (most recent call last): ... `TypeError: unsupported operand type(s) for -: 'tuple' and 'UniformGrid1D'`

`__truediv__(other)`

Tests. `>>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2.` Traceback (most recent call last): ... `NotImplementedError`

`property aspect2D`

The physical y vs x aspect ratio of a 2D mesh

`property cellCenters`

Coordinates of geometric centers of cells

`property cellFaceIDs`

`extrude(extrudeFunc=<function Mesh2D.<lambda>>, layers=1)`

This function returns a new 3D mesh. The 2D mesh is extruded using the `extrudeFunc` and the number of layers.

```
>>> from fipy.meshes.nonUniformGrid2D import NonUniformGrid2D
>>> print(NonUniformGrid2D(nx=2, ny=2).extrude(layers=2).cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]]
```

```
>>> from fipy.meshes.tri2D import Tri2D
>>> print(Tri2D().extrude(layers=2).cellCenters.allclose([[ 0.83333333,  0.5,
   - 0.16666667,  0.5,      0.83333333,  0.5,
   - 0.16666667,  0.5,      0.16666667,  0.5
   - ],
   - [ 0.5,      0.83333333,  0.5,      0.16666667,  0.5,
   - 0.83333333,  0.5,      0.16666667,  0.5,
   - 0.16666667],
   - [ 0.5,      0.5,      1.5,      1.5,      1.5,      1.5,
   - 1.5,      1.5]]))
True
```

Parameters

- **extrudeFunc** (*function*) – Takes the vertex coordinates and returns the displaced values
- **layers** (*int*) – Number of layers in the extruded mesh (number of times *extrudeFunc* will be called)

property facesBack

Return list of faces on back boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((6, 7, 8, 9, 10, 11),
...                           numerix.nonzero(mesh.facesBack)[0]))
True
>>> ignore = mesh.facesBack.value
```

property facesBottom

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesDown

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesFront

Return list of faces on front boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((0, 1, 2, 3, 4, 5),
...                           numerix.nonzero(mesh.facesFront)[0]))
True
>>> ignore = mesh.facesFront.value
```

property facesLeft

Return face on left boundary of *Mesh* as list with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((21, 25),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((9, 13),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
```

property facesRight

Return list of faces on right boundary of *Mesh* with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((24, 28),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((12, 16),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
```

property facesTop

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property facesUp

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
```

(continues on next page)

(continued from previous page)

```
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property xEquivalent to using `cellCenters[0]`.

```
>>> from fipy import *
>>> print(Grid1D(nx=2).x)
[ 0.5  1.5]
```

property yEquivalent to using `cellCenters[1]`.

```
>>> from fipy import *
>>> print(Grid2D(nx=2, ny=2).y)
[ 0.5  0.5  1.5  1.5]
>>> print(Grid1D(nx=2).y)
Traceback (most recent call last):
...
AttributeError: 1D meshes do not have a "y" attribute.
```

property zEquivalent to using `cellCenters[2]`.

```
>>> from fipy import *
>>> print(Grid3D(nx=2, ny=2, nz=2).z)
[ 0.5  0.5  0.5  1.5  1.5  1.5  1.5]
>>> print(Grid2D(nx=2, ny=2).z)
Traceback (most recent call last):
...
AttributeError: 1D and 2D meshes do not have a "z" attribute.
```

```
class fipy.meshes.gmshMesh.Gmsh2DIn3DSpace(arg, communicator=DummyComm(), overlap=1,
                                             background=None)
```

Bases: `Gmsh2D`

Create a topologically 2D Mesh in 3D coordinates using Gmsh

If called in parallel, the mesh will be partitioned based on the value of `parallelComm.Nproc`. If an *MSH* file is supplied, it must have been previously partitioned with the number of partitions matching `parallelComm.Nproc`.**Parameters**

- **arg** (`str`) – (i) the path to an *MSH* file, (ii) a path to a Gmsh geometry (`.geo`) file, or (iii) a Gmsh geometry script
- **coordDimensions** (`int`) – Dimension of shapes
- **overlap** (`int`) – The number of overlapping cells for parallel simulations. Generally 1 is adequate. Higher order equations or discretizations require more. If `overlap` is greater than one, communication reverts to serial, as Gmsh only provides one layer of ghost cells.

- **background (CellVariable)** – Specifies the desired characteristic lengths of the mesh cells

property VTKCellDataSet

Returns a TVTK *DataSet* representing the cells of this mesh

property VTKFaceDataSet

Returns a TVTK *DataSet* representing the face centers of this mesh

__add__(other)

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [ 10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

__div__(other)

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

__getstate__(self)

Helper for pickle.

__mul__(factor)

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3.  ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__radd__(other)`

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
```

(continues on next page)

(continued from previous page)

```
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

`__repr__()`

Return `repr(self)`.

`__rmul__(factor)`

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3.  ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__sub__(other)`

Tests. >>> from fipy import * >>> m = Grid1D() >>> print((m - ((1,))).cellCenters) [[-0.5]] >>> ((1,)) - m
Traceback (most recent call last): ... TypeError: unsupported operand type(s) for -: 'tuple' and 'UniformGrid1D'

`__truediv__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

property aspect2D

The physical y vs x aspect ratio of a 2D mesh

property cellCenters

Coordinates of geometric centers of cells

property cellFaceIDs

extrude(*extrudeFunc=<function Mesh2D.<lambda>>*, *layers=1*)

This function returns a new 3D mesh. The 2D mesh is extruded using the *extrudeFunc* and the number of layers.

```
>>> from fipy.meshes.nonUniformGrid2D import NonUniformGrid2D
>>> print(NonUniformGrid2D(nx=2, ny=2).extrude(layers=2).cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]]
```

```
>>> from fipy.meshes.tri2D import Tri2D
>>> print(Tri2D().extrude(layers=2).cellCenters.allclose([[ 0.83333333,  0.5,
   - 0.16666667,  0.5,      0.83333333,  0.5,
   - 0.16666667,  0.5
  ...,
  ...],
  ...,
  -0.83333333,  0.5,      0.16666667,  0.5,      0.83333333,
  ...,
  ...,
  -0.16666667],
  ...,
  -0.5,      0.5,      1.5,      1.5,      1.5,
  ...,
  ...]))))
True
```

Parameters

- **extrudeFunc** (*function*) – Takes the vertex coordinates and returns the displaced values
- **layers** (*int*) – Number of layers in the extruded mesh (number of times *extrudeFunc* will be called)

property facesBack

Return list of faces on back boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((6, 7, 8, 9, 10, 11),
   ...                           numerix.nonzero(mesh.facesBack)[0]))
True
>>> ignore = mesh.facesBack.value
```

property facesBottom

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
```

(continues on next page)

(continued from previous page)

```
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesDown

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesFront

Return list of faces on front boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((0, 1, 2, 3, 4, 5),
...                           numerix.nonzero(mesh.facesFront)[0]))
True
>>> ignore = mesh.facesFront.value
```

property facesLeft

Return face on left boundary of *Mesh* as list with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((21, 25),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((9, 13),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
```

property facesRight

Return list of faces on right boundary of *Mesh* with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((24, 28),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((12, 16),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
```

property facesTop

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property facesUp

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property x

Equivalent to using `cellCenters[0]`.

```
>>> from fipy import *
>>> print(Grid1D(nx=2).x)
[ 0.5  1.5]
```

property y

Equivalent to using `cellCenters[1]`.

```
>>> from fipy import *
>>> print(Grid2D(nx=2, ny=2).y)
[ 0.5  0.5  1.5  1.5]
>>> print(Grid1D(nx=2).y)
Traceback (most recent call last):
...
AttributeError: 1D meshes do not have a "y" attribute.
```

property z

Equivalent to using `cellCenters[2]`.

```
>>> from fipy import *
>>> print(Grid3D(nx=2, ny=2, nz=2).z)
[ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]
>>> print(Grid2D(nx=2, ny=2).z)
Traceback (most recent call last):
...
AttributeError: 1D and 2D meshes do not have a "z" attribute.
```

`class fipy.meshes.gmshMesh.Gmsh3D(arg, communicator=DummyComm(), overlap=1, background=None)`

Bases: `Mesh`

Create a 3D Mesh using Gmsh

If called in parallel, the mesh will be partitioned based on the value of `parallelComm.Nproc`. If an `MSH` file is supplied, it must have been previously partitioned with the number of partitions matching `parallelComm.Nproc`.

Parameters

- **arg** (`str`) – (i) the path to an `MSH` file, (ii) a path to a Gmsh geometry (`.geo`) file, or (iii) a Gmsh geometry script
- **overlap** (`int`) – The number of overlapping cells for parallel simulations. Generally 1 is adequate. Higher order equations or discretizations require more. If `overlap` is greater than one, communication reverts to serial, as Gmsh only provides one layer of ghost cells.
- **background** (`CellVariable`) – Specifies the desired characteristic lengths of the mesh cells

property VTKCellDataSet

Returns a TVTK `DataSet` representing the cells of this mesh

property VTKFaceDataSet

Returns a TVTK `DataSet` representing the face centers of this mesh

__add__(other)

Either translate a `Mesh` or concatenate two `Mesh` objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a `Mesh`, a translated `Mesh` is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5  6.5  5.5  6.5]
 [ 10.5 10.5 11.5 11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
```

(continues on next page)

(continued from previous page)

```

...
[ 0.5, 0.5, 1.5, 1.5, 1., 1.,
  1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
                           cellCenters))
...
True

```

Mesh concatenation is not limited to 2D meshes

```

>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]

```

but the different *Mesh* objects must, of course, have the same dimensionality.

```

>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match

```

__div__(other)

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

__getstate__(self)

Helper for pickle.

__mul__(factor)

Dilate a *Mesh* by *factor*.

```

>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]

```

The *factor* can be a scalar

```

>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]

```

or a vector

```

>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)

```

(continues on next page)

(continued from previous page)

```
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3. ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__radd__(other)`

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5 1.5 0.5 1.5 0.5 1.5 0.5 1.5 2.5]
 [ 0.5 0.5 1.5 1.5 0.5 0.5 1.5 1.5 0.5]
 [ 0.5 0.5 0.5 0.5 1.5 1.5 1.5 1.5 0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

__repr__()

Return repr(self).

__rmul__(factor)

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
```

(continues on next page)

(continued from previous page)

```
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3.  ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

__sub__(other)

Tests. >>> from fipy import * >>> m = Grid1D() >>> print((m - ((1,)).cellCenters) [[-0.5]]) >>> ((1,)) - m
Traceback (most recent call last): ... TypeError: unsupported operand type(s) for -: 'tuple' and 'UniformGrid1D'

__truediv__(other)

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

property aspect2D

The physical y vs x aspect ratio of a 2D mesh

property cellCenters

Coordinates of geometric centers of cells

property cellFaceIDs

property facesBack

Return list of faces on back boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((6, 7, 8, 9, 10, 11),
...                           numerix.nonzero(mesh.facesBack)[0]))
True
>>> ignore = mesh.facesBack.value
```

property facesBottom

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesDown

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesFront

Return list of faces on front boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((0, 1, 2, 3, 4, 5),
...                           numerix.nonzero(mesh.facesFront)[0]))
True
>>> ignore = mesh.facesFront.value
```

property facesLeft

Return face on left boundary of *Mesh* as list with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((21, 25),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((9, 13),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
```

property facesRight

Return list of faces on right boundary of *Mesh* with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((24, 28),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((12, 16),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
```

property facesTop

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property facesUp

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property x

Equivalent to using `cellCenters[0]`.

```
>>> from fipy import *
>>> print(Grid1D(nx=2).x)
[ 0.5  1.5]
```

property y

Equivalent to using `cellCenters[1]`.

```
>>> from fipy import *
>>> print(Grid2D(nx=2, ny=2).y)
[ 0.5  0.5  1.5  1.5]
>>> print(Grid1D(nx=2).y)
Traceback (most recent call last):
...
AttributeError: 1D meshes do not have a "y" attribute.
```

property z

Equivalent to using `cellCenters[2]`.

```
>>> from fipy import *
>>> print(Grid3D(nx=2, ny=2, nz=2).z)
[ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]
>>> print(Grid2D(nx=2, ny=2).z)
Traceback (most recent call last):
...
AttributeError: 1D and 2D meshes do not have a "z" attribute.
```

exception fipy.meshes.gmshMesh.GmshException

Bases: `Exception`

`Exception` raised for Gmsh error conditions.

__cause__

exception cause

__context__

exception context

__delattr__(name, /)

Implement delattr(self, name).

__getattribute__(name, /)

Return getattr(self, name).

__reduce__()

Helper for pickle.

__repr__()

Return repr(self).

__setattr__(name, value, /)

Implement setattr(self, name, value).

__str__()

Return str(self).

add_note()

`Exception.add_note(note)` – add a note to the exception

with_traceback()

`Exception.with_traceback(tb)` – set self.`__traceback__` to tb and return self.

```
class fipy.meshes.gmshMesh.GmshFile(filename, communicator, mode, fileIsTemporary=False)
```

Bases: `object`

Base class for Gmsh mesh storage files.

```
class fipy.meshes.gmshMesh.GmshGrid2D(dx=1.0, dy=1.0, nx=1, ny=None, coordDimensions=2,  
                                         communicator=DummyComm(), overlap=1)
```

Bases: `Gmsh2D`

Should serve as a drop-in replacement for `Grid2D`

property VTKCellDataSet

Returns a TVTK `DataSet` representing the cells of this mesh

property VTKFaceDataSet

Returns a TVTK `DataSet` representing the face centers of this mesh

__add__(other)

Either translate a `Mesh` or concatenate two `Mesh` objects.

```
>>> from fipy.meshes import Grid2D  
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)  
>>> print(baseMesh.cellCenters)  
[[ 0.5  1.5  0.5  1.5]  
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a `Mesh`, a translated `Mesh` is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))  
>>> print(translatedMesh.cellCenters)  
[[ 5.5   6.5   5.5   6.5]  
 [ 10.5  10.5  11.5  11.5]]
```

If a `Mesh` is added to a `Mesh`, a concatenation of the two `Mesh` objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))  
>>> print(addedMesh.cellCenters)  
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]  
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two `Mesh` objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))  
>>> print(addedMesh.cellCenters)  
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]  
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))  
>>> print(addedMesh.cellCenters)  
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]  
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping `Mesh` objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

`__div__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2).cellCenters) [[0.25]] >>> Ab-

stractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`__getstate__()`

Helper for pickle.

`__mul__(factor)`

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3.  ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__radd__(other)`

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [ 10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
```

(continues on next page)

(continued from previous page)

```
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                  0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                    1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

__repr__()

Return repr(self).

__rmul__(factor)

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.   3.   3. ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

__sub__(other)

Tests. >>> from fipy import * >>> m = Grid1D() >>> print((m - ((1,))).cellCenters) [[-0.5]] >>> ((1,)) - m
Traceback (most recent call last): ... TypeError: unsupported operand type(s) for -: 'tuple' and 'UniformGrid1D'

__truediv__(other)

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

property aspect2D

The physical y vs x aspect ratio of a 2D mesh

property cellCenters

Coordinates of geometric centers of cells

property cellFaceIDs**extrude(extrudeFunc=<function Mesh2D.<lambda>>, layers=1)**

This function returns a new 3D mesh. The 2D mesh is extruded using the *extrudeFunc* and the number of layers.

```
>>> from fipy.meshes.nonUniformGrid2D import NonUniformGrid2D
>>> print(NonUniformGrid2D(nx=2, ny=2).extrude(layers=2).cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]]
```

```
>>> from fipy.meshes.tri2D import Tri2D
>>> print(Tri2D().extrude(layers=2).cellCenters.allclose([[ 0.83333333,  0.5,
   - 0.16666667,  0.5,      0.83333333,  0.5,
   - 0.16666667,  0.5],
   ...
   [-0.83333333,  0.5,      0.16666667,  0.5,      0.83333333,
   - 0.5,      0.16666667],
   ...
   [ 0.5,      0.5,      1.5,      1.5,      1.5,
   - 1.5 ]]))
```

True

Parameters

- **extrudeFunc** (*function*) – Takes the vertex coordinates and returns the displaced values
- **layers** (*int*) – Number of layers in the extruded mesh (number of times *extrudeFunc* will be called)

property facesBack

Return list of faces on back boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((6, 7, 8, 9, 10, 11),
...                           numerix.nonzero(mesh.facesBack)[0]))
True
>>> ignore = mesh.facesBack.value
```

property facesBottom

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesDown

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesFront

Return list of faces on front boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((0, 1, 2, 3, 4, 5),
...                           numerix.nonzero(mesh.facesFront)[0]))
True
>>> ignore = mesh.facesFront.value
```

property facesLeft

Return face on left boundary of *Mesh* as list with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((21, 25),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((9, 13),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
```

property facesRight

Return list of faces on right boundary of *Mesh* with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((24, 28),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((12, 16),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
```

property facesTop

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property facesUp

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property x

Equivalent to using `cellCenters[0]`.

```
>>> from fipy import *
>>> print(Grid1D(nx=2).x)
[ 0.5  1.5]
```

property y

Equivalent to using `cellCenters[1]`.

```
>>> from fipy import *
>>> print(Grid2D(nx=2, ny=2).y)
[ 0.5  0.5  1.5  1.5]
>>> print(Grid1D(nx=2).y)
Traceback (most recent call last):
...
AttributeError: 1D meshes do not have a "y" attribute.
```

property z

Equivalent to using `cellCenters[2]`.

```
>>> from fipy import *
>>> print(Grid3D(nx=2, ny=2, nz=2).z)
[ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]
>>> print(Grid2D(nx=2, ny=2).z)
Traceback (most recent call last):
...
AttributeError: 1D and 2D meshes do not have a "z" attribute.
```

`class fipy.meshes.gmshMesh.GmshGrid3D(dx=1.0, dy=1.0, dz=1.0, nx=1, ny=None, nz=None, communicator=DummyComm(), overlap=1)`

Bases: `Gmsh3D`

Should serve as a drop-in replacement for `Grid3D`

property VTKCellDataSet

Returns a TVTK `DataSet` representing the cells of this mesh

property VTKFaceDataSet

Returns a TVTK `DataSet` representing the face centers of this mesh

__add__(other)

Either translate a `Mesh` or concatenate two `Mesh` objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a `Mesh`, a translated `Mesh` is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [10.5  10.5  11.5  11.5]]
```

If a `Mesh` is added to a `Mesh`, a concatenation of the two `Mesh` objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                  0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                    1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
... 
```

(continues on next page)

(continued from previous page)

```
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

`__div__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`__getstate__()`

Helper for pickle.

`__mul__(factor)`

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3. ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__radd__(other)`

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [ 10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                         cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5 1.5 0.5 1.5 0.5 1.5 0.5 1.5 2.5]
 [ 0.5 0.5 1.5 1.5 0.5 0.5 1.5 1.5 0.5]
 [ 0.5 0.5 0.5 0.5 1.5 1.5 1.5 1.5 0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

__repr__()

Return repr(self).

__rmul__(factor)

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5 1.5 0.5 1.5]
 [ 0.5 0.5 1.5 1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5 4.5 1.5 4.5]
 [ 1.5 1.5 4.5 4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3. ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilitatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__sub__(other)`

Tests. >>> from fipy import * >>> m = Grid1D() >>> print((m - ((1,))).cellCenters) [[-0.5]] >>> ((1,)) - m
Traceback (most recent call last): ... TypeError: unsupported operand type(s) for -: 'tuple' and 'UniformGrid1D'

`__truediv__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`property aspect2D`

The physical y vs x aspect ratio of a 2D mesh

`property cellCenters`

Coordinates of geometric centers of cells

`property cellFaceIDs`

`property facesBack`

Return list of faces on back boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((6, 7, 8, 9, 10, 11),
...                           numerix.nonzero(mesh.facesBack)[0]))
True
>>> ignore = mesh.facesBack.value
```

`property facesBottom`

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesDown

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesFront

Return list of faces on front boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((0, 1, 2, 3, 4, 5),
...                           numerix.nonzero(mesh.facesFront)[0]))
True
>>> ignore = mesh.facesFront.value
```

property facesLeft

Return face on left boundary of *Mesh* as list with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((21, 25),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((9, 13),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
```

property facesRight

Return list of faces on right boundary of *Mesh* with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((24, 28),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((12, 16),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
```

property facesTop

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property facesUp

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property x

Equivalent to using `cellCenters[0]`.

```
>>> from fipy import *
>>> print(Grid1D(nx=2).x)
[ 0.5  1.5]
```

property y

Equivalent to using `cellCenters[1]`.

```
>>> from fipy import *
>>> print(Grid2D(nx=2, ny=2).y)
[ 0.5  0.5  1.5  1.5]
>>> print(Grid1D(nx=2).y)
Traceback (most recent call last):
...
AttributeError: 1D meshes do not have a "y" attribute.
```

property z

Equivalent to using `cellCenters[2]`.

```
>>> from fipy import *
>>> print(Grid3D(nx=2, ny=2, nz=2).z)
```

(continues on next page)

(continued from previous page)

```
[ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]
>>> print(Grid2D(nx=2, ny=2).z)
Traceback (most recent call last):
...
AttributeError: 1D and 2D meshes do not have a "z" attribute.
```

`class fipy.meshes.gmshMesh.MSHFile(filename, dimensions, coordDimensions=None, communicator=DummyComm(), gmshOutput='', mode='r', fileIsTemporary=False)`

Bases: `GmshFile`

Wrapper for Gmsh MSH storage files.

Class responsible for parsing a Gmsh file and then readying its contents for use by a *Mesh* constructor.

Can handle a partitioned mesh based on *parallelComm.Nproc*. If partitioning, the *.msh* file must either be previously partitioned with the number of partitions matching *Nproc*, or the mesh must be specified with a *.geo* file or multiline string.

Does not support gmsh versions < 2. If partitioning, gmsh version must be >= 2.5.

TODO: Refactor face extraction functions.

Parameters

- `filename (str)` – Gmsh output file
- `dimensions (int)` – Dimension of mesh
- `coordDimensions (int)` – Dimension of shapes
- `communicator (CommWrapper)` – Generally, `fipy.tools.serialComm` or `fipy.tools.parallelComm`. Select `~fipy.tools.serialComm` to create a serial mesh when running in parallel; mostly used for test purposes.
- `gmshOutput (str)` – Output (if any) from Gmsh run that created *.msh* file
- `mode (str)` – Beginning with *r* for reading and *w* for writing. The file will be created if it doesn't exist when opened for writing; it will be truncated when opened for writing. Add a *b* to the mode for binary files.
- `fileIsTemporary (bool)` – If *True*, *filename* should be cleaned up on deletion

`makeMapVariables(mesh)`

Utility function to make *MeshVariables* that define different domains in the mesh

`read()`

0. Build *cellsToVertices*
1. Recover needed *vertexCoords* and mapping from file using *cellsToVertices*
2. Build *cellsToVertIDs* proper from *vertexCoords* and vertex map
3. Build faces
4. Build *cellsToFaces*

Isolate relevant data into three files, store in *self.nodesPath* for *\$Nodes*, *self.elemsPath* for *\$Elements*, *self.namesFile* for *\$PhysicalNames*.

Returns `vertexCoords, facesToVertexID, cellsToFaceID, cellGlobalIDMap, ghostCellGlobalIDMap.`

exception `fipy.meshes.gmshMesh.MeshExportError`

Bases: `GmshException`

`Exception` raised when FiPy mesh cannot be exported to Gmsh.

__cause__

exception cause

__context__

exception context

__delattr__(name, /)

Implement delattr(self, name).

__getattribute__(name, /)

Return getattr(self, name).

__reduce__()

Helper for pickle.

__repr__()

Return repr(self).

__setattr__(name, value, /)

Implement setattr(self, name, value).

__str__()

Return str(self).

add_note()

`Exception.add_note(note)` – add a note to the exception

with_traceback()

`Exception.with_traceback(tb)` – set self.__traceback__ to tb and return self.

class `fipy.meshes.gmshMesh.POSFile(filename, communicator, mode, fileIsTemporary=False)`

Bases: `GmshFile`

Wrapper for Gmsh POS mesh storage files.

`fipy.meshes.gmshMesh.gmshVersion(communicator=DummyComm())`

Determine the version of Gmsh.

We can't trust the generated `.msh` file for the correct version number, so we have to retrieve it from the gmsh binary.

`fipy.meshes.gmshMesh.openMSHFile(name, dimensions=None, coordDimensions=None, communicator=DummyComm(), overlap=1, mode='r', background=None)`

Open a Gmsh *MSH* file

Parameters

- `filename` (`str`) – Gmsh output file
- `dimensions` (`int`) – Dimension of mesh
- `coordDimensions` (`int`) – Dimension of shapes
- `overlap` (`int`) – The number of overlapping cells for parallel simulations. Generally 1 is adequate. Higher order equations or discretizations require more. If `overlap` is greater than one, communication reverts to serial, as Gmsh only provides one layer of ghost cells.

- **mode** (*str*) – Beginning with *r* for reading and *w* for writing. The file will be created if it doesn't exist when opened for writing; it will be truncated when opened for writing. Add a *b* to the mode for binary files.
- **background** (*CellVariable*) – Specifies the desired characteristic lengths of the mesh cells

`fipy.meshes.gmshMesh.openPOSFile(name, communicator=DummyComm(), mode='w')`

Open a Gmsh *POS* post-processing file

22.3.11 fipy.meshes.grid1D

22.3.12 fipy.meshes.grid2D

22.3.13 fipy.meshes.grid3D

22.3.14 fipy.meshes.mesh

Classes

`Mesh`(vertexCoords, faceVertexIDs, cellFaceIDs)

Generic mesh class using numerix to do the calculations

Exceptions

`MeshAdditionError`

```
class fipy.meshes.mesh.Mesh(vertexCoords, faceVertexIDs, cellFaceIDs, communicator=DummyComm(),
                            _RepresentationClass=<class
                                'fipy.meshes.representations.meshRepresentation._MeshRepresentation'>,
                            _TopologyClass=<class
                                'fipy.meshes.topologies.meshTopology._MeshTopology'>)
```

Bases: *AbstractMesh*

Generic mesh class using numerix to do the calculations

Meshes contain cells, faces, and vertices.

This is built for a non-mixed element mesh.

property VTKCellDataSet

Returns a TVTK *DataSet* representing the cells of this mesh

property VTKFaceDataSet

Returns a TVTK *DataSet* representing the face centers of this mesh

__add__(*other*)

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [ 10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                         cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5 1.5 0.5 1.5 0.5 1.5 0.5 1.5 2.5]
 [ 0.5 0.5 1.5 1.5 0.5 0.5 1.5 1.5 0.5]
 [ 0.5 0.5 0.5 0.5 1.5 1.5 1.5 1.5 0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

`__div__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`__getstate__()`

Helper for pickle.

`__mul__(factor)`

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5 1.5 0.5 1.5]
 [ 0.5 0.5 1.5 1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5 4.5 1.5 4.5]
 [ 1.5 1.5 4.5 4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3. ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__radd__(other)`

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
```

(continues on next page)

(continued from previous page)

```
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

__repr__()

Return repr(self).

__rmul__(factor)

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3.  ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

__sub__(other)

Tests. >>> from fipy import * >>> m = Grid1D() >>> print((m - ((1,))).cellCenters) [[-0.5]] >>> ((1,)) - m
Traceback (most recent call last): ... TypeError: unsupported operand type(s) for -: 'tuple' and 'UniformGrid1D'

__truediv__(other)

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

property aspect2D

The physical y vs x aspect ratio of a 2D mesh

property cellCenters

Coordinates of geometric centers of cells

property cellFaceIDs**property facesBack**

Return list of faces on back boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allegual((6, 7, 8, 9, 10, 11),
...                           numerix.nonzero(mesh.facesBack)[0]))
True
>>> ignore = mesh.facesBack.value
```

property facesBottom

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesDown

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesFront

Return list of faces on front boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((0, 1, 2, 3, 4, 5),
...                           numerix.nonzero(mesh.facesFront)[0]))
True
>>> ignore = mesh.facesFront.value
```

property facesLeft

Return face on left boundary of *Mesh* as list with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((21, 25),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((9, 13),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
```

property facesRight

Return list of faces on right boundary of *Mesh* with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((24, 28),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((12, 16),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
```

property facesTop

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property facesUp

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property x

Equivalent to using `cellCenters[0]`.

```
>>> from fipy import *
>>> print(Grid1D(nx=2).x)
[ 0.5  1.5]
```

property y

Equivalent to using `cellCenters[1]`.

```
>>> from fipy import *
>>> print(Grid2D(nx=2, ny=2).y)
[ 0.5  0.5  1.5  1.5]
>>> print(Grid1D(nx=2).y)
Traceback (most recent call last):
...
AttributeError: 1D meshes do not have a "y" attribute.
```

property z

Equivalent to using `cellCenters[2]`.

```
>>> from fipy import *
>>> print(Grid3D(nx=2, ny=2, nz=2).z)
[ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]
>>> print(Grid2D(nx=2, ny=2).z)
Traceback (most recent call last):
...
AttributeError: 1D and 2D meshes do not have a "z" attribute.
```

exception fipy.meshes.mesh.MeshAdditionError

Bases: `Exception`

__cause__

exception cause

__context__

exception context

__delattr__(name, /)

Implement delattr(self, name).

__getattribute__(name, /)

Return getattr(self, name).

__reduce__()

Helper for pickle.

__repr__()

Return repr(self).

__setattr__(name, value, /)

Implement setattr(self, name, value).

__str__()

Return str(self).

add_note()

`Exception.add_note(note)` – add a note to the exception

with_traceback()

`Exception.with_traceback(tb)` – set `self.__traceback__` to tb and return self.

22.3.15 fipy.meshes.mesh1D

Generic mesh class using numerix to do the calculations

Meshes contain cells, faces, and vertices.

This is built for a non-mixed element mesh.

Classes

```
Mesh1D(vertexCoords, faceVertexIDs, cellFaceIDs)
```

```
class fipy.meshes.mesh1D.Mesh1D(vertexCoords, faceVertexIDs, cellFaceIDs,
                                communicator=DummyComm(), _RepresentationClass=<class
                                'fipy.meshes.representations.meshRepresentation._MeshRepresentation'>,
                                _TopologyClass=<class
                                'fipy.meshes.topologies.meshTopology._Mesh1DTopology'>)
```

Bases: *Mesh*

property VTKCellDataSet

Returns a TVTK *DataSet* representing the cells of this mesh

property VTKFaceDataSet

Returns a TVTK *DataSet* representing the face centers of this mesh

__add__(other)

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [ 10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
```

(continues on next page)

(continued from previous page)

```
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

`__div__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`__getstate__()`

Helper for pickle.

`__mul__(factor)`

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3.  ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__radd__(other)`

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
```

(continues on next page)

(continued from previous page)

```
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5  6.5  5.5  6.5]
 [10.5 10.5 11.5 11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                         cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                  1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5 1.5 0.5 1.5 0.5 1.5 0.5 1.5 2.5]
 [ 0.5 0.5 1.5 1.5 0.5 0.5 1.5 1.5 0.5]
 [ 0.5 0.5 0.5 0.5 1.5 1.5 1.5 1.5 0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

__repr__()

Return repr(self).

__rmul__(factor)

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5 1.5 0.5 1.5]
 [ 0.5 0.5 1.5 1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5 4.5 1.5 4.5]
 [ 1.5 1.5 4.5 4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
```

(continues on next page)

(continued from previous page)

```
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3. ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

__sub__(other)

Tests. >>> from fipy import * >>> m = Grid1D() >>> print((m - ((1,)).cellCenters) [[-0.5]] >>> ((1,)) - m
Traceback (most recent call last): ... TypeError: unsupported operand type(s) for -: 'tuple' and 'UniformGrid1D'

__truediv__(other)

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

property aspect2D

The physical y vs x aspect ratio of a 2D mesh

property cellCenters

Coordinates of geometric centers of cells

property cellFaceIDs

property facesBack

Return list of faces on back boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((6, 7, 8, 9, 10, 11),
...                           numerix.nonzero(mesh.facesBack)[0]))
True
>>> ignore = mesh.facesBack.value
```

property facesBottom

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesDown

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesFront

Return list of faces on front boundary of *3D Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((0, 1, 2, 3, 4, 5),
...                           numerix.nonzero(mesh.facesFront)[0]))
True
>>> ignore = mesh.facesFront.value
```

property facesLeft

Return face on left boundary of *Mesh* as list with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((21, 25),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((9, 13),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
```

property facesRight

Return list of faces on right boundary of *Mesh* with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((24, 28),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((12, 16),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
```

property facesTop

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property facesUp

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property x

Equivalent to using `cellCenters[0]`.

```
>>> from fipy import *
>>> print(Grid1D(nx=2).x)
[ 0.5  1.5]
```

property y

Equivalent to using `cellCenters[1]`.

```
>>> from fipy import *
>>> print(Grid2D(nx=2, ny=2).y)
[ 0.5  0.5  1.5  1.5]
>>> print(Grid1D(nx=2).y)
Traceback (most recent call last):
...
AttributeError: 1D meshes do not have a "y" attribute.
```

property z

Equivalent to using `cellCenters[2]`.

```
>>> from fipy import *
>>> print(Grid3D(nx=2, ny=2, nz=2).z)
```

(continues on next page)

(continued from previous page)

```
[ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]
>>> print(Grid2D(nx=2, ny=2).z)
Traceback (most recent call last):
...
AttributeError: 1D and 2D meshes do not have a "z" attribute.
```

22.3.16 fipy.meshes.mesh2D

Generic mesh class using numerix to do the calculations

Meshes contain cells, faces, and vertices.

This is built for a non-mixed element mesh.

Classes

`Mesh2D(vertexCoords, faceVertexIDs, cellFaceIDs)`

```
class fipy.meshes.mesh2D.Mesh2D(vertexCoords, faceVertexIDs, cellFaceIDs,
                                communicator=DummyComm(), _RepresentationClass=<class
                                'fipy.meshes.representations.meshRepresentation._MeshRepresentation'>,
                                _TopologyClass=<class
                                'fipy.meshes.topologies.meshTopology._Mesh2DTopology'>)
```

Bases: `Mesh`

`property VTKCellDataSet`

Returns a TVTK `DataSet` representing the cells of this mesh

`property VTKFaceDataSet`

Returns a TVTK `DataSet` representing the face centers of this mesh

`__add__(other)`

Either translate a `Mesh` or concatenate two `Mesh` objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a `Mesh`, a translated `Mesh` is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [ 10.5  10.5  11.5  11.5]]
```

If a `Mesh` is added to a `Mesh`, a concatenation of the two `Mesh` objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                  0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                    1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

`__div__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`__getstate__()`

Helper for pickle.

`__mul__(factor)`

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3. ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

__radd__(other)

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [ 10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                  0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
```

(continues on next page)

(continued from previous page)

```
...
    cellCenters))
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                  1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5 1.5 0.5 1.5 0.5 1.5 0.5 1.5 2.5]
 [ 0.5 0.5 1.5 1.5 0.5 0.5 1.5 1.5 0.5]
 [ 0.5 0.5 0.5 0.5 1.5 1.5 1.5 1.5 0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

__repr__()

Return repr(self).

__rmul__(factor)

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5 1.5 0.5 1.5]
 [ 0.5 0.5 1.5 1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5 4.5 1.5 4.5]
 [ 1.5 1.5 4.5 4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3. ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__sub__(other)`

Tests. >>> from fipy import * >>> m = Grid1D() >>> print((m - ((1,))).cellCenters) [[-0.5]] >>> ((1,)) - m
Traceback (most recent call last): ... TypeError: unsupported operand type(s) for -: 'tuple' and 'UniformGrid1D'

`__truediv__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`property aspect2D`

The physical y vs x aspect ratio of a 2D mesh

`property cellCenters`

Coordinates of geometric centers of cells

`property cellFaceIDs`

`extrude(extrudeFunc=<function Mesh2D.<lambda>>, layers=1)`

This function returns a new 3D mesh. The 2D mesh is extruded using the *extrudeFunc* and the number of layers.

```
>>> from fipy.meshes.nonUniformGrid2D import NonUniformGrid2D
>>> print(NonUniformGrid2D(nx=2, ny=2).extrude(layers=2).cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]]
```

```
>>> from fipy.meshes.tri2D import Tri2D
>>> print(Tri2D().extrude(layers=2).cellCenters.allclose([[ 0.83333333,  0.5,
   ↳   0.16666667,  0.5,      0.83333333,  0.5,
   ...
   ↳],
   ...
   ↳ 0.83333333,  0.5,      0.16666667,  0.5,      0.83333333,
   ...
   ↳ 0.16666667],
   ...
   ↳ 0.5,      0.5,      1.5,      1.5,      1.5,      1.5,      1.5
   ...
   ↳ True]))
```

Parameters

- **extrudeFunc** (*function*) – Takes the vertex coordinates and returns the displaced values
- **layers** (*int*) – Number of layers in the extruded mesh (number of times *extrudeFunc* will be called)

property facesBack

Return list of faces on back boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((6, 7, 8, 9, 10, 11),
...                           numerix.nonzero(mesh.facesBack)[0]))
True
>>> ignore = mesh.facesBack.value
```

property facesBottom

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesDown

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesFront

Return list of faces on front boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((0, 1, 2, 3, 4, 5),
...                           numerix.nonzero(mesh.facesFront)[0]))
```

(continues on next page)

(continued from previous page)

```
True
>>> ignore = mesh.facesFront.value
```

property facesLeft

Return face on left boundary of *Mesh* as list with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((21, 25),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((9, 13),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
```

property facesRight

Return list of faces on right boundary of *Mesh* with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((24, 28),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((12, 16),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
```

property facesTop

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property facesUp

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property x

Equivalent to using `cellCenters[0]`.

```
>>> from fipy import *
>>> print(Grid1D(nx=2).x)
[ 0.5  1.5]
```

property y

Equivalent to using `cellCenters[1]`.

```
>>> from fipy import *
>>> print(Grid2D(nx=2, ny=2).y)
[ 0.5  0.5  1.5  1.5]
>>> print(Grid1D(nx=2).y)
Traceback (most recent call last):
...
AttributeError: 1D meshes do not have a "y" attribute.
```

property z

Equivalent to using `cellCenters[2]`.

```
>>> from fipy import *
>>> print(Grid3D(nx=2, ny=2, nz=2).z)
[ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]
>>> print(Grid2D(nx=2, ny=2).z)
Traceback (most recent call last):
...
AttributeError: 1D and 2D meshes do not have a "z" attribute.
```

22.3.17 fipy.meshes.nonUniformGrid1D

1D Mesh

Classes

<code>NonUniformGrid1D([dx, nx, overlap, ...])</code>	Creates a 1D grid mesh.
---	-------------------------

```
class fipy.meshes.nonUniformGrid1D.NonUniformGrid1D(dx=1.0, nx=None, overlap=2,
                                                    communicator=DummyComm(),
                                                    _BuilderClass=<class
'fipy.meshes.builders.grid1DBuilder._NonuniformGrid1DBuilder'>
                                                    _RepresentationClass=<class
'fipy.meshes.representations.gridRepresentation._Grid1DRepresent
                                                    _TopologyClass=<class
'fipy.meshes.topologies.gridTopology._Grid1DTopology'>)
```

Bases: `Mesh1D`

Creates a 1D grid mesh.

```
>>> mesh = NonUniformGrid1D(nx = 3)
>>> print(mesh.cellCenters)
[[ 0.5  1.5  2.5]]
```

```
>>> mesh = NonUniformGrid1D(dx = (1, 2, 3))
>>> print(mesh.cellCenters)
[[ 0.5  2.   4.5]]
```

```
>>> mesh = NonUniformGrid1D(nx = 2, dx = (1, 2, 3))
Traceback (most recent call last):
...
IndexError: nx != len(dx)
```

`property VTKCellDataSet`

Returns a TVTK *DataSet* representing the cells of this mesh

`property VTKFaceDataSet`

Returns a TVTK *DataSet* representing the face centers of this mesh

`__add__(other)`

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [ 10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5   1.5   0.5   1.5   2.5   3.5   2.5   3.5]
 [ 0.5   0.5   1.5   1.5   0.5   0.5   1.5   1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5   1.5   0.5   1.5   3.5   4.5   3.5   4.5]
 [ 0.5   0.5   1.5   1.5   0.5   0.5   1.5   1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5   1.5   0.5   1.5   2.5   3.5   2.5   3.5]
 [ 0.5   0.5   1.5   1.5   2.5   2.5   3.5   3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5   1.5   0.5   1.5   1.5   2.5   1.5   2.5]
 [ 0.5   0.5   1.5   1.5   0.5   0.5   1.5   1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
```

(continues on next page)

(continued from previous page)

```

...
[ 0.5, 0.5, 1.5, 1.5, 1., 1.,
  1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
                           cellCenters))
...
True

```

Mesh concatenation is not limited to 2D meshes

```

>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]

```

but the different *Mesh* objects must, of course, have the same dimensionality.

```

>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match

```

`__div__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`__getstate__()`

Helper for pickle.

`__mul__(factor)`

Dilate a *Mesh* by *factor*.

```

>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]

```

The *factor* can be a scalar

```

>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]

```

or a vector

```

>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)

```

(continues on next page)

(continued from previous page)

```
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3. ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__radd__(other)`

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5 1.5 0.5 1.5 0.5 1.5 0.5 1.5 2.5]
 [ 0.5 0.5 1.5 1.5 0.5 0.5 1.5 1.5 0.5]
 [ 0.5 0.5 0.5 0.5 1.5 1.5 1.5 1.5 0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

__repr__()

Return repr(self).

__rmul__(factor)

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
```

(continues on next page)

(continued from previous page)

```
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3.  ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__sub__(other)`

Tests. >>> from fipy import * >>> m = Grid1D() >>> print((m - ((1,)).cellCenters) [[-0.5]] >>> ((1,)) - m
Traceback (most recent call last): ... TypeError: unsupported operand type(s) for -: 'tuple' and 'UniformGrid1D'

`__truediv__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`property aspect2D`

The physical y vs x aspect ratio of a 2D mesh

`property cellCenters`

Coordinates of geometric centers of cells

`property cellFaceIDs`

`property facesBack`

Return list of faces on back boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((6, 7, 8, 9, 10, 11),
...                           numerix.nonzero(mesh.facesBack)[0]))
True
>>> ignore = mesh.facesBack.value
```

`property facesBottom`

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesDown

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesFront

Return list of faces on front boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((0, 1, 2, 3, 4, 5),
...                           numerix.nonzero(mesh.facesFront)[0]))
True
>>> ignore = mesh.facesFront.value
```

property facesLeft

Return face on left boundary of *Mesh* as list with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((21, 25),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((9, 13),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
```

property facesRight

Return list of faces on right boundary of *Mesh* with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((24, 28),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((12, 16),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
```

property facesTop

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property facesUp

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property x

Equivalent to using `cellCenters[0]`.

```
>>> from fipy import *
>>> print(Grid1D(nx=2).x)
[ 0.5  1.5]
```

property y

Equivalent to using `cellCenters[1]`.

```
>>> from fipy import *
>>> print(Grid2D(nx=2, ny=2).y)
[ 0.5  0.5  1.5  1.5]
>>> print(Grid1D(nx=2).y)
Traceback (most recent call last):
...
AttributeError: 1D meshes do not have a "y" attribute.
```

property z

Equivalent to using `cellCenters[2]`.

```
>>> from fipy import *
>>> print(Grid3D(nx=2, ny=2, nz=2).z)
[ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]
>>> print(Grid2D(nx=2, ny=2).z)
Traceback (most recent call last):
...
AttributeError: 1D and 2D meshes do not have a "z" attribute.
```

22.3.18 fipy.meshes.nonUniformGrid2D

2D rectangular Mesh

Classes

`NonUniformGrid2D([dx, dy, nx, ny, overlap, ...])`

Creates a 2D grid mesh with horizontal faces numbered first and then vertical faces.

```
class fipy.meshes.nonUniformGrid2D.NonUniformGrid2D(dx=1.0, dy=1.0, nx=None, ny=None, overlap=2,
                                                       communicator=DummyComm(),
                                                       _RepresentationClass=<class
                                                       'fipy.meshes.representations.gridRepresentation._Grid2DRepresentation'
                                                       _TopologyClass=<class
                                                       'fipy.meshes.topologies.gridTopology._Grid2DTopology'>)
```

Bases: `Mesh2D`

Creates a 2D grid mesh with horizontal faces numbered first and then vertical faces.

property VTKCellDataSet

Returns a TVTK *DataSet* representing the cells of this mesh

property VTKFaceDataSet

Returns a TVTK *DataSet* representing the face centers of this mesh

__add__(other)

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
```

(continues on next page)

(continued from previous page)

```
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [ 10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                         cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                  1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5 1.5 0.5 1.5 0.5 1.5 0.5 1.5 2.5]
 [ 0.5 0.5 1.5 1.5 0.5 0.5 1.5 1.5 0.5]
 [ 0.5 0.5 0.5 0.5 1.5 1.5 1.5 1.5 0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

`__div__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`__getstate__()`

Helper for pickle.

`__mul__(factor)`

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5 1.5 0.5 1.5]
 [ 0.5 0.5 1.5 1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5 4.5 1.5 4.5]
 [ 1.5 1.5 4.5 4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.   1.   3.   3. ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__radd__(other)`

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5  6.5  5.5  6.5]
 [ 10.5 10.5 11.5 11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5 1.5 0.5 1.5 0.5 1.5 0.5 1.5 2.5]
 [ 0.5 0.5 1.5 1.5 0.5 0.5 1.5 1.5 0.5]
 [ 0.5 0.5 0.5 0.5 1.5 1.5 1.5 1.5 0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

__repr__()

Return repr(self).

__rmul__(factor)

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3.  ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__sub__(other)`

Tests. >>> from fipy import * >>> m = Grid1D() >>> print((m - ((1,))).cellCenters) [[-0.5]] >>> ((1,)) - m
Traceback (most recent call last): ... TypeError: unsupported operand type(s) for -: 'tuple' and 'UniformGrid1D'

`__truediv__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`property aspect2D`

The physical y vs x aspect ratio of a 2D mesh

`property cellCenters`

Coordinates of geometric centers of cells

`property cellFaceIDs`

`extrude(extrudeFunc=<function Mesh2D.<lambda>>, layers=1)`

This function returns a new 3D mesh. The 2D mesh is extruded using the *extrudeFunc* and the number of layers.

```
>>> from fipy.meshes.nonUniformGrid2D import NonUniformGrid2D
>>> print(NonUniformGrid2D(nx=2, ny=2).extrude(layers=2).cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]]
```

```
>>> from fipy.meshes.tri2D import Tri2D
>>> print(Tri2D().extrude(layers=2).cellCenters.allclose([[ 0.83333333, 0.5,
   0.16666667, 0.5,      0.83333333, 0.5,
   ... ,           0.16666667, 0.5
   ... ],
   ... ,
   ... 0.83333333, 0.5,      0.16666667, 0.5,      0.83333333,
   ... ,           0.5,           0.5,
   ... 16666667],
   ... ,
   ... 0.5,           0.5,      1.5,           1.5,      1.5,
   ... ,           1.5       ]]))
```

True

Parameters

- **extrudeFunc** (*function*) – Takes the vertex coordinates and returns the displaced values
- **layers** (*int*) – Number of layers in the extruded mesh (number of times *extrudeFunc* will be called)

property facesBack

Return list of faces on back boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((6, 7, 8, 9, 10, 11),
...                           numerix.nonzero(mesh.facesBack)[0]))
True
>>> ignore = mesh.facesBack.value
```

property facesBottom

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesDown

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
```

(continues on next page)

(continued from previous page)

```

True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value

```

property facesFront

Return list of faces on front boundary of 3D *Mesh* with the z-axis running from front to back.

```

>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((0, 1, 2, 3, 4, 5),
...                           numerix.nonzero(mesh.facesFront)[0]))
True
>>> ignore = mesh.facesFront.value

```

property facesLeft

Return face on left boundary of *Mesh* as list with the x-axis running from left to right.

```

>>> from fipy import Grid2D, Grid3D
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((21, 25),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((9, 13),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value

```

property facesRight

Return list of faces on right boundary of *Mesh* with the x-axis running from left to right.

```

>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((24, 28),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((12, 16),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value

```

property facesTop

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property facesUp

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property x

Equivalent to using `cellCenters[0]`.

```
>>> from fipy import *
>>> print(Grid1D(nx=2).x)
[ 0.5  1.5]
```

property y

Equivalent to using `cellCenters[1]`.

```
>>> from fipy import *
>>> print(Grid2D(nx=2, ny=2).y)
[ 0.5  0.5  1.5  1.5]
>>> print(Grid1D(nx=2).y)
Traceback (most recent call last):
...
AttributeError: 1D meshes do not have a "y" attribute.
```

property z

Equivalent to using `cellCenters[2]`.

```
>>> from fipy import *
>>> print(Grid3D(nx=2, ny=2, nz=2).z)
[ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]
>>> print(Grid2D(nx=2, ny=2).z)
Traceback (most recent call last):
```

(continues on next page)

(continued from previous page)

```
...
AttributeError: 1D and 2D meshes do not have a "z" attribute.
```

22.3.19 fipy.meshes.nonUniformGrid3D

Classes

<code>NonUniformGrid3D([dx, dy, dz, nx, ny, nz, ...])</code>	3D rectangular-prism Mesh
--	---------------------------

```
class fipy.meshes.nonUniformGrid3D.NonUniformGrid3D(dx=1.0, dy=1.0, dz=1.0, nx=None, ny=None,
                                                     nz=None, overlap=2,
                                                     communicator=DummyComm(),
                                                     _RepresentationClass=<class
                                                     'fipy.meshes.representations.gridRepresentation._Grid3DRepresentation'
                                                     _TopologyClass=<class
                                                     'fipy.meshes.topologies.gridTopology._Grid3DTopology'>)
```

Bases: *Mesh*

3D rectangular-prism Mesh

X axis runs from left to right. Y axis runs from bottom to top. Z axis runs from front to back.

Numbering System:

Vertices: Numbered in the usual way. X coordinate changes most quickly, then Y, then Z.

Cells: Same numbering system as vertices.

Faces: XY faces numbered first, then XZ faces, then YZ faces. Within each subcategory, it is numbered in the usual way.

`property VTKCellDataSet`

Returns a TVTK *DataSet* representing the cells of this mesh

`property VTKFaceDataSet`

Returns a TVTK *DataSet* representing the face centers of this mesh

`__add__(other)`

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                  0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                    1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

`__div__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`__getstate__()`

Helper for pickle.

`__mul__(factor)`

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3. ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

__radd__(other)

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [ 10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                  0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
```

(continues on next page)

(continued from previous page)

```
...           cellCenters))
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5 1.5 0.5 1.5 0.5 1.5 0.5 1.5 2.5]
 [ 0.5 0.5 1.5 1.5 0.5 0.5 1.5 1.5 0.5]
 [ 0.5 0.5 0.5 0.5 1.5 1.5 1.5 1.5 0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

__repr__()

Return repr(self).

__rmul__(factor)

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5 1.5 0.5 1.5]
 [ 0.5 0.5 1.5 1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5 4.5 1.5 4.5]
 [ 1.5 1.5 4.5 4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3. ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__sub__(other)`

Tests. >>> from fipy import * >>> m = Grid1D() >>> print((m - ((1,))).cellCenters) [[-0.5]] >>> ((1,)) - m
Traceback (most recent call last): ... TypeError: unsupported operand type(s) for -: 'tuple' and 'UniformGrid1D'

`__truediv__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`property aspect2D`

The physical y vs x aspect ratio of a 2D mesh

`property cellCenters`

Coordinates of geometric centers of cells

`property cellFaceIDs`

`property facesBack`

Return list of faces on back boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((6, 7, 8, 9, 10, 11),
...                           numerix.nonzero(mesh.facesBack)[0]))
True
>>> ignore = mesh.facesBack.value
```

`property facesBottom`

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesDown

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesFront

Return list of faces on front boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((0, 1, 2, 3, 4, 5),
...                           numerix.nonzero(mesh.facesFront)[0]))
True
>>> ignore = mesh.facesFront.value
```

property facesLeft

Return face on left boundary of *Mesh* as list with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((21, 25),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((9, 13),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
```

property facesRight

Return list of faces on right boundary of *Mesh* with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((24, 28),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((12, 16),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
```

property facesTop

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property facesUp

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property x

Equivalent to using `cellCenters[0]`.

```
>>> from fipy import *
>>> print(Grid1D(nx=2).x)
[ 0.5  1.5]
```

property y

Equivalent to using `cellCenters[1]`.

```
>>> from fipy import *
>>> print(Grid2D(nx=2, ny=2).y)
[ 0.5  0.5  1.5  1.5]
>>> print(Grid1D(nx=2).y)
Traceback (most recent call last):
...
AttributeError: 1D meshes do not have a "y" attribute.
```

property z

Equivalent to using `cellCenters[2]`.

```
>>> from fipy import *
>>> print(Grid3D(nx=2, ny=2, nz=2).z)
```

(continues on next page)

(continued from previous page)

```
[ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]
>>> print(Grid2D(nx=2, ny=2).z)
Traceback (most recent call last):
...
AttributeError: 1D and 2D meshes do not have a "z" attribute.
```

22.3.20 fipy.meshes.periodicGrid1D

Periodic 1D Mesh

Classes

`PeriodicGrid1D([dx, nx, overlap])`

Creates a Periodic grid mesh.

`class fipy.meshes.periodicGrid1D.PeriodicGrid1D(dx=1.0, nx=None, overlap=2, *args, **kwargs)`

Bases: `NonUniformGrid1D`

Creates a Periodic grid mesh.

```
>>> mesh = PeriodicGrid1D(dx = (1, 2, 3))
```

```
>>> print(numerix.allclose(numerix.nonzero(mesh.exteriorFaces)[0],
...                           [3]))
True
```

```
>>> print(numerix.allclose(mesh.faceCellIDs.filled(-999),
...                           [[[2, 0, 1, 2],
...                            [0, 1, 2, -999]]]))
True
```

```
>>> print(numerix.allclose(mesh._cellDistances,
...                           [ 2., 1.5, 2.5, 1.5]))
True
```

```
>>> print(numerix.allclose(mesh._cellToCellDistances,
...                           [[ 2., 1.5, 2.5],
...                            [ 1.5, 2.5, 2. ]]))
True
```

```
>>> print(numerix.allclose(mesh.faceNormals,
...                           [[ 1., 1., 1., 1.]]))
True
```

```
>>> print(numerix.allclose(mesh._cellVertexIDs,
...                           [[[1, 2, 2],
...                            [0, 1, 0]]]))
True
```

property VTKCellDataSet

Returns a TVTK *DataSet* representing the cells of this mesh

property VTKFaceDataSet

Returns a TVTK *DataSet* representing the face centers of this mesh

__add__(other)

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5.,), (10.,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [ 10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2.,), (0.,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3.,), (0.,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2.,), (2.,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1.,), (0.,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2.,), (0.,))
```

(continues on next page)

(continued from previous page)

```
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                  2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                  [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                  0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                  2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                  [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                  1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

`__div__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`__getstate__()`

Helper for pickle.

`__mul__(factor)`

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3.  ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__radd__(other)`

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
```

(continues on next page)

(continued from previous page)

```
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

`__repr__()`

Return `repr(self)`.

`__rmul__(factor)`

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3.  ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__sub__(other)`

Tests. >>> from fipy import * >>> m = Grid1D() >>> print((m - ((1,))).cellCenters) [[-0.5]] >>> ((1,)) - m
Traceback (most recent call last): ... TypeError: unsupported operand type(s) for -: 'tuple' and 'UniformGrid1D'

`__truediv__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

property aspect2D

The physical y vs x aspect ratio of a 2D mesh

property cellCenters

Defined outside of a geometry class since we need the *CellVariable* version of *cellCenters*; that is, the *cellCenters* defined in `fipy.meshes.mesh` and not in any geometry (since a *CellVariable* requires a reference to a mesh).

property cellFaceIDs**property facesBack**

Return list of faces on back boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((6, 7, 8, 9, 10, 11),
...                           numerix.nonzero(mesh.facesBack)[0]))
True
>>> ignore = mesh.facesBack.value
```

property facesBottom

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesDown

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesFront

Return list of faces on front boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((0, 1, 2, 3, 4, 5),
...                           numerix.nonzero(mesh.facesFront)[0]))
True
>>> ignore = mesh.facesFront.value
```

property facesLeft

Return face on left boundary of *Mesh* as list with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((21, 25),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((9, 13),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
```

property facesRight

Return list of faces on right boundary of *Mesh* with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((24, 28),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((12, 16),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
```

property facesTop

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property facesUp

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property x

Equivalent to using `cellCenters[0]`.

```
>>> from fipy import *
>>> print(Grid1D(nx=2).x)
[ 0.5  1.5]
```

property y

Equivalent to using `cellCenters[1]`.

```
>>> from fipy import *
>>> print(Grid2D(nx=2, ny=2).y)
[ 0.5  0.5  1.5  1.5]
>>> print(Grid1D(nx=2).y)
Traceback (most recent call last):
...
AttributeError: 1D meshes do not have a "y" attribute.
```

property z

Equivalent to using `cellCenters[2]`.

```
>>> from fipy import *
>>> print(Grid3D(nx=2, ny=2, nz=2).z)
[ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]
>>> print(Grid2D(nx=2, ny=2).z)
Traceback (most recent call last):
...
AttributeError: 1D and 2D meshes do not have a "z" attribute.
```

22.3.21 fipy.meshes.periodicGrid2D

2D periodic rectangular Mesh

Classes

<i>PeriodicGrid2D</i> ([dx, dy, nx, ny, overlap, ...])	Creates a periodic 2D grid mesh with horizontal faces numbered first and then vertical faces.
<i>PeriodicGrid2DLeftRight</i> ([dx, dy, nx, ny, ...])	
<i>PeriodicGrid2DTopBottom</i> ([dx, dy, nx, ny, ...])	

```
class fipy.meshes.periodicGrid2D.PeriodicGrid2D(dx=1.0, dy=1.0, nx=None, ny=None, overlap=2,
                                                communicator=DummyComm(), *args, **kwargs)
```

Bases: `_BasePeriodicGrid2D`

Creates a periodic 2D grid mesh with horizontal faces numbered first and then vertical faces. Vertices and cells are numbered in the usual way.

```
>>> from fipy import numerix

>>> mesh = PeriodicGrid2D(dx = 1., dy = 0.5, nx = 2, ny = 2)

>>> print(numerix.allclose(numerix.nonzero(mesh.exteriorFaces)[0],
...                           [ 4,  5,  8, 11]))
True

>>> print(numerix.allclose(mesh.faceCellIDs.filled(-1),
...                           [[[2, 3, 0, 1, 2, 3, 1, 0, 1, 3, 2, 3],
...                           [0, 1, 2, 3, -1, -1, 0, 1, -1, 2, 3, -1]]]))
True

>>> print(numerix.allclose(mesh._cellDistances,
...                           [ 0.5, 0.5, 0.5, 0.5, 0.25, 0.25, 1., 1., 0.5, 1., 1., 0.
...                           -5]))
True

>>> print(numerix.allclose(mesh.cellFaceIDs,
...                           [[[0, 1, 2, 3],
...                           [7, 6, 10, 9],
...                           [2, 3, 0, 1],
...                           [6, 7, 9, 10]]]))
True

>>> print(numerix.allclose(mesh._cellToCellDistances,
...                           [[ 0.5, 0.5, 0.5, 0.5],
...                           [ 1., 1., 1., 1.],
...                           [ 0.5, 0.5, 0.5, 0.5],
```

(continues on next page)

(continued from previous page)

```
...
[ 1., 1., 1., 1. ])))
True
```

```
>>> normals = [[0, 0, 0, 0, 0, 1, 1, 1, 1, 1, 1],
...               [1, 1, 1, 1, 1, 0, 0, 0, 0, 0, 0]]
```

```
>>> print(numerix.allclose(mesh.faceNormals, normals))
True
```

```
>>> print(numerix.allclose(mesh._cellVertexIDs,
...
...               [[4, 5, 7, 8],
...                [3, 4, 6, 7],
...                [1, 2, 4, 5],
...                [0, 1, 3, 4]]))
True
```

property VTKCellDataSet

Returns a TVTK *DataSet* representing the cells of this mesh

property VTKFaceDataSet

Returns a TVTK *DataSet* representing the face centers of this mesh

__add__(other)

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
...
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

__div__(other)

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

__getstate__()

Helper for pickle.

__mul__(factor)

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3.  ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

__radd__(other)

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [ 10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
```

(continues on next page)

(continued from previous page)

```

...
[ 0.5, 0.5, 1.5, 1.5, 1., 1.,
  1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
                           cellCenters))
...
True

```

Mesh concatenation is not limited to 2D meshes

```

>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]

```

but the different *Mesh* objects must, of course, have the same dimensionality.

```

>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match

```

__repr__()

Return repr(self).

__rmul__(factor)

Dilate a *Mesh* by *factor*.

```

>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]

```

The *factor* can be a scalar

```

>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]

```

or a vector

```

>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.   3.   3. ]]

```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

__sub__(other)

```
Tests. >>> from fipy import * >>> m = Grid1D() >>> print((m - ((1,))).cellCenters) [[-0.5]] >>> ((1,)) - m
Traceback (most recent call last): ... TypeError: unsupported operand type(s) for -: 'tuple' and 'UniformGrid1D'
```

__truediv__(other)

```
Tests.    >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[ 0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError
```

property aspect2D

The physical y vs x aspect ratio of a 2D mesh

property cellCenters

Coordinates of geometric centers of cells

property cellFaceIDs

extrude(*extrudeFunc*=*<function Mesh2D.<lambda>>*, *layers*=1)

This function returns a new 3D mesh. The 2D mesh is extruded using the *extrudeFunc* and the number of layers.

```
>>> from fipy.meshes.nonUniformGrid2D import NonUniformGrid2D
>>> print(NonUniformGrid2D(nx=2, ny=2).extrude(layers=2).cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]]
```

```
>>> from fipy.meshes.tri2D import Tri2D
>>> print(Tri2D().extrude(layers=2).cellCenters.allclose([[ 0.83333333,  0.5,
    ↪  0.16666667,  0.5,           0.83333333,  0.5,
    ↪           0.16666667,  0.5
  ....
  ↪ ],
  ....
  ↪ [ 0.5,           0.
  ....
  ↪ 0.83333333,  0.5,           0.16666667,  0.5,
  ....
  ↪ 0.83333333,  0.5,           0.16666667,  0.
  ....
  ↪ 0.16666667],
  ....
  ↪ [ 0.5,           0.5,
  ....
  ↪ 0.5,           0.5,           1.5,           1.5,           1.5,
  ....
  ↪ 1.5           ]]))
```

Parameters

- **extrudeFunc** (*function*) – Takes the vertex coordinates and returns the displaced values
 - **layers** (*int*) – Number of layers in the extruded mesh (number of times *extrudeFunc* will be called)

property facesBack

Return list of faces on back boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((6, 7, 8, 9, 10, 11),
...                           numerix.nonzero(mesh.facesBack)[0]))
True
>>> ignore = mesh.facesBack.value
```

property facesBottom

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesDown

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesFront

Return list of faces on front boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((0, 1, 2, 3, 4, 5),
...                           numerix.nonzero(mesh.facesFront)[0]))
True
>>> ignore = mesh.facesFront.value
```

property facesLeft

Return face on left boundary of *Mesh* as list with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((21, 25),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((9, 13),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
```

property facesRight

Return list of faces on right boundary of *Mesh* with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((24, 28),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((12, 16),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
```

property facesTop

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property facesUp

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
```

(continues on next page)

(continued from previous page)

```
...
numerix.nonzero(mesh.facesTop)[0]))  
True  
>>> ignore = mesh.facesTop.value
```

property xEquivalent to using `cellCenters[0]`.

```
>>> from fipy import *  
>>> print(Grid1D(nx=2).x)  
[ 0.5  1.5]
```

property yEquivalent to using `cellCenters[1]`.

```
>>> from fipy import *  
>>> print(Grid2D(nx=2, ny=2).y)  
[ 0.5  0.5  1.5  1.5]  
>>> print(Grid1D(nx=2).y)  
Traceback (most recent call last):  
...  
  
AttributeError: 1D meshes do not have a "y" attribute.
```

property zEquivalent to using `cellCenters[2]`.

```
>>> from fipy import *  
>>> print(Grid3D(nx=2, ny=2, nz=2).z)  
[ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]  
>>> print(Grid2D(nx=2, ny=2).z)  
Traceback (most recent call last):  
...  
  
AttributeError: 1D and 2D meshes do not have a "z" attribute.
```

```
class fipy.meshes.periodicGrid2D.PeriodicGrid2DLeftRight(dx=1.0, dy=1.0, nx=None, ny=None,  
                                                       overlap=2,  
                                                       communicator=DummyComm(), *args,  
                                                       **kwargs)
```

Bases: `_BasePeriodicGrid2D`**property VTKCellDataSet**Returns a TVTK `DataSet` representing the cells of this mesh**property VTKFaceDataSet**Returns a TVTK `DataSet` representing the face centers of this mesh**__add__(other)**Either translate a `Mesh` or concatenate two `Mesh` objects.

```
>>> from fipy.meshes import Grid2D  
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)  
>>> print(baseMesh.cellCenters)  
[[ 0.5  1.5  0.5  1.5]  
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5  6.5  5.5  6.5]
 [ 10.5 10.5 11.5 11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                         cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
```

(continues on next page)

(continued from previous page)

```

...
    2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...
[ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...
1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...
cellCenters))
True

```

Mesh concatenation is not limited to 2D meshes

```

>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]

```

but the different *Mesh* objects must, of course, have the same dimensionality.

```

>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match

```

`__div__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`__getstate__()`

Helper for pickle.

`__mul__(factor)`

Dilate a *Mesh* by *factor*.

```

>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]

```

The *factor* can be a scalar

```

>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]

```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.   1.   3.   3. ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__radd__(other)`

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5  6.5  5.5  6.5]
 [ 10.5 10.5 11.5 11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5 1.5 0.5 1.5 0.5 1.5 0.5 1.5 2.5]
 [ 0.5 0.5 1.5 1.5 0.5 0.5 1.5 1.5 0.5]
 [ 0.5 0.5 0.5 0.5 1.5 1.5 1.5 1.5 0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

__repr__()

Return repr(self).

__rmul__(factor)

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3.  ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__sub__(other)`

Tests. >>> from fipy import * >>> m = Grid1D() >>> print((m - ((1,))).cellCenters) [[-0.5]] >>> ((1,)) - m
Traceback (most recent call last): ... TypeError: unsupported operand type(s) for -: 'tuple' and 'UniformGrid1D'

`__truediv__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`property aspect2D`

The physical y vs x aspect ratio of a 2D mesh

`property cellCenters`

Coordinates of geometric centers of cells

`property cellFaceIDs`

`extrude(extrudeFunc=<function Mesh2D.<lambda>>, layers=1)`

This function returns a new 3D mesh. The 2D mesh is extruded using the *extrudeFunc* and the number of layers.

```
>>> from fipy.meshes.nonUniformGrid2D import NonUniformGrid2D
>>> print(NonUniformGrid2D(nx=2, ny=2).extrude(layers=2).cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]]
```

```
>>> from fipy.meshes.tri2D import Tri2D
>>> print(Tri2D().extrude(layers=2).cellCenters.allclose([[ 0.83333333,  0.5,
   0.16666667,  0.5,      0.83333333,  0.5,
   0.16666667,  0.5],
  ],
  [
   [ 0.5,      0.5,
   0.83333333,  0.5,      0.16666667,  0.5,
   0.83333333,  0.5,
   0.5,      0.5,
   1.5,      1.5,      1.5,      1.5
   ]]))
```

Parameters

- **extrudeFunc** (*function*) – Takes the vertex coordinates and returns the displaced values
 - **layers** (*int*) – Number of layers in the extruded mesh (number of times *extrudeFunc* will be called)

property facesBack

Return list of faces on back boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((6, 7, 8, 9, 10, 11),
...                           numerix.nonzero(mesh.facesBack)[0]))
True
>>> ignore = mesh.facesBack.value
```

property facesBottom

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesDown

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

(continues on next page)

(continued from previous page)

```

True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value

```

property facesFront

Return list of faces on front boundary of 3D *Mesh* with the z-axis running from front to back.

```

>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((0, 1, 2, 3, 4, 5),
...                           numerix.nonzero(mesh.facesFront)[0]))
True
>>> ignore = mesh.facesFront.value

```

property facesLeft

Return face on left boundary of *Mesh* as list with the x-axis running from left to right.

```

>>> from fipy import Grid2D, Grid3D
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((21, 25),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((9, 13),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value

```

property facesRight

Return list of faces on right boundary of *Mesh* with the x-axis running from left to right.

```

>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((24, 28),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((12, 16),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value

```

property facesTop

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property facesUp

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property x

Equivalent to using `cellCenters[0]`.

```
>>> from fipy import *
>>> print(Grid1D(nx=2).x)
[ 0.5  1.5]
```

property y

Equivalent to using `cellCenters[1]`.

```
>>> from fipy import *
>>> print(Grid2D(nx=2, ny=2).y)
[ 0.5  0.5  1.5  1.5]
>>> print(Grid1D(nx=2).y)
Traceback (most recent call last):
...
AttributeError: 1D meshes do not have a "y" attribute.
```

property z

Equivalent to using `cellCenters[2]`.

```
>>> from fipy import *
>>> print(Grid3D(nx=2, ny=2, nz=2).z)
[ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]
>>> print(Grid2D(nx=2, ny=2).z)
Traceback (most recent call last):
```

(continues on next page)

(continued from previous page)

```

...
AttributeError: 1D and 2D meshes do not have a "z" attribute.
```

```
class fipy.meshes.periodicGrid2D.PeriodicGrid2DTopBottom(dx=1.0, dy=1.0, nx=None, ny=None,
overlap=2,
communicator=DummyComm(), *args,
**kwargs)
```

Bases: `_BasePeriodicGrid2D`

property VTKCellDataSet

Returns a TVTK *DataSet* representing the cells of this mesh

property VTKFaceDataSet

Returns a TVTK *DataSet* representing the face centers of this mesh

__add__(other)

Either translate a *Mesh* or concatenate two *Mesh* objects.

```

>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```

>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5  6.5  5.5  6.5]
 [10.5 10.5 11.5 11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```

>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```

>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```

>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

`__div__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2).cellCenters) [[0.25]] >>> Ab-

stractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`__getstate__()`

Helper for pickle.

`__mul__(factor)`

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3.  ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__radd__(other)`

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [ 10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
```

(continues on next page)

(continued from previous page)

```
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                  0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                    1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

__repr__()

Return repr(self).

__rmul__(factor)

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.   3.   3. ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

__sub__(other)

Tests. >>> from fipy import * >>> m = Grid1D() >>> print((m - ((1,))).cellCenters) [[-0.5]] >>> ((1,)) - m
Traceback (most recent call last): ... TypeError: unsupported operand type(s) for -: 'tuple' and 'UniformGrid1D'

__truediv__(other)

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

property aspect2D

The physical y vs x aspect ratio of a 2D mesh

property cellCenters

Coordinates of geometric centers of cells

property cellFaceIDs**extrude(extrudeFunc=<function Mesh2D.<lambda>>, layers=1)**

This function returns a new 3D mesh. The 2D mesh is extruded using the *extrudeFunc* and the number of layers.

```
>>> from fipy.meshes.nonUniformGrid2D import NonUniformGrid2D
>>> print(NonUniformGrid2D(nx=2, ny=2).extrude(layers=2).cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]]
```

```
>>> from fipy.meshes.tri2D import Tri2D
>>> print(Tri2D().extrude(layers=2).cellCenters.allclose([[ 0.83333333,  0.5,
   -> 0.16666667,  0.5,      0.83333333,  0.5,
   ->          ...,          0.16666667,  0.5
   ->          ...,          0.83333333,
   ->          ...,          0.5,          0.
   ->          ...,          0.16666667,
   ->          ...,          0.16666667,  0.5,
   ->          ...,          0.5,          0.5,
   ->          ...,          0.5,          1.5,          1.5,
   ->          ...,          1.5,          1.5,          1.5
   ->          ...]))]
True
```

Parameters

- **extrudeFunc** (*function*) – Takes the vertex coordinates and returns the displaced values
- **layers** (*int*) – Number of layers in the extruded mesh (number of times *extrudeFunc* will be called)

property facesBack

Return list of faces on back boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((6, 7, 8, 9, 10, 11),
...                           numerix.nonzero(mesh.facesBack)[0]))
True
>>> ignore = mesh.facesBack.value
```

property facesBottom

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesDown

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesFront

Return list of faces on front boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((0, 1, 2, 3, 4, 5),
...                           numerix.nonzero(mesh.facesFront)[0]))
True
>>> ignore = mesh.facesFront.value
```

property facesLeft

Return face on left boundary of *Mesh* as list with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((21, 25),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((9, 13),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
```

property facesRight

Return list of faces on right boundary of *Mesh* with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((24, 28),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((12, 16),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
```

property facesTop

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property facesUp

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property x

Equivalent to using `cellCenters[0]`.

```
>>> from fipy import *
>>> print(Grid1D(nx=2).x)
[ 0.5  1.5]
```

property y

Equivalent to using `cellCenters[1]`.

```
>>> from fipy import *
>>> print(Grid2D(nx=2, ny=2).y)
[ 0.5  0.5  1.5  1.5]
>>> print(Grid1D(nx=2).y)
Traceback (most recent call last):
...
AttributeError: 1D meshes do not have a "y" attribute.
```

property z

Equivalent to using `cellCenters[2]`.

```
>>> from fipy import *
>>> print(Grid3D(nx=2, ny=2, nz=2).z)
[ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]
>>> print(Grid2D(nx=2, ny=2).z)
Traceback (most recent call last):
...
AttributeError: 1D and 2D meshes do not have a "z" attribute.
```

22.3.22 fipy.meshes.periodicGrid3D

3D periodic rectangular Mesh

Classes

<code>PeriodicGrid3D([dx, dy, dz, nx, ny, nz, ...])</code>	Creates a periodic 3D grid mesh with horizontal faces numbered first and then vertical faces.
<code>PeriodicGrid3DFrontBack([dx, dy, dz, nx, ...])</code>	
<code>PeriodicGrid3DLeftRight([dx, dy, dz, nx, ...])</code>	
<code>PeriodicGrid3DLeftRightFrontBack([dx, dy, ...])</code>	
<code>PeriodicGrid3DLeftRightTopBottom([dx, dy, ...])</code>	
<code>PeriodicGrid3DTopBottom([dx, dy, dz, nx, ...])</code>	
<code>PeriodicGrid3DTopBottomFrontBack([dx, dy, ...])</code>	

```
class fipy.meshes.periodicGrid3D.PeriodicGrid3D(dx=1.0, dy=1.0, dz=1.0, nx=None, ny=None, nz=None, overlap=2, communicator=DummyComm(), *args, **kwargs)
```

Bases: `_BasePeriodicGrid3D`

Creates a periodic 3D grid mesh with horizontal faces numbered first and then vertical faces. Vertices and cells are numbered in the usual way.

```
>>> from fipy import numerix
```

```
>>> mesh = PeriodicGrid3D(dx=1., dy=0.5, dz=2., nx=2, ny=2, nz=1)
>>> print(numerix.allclose(numerix.nonzero(mesh.exteriorFaces)[0],
...                           [4, 5, 6, 7, 12, 13, 16, 19]))
True
```

```
>>> print(numerix.allclose(mesh.faceCellIDs.filled(-1),
...                           [[0, 1, 2, 3, 0, 1, 2, 3, 2, 3,
...                             0, 1, 2, 3, 1, 0, 1, 3, 2, 3],
...                           [0, 1, 2, 3, -1, -1, -1, 0, 1,
...                             2, 3, -1, -1, 0, 1, -1, 2, 3, -1]]))
True
```

```
>>> print(numerix.allclose(mesh._cellDistances,
...                           [2., 2., 2., 2., 1., 1., 1., 1., 0.5, 0.5,
...                           0.5, 0.5, 0.25, 0.25, 1., 1., 0.5, 1., 1., 0.5]))
True
```

```
>>> print(numerix.allclose(mesh.cellFaceIDs,
...                           [[[14, 15, 17, 18],
...                             [15, 14, 18, 17],
...                             [8, 9, 10, 11],
...                             [10, 11, 8, 9],
...                             [0, 1, 2, 3],
...                             [0, 1, 2, 3]]]))
True
```

```
>>> print(numerix.allclose(mesh._cellToCellDistances,
...                           [[1., 1., 1., 1.],
...                           [1., 1., 1., 1.],
...                           [0.5, 0.5, 0.5, 0.5],
...                           [0.5, 0.5, 0.5, 0.5],
...                           [2., 2., 2., 2.],
...                           [2., 2., 2., 2.]]))
True
```

```
>>> normals = [[0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 1, 1, 1, 1, 1, 1, 1],
...               [0, 0, 0, 0, 0, 0, 0, 1, 1, 1, 1, 1, 1, 0, 0, 0, 0, 0, 0, 0],
...               [1, 1, 1, 1, 1, 1, 1, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0]]
```

```
>>> print(numerix.allclose(mesh.faceNormals, normals))
True
```

```
>>> print(numerix.allclose(mesh._cellVertexIDs,
...                           [[[13, 14, 16, 17],
...                             [12, 13, 15, 16],
...                             [10, 11, 13, 14],
...                             [9, 10, 12, 13],
...                             [4, 5, 7, 8],
...                             [3, 4, 6, 7],
...                             [1, 2, 4, 5],
...                             [0, 1, 3, 4]]]))
```

(continues on next page)

(continued from previous page)

True

property VTKCellDataSetReturns a TVTK *DataSet* representing the cells of this mesh**property VTKFaceDataSet**Returns a TVTK *DataSet* representing the face centers of this mesh**__add__(other)**Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [ 10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

__div__(other)

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

__getstate__()

Helper for pickle.

__mul__(factor)

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3.  ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__radd__(other)`

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
```

(continues on next page)

(continued from previous page)

```
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

`__repr__()`

Return `repr(self)`.

`__rmul__(factor)`

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3.  ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__sub__(other)`

Tests. >>> from fipy import * >>> m = Grid1D() >>> print((m - ((1,))).cellCenters) [[-0.5]] >>> ((1,)) - m
Traceback (most recent call last): ... TypeError: unsupported operand type(s) for -: 'tuple' and 'UniformGrid1D'

`__truediv__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

property aspect2D

The physical y vs x aspect ratio of a 2D mesh

property cellCenters

Coordinates of geometric centers of cells

property cellFaceIDs**property facesBack**

Return list of faces on back boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((6, 7, 8, 9, 10, 11),
...                           numerix.nonzero(mesh.facesBack)[0]))
True
>>> ignore = mesh.facesBack.value
```

property facesBottom

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesDown

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesFront

Return list of faces on front boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((0, 1, 2, 3, 4, 5),
```

(continues on next page)

(continued from previous page)

```

...
numerix.nonzero(mesh.facesFront)[0]))  

True  

>>> ignore = mesh.facesFront.value

```

property facesLeft

Return face on left boundary of *Mesh* as list with the x-axis running from left to right.

```

>>> from fipy import Grid2D, Grid3D
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((21, 25),
...                         numerix.nonzero(mesh.facesLeft)[0]))  

True  

>>> ignore = mesh.facesLeft.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((9, 13),
...                         numerix.nonzero(mesh.facesLeft)[0]))  

True  

>>> ignore = mesh.facesLeft.value

```

property facesRight

Return list of faces on right boundary of *Mesh* with the x-axis running from left to right.

```

>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((24, 28),
...                         numerix.nonzero(mesh.facesRight)[0]))  

True  

>>> ignore = mesh.facesRight.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((12, 16),
...                         numerix.nonzero(mesh.facesRight)[0]))  

True  

>>> ignore = mesh.facesRight.value

```

property facesTop

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```

>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                         numerix.nonzero(mesh.facesTop)[0]))  

True  

>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                         numerix.nonzero(mesh.facesTop)[0]))  

True  

>>> ignore = mesh.facesTop.value

```

property facesUp

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property x

Equivalent to using `cellCenters[0]`.

```
>>> from fipy import *
>>> print(Grid1D(nx=2).x)
[ 0.5  1.5]
```

property y

Equivalent to using `cellCenters[1]`.

```
>>> from fipy import *
>>> print(Grid2D(nx=2, ny=2).y)
[ 0.5  0.5  1.5  1.5]
>>> print(Grid1D(nx=2).y)
Traceback (most recent call last):
...
AttributeError: 1D meshes do not have a "y" attribute.
```

property z

Equivalent to using `cellCenters[2]`.

```
>>> from fipy import *
>>> print(Grid3D(nx=2, ny=2, nz=2).z)
[ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]
>>> print(Grid2D(nx=2, ny=2).z)
Traceback (most recent call last):
...
AttributeError: 1D and 2D meshes do not have a "z" attribute.
```

```
class fipy.meshes.periodicGrid3D.PeriodicGrid3DFrontBack(dx=1.0, dy=1.0, dz=1.0, nx=None,
                                                          ny=None, nz=None, overlap=2,
                                                          communicator=DummyComm(), *args,
                                                          **kwargs)
```

Bases: `_BasePeriodicGrid3D`

property VTKCellDataSet

Returns a TVTK `DataSet` representing the cells of this mesh

property VTKFaceDataSet

Returns a TVTK `DataSet` representing the face centers of this mesh

__add__(other)

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5.,), (10.,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [ 10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2.,), (0.,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3.,), (0.,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2.,), (2.,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1.,), (0.,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2.,), (0.,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                  0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
```

(continues on next page)

(continued from previous page)

```
...           cellCenters))
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5 1.5 0.5 1.5 0.5 1.5 0.5 1.5 2.5]
 [ 0.5 0.5 1.5 1.5 0.5 0.5 1.5 1.5 0.5]
 [ 0.5 0.5 0.5 0.5 1.5 1.5 1.5 1.5 0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

__div__(other)

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

__getstate__()

Helper for pickle.

__mul__(factor)

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5 1.5 0.5 1.5]
 [ 0.5 0.5 1.5 1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3.  ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__radd__(other)`

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5  6.5  5.5  6.5]
 [10.5 10.5 11.5 11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

`__repr__()`

Return repr(self).

`__rmul__(factor)`

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3. ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__sub__(other)`

Tests. >>> from fipy import * >>> m = Grid1D() >>> print((m - ((1,))).cellCenters) [[-0.5]] >>> ((1,)) - m
Traceback (most recent call last): ... TypeError: unsupported operand type(s) for -: 'tuple' and 'UniformGrid1D'

`__truediv__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`property aspect2D`

The physical y vs x aspect ratio of a 2D mesh

`property cellCenters`

Coordinates of geometric centers of cells

`property cellFaceIDs`

`property facesBack`

Return list of faces on back boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((6, 7, 8, 9, 10, 11),
```

(continues on next page)

(continued from previous page)

```

...
numerix.nonzero(mesh.facesBack)[0]))  

True  

>>> ignore = mesh.facesBack.value

```

property facesBottom

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```

>>> from fipy import Grid2D, Grid3D, numerix  

>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)  

>>> print(numerix.allequal((12, 13, 14),  

...                           numerix.nonzero(mesh.facesBottom)[0]))  

True  

>>> ignore = mesh.facesBottom.value  

>>> x, y, z = mesh.faceCenters  

>>> print(numerix.allequal((12, 13),  

...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))  

True  

>>> ignore = mesh.facesBottom.value

```

property facesDown

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```

>>> from fipy import Grid2D, Grid3D, numerix  

>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)  

>>> print(numerix.allequal((12, 13, 14),  

...                           numerix.nonzero(mesh.facesBottom)[0]))  

True  

>>> ignore = mesh.facesBottom.value  

>>> x, y, z = mesh.faceCenters  

>>> print(numerix.allequal((12, 13),  

...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))  

True  

>>> ignore = mesh.facesBottom.value

```

property facesFront

Return list of faces on front boundary of 3D *Mesh* with the z-axis running from front to back.

```

>>> from fipy import Grid3D, numerix  

>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)  

>>> print(numerix.allequal((0, 1, 2, 3, 4, 5),  

...                           numerix.nonzero(mesh.facesFront)[0]))  

True  

>>> ignore = mesh.facesFront.value

```

property facesLeft

Return face on left boundary of *Mesh* as list with the x-axis running from left to right.

```

>>> from fipy import Grid2D, Grid3D  

>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)  

>>> print(numerix.allequal((21, 25),  

...                           numerix.nonzero(mesh.facesLeft)[0]))  

True

```

(continues on next page)

(continued from previous page)

```
>>> ignore = mesh.facesLeft.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((9, 13),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
```

property facesRight

Return list of faces on right boundary of *Mesh* with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((24, 28),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((12, 16),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
```

property facesTop

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property facesUp

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property x

Equivalent to using `cellCenters[0]`.

```
>>> from fipy import *
>>> print(Grid1D(nx=2).x)
[ 0.5  1.5]
```

property y

Equivalent to using `cellCenters[1]`.

```
>>> from fipy import *
>>> print(Grid2D(nx=2, ny=2).y)
[ 0.5  0.5  1.5  1.5]
>>> print(Grid1D(nx=2).y)
Traceback (most recent call last):
...
AttributeError: 1D meshes do not have a "y" attribute.
```

property z

Equivalent to using `cellCenters[2]`.

```
>>> from fipy import *
>>> print(Grid3D(nx=2, ny=2, nz=2).z)
[ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]
>>> print(Grid2D(nx=2, ny=2).z)
Traceback (most recent call last):
...
AttributeError: 1D and 2D meshes do not have a "z" attribute.
```

class fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRight(*dx=1.0, dy=1.0, dz=1.0, nx=None, ny=None, nz=None, overlap=2, communicator=DummyComm(), *args, **kwargs*)

Bases: `_BasePeriodicGrid3D`

property VTKCellDataSet

Returns a TVTK *DataSet* representing the cells of this mesh

property VTKFaceDataSet

Returns a TVTK *DataSet* representing the face centers of this mesh

__add__(other)

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
```

(continues on next page)

(continued from previous page)

```
[[ 5.5  6.5  5.5  6.5]
 [ 10.5 10.5 11.5 11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                  0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                    1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
```

(continues on next page)

(continued from previous page)

```
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                               cellCenters))
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

__div__(other)

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

__getstate__(self)

Helper for pickle.

__mul__(factor)

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3. ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__radd__(other)`

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [ 10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
```

(continues on next page)

(continued from previous page)

```
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5 1.5 0.5 1.5 0.5 1.5 0.5 1.5 2.5]
 [ 0.5 0.5 1.5 1.5 0.5 0.5 1.5 1.5 0.5]
 [ 0.5 0.5 0.5 0.5 1.5 1.5 1.5 1.5 0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

__repr__()

Return repr(self).

__rmul__(factor)

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
```

(continues on next page)

(continued from previous page)

```
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3.  ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

__sub__(other)

Tests. >>> from fipy import * >>> m = Grid1D() >>> print((m - ((1,)).cellCenters) [[-0.5]] >>> ((1,)) - m
Traceback (most recent call last): ... TypeError: unsupported operand type(s) for -: 'tuple' and 'UniformGrid1D'

__truediv__(other)

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

property aspect2D

The physical y vs x aspect ratio of a 2D mesh

property cellCenters

Coordinates of geometric centers of cells

property cellFaceIDs

property facesBack

Return list of faces on back boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((6, 7, 8, 9, 10, 11),
...                           numerix.nonzero(mesh.facesBack)[0]))
True
>>> ignore = mesh.facesBack.value
```

property facesBottom

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesDown

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesFront

Return list of faces on front boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((0, 1, 2, 3, 4, 5),
...                           numerix.nonzero(mesh.facesFront)[0]))
True
>>> ignore = mesh.facesFront.value
```

property facesLeft

Return face on left boundary of *Mesh* as list with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((21, 25),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((9, 13),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
```

property facesRight

Return list of faces on right boundary of *Mesh* with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((24, 28),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((12, 16),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
```

property facesTop

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property facesUp

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property x

Equivalent to using `cellCenters[0]`.

```
>>> from fipy import *
>>> print(Grid1D(nx=2).x)
[ 0.5  1.5]
```

property y

Equivalent to using `cellCenters[1]`.

```
>>> from fipy import *
>>> print(Grid2D(nx=2, ny=2).y)
[ 0.5  0.5  1.5  1.5]
>>> print(Grid1D(nx=2).y)
Traceback (most recent call last):
...
AttributeError: 1D meshes do not have a "y" attribute.
```

property z

Equivalent to using `cellCenters[2]`.

```
>>> from fipy import *
>>> print(Grid3D(nx=2, ny=2, nz=2).z)
[ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]
>>> print(Grid2D(nx=2, ny=2).z)
Traceback (most recent call last):
...
AttributeError: 1D and 2D meshes do not have a "z" attribute.
```

```
class fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightFrontBack(dx=1.0, dy=1.0, dz=1.0,
nx=None, ny=None, nz=None, overlap=2, communicator=DummyComm(), *args, **kwargs)
```

Bases: `_BasePeriodicGrid3D`

property VTKCellDataSet

Returns a TVTK *DataSet* representing the cells of this mesh

property VTKFaceDataSet

Returns a TVTK *DataSet* representing the face centers of this mesh

__add__(other)

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [ 10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
... 
```

(continues on next page)

(continued from previous page)

```
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

`__div__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`__getstate__()`

Helper for pickle.

`__mul__(factor)`

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3. ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__radd__(other)`

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [ 10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                         cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5 1.5 0.5 1.5 0.5 1.5 0.5 1.5 2.5]
 [ 0.5 0.5 1.5 1.5 0.5 0.5 1.5 1.5 0.5]
 [ 0.5 0.5 0.5 0.5 1.5 1.5 1.5 1.5 0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

__repr__()

Return repr(self).

__rmul__(factor)

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5 1.5 0.5 1.5]
 [ 0.5 0.5 1.5 1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5 4.5 1.5 4.5]
 [ 1.5 1.5 4.5 4.5]]
```

or a vector

```
>>> dilitatedMesh = baseMesh * ((3,), (2,))
>>> print(dilitatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3. ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilitatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__sub__(other)`

Tests. >>> from fipy import * >>> m = Grid1D() >>> print((m - ((1,))).cellCenters) [[-0.5]] >>> ((1,)) - m
Traceback (most recent call last): ... TypeError: unsupported operand type(s) for -: 'tuple' and 'UniformGrid1D'

`__truediv__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`property aspect2D`

The physical y vs x aspect ratio of a 2D mesh

`property cellCenters`

Coordinates of geometric centers of cells

`property cellFaceIDs`

`property facesBack`

Return list of faces on back boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((6, 7, 8, 9, 10, 11),
...                           numerix.nonzero(mesh.facesBack)[0]))
True
>>> ignore = mesh.facesBack.value
```

`property facesBottom`

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesDown

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesFront

Return list of faces on front boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((0, 1, 2, 3, 4, 5),
...                           numerix.nonzero(mesh.facesFront)[0]))
True
>>> ignore = mesh.facesFront.value
```

property facesLeft

Return face on left boundary of *Mesh* as list with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((21, 25),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((9, 13),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
```

property facesRight

Return list of faces on right boundary of *Mesh* with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((24, 28),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((12, 16),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
```

property facesTop

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property facesUp

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property x

Equivalent to using `cellCenters[0]`.

```
>>> from fipy import *
>>> print(Grid1D(nx=2).x)
[ 0.5  1.5]
```

property y

Equivalent to using `cellCenters[1]`.

```
>>> from fipy import *
>>> print(Grid2D(nx=2, ny=2).y)
[ 0.5  0.5  1.5  1.5]
>>> print(Grid1D(nx=2).y)
Traceback (most recent call last):
...
AttributeError: 1D meshes do not have a "y" attribute.
```

property z

Equivalent to using `cellCenters[2]`.

```
>>> from fipy import *
>>> print(Grid3D(nx=2, ny=2, nz=2).z)
```

(continues on next page)

(continued from previous page)

```
[ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]
>>> print(Grid2D(nx=2, ny=2).z)
Traceback (most recent call last):
...
AttributeError: 1D and 2D meshes do not have a "z" attribute.
```

```
class fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightTopBottom(dx=1.0, dy=1.0, dz=1.0,
nx=None, ny=None, nz=None,
overlap=2, communicator=DummyComm(), *args,
**kwargs)
```

Bases: `_BasePeriodicGrid3D`

property `VTKCellDataSet`

Returns a TVTK *DataSet* representing the cells of this mesh

property `VTKFaceDataSet`

Returns a TVTK *DataSet* representing the face centers of this mesh

`__add__(other)`

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5  6.5  5.5  6.5]
 [10.5 10.5 11.5 11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

`__div__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`__getstate__()`

Helper for pickle.

`__mul__(factor)`

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3.  ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__radd__(other)`

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5  6.5  5.5  6.5]
 [10.5 10.5 11.5 11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                  0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                    1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

__repr__()

Return repr(self).

__rmul__(factor)

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.   3.   3. ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

__sub__(other)

Tests. >>> from fipy import * >>> m = Grid1D() >>> print((m - ((1,))).cellCenters) [[-0.5]] >>> ((1,)) - m
Traceback (most recent call last): ... TypeError: unsupported operand type(s) for -: 'tuple' and 'UniformGrid1D'

__truediv__(other)

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

property aspect2D

The physical y vs x aspect ratio of a 2D mesh

property cellCenters

Coordinates of geometric centers of cells

property cellFaceIDs**property facesBack**

Return list of faces on back boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((6, 7, 8, 9, 10, 11),
...                           numerix.nonzero(mesh.facesBack)[0]))
True
>>> ignore = mesh.facesBack.value
```

property facesBottom

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesDown

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesFront

Return list of faces on front boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((0, 1, 2, 3, 4, 5),
...                           numerix.nonzero(mesh.facesFront)[0]))
True
>>> ignore = mesh.facesFront.value
```

property facesLeft

Return face on left boundary of *Mesh* as list with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((21, 25),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((9, 13),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
```

property facesRight

Return list of faces on right boundary of *Mesh* with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((24, 28),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((12, 16),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
```

property facesTop

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property facesUp

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property x

Equivalent to using `cellCenters[0]`.

```
>>> from fipy import *
>>> print(Grid1D(nx=2).x)
[ 0.5  1.5]
```

property y

Equivalent to using `cellCenters[1]`.

```
>>> from fipy import *
>>> print(Grid2D(nx=2, ny=2).y)
[ 0.5  0.5  1.5  1.5]
>>> print(Grid1D(nx=2).y)
Traceback (most recent call last):
...
AttributeError: 1D meshes do not have a "y" attribute.
```

property z

Equivalent to using `cellCenters[2]`.

```
>>> from fipy import *
>>> print(Grid3D(nx=2, ny=2, nz=2).z)
[ 0.5  0.5  0.5  1.5  1.5  1.5  1.5]
>>> print(Grid2D(nx=2, ny=2).z)
Traceback (most recent call last):
...
AttributeError: 1D and 2D meshes do not have a "z" attribute.
```

```
class fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottom(dx=1.0, dy=1.0, dz=1.0, nx=None,
                                                       ny=None, nz=None, overlap=2,
                                                       communicator=DummyComm(), *args,
                                                       **kwargs)
```

Bases: `_BasePeriodicGrid3D`

property VTKCellDataSet

Returns a TVTK *DataSet* representing the cells of this mesh

property VTKFaceDataSet

Returns a TVTK *DataSet* representing the face centers of this mesh

__add__(other)

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5.,), (10.,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [ 10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2.,), (0.,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3.,), (0.,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2.,), (2.,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1.,), (0.,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2.,), (0.,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                  0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
```

(continues on next page)

(continued from previous page)

```
...           cellCenters))
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5 1.5 0.5 1.5 0.5 1.5 0.5 1.5 2.5]
 [ 0.5 0.5 1.5 1.5 0.5 0.5 1.5 1.5 0.5]
 [ 0.5 0.5 0.5 0.5 1.5 1.5 1.5 1.5 0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

__div__(other)

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

__getstate__(self)

Helper for pickle.

__mul__(factor)

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5 1.5 0.5 1.5]
 [ 0.5 0.5 1.5 1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3.  ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__radd__(other)`

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5  6.5  5.5  6.5]
 [10.5 10.5 11.5 11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

`__repr__()`

Return repr(self).

`__rmul__(factor)`

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3. ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__sub__(other)`

Tests. >>> from fipy import * >>> m = Grid1D() >>> print((m - ((1,))).cellCenters) [[-0.5]] >>> ((1,)) - m
Traceback (most recent call last): ... TypeError: unsupported operand type(s) for -: 'tuple' and 'UniformGrid1D'

`__truediv__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`property aspect2D`

The physical y vs x aspect ratio of a 2D mesh

`property cellCenters`

Coordinates of geometric centers of cells

`property cellFaceIDs`

`property facesBack`

Return list of faces on back boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((6, 7, 8, 9, 10, 11),
```

(continues on next page)

(continued from previous page)

```

...
numerix.nonzero(mesh.facesBack)[0]))  

True  

>>> ignore = mesh.facesBack.value

```

property facesBottom

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```

>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))  

True  

>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))  

True  

>>> ignore = mesh.facesBottom.value

```

property facesDown

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```

>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))  

True  

>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))  

True  

>>> ignore = mesh.facesBottom.value

```

property facesFront

Return list of faces on front boundary of 3D *Mesh* with the z-axis running from front to back.

```

>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((0, 1, 2, 3, 4, 5),
...                           numerix.nonzero(mesh.facesFront)[0]))  

True  

>>> ignore = mesh.facesFront.value

```

property facesLeft

Return face on left boundary of *Mesh* as list with the x-axis running from left to right.

```

>>> from fipy import Grid2D, Grid3D
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((21, 25),
...                           numerix.nonzero(mesh.facesLeft)[0]))  

True

```

(continues on next page)

(continued from previous page)

```
>>> ignore = mesh.facesLeft.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((9, 13),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
```

property facesRight

Return list of faces on right boundary of *Mesh* with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((24, 28),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((12, 16),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
```

property facesTop

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property facesUp

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property x

Equivalent to using `cellCenters[0]`.

```
>>> from fipy import *
>>> print(Grid1D(nx=2).x)
[ 0.5  1.5]
```

property y

Equivalent to using `cellCenters[1]`.

```
>>> from fipy import *
>>> print(Grid2D(nx=2, ny=2).y)
[ 0.5  0.5  1.5  1.5]
>>> print(Grid1D(nx=2).y)
Traceback (most recent call last):
...
AttributeError: 1D meshes do not have a "y" attribute.
```

property z

Equivalent to using `cellCenters[2]`.

```
>>> from fipy import *
>>> print(Grid3D(nx=2, ny=2, nz=2).z)
[ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]
>>> print(Grid2D(nx=2, ny=2).z)
Traceback (most recent call last):
...
AttributeError: 1D and 2D meshes do not have a "z" attribute.
```

class `fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottomFrontBack`(`dx=1.0, dy=1.0, dz=1.0,`
`nx=None, ny=None, nz=None,`
`overlap=2, communicator=DummyComm(), *args,`
`**kwargs)`

Bases: `_BasePeriodicGrid3D`

property VTKCellDataSet

Returns a TVTK *DataSet* representing the cells of this mesh

property VTKFaceDataSet

Returns a TVTK *DataSet* representing the face centers of this mesh

__add__(other)

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [ 10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5   1.5   0.5   1.5   2.5   3.5   2.5   3.5]
 [ 0.5   0.5   1.5   1.5   0.5   0.5   1.5   1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5   1.5   0.5   1.5   3.5   4.5   3.5   4.5]
 [ 0.5   0.5   1.5   1.5   0.5   0.5   1.5   1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5   1.5   0.5   1.5   2.5   3.5   2.5   3.5]
 [ 0.5   0.5   1.5   1.5   2.5   2.5   3.5   3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5   1.5   0.5   1.5   1.5   2.5   1.5   2.5]
 [ 0.5   0.5   1.5   1.5   0.5   0.5   1.5   1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
```

(continues on next page)

(continued from previous page)

```

...
[ 0.5, 0.5, 1.5, 1.5, 1., 1.,
  1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
                           cellCenters))
...
True

```

Mesh concatenation is not limited to 2D meshes

```

>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]

```

but the different *Mesh* objects must, of course, have the same dimensionality.

```

>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match

```

__div__(other)

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

__getstate__()

Helper for pickle.

__mul__(factor)

Dilate a *Mesh* by *factor*.

```

>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]

```

The *factor* can be a scalar

```

>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]

```

or a vector

```

>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)

```

(continues on next page)

(continued from previous page)

```
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3. ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__radd__(other)`

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5 1.5 0.5 1.5 0.5 1.5 0.5 1.5 2.5]
 [ 0.5 0.5 1.5 1.5 0.5 0.5 1.5 1.5 0.5]
 [ 0.5 0.5 0.5 0.5 1.5 1.5 1.5 1.5 0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

__repr__()

Return repr(self).

__rmul__(factor)

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
```

(continues on next page)

(continued from previous page)

```
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3.  ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__sub__(other)`

Tests. >>> from fipy import * >>> m = Grid1D() >>> print((m - ((1,)).cellCenters) [[-0.5]] >>> ((1,)) - m
Traceback (most recent call last): ... TypeError: unsupported operand type(s) for -: 'tuple' and 'UniformGrid1D'

`__truediv__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`property aspect2D`

The physical y vs x aspect ratio of a 2D mesh

`property cellCenters`

Coordinates of geometric centers of cells

`property cellFaceIDs`

`property facesBack`

Return list of faces on back boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((6, 7, 8, 9, 10, 11),
...                           numerix.nonzero(mesh.facesBack)[0]))
True
>>> ignore = mesh.facesBack.value
```

`property facesBottom`

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesDown

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesFront

Return list of faces on front boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((0, 1, 2, 3, 4, 5),
...                           numerix.nonzero(mesh.facesFront)[0]))
True
>>> ignore = mesh.facesFront.value
```

property facesLeft

Return face on left boundary of *Mesh* as list with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((21, 25),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((9, 13),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
```

property facesRight

Return list of faces on right boundary of *Mesh* with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((24, 28),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((12, 16),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
```

property facesTop

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property facesUp

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property x

Equivalent to using `cellCenters[0]`.

```
>>> from fipy import *
>>> print(Grid1D(nx=2).x)
[ 0.5  1.5]
```

property y

Equivalent to using `cellCenters[1]`.

```
>>> from fipy import *
>>> print(Grid2D(nx=2, ny=2).y)
[ 0.5  0.5  1.5  1.5]
>>> print(Grid1D(nx=2).y)
Traceback (most recent call last):
...
AttributeError: 1D meshes do not have a "y" attribute.
```

property z

Equivalent to using `cellCenters[2]`.

```
>>> from fipy import *
>>> print(Grid3D(nx=2, ny=2, nz=2).z)
[ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]
>>> print(Grid2D(nx=2, ny=2).z)
Traceback (most recent call last):
...
AttributeError: 1D and 2D meshes do not have a "z" attribute.
```

22.3.23 fipy.meshes.representations

Modules

<code>fipy.meshes.representations.</code>
<code>abstractRepresentation</code>
<code>fipy.meshes.representations.</code>
<code>gridRepresentation</code>
<code>fipy.meshes.representations.</code>
<code>meshRepresentation</code>

`fipy.meshes.representations.abstractRepresentation`

`fipy.meshes.representations.gridRepresentation`

`fipy.meshes.representations.meshRepresentation`

22.3.24 fipy.meshes.skewedGrid2D

Classes

<code>SkewedGrid2D([dx, dy, nx, ny, rand])</code>	Creates a 2D grid mesh with horizontal faces numbered first and then vertical faces.
---	--

`class fipy.meshes.skewedGrid2D.SkewedGrid2D(dx=1.0, dy=1.0, nx=None, ny=1, rand=0, *args, **kwargs)`

Bases: `Mesh2D`

Creates a 2D grid mesh with horizontal faces numbered first and then vertical faces. The points are skewed by a random amount (between *rand* and *-rand*) in the X and Y directions.

Note: This *Mesh* only operates in serial

property VTKCellDataSet

Returns a TVTK *DataSet* representing the cells of this mesh

property VTKFaceDataSet

Returns a TVTK *DataSet* representing the face centers of this mesh

__add__(other)

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5  6.5  5.5  6.5]
 [ 10.5 10.5 11.5 11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5 1.5 0.5 1.5 0.5 1.5 0.5 1.5 2.5]
 [ 0.5 0.5 1.5 1.5 0.5 0.5 1.5 1.5 0.5]
 [ 0.5 0.5 0.5 0.5 1.5 1.5 1.5 1.5 0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

`__div__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`__getstate__()`

Helper for pickle.

__mul__(factor)

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilitatedMesh = baseMesh * ((3,), (2,))
>>> print(dilitatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3.  ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilitatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

__radd__(other)

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [ 10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
```

(continues on next page)

(continued from previous page)

```
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

`__repr__()`

Return `repr(self)`.

`__rmul__(factor)`

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3.  ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__sub__(other)`

Tests. >>> from fipy import * >>> m = Grid1D() >>> print((m - ((1,))).cellCenters) [[-0.5]] >>> ((1,)) - m
Traceback (most recent call last): ... TypeError: unsupported operand type(s) for -: 'tuple' and 'UniformGrid1D'

`__truediv__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

property aspect2D

The physical y vs x aspect ratio of a 2D mesh

property cellCenters

Coordinates of geometric centers of cells

property cellFaceIDs

extrude(*extrudeFunc*=*<function Mesh2D.<lambda>>*, *layers*=1)

This function returns a new 3D mesh. The 2D mesh is extruded using the *extrudeFunc* and the number of layers.

```
>>> from fipy.meshes.nonUniformGrid2D import NonUniformGrid2D
>>> print(NonUniformGrid2D(nx=2, ny=2).extrude(layers=2).cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]]
```

```
>>> from fipy.meshes.tri2D import Tri2D
>>> print(Tri2D().extrude(layers=2).cellCenters.allclose([[ 0.83333333,  0.5,
   ↪    0.16666667,  0.5,      0.83333333,  0.5,
   ...
   ↪    0.16666667,  0.5,      0.16666667,  0.5
   ...
   ↪    0.83333333,  0.5,      0.16666667,  0.5,
   ...
   ↪    0.83333333,  0.5,      0.16666667,  0.5,
   ...
   ↪    0.16666667], 
   ...
   ↪    0.5,      0.5,      1.5,      1.5,      1.5,
   ...
   ↪    1.5      ]]))
```

Parameters

- **extrudeFunc** (*function*) – Takes the vertex coordinates and returns the displaced values
 - **layers** (*int*) – Number of layers in the extruded mesh (number of times *extrudeFunc* will be called)

property facesBack

Return list of faces on back boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((6, 7, 8, 9, 10, 11),
...                           numerix.nonzero(mesh.facesBack)[0]))
True
>>> ignore = mesh.facesBack.value
```

property facesBottom

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix  
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
```

(continues on next page)

(continued from previous page)

```
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesDown

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesFront

Return list of faces on front boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((0, 1, 2, 3, 4, 5),
...                           numerix.nonzero(mesh.facesFront)[0]))
True
>>> ignore = mesh.facesFront.value
```

property facesLeft

Return face on left boundary of *Mesh* as list with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((21, 25),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((9, 13),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
```

property facesRight

Return list of faces on right boundary of *Mesh* with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((24, 28),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((12, 16),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
```

property facesTop

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property facesUp

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property physicalShape

Return physical dimensions of *Grid2D*.

property x

Equivalent to using *cellCenters*[0].

```
>>> from fipy import *
>>> print(Grid1D(nx=2).x)
[ 0.5  1.5]
```

property y

Equivalent to using *cellCenters*[1].

```
>>> from fipy import *
>>> print(Grid2D(nx=2, ny=2).y)
[ 0.5  0.5  1.5  1.5]
>>> print(Grid1D(nx=2).y)
Traceback (most recent call last):
...
AttributeError: 1D meshes do not have a "y" attribute.
```

property z

Equivalent to using `cellCenters[2]`.

```
>>> from fipy import *
>>> print(Grid3D(nx=2, ny=2, nz=2).z)
[ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]
>>> print(Grid2D(nx=2, ny=2).z)
Traceback (most recent call last):
...
AttributeError: 1D and 2D meshes do not have a "z" attribute.
```

22.3.25 fipy.meshes.sphericalNonUniformGrid1D

1D Mesh

Classes

<code>SphericalNonUniformGrid1D([dx, nx, origin, ...])</code>	Creates a 1D spherical grid mesh.
---	-----------------------------------

```
class fipy.meshes.sphericalNonUniformGrid1D.SphericalNonUniformGrid1D(dx=1.0, nx=None,
                                                                     origin=(0,), overlap=2,
                                                                     communicator=DummyComm(),
                                                                     *args, **kwargs)
```

Bases: `NonUniformGrid1D`

Creates a 1D spherical grid mesh.

```
>>> mesh = SphericalNonUniformGrid1D(nx = 3)
>>> print(mesh.cellCenters)
[[ 0.5  1.5  2.5]]
```

```
>>> mesh = SphericalNonUniformGrid1D(dx = (1, 2, 3))
>>> print(mesh.cellCenters)
[[ 0.5  2.   4.5]]
```

```
>>> print(numerix.allclose(mesh.cellVolumes, (0.5, 13., 94.5)))
True
```

```
>>> mesh = SphericalNonUniformGrid1D(nx = 2, dx = (1, 2, 3))
Traceback (most recent call last):
...
IndexError: nx != len(dx)
```

```
>>> mesh = SphericalNonUniformGrid1D(nx=2, dx=(1., 2.)) + ((1.,),)
>>> print(mesh.cellCenters)
[[ 1.5  3. ]]
>>> print(numerix.allclose(mesh.cellVolumes, (3.5, 28)))
True
```

property VTKCellDataSet

Returns a TVTK *DataSet* representing the cells of this mesh

property VTKFaceDataSet

Returns a TVTK *DataSet* representing the face centers of this mesh

__add__(other)

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [ 10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

`__div__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2).cellCenters) [[0.25]] >>> Ab-

stractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`__getstate__()`

Helper for pickle.

`__mul__(factor)`

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3.  ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__radd__(other)`

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [ 10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
```

(continues on next page)

(continued from previous page)

```
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                  0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                    1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

__repr__()

Return repr(self).

__rmul__(factor)

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.   3.   3. ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

__sub__(other)

Tests. >>> from fipy import * >>> m = Grid1D() >>> print((m - ((1,))).cellCenters) [[-0.5]] >>> ((1,)) - m
Traceback (most recent call last): ... TypeError: unsupported operand type(s) for -: 'tuple' and 'UniformGrid1D'

__truediv__(other)

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

property aspect2D

The physical y vs x aspect ratio of a 2D mesh

property cellCenters

Coordinates of geometric centers of cells

property cellFaceIDs**property facesBack**

Return list of faces on back boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((6, 7, 8, 9, 10, 11),
...                           numerix.nonzero(mesh.facesBack)[0]))
True
>>> ignore = mesh.facesBack.value
```

property facesBottom

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesDown

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesFront

Return list of faces on front boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((0, 1, 2, 3, 4, 5),
...                           numerix.nonzero(mesh.facesFront)[0]))
True
>>> ignore = mesh.facesFront.value
```

property facesLeft

Return face on left boundary of *Mesh* as list with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((21, 25),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((9, 13),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
```

property facesRight

Return list of faces on right boundary of *Mesh* with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((24, 28),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((12, 16),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
```

property facesTop

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property facesUp

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property x

Equivalent to using `cellCenters[0]`.

```
>>> from fipy import *
>>> print(Grid1D(nx=2).x)
[ 0.5  1.5]
```

property y

Equivalent to using `cellCenters[1]`.

```
>>> from fipy import *
>>> print(Grid2D(nx=2, ny=2).y)
[ 0.5  0.5  1.5  1.5]
>>> print(Grid1D(nx=2).y)
Traceback (most recent call last):
...
AttributeError: 1D meshes do not have a "y" attribute.
```

property z

Equivalent to using `cellCenters[2]`.

```
>>> from fipy import *
>>> print(Grid3D(nx=2, ny=2, nz=2).z)
[ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]
>>> print(Grid2D(nx=2, ny=2).z)
Traceback (most recent call last):
...
AttributeError: 1D and 2D meshes do not have a "z" attribute.
```

22.3.26 fipy.meshes.sphericalUniformGrid1D

1D Mesh

Classes

<code>SphericalUniformGrid1D([dx, nx, origin, ...])</code>	Creates a 1D spherical grid mesh.
--	-----------------------------------

```
class fipy.meshes.sphericalUniformGrid1D.SphericalUniformGrid1D(dx=1.0, nx=1, origin=(0,),  
                                                               overlap=2,  
                                                               communicator=DummyComm(),  
                                                               *args, **kwargs)
```

Bases: `UniformGrid1D`

Creates a 1D spherical grid mesh.

```
>>> mesh = SphericalUniformGrid1D(nx = 3)  
>>> print(mesh.cellCenters)  
[[ 0.5  1.5  2.5]]
```

`property VTKCellDataSet`

Returns a TVTK *DataSet* representing the cells of this mesh

`property VTKFaceDataSet`

Returns a TVTK *DataSet* representing the face centers of this mesh

`__add__(other)`

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D  
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)  
>>> print(baseMesh.cellCenters)  
[[ 0.5  1.5  0.5  1.5]  
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5.,), (10.,))  
>>> print(translatedMesh.cellCenters)  
[[ 5.5   6.5   5.5   6.5]  
 [10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2.,), (0.,)))  
>>> print(addedMesh.cellCenters)  
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]  
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
```

(continues on next page)

(continued from previous page)

```
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

`__div__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`__getstate__()`

Helper for pickle.

`__radd__(other)`

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [ 10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

`__repr__()`

Return repr(self).

__sub__(other)

Tests. >>> from fipy import * >>> m = Grid1D() >>> print((m - ((1,)).cellCenters) [[-0.5]] >>> ((1,)) - m
Traceback (most recent call last): ... TypeError: unsupported operand type(s) for -: 'tuple' and 'UniformGrid1D'

__truediv__(other)

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

property aspect2D

The physical y vs x aspect ratio of a 2D mesh

property cellCenters

Coordinates of geometric centers of cells

property cellFaceIDs

property exteriorFaces

property facesBack

Return list of faces on back boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((6, 7, 8, 9, 10, 11),
...                           numerix.nonzero(mesh.facesBack)[0]))
True
>>> ignore = mesh.facesBack.value
```

property facesBottom

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesDown

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
```

(continues on next page)

(continued from previous page)

```
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesFront

Return list of faces on front boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((0, 1, 2, 3, 4, 5),
...                           numerix.nonzero(mesh.facesFront)[0]))
True
>>> ignore = mesh.facesFront.value
```

property facesLeft

Return face on left boundary of *Mesh* as list with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((21, 25),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((9, 13),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
```

property facesRight

Return list of faces on right boundary of *Mesh* with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((24, 28),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((12, 16),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
```

property facesTop

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
```

(continues on next page)

(continued from previous page)

```
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property facesUp

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property x

Equivalent to using `cellCenters[0]`.

```
>>> from fipy import *
>>> print(Grid1D(nx=2).x)
[ 0.5  1.5]
```

property y

Equivalent to using `cellCenters[1]`.

```
>>> from fipy import *
>>> print(Grid2D(nx=2, ny=2).y)
[ 0.5  0.5  1.5  1.5]
>>> print(Grid1D(nx=2).y)
Traceback (most recent call last):
...
AttributeError: 1D meshes do not have a "y" attribute.
```

property z

Equivalent to using `cellCenters[2]`.

```
>>> from fipy import *
>>> print(Grid3D(nx=2, ny=2, nz=2).z)
[ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]
>>> print(Grid2D(nx=2, ny=2).z)
Traceback (most recent call last):
```

(continues on next page)

(continued from previous page)

```
...  
AttributeError: 1D and 2D meshes do not have a "z" attribute.
```

22.3.27 fipy.meshes.test

Test implementation of the mesh

22.3.28 fipy.meshes.topologies

Modules

```
fipy.meshes.topologies.abstractTopology
```

```
fipy.meshes.topologies.gridTopology
```

```
fipy.meshes.topologies.meshTopology
```

fipy.meshes.topologies.abstractTopology

fipy.meshes.topologies.gridTopology

fipy.meshes.topologies.meshTopology

22.3.29 fipy.meshes.tri2D

Classes

```
Tri2D([dx, dy, nx, ny, ...])
```

This class creates a mesh made out of triangles.

```
class fipy.meshes.tri2D.Tri2D(dx=1.0, dy=1.0, nx=1, ny=1, _RepresentationClass=<class  
    'fipy.meshes.representations.gridRepresentation._Grid2DRepresentation'>,  
    _TopologyClass=<class  
    'fipy.meshes.topologies.meshTopology._Mesh2DTopology'>)
```

Bases: *Mesh2D*

This class creates a mesh made out of triangles. It does this by starting with a standard Cartesian mesh (*Grid2D*) and dividing each cell in that mesh (hereafter referred to as a “box”) into four equal parts with the dividing lines being the diagonals.

Creates a 2D triangular mesh with horizontal faces numbered first then vertical faces, then diagonal faces. Vertices are numbered starting with the vertices at the corners of boxes and then the vertices at the centers of boxes. Cells on the right of boxes are numbered first, then cells on the top of boxes, then cells on the left of boxes, then cells on the bottom of boxes. Within each of the “sub-categories” in the above, the vertices, cells and faces are numbered in the usual way.

Parameters

- **dx** (*float*) – The X and Y dimensions of each “box”. If $dx <> dy$, the line segments connecting the cell centers will not be orthogonal to the faces.
- **dy** (*float*) – The X and Y dimensions of each “box”. If $dx <> dy$, the line segments connecting the cell centers will not be orthogonal to the faces.
- **nx** (*int*) – The number of boxes in the X direction and the Y direction. The total number of boxes will be equal to $nx * ny$, and the total number of cells will be equal to $4 * nx * ny$.
- **ny** (*int*) – The number of boxes in the X direction and the Y direction. The total number of boxes will be equal to $nx * ny$, and the total number of cells will be equal to $4 * nx * ny$.

property VTKCellDataSet

Returns a TVTK *DataSet* representing the cells of this mesh

property VTKFaceDataSet

Returns a TVTK *DataSet* representing the face centers of this mesh

__add__(other)

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5  6.5  5.5  6.5]
 [10.5 10.5 11.5 11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

`__div__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2).cellCenters) [[0.25]] >>> Ab-

stractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`__getstate__()`

Helper for pickle.

`__mul__(factor)`

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.    3.    3.  ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__radd__(other)`

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [ 10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
```

(continues on next page)

(continued from previous page)

```
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                  0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                    1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

__repr__()

Return repr(self).

__rmul__(factor)

Dilate a *Mesh* by *factor*.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

The *factor* can be a scalar

```
>>> dilatedMesh = baseMesh * 3
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.5  1.5  4.5  4.5]]
```

or a vector

```
>>> dilatedMesh = baseMesh * ((3,), (2,))
>>> print(dilatedMesh.cellCenters)
[[ 1.5  4.5  1.5  4.5]
 [ 1.    1.   3.   3. ]]
```

but the vector must have the same dimensionality as the *Mesh*

```
>>> dilatedMesh = baseMesh * ((3,), (2,), (1,))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

__sub__(other)

Tests. >>> from fipy import * >>> m = Grid1D() >>> print((m - ((1,))).cellCenters) [[-0.5]] >>> ((1,)) - m
Traceback (most recent call last): ... TypeError: unsupported operand type(s) for -: 'tuple' and 'UniformGrid1D'

__truediv__(other)

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

property aspect2D

The physical y vs x aspect ratio of a 2D mesh

property cellCenters

Coordinates of geometric centers of cells

property cellFaceIDs**extrude(extrudeFunc=<function Mesh2D.<lambda>>, layers=1)**

This function returns a new 3D mesh. The 2D mesh is extruded using the *extrudeFunc* and the number of layers.

```
>>> from fipy.meshes.nonUniformGrid2D import NonUniformGrid2D
>>> print(NonUniformGrid2D(nx=2, ny=2).extrude(layers=2).cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]]
```

```
>>> from fipy.meshes.tri2D import Tri2D
>>> print(Tri2D().extrude(layers=2).cellCenters.allclose([[ 0.83333333,  0.5,
   - 0.16666667,  0.5,      0.83333333,  0.5,
   - 0.16666667,  0.5],
   ...
   [-0.83333333,  0.5,      0.16666667,  0.5,      0.83333333,
   - 0.5,      0.16666667],
   ...
   [-0.5,      0.5,      1.5,      1.5,      1.5,      1.5,
   - 1.5]]))
True
```

Parameters

- **extrudeFunc** (*function*) – Takes the vertex coordinates and returns the displaced values
- **layers** (*int*) – Number of layers in the extruded mesh (number of times *extrudeFunc* will be called)

property facesBack

Return list of faces on back boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((6, 7, 8, 9, 10, 11),
...                           numerix.nonzero(mesh.facesBack)[0]))
True
>>> ignore = mesh.facesBack.value
```

property facesBottom

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesDown

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesFront

Return list of faces on front boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((0, 1, 2, 3, 4, 5),
...                           numerix.nonzero(mesh.facesFront)[0]))
True
>>> ignore = mesh.facesFront.value
```

property facesLeft

Return face on left boundary of *Mesh* as list with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((21, 25),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((9, 13),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
```

property facesRight

Return list of faces on right boundary of *Mesh* with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((24, 28),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((12, 16),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
```

property facesTop

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property facesUp

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property physicalShape

Return physical dimensions of *Grid2D*.

property x

Equivalent to using `cellCenters[0]`.

```
>>> from fipy import *
>>> print(Grid1D(nx=2).x)
[ 0.5  1.5]
```

property y

Equivalent to using `cellCenters[1]`.

```
>>> from fipy import *
>>> print(Grid2D(nx=2, ny=2).y)
[ 0.5  0.5  1.5  1.5]
>>> print(Grid1D(nx=2).y)
Traceback (most recent call last):
...
AttributeError: 1D meshes do not have a "y" attribute.
```

property z

Equivalent to using `cellCenters[2]`.

```
>>> from fipy import *
>>> print(Grid3D(nx=2, ny=2, nz=2).z)
[ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]
>>> print(Grid2D(nx=2, ny=2).z)
Traceback (most recent call last):
...
AttributeError: 1D and 2D meshes do not have a "z" attribute.
```

22.3.30 fipy.meshes.uniformGrid

Classes

`UniformGrid(communicator[, ...])`

Wrapped scaled geometry properties

```
class fipy.meshes.uniformGrid.UniformGrid(communicator, _RepresentationClass=<class
    'fipy.meshes.representations.abstractRepresentation._AbstractRepresentation'>,
    _TopologyClass=<class
    'fipy.meshes.topologies.abstractTopology._AbstractTopology'>)
```

Bases: `AbstractMesh`

Wrapped scaled geometry properties

property VTKCellDataSet

Returns a TVTK `DataSet` representing the cells of this mesh

property VTKFaceDataSet

Returns a TVTK `DataSet` representing the face centers of this mesh

__add__(other)

Either translate a `Mesh` or concatenate two `Mesh` objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a `Mesh`, a translated `Mesh` is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [ 10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5   1.5   0.5   1.5   2.5   3.5   2.5   3.5]
 [ 0.5   0.5   1.5   1.5   0.5   0.5   1.5   1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5   1.5   0.5   1.5   3.5   4.5   3.5   4.5]
 [ 0.5   0.5   1.5   1.5   0.5   0.5   1.5   1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5   1.5   0.5   1.5   2.5   3.5   2.5   3.5]
 [ 0.5   0.5   1.5   1.5   2.5   2.5   3.5   3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5   1.5   0.5   1.5   1.5   2.5   1.5   2.5]
 [ 0.5   0.5   1.5   1.5   0.5   0.5   1.5   1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
```

(continues on next page)

(continued from previous page)

```

...
[ 0.5, 0.5, 1.5, 1.5, 1., 1.,
  1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
                           cellCenters))
...
True

```

Mesh concatenation is not limited to 2D meshes

```

>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                            nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                            nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]

```

but the different *Mesh* objects must, of course, have the same dimensionality.

```

>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match

```

`__div__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`__getstate__()`

Helper for pickle.

`__radd__(other)`

Either translate a *Mesh* or concatenate two *Mesh* objects.

```

>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]

```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```

>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [ 10.5  10.5  11.5  11.5]]

```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```

>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)

```

(continues on next page)

(continued from previous page)

```
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                  0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                    1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

`__repr__()`

Return repr(self).

`__sub__(other)`

Tests. >>> from fipy import * >>> m = Grid1D() >>> print((m - ((1,))).cellCenters) [[-0.5]] >>> ((1,)) - m
Traceback (most recent call last): ... TypeError: unsupported operand type(s) for -: 'tuple' and 'UniformGrid1D'

`__truediv__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`property aspect2D`

The physical y vs x aspect ratio of a 2D mesh

`property cellCenters`

Coordinates of geometric centers of cells

`property cellFaceIDs`

`property facesBack`

Return list of faces on back boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((6, 7, 8, 9, 10, 11),
...                           numerix.nonzero(mesh.facesBack)[0]))
True
>>> ignore = mesh.facesBack.value
```

`property facesBottom`

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
```

(continues on next page)

(continued from previous page)

```

...
numerix.nonzero(mesh.facesBottom)[0])))

True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value

```

property facesDown

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```

>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value

```

property facesFront

Return list of faces on front boundary of 3D *Mesh* with the z-axis running from front to back.

```

>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((0, 1, 2, 3, 4, 5),
...                           numerix.nonzero(mesh.facesFront)[0]))
True
>>> ignore = mesh.facesFront.value

```

property facesLeft

Return face on left boundary of *Mesh* as list with the x-axis running from left to right.

```

>>> from fipy import Grid2D, Grid3D
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((21, 25),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((9, 13),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value

```

property facesRight

Return list of faces on right boundary of *Mesh* with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((24, 28),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((12, 16),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
```

property facesTop

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property facesUp

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property x

Equivalent to using `cellCenters[0]`.

```
>>> from fipy import *
>>> print(Grid1D(nx=2).x)
[ 0.5  1.5]
```

property y

Equivalent to using `cellCenters[1]`.

```
>>> from fipy import *
>>> print(Grid2D(nx=2, ny=2).y)
[ 0.5  0.5  1.5  1.5]
>>> print(Grid1D(nx=2).y)
Traceback (most recent call last):
...
AttributeError: 1D meshes do not have a "y" attribute.
```

property z

Equivalent to using `cellCenters[2]`.

```
>>> from fipy import *
>>> print(Grid3D(nx=2, ny=2, nz=2).z)
[ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]
>>> print(Grid2D(nx=2, ny=2).z)
Traceback (most recent call last):
...
AttributeError: 1D and 2D meshes do not have a "z" attribute.
```

22.3.31 fipy.meshes.uniformGrid1D

1D Mesh

Classes

<code>UniformGrid1D([dx, nx, origin, overlap, ...])</code>	Creates a 1D grid mesh.
--	-------------------------

```
class fipy.meshes.uniformGrid1D.UniformGrid1D(dx=1.0, nx=1, origin=(0, ), overlap=2,
                                                 communicator=DummyComm(),
                                                 _RepresentationClass=<class
'fipy.meshes.representations.gridRepresentation._Grid1DRepresentation'>,
                                                 _TopologyClass=<class
'fipy.meshes.topologies.gridTopology._Grid1DTopology'>)
```

Bases: `UniformGrid`

Creates a 1D grid mesh.

```
>>> mesh = UniformGrid1D(nx = 3)
>>> print(mesh.cellCenters)
[[ 0.5  1.5  2.5]]
```

property VTKCellDataSet

Returns a TVTK *DataSet* representing the cells of this mesh

property VTKFaceDataSet

Returns a TVTK *DataSet* representing the face centers of this mesh

__add__(other)

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [ 10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                         cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                   1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5 1.5 0.5 1.5 0.5 1.5 0.5 1.5 2.5]
 [ 0.5 0.5 1.5 1.5 0.5 0.5 1.5 1.5 0.5]
 [ 0.5 0.5 0.5 0.5 1.5 1.5 1.5 1.5 0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

`__div__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`__getstate__()`

Helper for pickle.

`__radd__(other)`

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5 1.5 0.5 1.5]
 [ 0.5 0.5 1.5 1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5 6.5 5.5 6.5]
 [ 10.5 10.5 11.5 11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                  0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                    1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

`__repr__()`

Return repr(self).

`__sub__(other)`

Tests. >>> from fipy import * >>> m = Grid1D() >>> print((m - ((1,)).cellCenters) [[-0.5]]) >>> ((1,)) - m
Traceback (most recent call last): ... TypeError: unsupported operand type(s) for -: 'tuple' and 'UniformGrid1D'

`__truediv__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`property aspect2D`

The physical y vs x aspect ratio of a 2D mesh

`property cellCenters`

Coordinates of geometric centers of cells

`property cellFaceIDs`

`property exteriorFaces`

Geometry set and calc

`property facesBack`

Return list of faces on back boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((6, 7, 8, 9, 10, 11),
...                           numerix.nonzero(mesh.facesBack)[0]))
...
True
>>> ignore = mesh.facesBack.value
```

`property facesBottom`

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesDown

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesFront

Return list of faces on front boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((0, 1, 2, 3, 4, 5),
...                           numerix.nonzero(mesh.facesFront)[0]))
True
>>> ignore = mesh.facesFront.value
```

property facesLeft

Return face on left boundary of *Mesh* as list with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((21, 25),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((9, 13),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
```

property facesRight

Return list of faces on right boundary of *Mesh* with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((24, 28),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((12, 16),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
```

property facesTop

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property facesUp

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property x

Equivalent to using `cellCenters[0]`.

```
>>> from fipy import *
>>> print(Grid1D(nx=2).x)
[ 0.5  1.5]
```

property y

Equivalent to using `cellCenters[1]`.

```
>>> from fipy import *
>>> print(Grid2D(nx=2, ny=2).y)
[ 0.5  0.5  1.5  1.5]
>>> print(Grid1D(nx=2).y)
Traceback (most recent call last):
...
AttributeError: 1D meshes do not have a "y" attribute.
```

property z

Equivalent to using `cellCenters[2]`.

```
>>> from fipy import *
>>> print(Grid3D(nx=2, ny=2, nz=2).z)
[ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]
>>> print(Grid2D(nx=2, ny=2).z)
Traceback (most recent call last):
...
AttributeError: 1D and 2D meshes do not have a "z" attribute.
```

22.3.32 fipy.meshes.uniformGrid2D

2D rectangular Mesh with constant spacing in x and constant spacing in y

Classes

`UniformGrid2D([dx, dy, nx, ny, origin, ...])`

Creates a 2D grid mesh with horizontal faces numbered first and then vertical faces.

```
class fipy.meshes.uniformGrid2D.UniformGrid2D(dx=1.0, dy=1.0, nx=1, ny=1, origin=((0, ), (0, )),  
                                              overlap=2, communicator=DummyComm(),  
                                              _RepresentationClass=<class  
                                              'fipy.meshes.representations.gridRepresentation._Grid2DRepresentation'>,  
                                              _TopologyClass=<class  
                                              'fipy.meshes.topologies.gridTopology._Grid2DTopology'>)
```

Bases: `UniformGrid`

Creates a 2D grid mesh with horizontal faces numbered first and then vertical faces.

property VTKCellDataSet

Returns a TVTK *DataSet* representing the cells of this mesh

property VTKFaceDataSet

Returns a TVTK *DataSet* representing the face centers of this mesh

__add__(other)

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
```

(continues on next page)

(continued from previous page)

```
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [ 10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                         cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                  1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                          cellCenters))
...
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5 1.5 0.5 1.5 0.5 1.5 0.5 1.5 2.5]
 [ 0.5 0.5 1.5 1.5 0.5 0.5 1.5 1.5 0.5]
 [ 0.5 0.5 0.5 0.5 1.5 1.5 1.5 1.5 0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

`__div__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`__getstate__()`

Helper for pickle.

`__radd__(other)`

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5 1.5 0.5 1.5]
 [ 0.5 0.5 1.5 1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5 6.5 5.5 6.5]
 [ 10.5 10.5 11.5 11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                  0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                   2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                   [ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...                    1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
True
```

Mesh concatenation is not limited to 2D meshes

```
>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]
```

but the different *Mesh* objects must, of course, have the same dimensionality.

```
>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match
```

`__repr__()`

Return repr(self).

`__sub__(other)`

Tests. >>> from fipy import * >>> m = Grid1D() >>> print((m - ((1,))).cellCenters) [[-0.5]] >>> ((1,)) - m
Traceback (most recent call last): ... TypeError: unsupported operand type(s) for -: 'tuple' and 'UniformGrid1D'

`__truediv__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`property aspect2D`

The physical y vs x aspect ratio of a 2D mesh

`property cellCenters`

Coordinates of geometric centers of cells

`property cellFaceIDs`

`property facesBack`

Return list of faces on back boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((6, 7, 8, 9, 10, 11),
...                           numerix.nonzero(mesh.facesBack)[0]))
True
>>> ignore = mesh.facesBack.value
```

`property facesBottom`

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
```

(continues on next page)

(continued from previous page)

```

...
numerix.nonzero(mesh.facesBottom)[0])))

True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value

```

property facesDown

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```

>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value

```

property facesFront

Return list of faces on front boundary of 3D *Mesh* with the z-axis running from front to back.

```

>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((0, 1, 2, 3, 4, 5),
...                           numerix.nonzero(mesh.facesFront)[0]))
True
>>> ignore = mesh.facesFront.value

```

property facesLeft

Return face on left boundary of *Mesh* as list with the x-axis running from left to right.

```

>>> from fipy import Grid2D, Grid3D
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((21, 25),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((9, 13),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value

```

property facesRight

Return list of faces on right boundary of *Mesh* with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((24, 28),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((12, 16),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
```

property facesTop

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property facesUp

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property x

Equivalent to using `cellCenters[0]`.

```
>>> from fipy import *
>>> print(Grid1D(nx=2).x)
[ 0.5  1.5]
```

property y

Equivalent to using `cellCenters[1]`.

```
>>> from fipy import *
>>> print(Grid2D(nx=2, ny=2).y)
[ 0.5  0.5  1.5  1.5]
>>> print(Grid1D(nx=2).y)
Traceback (most recent call last):
...
AttributeError: 1D meshes do not have a "y" attribute.
```

property z

Equivalent to using `cellCenters[2]`.

```
>>> from fipy import *
>>> print(Grid3D(nx=2, ny=2, nz=2).z)
[ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]
>>> print(Grid2D(nx=2, ny=2).z)
Traceback (most recent call last):
...
AttributeError: 1D and 2D meshes do not have a "z" attribute.
```

22.3.33 fipy.meshes.uniformGrid3D

Classes

`UniformGrid3D([dx, dy, dz, nx, ny, nz, ...])`

3D rectangular-prism Mesh with uniform grid spacing in each dimension.

```
class fipy.meshes.uniformGrid3D.UniformGrid3D(dx=1.0, dy=1.0, dz=1.0, nx=1, ny=1, nz=1, origin=[[0], [0], [0]], overlap=2, communicator=DummyComm(), _RepresentationClass=<class 'fipy.meshes.representations.gridRepresentation._Grid3DRepresentation'>, _TopologyClass=<class 'fipy.meshes.topologies.gridTopology._Grid3DTopology'>)
```

Bases: `UniformGrid`

3D rectangular-prism Mesh with uniform grid spacing in each dimension.

X axis runs from left to right. Y axis runs from bottom to top. Z axis runs from front to back.

Numbering System:

Vertices: Numbered in the usual way. X coordinate changes most quickly, then Y, then Z.

* arrays are arranged Z, Y, X because in numerix, the final index is the one that changes the most quickly
*

Cells: Same numbering system as vertices.

Faces: XY faces numbered first, then XZ faces, then YZ faces. Within each subcategory, it is numbered in the usual way.

property VTKCellDataSet

Returns a TVTK `DataSet` representing the cells of this mesh

property VTKFaceDataSet

Returns a TVTK *DataSet* representing the face centers of this mesh

__add__(other)

Either translate a *Mesh* or concatenate two *Mesh* objects.

```
>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5]
 [ 0.5  0.5  1.5  1.5]]
```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5   6.5   5.5   6.5]
 [ 10.5  10.5  11.5  11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
```

(continues on next page)

(continued from previous page)

```

...
[0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...
0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
                           cellCenters))
...
True

```

again, their faces need not align, but the mesh may not have the desired connectivity

```

>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...
...
2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...
[ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...
1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
                           cellCenters))
...
True

```

Mesh concatenation is not limited to 2D meshes

```

>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...
...
nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...
...
nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5 1.5 0.5 1.5 0.5 1.5 0.5 1.5 2.5]
 [ 0.5 0.5 1.5 1.5 0.5 0.5 1.5 1.5 0.5]
 [ 0.5 0.5 0.5 0.5 1.5 1.5 1.5 1.5 0.5]]

```

but the different *Mesh* objects must, of course, have the same dimensionality.

```

>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match

```

`__div__(other)`

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

`__getstate__()`

Helper for pickle.

`__radd__(other)`

Either translate a *Mesh* or concatenate two *Mesh* objects.

```

>>> from fipy.meshes import Grid2D
>>> baseMesh = Grid2D(dx = 1.0, dy = 1.0, nx = 2, ny = 2)
>>> print(baseMesh.cellCenters)
[[ 0.5 1.5 0.5 1.5]
 [ 0.5 0.5 1.5 1.5]]

```

If a vector is added to a *Mesh*, a translated *Mesh* is returned

```
>>> translatedMesh = baseMesh + ((5,), (10,))
>>> print(translatedMesh.cellCenters)
[[ 5.5  6.5  5.5  6.5]
 [ 10.5 10.5 11.5 11.5]]
```

If a *Mesh* is added to a *Mesh*, a concatenation of the two *Mesh* objects is returned

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

The two *Mesh* objects need not be properly aligned in order to concatenate them but the resulting mesh may not have the intended connectivity

```
>>> addedMesh = baseMesh + (baseMesh + ((3,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  3.5  4.5  3.5  4.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

```
>>> addedMesh = baseMesh + (baseMesh + ((2,), (2,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  2.5  3.5  2.5  3.5]
 [ 0.5  0.5  1.5  1.5  2.5  2.5  3.5  3.5]]
```

No provision is made to avoid or consolidate overlapping *Mesh* objects

```
>>> addedMesh = baseMesh + (baseMesh + ((1,), (0,)))
>>> print(addedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  1.5  2.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5]]
```

Different *Mesh* classes can be concatenated

```
>>> from fipy.meshes import Tri2D
>>> triMesh = Tri2D(dx = 1.0, dy = 1.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
...                 2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...                 [0.5, 0.5, 1.5, 1.5, 0.5, 0.5, 0.83333333, 0.83333333,
...                 0.5, 0.5, 0.16666667, 0.16666667]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...                           cellCenters))
...
True
```

again, their faces need not align, but the mesh may not have the desired connectivity

```
>>> triMesh = Tri2D(dx = 1.0, dy = 2.0, nx = 2, ny = 1)
>>> triMesh = triMesh + ((2,), (0,))
>>> triAddedMesh = baseMesh + triMesh
>>> cellCenters = [[ 0.5, 1.5, 0.5, 1.5, 2.83333333, 3.83333333,
```

(continues on next page)

(continued from previous page)

```

...
    2.5, 3.5, 2.16666667, 3.16666667, 2.5, 3.5],
...
[ 0.5, 0.5, 1.5, 1.5, 1., 1.,
...
1.66666667, 1.66666667, 1., 1., 0.33333333, 0.33333333]]
>>> print(numerix.allclose(triAddedMesh.cellCenters,
...
cellCenters))
True

```

Mesh concatenation is not limited to 2D meshes

```

>>> from fipy.meshes import Grid3D
>>> threeDBaseMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 2, ny = 2, nz = 2)
>>> threeDSecondMesh = Grid3D(dx = 1.0, dy = 1.0, dz = 1.0,
...                           nx = 1, ny = 1, nz = 1)
>>> threeDAddedMesh = threeDBaseMesh + (threeDSecondMesh + ((2,), (0,), (0,)))
>>> print(threeDAddedMesh.cellCenters)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.5  1.5  2.5]
 [ 0.5  0.5  1.5  1.5  0.5  0.5  1.5  1.5  0.5]
 [ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5  0.5]]

```

but the different *Mesh* objects must, of course, have the same dimensionality.

```

>>> InvalidMesh = threeDBaseMesh + baseMesh
Traceback (most recent call last):
...
MeshAdditionError: Dimensions do not match

```

__repr__()

Return repr(self).

__sub__(other)

Tests. >>> from fipy import * >>> m = Grid1D() >>> print((m - ((1,)).cellCenters) [[-0.5]] >>> ((1,)) - m
Traceback (most recent call last): ... TypeError: unsupported operand type(s) for -: 'tuple' and 'UniformGrid1D'

__truediv__(other)

Tests. >>> from fipy import * >>> print((Grid1D(nx=1) / 2.).cellCenters) [[0.25]] >>> AbstractMesh(communicator=None) / 2. Traceback (most recent call last): ... NotImplementedError

property aspect2D

The physical y vs x aspect ratio of a 2D mesh

property cellCenters

Coordinates of geometric centers of cells

property cellFaceIDs

property facesBack

Return list of faces on back boundary of 3D *Mesh* with the z-axis running from front to back.

```

>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((6, 7, 8, 9, 10, 11),
...                           numerix.nonzero(mesh.facesBack)[0]))
...

```

(continues on next page)

(continued from previous page)

```
True
>>> ignore = mesh.facesBack.value
```

property facesBottom

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesDown

Return list of faces on bottom boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((12, 13, 14),
...                           numerix.nonzero(mesh.facesBottom)[0]))
True
>>> ignore = mesh.facesBottom.value
>>> x, y, z = mesh.faceCenters
>>> print(numerix.allequal((12, 13),
...                           numerix.nonzero(mesh.facesBottom & (x < 1))[0]))
True
>>> ignore = mesh.facesBottom.value
```

property facesFront

Return list of faces on front boundary of 3D *Mesh* with the z-axis running from front to back.

```
>>> from fipy import Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((0, 1, 2, 3, 4, 5),
...                           numerix.nonzero(mesh.facesFront)[0]))
True
>>> ignore = mesh.facesFront.value
```

property facesLeft

Return face on left boundary of *Mesh* as list with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((21, 25),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
```

(continues on next page)

(continued from previous page)

```
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((9, 13),
...                           numerix.nonzero(mesh.facesLeft)[0]))
True
>>> ignore = mesh.facesLeft.value
```

property facesRight

Return list of faces on right boundary of *Mesh* with the x-axis running from left to right.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((24, 28),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((12, 16),
...                           numerix.nonzero(mesh.facesRight)[0]))
True
>>> ignore = mesh.facesRight.value
```

property facesTop

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property facesUp

Return list of faces on top boundary of 2D or 3D *Mesh* with the y-axis running from bottom to top.

```
>>> from fipy import Grid2D, Grid3D, numerix
>>> mesh = Grid3D(nx = 3, ny = 2, nz = 1, dx = 0.5, dy = 2., dz = 4.)
>>> print(numerix.allequal((18, 19, 20),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
>>> mesh = Grid2D(nx = 3, ny = 2, dx = 0.5, dy = 2.)
>>> print(numerix.allequal((6, 7, 8),
...                           numerix.nonzero(mesh.facesTop)[0]))
True
>>> ignore = mesh.facesTop.value
```

property x

Equivalent to using `cellCenters[0]`.

```
>>> from fipy import *
>>> print(Grid1D(nx=2).x)
[ 0.5  1.5]
```

property y

Equivalent to using `cellCenters[1]`.

```
>>> from fipy import *
>>> print(Grid2D(nx=2, ny=2).y)
[ 0.5  0.5  1.5  1.5]
>>> print(Grid1D(nx=2).y)
Traceback (most recent call last):
...
AttributeError: 1D meshes do not have a "y" attribute.
```

property z

Equivalent to using `cellCenters[2]`.

```
>>> from fipy import *
>>> print(Grid3D(nx=2, ny=2, nz=2).z)
[ 0.5  0.5  0.5  0.5  1.5  1.5  1.5  1.5]
>>> print(Grid2D(nx=2, ny=2).z)
Traceback (most recent call last):
...
AttributeError: 1D and 2D meshes do not have a "z" attribute.
```

22.4 fipy.solvers

Solving sparse linear systems

Module Attributes

<code>DefaultSolver</code>	Solver class for solving symmetric matrices.
<code>DefaultAsymmetricSolver</code>	Solver class for solving asymmetric matrices.
<code>DummySolver</code>	Solver used by tests that don't actually need to solve.
<code>GeneralSolver</code>	Solver class that should solve any matrix.

Exceptions

<code>SerialSolverError()</code>

`fipy.solvers.DefaultAsymmetricSolver`

Solver class for solving asymmetric matrices.

fipy.solvers.DefaultSolver

Solver class for solving symmetric matrices.

This solver should be both robust and performant.

fipy.solvers.DummySolver

Solver used by tests that don't actually need to solve.

Some tests are intended to confirm the matrix building machinery, but don't actually need to solve (and may not be able to, e.g., zeros on the diagonal).

fipy.solvers.GeneralSolver

Solver class that should solve any matrix.

exception fipy.solvers.SerialSolverError

Bases: `Exception`

__cause__

exception cause

__context__

exception context

__delattr__(name, /)

Implement delattr(self, name).

__getattribute__(name, /)

Return getattr(self, name).

__reduce__()

Helper for pickle.

__repr__()

Return repr(self).

__setattr__(name, value, /)

Implement setattr(self, name, value).

__str__()

Return str(self).

add_note()

Exception.add_note(note) – add a note to the exception

with_traceback()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

Modules

`fipy.solvers.petsc``fipy.solvers.pyAMG``fipy.solvers.pyamgx``fipy.solvers.pysparse``fipy.solvers.pysparseMatrixSolver``fipy.solvers.scipy``fipy.solvers.solver`

The iterative solvers may output warnings if the solution is considered unsatisfactory. If you are not interested in these warnings, you can invoke python with a warning filter such as::

`fipy.solvers.test``fipy.solvers.trilinos`

22.4.1 fipy.solvers.petsc

Modules

`fipy.solvers.petsc.comms``fipy.solvers.petsc.dummySolver``fipy.solvers.petsc.linearBicgSolver``fipy.solvers.petsc.linearCGSSolver``fipy.solvers.petsc.linearGMRESSolver``fipy.solvers.petsc.linearLUSolver``fipy.solvers.petsc.linearPCGSolver``fipy.solvers.petsc.petscKrylovSolver``fipy.solvers.petsc.petscSolver`

fipy.solvers.petsc.comms

Modules

```
fipy.solvers.petsc.comms.  
parallelPETScCommWrapper  
fipy.solvers.petsc.comms.petscCommWrapper  
  
fipy.solvers.petsc.comms.  
serialPETScCommWrapper
```

fipy.solvers.petsc.comms.parallelPETScCommWrapper

Classes

<code>ParallelPETScCommWrapper()</code>	MPI Communicator wrapper
---	--------------------------

```
class fipy.solvers.petsc.comms.parallelPETScCommWrapper.ParallelPETScCommWrapper  
Bases: PETScCommWrapper  
MPI Communicator wrapper  
Encapsulates capabilities needed for PETSc.  
  
__getstate__()  
Helper for pickle.  
  
__repr__()  
Return repr(self).
```

fipy.solvers.petsc.comms.petscCommWrapper

Classes

<code>PETScCommWrapper([petsc4py_comm])</code>	MPI Communicator wrapper
--	--------------------------

```
class fipy.solvers.petsc.comms.petscCommWrapper.PETScCommWrapper(petsc4py_comm=petsc4py.PETSc.COMM_WORLD)  
Bases: CommWrapper  
MPI Communicator wrapper  
Encapsulates capabilities needed for PETSc. Some capabilities are not parallel.  
  
__getstate__()  
Helper for pickle.  
  
__repr__()  
Return repr(self).
```

fipy.solvers.petsc.comms.serialPETScCommWrapper**Classes**

<i>SerialPETScCommWrapper()</i>

```
class fipy.solvers.petsc.comms.serialPETScCommWrapper.SerialPETScCommWrapper
```

Bases: *PETScCommWrapper*

__getstate__()

Helper for pickle.

__repr__()

Return repr(self).

fipy.solvers.petsc.dummySolver**Classes**

<i>DummySolver(*args, **kwargs)</i>	Solver that doesn't do anything.
-------------------------------------	----------------------------------

```
class fipy.solvers.petsc.dummySolver.DummySolver(*args, **kwargs)
```

Bases: *PETScSolver*

Solver that doesn't do anything.

PETSc is intolerant of having zeros on the diagonal

Create a *Solver* object.

Parameters

- **tolerance** (*float*) – Required error tolerance.
- **iterations** (*int*) – Maximum number of iterative steps to perform.
- **precon** – Preconditioner to use. Not all solver suites support preconditioners.

__repr__()

Return repr(self).

fipy.solvers.petsc.linearBicgSolver**Classes**

<i>LinearBicgSolver([tolerance, iterations, precon])</i>	The <i>LinearBicgSolver</i> is an interface to the biconjugate gradient solver in PETSc, using no preconditioner by default.
--	--

```
class fipy.solvers.petsc.linearBicgSolver.LinearBicgSolver(tolerance=1e-10, iterations=1000,  
                           precon=None)
```

Bases: *PETScKrylovSolver*

The *LinearBicgSolver* is an interface to the biconjugate gradient solver in PETSc, using no preconditioner by default.

Parameters

- *tolerance*: The required error tolerance.
- *iterations*: The maximum number of iterative steps to perform.
- *precon*: Preconditioner to use (string).

__repr__()

Return repr(self).

fipy.solvers.petsc.linearCGSSolver

Classes

<code>LinearCGSSolver([tolerance, iterations, precon])</code>	The <i>LinearCGSSolver</i> is an interface to the conjugate gradient squared solver in PETSc, using no preconditioner by default.
---	---

```
class fipy.solvers.petsc.linearCGSSolver.LinearCGSSolver(tolerance=1e-10, iterations=1000,  
                           precon=None)
```

Bases: *PETScKrylovSolver*

The *LinearCGSSolver* is an interface to the conjugate gradient squared solver in PETSc, using no preconditioner by default.

Parameters

- *tolerance*: The required error tolerance.
- *iterations*: The maximum number of iterative steps to perform.
- *precon*: Preconditioner to use (string).

__repr__()

Return repr(self).

fipy.solvers.petsc.linearGMRESSolver

Classes

<code>LinearGMRESSolver([tolerance, iterations, ...])</code>	The <i>LinearGMRESSolver</i> is an interface to the GMRES solver in PETSc, using no preconditioner by default.
--	--

```
class fipy.solvers.petsc.linearGMRESSolver.LinearGMRESSolver(tolerance=1e-10, iterations=1000,  
                                precon=None)
```

Bases: *PETScKrylovSolver*

The *LinearGMRESSolver* is an interface to the GMRES solver in PETSc, using no preconditioner by default.

Parameters

- *tolerance*: The required error tolerance.
- *iterations*: The maximum number of iterative steps to perform.
- *precon*: Preconditioner to use (string).

__repr__()

Return repr(self).

fipy.solvers.petsc.linearLUSolver

Classes

<i>LinearLUSolver</i> ([<i>tolerance</i> , <i>iterations</i> , <i>precon</i>])	The <i>LinearLUSolver</i> is an interface to the LU preconditioner in PETSc.
--	--

```
class fipy.solvers.petsc.linearLUSolver.LinearLUSolver(tolerance=1e-10, iterations=10,  
                                precon='lu')
```

Bases: *PETScSolver*

The *LinearLUSolver* is an interface to the LU preconditioner in PETSc. A direct solve is performed.

Parameters

- *tolerance*: The required error tolerance.
- *iterations*: The maximum number of iterative steps to perform.
- *precon*: Ignored.

__repr__()

Return repr(self).

fipy.solvers.petsc.linearPCGSolver

Classes

<i>LinearPCGSolver</i> ([<i>tolerance</i> , <i>iterations</i> , <i>precon</i>])	The <i>LinearPCGSolver</i> is an interface to the cg solver in PETSc, using no preconditioner by default.
---	---

```
class fipy.solvers.petsc.linearPCGSolver.LinearPCGSolver(tolerance=1e-10, iterations=1000,  
                                precon=None)
```

Bases: *PETScKrylovSolver*

The *LinearPCGSolver* is an interface to the cg solver in PETSc, using no preconditioner by default.

Parameters

- *tolerance*: The required error tolerance.
- *iterations*: The maximum number of iterative steps to perform.
- *precon*: Preconditioner to use (string).

`__repr__()`

Return `repr(self)`.

`fipy.solvers.petsc.petscKrylovSolver`

Classes

`PETScKrylovSolver([tolerance, iterations, ...])`

Attention:
This
class
is
ab-
stract,
al-
ways
cre-
ate
one
of
its
sub-
classes.

`class fipy.solvers.petsc.petscKrylovSolver.PETScKrylovSolver(tolerance=1e-10, iterations=1000, precon=None)`

Bases: `PETScSolver`

Attention: This class is abstract, always create one of its subclasses. It provides the code to call all Krylov solvers from the PETSc package.

Parameters

- *tolerance*: The required error tolerance.
- *iterations*: The maximum number of iterative steps to perform.
- *precon*: Preconditioner to use (string).

`__repr__()`

Return `repr(self)`.

fipy.solvers.petsc.petscSolver

Classes

`PETScSolver(*args, **kwargs)`

Attention:

This class is abstract. Always create one of its subclasses.

`class fipy.solvers.petsc.petscSolver.PETScSolver(*args, **kwargs)`

Bases: `Solver`

Attention: This class is abstract. Always create one of its subclasses.

Create a `Solver` object.

Parameters

- **tolerance** (`float`) – Required error tolerance.
- **iterations** (`int`) – Maximum number of iterative steps to perform.
- **precon** – Preconditioner to use. Not all solver suites support preconditioners.

`__repr__()`

Return `repr(self)`.

22.4.2 fipy.solvers.pyAMG

Modules

```
fipy.solvers.pyAMG.linearCGSSolver  
fipy.solvers.pyAMG.linearGMRESSolver  
fipy.solvers.pyAMG.linearGeneralSolver  
fipy.solvers.pyAMG.linearLUSolver  
fipy.solvers.pyAMG.linearPCGSolver  
fipy.solvers.pyAMG.preconditioners
```

fipy.solvers.pyAMG.linearCGSSolver

Classes

```
LinearCGSSolver([tolerance, iterations, precon])
```

The *LinearCGSSolver* is an interface to the CGS solver in Scipy, using the PyAMG *SmoothedAggregationPreconditioner* by default.

```
class fipy.solvers.pyAMG.linearCGSSolver.LinearCGSSolver(tolerance=1e-15, iterations=2000, precon=<fipy.solvers.pyAMG.preconditioners.smoothedAggregationPreconditioner object>)
```

Bases: *LinearCGSSolver*

The *LinearCGSSolver* is an interface to the CGS solver in Scipy, using the PyAMG *SmoothedAggregationPreconditioner* by default.

Parameters

- **tolerance** (*float*) – Required error tolerance.
- **iterations** (*int*) – Maximum number of iterative steps to perform.
- **precon** (*SmoothedAggregationPreconditioner*, *optional*) –

__repr__()

Return repr(self).

fipy.solvers.pyAMG.linearGMRESSolver

Classes

```
LinearGMRESSolver([tolerance, iterations, ...])
```

The *LinearGMRESSolver* is an interface to the GMRES solver in Scipy, using the PyAMG *SmoothedAggregationPreconditioner* by default.

```
class fipy.solvers.pyAMG.linearGMRESSolver.LinearGMRESSolver(tolerance=1e-15, iterations=2000,
                                                               pre-
                                                               con=<fipy.solvers.pyAMG.preconditioners.smoothedAgg-
                                                               object>)
```

Bases: `LinearGMRESSolver`

The `LinearGMRESSolver` is an interface to the GMRES solver in Scipy, using the PyAMG `SmoothedAggregationPreconditioner` by default.

Parameters

- **tolerance** (`float`) – Required error tolerance.
- **iterations** (`int`) – Maximum number of iterative steps to perform.
- **precon** (`SmoothedAggregationPreconditioner`, *optional*) –

`__repr__()`

Return `repr(self)`.

fipy.solvers.pyAMG.linearGeneralSolver

Classes

<code>LinearGeneralSolver</code> ([tolerance, iterations, ...])	The <code>LinearGeneralSolver</code> is an interface to the generic PyAMG, which solves the arbitrary system $Ax=b$ with the best out-of-the box choice for a solver.
---	---

```
class fipy.solvers.pyAMG.linearGeneralSolver.LinearGeneralSolver(tolerance=1e-10,
                                                               iterations=1000,
                                                               precon=None)
```

Bases: `_ScipySolver`

The `LinearGeneralSolver` is an interface to the generic PyAMG, which solves the arbitrary system $Ax=b$ with the best out-of-the box choice for a solver. See `pyAMG.solve` for details.

Create a *Solver* object.

Parameters

- **tolerance** (`float`) – Required error tolerance.
- **iterations** (`int`) – Maximum number of iterative steps to perform.
- **precon** – Preconditioner to use. Not all solver suites support preconditioners.

`__repr__()`

Return `repr(self)`.

fipy.solvers.pyAMG.linearLUSolver

Classes

<code>LinearLUSolver</code> ([tolerance, iterations, precon])	Create a <i>Solver</i> object.
---	--------------------------------

```
class fipy.solvers.pyAMG.linearLUSolver.LinearLUSolver(tolerance=1e-10, iterations=1000,  
                                                       precon=None)
```

Bases: `LinearLUSolver`

Create a *Solver* object.

Parameters

- **tolerance** (`float`) – Required error tolerance.
- **iterations** (`int`) – Maximum number of iterative steps to perform.
- **precon** – Preconditioner to use. Not all solver suites support preconditioners.

`__repr__()`

Return `repr(self)`.

fipy.solvers.pyAMG.linearPCGSolver

Classes

<code>LinearPCGSolver</code> ([tolerance, iterations, precon])	The <i>LinearPCGSolver</i> is an interface to the PCG solver in Scipy, using the PyAMG <i>SmoothedAggregationPreconditioner</i> by default.
--	---

```
class fipy.solvers.pyAMG.linearPCGSolver.LinearPCGSolver(tolerance=1e-15, iterations=2000, pre-  
con=<fipy.solvers.pyAMG.preconditioners.smoothedAggrega-  
object>)
```

Bases: `LinearPCGSolver`

The *LinearPCGSolver* is an interface to the PCG solver in Scipy, using the PyAMG *SmoothedAggregationPreconditioner* by default.

Parameters

- **tolerance** (`float`) – Required error tolerance.
- **iterations** (`int`) – Maximum number of iterative steps to perform.
- **precon** (`SmoothedAggregationPreconditioner`, *optional*) –

`__repr__()`

Return `repr(self)`.

fipy.solvers.pyAMG.preconditioners**Modules**

<i>fipy.solvers.pyAMG.preconditioners.</i>
<i>smoothedAggregationPreconditioner</i>

fipy.solvers.pyAMG.preconditioners.smoothedAggregationPreconditioner**Classes**

<i>SmoothedAggregationPreconditioner()</i>	Preconditioner based on	PyAMG
	<i>smoothed_aggregation_solver</i>	

```
class fipy.solvers.pyAMG.preconditioners.smoothedAggregationPreconditioner.
SmoothedAggregationPreconditioner
```

Bases: `object`

Preconditioner based on PyAMG smoothed_aggregation_solver

22.4.3 fipy.solvers.pyamgx**Modules**

<i>fipy.solvers.pyamgx.aggregationAMGSolver</i>
<i>fipy.solvers.pyamgx.classicalAMGSolver</i>
<i>fipy.solvers.pyamgx.linearBiCGStabSolver</i>
<i>fipy.solvers.pyamgx.linearCGSolver</i>
<i>fipy.solvers.pyamgx.linearFGMRESSolver</i>
<i>fipy.solvers.pyamgx.linearGMRESSolver</i>
<i>fipy.solvers.pyamgx.linearLUSolver</i>
<i>fipy.solvers.pyamgx.preconditioners</i>
<i>fipy.solvers.pyamgx.pyAMGXSolver</i>
<i>fipy.solvers.pyamgx.smoothers</i>

fipy.solvers.pyamgx.aggregationAMGSolver

Classes

```
AggregationAMGSolver([tolerance, ...])
```

The *AggregationAMGSolver* is an interface to the aggregation AMG solver in AMGX, with a Jacobi smoother by default.

```
class fipy.solvers.pyamgx.aggregationAMGSolver(tolerance=1e-10,
                                                iterations=2000,
                                                precon=None,
                                                smoother={'max_iters': 1,
                                                          'solver': 'BLOCK_JACOBI'},
                                                **kwargs)
```

Bases: *PyAMGSolver*

The *AggregationAMGSolver* is an interface to the aggregation AMG solver in AMGX, with a Jacobi smoother by default.

Parameters

- **tolerance** (*float*) – Required error tolerance.
- **iterations** (*int*) – Maximum number of iterative steps to perform.
- **precon** (*Preconditioner*, *optional*) –
- ****kwargs** – Other AMGX solver options

```
__repr__()
```

Return repr(self).

fipy.solvers.pyamgx.classicalAMGSolver

Classes

```
ClassicalAMGSolver([tolerance, iterations, ...])
```

The *ClassicalAMGSolver* is an interface to the classical AMG solver in AMGX, with a Jacobi smoother by default.

```
class fipy.solvers.pyamgx.classicalAMGSolver.ClassicalAMGSolver(tolerance=1e-10,
                                                               iterations=2000, precon=None,
                                                               smoother={'max_iters': 1,
                                                             'solver': 'BLOCK_JACOBI'},
                                                               **kwargs)
```

Bases: *PyAMGSolver*

The *ClassicalAMGSolver* is an interface to the classical AMG solver in AMGX, with a Jacobi smoother by default.

Parameters

- **tolerance** (*float*) – Required error tolerance.

- **iterations** (`int`) – Maximum number of iterative steps to perform.
- **precon** (`Preconditioner`, *optional*) –
- **smoother** (`Smoother`, *optional*) –
- ****kwargs** – Other AMGX solver options

`__repr__()`

Return `repr(self)`.

fipy.solvers.pyamgx.linearBiCGStabSolver**Classes**

`LinearBiCGStabSolver`([tolerance, ...])

The *LinearBiCGStabSolver* is an interface to the PBICGSTAB solver in AMGX, with a Jacobi preconditioner by default.

```
class fipy.solvers.pyamgx.linearBiCGStabSolver.LinearBiCGStabSolver(tolerance=1e-10,
                                                               iterations=2000,
                                                               precon={'max_iters': 1,
                                                               'solver':
                                                               'BLOCK_JACOBI'},
                                                               **kwargs)
```

Bases: `PyAMGXSolver`

The *LinearBiCGStabSolver* is an interface to the PBICGSTAB solver in AMGX, with a Jacobi preconditioner by default.

Parameters

- **tolerance** (`float`) – Required error tolerance.
- **iterations** (`int`) – Maximum number of iterative steps to perform.
- **precon** (`Preconditioner`, *optional*) –
- ****kwargs** – Other AMGX solver options

`__repr__()`

Return `repr(self)`.

fipy.solvers.pyamgx.linearCGSolver**Classes**

`LinearCGSolver`([tolerance, iterations, precon])

The *LinearCGSolver* is an interface to the PCG solver in AMGX, with no preconditioning by default.

`LinearPCGSolver`

alias of `LinearCGSolver`

```
class fipy.solvers.pyamgx.linearCGSolver.LinearCGSolver(tolerance=1e-10, iterations=2000,
                                                       precon={'max_iters': 1, 'solver':
                                                       'BLOCK_JACOBI'}, **kwargs)
```

Bases: *PyAMGXSolver*

The *LinearCGSolver* is an interface to the PCG solver in AMGX, with no preconditioning by default.

Parameters

- **tolerance** (*float*) – Required error tolerance.
- **iterations** (*int*) – Maximum number of iterative steps to perform.
- **precon** (*Preconditioner*, *optional*) –
- ****kwargs** – Other AMGX solver options

__repr__()

Return repr(self).

fipy.solvers.pyamgx.linearPCGSolver

alias of *LinearCGSolver*

fipy.solvers.pyamgx.linearFGMRESSolver

Classes

LinearFGMRESSolver([tolerance, iterations, ...])

The *LinearFGMRESSolver* is an interface to the FGMRES solver in AMGX, with a Jacobi preconditioner by default.

```
class fipy.solvers.pyamgx.linearFGMRESSolver.LinearFGMRESSolver(tolerance=1e-10,
                                                               iterations=2000,
                                                               precon={'max_iters': 1, 'solver':
                                                               'BLOCK_JACOBI'}, **kwargs)
```

Bases: *PyAMGXSolver*

The *LinearFGMRESSolver* is an interface to the FGMRES solver in AMGX, with a Jacobi preconditioner by default.

Parameters

- **tolerance** (*float*) – Required error tolerance.
- **iterations** (*int*) – Maximum number of iterative steps to perform.
- **precon** (*Preconditioner*, *optional*) –
- ****kwargs** – Other AMGX solver options

__repr__()

Return repr(self).

fipy.solvers.pyamgx.linearGMRESSolver**Classes**`LinearGMRESSolver([tolerance, iterations, ...])`

The *LinearGMRESSolver* is an interface to the GMRES solver in AMGX, with a Jacobi preconditioner by default.

```
class fipy.solvers.pyamgx.linearGMRESSolver.LinearGMRESSolver(tolerance=1e-10, iterations=2000,
                                                               precon={'max_iters': 1, 'solver':
                                                               'BLOCK_JACOBI'}, **kwargs)
```

Bases: *PyAMGSolver*

The *LinearGMRESSolver* is an interface to the GMRES solver in AMGX, with a Jacobi preconditioner by default.

Parameters

- **tolerance** (*float*) – Required error tolerance.
- **iterations** (*int*) – Maximum number of iterative steps to perform.
- **precon** (*Preconditioner, optional*) –
- ****kwargs** – Other AMGX solver options

__repr__()

Return repr(self).

fipy.solvers.pyamgx.linearLUSolver

```
class fipy.solvers.pyamgx.linearLUSolver.LinearLUSolver(tolerance=1e-10, iterations=1000,
                                                       precon=None)
```

Bases: *_ScipySolver*

The *LinearLUSolver* solves a linear system of equations using LU-factorization. The *LinearLUSolver* is a wrapper class for the the Scipy *scipy.sparse.linalg.splu* module.

Create a *Solver* object.

Parameters

- **tolerance** (*float*) – Required error tolerance.
- **iterations** (*int*) – Maximum number of iterative steps to perform.
- **precon** – Preconditioner to use. Not all solver suites support preconditioners.

__repr__()

Return repr(self).

fipy.solvers.pyamgx.preconditioners**Modules**

```
fipy.solvers.pyamgx.preconditioners.  
preconditioners
```

fipy.solvers.pyamgx.preconditioners.preconditioners**Classes**

```
Preconditioner(preconditioner_type, **kwargs)           Interface to pyamgx preconditioner configuration.
```

```
class fipy.solvers.pyamgx.preconditioners.Preconditioner(preconditioner_type,  
                                                       **kwargs)
```

Bases: `object`

Interface to pyamgx preconditioner configuration.

```
__call__(**kwargs)
```

Parameters

`**kwargs` – Other AMGX solver options

fipy.solvers.pyamgx.pyAMGSolver**Classes**

```
PyAMGSolver(config_dict[, tolerance, ...])
```

param config_dict
AMGX configuration options

```
class fipy.solvers.pyamgx.pyAMGSolver.PyAMGSolver(config_dict, tolerance=1e-10, iterations=2000,  
                                                 precon=None, smoother=None, **kwargs)
```

Bases: `Solver`

Parameters

- `config_dict` (`dict`) – AMGX configuration options
- `tolerance` (`float`) – Required error tolerance.
- `iterations` (`int`) – Maximum number of iterative steps to perform.
- `precon` (`Preconditioner`, `optional`) –
- `smoother` (`Smoother`, `optional`) –
- `**kwargs` – Other AMGX solver options

__repr__()

Return repr(self).

fipy.solvers.pyamgx.smoothers**Modules**

<i>fipy.solvers.pyamgx.smoothers.smoothers</i>
--

fipy.solvers.pyamgx.smoothers.smoothers**Classes**

<i>Smoother(smoother_type)</i>	Interface to pyamgx smoother configuration.
--------------------------------	---

class fipy.solvers.pyamgx.smoothers.smoothers.Smoother(smoother_type)

Bases: `object`

Interface to pyamgx smoother configuration.

__call__(kwargs)**

Call self as a function.

22.4.4 fipy.solvers.pysparse**Modules**

<i>fipy.solvers.pysparse.linearCGSSolver</i>
--

<i>fipy.solvers.pysparse.linearGMRESSolver</i>
--

<i>fipy.solvers.pysparse.linearJORSolver</i>
--

<i>fipy.solvers.pysparse.linearLUSolver</i>

<i>fipy.solvers.pysparse.linearPCGSolver</i>
--

<i>fipy.solvers.pysparse.preconditioners</i>
--

<i>fipy.solvers.pysparse.pysparseSolver</i>

fipy.solvers.pysparse.linearCGSSolver**Classes****LinearCGSSolver**([precon])

The *LinearCGSSolver* solves a linear system of equations using the conjugate gradient squared method (CGS), a variant of the biconjugate gradient method (BiCG).

class fipy.solvers.pysparse.linearCGSSolver.**LinearCGSSolver**(precon=None, *args, **kwargs)Bases: *PysparseSolver*

The *LinearCGSSolver* solves a linear system of equations using the conjugate gradient squared method (CGS), a variant of the biconjugate gradient method (BiCG). CGS solves linear systems with a general non-symmetric coefficient matrix.

The *LinearCGSSolver* is a wrapper class for the the *Pysparse itsolvers.cgs()* method.

Parameters**precon** (*Preconditioner*, *optional*) –**__repr__**()

Return repr(self).

fipy.solvers.pysparse.linearGMRESSolver**Classes****LinearGMRESSolver**([precon])

The *LinearGMRESSolver* solves a linear system of equations using the generalized minimal residual method (GMRES) with Jacobi preconditioning.

class fipy.solvers.pysparse.linearGMRESSolver.**LinearGMRESSolver**(precon=<fipy.solvers.pysparse.preconditioners.jacobi object>, *args, **kwargs)Bases: *PysparseSolver*

The *LinearGMRESSolver* solves a linear system of equations using the generalized minimal residual method (GMRES) with Jacobi preconditioning. GMRES solves systems with a general non-symmetric coefficient matrix.

The *LinearGMRESSolver* is a wrapper class for the the *Pysparse itsolvers.gmres()* and *precon.jacobi()* methods.

Parameters**precon** (*Preconditioner*, *optional*) –**__repr__**()

Return repr(self).

fipy.solvers.pysparse.linearJORSolver**Classes**`LinearJORSolver([tolerance, iterations, ...])`

The *LinearJORSolver* solves a linear system of equations using Jacobi over-relaxation.

```
class fipy.solvers.pysparse.linearJORSolver.LinearJORSolver(tolerance=1e-10, iterations=1000,
                                                               relaxation=1.0)
```

Bases: *PysparseSolver*

The *LinearJORSolver* solves a linear system of equations using Jacobi over-relaxation. This method solves systems with a general non-symmetric coefficient matrix.

The *Solver* class should not be invoked directly.

Parameters

- **tolerance** (*float*) – Required error tolerance.
- **iterations** (*int*) – Maximum number of iterative steps to perform.
- **relaxation** (*float*) – Fraction of update to apply

`__repr__()`

Return repr(self).

fipy.solvers.pysparse.linearLUSolver**Classes**`LinearLUSolver([tolerance, iterations, ...])`

The *LinearLUSolver* solves a linear system of equations using LU-factorization.

```
class fipy.solvers.pysparse.linearLUSolver.LinearLUSolver(tolerance=1e-10, iterations=10,
                                                               maxIterations=10, precon=None)
```

Bases: *PysparseSolver*

The *LinearLUSolver* solves a linear system of equations using LU-factorization. This method solves systems with a general non-symmetric coefficient matrix using partial pivoting.

The *LinearLUSolver* is a wrapper class for the the *Pysparse superlu.factorize()* method.

Creates a *LinearLUSolver*.

Parameters

- **tolerance** (*float*) – Required error tolerance.
- **iterations** (*int*) – Maximum number of iterative steps to perform.
- **precon** (*Preconditioner*) – ignored

`__repr__()`

Return repr(self).

fipy.solvers.pysparse.linearPCGSolver**Classes**`LinearPCGSolver([precon])`

The *LinearPCGSolver* solves a linear system of equations using the preconditioned conjugate gradient method (PCG) with symmetric successive over-relaxation (SSOR) preconditioning by default.

```
class fipy.solvers.pysparse.linearPCGSolver.LinearPCGSolver(precon=<fipy.solvers.pysparse.preconditioners.ssorPrecond object>, *args, **kwargs)
```

Bases: *PysparseSolver*

The *LinearPCGSolver* solves a linear system of equations using the preconditioned conjugate gradient method (PCG) with symmetric successive over-relaxation (SSOR) preconditioning by default. Alternatively, Jacobi preconditioning can be specified through *precon*. The PCG method solves systems with a symmetric positive definite coefficient matrix.

The *LinearPCGSolver* is a wrapper class for the the *Pysparse itsolvers.pcg()* and *precon.ssor()* methods.

Parameters

precon (*Preconditioner*, *optional*) –

__repr__()

Return repr(self).

fipy.solvers.pysparse.preconditioners**Modules**

```
fipy.solvers.pysparse.preconditioners.  
jacobiPreconditioner  
fipy.solvers.pysparse.preconditioners.  
preconditioner  
fipy.solvers.pysparse.preconditioners.  
ssorPreconditioner
```

fipy.solvers.pysparse.preconditioners.jacobiPreconditioner**Classes**`JacobiPreconditioner()`

Jacobi preconditioner for Pysparse.

```
class fipy.solvers.pysparse.preconditioners.jacobiPreconditioner.JacobiPreconditioner
```

Bases: *Preconditioner*

Jacobi preconditioner for Pysparse. Really just a wrapper class for *pysparse.precon.jacobi*.

Create a *Preconditioner* object.

fipy.solvers.pysparse.preconditioners.preconditioner**Classes**

<code>Preconditioner()</code>	Base preconditioner class
-------------------------------	---------------------------

```
class fipy.solvers.pysparse.preconditioners.preconditioner.Preconditioner
```

Bases: `object`

Base preconditioner class

Attention: This class is abstract. Always create one of its subclasses.

Create a *Preconditioner* object.

fipy.solvers.pysparse.preconditioners.ssorPreconditioner**Classes**

<code>SsorPreconditioner()</code>	SSOR preconditioner for Pysparse.
-----------------------------------	-----------------------------------

```
class fipy.solvers.pysparse.preconditioners.ssorPreconditioner.SsorPreconditioner
```

Bases: `Preconditioner`

SSOR preconditioner for Pysparse. Really just a wrapper class for *pysparse.precon.jacobi*.

Create a *Preconditioner* object.

fipy.solvers.pysparse.pysparseSolver**Classes**

<code>PysparseSolver(*args, **kwargs)</code>	The base <i>pysparseSolver</i> class.
--	---------------------------------------

```
class fipy.solvers.pysparse.pysparseSolver.PysparseSolver(*args, **kwargs)
```

Bases: `_PysparseMatrixSolver`

The base *pysparseSolver* class.

Attention: This class is abstract. Always create one of its subclasses.

Create a *Solver* object.

Parameters

- **tolerance** (`float`) – Required error tolerance.

- **iterations** (*int*) – Maximum number of iterative steps to perform.
- **precon** – Preconditioner to use. Not all solver suites support preconditioners.

`__repr__()`

Return `repr(self)`.

22.4.5 `fipy.solvers.pysparseMatrixSolver`

22.4.6 `fipy.solvers.scipy`

Modules

`fipy.solvers.scipy.linearBicgstabSolver`

`fipy.solvers.scipy.linearCGSSolver`

`fipy.solvers.scipy.linearGMRESSolver`

`fipy.solvers.scipy.linearLUSolver`

`fipy.solvers.scipy.linearPCGSolver`

`fipy.solvers.scipy.scipyKrylovSolver`

`fipy.solvers.scipy.scipySolver`

`fipy.solvers.scipy.linearBicgstabSolver`

Classes

`LinearBicgstabSolver`([tolerance, ...])

The `LinearBicgstabSolver` is an interface to the Bicgstab solver in Scipy, with no preconditioning by default.

`class fipy.solvers.scipy.linearBicgstabSolver.LinearBicgstabSolver(tolerance=1e-15,
iterations=2000,
precon=None)`

Bases: `_ScipyKrylovSolver`

The `LinearBicgstabSolver` is an interface to the Bicgstab solver in Scipy, with no preconditioning by default.

Parameters

- **tolerance** (*float*) – Required error tolerance.
- **iterations** (*int*) – Maximum number of iterative steps to perform.
- **precon** – Preconditioner to use.

`__repr__()`

Return `repr(self)`.

fipy.solvers.scipy.linearCGSSolver**Classes**`LinearCGSSolver([tolerance, iterations, precon])`

The *LinearCGSSolver* is an interface to the CGS solver in Scipy, with no preconditioning by default.

```
class fipy.solvers.scipy.linearCGSSolver.LinearCGSSolver(tolerance=1e-15, iterations=2000,
                                                          precon=None)
```

Bases: `_ScipyKrylovSolver`

The *LinearCGSSolver* is an interface to the CGS solver in Scipy, with no preconditioning by default.

Parameters

- **tolerance** (`float`) – Required error tolerance.
- **iterations** (`int`) – Maximum number of iterative steps to perform.
- **precon** – Preconditioner to use.

`__repr__()`

Return `repr(self)`.

fipy.solvers.scipy.linearGMRESSolver**Classes**`LinearGMRESSolver([tolerance, iterations, ...])`

The *LinearGMRESSolver* is an interface to the GMRES solver in Scipy, with no preconditioning by default.

```
class fipy.solvers.scipy.linearGMRESSolver.LinearGMRESSolver(tolerance=1e-15, iterations=2000,
                                                               precon=None)
```

Bases: `_ScipyKrylovSolver`

The *LinearGMRESSolver* is an interface to the GMRES solver in Scipy, with no preconditioning by default.

Parameters

- **tolerance** (`float`) – Required error tolerance.
- **iterations** (`int`) – Maximum number of iterative steps to perform.
- **precon** – Preconditioner to use.

`__repr__()`

Return `repr(self)`.

fipy.solvers.scipy.linearLUSolver

Classes

`LinearLUSolver([tolerance, iterations, precon])`

The *LinearLUSolver* solves a linear system of equations using LU-factorization.

```
class fipy.solvers.scipy.linearLUSolver.LinearLUSolver(tolerance=1e-10, iterations=1000,  
                                                       precon=None)
```

Bases: `_ScipySolver`

The *LinearLUSolver* solves a linear system of equations using LU-factorization. The *LinearLUSolver* is a wrapper class for the the Scipy `scipy.sparse.linalg.splu` module.

Create a *Solver* object.

Parameters

- **tolerance** (`float`) – Required error tolerance.
- **iterations** (`int`) – Maximum number of iterative steps to perform.
- **precon** – Preconditioner to use. Not all solver suites support preconditioners.

`__repr__()`

Return `repr(self)`.

fipy.solvers.scipy.linearPCGSolver

Classes

`LinearPCGSolver([tolerance, iterations, precon])`

The *LinearPCGSolver* is an interface to the CG solver in Scipy, with no preconditioning by default.

```
class fipy.solvers.scipy.linearPCGSolver.LinearPCGSolver(tolerance=1e-15, iterations=2000,  
                                                       precon=None)
```

Bases: `_ScipyKrylovSolver`

The *LinearPCGSolver* is an interface to the CG solver in Scipy, with no preconditioning by default.

Parameters

- **tolerance** (`float`) – Required error tolerance.
- **iterations** (`int`) – Maximum number of iterative steps to perform.
- **precon** – Preconditioner to use.

`__repr__()`

Return `repr(self)`.

`fipy.solvers.scipy.scipyKrylovSolver`

`fipy.solvers.scipy.scipySolver`

22.4.7 fipy.solvers.solver

The iterative solvers may output warnings if the solution is considered unsatisfactory. If you are not interested in these warnings, you can invoke python with a warning filter such as:

```
$ python -Wignore::fipy.SolverConvergenceWarning myscript.py
```

If you are extremely concerned about your preconditioner for some reason, you can abort whenever it has problems with:

```
$ python -Werror::fipy.PreconditionerWarning myscript.py
```

Classes

<code>Solver</code> ([tolerance, iterations, precon])	The base <i>LinearXSolver</i> class.
---	--------------------------------------

Exceptions

`IllConditionedPreconditionerWarning`(solver,
...)

`MatrixIllConditionedWarning`(solver, iter, relres)

`MaximumIterationWarning`(solver, iter, relres)

`PreconditionerNotPositiveDefiniteWarning`(...)

`PreconditionerWarning`(solver, iter, relres)

`ScalarQuantityOutOfRangeWarning`(solver, ...)

`SolverConvergenceWarning`(solver, iter, relres)

`StagnatedSolverWarning`(solver, iter, relres)

`exception fipy.solvers.solver.IllConditionedPreconditionerWarning(solver, iter, relres)`

Bases: `PreconditionerWarning`

`__cause__`

exception cause

`__context__`

exception context

```
__delattr__(name, /)
    Implement delattr(self, name).

__getattribute__(name, /)
    Return getattr(self, name).

__reduce__()
    Helper for pickle.

__repr__()
    Return repr(self).

__setattr__(name, value, /)
    Implement setattr(self, name, value).

__str__()
    Return str(self).

add_note()
    Exception.add_note(note) – add a note to the exception

with_traceback()
    Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception fipy.solvers.solver.MatrixIllConditionedWarning(solver, iter, relres)
Bases: SolverConvergenceWarning

__cause__
    exception cause

__context__
    exception context

__delattr__(name, /)
    Implement delattr(self, name).

__getattribute__(name, /)
    Return getattr(self, name).

__reduce__()
    Helper for pickle.

__repr__()
    Return repr(self).

__setattr__(name, value, /)
    Implement setattr(self, name, value).

__str__()
    Return str(self).

add_note()
    Exception.add_note(note) – add a note to the exception

with_traceback()
    Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.
```

```
exception fipy.solvers.solver.MaximumIterationWarning(solver, iter, relres)
```

Bases: *SolverConvergenceWarning*

__cause__

exception cause

__context__

exception context

__delattr__(name, /)

Implement delattr(self, name).

__getattribute__(name, /)

Return getattr(self, name).

__reduce__()

Helper for pickle.

__repr__()

Return repr(self).

__setattr__(name, value, /)

Implement setattr(self, name, value).

__str__()

Return str(self).

add_note()

Exception.add_note(note) – add a note to the exception

with_traceback()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

```
exception fipy.solvers.solver.PreconditionerNotPositiveDefiniteWarning(solver, iter, relres)
```

Bases: *PreconditionerWarning*

__cause__

exception cause

__context__

exception context

__delattr__(name, /)

Implement delattr(self, name).

__getattribute__(name, /)

Return getattr(self, name).

__reduce__()

Helper for pickle.

__repr__()

Return repr(self).

__setattr__(name, value, /)

Implement setattr(self, name, value).

__str__()

Return str(self).

add_note()

Exception.add_note(note) – add a note to the exception

with_traceback()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception fipy.solvers.solver.PreconditionerWarning(solver, iter, relres)

Bases: *SolverConvergenceWarning*

__cause__

exception cause

__context__

exception context

__delattr__(name, /)

Implement delattr(self, name).

__getattribute__(name, /)

Return getattr(self, name).

__reduce__()

Helper for pickle.

__repr__()

Return repr(self).

__setattr__(name, value, /)

Implement setattr(self, name, value).

__str__()

Return str(self).

add_note()

Exception.add_note(note) – add a note to the exception

with_traceback()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception fipy.solvers.solver.ScalarQuantityOutOfRangeWarning(solver, iter, relres)

Bases: *SolverConvergenceWarning*

__cause__

exception cause

__context__

exception context

__delattr__(name, /)

Implement delattr(self, name).

__getattribute__(name, /)

Return getattr(self, name).

__reduce__()
 Helper for pickle.

__repr__()
 Return repr(self).

__setattr__(name, value, /)
 Implement setattr(self, name, value).

__str__()
 Return str(self).

add_note()
 Exception.add_note(note) – add a note to the exception

with_traceback()
 Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

class fipy.solvers.solver.Solver(tolerance=1e-10, iterations=1000, precon=None)

Bases: `object`

The base *LinearXSolver* class.

Attention: This class is abstract. Always create one of its subclasses.

Create a *Solver* object.

Parameters

- **tolerance** (`float`) – Required error tolerance.
- **iterations** (`int`) – Maximum number of iterative steps to perform.
- **precon** – Preconditioner to use. Not all solver suites support preconditioners.

__repr__()

Return repr(self).

exception fipy.solvers.solver.SolverConvergenceWarning(solver, iter, relres)

Bases: `Warning`

__cause__

exception cause

__context__

exception context

__delattr__(name, /)

Implement delattr(self, name).

__getattribute__(name, /)

Return getattr(self, name).

__reduce__()

Helper for pickle.

__repr__()

Return repr(self).

```
__setattr__(name, value, /)
    Implement setattr(self, name, value).

__str__()
    Return str(self).

add_note()
    Exception.add_note(note) – add a note to the exception

with_traceback()
    Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception fipy.solvers.solver.StagnatedSolverWarning(solver, iter, relres)
    Bases: SolverConvergenceWarning

    __cause__
        exception cause

    __context__
        exception context

    __delattr__(name, /)
        Implement delattr(self, name).

    __getattribute__(name, /)
        Return getattr(self, name).

    __reduce__()
        Helper for pickle.

    __repr__()
        Return repr(self).

    __setattr__(name, value, /)
        Implement setattr(self, name, value).

    __str__()
        Return str(self).

add_note()
    Exception.add_note(note) – add a note to the exception

with_traceback()
    Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.
```

22.4.8 fipy.solvers.test

22.4.9 fipy.solvers.trilinos

Modules

`fipy.solvers.trilinos.comms`

`fipy.solvers.trilinos.linearBicgstabSolver`

`fipy.solvers.trilinos.linearCGSSolver`

`fipy.solvers.trilinos.linearGMRESSolver`

`fipy.solvers.trilinos.linearLUSolver`

`fipy.solvers.trilinos.linearPCGSolver`

`fipy.solvers.trilinos.preconditioners`

`fipy.solvers.trilinos.`
`trilinosAztecOOsolver`

`fipy.solvers.trilinos.trilinosMLTest`

`fipy.solvers.trilinos.`
`trilinosNonlinearSolver`

`fipy.solvers.trilinos.trilinosSolver`

fipy.solvers.trilinos.comms

Modules

`fipy.solvers.trilinos.comms.`
`epetraCommWrapper`

`fipy.solvers.trilinos.comms.`
`parallelEpetraCommWrapper`

`fipy.solvers.trilinos.comms.`
`serialEpetraCommWrapper`

fipy.solvers.trilinos.comms.epetraCommWrapper

Classes

<code>EpetraCommWrapper()</code>	MPI Communicator wrapper
----------------------------------	--------------------------

`class fipy.solvers.trilinos.comms.epetraCommWrapper.EpetraCommWrapper`

Bases: `CommWrapper`

MPI Communicator wrapper

Encapsulates capabilities needed for Epetra. Some capabilities are not parallel.

__getstate__()
Helper for pickle.

__repr__()
Return repr(self).

fipy.solvers.trilinos.comms.parallelEpetraCommWrapper

Classes

<i>ParallelEpetraCommWrapper()</i>	MPI Communicator wrapper
class fipy.solvers.trilinos.comms.parallelEpetraCommWrapper. <i>ParallelEpetraCommWrapper</i>	
Bases: <i>EpetraCommWrapper</i>	
MPI Communicator wrapper	
Encapsulates capabilities needed for both Epetra and mpi4py.	
MaxAll (<i>obj</i>)	
return max across all processes	
MinAll (<i>obj</i>)	
return min across all processes	
__getstate__()	
Helper for pickle.	
__repr__()	
Return repr(self).	
allgather (<i>obj</i>)	
mpi4py <i>allgather</i>	
Communicates copies of each <i>sendobj</i> to every rank in the comm, creating a rank-dimensional list of <i>sendobj</i> objects.	
<pre>>>> m4count = self.mpi4py_comm.allgather(self.mpi4py_comm.Get_rank()) >>> from builtins import range >>> for i in range(self.mpi4py_comm.Get_size()): ... assert m4count[i] == i</pre>	

fipy.solvers.trilinos.comms.serialEpetraCommWrapper

Classes

<i>SerialEpetraCommWrapper()</i>

class fipy.solvers.trilinos.comms.serialEpetraCommWrapper. <i>SerialEpetraCommWrapper</i>
Bases: <i>EpetraCommWrapper</i>

`__getstate__()`

Helper for pickle.

`__repr__()`

Return repr(self).

fipy.solvers.trilinos.linearBicgstabSolver**Classes**

`LinearBicgstabSolver([tolerance, ...])`

The *LinearBicgstabSolver* is an interface to the biconjugate gradient stabilized solver in Trilinos, using the *JacobiPreconditioner* by default.

```
class fipy.solvers.trilinos.linearBicgstabSolver.LinearBicgstabSolver(tolerance=1e-10,
                                                               iterations=1000, pre-
                                                               con=<fipy.solvers.trilinos.preconditioners.j
                                                               object>)
```

Bases: *TrilinosAztecOOsolver*

The *LinearBicgstabSolver* is an interface to the biconjugate gradient stabilized solver in Trilinos, using the *JacobiPreconditioner* by default.

Parameters

- **tolerance** (*float*) – Required error tolerance.
- **iterations** (*int*) – Maximum number of iterative steps to perform.
- **precon** (*Preconditioner*) –

`__repr__()`

Return repr(self).

fipy.solvers.trilinos.linearCGSSolver**Classes**

`LinearCGSSolver([tolerance, iterations, precon])`

The *LinearCGSSolver* is an interface to the CGS solver in Trilinos, using the *MultilevelSGSPreconditioner* by default.

```
class fipy.solvers.trilinos.linearCGSSolver.LinearCGSSolver(tolerance=1e-10, iterations=1000,
                                                               pre-
                                                               con=<fipy.solvers.trilinos.preconditioners.multilevelDD
                                                               object>)
```

Bases: *TrilinosAztecOOsolver*

The *LinearCGSSolver* is an interface to the CGS solver in Trilinos, using the *MultilevelSGSPreconditioner* by default.

Parameters

- **tolerance** (*float*) – Required error tolerance.
- **iterations** (*int*) – Maximum number of iterative steps to perform.
- **precon** (*Preconditioner*) –

__repr__()

Return repr(self).

fipy.solvers.trilinos.linearGMRESSolver**Classes****LinearGMRESSolver**([tolerance, iterations, ...])

The *LinearGMRESSolver* is an interface to the GMRES solver in Trilinos, using a the *MultilevelDDPreconditioner* by default.

```
class fipy.solvers.trilinos.linearGMRESSolver.LinearGMRESSolver(tolerance=1e-10,
                                                               iterations=1000, pre-
                                                               con=<fipy.solvers.trilinos.preconditioners.multileve-
```

Bases: *TrilinosAztecOOsolver*

The *LinearGMRESSolver* is an interface to the GMRES solver in Trilinos, using a the *MultilevelDDPreconditioner* by default.

Parameters

- **tolerance** (*float*) – Required error tolerance.
- **iterations** (*int*) – Maximum number of iterative steps to perform.
- **precon** (*Preconditioner*) –

__repr__()

Return repr(self).

fipy.solvers.trilinos.linearLUSolver**Classes****LinearLUSolver**([tolerance, iterations, ...])

The *LinearLUSolver* is an interface to the Amesos KLU solver in Trilinos.

```
class fipy.solvers.trilinos.linearLUSolver.LinearLUSolver(tolerance=1e-10, iterations=10,
                                                               precon=None, maxIterations=10)
```

Bases: *TrilinosSolver*

The *LinearLUSolver* is an interface to the Amesos KLU solver in Trilinos.

Parameters

- **tolerance** (*float*) – Required error tolerance.
- **iterations** (*int*) – Maximum number of iterative steps to perform.

- **precon** – *ignored*

__repr__()

Return repr(self).

fipy.solvers.trilinos.linearPCGSolver

Classes

`LinearPCGSolver`([tolerance, iterations, precon])

The *LinearPCGSolver* is an interface to the cg solver in Trilinos, using the *MultilevelSGSPreconditioner* by default.

```
class fipy.solvers.trilinos.linearPCGSolver.LinearPCGSolver(tolerance=1e-10, iterations=1000,  
                                                               pre-  
                                                               con=<fipy.solvers.trilinos.preconditioners.multilevelDD  
                                                               object>)
```

Bases: *TrilinosAztecOOsolver*

The *LinearPCGSolver* is an interface to the cg solver in Trilinos, using the *MultilevelSGSPreconditioner* by default.

Parameters

- **tolerance** (*float*) – Required error tolerance.
- **iterations** (*int*) – Maximum number of iterative steps to perform.
- **precon** (*Preconditioner*) –

__repr__()

Return repr(self).

fipy.solvers.trilinos.preconditioners

Modules

```
fipy.solvers.trilinos.preconditioners.  
domDecompPreconditioner  
fipy.solvers.trilinos.preconditioners.  
icPreconditioner  
fipy.solvers.trilinos.preconditioners.  
jacobiPreconditioner  
fipy.solvers.trilinos.preconditioners.  
multilevelDDMLPreconditioner  
fipy.solvers.trilinos.preconditioners.  
multilevelDDPPreconditioner  
fipy.solvers.trilinos.preconditioners.  
multilevelNSSAPreconditioner  
fipy.solvers.trilinos.preconditioners.  
multilevelSAPreconditioner  
fipy.solvers.trilinos.preconditioners.  
multilevelSGSPreconditioner  
fipy.solvers.trilinos.preconditioners.  
multilevelSolverSmoothenPreconditioner  
fipy.solvers.trilinos.preconditioners.  
preconditioner
```

fipy.solvers.trilinos.preconditioners.domDecompPreconditioner

Classes

<code>DomDecompPreconditioner()</code>	Domain Decomposition preconditioner for Trilinos solvers.
--	---

```
class  
fipy.solvers.trilinos.preconditioners.domDecompPreconditioner.DomDecompPreconditioner  
    Bases: Preconditioner  
  
    Domain Decomposition preconditioner for Trilinos solvers.  
  
    Create a Preconditioner object.
```

fipy.solvers.trilinos.preconditioners.icPreconditioner

Classes

<code>ICPPreconditioner()</code>	Incomplete Cholesky Preconditioner from IFPACK for Trilinos Solvers.
----------------------------------	--

```
class fipy.solvers.trilinos.preconditioners.icPreconditioner.ICPreconditioner
```

Bases: *Preconditioner*

Incomplete Cholesky Preconditioner from IFPACK for Trilinos Solvers.

Create a *Preconditioner* object.

fipy.solvers.trilinos.preconditioners.jacobiPreconditioner

Classes

JacobiPreconditioner()	Jacobi Preconditioner for Trilinos solvers.
--	---

```
class fipy.solvers.trilinos.preconditioners.jacobiPreconditioner.JacobiPreconditioner
```

Bases: *Preconditioner*

Jacobi Preconditioner for Trilinos solvers.

Create a *Preconditioner* object.

fipy.solvers.trilinos.preconditioners.multilevelDDMLPreconditioner

Classes

MultilevelDDMLPreconditioner()	Multilevel preconditioner for Trilinos solvers.
--	---

```
class fipy.solvers.trilinos.preconditioners.multilevelDDMLPreconditioner.MultilevelDDMLPreconditioner
```

Bases: *Preconditioner*

Multilevel preconditioner for Trilinos solvers. 3-level algebraic domain decomposition.

Create a *Preconditioner* object.

fipy.solvers.trilinos.preconditioners.multilevelDDPreconditioner

Classes

MultilevelDDPreconditioner()	Multilevel preconditioner for Trilinos solvers.
--	---

```
class fipy.solvers.trilinos.preconditioners.multilevelDDPreconditioner.MultilevelDDPreconditioner
```

Bases: *Preconditioner*

Multilevel preconditioner for Trilinos solvers. A classical smoothed aggregation-based 2-level domain decomposition.

Create a *Preconditioner* object.

fipy.solvers.trilinos.preconditioners.multilevelNSSAPreconditioner**Classes****MultilevelNSSAPreconditioner()**

Energy-based minimizing smoothed aggregation suitable for highly convective non-symmetric fluid flow problems.

```
class fipy.solvers.trilinos.preconditioners.MultilevelNSSAPreconditioner
```

Bases: *Preconditioner*

Energy-based minimizing smoothed aggregation suitable for highly convective non-symmetric fluid flow problems.

Create a *Preconditioner* object.

fipy.solvers.trilinos.preconditioners.multilevelSAPreconditioner**Classes****MultilevelSAPreconditioner()**

Multilevel preconditioner for Trilinos solvers suitable classical smoothed aggregation for symmetric positive definite or nearly symmetric positive definite systems.

```
class fipy.solvers.trilinos.preconditioners.MultilevelSAPreconditioner
```

Bases: *Preconditioner*

Multilevel preconditioner for Trilinos solvers suitable classical smoothed aggregation for symmetric positive definite or nearly symmetric positive definite systems.

Create a *Preconditioner* object.

fipy.solvers.trilinos.preconditioners.multilevelSGSPreconditioner**Classes****MultilevelSGSPreconditioner([levels])**

Multilevel preconditioner for Trilinos solvers using Symmetric Gauss-Seidel smoothing.

```
class fipy.solvers.trilinos.preconditioners.MultilevelSGSPreconditioner(levels)
```

Bases: *Preconditioner*

Multilevel preconditioner for Trilinos solvers using Symmetric Gauss-Seidel smoothing.

Initialize the multilevel preconditioner

- *levels*: Maximum number of levels

fipy.solvers.trilinos.preconditioners.multilevelSolverSmootherPreconditioner**Classes**

<i>MultilevelSolverSmootherPreconditioner</i> ([levels	Multilevel preconditioner for Trilinos solvers using Aztec solvers as smoothers.
--	--

```
class fipy.solvers.trilinos.preconditioners.multilevelSolverSmootherPreconditioner.MultilevelSolverSmo
```

Bases: *Preconditioner*

Multilevel preconditioner for Trilinos solvers using Aztec solvers as smoothers.

Initialize the multilevel preconditioner

- *levels*: Maximum number of levels

fipy.solvers.trilinos.preconditioners.preconditioner**Classes**

<i>Preconditioner</i> ()	The base Preconditioner class.
--------------------------	--------------------------------

```
class fipy.solvers.trilinos.preconditioners.preconditioner.Preconditioner
```

Bases: *object*

The base Preconditioner class.

Attention: This class is abstract. Always create one of its subclasses.

Create a *Preconditioner* object.

fipy.solvers.trilinos.trilinosAztecOOsolver**Classes**

```
TrilinosAztecOOsolver([tolerance, ...])
```

Attention:

This class is abstract, always create on of its subclasses.

```
class fipy.solvers.trilinos.trilinosAztecOOsolver.TrilinosAztecOOsolver(tolerance=1e-10,
                                                               iterations=1000, pre-
                                                               con=<fipy.solvers.trilinos.preconditioner
                                                               object>)
```

Bases: *TrilinosSolver*

Attention: This class is abstract, always create on of its subclasses. It provides the code to call all solvers from the Trilinos AztecOO package.

Parameters

- **tolerance** (*float*) – Required error tolerance.
- **iterations** (*int*) – Maximum number of iterative steps to perform.
- **precon** (*Preconditioner*) –

__repr__()

Return repr(self).

fipy.solvers.trilinos.trilinosMLTest**Classes**`TrilinosMLTest([tolerance, iterations, ...])`

This solver class does not actually solve the system, but outputs information about what ML preconditioner settings will work best.

```
class fipy.solvers.trilinos.trilinosMLTest.TrilinosMLTest(tolerance=1e-10, iterations=5,
MLOptions={}, testUnsupported=False)
```

Bases: `TrilinosSolver`

This solver class does not actually solve the system, but outputs information about what ML preconditioner settings will work best.

For detailed information on the possible parameters for ML, see <http://trilinos.sandia.gov/packages/ml/documentation.html>

Currently, passing options to Aztec through ML is not supported.

Parameters

- **tolerance** (`float`) – Required error tolerance.
- **iterations** (`int`) – Maximum number of iterative steps to perform.
- **MLOptions** (`dict`) – Options to pass to ML. This will be passed to `ML.SetParameterList`.
- **testUnsupported** (`bool`) – Test smoothers that are not currently implemented in preconditioner objects.

`__repr__()`

Return `repr(self)`.

fipy.solvers.trilinos.trilinosNonlinearSolver**Classes**`TrilinosNonlinearSolver(equation[, ...])`

Create a `Solver` object.

```
class fipy.solvers.trilinos.trilinosNonlinearSolver.TrilinosNonlinearSolver(equation,
    jacobian=None,
    tolerance=1e-10,
    iterations=1000,
    printingOptions=None,
    solverOptions=None,
    linearSolverOptions=None,
    lineSearchOptions=None,
    directionOptions=None,
    newtonOptions=None)
```

Bases: *TrilinosSolver*

Create a *Solver* object.

Parameters

- **tolerance** (*float*) – Required error tolerance.
- **iterations** (*int*) – Maximum number of iterative steps to perform.
- **precon** – Preconditioner to use. Not all solver suites support preconditioners.

__repr__()

Return repr(self).

fipy.solvers.trilinos.trilinosSolver

Classes

TrilinosSolver(*args, **kwargs)

Attention:
This
class
is
ab-
stract.
Al-
ways
cre-
ate
one
of
its
sub-
classes.

```
class fipy.solvers.trilinos.trilinosSolver.TrilinosSolver(*args, **kwargs)
```

Bases: *Solver*

Attention: This class is abstract. Always create one of its subclasses.

Create a *Solver* object.

Parameters

- **tolerance** (*float*) – Required error tolerance.
- **iterations** (*int*) – Maximum number of iterative steps to perform.
- **precon** – Preconditioner to use. Not all solver suites support preconditioners.

__repr__()

Return repr(self).

22.5 fipy.steppers

(Obsolete) utilities for iterating time steps

Use `steppystounes` instead.

Functions

<code>L1error(var, matrix, RHSvector)</code>
--

<code>L2error(var, matrix, RHSvector)</code>
--

<code>LINFerror(var, matrix, RHSvector)</code>
--

<code>error(var, matrix, RHSvector[, norm])</code>
--

<code>residual(var, matrix, RHSvector)</code>	Determines the residual for the current solution matrix and variable.
---	---

<code>sweepMonotonic(fn, *args, **kwargs)</code>	Repeatedly calls <code>fn(*args, **kwargs)()</code> until the residual returned by <code>fn()</code> is no longer decreasing.
--	---

`fipy.steppers.L1error(var, matrix, RHSvector)`

$$\frac{\|\var - \var^{\text{old}}\|_1}{\|\var^{\text{old}}\|_1}$$

where $\|\vec{x}\|_1$ is the L^1 norm of \vec{x} .

Parameters

- **var** (*CellVariable*) – The *CellVariable* in question.
- **matrix** – (*ignored*)
- **RHSvector** – (*ignored*)

`fipy.steppers.L2error(var, matrix, RHSvector)`

$$\frac{\|\mathbf{var} - \mathbf{var}^{\text{old}}\|_2}{\|\mathbf{var}^{\text{old}}\|_2}$$

where $\|\vec{x}\|_2$ is the L^2 norm of \vec{x} .

Parameters

- `var` (`CellVariable`) – The *CellVariable* in question.
- `matrix` – (*ignored*)
- `RHSvector` – (*ignored*)

`fipy.steppers.LINFerror(var, matrix, RHSvector)`

$$\frac{\|\mathbf{var} - \mathbf{var}^{\text{old}}\|_{\infty}}{\|\mathbf{var}^{\text{old}}\|_{\infty}}$$

where $\|\vec{x}\|_{\infty}$ is the L^{∞} norm of \vec{x} .

Parameters

- `var` (`CellVariable`) – The *CellVariable* in question.
- `matrix` – (*ignored*)
- `RHSvector` – (*ignored*)

`fipy.steppers.error(var, matrix, RHSvector, norm=<function L1norm>)`

$$\frac{\|\mathbf{var} - \mathbf{var}^{\text{old}}\|_{?}}{\|\mathbf{var}^{\text{old}}\|_{?}}$$

where $\|\vec{x}\|_{?}$ is the normalization of \vec{x} provided by `norm`.

Parameters

- `var` (`CellVariable`) – The *CellVariable* in question.
- `matrix` – (*ignored*)
- `RHSvector` – (*ignored*)
- `norm` (`function`) – A function that will normalize its `array` argument and return a single number (default: `L1norm()`).

`fipy.steppers.residual(var, matrix, RHSvector)`

Determines the residual for the current solution matrix and variable.

$$\|\mathbf{L}\vec{x} - \vec{b}\|_{\infty}$$

where $\|\vec{\xi}\|_{\infty}$ is the L^{∞} norm of $\vec{\xi}$.

Parameters

- `var` (`CellVariable`) – The *CellVariable* in question, *prior* to solution.
- `matrix` (`_SparseMatrix`) – The coefficient matrix at this step/sweep
- `RHSvector` (`ndarray`) – The right hand side vector

fipy.steppers.sweepMonotonic(*fn*, **args*, *kwargs*)**

Repeatedly calls *fn(*args, **kwargs)()* until the residual returned by *fn()* is no longer decreasing.

Parameters

- ***fn (function)*** – The function to call
- ****args*** –
- *****kwargs*** –

Return type

float

Modules

fipy.steppers.pidStepper

fipy.steppers.pseudoRKQSStepper

fipy.steppers stepper

22.5.1 fipy.steppers.pidStepper**Classes**

PIDStepper([*vardata*, *proportional*, ...])

Adaptive stepper using a PID controller, based on.

```
class fipy.steppers.pidStepper.PIDStepper(vardata=(), proportional=0.075, integral=0.175,
                                            derivative=0.01)
```

Bases: *Stepper*

Adaptive stepper using a PID controller, based on:

```
@article{PIDpaper,
    author = {A. M. P. Valli and G. F. Carey and A. L. G. A. Coutinho},
    title = {Control strategies for timestep selection in finite element
            simulation of incompressible flows and coupled
            reaction-convection-diffusion processes},
    journal = {Int. J. Numer. Meth. Fluids},
    volume = 47,
    year = 2005,
    pages = {201-231},
}
```

22.5.2 fipy.steppers.pseudoRKQSStepper

Classes

`PseudoRKQSStepper([vardata, safety, pgrow, ...])`

Adaptive stepper based on the rkqs (Runge-Kutta "quality-controlled" stepper) algorithm of Numerical Recipes in C: 2nd Edition, Section 16.2.

```
class fipy.steppers.pseudoRKQSStepper.PseudoRKQSStepper(vardata=(), safety=0.9, pgrow=-0.2, pshrink=-0.25, errcon=0.000189)
```

Bases: `Stepper`

Adaptive stepper based on the rkqs (Runge-Kutta “quality-controlled” stepper) algorithm of Numerical Recipes in C: 2nd Edition, Section 16.2.

Not really appropriate, since we’re not doing Runge-Kutta steps in the first place, but works OK.

22.5.3 fipy.steppers.stepper

Classes

`Stepper([vardata])`

Rudimentary utility class for iterating time steps

```
class fipy.steppers.stepper.Stepper(vardata=())
```

Bases: `object`

Rudimentary utility class for iterating time steps

Use `steppingstounes` instead.

22.6 fipy.terms

Discretizations of partial differential equation expressions

Exceptions

<code>AbstractBaseClassError([s])</code>
<code>ExplicitVariableError([s])</code>
<code>IncorrectSolutionVariable([s])</code>
<code>SolutionVariableNumberError([s])</code>
<code>SolutionVariableRequiredError([s])</code>
<code>TermMultiplyError([s])</code>
<code>TransientTermError([s])</code>
<code>VectorCoeffError([s])</code>

exception `fipy.terms.AbstractBaseClassError(s="can't instantiate abstract base class")`

Bases: `NotImplementedError`

__cause__

exception cause

__context__

exception context

__delattr__(name, /)

Implement delattr(self, name).

__getattribute__(name, /)

Return getattr(self, name).

__reduce__()

Helper for pickle.

__repr__()

Return repr(self).

__setattr__(name, value, /)

Implement setattr(self, name, value).

__str__()

Return str(self).

add_note()

Exception.add_note(note) – add a note to the exception

with_traceback()

Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception `fipy.terms.ExplicitVariableError(s='Terms with explicit Variables cannot mix with Terms with implicit Variables.')`

Bases: `Exception`

`__cause__`
exception cause

`__context__`
exception context

`__delattr__(name, /)`
Implement delattr(self, name).

`__getattribute__(name, /)`
Return getattr(self, name).

`__reduce__()`
Helper for pickle.

`__repr__()`
Return repr(self).

`__setattr__(name, value, /)`
Implement setattr(self, name, value).

`__str__()`
Return str(self).

`add_note()`
Exception.add_note(note) – add a note to the exception

`with_traceback()`
Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

`exception fipy.terms.IncorrectSolutionVariable(s='The solution variable is incorrect.')`
Bases: `Exception`

`__cause__`
exception cause

`__context__`
exception context

`__delattr__(name, /)`
Implement delattr(self, name).

`__getattribute__(name, /)`
Return getattr(self, name).

`__reduce__()`
Helper for pickle.

`__repr__()`
Return repr(self).

`__setattr__(name, value, /)`
Implement setattr(self, name, value).

`__str__()`
Return str(self).

add_note()
Exception.add_note(note) – add a note to the exception

with_traceback()
Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception fipy.terms.SolutionVariableNumberError(*s='Different number of solution variables and equations.'*)

Bases: `Exception`

__cause__
exception cause

__context__
exception context

__delattr__(name, /)
Implement delattr(self, name).

__getattribute__(name, /)
Return getattr(self, name).

__reduce__()
Helper for pickle.

__repr__()
Return repr(self).

__setattr__(name, value, /)
Implement setattr(self, name, value).

__str__()
Return str(self).

add_note()
Exception.add_note(note) – add a note to the exception

with_traceback()
Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception fipy.terms.SolutionVariableRequiredError(*s='The solution variable needs to be specified.'*)

Bases: `Exception`

__cause__
exception cause

__context__
exception context

__delattr__(name, /)
Implement delattr(self, name).

__getattribute__(name, /)
Return getattr(self, name).

__reduce__()
Helper for pickle.

`__repr__()`
Return repr(self).

`__setattr__(name, value, /)`
Implement setattr(self, name, value).

`__str__()`
Return str(self).

`add_note()`
Exception.add_note(note) – add a note to the exception

`with_traceback()`
Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception `fipy.terms.TermMultiplyError`(*s*=‘Must multiply terms by int or float.’)
Bases: `Exception`

`__cause__`
exception cause

`__context__`
exception context

`__delattr__(name, /)`
Implement delattr(self, name).

`__getattribute__(name, /)`
Return getattr(self, name).

`__reduce__()`
Helper for pickle.

`__repr__()`
Return repr(self).

`__setattr__(name, value, /)`
Implement setattr(self, name, value).

`__str__()`
Return str(self).

`add_note()`
Exception.add_note(note) – add a note to the exception

`with_traceback()`
Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception `fipy.terms.TransientTermError`(*s*=‘The equation requires a TransientTerm with explicit convection.’)
Bases: `Exception`

`__cause__`
exception cause

`__context__`
exception context

```
__delattr__(name, /)
    Implement delattr(self, name).

__getattribute__(name, /)
    Return getattr(self, name).

__reduce__()
    Helper for pickle.

__repr__()
    Return repr(self).

__setattr__(name, value, /)
    Implement setattr(self, name, value).

__str__()
    Return str(self).

add_note()
    Exception.add_note(note) – add a note to the exception

with_traceback()
    Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception fipy.terms.VectorCoeffError(s='The coefficient must be a vector value.')
Bases: TypeError

__cause__
    exception cause

__context__
    exception context

__delattr__(name, /)
    Implement delattr(self, name).

__getattribute__(name, /)
    Return getattr(self, name).

__reduce__()
    Helper for pickle.

__repr__()
    Return repr(self).

__setattr__(name, value, /)
    Implement setattr(self, name, value).

__str__()
    Return str(self).

add_note()
    Exception.add_note(note) – add a note to the exception

with_traceback()
    Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.
```

Modules

`fipy.terms.abstractBinaryTerm`
`fipy.terms.abstractConvectionTerm`
`fipy.terms.abstractDiffusionTerm`
`fipy.terms.abstractUpwindConvectionTerm`
`fipy.terms.advectionTerm`
`fipy.terms.asymmetricConvectionTerm`
`fipy.terms.binaryTerm`
`fipy.terms.cellTerm`
`fipy.terms.centralDiffConvectionTerm`
`fipy.terms.coupledBinaryTerm`
`fipy.terms.diffusionTerm`
`fipy.terms.diffusionTermCorrection`
`fipy.terms.diffusionTermNoCorrection`
`fipy.terms.explicitDiffusionTerm`
`fipy.terms.explicitSourceTerm`
`fipy.terms.explicitUpwindConvectionTerm`
`fipy.terms.exponentialConvectionTerm`
`fipy.terms.faceTerm`
`fipy.terms.firstOrderAdvectionTerm`
`fipy.terms.hybridConvectionTerm`
`fipy.terms.implicitDiffusionTerm`
`fipy.terms.implicitSourceTerm`
`fipy.terms.nonDiffusionTerm`
`fipy.terms.powerLawConvectionTerm`
`fipy.terms.residualTerm`

continues on next page

Table 2 – continued from previous page

<code>fipy.terms.sourceTerm</code>
<code>fipy.terms.term</code>
<code>fipy.terms.test</code>
<code>fipy.terms.transientTerm</code>
<code>fipy.terms.unaryTerm</code>
<code>fipy.terms.upwindConvectionTerm</code>
<code>fipy.terms.vanLeerConvectionTerm</code>

22.6.1 fipy.terms.abstractBinaryTerm

22.6.2 fipy.terms.abstractConvectionTerm

22.6.3 fipy.terms.abstractDiffusionTerm

22.6.4 fipy.terms.abstractUpwindConvectionTerm

22.6.5 fipy.terms.advectionTerm

Classes

<code>AdvectionTerm([coeff])</code>	The <code>AdvectionTerm</code> object constructs the b vector contribution for the advection term given by
-------------------------------------	--

`class fipy.terms.advectionTerm.AdvectionTerm(coeff=None)`

Bases: `FirstOrderAdvectionTerm`

The `AdvectionTerm` object constructs the b vector contribution for the advection term given by

$$u|\nabla\phi|$$

from the advection equation given by:

$$\frac{\partial\phi}{\partial t} + u|\nabla\phi| = 0$$

The construction of the gradient magnitude term requires upwinding as in the standard `FirstOrderAdvectionTerm`. The higher order terms are incorporated as follows. The formula used here is given by:

$$u_P|\nabla\phi|_P = \max(u_P, 0) \left[\sum_A \min(D_{AP}, 0)^2 \right]^{1/2} + \min(u_P, 0) \left[\sum_A \max(D_{AP}, 0)^2 \right]^{1/2}$$

where,

$$D_{AP} = \frac{\phi_A - \phi_P}{d_{AP}} - \frac{d_{AP}}{2} m(L_A, L_P)$$

and

$$\begin{aligned} m(x, y) &= x && \text{if } |x| \leq |y| \forall xy \geq 0 \\ m(x, y) &= y && \text{if } |x| > |y| \forall xy \geq 0 \\ m(x, y) &= 0 && \text{if } xy < 0 \end{aligned}$$

also,

$$\begin{aligned} L_A &= \frac{\phi_{AA} + \phi_P - 2\phi_A}{d_{AP}^2} \\ L_P &= \frac{\phi_A + \phi_{PP} - 2\phi_P}{d_{AP}^2} \end{aligned}$$

Here are some simple test cases for this problem:

```
>>> from fipy.meshes import Grid1D
>>> from fipy.solvers import *
>>> SparseMatrix = LinearPCGSolver().__matrixClass
>>> mesh = Grid1D(dx = 1., nx = 3)
```

Trivial test:

```
>>> from fipy.variables.cellVariable import CellVariable
>>> coeff = CellVariable(mesh = mesh, value = numerix.zeros(3, 'd'))
>>> v, L, b = AdvectionTerm(0.)._buildMatrix(coeff, SparseMatrix)
>>> print(numerix.allclose(b, numerix.zeros(3, 'd')), atol = 1e-10)
True
```

Less trivial test:

```
>>> coeff = CellVariable(mesh = mesh, value = numerix.arange(3))
>>> v, L, b = AdvectionTerm(1.)._buildMatrix(coeff, SparseMatrix)
>>> print(numerix.allclose(b, numerix.array((0., -1., -1.)), atol = 1e-10))
True
```

Even less trivial

```
>>> coeff = CellVariable(mesh = mesh, value = numerix.arange(3))
>>> v, L, b = AdvectionTerm(-1.)._buildMatrix(coeff, SparseMatrix)
>>> print(numerix.allclose(b, numerix.array((1., 1., 0.)), atol = 1e-10))
True
```

Another trivial test case (more trivial than a trivial test case standing on a harpsichord singing “trivial test cases are here again”)

```
>>> vel = numerix.array((-1, 2, -3))
>>> coeff = CellVariable(mesh = mesh, value = numerix.array((4, 6, 1)))
>>> v, L, b = AdvectionTerm(vel)._buildMatrix(coeff, SparseMatrix)
>>> print(numerix.allclose(b, -vel * numerix.array((2, numerix.sqrt(5**2 + 2**2), -5)), atol = 1e-10))
True
```

Somewhat less trivial test case:

```
>>> from fipy.meshes import Grid2D
>>> mesh = Grid2D(dx = 1., dy = 1., nx = 2, ny = 2)
>>> vel = numerix.array((3, -5, -6, -3))
>>> coeff = CellVariable(mesh = mesh, value = numerix.array((3, 1, 6, 7)))
>>> v, L, b = AdvectionTerm(vel)._buildMatrix(coeff, SparseMatrix)
>>> answer = -vel * numerix.array((2, numerix.sqrt(2**2 + 6**2), 1, 0))
>>> print(numerix.allclose(b, answer, atol = 1e-10))
True
```

For the above test cases the *AdvectionTerm* gives the same result as the *AdvectionTerm*. The following test imposes a quadratic field. The higher order term can resolve this field correctly.

$$\phi = x^2$$

The returned vector *b* should have the value:

$$-|\nabla\phi| = - \left| \frac{\partial\phi}{\partial x} \right| = -2|x|$$

Build the test case in the following way,

```
>>> mesh = Grid1D(dx = 1., nx = 5)
>>> vel = 1.
>>> coeff = CellVariable(mesh = mesh, value = mesh.cellCenters[0]**2)
>>> v, L, b = __AdvectionTerm(vel)._buildMatrix(coeff, SparseMatrix)
```

The first order term is not accurate. The first and last element are ignored because they don't have any neighbors for higher order evaluation

```
>>> print(numerix.allclose(CellVariable(mesh=mesh,
... value=b).globalValue[1:-1], -2 * mesh.cellCenters.globalValue[0][1:-1]))
False
```

The higher order term is spot on.

```
>>> v, L, b = AdvectionTerm(vel)._buildMatrix(coeff, SparseMatrix)
>>> print(numerix.allclose(CellVariable(mesh=mesh,
... value=b).globalValue[1:-1], -2 * mesh.cellCenters.globalValue[0][1:-1]))
True
```

The *AdvectionTerm* will also resolve a circular field with more accuracy,

$$\phi = (x^2 + y^2)^{1/2}$$

Build the test case in the following way,

```
>>> mesh = Grid2D(dx = 1., dy = 1., nx = 10, ny = 10)
>>> vel = 1.
>>> x, y = mesh.cellCenters
>>> r = numerix.sqrt(x**2 + y**2)
>>> coeff = CellVariable(mesh = mesh, value = r)
>>> v, L, b = __AdvectionTerm(1.)._buildMatrix(coeff, SparseMatrix)
>>> error = CellVariable(mesh=mesh, value=b + 1)
>>> ans = CellVariable(mesh=mesh, value=b + 1)
>>> ans[(x > 2) & (x < 8) & (y > 2) & (y < 8)] = 0.123105625618
>>> print((error <= ans).all())
True
```

The maximum error is large (about 12 %) for the first order advection.

```
>>> v, L, b = AdvectionTerm(1.)._buildMatrix(coeff, SparseMatrix)
>>> error = CellVariable(mesh=mesh, value=b + 1)
>>> ans = CellVariable(mesh=mesh, value=b + 1)
>>> ans[(x > 2) & (x < 8) & (y > 2) & (y < 8)] = 0.0201715476598
>>> print((error <= ans).all())
True
```

The maximum error is 2 % when using a higher order contribution.

Create a *Term*.

Parameters

coeff (*float* or *CellVariable* or *FaceVariable*) – Coefficient for the term. *FaceVariable* objects are only acceptable for diffusion or convection terms.

property RHSvector

Return the RHS vector calculated in *solve()* or *sweep()*. The *cacheRHSvector()* method should be called before *solve()* or *sweep()* to cache the vector.

__eq__(other)

Return self==value.

__hash__(self)

Return hash(self).

__mul__(other)

Multiply a term

```
>>> 2. * __NonDiffusionTerm(coeff=0.5)
__NonDiffusionTerm(coeff=1.0)
```

Test for ticket:291.

```
>>> from fipy import PowerLawConvectionTerm
>>> PowerLawConvectionTerm(coeff=[[1, [0]]]) * 1.0
PowerLawConvectionTerm(coeff=array([[ 1.],
       [ 0.]]))
```

__neg__(self)

Negate a *Term*.

```
>>> -__NonDiffusionTerm(coeff=1.)
__NonDiffusionTerm(coeff=-1.0)
```

__repr__(self)

The representation of a *Term* object is given by,

```
>>> print(__UnaryTerm(123.456))
__UnaryTerm(coeff=123.456)
```

__rmul__(other)

Multiply a term

```
>>> 2. * __NonDiffusionTerm(coeff=0.5)
__NonDiffusionTerm(coeff=1.0)
```

Test for ticket:291.

```
>>> from fipy import PowerLawConvectionTerm
>>> PowerLawConvectionTerm(coeff=[[1], [0]]) * 1.0
PowerLawConvectionTerm(coeff=array([[ 1.],
[ 0.]]))
```

`cacheMatrix()`

Informs `solve()` and `sweep()` to cache their matrix so that `matrix` can return the matrix.

`cacheRHSvector()`

Informs `solve()` and `sweep()` to cache their right hand side vector so that `getRHSvector()` can return it.

`justErrorVector(var=None, solver=None, boundaryConditions=(), dt=1.0, underRelaxation=None, residualFn=None)`

Builds the `Term`'s linear system once.

This method also recalculates and returns the error as well as applying under-relaxation.

`justErrorVector` returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy.solvers import DummySolver
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(DiffusionTerm().justErrorVector(v, solver=DummySolver())) == m.
->numberCells
True
```

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or `None` in the case of no under-relaxation
- **residualFn** (`function`) – Takes `var`, `matrix`, and `RHSvector` arguments, used to customize the residual calculation.

Returns

`error` – The residual vector $\vec{e} = \mathbf{L}\vec{x}_{\text{old}} - \vec{b}$

Return type

`CellVariable`

justResidualVector(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*)

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

justResidualVector returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(numerix.asarray(DiffusionTerm().justResidualVector(v))) == m.
->>> numberofCells
True
```

Parameters

- **var** (*CellVariable*) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (*Solver*) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (*tuple* of *BoundaryCondition*) –
- **dt** (*float*) – Timestep size.
- **underRelaxation** (*float*) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (*function*) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

residual – The residual vector $\vec{r} = \mathcal{L}\vec{x} - \vec{b}$

Return type

CellVariable

property matrix

Return the matrix calculated in *solve()* or *sweep()*. The *cacheMatrix()* method should be called before *solve()* or *sweep()* to cache the matrix.

residualVectorAndNorm(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*)

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** (*CellVariable*) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (*Solver*) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (*tuple* of *BoundaryCondition*) –
- **dt** (*float*) – Timestep size.

- **underRelaxation** (*float*) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (*function*) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

- **residual** (*~fipy.variables.cellVariable.CellVariable*) – The residual vector $\vec{r} = L\vec{x} - \vec{b}$
- **norm** (*float*) – The L2 norm of *residual*, $\|\vec{r}\|_2$

solve(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*)

Builds and solves the *Term*'s linear system once. This method does not return the residual. It should be used when the residual is not required.

Parameters

- **var** (*CellVariable*) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (*Solver*) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (*tuple* of *BoundaryCondition*) –
- **dt** (*float*) – Timestep size.

sweep(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*, *cacheResidual=False*, *cacheError=False*)

Builds and solves the *Term*'s linear system once. This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** (*CellVariable*) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (*Solver*) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (*tuple* of *BoundaryCondition*) –
- **dt** (*float*) – Timestep size.
- **underRelaxation** (*float*) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (*function*) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.
- **cacheResidual** (*bool*) – If *True*, calculate and store the residual vector $\vec{r} = L\vec{x} - \vec{b}$ in the *residualVector* member of *Term*
- **cacheError** (*bool*) – If *True*, use the residual vector \vec{r} to solve $L\vec{e} = \vec{r}$ for the error vector \vec{e} and store it in the *errorVector* member of *Term*

Returns

residual – The residual vector $\vec{r} = L\vec{x} - \vec{b}$

Return type

CellVariable

22.6.6 fipy.terms.asymmetricConvectionTerm

22.6.7 fipy.terms.binaryTerm

22.6.8 fipy.terms.cellTerm

Classes

CellTerm([coeff, var])

Attention:
This
class
is
ab-
stract.
Al-
ways
cre-
ate
one
of
its
sub-
classes.

class fipy.terms.cellTerm.CellTerm(*coeff*=1.0, *var*=None)

Bases: _NonDiffusionTerm

Attention: This class is abstract. Always create one of its subclasses.

Create a *Term*.

Parameters

coeff (*float* or *CellVariable* or *FaceVariable*) – Coefficient for the term. *FaceVariable* objects are only acceptable for diffusion or convection terms.

property RHSvector

Return the RHS vector calculated in *solve()* or *sweep()*. The *cacheRHSvector()* method should be called before *solve()* or *sweep()* to cache the vector.

__eq__(other)

Return self==value.

__hash__()

Return hash(self).

__mul__(other)

Multiply a term

```
>>> 2. * __NonDiffusionTerm(coeff=0.5)
__NonDiffusionTerm(coeff=1.0)
```

Test for ticket:291.

```
>>> from fipy import PowerLawConvectionTerm
>>> PowerLawConvectionTerm(coeff=[[1], [0]]) * 1.0
PowerLawConvectionTerm(coeff=array([[ 1.],
[ 0.]]))
```

`__neg__()`

Negate a *Term*.

```
>>> -__NonDiffusionTerm(coeff=1.)
__NonDiffusionTerm(coeff=-1.0)
```

`__repr__()`

The representation of a *Term* object is given by,

```
>>> print(__UnaryTerm(123.456))
__UnaryTerm(coeff=123.456)
```

`__rmul__(other)`

Multiply a term

```
>>> 2. * __NonDiffusionTerm(coeff=0.5)
__NonDiffusionTerm(coeff=1.0)
```

Test for ticket:291.

```
>>> from fipy import PowerLawConvectionTerm
>>> PowerLawConvectionTerm(coeff=[[1], [0]]) * 1.0
PowerLawConvectionTerm(coeff=array([[ 1.],
[ 0.]]))
```

`cacheMatrix()`

Informs *solve()* and *sweep()* to cache their matrix so that *matrix* can return the matrix.

`cacheRHSvector()`

Informs *solve()* and *sweep()* to cache their right hand side vector so that *getRHSvector()* can return it.

`justErrorVector(var=None, solver=None, boundaryConditions=(), dt=1.0, underRelaxation=None, residualFn=None)`

Builds the *Term*'s linear system once.

This method also recalculates and returns the error as well as applying under-relaxation.

justErrorVector returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy.solvers import DummySolver
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(DiffusionTerm().justErrorVector(v, solver=DummySolver())) == m.
```

(continues on next page)

(continued from previous page)

`↳numberOfCells`

True

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (`function`) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

`error` – The residual vector $\vec{e} = \mathbf{L}\vec{x}_{\text{old}} - \vec{b}$

Return type

`CellVariable`

`justResidualVector(var=None, solver=None, boundaryConditions=(), dt=None, underRelaxation=None, residualFn=None)`

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

justResidualVector returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(numerix.asarray(DiffusionTerm().justResidualVector(v))) == m.
↳numberOfCells
True
```

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (`function`) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

residual – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$

Return type

`CellVariable`

property matrix

Return the matrix calculated in `solve()` or `sweep()`. The `cacheMatrix()` method should be called before `solve()` or `sweep()` to cache the matrix.

residualVectorAndNorm(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*)

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (`function`) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

- **residual** (`~fipy.variables.cellVariable.CellVariable`) – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$
- **norm** (`float`) – The L2 norm of *residual*, $\|\vec{r}\|_2$

solve(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*)

Builds and solves the *Term*'s linear system once. This method does not return the residual. It should be used when the residual is not required.

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.

sweep(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*, *cacheResidual=False*, *cacheError=False*)

Builds and solves the *Term*'s linear system once. This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (`function`) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.
- **cacheResidual** (`bool`) – If *True*, calculate and store the residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$ in the *residualVector* member of *Term*
- **cacheError** (`bool`) – If *True*, use the residual vector \vec{r} to solve $\mathbf{L}\vec{e} = \vec{r}$ for the error vector \vec{e} and store it in the *errorVector* member of *Term*

Returns

residual – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$

Return type

`CellVariable`

22.6.9 `fipy.terms.centralDiffConvectionTerm`

Classes

<code>CentralDifferenceConvectionTerm</code> ([coeff, var])	This <i>Term</i> represents
---	-----------------------------

```
class fipy.terms.centralDiffConvectionTerm.CentralDifferenceConvectionTerm(coeff=1.0,
                                                               var=None)
```

Bases: `_AbstractConvectionTerm`

This *Term* represents

$$\int_V \nabla \cdot (\vec{u}\phi) dV \simeq \sum_f (\vec{n} \cdot \vec{u})_f \phi_f A_f$$

where $\phi_f = \alpha_f \phi_P + (1 - \alpha_f) \phi_A$ and α_f is calculated using the central differencing scheme. For further details see *Numerical Schemes*.

Create a `_AbstractConvectionTerm` object.

```
>>> from fipy import *
>>> m = Grid1D(nx = 2)
>>> cv = CellVariable(mesh = m)
>>> fv = FaceVariable(mesh = m)
>>> vcv = CellVariable(mesh=m, rank=1)
>>> vfv = FaceVariable(mesh=m, rank=1)
>>> __ConvectionTerm(coeff = cv)
Traceback (most recent call last):
```

(continues on next page)

(continued from previous page)

```

...
VectorCoeffError: The coefficient must be a vector value.
>>> __ConvectionTerm(coeff = fv)
Traceback (most recent call last):

...
VectorCoeffError: The coefficient must be a vector value.
>>> __ConvectionTerm(coeff = vcv)
__ConvectionTerm(coeff=_ArithmeticCellToFaceVariable(value=array([[ 0.,  0.,  0.])),
    ↵ mesh=UniformGrid1D(dx=1.0, nx=2)))
>>> __ConvectionTerm(coeff = vfv)
__ConvectionTerm(coeff=FaceVariable(value=array([[ 0.,  0.,  0.]]), ↵
    ↵ mesh=UniformGrid1D(dx=1.0, nx=2)))
>>> __ConvectionTerm(coeff = (1,))
__ConvectionTerm(coeff=(1,))
>>> ExplicitUpwindConvectionTerm(coeff = (0,)).solve(var=cv, solver=DummySolver())
Traceback (most recent call last):

...
TransientTermError: The equation requires a TransientTerm with explicit convection.
>>> (TransientTerm(0.) - ExplicitUpwindConvectionTerm(coeff = (0,))).solve(var=cv, ↵
    ↵ solver=DummySolver(), dt=1.)

```

```

>>> (TransientTerm() - ExplicitUpwindConvectionTerm(coeff = 1)).solve(var=cv, ↵
    ↵ solver=DummySolver(), dt=1.)
Traceback (most recent call last):

...
VectorCoeffError: The coefficient must be a vector value.
>>> m2 = Grid2D(nx=2, ny=1)
>>> cv2 = CellVariable(mesh=m2)
>>> vcv2 = CellVariable(mesh=m2, rank=1)
>>> vfv2 = FaceVariable(mesh=m2, rank=1)
>>> __ConvectionTerm(coeff=vcv2)
__ConvectionTerm(coeff=_ArithmeticCellToFaceVariable(value=array([[ 0.,  0.,  0., ↵
    ↵ 0.,  0.,  0.,  0.],
        [ 0.,  0.,  0.,  0.,  0.,  0.,  0.]]), mesh=UniformGrid2D(dx=1.0, nx=2, dy=1.0,
    ↵ 0, ny=1)))
>>> __ConvectionTerm(coeff=vfv2)
__ConvectionTerm(coeff=FaceVariable(value=array([[ 0.,  0.,  0.,  0.,  0.,  0.,  0.],
    ↵ [ 0.,  0.,  0.,  0.,  0.,  0.,  0.]]), mesh=UniformGrid2D(dx=1.0, nx=2, dy=1.0,
    ↵ 0, ny=1)))
>>> (TransientTerm() - ExplicitUpwindConvectionTerm(coeff = ((0,), (0,)))). ↵
    ↵ solve(var=cv2, solver=DummySolver(), dt=1.)
>>> (TransientTerm() - ExplicitUpwindConvectionTerm(coeff = (0, 0))).solve(var=cv2, ↵
    ↵ solver=DummySolver(), dt=1.)

```

Parameters

coeff (The *Term*'s coefficient value.) –

property **RHSvector**

Return the RHS vector calculated in *solve()* or *sweep()*. The *cacheRHSvector()* method should be called before *solve()* or *sweep()* to cache the vector.

__eq__(other)

Return self==value.

__hash__()

Return hash(self).

__mul__(other)

Multiply a term

```
>>> 2. * __NonDiffusionTerm(coef=0.5)
__NonDiffusionTerm(coef=1.0)
```

Test for ticket:291.

```
>>> from fipy import PowerLawConvectionTerm
>>> PowerLawConvectionTerm(coef=[[1, [0]]]) * 1.0
PowerLawConvectionTerm(coef=array([[ 1.],
       [ 0.]]))
```

__neg__()

Negate a *Term*.

```
>>> -__NonDiffusionTerm(coef=1.)
__NonDiffusionTerm(coef=-1.0)
```

__repr__()

The representation of a *Term* object is given by,

```
>>> print(__UnaryTerm(123.456))
__UnaryTerm(coef=123.456)
```

__rmul__(other)

Multiply a term

```
>>> 2. * __NonDiffusionTerm(coef=0.5)
__NonDiffusionTerm(coef=1.0)
```

Test for ticket:291.

```
>>> from fipy import PowerLawConvectionTerm
>>> PowerLawConvectionTerm(coef=[[1, [0]]]) * 1.0
PowerLawConvectionTerm(coef=array([[ 1.],
       [ 0.]]))
```

cacheMatrix()

Informs *solve()* and *sweep()* to cache their matrix so that *matrix* can return the matrix.

cacheRHSvector()

Informs *solve()* and *sweep()* to cache their right hand side vector so that *getRHSvector()* can return it.

justErrorVector(var=None, solver=None, boundaryConditions=(), dt=1.0, underRelaxation=None, residualFn=None)

Builds the *Term*'s linear system once.

This method also recalculates and returns the error as well as applying under-relaxation.

justErrorVector returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy.solvers import DummySolver
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(DiffusionTerm().justErrorVector(v, solver=DummySolver())) == m.
->numberOfCells
True
```

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default sovler depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between *0* and *1* or *None* in the case of no under-relaxation
- **residualFn** (`function`) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

`error` – The residual vector $\vec{e} = \mathbf{L}\vec{x}_{\text{old}} - \vec{b}$

Return type

`CellVariable`

justResidualVector(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*)

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

justResidualVector returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(numerix.asarray(DiffusionTerm().justResidualVector(v))) == m.
->numberOfCells
True
```

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default sovler depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.

- **underRelaxation** (`float`) – Usually a value between 0 and 1 or `None` in the case of no under-relaxation
- **residualFn** (`function`) – Takes `var`, `matrix`, and `RHSvector` arguments, used to customize the residual calculation.

Returns

residual – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$

Return type

`CellVariable`

property matrix

Return the matrix calculated in `solve()` or `sweep()`. The `cacheMatrix()` method should be called before `solve()` or `sweep()` to cache the matrix.

residualVectorAndNorm(`var=None`, `solver=None`, `boundaryConditions=()`, `dt=None`, `underRelaxation=None`, `residualFn=None`)

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or `None` in the case of no under-relaxation
- **residualFn** (`function`) – Takes `var`, `matrix`, and `RHSvector` arguments, used to customize the residual calculation.

Returns

- **residual** (`~fipy.variables.cellVariable.CellVariable`) – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$
- **norm** (`float`) – The L2 norm of `residual`, $\|\vec{r}\|_2$

solve(`var=None`, `solver=None`, `boundaryConditions=()`, `dt=None`)

Builds and solves the *Term*'s linear system once. This method does not return the residual. It should be used when the residual is not required.

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.

```
sweep(var=None, solver=None, boundaryConditions=(), dt=None, underRelaxation=None,
      residualFn=None, cacheResidual=False, cacheError=False)
```

Builds and solves the *Term*'s linear system once. This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** (*CellVariable*) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (*Solver*) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (*tuple* of *BoundaryCondition*) –
- **dt** (*float*) – Timestep size.
- **underRelaxation** (*float*) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (*function*) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.
- **cacheResidual** (*bool*) – If *True*, calculate and store the residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$ in the *residualVector* member of *Term*
- **cacheError** (*bool*) – If *True*, use the residual vector \vec{r} to solve $\mathbf{L}\vec{e} = \vec{r}$ for the error vector \vec{e} and store it in the *errorVector* member of *Term*

Returns

residual – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$

Return type

CellVariable

22.6.10 fipy.terms.coupledBinaryTerm

22.6.11 fipy.terms.diffusionTerm

Classes

<i>DiffusionTerm</i> ([coeff, var])	This term represents a higher order diffusion term. The order of the term is determined by the number of <i>coeffs</i> , such that::
-------------------------------------	--

```
class fipy.terms.diffusionTerm.DiffusionTerm(coeff=(1.0,), var=None)
```

Bases: *DiffusionTermNoCorrection*

This term represents a higher order diffusion term. The order of the term is determined by the number of *coeffs*, such that:

DiffusionTerm(D1)

represents a typical 2nd-order diffusion term of the form

$$\nabla \cdot (D_1 \nabla \phi)$$

and:

DiffusionTerm((D1,D2))

represents a 4th-order Cahn-Hilliard term of the form

$$\nabla \cdot \{ D_1 \nabla [\nabla \cdot (D_2 \nabla \phi)] \}$$

and so on.

Create a *Term*.

Parameters

- coeff** (`float` or `CellVariable` or `FaceVariable`) – Coefficient for the term. `FaceVariable` objects are only acceptable for diffusion or convection terms.

property `RHSvector`

Return the RHS vector calculated in `solve()` or `sweep()`. The `cacheRHSvector()` method should be called before `solve()` or `sweep()` to cache the vector.

`__eq__(other)`

Return `self==value`.

`__hash__()`

Return `hash(self)`.

`__repr__()`

The representation of a *Term* object is given by,

```
>>> print(__UnaryTerm(123.456))
__UnaryTerm(coeff=123.456)
```

`cacheMatrix()`

Informs `solve()` and `sweep()` to cache their matrix so that `matrix` can return the matrix.

`cacheRHSvector()`

Informs `solve()` and `sweep()` to cache their right hand side vector so that `getRHSvector()` can return it.

`justErrorVector(var=None, solver=None, boundaryConditions=(), dt=1.0, underRelaxation=None, residualFn=None)`

Builds the *Term*'s linear system once.

This method also recalculates and returns the error as well as applying under-relaxation.

`justErrorVector` returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy.solvers import DummySolver
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(DiffusionTerm().justErrorVector(v, solver=DummySolver())) == m.
<number of cells>
True
```

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.

- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple of BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or `None` in the case of no under-relaxation
- **residualFn** (`function`) – Takes `var`, `matrix`, and `RHSvector` arguments, used to customize the residual calculation.

Returns

error – The residual vector $\vec{e} = \mathbf{L}\vec{x}_{\text{old}} - \vec{b}$

Return type

`CellVariable`

justResidualVector(`var=None, solver=None, boundaryConditions=(), dt=None, underRelaxation=None, residualFn=None`)

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

justResidualVector returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(numerix.asarray(DiffusionTerm().justResidualVector(v))) == m._numberofCells
True
```

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple of BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or `None` in the case of no under-relaxation
- **residualFn** (`function`) – Takes `var`, `matrix`, and `RHSvector` arguments, used to customize the residual calculation.

Returns

residual – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$

Return type

`CellVariable`

property matrix

Return the matrix calculated in `solve()` or `sweep()`. The `cacheMatrix()` method should be called before `solve()` or `sweep()` to cache the matrix.

```
residualVectorAndNorm(var=None, solver=None, boundaryConditions=(), dt=None,  
underRelaxation=None, residualFn=None)
```

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** ([CellVariable](#)) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** ([Solver](#)) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** ([tuple](#) of [BoundaryCondition](#)) –
- **dt** ([float](#)) – Timestep size.
- **underRelaxation** ([float](#)) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** ([function](#)) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

- **residual** ([~fipy.variables.cellVariable.CellVariable](#)) – The residual vector $\vec{r} = L\vec{x} - \vec{b}$
- **norm** ([float](#)) – The L2 norm of *residual*, $\|\vec{r}\|_2$

```
solve(var=None, solver=None, boundaryConditions=(), dt=None)
```

Builds and solves the *Term*'s linear system once. This method does not return the residual. It should be used when the residual is not required.

Parameters

- **var** ([CellVariable](#)) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** ([Solver](#)) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** ([tuple](#) of [BoundaryCondition](#)) –
- **dt** ([float](#)) – Timestep size.

```
sweep(var=None, solver=None, boundaryConditions=(), dt=None, underRelaxation=None,  
residualFn=None, cacheResidual=False, cacheError=False)
```

Builds and solves the *Term*'s linear system once. This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** ([CellVariable](#)) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** ([Solver](#)) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** ([tuple](#) of [BoundaryCondition](#)) –
- **dt** ([float](#)) – Timestep size.
- **underRelaxation** ([float](#)) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation

- **residualFn** (*function*) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.
- **cacheResidual** (*bool*) – If *True*, calculate and store the residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$ in the *residualVector* member of *Term*
- **cacheError** (*bool*) – If *True*, use the residual vector \vec{r} to solve $\mathbf{L}\vec{e} = \vec{r}$ for the error vector \vec{e} and store it in the *errorVector* member of *Term*

Returns

residual – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$

Return type

CellVariable

22.6.12 fipy.terms.diffusionTermCorrection

Classes

<i>DiffusionTermCorrection</i> ([coeff, var])	Create a <i>Term</i> .
---	------------------------

```
class fipy.terms.diffusionTermCorrection.DiffusionTermCorrection(coeff=(1.0,), var=None)
```

Bases: *_AbstractDiffusionTerm*

Create a *Term*.

Parameters

coeff (*float* or *CellVariable* or *FaceVariable*) – Coefficient for the term. *FaceVariable* objects are only acceptable for diffusion or convection terms.

property RHSvector

Return the RHS vector calculated in *solve()* or *sweep()*. The *cacheRHSvector()* method should be called before *solve()* or *sweep()* to cache the vector.

__eq__(other)

Return self==value.

__hash__()

Return hash(self).

__repr__()

The representation of a *Term* object is given by,

```
>>> print(__UnaryTerm(123.456))
__UnaryTerm(coeff=123.456)
```

cacheMatrix()

Informs *solve()* and *sweep()* to cache their matrix so that *matrix* can return the matrix.

cacheRHSvector()

Informs *solve()* and *sweep()* to cache their right hand side vector so that *getRHSvector()* can return it.

```
justErrorVector(var=None, solver=None, boundaryConditions=(), dt=1.0, underRelaxation=None,
residualFn=None)
```

Builds the *Term*'s linear system once.

This method also recalculates and returns the error as well as applying under-relaxation.

justErrorVector returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy.solvers import DummySolver
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(DiffusionTerm().justErrorVector(v, solver=DummySolver())) == m.
->numberOfCells
True
```

Parameters

- **var** (*CellVariable*) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (*Solver*) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (*tuple* of *BoundaryCondition*) –
- **dt** (*float*) – Timestep size.
- **underRelaxation** (*float*) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (*function*) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

error – The residual vector $\vec{e} = \mathbf{L}\vec{x}_{\text{old}} - \vec{b}$

Return type

CellVariable

justResidualVector(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*)

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

justResidualVector returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(numerix.asarray(DiffusionTerm().justResidualVector(v))) == m.
->numberOfCells
True
```

Parameters

- **var** (*CellVariable*) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.

- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or `None` in the case of no under-relaxation
- **residualFn** (`function`) – Takes `var`, `matrix`, and `RHSvector` arguments, used to customize the residual calculation.

Returns

residual – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$

Return type

`CellVariable`

property matrix

Return the matrix calculated in `solve()` or `sweep()`. The `cacheMatrix()` method should be called before `solve()` or `sweep()` to cache the matrix.

residualVectorAndNorm(`var=None`, `solver=None`, `boundaryConditions=()`, `dt=None`, `underRelaxation=None`, `residualFn=None`)

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or `None` in the case of no under-relaxation
- **residualFn** (`function`) – Takes `var`, `matrix`, and `RHSvector` arguments, used to customize the residual calculation.

Returns

- **residual** (`~fipy.variables.cellVariable.CellVariable`) – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$
- **norm** (`float`) – The L2 norm of `residual`, $\|\vec{r}\|_2$

solve(`var=None`, `solver=None`, `boundaryConditions=()`, `dt=None`)

Builds and solves the *Term*'s linear system once. This method does not return the residual. It should be used when the residual is not required.

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.

- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.

sweep(`var=None`, `solver=None`, `boundaryConditions=()`, `dt=None`, `underRelaxation=None`, `residualFn=None`, `cacheResidual=False`, `cacheError=False`)

Builds and solves the *Term*'s linear system once. This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or `None` in the case of no under-relaxation
- **residualFn** (`function`) – Takes `var`, `matrix`, and `RHSvector` arguments, used to customize the residual calculation.
- **cacheResidual** (`bool`) – If `True`, calculate and store the residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$ in the `residualVector` member of *Term*
- **cacheError** (`bool`) – If `True`, use the residual vector \vec{r} to solve $\mathbf{L}\vec{e} = \vec{r}$ for the error vector \vec{e} and store it in the `errorVector` member of *Term*

Returns

residual – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$

Return type

`CellVariable`

22.6.13 `fipy.terms.diffusionTermNoCorrection`

Classes

<code>DiffusionTermNoCorrection([coeff, var])</code>	Create a <i>Term</i> .
--	------------------------

`class fipy.terms.diffusionTermNoCorrection.DiffusionTermNoCorrection(coeff=(1.0,), var=None)`

Bases: `_AbstractDiffusionTerm`

Create a *Term*.

Parameters

- coeff** (`float` or `CellVariable` or `FaceVariable`) – Coefficient for the term. *FaceVariable* objects are only acceptable for diffusion or convection terms.

property `RHSvector`

Return the RHS vector calculated in `solve()` or `sweep()`. The `cacheRHSvector()` method should be called before `solve()` or `sweep()` to cache the vector.

eq(*other*)

Return self==value.

__hash__()

Return hash(self).

__repr__()

The representation of a *Term* object is given by,

```
>>> print(__UnaryTerm(123.456))
__UnaryTerm(coeff=123.456)
```

cacheMatrix()

Informs `solve()` and `sweep()` to cache their matrix so that `matrix` can return the matrix.

cacheRHSvector()

Informs `solve()` and `sweep()` to cache their right hand side vector so that `getRHSvector()` can return it.

```
justErrorVector(var=None, solver=None, boundaryConditions=(), dt=1.0, underRelaxation=None, residualFn=None)
```

Builds the *Term*'s linear system once.

This method also recalculates and returns the error as well as applying under-relaxation.

justErrorVector returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy.solvers import DummySolver
```

```
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(DiffusionTerm().justErrorVector(v, solver=DummySolver())) == m.
    ~numberOfCells
True
```

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
 - **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
 - **boundaryConditions** (`tuple` of `BoundaryCondition`) –
 - **dt** (`float`) – Timestep size.
 - **underRelaxation** (`float`) – Usually a value between *0* and *1* or *None* in the case of no under-relaxation
 - **residualFn** (`function`) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

error – The residual vector $\vec{e} = \mathbb{L}\vec{x}_{\text{old}} - \vec{b}$

Return type

CellVariable

justResidualVector(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*)

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

justResidualVector returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(numerix.asarray(DiffusionTerm().justResidualVector(v))) == m.
->numberOfCells
True
```

Parameters

- **var** (*CellVariable*) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (*Solver*) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (*tuple* of *BoundaryCondition*) –
- **dt** (*float*) – Timestep size.
- **underRelaxation** (*float*) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (*function*) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

residual – The residual vector $\vec{r} = \mathcal{L}\vec{x} - \vec{b}$

Return type

CellVariable

property matrix

Return the matrix calculated in *solve()* or *sweep()*. The *cacheMatrix()* method should be called before *solve()* or *sweep()* to cache the matrix.

residualVectorAndNorm(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*)

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** (*CellVariable*) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (*Solver*) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (*tuple* of *BoundaryCondition*) –
- **dt** (*float*) – Timestep size.

- **underRelaxation** (*float*) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (*function*) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

- **residual** (*~fipy.variables.cellVariable.CellVariable*) – The residual vector $\vec{r} = L\vec{x} - \vec{b}$
- **norm** (*float*) – The L2 norm of *residual*, $\|\vec{r}\|_2$

solve(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*)

Builds and solves the *Term*'s linear system once. This method does not return the residual. It should be used when the residual is not required.

Parameters

- **var** (*CellVariable*) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (*Solver*) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (*tuple* of *BoundaryCondition*) –
- **dt** (*float*) – Timestep size.

sweep(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*, *cacheResidual=False*, *cacheError=False*)

Builds and solves the *Term*'s linear system once. This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** (*CellVariable*) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (*Solver*) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (*tuple* of *BoundaryCondition*) –
- **dt** (*float*) – Timestep size.
- **underRelaxation** (*float*) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (*function*) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.
- **cacheResidual** (*bool*) – If *True*, calculate and store the residual vector $\vec{r} = L\vec{x} - \vec{b}$ in the *residualVector* member of *Term*
- **cacheError** (*bool*) – If *True*, use the residual vector \vec{r} to solve $L\vec{e} = \vec{r}$ for the error vector \vec{e} and store it in the *errorVector* member of *Term*

Returns

residual – The residual vector $\vec{r} = L\vec{x} - \vec{b}$

Return type

CellVariable

22.6.14 fipy.terms.explicitDiffusionTerm

Classes

`ExplicitDiffusionTerm([coeff, var])`

The discretization for the *ExplicitDiffusionTerm* is given by

`class fipy.terms.explicitDiffusionTerm.ExplicitDiffusionTerm(coeff=(1.0,), var=None)`

Bases: `_AbstractDiffusionTerm`

The discretization for the *ExplicitDiffusionTerm* is given by

$$\int_V \nabla \cdot (\Gamma \nabla \phi) dV \simeq \sum_f \Gamma_f \frac{\phi_A^{\text{old}} - \phi_P^{\text{old}}}{d_{AP}} A_f$$

where ϕ_A^{old} and ϕ_P^{old} are the old values of the variable. The term is added to the RHS vector and makes no contribution to the solution matrix.

Create a *Term*.

Parameters

`coeff (float or CellVariable or FaceVariable)` – Coefficient for the term. *FaceVariable* objects are only acceptable for diffusion or convection terms.

property `RHSvector`

Return the RHS vector calculated in `solve()` or `sweep()`. The `cacheRHSvector()` method should be called before `solve()` or `sweep()` to cache the vector.

`__eq__(other)`

Return `self==value`.

`__hash__()`

Return `hash(self)`.

`__repr__()`

The representation of a *Term* object is given by,

```
>>> print(__UnaryTerm(123.456))
__UnaryTerm(coeff=123.456)
```

`cacheMatrix()`

Informs `solve()` and `sweep()` to cache their matrix so that `matrix` can return the matrix.

`cacheRHSvector()`

Informs `solve()` and `sweep()` to cache their right hand side vector so that `getRHSvector()` can return it.

`justErrorVector(var=None, solver=None, boundaryConditions=(), dt=1.0, underRelaxation=None, residualFn=None)`

Builds the *Term*'s linear system once.

This method also recalculates and returns the error as well as applying under-relaxation.

`justErrorVector` returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy.solvers import DummySolver
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(DiffusionTerm().justErrorVector(v, solver=DummySolver())) == m.
->numberOfCells
True
```

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default sovler depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (`function`) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

error – The residual vector $\vec{e} = \mathbf{L}\vec{x}_{\text{old}} - \vec{b}$

Return type

`CellVariable`

justResidualVector(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*)

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

justResidualVector returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(numerix.asarray(DiffusionTerm().justResidualVector(v))) == m.
->numberOfCells
True
```

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default sovler depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.

- **underRelaxation** (`float`) – Usually a value between 0 and 1 or `None` in the case of no under-relaxation
- **residualFn** (`function`) – Takes `var`, `matrix`, and `RHSvector` arguments, used to customize the residual calculation.

Returns

residual – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$

Return type

`CellVariable`

property matrix

Return the matrix calculated in `solve()` or `sweep()`. The `cacheMatrix()` method should be called before `solve()` or `sweep()` to cache the matrix.

residualVectorAndNorm(`var=None`, `solver=None`, `boundaryConditions=()`, `dt=None`, `underRelaxation=None`, `residualFn=None`)

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or `None` in the case of no under-relaxation
- **residualFn** (`function`) – Takes `var`, `matrix`, and `RHSvector` arguments, used to customize the residual calculation.

Returns

- **residual** (`~fipy.variables.cellVariable.CellVariable`) – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$
- **norm** (`float`) – The L2 norm of `residual`, $\|\vec{r}\|_2$

solve(`var=None`, `solver=None`, `boundaryConditions=()`, `dt=None`)

Builds and solves the *Term*'s linear system once. This method does not return the residual. It should be used when the residual is not required.

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.

```
sweep(var=None, solver=None, boundaryConditions=(), dt=None, underRelaxation=None,
      residualFn=None, cacheResidual=False, cacheError=False)
```

Builds and solves the *Term*'s linear system once. This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (`function`) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.
- **cacheResidual** (`bool`) – If *True*, calculate and store the residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$ in the *residualVector* member of *Term*
- **cacheError** (`bool`) – If *True*, use the residual vector \vec{r} to solve $\mathbf{L}\vec{e} = \vec{r}$ for the error vector \vec{e} and store it in the *errorVector* member of *Term*

Returns

residual – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$

Return type

`CellVariable`

22.6.15 `fipy.terms.explicitSourceTerm`

22.6.16 `fipy.terms.explicitUpwindConvectionTerm`

Classes

<code>ExplicitUpwindConvectionTerm</code> ([coeff, var])	The discretization for this <i>Term</i> is given by
--	---

```
class fipy.terms.explicitUpwindConvectionTerm.ExplicitUpwindConvectionTerm(coeff=1.0,
                           var=None)
```

Bases: `_AbstractUpwindConvectionTerm`

The discretization for this *Term* is given by

$$\int_V \nabla \cdot (\vec{u}\phi) dV \simeq \sum_f (\vec{n} \cdot \vec{u})_f \phi_f A_f$$

where $\phi_f = \alpha_f \phi_P^{\text{old}} + (1 - \alpha_f) \phi_A^{\text{old}}$ and α_f is calculated using the upwind scheme. For further details see *Numerical Schemes*.

Create a `_AbstractConvectionTerm` object.

```

>>> from fipy import *
>>> m = Grid1D(nx = 2)
>>> cv = CellVariable(mesh = m)
>>> fv = FaceVariable(mesh = m)
>>> vcv = CellVariable(mesh=m, rank=1)
>>> vfv = FaceVariable(mesh=m, rank=1)
>>> __ConvectionTerm(coeff = cv)
Traceback (most recent call last):
...
VectorCoeffError: The coefficient must be a vector value.
>>> __ConvectionTerm(coeff = fv)
Traceback (most recent call last):
...
VectorCoeffError: The coefficient must be a vector value.
>>> __ConvectionTerm(coeff = vcv)
__ConvectionTerm(coeff=_ArithmeticCellToFaceVariable(value=array([[ 0.,  0.,  0.]]),
               ↪ mesh=UniformGrid1D(dx=1.0, nx=2)))
>>> __ConvectionTerm(coeff = vfv)
__ConvectionTerm(coeff=FaceVariable(value=array([[ 0.,  0.,  0.]]), ↪
               ↪ mesh=UniformGrid1D(dx=1.0, nx=2)))
>>> __ConvectionTerm(coeff = (1,))
__ConvectionTerm(coeff=(1,))
>>> ExplicitUpwindConvectionTerm(coeff = (0,)).solve(var=cv, solver=DummySolver())
Traceback (most recent call last):
...
TransientTermError: The equation requires a TransientTerm with explicit convection.
>>> (TransientTerm(0.) - ExplicitUpwindConvectionTerm(coeff = (0,))).solve(var=cv, ↪
               ↪ solver=DummySolver(), dt=1.)

```

```

>>> (TransientTerm() - ExplicitUpwindConvectionTerm(coeff = 1)).solve(var=cv, ↪
               ↪ solver=DummySolver(), dt=1.)
Traceback (most recent call last):
...
VectorCoeffError: The coefficient must be a vector value.
>>> m2 = Grid2D(nx=2, ny=1)
>>> cv2 = CellVariable(mesh=m2)
>>> vcv2 = CellVariable(mesh=m2, rank=1)
>>> vfv2 = FaceVariable(mesh=m2, rank=1)
>>> __ConvectionTerm(coeff=vcv2)
__ConvectionTerm(coeff=_ArithmeticCellToFaceVariable(value=array([[ 0.,  0.,  0.,  ↪
               ↪ 0.,  0.,  0.], [ 0.,  0.,  0.,  0.,  0.,  0.]]), mesh=UniformGrid2D(dx=1.0, nx=2, dy=1. ↪
               ↪ 0, ny=1)))
>>> __ConvectionTerm(coeff=vfv2)
__ConvectionTerm(coeff=FaceVariable(value=array([[ 0.,  0.,  0.,  0.,  0.,  0.,  0.], [ 0.,  0.,  0.,  0.,  0.,  0.,  0.]]), mesh=UniformGrid2D(dx=1.0, nx=2, dy=1. ↪
               ↪ 0, ny=1)))
>>> (TransientTerm() - ExplicitUpwindConvectionTerm(coeff = ((0,), (0,)))). ↪
               ↪ solve(var=cv2, solver=DummySolver(), dt=1.)
>>> (TransientTerm() - ExplicitUpwindConvectionTerm(coeff = (0, 0))).solve(var=cv2, ↪
               ↪ solver=DummySolver(), dt=1.)

```

Parameters

coeff (The *Term*'s coefficient value.) –

property RHSvector

Return the RHS vector calculated in *solve()* or *sweep()*. The *cacheRHSvector()* method should be called before *solve()* or *sweep()* to cache the vector.

__eq__(other)

Return self==value.

__hash__()

Return hash(self).

__mul__(other)

Multiply a term

```
>>> 2. * __NonDiffusionTerm(coeff=0.5)
__NonDiffusionTerm(coeff=1.0)
```

Test for ticket:291.

```
>>> from fipy import PowerLawConvectionTerm
>>> PowerLawConvectionTerm(coeff=[[1, [0]]) * 1.0
PowerLawConvectionTerm(coeff=array([[ 1.],
[ 0.]]))
```

__neg__()

Negate a *Term*.

```
>>> -__NonDiffusionTerm(coeff=1.)
__NonDiffusionTerm(coeff=-1.0)
```

__repr__()

The representation of a *Term* object is given by,

```
>>> print(__UnaryTerm(123.456))
__UnaryTerm(coeff=123.456)
```

__rmul__(other)

Multiply a term

```
>>> 2. * __NonDiffusionTerm(coeff=0.5)
__NonDiffusionTerm(coeff=1.0)
```

Test for ticket:291.

```
>>> from fipy import PowerLawConvectionTerm
>>> PowerLawConvectionTerm(coeff=[[1, [0]]) * 1.0
PowerLawConvectionTerm(coeff=array([[ 1.],
[ 0.]]))
```

cacheMatrix()

Informs *solve()* and *sweep()* to cache their matrix so that *matrix* can return the matrix.

cacheRHSvector()

Informs `solve()` and `sweep()` to cache their right hand side vector so that `getRHSvector()` can return it.

justErrorVector(var=None, solver=None, boundaryConditions=(), dt=1.0, underRelaxation=None, residualFn=None)

Builds the *Term*'s linear system once.

This method also recalculates and returns the error as well as applying under-relaxation.

justErrorVector returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy.solvers import DummySolver
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(DiffusionTerm().justErrorVector(v, solver=DummySolver())) == m.
->>> numberofCells
True
```

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (`function`) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

`error` – The residual vector $\vec{e} = \mathbf{L}\vec{x}_{\text{old}} - \vec{b}$

Return type

`CellVariable`

justResidualVector(var=None, solver=None, boundaryConditions=(), dt=None, underRelaxation=None, residualFn=None)

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

justResidualVector returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(numerix.asarray(DiffusionTerm().justResidualVector(v))) == m.
->>> numberofCells
True
```

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (`function`) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

residual – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$

Return type

`CellVariable`

property matrix

Return the matrix calculated in *solve()* or *sweep()*. The *cacheMatrix()* method should be called before *solve()* or *sweep()* to cache the matrix.

residualVectorAndNorm(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*)

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (`function`) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

- **residual** (`~fipy.variables.cellVariable.CellVariable`) – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$
- **norm** (`float`) – The L2 norm of *residual*, $\|\vec{r}\|_2$

solve(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*)

Builds and solves the *Term*'s linear system once. This method does not return the residual. It should be used when the residual is not required.

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.

- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.

sweep(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*, *cacheResidual=False*, *cacheError=False*)

Builds and solves the *Term*'s linear system once. This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (`function`) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.
- **cacheResidual** (`bool`) – If *True*, calculate and store the residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$ in the *residualVector* member of *Term*
- **cacheError** (`bool`) – If *True*, use the residual vector \vec{r} to solve $\mathbf{L}\vec{e} = \vec{r}$ for the error vector \vec{e} and store it in the *errorVector* member of *Term*

Returns

residual – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$

Return type

`CellVariable`

22.6.17 `fipy.terms.exponentialConvectionTerm`

Classes

`ExponentialConvectionTerm([coeff, var])`

The discretization for this *Term* is given by

`class fipy.terms.exponentialConvectionTerm.ExponentialConvectionTerm(coeff=1.0, var=None)`

Bases: `_AsymmetricConvectionTerm`

The discretization for this *Term* is given by

$$\int_V \nabla \cdot (\vec{u}\phi) dV \simeq \sum_f (\vec{n} \cdot \vec{u})_f \phi_f A_f$$

where $\phi_f = \alpha_f \phi_P + (1 - \alpha_f) \phi_A$ and α_f is calculated using the exponential scheme. For further details see *Numerical Schemes*.

Create a `_AbstractConvectionTerm` object.

```

>>> from fipy import *
>>> m = Grid1D(nx = 2)
>>> cv = CellVariable(mesh = m)
>>> fv = FaceVariable(mesh = m)
>>> vcv = CellVariable(mesh=m, rank=1)
>>> vfv = FaceVariable(mesh=m, rank=1)
>>> __ConvectionTerm(coeff = cv)
Traceback (most recent call last):
...
VectorCoeffError: The coefficient must be a vector value.
>>> __ConvectionTerm(coeff = fv)
Traceback (most recent call last):
...
VectorCoeffError: The coefficient must be a vector value.
>>> __ConvectionTerm(coeff = vcv)
__ConvectionTerm(coeff=_ArithmeticCellToFaceVariable(value=array([[ 0.,  0.,  0.]]),
               ↪ mesh=UniformGrid1D(dx=1.0, nx=2)))
>>> __ConvectionTerm(coeff = vfv)
__ConvectionTerm(coeff=FaceVariable(value=array([[ 0.,  0.,  0.]]), ↪
               ↪ mesh=UniformGrid1D(dx=1.0, nx=2)))
>>> __ConvectionTerm(coeff = (1,))
__ConvectionTerm(coeff=(1,))
>>> ExplicitUpwindConvectionTerm(coeff = (0,)).solve(var=cv, solver=DummySolver())
Traceback (most recent call last):
...
TransientTermError: The equation requires a TransientTerm with explicit convection.
>>> (TransientTerm(0.) - ExplicitUpwindConvectionTerm(coeff = (0,))).solve(var=cv, ↪
               ↪ solver=DummySolver(), dt=1.)

```

```

>>> (TransientTerm() - ExplicitUpwindConvectionTerm(coeff = 1)).solve(var=cv, ↪
               ↪ solver=DummySolver(), dt=1.)
Traceback (most recent call last):
...
VectorCoeffError: The coefficient must be a vector value.
>>> m2 = Grid2D(nx=2, ny=1)
>>> cv2 = CellVariable(mesh=m2)
>>> vcv2 = CellVariable(mesh=m2, rank=1)
>>> vfv2 = FaceVariable(mesh=m2, rank=1)
>>> __ConvectionTerm(coeff=vcv2)
__ConvectionTerm(coeff=_ArithmeticCellToFaceVariable(value=array([[ 0.,  0.,  0.,  ↪
               ↪ 0.,  0.,  0.], [ 0.,  0.,  0.,  0.,  0.,  0.]]), mesh=UniformGrid2D(dx=1.0, nx=2, dy=1. ↪
               ↪ 0, ny=1)))
>>> __ConvectionTerm(coeff=vfv2)
__ConvectionTerm(coeff=FaceVariable(value=array([[ 0.,  0.,  0.,  0.,  0.,  0.,  0.], [ 0.,  0.,  0.,  0.,  0.,  0.,  0.]]), mesh=UniformGrid2D(dx=1.0, nx=2, dy=1. ↪
               ↪ 0, ny=1)))
>>> (TransientTerm() - ExplicitUpwindConvectionTerm(coeff = ((0,), (0,)))). ↪
               ↪ solve(var=cv2, solver=DummySolver(), dt=1.)
>>> (TransientTerm() - ExplicitUpwindConvectionTerm(coeff = (0, 0))).solve(var=cv2, ↪
               ↪ solver=DummySolver(), dt=1.)

```

Parameters**coeff** (The *Term*'s coefficient value.) –**property RHSvector**

Return the RHS vector calculated in *solve()* or *sweep()*. The *cacheRHSvector()* method should be called before *solve()* or *sweep()* to cache the vector.

__eq__(other)

Return self==value.

__hash__()

Return hash(self).

__mul__(other)

Multiply a term

```
>>> 2. * __NonDiffusionTerm(coeff=0.5)
__NonDiffusionTerm(coeff=1.0)
```

Test for ticket:291.

```
>>> from fipy import PowerLawConvectionTerm
>>> PowerLawConvectionTerm(coeff=[[1, [0]]) * 1.0
PowerLawConvectionTerm(coeff=array([[ 1.],
[ 0.]]))
```

__neg__()

Negate a *Term*.

```
>>> -__NonDiffusionTerm(coeff=1.)
__NonDiffusionTerm(coeff=-1.0)
```

__repr__()

The representation of a *Term* object is given by,

```
>>> print(__UnaryTerm(123.456))
__UnaryTerm(coeff=123.456)
```

__rmul__(other)

Multiply a term

```
>>> 2. * __NonDiffusionTerm(coeff=0.5)
__NonDiffusionTerm(coeff=1.0)
```

Test for ticket:291.

```
>>> from fipy import PowerLawConvectionTerm
>>> PowerLawConvectionTerm(coeff=[[1, [0]]) * 1.0
PowerLawConvectionTerm(coeff=array([[ 1.],
[ 0.]]))
```

cacheMatrix()

Informs *solve()* and *sweep()* to cache their matrix so that *matrix* can return the matrix.

cacheRHSvector()

Informs `solve()` and `sweep()` to cache their right hand side vector so that `getRHSvector()` can return it.

justErrorVector(var=None, solver=None, boundaryConditions=(), dt=1.0, underRelaxation=None, residualFn=None)

Builds the *Term*'s linear system once.

This method also recalculates and returns the error as well as applying under-relaxation.

justErrorVector returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy.solvers import DummySolver
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(DiffusionTerm().justErrorVector(v, solver=DummySolver())) == m.
->>> numberofCells
True
```

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (`function`) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

`error` – The residual vector $\vec{e} = \mathbf{L}\vec{x}_{\text{old}} - \vec{b}$

Return type

`CellVariable`

justResidualVector(var=None, solver=None, boundaryConditions=(), dt=None, underRelaxation=None, residualFn=None)

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

justResidualVector returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(numerix.asarray(DiffusionTerm().justResidualVector(v))) == m.
->>> numberofCells
True
```

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (`function`) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

residual – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$

Return type

`CellVariable`

property matrix

Return the matrix calculated in *solve()* or *sweep()*. The *cacheMatrix()* method should be called before *solve()* or *sweep()* to cache the matrix.

residualVectorAndNorm(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*)

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (`function`) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

- **residual** (`~fipy.variables.cellVariable.CellVariable`) – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$
- **norm** (`float`) – The L2 norm of *residual*, $\|\vec{r}\|_2$

solve(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*)

Builds and solves the *Term*'s linear system once. This method does not return the residual. It should be used when the residual is not required.

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.

- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.

sweep(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*,
residualFn=None, *cacheResidual=False*, *cacheError=False*)

Builds and solves the *Term*'s linear system once. This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (`function`) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.
- **cacheResidual** (`bool`) – If *True*, calculate and store the residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$ in the *residualVector* member of *Term*
- **cacheError** (`bool`) – If *True*, use the residual vector \vec{r} to solve $\mathbf{L}\vec{e} = \vec{r}$ for the error vector \vec{e} and store it in the *errorVector* member of *Term*

Returns

residual – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$

Return type

`CellVariable`

22.6.18 fipy.terms.faceTerm

Classes

`FaceTerm([coeff, var])`

Attention:
This
class
is
ab-
stract.
Al-
ways
cre-
ate
one
of
its
sub-
classes.

`class fipy.terms.faceTerm.FaceTerm(coeff=1.0, var=None)`

Bases: `_NonDiffusionTerm`

Attention: This class is abstract. Always create one of its subclasses.

Create a *Term*.

Parameters

`coeff` (`float` or `CellVariable` or `FaceVariable`) – Coefficient for the term. `FaceVariable` objects are only acceptable for diffusion or convection terms.

property `RHSvector`

Return the RHS vector calculated in `solve()` or `sweep()`. The `cacheRHSvector()` method should be called before `solve()` or `sweep()` to cache the vector.

`__eq__(other)`

Return `self==value`.

`__hash__()`

Return `hash(self)`.

`__mul__(other)`

Multiply a term

```
>>> 2. * __NonDiffusionTerm(coeff=0.5)
__NonDiffusionTerm(coeff=1.0)
```

Test for ticket:291.

```
>>> from fipy import PowerLawConvectionTerm
>>> PowerLawConvectionTerm(coeff=[[1], [0]]) * 1.0
PowerLawConvectionTerm(coeff=array([[ 1.],
       [ 0.]]))
```

__neg__()

Negate a *Term*.

```
>>> -__NonDiffusionTerm(coeff=1.)
__NonDiffusionTerm(coeff=-1.0)
```

__repr__()

The representation of a *Term* object is given by,

```
>>> print(__UnaryTerm(123.456))
__UnaryTerm(coeff=123.456)
```

__rmul__(other)

Multiply a term

```
>>> 2. * __NonDiffusionTerm(coeff=0.5)
__NonDiffusionTerm(coeff=1.0)
```

Test for ticket:291.

```
>>> from fipy import PowerLawConvectionTerm
>>> PowerLawConvectionTerm(coeff=[[1], [0]]) * 1.0
PowerLawConvectionTerm(coeff=array([[ 1.],
       [ 0.]]))
```

cacheMatrix()

Informs *solve()* and *sweep()* to cache their matrix so that *matrix* can return the matrix.

cacheRHSvector()

Informs *solve()* and *sweep()* to cache their right hand side vector so that *getRHSvector()* can return it.

justErrorVector(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=1.0*, *underRelaxation=None*, *residualFn=None*)

Builds the *Term*'s linear system once.

This method also recalculates and returns the error as well as applying under-relaxation.

justErrorVector returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy.solvers import DummySolver
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(DiffusionTerm().justErrorVector(v, solver=DummySolver())) == m.
->numberofCells
True
```

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (`function`) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

error – The residual vector $\vec{e} = \mathbf{L}\vec{x}_{\text{old}} - \vec{b}$

Return type

`CellVariable`

justResidualVector(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*)

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

justResidualVector returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(numerix.asarray(DiffusionTerm().justResidualVector(v))) == m.
->numberofCells
True
```

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (`function`) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

residual – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$

Return type

`CellVariable`

property matrix

Return the matrix calculated in `solve()` or `sweep()`. The `cacheMatrix()` method should be called before `solve()` or `sweep()` to cache the matrix.

residualVectorAndNorm(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*)

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (`function`) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

- **residual** (~`fipy.variables.cellVariable.CellVariable`) – The residual vector $\vec{r} = L\vec{x} - \vec{b}$
- **norm** (`float`) – The L2 norm of *residual*, $\|\vec{r}\|_2$

solve(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*)

Builds and solves the *Term*'s linear system once. This method does not return the residual. It should be used when the residual is not required.

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.

sweep(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*, *cacheResidual=False*, *cacheError=False*)

Builds and solves the *Term*'s linear system once. This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –

- **dt** (*float*) – Timestep size.
- **underRelaxation** (*float*) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (*function*) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.
- **cacheResidual** (*bool*) – If *True*, calculate and store the residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$ in the *residualVector* member of *Term*
- **cacheError** (*bool*) – If *True*, use the residual vector \vec{r} to solve $\mathbf{L}\vec{e} = \vec{r}$ for the error vector \vec{e} and store it in the *errorVector* member of *Term*

Returns

residual – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$

Return type

CellVariable

22.6.19 fipy.terms.firstOrderAdvectionTerm

Classes

FirstOrderAdvectionTerm([coeff])

The *FirstOrderAdvectionTerm* object constructs the b vector contribution for the advection term given by

class fipy.terms.firstOrderAdvectionTerm.**FirstOrderAdvectionTerm**(coeff=None)

Bases: *_NonDiffusionTerm*

The *FirstOrderAdvectionTerm* object constructs the b vector contribution for the advection term given by

$$u|\nabla\phi|$$

from the advection equation given by:

$$\frac{\partial\phi}{\partial t} + u|\nabla\phi| = 0$$

The construction of the gradient magnitude term requires upwinding. The formula used here is given by:

$$u_P|\nabla\phi|_P = \max(u_P, 0) \left[\sum_A \min \left(\frac{\phi_A - \phi_P}{d_{AP}}, 0 \right)^2 \right]^{1/2} + \min(u_P, 0) \left[\sum_A \max \left(\frac{\phi_A - \phi_P}{d_{AP}}, 0 \right)^2 \right]^{1/2}$$

Here are some simple test cases for this problem:

```
>>> from fipy.meshes import Grid1D
>>> from fipy.solvers import *
>>> SparseMatrix = LinearLUSolver().__matrixClass
>>> mesh = Grid1D(dx = 1., nx = 3)
>>> from fipy.variables.cellVariable import CellVariable
```

Trivial test:

```
>>> var = CellVariable(value = numerix.zeros(3, 'd'), mesh = mesh)
>>> v, L, b = FirstOrderAdvectionTerm(0.)._buildMatrix(var, SparseMatrix)
>>> print(numerix.allclose(b, numerix.zeros(3, 'd'), atol = 1e-10))
True
```

Less trivial test:

```
>>> var = CellVariable(value = numerix.arange(3), mesh = mesh)
>>> v, L, b = FirstOrderAdvectionTerm(1.)._buildMatrix(var, SparseMatrix)
>>> print(numerix.allclose(b, numerix.array([0., -1., -1.]), atol = 1e-10))
True
```

Even less trivial

```
>>> var = CellVariable(value = numerix.arange(3), mesh = mesh)
>>> v, L, b = FirstOrderAdvectionTerm(-1.)._buildMatrix(var, SparseMatrix)
>>> print(numerix.allclose(b, numerix.array([1., 1., 0.]), atol = 1e-10))
True
```

Another trivial test case (more trivial than a trivial test case standing on a harpsichord singing “trivial test cases are here again”)

```
>>> vel = numerix.array([-1, 2, -3])
>>> var = CellVariable(value = numerix.array([4, 6, 1]), mesh = mesh)
>>> v, L, b = FirstOrderAdvectionTerm(vel)._buildMatrix(var, SparseMatrix)
>>> print(numerix.allclose(b, -vel * numerix.array([2, numerix.sqrt(5**2 + 2**2), -5]), atol = 1e-10))
True
```

Somewhat less trivial test case:

```
>>> from fipy.meshes import Grid2D
>>> mesh = Grid2D(dx = 1., dy = 1., nx = 2, ny = 2)
>>> vel = numerix.array([3, -5, -6, -3])
>>> var = CellVariable(value = numerix.array([3, 1, 6, 7]), mesh = mesh)
>>> v, L, b = FirstOrderAdvectionTerm(vel)._buildMatrix(var, SparseMatrix)
>>> answer = -vel * numerix.array([2, numerix.sqrt(2**2 + 6**2), 1, 0])
>>> print(numerix.allclose(b, answer, atol = 1e-10))
True
```

Create a *Term*.

Parameters

coeff (*float* or *CellVariable* or *FaceVariable*) – Coefficient for the term. *FaceVariable* objects are only acceptable for diffusion or convection terms.

property **RHSvector**

Return the RHS vector calculated in *solve()* or *sweep()*. The *cacheRHSvector()* method should be called before *solve()* or *sweep()* to cache the vector.

__eq__(other)

Return self==value.

__hash__()

Return hash(self).

__mul__(other)

Multiply a term

```
>>> 2. * __NonDiffusionTerm(coeff=0.5)
__NonDiffusionTerm(coeff=1.0)
```

Test for ticket:291.

```
>>> from fipy import PowerLawConvectionTerm
>>> PowerLawConvectionTerm(coeff=[[1, [0]]]) * 1.0
PowerLawConvectionTerm(coef...
```

__neg__()

Negate a *Term*.

```
>>> -__NonDiffusionTerm(coeff=1.)
__NonDiffusionTerm(coeff=-1.0)
```

__repr__()

The representation of a *Term* object is given by,

```
>>> print(__UnaryTerm(123.456))
__UnaryTerm(coeff=123.456)
```

__rmul__(other)

Multiply a term

```
>>> 2. * __NonDiffusionTerm(coeff=0.5)
__NonDiffusionTerm(coeff=1.0)
```

Test for ticket:291.

```
>>> from fipy import PowerLawConvectionTerm
>>> PowerLawConvectionTerm(coeff=[[1, [0]]]) * 1.0
PowerLawConvectionTerm(coef...
```

cacheMatrix()

Informs *solve()* and *sweep()* to cache their matrix so that *matrix* can return the matrix.

cacheRHsvector()

Informs *solve()* and *sweep()* to cache their right hand side vector so that *getRHsvector()* can return it.

justErrorVector(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=1.0*, *underRelaxation=None*, *residualFn=None*)

Builds the *Term*'s linear system once.

This method also recalculates and returns the error as well as applying under-relaxation.

justErrorVector returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy.solvers import DummySolver
>>> from fipy import *
>>> m = Grid1D(nx=10)
```

(continues on next page)

(continued from previous page)

```
>>> v = CellVariable(mesh=m)
>>> len(DiffusionTerm().justErrorVector(v, solver=DummySolver())) == m.
->numberofCells
True
```

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between *0* and *1* or *None* in the case of no under-relaxation
- **residualFn** (`function`) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

`error` – The residual vector $\vec{e} = \mathbf{L}\vec{x}_{\text{old}} - \vec{b}$

Return type

`CellVariable`

`justResidualVector(var=None, solver=None, boundaryConditions=(), dt=None, underRelaxation=None, residualFn=None)`

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

justResidualVector returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(numerix.asarray(DiffusionTerm().justResidualVector(v))) == m.
->numberofCells
True
```

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between *0* and *1* or *None* in the case of no under-relaxation

- **residualFn** (*function*) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

residual – The residual vector $\vec{r} = L\vec{x} - \vec{b}$

Return type

[CellVariable](#)

property matrix

Return the matrix calculated in *solve()* or *sweep()*. The *cacheMatrix()* method should be called before *solve()* or *sweep()* to cache the matrix.

residualVectorAndNorm(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*)

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** ([CellVariable](#)) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** ([Solver](#)) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** ([tuple](#) of [BoundaryCondition](#)) –
- **dt** ([float](#)) – Timestep size.
- **underRelaxation** ([float](#)) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (*function*) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

- **residual** (*~fipy.variables.cellVariable.CellVariable*) – The residual vector $\vec{r} = L\vec{x} - \vec{b}$
- **norm** ([float](#)) – The L2 norm of *residual*, $\|\vec{r}\|_2$

solve(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*)

Builds and solves the *Term*'s linear system once. This method does not return the residual. It should be used when the residual is not required.

Parameters

- **var** ([CellVariable](#)) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** ([Solver](#)) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** ([tuple](#) of [BoundaryCondition](#)) –
- **dt** ([float](#)) – Timestep size.

sweep(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*, *cacheResidual=False*, *cacheError=False*)

Builds and solves the *Term*'s linear system once. This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (`function`) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.
- **cacheResidual** (`bool`) – If *True*, calculate and store the residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$ in the *residualVector* member of *Term*
- **cacheError** (`bool`) – If *True*, use the residual vector \vec{r} to solve $\mathbf{L}\vec{e} = \vec{r}$ for the error vector \vec{e} and store it in the *errorVector* member of *Term*

Returns

residual – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$

Return type

`CellVariable`

22.6.20 `fipy.terms.hybridConvectionTerm`

Classes

<code>HybridConvectionTerm</code> ([coeff, var])	The discretization for this <i>Term</i> is given by
--	---

```
class fipy.terms.hybridConvectionTerm.HybridConvectionTerm(coeff=1.0, var=None)
```

Bases: `_AsymmetricConvectionTerm`

The discretization for this *Term* is given by

$$\int_V \nabla \cdot (\vec{u}\phi) dV \simeq \sum_f (\vec{n} \cdot \vec{u})_f \phi_f A_f$$

where $\phi_f = \alpha_f \phi_P + (1 - \alpha_f) \phi_A$ and α_f is calculated using the hybrid scheme. For further details see *Numerical Schemes*.

Create a `_AbstractConvectionTerm` object.

```
>>> from fipy import *
>>> m = Grid1D(nx = 2)
>>> cv = CellVariable(mesh = m)
>>> fv = FaceVariable(mesh = m)
>>> vcv = CellVariable(mesh=m, rank=1)
>>> vfv = FaceVariable(mesh=m, rank=1)
>>> __ConvectionTerm(coeff = cv)
Traceback (most recent call last):
```

(continues on next page)

(continued from previous page)

```

...
VectorCoeffError: The coefficient must be a vector value.
>>> __ConvectionTerm(coeff = fv)
Traceback (most recent call last):

...
VectorCoeffError: The coefficient must be a vector value.
>>> __ConvectionTerm(coeff = vcv)
__ConvectionTerm(coeff=_ArithmeticCellToFaceVariable(value=array([[ 0.,  0.,  0.])),
    ↪ mesh=UniformGrid1D(dx=1.0, nx=2)))
>>> __ConvectionTerm(coeff = vfv)
__ConvectionTerm(coeff=FaceVariable(value=array([[ 0.,  0.,  0.]]), ↪
    ↪ mesh=UniformGrid1D(dx=1.0, nx=2)))
>>> __ConvectionTerm(coeff = (1,))
__ConvectionTerm(coeff=(1,))
>>> ExplicitUpwindConvectionTerm(coeff = (0,)).solve(var=cv, solver=DummySolver())
Traceback (most recent call last):

...
TransientTermError: The equation requires a TransientTerm with explicit convection.
>>> (TransientTerm(0.) - ExplicitUpwindConvectionTerm(coeff = (0,))).solve(var=cv, ↪
    ↪ solver=DummySolver(), dt=1.)

```

```

>>> (TransientTerm() - ExplicitUpwindConvectionTerm(coeff = 1)).solve(var=cv, ↪
    ↪ solver=DummySolver(), dt=1.)
Traceback (most recent call last):

...
VectorCoeffError: The coefficient must be a vector value.
>>> m2 = Grid2D(nx=2, ny=1)
>>> cv2 = CellVariable(mesh=m2)
>>> vcv2 = CellVariable(mesh=m2, rank=1)
>>> vfv2 = FaceVariable(mesh=m2, rank=1)
>>> __ConvectionTerm(coeff=vcv2)
__ConvectionTerm(coeff=_ArithmeticCellToFaceVariable(value=array([[ 0.,  0.,  0., ↪
    ↪ 0.,  0.,  0.,  0.],
        [ 0.,  0.,  0.,  0.,  0.,  0.,  0.]]), mesh=UniformGrid2D(dx=1.0, nx=2, dy=1.0,
    ↪ ny=1)))
>>> __ConvectionTerm(coeff=vfv2)
__ConvectionTerm(coeff=FaceVariable(value=array([[ 0.,  0.,  0.,  0.,  0.,  0.,  0.],
    ↪ [ 0.,  0.,  0.,  0.,  0.,  0.,  0.]]), mesh=UniformGrid2D(dx=1.0, nx=2, dy=1.0,
    ↪ ny=1)))
>>> (TransientTerm() - ExplicitUpwindConvectionTerm(coeff = ((0,), (0,)))). ↪
    ↪ solve(var=cv2, solver=DummySolver(), dt=1.)
>>> (TransientTerm() - ExplicitUpwindConvectionTerm(coeff = (0, 0))).solve(var=cv2, ↪
    ↪ solver=DummySolver(), dt=1.)

```

Parameters**coeff** (The *Term*'s coefficient value.) –**property RHSvector**

Return the RHS vector calculated in *solve()* or *sweep()*. The *cacheRHSvector()* method should be called before *solve()* or *sweep()* to cache the vector.

`__eq__(other)`

Return `self==value`.

`__hash__()`

Return `hash(self)`.

`__mul__(other)`

Multiply a term

```
>>> 2. * __NonDiffusionTerm(coef=0.5)
__NonDiffusionTerm(coef=1.0)
```

Test for ticket:291.

```
>>> from fipy import PowerLawConvectionTerm
>>> PowerLawConvectionTerm(coef=[[1, [0]]]) * 1.0
PowerLawConvectionTerm(coef=array([[ 1.],
       [ 0.]]))
```

`__neg__()`

Negate a *Term*.

```
>>> -__NonDiffusionTerm(coef=1.)
__NonDiffusionTerm(coef=-1.0)
```

`__repr__()`

The representation of a *Term* object is given by,

```
>>> print(__UnaryTerm(123.456))
__UnaryTerm(coef=123.456)
```

`__rmul__(other)`

Multiply a term

```
>>> 2. * __NonDiffusionTerm(coef=0.5)
__NonDiffusionTerm(coef=1.0)
```

Test for ticket:291.

```
>>> from fipy import PowerLawConvectionTerm
>>> PowerLawConvectionTerm(coef=[[1, [0]]]) * 1.0
PowerLawConvectionTerm(coef=array([[ 1.],
       [ 0.]]))
```

`cacheMatrix()`

Informs `solve()` and `sweep()` to cache their matrix so that `matrix` can return the matrix.

`cacheRHSvector()`

Informs `solve()` and `sweep()` to cache their right hand side vector so that `getRHSvector()` can return it.

`justErrorVector(var=None, solver=None, boundaryConditions=(), dt=1.0, underRelaxation=None, residualFn=None)`

Builds the *Term*'s linear system once.

This method also recalculates and returns the error as well as applying under-relaxation.

`justErrorVector` returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy.solvers import DummySolver
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(DiffusionTerm().justErrorVector(v, solver=DummySolver())) == m.
->numberOfCells
True
```

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default sovler depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between *0* and *1* or *None* in the case of no under-relaxation
- **residualFn** (`function`) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

error – The residual vector $\vec{e} = \mathbf{L}\vec{x}_{\text{old}} - \vec{b}$

Return type

`CellVariable`

justResidualVector(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*)

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

justResidualVector returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(numerix.asarray(DiffusionTerm().justResidualVector(v))) == m.
->numberOfCells
True
```

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default sovler depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.

- **underRelaxation** (`float`) – Usually a value between 0 and 1 or `None` in the case of no under-relaxation
- **residualFn** (`function`) – Takes `var`, `matrix`, and `RHSvector` arguments, used to customize the residual calculation.

Returns

residual – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$

Return type

`CellVariable`

property matrix

Return the matrix calculated in `solve()` or `sweep()`. The `cacheMatrix()` method should be called before `solve()` or `sweep()` to cache the matrix.

residualVectorAndNorm(`var=None`, `solver=None`, `boundaryConditions=()`, `dt=None`, `underRelaxation=None`, `residualFn=None`)

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or `None` in the case of no under-relaxation
- **residualFn** (`function`) – Takes `var`, `matrix`, and `RHSvector` arguments, used to customize the residual calculation.

Returns

- **residual** (`~fipy.variables.cellVariable.CellVariable`) – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$
- **norm** (`float`) – The L2 norm of `residual`, $\|\vec{r}\|_2$

solve(`var=None`, `solver=None`, `boundaryConditions=()`, `dt=None`)

Builds and solves the *Term*'s linear system once. This method does not return the residual. It should be used when the residual is not required.

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.

```
sweep(var=None, solver=None, boundaryConditions=(), dt=None, underRelaxation=None,
       residualFn=None, cacheResidual=False, cacheError=False)
```

Builds and solves the *Term*'s linear system once. This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (`function`) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.
- **cacheResidual** (`bool`) – If *True*, calculate and store the residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$ in the *residualVector* member of *Term*
- **cacheError** (`bool`) – If *True*, use the residual vector \vec{r} to solve $\mathbf{L}\vec{e} = \vec{r}$ for the error vector \vec{e} and store it in the *errorVector* member of *Term*

Returns

residual – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$

Return type

`CellVariable`

22.6.21 `fipy.terms.implicitDiffusionTerm`

`fipy.terms.implicitDiffusionTerm.ImplicitDiffusionTerm`

alias of `DiffusionTerm`

22.6.22 `fipy.terms.implicitSourceTerm`

Classes

<code>ImplicitSourceTerm</code> ([coeff, var])	The <i>ImplicitSourceTerm</i> represents
--	--

```
class fipy.terms.implicitSourceTerm.ImplicitSourceTerm(coeff=1.0, var=None)
```

Bases: `SourceTerm`

The *ImplicitSourceTerm* represents

$$\int_V \phi S dV \simeq \phi_P S_P V_P$$

where *S* is the *coeff* value.

Parameters

- **coeff** (`float or CellVariable`) – Proportionality coefficient S (default: 1)
- **var** (`CellVariable`) – Variable ϕ that `ImplicitSourceTerm` is implicit in.

property RHSvector

Return the RHS vector calculated in `solve()` or `sweep()`. The `cacheRHSvector()` method should be called before `solve()` or `sweep()` to cache the vector.

`__eq__(other)`

Return `self==value`.

`__hash__()`

Return `hash(self)`.

`__mul__(other)`

Multiply a term

```
>>> 2. * __NonDiffusionTerm(coeff=0.5)
__NonDiffusionTerm(coeff=1.0)
```

Test for ticket:291.

```
>>> from fipy import PowerLawConvectionTerm
>>> PowerLawConvectionTerm(coeff=[[1, [0]]) * 1.0
PowerLawConvectionTerm(coeff=array([[ 1.],
[ 0.]]))
```

`__neg__()`

Negate a *Term*.

```
>>> -__NonDiffusionTerm(coeff=1.)
__NonDiffusionTerm(coeff=-1.0)
```

`__repr__()`

The representation of a *Term* object is given by,

```
>>> print(__UnaryTerm(123.456))
__UnaryTerm(coeff=123.456)
```

`__rmul__(other)`

Multiply a term

```
>>> 2. * __NonDiffusionTerm(coeff=0.5)
__NonDiffusionTerm(coeff=1.0)
```

Test for ticket:291.

```
>>> from fipy import PowerLawConvectionTerm
>>> PowerLawConvectionTerm(coeff=[[1, [0]]) * 1.0
PowerLawConvectionTerm(coeff=array([[ 1.],
[ 0.]]))
```

`cacheMatrix()`

Informs `solve()` and `sweep()` to cache their matrix so that `matrix` can return the matrix.

cacheRHSvector()

Informs `solve()` and `sweep()` to cache their right hand side vector so that `getRHSvector()` can return it.

justErrorVector(var=None, solver=None, boundaryConditions=(), dt=1.0, underRelaxation=None, residualFn=None)

Builds the *Term*'s linear system once.

This method also recalculates and returns the error as well as applying under-relaxation.

justErrorVector returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy.solvers import DummySolver
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(DiffusionTerm().justErrorVector(v, solver=DummySolver())) == m.
->>> numberofCells
True
```

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (`function`) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

`error` – The residual vector $\vec{e} = \mathbf{L}\vec{x}_{\text{old}} - \vec{b}$

Return type

`CellVariable`

justResidualVector(var=None, solver=None, boundaryConditions=(), dt=None, underRelaxation=None, residualFn=None)

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

justResidualVector returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(numerix.asarray(DiffusionTerm().justResidualVector(v))) == m.
->>> numberofCells
True
```

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (`function`) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

residual – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$

Return type

`CellVariable`

property matrix

Return the matrix calculated in *solve()* or *sweep()*. The *cacheMatrix()* method should be called before *solve()* or *sweep()* to cache the matrix.

residualVectorAndNorm(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*)

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (`function`) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

- **residual** (`~fipy.variables.cellVariable.CellVariable`) – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$
- **norm** (`float`) – The L2 norm of *residual*, $\|\vec{r}\|_2$

solve(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*)

Builds and solves the *Term*'s linear system once. This method does not return the residual. It should be used when the residual is not required.

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.

- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple of BoundaryCondition`) –
- **dt** (`float`) – Timestep size.

sweep(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*, *cacheResidual=False*, *cacheError=False*)

Builds and solves the *Term*'s linear system once. This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple of BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (`function`) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.
- **cacheResidual** (`bool`) – If *True*, calculate and store the residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$ in the *residualVector* member of *Term*
- **cacheError** (`bool`) – If *True*, use the residual vector \vec{r} to solve $\mathbf{L}\vec{e} = \vec{r}$ for the error vector \vec{e} and store it in the *errorVector* member of *Term*

Returns

residual – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$

Return type

`CellVariable`

22.6.23 `fipy.terms.nonDiffusionTerm`

22.6.24 `fipy.terms.powerLawConvectionTerm`

Classes

<code>PowerLawConvectionTerm</code> ([coeff, var])	The discretization for this <i>Term</i> is given by
--	---

`class fipy.terms.powerLawConvectionTerm.PowerLawConvectionTerm(coeff=1.0, var=None)`

Bases: `_AsymmetricConvectionTerm`

The discretization for this *Term* is given by

$$\int_V \nabla \cdot (\vec{u}\phi) dV \simeq \sum_f (\vec{n} \cdot \vec{u})_f \phi_f A_f$$

where $\phi_f = \alpha_f \phi_P + (1 - \alpha_f) \phi_A$ and α_f is calculated using the power law scheme. For further details see [Numerical Schemes](#).

Create a `_AbstractConvectionTerm` object.

```
>>> from fipy import *
>>> m = Grid1D(nx = 2)
>>> cv = CellVariable(mesh = m)
>>> fv = FaceVariable(mesh = m)
>>> vcv = CellVariable(mesh=m, rank=1)
>>> vfv = FaceVariable(mesh=m, rank=1)
>>> __ConvectionTerm(coeff = cv)
Traceback (most recent call last):
...
VectorCoeffrror: The coefficient must be a vector value.
>>> __ConvectionTerm(coeff = fv)
Traceback (most recent call last):
...
VectorCoeffrror: The coefficient must be a vector value.
>>> __ConvectionTerm(coeff = vcv)
__ConvectionTerm(coeff=_ArithmeticCellToFaceVariable(value=array([[ 0.,  0.,  0.]]),
               mesh=UniformGrid1D(dx=1.0, nx=2)))
>>> __ConvectionTerm(coeff = vfv)
__ConvectionTerm(coeff=FaceVariable(value=array([[ 0.,  0.,  0.]]), 
               mesh=UniformGrid1D(dx=1.0, nx=2)))
>>> __ConvectionTerm(coeff = (1,))
__ConvectionTerm(coeff=(1,))
>>> ExplicitUpwindConvectionTerm(coeff = (0,)).solve(var=cv, solver=DummySolver())
Traceback (most recent call last):
...
TransientTermError: The equation requires a TransientTerm with explicit convection.
>>> (TransientTerm(0.) - ExplicitUpwindConvectionTerm(coeff = (0,))).solve(var=cv,
   solver=DummySolver(), dt=1.)
```

```
>>> (TransientTerm() - ExplicitUpwindConvectionTerm(coeff = 1)).solve(var=cv,
   solver=DummySolver(), dt=1.)
Traceback (most recent call last):
...
VectorCoeffrror: The coefficient must be a vector value.
>>> m2 = Grid2D(nx=2, ny=1)
>>> cv2 = CellVariable(mesh=m2)
>>> vcv2 = CellVariable(mesh=m2, rank=1)
>>> vfv2 = FaceVariable(mesh=m2, rank=1)
>>> __ConvectionTerm(coeff=vcv2)
__ConvectionTerm(coeff=_ArithmeticCellToFaceVariable(value=array([[ 0.,  0.,  0.,  0.,
                    [ 0.,  0.,  0.,  0.,  0.,  0.]]), mesh=UniformGrid2D(dx=1.0, nx=2, dy=1.
                   0., ny=1)))
>>> __ConvectionTerm(coeff=vfv2)
__ConvectionTerm(coeff=FaceVariable(value=array([[ 0.,  0.,  0.,  0.,  0.,  0.,
                    [ 0.,  0.,  0.,  0.,  0.,  0.]]), mesh=UniformGrid2D(dx=1.0, nx=2, dy=1.
                   0., ny=1)))
>>> (TransientTerm() - ExplicitUpwindConvectionTerm(coeff = ((0,), (0,)))).
```

(continues on next page)

(continued from previous page)

```
→solve(var=cv2, solver=DummySolver(), dt=1.)
>>> (TransientTerm() - ExplicitUpwindConvectionTerm(coeff = (0, 0))).solve(var=cv2,_
→solver=DummySolver(), dt=1.)
```

Parameters**coeff** (The *Term*'s coefficient value.) –**property RHSvector**

Return the RHS vector calculated in *solve()* or *sweep()*. The *cacheRHSvector()* method should be called before *solve()* or *sweep()* to cache the vector.

__eq__(other)

Return self==value.

__hash__()

Return hash(self).

__mul__(other)

Multiply a term

```
>>> 2. * __NonDiffusionTerm(coeff=0.5)
__NonDiffusionTerm(coeff=1.0)
```

Test for ticket:291.

```
>>> from fipy import PowerLawConvectionTerm
>>> PowerLawConvectionTerm(coeff=[[1], [0]]) * 1.0
PowerLawConvectionTerm(coeff=array([[ 1.],
[ 0.]]))
```

__neg__()

Negate a *Term*.

```
>>> -__NonDiffusionTerm(coeff=1.)
__NonDiffusionTerm(coeff=-1.0)
```

__repr__()

The representation of a *Term* object is given by,

```
>>> print(__UnaryTerm(123.456))
__UnaryTerm(coeff=123.456)
```

__rmul__(other)

Multiply a term

```
>>> 2. * __NonDiffusionTerm(coeff=0.5)
__NonDiffusionTerm(coeff=1.0)
```

Test for ticket:291.

```
>>> from fipy import PowerLawConvectionTerm
>>> PowerLawConvectionTerm(coeff=[[1], [0]]) * 1.0
```

(continues on next page)

(continued from previous page)

```
PowerLawConvectionTerm(coeff=array([[ 1.],
[ 0.]]))
```

cacheMatrix()

Informs `solve()` and `sweep()` to cache their matrix so that `matrix` can return the matrix.

cacheRHSvector()

Informs `solve()` and `sweep()` to cache their right hand side vector so that `getRHSvector()` can return it.

justErrorVector(var=None, solver=None, boundaryConditions=(), dt=1.0, underRelaxation=None, residualFn=None)

Builds the `Term`'s linear system once.

This method also recalculates and returns the error as well as applying under-relaxation.

justErrorVector returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy.solvers import DummySolver
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(DiffusionTerm().justErrorVector(v, solver=DummySolver())) == m.
->numberOfCells
True
```

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (`function`) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

`error` – The residual vector $\vec{e} = \mathbf{L}\vec{x}_{\text{old}} - \vec{b}$

Return type

`CellVariable`

justResidualVector(var=None, solver=None, boundaryConditions=(), dt=None, underRelaxation=None, residualFn=None)

Builds the `Term`'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

justResidualVector returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(numerix.asarray(DiffusionTerm().justResidualVector(v))) == m.
->numberofCells
True
```

Parameters

- **var** ([CellVariable](#)) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** ([Solver](#)) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** ([tuple](#) of [BoundaryCondition](#)) –
- **dt** ([float](#)) – Timestep size.
- **underRelaxation** ([float](#)) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** ([function](#)) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

residual – The residual vector $\vec{r} = \mathcal{L}\vec{x} - \vec{b}$

Return type

[CellVariable](#)

property matrix

Return the matrix calculated in *solve()* or *sweep()*. The *cacheMatrix()* method should be called before *solve()* or *sweep()* to cache the matrix.

residualVectorAndNorm(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*)

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** ([CellVariable](#)) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** ([Solver](#)) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** ([tuple](#) of [BoundaryCondition](#)) –
- **dt** ([float](#)) – Timestep size.
- **underRelaxation** ([float](#)) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** ([function](#)) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

- **residual** (`~fipy.variables.cellVariable.CellVariable`) – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$
- **norm** (`float`) – The L2 norm of *residual*, $\|\vec{r}\|_2$

solve(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*)

Builds and solves the *Term*'s linear system once. This method does not return the residual. It should be used when the residual is not required.

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.

sweep(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*, *cacheResidual=False*, *cacheError=False*)

Builds and solves the *Term*'s linear system once. This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (`function`) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.
- **cacheResidual** (`bool`) – If *True*, calculate and store the residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$ in the *residualVector* member of *Term*
- **cacheError** (`bool`) – If *True*, use the residual vector \vec{r} to solve $\mathbf{L}\vec{e} = \vec{r}$ for the error vector \vec{e} and store it in the *errorVector* member of *Term*

Returns

residual – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$

Return type

`CellVariable`

22.6.25 fipy.terms.residualTerm

Classes

`ResidualTerm`(equation[, underRelaxation])

The *ResidualTerm* is a special form of explicit *SourceTerm* that adds the residual of one equation to another equation.

```
class fipy.terms.residualTerm.ResidualTerm(equation, underRelaxation=1.0)
```

Bases: `_ExplicitSourceTerm`

The *ResidualTerm* is a special form of explicit *SourceTerm* that adds the residual of one equation to another equation. Useful for Newton's method.

Parameters

- `coeff` (`float` or `CellVariable`) – Coefficient of source (default: 0)
- `var` (`CellVariable`) – Variable ϕ that *SourceTerm* is implicit in.

property `RHSvector`

Return the RHS vector calculated in `solve()` or `sweep()`. The `cacheRHSvector()` method should be called before `solve()` or `sweep()` to cache the vector.

`__eq__(other)`

Return `self==value`.

`__hash__()`

Return `hash(self)`.

`__mul__(other)`

Multiply a term

```
>>> 2. * __NonDiffusionTerm(coeff=0.5)
__NonDiffusionTerm(coeff=1.0)
```

Test for ticket:291.

```
>>> from fipy import PowerLawConvectionTerm
>>> PowerLawConvectionTerm(coeff=[[1], [0]]) * 1.0
PowerLawConvectionTerm(coeff=array([[ 1.],
       [ 0.]]))
```

`__neg__()`

Negate a *Term*.

```
>>> -__NonDiffusionTerm(coeff=1.)
__NonDiffusionTerm(coeff=-1.0)
```

`__repr__()`

The representation of a *Term* object is given by,

```
>>> print(__UnaryTerm(123.456))
__UnaryTerm(coeff=123.456)
```

__rmul__(other)

Multiply a term

```
>>> 2. * __NonDiffusionTerm(coeff=0.5)
__NonDiffusionTerm(coeff=1.0)
```

Test for ticket:291.

```
>>> from fipy import PowerLawConvectionTerm
>>> PowerLawConvectionTerm(coeff=[[1, [0]]]) * 1.0
PowerLawConvectionTerm(coeff=array([[ 1.],
[ 0.]]))
```

cacheMatrix()

Informs *solve()* and *sweep()* to cache their matrix so that *matrix* can return the matrix.

cacheRHSvector()

Informs *solve()* and *sweep()* to cache their right hand side vector so that *getRHSvector()* can return it.

justErrorVector(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=1.0*, *underRelaxation=None*, *residualFn=None*)

Builds the *Term*'s linear system once.

This method also recalculates and returns the error as well as applying under-relaxation.

justErrorVector returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy.solvers import DummySolver
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(DiffusionTerm().justErrorVector(v, solver=DummySolver())) == m.
->numberOfCells
True
```

Parameters

- **var** (*CellVariable*) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (*Solver*) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (*tuple* of *BoundaryCondition*) –
- **dt** (*float*) – Timestep size.
- **underRelaxation** (*float*) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (*function*) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

error – The residual vector $\vec{e} = \mathbf{L}\vec{x}_{\text{old}} - \vec{b}$

Return type

CellVariable

justResidualVector(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*)

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

justResidualVector returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(numerix.asarray(DiffusionTerm().justResidualVector(v))) == m.
->numberOfCells
True
```

Parameters

- **var** (*CellVariable*) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (*Solver*) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (*tuple* of *BoundaryCondition*) –
- **dt** (*float*) – Timestep size.
- **underRelaxation** (*float*) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (*function*) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

residual – The residual vector $\vec{r} = \mathcal{L}\vec{x} - \vec{b}$

Return type

CellVariable

property matrix

Return the matrix calculated in *solve()* or *sweep()*. The *cacheMatrix()* method should be called before *solve()* or *sweep()* to cache the matrix.

residualVectorAndNorm(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*)

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** (*CellVariable*) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (*Solver*) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (*tuple* of *BoundaryCondition*) –
- **dt** (*float*) – Timestep size.

- **underRelaxation** (*float*) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (*function*) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

- **residual** (*~fipy.variables.cellVariable.CellVariable*) – The residual vector $\vec{r} = L\vec{x} - \vec{b}$
- **norm** (*float*) – The L2 norm of *residual*, $\|\vec{r}\|_2$

solve(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*)

Builds and solves the *Term*'s linear system once. This method does not return the residual. It should be used when the residual is not required.

Parameters

- **var** (*CellVariable*) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (*Solver*) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (*tuple* of *BoundaryCondition*) –
- **dt** (*float*) – Timestep size.

sweep(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*, *cacheResidual=False*, *cacheError=False*)

Builds and solves the *Term*'s linear system once. This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** (*CellVariable*) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (*Solver*) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (*tuple* of *BoundaryCondition*) –
- **dt** (*float*) – Timestep size.
- **underRelaxation** (*float*) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (*function*) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.
- **cacheResidual** (*bool*) – If *True*, calculate and store the residual vector $\vec{r} = L\vec{x} - \vec{b}$ in the *residualVector* member of *Term*
- **cacheError** (*bool*) – If *True*, use the residual vector \vec{r} to solve $L\vec{e} = \vec{r}$ for the error vector \vec{e} and store it in the *errorVector* member of *Term*

Returns

residual – The residual vector $\vec{r} = L\vec{x} - \vec{b}$

Return type

CellVariable

22.6.26 fipy.terms.sourceTerm

Classes

SourceTerm([coeff, var])

Attention:
This
class
is
ab-
stract.
Al-
ways
cre-
ate
one
of
its
sub-
classes.

class `fipy.terms.sourceTerm.SourceTerm(coeff=0.0, var=None)`

Bases: `CellTerm`

Attention: This class is abstract. Always create one of its subclasses.

Parameters

- `coeff` (`float` or `CellVariable`) – Coefficient of source (default: 0)
- `var` (`CellVariable`) – Variable ϕ that `SourceTerm` is implicit in.

`property RHSvector`

Return the RHS vector calculated in `solve()` or `sweep()`. The `cacheRHSvector()` method should be called before `solve()` or `sweep()` to cache the vector.

`__eq__(other)`

Return `self==value`.

`__hash__()`

Return `hash(self)`.

`__mul__(other)`

Multiply a term

```
>>> 2. * __NonDiffusionTerm(coeff=0.5)
__NonDiffusionTerm(coeff=1.0)
```

Test for ticket:291.

```
>>> from fipy import PowerLawConvectionTerm
>>> PowerLawConvectionTerm(coeff=[[1], [0]]) * 1.0
PowerLawConvectionTerm(coeff=array([[ 1.],
       [ 0.]]))
```

__neg__()

Negate a *Term*.

```
>>> -__NonDiffusionTerm(coeff=1.)
__NonDiffusionTerm(coeff=-1.0)
```

__repr__()

The representation of a *Term* object is given by,

```
>>> print(__UnaryTerm(123.456))
__UnaryTerm(coeff=123.456)
```

__rmul__(other)

Multiply a term

```
>>> 2. * __NonDiffusionTerm(coeff=0.5)
__NonDiffusionTerm(coeff=1.0)
```

Test for ticket:291.

```
>>> from fipy import PowerLawConvectionTerm
>>> PowerLawConvectionTerm(coeff=[[1], [0]]) * 1.0
PowerLawConvectionTerm(coeff=array([[ 1.],
       [ 0.]]))
```

cacheMatrix()

Informs *solve()* and *sweep()* to cache their matrix so that *matrix* can return the matrix.

cacheRHSvector()

Informs *solve()* and *sweep()* to cache their right hand side vector so that *getRHSvector()* can return it.

justErrorVector(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=1.0*, *underRelaxation=None*, *residualFn=None*)

Builds the *Term*'s linear system once.

This method also recalculates and returns the error as well as applying under-relaxation.

justErrorVector returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy.solvers import DummySolver
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(DiffusionTerm().justErrorVector(v, solver=DummySolver())) == m.
->numberofCells
True
```

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (`function`) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

error – The residual vector $\vec{e} = \mathbf{L}\vec{x}_{\text{old}} - \vec{b}$

Return type

`CellVariable`

justResidualVector(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*)

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

justResidualVector returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(numerix.asarray(DiffusionTerm().justResidualVector(v))) == m.
->numberofCells
True
```

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (`function`) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

residual – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$

Return type

`CellVariable`

property matrix

Return the matrix calculated in `solve()` or `sweep()`. The `cacheMatrix()` method should be called before `solve()` or `sweep()` to cache the matrix.

residualVectorAndNorm(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*)

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (`function`) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

- **residual** (~`fipy.variables.cellVariable.CellVariable`) – The residual vector $\vec{r} = L\vec{x} - \vec{b}$
- **norm** (`float`) – The L2 norm of *residual*, $\|\vec{r}\|_2$

solve(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*)

Builds and solves the *Term*'s linear system once. This method does not return the residual. It should be used when the residual is not required.

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.

sweep(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*, *cacheResidual=False*, *cacheError=False*)

Builds and solves the *Term*'s linear system once. This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –

- **dt** (*float*) – Timestep size.
- **underRelaxation** (*float*) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (*function*) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.
- **cacheResidual** (*bool*) – If *True*, calculate and store the residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$ in the *residualVector* member of *Term*
- **cacheError** (*bool*) – If *True*, use the residual vector \vec{r} to solve $\mathbf{L}\vec{e} = \vec{r}$ for the error vector \vec{e} and store it in the *errorVector* member of *Term*

Returns

residual – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$

Return type

CellVariable

22.6.27 `fipy.terms.term`

Classes

Term([coeff, var])

Attention:
This
class
is
ab-
stract.
Al-
ways
cre-
ate
one
of
its
sub-
classes.

class `fipy.terms.term.Term(coeff=1.0, var=None)`

Bases: `object`

Attention: This class is abstract. Always create one of its subclasses.

Create a *Term*.

Parameters

coeff (*float* or *CellVariable* or *FaceVariable*) – Coefficient for the term. *FaceVariable* objects are only acceptable for diffusion or convection terms.

property RHSvector

Return the RHS vector calculated in *solve()* or *sweep()*. The *cacheRHSvector()* method should be called before *solve()* or *sweep()* to cache the vector.

__eq__(other)

Return self==value.

__hash__()

Return hash(self).

__repr__()

Return repr(self).

cacheMatrix()

Informs *solve()* and *sweep()* to cache their matrix so that *matrix* can return the matrix.

cacheRHSvector()

Informs *solve()* and *sweep()* to cache their right hand side vector so that *getRHSvector()* can return it.

justErrorVector(var=None, solver=None, boundaryConditions=(), dt=1.0, underRelaxation=None, residualFn=None)

Builds the *Term*'s linear system once.

This method also recalculates and returns the error as well as applying under-relaxation.

justErrorVector returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy.solvers import DummySolver
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(DiffusionTerm().justErrorVector(v, solver=DummySolver())) == m.
->numberOfCells
True
```

Parameters

- **var** (*CellVariable*) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (*Solver*) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (*tuple* of *BoundaryCondition*) –
- **dt** (*float*) – Timestep size.
- **underRelaxation** (*float*) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (*function*) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

error – The residual vector $\vec{e} = \mathbf{L}\vec{x}_{\text{old}} - \vec{b}$

Return type

CellVariable

justResidualVector(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*)

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

justResidualVector returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(numerix.asarray(DiffusionTerm().justResidualVector(v))) == m.
->numberOfCells
True
```

Parameters

- **var** (*CellVariable*) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (*Solver*) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (*tuple* of *BoundaryCondition*) –
- **dt** (*float*) – Timestep size.
- **underRelaxation** (*float*) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (*function*) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

residual – The residual vector $\vec{r} = \mathcal{L}\vec{x} - \vec{b}$

Return type

CellVariable

property matrix

Return the matrix calculated in *solve()* or *sweep()*. The *cacheMatrix()* method should be called before *solve()* or *sweep()* to cache the matrix.

residualVectorAndNorm(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*)

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** (*CellVariable*) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (*Solver*) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (*tuple* of *BoundaryCondition*) –
- **dt** (*float*) – Timestep size.

- **underRelaxation** (*float*) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (*function*) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

- **residual** (*~fipy.variables.cellVariable.CellVariable*) – The residual vector $\vec{r} = L\vec{x} - \vec{b}$
- **norm** (*float*) – The L2 norm of *residual*, $\|\vec{r}\|_2$

solve(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*)

Builds and solves the *Term*'s linear system once. This method does not return the residual. It should be used when the residual is not required.

Parameters

- **var** (*CellVariable*) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (*Solver*) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (*tuple* of *BoundaryCondition*) –
- **dt** (*float*) – Timestep size.

sweep(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*, *cacheResidual=False*, *cacheError=False*)

Builds and solves the *Term*'s linear system once. This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** (*CellVariable*) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (*Solver*) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (*tuple* of *BoundaryCondition*) –
- **dt** (*float*) – Timestep size.
- **underRelaxation** (*float*) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (*function*) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.
- **cacheResidual** (*bool*) – If *True*, calculate and store the residual vector $\vec{r} = L\vec{x} - \vec{b}$ in the *residualVector* member of *Term*
- **cacheError** (*bool*) – If *True*, use the residual vector \vec{r} to solve $L\vec{e} = \vec{r}$ for the error vector \vec{e} and store it in the *errorVector* member of *Term*

Returns

residual – The residual vector $\vec{r} = L\vec{x} - \vec{b}$

Return type

CellVariable

22.6.28 fipy.terms.test

22.6.29 fipy.terms.transientTerm

Classes

`TransientTerm([coeff, var])`

The *TransientTerm* represents

`class fipy.terms.transientTerm.TransientTerm(coeff=1.0, var=None)`

Bases: `CellTerm`

The *TransientTerm* represents

$$\int_V \frac{\partial(\rho\phi)}{\partial t} dV \simeq \frac{(\rho_P\phi_P - \rho_P^{\text{old}}\phi_P^{\text{old}})V_P}{\Delta t}$$

where ρ is the *coeff* value.

The following test case verifies that variable coefficients and old coefficient values work correctly. We will solve the following equation

$$\frac{\partial\phi^2}{\partial t} = k.$$

The analytic solution is given by

$$\phi = \sqrt{\phi_0^2 + kt},$$

where ϕ_0 is the initial value.

```
>>> phi0 = 1.
>>> k = 1.
>>> dt = 1.
>>> relaxationFactor = 1.5
>>> steps = 2
>>> sweeps = 8
```

```
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx = 1)
>>> from fipy.variables.cellVariable import CellVariable
>>> var = CellVariable(mesh = mesh, value = phi0, hasOld = 1)
>>> from fipy.terms.transientTerm import TransientTerm
>>> from fipy.terms.implicitSourceTerm import ImplicitSourceTerm
```

Relaxation, given by *relaxationFactor*, is required for a converged solution.

```
>>> eq = TransientTerm(var) == ImplicitSourceTerm(-relaxationFactor) \
... + var * relaxationFactor + k
```

A number of sweeps at each time step are required to let the relaxation take effect.

```
>>> from builtins import range
>>> for step in range(steps):
...     var.updateOld()
...     for sweep in range(sweeps):
...         eq.solve(var, dt = dt)
```

Compare the final result with the analytical solution.

```
>>> from fipy.tools import numerix
>>> print(var.allclose(numerix.sqrt(k * dt * steps + phi0**2)))
1
```

Create a *Term*.

Parameters

`coeff (float or CellVariable or FaceVariable)` – Coefficient for the term. *FaceVariable* objects are only acceptable for diffusion or convection terms.

property RHSvector

Return the RHS vector calculated in *solve()* or *sweep()*. The *cacheRHSvector()* method should be called before *solve()* or *sweep()* to cache the vector.

__eq__(other)

Return self==value.

__hash__()

Return hash(self).

__mul__(other)

Multiply a term

```
>>> 2. * __NonDiffusionTerm(coeff=0.5)
__NonDiffusionTerm(coeff=1.0)
```

Test for ticket:291.

```
>>> from fipy import PowerLawConvectionTerm
>>> PowerLawConvectionTerm(coeff=[[1, [0]]) * 1.0
PowerLawConvectionTerm(coeff=array([[ 1.],
[ 0.]]))
```

__neg__()

Negate a *Term*.

```
>>> -__NonDiffusionTerm(coeff=1.)
__NonDiffusionTerm(coeff=-1.0)
```

__repr__()

The representation of a *Term* object is given by,

```
>>> print(__UnaryTerm(123.456))
__UnaryTerm(coeff=123.456)
```

__rmul__(other)

Multiply a term

```
>>> 2. * __NonDiffusionTerm(coeff=0.5)
__NonDiffusionTerm(coeff=1.0)
```

Test for ticket:291.

```
>>> from fipy import PowerLawConvectionTerm
>>> PowerLawConvectionTerm(coeff=[[1], [0]]) * 1.0
PowerLawConvectionTerm(coeff=array([[ 1.],
[ 0.]]))
```

cacheMatrix()

Informs *solve()* and *sweep()* to cache their matrix so that *matrix* can return the matrix.

cacheRHSvector()

Informs *solve()* and *sweep()* to cache their right hand side vector so that *getRHSvector()* can return it.

justErrorVector(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=1.0*, *underRelaxation=None*, *residualFn=None*)

Builds the *Term*'s linear system once.

This method also recalculates and returns the error as well as applying under-relaxation.

justErrorVector returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy.solvers import DummySolver
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(DiffusionTerm().justErrorVector(v, solver=DummySolver())) == m.
->numberOfCells
True
```

Parameters

- **var** (*CellVariable*) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (*Solver*) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (*tuple* of *BoundaryCondition*) –
- **dt** (*float*) – Timestep size.
- **underRelaxation** (*float*) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (*function*) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

error – The residual vector $\vec{e} = \mathbf{L}\vec{x}_{\text{old}} - \vec{b}$

Return type

CellVariable

justResidualVector(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*)

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

justResidualVector returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(numerix.asarray(DiffusionTerm().justResidualVector(v))) == m.
->numberofCells
True
```

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (`function`) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

residual – The residual vector $\vec{r} = \mathcal{L}\vec{x} - \vec{b}$

Return type

`CellVariable`

property matrix

Return the matrix calculated in *solve()* or *sweep()*. The *cacheMatrix()* method should be called before *solve()* or *sweep()* to cache the matrix.

residualVectorAndNorm(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*)

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (`function`) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

- **residual** (`~fipy.variables.cellVariable.CellVariable`) – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$
- **norm** (`float`) – The L2 norm of *residual*, $\|\vec{r}\|_2$

solve(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*)

Builds and solves the *Term*'s linear system once. This method does not return the residual. It should be used when the residual is not required.

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.

sweep(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*, *cacheResidual=False*, *cacheError=False*)

Builds and solves the *Term*'s linear system once. This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple` of `BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (`function`) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.
- **cacheResidual** (`bool`) – If *True*, calculate and store the residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$ in the *residualVector* member of *Term*
- **cacheError** (`bool`) – If *True*, use the residual vector \vec{r} to solve $\mathbf{L}\vec{e} = \vec{r}$ for the error vector \vec{e} and store it in the *errorVector* member of *Term*

Returns

residual – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$

Return type

`CellVariable`

22.6.30 fipy.terms.unaryTerm

22.6.31 fipy.terms.upwindConvectionTerm

Classes

`UpwindConvectionTerm([coeff, var])`

The discretization for this `Term` is given by

```
class fipy.terms.upwindConvectionTerm.UpwindConvectionTerm(coeff=1.0, var=None)
```

Bases: `_AbstractUpwindConvectionTerm`

The discretization for this `Term` is given by

$$\int_V \nabla \cdot (\vec{u}\phi) dV \simeq \sum_f (\vec{n} \cdot \vec{u})_f \phi_f A_f$$

where $\phi_f = \alpha_f \phi_P + (1 - \alpha_f) \phi_A$ and α_f is calculated using the upwind convection scheme. For further details see [Numerical Schemes](#).

Create a `_AbstractConvectionTerm` object.

```
>>> from fipy import *
>>> m = Grid1D(nx = 2)
>>> cv = CellVariable(mesh = m)
>>> fv = FaceVariable(mesh = m)
>>> vcv = CellVariable(mesh=m, rank=1)
>>> vfv = FaceVariable(mesh=m, rank=1)
>>> __ConvectionTerm(coeff = cv)
Traceback (most recent call last):
...
VectorCoeffError: The coefficient must be a vector value.
>>> __ConvectionTerm(coeff = fv)
Traceback (most recent call last):
...
VectorCoeffError: The coefficient must be a vector value.
>>> __ConvectionTerm(coeff = vcv)
__ConvectionTerm(coeff=_ArithmeticCellToFaceVariable(value=array([[ 0.,  0.,  0.]]), 
    ↪ mesh=UniformGrid1D(dx=1.0, nx=2)))
>>> __ConvectionTerm(coeff = vfv)
__ConvectionTerm(coeff=FaceVariable(value=array([[ 0.,  0.,  0.]]), 
    ↪ mesh=UniformGrid1D(dx=1.0, nx=2)))
>>> __ConvectionTerm(coeff = (1,))
__ConvectionTerm(coeff=(1,))
>>> ExplicitUpwindConvectionTerm(coeff = (0,)).solve(var=cv, solver=DummySolver())
Traceback (most recent call last):
...
TransientTermError: The equation requires a TransientTerm with explicit convection.
>>> (TransientTerm(0.) - ExplicitUpwindConvectionTerm(coeff = (0,))).solve(var=cv, 
    ↪ solver=DummySolver(), dt=1.)
>>> (TransientTerm() - ExplicitUpwindConvectionTerm(coeff = 1)).solve(var=cv, 
    ↪ solver=DummySolver(), dt=1.)
```

(continues on next page)

(continued from previous page)

```
Traceback (most recent call last):
...
VectorCoeffError: The coefficient must be a vector value.
>>> m2 = Grid2D(nx=2, ny=1)
>>> cv2 = CellVariable(mesh=m2)
>>> vcv2 = CellVariable(mesh=m2, rank=1)
>>> vfv2 = FaceVariable(mesh=m2, rank=1)
>>> __ConvectionTerm(coeff=vcv2)
__ConvectionTerm(coeff=_ArithmeticCellToFaceVariable(value=array([[ 0.,  0.,  0.,
- 0.,  0.,  0.,  0.],
       [ 0.,  0.,  0.,  0.,  0.,  0.,  0.]]), mesh=UniformGrid2D(dx=1.0, nx=2, dy=1.
- 0, ny=1)))
>>> __ConvectionTerm(coeff=vfv2)
__ConvectionTerm(coeff=FaceVariable(value=array([[ 0.,  0.,  0.,  0.,  0.,  0.,  0.,
- 0.],
       [ 0.,  0.,  0.,  0.,  0.,  0.,  0.]]), mesh=UniformGrid2D(dx=1.0, nx=2, dy=1.
- 0, ny=1)))
>>> (TransientTerm() - ExplicitUpwindConvectionTerm(coeff = ((0,), (0,)))).solve(var=cv2, solver=DummySolver(), dt=1.)
>>> (TransientTerm() - ExplicitUpwindConvectionTerm(coeff = (0, 0))).solve(var=cv2, solver=DummySolver(), dt=1.)
```

Parameters

coeff (The *Term*'s coefficient value.) —

property RHSvector

Return the RHS vector calculated in `solve()` or `sweep()`. The `cacheRHSvector()` method should be called before `solve()` or `sweep()` to cache the vector.

--eq--(other)

Return self==value.

hash ()

Return hash(self).

mul (other)

Multiply a term

```
>>> 2. * __NonDiffusionTerm(coeff=0.5)  
__NonDiffusionTerm(coeff=1.0)
```

Test for ticket:291.

```
>>> from fipy import PowerLawConvectionTerm
>>> PowerLawConvectionTerm(coeff=[[1], [0]]) * 1.0
PowerLawConvectionTerm(coeff=array([[ 1.],
                                     [ 0.]]))
```

neg ()

Negate a *Term*.

```
>>> -__NonDiffusionTerm(coef=1.)  
NonDiffusionTerm(coef=-1.0)
```

`__repr__()`

The representation of a *Term* object is given by,

```
>>> print(__UnaryTerm(123.456))
__UnaryTerm(coeff=123.456)
```

`__rmul__(other)`

Multiply a term

```
>>> 2. * __NonDiffusionTerm(coeff=0.5)
__NonDiffusionTerm(coeff=1.0)
```

Test for ticket:291.

```
>>> from fipy import PowerLawConvectionTerm
>>> PowerLawConvectionTerm(coeff=[[1, [0]]) * 1.0
PowerLawConvectionTerm(coeff=array([[ 1.],
       [ 0.]]))
```

`cacheMatrix()`

Informs *solve()* and *sweep()* to cache their matrix so that *matrix* can return the matrix.

`cacheRHsvector()`

Informs *solve()* and *sweep()* to cache their right hand side vector so that *getRHsvector()* can return it.

`justErrorVector(var=None, solver=None, boundaryConditions=(), dt=1.0, underRelaxation=None, residualFn=None)`

Builds the *Term*'s linear system once.

This method also recalculates and returns the error as well as applying under-relaxation.

justErrorVector returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy.solvers import DummySolver
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(DiffusionTerm().justErrorVector(v, solver=DummySolver())) == m.
...numberofCells
True
```

Parameters

- **`var (CellVariable)`** – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **`solver (Solver)`** – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **`boundaryConditions (tuple of BoundaryCondition)`** –
- **`dt (float)`** – Timestep size.
- **`underRelaxation (float)`** – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **`residualFn (function)`** – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

error – The residual vector $\vec{e} = \mathbf{L}\vec{x}_{\text{old}} - \vec{b}$

Return type

CellVariable

justResidualVector(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*)

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

justResidualVector returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(numerix.asarray(DiffusionTerm().justResidualVector(v))) == m.
...numberofCells
True
```

Parameters

- **var** (*CellVariable*) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (*Solver*) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (*tuple of BoundaryCondition*) –
- **dt** (*float*) – Timestep size.
- **underRelaxation** (*float*) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (*function*) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

residual – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$

Return type

CellVariable

property matrix

Return the matrix calculated in *solve()* or *sweep()*. The *cacheMatrix()* method should be called before *solve()* or *sweep()* to cache the matrix.

residualVectorAndNorm(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*)

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** (*CellVariable*) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.

- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple of BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or `None` in the case of no under-relaxation
- **residualFn** (`function`) – Takes `var`, `matrix`, and `RHSvector` arguments, used to customize the residual calculation.

Returns

- **residual** (`~fipy.variables.cellVariable.CellVariable`) – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$
- **norm** (`float`) – The L2 norm of `residual`, $\|\vec{r}\|_2$

solve(`var=None`, `solver=None`, `boundaryConditions=()`, `dt=None`)

Builds and solves the *Term*'s linear system once. This method does not return the residual. It should be used when the residual is not required.

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple of BoundaryCondition`) –
- **dt** (`float`) – Timestep size.

sweep(`var=None`, `solver=None`, `boundaryConditions=()`, `dt=None`, `underRelaxation=None`, `residualFn=None`, `cacheResidual=False`, `cacheError=False`)

Builds and solves the *Term*'s linear system once. This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (`tuple of BoundaryCondition`) –
- **dt** (`float`) – Timestep size.
- **underRelaxation** (`float`) – Usually a value between 0 and 1 or `None` in the case of no under-relaxation
- **residualFn** (`function`) – Takes `var`, `matrix`, and `RHSvector` arguments, used to customize the residual calculation.
- **cacheResidual** (`bool`) – If `True`, calculate and store the residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$ in the `residualVector` member of `Term`
- **cacheError** (`bool`) – If `True`, use the residual vector \vec{r} to solve $\mathbf{L}\vec{e} = \vec{r}$ for the error vector \vec{e} and store it in the `errorVector` member of `Term`

Returns

residual – The residual vector $\vec{r} = \mathcal{L}\vec{x} - \vec{b}$

Return type

`CellVariable`

22.6.32 `fipy.terms.vanLeerConvectionTerm`

Classes

`VanLeerConvectionTerm`([coeff, var])

Create a `_AbstractConvectionTerm` object.

`class fipy.terms.vanLeerConvectionTerm.VanLeerConvectionTerm(coeff=1.0, var=None)`

Bases: `ExplicitUpwindConvectionTerm`

Create a `_AbstractConvectionTerm` object.

```
>>> from fipy import *
>>> m = Grid1D(nx = 2)
>>> cv = CellVariable(mesh = m)
>>> fv = FaceVariable(mesh = m)
>>> vcv = CellVariable(mesh=m, rank=1)
>>> vfv = FaceVariable(mesh=m, rank=1)
>>> __ConvectionTerm(coeff = cv)
Traceback (most recent call last):
...
VectorCoeffError: The coefficient must be a vector value.
>>> __ConvectionTerm(coeff = fv)
Traceback (most recent call last):
...
VectorCoeffError: The coefficient must be a vector value.
>>> __ConvectionTerm(coeff = vcv)
__ConvectionTerm(coeff=_ArithmeticCellToFaceVariable(value=array([[ 0.,  0.,  0.])),
    ↪ mesh=UniformGrid1D(dx=1.0, nx=2)))
>>> __ConvectionTerm(coeff = vfv)
__ConvectionTerm(coeff=FaceVariable(value=array([[ 0.,  0.,  0.]]), ↪
    ↪ mesh=UniformGrid1D(dx=1.0, nx=2)))
>>> __ConvectionTerm(coeff = (1,))
__ConvectionTerm(coeff=(1,))
>>> ExplicitUpwindConvectionTerm(coeff = (0,)).solve(var=cv, solver=DummySolver())
Traceback (most recent call last):
...
TransientTermError: The equation requires a TransientTerm with explicit convection.
>>> (TransientTerm(0.) - ExplicitUpwindConvectionTerm(coeff = (0,))).solve(var=cv, ↪
    ↪ solver=DummySolver(), dt=1.)
```

```
>>> (TransientTerm() - ExplicitUpwindConvectionTerm(coeff = 1)).solve(var=cv, ↪
    ↪ solver=DummySolver(), dt=1.)
Traceback (most recent call last):
...
```

VectorCoeffError: The coefficient must be a vector value.

(continues on next page)

(continued from previous page)

```
>>> m2 = Grid2D(nx=2, ny=1)
>>> cv2 = CellVariable(mesh=m2)
>>> vcv2 = CellVariable(mesh=m2, rank=1)
>>> vfv2 = FaceVariable(mesh=m2, rank=1)
>>> __ConvectionTerm(coef=vcv2)
__ConvectionTerm(coef=_ArithmetricCellToFaceVariable(value=array([[ 0.,  0.,  0.,
   -0.,  0.,  0.,  0.],
      [ 0.,  0.,  0.,  0.,  0.,  0.,  0.]]), mesh=UniformGrid2D(dx=1.0, nx=2, dy=1.
   -0., ny=1)))
>>> __ConvectionTerm(coef=vfv2)
__ConvectionTerm(coef=FaceVariable(value=array([[ 0.,  0.,  0.,  0.,  0.,  0.,  0.,
   -0.],
      [ 0.,  0.,  0.,  0.,  0.,  0.,  0.]]), mesh=UniformGrid2D(dx=1.0, nx=2, dy=1.
   -0., ny=1)))
>>> (TransientTerm() - ExplicitUpwindConvectionTerm(coef = ((0,), (0,)))._
  -solve(var=cv2, solver=DummySolver(), dt=1.))
>>> (TransientTerm() - ExplicitUpwindConvectionTerm(coef = (0, 0))).solve(var=cv2,_
  -solver=DummySolver(), dt=1.)
```

Parameters**coef** (The *Term*'s coefficient value.) –**property RHSvector**

Return the RHS vector calculated in *solve()* or *sweep()*. The *cacheRHSvector()* method should be called before *solve()* or *sweep()* to cache the vector.

__eq__(other)

Return self==value.

__hash__()

Return hash(self).

__mul__(other)

Multiply a term

```
>>> 2. * __NonDiffusionTerm(coef=0.5)
__NonDiffusionTerm(coef=1.0)
```

Test for ticket:291.

```
>>> from fipy import PowerLawConvectionTerm
>>> PowerLawConvectionTerm(coef=[[1], [0]]) * 1.0
PowerLawConvectionTerm(coef=array([[ 1.],
      [ 0.]]))
```

__neg__()

Negate a *Term*.

```
>>> -__NonDiffusionTerm(coef=1.)
__NonDiffusionTerm(coef=-1.0)
```

__repr__()

The representation of a *Term* object is given by,

```
>>> print(__UnaryTerm(123.456))
__UnaryTerm(coeff=123.456)
```

__rmul__(other)

Multiply a term

```
>>> 2. * __NonDiffusionTerm(coeff=0.5)  
__NonDiffusionTerm(coeff=1.0)
```

Test for ticket:291.

```
>>> from fipy import PowerLawConvectionTerm
>>> PowerLawConvectionTerm(coeff=[[1], [0]]) * 1.0
PowerLawConvectionTerm(coeff=array([[ 1.],
                                     [ 0.]]))
```

cacheMatrix()

Informs `solve()` and `sweep()` to cache their matrix so that `matrix` can return the matrix.

cacheRHSvector()

Informs `solve()` and `sweep()` to cache their right hand side vector so that `getRHSvector()` can return it.

```
justErrorVector(var=None, solver=None, boundaryConditions=(), dt=1.0, underRelaxation=None, residualFn=None)
```

Builds the *Term*'s linear system once.

This method also recalculates and returns the error as well as applying under-relaxation.

justErrorVector returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy.solvers import DummySolver
```

```
>>> from tipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(DiffusionTerm().justErrorVector(v, solver=DummySolver())) == m.
...~numberOfCells
True
```

Parameters

- **var** (`CellVariable`) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
 - **solver** (`Solver`) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
 - **boundaryConditions** (`tuple` of `BoundaryCondition`) –
 - **dt** (`float`) – Timestep size.
 - **underRelaxation** (`float`) – Usually a value between *0* and *1* or *None* in the case of no under-relaxation
 - **residualFn** (`function`) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

error – The residual vector $\vec{e} = \mathsf{L}\vec{x}_{\text{old}} - \vec{b}$

Return type

CellVariable

justResidualVector(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*)

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

justResidualVector returns the overlapping local value in parallel (not the non-overlapping value).

```
>>> from fipy import *
>>> m = Grid1D(nx=10)
>>> v = CellVariable(mesh=m)
>>> len(numerix.asarray(DiffusionTerm().justResidualVector(v))) == m.
...numberofCells
True
```

Parameters

- **var** (*CellVariable*) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (*Solver*) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (*tuple of BoundaryCondition*) –
- **dt** (*float*) – Timestep size.
- **underRelaxation** (*float*) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (*function*) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

residual – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$

Return type

CellVariable

property matrix

Return the matrix calculated in *solve()* or *sweep()*. The *cacheMatrix()* method should be called before *solve()* or *sweep()* to cache the matrix.

residualVectorAndNorm(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*)

Builds the *Term*'s linear system once.

This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** (*CellVariable*) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (*Solver*) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (*tuple of BoundaryCondition*) –

- **dt** (*float*) – Timestep size.
- **underRelaxation** (*float*) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (*function*) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.

Returns

- **residual** (~*fipy.variables.cellVariable.CellVariable*) – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$
- **norm** (*float*) – The L2 norm of *residual*, $\|\vec{r}\|_2$

solve(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*)

Builds and solves the *Term*'s linear system once. This method does not return the residual. It should be used when the residual is not required.

Parameters

- **var** (*CellVariable*) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (*Solver*) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (*tuple* of *BoundaryCondition*) –
- **dt** (*float*) – Timestep size.

sweep(*var=None*, *solver=None*, *boundaryConditions=()*, *dt=None*, *underRelaxation=None*, *residualFn=None*, *cacheResidual=False*, *cacheError=False*)

Builds and solves the *Term*'s linear system once. This method also recalculates and returns the residual as well as applying under-relaxation.

Parameters

- **var** (*CellVariable*) – *Variable* to be solved for. Provides the initial condition, the old value and holds the solution on completion.
- **solver** (*Solver*) – Iterative solver to be used to solve the linear system of equations. The default solver depends on the solver package selected.
- **boundaryConditions** (*tuple* of *BoundaryCondition*) –
- **dt** (*float*) – Timestep size.
- **underRelaxation** (*float*) – Usually a value between 0 and 1 or *None* in the case of no under-relaxation
- **residualFn** (*function*) – Takes *var*, *matrix*, and *RHSvector* arguments, used to customize the residual calculation.
- **cacheResidual** (*bool*) – If *True*, calculate and store the residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$ in the *residualVector* member of *Term*
- **cacheError** (*bool*) – If *True*, use the residual vector \vec{r} to solve $\mathbf{L}\vec{e} = \vec{r}$ for the error vector \vec{e} and store it in the *errorVector* member of *Term*

Returns

residual – The residual vector $\vec{r} = \mathbf{L}\vec{x} - \vec{b}$

Return type

CellVariable

22.7 fipy.testFiPy

Test suite for *FiPy* modules

22.8 fipy.tests

Unit testing scripts

Modules

<code>fipy.tests.doctestPlus</code>	
<code>fipy.tests.lateImportTest</code>	Classes to enable accumulating tests without importing them
<code>fipy.tests.test</code>	
<code>fipy.tests.testProgram</code>	

22.8.1 fipy.tests.doctestPlus

Functions

<code>execButNoTest([name])</code>	Execute the doctests in the module without testing.
<code>register_skipper(flag, test, why[, skipWarning])</code>	Create a new doctest option flag for skipping tests
<code>report_skips()</code>	Print out how many doctest examples were skipped due to flags
<code>testmod([m, name, globs, verbose, report, ...])</code>	Test examples in the given module.

`fipy.tests.doctestPlus.execButNoTest(name='__main__')`

Execute the doctests in the module without testing.

`fipy.tests.doctestPlus.register_skipper(flag, test, why, skipWarning=True)`

Create a new doctest option flag for skipping tests

Parameters

- `flag (str)` – Name of the option flag
- `test (function)` – A function which should return `True` if the test should be run
- `why (str)` – Explanation for why the test was skipped (to be used in a string “Skipped %%(%(count)d doctest examples because %(why)s”)
- `skipWarning (bool)` – Whether or not to report on tests skipped by this flag (default `True`)

`fipy.tests.doctestPlus.report_skips()`

Print out how many doctest examples were skipped due to flags

```
fipy.tests doctestPlus.testmod(m=None, name=None, globs=None, verbose=None, report=True,  
    optionflags=0, extraglobs=None, raise_on_error=False,  
    exclude_empty=False)
```

Test examples in the given module. Return (#failures, #tests).

Largely duplicated from [doctest.testmod\(\)](#), but using `_SelectiveDocTestParser`.

Test examples in docstrings in functions and classes reachable from module *m* (or the current module if *m* is not supplied), starting with *m.__doc__*.

Also test examples reachable from dict *m.__test__* if it exists and is not None. *m.__test__* maps names to functions, classes and strings; function and class docstrings are tested even if the name is private; strings are tested directly, as if they were docstrings.

Return (#failures, #tests).

See `help(doctest)` for an overview.

Optional keyword arg *name* gives the name of the module; by default use *m.__name__*.

Optional keyword arg *globs* gives a dict to be used as the globals when executing examples; by default, use *m.__dict__*. A copy of this dict is actually used for each docstring, so that each docstring's examples start with a clean slate.

Optional keyword arg *extraglobs* gives a dictionary that should be merged into the globals that are used to execute examples. By default, no extra globals are used. This is new in 2.4.

Optional keyword arg *verbose* prints lots of stuff if true, prints only failures if false; by default, it's true iff `-v` is in `sys.argv`.

Optional keyword arg *report* prints a summary at the end when true, else prints nothing at the end. In verbose mode, the summary is detailed, else very brief (in fact, empty if all tests passed).

Optional keyword arg *optionflags* or's together module constants, and defaults to 0. This is new in 2.3. Possible values (see the docs for details):

```
DONT_ACCEPT_TRUE_FOR_1  
DONT_ACCEPT_BLANKLINE  
NORMALIZE_WHITESPACE  
ELLIPSIS  
SKIP  
IGNORE_EXCEPTION_DETAIL  
REPORT_UDIFF  
REPORT_CDIFF  
REPORT_NDIFF  
REPORT_ONLY_FIRST_FAILURE
```

as well as FiPy's flags:

```
GMSH  
SCIPY  
TVTK  
SERIAL  
PARALLEL  
PROCESSOR_0  
PROCESSOR_0_OF_2  
PROCESSOR_1_OF_2  
PROCESSOR_0_OF_3
```

(continues on next page)

(continued from previous page)

PROCESSOR_1_OF_3
PROCESSOR_2_OF_3

Optional keyword arg “raise_on_error” raises an exception on the first unexpected exception or failure. This allows failures to be postmortem debugged.

22.8.2 fipy.tests.lateImportTest

Classes to enable accumulating tests without importing them

Prevent failure to import one test from stopping execution of other tests.

22.8.3 fipy.tests.test

Classes

<i>DeprecationErroringTestProgram</i> ([module, ...])	<i>TestProgram</i> that overrides inability of standard <i>TestProgram</i> to throw errors on <i>DeprecationWarning</i>
test (dist, **kw)	Construct the command for dist, updating vars(self) with any keyword parameters.

```
class fipy.tests.test.DeprecationErroringTestProgram(module='__main__', defaultTest=None,
                                                      argv=None, testRunner=None,
                                                      testLoader=<unittest.loader.TestLoader
                                                      object>, exit=True, verbosity=1, failfast=None,
                                                      catchbreak=None, buffer=None,
                                                      warnings=None, *, tb_locals=False)
```

Bases: *TestProgram*

TestProgram that overrides inability of standard *TestProgram* to throw errors on *DeprecationWarning*

```
class fipy.tests.test.test(dist, **kw)
```

Bases: *test*

Construct the command for dist, updating vars(self) with any keyword parameters.

finalize_options()

Set final values for all the options that this command supports. This is always called as late as possible, ie. after any option assignments from the command-line or from other commands have been done. Thus, this is the place to code option dependencies: if ‘foo’ depends on ‘bar’, then it is safe to set ‘foo’ from ‘bar’ as long as ‘foo’ still has the same value it was assigned in ‘initialize_options()’.

This method must be implemented by all command classes.

initialize_options()

Set default values for all the options that this command supports. Note that these defaults may be overridden by other commands, by the setup script, by config files, or by the command-line. Thus, this is not the place to code dependencies between options; generally, ‘initialize_options()’ implementations are just a bunch of “self.foo = None” assignments.

This method must be implemented by all command classes.

22.8.4 fipy.tests.testProgram

Classes

<code>TestProgram([module, defaultTest, argv, ...])</code>	A command-line program that runs a set of tests alias of <code>TestProgram</code>
--	--

```
class fipy.tests.testProgram.TestProgram(module='__main__', defaultTest=None, argv=None,
                                         testRunner=None, testLoader=<unittest.loader.TestLoader
                                         object>, exit=True, verbosity=1, failfast=None,
                                         catchbreak=None, buffer=None, warnings=None, *,
                                         tb_locals=False)
```

Bases: `TestProgram`

A command-line program that runs a set of tests

This is primarily for making test modules conveniently executable.

`fipy.tests.testProgram.main`

alias of `TestProgram`

22.9 fipy.tools

Utility modules, functions, and values

`fipy.tools.serialComm:` *CommWrapper*

Serial MPI communicator when running in parallel.

`fipy.tools.parallelComm:` *CommWrapper*

Parallel MPI communicator when running in parallel.

```
class fipy.tools.PhysicalField(value, unit=None, array=None)
```

Bases: `object`

Field or quantity with units.

Physical Fields can be constructed in one of two ways:

- `PhysicalField(*value*, *unit*)`, where `*value*` is a number of arbitrary type and `*unit*` is a string containing the unit name

```
>>> print(PhysicalField(value = 10., unit = 'm'))  
10.0 m
```

- `PhysicalField(*string*)`, where `*string*` contains both the value and the unit. This form is provided to make interactive use more convenient

```
>>> print(PhysicalField(value = "10. m"))  
10.0 m
```

Dimensionless quantities, with a *unit* of 1, can be specified in several ways

```
>>> print(PhysicalField(value = "1"))
1.0 1
>>> print(PhysicalField(value = 2., unit = ""))
2.0 1
>>> print(PhysicalField(value = 2.))
2.0 1
```

Physical arrays are also possible (and are the reason this code was adapted from Konrad Hinsen's original `PhysicalQuantity`). The `value` can be a `Numeric array`:

```
>>> a = numerix.array((3., 4.))
>>> print(PhysicalField(value = a, unit = "m"))
[[ 3.  4.]
 [ 5.  6.]] m
```

or a `tuple`:

```
>>> print(PhysicalField(value = ((3., 4.), (5., 6.)), unit = "m"))
[[ 3.  4.]
 [ 5.  6.]] m
```

or as a single value to be applied to every element of a supplied array:

```
>>> print(PhysicalField(value = 2., unit = "m", array = a))
[[ 2.  2.]
 [ 2.  2.]] m
```

Every element in an array has the same unit, which is stored only once for the whole array.

`__abs__()`

Return the absolute value of the quantity. The `unit` is unchanged.

```
>>> print(abs(PhysicalField((3., -2.), (-1., 4.)), 'm'))
[[ 3.  2.]
 [ 1.  4.]] m
```

`__add__(other)`

Add two physical quantities, so long as their units are compatible. The unit of the result is the unit of the first operand.

```
>>> print(PhysicalField(10., 'km') + PhysicalField(10., 'm'))
10.01 km
>>> print(PhysicalField(10., 'km') + PhysicalField(10., 'J'))
Traceback (most recent call last):
...
TypeError: Incompatible units
```

`__array__(t=None)`

Return a dimensionless `PhysicalField` as a `Numeric array`.

```
>>> print(numerix.array(PhysicalField((2., 3.), (4., 5.)), "m/m"))
[[ 2.  3.]
 [ 4.  5.]]
```

As a special case, fields with angular units are converted to base units (radians) and then assumed dimensionless.

```
>>> print(numerix.array(PhysicalField((2., 3.), (4., 5.)), "deg"))
[[ 0.03490659  0.05235988]
 [ 0.06981317  0.08726646]]
```

If the array is not dimensionless, the numerical value in its base units is returned.

```
>>> numerix.array(PhysicalField((2., 3.), (4., 5.)), "mm")
array([[ 0.002,  0.003],
       [ 0.004,  0.005]])
```

`__array_wrap__(arr, context=None)`

Required to prevent numpy not calling the reverse binary operations. Both the following tests are examples ufuncs.

```
>>> from fipy.tools.dimensions.physicalField import PhysicalField
>>> print(type(numerix.array([1.0, 2.0]) * PhysicalField([1.0, 2.0], unit="m")))
<class 'fipy.tools.dimensions.physicalField.PhysicalField'>
```

```
>>> print(type(numerix.array([1.0, 2.0]) * PhysicalField([1.0, 2.0])))
<class 'fipy.tools.dimensions.physicalField.PhysicalField'>
```

```
>>> from scipy.special import gamma as Gamma
>>> print(isinstance(Gamma(PhysicalField([1.0, 2.0])), type(numerix.array(1))))
1
```

`__bool__()`

Test if the quantity is zero.

Should this only pass if the unit offset is zero?

`__div__(other)`

Divide two physical quantities. The unit of the result is the unit of the first operand divided by the unit of the second.

```
>>> print(PhysicalField(10., 'm') / PhysicalField(2., 's'))
5.0 m/s
```

As a special case, if the result is dimensionless, the value is returned without units, rather than with a dimensionless unit of 1. This facilitates passing physical quantities to packages such as Numeric that cannot use units, while ensuring the quantities have the desired units

```
>>> print((PhysicalField(1., 'inch')
...         / PhysicalField(1., 'mm')))
25.4
```

`__eq__(other)`

Return self==value.

`__float__()`

Return a dimensionless *PhysicalField* quantity as a float.

```
>>> float(PhysicalField("2. m/m"))
2.0
```

As a special case, quantities with angular units are converted to base units (radians) and then assumed dimensionless.

```
>>> print(numerix.round(float(PhysicalField("2. deg")), 6))
0.034907
```

If the quantity is not dimensionless, the conversion fails.

```
>>> float(PhysicalField("2. m"))
Traceback (most recent call last):
...
TypeError: Not possible to convert a PhysicalField with dimensions to float
```

Just as a `Numeric array` cannot be cast to float, neither can `PhysicalField` arrays

```
>>> float(PhysicalField(((2., 3.), (4., 5.)), "m/m"))
Traceback (most recent call last):
...
TypeError: only ...-1 arrays can be converted to Python scalars
```

`__ge__(other)`

Return `self>=value`.

`__getitem__(index)`

Return the specified element of the array. The unit of the result will be the unit of the array.

```
>>> a = PhysicalField(((3., 4.), (5., 6.)), "m")
>>> print(a[1, 1])
6.0 m
```

`__gt__(other)`

Compare `self` to `other`, returning an array of Boolean values corresponding to the test against each element.

```
>>> a = PhysicalField(((3., 4.), (5., 6.)), "m")
>>> print(numerix.allclose(a > PhysicalField("13 ft"),
...                           [[False, True], [True, True]]))
True
```

Appropriately formatted dimensional quantity strings can also be compared.

```
>>> print(numerix.allclose(a > "13 ft",
...                           [[False, True], [True, True]]))
True
```

Arrays are compared element to element

```
>>> print(numerix.allclose(a > PhysicalField(((3., 13.), (17., 6.)), "ft"),
...                           [[True, True], [False, True]]))
True
```

Units must be compatible

```
>>> print(a > PhysicalField("1 lb"))
Traceback (most recent call last):
...
TypeError: Incompatible units
```

And so must array dimensions

```
>>> print(a > PhysicalField(((3., 13., 4.), (17., 6., 2.)), "ft"))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

`__hash__()`

Return hash(self).

`__le__(other)`

Return self<=value.

`__lt__(other)`

Return self<value.

`__mod__(other)`

Return the remainder of dividing two physical quantities. The unit of the result is the unit of the first operand divided by the unit of the second.

```
>>> print(PhysicalField(11., 'm') % PhysicalField(2., 's'))
1.0 m/s
```

`__mul__(other)`

Multiply two physical quantities. The unit of the result is the product of the units of the operands.

```
>>> print(PhysicalField(10., 'N') * PhysicalField(10., 'm') ==_
...PhysicalField(100., 'N*m'))
True
```

As a special case, if the result is dimensionless, the value is returned without units, rather than with a dimensionless unit of *l*. This facilitates passing physical quantities to packages such as Numeric that cannot use units, while ensuring the quantities have the desired units.

```
>>> print((PhysicalField(10., 's') * PhysicalField(2., 'Hz')))
20.0
```

`__ne__(other)`

Return self!=value.

`__neg__()`

Return the negative of the quantity. The *unit* is unchanged.

```
>>> print(-PhysicalField(((3., -2.), (-1., 4.)), 'm'))
[[[-3.  2.]
 [ 1. -4.]]] m
```

`__nonzero__()`

Test if the quantity is zero.

Should this only pass if the unit offset is zero?

[__pow__\(other\)](#)

Raise a *PhysicalField* to a power. The unit is raised to the same power.

```
>>> print(PhysicalField(10., 'm')**2)
100.0 m**2
```

[__radd__\(other\)](#)

Add two physical quantities, so long as their units are compatible. The unit of the result is the unit of the first operand.

```
>>> print(PhysicalField(10., 'km') + PhysicalField(10., 'm'))
10.01 km
>>> print(PhysicalField(10., 'km') + PhysicalField(10., 'J'))
Traceback (most recent call last):
...
TypeError: Incompatible units
```

[__repr__\(\)](#)

Return representation of a physical quantity suitable for re-use

```
>>> PhysicalField(value = 3., unit = "eV")
PhysicalField(3.0, 'eV')
```

[__rmul__\(other\)](#)

Multiply two physical quantities. The unit of the result is the product of the units of the operands.

```
>>> print(PhysicalField(10., 'N') * PhysicalField(10., 'm') ==_
PhysicalField(100., 'N*m'))
True
```

As a special case, if the result is dimensionless, the value is returned without units, rather than with a dimensionless unit of *I*. This facilitates passing physical quantities to packages such as Numeric that cannot use units, while ensuring the quantities have the desired units.

```
>>> print((PhysicalField(10., 's') * PhysicalField(2., 'Hz')))
20.0
```

[__setitem__\(index, value\)](#)

Assign the specified element of the array, performing appropriate conversions.

```
>>> a = PhysicalField(((3., 4.), (5., 6.)), "m")
>>> a[0, 1] = PhysicalField("6 ft")
>>> print(a)
[[ 3.      1.8288]
 [ 5.      6.      ]] m
>>> a[1, 0] = PhysicalField("2 min")
Traceback (most recent call last):
...
TypeError: Incompatible units
```

[__str__\(\)](#)

Return human-readable form of a physical quantity

```
>>> print(PhysicalField(value = 3., unit = "eV"))
3.0 eV
```

`__sub__(other)`

Subtract two physical quantities, so long as their units are compatible. The unit of the result is the unit of the first operand.

```
>>> print(PhysicalField(10., 'km') - PhysicalField(10., 'm'))
9.99 km
>>> print(PhysicalField(10., 'km') - PhysicalField(10., 'J'))
Traceback (most recent call last):
...
TypeError: Incompatible units
```

`__truediv__(other)`

Divide two physical quantities. The unit of the result is the unit of the first operand divided by the unit of the second.

```
>>> print(PhysicalField(10., 'm') / PhysicalField(2., 's'))
5.0 m/s
```

As a special case, if the result is dimensionless, the value is returned without units, rather than with a dimensionless unit of *l*. This facilitates passing physical quantities to packages such as [Numeric](#) that cannot use units, while ensuring the quantities have the desired units

```
>>> print((PhysicalField(1., 'inch')
...         / PhysicalField(1., 'mm')))
25.4
```

`add(other)`

Add two physical quantities, so long as their units are compatible. The unit of the result is the unit of the first operand.

```
>>> print(PhysicalField(10., 'km') + PhysicalField(10., 'm'))
10.01 km
>>> print(PhysicalField(10., 'km') + PhysicalField(10., 'J'))
Traceback (most recent call last):
...
TypeError: Incompatible units
```

`allclose(other, atol=None, rtol=1e-08)`

This function tests whether or not *self* and *other* are equal subject to the given relative and absolute tolerances. The formula used is:

```
| self - other | < atol + rtol * | other |
```

This means essentially that both elements are small compared to *atol* or their difference divided by *other*'s value is small compared to *rtol*.

`allequal(other)`

This function tests whether or not *self* and *other* are exactly equal.

`arccos()`

Return the inverse cosine of the *PhysicalField* in radians

```
>>> print(PhysicalField(0).arccos().allclose("1.57079632679 rad"))
1
```

The input *PhysicalField* must be dimensionless

```
>>> print(numerix.round(PhysicalField("1 m").arccos(), 6))
Traceback (most recent call last):
...
TypeError: Incompatible units
```

arccosh()

Return the inverse hyperbolic cosine of the *PhysicalField*

```
>>> print(numerix.allclose(PhysicalField(2).arccosh(),
...                           1.31695789692))
1
```

The input *PhysicalField* must be dimensionless

```
>>> print(numerix.round(PhysicalField("1. m").arccosh(), 6))
Traceback (most recent call last):
...
TypeError: Incompatible units
```

arcsin()

Return the inverse sine of the *PhysicalField* in radians

```
>>> print(PhysicalField(1).arcsin().allclose("1.57079632679 rad"))
1
```

The input *PhysicalField* must be dimensionless

```
>>> print(numerix.round(PhysicalField("1 m").arcsin(), 6))
Traceback (most recent call last):
...
TypeError: Incompatible units
```

arctan()

Return the arctangent of the *PhysicalField* in radians

```
>>> print(numerix.round(PhysicalField(1).arctan(), 6))
0.785398
```

The input *PhysicalField* must be dimensionless

```
>>> print(numerix.round(PhysicalField("1 m").arctan(), 6))
Traceback (most recent call last):
...
TypeError: Incompatible units
```

arctan2(*other*)

Return the arctangent of *self* divided by *other* in radians

```
>>> print(numerix.round(PhysicalField(2.).arctan2(PhysicalField(5.)), 6))
0.380506
```

The input *PhysicalField* objects must be in the same dimensions

```
>>> print(numerix.round(PhysicalField(2.54, "cm").arctan2(PhysicalField(1.,
    ↪"inch")), 6))
0.785398
```

```
>>> print(numerix.round(PhysicalField(2.).arctan2(PhysicalField("5. m")), 6))
Traceback (most recent call last):
...
TypeError: Incompatible units
```

arctanh()

Return the inverse hyperbolic tangent of the *PhysicalField*

```
>>> print(PhysicalField(0.5).arctanh())
0.549306144334
```

The input *PhysicalField* must be dimensionless

```
>>> print(numerix.round(PhysicalField("1 m").arctanh(), 6))
Traceback (most recent call last):
...
TypeError: Incompatible units
```

ceil()

Return the smallest integer greater than or equal to the *PhysicalField*.

```
>>> print(PhysicalField(2.2, "m").ceil())
3.0 m
```

conjugate()

Return the complex conjugate of the *PhysicalField*.

```
>>> print(PhysicalField(2.2 - 3j, "ohm").conjugate() == PhysicalField(2.2 + 3j,
    ↪"ohm"))
True
```

convertToUnit(*unit*)

Changes the unit to *unit* and adjusts the value such that the combination is equivalent. The new unit is by a string containing its name. The new unit must be compatible with the previous unit of the object.

```
>>> e = PhysicalField('2.7 Hartree*Nav')
>>> e.convertToUnit('kcal/mol')
>>> print(e)
1694.27557621 kcal/mol
```

copy()

Make a duplicate.

```
>>> a = PhysicalField(1, unit = 'inch')
>>> b = a.copy()
```

The duplicate will not reflect changes made to the original

```
>>> a.convertToUnit('cm')
>>> print(a)
2.54 cm
>>> print(b)
1 inch
```

Likewise for arrays

```
>>> a = PhysicalField(numerix.array((0, 1, 2)), unit = 'm')
>>> b = a.copy()
>>> a[0] = 3
>>> print(a)
[3 1 2] m
>>> print(b)
[0 1 2] m
```

`cos()`

Return the cosine of the *PhysicalField*

```
>>> print(numerix.round(PhysicalField(2*numerix.pi/6, "rad").cos(), 6))
0.5
>>> print(numerix.round(PhysicalField(60., "deg").cos(), 6))
0.5
```

The units of the *PhysicalField* must be an angle

```
>>> PhysicalField(60., "m").cos()
Traceback (most recent call last):
...
TypeError: Incompatible units
```

`cosh()`

Return the hyperbolic cosine of the *PhysicalField*

```
>>> PhysicalField(0.).cosh()
1.0
```

The units of the *PhysicalField* must be dimensionless

```
>>> PhysicalField(60., "m").cosh()
Traceback (most recent call last):
...
TypeError: Incompatible units
```

`divide(other)`

Divide two physical quantities. The unit of the result is the unit of the first operand divided by the unit of the second.

```
>>> print(PhysicalField(10., 'm') / PhysicalField(2., 's'))
5.0 m/s
```

As a special case, if the result is dimensionless, the value is returned without units, rather than with a dimensionless unit of *l*. This facilitates passing physical quantities to packages such as Numeric that cannot use units, while ensuring the quantities have the desired units

```
>>> print((PhysicalField(1., 'inch')
...         / PhysicalField(1., 'mm')))
25.4
```

`dot(other)`

Return the dot product of *self* with *other*. The resulting unit is the product of the units of *self* and *other*.

```
>>> v = PhysicalField(((5., 6.), (7., 8.)), "m")
>>> print(PhysicalField(((1., 2.), (3., 4.)), "m").dot(v))
[ 26.  44.] m**2
```

`floor()`

Return the largest integer less than or equal to the *PhysicalField*.

```
>>> print(PhysicalField(2.2, "m").floor())
2.0 m
```

`getSctype(default=None)`

Returns the NumPy sctype of the underlying array.

```
>>> PhysicalField(1, 'm').getSctype() == numerix.NUMERIX.obj2sctype(numerix.
...array(1))
True
>>> PhysicalField(1., 'm').getSctype() == numerix.NUMERIX.obj2sctype(numerix.
...array(1.))
True
>>> PhysicalField((1, 1.), 'm').getSctype() == numerix.NUMERIX.
...obj2sctype(numerix.array((1., 1.)))
True
```

`inBaseUnits()`

Return the quantity with all units reduced to their base SI elements.

```
>>> e = PhysicalField('2.7 Hartree*Nav')
>>> print(e.inBaseUnits().allclose("7088849.01085 kg*m**2/s**2/mol"))
1
```

`inDimensionless()`

Returns the numerical value of a dimensionless quantity.

```
>>> print(PhysicalField(((2., 3.), (4., 5.))).inDimensionless())
[[ 2.  3.]
 [ 4.  5.]]
```

It's an error to convert a quantity with units

```
>>> print(PhysicalField(((2., 3.), (4., 5.)), "m").inDimensionless())
Traceback (most recent call last):
...
TypeError: Incompatible units
```

inRadians()

Converts an angular quantity to radians and returns the numerical value.

```
>>> print(PhysicalField(((2., 3.), (4., 5.)), "rad").inRadians())
[[ 2.  3.]
 [ 4.  5.]]
>>> print(PhysicalField(((2., 3.), (4., 5.)), "deg").inRadians())
[[ 0.03490659  0.05235988]
 [ 0.06981317  0.08726646]]
```

As a special case, assumes a dimensionless quantity is already in radians.

```
>>> print(PhysicalField(((2., 3.), (4., 5.))).inRadians())
[[ 2.  3.]
 [ 4.  5.]]
```

It's an error to convert a quantity with non-angular units

```
>>> print(PhysicalField(((2., 3.), (4., 5.)), "m").inRadians())
Traceback (most recent call last):
...
TypeError: Incompatible units
```

inSIUnits()

Return the quantity with all units reduced to SI-compatible elements.

```
>>> e = PhysicalField('2.7 Hartree*Nav')
>>> print(e.inSIUnits().allclose("7088849.01085 kg*m**2/s**2/mol"))
1
```

inUnitsOf(*units)

Returns one or more *PhysicalField* objects that express the same physical quantity in different units. The units are specified by strings containing their names. The units must be compatible with the unit of the object. If one unit is specified, the return value is a single *PhysicalField*.

```
>>> freeze = PhysicalField('0 degC')
>>> print(freeze.inUnitsOf('degF').allclose("32.0 degF"))
1
```

If several units are specified, the return value is a tuple of *PhysicalField* instances with one element per unit such that the sum of all quantities in the tuple equals the the original quantity and all the values except for the last one are integers. This is used to convert to irregular unit systems like hour/minute/second. The original object will not be changed.

```
>>> t = PhysicalField(314159., 's')
>>> from builtins import zip
>>> print(numerix.allclose([e.allclose(v) for (e, v) in zip(t.inUnitsOf('d', 'h', 'min', 's'),
```

(continues on next page)

(continued from previous page)

```

...
      ↵'15.0 min', '59.0 s'])],
      True))
...
1

```

itemset(value)

Assign the value of a scalar array, performing appropriate conversions.

```

>>> a = PhysicalField(4., "m")
>>> a.itemset(PhysicalField("6 ft"))
>>> print(a.allclose("1.8288 m"))
1
>>> a = PhysicalField(((3., 4.), (5., 6.)), "m")
>>> try:
...     a.itemset(PhysicalField("6 ft"))
... except IndexError:
...     # NumPy 1.7 has changed the exception type
...     raise ValueError("can only place a scalar for an array of size 1")
Traceback (most recent call last):
...
ValueError: can only convert an array of size 1 to a Python scalar
>>> a.itemset(PhysicalField("2 min"))
Traceback (most recent call last):
...
TypeError: Incompatible units

```

log()

Return the natural logarithm of the *PhysicalField*

```

>>> print(numerix.round(PhysicalField(10).log(), 6))
2.302585

```

The input *PhysicalField* must be dimensionless

```

>>> print(numerix.round(PhysicalField("1. m").log(), 6))
Traceback (most recent call last):
...
TypeError: Incompatible units

```

log10()

Return the base-10 logarithm of the *PhysicalField*

```

>>> print(numerix.round(PhysicalField(10.).log10(), 6))
1.0

```

The input *PhysicalField* must be dimensionless

```

>>> print(numerix.round(PhysicalField("1. m").log10(), 6))
Traceback (most recent call last):
...
TypeError: Incompatible units

```

multiply(*other*)

Multiply two physical quantities. The unit of the result is the product of the units of the operands.

```
>>> print(PhysicalField(10., 'N') * PhysicalField(10., 'm') ==_
... PhysicalField(100., 'N*m'))
True
```

As a special case, if the result is dimensionless, the value is returned without units, rather than with a dimensionless unit of *I*. This facilitates passing physical quantities to packages such as Numeric that cannot use units, while ensuring the quantities have the desired units.

```
>>> print((PhysicalField(10., 's') * PhysicalField(2., 'Hz')))
20.0
```

property numericValue

Return the *PhysicalField* without units, after conversion to base SI units.

```
>>> print(numerix.round(PhysicalField("1 inch").numericValue, 6))
0.0254
```

put(*indices, values*)

put is the opposite of *take*. The values of *self* at the locations specified in *indices* are set to the corresponding value of *values*.

The *indices* can be any integer sequence object with values suitable for indexing into the flat form of *self*. The *values* must be any sequence of values that can be converted to the typecode of *self*.

```
>>> f = PhysicalField((1., 2., 3.), "m")
>>> f.put((2, 0), PhysicalField((2., 3.), "inch"))
>>> print(f)
[ 0.0762  2.       0.0508] m
```

The units of *values* must be compatible with *self*.

```
>>> f.put(1, PhysicalField(3, "kg"))
Traceback (most recent call last):
...
TypeError: Incompatible units
```

reshape(*shape*)

Changes the shape of *self* to that specified in *shape*

```
>>> print(PhysicalField((1., 2., 3., 4.), "m").reshape((2, 2)))
[[ 1.  2.]
 [ 3.  4.]] m
```

The new shape must have the same size as the existing one.

```
>>> print(PhysicalField((1., 2., 3., 4.), "m").reshape((2, 3)))
Traceback (most recent call last):
...
ValueError: total size of new array must be unchanged
```

property shape

Tuple of array dimensions.

sign()

Return the sign of the quantity. The *unit* is unchanged.

```
>>> from fipy.tools.numerix import sign
>>> print(sign(PhysicalField(((3., -2.), (-1., 4.)), 'm')))
[[ 1. -1.]
 [-1.  1.]]
```

sin()

Return the sine of the *PhysicalField*

```
>>> print(PhysicalField(numerix.pi/6, "rad").sin())
0.5
>>> print(PhysicalField(30., "deg").sin())
0.5
```

The units of the *PhysicalField* must be an angle

```
>>> PhysicalField(30., "m").sin()
Traceback (most recent call last):
...
TypeError: Incompatible units
```

sinh()

Return the hyperbolic sine of the *PhysicalField*

```
>>> PhysicalField(0.).sinh()
0.0
```

The units of the *PhysicalField* must be dimensionless

```
>>> PhysicalField(60., "m").sinh()
Traceback (most recent call last):
...
TypeError: Incompatible units
```

sqrt()

Return the square root of the *PhysicalField*

```
>>> print(PhysicalField("100. m**2").sqrt())
10.0 m
```

The resulting unit must be integral

```
>>> print(PhysicalField("100. m").sqrt())
Traceback (most recent call last):
...
TypeError: Illegal exponent
```

subtract(*other*)

Subtract two physical quantities, so long as their units are compatible. The unit of the result is the unit of the first operand.

```
>>> print(PhysicalField(10., 'km') - PhysicalField(10., 'm'))
9.99 km
>>> print(PhysicalField(10., 'km') - PhysicalField(10., 'J'))
Traceback (most recent call last):
...
TypeError: Incompatible units
```

sum(*index=0*)

Returns the sum of all of the elements in *self* along the specified axis (first axis by default).

```
>>> print(PhysicalField(((1., 2.), (3., 4.)), "m").sum())
[ 4.  6.] m
>>> print(PhysicalField(((1., 2.), (3., 4.)), "m").sum(1))
[ 3.  7.] m
```

take(*indices, axis=0*)

Return the elements of *self* specified by the elements of *indices*. The resulting *PhysicalField* array has the same units as the original.

```
>>> print(PhysicalField((1., 2., 3.), "m").take((2, 0)))
[ 3.  1.] m
```

The optional third argument specifies the axis along which the selection occurs, and the default value (as in the example above) is 0, the first axis.

```
>>> print(PhysicalField(((1., 2., 3.), (4., 5., 6.)), "m").take((2, 0), axis = 1))
[[ 3.  1.]
 [ 6.  4.]] m
```

tan()

Return the tangent of the *PhysicalField*

```
>>> numerix.round(PhysicalField(numerix.pi/4, "rad").tan(), 6)
1.0
>>> numerix.round(PhysicalField(45, "deg").tan(), 6)
1.0
```

The units of the *PhysicalField* must be an angle

```
>>> PhysicalField(45., "m").tan()
Traceback (most recent call last):
...
TypeError: Incompatible units
```

tanh()

Return the hyperbolic tangent of the *PhysicalField*

```
>>> print(numerix.allclose(PhysicalField(1.).tanh(), 0.761594155956))
True
```

The units of the *PhysicalField* must be dimensionless

```
>>> PhysicalField(60., "m").tanh()
Traceback (most recent call last):
...
TypeError: Incompatible units
```

tostring(*max_line_width=75, precision=8, suppress_small=False, separator=' '*)

Return human-readable form of a physical quantity

```
>>> p = PhysicalField(value = (3., 3.14159), unit = "eV")
>>> print(p.tostring(precision = 3, separator = '|'))
[ 3. | 3.142] eV
```

property unit

Return the unit object of *self*.

```
>>> PhysicalField("1 m").unit
<PhysicalUnit m>
```

fipy.tools.SharedTemporaryFile(*mode='w+b', buffering=-1, encoding=None, newline=None, suffix='', prefix='tmp', dir=None, delete=True, communicator=DummyComm()*)

Create a temporary file shared by all MPI ranks.

The file is created as *NamedTemporaryFile* would do it. The name of the returned file-like object is accessible as its *name* attribute. The file will be automatically deleted when it is closed unless the *delete* argument is set to False.

```
>>> from fipy.tools import SharedTemporaryFile, parallelComm
>>> with SharedTemporaryFile(mode='w+', suffix=".tmp") as tmpFile:
...     # write on processor 0
...     if parallelComm.procID == 0:
...         _ = tmpFile.write("shared text")
...
...     parallelComm.Barrier()
...
...     # read on all processors
...     _ = tmpFile.seek(0)
...     txt = tmpFile.read()
>>> print(txt)
shared text
```

Parameters

- **prefix** (*str*) – As for `mkstemp`
- **suffix** (*str*) – As for `mkstemp`
- **dir** (*str*) – As for `mkstemp`
- **mode** (*str*) – The mode argument to `io.open` (default “w+b”)
- **buffering** (*int*) – The buffer size argument to `io.open` (default -1)
- **encoding** (*str or None*) – The encoding argument to `io.open` (default `None`)
- **newline** (*str or None*) – The newline argument to `io.open` (default `None`)
- **delete** (*bool*) – Whether the file is deleted on close (default `True`)

- **communicator** ([CommWrapper](#)) – MPI communicator describing ranks to share with. A duck-typed object with *procID* and *Nproc* attributes is sufficient.

Return type

file-like object

See also:

`tempfile.NamedTemporaryFile`, `tempfile.mkstemp`, `io.open`

class fipy.tools.Vitals

Bases: `Document`

Returns XML formatted information about current FiPy environment

__str__()

Return str(self).

appendInfo(name, svnpath=None, **kwargs)

append some additional information, possibly about a project under a separate svn repository

property documentElement

Top-level element of this document.

property firstChild

First child node, or None.

property lastChild

Last child node, or None.

property localName

Namespace-local name of this node.

Modules

<code>fipy.tools.comms</code>	
<code>fipy.tools.debug</code>	
<code>fipy.tools.decorators</code>	
<code>fipy.tools.dimensions</code>	
<code>fipy.tools.dump</code>	
<code>fipy.tools.inline</code>	
<code>fipy.tools.logging</code>	
<code>fipy.tools.numerix</code>	Replacement module for NumPy
<code>fipy.tools.parser</code>	
<code>fipy.tools.sharedtempfile</code>	This module provides a generic, high-level interface for creating shared temporary files.
<code>fipy.tools.test</code>	
<code>fipy.tools.vector</code>	Vector utility functions that are inexplicably absent from Numeric
<code>fipy.tools.version</code>	Shim for version checking
<code>fipy.tools.vitals</code>	

22.9.1 `fipy.tools.comms`

Modules

<code>fipy.tools.comms.commWrapper</code>	
<code>fipy.tools.comms.dummyComm</code>	

`fipy.tools.comms.commWrapper`

Classes

<code>CommWrapper()</code>	MPI Communicator wrapper
----------------------------	--------------------------

`class fipy.tools.comms.commWrapper.CommWrapper`

Bases: `object`

MPI Communicator wrapper

Encapsulates capabilities needed for possibly parallel operations. Some capabilities are not parallel.

`__getstate__()`

Helper for pickle.

`__repr__()`

Return repr(self).

fipy.tools.comms.dummyComm

Classes

`DummyComm()`

`class fipy.tools.comms.dummyComm.DummyComm`

Bases: `CommWrapper`

`__getstate__()`

Helper for pickle.

`__repr__()`

Return repr(self).

22.9.2 fipy.tools.debug

Functions

`PRINT(label[, arg, stall])`

Display *label* and *arg* on each MPI rank.

`fipy.tools.debug.PRINT(label, arg='', stall=True)`

Display *label* and *arg* on each MPI rank.

Annotate with rank number. If *stall* is true, ensure all ranks print before proceeding.

22.9.3 fipy.tools.decorators

Functions

`deprecate(*args, **kwargs)`

Issues a generic *DeprecationWarning*.

`fipy.tools.decorators.deprecate(*args, **kwargs)`

Issues a generic *DeprecationWarning*.

This function may also be used as a decorator.

Parameters

- **func** (*function*) – The function to be deprecated.

- **old_name** (*str*, *optional*) – The name of the function to be deprecated. Default is None, in which case the name of *func* is used.
- **new_name** (*str*, *optional*) – The new name for the function. Default is None, in which case the deprecation message is that *old_name* is deprecated. If given, the deprecation message is that *old_name* is deprecated and *new_name* should be used instead.
- **message** (*str*, *optional*) – Additional explanation of the deprecation. Displayed in the docstring after the warning.

Returns

old_func – The deprecated function.

Return type

function

22.9.4 fipy.tools.dimensions

Modules

`fipy.tools.dimensions.DictWithDefault`

`fipy.tools.dimensions.NumberDict`

`fipy.tools.dimensions.physicalField` Physical quantities with units.

fipy.tools.dimensions.DictWithDefault

fipy.tools.dimensions.NumberDict

fipy.tools.dimensions.physicalField

Physical quantities with units.

This module derives from Konrad Hinsen’s `PhysicalQuantity` <<http://dirac.cnrs-orleans.fr/ScientificPython/>>.

This module provides a data type that represents a physical quantity together with its unit. It is possible to add and subtract these quantities if the units are compatible, and a quantity can be converted to another compatible unit. Multiplication, subtraction, and raising to integer powers is allowed without restriction, and the result will have the correct unit. A quantity can be raised to a non-integer power only if the result can be represented by integer powers of the base units.

The values of physical constants are taken from the 2002 recommended values from CODATA. Other conversion factors (e.g. for British units) come from Appendix B of NIST Special Publication 811.

Warning: We can’t guarantee for the correctness of all entries in the unit table, so use this at your own risk!

Base SI units:

`m, kg, s, A, K, mol, cd, rad, sr`

SI prefixes:

```

Y = 1e+24
Z = 1e+21
E = 1e+18
P = 1e+15
T = 1e+12
G = 1e+09
M = 1e+06
k = 1000
h = 100
da = 10
d = 0.1
c = 0.01
m = 0.001
mu = 1e-06
n = 1e-09
p = 1e-12
f = 1e-15
a = 1e-18
z = 1e-21
y = 1e-24

```

Units derived from SI (accepting SI prefixes):

```

1 Bq = 1 1/s
1 C = 1 s*A
1 degC = 1 K
1 F = 1 s***4*A***2/m***2/kg
1 Gy = 1 m***2/s***2
1 H = 1 m***2*kg/s***2/A***2
1 Hz = 1 1/s
1 J = 1 m***2*kg/s***2
1 lm = 1 cd*sr
1 lx = 1 cd*sr/m***2
1 N = 1 m*kg/s***2
1 ohm = 1 m***2*kg/s***3/A***2
1 Pa = 1 kg/m/s***2
1 S = 1 s***3*A***2/m***2/kg
1 Sv = 1 m***2/s***2
1 T = 1 kg/s***2/A
1 V = 1 m***2*kg/s***3/A
1 W = 1 m***2*kg/s***3
1 Wb = 1 m***2*kg/s***2/A

```

Other units that accept SI prefixes:

```
1 eV = 1.60217653e-19 m***2*kg/s***2
```

Additional units and constants:

```

1 acres = 4046.8564224 m***2
1 amu = 1.6605402e-27 kg
1 Ang = 1e-10 m
1 atm = 101325.0 kg/m/s***2

```

(continues on next page)

(continued from previous page)

```

1 b = 1e-28 m
1 bar = 100000.0 kg/m/s**2
1 Bohr = 5.291772081145378e-11 m
1 Btui = 1055.05585262 m**2*kg/s**2
1 c = 299792458.0 m/s
1 cal = 4.184 m**2*kg/s**2
1 cali = 4.1868 m**2*kg/s**2
1 cl = 1.0000000000000003e-05 m**3
1 cup = 0.00023658825600000004 m**3
1 d = 86400.0 s
1 deg = 0.017453292519943295 rad
1 degF = 0.5555555555555556 K
1 degR = 0.5555555555555556 K
1 dl = 0.00010000000000000003 m**3
1 dyn = 1e-05 m*kg/s**2
1 e = 1.60217653e-19 s*A
1 eps0 = 8.85418781762039e-12 s**4*A**2/m**3/kg
1 erg = 1e-07 m**2*kg/s**2
1 floz = 2.9573532000000005e-05 m**3
1 ft = 0.3048 m
1 g = 0.001 kg
1 galUK = 0.004546090000000002 m**3
1 galUS = 0.003785412096000006 m**3
1 gn = 9.80665 m/s**2
1 Grav = 6.6742e-11 m**3/kg/s**2
1 h = 3600.0 s
1 ha = 10000.0 m**2
1 Hartree = 4.35974417680088e-18 m**2*kg/s**2
1 hbar = 1.0545716823644548e-34 m**2*kg/s
1 hpEl = 746.0 m**2*kg/s**3
1 hplanck = 6.6260693e-34 m**2*kg/s
1 hpUK = 745.7 m**2*kg/s**3
1 inch = 0.02540000000000002 m
1 invcm = 1.9864456023253395e-23 m**2*kg/s**2
1 kB = 1.3806505e-23 m**2*kg/s**2/K
1 kcal = 4184.0 m**2*kg/s**2
1 kcali = 4186.8 m**2*kg/s**2
1 Ken = 1.3806505e-23 m**2*kg/s**2
1 l = 0.001000000000000002 m**3
1 lb = 0.45359237 kg
1 lyr = 9460730472580800.0 m
1 me = 9.1093826e-31 kg
1 mi = 1609.344 m
1 min = 60.0 s
1 ml = 1.000000000000002e-06 m**3
1 mp = 1.67262171e-27 kg
1 mu0 = 1.2566370614359173e-06 m*kg/s**2/A**2
1 Nav = 6.0221415e+23 1/mol
1 nmi = 1852.0 m
1 oz = 0.028349523125 kg
1 psi = 6894.75729316836 kg/m/s**2
1 pt = 0.000473176512000001 m**3

```

(continues on next page)

(continued from previous page)

```

1 qt = 0.0009463530240000002 m**3
1 tbsp = 1.4786766000000002e-05 m**3
1 ton = 907.18474 kg
1 Torr = 133.32236842105263 kg/m/s**2
1 tsp = 4.9289220000000005e-06 m**3
1 wk = 604800.0 s
1 yd = 0.9144000000000001 m
1 yr = 31536000.0 s
1 yrJul = 31557600.0 s
1 yrSid = 31558152.959999997 s

```

Classes

<code>PhysicalField</code> (value[, unit, array])	Field or quantity with units.
<code>PhysicalUnit</code> (names, factor, powers[, offset])	The units of a <code>PhysicalField</code> .

`class fipy.tools.dimensions.physicalField.PhysicalField(value, unit=None, array=None)`

Bases: `object`

Field or quantity with units.

Physical Fields can be constructed in one of two ways:

- `PhysicalField(*value*, *unit*)`, where `*value*` is a number of arbitrary type and `*unit*` is a string containing the unit name

```
>>> print(PhysicalField(value = 10., unit = 'm'))
10.0 m
```

- `PhysicalField(*string*)`, where `*string*` contains both the value and the unit. This form is provided to make interactive use more convenient

```
>>> print(PhysicalField(value = "10. m"))
10.0 m
```

Dimensionless quantities, with a `unit` of 1, can be specified in several ways

```
>>> print(PhysicalField(value = "1"))
1.0 1
>>> print(PhysicalField(value = 2., unit = " "))
2.0 1
>>> print(PhysicalField(value = 2.))
2.0 1
```

Physical arrays are also possible (and are the reason this code was adapted from Konrad Hinsen's original `PhysicalQuantity`). The `value` can be a `Numeric array`:

```
>>> a = numerix.array(((3., 4.), (5., 6.)))
>>> print(PhysicalField(value = a, unit = "m"))
[[ 3.  4.]
 [ 5.  6.]] m
```

or a *tuple*:

```
>>> print(PhysicalField(value = ((3., 4.), (5., 6.)), unit = "m"))
[[ 3.  4.]
 [ 5.  6.]] m
```

or as a single value to be applied to every element of a supplied array:

```
>>> print(PhysicalField(value = 2., unit = "m", array = a))
[[ 2.  2.]
 [ 2.  2.]] m
```

Every element in an array has the same unit, which is stored only once for the whole array.

`__abs__()`

Return the absolute value of the quantity. The *unit* is unchanged.

```
>>> print(abs(PhysicalField(((3., -2.), (-1., 4.)), 'm')))
[[ 3.  2.]
 [ 1.  4.]] m
```

`__add__(other)`

Add two physical quantities, so long as their units are compatible. The unit of the result is the unit of the first operand.

```
>>> print(PhysicalField(10., 'km') + PhysicalField(10., 'm'))
10.01 km
>>> print(PhysicalField(10., 'km') + PhysicalField(10., 'J'))
Traceback (most recent call last):
...
TypeError: Incompatible units
```

`__array__(t=None)`

Return a dimensionless *PhysicalField* as a [Numeric array](#).

```
>>> print(numerix.array(PhysicalField(((2., 3.), (4., 5.)), "m/m")))
[[ 2.  3.]
 [ 4.  5.]]
```

As a special case, fields with angular units are converted to base units (radians) and then assumed dimensionless.

```
>>> print(numerix.array(PhysicalField(((2., 3.), (4., 5.)), "deg")))
[[ 0.03490659  0.05235988]
 [ 0.06981317  0.08726646]]
```

If the array is not dimensionless, the numerical value in its base units is returned.

```
>>> numerix.array(PhysicalField(((2., 3.), (4., 5.)), "mm"))
array([[ 0.002,  0.003],
       [ 0.004,  0.005]])
```

`__array_wrap__(arr, context=None)`

Required to prevent numpy not calling the reverse binary operations. Both the following tests are examples ufuncs.

```
>>> from fipy.tools.dimensions.physicalField import PhysicalField
>>> print(type(numerix.array([1.0, 2.0]) * PhysicalField([1.0, 2.0], unit="m")))
<class 'fipy.tools.dimensions.physicalField.PhysicalField'>
```

```
>>> print(type(numerix.array([1.0, 2.0]) * PhysicalField([1.0, 2.0])))
<class 'fipy.tools.dimensions.physicalField.PhysicalField'>
```

```
>>> from scipy.special import gamma as Gamma
>>> print(isinstance(Gamma(PhysicalField([1.0, 2.0])), type(numerix.array(1))))
1
```

`__bool__()`

Test if the quantity is zero.

Should this only pass if the unit offset is zero?

`__div__(other)`

Divide two physical quantities. The unit of the result is the unit of the first operand divided by the unit of the second.

```
>>> print(PhysicalField(10., 'm') / PhysicalField(2., 's'))
5.0 m/s
```

As a special case, if the result is dimensionless, the value is returned without units, rather than with a dimensionless unit of *I*. This facilitates passing physical quantities to packages such as Numeric that cannot use units, while ensuring the quantities have the desired units

```
>>> print((PhysicalField(1., 'inch')
...         / PhysicalField(1., 'mm')))
25.4
```

`__eq__(other)`

Return self==value.

`__float__()`

Return a dimensionless *PhysicalField* quantity as a float.

```
>>> float(PhysicalField("2. m/m"))
2.0
```

As a special case, quantities with angular units are converted to base units (radians) and then assumed dimensionless.

```
>>> print(numerix.round(float(PhysicalField("2. deg")), 6))
0.034907
```

If the quantity is not dimensionless, the conversion fails.

```
>>> float(PhysicalField("2. m"))
Traceback (most recent call last):
...
TypeError: Not possible to convert a PhysicalField with dimensions to float
```

Just as a Numeric *array* cannot be cast to float, neither can *PhysicalField* arrays

```
>>> float(PhysicalField(((2., 3.), (4., 5.)), "m/m"))
Traceback (most recent call last):
...
TypeError: only ...-1 arrays can be converted to Python scalars
```

__ge__(other)

Return self>=value.

__getitem__(index)

Return the specified element of the array. The unit of the result will be the unit of the array.

```
>>> a = PhysicalField(((3., 4.), (5., 6.)), "m")
>>> print(a[1, 1])
6.0 m
```

__gt__(other)

Compare *self* to *other*, returning an array of Boolean values corresponding to the test against each element.

```
>>> a = PhysicalField(((3., 4.), (5., 6.)), "m")
>>> print(numerix.allclose(a > PhysicalField("13 ft"),
...                           [[False, True], [True, True]]))
True
```

Appropriately formatted dimensional quantity strings can also be compared.

```
>>> print(numerix.allclose(a > "13 ft",
...                           [[False, True], [True, True]]))
True
```

Arrays are compared element to element

```
>>> print(numerix.allclose(a > PhysicalField(((3., 13.), (17., 6.)), "ft"),
...                           [[True, True], [False, True]]))
True
```

Units must be compatible

```
>>> print(a > PhysicalField("1 lb"))
Traceback (most recent call last):
...
TypeError: Incompatible units
```

And so must array dimensions

```
>>> print(a > PhysicalField(((3., 13., 4.), (17., 6., 2.)), "ft"))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

__hash__()

Return hash(self).

__le__(other)

Return self<=value.

__lt__(other)

Return self<value.

__mod__(other)

Return the remainder of dividing two physical quantities. The unit of the result is the unit of the first operand divided by the unit of the second.

```
>>> print(PhysicalField(11., 'm') % PhysicalField(2., 's'))
1.0 m/s
```

__mul__(other)

Multiply two physical quantities. The unit of the result is the product of the units of the operands.

```
>>> print(PhysicalField(10., 'N') * PhysicalField(10., 'm') ==_
PhysicalField(100., 'N*m'))
True
```

As a special case, if the result is dimensionless, the value is returned without units, rather than with a dimensionless unit of *l*. This facilitates passing physical quantities to packages such as Numeric that cannot use units, while ensuring the quantities have the desired units.

```
>>> print((PhysicalField(10., 's') * PhysicalField(2., 'Hz')))
20.0
```

__ne__(other)

Return self!=value.

__neg__()

Return the negative of the quantity. The *unit* is unchanged.

```
>>> print(-PhysicalField((3., -2.), (-1., 4.)), 'm'))
[[-3.  2.]
 [ 1. -4.]] m
```

__nonzero__()

Test if the quantity is zero.

Should this only pass if the unit offset is zero?

__pow__(other)

Raise a *PhysicalField* to a power. The unit is raised to the same power.

```
>>> print(PhysicalField(10., 'm')**2)
100.0 m**2
```

__radd__(other)

Add two physical quantities, so long as their units are compatible. The unit of the result is the unit of the first operand.

```
>>> print(PhysicalField(10., 'km') + PhysicalField(10., 'm'))
10.01 km
>>> print(PhysicalField(10., 'km') + PhysicalField(10., 'J'))
Traceback (most recent call last):
...
TypeError: Incompatible units
```

__repr__()

Return representation of a physical quantity suitable for re-use

```
>>> PhysicalField(value = 3., unit = "eV")
PhysicalField(3.0, 'eV')
```

__rmul__(other)

Multiply two physical quantities. The unit of the result is the product of the units of the operands.

```
>>> print(PhysicalField(10., 'N') * PhysicalField(10., 'm') ==_
...PhysicalField(100., 'N*m'))
True
```

As a special case, if the result is dimensionless, the value is returned without units, rather than with a dimensionless unit of *l*. This facilitates passing physical quantities to packages such as Numeric that cannot use units, while ensuring the quantities have the desired units.

```
>>> print((PhysicalField(10., 's') * PhysicalField(2., 'Hz')))
20.0
```

__setitem__(index, value)

Assign the specified element of the array, performing appropriate conversions.

```
>>> a = PhysicalField((3., 4.), (5., 6.)), "m")
>>> a[0, 1] = PhysicalField("6 ft")
>>> print(a)
[[ 3.      1.8288]
 [ 5.      6.      ] ] m
>>> a[1, 0] = PhysicalField("2 min")
Traceback (most recent call last):
...
TypeError: Incompatible units
```

__str__()

Return human-readable form of a physical quantity

```
>>> print(PhysicalField(value = 3., unit = "eV"))
3.0 eV
```

__sub__(other)

Subtract two physical quantities, so long as their units are compatible. The unit of the result is the unit of the first operand.

```
>>> print(PhysicalField(10., 'km') - PhysicalField(10., 'm'))
9.99 km
>>> print(PhysicalField(10., 'km') - PhysicalField(10., 'J'))
Traceback (most recent call last):
...
TypeError: Incompatible units
```

__truediv__(other)

Divide two physical quantities. The unit of the result is the unit of the first operand divided by the unit of the second.

```
>>> print(PhysicalField(10., 'm') / PhysicalField(2., 's'))
5.0 m/s
```

As a special case, if the result is dimensionless, the value is returned without units, rather than with a dimensionless unit of *l*. This facilitates passing physical quantities to packages such as Numeric that cannot use units, while ensuring the quantities have the desired units

```
>>> print((PhysicalField(1., 'inch')
...         / PhysicalField(1., 'mm')))
25.4
```

`add(other)`

Add two physical quantities, so long as their units are compatible. The unit of the result is the unit of the first operand.

```
>>> print(PhysicalField(10., 'km') + PhysicalField(10., 'm'))
10.01 km
>>> print(PhysicalField(10., 'km') + PhysicalField(10., 'J'))
Traceback (most recent call last):
...
TypeError: Incompatible units
```

`allclose(other, atol=None, rtol=1e-08)`

This function tests whether or not *self* and *other* are equal subject to the given relative and absolute tolerances. The formula used is:

$$|\text{self} - \text{other}| < \text{atol} + \text{rtol} * |\text{other}|$$

This means essentially that both elements are small compared to *atol* or their difference divided by *other*'s value is small compared to *rtol*.

`allequal(other)`

This function tests whether or not *self* and *other* are exactly equal.

`arccos()`

Return the inverse cosine of the *PhysicalField* in radians

```
>>> print(PhysicalField(0).arccos().allclose("1.57079632679 rad"))
1
```

The input *PhysicalField* must be dimensionless

```
>>> print(numerix.round(PhysicalField("1 m").arccos(), 6))
Traceback (most recent call last):
...
TypeError: Incompatible units
```

`arccosh()`

Return the inverse hyperbolic cosine of the *PhysicalField*

```
>>> print(numerix.allclose(PhysicalField(2).arccosh(),
...                           1.31695789692))
1
```

The input *PhysicalField* must be dimensionless

```
>>> print(numerix.round(PhysicalField("1. m").arccosh(), 6))
Traceback (most recent call last):
...
TypeError: Incompatible units
```

arcsin()

Return the inverse sine of the *PhysicalField* in radians

```
>>> print(PhysicalField(1).arcsin().allclose("1.57079632679 rad"))
1
```

The input *PhysicalField* must be dimensionless

```
>>> print(numerix.round(PhysicalField("1 m").arcsin(), 6))
Traceback (most recent call last):
...
TypeError: Incompatible units
```

arctan()

Return the arctangent of the *PhysicalField* in radians

```
>>> print(numerix.round(PhysicalField(1).arctan(), 6))
0.785398
```

The input *PhysicalField* must be dimensionless

```
>>> print(numerix.round(PhysicalField("1 m").arctan(), 6))
Traceback (most recent call last):
...
TypeError: Incompatible units
```

arctan2(*other*)

Return the arctangent of *self* divided by *other* in radians

```
>>> print(numerix.round(PhysicalField(2.).arctan2(PhysicalField(5.)), 6))
0.380506
```

The input *PhysicalField* objects must be in the same dimensions

```
>>> print(numerix.round(PhysicalField(2.54, "cm").arctan2(PhysicalField(1.,
->"inch")), 6))
0.785398
```

```
>>> print(numerix.round(PhysicalField(2.).arctan2(PhysicalField("5. m")), 6))
Traceback (most recent call last):
...
TypeError: Incompatible units
```

arctanh()

Return the inverse hyperbolic tangent of the *PhysicalField*

```
>>> print(PhysicalField(0.5).arctanh())
0.549306144334
```

The input *PhysicalField* must be dimensionless

```
>>> print(numerix.round(PhysicalField("1 m").arctanh(), 6))
Traceback (most recent call last):
...
TypeError: Incompatible units
```

`ceil()`

Return the smallest integer greater than or equal to the *PhysicalField*.

```
>>> print(PhysicalField(2.2, "m").ceil())
3.0 m
```

`conjugate()`

Return the complex conjugate of the *PhysicalField*.

```
>>> print(PhysicalField(2.2 - 3j, "ohm").conjugate() == PhysicalField(2.2 + 3j,
...     "ohm"))
True
```

`convertToUnit(unit)`

Changes the unit to *unit* and adjusts the value such that the combination is equivalent. The new unit is by a string containing its name. The new unit must be compatible with the previous unit of the object.

```
>>> e = PhysicalField('2.7 Hartree*Nav')
>>> e.convertToUnit('kcal/mol')
>>> print(e)
1694.27557621 kcal/mol
```

`copy()`

Make a duplicate.

```
>>> a = PhysicalField(1, unit = 'inch')
>>> b = a.copy()
```

The duplicate will not reflect changes made to the original

```
>>> a.convertToUnit('cm')
>>> print(a)
2.54 cm
>>> print(b)
1 inch
```

Likewise for arrays

```
>>> a = PhysicalField(numerix.array((0, 1, 2)), unit = 'm')
>>> b = a.copy()
>>> a[0] = 3
>>> print(a)
[3 1 2] m
>>> print(b)
[0 1 2] m
```

cos()

Return the cosine of the *PhysicalField*

```
>>> print(numerix.round(PhysicalField(2*numerix.pi/6, "rad").cos(), 6))
0.5
>>> print(numerix.round(PhysicalField(60., "deg").cos(), 6))
0.5
```

The units of the *PhysicalField* must be an angle

```
>>> PhysicalField(60., "m").cos()
Traceback (most recent call last):
...
TypeError: Incompatible units
```

cosh()

Return the hyperbolic cosine of the *PhysicalField*

```
>>> PhysicalField(0.).cosh()
1.0
```

The units of the *PhysicalField* must be dimensionless

```
>>> PhysicalField(60., "m").cosh()
Traceback (most recent call last):
...
TypeError: Incompatible units
```

divide(*other*)

Divide two physical quantities. The unit of the result is the unit of the first operand divided by the unit of the second.

```
>>> print(PhysicalField(10., 'm') / PhysicalField(2., 's'))
5.0 m/s
```

As a special case, if the result is dimensionless, the value is returned without units, rather than with a dimensionless unit of *I*. This facilitates passing physical quantities to packages such as Numeric that cannot use units, while ensuring the quantities have the desired units

```
>>> print((PhysicalField(1., 'inch')
...         / PhysicalField(1., 'mm')))
25.4
```

dot(*other*)

Return the dot product of *self* with *other*. The resulting unit is the product of the units of *self* and *other*.

```
>>> v = PhysicalField(((5., 6.), (7., 8.)), "m")
>>> print(PhysicalField(((1., 2.), (3., 4.)), "m").dot(v))
[ 26.  44.] m**2
```

floor()

Return the largest integer less than or equal to the *PhysicalField*.

```
>>> print(PhysicalField(2.2, "m").floor())
2.0 m
```

getscstype(*default=None*)

Returns the NumPy sctype of the underlying array.

```
>>> PhysicalField(1, 'm').getscstype() == numerix.NUMERIX.obj2scstype(numerix.
...array(1))
True
>>> PhysicalField(1., 'm').getscstype() == numerix.NUMERIX.obj2scstype(numerix.
...array(1.))
True
>>> PhysicalField((1, 1.), 'm').getscstype() == numerix.NUMERIX.
...obj2scstype(numerix.array((1., 1.)))
True
```

inBaseUnits()

Return the quantity with all units reduced to their base SI elements.

```
>>> e = PhysicalField('2.7 Hartree*Nav')
>>> print(e.inBaseUnits().allclose("7088849.01085 kg*m**2/s**2/mol"))
1
```

inDimensionless()

Returns the numerical value of a dimensionless quantity.

```
>>> print(PhysicalField(((2., 3.), (4., 5.))).inDimensionless())
[[ 2.  3.]
 [ 4.  5.]]
```

It's an error to convert a quantity with units

```
>>> print(PhysicalField(((2., 3.), (4., 5.)), "m").inDimensionless())
Traceback (most recent call last):
...
TypeError: Incompatible units
```

inRadians()

Converts an angular quantity to radians and returns the numerical value.

```
>>> print(PhysicalField(((2., 3.), (4., 5.)), "rad").inRadians())
[[ 2.  3.]
 [ 4.  5.]]
>>> print(PhysicalField(((2., 3.), (4., 5.)), "deg").inRadians())
[[ 0.03490659  0.05235988]
 [ 0.06981317  0.08726646]]
```

As a special case, assumes a dimensionless quantity is already in radians.

```
>>> print(PhysicalField(((2., 3.), (4., 5.))).inRadians())
[[ 2.  3.]
 [ 4.  5.]]
```

It's an error to convert a quantity with non-angular units

```
>>> print(PhysicalField(((2., 3.), (4., 5.)), "m").inRadians())
Traceback (most recent call last):
...
TypeError: Incompatible units
```

inSIUnits()

Return the quantity with all units reduced to SI-compatible elements.

```
>>> e = PhysicalField('2.7 Hartree*Nav')
>>> print(e.inSIUnits().allclose("7088849.01085 kg*m**2/s**2/mol"))
1
```

inUnitsOf(*units)

Returns one or more *PhysicalField* objects that express the same physical quantity in different units. The units are specified by strings containing their names. The units must be compatible with the unit of the object. If one unit is specified, the return value is a single *PhysicalField*.

```
>>> freeze = PhysicalField('0 degC')
>>> print(freeze.inUnitsOf('degF').allclose("32.0 degF"))
1
```

If several units are specified, the return value is a tuple of *PhysicalField* instances with one element per unit such that the sum of all quantities in the tuple equals the the original quantity and all the values except for the last one are integers. This is used to convert to irregular unit systems like hour/minute/second. The original object will not be changed.

```
>>> t = PhysicalField(314159., 's')
>>> from builtins import zip
>>> print(numerix.allclose([e.allclose(v) for (e, v) in zip(t.inUnitsOf('d', 'h',
...     'min', 's'),
...     ['3.0 d', '15.0 h',
...     '15.0 min', '59.0 s'])],
...     True))
1
```

itemset(value)

Assign the value of a scalar array, performing appropriate conversions.

```
>>> a = PhysicalField(4., "m")
>>> a.itemset(PhysicalField("6 ft"))
>>> print(a.allclose("1.8288 m"))
1
>>> a = PhysicalField(((3., 4.), (5., 6.)), "m")
>>> try:
...     a.itemset(PhysicalField("6 ft"))
... except IndexError:
...     # NumPy 1.7 has changed the exception type
...     raise ValueError("can only place a scalar for an array of size 1")
Traceback (most recent call last):
...
ValueError: can only convert an array of size 1 to a Python scalar
>>> a.itemset(PhysicalField("2 min"))
Traceback (most recent call last):
```

(continues on next page)

(continued from previous page)

```
...
TypeError: Incompatible units
```

log()

Return the natural logarithm of the *PhysicalField*

```
>>> print(numerix.round(PhysicalField(10).log(), 6))
2.302585
```

The input *PhysicalField* must be dimensionless

```
>>> print(numerix.round(PhysicalField("1. m").log(), 6))
Traceback (most recent call last):
...
TypeError: Incompatible units
```

log10()

Return the base-10 logarithm of the *PhysicalField*

```
>>> print(numerix.round(PhysicalField(10.).log10(), 6))
1.0
```

The input *PhysicalField* must be dimensionless

```
>>> print(numerix.round(PhysicalField("1. m").log10(), 6))
Traceback (most recent call last):
...
TypeError: Incompatible units
```

multiply(*other*)

Multiply two physical quantities. The unit of the result is the product of the units of the operands.

```
>>> print(PhysicalField(10., 'N') * PhysicalField(10., 'm') ==_
...PhysicalField(100., 'N*m'))
True
```

As a special case, if the result is dimensionless, the value is returned without units, rather than with a dimensionless unit of 1. This facilitates passing physical quantities to packages such as Numeric that cannot use units, while ensuring the quantities have the desired units.

```
>>> print((PhysicalField(10., 's') * PhysicalField(2., 'Hz')))
20.0
```

property numericValue

Return the *PhysicalField* without units, after conversion to base SI units.

```
>>> print(numerix.round(PhysicalField("1 inch").numericValue, 6))
0.0254
```

put(*indices*, *values*)

put is the opposite of *take*. The values of *self* at the locations specified in *indices* are set to the corresponding value of *values*.

The *indices* can be any integer sequence object with values suitable for indexing into the flat form of *self*. The *values* must be any sequence of values that can be converted to the typecode of *self*.

```
>>> f = PhysicalField((1., 2., 3.), "m")
>>> f.put((2, 0), PhysicalField((2., 3.), "inch"))
>>> print(f)
[ 0.0762  2.       0.0508] m
```

The units of *values* must be compatible with *self*.

```
>>> f.put(1, PhysicalField(3, "kg"))
Traceback (most recent call last):
...
TypeError: Incompatible units
```

reshape(*shape*)

Changes the shape of *self* to that specified in *shape*

```
>>> print(PhysicalField((1., 2., 3., 4.), "m").reshape((2, 2)))
[[ 1.  2.]
 [ 3.  4.]] m
```

The new shape must have the same size as the existing one.

```
>>> print(PhysicalField((1., 2., 3., 4.), "m").reshape((2, 3)))
Traceback (most recent call last):
...
ValueError: total size of new array must be unchanged
```

property shape

Tuple of array dimensions.

sign()

Return the sign of the quantity. The *unit* is unchanged.

```
>>> from fipy.tools.numerix import sign
>>> print(sign(PhysicalField(((3., -2.), (-1., 4.)), 'm')))
[[ 1. -1.]
 [-1.  1.]]
```

sin()

Return the sine of the *PhysicalField*

```
>>> print(PhysicalField(numerix.pi/6, "rad").sin())
0.5
>>> print(PhysicalField(30., "deg").sin())
0.5
```

The units of the *PhysicalField* must be an angle

```
>>> PhysicalField(30., "m").sin()
Traceback (most recent call last):
...
TypeError: Incompatible units
```

sinh()

Return the hyperbolic sine of the *PhysicalField*

```
>>> PhysicalField(0.).sinh()
0.0
```

The units of the *PhysicalField* must be dimensionless

```
>>> PhysicalField(60., "m").sinh()
Traceback (most recent call last):
...
TypeError: Incompatible units
```

sqrt()

Return the square root of the *PhysicalField*

```
>>> print(PhysicalField("100. m**2").sqrt())
10.0 m
```

The resulting unit must be integral

```
>>> print(PhysicalField("100. m").sqrt())
Traceback (most recent call last):
...
TypeError: Illegal exponent
```

subtract(*other*)

Subtract two physical quantities, so long as their units are compatible. The unit of the result is the unit of the first operand.

```
>>> print(PhysicalField(10., 'km') - PhysicalField(10., 'm'))
9.99 km
>>> print(PhysicalField(10., 'km') - PhysicalField(10., 'J'))
Traceback (most recent call last):
...
TypeError: Incompatible units
```

sum(*index=0*)

Returns the sum of all of the elements in *self* along the specified axis (first axis by default).

```
>>> print(PhysicalField(((1., 2.), (3., 4.)), "m").sum())
[ 4.  6.] m
>>> print(PhysicalField(((1., 2.), (3., 4.)), "m").sum(1))
[ 3.  7.] m
```

take(*indices, axis=0*)

Return the elements of *self* specified by the elements of *indices*. The resulting *PhysicalField* array has the same units as the original.

```
>>> print(PhysicalField((1., 2., 3.), "m").take((2, 0)))
[ 3.  1.] m
```

The optional third argument specifies the axis along which the selection occurs, and the default value (as in the example above) is 0, the first axis.

```
>>> print(PhysicalField(((1., 2., 3.), (4., 5., 6.)), "m").take((2, 0), axis = 1))
[[ 3.  1.]
 [ 6.  4.]] m
```

tan()

Return the tangent of the *PhysicalField*

```
>>> numerix.round(PhysicalField(numerix.pi/4, "rad").tan(), 6)
1.0
>>> numerix.round(PhysicalField(45, "deg").tan(), 6)
1.0
```

The units of the *PhysicalField* must be an angle

```
>>> PhysicalField(45., "m").tan()
Traceback (most recent call last):
...
TypeError: Incompatible units
```

tanh()

Return the hyperbolic tangent of the *PhysicalField*

```
>>> print(numerix.allclose(PhysicalField(1.).tanh(), 0.761594155956))
True
```

The units of the *PhysicalField* must be dimensionless

```
>>> PhysicalField(60., "m").tanh()
Traceback (most recent call last):
...
TypeError: Incompatible units
```

tostring(max_line_width=75, precision=8, suppress_small=False, separator='')

Return human-readable form of a physical quantity

```
>>> p = PhysicalField(value = (3., 3.14159), unit = "eV")
>>> print(p.tostring(precision = 3, separator = '|'))
[ 3. | 3.142] eV
```

property unit

Return the unit object of *self*.

```
>>> PhysicalField("1 m").unit
<PhysicalUnit m>
```

class fipy.tools.dimensions.physicalField.PhysicalUnit(names, factor, powers, offset=0)

Bases: `object`

The units of a *PhysicalField*.

This class is not generally not instantiated by users of this module, but rather it is created in the process of constructing a *PhysicalField*.

Parameters

- **names** (*str*) – Name of the unit
- **factor** (*float*) – Multiplier between the unit and the fundamental SI unit
- **powers`** (*array_like* of *float*) – Nine elements representing the fundamental SI units of [“m”, “kg”, “s”, “A”, “K”, “mol”, “cd”, “rad”, “sr”]
- **offset** (*float*) – Displacement between the zero-point of the unit and the zero-point of the corresponding fundamental SI unit.

__div__(other)

Divide one unit by another

```
>>> a = PhysicalField("1. m")
>>> b = PhysicalField("3. ft")
>>> a.unit / b.unit
<PhysicalUnit m/ft>
>>> a.unit / b.inBaseUnits().unit
<PhysicalUnit 1>
>>> c = PhysicalField("1. s")
>>> d = PhysicalField("3. Hz")
>>> c.unit / d.unit
<PhysicalUnit s/Hz>
>>> c.unit / d.inBaseUnits().unit
<PhysicalUnit s**2/1>
```

or divide units by numbers

```
>>> a.unit / 3.
<PhysicalUnit m/3.0>
```

Units must have zero offset to be divided

```
>>> e = PhysicalField("1. J")
>>> f = PhysicalField("25. degC")
>>> e.unit / f.unit
Traceback (most recent call last):
...
TypeError: cannot divide units with non-zero offset
>>> e.unit / f.inBaseUnits().unit
<PhysicalUnit J/K>
```

__eq__(other)

Determine if units are identical

```
>>> a = PhysicalField("1. m")
>>> b = PhysicalField("3. ft")
>>> a.unit == b.unit
0
>>> a.unit == b.inBaseUnits().unit
1
```

Units can only be compared with other units

```
>>> a.unit == 3
Traceback (most recent call last):
```

(continues on next page)

(continued from previous page)

```
...  
TypeError: PhysicalUnits can only be compared with other PhysicalUnits
```

__ge__(other)

Return self>=value.

__gt__(other)

Return self>value.

__hash__ = None**__le__(other)**

Return self<=value.

__lt__(other)

Return self<value.

__mul__(other)

Multiply units together

```
>>> a = PhysicalField("1. m")
>>> b = PhysicalField("3. ft")
>>> a.unit * b.unit == _findUnit('ft*m')
True
>>> a.unit * b.inBaseUnits().unit
<PhysicalUnit m**2>
>>> c = PhysicalField("1. s")
>>> d = PhysicalField("3. Hz")
>>> c.unit * d.unit == _findUnit('Hz*s')
True
>>> c.unit * d.inBaseUnits().unit
<PhysicalUnit 1>
```

or multiply units by numbers

```
>>> a.unit * 3.
<PhysicalUnit m*3.0>
```

Units must have zero offset to be multiplied

```
>>> e = PhysicalField("1. kB")
>>> f = PhysicalField("25. degC")
>>> e.unit * f.unit
Traceback (most recent call last):
...
TypeError: cannot multiply units with non-zero offset
>>> e.unit * f.inBaseUnits().unit
<PhysicalUnit kB*K>
```

__ne__(other)

Return self!=value.

__pow__(other)

Raise a unit to an integer power

```
>>> a = PhysicalField("1. m")
>>> a.unit**2
<PhysicalUnit m**2>
>>> a.unit**-2
<PhysicalUnit 1/m**2>
```

Non-integer powers are not supported

```
>>> a.unit**0.5
Traceback (most recent call last):
...
TypeError: Illegal exponent
```

Units must have zero offset to be exponentiated

```
>>> b = PhysicalField("25. degC")
>>> b.unit**2
Traceback (most recent call last):
...
TypeError: cannot exponentiate units with non-zero offset
>>> b.inBaseUnits().unit**2
<PhysicalUnit K**2>
```

`__rdiv__(other)`

Divide something by a unit

```
>>> a = PhysicalField("1. m")
>>> 3. / a.unit
<PhysicalUnit 3.0/m>
```

Units must have zero offset to be divided

```
>>> b = PhysicalField("25. degC")
>>> 3. / b.unit
Traceback (most recent call last):
...
TypeError: cannot divide units with non-zero offset
>>> 3. / b.inBaseUnits().unit
<PhysicalUnit 3.0/K>
```

`__repr__()`

Return representation of a physical unit

```
>>> PhysicalUnit('m', 1., [1, 0, 0, 0, 0, 0, 0, 0])
<PhysicalUnit m>
```

`__rmul__(other)`

Multiply units together

```
>>> a = PhysicalField("1. m")
>>> b = PhysicalField("3. ft")
>>> a.unit * b.unit == _findUnit('ft*m')
True
```

(continues on next page)

(continued from previous page)

```
>>> a.unit * b.inBaseUnits().unit
<PhysicalUnit m**2>
>>> c = PhysicalField("1. s")
>>> d = PhysicalField("3. Hz")
>>> c.unit * d.unit == _findUnit('Hz*s')
True
>>> c.unit * d.inBaseUnits().unit
<PhysicalUnit 1>
```

or multiply units by numbers

```
>>> a.unit * 3.
<PhysicalUnit m*3.0>
```

Units must have zero offset to be multiplied

```
>>> e = PhysicalField("1. kB")
>>> f = PhysicalField("25. degC")
>>> e.unit * f.unit
Traceback (most recent call last):
...
TypeError: cannot multiply units with non-zero offset
>>> e.unit * f.inBaseUnits().unit
<PhysicalUnit kB*K>
```

__rtruediv__(other)

Divide something by a unit

```
>>> a = PhysicalField("1. m")
>>> 3. / a.unit
<PhysicalUnit 3.0/m>
```

Units must have zero offset to be divided

```
>>> b = PhysicalField("25. degC")
>>> 3. / b.unit
Traceback (most recent call last):
...
TypeError: cannot divide units with non-zero offset
>>> 3. / b.inBaseUnits().unit
<PhysicalUnit 3.0/K>
```

__str__()

Return representation of a physical unit

```
>>> PhysicalUnit('m', 1., [1, 0, 0, 0, 0, 0, 0, 0])
<PhysicalUnit m>
```

__truediv__(other)

Divide one unit by another

```
>>> a = PhysicalField("1. m")
>>> b = PhysicalField("3. ft")
```

(continues on next page)

(continued from previous page)

```
>>> a.unit / b.unit
<PhysicalUnit m/ft>
>>> a.unit / b.inBaseUnits().unit
<PhysicalUnit 1>
>>> c = PhysicalField("1. s")
>>> d = PhysicalField("3. Hz")
>>> c.unit / d.unit
<PhysicalUnit s/Hz>
>>> c.unit / d.inBaseUnits().unit
<PhysicalUnit s**2/1>
```

or divide units by numbers

```
>>> a.unit / 3.
<PhysicalUnit m/3.0>
```

Units must have zero offset to be divided

```
>>> e = PhysicalField("1. J")
>>> f = PhysicalField("25. degC")
>>> e.unit / f.unit
Traceback (most recent call last):
...
TypeError: cannot divide units with non-zero offset
>>> e.unit / f.inBaseUnits().unit
<PhysicalUnit J/K>
```

conversionFactorTo(*other*)

Return the multiplication factor between two physical units

```
>>> a = PhysicalField("1. mm")
>>> b = PhysicalField("1. inch")
>>> print(numerix.round(b.unit.conversionFactorTo(a.unit), 6))
25.4
```

Units must have the same fundamental SI units

```
>>> c = PhysicalField("1. K")
>>> c.unit.conversionFactorTo(a.unit)
Traceback (most recent call last):
...
TypeError: Incompatible units
```

If units have different offsets, they must have the same factor

```
>>> d = PhysicalField("1. degC")
>>> c.unit.conversionFactorTo(d.unit)
1.0
>>> e = PhysicalField("1. degF")
>>> c.unit.conversionFactorTo(e.unit)
Traceback (most recent call last):
...
```

(continues on next page)

(continued from previous page)

TypeError: Unit conversion (K to degF) cannot be expressed as a simple
multiplicative factor

conversionTupleTo(*other*)

Return a *tuple* of the multiplication factor and offset between two physical units

```
>>> a = PhysicalField("1. K").unit
>>> b = PhysicalField("1. degF").unit
>>> from builtins import str
>>> [str(numerix.round(element, 6)) for element in b.conversionTupleTo(a)]
['0.555556', '459.67']
```

isAngle()

Returns *True* if the unit is an angle

```
>>> PhysicalField("1. deg").unit.isAngle()
1
>>> PhysicalField("1. rad").unit.isAngle()
1
>>> PhysicalField("1. inch").unit.isAngle()
0
```

isCompatible(*other*)

Returns a list of which fundamental SI units are compatible between *self* and *other*

```
>>> a = PhysicalField("1. mm")
>>> b = PhysicalField("1. inch")
>>> print(numerix.allclose(a.unit.isCompatible(b.unit),
...                           [True, True, True, True, True, True, True, True,
...                            True]))
True
>>> c = PhysicalField("1. K")
>>> print(numerix.allclose(a.unit.isCompatible(c.unit),
...                           [False, True, True, True, False, True, True, True,
...                            True]))
True
```

isDimensionless()

Returns *True* if the unit is dimensionless

```
>>> PhysicalField("1. m/m").unit.isDimensionless()
1
>>> PhysicalField("1. inch").unit.isDimensionless()
0
```

isDimensionlessOrAngle()

Returns *True* if the unit is dimensionless or an angle

```
>>> PhysicalField("1. m/m").unit.isDimensionlessOrAngle()
1
>>> PhysicalField("1. deg").unit.isDimensionlessOrAngle()
1
```

(continues on next page)

(continued from previous page)

```
>>> PhysicalField("1. rad").unit.isDimensionlessOrAngle()
1
>>> PhysicalField("1. inch").unit.isDimensionlessOrAngle()
0
```

isInverseAngle()

Returns *True* if the 1 divided by the unit is an angle

```
>>> PhysicalField("1. deg**-1").unit.isInverseAngle()
1
>>> PhysicalField("1. 1/rad").unit.isInverseAngle()
1
>>> PhysicalField("1. inch").unit.isInverseAngle()
0
```

name()

Return the name of the unit

```
>>> PhysicalField("1. m").unit.name()
'm'
>>> (PhysicalField("1. m") / PhysicalField("1. s"))
... / PhysicalField("1. s").unit.name()
'm/s**2'
```

setName(name)

Set the name of the unit to *name*

```
>>> a = PhysicalField("1. m/s").unit
>>> a
<PhysicalUnit m/s>
>>> a.setName('meterpersecond')
>>> a
<PhysicalUnit meterpersecond>
```

22.9.5 fipy.tools.dump

Functions

<code>read(filename[, fileobject, communicator, ...])</code>	Read a pickled object from a file.
<code>write(data[, filename, extension, communicator])</code>	Pickle an object and write it to a file.

`fipy.tools.dump.read(filename, fileobject=None, communicator=DummyComm(), mesh_unmangle=False)`

Read a pickled object from a file. Returns the unpickled object. Wrapper for `cPickle.load()`.

Parameters

- **filename** (`str`) – Name of the file to unpickle the object from. If the filename extension is `.gz`, the file is first decompressed.
- **fileobject** (`file`) – Used to remove temporary files

- **communicator** (`CommWrapper`) – A duck-typed object with `procID` and `Nproc` attributes is sufficient
- **mesh_unmangle** (`bool`) – Whether to correct improper pickling of non-uniform meshes (ticket:243)

`fipy.tools.dump.write(data, filename=None, extension='', communicator=DummyComm())`

Pickle an object and write it to a file. Wrapper for `cPickle.dump()`.

Test to check pickling and unpickling.

```
>>> from fipy.meshes import Grid1D
>>> old = Grid1D(nx = 2)
>>> f, tempfile = write(old)
>>> new = read(tempfile, f)
>>> print(old.numberOfCells == new.numberOfCells)
True
```

Parameters

- **data** – Object to be pickled.
- **filename** (`str`) – Name of the file to place the pickled object. If `filename` is `None` then a temporary file will be used and the file object and file name will be returned as a tuple. If the filename ends in `.gz`, the file is automatically saved in compressed gzip format.
- **extension** (`str`) – File extension to append if `filename` is not given. If set to `.gz`, the file is automatically saved in compressed gzip format.
- **communicator** (`CommWrapper`) – A duck-typed object with `procID` and `Nproc` attributes is sufficient

22.9.6 `fipy.tools.inline`

22.9.7 `fipy.tools.logging`

Functions

`package_info()`

Return dictionary of versions for FiPy dependencies.

`fipy.tools.logging.package_info()`

Return dictionary of versions for FiPy dependencies.

22.9.8 `fipy.tools.numerix`

Replacement module for NumPy

Attention: This module should be the only place in the code where `numpy` is explicitly imported and you should always import this module and not `numpy` in your own code. The documentation for `numpy` remains canonical for all functions and classes not explicitly documented here.

The functions provided in this module replace and augment the *NumPy* module. The functions work with *Variables*, arrays or numbers. For example, create a *Variable*.

```
>>> from fipy.variables.variable import Variable  
>>> var = Variable(value=0)
```

Take the tangent of such a variable. The returned value is itself a *Variable*.

```
>>> v = tan(var)  
>>> v  
tan(Variable(value=array(0)))  
>>> print(float(v))  
0.0
```

Take the tangent of a int.

```
>>> tan(0)  
0.0
```

Take the tangent of an array.

```
>>> print(tan(array((0, 0, 0))))  
[ 0.  0.  0.]
```

Functions

<code>L1norm(arr)</code>	Taxicab or Manhattan norm of <i>arr</i>
<code>L2norm(arr)</code>	Euclidean norm of <i>arr</i>
<code>LINFnorm(arr)</code>	Infinity norm of <i>arr</i>
<code>all(a[, axis, out])</code>	Test whether all array elements along a given axis evaluate to True.
<code>allclose(first, second[, rtol, atol])</code>	Tests whether or not <i>first</i> and <i>second</i> are equal, subject to the given relative and absolute tolerances, such that.
<code>allequal(first, second)</code>	Returns <i>true</i> if every element of <i>first</i> is equal to the corresponding element of <i>second</i> .
<code>dot(a1, a2[, axis])</code>	return array of vector dot-products of <i>v1</i> and <i>v2</i> for arrays <i>a1</i> and <i>a2</i> of vectors <i>v1</i> and <i>v2</i>
<code>getShape(arr)</code>	Return the shape of <i>arr</i>
<code>getUnit(arr)</code>	Return the unit of <i>arr</i> .
<code>isclose(first, second[, rtol, atol])</code>	Returns which elements of <i>first</i> and <i>second</i> are equal, subject to the given relative and absolute tolerances, such that.
<code>nearest(data, points[, max_mem])</code>	find the indices of <i>data</i> that are closest to <i>points</i>
<code>put(arr, ids, values)</code>	The opposite of <i>take</i> .
<code>rank(a)</code>	Get the rank of sequence <i>a</i> (the number of dimensions, not a matrix rank) The rank of a scalar is zero.
<code>reshape(arr, shape)</code>	Change the shape of <i>arr</i> to <i>shape</i> , as long as the product of all the lengths of all the axes is constant (the total number of elements does not change).
<code>sqrtDot(a1, a2)</code>	Return array of square roots of vector dot-products for arrays <i>a1</i> and <i>a2</i> of vectors <i>v1</i> and <i>v2</i>
<code>sum(arr[, axis])</code>	The sum of all the elements of <i>arr</i> along the specified axis.
<code>take(a, indices[, axis, fill_value])</code>	Selects the elements of <i>a</i> corresponding to <i>indices</i> .
<code>toString(arr[, max_line_width, precision, ...])</code>	Returns a textual representation of a number or field of numbers.

`fipy.tools.numerix.L1norm(arr)`

Taxicab or Manhattan norm of *arr*

$\|arr\|_1 = \sum_{j=1}^n |arr_j|$ is the L^1 norm of *arr*.

Parameters

`arr (ndarray)` –

`fipy.tools.numerix.L2norm(arr)`

Euclidean norm of *arr*

$\|arr\|_2 = \sqrt{\sum_{j=1}^n |arr_j|^2}$ is the L^2 norm of *arr*.

Parameters

`arr (ndarray)` –

`fipy.tools.numerix.LINFnorm(arr)`

Infinity norm of *arr*

$\|arr\|_\infty = [\sum_{j=1}^n |arr_j|^\infty]^\infty = \max_j |arr_j|$ is the L^∞ norm of *arr*.

Parameters**arr** (*ndarray*) –**fipy.tools.numerix.all**(*a*, *axis=None*, *out=None*)

Test whether all array elements along a given axis evaluate to True.

Parameters

- **a** (*array_like*) – Input array or object that can be converted to an array.
- **axis** (*int*, *optional*) – Axis along which an logical AND is performed. The default (*axis* = *None*) is to perform a logical AND over a flattened input array. *axis* may be negative, in which case it counts from the last to the first axis.
- **out** (*ndarray*, *optional*) – Alternative output array in which to place the result. It must have the same shape as the expected output and the type is preserved.

fipy.tools.numerix.allclose(*first*, *second*, *rtol=1e-05*, *atol=1e-08*)Tests whether or not *first* and *second* are equal, subject to the given relative and absolute tolerances, such that:

$$|\text{first} - \text{second}| < \text{atol} + \text{rtol} * |\text{second}|$$

This means essentially that both elements are small compared to *atol* or their difference divided by *second*'s value is small compared to *rtol*.**fipy.tools.numerix.allequal**(*first*, *second*)Returns *true* if every element of *first* is equal to the corresponding element of *second*.**fipy.tools.numerix.dot**(*a1*, *a2*, *axis=0*)return array of vector dot-products of *v1* and *v2* for arrays *a1* and *a2* of vectors *v1* and *v2*We can't use `numpy.dot()` on an array of vectorsTest that *Variables* are returned as *Variables*.

```
>>> from fipy.meshes import Grid2D
>>> mesh = Grid2D(nx=2, ny=1)
>>> from fipy.variables.cellVariable import CellVariable
>>> v1 = CellVariable(mesh=mesh, value=((0, 1), (2, 3)), rank=1)
>>> v2 = CellVariable(mesh=mesh, value=((0, 1), (2, 3)), rank=1)
>>> dot(v1, v2)._variableClass
<class 'fipy.variables.cellVariable.CellVariable'>
>>> dot(v2, v1)._variableClass
<class 'fipy.variables.cellVariable.CellVariable'>
>>> print(rank(dot(v2, v1)))
0
>>> print(dot(v1, v2))
[ 4 10]
>>> dot(v1, v1)._variableClass
<class 'fipy.variables.cellVariable.CellVariable'>
>>> print(dot(v1, v1))
[ 4 10]
>>> v3 = array(((0, 1), (2, 3)))
>>> print(isinstance(dot(v3, v3), type(array(1))))
1
>>> print(dot(v3, v3))
[ 4 10]
```

`fipy.tools.numerix.getShape(arr)`

Return the shape of *arr*

```
>>> getShape(1)
()
>>> getShape(1.)
()
>>> from fipy.variables.variable import Variable
>>> getShape(Variable(1))
()
>>> getShape(Variable(1.))
()
>>> getShape(Variable(1., unit="m"))
()
>>> getShape(Variable("1 m"))
()
```

`fipy.tools.numerix.getUnit(arr)`

Return the unit of *arr*.

If *arr* has no units, returns 1.

`fipy.tools.numerix.isclose(first, second, rtol=1e-05, atol=1e-08)`

Returns which elements of *first* and *second* are equal, subject to the given relative and absolute tolerances, such that:

```
|first - second| < atol + rtol * |second|
```

This means essentially that both elements are small compared to *atol* or their difference divided by *second*'s value is small compared to *rtol*.

`fipy.tools.numerix.nearest(data, points, max_mem=100000000.0)`

find the indices of *data* that are closest to *points*

```
>>> from fipy import *
>>> m0 = Grid2D(dx=(.1, 1., 10.), dy=(.1, 1., 10.))
>>> m1 = Grid2D(nx=2, ny=2, dx=5., dy=5.)
>>> print(nearest(m0.cellCenters.globalValue, m1.cellCenters.globalValue))
[4 5 7 8]
>>> print(nearest(m0.cellCenters.globalValue, m1.cellCenters.globalValue, max_
->mem=100))
[4 5 7 8]
>>> print(nearest(m0.cellCenters.globalValue, m1.cellCenters.globalValue, max_
->mem=1000))
[4 5 7 8]
```

`fipy.tools.numerix.put(arr, ids, values)`

The opposite of *take*. The values of *arr* at the locations specified by *ids* are set to the corresponding value of *values*.

The following is to test improvements to puts with masked arrays. Places in the code were assuming incorrect put behavior.

```
>>> maskValue = 999999
```

```
>>> arr = zeros(3, '1')
>>> ids = MA.masked_values((2, maskValue), maskValue)
>>> values = MA.masked_values((4, maskValue), maskValue)
>>> put(arr, ids, values) ## this should work
>>> print(arr)
[0 0 4]
```

```
>>> arr = MA.masked_values((maskValue, 5, 10), maskValue)
>>> ids = MA.masked_values((2, maskValue), maskValue)
>>> values = MA.masked_values((4, maskValue), maskValue)
>>> put(arr, ids, values)
>>> print(arr) ## works as expected
[-- 5 4]
```

```
>>> arr = MA.masked_values((maskValue, 5, 10), maskValue)
>>> ids = MA.masked_values((maskValue, 2), maskValue)
>>> values = MA.masked_values((4, maskValue), maskValue)
>>> put(arr, ids, values)
>>> print(arr) ## should be [-- 5 --] maybe??
[-- 5 999999]
```

fipy.tools.numerix.rank(*a*)

Get the rank of sequence *a* (the number of dimensions, not a matrix rank) The rank of a scalar is zero.

Note: The rank of a *MeshVariable* is for any single element. E.g., A *CellVariable* containing scalars at each cell, and defined on a 9 element *Grid1D*, has rank 0. If it is defined on a 3x3 *Grid2D*, it is still rank 0.

fipy.tools.numerix.reshape(*arr, shape*)

Change the shape of *arr* to *shape*, as long as the product of all the lengths of all the axes is constant (the total number of elements does not change).

fipy.tools.numerix.sqrtDot(*a1, a2*)

Return array of square roots of vector dot-products for arrays *a1* and *a2* of vectors *v1* and *v2*

Usually used with *v1==v2* to return magnitude of *v1*.

fipy.tools.numerix.sum(*arr, axis=0*)

The sum of all the elements of *arr* along the specified axis.

fipy.tools.numerix.take(*a, indices, axis=0, fill_value=None*)

Selects the elements of *a* corresponding to *indices*.

fipy.tools.numerix.tostring(*arr, max_line_width=75, precision=8, suppress_small=False, separator=' ', array_output=0*)

Returns a textual representation of a number or field of numbers. Each dimension is indicated by a pair of matching square brackets (*[[*]), within which each subset of the field is output. The orientation of the dimensions is as follows: the last (rightmost) dimension is always horizontal, so that the frequent rank-1 fields use a minimum of screen real-estate. The next-to-last dimension is displayed vertically if present and any earlier dimension is displayed with additional bracket divisions.

```
>>> from fipy import Variable
>>> print(tostring(Variable((1, 0, 11.2345)), precision=1))
```

(continues on next page)

(continued from previous page)

```
[ 1.    0.   11.2]
>>> print(tostring(array((1, 2)), precision=5))
[1 2]
>>> print(tostring(array((1.12345, 2.79)), precision=2))
[ 1.12  2.79]
>>> print(tostring(1))
1
>>> print(tostring(array(1)))
1
>>> print(tostring(array([1.23345]), precision=2))
[ 1.23]
>>> print(tostring(array([1]), precision=2))
[1]
>>> print(tostring(1.123456, precision=2))
1.12
>>> print(tostring(array(1.123456), precision=3))
1.123
```

Parameters

- **max_line_width** (*int*) – Maximum number of characters used in a single line. Default is *sys.output_line_width* or 77.
- **precision** (*int*) – Number of digits after the decimal point. Default is *sys.float_output_precision* or 8.
- **suppress_small** (*bool*) – Whether small values should be suppressed (and output as 0). Default is *sys.float_output_suppress_small* or *False*.
- **separator** (*str*) – What character string to place between two numbers.
- **array_output** (*bool*) – unused

22.9.9 fipy.tools.parser

Functions

`parse(larg[, action, type, default])`This is a wrapper function for the python *optparse* module.`fipy.tools.parser.parse(larg, action=None, type=None, default=None)`

This is a wrapper function for the python *optparse* module. Unfortunately *optparse* does not allow command line arguments to be ignored. See the documentation for *optparse* for more details. Returns the argument value.

Parameters

- **larg** (*str*) – Argument to be parsed.
- **action** ({‘store’, ‘store_true’, ‘store_false’, ‘store_const’, ‘append’, ‘count’, ‘callback’})
– Basic type of action to be taken when this argument is encountered at the command line.
See <https://docs.python.org/2/library/argparse.html#action>
- **type** (*type*) – Type to which the command-line argument should be converted

- **default** – Value produced if the argument is absent from the command line

22.9.10 fipy.tools.sharedtempfile

This module provides a generic, high-level interface for creating shared temporary files. All of the interfaces provided by this module can be used without fear of race conditions.

Functions

<code>SharedTemporaryFile([mode, buffering, ...])</code>	Create a temporary file shared by all MPI ranks.
--	--

```
fipy.tools.sharedtempfile.SharedTemporaryFile(mode='w+b', buffering=-1, encoding=None,
                                              newline=None, suffix='', prefix='tmp', dir=None,
                                              delete=True, communicator=DummyComm())
```

Create a temporary file shared by all MPI ranks.

The file is created as *NamedTemporaryFile* would do it. The name of the returned file-like object is accessible as its name attribute. The file will be automatically deleted when it is closed unless the *delete* argument is set to False.

```
>>> from fipy.tools import SharedTemporaryFile, parallelComm
>>> with SharedTemporaryFile(mode='w+', suffix=".tmp") as tmpFile:
...     # write on processor 0
...     if parallelComm.procID == 0:
...         _ = tmpFile.write("shared text")
...
...     parallelComm.Barrier()
...
...     # read on all processors
...     _ = tmpFile.seek(0)
...     txt = tmpFile.read()
>>> print(txt)
shared text
```

Parameters

- **prefix** (*str*) – As for mkstemp
- **suffix** (*str*) – As for mkstemp
- **dir** (*str*) – As for mkstemp
- **mode** (*str*) – The mode argument to io.open (default “w+b”)
- **buffering** (*int*) – The buffer size argument to io.open (default -1)
- **encoding** (*str or None*) – The encoding argument to io.open (default None)
- **newline** (*str or None*) – The newline argument to io.open (default None)
- **delete** (*bool*) – Whether the file is deleted on close (default True)
- **communicator** (*CommWrapper*) – MPI communicator describing ranks to share with. A duck-typed object with *procID* and *Nproc* attributes is sufficient.

Return type
file-like object

See also:

`tempfile.NamedTemporaryFile`, `tempfile.mkstemp`, `io.open`

22.9.11 fipy.tools.test

22.9.12 fipy.tools.vector

Vector utility functions that are inexplicably absent from Numeric

Functions

<code>prune(array, shift[, start, axis])</code>	removes elements with indices $i = start + shift * n$ where $n = 0, 1, 2, \dots$
<code>putAdd(vector, ids, additionVector)</code>	This is a temporary replacement for <i>Numeric.put</i> as it was not doing what we thought it was doing.

`fipy.tools.vector.prune(array, shift, start=0, axis=0)`

removes elements with indices $i = start + shift * n$ where $n = 0, 1, 2, \dots$

```
>>> prune(numerix.arange(10), 3, 5)
array([0, 1, 2, 3, 4, 5, 6, 7, 8, 9])
>>> prune(numerix.arange(10), 3, 2)
array([0, 1, 3, 4, 6, 7, 9])
>>> prune(numerix.arange(10), 3)
array([1, 2, 4, 5, 7, 8])
>>> prune(numerix.arange(4, 7), 3)
array([5, 6])
```

`fipy.tools.vector.putAdd(vector, ids, additionVector)`

This is a temporary replacement for *Numeric.put* as it was not doing what we thought it was doing.

22.9.13 fipy.tools.version

Shim for version checking

`distutils.version` is deprecated, but `packaging.version` is unavailable in Python 2.7

22.9.14 fipy.tools.vitals

Classes

<code>Vitals()</code>	Returns XML formatted information about current FiPy environment
-----------------------	--

`class fipy.tools.vitals.Vitals`

Bases: Document

Returns XML formatted information about current FiPy environment

`__str__()`

Return str(self).

`appendInfo(name, svnpath=None, **kwargs)`

append some additional information, possibly about a project under a separate svn repository

`property documentElement`

Top-level element of this document.

`property firstChild`

First child node, or None.

`property lastChild`

Last child node, or None.

`property localName`

Namespace-local name of this node.

22.10 fipy.variables

Collections of values supporting lazy evaluation

Modules

`fipy.variables.addOverFacesVariable`

`fipy.variables.arithmeticCellToFaceVariable`

`fipy.variables.betaNoiseVariable`

`fipy.variables.binaryOperatorVariable`

`fipy.variables.cellToFaceVariable`

`fipy.variables.cellVariable`

`fipy.variables.constant`

continues on next page

Table 3 – continued from previous page

<i>fipy.variables.constraintMask</i>
<i>fipy.variables.coupledCellVariable</i>
<i>fipy.variables.distanceVariable</i>
<i>fipy.variables.exponentialNoiseVariable</i>
<i>fipy.variables.faceGradContributionsVariable</i>
<i>fipy.variables.faceGradVariable</i>
<i>fipy.variables.faceVariable</i>
<i>fipy.variables.gammaNoiseVariable</i>
<i>fipy.variables.gaussCellGradVariable</i>
<i>fipy.variables.gaussianNoiseVariable</i>
<i>fipy.variables.harmonicCellToFaceVariable</i>
<i>fipy.variables.histogramVariable</i>
<i>fipy.variables.interfaceAreaVariable</i>
<i>fipy.variables.interfaceFlagVariable</i>
<i>fipy.variables.leastSquaresCellGradVariable</i>
<i>fipy.variables.levelSetDiffusionVariable</i>
<i>fipy.variables.meshVariable</i>
<i>fipy.variables.minmodCellToFaceVariable</i>
<i>fipy.variables.modCellGradVariable</i>
<i>fipy.variables.modCellToFaceVariable</i>
<i>fipy.variables.modFaceGradVariable</i>
<i>fipy.variables.modPhysicalField</i>
<i>fipy.variables.modularVariable</i>
<i>fipy.variables.noiseVariable</i>
<i>fipy.variables.operatorVariable</i>
<i>fipy.variables.scharfetterGummelFaceVariable</i>

continues on next page

Table 3 – continued from previous page

<code>fipy.variables.surfactantConvectionVariable</code>	
<code>fipy.variables.surfactantVariable</code>	
<code>fipy.variables.test</code>	Test numeric implementation of the mesh
<code>fipy.variables.unaryOperatorVariable</code>	
<code>fipy.variables.uniformNoiseVariable</code>	
<code>fipy.variables.variable</code>	

22.10.1 `fipy.variables.addOverFacesVariable`

22.10.2 `fipy.variables.arithmeticCellToFaceVariable`

22.10.3 `fipy.variables.betaNoiseVariable`

Classes

<code>BetaNoiseVariable(*args, **kwds)</code>	Represents a beta distribution of random numbers with the probability distribution
---	--

`class fipy.variables.betaNoiseVariable.BetaNoiseVariable(*args, **kwds)`

Bases: `NoiseVariable`

Represents a beta distribution of random numbers with the probability distribution

$$x^{\alpha-1} \frac{\beta^\alpha e^{-\beta x}}{\Gamma(\alpha)}$$

with a shape parameter α , a rate parameter β , and $\Gamma(z) = \int_0^\infty t^{z-1} e^{-t} dt$.

Seed the random module for the sake of deterministic test results.

```
>>> from fipy import numerix
>>> numerix.random.seed(1)
```

We generate noise on a uniform Cartesian mesh

```
>>> from fipy.variables.variable import Variable
>>> alpha = Variable()
>>> beta = Variable()
>>> from fipy.meshes import Grid2D
>>> noise = BetaNoiseVariable(mesh = Grid2D(nx = 100, ny = 100), alpha = alpha,
-> beta = beta)
```

We histogram the root-volume-weighted noise distribution

```
>>> from fipy.variables.histogramVariable import HistogramVariable
>>> histogram = HistogramVariable(distribution = noise, dx = 0.01, nx = 100)
```

and compare to a Gaussian distribution


```
>>> from fipy.variables.cellVariable import CellVariable
>>> betadist = CellVariable(mesh = histogram.mesh)
>>> x = CellVariable(mesh=histogram.mesh, value=histogram.mesh.cellCenters[0])
>>> from scipy.special import gamma as Gamma
>>> betadist = ((Gamma(alpha + beta) / (Gamma(alpha) * Gamma(beta)))
...             * x**(alpha - 1) * (1 - x)**(beta - 1))
```


```
>>> if __name__ == '__main__':
...     from fipy import Viewer
...     viewer = Viewer(vars=noise, datamin=0, datamax=1)
...     histoplot = Viewer(vars=(histogram, betadist),
...                         datamin=0, datamax=1.5)
```

```
>>> from fipy.tools.numerix import arange
```

```
>>> for a in arange(0.5, 5, 0.5):
...     alpha.value = a
...     for b in arange(0.5, 5, 0.5):
...         beta.value = b
...         if __name__ == '__main__':
...             import sys
...             print("alpha: %g, beta: %g" % (alpha, beta), file=sys.stderr)
...             viewer.plot()
...             histoplot.plot()
```

```
>>> print(abs(noise.faceGrad.divergence.cellVolumeAverage) < 5e-15)
1
```

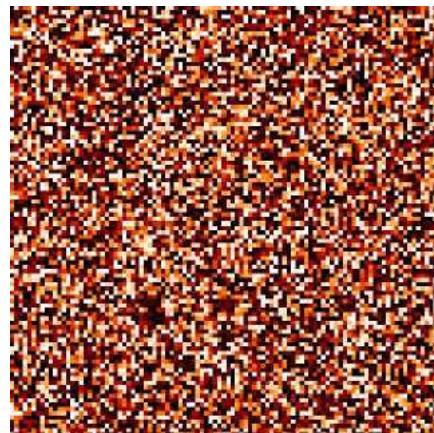

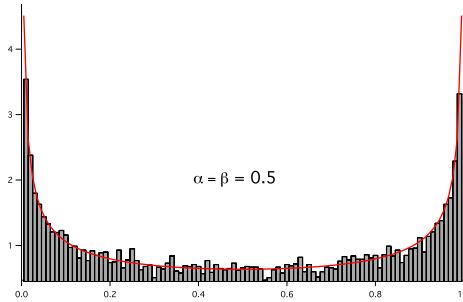

Parameters

- **mesh** (`Mesh`) – The mesh on which to define the noise.
- **alpha** (`float`) – The parameter α .
- **beta** (`float`) – The parameter β .

`__abs__()`

Following test it to fix a bug with C inline string using `abs()` instead of `fabs()`

```
>>> print(abs(Variable(2.3) - Variable(1.2)))
1.1
```

Check representation works with different versions of numpy

```
>>> print(repr(abs(Variable(2.3))))
numerix.fabs(Variable(value=array(2.3)))
```

`__and__(other)`

This test case has been added due to a weird bug that was appearing.

```
>>> a = Variable(value=(0, 0, 1, 1))
>>> b = Variable(value=(0, 1, 0, 1))
>>> print(numerix.equal((a == 0) & (b == 1), [False, True, False, False]).all())
True
>>> print(a & b)
[0 0 0 1]
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx=4)
>>> from fipy.variables.cellVariable import CellVariable
>>> a = CellVariable(value=(0, 0, 1, 1), mesh=mesh)
>>> b = CellVariable(value=(0, 1, 0, 1), mesh=mesh)
>>> print(numerix.allequal((a == 0) & (b == 1), [False, True, False, False]))
True
>>> print(a & b)
[0 0 0 1]
```

`__array__(t=None)`

Attempt to convert the *Variable* to a numerix *array* object

```
>>> v = Variable(value=[2, 3])
>>> print(numerix.array(v))
[2 3]
```

A dimensional *Variable* will convert to the numeric value in its base units

```
>>> v = Variable(value=[2, 3], unit="mm")
>>> numerix.array(v)
array([ 0.002,  0.003])
```

`__array_wrap__(arr, context=None)`

Required to prevent numpy not calling the reverse binary operations. Both the following tests are examples ufuncs.

```
>>> print(type(numerix.array([1.0, 2.0]) * Variable([1.0, 2.0])))
<class 'fipy.variables.binaryOperatorVariable...binOp'>
```

```
>>> from scipy.special import gamma as Gamma
>>> print(type(Gamma(Variable([1.0, 2.0]))))
<class 'fipy.variables.unaryOperatorVariable...unOp'>
```

`__bool__()`

```
>>> print(bool(Variable(value=0)))
0
>>> print(bool(Variable(value=(0, 0, 1, 1))))
Traceback (most recent call last):
...
ValueError: The truth value of an array with more than one element is ambiguous.
→ Use a.any() or a.all()
```

`__call__(points=None, order=0, nearestCellIDs=None)`

Interpolates the *CellVariable* to a set of points using a method that has a memory requirement on the order of *Ncells* by *Npoints* in general, but uses only *Ncells* when the *CellVariable*'s mesh is a *UniformGrid* object.

Tests

```
>>> from fipy import *
>>> m = Grid2D(nx=3, ny=2)
>>> v = CellVariable(mesh=m, value=m.cellCenters[0])
>>> print(v((0., 1.1, 1.2), (0., 1., 1.)))
[ 0.5  1.5  1.5]
>>> print(v((0., 1.1, 1.2), (0., 1., 1.)), order=1)
[ 0.25  1.1   1.2 ]
>>> m0 = Grid2D(nx=2, ny=2, dx=1., dy=1.)
>>> m1 = Grid2D(nx=4, ny=4, dx=.5, dy=.5)
>>> x, y = m0.cellCenters
>>> v0 = CellVariable(mesh=m0, value=x * y)
>>> print(v0(m1.cellCenters.globalValue))
[ 0.25  0.25  0.75  0.75  0.25  0.25  0.75  0.75  0.75  0.75  2.25  2.25
 0.75  0.75  2.25  2.25]
>>> print(v0(m1.cellCenters.globalValue, order=1))
[ 0.125  0.25   0.5    0.625  0.25   0.375  0.875  1.      0.5     0.875
 1.875  2.25   0.625  1.      2.25   2.625]
```

Parameters

- **points** (tuple or list of tuple) – A point or set of points in the format (X, Y, Z)

- **order** ({0, 1}) – The order of interpolation, default is 0
- **nearestCellIDs** (*array_like*) – Optional argument if user can calculate own nearest cell IDs array, shape should be same as points

__eq__(other)

Test if a *Variable* is equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a == 4)
>>> b
(Variable(value=array(3)) == 4)
>>> b()
()
```

__ge__(other)

Test if a *Variable* is greater than or equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a >= 4)
>>> b
(Variable(value=array(3)) >= 4)
>>> b()
()
>>> a.value = 4
>>> print(b())
1
>>> a.value = 5
>>> print(b())
1
```

__getitem__(index)

“Evaluate” the *Variable* and return the specified element

```
>>> a = Variable(value=((3., 4.), (5., 6.)), unit="m") + "4 m"
>>> print(a[1, 1])
10.0 m
```

It is an error to slice a *Variable* whose *value* is not sliceable

```
>>> Variable(value=3)[2]
Traceback (most recent call last):
...
IndexError: 0-d arrays can't be indexed
```

__getstate__()

Used internally to collect the necessary information to pickle the *CellVariable* to persistent storage.

__gt__(other)

Test if a *Variable* is greater than another quantity

```
>>> a = Variable(value=3)
>>> b = (a > 4)
>>> b
```

(continues on next page)

(continued from previous page)

```
(Variable(value=array(3)) > 4)
>>> print(b())
Ø
>>> a.value = 5
>>> print(b())
1
```

__hash__()

Return hash(self).

__invert__()

Returns logical “not” of the *Variable*

```
>>> a = Variable(value=True)
>>> print(~a)
False
```

__le__(other)

Test if a *Variable* is less than or equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a <= 4)
>>> b
(Variable(value=array(3)) <= 4)
>>> b()
1
>>> a.value = 4
>>> print(b())
1
>>> a.value = 5
>>> print(b())
Ø
```

__lt__(other)

Test if a *Variable* is less than another quantity

```
>>> a = Variable(value=3)
>>> b = (a < 4)
>>> b
(Variable(value=array(3)) < 4)
>>> b()
1
>>> a.value = 4
>>> print(b())
Ø
>>> print(10000000000000000000 * Variable(1) < 1.)
Ø
>>> print(1000 * Variable(1) < 1.)
Ø
```

Python automatically reverses the arguments when necessary

```
>>> 4 > Variable(value=3)
(Variable(value=array(3)) < 4)
```

__ne__(other)

Test if a *Variable* is not equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a != 4)
>>> b
(Variable(value=array(3)) != 4)
>>> b()
1
```

static __new__(cls, *args, **kwds)**__nonzero__()**

```
>>> print(bool(Variable(value=0)))
0
>>> print(bool(Variable(value=(0, 0, 1, 1))))
Traceback (most recent call last):
...
ValueError: The truth value of an array with more than one element is ambiguous.
→ Use a.any() or a.all()
```

__or__(other)

This test case has been added due to a weird bug that was appearing.

```
>>> a = Variable(value=(0, 0, 1, 1))
>>> b = Variable(value=(0, 1, 0, 1))
>>> print(numerix.equal((a == 0) | (b == 1), [True, True, False, True]).all())
True
>>> print(a | b)
[0 1 1 1]
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx=4)
>>> from fipy.variables.cellVariable import CellVariable
>>> a = CellVariable(value=(0, 0, 1, 1), mesh=mesh)
>>> b = CellVariable(value=(0, 1, 0, 1), mesh=mesh)
>>> print(numerix.allequal((a == 0) | (b == 1), [True, True, False, True]))
True
>>> print(a | b)
[0 1 1 1]
```

__pow__(other)

return self**other, or self raised to power other

```
>>> print(Variable(1, "mol/l")**3)
1.0 mol**3/l**3
>>> print((Variable(1, "mol/l")**3).unit)
<PhysicalUnit mol**3/l**3>
```

__repr__()

Return repr(self).

__setstate__(dict)

Used internally to create a new *CellVariable* from pickled persistent storage.

__str__()

Return str(self).

all(axis=None)

```
>>> print(Variable(value=(0, 0, 1, 1)).all())
0
>>> print(Variable(value=(1, 1, 1, 1)).all())
1
```

allclose(other, rtol=1e-05, atol=1e-08)

```
>>> var = Variable((1, 1))
>>> print(var.allclose((1, 1)))
1
>>> print(var.allclose((1,)))
1
```

The following test is to check that the system does not run out of memory.

```
>>> from fipy.tools import numerix
>>> var = Variable(numerix.ones(10000))
>>> print(var.allclose(numerix.zeros(10000, 'l')))
False
```

any(axis=None)

```
>>> print(Variable(value=0).any())
0
>>> print(Variable(value=(0, 0, 1, 1)).any())
1
```

property arithmeticFaceValue

Returns a *FaceVariable* whose value corresponds to the arithmetic interpolation of the adjacent cells:

$$\phi_f = (\phi_1 - \phi_2) \frac{d_{f2}}{d_{12}} + \phi_2$$

```
>>> from fipy.meshes import Grid1D
>>> from fipy import numerix
>>> mesh = Grid1D(dx = (1., 1.))
>>> L = 1
>>> R = 2
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (0.5 / 1.) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (2., 4.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (1.0 / 3.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (10., 100.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (5.0 / 55.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

property `cellVolumeAverage`

Return the cell-volume-weighted average of the *CellVariable*:

$$\langle \phi \rangle_{\text{vol}} = \frac{\sum_{\text{cells}} \phi_{\text{cell}} V_{\text{cell}}}{\sum_{\text{cells}} V_{\text{cell}}}$$

```
>>> from fipy.meshes import Grid2D
>>> from fipy.variables.cellVariable import CellVariable
>>> mesh = Grid2D(nx = 3, ny = 1, dx = .5, dy = .1)
>>> var = CellVariable(value = (1, 2, 6), mesh = mesh)
>>> print(var.cellVolumeAverage)
3.0
```

`constrain(value, where=None)`

Constrains the *CellVariable* to *value* at a location specified by *where*.

```
>>> from fipy import *
>>> m = Grid1D(nx=3)
>>> v = CellVariable(mesh=m, value=m.cellCenters[0])
>>> v.constrain(0., where=m.facesLeft)
>>> v.faceGrad.constrain([1.], where=m.facesRight)
>>> print(v.faceGrad)
[[ 1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 0.   1.   2.   2.5]
```

Changing the constraint changes the dependencies

```
>>> v.constrain(1., where=m.facesLeft)
>>> print(v.faceGrad)
[[-1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 1.   1.   2.   2.5]
```

Constraints can be *Variable*

```
>>> c = Variable(0.)
>>> v.constrain(c, where=m.facesLeft)
```

(continues on next page)

(continued from previous page)

```
>>> print(v.faceGrad)
[[ 1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 0.  1.  2.  2.5]
>>> c.value = 1.
>>> print(v.faceGrad)
[[-1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 1.  1.  2.  2.5]
```

Constraints can have a *Variable* mask.

```
>>> v = CellVariable(mesh=m)
>>> mask = FaceVariable(mesh=m, value=m.facesLeft)
>>> v.constrain(1., where=mask)
>>> print(v.faceValue)
[ 1.  0.  0.  0.]
>>> mask[:] = mask | m.facesRight
>>> print(v.faceValue)
[ 1.  0.  0.  1.]
```

property constraintMask

Test that *constraintMask* returns a Variable that updates itself whenever the constraints change.

```
>>> from fipy import *
>>>
>>> m = Grid2D(nx=2, ny=2)
>>> x, y = m.cellCenters
>>> v0 = CellVariable(mesh=m)
>>> v0.constrain(1., where=m.facesLeft)
>>> print(v0.faceValue.constraintMask)
[False False False False False False True False False True False False]
>>> print(v0.faceValue)
[ 0.  0.  0.  0.  0.  1.  0.  0.  1.  0.  0.]
>>> v0.constrain(3., where=m.facesRight)
>>> print(v0.faceValue.constraintMask)
[False False False False False False True False True True False True]
>>> print(v0.faceValue)
[ 0.  0.  0.  0.  0.  1.  0.  3.  1.  0.  3.]
>>> v1 = CellVariable(mesh=m)
>>> v1.constrain(1., where=(x < 1) & (y < 1))
>>> print(v1.constraintMask)
[ True False False False]
>>> print(v1)
[ 1.  0.  0.  0.]
>>> v1.constrain(3., where=(x > 1) & (y > 1))
>>> print(v1.constraintMask)
[ True False False  True]
>>> print(v1)
[ 1.  0.  0.  3.]
```

copy()

Copy the value of the *NoiseVariable* to a static *CellVariable*.

dot(*other*, *opShape=None*, *operatorClass=None*)

Return the mesh-element–by–mesh-element (cell-by-cell, face-by-face, etc.) scalar product

$$\text{extself} \cdot \text{extother}$$

Both *self* and *other* can be of arbitrary rank, and *other* does not need to be a *MeshVariable*.

property faceGrad

Return $\nabla\phi$ as a rank-1 *FaceVariable* using differencing for the normal direction(second-order gradient).

property faceGradAverage

Deprecated since version 3.3: use *grad.arithmeticFaceValue* instead

Return $\nabla\phi$ as a rank-1 *FaceVariable* using averaging for the normal direction(second-order gradient)

property faceValue

Returns a *FaceVariable* whose value corresponds to the arithmetic interpolation of the adjacent cells:

$$\phi_f = (\phi_1 - \phi_2) \frac{d_{f2}}{d_{12}} + \phi_2$$

```
>>> from fipy.meshes import Grid1D
>>> from fipy import numerix
>>> mesh = Grid1D(dx = (1., 1.))
>>> L = 1
>>> R = 2
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (0.5 / 1.) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (2., 4.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (1.0 / 3.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (10., 100.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (5.0 / 55.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

property gaussGrad

Return $\frac{1}{V_P} \sum_f \vec{n}\phi_f A_f$ as a rank-1 *CellVariable* (first-order gradient).

getscctype(*default=None*)

Returns the Numpy *scctype* of the underlying array.

```
>>> Variable(1).getSctype() == numerix.NUMERIX.obj2sctype(numerix.array(1))
True
>>> Variable(1.).getSctype() == numerix.NUMERIX.obj2sctype(numerix.array(1.))
True
>>> Variable((1, 1.)).getSctype() == numerix.NUMERIX.obj2sctype(numerix.
->array((1., 1.)))
True
```

property globalValue

Concatenate and return values from all processors

When running on a single processor, the result is identical to `value`.

property grad

Return $\nabla\phi$ as a rank-1 *CellVariable* (first-order gradient).

property harmonicFaceValue

Returns a *FaceVariable* whose value corresponds to the harmonic interpolation of the adjacent cells:

$$\phi_f = \frac{\phi_1 \phi_2}{(\phi_2 - \phi_1) \frac{d_{f2}}{d_{12}} + \phi_1}$$

```
>>> from fipy.meshes import Grid1D
>>> from fipy import numerix
>>> mesh = Grid1D(dx = (1., 1.))
>>> L = 1
>>> R = 2
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.harmonicFaceValue[mesh.interiorFaces.value]
>>> answer = L * R / ((R - L) * (0.5 / 1.) + L)
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (2., 4.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.harmonicFaceValue[mesh.interiorFaces.value]
>>> answer = L * R / ((R - L) * (1.0 / 3.0) + L)
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (10., 100.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.harmonicFaceValue[mesh.interiorFaces.value]
>>> answer = L * R / ((R - L) * (5.0 / 55.0) + L)
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

inBaseUnits()

Return the value of the *Variable* with all units reduced to their base SI elements.

```
>>> e = Variable(value="2.7 Hartree*Nav")
>>> print(e.inBaseUnits().allclose("7088849.01085 kg*m**2/s**2/mol"))
1
```

inUnitsOf(*units)

Returns one or more *Variable* objects that express the same physical quantity in different units. The units are specified by strings containing their names. The units must be compatible with the unit of the object. If one unit is specified, the return value is a single *Variable*.

```
>>> freeze = Variable('0 degC')
>>> print(freeze.inUnitsOf('degF').allclose("32.0 degF"))
1
```

If several units are specified, the return value is a tuple of *Variable* instances with one element per unit such that the sum of all quantities in the tuple equals the the original quantity and all the values except for the last one are integers. This is used to convert to irregular unit systems like hour/minute/second. The original object will not be changed.

```
>>> t = Variable(value=314159., unit='s')
>>> from builtins import zip
>>> print(numerix.allclose([e.allclose(v) for (e, v) in zip(t.inUnitsOf('d', 'h',
    'min', 's'), ['3.0 d', '15.0 h',
    '15.0 min', '59.0 s'])], True))
1
```

property leastSquaresGrad

Return $\nabla\phi$, which is determined by solving for $\nabla\phi$ in the following matrix equation,

$$\nabla\phi \cdot \sum_f d_{AP}^2 \vec{n}_{AP} \otimes \vec{n}_{AP} = \sum_f d_{AP}^2 (\vec{n} \cdot \nabla\phi)_{AP}$$

The matrix equation is derived by minimizing the following least squares sum,

$$F(\phi_x, \phi_y) = \sqrt{\sum_f (d_{AP} \vec{n}_{AP} \cdot \nabla\phi - d_{AP} (\vec{n}_{AP} \cdot \nabla\phi)_{AP})^2}$$

Tests

```
>>> from fipy import Grid2D
>>> m = Grid2D(nx=2, ny=2, dx=0.1, dy=2.0)
>>> print(numerix.allclose(CellVariable(mesh=m, value=(0, 1, 3, 6)).
    leastSquaresGrad.globalValue, [
        [[8.0, 8.0, 24.0, 24.0],
         [1.2, 2.0, 1.2, 2.0]]]))
True
```

```
>>> from fipy import Grid1D
>>> print(numerix.allclose(CellVariable(mesh=Grid1D(dx=(2.0, 1.0, 0.5)),
    value=(0, 1, 2)).leastSquaresGrad.
    globalValue, [[0.461538461538, 0.8, 1.2]]))
True
```

property mag

The magnitude of the *Variable*, e.g., $|\vec{\psi}| = \sqrt{\vec{\psi} \cdot \vec{\psi}}$.

max(axis=None)

Return the maximum along a given axis.

min(axis=None)

```
>>> from fipy import Grid2D, CellVariable
>>> mesh = Grid2D(nx=5, ny=5)
>>> x, y = mesh.cellCenters
>>> v = CellVariable(mesh=mesh, value=x*y)
>>> print(v.min())
0.25
```

property minmodFaceValueReturns a *FaceVariable* with a value that is the minimum of the absolute values of the adjacent cells. If the values are of opposite sign then the result is zero:

$$\phi_f = \begin{cases} \phi_1 & \text{when } |\phi_1| \leq |\phi_2|, \\ \phi_2 & \text{when } |\phi_2| < |\phi_1|, \\ 0 & \text{when } \phi_1\phi_2 < 0 \end{cases}$$

```
>>> from fipy import *
>>> print(CellVariable(mesh=Grid1D(nx=2), value=(1, 2)).minmodFaceValue)
[1 1 2]
>>> print(CellVariable(mesh=Grid1D(nx=2), value=(-1, -2)).minmodFaceValue)
[-1 -1 -2]
>>> print(CellVariable(mesh=Grid1D(nx=2), value=(-1, 2)).minmodFaceValue)
[-1 0 2]
```

property oldReturn the values of the *CellVariable* from the previous solution sweep.Combinations of *CellVariable*'s should also return old values.

```
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx = 2)
>>> from fipy.variables.cellVariable import CellVariable
>>> var1 = CellVariable(mesh = mesh, value = (2, 3), hasOld = 1)
>>> var2 = CellVariable(mesh = mesh, value = (3, 4))
>>> v = var1 * var2
>>> print(v)
[ 6 12]
>>> var1.value = ((3, 2))
>>> print(v)
[9 8]
>>> print(v.old)
[ 6 12]
```

The following small test is to correct for a bug when the operator does not just use variables.

```
>>> v1 = var1 * 3
>>> print(v1)
[9 6]
>>> print(v1.old)
[6 9]
```

rdot(*other*, *opShape=None*, *operatorClass=None*)

Return the mesh-element–by–mesh-element (cell-by-cell, face-by-face, etc.) scalar product

$$\text{exto}other \cdot \text{extsel}f$$

Both *self* and *other* can be of arbitrary rank, and *other* does not need to be a *MeshVariable*.

release(*constraint*)

Remove *constraint* from *self*

```
>>> from fipy import *
>>> m = Grid1D(nx=3)
>>> v = CellVariable(mesh=m, value=m.cellCenters[0])
>>> c = Constraint(0., where=m.facesLeft)
>>> v.constrain(c)
>>> print(v.faceValue)
[ 0.  1.  2.  2.5]
>>> v.release(constraint=c)
>>> print(v.faceValue)
[ 0.5  1.  2.  2.5]
```

scramble()

Generate a new random distribution.

setValue(*value*, *unit=None*, *where=None*)

Set the value of the Variable. Can take a masked array.

```
>>> a = Variable((1, 2, 3))
>>> a.setValue(5, where=(1, 0, 1))
>>> print(a)
[5 2 5]
```

```
>>> b = Variable((4, 5, 6))
>>> a.setValue(b, where=(1, 0, 1))
>>> print(a)
[4 2 6]
>>> print(b)
[4 5 6]
>>> a.value = 3
>>> print(a)
[3 3 3]
```

```
>>> b = numerix.array((3, 4, 5))
>>> a.value = b
>>> a[:] = 1
>>> print(b)
[3 4 5]
```

```
>>> a.setValue((4, 5, 6), where=(1, 0))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

property shape

```
>>> from fipy.meshes import Grid2D
>>> from fipy.variables.cellVariable import CellVariable
>>> mesh = Grid2D(nx=2, ny=3)
>>> var = CellVariable(mesh=mesh)
>>> print(numerix.allequal(var.shape, (6,)))
True
>>> print(numerix.allequal(var.arithmeticFaceValue.shape, (17,)))
True
>>> print(numerix.allequal(var.grad.shape, (2, 6)))
True
>>> print(numerix.allequal(var.faceGrad.shape, (2, 17)))
True
```

Have to account for zero length arrays

```
>>> from fipy import Grid1D
>>> m = Grid1D(nx=0)
>>> v = CellVariable(mesh=m, elementshape=(2,))
>>> numerix.allequal((v * 1).shape, (2, 0))
True
```

std(*axis=None*, *kwargs*)**

Evaluate standard deviation of all the elements of a *MeshVariable*.

Adapted from <http://mpitutorial.com/tutorials/mpi-reduce-and-allreduce/>

```
>>> import fipy as fp
>>> mesh = fp.Grid2D(nx=2, ny=2, dx=2., dy=5.)
>>> var = fp.CellVariable(value=(1., 2., 3., 4.), mesh=mesh)
>>> print((var.std()**2).allclose(1.25))
True
```

property unit

Return the unit object of *self*.

```
>>> Variable(value="1 m").unit
<PhysicalUnit m>
```

updateOld()

Set the values of the previous solution sweep to the current values.

```
>>> from fipy import *
>>> v = CellVariable(mesh=Grid1D(), hasOld=False)
>>> v.updateOld()
Traceback (most recent call last):
...
AssertionError: The updateOld method requires the CellVariable to have an old_
value. Set hasOld to True when instantiating the CellVariable.
```

property value

“Evaluate” the *Variable* and return its value (longhand)

```
>>> a = Variable(value=3)
>>> print(a.value)
3
>>> b = a + 4
>>> b
(Variable(value=array(3)) + 4)
>>> b.value
7
```

22.10.4 fipy.variables.binaryOperatorVariable

22.10.5 fipy.variables.cellToFaceVariable

22.10.6 fipy.variables.cellVariable

Classes

<code>CellVariable(*args, **kwds)</code>	Represents the field of values of a <i>Mesh</i> .
--	---

`class fipy.variables.cellVariable.CellVariable(*args, **kwds)`

Bases: `MeshVariable`

Represents the field of values of a variable on a *Mesh*.

A *CellVariable* can be pickled to persistent storage (disk) for later use:

```
>>> from fipy.meshes import Grid2D
>>> mesh = Grid2D(dx = 1., dy = 1., nx = 10, ny = 10)
```

```
>>> var = CellVariable(mesh = mesh, value = 1., hasOld = 1, name = 'test')
>>> x, y = mesh.cellCenters
>>> var.value = (x * y)
```

```
>>> from fipy.tools import dump
>>> (f, filename) = dump.write(var, extension = '.gz')
>>> unPickledVar = dump.read(filename, f)
```

```
>>> print(var.allclose(unPickledVar, atol = 1e-10, rtol = 1e-10))
1
```

Parameters

- `mesh` (`Mesh`) – the mesh that defines the geometry of this *Variable*
- `name` (`str`) – the user-readable name of the *Variable*
- `value` (`float or array_like`) – the initial value
- `rank` (`int`) – the rank (number of dimensions) of each element of this *Variable*. Default: 0
- `elementshape` (`tuple of int`) – the shape of each element of this variable Default: `rank * (mesh.dim,)`

- `unit(str or PhysicalUnit)` – The physical units of the variable

`__abs__()`

Following test it to fix a bug with C inline string using `abs()` instead of `fabs()`

```
>>> print(abs(Variable(2.3) - Variable(1.2)))
1.1
```

Check representation works with different versions of numpy

```
>>> print(repr(abs(Variable(2.3))))
numerix.fabs(Variable(value=array(2.3)))
```

`__and__(other)`

This test case has been added due to a weird bug that was appearing.

```
>>> a = Variable(value=(0, 0, 1, 1))
>>> b = Variable(value=(0, 1, 0, 1))
>>> print(numerix.equal((a == 0) & (b == 1), [False, True, False, False]).all())
True
>>> print(a & b)
[0 0 0 1]
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx=4)
>>> from fipy.variables.cellVariable import CellVariable
>>> a = CellVariable(value=(0, 0, 1, 1), mesh=mesh)
>>> b = CellVariable(value=(0, 1, 0, 1), mesh=mesh)
>>> print(numerix.allequal((a == 0) & (b == 1), [False, True, False, False]))
True
>>> print(a & b)
[0 0 0 1]
```

`__array__(t=None)`

Attempt to convert the *Variable* to a numerix *array* object

```
>>> v = Variable(value=[2, 3])
>>> print(numerix.array(v))
[2 3]
```

A dimensional *Variable* will convert to the numeric value in its base units

```
>>> v = Variable(value=[2, 3], unit="mm")
>>> numerix.array(v)
array([ 0.002,  0.003])
```

`__array_wrap__(arr, context=None)`

Required to prevent numpy not calling the reverse binary operations. Both the following tests are examples ufuncs.

```
>>> print(type(numerix.array([1.0, 2.0]) * Variable([1.0, 2.0])))
<class 'fipy.variables.binaryOperatorVariable...binOp'>
```

```
>>> from scipy.special import gamma as Gamma
>>> print(type(Gamma(Variable([1.0, 2.0]))))
<class 'fipy.variables.unaryOperatorVariable...unOp'>
```

`__bool__()`

```
>>> print(bool(Variable(value=0)))
0
>>> print(bool(Variable(value=(0, 0, 1, 1))))
Traceback (most recent call last):
...
ValueError: The truth value of an array with more than one element is ambiguous.
Use a.any() or a.all()
```

`__call__(points=None, order=0, nearestCellIDs=None)`

Interpolates the *CellVariable* to a set of points using a method that has a memory requirement on the order of *Ncells* by *Npoints* in general, but uses only *Ncells* when the *CellVariable*'s mesh is a *UniformGrid* object.

Tests

```
>>> from fipy import *
>>> m = Grid2D(nx=3, ny=2)
>>> v = CellVariable(mesh=m, value=m.cellCenters[0])
>>> print(v((0., 1.1, 1.2), (0., 1., 1.)))
[ 0.5  1.5  1.5]
>>> print(v((0., 1.1, 1.2), (0., 1., 1.)), order=1)
[ 0.25  1.1   1.2 ]
>>> m0 = Grid2D(nx=2, ny=2, dx=1., dy=1.)
>>> m1 = Grid2D(nx=4, ny=4, dx=.5, dy=.5)
>>> x, y = m0.cellCenters
>>> v0 = CellVariable(mesh=m0, value=x * y)
>>> print(v0(m1.cellCenters.globalValue))
[ 0.25  0.25  0.75  0.75  0.25  0.25  0.75  0.75  0.75  0.75  2.25  2.25
 0.75  0.75  2.25  2.25]
>>> print(v0(m1.cellCenters.globalValue, order=1))
[ 0.125  0.25   0.5    0.625  0.25   0.375  0.875  1.      0.5     0.875
 1.875  2.25   0.625  1.      2.25   2.625]
```

Parameters

- **points** (tuple or list of tuple) – A point or set of points in the format (X, Y, Z)
- **order** ({0, 1}) – The order of interpolation, default is 0
- **nearestCellIDs** (array_like) – Optional argument if user can calculate own nearest cell IDs array, shape should be same as points

`__eq__(other)`

Test if a *Variable* is equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a == 4)
>>> b
(Variable(value=array(3)) == 4)
```

(continues on next page)

(continued from previous page)

```
>>> b()
()
```

__ge__(other)Test if a *Variable* is greater than or equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a >= 4)
>>> b
(Variable(value=array(3)) >= 4)
>>> b()
()
>>> a.value = 4
>>> print(b())
1
>>> a.value = 5
>>> print(b())
1
```

__getitem__(index)“Evaluate” the *Variable* and return the specified element

```
>>> a = Variable(value=((3., 4.), (5., 6.)), unit="m") + "4 m"
>>> print(a[1, 1])
10.0 m
```

It is an error to slice a *Variable* whose *value* is not sliceable

```
>>> Variable(value=3)[2]
Traceback (most recent call last):
...
IndexError: 0-d arrays can't be indexed
```

__getstate__()Used internally to collect the necessary information to **pickle** the *CellVariable* to persistent storage.**__gt__(other)**Test if a *Variable* is greater than another quantity

```
>>> a = Variable(value=3)
>>> b = (a > 4)
>>> b
(Variable(value=array(3)) > 4)
>>> print(b())
()
>>> a.value = 5
>>> print(b())
1
```

__hash__()

Return hash(self).

__invert__()

Returns logical “not” of the *Variable*

```
>>> a = Variable(value=True)
>>> print(~a)
False
```

__le__(other)

Test if a *Variable* is less than or equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a <= 4)
>>> b
(Variable(value=array(3)) <= 4)
>>> b()
1
>>> a.value = 4
>>> print(b())
1
>>> a.value = 5
>>> print(b())
0
```

__lt__(other)

Test if a *Variable* is less than another quantity

```
>>> a = Variable(value=3)
>>> b = (a < 4)
>>> b
(Variable(value=array(3)) < 4)
>>> b()
1
>>> a.value = 4
>>> print(b())
0
>>> print(10000000000000000 * Variable(1) < 1.)
0
>>> print(1000 * Variable(1) < 1.)
0
```

Python automatically reverses the arguments when necessary

```
>>> 4 > Variable(value=3)
(Variable(value=array(3)) < 4)
```

__ne__(other)

Test if a *Variable* is not equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a != 4)
>>> b
(Variable(value=array(3)) != 4)
>>> b()
1
```

```
static __new__(cls, *args, **kwds)
```

```
__nonzero__()
```

```
>>> print(bool(Variable(value=0)))
0
>>> print(bool(Variable(value=(0, 0, 1, 1))))
Traceback (most recent call last):
...
ValueError: The truth value of an array with more than one element is ambiguous.
→ Use a.any() or a.all()
```

```
__or__(other)
```

This test case has been added due to a weird bug that was appearing.

```
>>> a = Variable(value=(0, 0, 1, 1))
>>> b = Variable(value=(0, 1, 0, 1))
>>> print(numerix.equal((a == 0) | (b == 1), [True, True, False, True]).all())
True
>>> print(a | b)
[0 1 1 1]
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx=4)
>>> from fipy.variables.cellVariable import CellVariable
>>> a = CellVariable(value=(0, 0, 1, 1), mesh=mesh)
>>> b = CellVariable(value=(0, 1, 0, 1), mesh=mesh)
>>> print(numerix.allequal((a == 0) | (b == 1), [True, True, False, True]))
True
>>> print(a | b)
[0 1 1 1]
```

```
__pow__(other)
```

return self**other, or self raised to power other

```
>>> print(Variable(1, "mol/l")**3)
1.0 mol**3/l**3
>>> print((Variable(1, "mol/l")**3).unit)
<PhysicalUnit mol**3/l**3>
```

```
__repr__()
```

Return repr(self).

```
__setstate__(dict)
```

Used internally to create a new *CellVariable* from pickled persistent storage.

```
__str__()
```

Return str(self).

```
all(axis=None)
```

```
>>> print(Variable(value=(0, 0, 1, 1)).all())
0
>>> print(Variable(value=(1, 1, 1, 1)).all())
1
```

allclose(*other*, *rtol*=*1e-05*, *atol*=*1e-08*)

```
>>> var = Variable((1, 1))
>>> print(var.allclose((1, 1)))
1
>>> print(var.allclose((1,)))
1
```

The following test is to check that the system does not run out of memory.

```
>>> from fipy.tools import numerix
>>> var = Variable(numerix.ones(10000))
>>> print(var.allclose(numerix.zeros(10000, '1')))
False
```

any(*axis=None*)

```
>>> print(Variable(value=0).any())
0
>>> print(Variable(value=(0, 0, 1, 1)).any())
1
```

property arithmeticFaceValue

Returns a *FaceVariable* whose value corresponds to the arithmetic interpolation of the adjacent cells:

$$\phi_f = (\phi_1 - \phi_2) \frac{d_{f2}}{d_{12}} + \phi_2$$

```
>>> from fipy.meshes import Grid1D
>>> from fipy import numerix
>>> mesh = Grid1D(dx = (1., 1.))
>>> L = 1
>>> R = 2
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (0.5 / 1.) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (2., 4.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (1.0 / 3.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (10., 100.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (5.0 / 55.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

property cellVolumeAverage

Return the cell-volume-weighted average of the *CellVariable*:

$$\langle \phi \rangle_{\text{vol}} = \frac{\sum_{\text{cells}} \phi_{\text{cell}} V_{\text{cell}}}{\sum_{\text{cells}} V_{\text{cell}}}$$

```
>>> from fipy.meshes import Grid2D
>>> from fipy.variables.cellVariable import CellVariable
>>> mesh = Grid2D(nx = 3, ny = 1, dx = .5, dy = .1)
>>> var = CellVariable(value = (1, 2, 6), mesh = mesh)
>>> print(var.cellVolumeAverage)
3.0
```

constraint(value, where=None)

Constrains the *CellVariable* to *value* at a location specified by *where*.

```
>>> from fipy import *
>>> m = Grid1D(nx=3)
>>> v = CellVariable(mesh=m, value=m.cellCenters[0])
>>> v.constrain(0., where=m.facesLeft)
>>> v.faceGrad.constrain([1.], where=m.facesRight)
>>> print(v.faceGrad)
[[ 1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 0.  1.  2.  2.5]
```

Changing the constraint changes the dependencies

```
>>> v.constrain(1., where=m.facesLeft)
>>> print(v.faceGrad)
[[-1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 1.  1.  2.  2.5]
```

Constraints can be *Variable*

```
>>> c = Variable(0.)
>>> v.constrain(c, where=m.facesLeft)
>>> print(v.faceGrad)
[[ 1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 0.  1.  2.  2.5]
>>> c.value = 1.
>>> print(v.faceGrad)
[[-1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 1.  1.  2.  2.5]
```

Constraints can have a *Variable* mask.

```
>>> v = CellVariable(mesh=m)
>>> mask = FaceVariable(mesh=m, value=m.facesLeft)
>>> v.constrain(1., where=mask)
```

(continues on next page)

(continued from previous page)

```
>>> print(v.faceValue)
[ 1.  0.  0.  0.]
>>> mask[:] = mask | m.facesRight
>>> print(v.faceValue)
[ 1.  0.  0.  1.]
```

property constraintMask

Test that *constraintMask* returns a Variable that updates itself whenever the constraints change.

```
>>> from fipy import *
```

```
>>> m = Grid2D(nx=2, ny=2)
>>> x, y = m.cellCenters
>>> v0 = CellVariable(mesh=m)
>>> v0.constrain(1., where=m.facesLeft)
>>> print(v0.faceValue.constraintMask)
[False False False False False False  True False False  True False False]
>>> print(v0.faceValue)
[ 0.  0.  0.  0.  0.  0.  1.  0.  0.  1.  0.  0.]
>>> v0.constrain(3., where=m.facesRight)
>>> print(v0.faceValue.constraintMask)
[False False False False False  True False  True  True False  True]
>>> print(v0.faceValue)
[ 0.  0.  0.  0.  0.  0.  1.  0.  3.  1.  0.  3.]
>>> v1 = CellVariable(mesh=m)
>>> v1.constrain(1., where=(x < 1) & (y < 1))
>>> print(v1.constraintMask)
[ True False False False]
>>> print(v1)
[ 1.  0.  0.  0.]
>>> v1.constrain(3., where=(x > 1) & (y > 1))
>>> print(v1.constraintMask)
[ True False False  True]
>>> print(v1)
[ 1.  0.  0.  3.]
```

copy()

Make an duplicate of the *Variable*

```
>>> a = Variable(value=3)
>>> b = a.copy()
>>> b
Variable(value=array(3))
```

The duplicate will not reflect changes made to the original

```
>>> a.setValue(5)
>>> b
Variable(value=array(3))
```

Check that this works for arrays.

```
>>> a = Variable(value=numerix.array([0, 1, 2]))
>>> b = a.copy()
>>> b
Variable(value=array([0, 1, 2]))
>>> a[1] = 3
>>> b
Variable(value=array([0, 1, 2]))
```

dot(*other*, *opShape=None*, *operatorClass=None*)

Return the mesh-element–by–mesh-element (cell-by-cell, face-by-face, etc.) scalar product

$$\text{ext}self \cdot \text{ext}other$$

Both *self* and *other* can be of arbitrary rank, and *other* does not need to be a *MeshVariable*.

property faceGrad

Return $\nabla\phi$ as a rank-1 *FaceVariable* using differencing for the normal direction(second-order gradient).

property faceGradAverage

Deprecated since version 3.3: use *grad.arithmeticFaceValue* instead

Return $\nabla\phi$ as a rank-1 *FaceVariable* using averaging for the normal direction(second-order gradient)

property faceValue

Returns a *FaceVariable* whose value corresponds to the arithmetic interpolation of the adjacent cells:

$$\phi_f = (\phi_1 - \phi_2) \frac{d_{f2}}{d_{12}} + \phi_2$$

```
>>> from fipy.meshes import Grid1D
>>> from fipy import numerix
>>> mesh = Grid1D(dx = (1., 1.))
>>> L = 1
>>> R = 2
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (0.5 / 1.) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (2., 4.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (1.0 / 3.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (10., 100.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (5.0 / 55.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

property gaussGrad

Return $\frac{1}{V_P} \sum_f \vec{n} \phi_f A_f$ as a rank-1 *CellVariable* (first-order gradient).

getsctype(*default=None*)

Returns the Numpy *sctype* of the underlying array.

```
>>> Variable(1).getsctype() == numerix.NUMERIX.obj2sctype(numerix.array(1))
True
>>> Variable(1.).getsctype() == numerix.NUMERIX.obj2sctype(numerix.array(1.))
True
>>> Variable((1, 1.)).getsctype() == numerix.NUMERIX.obj2sctype(numerix.
...array((1., 1.)))
True
```

property globalValue

Concatenate and return values from all processors

When running on a single processor, the result is identical to *value*.

property grad

Return $\nabla \phi$ as a rank-1 *CellVariable* (first-order gradient).

property harmonicFaceValue

Returns a *FaceVariable* whose value corresponds to the harmonic interpolation of the adjacent cells:

$$\phi_f = \frac{\phi_1 \phi_2}{(\phi_2 - \phi_1) \frac{d_{f2}}{d_{12}} + \phi_1}$$

```
>>> from fipy.meshes import Grid1D
>>> from fipy import numerix
>>> mesh = Grid1D(dx = (1., 1.))
>>> L = 1
>>> R = 2
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.harmonicFaceValue[mesh.interiorFaces.value]
>>> answer = L * R / ((R - L) * (0.5 / 1.) + L)
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (2., 4.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.harmonicFaceValue[mesh.interiorFaces.value]
>>> answer = L * R / ((R - L) * (1.0 / 3.0) + L)
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (10., 100.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.harmonicFaceValue[mesh.interiorFaces.value]
>>> answer = L * R / ((R - L) * (5.0 / 55.0) + L)
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

inBaseUnits()

Return the value of the *Variable* with all units reduced to their base SI elements.

```
>>> e = Variable(value="2.7 Hartree*Nav")
>>> print(e.inBaseUnits().allclose("7088849.01085 kg*m**2/s**2/mol"))
1
```

inUnitsOf(*units)

Returns one or more *Variable* objects that express the same physical quantity in different units. The units are specified by strings containing their names. The units must be compatible with the unit of the object. If one unit is specified, the return value is a single *Variable*.

```
>>> freeze = Variable('0 degC')
>>> print(freeze.inUnitsOf('degF').allclose("32.0 degF"))
1
```

If several units are specified, the return value is a tuple of *Variable* instances with one element per unit such that the sum of all quantities in the tuple equals the original quantity and all the values except for the last one are integers. This is used to convert to irregular unit systems like hour/minute/second. The original object will not be changed.

```
>>> t = Variable(value=314159., unit='s')
>>> from builtins import zip
>>> print(numerix.allclose([e.allclose(v) for (e, v) in zip(t.inUnitsOf('d', 'h'),
... 'min', 's'),
... ...
... '15.0 min', '59.0 s')]),
... ...
... True))
1
```

property leastSquaresGrad

Return $\nabla\phi$, which is determined by solving for $\nabla\phi$ in the following matrix equation,

$$\nabla \phi \cdot \sum_f d_{AP}^2 \vec{n}_{AP} \otimes \vec{n}_{AP} = \sum_f d_{AP}^2 (\vec{n} \cdot \nabla \phi)_{AP}$$

The matrix equation is derived by minimizing the following least squares sum,

$$F(\phi_x, \phi_y) = \sqrt{\sum_f (d_{AP} \vec{n}_{AP} \cdot \nabla \phi - d_{AP} (\vec{n}_{AP} \cdot \nabla \phi)_{AP})^2}$$

Tests

(continues on next page)

(continued from previous page)

```
    ↵globalValue, [[0.461538461538, 0.8, 1.2]]))
True
```

property mag

The magnitude of the *Variable*, e.g., $|\vec{\psi}| = \sqrt{\vec{\psi} \cdot \vec{\psi}}$.

max(*axis=None*)

Return the maximum along a given axis.

min(*axis=None*)

```
>>> from fipy import Grid2D, CellVariable
>>> mesh = Grid2D(nx=5, ny=5)
>>> x, y = mesh.cellCenters
>>> v = CellVariable(mesh=mesh, value=x*y)
>>> print(v.min())
0.25
```

property minmodFaceValue

Returns a *FaceVariable* with a value that is the minimum of the absolute values of the adjacent cells. If the values are of opposite sign then the result is zero:

$$\phi_f = \begin{cases} \phi_1 & \text{when } |\phi_1| \leq |\phi_2|, \\ \phi_2 & \text{when } |\phi_2| < |\phi_1|, \\ 0 & \text{when } \phi_1\phi_2 < 0 \end{cases}$$

```
>>> from fipy import *
>>> print(CellVariable(mesh=Grid1D(nx=2), value=(1, 2)).minmodFaceValue)
[1 1 2]
>>> print(CellVariable(mesh=Grid1D(nx=2), value=(-1, -2)).minmodFaceValue)
[-1 -1 -2]
>>> print(CellVariable(mesh=Grid1D(nx=2), value=(-1, 2)).minmodFaceValue)
[-1 0 2]
```

property old

Return the values of the *CellVariable* from the previous solution sweep.

Combinations of *CellVariable*'s should also return old values.

```
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx = 2)
>>> from fipy.variables.cellVariable import CellVariable
>>> var1 = CellVariable(mesh = mesh, value = (2, 3), hasOld = 1)
>>> var2 = CellVariable(mesh = mesh, value = (3, 4))
>>> v = var1 * var2
>>> print(v)
[ 6 12]
>>> var1.value = ((3, 2))
>>> print(v)
[9 8]
>>> print(v.old)
[ 6 12]
```

The following small test is to correct for a bug when the operator does not just use variables.

```
>>> v1 = var1 * 3
>>> print(v1)
[9 6]
>>> print(v1.old)
[6 9]
```

`rdot(other, opShape=None, operatorClass=None)`

Return the mesh-element–by–mesh-element (cell-by-cell, face-by-face, etc.) scalar product

$$\text{ext}_{\text{other}} \cdot \text{ext}_{\text{self}}$$

Both *self* and *other* can be of arbitrary rank, and *other* does not need to be a *MeshVariable*.

`release(constraint)`

Remove *constraint* from *self*

```
>>> from fipy import *
>>> m = Grid1D(nx=3)
>>> v = CellVariable(mesh=m, value=m.cellCenters[0])
>>> c = Constraint(0., where=m.facesLeft)
>>> v.constrain(c)
>>> print(v.faceValue)
[ 0.   1.   2.   2.5]
>>> v.release(constraint=c)
>>> print(v.faceValue)
[ 0.5  1.   2.   2.5]
```

`setValue(value, unit=None, where=None)`

Set the value of the Variable. Can take a masked array.

```
>>> a = Variable((1, 2, 3))
>>> a.setValue(5, where=(1, 0, 1))
>>> print(a)
[5 2 5]
```

```
>>> b = Variable((4, 5, 6))
>>> a.setValue(b, where=(1, 0, 1))
>>> print(a)
[4 2 6]
>>> print(b)
[4 5 6]
>>> a.value = 3
>>> print(a)
[3 3 3]
```

```
>>> b = numerix.array((3, 4, 5))
>>> a.value = b
>>> a[:] = 1
>>> print(b)
[3 4 5]
```

```
>>> a.setValue((4, 5, 6), where=(1, 0))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

property shape

```
>>> from fipy.meshes import Grid2D
>>> from fipy.variables.cellVariable import CellVariable
>>> mesh = Grid2D(nx=2, ny=3)
>>> var = CellVariable(mesh=mesh)
>>> print(numerix.allequal(var.shape, (6,)))
True
>>> print(numerix.allequal(var.arithmeticFaceValue.shape, (17,)))
True
>>> print(numerix.allequal(var.grad.shape, (2, 6)))
True
>>> print(numerix.allequal(var.faceGrad.shape, (2, 17)))
True
```

Have to account for zero length arrays

```
>>> from fipy import Grid1D
>>> m = Grid1D(nx=0)
>>> v = CellVariable(mesh=m, elementshape=(2,))
>>> numerix.allequal((v * 1).shape, (2, 0))
True
```

std(*axis=None*, *kargs*)**

Evaluate standard deviation of all the elements of a *MeshVariable*.

Adapted from <http://mpitutorial.com/tutorials/mpi-reduce-and-allreduce/>

```
>>> import fipy as fp
>>> mesh = fp.Grid2D(nx=2, ny=2, dx=2., dy=5.)
>>> var = fp.CellVariable(value=(1., 2., 3., 4.), mesh=mesh)
>>> print((var.std()**2).allclose(1.25))
True
```

property unit

Return the unit object of *self*.

```
>>> Variable(value="1 m").unit
<PhysicalUnit m>
```

updateOld()

Set the values of the previous solution sweep to the current values.

```
>>> from fipy import *
>>> v = CellVariable(mesh=Grid1D(), hasOld=False)
>>> v.updateOld()
Traceback (most recent call last):
...
```

(continues on next page)

(continued from previous page)

AssertionError: The updateOld method requires the CellVariable to have an old_value. Set hasOld to True when instantiating the CellVariable.

property value

“Evaluate” the *Variable* and return its value (longhand)

```
>>> a = Variable(value=3)
>>> print(a.value)
3
>>> b = a + 4
>>> b
(Variable(value=array(3)) + 4)
>>> b.value
7
```

22.10.7 fipy.variables.constant**22.10.8 fipy.variables.constraintMask****22.10.9 fipy.variables.coupledCellVariable****22.10.10 fipy.variables.distanceVariable****Classes***DistanceVariable*(*args, **kwds)A *DistanceVariable* object calculates ϕ so it satisfies,**class fipy.variables.distanceVariable.DistanceVariable(*args, **kwds)**Bases: *CellVariable*A *DistanceVariable* object calculates ϕ so it satisfies,

$$|\nabla \phi| = 1$$

using the fast marching method with an initial condition defined by the zero level set. The solution can either be first or second order.

Here we will define a few test cases. Firstly a 1D test case

```
>>> from fipy.meshes import Grid1D
>>> from fipy.tools import serialComm
>>> mesh = Grid1D(dx = .5, nx = 8, communicator=serialComm)
>>> from .distanceVariable import DistanceVariable
>>> var = DistanceVariable(mesh = mesh, value = (-1., -1., -1., -1., 1., 1., 1., 1.))
>>> var.calcDistanceFunction()
>>> answer = (-1.75, -1.25, -.75, -.25, .25, .75, 1.25, 1.75)
>>> print(var.allclose(answer))
1
```

A 1D test case with very small dimensions.

```
>>> dx = 1e-10
>>> mesh = Grid1D(dx = dx, nx = 8, communicator=serialComm)
>>> var = DistanceVariable(mesh = mesh, value = (-1., -1., -1., -1., 1., 1., 1., 1.))
>>> var.calcDistanceFunction()
>>> answer = numerix.arange(8) * dx - 3.5 * dx
>>> print(var.allclose(answer))
1
```

A 2D test case to test `_calcTrialValue` for a pathological case.

```
>>> dx = 1.
>>> dy = 2.
>>> from fipy.meshes import Grid2D
>>> mesh = Grid2D(dx = dx, dy = dy, nx = 2, ny = 3, communicator=serialComm)
>>> var = DistanceVariable(mesh = mesh, value = (-1., 1., 1., 1., -1., 1.))
```

```
>>> var.calcDistanceFunction()
>>> vbl = -dx * dy / numerix.sqrt(dx**2 + dy**2) / 2.
>>> vbr = dx / 2
>>> vml = dy / 2.
>>> crossProd = dx * dy
>>> dsq = dx**2 + dy**2
>>> top = vbr * dx**2 + vml * dy**2
>>> sqrt = crossProd**2 * (dsq - (vbr - vml)**2)
>>> sqrt = numerix.sqrt(max(sqrt, 0))
>>> vmr = (top + sqrt) / dsq
>>> answer = (vbl, vbr, vml, vmr, vbl, vbr)
>>> print(var.allclose(answer))
1
```

The `extendVariable` method solves the following equation for a given `extensionVariable`.

$$\nabla u \cdot \nabla \phi = 0$$

using the fast marching method with an initial condition defined at the zero level set.

```
>>> from fipy.variables.cellVariable import CellVariable
>>> mesh = Grid2D(dx = 1., dy = 1., nx = 2, ny = 2, communicator=serialComm)
>>> var = DistanceVariable(mesh = mesh, value = (-1., 1., 1., 1.))
>>> var.calcDistanceFunction()
>>> extensionVar = CellVariable(mesh = mesh, value = (-1, .5, 2, -1))
>>> tmp = 1 / numerix.sqrt(2)
>>> print(var.allclose((-tmp / 2, 0.5, 0.5, 0.5 + tmp)))
1
>>> var.extendVariable(extensionVar, order=1)
>>> print(extensionVar.allclose((1.25, .5, 2, 1.25)))
1
>>> mesh = Grid2D(dx = 1., dy = 1., nx = 3, ny = 3, communicator=serialComm)
>>> var = DistanceVariable(mesh = mesh, value = (-1., 1., 1.,
...                                         1., 1., 1.,
...                                         1., 1., 1.))
... 
```

(continues on next page)

(continued from previous page)

```
>>> var.calcDistanceFunction(order=1)
>>> extensionVar = CellVariable(mesh = mesh, value = (-1., .5, -1.,
...                                         2., -1., -1.,
...                                         -1., -1., -1.))
```

```
>>> v1 = 0.5 + tmp
>>> v2 = 1.5
>>> tmp1 = (v1 + v2) / 2 + numerix.sqrt(2. - (v1 - v2)**2) / 2
>>> tmp2 = tmp1 + 1 / numerix.sqrt(2)
>>> print(var.allclose((-tmp / 2, 0.5, 1.5, 0.5, 0.5 + tmp,
...                      tmp1, 1.5, tmp1, tmp2)))
1
>>> answer = (1.25, .5, .5, 2, 1.25, 0.9544, 2, 1.5456, 1.25)
>>> var.extendVariable(extensionVar, order=1)
>>> print(extensionVar.allclose(answer, rtol = 1e-4))
1
```

Test case for a bug that occurs when initializing the distance variable at the interface. Currently it is assumed that adjacent cells that are opposite sign neighbors have perpendicular normal vectors. In fact the two closest cells could have opposite normals.

```
>>> mesh = Grid1D(dx = 1., nx = 3, communicator=serialComm)
>>> var = DistanceVariable(mesh = mesh, value = (-1., 1., -1.))
>>> var.calcDistanceFunction()
>>> print(var.allclose((-0.5, 0.5, -0.5)))
1
```

Testing second order. This example failed with Scikit-fmm.

```
>>> mesh = Grid2D(dx = 1., dy = 1., nx = 4, ny = 4, communicator=serialComm)
>>> var = DistanceVariable(mesh = mesh, value = (-1., -1., 1., 1.,
...                                         -1., -1., 1., 1.,
...                                         1., 1., 1., 1.,
...                                         1, 1, 1, 1))
>>> var.calcDistanceFunction(order=2)
>>> answer = [-1.30473785, -0.5, 0.5, 1.49923009,
...             -0.5, -0.35355339, 0.5, 1.45118446,
...             0.5, 0.5, 0.97140452, 1.76215286,
...             1.49923009, 1.45118446, 1.76215286, 2.33721352]
>>> print(numerix.allclose(var, answer, rtol=1e-9))
True
```

** A test for a bug in both LSMLIB and Scikit-fmm **

The following test gives different result depending on whether LSMLIB or Scikit-fmm is used. There is a deeper problem that is related to this issue. When a value becomes “known” after previously being a “trial” value it updates its neighbors’ values. In a second order scheme the neighbors one step away also need to be updated (if the in between cell is “known” and the far cell is a “trial” cell), but are not in either package. By luck (due to trial values having the same value), the values calculated in Scikit-fmm for the following example are correct although an example that didn’t work for Scikit-fmm could also be constructed.

```
>>> mesh = Grid2D(dx = 1., dy = 1., nx = 4, ny = 4, communicator=serialComm)
>>> var = DistanceVariable(mesh = mesh, value = (-1., -1., -1., -1.,
```

(continues on next page)

(continued from previous page)

```

...
...
...
...
>>> var.calcDistanceFunction(order=2)
>>> var.calcDistanceFunction(order=2)
>>> answer = [-0.5, -0.58578644, -1.08578644, -1.85136395,
...             0.5, 0.29289322, -0.58578644, -1.54389939,
...             1.30473785, 0.5, -0.5, -1.5,
...             1.49547948, 0.5, -0.5, -1.5]

```

The 3rd and 7th element are different for LSMLIB. This is because the 15th element is not “known” when the “trial” value for the 7th element is calculated. Scikit-fmm calculates the values in a slightly different order so gets a seemingly better answer, but this is just chance.

```
>>> print(numerix.allclose(var, answer, rtol=1e-9))
True
```

Creates a *distanceVariable* object.

Parameters

- **mesh** (`Mesh`) – The mesh that defines the geometry of this variable.
- **name** (`str`) – The name of the variable.
- **value** (`float or array_like`) – The initial value.
- **unit** (`str or PhysicalUnit`) – The physical units of the variable
- **hasOld** (`bool`) – Whether the variable maintains an old value.

`__abs__()`

Following test it to fix a bug with C inline string using `abs()` instead of `fabs()`

```
>>> print(abs(Variable(2.3) - Variable(1.2)))
1.1
```

Check representation works with different versions of numpy

```
>>> print(repr(abs(Variable(2.3))))
numerix.fabs(Variable(value=array(2.3)))
```

`__and__(other)`

This test case has been added due to a weird bug that was appearing.

```

>>> a = Variable(value=(0, 0, 1, 1))
>>> b = Variable(value=(0, 1, 0, 1))
>>> print(numerix.equal((a == 0) & (b == 1), [False, True, False, False]).all())
True
>>> print(a & b)
[0 0 0 1]
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx=4)
>>> from fipy.variables.cellVariable import CellVariable
>>> a = CellVariable(value=(0, 0, 1, 1), mesh=mesh)

```

(continues on next page)

(continued from previous page)

```
>>> b = CellVariable(value=(0, 1, 0, 1), mesh=mesh)
>>> print(numerix.allequal((a == 0) & (b == 1), [False, True, False, False]))
True
>>> print(a & b)
[0 0 0 1]
```

__array__(t=None)

Attempt to convert the *Variable* to a numerix *array* object

```
>>> v = Variable(value=[2, 3])
>>> print(numerix.array(v))
[2 3]
```

A dimensional *Variable* will convert to the numeric value in its base units

```
>>> v = Variable(value=[2, 3], unit="mm")
>>> numerix.array(v)
array([ 0.002,  0.003])
```

__array_wrap__(arr, context=None)

Required to prevent numpy not calling the reverse binary operations. Both the following tests are examples ufuncs.

```
>>> print(type(numerix.array([1.0, 2.0]) * Variable([1.0, 2.0])))
<class 'fipy.variables.binaryOperatorVariable...binOp'>
```

```
>>> from scipy.special import gamma as Gamma
>>> print(type(Gamma(Variable([1.0, 2.0]))))
<class 'fipy.variables.unaryOperatorVariable...unOp'>
```

__bool__()

```
>>> print(bool(Variable(value=0)))
0
>>> print(bool(Variable(value=(0, 0, 1, 1))))
Traceback (most recent call last):
...
ValueError: The truth value of an array with more than one element is ambiguous.
→ Use a.any() or a.all()
```

__call__(points=None, order=0, nearestCellIDs=None)

Interpolates the *CellVariable* to a set of points using a method that has a memory requirement on the order of *Ncells* by *Npoints* in general, but uses only *Ncells* when the *CellVariable*'s mesh is a *UniformGrid* object.

Tests

```
>>> from fipy import *
>>> m = Grid2D(nx=3, ny=2)
>>> v = CellVariable(mesh=m, value=m.cellCenters[0])
>>> print(v((0., 1.1, 1.2), (0., 1., 1.)))
[ 0.5  1.5  1.5]
>>> print(v((0., 1.1, 1.2), (0., 1., 1.)), order=1)
```

(continues on next page)

(continued from previous page)

```
[ 0.25  1.1   1.2 ]
>>> m0 = Grid2D(nx=2, ny=2, dx=1., dy=1.)
>>> m1 = Grid2D(nx=4, ny=4, dx=.5, dy=.5)
>>> x, y = m0.cellCenters
>>> v0 = CellVariable(mesh=m0, value=x * y)
>>> print(v0(m1.cellCenters.globalValue))
[ 0.25  0.25  0.75  0.75  0.25  0.25  0.75  0.75  0.75  0.75  2.25  2.25
 0.75  0.75  2.25  2.25]
>>> print(v0(m1.cellCenters.globalValue, order=1))
[ 0.125  0.25   0.5    0.625  0.25   0.375  0.875  1.      0.5     0.875
 1.875  2.25   0.625  1.      2.25   2.625]
```

Parameters

- **points** (tuple or list of tuple) – A point or set of points in the format (X, Y, Z)
- **order** ({0, 1}) – The order of interpolation, default is 0
- **nearestCellIDs** (array_like) – Optional argument if user can calculate own nearest cell IDs array, shape should be same as points

`__eq__(other)`

Test if a *Variable* is equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a == 4)
>>> b
(Variable(value=array(3)) == 4)
>>> b()
()
```

`__ge__(other)`

Test if a *Variable* is greater than or equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a >= 4)
>>> b
(Variable(value=array(3)) >= 4)
>>> b()
()
>>> a.value = 4
>>> print(b())
1
>>> a.value = 5
>>> print(b())
1
```

`__getitem__(index)`

“Evaluate” the *Variable* and return the specified element

```
>>> a = Variable(value=((3., 4.), (5., 6.)), unit="m") + "4 m"
>>> print(a[1, 1])
10.0 m
```

It is an error to slice a *Variable* whose *value* is not sliceable

```
>>> Variable(value=3)[2]
Traceback (most recent call last):
...
IndexError: 0-d arrays can't be indexed
```

`__getstate__()`

Used internally to collect the necessary information to pickle the *CellVariable* to persistent storage.

`__gt__(other)`

Test if a *Variable* is greater than another quantity

```
>>> a = Variable(value=3)
>>> b = (a > 4)
>>> b
(Variable(value=array(3)) > 4)
>>> print(b())
0
>>> a.value = 5
>>> print(b())
1
```

`__hash__()`

Return hash(self).

`__invert__()`

Returns logical “not” of the *Variable*

```
>>> a = Variable(value=True)
>>> print(~a)
False
```

`__le__(other)`

Test if a *Variable* is less than or equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a <= 4)
>>> b
(Variable(value=array(3)) <= 4)
>>> b()
1
>>> a.value = 4
>>> print(b())
1
>>> a.value = 5
>>> print(b())
0
```

`__lt__(other)`

Test if a *Variable* is less than another quantity

```
>>> a = Variable(value=3)
>>> b = (a < 4)
```

(continues on next page)

(continued from previous page)

```
>>> b
(Variable(value=array(3)) < 4)
>>> b()
1
>>> a.value = 4
>>> print(b())
0
>>> print(10000000000000000000 * Variable(1) < 1.)
0
>>> print(1000 * Variable(1) < 1.)
0
```

Python automatically reverses the arguments when necessary

```
>>> 4 > Variable(value=3)
(Variable(value=array(3)) < 4)
```

`__ne__(other)`

Test if a *Variable* is not equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a != 4)
>>> b
(Variable(value=array(3)) != 4)
>>> b()
1
```

`static __new__(cls, *args, **kwds)`

`__nonzero__()`

```
>>> print(bool(Variable(value=0)))
0
>>> print(bool(Variable(value=(0, 0, 1, 1))))
Traceback (most recent call last):
...
ValueError: The truth value of an array with more than one element is ambiguous.
→ Use a.any() or a.all()
```

`__or__(other)`

This test case has been added due to a weird bug that was appearing.

```
>>> a = Variable(value=(0, 0, 1, 1))
>>> b = Variable(value=(0, 1, 0, 1))
>>> print(numerix.equal((a == 0) | (b == 1), [True, True, False, True]).all())
True
>>> print(a | b)
[0 1 1 1]
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx=4)
>>> from fipy.variables.cellVariable import CellVariable
>>> a = CellVariable(value=(0, 0, 1, 1), mesh=mesh)
```

(continues on next page)

(continued from previous page)

```
>>> b = CellVariable(value=(0, 1, 0, 1), mesh=mesh)
>>> print(numerix.allequal((a == 0) | (b == 1), [True, True, False, True]))
True
>>> print(a | b)
[0 1 1 1]
```

__pow__(other)

return self**other, or self raised to power other

```
>>> print(Variable(1, "mol/l")**3)
1.0 mol**3/l**3
>>> print((Variable(1, "mol/l")**3).unit)
<PhysicalUnit mol**3/l**3>
```

__repr__()

Return repr(self).

__setstate__(dict)

Used internally to create a new *CellVariable* from pickled persistent storage.

__str__()

Return str(self).

all(axis=None)

```
>>> print(Variable(value=(0, 0, 1, 1)).all())
0
>>> print(Variable(value=(1, 1, 1, 1)).all())
1
```

allclose(other, rtol=1e-05, atol=1e-08)

```
>>> var = Variable((1, 1))
>>> print(var.allclose((1, 1)))
1
>>> print(var.allclose((1,)))
1
```

The following test is to check that the system does not run out of memory.

```
>>> from fipy.tools import numerix
>>> var = Variable(numerix.ones(10000))
>>> print(var.allclose(numerix.zeros(10000, 'l')))
False
```

any(axis=None)

```
>>> print(Variable(value=0).any())
0
>>> print(Variable(value=(0, 0, 1, 1)).any())
1
```

property arithmeticFaceValue

Returns a *FaceVariable* whose value corresponds to the arithmetic interpolation of the adjacent cells:

$$\phi_f = (\phi_1 - \phi_2) \frac{d_{f2}}{d_{12}} + \phi_2$$

```
>>> from fipy.meshes import Grid1D
>>> from fipy import numerix
>>> mesh = Grid1D(dx = (1., 1.))
>>> L = 1
>>> R = 2
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (0.5 / 1.) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (2., 4.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (1.0 / 3.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (10., 100.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (5.0 / 55.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

calcDistanceFunction(*order*=2)

Calculates the *distanceVariable* as a distance function.

Parameters

order ({1, 2}) – The order of accuracy for the distance function calculation

property cellInterfaceAreas

Returns the length of the interface that crosses the cell

A simple 1D test:

```
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(dx = 1., nx = 4)
>>> distanceVariable = DistanceVariable(mesh = mesh,
...                                         value = (-1.5, -0.5, 0.5, 1.5))
>>> answer = CellVariable(mesh=mesh, value=(0, 0., 1., 0))
>>> print(numerix.allclose(distanceVariable.cellInterfaceAreas,
...                         answer))
True
```

A 2D test case:

```
>>> from fipy.meshes import Grid2D
>>> from fipy.variables.cellVariable import CellVariable
>>> mesh = Grid2D(dx = 1., dy = 1., nx = 3, ny = 3)
>>> distanceVariable = DistanceVariable(mesh = mesh,
...                                         value = (1.5, 0.5, 1.5,
...                                                   0.5, -0.5, 0.5,
...                                                   1.5, 0.5, 1.5))
>>> answer = CellVariable(mesh=mesh,
...                        value=(0, 1, 0, 1, 0, 1, 0, 1, 0))
>>> print(numerix.allclose(distanceVariable.cellInterfaceAreas, answer))
True
```

Another 2D test case:

```
>>> mesh = Grid2D(dx = .5, dy = .5, nx = 2, ny = 2)
>>> from fipy.variables.cellVariable import CellVariable
>>> distanceVariable = DistanceVariable(mesh = mesh,
...                                         value = (-0.5, 0.5, 0.5, 1.5))
>>> answer = CellVariable(mesh=mesh,
...                        value=(0, numerix.sqrt(2) / 4, numerix.sqrt(2) / 4, 0))
>>> print(numerix.allclose(distanceVariable.cellInterfaceAreas,
...                           answer))
True
```

Test to check that the circumference of a circle is, in fact, $2\pi r$.

```
>>> mesh = Grid2D(dx = 0.05, dy = 0.05, nx = 20, ny = 20)
>>> r = 0.25
>>> x, y = mesh.cellCenters
>>> rad = numerix.sqrt((x - .5)**2 + (y - .5)**2) - r
>>> distanceVariable = DistanceVariable(mesh = mesh, value = rad)
>>> print(numerix.allclose(distanceVariable.cellInterfaceAreas.sum(), 1.
... -57984690073))
1
```

property `cellVolumeAverage`

Return the cell-volume-weighted average of the *CellVariable*:

$$\langle \phi \rangle_{\text{vol}} = \frac{\sum_{\text{cells}} \phi_{\text{cell}} V_{\text{cell}}}{\sum_{\text{cells}} V_{\text{cell}}}$$

```
>>> from fipy.meshes import Grid2D
>>> from fipy.variables.cellVariable import CellVariable
>>> mesh = Grid2D(nx = 3, ny = 1, dx = .5, dy = .1)
>>> var = CellVariable(value = (1, 2, 6), mesh = mesh)
>>> print(var.cellVolumeAverage)
3.0
```

`constrain(value, where=None)`

Constrains the *CellVariable* to *value* at a location specified by *where*.

```
>>> from fipy import *
>>> m = Grid1D(nx=3)
>>> v = CellVariable(mesh=m, value=m.cellCenters[0])
>>> v.constrain(0., where=m.facesLeft)
>>> v.faceGrad.constrain([1.], where=m.facesRight)
>>> print(v.faceGrad)
[[ 1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 0.   1.   2.   2.5]
```

Changing the constraint changes the dependencies

```
>>> v.constrain(1., where=m.facesLeft)
>>> print(v.faceGrad)
[[-1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 1.   1.   2.   2.5]
```

Constraints can be *Variable*

```
>>> c = Variable(0.)
>>> v.constrain(c, where=m.facesLeft)
>>> print(v.faceGrad)
[[ 1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 0.   1.   2.   2.5]
>>> c.value = 1.
>>> print(v.faceGrad)
[[-1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 1.   1.   2.   2.5]
```

Constraints can have a *Variable* mask.

```
>>> v = CellVariable(mesh=m)
>>> mask = FaceVariable(mesh=m, value=m.facesLeft)
>>> v.constrain(1., where=mask)
>>> print(v.faceValue)
[ 1.  0.  0.  0.]
>>> mask[:] = mask | m.facesRight
>>> print(v.faceValue)
[ 1.  0.  0.  1.]
```

property constraintMask

Test that *constraintMask* returns a Variable that updates itself whenever the constraints change.

```
>>> from fipy import *
```

```
>>> m = Grid2D(nx=2, ny=2)
>>> x, y = m.cellCenters
>>> v0 = CellVariable(mesh=m)
>>> v0.constrain(1., where=m.facesLeft)
>>> print(v0.faceValue.constraintMask)
```

(continues on next page)

(continued from previous page)

```
[False False False False False False True False False True False False]
>>> print(v0.faceValue)
[ 0.  0.  0.  0.  0.  1.  0.  0.  1.  0.  0.]
>>> v0.constrain(3., where=m.facesRight)
>>> print(v0.faceValue.constraintMask)
[False False False False False False True False True True False True]
>>> print(v0.faceValue)
[ 0.  0.  0.  0.  0.  1.  0.  3.  1.  0.  3.]
>>> v1 = CellVariable(mesh=m)
>>> v1.constrain(1., where=(x < 1) & (y < 1))
>>> print(v1.constraintMask)
[ True False False False]
>>> print(v1)
[ 1.  0.  0.  0.]
>>> v1.constrain(3., where=(x > 1) & (y > 1))
>>> print(v1.constraintMask)
[ True False False  True]
>>> print(v1)
[ 1.  0.  0.  3.]
```

copy()Make an duplicate of the *Variable*

```
>>> a = Variable(value=3)
>>> b = a.copy()
>>> b
Variable(value=array(3))
```

The duplicate will not reflect changes made to the original

```
>>> a.setValue(5)
>>> b
Variable(value=array(3))
```

Check that this works for arrays.

```
>>> a = Variable(value=numerix.array((0, 1, 2)))
>>> b = a.copy()
>>> b
Variable(value=array([0, 1, 2]))
>>> a[1] = 3
>>> b
Variable(value=array([0, 1, 2]))
```

dot(*other*, *opShape=None*, *operatorClass=None*)

Return the mesh-element-by-mesh-element (cell-by-cell, face-by-face, etc.) scalar product

$$\text{ext}self \cdot \text{ext}other$$

Both *self* and *other* can be of arbitrary rank, and *other* does not need to be a *MeshVariable*.**extendVariable(*extensionVariable*, *order=2*)**Calculates the extension of *extensionVariable* from the zero level set.

Parameters

extensionVariable (`CellVariable`) – The variable to extend from the zero level set.

property faceGrad

Return $\nabla\phi$ as a rank-1 `FaceVariable` using differencing for the normal direction(second-order gradient).

property faceGradAverage

Deprecated since version 3.3: use `grad.arithmeticFaceValue` instead

Return $\nabla\phi$ as a rank-1 `FaceVariable` using averaging for the normal direction(second-order gradient)

property faceValue

Returns a `FaceVariable` whose value corresponds to the arithmetic interpolation of the adjacent cells:

$$\phi_f = (\phi_1 - \phi_2) \frac{d_{f2}}{d_{12}} + \phi_2$$

```
>>> from fipy.meshes import Grid1D
>>> from fipy import numerix
>>> mesh = Grid1D(dx = (1., 1.))
>>> L = 1
>>> R = 2
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (0.5 / 1.) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (2., 4.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (1.0 / 3.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (10., 100.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (5.0 / 55.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

property gaussGrad

Return $\frac{1}{V_P} \sum_f \vec{n}\phi_f A_f$ as a rank-1 `CellVariable` (first-order gradient).

getscstype(*default=None*)

Returns the Numpy *sctype* of the underlying array.

```
>>> Variable(1).getscstype() == numerix.NUMERIX.obj2scstype(numerix.array(1))
True
>>> Variable(1.).getscstype() == numerix.NUMERIX.obj2scstype(numerix.array(1.))
True
>>> Variable((1, 1.)).getscstype() == numerix.NUMERIX.obj2scstype(numerix.
->array((1., 1.)))
True
```

property globalValue

Concatenate and return values from all processors

When running on a single processor, the result is identical to `value`.

property grad

Return $\nabla\phi$ as a rank-1 *CellVariable* (first-order gradient).

property harmonicFaceValue

Returns a *FaceVariable* whose value corresponds to the harmonic interpolation of the adjacent cells:

$$\phi_f = \frac{\phi_1 \phi_2}{(\phi_2 - \phi_1) \frac{d_{f2}}{d_{12}} + \phi_1}$$

```
>>> from fipy.meshes import Grid1D
>>> from fipy import numerix
>>> mesh = Grid1D(dx = (1., 1.))
>>> L = 1
>>> R = 2
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.harmonicFaceValue[mesh.interiorFaces.value]
>>> answer = L * R / ((R - L) * (0.5 / 1.) + L)
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (2., 4.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.harmonicFaceValue[mesh.interiorFaces.value]
>>> answer = L * R / ((R - L) * (1.0 / 3.0) + L)
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (10., 100.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.harmonicFaceValue[mesh.interiorFaces.value]
>>> answer = L * R / ((R - L) * (5.0 / 55.0) + L)
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

inBaseUnits()

Return the value of the *Variable* with all units reduced to their base SI elements.

```
>>> e = Variable(value="2.7 Hartree*Nav")
>>> print(e.inBaseUnits().allclose("7088849.01085 kg*m**2/s**2/mol"))
1
```

inUnitsOf(*units)

Returns one or more *Variable* objects that express the same physical quantity in different units. The units are specified by strings containing their names. The units must be compatible with the unit of the object. If one unit is specified, the return value is a single *Variable*.

```
>>> freeze = Variable('0 degC')
>>> print(freeze.inUnitsOf('degF').allclose("32.0 degF"))
1
```

If several units are specified, the return value is a tuple of *Variable* instances with one element per unit such that the sum of all quantities in the tuple equals the the original quantity and all the values except for the last one are integers. This is used to convert to irregular unit systems like hour/minute/second. The original object will not be changed.

```
>>> t = Variable(value=314159., unit='s')
>>> from builtins import zip
>>> print(numerix.allclose([e.allclose(v) for (e, v) in zip(t.inUnitsOf('d', 'h',
... , 'min', 's'),
... ,
... , '15.0 min', '59.0 s')], [
... ,
... True)))
1
```

property leastSquaresGrad

Return $\nabla\phi$, which is determined by solving for $\nabla\phi$ in the following matrix equation,

$$\nabla\phi \cdot \sum_f d_{AP}^2 \vec{n}_{AP} \otimes \vec{n}_{AP} = \sum_f d_{AP}^2 (\vec{n} \cdot \nabla\phi)_{AP}$$

The matrix equation is derived by minimizing the following least squares sum,

$$F(\phi_x, \phi_y) = \sqrt{\sum_f (d_{AP} \vec{n}_{AP} \cdot \nabla\phi - d_{AP} (\vec{n}_{AP} \cdot \nabla\phi)_{AP})^2}$$

Tests

```
>>> from fipy import Grid2D
>>> m = Grid2D(nx=2, ny=2, dx=0.1, dy=2.0)
>>> print(numerix.allclose(CellVariable(mesh=m, value=(0, 1, 3, 6)).leastSquaresGrad.globalValue, [
... ,
... [8.0, 8.0, 24.0, 24.0],
... [1.2, 2.0, 1.2, 2.0]]))
True
```

```
>>> from fipy import Grid1D
>>> print(numerix.allclose(CellVariable(mesh=Grid1D(dx=(2.0, 1.0, 0.5)),
... ,
... value=(0, 1, 2)).leastSquaresGrad.globalValue, [[0.461538461538, 0.8, 1.2]]))
True
```

property mag

The magnitude of the *Variable*, e.g., $|\vec{\psi}| = \sqrt{\vec{\psi} \cdot \vec{\psi}}$.

max(axis=None)

Return the maximum along a given axis.

min(axis=None)

```
>>> from fipy import Grid2D, CellVariable
>>> mesh = Grid2D(nx=5, ny=5)
>>> x, y = mesh.cellCenters
>>> v = CellVariable(mesh=mesh, value=x*y)
>>> print(v.min())
0.25
```

property minmodFaceValue

Returns a *FaceVariable* with a value that is the minimum of the absolute values of the adjacent cells. If the values are of opposite sign then the result is zero:

$$\phi_f = \begin{cases} \phi_1 & \text{when } |\phi_1| \leq |\phi_2|, \\ \phi_2 & \text{when } |\phi_2| < |\phi_1|, \\ 0 & \text{when } \phi_1\phi_2 < 0 \end{cases}$$

```
>>> from fipy import *
>>> print(CellVariable(mesh=Grid1D(nx=2), value=(1, 2)).minmodFaceValue)
[1 1 2]
>>> print(CellVariable(mesh=Grid1D(nx=2), value=(-1, -2)).minmodFaceValue)
[-1 -1 -2]
>>> print(CellVariable(mesh=Grid1D(nx=2), value=(-1, 2)).minmodFaceValue)
[-1 0 2]
```

property old

Return the values of the *CellVariable* from the previous solution sweep.

Combinations of *CellVariable*'s should also return old values.

```
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx = 2)
>>> from fipy.variables.cellVariable import CellVariable
>>> var1 = CellVariable(mesh = mesh, value = (2, 3), hasOld = 1)
>>> var2 = CellVariable(mesh = mesh, value = (3, 4))
>>> v = var1 * var2
>>> print(v)
[ 6 12]
>>> var1.value = ((3, 2))
>>> print(v)
[9 8]
>>> print(v.old)
[ 6 12]
```

The following small test is to correct for a bug when the operator does not just use variables.

```
>>> v1 = var1 * 3
>>> print(v1)
[9 6]
>>> print(v1.old)
[6 9]
```

rdot(other, opShape=None, operatorClass=None)

Return the mesh-element-by-mesh-element (cell-by-cell, face-by-face, etc.) scalar product

$$\text{extother} \cdot \text{extself}$$

Both *self* and *other* can be of arbitrary rank, and *other* does not need to be a *MeshVariable*.

release(constraint)

Remove *constraint* from *self*

```
>>> from fipy import *
>>> m = Grid1D(nx=3)
>>> v = CellVariable(mesh=m, value=m.cellCenters[0])
>>> c = Constraint(0., where=m.facesLeft)
>>> v.constrain(c)
>>> print(v.faceValue)
[ 0.  1.  2.  2.5]
>>> v.release(constraint=c)
>>> print(v.faceValue)
[ 0.5  1.  2.  2.5]
```

setValue(value, unit=None, where=None)

Set the value of the Variable. Can take a masked array.

```
>>> a = Variable((1, 2, 3))
>>> a.setValue(5, where=(1, 0, 1))
>>> print(a)
[5 2 5]
```

```
>>> b = Variable((4, 5, 6))
>>> a.setValue(b, where=(1, 0, 1))
>>> print(a)
[4 2 6]
>>> print(b)
[4 5 6]
>>> a.value = 3
>>> print(a)
[3 3 3]
```

```
>>> b = numerix.array((3, 4, 5))
>>> a.value = b
>>> a[:] = 1
>>> print(b)
[3 4 5]
```

```
>>> a.setValue((4, 5, 6), where=(1, 0))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

property shape

```
>>> from fipy.meshes import Grid2D
>>> from fipy.variables.cellVariable import CellVariable
>>> mesh = Grid2D(nx=2, ny=3)
>>> var = CellVariable(mesh=mesh)
>>> print(numerix.allequal(var.shape, (6,)))
True
>>> print(numerix.allequal(var.arithmeticFaceValue.shape, (17,)))
True
>>> print(numerix.allequal(var.grad.shape, (2, 6)))
True
```

(continues on next page)

(continued from previous page)

```
>>> print(numerix.allequal(var.faceGrad.shape, (2, 17)))
True
```

Have to account for zero length arrays

```
>>> from fipy import Grid1D
>>> m = Grid1D(nx=0)
>>> v = CellVariable(mesh=m, elementshape=(2,))
>>> numerix.allequal((v * 1).shape, (2, 0))
True
```

`std(axis=None, **kwargs)`

Evaluate standard deviation of all the elements of a *MeshVariable*.

Adapted from <http://mpitutorial.com/tutorials/mpi-reduce-and-allreduce/>

```
>>> import fipy as fp
>>> mesh = fp.Grid2D(nx=2, ny=2, dx=2., dy=5.)
>>> var = fp.CellVariable(value=(1., 2., 3., 4.), mesh=mesh)
>>> print((var.std()**2).allclose(1.25))
True
```

`property unit`

Return the unit object of *self*.

```
>>> Variable(value="1 m").unit
<PhysicalUnit m>
```

`updateOld()`

Set the values of the previous solution sweep to the current values.

```
>>> from fipy import *
>>> v = CellVariable(mesh=Grid1D(), hasOld=False)
>>> v.updateOld()
Traceback (most recent call last):
...
AssertionError: The updateOld method requires the CellVariable to have an old_
value. Set hasOld to True when instantiating the CellVariable.
```

`property value`

“Evaluate” the *Variable* and return its value (longhand)

```
>>> a = Variable(value=3)
>>> print(a.value)
3
>>> b = a + 4
>>> b
(Variable(value=array(3)) + 4)
>>> b.value
7
```

22.10.11 fipy.variables.exponentialNoiseVariable

Classes

<code>ExponentialNoiseVariable(*args, **kwds)</code>	Represents an exponential distribution of random numbers with the probability distribution
--	--

```
class fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable(*args, **kwds)
```

Bases: `NoiseVariable`

Represents an exponential distribution of random numbers with the probability distribution

$$\mu^{-1} e^{-\frac{x}{\mu}}$$

with a mean parameter μ .

Seed the random module for the sake of deterministic test results.

```
>>> from fipy import numerix
>>> numerix.random.seed(1)
```

We generate noise on a uniform Cartesian mesh

```
>>> from fipy.variables.variable import Variable
>>> mean = Variable()
>>> from fipy.meshes import Grid2D
>>> noise = ExponentialNoiseVariable(mesh = Grid2D(nx = 100, ny = 100), mean = mean)
```

We histogram the root-volume-weighted noise distribution

```
>>> from fipy.variables.histogramVariable import HistogramVariable
>>> histogram = HistogramVariable(distribution = noise, dx = 0.1, nx = 100)
```

and compare to a Gaussian distribution

```
>>> from fipy.variables.cellVariable import CellVariable
>>> expdist = CellVariable(mesh = histogram.mesh)
>>> x = histogram.mesh.cellCenters[0]
```

```
>>> if __name__ == '__main__':
...     from fipy import Viewer
...     viewer = Viewer(vars=noise, datamin=0, datamax=5)
...     histoplot = Viewer(vars=(histogram, expdist),
...                         datamin=0, datamax=1.5)
... 
```

```
>>> from fipy.tools.numerix import arange, exp
```



```
>>> for mu in arange(0.5, 3, 0.5):
...     mean.value = (mu)
...     expdist.value = ((1/mean)*exp(-x/mean))
...     if __name__ == '__main__':
...         import sys
```

(continues on next page)

(continued from previous page)

```
...
    print("mean: %g" % mean, file=sys.stderr)
...
viewer.plot()
histoplot.plot()
```

```
>>> print(abs(noise.faceGrad.divergence.cellVolumeAverage) < 5e-15)
1
```

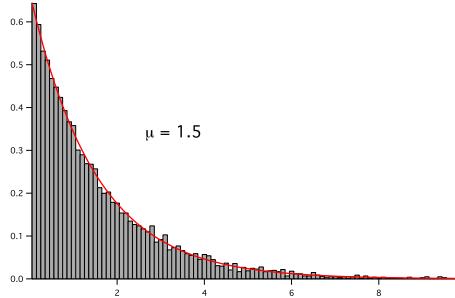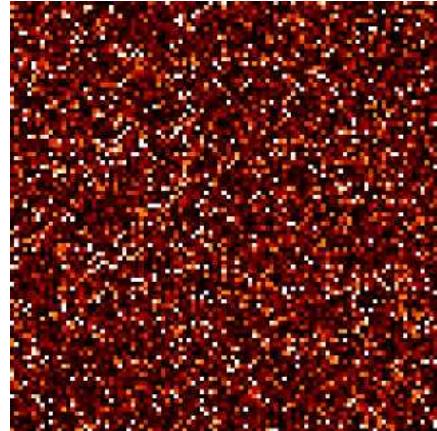

Parameters

- **mesh** ([Mesh](#)) – The mesh on which to define the noise.
- **mean** ([float](#)) – The mean of the distribution μ .

__abs__()

Following test it to fix a bug with C inline string using `abs()` instead of `fabs()`

```
>>> print(abs(Variable(2.3) - Variable(1.2)))
1.1
```

Check representation works with different versions of numpy

```
>>> print(repr(abs(Variable(2.3))))
numerix.fabs(Variable(value=array(2.3)))
```

__and__(other)

This test case has been added due to a weird bug that was appearing.

```
>>> a = Variable(value=(0, 0, 1, 1))
>>> b = Variable(value=(0, 1, 0, 1))
```

(continues on next page)

(continued from previous page)

```
>>> print(numerix.equal((a == 0) & (b == 1), [False, True, False, False]))
False
True
>>> print(a & b)
[0 0 0 1]
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx=4)
>>> from fipy.variables.cellVariable import CellVariable
>>> a = CellVariable(value=(0, 0, 1, 1), mesh=mesh)
>>> b = CellVariable(value=(0, 1, 0, 1), mesh=mesh)
>>> print(numerix.allequal((a == 0) & (b == 1), [False, True, False, False]))
True
>>> print(a & b)
[0 0 0 1]
```

__array__(t=None)

Attempt to convert the *Variable* to a numerix *array* object

```
>>> v = Variable(value=[2, 3])
>>> print(numerix.array(v))
[2 3]
```

A dimensional *Variable* will convert to the numeric value in its base units

```
>>> v = Variable(value=[2, 3], unit="mm")
>>> numerix.array(v)
array([ 0.002,  0.003])
```

__array_wrap__(arr, context=None)

Required to prevent numpy not calling the reverse binary operations. Both the following tests are examples ufuncs.

```
>>> print(type(numerix.array([1.0, 2.0]) * Variable([1.0, 2.0])))
<class 'fipy.variables.binaryOperatorVariable...binOp'>
```

```
>>> from scipy.special import gamma as Gamma
>>> print(type(Gamma(Variable([1.0, 2.0]))))
<class 'fipy.variables.unaryOperatorVariable...unOp'>
```

__bool__()

```
>>> print(bool(Variable(value=0)))
0
>>> print(bool(Variable(value=(0, 0, 1, 1))))
Traceback (most recent call last):
...
ValueError: The truth value of an array with more than one element is ambiguous.
→ Use a.any() or a.all()
```

__call__(points=None, order=0, nearestCellIDs=None)

Interpolates the *CellVariable* to a set of points using a method that has a memory requirement on the order of *Ncells* by *Npoints* in general, but uses only *Ncells* when the *CellVariable*'s mesh is a *UniformGrid* object.

Tests

```
>>> from fipy import *
>>> m = Grid2D(nx=3, ny=2)
>>> v = CellVariable(mesh=m, value=m.cellCenters[0])
>>> print(v(((0., 1.1, 1.2), (0., 1., 1.))))
[ 0.5  1.5]
>>> print(v(((0., 1.1, 1.2), (0., 1., 1.)), order=1))
[ 0.25  1.1   1.2 ]
>>> m0 = Grid2D(nx=2, ny=2, dx=1., dy=1.)
>>> m1 = Grid2D(nx=4, ny=4, dx=.5, dy=.5)
>>> x, y = m0.cellCenters
>>> v0 = CellVariable(mesh=m0, value=x * y)
>>> print(v0(m1.cellCenters.globalValue))
[ 0.25  0.25  0.75  0.75  0.25  0.25  0.75  0.75  0.75  0.75  2.25  2.25
 0.75  0.75  2.25  2.25]
>>> print(v0(m1.cellCenters.globalValue, order=1))
[ 0.125  0.25   0.5    0.625  0.25   0.375  0.875  1.      0.5     0.875
 1.875  2.25   0.625  1.      2.25   2.625]
```

Parameters

- **points** (tuple or `list of tuple`) – A point or set of points in the format (X, Y, Z)
- **order** ({0, 1}) – The order of interpolation, default is 0
- **nearestCellIDs** (`array_like`) – Optional argument if user can calculate own nearest cell IDs array, shape should be same as points

`__eq__(other)`

Test if a *Variable* is equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a == 4)
>>> b
(Variable(value=array(3)) == 4)
>>> b()
()
```

`__ge__(other)`

Test if a *Variable* is greater than or equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a >= 4)
>>> b
(Variable(value=array(3)) >= 4)
>>> b()
()
>>> a.value = 4
>>> print(b())
1
>>> a.value = 5
>>> print(b())
1
```

__getitem__(index)

“Evaluate” the *Variable* and return the specified element

```
>>> a = Variable(value=((3., 4.), (5., 6.)), unit="m") + "4 m"
>>> print(a[1, 1])
10.0 m
```

It is an error to slice a *Variable* whose *value* is not sliceable

```
>>> Variable(value=3)[2]
Traceback (most recent call last):
...
IndexError: 0-d arrays can't be indexed
```

__getstate__()

Used internally to collect the necessary information to pickle the *CellVariable* to persistent storage.

__gt__(other)

Test if a *Variable* is greater than another quantity

```
>>> a = Variable(value=3)
>>> b = (a > 4)
>>> b
(Variable(value=array(3)) > 4)
>>> print(b())
0
>>> a.value = 5
>>> print(b())
1
```

__hash__()

Return hash(self).

__invert__()

Returns logical “not” of the *Variable*

```
>>> a = Variable(value=True)
>>> print(~a)
False
```

__le__(other)

Test if a *Variable* is less than or equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a <= 4)
>>> b
(Variable(value=array(3)) <= 4)
>>> b()
1
>>> a.value = 4
>>> print(b())
1
>>> a.value = 5
>>> print(b())
0
```

[__lt__\(other\)](#)

Test if a *Variable* is less than another quantity

```
>>> a = Variable(value=3)
>>> b = (a < 4)
>>> b
(Variable(value=array(3)) < 4)
>>> b()
1
>>> a.value = 4
>>> print(b())
0
>>> print(10000000000000000 * Variable(1) < 1.)
0
>>> print(1000 * Variable(1) < 1.)
0
```

Python automatically reverses the arguments when necessary

```
>>> 4 > Variable(value=3)
(Variable(value=array(3)) < 4)
```

[__ne__\(other\)](#)

Test if a *Variable* is not equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a != 4)
>>> b
(Variable(value=array(3)) != 4)
>>> b()
1
```

static __new__(cls, *args, **kwds)

[__nonzero__\(\)](#)

```
>>> print(bool(Variable(value=0)))
0
>>> print(bool(Variable(value=(0, 0, 1, 1))))
Traceback (most recent call last):
...
ValueError: The truth value of an array with more than one element is ambiguous.
→ Use a.any() or a.all()
```

[__or__\(other\)](#)

This test case has been added due to a weird bug that was appearing.

```
>>> a = Variable(value=(0, 0, 1, 1))
>>> b = Variable(value=(0, 1, 0, 1))
>>> print(numerix.equal((a == 0) | (b == 1), [True, True, False, True]).all())
True
>>> print(a | b)
[0 1 1 1]
>>> from fipy.meshes import Grid1D
```

(continues on next page)

(continued from previous page)

```
>>> mesh = Grid1D(nx=4)
>>> from fipy.variables.cellVariable import CellVariable
>>> a = CellVariable(value=(0, 0, 1, 1), mesh=mesh)
>>> b = CellVariable(value=(0, 1, 0, 1), mesh=mesh)
>>> print(numerix.allequal((a == 0) | (b == 1), [True, True, False, True]))
True
>>> print(a | b)
[0 1 1 1]
```

__pow__(other)

return self**other, or self raised to power other

```
>>> print(Variable(1, "mol/l")**3)
1.0 mol**3/l**3
>>> print((Variable(1, "mol/l")**3).unit)
<PhysicalUnit mol**3/l**3>
```

__repr__()

Return repr(self).

__setstate__(dict)Used internally to create a new *CellVariable* from pickled persistent storage.**__str__()**

Return str(self).

all(axis=None)

```
>>> print(Variable(value=(0, 0, 1, 1)).all())
0
>>> print(Variable(value=(1, 1, 1, 1)).all())
1
```

allclose(other, rtol=1e-05, atol=1e-08)

```
>>> var = Variable((1, 1))
>>> print(var.allclose((1, 1)))
1
>>> print(var.allclose((1,)))
1
```

The following test is to check that the system does not run out of memory.

```
>>> from fipy.tools import numerix
>>> var = Variable(numerix.ones(10000))
>>> print(var.allclose(numerix.zeros(10000, '1')))
False
```

any(axis=None)

```
>>> print(Variable(value=0).any())
0
>>> print(Variable(value=(0, 0, 1, 1)).any())
1
```

property arithmeticFaceValue

Returns a *FaceVariable* whose value corresponds to the arithmetic interpolation of the adjacent cells:

$$\phi_f = (\phi_1 - \phi_2) \frac{d_{f2}}{d_{12}} + \phi_2$$

```
>>> from fipy.meshes import Grid1D
>>> from fipy import numerix
>>> mesh = Grid1D(dx = (1., 1.))
>>> L = 1
>>> R = 2
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (0.5 / 1.) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (2., 4.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (1.0 / 3.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (10., 100.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (5.0 / 55.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

property cellVolumeAverage

Return the cell-volume-weighted average of the *CellVariable*:

$$\langle \phi \rangle_{\text{vol}} = \frac{\sum_{\text{cells}} \phi_{\text{cell}} V_{\text{cell}}}{\sum_{\text{cells}} V_{\text{cell}}}$$

```
>>> from fipy.meshes import Grid2D
>>> from fipy.variables.cellVariable import CellVariable
>>> mesh = Grid2D(nx = 3, ny = 1, dx = .5, dy = .1)
>>> var = CellVariable(value = (1, 2, 6), mesh = mesh)
>>> print(var.cellVolumeAverage)
3.0
```

constraint(*value*, *where=None*)

Constrains the *CellVariable* to *value* at a location specified by *where*.

```
>>> from fipy import *
>>> m = Grid1D(nx=3)
>>> v = CellVariable(mesh=m, value=m.cellCenters[0])
>>> v.constrain(0., where=m.facesLeft)
>>> v.faceGrad.constrain([1.], where=m.facesRight)
```

(continues on next page)

(continued from previous page)

```
>>> print(v.faceGrad)
[[ 1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 0.  1.  2.  2.5]
```

Changing the constraint changes the dependencies

```
>>> v.constrain(1., where=m.facesLeft)
>>> print(v.faceGrad)
[[-1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 1.  1.  2.  2.5]
```

Constraints can be *Variable*

```
>>> c = Variable(0.)
>>> v.constrain(c, where=m.facesLeft)
>>> print(v.faceGrad)
[[ 1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 0.  1.  2.  2.5]
>>> c.value = 1.
>>> print(v.faceGrad)
[[-1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 1.  1.  2.  2.5]
```

Constraints can have a *Variable* mask.

```
>>> v = CellVariable(mesh=m)
>>> mask = FaceVariable(mesh=m, value=m.facesLeft)
>>> v.constrain(1., where=mask)
>>> print(v.faceValue)
[ 1.  0.  0.  0.]
>>> mask[:] = mask | m.facesRight
>>> print(v.faceValue)
[ 1.  0.  0.  1.]
```

property constraintMask

Test that *constraintMask* returns a Variable that updates itself whenever the constraints change.

```
>>> from fipy import *
```

```
>>> m = Grid2D(nx=2, ny=2)
>>> x, y = m.cellCenters
>>> v0 = CellVariable(mesh=m)
>>> v0.constrain(1., where=m.facesLeft)
>>> print(v0.faceValue.constraintMask)
[False False False False False False True False False True False False]
>>> print(v0.faceValue)
[ 0.  0.  0.  0.  0.  0.  1.  0.  0.  1.  0.  0.]
>>> v0.constrain(3., where=m.facesRight)
```

(continues on next page)

(continued from previous page)

```
>>> print(v0.faceValue.constraintMask)
[False False False False False True False True True False True]
>>> print(v0.faceValue)
[ 0.  0.  0.  0.  0.  1.  0.  3.  1.  0.  3.]
>>> v1 = CellVariable(mesh=m)
>>> v1.constrain(1., where=(x < 1) & (y < 1))
>>> print(v1.constraintMask)
[ True False False False]
>>> print(v1)
[ 1.  0.  0.  0.]
>>> v1.constrain(3., where=(x > 1) & (y > 1))
>>> print(v1.constraintMask)
[ True False False  True]
>>> print(v1)
[ 1.  0.  0.  3.]
```

copy()

Copy the value of the *NoiseVariable* to a static *CellVariable*.

dot(*other*, *opShape=None*, *operatorClass=None*)

Return the mesh-element–by–mesh-element (cell-by-cell, face-by-face, etc.) scalar product

$$\text{extself} \cdot \text{extother}$$

Both *self* and *other* can be of arbitrary rank, and *other* does not need to be a *MeshVariable*.

property faceGrad

Return $\nabla\phi$ as a rank-1 *FaceVariable* using differencing for the normal direction(second-order gradient).

property faceGradAverage

Deprecated since version 3.3: use *grad.arithmeticFaceValue* instead

Return $\nabla\phi$ as a rank-1 *FaceVariable* using averaging for the normal direction(second-order gradient)

property faceValue

Returns a *FaceVariable* whose value corresponds to the arithmetic interpolation of the adjacent cells:

$$\phi_f = (\phi_1 - \phi_2) \frac{d_{f2}}{d_{12}} + \phi_2$$

```
>>> from fipy.meshes import Grid1D
>>> from fipy import numerix
>>> mesh = Grid1D(dx = (1., 1.))
>>> L = 1
>>> R = 2
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (0.5 / 1.) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (2., 4.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
```

(continues on next page)

(continued from previous page)

```
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (1.0 / 3.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (10., 100.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (5.0 / 55.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

property gaussGrad

Return $\frac{1}{V_P} \sum_f \vec{n} \phi_f A_f$ as a rank-1 *CellVariable* (first-order gradient).

getscctype(*default=None*)

Returns the Numpy *sctype* of the underlying array.

```
>>> Variable(1).getscctype() == numerix.NUMERIX.obj2sctype(numerix.array(1))
True
>>> Variable(1.).getscctype() == numerix.NUMERIX.obj2sctype(numerix.array(1.))
True
>>> Variable((1, 1.)).getscctype() == numerix.NUMERIX.obj2sctype(numerix.
->>> array((1., 1.)))
True
```

property globalValue

Concatenate and return values from all processors

When running on a single processor, the result is identical to *value*.

property grad

Return $\nabla \phi$ as a rank-1 *CellVariable* (first-order gradient).

property harmonicFaceValue

Returns a *FaceVariable* whose value corresponds to the harmonic interpolation of the adjacent cells:

$$\phi_f = \frac{\phi_1 \phi_2}{(\phi_2 - \phi_1) \frac{d_{f2}}{d_{12}} + \phi_1}$$

```
>>> from fipy.meshes import Grid1D
>>> from fipy import numerix
>>> mesh = Grid1D(dx = (1., 1.))
>>> L = 1
>>> R = 2
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.harmonicFaceValue[mesh.interiorFaces.value]
>>> answer = L * R / ((R - L) * (0.5 / 1.) + L)
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (2., 4.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.harmonicFaceValue[mesh.interiorFaces.value]
>>> answer = L * R / ((R - L) * (1.0 / 3.0) + L)
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (10., 100.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.harmonicFaceValue[mesh.interiorFaces.value]
>>> answer = L * R / ((R - L) * (5.0 / 55.0) + L)
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

inBaseUnits()

Return the value of the *Variable* with all units reduced to their base SI elements.

```
>>> e = Variable(value="2.7 Hartree*Nav")
>>> print(e.inBaseUnits().allclose("7088849.01085 kg*m**2/s**2/mol"))
1
```

inUnitsOf(*units)

Returns one or more *Variable* objects that express the same physical quantity in different units. The units are specified by strings containing their names. The units must be compatible with the unit of the object. If one unit is specified, the return value is a single *Variable*.

```
>>> freeze = Variable('0 degC')
>>> print(freeze.inUnitsOf('degF').allclose("32.0 degF"))
1
```

If several units are specified, the return value is a tuple of *Variable* instances with one element per unit such that the sum of all quantities in the tuple equals the the original quantity and all the values except for the last one are integers. This is used to convert to irregular unit systems like hour/minute/second. The original object will not be changed.

```
>>> t = Variable(value=314159., unit='s')
>>> from builtins import zip
>>> print(numerix.allclose([e.allclose(v) for (e, v) in zip(t.inUnitsOf('d', 'h',
-> 'min', 's'), ...
-> ...
-> '15.0 min', '59.0 s')], ...
-> ...
-> True))
1
```

property leastSquaresGrad

Return $\nabla\phi$, which is determined by solving for $\nabla\phi$ in the following matrix equation,

$$\nabla\phi \cdot \sum_f d_{AP}^2 \vec{n}_{AP} \otimes \vec{n}_{AP} = \sum_f d_{AP}^2 (\vec{n} \cdot \nabla\phi)_{AP}$$

The matrix equation is derived by minimizing the following least squares sum,

$$F(\phi_x, \phi_y) = \sqrt{\sum_f (d_{AP} \vec{n}_{AP} \cdot \nabla\phi - d_{AP} (\vec{n}_{AP} \cdot \nabla\phi)_{AP})^2}$$

Tests

```
>>> from fipy import Grid2D
>>> m = Grid2D(nx=2, ny=2, dx=0.1, dy=2.0)
>>> print(numerix.allclose(CellVariable(mesh=m, value=(0, 1, 3, 6)).
...leastSquaresGrad.globalValue, \
...
...
...
True
```

```
>>> from fipy import Grid1D
>>> print(numerix.allclose(CellVariable(mesh=Grid1D(dx=(2.0, 1.0, 0.5)),
...value=(0, 1, 2)).leastSquaresGrad.
...globalValue, [[0.461538461538, 0.8, 1.2]]))
True
```

property mag

The magnitude of the *Variable*, e.g., $|\vec{\psi}| = \sqrt{\vec{\psi} \cdot \vec{\psi}}$.

max(axis=None)

Return the maximum along a given axis.

min(axis=None)

```
>>> from fipy import Grid2D, CellVariable
>>> mesh = Grid2D(nx=5, ny=5)
>>> x, y = mesh.cellCenters
>>> v = CellVariable(mesh=mesh, value=x*y)
>>> print(v.min())
0.25
```

property minmodFaceValue

Returns a *FaceVariable* with a value that is the minimum of the absolute values of the adjacent cells. If the values are of opposite sign then the result is zero:

$$\phi_f = \begin{cases} \phi_1 & \text{when } |\phi_1| \leq |\phi_2|, \\ \phi_2 & \text{when } |\phi_2| < |\phi_1|, \\ 0 & \text{when } \phi_1\phi_2 < 0 \end{cases}$$

```
>>> from fipy import *
>>> print(CellVariable(mesh=Grid1D(nx=2), value=(1, 2)).minmodFaceValue)
[1 1 2]
>>> print(CellVariable(mesh=Grid1D(nx=2), value=(-1, -2)).minmodFaceValue)
[-1 -1 -2]
>>> print(CellVariable(mesh=Grid1D(nx=2), value=(-1, 2)).minmodFaceValue)
[-1 0 2]
```

property old

Return the values of the *CellVariable* from the previous solution sweep.

Combinations of *CellVariable*'s should also return old values.

```
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx = 2)
>>> from fipy.variables.cellVariable import CellVariable
>>> var1 = CellVariable(mesh = mesh, value = (2, 3), hasOld = 1)
>>> var2 = CellVariable(mesh = mesh, value = (3, 4))
>>> v = var1 * var2
>>> print(v)
[ 6 12]
>>> var1.value = ((3, 2))
>>> print(v)
[9 8]
>>> print(v.old)
[ 6 12]
```

The following small test is to correct for a bug when the operator does not just use variables.

```
>>> v1 = var1 * 3
>>> print(v1)
[9 6]
>>> print(v1.old)
[6 9]
```

rdot(*other*, *opShape=None*, *operatorClass=None*)

Return the mesh-element-by-mesh-element (cell-by-cell, face-by-face, etc.) scalar product

$$\text{exto}other \cdot \text{extsel}f$$

Both *self* and *other* can be of arbitrary rank, and *other* does not need to be a *MeshVariable*.

release(*constraint*)

Remove *constraint* from *self*

```
>>> from fipy import *
>>> m = Grid1D(nx=3)
>>> v = CellVariable(mesh=m, value=m.cellCenters[0])
>>> c = Constraint(0., where=m.facesLeft)
>>> v.constrain(c)
>>> print(v.faceValue)
[ 0.  1.  2.  2.5]
>>> v.release(constraint=c)
>>> print(v.faceValue)
[ 0.5  1.   2.   2.5]
```

scramble()

Generate a new random distribution.

setValue(*value*, *unit=None*, *where=None*)

Set the value of the Variable. Can take a masked array.

```
>>> a = Variable((1, 2, 3))
>>> a.setValue(5, where=(1, 0, 1))
>>> print(a)
[5 2 5]
```

```
>>> b = Variable((4, 5, 6))
>>> a.setValue(b, where=(1, 0, 1))
>>> print(a)
[4 2 6]
>>> print(b)
[4 5 6]
>>> a.value = 3
>>> print(a)
[3 3 3]
```

```
>>> b = numerix.array((3, 4, 5))
>>> a.value = b
>>> a[:] = 1
>>> print(b)
[3 4 5]
```

```
>>> a.setValue((4, 5, 6), where=(1, 0))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

property shape

```
>>> from fipy.meshes import Grid2D
>>> from fipy.variables.cellVariable import CellVariable
>>> mesh = Grid2D(nx=2, ny=3)
>>> var = CellVariable(mesh=mesh)
>>> print(numerix.allequal(var.shape, (6,)))
True
>>> print(numerix.allequal(var.arithmeticFaceValue.shape, (17,)))
True
>>> print(numerix.allequal(var.grad.shape, (2, 6)))
True
>>> print(numerix.allequal(var.faceGrad.shape, (2, 17)))
True
```

Have to account for zero length arrays

```
>>> from fipy import Grid1D
>>> m = Grid1D(nx=0)
>>> v = CellVariable(mesh=m, elementshape=(2,))
>>> numerix.allequal((v * 1).shape, (2, 0))
True
```

`std(axis=None, **kwargs)`

Evaluate standard deviation of all the elements of a *MeshVariable*.

Adapted from <http://mpitutorial.com/tutorials/mpi-reduce-and-allreduce/>

```
>>> import fipy as fp
>>> mesh = fp.Grid2D(nx=2, ny=2, dx=2., dy=5.)
>>> var = fp.CellVariable(value=(1., 2., 3., 4.), mesh=mesh)
```

(continues on next page)

(continued from previous page)

```
>>> print((var.std()**2).allclose(1.25))
True
```

property unit

Return the unit object of *self*.

```
>>> Variable(value="1 m").unit
<PhysicalUnit m>
```

updateOld()

Set the values of the previous solution sweep to the current values.

```
>>> from fipy import *
>>> v = CellVariable(mesh=Grid1D(), hasOld=False)
>>> v.updateOld()
Traceback (most recent call last):
...
AssertionError: The updateOld method requires the CellVariable to have an old_
value. Set hasOld to True when instantiating the CellVariable.
```

property value

“Evaluate” the *Variable* and return its value (longhand)

```
>>> a = Variable(value=3)
>>> print(a.value)
3
>>> b = a + 4
>>> b
(Variable(value=array(3)) + 4)
>>> b.value
7
```

22.10.12 fipy.variables.faceGradContributionsVariable**22.10.13 fipy.variables.faceGradVariable****22.10.14 fipy.variables.faceVariable****Classes**

FaceVariable(*args, **kwds)

param mesh

the mesh that defines the geometry of
this *Variable*

class fipy.variables.faceVariable.FaceVariable(*args, **kwds)

Bases: *MeshVariable*

Parameters

- **mesh** (`Mesh`) – the mesh that defines the geometry of this *Variable*
- **name** (`str`) – the user-readable name of the *Variable*
- **value** (`float or array_like`) – the initial value
- **rank** (`int`) – the rank (number of dimensions) of each element of this *Variable*. Default: 0
- **elementshape** (`tuple of int`) – the shape of each element of this variable Default: $rank * (mesh.dim,)$
- **unit** (`str or PhysicalUnit`) – The physical units of the variable

__abs__()

Following test it to fix a bug with C inline string using `abs()` instead of `fabs()`

```
>>> print(abs(Variable(2.3) - Variable(1.2)))
1.1
```

Check representation works with different versions of numpy

```
>>> print(repr(abs(Variable(2.3))))
numerix.fabs(Variable(value=array(2.3)))
```

__and__(other)

This test case has been added due to a weird bug that was appearing.

```
>>> a = Variable(value=(0, 0, 1, 1))
>>> b = Variable(value=(0, 1, 0, 1))
>>> print(numerix.equal((a == 0) & (b == 1), [False, True, False, False]).all())
True
>>> print(a & b)
[0 0 0 1]
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx=4)
>>> from fipy.variables.cellVariable import CellVariable
>>> a = CellVariable(value=(0, 0, 1, 1), mesh=mesh)
>>> b = CellVariable(value=(0, 1, 0, 1), mesh=mesh)
>>> print(numerix.allequal((a == 0) & (b == 1), [False, True, False, False]))
True
>>> print(a & b)
[0 0 0 1]
```

__array__(t=None)

Attempt to convert the *Variable* to a numerix *array* object

```
>>> v = Variable(value=[2, 3])
>>> print(numerix.array(v))
[2 3]
```

A dimensional *Variable* will convert to the numeric value in its base units

```
>>> v = Variable(value=[2, 3], unit="mm")
>>> numerix.array(v)
array([ 0.002,  0.003])
```

`__array_wrap__(arr, context=None)`

Required to prevent numpy not calling the reverse binary operations. Both the following tests are examples ufuncs.

```
>>> print(type(numerix.array([1.0, 2.0]) * Variable([1.0, 2.0])))
<class 'fipy.variables.binaryOperatorVariable...binOp'>
```

```
>>> from scipy.special import gamma as Gamma
>>> print(type(Gamma(Variable([1.0, 2.0]))))
<class 'fipy.variables.unaryOperatorVariable...unOp'>
```

`__bool__()`

```
>>> print(bool(Variable(value=0)))
0
>>> print(bool(Variable(value=(0, 0, 1, 1))))
Traceback (most recent call last):
...
ValueError: The truth value of an array with more than one element is ambiguous.
→ Use a.any() or a.all()
```

`__call__()`

“Evaluate” the *Variable* and return its value

```
>>> a = Variable(value=3)
>>> print(a())
3
>>> b = a + 4
>>> b
(Variable(value=array(3)) + 4)
>>> b()
7
```

`__eq__(other)`

Test if a *Variable* is equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a == 4)
>>> b
(Variable(value=array(3)) == 4)
>>> b()
0
```

`__ge__(other)`

Test if a *Variable* is greater than or equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a >= 4)
>>> b
(Variable(value=array(3)) >= 4)
>>> b()
0
>>> a.value = 4
```

(continues on next page)

(continued from previous page)

```
>>> print(b())
1
>>> a.value = 5
>>> print(b())
1
```

__getitem__(index)“Evaluate” the *Variable* and return the specified element

```
>>> a = Variable(value=((3., 4.), (5., 6.)), unit="m") + "4 m"
>>> print(a[1, 1])
10.0 m
```

It is an error to slice a *Variable* whose *value* is not sliceable

```
>>> Variable(value=3)[2]
Traceback (most recent call last):
...
IndexError: 0-d arrays can't be indexed
```

__getstate__()Used internally to collect the necessary information to pickle the *MeshVariable* to persistent storage.**__gt__(other)**Test if a *Variable* is greater than another quantity

```
>>> a = Variable(value=3)
>>> b = (a > 4)
>>> b
(Variable(value=array(3)) > 4)
>>> print(b())
0
>>> a.value = 5
>>> print(b())
1
```

__hash__()

Return hash(self).

__invert__()Returns logical “not” of the *Variable*

```
>>> a = Variable(value=True)
>>> print(~a)
False
```

__le__(other)Test if a *Variable* is less than or equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a <= 4)
>>> b
(Variable(value=array(3)) <= 4)
```

(continues on next page)

(continued from previous page)

```
>>> b()
1
>>> a.value = 4
>>> print(b())
1
>>> a.value = 5
>>> print(b())
0
```

__lt__(other)Test if a *Variable* is less than another quantity

```
>>> a = Variable(value=3)
>>> b = (a < 4)
>>> b
(Variable(value=array(3)) < 4)
>>> b()
1
>>> a.value = 4
>>> print(b())
0
>>> print(10000000000000000 * Variable(1) < 1.)
0
>>> print(1000 * Variable(1) < 1.)
0
```

Python automatically reverses the arguments when necessary

```
>>> 4 > Variable(value=3)
(Variable(value=array(3)) < 4)
```

__ne__(other)Test if a *Variable* is not equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a != 4)
>>> b
(Variable(value=array(3)) != 4)
>>> b()
1
```

static __new__(cls, *args, **kwds)**__nonzero__()**

```
>>> print(bool(Variable(value=0)))
0
>>> print(bool(Variable(value=(0, 0, 1, 1))))
Traceback (most recent call last):
...
ValueError: The truth value of an array with more than one element is ambiguous.
→ Use a.any() or a.all()
```

__or__(other)

This test case has been added due to a weird bug that was appearing.

```
>>> a = Variable(value=(0, 0, 1, 1))
>>> b = Variable(value=(0, 1, 0, 1))
>>> print(numerix.equal((a == 0) | (b == 1), [True, True, False, True]).all())
True
>>> print(a | b)
[0 1 1 1]
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx=4)
>>> from fipy.variables.cellVariable import CellVariable
>>> a = CellVariable(value=(0, 0, 1, 1), mesh=mesh)
>>> b = CellVariable(value=(0, 1, 0, 1), mesh=mesh)
>>> print(numerix.allequal((a == 0) | (b == 1), [True, True, False, True]))
True
>>> print(a | b)
[0 1 1 1]
```

__pow__(other)

return self**other, or self raised to power other

```
>>> print(Variable(1, "mol/l")**3)
1.0 mol**3/l**3
>>> print((Variable(1, "mol/l")**3).unit)
<PhysicalUnit mol**3/l**3>
```

__repr__()

Return repr(self).

__setstate__(dict)

Used internally to create a new *Variable* from pickled persistent storage.

__str__()

Return str(self).

all(axis=None)

```
>>> print(Variable(value=(0, 0, 1, 1)).all())
0
>>> print(Variable(value=(1, 1, 1, 1)).all())
1
```

allclose(other, rtol=1e-05, atol=1e-08)

```
>>> var = Variable((1, 1))
>>> print(var.allclose((1, 1)))
1
>>> print(var.allclose((1,)))
1
```

The following test is to check that the system does not run out of memory.

```
>>> from fipy.tools import numerix
>>> var = Variable(numerix.ones(10000))
>>> print(var.allclose(numerix.zeros(10000, 'l')))
False
```

any(*axis=None*)

```
>>> print(Variable(value=0).any())
0
>>> print(Variable(value=(0, 0, 1, 1)).any())
1
```

constraint(*value, where=None*)

Constrain the *Variable* to have a *value* at an index or mask location specified by *where*.

```
>>> v = Variable((0, 1, 2, 3))
>>> v.constrain(2, numerix.array((True, False, False, False)))
>>> print(v)
[2 1 2 3]
>>> v[:] = 10
>>> print(v)
[ 2 10 10 10]
>>> v.constrain(5, numerix.array((False, False, True, False)))
>>> print(v)
[ 2 10  5 10]
>>> v[:] = 6
>>> print(v)
[2 6 5 6]
>>> v.constrain(8)
>>> print(v)
[8 8 8 8]
>>> v[:] = 10
>>> print(v)
[8 8 8 8]
>>> del v.constraints[2]
>>> print(v)
[ 2 10  5 10]
```

```
>>> from fipy.variables.cellVariable import CellVariable
>>> from fipy.meshes import Grid2D
>>> m = Grid2D(nx=2, ny=2)
>>> x, y = m.cellCenters
>>> v = CellVariable(mesh=m, rank=1, value=(x, y))
>>> v.constrain((0.,), (-1.,)), where=m.facesLeft)
>>> print(v.faceValue)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.    1.    1.5  0.    1.    1.5]
 [ 0.5  0.5  1.    1.    1.5  1.5 -1.    0.5  0.5 -1.    1.5  1.5]]
```

Parameters

- **value** (float or *array_like*) – The value of the constraint
- **where** (*array_like* of *bool*) – The constraint mask or index specifying the location of the constraint

property constraintMask

Test that *constraintMask* returns a Variable that updates itself whenever the constraints change.

```
>>> from fipy import *

>>> m = Grid2D(nx=2, ny=2)
>>> x, y = m.cellCenters
>>> v0 = CellVariable(mesh=m)
>>> v0.constrain(1., where=m.facesLeft)
>>> print(v0.faceValue.constraintMask)
[False False False False False False True False False True False False]
>>> print(v0.faceValue)
[ 0.  0.  0.  0.  0.  0.  1.  0.  0.  1.  0.  0.]
>>> v0.constrain(3., where=m.facesRight)
>>> print(v0.faceValue.constraintMask)
[False False False False False False True False True True False True]
>>> print(v0.faceValue)
[ 0.  0.  0.  0.  0.  0.  1.  0.  3.  1.  0.  3.]
>>> v1 = CellVariable(mesh=m)
>>> v1.constrain(1., where=(x < 1) & (y < 1))
>>> print(v1.constraintMask)
[ True False False False]
>>> print(v1)
[ 1.  0.  0.  0.]
>>> v1.constrain(3., where=(x > 1) & (y > 1))
>>> print(v1.constraintMask)
[ True False False  True]
>>> print(v1)
[ 1.  0.  0.  3.]
```

copy()

Make an duplicate of the *Variable*

```
>>> a = Variable(value=3)
>>> b = a.copy()
>>> b
Variable(value=array(3))
```

The duplicate will not reflect changes made to the original

```
>>> a.setValue(5)
>>> b
Variable(value=array(3))
```

Check that this works for arrays.

```
>>> a = Variable(value=numerix.array((0, 1, 2)))
>>> b = a.copy()
>>> b
Variable(value=array([0, 1, 2]))
>>> a[1] = 3
>>> b
Variable(value=array([0, 1, 2]))
```

property divergence

the divergence of *self*, \vec{u} ,

$$\nabla \cdot \vec{u} \approx \frac{\sum_f (\vec{u} \cdot \hat{n})_f A_f}{V_P}$$

Returns

divergence – one rank lower than *self*

Return type

fipy.variables.cellVariable.CellVariable

Examples

```
>>> from fipy.meshes import Grid2D
>>> from fipy.variables.cellVariable import CellVariable
>>> mesh = Grid2D(nx=3, ny=2)
>>> from builtins import range
>>> var = CellVariable(mesh=mesh, value=list(range(3*2)))
>>> print(var.faceGrad.divergence)
[ 4.  3.  2. -2. -3. -4.]
```

dot(*other*, *opShape=None*, *operatorClass=None*)

Return the mesh-element–by–mesh-element (cell-by-cell, face-by-face, etc.) scalar product

$$\text{extself} \cdot \text{extother}$$

Both *self* and *other* can be of arbitrary rank, and *other* does not need to be a *MeshVariable*.

getSctype(*default=None*)

Returns the Numpy *sctype* of the underlying array.

```
>>> Variable(1).getSctype() == numerix.NUMERIX.obj2sctype(numerix.array(1))
True
>>> Variable(1.).getSctype() == numerix.NUMERIX.obj2sctype(numerix.array(1.))
True
>>> Variable((1, 1.)).getSctype() == numerix.NUMERIX.obj2sctype(numerix.
...array((1., 1.)))
True
```

inBaseUnits()

Return the value of the *Variable* with all units reduced to their base SI elements.

```
>>> e = Variable(value="2.7 Hartree*Nav")
>>> print(e.inBaseUnits().allclose("7088849.01085 kg*m**2/s**2/mol"))
1
```

inUnitsOf(units*)**

Returns one or more *Variable* objects that express the same physical quantity in different units. The units are specified by strings containing their names. The units must be compatible with the unit of the object. If one unit is specified, the return value is a single *Variable*.

```
>>> freeze = Variable('0 degC')
>>> print(freeze.inUnitsOf('degF').allclose("32.0 degF"))
1
```

If several units are specified, the return value is a tuple of *Variable* instances with one element per unit such that the sum of all quantities in the tuple equals the the original quantity and all the values except for the last one are integers. This is used to convert to irregular unit systems like hour/minute/second. The original object will not be changed.

```
>>> t = Variable(value=314159., unit='s')
>>> from builtins import zip
>>> print(numerix.allclose([e.allclose(v) for (e, v) in zip(t.inUnitsOf('d', 'h',
... , 'min', 's'),
... , '15.0 min', '59.0 s')], [
... , True)))
1
```

property mag

The magnitude of the *Variable*, e.g., $|\vec{\psi}| = \sqrt{\vec{\psi} \cdot \vec{\psi}}$.

max(axis=None)

Return the maximum along a given axis.

min(axis=None)

```
>>> from fipy import Grid2D, CellVariable
>>> mesh = Grid2D(nx=5, ny=5)
>>> x, y = mesh.cellCenters
>>> v = CellVariable(mesh=mesh, value=x*y)
>>> print(v.min())
0.25
```

rdot(other, opShape=None, operatorClass=None)

Return the mesh-element-by-mesh-element (cell-by-cell, face-by-face, etc.) scalar product

$$\text{extoother} \cdot \text{extsel}$$

Both *self* and *other* can be of arbitrary rank, and *other* does not need to be a *MeshVariable*.

release(constraint)

Remove *constraint* from *self*

```
>>> v = Variable((0, 1, 2, 3))
>>> v.constrain(2, numerix.array((True, False, False, False)))
>>> v[:] = 10
>>> from fipy.boundaryConditions.constraint import Constraint
>>> c1 = Constraint(5, numerix.array((False, False, True, False)))
>>> v.constrain(c1)
>>> v[:] = 6
>>> v.constrain(8)
>>> v[:] = 10
>>> del v.constraints[2]
>>> v.release(constraint=c1)
>>> print(v)
[ 2 10 10 10]
```

setValue(*value*, *unit*=None, *where*=None)

Set the value of the Variable. Can take a masked array.

```
>>> a = Variable((1, 2, 3))
>>> a.setValue(5, where=(1, 0, 1))
>>> print(a)
[5 2 5]
```

```
>>> b = Variable((4, 5, 6))
>>> a.setValue(b, where=(1, 0, 1))
>>> print(a)
[4 2 6]
>>> print(b)
[4 5 6]
>>> a.value = 3
>>> print(a)
[3 3 3]
```

```
>>> b = numerix.array((3, 4, 5))
>>> a.value = b
>>> a[:] = 1
>>> print(b)
[3 4 5]
```

```
>>> a.setValue((4, 5, 6), where=(1, 0))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

property shape

```
>>> from fipy.meshes import Grid2D
>>> from fipy.variables.cellVariable import CellVariable
>>> mesh = Grid2D(nx=2, ny=3)
>>> var = CellVariable(mesh=mesh)
>>> print(numerix.allequal(var.shape, (6,)))
True
>>> print(numerix.allequal(var.arithmeticFaceValue.shape, (17,)))
True
>>> print(numerix.allequal(var.grad.shape, (2, 6)))
True
>>> print(numerix.allequal(var.faceGrad.shape, (2, 17)))
True
```

Have to account for zero length arrays

```
>>> from fipy import Grid1D
>>> m = Grid1D(nx=0)
>>> v = CellVariable(mesh=m, elementshape=(2,))
>>> numerix.allequal((v * 1).shape, (2, 0))
True
```

std(*axis*=None, ***kwargs*)

Evaluate standard deviation of all the elements of a *MeshVariable*.

Adapted from <http://mpitutorial.com/tutorials/mpi-reduce-and-allreduce/>

```
>>> import fipy as fp
>>> mesh = fp.Grid2D(nx=2, ny=2, dx=2., dy=5.)
>>> var = fp.CellVariable(value=(1., 2., 3., 4.), mesh=mesh)
>>> print((var.std() ** 2).allclose(1.25))
True
```

property unit

Return the unit object of *self*.

```
>>> Variable(value="1 m").unit
<PhysicalUnit m>
```

property value

“Evaluate” the *Variable* and return its value (longhand)

```
>>> a = Variable(value=3)
>>> print(a.value)
3
>>> b = a + 4
>>> b
(Variable(value=array(3)) + 4)
>>> b.value
7
```

22.10.15 fipy.variables.gammaNoiseVariable

Classes

GammaNoiseVariable(*args, **kwds)

Represents a gamma distribution of random numbers with the probability distribution

class fipy.variables.gammaNoiseVariable.*GammaNoiseVariable*(*args, **kwds)

Bases: *NoiseVariable*

Represents a gamma distribution of random numbers with the probability distribution

$$x^{\alpha-1} \frac{\beta^\alpha e^{-\beta x}}{\Gamma(\alpha)}$$

with a shape parameter α , a rate parameter β , and $\Gamma(z) = \int_0^\infty t^{z-1} e^{-t} dt$.

Seed the random module for the sake of deterministic test results.

```
>>> from fipy import numerix
>>> numerix.random.seed(1)
```

We generate noise on a uniform Cartesian mesh

```
>>> from fipy.variables.variable import Variable
>>> alpha = Variable()
>>> beta = Variable()
>>> from fipy.meshes import Grid2D
>>> noise = GammaNoiseVariable(mesh = Grid2D(nx = 100, ny = 100), shape = alpha,
-> rate = beta)
```

We histogram the root-volume-weighted noise distribution

```
>>> from fipy.variables.histogramVariable import HistogramVariable
>>> histogram = HistogramVariable(distribution = noise, dx = 0.1, nx = 300)
```

and compare to a Gaussian distribution


```
>>> from fipy.variables.cellVariable import CellVariable
>>> x = CellVariable(mesh=histogram.mesh, value=histogram.mesh.cellCenters[0])
>>> from scipy.special import gamma as Gamma
>>> from fipy.tools.numerix import exp
>>> gammadist = (x**alpha * (beta**alpha * exp(-beta * x)) / Gamma(alpha))
```

```
>>> if __name__ == '__main__':
...     from fipy import Viewer
...     viewer = Viewer(vars=noise, datamin=0, datamax=30)
...     histoplot = Viewer(vars=(histogram, gammadist),
...                         datamin=0, datamax=1)
```

```
>>> from fipy.tools.numerix import arange
```

```
>>> for shape in arange(1, 8, 1):
...     alpha.value = shape
...     for rate in arange(0.5, 2.5, 0.5):
...         beta.value = rate
...         if __name__ == '__main__':
...             import sys
...             print("alpha: %g, beta: %g" % (alpha, beta), file=sys.stderr)
...             viewer.plot()
...             histoplot.plot()
```

```
>>> print(abs(noise.faceGrad.divergence.cellVolumeAverage) < 5e-15)
1
```

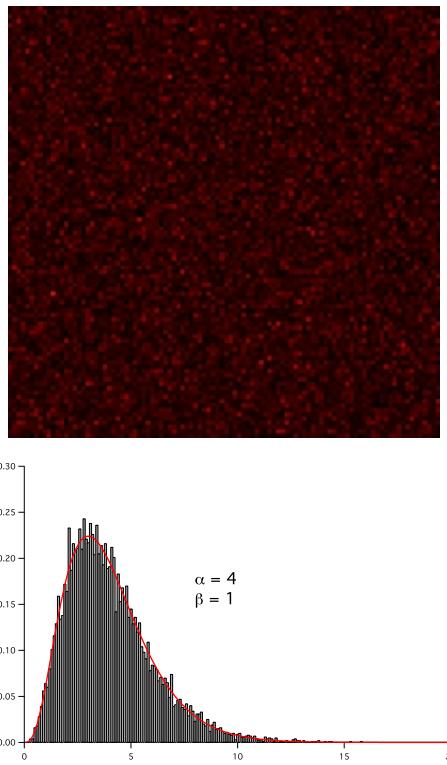

Parameters

- **mesh** (`Mesh`) – The mesh on which to define the noise.
- **shape** (`float`) – The shape parameter, α .
- **rate** (`float`) – The rate or inverse scale parameter, β .

`__abs__()`

Following test it to fix a bug with C inline string using `abs()` instead of `fabs()`

```
>>> print(abs(Variable(2.3) - Variable(1.2)))
1.1
```

Check representation works with different versions of numpy

```
>>> print(repr(abs(Variable(2.3))))
numerix.fabs(Variable(value=array(2.3)))
```

`__and__(other)`

This test case has been added due to a weird bug that was appearing.

```
>>> a = Variable(value=(0, 0, 1, 1))
>>> b = Variable(value=(0, 1, 0, 1))
>>> print(numerix.equal((a == 0) & (b == 1), [False, True, False, False]).all())
True
>>> print(a & b)
[0 0 0 1]
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx=4)
```

(continues on next page)

(continued from previous page)

```
>>> from fipy.variables.cellVariable import CellVariable
>>> a = CellVariable(value=(0, 0, 1, 1), mesh=mesh)
>>> b = CellVariable(value=(0, 1, 0, 1), mesh=mesh)
>>> print(numerix.allequal((a == 0) & (b == 1), [False, True, False, False]))
True
>>> print(a & b)
[0 0 0 1]
```

__array__(t=None)

Attempt to convert the *Variable* to a numerix *array* object

```
>>> v = Variable(value=[2, 3])
>>> print(numerix.array(v))
[2 3]
```

A dimensional *Variable* will convert to the numeric value in its base units

```
>>> v = Variable(value=[2, 3], unit="mm")
>>> numerix.array(v)
array([ 0.002,  0.003])
```

__array_wrap__(arr, context=None)

Required to prevent numpy not calling the reverse binary operations. Both the following tests are examples ufuncs.

```
>>> print(type(numerix.array([1.0, 2.0]) * Variable([1.0, 2.0])))
<class 'fipy.variables.binaryOperatorVariable...binOp'>
```

```
>>> from scipy.special import gamma as Gamma
>>> print(type(Gamma(Variable([1.0, 2.0]))))
<class 'fipy.variables.unaryOperatorVariable...unOp'>
```

__bool__()

```
>>> print(bool(Variable(value=0)))
0
>>> print(bool(Variable(value=(0, 0, 1, 1))))
Traceback (most recent call last):
...
ValueError: The truth value of an array with more than one element is ambiguous.
→ Use a.any() or a.all()
```

__call__(points=None, order=0, nearestCellIDs=None)

Interpolates the *CellVariable* to a set of points using a method that has a memory requirement on the order of *Ncells* by *Npoints* in general, but uses only *Ncells* when the *CellVariable*'s mesh is a *UniformGrid* object.

Tests

```
>>> from fipy import *
>>> m = Grid2D(nx=3, ny=2)
>>> v = CellVariable(mesh=m, value=m.cellCenters[0])
>>> print(v(((0., 1.1, 1.2), (0., 1., 1.))))
```

(continues on next page)

(continued from previous page)

```
[ 0.5  1.5  1.5]
>>> print(v((0., 1.1, 1.2), (0., 1., 1.)), order=1)
[ 0.25  1.1   1.2 ]
>>> m0 = Grid2D(nx=2, ny=2, dx=1., dy=1.)
>>> m1 = Grid2D(nx=4, ny=4, dx=.5, dy=.5)
>>> x, y = m0.cellCenters
>>> v0 = CellVariable(mesh=m0, value=x * y)
>>> print(v0(m1.cellCenters.globalValue))
[ 0.25  0.25  0.75  0.75  0.25  0.25  0.75  0.75  0.75  0.75  2.25  2.25
 0.75  0.75  2.25  2.25]
>>> print(v0(m1.cellCenters.globalValue, order=1))
[ 0.125  0.25   0.5    0.625  0.25   0.375  0.875  1.      0.5     0.875
 1.875  2.25   0.625  1.      2.25   2.625]
```

Parameters

- **points** (tuple or list of tuple) – A point or set of points in the format (X, Y, Z)
- **order** ({0, 1}) – The order of interpolation, default is 0
- **nearestCellIDs** (array_like) – Optional argument if user can calculate own nearest cell IDs array, shape should be same as points

`__eq__(other)`

Test if a *Variable* is equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a == 4)
>>> b
(Variable(value=array(3)) == 4)
>>> b()
()
```

`__ge__(other)`

Test if a *Variable* is greater than or equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a >= 4)
>>> b
(Variable(value=array(3)) >= 4)
>>> b()
()
>>> a.value = 4
>>> print(b())
1
>>> a.value = 5
>>> print(b())
1
```

`__getitem__(index)`

“Evaluate” the *Variable* and return the specified element

```
>>> a = Variable(value=((3., 4.), (5., 6.)), unit="m") + "4 m"
>>> print(a[1, 1])
10.0 m
```

It is an error to slice a *Variable* whose *value* is not sliceable

```
>>> Variable(value=3)[2]
Traceback (most recent call last):
...
IndexError: 0-d arrays can't be indexed
```

`__getstate__()`

Used internally to collect the necessary information to pickle the *CellVariable* to persistent storage.

`__gt__(other)`

Test if a *Variable* is greater than another quantity

```
>>> a = Variable(value=3)
>>> b = (a > 4)
>>> b
(Variable(value=array(3)) > 4)
>>> print(b())
0
>>> a.value = 5
>>> print(b())
1
```

`__hash__()`

Return hash(self).

`__invert__()`

Returns logical “not” of the *Variable*

```
>>> a = Variable(value=True)
>>> print(~a)
False
```

`__le__(other)`

Test if a *Variable* is less than or equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a <= 4)
>>> b
(Variable(value=array(3)) <= 4)
>>> b()
1
>>> a.value = 4
>>> print(b())
1
>>> a.value = 5
>>> print(b())
0
```

__lt__(other)

Test if a *Variable* is less than another quantity

```
>>> a = Variable(value=3)
>>> b = (a < 4)
>>> b
(Variable(value=array(3)) < 4)
>>> b()
1
>>> a.value = 4
>>> print(b())
0
>>> print(10000000000000000 * Variable(1) < 1.)
0
>>> print(1000 * Variable(1) < 1.)
0
```

Python automatically reverses the arguments when necessary

```
>>> 4 > Variable(value=3)
(Variable(value=array(3)) < 4)
```

__ne__(other)

Test if a *Variable* is not equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a != 4)
>>> b
(Variable(value=array(3)) != 4)
>>> b()
1
```

static __new__(cls, *args, **kwds)

__nonzero__()

```
>>> print(bool(Variable(value=0)))
0
>>> print(bool(Variable(value=(0, 0, 1, 1))))
Traceback (most recent call last):
...
ValueError: The truth value of an array with more than one element is ambiguous.
→ Use a.any() or a.all()
```

__or__(other)

This test case has been added due to a weird bug that was appearing.

```
>>> a = Variable(value=(0, 0, 1, 1))
>>> b = Variable(value=(0, 1, 0, 1))
>>> print(numerix.equal((a == 0) | (b == 1), [True, True, False, True]).all())
True
>>> print(a | b)
[0 1 1 1]
>>> from fipy.meshes import Grid1D
```

(continues on next page)

(continued from previous page)

```
>>> mesh = Grid1D(nx=4)
>>> from fipy.variables.cellVariable import CellVariable
>>> a = CellVariable(value=(0, 0, 1, 1), mesh=mesh)
>>> b = CellVariable(value=(0, 1, 0, 1), mesh=mesh)
>>> print(numerix.allequal((a == 0) | (b == 1), [True, True, False, True]))
True
>>> print(a | b)
[0 1 1 1]
```

__pow__(other)

return self**other, or self raised to power other

```
>>> print(Variable(1, "mol/l")**3)
1.0 mol**3/l**3
>>> print((Variable(1, "mol/l")**3).unit)
<PhysicalUnit mol**3/l**3>
```

__repr__()

Return repr(self).

__setstate__(dict)Used internally to create a new *CellVariable* from pickled persistent storage.**__str__()**

Return str(self).

all(axis=None)

```
>>> print(Variable(value=(0, 0, 1, 1)).all())
0
>>> print(Variable(value=(1, 1, 1, 1)).all())
1
```

allclose(other, rtol=1e-05, atol=1e-08)

```
>>> var = Variable((1, 1))
>>> print(var.allclose((1, 1)))
1
>>> print(var.allclose((1,)))
1
```

The following test is to check that the system does not run out of memory.

```
>>> from fipy.tools import numerix
>>> var = Variable(numerix.ones(10000))
>>> print(var.allclose(numerix.zeros(10000, '1')))
False
```

any(axis=None)

```
>>> print(Variable(value=0).any())
0
>>> print(Variable(value=(0, 0, 1, 1)).any())
1
```

property arithmeticFaceValue

Returns a *FaceVariable* whose value corresponds to the arithmetic interpolation of the adjacent cells:

$$\phi_f = (\phi_1 - \phi_2) \frac{d_{f2}}{d_{12}} + \phi_2$$

```
>>> from fipy.meshes import Grid1D
>>> from fipy import numerix
>>> mesh = Grid1D(dx = (1., 1.))
>>> L = 1
>>> R = 2
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (0.5 / 1.) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (2., 4.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (1.0 / 3.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (10., 100.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (5.0 / 55.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

property cellVolumeAverage

Return the cell-volume-weighted average of the *CellVariable*:

$$\langle \phi \rangle_{\text{vol}} = \frac{\sum_{\text{cells}} \phi_{\text{cell}} V_{\text{cell}}}{\sum_{\text{cells}} V_{\text{cell}}}$$

```
>>> from fipy.meshes import Grid2D
>>> from fipy.variables.cellVariable import CellVariable
>>> mesh = Grid2D(nx = 3, ny = 1, dx = .5, dy = .1)
>>> var = CellVariable(value = (1, 2, 6), mesh = mesh)
>>> print(var.cellVolumeAverage)
3.0
```

constraint(*value*, *where=None*)

Constrains the *CellVariable* to *value* at a location specified by *where*.

```
>>> from fipy import *
>>> m = Grid1D(nx=3)
>>> v = CellVariable(mesh=m, value=m.cellCenters[0])
>>> v.constrain(0., where=m.facesLeft)
>>> v.faceGrad.constrain([1.], where=m.facesRight)
```

(continues on next page)

(continued from previous page)

```
>>> print(v.faceGrad)
[[ 1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 0.  1.  2.  2.5]
```

Changing the constraint changes the dependencies

```
>>> v.constrain(1., where=m.facesLeft)
>>> print(v.faceGrad)
[[-1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 1.  1.  2.  2.5]
```

Constraints can be *Variable*

```
>>> c = Variable(0.)
>>> v.constrain(c, where=m.facesLeft)
>>> print(v.faceGrad)
[[ 1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 0.  1.  2.  2.5]
>>> c.value = 1.
>>> print(v.faceGrad)
[[-1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 1.  1.  2.  2.5]
```

Constraints can have a *Variable* mask.

```
>>> v = CellVariable(mesh=m)
>>> mask = FaceVariable(mesh=m, value=m.facesLeft)
>>> v.constrain(1., where=mask)
>>> print(v.faceValue)
[ 1.  0.  0.  0.]
>>> mask[:] = mask | m.facesRight
>>> print(v.faceValue)
[ 1.  0.  0.  1.]
```

property constraintMask

Test that *constraintMask* returns a Variable that updates itself whenever the constraints change.

```
>>> from fipy import *
```

```
>>> m = Grid2D(nx=2, ny=2)
>>> x, y = m.cellCenters
>>> v0 = CellVariable(mesh=m)
>>> v0.constrain(1., where=m.facesLeft)
>>> print(v0.faceValue.constraintMask)
[False False False False False False True False False True False False]
>>> print(v0.faceValue)
[ 0.  0.  0.  0.  0.  0.  1.  0.  0.  1.  0.  0.]
>>> v0.constrain(3., where=m.facesRight)
```

(continues on next page)

(continued from previous page)

```
>>> print(v0.faceValue.constraintMask)
[False False False False False True False True True False True]
>>> print(v0.faceValue)
[ 0.  0.  0.  0.  0.  1.  0.  3.  1.  0.  3.]
>>> v1 = CellVariable(mesh=m)
>>> v1.constrain(1., where=(x < 1) & (y < 1))
>>> print(v1.constraintMask)
[ True False False False]
>>> print(v1)
[ 1.  0.  0.  0.]
>>> v1.constrain(3., where=(x > 1) & (y > 1))
>>> print(v1.constraintMask)
[ True False False  True]
>>> print(v1)
[ 1.  0.  0.  3.]
```

copy()

Copy the value of the *NoiseVariable* to a static *CellVariable*.

dot(*other*, *opShape=None*, *operatorClass=None*)

Return the mesh-element–by–mesh-element (cell-by-cell, face-by-face, etc.) scalar product

$$\text{extself} \cdot \text{extother}$$

Both *self* and *other* can be of arbitrary rank, and *other* does not need to be a *MeshVariable*.

property faceGrad

Return $\nabla\phi$ as a rank-1 *FaceVariable* using differencing for the normal direction(second-order gradient).

property faceGradAverage

Deprecated since version 3.3: use *grad.arithmeticFaceValue* instead

Return $\nabla\phi$ as a rank-1 *FaceVariable* using averaging for the normal direction(second-order gradient)

property faceValue

Returns a *FaceVariable* whose value corresponds to the arithmetic interpolation of the adjacent cells:

$$\phi_f = (\phi_1 - \phi_2) \frac{d_{f2}}{d_{12}} + \phi_2$$

```
>>> from fipy.meshes import Grid1D
>>> from fipy import numerix
>>> mesh = Grid1D(dx = (1., 1.))
>>> L = 1
>>> R = 2
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (0.5 / 1.) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (2., 4.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
```

(continues on next page)

(continued from previous page)

```
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (1.0 / 3.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (10., 100.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (5.0 / 55.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

property gaussGrad

Return $\frac{1}{V_P} \sum_f \vec{n} \phi_f A_f$ as a rank-1 *CellVariable* (first-order gradient).

getSctype(*default=None*)

Returns the Numpy *sctype* of the underlying array.

```
>>> Variable(1).getSctype() == numerix.NUMERIX.obj2sctype(numerix.array(1))
True
>>> Variable(1.).getSctype() == numerix.NUMERIX.obj2sctype(numerix.array(1.))
True
>>> Variable((1, 1.)).getSctype() == numerix.NUMERIX.obj2sctype(numerix.
->>> array((1., 1.)))
True
```

property globalValue

Concatenate and return values from all processors

When running on a single processor, the result is identical to *value*.

property grad

Return $\nabla \phi$ as a rank-1 *CellVariable* (first-order gradient).

property harmonicFaceValue

Returns a *FaceVariable* whose value corresponds to the harmonic interpolation of the adjacent cells:

$$\phi_f = \frac{\phi_1 \phi_2}{(\phi_2 - \phi_1) \frac{d_{f2}}{d_{12}} + \phi_1}$$

```
>>> from fipy.meshes import Grid1D
>>> from fipy import numerix
>>> mesh = Grid1D(dx = (1., 1.))
>>> L = 1
>>> R = 2
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.harmonicFaceValue[mesh.interiorFaces.value]
>>> answer = L * R / ((R - L) * (0.5 / 1.) + L)
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (2., 4.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.harmonicFaceValue[mesh.interiorFaces.value]
>>> answer = L * R / ((R - L) * (1.0 / 3.0) + L)
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (10., 100.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.harmonicFaceValue[mesh.interiorFaces.value]
>>> answer = L * R / ((R - L) * (5.0 / 55.0) + L)
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

inBaseUnits()

Return the value of the *Variable* with all units reduced to their base SI elements.

```
>>> e = Variable(value="2.7 Hartree*Nav")
>>> print(e.inBaseUnits().allclose("7088849.01085 kg*m**2/s**2/mol"))
1
```

inUnitsOf(*units)

Returns one or more *Variable* objects that express the same physical quantity in different units. The units are specified by strings containing their names. The units must be compatible with the unit of the object. If one unit is specified, the return value is a single *Variable*.

```
>>> freeze = Variable('0 degC')
>>> print(freeze.inUnitsOf('degF').allclose("32.0 degF"))
1
```

If several units are specified, the return value is a tuple of *Variable* instances with one element per unit such that the sum of all quantities in the tuple equals the the original quantity and all the values except for the last one are integers. This is used to convert to irregular unit systems like hour/minute/second. The original object will not be changed.

```
>>> t = Variable(value=314159., unit='s')
>>> from builtins import zip
>>> print(numerix.allclose([e.allclose(v) for (e, v) in zip(t.inUnitsOf('d', 'h',
-> 'min', 's'), ...
-> ...
-> '15.0 min', '59.0 s')], ...
-> ...
-> True))
1
```

property leastSquaresGrad

Return $\nabla\phi$, which is determined by solving for $\nabla\phi$ in the following matrix equation,

$$\nabla\phi \cdot \sum_f d_{AP}^2 \vec{n}_{AP} \otimes \vec{n}_{AP} = \sum_f d_{AP}^2 (\vec{n} \cdot \nabla\phi)_{AP}$$

The matrix equation is derived by minimizing the following least squares sum,

$$F(\phi_x, \phi_y) = \sqrt{\sum_f (d_{AP} \vec{n}_{AP} \cdot \nabla\phi - d_{AP} (\vec{n}_{AP} \cdot \nabla\phi)_{AP})^2}$$

Tests

```
>>> from fipy import Grid2D
>>> m = Grid2D(nx=2, ny=2, dx=0.1, dy=2.0)
>>> print(numerix.allclose(CellVariable(mesh=m, value=(0, 1, 3, 6)).
...leastSquaresGrad.globalValue, \
...
...
...
True
```

```
>>> from fipy import Grid1D
>>> print(numerix.allclose(CellVariable(mesh=Grid1D(dx=(2.0, 1.0, 0.5)),
...value=(0, 1, 2)).leastSquaresGrad.
...globalValue, [[0.461538461538, 0.8, 1.2]]))
True
```

property mag

The magnitude of the *Variable*, e.g., $|\vec{\psi}| = \sqrt{\vec{\psi} \cdot \vec{\psi}}$.

max(axis=None)

Return the maximum along a given axis.

min(axis=None)

```
>>> from fipy import Grid2D, CellVariable
>>> mesh = Grid2D(nx=5, ny=5)
>>> x, y = mesh.cellCenters
>>> v = CellVariable(mesh=mesh, value=x*y)
>>> print(v.min())
0.25
```

property minmodFaceValue

Returns a *FaceVariable* with a value that is the minimum of the absolute values of the adjacent cells. If the values are of opposite sign then the result is zero:

$$\phi_f = \begin{cases} \phi_1 & \text{when } |\phi_1| \leq |\phi_2|, \\ \phi_2 & \text{when } |\phi_2| < |\phi_1|, \\ 0 & \text{when } \phi_1\phi_2 < 0 \end{cases}$$

```
>>> from fipy import *
>>> print(CellVariable(mesh=Grid1D(nx=2), value=(1, 2)).minmodFaceValue)
[1 1 2]
>>> print(CellVariable(mesh=Grid1D(nx=2), value=(-1, -2)).minmodFaceValue)
[-1 -1 -2]
>>> print(CellVariable(mesh=Grid1D(nx=2), value=(-1, 2)).minmodFaceValue)
[-1 0 2]
```

property old

Return the values of the *CellVariable* from the previous solution sweep.

Combinations of *CellVariable*'s should also return old values.

```
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx = 2)
>>> from fipy.variables.cellVariable import CellVariable
>>> var1 = CellVariable(mesh = mesh, value = (2, 3), hasOld = 1)
>>> var2 = CellVariable(mesh = mesh, value = (3, 4))
>>> v = var1 * var2
>>> print(v)
[ 6 12]
>>> var1.value = ((3, 2))
>>> print(v)
[9 8]
>>> print(v.old)
[ 6 12]
```

The following small test is to correct for a bug when the operator does not just use variables.

```
>>> v1 = var1 * 3
>>> print(v1)
[9 6]
>>> print(v1.old)
[6 9]
```

rdot(*other*, *opShape=None*, *operatorClass=None*)

Return the mesh-element-by-mesh-element (cell-by-cell, face-by-face, etc.) scalar product

$$\text{ext}_{\text{other}} \cdot \text{ext}_{\text{self}}$$

Both *self* and *other* can be of arbitrary rank, and *other* does not need to be a *MeshVariable*.

release(*constraint*)

Remove *constraint* from *self*

```
>>> from fipy import *
>>> m = Grid1D(nx=3)
>>> v = CellVariable(mesh=m, value=m.cellCenters[0])
>>> c = Constraint(0., where=m.facesLeft)
>>> v.constrain(c)
>>> print(v.faceValue)
[ 0.  1.  2.  2.5]
>>> v.release(constraint=c)
>>> print(v.faceValue)
[ 0.5  1.   2.   2.5]
```

scramble()

Generate a new random distribution.

setValue(*value*, *unit=None*, *where=None*)

Set the value of the Variable. Can take a masked array.

```
>>> a = Variable((1, 2, 3))
>>> a.setValue(5, where=(1, 0, 1))
>>> print(a)
[5 2 5]
```

```
>>> b = Variable((4, 5, 6))
>>> a.setValue(b, where=(1, 0, 1))
>>> print(a)
[4 2 6]
>>> print(b)
[4 5 6]
>>> a.value = 3
>>> print(a)
[3 3 3]
```

```
>>> b = numerix.array((3, 4, 5))
>>> a.value = b
>>> a[:] = 1
>>> print(b)
[3 4 5]
```

```
>>> a.setValue((4, 5, 6), where=(1, 0))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

property shape

```
>>> from fipy.meshes import Grid2D
>>> from fipy.variables.cellVariable import CellVariable
>>> mesh = Grid2D(nx=2, ny=3)
>>> var = CellVariable(mesh=mesh)
>>> print(numerix.allequal(var.shape, (6,)))
True
>>> print(numerix.allequal(var.arithmeticFaceValue.shape, (17,)))
True
>>> print(numerix.allequal(var.grad.shape, (2, 6)))
True
>>> print(numerix.allequal(var.faceGrad.shape, (2, 17)))
True
```

Have to account for zero length arrays

```
>>> from fipy import Grid1D
>>> m = Grid1D(nx=0)
>>> v = CellVariable(mesh=m, elementshape=(2,))
>>> numerix.allequal((v * 1).shape, (2, 0))
True
```

`std(axis=None, **kwargs)`

Evaluate standard deviation of all the elements of a *MeshVariable*.

Adapted from <http://mpitutorial.com/tutorials/mpi-reduce-and-allreduce/>

```
>>> import fipy as fp
>>> mesh = fp.Grid2D(nx=2, ny=2, dx=2., dy=5.)
>>> var = fp.CellVariable(value=(1., 2., 3., 4.), mesh=mesh)
```

(continues on next page)

(continued from previous page)

```
>>> print((var.std()**2).allclose(1.25))
True
```

property unit

Return the unit object of *self*.

```
>>> Variable(value="1 m").unit
<PhysicalUnit m>
```

updateOld()

Set the values of the previous solution sweep to the current values.

```
>>> from fipy import *
>>> v = CellVariable(mesh=Grid1D(), hasOld=False)
>>> v.updateOld()
Traceback (most recent call last):
...
AssertionError: The updateOld method requires the CellVariable to have an old_
value. Set hasOld to True when instantiating the CellVariable.
```

property value

“Evaluate” the *Variable* and return its value (longhand)

```
>>> a = Variable(value=3)
>>> print(a.value)
3
>>> b = a + 4
>>> b
(Variable(value=array(3)) + 4)
>>> b.value
7
```

22.10.16 fipy.variables.gaussCellGradVariable**22.10.17 fipy.variables.gaussianNoiseVariable****Classes**

GaussianNoiseVariable(*args, **kwds)

Represents a normal (Gaussian) distribution of random numbers with mean μ and variance $\langle \eta(\vec{r})\eta(\vec{r}') \rangle = \sigma^2$, which has the probability distribution

class fipy.variables.gaussianNoiseVariable.*GaussianNoiseVariable*(*args, **kwds)

Bases: *NoiseVariable*

Represents a normal (Gaussian) distribution of random numbers with mean μ and variance $\langle \eta(\vec{r})\eta(\vec{r}') \rangle = \sigma^2$, which has the probability distribution

$$\frac{1}{\sigma\sqrt{2\pi}} \exp -\frac{(x - \mu)^2}{2\sigma^2}$$

For example, the variance of thermal noise that is uncorrelated in space and time is often expressed as

$$\langle \eta(\vec{r}, t)\eta(\vec{r}', t') \rangle = M k_B T \delta(\vec{r} - \vec{r}') \delta(t - t')$$

which can be obtained with:

```
sigmaSqr = Mobility * kBoltzmann * Temperature / (mesh.cellVolumes * timeStep)
GaussianNoiseVariable(mesh = mesh, variance = sigmaSqr)
```

Note: If the time step will change as the simulation progresses, either through use of an adaptive iterator or by making manual changes at different stages, remember to declare `timeStep` as a *Variable* and to change its value with its `setValue()` method.

```
>>> import sys
>>> from fipy.tools.numerix import *
```

```
>>> mean = 0.
>>> variance = 4.
```

Seed the random module for the sake of deterministic test results.

```
>>> from fipy import numerix
>>> numerix.random.seed(3)
```

We generate noise on a non-uniform Cartesian mesh with cell dimensions of x^2 and y^3 .

```
>>> from fipy.meshes import Grid2D
>>> mesh = Grid2D(dx = arange(0.1, 5., 0.1)**2, dy = arange(0.1, 3., 0.1)**3)
>>> from fipy.variables.cellVariable import CellVariable
>>> volumes = CellVariable(mesh=mesh, value=mesh.cellVolumes)
>>> noise = GaussianNoiseVariable(mesh = mesh, mean = mean,
...                                 variance = variance / volumes)
```

We histogram the root-volume-weighted noise distribution

```
>>> from fipy.variables.histogramVariable import HistogramVariable
>>> histogram = HistogramVariable(distribution = noise * sqrt(volumes),
...                                 dx = 0.1, nx = 600, offset = -30)
```

and compare to a Gaussian distribution


```
>>> gauss = CellVariable(mesh = histogram.mesh)
>>> x = histogram.mesh.cellCenters[0]
>>> gauss.value = ((1/(sqrt(variance * 2 * pi))) * exp(-(x - mean)**2 / (2 * variance)))
```

```
>>> if __name__ == '__main__':
...     from fipy.viewers import Viewer
...     viewer = Viewer(vars=noise,
...                     datamin=-5, datamax=5)
...     histoplot = Viewer(vars=(histogram, gauss))
```


```
>>> from builtins import range
>>> for i in range(10):
...     noise.scramble()
...     if __name__ == '__main__':
...         viewer.plot()
...         histoplot.plot()
```

```
>>> print(abs(noise.faceGrad.divergence.cellVolumeAverage) < 5e-15)
1
```

Note that the noise exhibits larger amplitude in the small cells than in the large ones

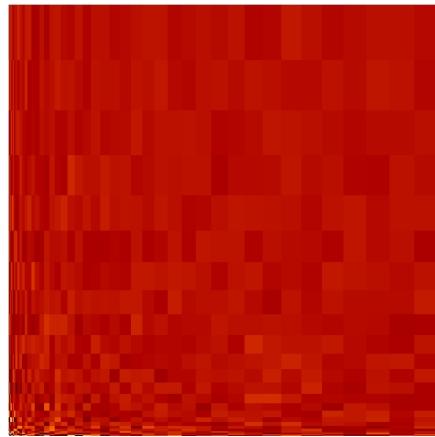

but that the root-volume-weighted histogram is Gaussian.

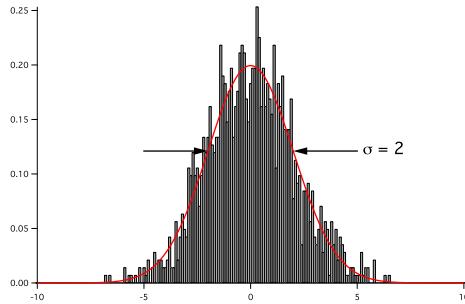

Parameters

- **mesh** ([Mesh](#)) – The mesh on which to define the noise.
- **mean** ([float](#)) – The mean of the noise distribution, μ .
- **variance** ([float](#)) – The variance of the noise distribution, σ^2 .

abs()

Following test it to fix a bug with C inline string using `abs()` instead of `fabs()`

```
>>> print(abs(Variable(2.3) - Variable(1.2)))
1.1
```

Check representation works with different versions of numpy

```
>>> print(repr(abs(Variable(2.3))))
numerix.fabs(Variable(value=array(2.3)))
```

__and__(other)

This test case has been added due to a weird bug that was appearing.

```
>>> a = Variable(value=(0, 0, 1, 1))
>>> b = Variable(value=(0, 1, 0, 1))
>>> print(numerix.equal((a == 0) & (b == 1), [False, True, False, False]).all())
True
>>> print(a & b)
[0 0 0 1]
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx=4)
>>> from fipy.variables.cellVariable import CellVariable
>>> a = CellVariable(value=(0, 0, 1, 1), mesh=mesh)
>>> b = CellVariable(value=(0, 1, 0, 1), mesh=mesh)
>>> print(numerix.allequal((a == 0) & (b == 1), [False, True, False, False]))
True
>>> print(a & b)
[0 0 0 1]
```

__array__(t=None)

Attempt to convert the *Variable* to a numerix *array* object

```
>>> v = Variable(value=[2, 3])
>>> print(numerix.array(v))
[2 3]
```

A dimensional *Variable* will convert to the numeric value in its base units

```
>>> v = Variable(value=[2, 3], unit="mm")
>>> numerix.array(v)
array([ 0.002,  0.003])
```

__array_wrap__(arr, context=None)

Required to prevent numpy not calling the reverse binary operations. Both the following tests are examples ufuncs.

```
>>> print(type(numerix.array([1.0, 2.0]) * Variable([1.0, 2.0])))
<class 'fipy.variables.binaryOperatorVariable...binOp'>
```

```
>>> from scipy.special import gamma as Gamma
>>> print(type(Gamma(Variable([1.0, 2.0]))))
<class 'fipy.variables.unaryOperatorVariable...unOp'>
```

__bool__()

```
>>> print(bool(Variable(value=0)))
0
>>> print(bool(Variable(value=(0, 0, 1, 1))))
```

(continues on next page)

(continued from previous page)

```
Traceback (most recent call last):
...
ValueError: The truth value of an array with more than one element is ambiguous.
→ Use a.any() or a.all()
```

`__call__(points=None, order=0, nearestCellIDs=None)`

Interpolates the *CellVariable* to a set of points using a method that has a memory requirement on the order of *Ncells* by *Npoints* in general, but uses only *Ncells* when the *CellVariable*'s mesh is a *UniformGrid* object.

Tests

```
>>> from fipy import *
>>> m = Grid2D(nx=3, ny=2)
>>> v = CellVariable(mesh=m, value=m.cellCenters[0])
>>> print(v((0., 1.1, 1.2), (0., 1., 1.)))
[ 0.5  1.5  1.5]
>>> print(v((0., 1.1, 1.2), (0., 1., 1.)), order=1)
[ 0.25  1.1   1.2 ]
>>> m0 = Grid2D(nx=2, ny=2, dx=1., dy=1.)
>>> m1 = Grid2D(nx=4, ny=4, dx=.5, dy=.5)
>>> x, y = m0.cellCenters
>>> v0 = CellVariable(mesh=m0, value=x * y)
>>> print(v0(m1.cellCenters.globalValue))
[ 0.25  0.25  0.75  0.75  0.25  0.25  0.75  0.75  0.75  0.75  2.25  2.25
 0.75  0.75  2.25  2.25]
>>> print(v0(m1.cellCenters.globalValue, order=1))
[ 0.125  0.25   0.5    0.625  0.25   0.375  0.875  1.      0.5     0.875
 1.875  2.25   0.625  1.      2.25   2.625]
```

Parameters

- **points** (tuple or list of tuple) – A point or set of points in the format (X, Y, Z)
- **order** ({0, 1}) – The order of interpolation, default is 0
- **nearestCellIDs** (array_like) – Optional argument if user can calculate own nearest cell IDs array, shape should be same as points

`__eq__(other)`

Test if a *Variable* is equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a == 4)
>>> b
(Variable(value=array(3)) == 4)
>>> b()
()
```

`__ge__(other)`

Test if a *Variable* is greater than or equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a >= 4)
```

(continues on next page)

(continued from previous page)

```
>>> b
(Variable(value=array(3)) >= 4)
>>> b()
0
>>> a.value = 4
>>> print(b())
1
>>> a.value = 5
>>> print(b())
1
```

__getitem__(index)

“Evaluate” the *Variable* and return the specified element

```
>>> a = Variable(value=((3., 4.), (5., 6.)), unit="m") + "4 m"
>>> print(a[1, 1])
10.0 m
```

It is an error to slice a *Variable* whose *value* is not sliceable

```
>>> Variable(value=3)[2]
Traceback (most recent call last):
...
IndexError: 0-d arrays can't be indexed
```

__getstate__()

Used internally to collect the necessary information to **pickle** the *CellVariable* to persistent storage.

__gt__(other)

Test if a *Variable* is greater than another quantity

```
>>> a = Variable(value=3)
>>> b = (a > 4)
>>> b
(Variable(value=array(3)) > 4)
>>> print(b())
0
>>> a.value = 5
>>> print(b())
1
```

__hash__()

Return hash(self).

__invert__()

Returns logical “not” of the *Variable*

```
>>> a = Variable(value=True)
>>> print(~a)
False
```

__le__(other)

Test if a *Variable* is less than or equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a <= 4)
>>> b
(Variable(value=array(3)) <= 4)
>>> b()
1
>>> a.value = 4
>>> print(b())
1
>>> a.value = 5
>>> print(b())
0
```

__lt__(other)

Test if a *Variable* is less than another quantity

```
>>> a = Variable(value=3)
>>> b = (a < 4)
>>> b
(Variable(value=array(3)) < 4)
>>> b()
1
>>> a.value = 4
>>> print(b())
0
>>> print(10000000000000000 * Variable(1) < 1.)
0
>>> print(1000 * Variable(1) < 1.)
0
```

Python automatically reverses the arguments when necessary

```
>>> 4 > Variable(value=3)
(Variable(value=array(3)) < 4)
```

__ne__(other)

Test if a *Variable* is not equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a != 4)
>>> b
(Variable(value=array(3)) != 4)
>>> b()
1
```

static __new__(cls, *args, **kwds)**__nonzero__()**

```
>>> print(bool(Variable(value=0)))
0
>>> print(bool(Variable(value=(0, 0, 1, 1))))
Traceback (most recent call last):
```

(continues on next page)

(continued from previous page)

```

    ...
ValueError: The truth value of an array with more than one element is ambiguous.
→ Use a.any() or a.all()

```

__or__(other)

This test case has been added due to a weird bug that was appearing.

```

>>> a = Variable(value=(0, 0, 1, 1))
>>> b = Variable(value=(0, 1, 0, 1))
>>> print(numerix.equal((a == 0) | (b == 1), [True, True, False, True]).all())
True
>>> print(a | b)
[0 1 1 1]
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx=4)
>>> from fipy.variables.cellVariable import CellVariable
>>> a = CellVariable(value=(0, 0, 1, 1), mesh=mesh)
>>> b = CellVariable(value=(0, 1, 0, 1), mesh=mesh)
>>> print(numerix.allequal((a == 0) | (b == 1), [True, True, False, True]))
True
>>> print(a | b)
[0 1 1 1]

```

__pow__(other)

return self**other, or self raised to power other

```

>>> print(Variable(1, "mol/l")**3)
1.0 mol**3/l**3
>>> print((Variable(1, "mol/l")**3).unit)
<PhysicalUnit mol**3/l**3>

```

__repr__()

Return repr(self).

__setstate__(dict)

Used internally to create a new *CellVariable* from pickled persistent storage.

__str__()

Return str(self).

all(axis=None)

```

>>> print(Variable(value=(0, 0, 1, 1)).all())
0
>>> print(Variable(value=(1, 1, 1, 1)).all())
1

```

allclose(other, rtol=1e-05, atol=1e-08)

```

>>> var = Variable((1, 1))
>>> print(var.allclose((1, 1)))
1

```

(continues on next page)

(continued from previous page)

```
>>> print(var.allclose((1,)))
1
```

The following test is to check that the system does not run out of memory.

```
>>> from fipy.tools import numerix
>>> var = Variable(numerix.ones(10000))
>>> print(var.allclose(numerix.zeros(10000, 'l')))
False
```

any(*axis=None*)

```
>>> print(Variable(value=0).any())
0
>>> print(Variable(value=(0, 0, 1, 1)).any())
1
```

property arithmeticFaceValue

Returns a *FaceVariable* whose value corresponds to the arithmetic interpolation of the adjacent cells:

$$\phi_f = (\phi_1 - \phi_2) \frac{d_{f2}}{d_{12}} + \phi_2$$

```
>>> from fipy.meshes import Grid1D
>>> from fipy import numerix
>>> mesh = Grid1D(dx = (1., 1.))
>>> L = 1
>>> R = 2
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (0.5 / 1.) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (2., 4.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (1.0 / 3.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (10., 100.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (5.0 / 55.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

property cellVolumeAverage

Return the cell-volume-weighted average of the *CellVariable*:

$$\langle \phi \rangle_{\text{vol}} = \frac{\sum_{\text{cells}} \phi_{\text{cell}} V_{\text{cell}}}{\sum_{\text{cells}} V_{\text{cell}}}$$

```
>>> from fipy.meshes import Grid2D
>>> from fipy.variables.cellVariable import CellVariable
>>> mesh = Grid2D(nx = 3, ny = 1, dx = .5, dy = .1)
>>> var = CellVariable(value = (1, 2, 6), mesh = mesh)
>>> print(var.cellVolumeAverage)
3.0
```

constraint(*value*, *where*=None)

Constrains the *CellVariable* to *value* at a location specified by *where*.

```
>>> from fipy import *
>>> m = Grid1D(nx=3)
>>> v = CellVariable(mesh=m, value=m.cellCenters[0])
>>> v.constrain(0., where=m.facesLeft)
>>> v.faceGrad.constrain([1.], where=m.facesRight)
>>> print(v.faceGrad)
[[ 1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 0.   1.   2.   2.5]
```

Changing the constraint changes the dependencies

```
>>> v.constrain(1., where=m.facesLeft)
>>> print(v.faceGrad)
[[-1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 1.   1.   2.   2.5]
```

Constraints can be *Variable*

```
>>> c = Variable(0.)
>>> v.constrain(c, where=m.facesLeft)
>>> print(v.faceGrad)
[[ 1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 0.   1.   2.   2.5]
>>> c.value = 1.
>>> print(v.faceGrad)
[[-1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 1.   1.   2.   2.5]
```

Constraints can have a *Variable* mask.

```
>>> v = CellVariable(mesh=m)
>>> mask = FaceVariable(mesh=m, value=m.facesLeft)
>>> v.constrain(1., where=mask)
>>> print(v.faceValue)
[ 1.  0.  0.  0.]
>>> mask[:] = mask | m.facesRight
>>> print(v.faceValue)
[ 1.  0.  0.  1.]
```

property constraintMask

Test that *constraintMask* returns a Variable that updates itself whenever the constraints change.

```
>>> from fipy import *
>>> m = Grid2D(nx=2, ny=2)
>>> x, y = m.cellCenters
>>> v0 = CellVariable(mesh=m)
>>> v0.constrain(1., where=m.facesLeft)
>>> print(v0.faceValue.constraintMask)
[False False False False False True False False True False False]
>>> print(v0.faceValue)
[ 0.  0.  0.  0.  0.  1.  0.  0.  1.  0.  0.]
>>> v0.constrain(3., where=m.facesRight)
>>> print(v0.faceValue.constraintMask)
[False False False False False False True False True True False True]
>>> print(v0.faceValue)
[ 0.  0.  0.  0.  0.  1.  0.  3.  1.  0.  3.]
>>> v1 = CellVariable(mesh=m)
>>> v1.constrain(1., where=(x < 1) & (y < 1))
>>> print(v1.constraintMask)
[ True False False False]
>>> print(v1)
[ 1.  0.  0.  0.]
>>> v1.constrain(3., where=(x > 1) & (y > 1))
>>> print(v1.constraintMask)
[ True False False  True]
>>> print(v1)
[ 1.  0.  0.  3.]
```

copy()

Copy the value of the *NoiseVariable* to a static *CellVariable*.

dot(*other*, *opShape=None*, *operatorClass=None*)

Return the mesh-element–by–mesh-element (cell-by-cell, face-by-face, etc.) scalar product

$$\text{extself} \cdot \text{extother}$$

Both *self* and *other* can be of arbitrary rank, and *other* does not need to be a *MeshVariable*.

property faceGrad

Return $\nabla\phi$ as a rank-1 *FaceVariable* using differencing for the normal direction(second-order gradient).

property faceGradAverage

Deprecated since version 3.3: use *grad.arithmeticFaceValue* instead

Return $\nabla\phi$ as a rank-1 *FaceVariable* using averaging for the normal direction(second-order gradient)

property faceValue

Returns a *FaceVariable* whose value corresponds to the arithmetic interpolation of the adjacent cells:

$$\phi_f = (\phi_1 - \phi_2) \frac{d_{f2}}{d_{12}} + \phi_2$$

```
>>> from fipy.meshes import Grid1D
>>> from fipy import numerix
>>> mesh = Grid1D(dx = (1., 1.))
>>> L = 1
>>> R = 2
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (0.5 / 1.) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (2., 4.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (1.0 / 3.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (10., 100.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (5.0 / 55.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

property gaussGrad

Return $\frac{1}{V_P} \sum_f \vec{n} \phi_f A_f$ as a rank-1 *CellVariable* (first-order gradient).

getscctype(*default=None*)

Returns the Numpy *scctype* of the underlying array.

```
>>> Variable(1).getscctype() == numerix.NUMERIX.obj2scctype(numerix.array(1))
True
>>> Variable(1.).getscctype() == numerix.NUMERIX.obj2scctype(numerix.array(1.))
True
>>> Variable((1, 1.)).getscctype() == numerix.NUMERIX.obj2scctype(numerix.
->array((1., 1.)))
True
```

property globalValue

Concatenate and return values from all processors

When running on a single processor, the result is identical to *value*.

property grad

Return $\nabla\phi$ as a rank-1 *CellVariable* (first-order gradient).

property harmonicFaceValue

Returns a *FaceVariable* whose value corresponds to the harmonic interpolation of the adjacent cells:

$$\phi_f = \frac{\phi_1 \phi_2}{(\phi_2 - \phi_1) \frac{d_{f2}}{d_{12}} + \phi_1}$$

```
>>> from fipy.meshes import Grid1D
>>> from fipy import numerix
>>> mesh = Grid1D(dx = (1., 1.))
>>> L = 1
>>> R = 2
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.harmonicFaceValue[mesh.interiorFaces.value]
>>> answer = L * R / ((R - L) * (0.5 / 1.) + L)
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (2., 4.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.harmonicFaceValue[mesh.interiorFaces.value]
>>> answer = L * R / ((R - L) * (1.0 / 3.0) + L)
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (10., 100.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.harmonicFaceValue[mesh.interiorFaces.value]
>>> answer = L * R / ((R - L) * (5.0 / 55.0) + L)
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

inBaseUnits()

Return the value of the *Variable* with all units reduced to their base SI elements.

```
>>> e = Variable(value="2.7 Hartree*Nav")
>>> print(e.inBaseUnits().allclose("7088849.01085 kg*m**2/s**2/mol"))
1
```

inUnitsOf(*units)

Returns one or more *Variable* objects that express the same physical quantity in different units. The units are specified by strings containing their names. The units must be compatible with the unit of the object. If one unit is specified, the return value is a single *Variable*.

```
>>> freeze = Variable('0 degC')
>>> print(freeze.inUnitsOf('degF').allclose("32.0 degF"))
1
```

If several units are specified, the return value is a tuple of *Variable* instances with one element per unit such that the sum of all quantities in the tuple equals the the original quantity and all the values except for the last one are integers. This is used to convert to irregular unit systems like hour/minute/second. The original object will not be changed.

```
>>> t = Variable(value=314159., unit='s')
>>> from builtins import zip
>>> print(numerix.allclose([e.allclose(v) for (e, v) in zip(t.inUnitsOf('d'), 'h
  ', 'min', 's'),
...                           ['3.0 d', '15.0 h',
...                            '15.0 min', '59.0 s'])],
```

(continues on next page)

(continued from previous page)

```
...
    True))
1
```

property leastSquaresGrad

Return $\nabla\phi$, which is determined by solving for $\nabla\phi$ in the following matrix equation,

$$\nabla\phi \cdot \sum_f d_{AP}^2 \vec{n}_{AP} \otimes \vec{n}_{AP} = \sum_f d_{AP}^2 (\vec{n} \cdot \nabla\phi)_{AP}$$

The matrix equation is derived by minimizing the following least squares sum,

$$F(\phi_x, \phi_y) = \sqrt{\sum_f (d_{AP} \vec{n}_{AP} \cdot \nabla\phi - d_{AP} (\vec{n}_{AP} \cdot \nabla\phi)_{AP})^2}$$

Tests

```
>>> from fipy import Grid2D
>>> m = Grid2D(nx=2, ny=2, dx=0.1, dy=2.0)
>>> print(numerix.allclose(CellVariable(mesh=m, value=(0, 1, 3, 6)).leastSquaresGrad.globalValue,
...                           [[8.0, 8.0, 24.0, 24.0],
...                            [1.2, 2.0, 1.2, 2.0]]))
True
```

```
>>> from fipy import Grid1D
>>> print(numerix.allclose(CellVariable(mesh=Grid1D(dx=(2.0, 1.0, 0.5)),
...                                         value=(0, 1, 2)).leastSquaresGrad.globalValue,
...                           [[0.461538461538, 0.8, 1.2]]))
True
```

property mag

The magnitude of the *Variable*, e.g., $|\vec{\psi}| = \sqrt{\vec{\psi} \cdot \vec{\psi}}$.

max(axis=None)

Return the maximum along a given axis.

min(axis=None)

```
>>> from fipy import Grid2D, CellVariable
>>> mesh = Grid2D(nx=5, ny=5)
>>> x, y = mesh.cellCenters
>>> v = CellVariable(mesh=mesh, value=x*y)
>>> print(v.min())
0.25
```

property minmodFaceValue

Returns a *FaceVariable* with a value that is the minimum of the absolute values of the adjacent cells. If the values are of opposite sign then the result is zero:

$$\phi_f = \begin{cases} \phi_1 & \text{when } |\phi_1| \leq |\phi_2|, \\ \phi_2 & \text{when } |\phi_2| < |\phi_1|, \\ 0 & \text{when } \phi_1 \phi_2 < 0 \end{cases}$$

```
>>> from fipy import *
>>> print(CellVariable(mesh=Grid1D(nx=2), value=(1, 2)).minmodFaceValue)
[1 1 2]
>>> print(CellVariable(mesh=Grid1D(nx=2), value=(-1, -2)).minmodFaceValue)
[-1 -1 -2]
>>> print(CellVariable(mesh=Grid1D(nx=2), value=(-1, 2)).minmodFaceValue)
[-1 0 2]
```

property old

Return the values of the *CellVariable* from the previous solution sweep.

Combinations of *CellVariable*'s should also return old values.

```
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx = 2)
>>> from fipy.variables.cellVariable import CellVariable
>>> var1 = CellVariable(mesh = mesh, value = (2, 3), hasOld = 1)
>>> var2 = CellVariable(mesh = mesh, value = (3, 4))
>>> v = var1 * var2
>>> print(v)
[ 6 12]
>>> var1.value = ((3, 2))
>>> print(v)
[9 8]
>>> print(v.old)
[ 6 12]
```

The following small test is to correct for a bug when the operator does not just use variables.

```
>>> v1 = var1 * 3
>>> print(v1)
[9 6]
>>> print(v1.old)
[6 9]
```

rdot(other, opShape=None, operatorClass=None)

Return the mesh-element-by-mesh-element (cell-by-cell, face-by-face, etc.) scalar product

$$\text{exto}other \cdot \text{extsel}$$

Both *self* and *other* can be of arbitrary rank, and *other* does not need to be a *MeshVariable*.

release(constraint)

Remove *constraint* from *self*

```
>>> from fipy import *
>>> m = Grid1D(nx=3)
>>> v = CellVariable(mesh=m, value=m.cellCenters[0])
>>> c = Constraint(0., where=m.facesLeft)
>>> v.constrain(c)
>>> print(v.faceValue)
[ 0. 1. 2. 2.5]
>>> v.release(constraint=c)
>>> print(v.faceValue)
[ 0.5 1. 2. 2.5]
```

scramble()

Generate a new random distribution.

setValue(value, unit=None, where=None)

Set the value of the Variable. Can take a masked array.

```
>>> a = Variable((1, 2, 3))
>>> a.setValue(5, where=(1, 0, 1))
>>> print(a)
[5 2 5]
```

```
>>> b = Variable((4, 5, 6))
>>> a.setValue(b, where=(1, 0, 1))
>>> print(a)
[4 2 6]
>>> print(b)
[4 5 6]
>>> a.value = 3
>>> print(a)
[3 3 3]
```

```
>>> b = numerix.array((3, 4, 5))
>>> a.value = b
>>> a[:] = 1
>>> print(b)
[3 4 5]
```

```
>>> a.setValue((4, 5, 6), where=(1, 0))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

property shape

```
>>> from fipy.meshes import Grid2D
>>> from fipy.variables.cellVariable import CellVariable
>>> mesh = Grid2D(nx=2, ny=3)
>>> var = CellVariable(mesh=mesh)
>>> print(numerix.allequal(var.shape, (6,)))
True
>>> print(numerix.allequal(var.arithmeticFaceValue.shape, (17,)))
True
>>> print(numerix.allequal(var.grad.shape, (2, 6)))
True
>>> print(numerix.allequal(var.faceGrad.shape, (2, 17)))
True
```

Have to account for zero length arrays

```
>>> from fipy import Grid1D
>>> m = Grid1D(nx=0)
>>> v = CellVariable(mesh=m, elementshape=(2,))
```

(continues on next page)

(continued from previous page)

```
>>> numerix.allequal((v * 1).shape, (2, 0))
True
```

std(*axis=None*, *kwargs*)**Evaluate standard deviation of all the elements of a *MeshVariable*.Adapted from <http://mpitutorial.com/tutorials/mpi-reduce-and-allreduce/>

```
>>> import fipy as fp
>>> mesh = fp.Grid2D(nx=2, ny=2, dx=2., dy=5.)
>>> var = fp.CellVariable(value=(1., 2., 3., 4.), mesh=mesh)
>>> print((var.std()**2).allclose(1.25))
True
```

property unitReturn the unit object of *self*.

```
>>> Variable(value="1 m").unit
<PhysicalUnit m>
```

updateOld()

Set the values of the previous solution sweep to the current values.

```
>>> from fipy import *
>>> v = CellVariable(mesh=Grid1D(), hasOld=False)
>>> v.updateOld()
Traceback (most recent call last):
...
AssertionError: The updateOld method requires the CellVariable to have an old_
value. Set hasOld to True when instantiating the CellVariable.
```

property value“Evaluate” the *Variable* and return its value (longhand)

```
>>> a = Variable(value=3)
>>> print(a.value)
3
>>> b = a + 4
>>> b
(Variable(value=array(3)) + 4)
>>> b.value
7
```

22.10.18 fipy.variables.harmonicCellToFaceVariable

22.10.19 fipy.variables.histogramVariable

Classes

<code>HistogramVariable(*args, **kwds)</code>	Produces a histogram of the values of the supplied distribution.
---	--

`class fipy.variables.histogramVariable.HistogramVariable(*args, **kwds)`

Bases: `CellVariable`

Produces a histogram of the values of the supplied distribution.

Parameters

- `distribution (array_like or Variable)` – The collection of values to sample.
- `dx (float)` – The bin size
- `nx (int)` – The number of bins
- `offset (float)` – The position of the first bin

`__abs__()`

Following test it to fix a bug with C inline string using `abs()` instead of `fabs()`

```
>>> print(abs(Variable(2.3) - Variable(1.2)))
1.1
```

Check representation works with different versions of numpy

```
>>> print(repr(abs(Variable(2.3))))
numerix.fabs(Variable(value=array(2.3)))
```

`__and__(other)`

This test case has been added due to a weird bug that was appearing.

```
>>> a = Variable(value=(0, 0, 1, 1))
>>> b = Variable(value=(0, 1, 0, 1))
>>> print(numerix.equal((a == 0) & (b == 1), [False, True, False, False]).all())
True
>>> print(a & b)
[0 0 0 1]
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx=4)
>>> from fipy.variables.cellVariable import CellVariable
>>> a = CellVariable(value=(0, 0, 1, 1), mesh=mesh)
>>> b = CellVariable(value=(0, 1, 0, 1), mesh=mesh)
>>> print(numerix.allequal((a == 0) & (b == 1), [False, True, False, False]))
True
>>> print(a & b)
[0 0 0 1]
```

`__array__(t=None)`

Attempt to convert the *Variable* to a numerix *array* object

```
>>> v = Variable(value=[2, 3])
>>> print(numerix.array(v))
[2 3]
```

A dimensional *Variable* will convert to the numeric value in its base units

```
>>> v = Variable(value=[2, 3], unit="mm")
>>> numerix.array(v)
array([ 0.002,  0.003])
```

`__array_wrap__(arr, context=None)`

Required to prevent numpy not calling the reverse binary operations. Both the following tests are examples ufuncs.

```
>>> print(type(numerix.array([1.0, 2.0]) * Variable([1.0, 2.0])))
<class 'fipy.variables.binaryOperatorVariable...binOp'>
```

```
>>> from scipy.special import gamma as Gamma
>>> print(type(Gamma(Variable([1.0, 2.0]))))
<class 'fipy.variables.unaryOperatorVariable...unOp'>
```

`__bool__()`

```
>>> print(bool(Variable(value=0)))
0
>>> print(bool(Variable(value=(0, 0, 1, 1))))
Traceback (most recent call last):
...
ValueError: The truth value of an array with more than one element is ambiguous.
→ Use a.any() or a.all()
```

`__call__(points=None, order=0, nearestCellIDs=None)`

Interpolates the *CellVariable* to a set of points using a method that has a memory requirement on the order of *Ncells* by *Npoints* in general, but uses only *Ncells* when the *CellVariable*'s mesh is a *UniformGrid* object.

Tests

```
>>> from fipy import *
>>> m = Grid2D(nx=3, ny=2)
>>> v = CellVariable(mesh=m, value=m.cellCenters[0])
>>> print(v((0., 1.1, 1.2), (0., 1., 1.)))
[ 0.5  1.5  1.5]
>>> print(v((0., 1.1, 1.2), (0., 1., 1.)), order=1)
[ 0.25  1.1   1.2 ]
>>> m0 = Grid2D(nx=2, ny=2, dx=1., dy=1.)
>>> m1 = Grid2D(nx=4, ny=4, dx=.5, dy=.5)
>>> x, y = m0.cellCenters
>>> v0 = CellVariable(mesh=m0, value=x * y)
>>> print(v0(m1.cellCenters.globalValue))
[ 0.25  0.25  0.75  0.75  0.25  0.25  0.75  0.75  0.75  2.25  2.25]
```

(continues on next page)

(continued from previous page)

```

0.75  0.75  2.25  2.25]
>>> print(v0(m1.cellCenters.globalValue, order=1))
[ 0.125   0.25   0.5    0.625   0.25   0.375   0.875   1.      0.5     0.875
  1.875   2.25   0.625   1.      2.25   2.625]

```

Parameters

- **points** (tuple or list of tuple) – A point or set of points in the format (X, Y, Z)
- **order** ({0, 1}) – The order of interpolation, default is 0
- **nearestCellIDs** (array_like) – Optional argument if user can calculate own nearest cell IDs array, shape should be same as points

__eq__(other)Test if a *Variable* is equal to another quantity

```

>>> a = Variable(value=3)
>>> b = (a == 4)
>>> b
(Variable(value=array(3)) == 4)
>>> b()
0

```

__ge__(other)Test if a *Variable* is greater than or equal to another quantity

```

>>> a = Variable(value=3)
>>> b = (a >= 4)
>>> b
(Variable(value=array(3)) >= 4)
>>> b()
0
>>> a.value = 4
>>> print(b())
1
>>> a.value = 5
>>> print(b())
1

```

__getitem__(index)“Evaluate” the *Variable* and return the specified element

```

>>> a = Variable(value=((3., 4.), (5., 6.)), unit="m") + "4 m"
>>> print(a[1, 1])
10.0 m

```

It is an error to slice a *Variable* whose *value* is not sliceable

```

>>> Variable(value=3)[2]
Traceback (most recent call last):
...
IndexError: 0-d arrays can't be indexed

```

`__getstate__()`

Used internally to collect the necessary information to pickle the *CellVariable* to persistent storage.

`__gt__(other)`

Test if a *Variable* is greater than another quantity

```
>>> a = Variable(value=3)
>>> b = (a > 4)
>>> b
(Variable(value=array(3)) > 4)
>>> print(b())
0
>>> a.value = 5
>>> print(b())
1
```

`__hash__()`

Return hash(self).

`__invert__()`

Returns logical “not” of the *Variable*

```
>>> a = Variable(value=True)
>>> print(~a)
False
```

`__le__(other)`

Test if a *Variable* is less than or equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a <= 4)
>>> b
(Variable(value=array(3)) <= 4)
>>> b()
1
>>> a.value = 4
>>> print(b())
1
>>> a.value = 5
>>> print(b())
0
```

`__lt__(other)`

Test if a *Variable* is less than another quantity

```
>>> a = Variable(value=3)
>>> b = (a < 4)
>>> b
(Variable(value=array(3)) < 4)
>>> b()
1
>>> a.value = 4
>>> print(b())
0
```

(continues on next page)

(continued from previous page)

```
>>> print(10000000000000000000 * Variable(1) < 1.)
0
>>> print(1000 * Variable(1) < 1.)
0
```

Python automatically reverses the arguments when necessary

```
>>> 4 > Variable(value=3)
(Variable(value=array(3)) < 4)
```

`__ne__(other)`

Test if a *Variable* is not equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a != 4)
>>> b
(Variable(value=array(3)) != 4)
>>> b()
1
```

`static __new__(cls, *args, **kwds)`

`__nonzero__()`

```
>>> print(bool(Variable(value=0)))
0
>>> print(bool(Variable(value=(0, 0, 1, 1))))
Traceback (most recent call last):
...
ValueError: The truth value of an array with more than one element is ambiguous.
→ Use a.any() or a.all()
```

`__or__(other)`

This test case has been added due to a weird bug that was appearing.

```
>>> a = Variable(value=(0, 0, 1, 1))
>>> b = Variable(value=(0, 1, 0, 1))
>>> print(numerix.equal((a == 0) | (b == 1), [True, True, False, True]).all())
True
>>> print(a | b)
[0 1 1 1]
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx=4)
>>> from fipy.variables.cellVariable import CellVariable
>>> a = CellVariable(value=(0, 0, 1, 1), mesh=mesh)
>>> b = CellVariable(value=(0, 1, 0, 1), mesh=mesh)
>>> print(numerix.allequal((a == 0) | (b == 1), [True, True, False, True]))
True
>>> print(a | b)
[0 1 1 1]
```

`__pow__(other)`

return self**other, or self raised to power other

```
>>> print(Variable(1, "mol/l")**3)
1.0 mol**3/l**3
>>> print((Variable(1, "mol/l")**3).unit)
<PhysicalUnit mol**3/l**3>
```

__repr__()

Return repr(self).

__setstate__(dict)

Used internally to create a new *CellVariable* from pickled persistent storage.

__str__()

Return str(self).

all(axis=None)

```
>>> print(Variable(value=(0, 0, 1, 1)).all())
0
>>> print(Variable(value=(1, 1, 1, 1)).all())
1
```

allclose(other, rtol=1e-05, atol=1e-08)

```
>>> var = Variable((1, 1))
>>> print(var.allclose((1, 1)))
1
>>> print(var.allclose((1,)))
1
```

The following test is to check that the system does not run out of memory.

```
>>> from fipy.tools import numerix
>>> var = Variable(numerix.ones(10000))
>>> print(var.allclose(numerix.zeros(10000, '1')))
False
```

any(axis=None)

```
>>> print(Variable(value=0).any())
0
>>> print(Variable(value=(0, 0, 1, 1)).any())
1
```

property arithmeticFaceValue

Returns a *FaceVariable* whose value corresponds to the arithmetic interpolation of the adjacent cells:

$$\phi_f = (\phi_1 - \phi_2) \frac{d_{f2}}{d_{12}} + \phi_2$$

```
>>> from fipy.meshes import Grid1D
>>> from fipy import numerix
>>> mesh = Grid1D(dx = (1., 1.))
>>> L = 1
```

(continues on next page)

(continued from previous page)

```
>>> R = 2
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (0.5 / 1.) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (2., 4.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (1.0 / 3.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (10., 100.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (5.0 / 55.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

property cellVolumeAverage

Return the cell-volume-weighted average of the *CellVariable*:

$$\langle \phi \rangle_{\text{vol}} = \frac{\sum_{\text{cells}} \phi_{\text{cell}} V_{\text{cell}}}{\sum_{\text{cells}} V_{\text{cell}}}$$

```
>>> from fipy.meshes import Grid2D
>>> from fipy.variables.cellVariable import CellVariable
>>> mesh = Grid2D(nx = 3, ny = 1, dx = .5, dy = .1)
>>> var = CellVariable(value = (1, 2, 6), mesh = mesh)
>>> print(var.cellVolumeAverage)
3.0
```

constrain(*value*, *where=None*)

Constrains the *CellVariable* to *value* at a location specified by *where*.

```
>>> from fipy import *
>>> m = Grid1D(nx=3)
>>> v = CellVariable(mesh=m, value=m.cellCenters[0])
>>> v.constrain(0., where=m.facesLeft)
>>> v.faceGrad.constrain([1.], where=m.facesRight)
>>> print(v.faceGrad)
[[ 1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 0.   1.   2.   2.5]
```

Changing the constraint changes the dependencies

```
>>> v.constrain(1., where=m.facesLeft)
>>> print(v.faceGrad)
```

(continues on next page)

(continued from previous page)

```
[[[-1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 1.  1.  2.  2.5]
```

Constraints can be *Variable*

```
>>> c = Variable(0.)
>>> v.constrain(c, where=m.facesLeft)
>>> print(v.faceGrad)
[[ 1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 0.  1.  2.  2.5]
>>> c.value = 1.
>>> print(v.faceGrad)
[[[-1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 1.  1.  2.  2.5]
```

Constraints can have a *Variable* mask.

```
>>> v = CellVariable(mesh=m)
>>> mask = FaceVariable(mesh=m, value=m.facesLeft)
>>> v.constrain(1., where=mask)
>>> print(v.faceValue)
[ 1.  0.  0.  0.]
>>> mask[:] = mask | m.facesRight
>>> print(v.faceValue)
[ 1.  0.  0.  1.]
```

property constraintMask

Test that *constraintMask* returns a Variable that updates itself whenever the constraints change.

```
>>> from fipy import *
```

```
>>> m = Grid2D(nx=2, ny=2)
>>> x, y = m.cellCenters
>>> v0 = CellVariable(mesh=m)
>>> v0.constrain(1., where=m.facesLeft)
>>> print(v0.faceValue.constraintMask)
[False False False False False False True False False True False False]
>>> print(v0.faceValue)
[ 0.  0.  0.  0.  0.  0.  1.  0.  0.  1.  0.  0.]
>>> v0.constrain(3., where=m.facesRight)
>>> print(v0.faceValue.constraintMask)
[False False False False False False True False True True False True]
>>> print(v0.faceValue)
[ 0.  0.  0.  0.  0.  0.  1.  0.  3.  1.  0.  3.]
>>> v1 = CellVariable(mesh=m)
>>> v1.constrain(1., where=(x < 1) & (y < 1))
>>> print(v1.constraintMask)
[ True False False False]
>>> print(v1)
```

(continues on next page)

(continued from previous page)

```
[ 1.  0.  0.  0.]
>>> v1.constrain(3., where=(x > 1) & (y > 1))
>>> print(v1.constraintMask)
[ True False False  True]
>>> print(v1)
[ 1.  0.  0.  3.]
```

copy()Make an duplicate of the *Variable*

```
>>> a = Variable(value=3)
>>> b = a.copy()
>>> b
Variable(value=array(3))
```

The duplicate will not reflect changes made to the original

```
>>> a.setValue(5)
>>> b
Variable(value=array(3))
```

Check that this works for arrays.

```
>>> a = Variable(value=numerix.array([0, 1, 2]))
>>> b = a.copy()
>>> b
Variable(value=array([0, 1, 2]))
>>> a[1] = 3
>>> b
Variable(value=array([0, 1, 2]))
```

dot(*other*, *opShape=None*, *operatorClass=None*)

Return the mesh-element–by–mesh-element (cell-by-cell, face-by-face, etc.) scalar product

$$\text{extself} \cdot \text{extother}$$

Both *self* and *other* can be of arbitrary rank, and *other* does not need to be a *MeshVariable*.**property faceGrad**Return $\nabla\phi$ as a rank-1 *FaceVariable* using differencing for the normal direction(second-order gradient).**property faceGradAverage**Deprecated since version 3.3: use *grad.arithmeticFaceValue* insteadReturn $\nabla\phi$ as a rank-1 *FaceVariable* using averaging for the normal direction(second-order gradient)**property faceValue**Returns a *FaceVariable* whose value corresponds to the arithmetic interpolation of the adjacent cells:

$$\phi_f = (\phi_1 - \phi_2) \frac{d_{f2}}{d_{12}} + \phi_2$$

```
>>> from fipy.meshes import Grid1D
>>> from fipy import numerix
>>> mesh = Grid1D(dx = (1., 1.))
>>> L = 1
>>> R = 2
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (0.5 / 1.) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (2., 4.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (1.0 / 3.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (10., 100.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (5.0 / 55.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

property gaussGrad

Return $\frac{1}{V_P} \sum_f \vec{n} \phi_f A_f$ as a rank-1 *CellVariable* (first-order gradient).

getscctype(*default=None*)

Returns the Numpy *sctype* of the underlying array.

```
>>> Variable(1).getscctype() == numerix.NUMERIX.obj2sctype(numerix.array(1))
True
>>> Variable(1.).getscctype() == numerix.NUMERIX.obj2sctype(numerix.array(1.))
True
>>> Variable((1, 1.)).getscctype() == numerix.NUMERIX.obj2sctype(numerix.
->array((1., 1.)))
True
```

property globalValue

Concatenate and return values from all processors

When running on a single processor, the result is identical to *value*.

property grad

Return $\nabla\phi$ as a rank-1 *CellVariable* (first-order gradient).

property harmonicFaceValue

Returns a *FaceVariable* whose value corresponds to the harmonic interpolation of the adjacent cells:

$$\phi_f = \frac{\phi_1 \phi_2}{(\phi_2 - \phi_1) \frac{d_{f2}}{d_{12}} + \phi_1}$$

```
>>> from fipy.meshes import Grid1D
>>> from fipy import numerix
>>> mesh = Grid1D(dx = (1., 1.))
>>> L = 1
>>> R = 2
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.harmonicFaceValue[mesh.interiorFaces.value]
>>> answer = L * R / ((R - L) * (0.5 / 1.) + L)
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (2., 4.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.harmonicFaceValue[mesh.interiorFaces.value]
>>> answer = L * R / ((R - L) * (1.0 / 3.0) + L)
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (10., 100.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.harmonicFaceValue[mesh.interiorFaces.value]
>>> answer = L * R / ((R - L) * (5.0 / 55.0) + L)
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

inBaseUnits()

Return the value of the *Variable* with all units reduced to their base SI elements.

```
>>> e = Variable(value="2.7 Hartree*Nav")
>>> print(e.inBaseUnits().allclose("7088849.01085 kg*m**2/s**2/mol"))
1
```

inUnitsOf(*units)

Returns one or more *Variable* objects that express the same physical quantity in different units. The units are specified by strings containing their names. The units must be compatible with the unit of the object. If one unit is specified, the return value is a single *Variable*.

```
>>> freeze = Variable('0 degC')
>>> print(freeze.inUnitsOf('degF').allclose("32.0 degF"))
1
```

If several units are specified, the return value is a tuple of *Variable* instances with one element per unit such that the sum of all quantities in the tuple equals the the original quantity and all the values except for the last one are integers. This is used to convert to irregular unit systems like hour/minute/second. The original object will not be changed.

```
>>> t = Variable(value=314159., unit='s')
>>> from builtins import zip
>>> print(numerix.allclose([e.allclose(v) for (e, v) in zip(t.inUnitsOf('d', 'h', 'min', 's'), ['3.0 d', '15.0 h', '15.0 min', '59.0 s'])]),
```

(continues on next page)

(continued from previous page)

```
...
    True))
1
```

property leastSquaresGrad

Return $\nabla\phi$, which is determined by solving for $\nabla\phi$ in the following matrix equation,

$$\nabla\phi \cdot \sum_f d_{AP}^2 \vec{n}_{AP} \otimes \vec{n}_{AP} = \sum_f d_{AP}^2 (\vec{n} \cdot \nabla\phi)_{AP}$$

The matrix equation is derived by minimizing the following least squares sum,

$$F(\phi_x, \phi_y) = \sqrt{\sum_f (d_{AP} \vec{n}_{AP} \cdot \nabla\phi - d_{AP} (\vec{n}_{AP} \cdot \nabla\phi)_{AP})^2}$$

Tests

```
>>> from fipy import Grid2D
>>> m = Grid2D(nx=2, ny=2, dx=0.1, dy=2.0)
>>> print(numerix.allclose(CellVariable(mesh=m, value=(0, 1, 3, 6)).leastSquaresGrad.globalValue,
...                           [[8.0, 8.0, 24.0, 24.0],
...                            [1.2, 2.0, 1.2, 2.0]]))
True
```

```
>>> from fipy import Grid1D
>>> print(numerix.allclose(CellVariable(mesh=Grid1D(dx=(2.0, 1.0, 0.5)),
...                                         value=(0, 1, 2)).leastSquaresGrad.globalValue,
...                           [[0.461538461538, 0.8, 1.2]]))
True
```

property mag

The magnitude of the *Variable*, e.g., $|\vec{\psi}| = \sqrt{\vec{\psi} \cdot \vec{\psi}}$.

max(axis=None)

Return the maximum along a given axis.

min(axis=None)

```
>>> from fipy import Grid2D, CellVariable
>>> mesh = Grid2D(nx=5, ny=5)
>>> x, y = mesh.cellCenters
>>> v = CellVariable(mesh=mesh, value=x*y)
>>> print(v.min())
0.25
```

property minmodFaceValue

Returns a *FaceVariable* with a value that is the minimum of the absolute values of the adjacent cells. If the values are of opposite sign then the result is zero:

$$\phi_f = \begin{cases} \phi_1 & \text{when } |\phi_1| \leq |\phi_2|, \\ \phi_2 & \text{when } |\phi_2| < |\phi_1|, \\ 0 & \text{when } \phi_1 \phi_2 < 0 \end{cases}$$

```
>>> from fipy import *
>>> print(CellVariable(mesh=Grid1D(nx=2), value=(1, 2)).minmodFaceValue)
[1 1 2]
>>> print(CellVariable(mesh=Grid1D(nx=2), value=(-1, -2)).minmodFaceValue)
[-1 -1 -2]
>>> print(CellVariable(mesh=Grid1D(nx=2), value=(-1, 2)).minmodFaceValue)
[-1 0 2]
```

property old

Return the values of the *CellVariable* from the previous solution sweep.

Combinations of *CellVariable*'s should also return old values.

```
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx = 2)
>>> from fipy.variables.cellVariable import CellVariable
>>> var1 = CellVariable(mesh = mesh, value = (2, 3), hasOld = 1)
>>> var2 = CellVariable(mesh = mesh, value = (3, 4))
>>> v = var1 * var2
>>> print(v)
[ 6 12]
>>> var1.value = ((3, 2))
>>> print(v)
[9 8]
>>> print(v.old)
[ 6 12]
```

The following small test is to correct for a bug when the operator does not just use variables.

```
>>> v1 = var1 * 3
>>> print(v1)
[9 6]
>>> print(v1.old)
[6 9]
```

rdot(*other*, *opShape=None*, *operatorClass=None*)

Return the mesh-element-by-mesh-element (cell-by-cell, face-by-face, etc.) scalar product

$$\text{exto}other \cdot \text{extsel}f$$

Both *self* and *other* can be of arbitrary rank, and *other* does not need to be a *MeshVariable*.

release(*constraint*)

Remove *constraint* from *self*

```
>>> from fipy import *
>>> m = Grid1D(nx=3)
>>> v = CellVariable(mesh=m, value=m.cellCenters[0])
>>> c = Constraint(0., where=m.facesLeft)
>>> v.constrain(c)
>>> print(v.faceValue)
[ 0. 1. 2. 2.5]
>>> v.release(constraint=c)
>>> print(v.faceValue)
[ 0.5 1. 2. 2.5]
```

setValue(*value*, *unit=None*, *where=None*)

Set the value of the Variable. Can take a masked array.

```
>>> a = Variable((1, 2, 3))
>>> a.setValue(5, where=(1, 0, 1))
>>> print(a)
[5 2 5]
```

```
>>> b = Variable((4, 5, 6))
>>> a.setValue(b, where=(1, 0, 1))
>>> print(a)
[4 2 6]
>>> print(b)
[4 5 6]
>>> a.value = 3
>>> print(a)
[3 3 3]
```

```
>>> b = numerix.array((3, 4, 5))
>>> a.value = b
>>> a[:] = 1
>>> print(b)
[3 4 5]
```

```
>>> a.setValue((4, 5, 6), where=(1, 0))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

property shape

```
>>> from fipy.meshes import Grid2D
>>> from fipy.variables.cellVariable import CellVariable
>>> mesh = Grid2D(nx=2, ny=3)
>>> var = CellVariable(mesh=mesh)
>>> print(numerix.allequal(var.shape, (6,)))
True
>>> print(numerix.allequal(var.arithmeticFaceValue.shape, (17,)))
True
>>> print(numerix.allequal(var.grad.shape, (2, 6)))
True
>>> print(numerix.allequal(var.faceGrad.shape, (2, 17)))
True
```

Have to account for zero length arrays

```
>>> from fipy import Grid1D
>>> m = Grid1D(nx=0)
>>> v = CellVariable(mesh=m, elementshape=(2,))
>>> numerix.allequal((v * 1).shape, (2, 0))
True
```

std(*axis=None*, *kwargs*)**

Evaluate standard deviation of all the elements of a *MeshVariable*.

Adapted from <http://mpitutorial.com/tutorials/mpi-reduce-and-allreduce/>

```
>>> import fipy as fp
>>> mesh = fp.Grid2D(nx=2, ny=2, dx=2., dy=5.)
>>> var = fp.CellVariable(value=(1., 2., 3., 4.), mesh=mesh)
>>> print((var.std() ** 2).allclose(1.25))
True
```

property unit

Return the unit object of *self*.

```
>>> Variable(value="1 m").unit
<PhysicalUnit m>
```

updateOld()

Set the values of the previous solution sweep to the current values.

```
>>> from fipy import *
>>> v = CellVariable(mesh=Grid1D(), hasOld=False)
>>> v.updateOld()
Traceback (most recent call last):
...
AssertionError: The updateOld method requires the CellVariable to have an old_
value. Set hasOld to True when instantiating the CellVariable.
```

property value

“Evaluate” the *Variable* and return its value (longhand)

```
>>> a = Variable(value=3)
>>> print(a.value)
3
>>> b = a + 4
>>> b
(Variable(value=array(3)) + 4)
>>> b.value
7
```

22.10.20 fipy.variables.interfaceAreaVariable

22.10.21 fipy.variables.interfaceFlagVariable

22.10.22 fipy.variables.leastSquaresCellGradVariable

22.10.23 fipy.variables.levelSetDiffusionVariable

22.10.24 fipy.variables.meshVariable

Classes

<code>MeshVariable(*args, **kwds)</code>	Abstract base class for a <i>Variable</i> that is defined on a mesh
--	---

```
class fipy.variables.meshVariable.MeshVariable(*args, **kwds)
```

Bases: `Variable`

Abstract base class for a *Variable* that is defined on a mesh

Attention: This class is abstract. Always create one of its subclasses.

Parameters

- `mesh` (`Mesh`) – the mesh that defines the geometry of this *Variable*
- `name` (`str`) – the user-readable name of the *Variable*
- `value` (`float or array_like`) – the initial value
- `rank` (`int`) – the rank (number of dimensions) of each element of this *Variable*. Default: 0
- `elementshape` (`tuple of int`) – the shape of each element of this variable Default: `rank * (mesh.dim,)`
- `unit` (`str or PhysicalUnit`) – The physical units of the variable

`__abs__()`

Following test it to fix a bug with C inline string using `abs()` instead of `fabs()`

```
>>> print(abs(Variable(2.3) - Variable(1.2)))
1.1
```

Check representation works with different versions of numpy

```
>>> print(repr(abs(Variable(2.3))))
numerix.fabs(Variable(value=array(2.3)))
```

`__and__(other)`

This test case has been added due to a weird bug that was appearing.

```
>>> a = Variable(value=(0, 0, 1, 1))
>>> b = Variable(value=(0, 1, 0, 1))
>>> print(numerix.equal((a == 0) & (b == 1), [False, True, False, False]).all())
True
>>> print(a & b)
[0 0 0 1]
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx=4)
>>> from fipy.variables.cellVariable import CellVariable
>>> a = CellVariable(value=(0, 0, 1, 1), mesh=mesh)
>>> b = CellVariable(value=(0, 1, 0, 1), mesh=mesh)
>>> print(numerix.allequal((a == 0) & (b == 1), [False, True, False, False]))
```

(continues on next page)

(continued from previous page)

```
True
>>> print(a & b)
[0 0 0 1]
```

__array__(t=None)

Attempt to convert the *Variable* to a numerix *array* object

```
>>> v = Variable(value=[2, 3])
>>> print(numerix.array(v))
[2 3]
```

A dimensional *Variable* will convert to the numeric value in its base units

```
>>> v = Variable(value=[2, 3], unit="mm")
>>> numerix.array(v)
array([ 0.002,  0.003])
```

__array_wrap__(arr, context=None)

Required to prevent numpy not calling the reverse binary operations. Both the following tests are examples ufuncs.

```
>>> print(type(numerix.array([1.0, 2.0]) * Variable([1.0, 2.0])))
<class 'fipy.variables.binaryOperatorVariable...binOp'>
```

```
>>> from scipy.special import gamma as Gamma
>>> print(type(Gamma(Variable([1.0, 2.0]))))
<class 'fipy.variables.unaryOperatorVariable...unOp'>
```

__bool__()

```
>>> print(bool(Variable(value=0)))
0
>>> print(bool(Variable(value=(0, 0, 1, 1))))
Traceback (most recent call last):
...
ValueError: The truth value of an array with more than one element is ambiguous.
→ Use a.any() or a.all()
```

__call__()

“Evaluate” the *Variable* and return its value

```
>>> a = Variable(value=3)
>>> print(a())
3
>>> b = a + 4
>>> b
(Variable(value=array(3)) + 4)
>>> b()
7
```

__eq__(other)

Test if a *Variable* is equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a == 4)
>>> b
(Variable(value=array(3)) == 4)
>>> b()
()
```

__ge__(other)

Test if a *Variable* is greater than or equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a >= 4)
>>> b
(Variable(value=array(3)) >= 4)
>>> b()
()
>>> a.value = 4
>>> print(b())
1
>>> a.value = 5
>>> print(b())
1
```

__getitem__(index)

“Evaluate” the *Variable* and return the specified element

```
>>> a = Variable(value=((3., 4.), (5., 6.)), unit="m") + "4 m"
>>> print(a[1, 1])
10.0 m
```

It is an error to slice a *Variable* whose *value* is not sliceable

```
>>> Variable(value=3)[2]
Traceback (most recent call last):
...
IndexError: 0-d arrays can't be indexed
```

__getstate__()

Used internally to collect the necessary information to pickle the *MeshVariable* to persistent storage.

__gt__(other)

Test if a *Variable* is greater than another quantity

```
>>> a = Variable(value=3)
>>> b = (a > 4)
>>> b
(Variable(value=array(3)) > 4)
>>> print(b())
()
>>> a.value = 5
>>> print(b())
1
```

__hash__()

Return hash(self).

__invert__()

Returns logical “not” of the *Variable*

```
>>> a = Variable(value=True)
>>> print(~a)
False
```

__le__(other)

Test if a *Variable* is less than or equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a <= 4)
>>> b
(Variable(value=array(3)) <= 4)
>>> b()
1
>>> a.value = 4
>>> print(b())
1
>>> a.value = 5
>>> print(b())
0
```

__lt__(other)

Test if a *Variable* is less than another quantity

```
>>> a = Variable(value=3)
>>> b = (a < 4)
>>> b
(Variable(value=array(3)) < 4)
>>> b()
1
>>> a.value = 4
>>> print(b())
0
>>> print(10000000000000000 * Variable(1) < 1.)
0
>>> print(1000 * Variable(1) < 1.)
0
```

Python automatically reverses the arguments when necessary

```
>>> 4 > Variable(value=3)
(Variable(value=array(3)) < 4)
```

__ne__(other)

Test if a *Variable* is not equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a != 4)
>>> b
```

(continues on next page)

(continued from previous page)

```
(Variable(value=array(3)) != 4)
>>> b()
1
```

`static __new__(cls, *args, **kwds)`**`__nonzero__()`**

```
>>> print(bool(Variable(value=0)))
0
>>> print(bool(Variable(value=(0, 0, 1, 1))))
Traceback (most recent call last):
...
ValueError: The truth value of an array with more than one element is ambiguous.
→ Use a.any() or a.all()
```

`__or__(other)`

This test case has been added due to a weird bug that was appearing.

```
>>> a = Variable(value=(0, 0, 1, 1))
>>> b = Variable(value=(0, 1, 0, 1))
>>> print(numerix.equal((a == 0) | (b == 1), [True, True, False, True]).all())
True
>>> print(a | b)
[0 1 1 1]
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx=4)
>>> from fipy.variables.cellVariable import CellVariable
>>> a = CellVariable(value=(0, 0, 1, 1), mesh=mesh)
>>> b = CellVariable(value=(0, 1, 0, 1), mesh=mesh)
>>> print(numerix.allequal((a == 0) | (b == 1), [True, True, False, True]))
True
>>> print(a | b)
[0 1 1 1]
```

`__pow__(other)`

return self**other, or self raised to power other

```
>>> print(Variable(1, "mol/l")**3)
1.0 mol**3/l**3
>>> print((Variable(1, "mol/l")**3).unit)
<PhysicalUnit mol**3/l**3>
```

`__repr__()`

Return repr(self).

`__setstate__(dict)`

Used internally to create a new *Variable* from pickled persistent storage.

`__str__()`

Return str(self).

`all(axis=None)`

```
>>> print(Variable(value=(0, 0, 1, 1)).all())
0
>>> print(Variable(value=(1, 1, 1, 1)).all())
1
```

allclose(*other*, *rtol*=*1e-05*, *atol*=*1e-08*)

```
>>> var = Variable((1, 1))
>>> print(var.allclose((1, 1)))
1
>>> print(var.allclose((1,)))
1
```

The following test is to check that the system does not run out of memory.

```
>>> from fipy.tools import numerix
>>> var = Variable(numerix.ones(10000))
>>> print(var.allclose(numerix.zeros(10000, '1')))
False
```

any(*axis=None*)

```
>>> print(Variable(value=0).any())
0
>>> print(Variable(value=(0, 0, 1, 1)).any())
1
```

constrain(*value*, *where=None*)

Constrain the *Variable* to have a *value* at an index or mask location specified by *where*.

```
>>> v = Variable((0, 1, 2, 3))
>>> v.constrain(2, numerix.array((True, False, False, False)))
>>> print(v)
[2 1 2 3]
>>> v[:] = 10
>>> print(v)
[ 2 10 10 10]
>>> v.constrain(5, numerix.array((False, False, True, False)))
>>> print(v)
[ 2 10  5 10]
>>> v[:] = 6
>>> print(v)
[2 6 5 6]
>>> v.constrain(8)
>>> print(v)
[8 8 8 8]
>>> v[:] = 10
>>> print(v)
[8 8 8 8]
>>> del v.constraints[2]
>>> print(v)
[ 2 10  5 10]
```

```
>>> from fipy.variables.cellVariable import CellVariable
>>> from fipy.meshes import Grid2D
>>> m = Grid2D(nx=2, ny=2)
>>> x, y = m.cellCenters
>>> v = CellVariable(mesh=m, rank=1, value=(x, y))
>>> v.constrain(((0.,), (-1.,)), where=m.facesLeft)
>>> print(v.faceValue)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.   1.   1.5  0.   1.   1.5]
 [ 0.5  0.5  1.   1.   1.5  1.5 -1.   0.5  0.5 -1.   1.5  1.5]]
```

Parameters

- **value** (float or *array_like*) – The value of the constraint
- **where** (*array_like* of `bool`) – The constraint mask or index specifying the location of the constraint

property constraintMask

Test that `constraintMask` returns a Variable that updates itself whenever the constraints change.

```
>>> from fipy import *
```

```
>>> m = Grid2D(nx=2, ny=2)
>>> x, y = m.cellCenters
>>> v0 = CellVariable(mesh=m)
>>> v0.constrain(1., where=m.facesLeft)
>>> print(v0.faceValue.constraintMask)
[False False False False False False True False False True False False]
>>> print(v0.faceValue)
[ 0.  0.  0.  0.  0.  1.  0.  0.  1.  0.  0.]
>>> v0.constrain(3., where=m.facesRight)
>>> print(v0.faceValue.constraintMask)
[False False False False False False True False True True False True]
>>> print(v0.faceValue)
[ 0.  0.  0.  0.  0.  1.  0.  3.  1.  0.  3.]
>>> v1 = CellVariable(mesh=m)
>>> v1.constrain(1., where=(x < 1) & (y < 1))
>>> print(v1.constraintMask)
[ True False False False]
>>> print(v1)
[ 1.  0.  0.  0.]
>>> v1.constrain(3., where=(x > 1) & (y > 1))
>>> print(v1.constraintMask)
[ True False False  True]
>>> print(v1)
[ 1.  0.  0.  3.]
```

copy()

Make an duplicate of the *Variable*

```
>>> a = Variable(value=3)
>>> b = a.copy()
```

(continues on next page)

(continued from previous page)

```
>>> b
Variable(value=array(3))
```

The duplicate will not reflect changes made to the original

```
>>> a.setValue(5)
>>> b
Variable(value=array(3))
```

Check that this works for arrays.

```
>>> a = Variable(value=numerix.array([0, 1, 2]))
>>> b = a.copy()
>>> b
Variable(value=array([0, 1, 2]))
>>> a[1] = 3
>>> b
Variable(value=array([0, 1, 2]))
```

dot(*other*, *opShape=None*, *operatorClass=None*)

Return the mesh-element-by-mesh-element (cell-by-cell, face-by-face, etc.) scalar product

$$\text{extself} \cdot \text{extother}$$

Both *self* and *other* can be of arbitrary rank, and *other* does not need to be a *MeshVariable*.

getsctype(*default=None*)

Returns the Numpy *sctype* of the underlying array.

```
>>> Variable(1).getsctype() == numerix.NUMERIX.obj2sctype(numerix.array(1))
True
>>> Variable(1.).getsctype() == numerix.NUMERIX.obj2sctype(numerix.array(1.))
True
>>> Variable((1, 1.)).getsctype() == numerix.NUMERIX.obj2sctype(numerix.
...array((1., 1.)))
True
```

inBaseUnits()

Return the value of the *Variable* with all units reduced to their base SI elements.

```
>>> e = Variable(value="2.7 Hartree*Nav")
>>> print(e.inBaseUnits().allclose("7088849.01085 kg*m**2/s**2/mol"))
1
```

inUnitsOf(*units)

Returns one or more *Variable* objects that express the same physical quantity in different units. The units are specified by strings containing their names. The units must be compatible with the unit of the object. If one unit is specified, the return value is a single *Variable*.

```
>>> freeze = Variable('0 degC')
>>> print(freeze.inUnitsOf('degF').allclose("32.0 degF"))
1
```

If several units are specified, the return value is a tuple of *Variable* instances with one element per unit such that the sum of all quantities in the tuple equals the the original quantity and all the values except for the last one are integers. This is used to convert to irregular unit systems like hour/minute/second. The original object will not be changed.

```
>>> t = Variable(value=314159., unit='s')
>>> from builtins import zip
>>> print(numerix.allclose([e.allclose(v) for (e, v) in zip(t.inUnitsOf('d', 'h',
... , 'min', 's'),
... , '15.0 min', '59.0 s')], [
... , True)))
1
```

property mag

The magnitude of the *Variable*, e.g., $|\vec{\psi}| = \sqrt{\vec{\psi} \cdot \vec{\psi}}$.

max(axis=None)

Return the maximum along a given axis.

min(axis=None)

```
>>> from fipy import Grid2D, CellVariable
>>> mesh = Grid2D(nx=5, ny=5)
>>> x, y = mesh.cellCenters
>>> v = CellVariable(mesh=mesh, value=x*y)
>>> print(v.min())
0.25
```

rdot(other, opShape=None, operatorClass=None)

Return the mesh-element-by-mesh-element (cell-by-cell, face-by-face, etc.) scalar product

$$\text{extoother} \cdot \text{extsel}$$

Both *self* and *other* can be of arbitrary rank, and *other* does not need to be a *MeshVariable*.

release(constraint)

Remove *constraint* from *self*

```
>>> v = Variable((0, 1, 2, 3))
>>> v.constrain(2, numerix.array((True, False, False, False)))
>>> v[:] = 10
>>> from fipy.boundaryConditions.constraint import Constraint
>>> c1 = Constraint(5, numerix.array((False, False, True, False)))
>>> v.constrain(c1)
>>> v[:] = 6
>>> v.constrain(8)
>>> v[:] = 10
>>> del v.constraints[2]
>>> v.release(constraint=c1)
>>> print(v)
[ 2 10 10 10]
```

setValue(*value*, *unit*=None, *where*=None)

Set the value of the Variable. Can take a masked array.

```
>>> a = Variable((1, 2, 3))
>>> a.setValue(5, where=(1, 0, 1))
>>> print(a)
[5 2 5]
```

```
>>> b = Variable((4, 5, 6))
>>> a.setValue(b, where=(1, 0, 1))
>>> print(a)
[4 2 6]
>>> print(b)
[4 5 6]
>>> a.value = 3
>>> print(a)
[3 3 3]
```

```
>>> b = numerix.array((3, 4, 5))
>>> a.value = b
>>> a[:] = 1
>>> print(b)
[3 4 5]
```

```
>>> a.setValue((4, 5, 6), where=(1, 0))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

property shape

```
>>> from fipy.meshes import Grid2D
>>> from fipy.variables.cellVariable import CellVariable
>>> mesh = Grid2D(nx=2, ny=3)
>>> var = CellVariable(mesh=mesh)
>>> print(numerix.allequal(var.shape, (6,)))
True
>>> print(numerix.allequal(var.arithmeticFaceValue.shape, (17,)))
True
>>> print(numerix.allequal(var.grad.shape, (2, 6)))
True
>>> print(numerix.allequal(var.faceGrad.shape, (2, 17)))
True
```

Have to account for zero length arrays

```
>>> from fipy import Grid1D
>>> m = Grid1D(nx=0)
>>> v = CellVariable(mesh=m, elementshape=(2,))
>>> numerix.allequal((v * 1).shape, (2, 0))
True
```

std(*axis*=None, ***kwargs*)

Evaluate standard deviation of all the elements of a *MeshVariable*.

Adapted from <http://mpitutorial.com/tutorials/mpi-reduce-and-allreduce/>

```
>>> import fipy as fp
>>> mesh = fp.Grid2D(nx=2, ny=2, dx=2., dy=5.)
>>> var = fp.CellVariable(value=(1., 2., 3., 4.), mesh=mesh)
>>> print((var.std() ** 2).allclose(1.25))
True
```

property unit

Return the unit object of *self*.

```
>>> Variable(value="1 m").unit
<PhysicalUnit m>
```

property value

“Evaluate” the *Variable* and return its value (longhand)

```
>>> a = Variable(value=3)
>>> print(a.value)
3
>>> b = a + 4
>>> b
(Variable(value=array(3)) + 4)
>>> b.value
7
```

22.10.25 fipy.variables.minmodCellToFaceVariable

22.10.26 fipy.variables.modCellGradVariable

22.10.27 fipy.variables.modCellToFaceVariable

22.10.28 fipy.variables.modFaceGradVariable

22.10.29 fipy.variables.modPhysicalField

22.10.30 fipy.variables.modularVariable

Classes

ModularVariable(*args, **kwds)

The *ModularVariable* defines a variable that exists on the circle between $-\pi$ and π

`class fipy.variables.modularVariable.ModularVariable(*args, **kwds)`

Bases: *CellVariable*

The *ModularVariable* defines a variable that exists on the circle between $-\pi$ and π

The following examples show how *ModularVariable* works. When subtracting the answer wraps back around the circle.

```
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx = 2)
>>> from fipy.tools import numerix
>>> pi = numerix.pi
>>> v1 = ModularVariable(mesh = mesh, value = (2*pi/3, -2*pi/3))
>>> v2 = ModularVariable(mesh = mesh, value = -2*pi/3)
>>> print(numerix.allclose(v2 - v1, (2*pi/3, 0)))
1
```

Obtaining the arithmetic face value.

```
>>> print(numerix.allclose(v1.arithmeticeFaceValue, (2*pi/3, pi, -2*pi/3)))
1
```

Obtaining the gradient.

```
>>> print(numerix.allclose(v1.grad, ((pi/3, pi/3),)))
1
```

Obtaining the gradient at the faces.

```
>>> print(numerix.allclose(v1.faceGrad, ((0, 2*pi/3, 0),)))
1
```

Obtaining the gradient at the faces but without modular arithmetic.

```
>>> print(numerix.allclose(v1.faceGradNoMod, ((0, -4*pi/3, 0),)))
1
```

Parameters

- **mesh** (*Mesh*) – the mesh that defines the geometry of this *Variable*
- **name** (*str*) – the user-readable name of the *Variable*
- **value** (*float or array_like*) – the initial value
- **rank** (*int*) – the rank (number of dimensions) of each element of this *Variable*. Default: 0
- **elementshape** (*tuple of int*) – the shape of each element of this variable Default: *rank * (mesh.dim,)*
- **unit** (*str or PhysicalUnit*) – The physical units of the variable

__abs__()

Following test it to fix a bug with C inline string using *abs()* instead of *fabs()*

```
>>> print(abs(Variable(2.3) - Variable(1.2)))
1.1
```

Check representation works with different versions of numpy

```
>>> print(repr(abs(Variable(2.3))))
numerix.fabs(Variable(value=array(2.3)))
```

`__and__(other)`

This test case has been added due to a weird bug that was appearing.

```
>>> a = Variable(value=(0, 0, 1, 1))
>>> b = Variable(value=(0, 1, 0, 1))
>>> print(numerix.equal((a == 0) & (b == 1), [False, True, False, False]).all())
True
>>> print(a & b)
[0 0 0 1]
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx=4)
>>> from fipy.variables.cellVariable import CellVariable
>>> a = CellVariable(value=(0, 0, 1, 1), mesh=mesh)
>>> b = CellVariable(value=(0, 1, 0, 1), mesh=mesh)
>>> print(numerix.allequal((a == 0) & (b == 1), [False, True, False, False]))
True
>>> print(a & b)
[0 0 0 1]
```

`__array__(t=None)`

Attempt to convert the *Variable* to a numerix *array* object

```
>>> v = Variable(value=[2, 3])
>>> print(numerix.array(v))
[2 3]
```

A dimensional *Variable* will convert to the numeric value in its base units

```
>>> v = Variable(value=[2, 3], unit="mm")
>>> numerix.array(v)
array([ 0.002,  0.003])
```

`__array_wrap__(arr, context=None)`

Required to prevent numpy not calling the reverse binary operations. Both the following tests are examples ufuncs.

```
>>> print(type(numerix.array([1.0, 2.0]) * Variable([1.0, 2.0])))
<class 'fipy.variables.binaryOperatorVariable...binOp'>
```

```
>>> from scipy.special import gamma as Gamma
>>> print(type(Gamma(Variable([1.0, 2.0]))))
<class 'fipy.variables.unaryOperatorVariable...unOp'>
```

`__bool__()`

```
>>> print(bool(Variable(value=0)))
0
>>> print(bool(Variable(value=(0, 0, 1, 1))))
Traceback (most recent call last):
...
ValueError: The truth value of an array with more than one element is ambiguous.
→ Use a.any() or a.all()
```

`__call__(points=None, order=0, nearestCellIDs=None)`

Interpolates the *CellVariable* to a set of points using a method that has a memory requirement on the order of N_{cells} by N_{points} in general, but uses only N_{cells} when the *CellVariable*'s mesh is a *UniformGrid* object.

Tests

```
>>> from fipy import *
>>> m = Grid2D(nx=3, ny=2)
>>> v = CellVariable(mesh=m, value=m.cellCenters[0])
>>> print(v((0., 1.1, 1.2), (0., 1., 1.)))
[ 0.5  1.5  1.5]
>>> print(v((0., 1.1, 1.2), (0., 1., 1.)), order=1)
[ 0.25  1.1   1.2 ]
>>> m0 = Grid2D(nx=2, ny=2, dx=1., dy=1.)
>>> m1 = Grid2D(nx=4, ny=4, dx=.5, dy=.5)
>>> x, y = m0.cellCenters
>>> v0 = CellVariable(mesh=m0, value=x * y)
>>> print(v0(m1.cellCenters.globalValue))
[ 0.25  0.25  0.75  0.75  0.25  0.25  0.75  0.75  0.75  0.75  2.25  2.25
 0.75  0.75  2.25  2.25]
>>> print(v0(m1.cellCenters.globalValue, order=1))
[ 0.125  0.25   0.5    0.625  0.25   0.375  0.875  1.     0.5     0.875
 1.875  2.25   0.625  1.     2.25   2.625]
```

Parameters

- **points** (tuple or list of tuple) – A point or set of points in the format (X, Y, Z)
- **order** ({0, 1}) – The order of interpolation, default is 0
- **nearestCellIDs** (array_like) – Optional argument if user can calculate own nearest cell IDs array, shape should be same as points

`__eq__(other)`

Test if a *Variable* is equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a == 4)
>>> b
(Variable(value=array(3)) == 4)
>>> b()
()
```

`__ge__(other)`

Test if a *Variable* is greater than or equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a >= 4)
>>> b
(Variable(value=array(3)) >= 4)
>>> b()
()
>>> a.value = 4
>>> print(b())
1
```

(continues on next page)

(continued from previous page)

```
>>> a.value = 5
>>> print(b())
1
```

__getitem__(index)

“Evaluate” the *Variable* and return the specified element

```
>>> a = Variable(value=((3., 4.), (5., 6.)), unit="m") + "4 m"
>>> print(a[1, 1])
10.0 m
```

It is an error to slice a *Variable* whose *value* is not sliceable

```
>>> Variable(value=3)[2]
Traceback (most recent call last):
...
IndexError: 0-d arrays can't be indexed
```

__getstate__()

Used internally to collect the necessary information to pickle the *CellVariable* to persistent storage.

__gt__(other)

Test if a *Variable* is greater than another quantity

```
>>> a = Variable(value=3)
>>> b = (a > 4)
>>> b
(Variable(value=array(3)) > 4)
>>> print(b())
0
>>> a.value = 5
>>> print(b())
1
```

__hash__()

Return hash(self).

__invert__()

Returns logical “not” of the *Variable*

```
>>> a = Variable(value=True)
>>> print(~a)
False
```

__le__(other)

Test if a *Variable* is less than or equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a <= 4)
>>> b
(Variable(value=array(3)) <= 4)
>>> b()
1
```

(continues on next page)

(continued from previous page)

```
>>> a.value = 4
>>> print(b())
1
>>> a.value = 5
>>> print(b())
0
```

__lt__(other)Test if a *Variable* is less than another quantity

```
>>> a = Variable(value=3)
>>> b = (a < 4)
>>> b
(Variable(value=array(3)) < 4)
>>> b()
1
>>> a.value = 4
>>> print(b())
0
>>> print(10000000000000000000 * Variable(1) < 1.)
0
>>> print(1000 * Variable(1) < 1.)
0
```

Python automatically reverses the arguments when necessary

```
>>> 4 > Variable(value=3)
(Variable(value=array(3)) < 4)
```

__ne__(other)Test if a *Variable* is not equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a != 4)
>>> b
(Variable(value=array(3)) != 4)
>>> b()
1
```

static __new__(cls, *args, **kwds)**__nonzero__()**

```
>>> print(bool(Variable(value=0)))
0
>>> print(bool(Variable(value=(0, 0, 1, 1))))
Traceback (most recent call last):
...
ValueError: The truth value of an array with more than one element is ambiguous.
→ Use a.any() or a.all()
```

__or__(other)

This test case has been added due to a weird bug that was appearing.

```
>>> a = Variable(value=(0, 0, 1, 1))
>>> b = Variable(value=(0, 1, 0, 1))
>>> print(numerix.equal((a == 0) | (b == 1), [True, True, False, True]).all())
True
>>> print(a | b)
[0 1 1 1]
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx=4)
>>> from fipy.variables.cellVariable import CellVariable
>>> a = CellVariable(value=(0, 0, 1, 1), mesh=mesh)
>>> b = CellVariable(value=(0, 1, 0, 1), mesh=mesh)
>>> print(numerix.allequal((a == 0) | (b == 1), [True, True, False, True]))
True
>>> print(a | b)
[0 1 1 1]
```

__pow__(other)

return self**other, or self raised to power other

```
>>> print(Variable(1, "mol/l")**3)
1.0 mol**3/l**3
>>> print((Variable(1, "mol/l")**3).unit)
<PhysicalUnit mol**3/l**3>
```

__repr__()

Return repr(self).

__setstate__(dict)

Used internally to create a new *CellVariable* from pickled persistent storage.

__str__()

Return str(self).

all(axis=None)

```
>>> print(Variable(value=(0, 0, 1, 1)).all())
0
>>> print(Variable(value=(1, 1, 1, 1)).all())
1
```

allclose(other, rtol=1e-05, atol=1e-08)

```
>>> var = Variable((1, 1))
>>> print(var.allclose((1, 1)))
1
>>> print(var.allclose((1,)))
1
```

The following test is to check that the system does not run out of memory.

```
>>> from fipy.tools import numerix
>>> var = Variable(numerix.ones(10000))
>>> print(var.allclose(numerix.zeros(10000, 'l')))
False
```

any(axis=None)

```
>>> print(Variable(value=0).any())
0
>>> print(Variable(value=(0, 0, 1, 1)).any())
1
```

property arithmeticFaceValue

Returns a *FaceVariable* whose value corresponds to the arithmetic interpolation of the adjacent cells:

$$\phi_f = (\phi_1 - \phi_2) \frac{d_{f2}}{d_{12}} + \phi_2$$

Adjusted for a *ModularVariable*

property cellVolumeAverage

Return the cell-volume-weighted average of the *CellVariable*:

$$\langle \phi \rangle_{\text{vol}} = \frac{\sum_{\text{cells}} \phi_{\text{cell}} V_{\text{cell}}}{\sum_{\text{cells}} V_{\text{cell}}}$$

```
>>> from fipy.meshes import Grid2D
>>> from fipy.variables.cellVariable import CellVariable
>>> mesh = Grid2D(nx = 3, ny = 1, dx = .5, dy = .1)
>>> var = CellVariable(value = (1, 2, 6), mesh = mesh)
>>> print(var.cellVolumeAverage)
3.0
```

constraint(value, where=None)

Constrains the *CellVariable* to *value* at a location specified by *where*.

```
>>> from fipy import *
>>> m = Grid1D(nx=3)
>>> v = CellVariable(mesh=m, value=m.cellCenters[0])
>>> v.constrain(0., where=m.facesLeft)
>>> v.faceGrad.constrain([1.], where=m.facesRight)
>>> print(v.faceGrad)
[[ 1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 0.   1.   2.   2.5]
```

Changing the constraint changes the dependencies

```
>>> v.constrain(1., where=m.facesLeft)
>>> print(v.faceGrad)
[[-1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 1.   1.   2.   2.5]
```

Constraints can be *Variable*

```
>>> c = Variable(0.)
>>> v.constrain(c, where=m.facesLeft)
>>> print(v.faceGrad)
```

(continues on next page)

(continued from previous page)

```
[[ 1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 0.   1.   2.   2.5]
>>> c.value = 1.
>>> print(v.faceGrad)
[[[-1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 1.   1.   2.   2.5]
```

Constraints can have a *Variable* mask.

```
>>> v = CellVariable(mesh=m)
>>> mask = FaceVariable(mesh=m, value=m.facesLeft)
>>> v.constrain(1., where=mask)
>>> print(v.faceValue)
[ 1.  0.  0.  0.]
>>> mask[:] = mask | m.facesRight
>>> print(v.faceValue)
[ 1.  0.  0.  1.]
```

property constraintMask

Test that *constraintMask* returns a Variable that updates itself whenever the constraints change.

```
>>> from fipy import *
```

```
>>> m = Grid2D(nx=2, ny=2)
>>> x, y = m.cellCenters
>>> v0 = CellVariable(mesh=m)
>>> v0.constrain(1., where=m.facesLeft)
>>> print(v0.faceValue.constraintMask)
[False False False False False False True False False True False False]
>>> print(v0.faceValue)
[ 0.  0.  0.  0.  0.  0.  1.  0.  0.  1.  0.  0.]
>>> v0.constrain(3., where=m.facesRight)
>>> print(v0.faceValue.constraintMask)
[False False False False False False True False True True False True]
>>> print(v0.faceValue)
[ 0.  0.  0.  0.  0.  0.  1.  0.  3.  1.  0.  3.]
>>> v1 = CellVariable(mesh=m)
>>> v1.constrain(1., where=(x < 1) & (y < 1))
>>> print(v1.constraintMask)
[ True False False False]
>>> print(v1)
[ 1.  0.  0.  0.]
>>> v1.constrain(3., where=(x > 1) & (y > 1))
>>> print(v1.constraintMask)
[ True False False  True]
>>> print(v1)
[ 1.  0.  0.  3.]
```

copy()

Make an duplicate of the *Variable*

```
>>> a = Variable(value=3)
>>> b = a.copy()
>>> b
Variable(value=array(3))
```

The duplicate will not reflect changes made to the original

```
>>> a.setValue(5)
>>> b
Variable(value=array(3))
```

Check that this works for arrays.

```
>>> a = Variable(value=numerix.array([0, 1, 2]))
>>> b = a.copy()
>>> b
Variable(value=array([0, 1, 2]))
>>> a[1] = 3
>>> b
Variable(value=array([0, 1, 2]))
```

`dot(other, opShape=None, operatorClass=None)`

Return the mesh-element–by–mesh-element (cell-by-cell, face-by-face, etc.) scalar product

$$\text{extself} \cdot \text{extother}$$

Both *self* and *other* can be of arbitrary rank, and *other* does not need to be a *MeshVariable*.

`property faceGrad`

Return $\nabla\phi$ as a rank-1 *FaceVariable* (second-order gradient). Adjusted for a *ModularVariable*

`property faceGradAverage`

Deprecated since version 3.3: use `grad.arithmeticFaceValue` instead

Return $\nabla\phi$ as a rank-1 *FaceVariable* using averaging for the normal direction(second-order gradient)

`property faceGradNoMod`

Return $\nabla\phi$ as a rank-1 *FaceVariable* (second-order gradient). Not adjusted for a *ModularVariable*

`property faceValue`

Returns a *FaceVariable* whose value corresponds to the arithmetic interpolation of the adjacent cells:

$$\phi_f = (\phi_1 - \phi_2) \frac{d_{f2}}{d_{12}} + \phi_2$$

```
>>> from fipy.meshes import Grid1D
>>> from fipy import numerix
>>> mesh = Grid1D(dx = (1., 1.))
>>> L = 1
>>> R = 2
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (0.5 / 1.) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (2., 4.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (1.0 / 3.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (10., 100.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (5.0 / 55.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

property gaussGrad

Return $\frac{1}{V_F} \sum_f \vec{n} \phi_f A_f$ as a rank-1 *CellVariable* (first-order gradient).

getsctype(*default=None*)

Returns the Numpy *sctype* of the underlying array.

```
>>> Variable(1).getsctype() == numerix.NUMERIX.obj2sctype(numerix.array(1))
True
>>> Variable(1.).getsctype() == numerix.NUMERIX.obj2sctype(numerix.array(1.))
True
>>> Variable((1, 1.)).getsctype() == numerix.NUMERIX.obj2sctype(numerix.
...array((1., 1.)))
True
```

property globalValue

Concatenate and return values from all processors

When running on a single processor, the result is identical to *value*.

property grad

Return $\nabla \phi$ as a rank-1 *CellVariable* (first-order gradient). Adjusted for a *ModularVariable*

property harmonicFaceValue

Returns a *FaceVariable* whose value corresponds to the harmonic interpolation of the adjacent cells:

$$\phi_f = \frac{\phi_1 \phi_2}{(\phi_2 - \phi_1) \frac{d_{f2}}{d_{12}} + \phi_1}$$

```
>>> from fipy.meshes import Grid1D
>>> from fipy import numerix
>>> mesh = Grid1D(dx = (1., 1.))
>>> L = 1
>>> R = 2
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.harmonicFaceValue[mesh.interiorFaces.value]
>>> answer = L * R / ((R - L) * (0.5 / 1.) + L)
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (2., 4.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.harmonicFaceValue[mesh.interiorFaces.value]
>>> answer = L * R / ((R - L) * (1.0 / 3.0) + L)
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (10., 100.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.harmonicFaceValue[mesh.interiorFaces.value]
>>> answer = L * R / ((R - L) * (5.0 / 55.0) + L)
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

inBaseUnits()

Return the value of the *Variable* with all units reduced to their base SI elements.

```
>>> e = Variable(value="2.7 Hartree*Nav")
>>> print(e.inBaseUnits().allclose("7088849.01085 kg*m**2/s**2/mol"))
1
```

inUnitsOf(*units)

Returns one or more *Variable* objects that express the same physical quantity in different units. The units are specified by strings containing their names. The units must be compatible with the unit of the object. If one unit is specified, the return value is a single *Variable*.

```
>>> freeze = Variable('0 degC')
>>> print(freeze.inUnitsOf('degF').allclose("32.0 degF"))
1
```

If several units are specified, the return value is a tuple of *Variable* instances with one element per unit such that the sum of all quantities in the tuple equals the the original quantity and all the values except for the last one are integers. This is used to convert to irregular unit systems like hour/minute/second. The original object will not be changed.

```
>>> t = Variable(value=314159., unit='s')
>>> from builtins import zip
>>> print(numerix.allclose([e.allclose(v) for (e, v) in zip(t.inUnitsOf('d', 'h',
-> 'min', 's'), ...
-> ...
-> '15.0 min', '59.0 s')], ...
-> ...
-> True))
1
```

property leastSquaresGrad

Return $\nabla\phi$, which is determined by solving for $\nabla\phi$ in the following matrix equation,

$$\nabla\phi \cdot \sum_f d_{AP}^2 \vec{n}_{AP} \otimes \vec{n}_{AP} = \sum_f d_{AP}^2 (\vec{n} \cdot \nabla\phi)_{AP}$$

The matrix equation is derived by minimizing the following least squares sum,

$$F(\phi_x, \phi_y) = \sqrt{\sum_f (d_{AP} \vec{n}_{AP} \cdot \nabla\phi - d_{AP} (\vec{n}_{AP} \cdot \nabla\phi)_{AP})^2}$$

Tests

```
>>> from fipy import Grid2D
>>> m = Grid2D(nx=2, ny=2, dx=0.1, dy=2.0)
>>> print(numerix.allclose(CellVariable(mesh=m, value=(0, 1, 3, 6)).
...leastSquaresGrad.globalValue, \
...
...
...
True
```

```
>>> from fipy import Grid1D
>>> print(numerix.allclose(CellVariable(mesh=Grid1D(dx=(2.0, 1.0, 0.5)),
...value=(0, 1, 2)).leastSquaresGrad.
...globalValue, [[0.461538461538, 0.8, 1.2]]))
True
```

property mag

The magnitude of the *Variable*, e.g., $|\vec{\psi}| = \sqrt{\vec{\psi} \cdot \vec{\psi}}$.

max(axis=None)

Return the maximum along a given axis.

min(axis=None)

```
>>> from fipy import Grid2D, CellVariable
>>> mesh = Grid2D(nx=5, ny=5)
>>> x, y = mesh.cellCenters
>>> v = CellVariable(mesh=mesh, value=x*y)
>>> print(v.min())
0.25
```

property minmodFaceValue

Returns a *FaceVariable* with a value that is the minimum of the absolute values of the adjacent cells. If the values are of opposite sign then the result is zero:

$$\phi_f = \begin{cases} \phi_1 & \text{when } |\phi_1| \leq |\phi_2|, \\ \phi_2 & \text{when } |\phi_2| < |\phi_1|, \\ 0 & \text{when } \phi_1\phi_2 < 0 \end{cases}$$

```
>>> from fipy import *
>>> print(CellVariable(mesh=Grid1D(nx=2), value=(1, 2)).minmodFaceValue)
[1 1 2]
>>> print(CellVariable(mesh=Grid1D(nx=2), value=(-1, -2)).minmodFaceValue)
[-1 -1 -2]
>>> print(CellVariable(mesh=Grid1D(nx=2), value=(-1, 2)).minmodFaceValue)
[-1 0 2]
```

property old

Return the values of the *CellVariable* from the previous solution sweep.

Combinations of *CellVariable*'s should also return old values.

```
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx = 2)
>>> from fipy.variables.cellVariable import CellVariable
>>> var1 = CellVariable(mesh = mesh, value = (2, 3), hasOld = 1)
>>> var2 = CellVariable(mesh = mesh, value = (3, 4))
>>> v = var1 * var2
>>> print(v)
[ 6 12]
>>> var1.value = ((3, 2))
>>> print(v)
[9 8]
>>> print(v.old)
[ 6 12]
```

The following small test is to correct for a bug when the operator does not just use variables.

```
>>> v1 = var1 * 3
>>> print(v1)
[9 6]
>>> print(v1.old)
[6 9]
```

`rdot(other, opShape=None, operatorClass=None)`

Return the mesh-element-by-mesh-element (cell-by-cell, face-by-face, etc.) scalar product

$$\text{exto}other \cdot \text{extsel}$$

Both *self* and *other* can be of arbitrary rank, and *other* does not need to be a *MeshVariable*.

`release(constraint)`

Remove *constraint* from *self*

```
>>> from fipy import *
>>> m = Grid1D(nx=3)
>>> v = CellVariable(mesh=m, value=m.cellCenters[0])
>>> c = Constraint(0., where=m.facesLeft)
>>> v.constrain(c)
>>> print(v.faceValue)
[ 0.  1.  2.  2.5]
>>> v.release(constraint=c)
>>> print(v.faceValue)
[ 0.5  1.   2.   2.5]
```

`setValue(value, unit=None, where=None)`

Set the value of the Variable. Can take a masked array.

```
>>> a = Variable((1, 2, 3))
>>> a.setValue(5, where=(1, 0, 1))
>>> print(a)
[5 2 5]
```

```
>>> b = Variable((4, 5, 6))
>>> a.setValue(b, where=(1, 0, 1))
```

(continues on next page)

(continued from previous page)

```
>>> print(a)
[4 2 6]
>>> print(b)
[4 5 6]
>>> a.value = 3
>>> print(a)
[3 3 3]
```

```
>>> b = numerix.array((3, 4, 5))
>>> a.value = b
>>> a[:] = 1
>>> print(b)
[3 4 5]
```

```
>>> a.setValue((4, 5, 6), where=(1, 0))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

property shape

```
>>> from fipy.meshes import Grid2D
>>> from fipy.variables.cellVariable import CellVariable
>>> mesh = Grid2D(nx=2, ny=3)
>>> var = CellVariable(mesh=mesh)
>>> print(numerix.allequal(var.shape, (6,)))
True
>>> print(numerix.allequal(var.arithmeticFaceValue.shape, (17,)))
True
>>> print(numerix.allequal(var.grad.shape, (2, 6)))
True
>>> print(numerix.allequal(var.faceGrad.shape, (2, 17)))
True
```

Have to account for zero length arrays

```
>>> from fipy import Grid1D
>>> m = Grid1D(nx=0)
>>> v = CellVariable(mesh=m, elementshape=(2,))
>>> numerix.allequal((v * 1).shape, (2, 0))
True
```

`std(axis=None, **kwargs)`

Evaluate standard deviation of all the elements of a *MeshVariable*.

Adapted from <http://mpitutorial.com/tutorials/mpi-reduce-and-allreduce/>

```
>>> import fipy as fp
>>> mesh = fp.Grid2D(nx=2, ny=2, dx=2., dy=5.)
>>> var = fp.CellVariable(value=(1., 2., 3., 4.), mesh=mesh)
>>> print((var.std()**2).allclose(1.25))
True
```

property unit

Return the unit object of *self*.

```
>>> Variable(value="1 m").unit  
<PhysicalUnit m>
```

updateOld()

Set the values of the previous solution sweep to the current values. Test case due to bug.

```
>>> from fipy.meshes import Grid1D  
>>> mesh = Grid1D(nx = 1)  
>>> var = ModularVariable(mesh=mesh, value=1., hasOld=1)  
>>> var.updateOld()  
>>> var[:] = 2  
>>> answer = CellVariable(mesh=mesh, value=1.)  
>>> print(var.old.allclose(answer))  
True
```

property value

“Evaluate” the *Variable* and return its value (longhand)

```
>>> a = Variable(value=3)  
>>> print(a.value)  
3  
>>> b = a + 4  
>>> b  
(Variable(value=array(3)) + 4)  
>>> b.value  
7
```

22.10.31 fipy.variables.noiseVariable

Classes

`NoiseVariable(*args, **kwds)`

Attention:

This class is abstract. Always create one of its subclasses.

`class fipy.variables.noiseVariable.NoiseVariable(*args, **kwds)`

Bases: `CellVariable`

Attention: This class is abstract. Always create one of its subclasses.

A generic base class for sources of noise distributed over the cells of a mesh.

In the event that the noise should be conserved, use:

`<Specific>NoiseVariable(...).faceGrad.divergence`

The `seed()` and `get_seed()` functions of the `fipy.tools.numerix.random` module can be set and query the random number generated used by all `NoiseVariable` objects.

Parameters

- `mesh (Mesh)` – the mesh that defines the geometry of this `Variable`
- `name (str)` – the user-readable name of the `Variable`
- `value (float or array_like)` – the initial value
- `rank (int)` – the rank (number of dimensions) of each element of this `Variable`. Default: 0
- `elementshape (tuple of int)` – the shape of each element of this variable Default: `rank * (mesh.dim,)`
- `unit (str or PhysicalUnit)` – The physical units of the variable

`__abs__()`

Following test it to fix a bug with C inline string using `abs()` instead of `fabs()`

```
>>> print(abs(Variable(2.3) - Variable(1.2)))
1.1
```

Check representation works with different versions of numpy

```
>>> print(repr(abs(Variable(2.3))))
numerix.fabs(Variable(value=array(2.3)))
```

`__and__(other)`

This test case has been added due to a weird bug that was appearing.

```
>>> a = Variable(value=(0, 0, 1, 1))
>>> b = Variable(value=(0, 1, 0, 1))
>>> print(numerix.equal((a == 0) & (b == 1), [False, True, False, False]).all())
True
>>> print(a & b)
[0 0 0 1]
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx=4)
>>> from fipy.variables.cellVariable import CellVariable
>>> a = CellVariable(value=(0, 0, 1, 1), mesh=mesh)
>>> b = CellVariable(value=(0, 1, 0, 1), mesh=mesh)
>>> print(numerix.allequal((a == 0) & (b == 1), [False, True, False, False]))
True
>>> print(a & b)
[0 0 0 1]
```

`__array__(t=None)`

Attempt to convert the *Variable* to a numerix *array* object

```
>>> v = Variable(value=[2, 3])
>>> print(numerix.array(v))
[2 3]
```

A dimensional *Variable* will convert to the numeric value in its base units

```
>>> v = Variable(value=[2, 3], unit="mm")
>>> numerix.array(v)
array([ 0.002,  0.003])
```

`__array_wrap__(arr, context=None)`

Required to prevent numpy not calling the reverse binary operations. Both the following tests are examples ufuncs.

```
>>> print(type(numerix.array([1.0, 2.0]) * Variable([1.0, 2.0])))
<class 'fipy.variables.binaryOperatorVariable...binOp'>
```

```
>>> from scipy.special import gamma as Gamma
>>> print(type(Gamma(Variable([1.0, 2.0]))))
<class 'fipy.variables.unaryOperatorVariable...unOp'>
```

`__bool__()`

```
>>> print(bool(Variable(value=0)))
0
>>> print(bool(Variable(value=(0, 0, 1, 1))))
Traceback (most recent call last):
...
ValueError: The truth value of an array with more than one element is ambiguous.
→ Use a.any() or a.all()
```

`__call__(points=None, order=0, nearestCellIDs=None)`

Interpolates the *CellVariable* to a set of points using a method that has a memory requirement on the order of *Ncells* by *Npoints* in general, but uses only *Ncells* when the *CellVariable*'s mesh is a *UniformGrid* object.

Tests

```
>>> from fipy import *
>>> m = Grid2D(nx=3, ny=2)
>>> v = CellVariable(mesh=m, value=m.cellCenters[0])
>>> print(v(((0., 1.1, 1.2), (0., 1., 1.))))
[ 0.5  1.5  1.5]
>>> print(v(((0., 1.1, 1.2), (0., 1., 1.)), order=1))
[ 0.25  1.1   1.2 ]
>>> m0 = Grid2D(nx=2, ny=2, dx=.1, dy=.1)
>>> m1 = Grid2D(nx=4, ny=4, dx=.05, dy=.05)
>>> x, y = m0.cellCenters
>>> v0 = CellVariable(mesh=m0, value=x * y)
>>> print(v0(m1.cellCenters.globalValue))
[ 0.25  0.25  0.75  0.75  0.25  0.25  0.75  0.75  0.75  0.75  2.25  2.25
 0.75  0.75  2.25  2.25]
>>> print(v0(m1.cellCenters.globalValue, order=1))
[ 0.125  0.25   0.5    0.625  0.25   0.375  0.875  1.      0.5     0.875
 1.875  2.25   0.625  1.      2.25   2.625]
```

Parameters

- **points** (tuple or list of tuple) – A point or set of points in the format (X, Y, Z)
- **order** ({0, 1}) – The order of interpolation, default is 0
- **nearestCellIDs** (array_like) – Optional argument if user can calculate own nearest cell IDs array, shape should be same as points

`__eq__(other)`

Test if a *Variable* is equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a == 4)
>>> b
(Variable(value=array(3)) == 4)
>>> b()
0
```

`__ge__(other)`

Test if a *Variable* is greater than or equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a >= 4)
>>> b
(Variable(value=array(3)) >= 4)
>>> b()
0
>>> a.value = 4
>>> print(b())
1
>>> a.value = 5
>>> print(b())
1
```

`__getitem__(index)`

“Evaluate” the *Variable* and return the specified element

```
>>> a = Variable(value=((3., 4.), (5., 6.)), unit="m") + "4 m"
>>> print(a[1, 1])
10.0 m
```

It is an error to slice a *Variable* whose *value* is not sliceable

```
>>> Variable(value=3)[2]
Traceback (most recent call last):
...
IndexError: 0-d arrays can't be indexed
```

`__getstate__()`

Used internally to collect the necessary information to `pickle` the *CellVariable* to persistent storage.

`__gt__(other)`

Test if a *Variable* is greater than another quantity

```
>>> a = Variable(value=3)
>>> b = (a > 4)
>>> b
(Variable(value=array(3)) > 4)
>>> print(b())
0
>>> a.value = 5
>>> print(b())
1
```

`__hash__()`

Return `hash(self)`.

`__invert__()`

Returns logical “not” of the *Variable*

```
>>> a = Variable(value=True)
>>> print(~a)
False
```

__le__(other)

Test if a *Variable* is less than or equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a <= 4)
>>> b
(Variable(value=array(3)) <= 4)
>>> b()
1
>>> a.value = 4
>>> print(b())
1
>>> a.value = 5
>>> print(b())
0
```

__lt__(other)

Test if a *Variable* is less than another quantity

```
>>> a = Variable(value=3)
>>> b = (a < 4)
>>> b
(Variable(value=array(3)) < 4)
>>> b()
1
>>> a.value = 4
>>> print(b())
0
>>> print(10000000000000000 * Variable(1) < 1.)
0
>>> print(1000 * Variable(1) < 1.)
0
```

Python automatically reverses the arguments when necessary

```
>>> 4 > Variable(value=3)
(Variable(value=array(3)) < 4)
```

__ne__(other)

Test if a *Variable* is not equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a != 4)
>>> b
(Variable(value=array(3)) != 4)
>>> b()
1
```

static __new__(cls, *args, **kwds)

__nonzero__()

```
>>> print(bool(Variable(value=0)))
0
```

(continues on next page)

(continued from previous page)

```
>>> print(bool(Variable(value=(0, 0, 1, 1))))
Traceback (most recent call last):
...
ValueError: The truth value of an array with more than one element is ambiguous.
→ Use a.any() or a.all()
```

__or__(other)

This test case has been added due to a weird bug that was appearing.

```
>>> a = Variable(value=(0, 0, 1, 1))
>>> b = Variable(value=(0, 1, 0, 1))
>>> print(numerix.equal((a == 0) | (b == 1), [True, True, False, True]).all())
True
>>> print(a | b)
[0 1 1 1]
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx=4)
>>> from fipy.variables.cellVariable import CellVariable
>>> a = CellVariable(value=(0, 0, 1, 1), mesh=mesh)
>>> b = CellVariable(value=(0, 1, 0, 1), mesh=mesh)
>>> print(numerix.allequal((a == 0) | (b == 1), [True, True, False, True]))
True
>>> print(a | b)
[0 1 1 1]
```

__pow__(other)

return self**other, or self raised to power other

```
>>> print(Variable(1, "mol/l")**3)
1.0 mol**3/l**3
>>> print((Variable(1, "mol/l")**3).unit)
<PhysicalUnit mol**3/l**3>
```

__repr__()

Return repr(self).

__setstate__(dict)

Used internally to create a new *CellVariable* from pickled persistent storage.

__str__()

Return str(self).

all(axis=None)

```
>>> print(Variable(value=(0, 0, 1, 1)).all())
0
>>> print(Variable(value=(1, 1, 1, 1)).all())
1
```

allclose(other, rtol=1e-05, atol=1e-08)

```
>>> var = Variable((1, 1))
>>> print(var.allclose((1, 1)))
```

(continues on next page)

(continued from previous page)

```

1
>>> print(var.allclose((1,)))
1

```

The following test is to check that the system does not run out of memory.

```

>>> from fipy.tools import numerix
>>> var = Variable(numerix.ones(10000))
>>> print(var.allclose(numerix.zeros(10000, '1')))
False

```

`any(axis=None)`

```

>>> print(Variable(value=0).any())
0
>>> print(Variable(value=(0, 0, 1, 1)).any())
1

```

property arithmeticFaceValue

Returns a *FaceVariable* whose value corresponds to the arithmetic interpolation of the adjacent cells:

$$\phi_f = (\phi_1 - \phi_2) \frac{d_{f2}}{d_{12}} + \phi_2$$

```

>>> from fipy.meshes import Grid1D
>>> from fipy import numerix
>>> mesh = Grid1D(dx = (1., 1.))
>>> L = 1
>>> R = 2
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (0.5 / 1.) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True

```

```

>>> mesh = Grid1D(dx = (2., 4.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (1.0 / 3.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True

```

```

>>> mesh = Grid1D(dx = (10., 100.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (5.0 / 55.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True

```

property cellVolumeAverage

Return the cell-volume-weighted average of the *CellVariable*:

$$\langle \phi \rangle_{\text{vol}} = \frac{\sum_{\text{cells}} \phi_{\text{cell}} V_{\text{cell}}}{\sum_{\text{cells}} V_{\text{cell}}}$$

```
>>> from fipy.meshes import Grid2D
>>> from fipy.variables.cellVariable import CellVariable
>>> mesh = Grid2D(nx = 3, ny = 1, dx = .5, dy = .1)
>>> var = CellVariable(value = (1, 2, 6), mesh = mesh)
>>> print(var.cellVolumeAverage)
3.0
```

constraint(*value*, *where*=None)

Constrains the *CellVariable* to *value* at a location specified by *where*.

```
>>> from fipy import *
>>> m = Grid1D(nx=3)
>>> v = CellVariable(mesh=m, value=m.cellCenters[0])
>>> v.constrain(0., where=m.facesLeft)
>>> v.faceGrad.constrain([1.], where=m.facesRight)
>>> print(v.faceGrad)
[[ 1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 0.   1.   2.   2.5]
```

Changing the constraint changes the dependencies

```
>>> v.constrain(1., where=m.facesLeft)
>>> print(v.faceGrad)
[[-1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 1.   1.   2.   2.5]
```

Constraints can be *Variable*

```
>>> c = Variable(0.)
>>> v.constrain(c, where=m.facesLeft)
>>> print(v.faceGrad)
[[ 1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 0.   1.   2.   2.5]
>>> c.value = 1.
>>> print(v.faceGrad)
[[-1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 1.   1.   2.   2.5]
```

Constraints can have a *Variable* mask.

```
>>> v = CellVariable(mesh=m)
>>> mask = FaceVariable(mesh=m, value=m.facesLeft)
>>> v.constrain(1., where=mask)
>>> print(v.faceValue)
[ 1.  0.  0.  0.]
>>> mask[:] = mask | m.facesRight
>>> print(v.faceValue)
[ 1.  0.  0.  1.]
```

property constraintMask

Test that *constraintMask* returns a Variable that updates itself whenever the constraints change.

```
>>> from fipy import *
>>> m = Grid2D(nx=2, ny=2)
>>> x, y = m.cellCenters
>>> v0 = CellVariable(mesh=m)
>>> v0.constrain(1., where=m.facesLeft)
>>> print(v0.faceValue.constraintMask)
[False False False False False True False False True False False]
>>> print(v0.faceValue)
[ 0.  0.  0.  0.  0.  1.  0.  0.  1.  0.  0.]
>>> v0.constrain(3., where=m.facesRight)
>>> print(v0.faceValue.constraintMask)
[False False False False False False True False True True False True]
>>> print(v0.faceValue)
[ 0.  0.  0.  0.  0.  1.  0.  3.  1.  0.  3.]
>>> v1 = CellVariable(mesh=m)
>>> v1.constrain(1., where=(x < 1) & (y < 1))
>>> print(v1.constraintMask)
[ True False False False]
>>> print(v1)
[ 1.  0.  0.  0.]
>>> v1.constrain(3., where=(x > 1) & (y > 1))
>>> print(v1.constraintMask)
[ True False False  True]
>>> print(v1)
[ 1.  0.  0.  3.]
```

copy()

Copy the value of the *NoiseVariable* to a static *CellVariable*.

dot(*other*, *opShape=None*, *operatorClass=None*)

Return the mesh-element–by–mesh-element (cell-by-cell, face-by-face, etc.) scalar product

$$\text{extself} \cdot \text{extother}$$

Both *self* and *other* can be of arbitrary rank, and *other* does not need to be a *MeshVariable*.

property faceGrad

Return $\nabla\phi$ as a rank-1 *FaceVariable* using differencing for the normal direction(second-order gradient).

property faceGradAverage

Deprecated since version 3.3: use *grad.arithmeticFaceValue* instead

Return $\nabla\phi$ as a rank-1 *FaceVariable* using averaging for the normal direction(second-order gradient)

property faceValue

Returns a *FaceVariable* whose value corresponds to the arithmetic interpolation of the adjacent cells:

$$\phi_f = (\phi_1 - \phi_2) \frac{d_{f2}}{d_{12}} + \phi_2$$

```
>>> from fipy.meshes import Grid1D
>>> from fipy import numerix
>>> mesh = Grid1D(dx = (1., 1.))
>>> L = 1
>>> R = 2
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (0.5 / 1.) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (2., 4.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (1.0 / 3.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (10., 100.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (5.0 / 55.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

property gaussGrad

Return $\frac{1}{V_P} \sum_f \vec{n} \phi_f A_f$ as a rank-1 *CellVariable* (first-order gradient).

getscctype(*default=None*)

Returns the Numpy *sctype* of the underlying array.

```
>>> Variable(1).getscctype() == numerix.NUMERIX.obj2sctype(numerix.array(1))
True
>>> Variable(1.).getscctype() == numerix.NUMERIX.obj2sctype(numerix.array(1.))
True
>>> Variable((1, 1.)).getscctype() == numerix.NUMERIX.obj2sctype(numerix.
->array((1., 1.)))
True
```

property globalValue

Concatenate and return values from all processors

When running on a single processor, the result is identical to *value*.

property grad

Return $\nabla\phi$ as a rank-1 *CellVariable* (first-order gradient).

property harmonicFaceValue

Returns a *FaceVariable* whose value corresponds to the harmonic interpolation of the adjacent cells:

$$\phi_f = \frac{\phi_1 \phi_2}{(\phi_2 - \phi_1) \frac{d_{f2}}{d_{12}} + \phi_1}$$

```
>>> from fipy.meshes import Grid1D
>>> from fipy import numerix
>>> mesh = Grid1D(dx = (1., 1.))
>>> L = 1
>>> R = 2
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.harmonicFaceValue[mesh.interiorFaces.value]
>>> answer = L * R / ((R - L) * (0.5 / 1.) + L)
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (2., 4.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.harmonicFaceValue[mesh.interiorFaces.value]
>>> answer = L * R / ((R - L) * (1.0 / 3.0) + L)
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (10., 100.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.harmonicFaceValue[mesh.interiorFaces.value]
>>> answer = L * R / ((R - L) * (5.0 / 55.0) + L)
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

inBaseUnits()

Return the value of the *Variable* with all units reduced to their base SI elements.

```
>>> e = Variable(value="2.7 Hartree*Nav")
>>> print(e.inBaseUnits().allclose("7088849.01085 kg*m**2/s**2/mol"))
1
```

inUnitsOf(*units)

Returns one or more *Variable* objects that express the same physical quantity in different units. The units are specified by strings containing their names. The units must be compatible with the unit of the object. If one unit is specified, the return value is a single *Variable*.

```
>>> freeze = Variable('0 degC')
>>> print(freeze.inUnitsOf('degF').allclose("32.0 degF"))
1
```

If several units are specified, the return value is a tuple of *Variable* instances with one element per unit such that the sum of all quantities in the tuple equals the the original quantity and all the values except for the last one are integers. This is used to convert to irregular unit systems like hour/minute/second. The original object will not be changed.

```
>>> t = Variable(value=314159., unit='s')
>>> from builtins import zip
>>> print(numerix.allclose([e.allclose(v) for (e, v) in zip(t.inUnitsOf('d'), 'h
  ', 'min', 's'),
...                           ['3.0 d', '15.0 h',
...                            '15.0 min', '59.0 s'])],
```

(continues on next page)

(continued from previous page)

```
...
    True))
1
```

property leastSquaresGrad

Return $\nabla\phi$, which is determined by solving for $\nabla\phi$ in the following matrix equation,

$$\nabla\phi \cdot \sum_f d_{AP}^2 \vec{n}_{AP} \otimes \vec{n}_{AP} = \sum_f d_{AP}^2 (\vec{n} \cdot \nabla\phi)_{AP}$$

The matrix equation is derived by minimizing the following least squares sum,

$$F(\phi_x, \phi_y) = \sqrt{\sum_f (d_{AP} \vec{n}_{AP} \cdot \nabla\phi - d_{AP} (\vec{n}_{AP} \cdot \nabla\phi)_{AP})^2}$$

Tests

```
>>> from fipy import Grid2D
>>> m = Grid2D(nx=2, ny=2, dx=0.1, dy=2.0)
>>> print(numerix.allclose(CellVariable(mesh=m, value=(0, 1, 3, 6)).leastSquaresGrad.globalValue,
...                           [[8.0, 8.0, 24.0, 24.0],
...                            [1.2, 2.0, 1.2, 2.0]]))
True
```

```
>>> from fipy import Grid1D
>>> print(numerix.allclose(CellVariable(mesh=Grid1D(dx=(2.0, 1.0, 0.5)),
...                                         value=(0, 1, 2)).leastSquaresGrad.globalValue,
...                           [[0.461538461538, 0.8, 1.2]]))
True
```

property mag

The magnitude of the *Variable*, e.g., $|\vec{\psi}| = \sqrt{\vec{\psi} \cdot \vec{\psi}}$.

max(axis=None)

Return the maximum along a given axis.

min(axis=None)

```
>>> from fipy import Grid2D, CellVariable
>>> mesh = Grid2D(nx=5, ny=5)
>>> x, y = mesh.cellCenters
>>> v = CellVariable(mesh=mesh, value=x*y)
>>> print(v.min())
0.25
```

property minmodFaceValue

Returns a *FaceVariable* with a value that is the minimum of the absolute values of the adjacent cells. If the values are of opposite sign then the result is zero:

$$\phi_f = \begin{cases} \phi_1 & \text{when } |\phi_1| \leq |\phi_2|, \\ \phi_2 & \text{when } |\phi_2| < |\phi_1|, \\ 0 & \text{when } \phi_1 \phi_2 < 0 \end{cases}$$

```
>>> from fipy import *
>>> print(CellVariable(mesh=Grid1D(nx=2), value=(1, 2)).minmodFaceValue)
[1 1 2]
>>> print(CellVariable(mesh=Grid1D(nx=2), value=(-1, -2)).minmodFaceValue)
[-1 -1 -2]
>>> print(CellVariable(mesh=Grid1D(nx=2), value=(-1, 2)).minmodFaceValue)
[-1 0 2]
```

property old

Return the values of the *CellVariable* from the previous solution sweep.

Combinations of *CellVariable*'s should also return old values.

```
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx = 2)
>>> from fipy.variables.cellVariable import CellVariable
>>> var1 = CellVariable(mesh = mesh, value = (2, 3), hasOld = 1)
>>> var2 = CellVariable(mesh = mesh, value = (3, 4))
>>> v = var1 * var2
>>> print(v)
[ 6 12]
>>> var1.value = ((3, 2))
>>> print(v)
[9 8]
>>> print(v.old)
[ 6 12]
```

The following small test is to correct for a bug when the operator does not just use variables.

```
>>> v1 = var1 * 3
>>> print(v1)
[9 6]
>>> print(v1.old)
[6 9]
```

rdot(other, opShape=None, operatorClass=None)

Return the mesh-element-by-mesh-element (cell-by-cell, face-by-face, etc.) scalar product

$$\text{extoother} \cdot \text{extsel}$$

Both *self* and *other* can be of arbitrary rank, and *other* does not need to be a *MeshVariable*.

release(constraint)

Remove *constraint* from *self*

```
>>> from fipy import *
>>> m = Grid1D(nx=3)
>>> v = CellVariable(mesh=m, value=m.cellCenters[0])
>>> c = Constraint(0., where=m.facesLeft)
>>> v.constrain(c)
>>> print(v.faceValue)
[ 0. 1. 2. 2.5]
>>> v.release(constraint=c)
>>> print(v.faceValue)
[ 0.5 1. 2. 2.5]
```

scramble()

Generate a new random distribution.

setValue(value, unit=None, where=None)

Set the value of the Variable. Can take a masked array.

```
>>> a = Variable((1, 2, 3))
>>> a.setValue(5, where=(1, 0, 1))
>>> print(a)
[5 2 5]
```

```
>>> b = Variable((4, 5, 6))
>>> a.setValue(b, where=(1, 0, 1))
>>> print(a)
[4 2 6]
>>> print(b)
[4 5 6]
>>> a.value = 3
>>> print(a)
[3 3 3]
```

```
>>> b = numerix.array((3, 4, 5))
>>> a.value = b
>>> a[:] = 1
>>> print(b)
[3 4 5]
```

```
>>> a.setValue((4, 5, 6), where=(1, 0))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

property shape

```
>>> from fipy.meshes import Grid2D
>>> from fipy.variables.cellVariable import CellVariable
>>> mesh = Grid2D(nx=2, ny=3)
>>> var = CellVariable(mesh=mesh)
>>> print(numerix.allequal(var.shape, (6,)))
True
>>> print(numerix.allequal(var.arithmeticFaceValue.shape, (17,)))
True
>>> print(numerix.allequal(var.grad.shape, (2, 6)))
True
>>> print(numerix.allequal(var.faceGrad.shape, (2, 17)))
True
```

Have to account for zero length arrays

```
>>> from fipy import Grid1D
>>> m = Grid1D(nx=0)
>>> v = CellVariable(mesh=m, elementshape=(2,))
```

(continues on next page)

(continued from previous page)

```
>>> numerix.allequal((v * 1).shape, (2, 0))
True
```

std(*axis=None*, *kwargs*)**Evaluate standard deviation of all the elements of a *MeshVariable*.Adapted from <http://mpitutorial.com/tutorials/mpi-reduce-and-allreduce/>

```
>>> import fipy as fp
>>> mesh = fp.Grid2D(nx=2, ny=2, dx=2., dy=5.)
>>> var = fp.CellVariable(value=(1., 2., 3., 4.), mesh=mesh)
>>> print((var.std()**2).allclose(1.25))
True
```

property unitReturn the unit object of *self*.

```
>>> Variable(value="1 m").unit
<PhysicalUnit m>
```

updateOld()

Set the values of the previous solution sweep to the current values.

```
>>> from fipy import *
>>> v = CellVariable(mesh=Grid1D(), hasOld=False)
>>> v.updateOld()
Traceback (most recent call last):
...
AssertionError: The updateOld method requires the CellVariable to have an old_
value. Set hasOld to True when instantiating the CellVariable.
```

property value“Evaluate” the *Variable* and return its value (longhand)

```
>>> a = Variable(value=3)
>>> print(a.value)
3
>>> b = a + 4
>>> b
(Variable(value=array(3)) + 4)
>>> b.value
7
```

22.10.32 fipy.variables.operatorVariable

22.10.33 fipy.variables.scharfetterGummelFaceVariable

Classes

`ScharfetterGummelFaceVariable(*args, **kwds)`

param mesh

the mesh that defines the geometry of this *Variable*

`class fipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable(*args, **kwds)`

Bases: `_CellToFaceVariable`

Parameters

- **mesh** (`Mesh`) – the mesh that defines the geometry of this *Variable*
- **name** (`str`) – the user-readable name of the *Variable*
- **value** (`float or array_like`) – the initial value
- **rank** (`int`) – the rank (number of dimensions) of each element of this *Variable*. Default: 0
- **elementshape** (`tuple of int`) – the shape of each element of this variable Default: `rank * (mesh.dim,)`
- **unit** (`str or PhysicalUnit`) – The physical units of the variable

`__abs__()`

Following test it to fix a bug with C inline string using `abs()` instead of `fabs()`

```
>>> print(abs(Variable(2.3) - Variable(1.2)))
1.1
```

Check representation works with different versions of numpy

```
>>> print(repr(abs(Variable(2.3))))
numerix.fabs(Variable(value=array(2.3)))
```

`__and__(other)`

This test case has been added due to a weird bug that was appearing.

```
>>> a = Variable(value=(0, 0, 1, 1))
>>> b = Variable(value=(0, 1, 0, 1))
>>> print(numerix.equal((a == 0) & (b == 1), [False, True, False, False]).all())
True
>>> print(a & b)
[0 0 0 1]
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx=4)
>>> from fipy.variables.cellVariable import CellVariable
```

(continues on next page)

(continued from previous page)

```
>>> a = CellVariable(value=(0, 0, 1, 1), mesh=mesh)
>>> b = CellVariable(value=(0, 1, 0, 1), mesh=mesh)
>>> print(numerix.allequal((a == 0) & (b == 1), [False, True, False, False]))
True
>>> print(a & b)
[0 0 0 1]
```

__array__(t=None)

Attempt to convert the *Variable* to a numerix *array* object

```
>>> v = Variable(value=[2, 3])
>>> print(numerix.array(v))
[2 3]
```

A dimensional *Variable* will convert to the numeric value in its base units

```
>>> v = Variable(value=[2, 3], unit="mm")
>>> numerix.array(v)
array([ 0.002,  0.003])
```

__array_wrap__(arr, context=None)

Required to prevent numpy not calling the reverse binary operations. Both the following tests are examples ufuncs.

```
>>> print(type(numerix.array([1.0, 2.0]) * Variable([1.0, 2.0])))
<class 'fipy.variables.binaryOperatorVariable...binOp'>
```

```
>>> from scipy.special import gamma as Gamma
>>> print(type(Gamma(Variable([1.0, 2.0]))))
<class 'fipy.variables.unaryOperatorVariable...unOp'>
```

__bool__()

```
>>> print(bool(Variable(value=0)))
0
>>> print(bool(Variable(value=(0, 0, 1, 1))))
Traceback (most recent call last):
...
ValueError: The truth value of an array with more than one element is ambiguous.
→ Use a.any() or a.all()
```

__call__()

“Evaluate” the *Variable* and return its value

```
>>> a = Variable(value=3)
>>> print(a())
3
>>> b = a + 4
>>> b
(Variable(value=array(3)) + 4)
>>> b()
7
```

__eq__(other)

Test if a *Variable* is equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a == 4)
>>> b
(Variable(value=array(3)) == 4)
>>> b()
()
```

__ge__(other)

Test if a *Variable* is greater than or equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a >= 4)
>>> b
(Variable(value=array(3)) >= 4)
>>> b()
()
>>> a.value = 4
>>> print(b())
1
>>> a.value = 5
>>> print(b())
1
```

__getitem__(index)

“Evaluate” the *Variable* and return the specified element

```
>>> a = Variable(value=((3., 4.), (5., 6.)), unit="m") + "4 m"
>>> print(a[1, 1])
10.0 m
```

It is an error to slice a *Variable* whose *value* is not sliceable

```
>>> Variable(value=3)[2]
Traceback (most recent call last):
...
IndexError: 0-d arrays can't be indexed
```

__getstate__()

Used internally to collect the necessary information to pickle the *MeshVariable* to persistent storage.

__gt__(other)

Test if a *Variable* is greater than another quantity

```
>>> a = Variable(value=3)
>>> b = (a > 4)
>>> b
(Variable(value=array(3)) > 4)
>>> print(b())
()
>>> a.value = 5
```

(continues on next page)

(continued from previous page)

```
>>> print(b())
1
```

__hash__(self)

Return hash(self).

__invert__(self)

Returns logical “not” of the *Variable*

```
>>> a = Variable(value=True)
>>> print(~a)
False
```

__le__(self, other)

Test if a *Variable* is less than or equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a <= 4)
>>> b
(Variable(value=array(3)) <= 4)
>>> b()
1
>>> a.value = 4
>>> print(b())
1
>>> a.value = 5
>>> print(b())
0
```

__lt__(self, other)

Test if a *Variable* is less than another quantity

```
>>> a = Variable(value=3)
>>> b = (a < 4)
>>> b
(Variable(value=array(3)) < 4)
>>> b()
1
>>> a.value = 4
>>> print(b())
0
>>> print(10000000000000000 * Variable(1) < 1.)
0
>>> print(1000 * Variable(1) < 1.)
0
```

Python automatically reverses the arguments when necessary

```
>>> 4 > Variable(value=3)
(Variable(value=array(3)) < 4)
```

__ne__(self, other)

Test if a *Variable* is not equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a != 4)
>>> b
(Variable(value=array(3)) != 4)
>>> b()
1
```

static __new__(cls, *args, **kwds)

__nonzero__()

```
>>> print(bool(Variable(value=0)))
0
>>> print(bool(Variable(value=(0, 0, 1, 1))))
Traceback (most recent call last):
...
ValueError: The truth value of an array with more than one element is ambiguous.
→ Use a.any() or a.all()
```

__or__(other)

This test case has been added due to a weird bug that was appearing.

```
>>> a = Variable(value=(0, 0, 1, 1))
>>> b = Variable(value=(0, 1, 0, 1))
>>> print(numerix.equal((a == 0) | (b == 1), [True, True, False, True]).all())
True
>>> print(a | b)
[0 1 1 1]
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx=4)
>>> from fipy.variables.cellVariable import CellVariable
>>> a = CellVariable(value=(0, 0, 1, 1), mesh=mesh)
>>> b = CellVariable(value=(0, 1, 0, 1), mesh=mesh)
>>> print(numerix.allequal((a == 0) | (b == 1), [True, True, False, True]))
True
>>> print(a | b)
[0 1 1 1]
```

__pow__(other)

return self**other, or self raised to power other

```
>>> print(Variable(1, "mol/l")**3)
1.0 mol**3/l**3
>>> print((Variable(1, "mol/l")**3).unit)
<PhysicalUnit mol**3/l**3>
```

__repr__()

Return repr(self).

__setstate__(dict)

Used internally to create a new *Variable* from pickled persistent storage.

__str__()

Return str(self).

all(*axis=None*)

```
>>> print(Variable(value=(0, 0, 1, 1)).all())
0
>>> print(Variable(value=(1, 1, 1, 1)).all())
1
```

allclose(*other*, *rtol*=*1e-05*, *atol*=*1e-08*)

```
>>> var = Variable((1, 1))
>>> print(var.allclose((1, 1)))
1
>>> print(var.allclose((1,)))
1
```

The following test is to check that the system does not run out of memory.

```
>>> from fipy.tools import numerix
>>> var = Variable(numerix.ones(10000))
>>> print(var.allclose(numerix.zeros(10000, '1')))
False
```

any(*axis=None*)

```
>>> print(Variable(value=0).any())
0
>>> print(Variable(value=(0, 0, 1, 1)).any())
1
```

constraint(*value*, *where=None*)

Constrain the *Variable* to have a *value* at an index or mask location specified by *where*.

```
>>> v = Variable((0, 1, 2, 3))
>>> v.constrain(2, numerix.array((True, False, False, False)))
>>> print(v)
[2 1 2 3]
>>> v[:] = 10
>>> print(v)
[ 2 10 10 10]
>>> v.constrain(5, numerix.array((False, False, True, False)))
>>> print(v)
[ 2 10  5 10]
>>> v[:] = 6
>>> print(v)
[2 6 5 6]
>>> v.constrain(8)
>>> print(v)
[8 8 8 8]
>>> v[:] = 10
>>> print(v)
[8 8 8 8]
>>> del v.constraints[2]
>>> print(v)
[ 2 10  5 10]
```

```
>>> from fipy.variables.cellVariable import CellVariable
>>> from fipy.meshes import Grid2D
>>> m = Grid2D(nx=2, ny=2)
>>> x, y = m.cellCenters
>>> v = CellVariable(mesh=m, rank=1, value=(x, y))
>>> v.constrain(((0.,), (-1.,)), where=m.facesLeft)
>>> print(v.faceValue)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.   1.   1.5  0.   1.   1.5]
 [ 0.5  0.5  1.   1.   1.5  1.5 -1.   0.5  0.5 -1.   1.5  1.5]]
```

Parameters

- **value** (float or *array_like*) – The value of the constraint
- **where** (*array_like* of `bool`) – The constraint mask or index specifying the location of the constraint

property constraintMask

Test that `constraintMask` returns a Variable that updates itself whenever the constraints change.

```
>>> from fipy import *

>>> m = Grid2D(nx=2, ny=2)
>>> x, y = m.cellCenters
>>> v0 = CellVariable(mesh=m)
>>> v0.constrain(1., where=m.facesLeft)
>>> print(v0.faceValue.constraintMask)
[False False False False False False True False False True False False]
>>> print(v0.faceValue)
[ 0.  0.  0.  0.  0.  1.  0.  0.  1.  0.  0.]
>>> v0.constrain(3., where=m.facesRight)
>>> print(v0.faceValue.constraintMask)
[False False False False False False True False True True False True]
>>> print(v0.faceValue)
[ 0.  0.  0.  0.  0.  1.  0.  3.  1.  0.  3.]
>>> v1 = CellVariable(mesh=m)
>>> v1.constrain(1., where=(x < 1) & (y < 1))
>>> print(v1.constraintMask)
[ True False False False]
>>> print(v1)
[ 1.  0.  0.  0.]
>>> v1.constrain(3., where=(x > 1) & (y > 1))
>>> print(v1.constraintMask)
[ True False False  True]
>>> print(v1)
[ 1.  0.  0.  3.]
```

copy()

Make an duplicate of the *Variable*

```
>>> a = Variable(value=3)
>>> b = a.copy()
```

(continues on next page)

(continued from previous page)

```
>>> b
Variable(value=array(3))
```

The duplicate will not reflect changes made to the original

```
>>> a.setValue(5)
>>> b
Variable(value=array(3))
```

Check that this works for arrays.

```
>>> a = Variable(value=numerix.array([0, 1, 2]))
>>> b = a.copy()
>>> b
Variable(value=array([0, 1, 2]))
>>> a[1] = 3
>>> b
Variable(value=array([0, 1, 2]))
```

property divergence

the divergence of *self*, \vec{u} ,

$$\nabla \cdot \vec{u} \approx \frac{\sum_f (\vec{u} \cdot \hat{n})_f A_f}{V_P}$$

Returns

divergence – one rank lower than *self*

Return type

fipy.variables.cellVariable.CellVariable

Examples

```
>>> from fipy.meshes import Grid2D
>>> from fipy.variables.cellVariable import CellVariable
>>> mesh = Grid2D(nx=3, ny=2)
>>> from builtins import range
>>> var = CellVariable(mesh=mesh, value=list(range(3*2)))
>>> print(var.faceGrad.divergence)
[ 4.  3.  2. -2. -3. -4.]
```

dot(*other*, *opShape=None*, *operatorClass=None*)

Return the mesh-element-by-mesh-element (cell-by-cell, face-by-face, etc.) scalar product

$$\text{extself} \cdot \text{extother}$$

Both *self* and *other* can be of arbitrary rank, and *other* does not need to be a *MeshVariable*.

getSctype(*default=None*)

Returns the Numpy *sctype* of the underlying array.

```
>>> Variable(1).getSctype() == numerix.NUMERIX.obj2sctype(numerix.array(1))
True
>>> Variable(1.).getSctype() == numerix.NUMERIX.obj2sctype(numerix.array(1.))
True
>>> Variable((1, 1.)).getSctype() == numerix.NUMERIX.obj2sctype(numerix.
->array((1., 1.)))
True
```

inBaseUnits()

Return the value of the *Variable* with all units reduced to their base SI elements.

```
>>> e = Variable(value="2.7 Hartree*Nav")
>>> print(e.inBaseUnits().allclose("7088849.01085 kg*m**2/s**2/mol"))
1
```

inUnitsOf(*units)

Returns one or more *Variable* objects that express the same physical quantity in different units. The units are specified by strings containing their names. The units must be compatible with the unit of the object. If one unit is specified, the return value is a single *Variable*.

```
>>> freeze = Variable('0 degC')
>>> print(freeze.inUnitsOf('degF').allclose("32.0 degF"))
1
```

If several units are specified, the return value is a tuple of *Variable* instances with one element per unit such that the sum of all quantities in the tuple equals the the original quantity and all the values except for the last one are integers. This is used to convert to irregular unit systems like hour/minute/second. The original object will not be changed.

```
>>> t = Variable(value=314159., unit='s')
>>> from builtins import zip
>>> print(numerix.allclose([e.allclose(v) for (e, v) in zip(t.inUnitsOf('d', 'h',
->, 'min', 's'),
...
->'15.0 min', '59.0 s')], [
...                                     ['3.0 d', '15.0 h',
...                                     True]))
1
```

property mag

The magnitude of the *Variable*, e.g., $|\vec{\psi}| = \sqrt{\vec{\psi} \cdot \vec{\psi}}$.

max(axis=None)

Return the maximum along a given axis.

min(axis=None)

```
>>> from fipy import Grid2D, CellVariable
>>> mesh = Grid2D(nx=5, ny=5)
>>> x, y = mesh.cellCenters
>>> v = CellVariable(mesh=mesh, value=x*y)
>>> print(v.min())
0.25
```

rdot(*other*, *opShape=None*, *operatorClass=None*)

Return the mesh-element-by-mesh-element (cell-by-cell, face-by-face, etc.) scalar product

$$\text{ext}_{\text{other}} \cdot \text{ext}_{\text{self}}$$

Both *self* and *other* can be of arbitrary rank, and *other* does not need to be a *MeshVariable*.

release(*constraint*)

Remove *constraint* from *self*

```
>>> from fipy import *
>>> m = Grid1D(nx=3)
>>> v = CellVariable(mesh=m, value=m.cellCenters[0])
>>> c0 = Constraint(0., where=m.facesLeft)
>>> v.constrain(c0)
>>> c1 = Constraint(3., where=m.facesRight)
>>> v.faceValue.constrain(c1)
>>> print(v.faceValue)
[ 0.  1.  2.  3.]
>>> v.faceValue.release(constraint=c0)
>>> print(v.faceValue)
[ 0.5  1.   2.   3. ]
>>> v.faceValue.release(constraint=c1)
>>> print(v.faceValue)
[ 0.5  1.   2.   2.5]
```

setValue(*value*, *unit=None*, *where=None*)

Set the value of the Variable. Can take a masked array.

```
>>> a = Variable((1, 2, 3))
>>> a.setValue(5, where=(1, 0, 1))
>>> print(a)
[5 2 5]
```

```
>>> b = Variable((4, 5, 6))
>>> a.setValue(b, where=(1, 0, 1))
>>> print(a)
[4 2 6]
>>> print(b)
[4 5 6]
>>> a.value = 3
>>> print(a)
[3 3 3]
```

```
>>> b = numerix.array((3, 4, 5))
>>> a.value = b
>>> a[:] = 1
>>> print(b)
[3 4 5]
```

```
>>> a.setValue((4, 5, 6), where=(1, 0))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

property shape

```
>>> from fipy.meshes import Grid2D
>>> from fipy.variables.cellVariable import CellVariable
>>> mesh = Grid2D(nx=2, ny=3)
>>> var = CellVariable(mesh=mesh)
>>> print(numerix.allequal(var.shape, (6,)))
True
>>> print(numerix.allequal(var.arithmeticFaceValue.shape, (17,)))
True
>>> print(numerix.allequal(var.grad.shape, (2, 6)))
True
>>> print(numerix.allequal(var.faceGrad.shape, (2, 17)))
True
```

Have to account for zero length arrays

```
>>> from fipy import Grid1D
>>> m = Grid1D(nx=0)
>>> v = CellVariable(mesh=m, elementshape=(2,))
>>> numerix.allequal((v * 1).shape, (2, 0))
True
```

std(*axis=None*, *kwargs*)**

Evaluate standard deviation of all the elements of a *MeshVariable*.

Adapted from <http://mpitutorial.com/tutorials/mpi-reduce-and-allreduce/>

```
>>> import fipy as fp
>>> mesh = fp.Grid2D(nx=2, ny=2, dx=2., dy=5.)
>>> var = fp.CellVariable(value=(1., 2., 3., 4.), mesh=mesh)
>>> print((var.std()**2).allclose(1.25))
True
```

property unit

Return the unit object of *self*.

```
>>> Variable(value="1 m").unit
<PhysicalUnit m>
```

property value

“Evaluate” the *Variable* and return its value (longhand)

```
>>> a = Variable(value=3)
>>> print(a.value)
3
>>> b = a + 4
>>> b
(Variable(value=array(3)) + 4)
>>> b.value
7
```

22.10.34 fipy.variables.surfactantConvectionVariable

Classes

<code>SurfactantConvectionVariable(*args, **kwds)</code>	Convection coefficient for the <i>ConservativeSurfactantEquation</i> .
--	--

```
class fipy.variables.surfactantConvectionVariable(*args,
                                                **kwds)
```

Bases: `FaceVariable`

Convection coefficient for the *ConservativeSurfactantEquation*. The coefficient only has a value for a negative *distanceVar*.

Simple one dimensional test:

```
>>> from fipy.variables.cellVariable import CellVariable
>>> from fipy.meshes import Grid2D
>>> mesh = Grid2D(nx = 3, ny = 1, dx = 1., dy = 1.)
>>> from fipy.variables.distanceVariable import DistanceVariable
>>> distanceVar = DistanceVariable(mesh, value = (-.5, .5, 1.5))
>>> ## answer = numerix.zeros((2, mesh.numberOfFaces), 'd')
>>> answer = FaceVariable(mesh=mesh, rank=1, value=0.).globalValue
>>> answer[0, 7] = -1
>>> print(numerix.allclose(SurfactantConvectionVariable(distanceVar).globalValue, answer))
True
```

Change the dimensions:

```
>>> mesh = Grid2D(nx = 3, ny = 1, dx = .5, dy = .25)
>>> distanceVar = DistanceVariable(mesh, value = (-.25, .25, .75))
>>> answer[0, 7] = -.5
>>> print(numerix.allclose(SurfactantConvectionVariable(distanceVar).globalValue, answer))
True
```

Two dimensional example:

```
>>> mesh = Grid2D(nx = 2, ny = 2, dx = 1., dy = 1.)
>>> distanceVar = DistanceVariable(mesh, value = (-1.5, -.5, -.5, .5))
>>> answer = FaceVariable(mesh=mesh, rank=1, value=0.).globalValue
>>> answer[1, 2] = -.5
>>> answer[1, 3] = -1
>>> answer[0, 7] = -.5
>>> answer[0, 10] = -1
>>> print(numerix.allclose(SurfactantConvectionVariable(distanceVar).globalValue, answer))
True
```

Larger grid:

```
>>> mesh = Grid2D(nx = 3, ny = 3, dx = 1., dy = 1.)
>>> distanceVar = DistanceVariable(mesh, value = (1.5, .5, 1.5,
...                                         .5, -.5, .5,
...                                         1.5, .5, 1.5))
...
>>> answer = FaceVariable(mesh=mesh, rank=1, value=0.).globalValue
>>> answer[1, 4] = .25
>>> answer[1, 7] = -.25
>>> answer[0, 17] = .25
>>> answer[0, 18] = -.25
>>> print(numerix.allclose(SurfactantConvectionVariable(distanceVar).globalValue,
...                           answer))
True
```

`__abs__()`

Following test it to fix a bug with C inline string using `abs()` instead of `fabs()`

```
>>> print(abs(Variable(2.3) - Variable(1.2)))
1.1
```

Check representation works with different versions of numpy

```
>>> print(repr(abs(Variable(2.3))))
numerix.fabs(Variable(value=array(2.3)))
```

`__and__(other)`

This test case has been added due to a weird bug that was appearing.

```
>>> a = Variable(value=(0, 0, 1, 1))
>>> b = Variable(value=(0, 1, 0, 1))
>>> print(numerix.equal((a == 0) & (b == 1), [False, True, False, False]).all())
True
>>> print(a & b)
[0 0 0 1]
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx=4)
>>> from fipy.variables.cellVariable import CellVariable
>>> a = CellVariable(value=(0, 0, 1, 1), mesh=mesh)
>>> b = CellVariable(value=(0, 1, 0, 1), mesh=mesh)
>>> print(numerix.allequal((a == 0) & (b == 1), [False, True, False, False]))
True
>>> print(a & b)
[0 0 0 1]
```

`__array__(t=None)`

Attempt to convert the *Variable* to a numerix *array* object

```
>>> v = Variable(value=[2, 3])
>>> print(numerix.array(v))
[2 3]
```

A dimensional *Variable* will convert to the numeric value in its base units

```
>>> v = Variable(value=[2, 3], unit="mm")
>>> numerix.array(v)
array([ 0.002,  0.003])
```

__array_wrap__(arr, context=None)

Required to prevent numpy not calling the reverse binary operations. Both the following tests are examples ufuncs.

```
>>> print(type(numerix.array([1.0, 2.0]) * Variable([1.0, 2.0])))
<class 'fipy.variables.binaryOperatorVariable...binOp'>
```

```
>>> from scipy.special import gamma as Gamma
>>> print(type(Gamma(Variable([1.0, 2.0]))))
<class 'fipy.variables.unaryOperatorVariable...unOp'>
```

__bool__(self)

```
>>> print(bool(Variable(value=0)))
0
>>> print(bool(Variable(value=(0, 0, 1, 1))))
Traceback (most recent call last):
...
ValueError: The truth value of an array with more than one element is ambiguous.
→ Use a.any() or a.all()
```

__call__(self)

“Evaluate” the *Variable* and return its value

```
>>> a = Variable(value=3)
>>> print(a())
3
>>> b = a + 4
>>> b
(Variable(value=array(3)) + 4)
>>> b()
7
```

__eq__(other)

Test if a *Variable* is equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a == 4)
>>> b
(Variable(value=array(3)) == 4)
>>> b()
0
```

__ge__(other)

Test if a *Variable* is greater than or equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a >= 4)
```

(continues on next page)

(continued from previous page)

```
>>> b
(Variable(value=array(3)) >= 4)
>>> b()
0
>>> a.value = 4
>>> print(b())
1
>>> a.value = 5
>>> print(b())
1
```

__getitem__(index)

“Evaluate” the *Variable* and return the specified element

```
>>> a = Variable(value=((3., 4.), (5., 6.)), unit="m") + "4 m"
>>> print(a[1, 1])
10.0 m
```

It is an error to slice a *Variable* whose *value* is not sliceable

```
>>> Variable(value=3)[2]
Traceback (most recent call last):
...
IndexError: 0-d arrays can't be indexed
```

__getstate__()

Used internally to collect the necessary information to pickle the *MeshVariable* to persistent storage.

__gt__(other)

Test if a *Variable* is greater than another quantity

```
>>> a = Variable(value=3)
>>> b = (a > 4)
>>> b
(Variable(value=array(3)) > 4)
>>> print(b())
0
>>> a.value = 5
>>> print(b())
1
```

__hash__()

Return hash(self).

__invert__()

Returns logical “not” of the *Variable*

```
>>> a = Variable(value=True)
>>> print(~a)
False
```

__le__(other)

Test if a *Variable* is less than or equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a <= 4)
>>> b
(Variable(value=array(3)) <= 4)
>>> b()
1
>>> a.value = 4
>>> print(b())
1
>>> a.value = 5
>>> print(b())
0
```

__lt__(other)

Test if a *Variable* is less than another quantity

```
>>> a = Variable(value=3)
>>> b = (a < 4)
>>> b
(Variable(value=array(3)) < 4)
>>> b()
1
>>> a.value = 4
>>> print(b())
0
>>> print(10000000000000000 * Variable(1) < 1.)
0
>>> print(1000 * Variable(1) < 1.)
0
```

Python automatically reverses the arguments when necessary

```
>>> 4 > Variable(value=3)
(Variable(value=array(3)) < 4)
```

__ne__(other)

Test if a *Variable* is not equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a != 4)
>>> b
(Variable(value=array(3)) != 4)
>>> b()
1
```

static __new__(cls, *args, **kwds)**__nonzero__()**

```
>>> print(bool(Variable(value=0)))
0
>>> print(bool(Variable(value=(0, 0, 1, 1))))
Traceback (most recent call last):
```

(continues on next page)

(continued from previous page)

```

    ...
ValueError: The truth value of an array with more than one element is ambiguous.
→ Use a.any() or a.all()

```

__or__(other)

This test case has been added due to a weird bug that was appearing.

```

>>> a = Variable(value=(0, 0, 1, 1))
>>> b = Variable(value=(0, 1, 0, 1))
>>> print(numerix.equal((a == 0) | (b == 1), [True, True, False, True]).all())
True
>>> print(a | b)
[0 1 1 1]
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx=4)
>>> from fipy.variables.cellVariable import CellVariable
>>> a = CellVariable(value=(0, 0, 1, 1), mesh=mesh)
>>> b = CellVariable(value=(0, 1, 0, 1), mesh=mesh)
>>> print(numerix.allequal((a == 0) | (b == 1), [True, True, False, True]))
True
>>> print(a | b)
[0 1 1 1]

```

__pow__(other)

return self**other, or self raised to power other

```

>>> print(Variable(1, "mol/l")**3)
1.0 mol**3/l**3
>>> print((Variable(1, "mol/l")**3).unit)
<PhysicalUnit mol**3/l**3>

```

__repr__()

Return repr(self).

__setstate__(dict)

Used internally to create a new *Variable* from pickled persistent storage.

__str__()

Return str(self).

all(axis=None)

```

>>> print(Variable(value=(0, 0, 1, 1)).all())
0
>>> print(Variable(value=(1, 1, 1, 1)).all())
1

```

allclose(other, rtol=1e-05, atol=1e-08)

```

>>> var = Variable((1, 1))
>>> print(var.allclose((1, 1)))
1

```

(continues on next page)

(continued from previous page)

```
>>> print(var.allclose((1,)))
1
```

The following test is to check that the system does not run out of memory.

```
>>> from fipy.tools import numerix
>>> var = Variable(numerix.ones(10000))
>>> print(var.allclose(numerix.zeros(10000, '1')))
False
```

any(*axis=None*)

```
>>> print(Variable(value=0).any())
0
>>> print(Variable(value=(0, 0, 1, 1)).any())
1
```

constraint(*value, where=None*)

Constrain the *Variable* to have a *value* at an index or mask location specified by *where*.

```
>>> v = Variable((0, 1, 2, 3))
>>> v.constrain(2, numerix.array((True, False, False, False)))
>>> print(v)
[2 1 2 3]
>>> v[:] = 10
>>> print(v)
[ 2 10 10 10]
>>> v.constrain(5, numerix.array((False, False, True, False)))
>>> print(v)
[ 2 10  5 10]
>>> v[:] = 6
>>> print(v)
[2 6 5 6]
>>> v.constrain(8)
>>> print(v)
[8 8 8 8]
>>> v[:] = 10
>>> print(v)
[8 8 8 8]
>>> del v.constraints[2]
>>> print(v)
[ 2 10  5 10]
```

```
>>> from fipy.variables.cellVariable import CellVariable
>>> from fipy.meshes import Grid2D
>>> m = Grid2D(nx=2, ny=2)
>>> x, y = m.cellCenters
>>> v = CellVariable(mesh=m, rank=1, value=(x, y))
>>> v.constrain(((0.,), (-1.,)), where=m.facesLeft)
>>> print(v.faceValue)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.    1.    1.5  0.    1.    1.5]
 [ 0.5  0.5  1.    1.    1.5  1.5 -1.    0.5  0.5 -1.    1.5  1.5]]
```

Parameters

- **value** (float or *array_like*) – The value of the constraint
- **where** (*array_like* of `bool`) – The constraint mask or index specifying the location of the constraint

property constraintMask

Test that `constraintMask` returns a Variable that updates itself whenever the constraints change.

```
>>> from fipy import *
```



```
>>> m = Grid2D(nx=2, ny=2)
>>> x, y = m.cellCenters
>>> v0 = CellVariable(mesh=m)
>>> v0.constrain(1., where=m.facesLeft)
>>> print(v0.faceValue.constraintMask)
[False False False False False False True False False True False False]
>>> print(v0.faceValue)
[ 0.  0.  0.  0.  0.  0.  1.  0.  0.  1.  0.  0.]
>>> v0.constrain(3., where=m.facesRight)
>>> print(v0.faceValue.constraintMask)
[False False False False False False True False True True False True]
>>> print(v0.faceValue)
[ 0.  0.  0.  0.  0.  0.  1.  0.  3.  1.  0.  3.]
>>> v1 = CellVariable(mesh=m)
>>> v1.constrain(1., where=(x < 1) & (y < 1))
>>> print(v1.constraintMask)
[ True False False False]
>>> print(v1)
[ 1.  0.  0.  0.]
>>> v1.constrain(3., where=(x > 1) & (y > 1))
>>> print(v1.constraintMask)
[ True False False  True]
>>> print(v1)
[ 1.  0.  0.  3.]
```

copy()

Make an duplicate of the *Variable*

```
>>> a = Variable(value=3)
>>> b = a.copy()
>>> b
Variable(value=array(3))
```

The duplicate will not reflect changes made to the original

```
>>> a.setValue(5)
>>> b
Variable(value=array(3))
```

Check that this works for arrays.

```
>>> a = Variable(value=numerix.array([0, 1, 2]))
>>> b = a.copy()
>>> b
Variable(value=array([0, 1, 2]))
>>> a[1] = 3
>>> b
Variable(value=array([0, 1, 2]))
```

property divergence

the divergence of *self*, \vec{u} ,

$$\nabla \cdot \vec{u} \approx \frac{\sum_f (\vec{u} \cdot \hat{n})_f A_f}{V_P}$$

Returns

divergence – one rank lower than *self*

Return type

fipy.variables.cellVariable.CellVariable

Examples

```
>>> from fipy.meshes import Grid2D
>>> from fipy.variables.cellVariable import CellVariable
>>> mesh = Grid2D(nx=3, ny=2)
>>> from builtins import range
>>> var = CellVariable(mesh=mesh, value=list(range(3*2)))
>>> print(var.faceGrad.divergence)
[ 4.  3.  2. -2. -3. -4.]
```

dot(*other*, *opShape=None*, *operatorClass=None*)

Return the mesh-element-by-mesh-element (cell-by-cell, face-by-face, etc.) scalar product

$$\text{extself} \cdot \text{extother}$$

Both *self* and *other* can be of arbitrary rank, and *other* does not need to be a *MeshVariable*.

getSctype(*default=None*)

Returns the Numpy *sctype* of the underlying array.

```
>>> Variable(1).getSctype() == numerix.NUMERIX.obj2sctype(numerix.array(1))
True
>>> Variable(1.).getSctype() == numerix.NUMERIX.obj2sctype(numerix.array(1.))
True
>>> Variable((1, 1.)).getSctype() == numerix.NUMERIX.obj2sctype(numerix.
->array((1., 1.)))
True
```

inBaseUnits()

Return the value of the *Variable* with all units reduced to their base SI elements.

```
>>> e = Variable(value="2.7 Hartree*Nav")
>>> print(e.inBaseUnits().allclose("7088849.01085 kg*m**2/s**2/mol"))
1
```

inUnitsOf(*units)

Returns one or more *Variable* objects that express the same physical quantity in different units. The units are specified by strings containing their names. The units must be compatible with the unit of the object. If one unit is specified, the return value is a single *Variable*.

```
>>> freeze = Variable('0 degC')
>>> print(freeze.inUnitsOf('degF').allclose("32.0 degF"))
1
```

If several units are specified, the return value is a tuple of *Variable* instances with one element per unit such that the sum of all quantities in the tuple equals the the original quantity and all the values except for the last one are integers. This is used to convert to irregular unit systems like hour/minute/second. The original object will not be changed.

```
>>> t = Variable(value=314159., unit='s')
>>> from builtins import zip
>>> print(numerix.allclose([e.allclose(v) for (e, v) in zip(t.inUnitsOf('d', 'h',
...     'min', 's'),
...     ['3.0 d', '15.0 h',
...     '15.0 min', '59.0 s'])],
...     True))
1
```

property mag

The magnitude of the *Variable*, e.g., $|\vec{\psi}| = \sqrt{\vec{\psi} \cdot \vec{\psi}}$.

max(axis=None)

Return the maximum along a given axis.

min(axis=None)

```
>>> from fipy import Grid2D, CellVariable
>>> mesh = Grid2D(nx=5, ny=5)
>>> x, y = mesh.cellCenters
>>> v = CellVariable(mesh=mesh, value=x*y)
>>> print(v.min())
0.25
```

rdot(other, opShape=None, operatorClass=None)

Return the mesh-element-by-mesh-element (cell-by-cell, face-by-face, etc.) scalar product

$$\text{extoother} \cdot \text{extself}$$

Both *self* and *other* can be of arbitrary rank, and *other* does not need to be a *MeshVariable*.

release(constraint)

Remove *constraint* from *self*

```
>>> v = Variable((0, 1, 2, 3))
>>> v.constrain(2, numerix.array((True, False, False, False)))
>>> v[:] = 10
>>> from fipy.boundaryConditions.constraint import Constraint
>>> c1 = Constraint(5, numerix.array((False, False, True, False)))
>>> v.constrain(c1)
```

(continues on next page)

(continued from previous page)

```
>>> v[:] = 6
>>> v.constrain(8)
>>> v[:] = 10
>>> del v.constraints[2]
>>> v.release(constraint=c1)
>>> print(v)
[ 2 10 10 10]
```

setValue(value, unit=None, where=None)

Set the value of the Variable. Can take a masked array.

```
>>> a = Variable((1, 2, 3))
>>> a.setValue(5, where=(1, 0, 1))
>>> print(a)
[5 2 5]
```

```
>>> b = Variable((4, 5, 6))
>>> a.setValue(b, where=(1, 0, 1))
>>> print(a)
[4 2 6]
>>> print(b)
[4 5 6]
>>> a.value = 3
>>> print(a)
[3 3 3]
```

```
>>> b = numerix.array((3, 4, 5))
>>> a.value = b
>>> a[:] = 1
>>> print(b)
[3 4 5]
```

```
>>> a.setValue((4, 5, 6), where=(1, 0))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

property shape

```
>>> from fipy.meshes import Grid2D
>>> from fipy.variables.cellVariable import CellVariable
>>> mesh = Grid2D(nx=2, ny=3)
>>> var = CellVariable(mesh=mesh)
>>> print(numerix.allequal(var.shape, (6,)))
True
>>> print(numerix.allequal(var.arithmeticFaceValue.shape, (17,)))
True
>>> print(numerix.allequal(var.grad.shape, (2, 6)))
True
>>> print(numerix.allequal(var.faceGrad.shape, (2, 17)))
True
```

Have to account for zero length arrays

```
>>> from fipy import Grid1D
>>> m = Grid1D(nx=0)
>>> v = CellVariable(mesh=m, elementshape=(2,))
>>> numerix.allequal((v * 1).shape, (2, 0))
True
```

std(*axis=None*, *kwargs*)**

Evaluate standard deviation of all the elements of a *MeshVariable*.

Adapted from <http://mpitutorial.com/tutorials/mpi-reduce-and-allreduce/>

```
>>> import fipy as fp
>>> mesh = fp.Grid2D(nx=2, ny=2, dx=2., dy=5.)
>>> var = fp.CellVariable(value=(1., 2., 3., 4.), mesh=mesh)
>>> print((var.std()**2).allclose(1.25))
True
```

property unit

Return the unit object of *self*.

```
>>> Variable(value="1 m").unit
<PhysicalUnit m>
```

property value

“Evaluate” the *Variable* and return its value (longhand)

```
>>> a = Variable(value=3)
>>> print(a.value)
3
>>> b = a + 4
>>> b
(Variable(value=array(3)) + 4)
>>> b.value
7
```

22.10.35 fipy.variables.surfactantVariable

Classes

SurfactantVariable(*args, **kwds)

The *SurfactantVariable* maintains a conserved volumetric concentration on cells adjacent to, but in front of, the interface.

class fipy.variables.surfactantVariable.SurfactantVariable(*args, **kwds)

Bases: *CellVariable*

The *SurfactantVariable* maintains a conserved volumetric concentration on cells adjacent to, but in front of, the interface. The *value* argument corresponds to the initial concentration of surfactant on the interface (moles divided by area). The value held by the *SurfactantVariable* is actually a volume density (moles divided by volume).

A simple 1D test:

```
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(dx = 1., nx = 4)
>>> from fipy.variables.distanceVariable import DistanceVariable
>>> distanceVariable = DistanceVariable(mesh = mesh,
...                                         value = (-1.5, -0.5, 0.5, 941.5))
...
>>> surfactantVariable = SurfactantVariable(value = 1,
...                                            distanceVar = distanceVariable)
...
>>> print(numerix.allclose(surfactantVariable, (0, 0., 1., 0)))
1
```

A 2D test case:

```
>>> from fipy.meshes import Grid2D
>>> mesh = Grid2D(dx = 1., dy = 1., nx = 3, ny = 3)
>>> distanceVariable = DistanceVariable(mesh = mesh,
...                                         value = (1.5, 0.5, 1.5,
...                                                   0.5, -0.5, 0.5,
...                                                   1.5, 0.5, 1.5))
...
>>> surfactantVariable = SurfactantVariable(value = 1,
...                                            distanceVar = distanceVariable)
...
>>> print(numerix.allclose(surfactantVariable, (0, 1, 0, 1, 0, 1, 0, 1, 0)))
1
```

Another 2D test case:

```
>>> mesh = Grid2D(dx = .5, dy = .5, nx = 2, ny = 2)
>>> distanceVariable = DistanceVariable(mesh = mesh,
...                                         value = (-0.5, 0.5, 0.5, 1.5))
...
>>> surfactantVariable = SurfactantVariable(value = 1,
...                                            distanceVar = distanceVariable)
...
>>> print(numerix.allclose(surfactantVariable,
...                           (0, numerix.sqrt(2), numerix.sqrt(2), 0)))
1
```

Parameters

- **value** (*float or array_like*) – The initial value.
- **distanceVar** (*DistanceVariable*) –
- **name** (*str*) – The name of the variable.

__abs__()

Following test it to fix a bug with C inline string using *abs()* instead of *fabs()*

```
>>> print(abs(Variable(2.3) - Variable(1.2)))
1.1
```

Check representation works with different versions of numpy

```
>>> print(repr(abs(Variable(2.3))))
numerix.fabs(Variable(value=array(2.3)))
```

`__and__(other)`

This test case has been added due to a weird bug that was appearing.

```
>>> a = Variable(value=(0, 0, 1, 1))
>>> b = Variable(value=(0, 1, 0, 1))
>>> print(numerix.equal((a == 0) & (b == 1), [False, True, False, False]).all())
True
>>> print(a & b)
[0 0 0 1]
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx=4)
>>> from fipy.variables.cellVariable import CellVariable
>>> a = CellVariable(value=(0, 0, 1, 1), mesh=mesh)
>>> b = CellVariable(value=(0, 1, 0, 1), mesh=mesh)
>>> print(numerix.allequal((a == 0) & (b == 1), [False, True, False, False]))
True
>>> print(a & b)
[0 0 0 1]
```

`__array__(t=None)`

Attempt to convert the *Variable* to a numerix *array* object

```
>>> v = Variable(value=[2, 3])
>>> print(numerix.array(v))
[2 3]
```

A dimensional *Variable* will convert to the numeric value in its base units

```
>>> v = Variable(value=[2, 3], unit="mm")
>>> numerix.array(v)
array([ 0.002,  0.003])
```

`__array_wrap__(arr, context=None)`

Required to prevent numpy not calling the reverse binary operations. Both the following tests are examples ufuncs.

```
>>> print(type(numerix.array([1.0, 2.0]) * Variable([1.0, 2.0])))
<class 'fipy.variables.binaryOperatorVariable...binOp'>
```

```
>>> from scipy.special import gamma as Gamma
>>> print(type(Gamma(Variable([1.0, 2.0]))))
<class 'fipy.variables.unaryOperatorVariable...unOp'>
```

`__bool__()`

```
>>> print(bool(Variable(value=0)))
0
>>> print(bool(Variable(value=(0, 0, 1, 1))))
Traceback (most recent call last):
...
ValueError: The truth value of an array with more than one element is ambiguous.
→ Use a.any() or a.all()
```

`__call__(points=None, order=0, nearestCellIDs=None)`

Interpolates the *CellVariable* to a set of points using a method that has a memory requirement on the order of N_{cells} by N_{points} in general, but uses only N_{cells} when the *CellVariable*'s mesh is a *UniformGrid* object.

Tests

```
>>> from fipy import *
>>> m = Grid2D(nx=3, ny=2)
>>> v = CellVariable(mesh=m, value=m.cellCenters[0])
>>> print(v((0., 1.1, 1.2), (0., 1., 1.)))
[ 0.5  1.5  1.5]
>>> print(v((0., 1.1, 1.2), (0., 1., 1.)), order=1)
[ 0.25  1.1   1.2 ]
>>> m0 = Grid2D(nx=2, ny=2, dx=1., dy=1.)
>>> m1 = Grid2D(nx=4, ny=4, dx=.5, dy=.5)
>>> x, y = m0.cellCenters
>>> v0 = CellVariable(mesh=m0, value=x * y)
>>> print(v0(m1.cellCenters.globalValue))
[ 0.25  0.25  0.75  0.75  0.25  0.25  0.75  0.75  0.75  0.75  2.25  2.25
 0.75  0.75  2.25  2.25]
>>> print(v0(m1.cellCenters.globalValue, order=1))
[ 0.125  0.25   0.5    0.625  0.25   0.375  0.875  1.     0.5     0.875
 1.875  2.25   0.625  1.     2.25   2.625]
```

Parameters

- **points** (tuple or `list` of `tuple`) – A point or set of points in the format (X, Y, Z)
- **order** ({0, 1}) – The order of interpolation, default is 0
- **nearestCellIDs** (`array_like`) – Optional argument if user can calculate own nearest cell IDs array, shape should be same as points

`__eq__(other)`

Test if a *Variable* is equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a == 4)
>>> b
(Variable(value=array(3)) == 4)
>>> b()
()
```

`__ge__(other)`

Test if a *Variable* is greater than or equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a >= 4)
>>> b
(Variable(value=array(3)) >= 4)
>>> b()
()
>>> a.value = 4
>>> print(b())
1
```

(continues on next page)

(continued from previous page)

```
>>> a.value = 5
>>> print(b())
1
```

__getitem__(index)

“Evaluate” the *Variable* and return the specified element

```
>>> a = Variable(value=((3., 4.), (5., 6.)), unit="m") + "4 m"
>>> print(a[1, 1])
10.0 m
```

It is an error to slice a *Variable* whose *value* is not sliceable

```
>>> Variable(value=3)[2]
Traceback (most recent call last):
...
IndexError: 0-d arrays can't be indexed
```

__getstate__()

Used internally to collect the necessary information to pickle the *CellVariable* to persistent storage.

__gt__(other)

Test if a *Variable* is greater than another quantity

```
>>> a = Variable(value=3)
>>> b = (a > 4)
>>> b
(Variable(value=array(3)) > 4)
>>> print(b())
0
>>> a.value = 5
>>> print(b())
1
```

__hash__()

Return hash(self).

__invert__()

Returns logical “not” of the *Variable*

```
>>> a = Variable(value=True)
>>> print(~a)
False
```

__le__(other)

Test if a *Variable* is less than or equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a <= 4)
>>> b
(Variable(value=array(3)) <= 4)
>>> b()
1
```

(continues on next page)

(continued from previous page)

```
>>> a.value = 4
>>> print(b())
1
>>> a.value = 5
>>> print(b())
0
```

__lt__(other)Test if a *Variable* is less than another quantity

```
>>> a = Variable(value=3)
>>> b = (a < 4)
>>> b
(Variable(value=array(3)) < 4)
>>> b()
1
>>> a.value = 4
>>> print(b())
0
>>> print(10000000000000000000 * Variable(1) < 1.)
0
>>> print(1000 * Variable(1) < 1.)
0
```

Python automatically reverses the arguments when necessary

```
>>> 4 > Variable(value=3)
(Variable(value=array(3)) < 4)
```

__ne__(other)Test if a *Variable* is not equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a != 4)
>>> b
(Variable(value=array(3)) != 4)
>>> b()
1
```

static __new__(cls, *args, **kwds)**__nonzero__()**

```
>>> print(bool(Variable(value=0)))
0
>>> print(bool(Variable(value=(0, 0, 1, 1))))
Traceback (most recent call last):
...
ValueError: The truth value of an array with more than one element is ambiguous.
→ Use a.any() or a.all()
```

__or__(other)

This test case has been added due to a weird bug that was appearing.

```
>>> a = Variable(value=(0, 0, 1, 1))
>>> b = Variable(value=(0, 1, 0, 1))
>>> print(numerix.equal((a == 0) | (b == 1), [True, True, False, True]).all())
True
>>> print(a | b)
[0 1 1 1]
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx=4)
>>> from fipy.variables.cellVariable import CellVariable
>>> a = CellVariable(value=(0, 0, 1, 1), mesh=mesh)
>>> b = CellVariable(value=(0, 1, 0, 1), mesh=mesh)
>>> print(numerix.allequal((a == 0) | (b == 1), [True, True, False, True]))
True
>>> print(a | b)
[0 1 1 1]
```

__pow__(other)

return self**other, or self raised to power other

```
>>> print(Variable(1, "mol/l")**3)
1.0 mol**3/l**3
>>> print((Variable(1, "mol/l")**3).unit)
<PhysicalUnit mol**3/l**3>
```

__repr__()

Return repr(self).

__setstate__(dict)

Used internally to create a new *CellVariable* from pickled persistent storage.

__str__()

Return str(self).

all(axis=None)

```
>>> print(Variable(value=(0, 0, 1, 1)).all())
0
>>> print(Variable(value=(1, 1, 1, 1)).all())
1
```

allclose(other, rtol=1e-05, atol=1e-08)

```
>>> var = Variable((1, 1))
>>> print(var.allclose((1, 1)))
1
>>> print(var.allclose((1,)))
1
```

The following test is to check that the system does not run out of memory.

```
>>> from fipy.tools import numerix
>>> var = Variable(numerix.ones(10000))
>>> print(var.allclose(numerix.zeros(10000, 'l')))
False
```

any(*axis=None*)

```
>>> print(Variable(value=0).any())
0
>>> print(Variable(value=(0, 0, 1, 1)).any())
1
```

property arithmeticFaceValue

Returns a *FaceVariable* whose value corresponds to the arithmetic interpolation of the adjacent cells:

$$\phi_f = (\phi_1 - \phi_2) \frac{d_{f2}}{d_{12}} + \phi_2$$

```
>>> from fipy.meshes import Grid1D
>>> from fipy import numerix
>>> mesh = Grid1D(dx = (1., 1.))
>>> L = 1
>>> R = 2
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (0.5 / 1.) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (2., 4.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (1.0 / 3.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (10., 100.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (5.0 / 55.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

property cellVolumeAverage

Return the cell-volume-weighted average of the *CellVariable*:

$$\langle \phi \rangle_{\text{vol}} = \frac{\sum_{\text{cells}} \phi_{\text{cell}} V_{\text{cell}}}{\sum_{\text{cells}} V_{\text{cell}}}$$

```
>>> from fipy.meshes import Grid2D
>>> from fipy.variables.cellVariable import CellVariable
>>> mesh = Grid2D(nx = 3, ny = 1, dx = .5, dy = .1)
>>> var = CellVariable(value = (1, 2, 6), mesh = mesh)
>>> print(var.cellVolumeAverage)
3.0
```

constraint(*value*, *where=None*)

Constrains the *CellVariable* to *value* at a location specified by *where*.

```
>>> from fipy import *
>>> m = Grid1D(nx=3)
>>> v = CellVariable(mesh=m, value=m.cellCenters[0])
>>> v.constrain(0., where=m.facesLeft)
>>> v.faceGrad.constrain([1.], where=m.facesRight)
>>> print(v.faceGrad)
[[ 1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 0.   1.   2.   2.5]
```

Changing the constraint changes the dependencies

```
>>> v.constrain(1., where=m.facesLeft)
>>> print(v.faceGrad)
[[-1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 1.   1.   2.   2.5]
```

Constraints can be *Variable*

```
>>> c = Variable(0.)
>>> v.constrain(c, where=m.facesLeft)
>>> print(v.faceGrad)
[[ 1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 0.   1.   2.   2.5]
>>> c.value = 1.
>>> print(v.faceGrad)
[[-1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 1.   1.   2.   2.5]
```

Constraints can have a *Variable* mask.

```
>>> v = CellVariable(mesh=m)
>>> mask = FaceVariable(mesh=m, value=m.facesLeft)
>>> v.constrain(1., where=mask)
>>> print(v.faceValue)
[ 1.  0.  0.  0.]
>>> mask[:] = mask | m.facesRight
>>> print(v.faceValue)
[ 1.  0.  0.  1.]
```

property constraintMask

Test that *constraintMask* returns a Variable that updates itself whenever the constraints change.

```
>>> from fipy import *
```

```
>>> m = Grid2D(nx=2, ny=2)
>>> x, y = m.cellCenters
>>> v0 = CellVariable(mesh=m)
>>> v0.constrain(1., where=m.facesLeft)
>>> print(v0.faceValue.constraintMask)
```

(continues on next page)

(continued from previous page)

```
[False False False False False False True False False True False False]
>>> print(v0.faceValue)
[ 0.  0.  0.  0.  0.  1.  0.  0.  1.  0.  0.]
>>> v0.constrain(3., where=m.facesRight)
>>> print(v0.faceValue.constraintMask)
[False False False False False False True False True True False True]
>>> print(v0.faceValue)
[ 0.  0.  0.  0.  0.  1.  0.  3.  1.  0.  3.]
>>> v1 = CellVariable(mesh=m)
>>> v1.constrain(1., where=(x < 1) & (y < 1))
>>> print(v1.constraintMask)
[ True False False False]
>>> print(v1)
[ 1.  0.  0.  0.]
>>> v1.constrain(3., where=(x > 1) & (y > 1))
>>> print(v1.constraintMask)
[ True False False  True]
>>> print(v1)
[ 1.  0.  0.  3.]
```

copy()Make an duplicate of the *Variable*

```
>>> a = Variable(value=3)
>>> b = a.copy()
>>> b
Variable(value=array(3))
```

The duplicate will not reflect changes made to the original

```
>>> a.setValue(5)
>>> b
Variable(value=array(3))
```

Check that this works for arrays.

```
>>> a = Variable(value=numerix.array((0, 1, 2)))
>>> b = a.copy()
>>> b
Variable(value=array([0, 1, 2]))
>>> a[1] = 3
>>> b
Variable(value=array([0, 1, 2]))
```

dot(*other*, *opShape=None*, *operatorClass=None*)

Return the mesh-element–by–mesh-element (cell-by-cell, face-by-face, etc.) scalar product

$$\text{ext}self \cdot \text{ext}other$$

Both *self* and *other* can be of arbitrary rank, and *other* does not need to be a *MeshVariable*.**property faceGrad**Return $\nabla\phi$ as a rank-1 *FaceVariable* using differencing for the normal direction(second-order gradient).

property faceGradAverage

Deprecated since version 3.3: use `grad.arithmeticFaceValue` instead

Return $\nabla\phi$ as a rank-1 *FaceVariable* using averaging for the normal direction(second-order gradient)

property faceValue

Returns a *FaceVariable* whose value corresponds to the arithmetic interpolation of the adjacent cells:

$$\phi_f = (\phi_1 - \phi_2) \frac{d_{f2}}{d_{12}} + \phi_2$$

```
>>> from fipy.meshes import Grid1D
>>> from fipy import numerix
>>> mesh = Grid1D(dx = (1., 1.))
>>> L = 1
>>> R = 2
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (0.5 / 1.) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (2., 4.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (1.0 / 3.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (10., 100.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (5.0 / 55.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

property gaussGrad

Return $\frac{1}{V_P} \sum_f \vec{n}\phi_f A_f$ as a rank-1 *CellVariable* (first-order gradient).

getscctype(*default=None*)

Returns the Numpy *sctype* of the underlying array.

```
>>> Variable(1).getscctype() == numerix.NUMERIX.obj2sctype(numerix.array(1))
True
>>> Variable(1.).getscctype() == numerix.NUMERIX.obj2sctype(numerix.array(1.))
True
>>> Variable((1, 1.)).getscctype() == numerix.NUMERIX.obj2sctype(numerix.
->array((1., 1.)))
True
```

property globalValue

Concatenate and return values from all processors

When running on a single processor, the result is identical to *value*.

property grad

Return $\nabla\phi$ as a rank-1 *CellVariable* (first-order gradient).

property harmonicFaceValue

Returns a *FaceVariable* whose value corresponds to the harmonic interpolation of the adjacent cells:

$$\phi_f = \frac{\phi_1 \phi_2}{(\phi_2 - \phi_1) \frac{d_{f2}}{d_{12}} + \phi_1}$$

```
>>> from fipy.meshes import Grid1D
>>> from fipy import numerix
>>> mesh = Grid1D(dx = (1., 1.))
>>> L = 1
>>> R = 2
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.harmonicFaceValue[mesh.interiorFaces.value]
>>> answer = L * R / ((R - L) * (0.5 / 1.) + L)
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (2., 4.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.harmonicFaceValue[mesh.interiorFaces.value]
>>> answer = L * R / ((R - L) * (1.0 / 3.0) + L)
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (10., 100.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.harmonicFaceValue[mesh.interiorFaces.value]
>>> answer = L * R / ((R - L) * (5.0 / 55.0) + L)
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

inBaseUnits()

Return the value of the *Variable* with all units reduced to their base SI elements.

```
>>> e = Variable(value="2.7 Hartree*Nav")
>>> print(e.inBaseUnits().allclose("7088849.01085 kg*m**2/s**2/mol"))
1
```

inUnitsOf(*units)

Returns one or more *Variable* objects that express the same physical quantity in different units. The units are specified by strings containing their names. The units must be compatible with the unit of the object. If one unit is specified, the return value is a single *Variable*.

```
>>> freeze = Variable('0 degC')
>>> print(freeze.inUnitsOf('degF').allclose("32.0 degF"))
1
```

If several units are specified, the return value is a tuple of *Variable* instances with one element per unit such that the sum of all quantities in the tuple equals the the original quantity and all the values except for the last one are integers. This is used to convert to irregular unit systems like hour/minute/second. The original object will not be changed.

```
>>> t = Variable(value=314159., unit='s')
>>> from builtins import zip
>>> print(numerix.allclose([e.allclose(v) for (e, v) in zip(t.inUnitsOf('d', 'h',
... , 'min', 's'), [
...     '15.0 min', '59.0 s'])], True))
1
```

property interfaceVar

Returns the *SurfactantVariable* rendered as an *_InterfaceSurfactantVariable* which evaluates the surfactant concentration as an area concentration the interface rather than a volumetric concentration.

property leastSquaresGrad

Return $\nabla\phi$, which is determined by solving for $\nabla\phi$ in the following matrix equation,

$$\nabla\phi \cdot \sum_f d_{AP}^2 \vec{n}_{AP} \otimes \vec{n}_{AP} = \sum_f d_{AP}^2 (\vec{n} \cdot \nabla\phi)_{AP}$$

The matrix equation is derived by minimizing the following least squares sum,

$$F(\phi_x, \phi_y) = \sqrt{\sum_f (d_{AP} \vec{n}_{AP} \cdot \nabla\phi - d_{AP} (\vec{n}_{AP} \cdot \nabla\phi)_{AP})^2}$$

Tests

```
>>> from fipy import Grid2D
>>> m = Grid2D(nx=2, ny=2, dx=0.1, dy=2.0)
>>> print(numerix.allclose(CellVariable(mesh=m, value=(0, 1, 3, 6)).leastSquaresGrad.globalValue, [
...     [[8.0, 8.0, 24.0, 24.0],
...      [1.2, 2.0, 1.2, 2.0]]]))
True
```

```
>>> from fipy import Grid1D
>>> print(numerix.allclose(CellVariable(mesh=Grid1D(dx=(2.0, 1.0, 0.5)), value=(0, 1, 2)).leastSquaresGrad.globalValue, [[0.461538461538, 0.8, 1.2]]))
True
```

property mag

The magnitude of the *Variable*, e.g., $|\vec{\psi}| = \sqrt{\vec{\psi} \cdot \vec{\psi}}$.

max(axis=None)

Return the maximum along a given axis.

min(axis=None)

```
>>> from fipy import Grid2D, CellVariable
>>> mesh = Grid2D(nx=5, ny=5)
>>> x, y = mesh.cellCenters
>>> v = CellVariable(mesh=mesh, value=x*y)
>>> print(v.min())
0.25
```

property minmodFaceValue

Returns a *FaceVariable* with a value that is the minimum of the absolute values of the adjacent cells. If the values are of opposite sign then the result is zero:

$$\phi_f = \begin{cases} \phi_1 & \text{when } |\phi_1| \leq |\phi_2|, \\ \phi_2 & \text{when } |\phi_2| < |\phi_1|, \\ 0 & \text{when } \phi_1\phi_2 < 0 \end{cases}$$

```
>>> from fipy import *
>>> print(CellVariable(mesh=Grid1D(nx=2), value=(1, 2)).minmodFaceValue)
[1 1 2]
>>> print(CellVariable(mesh=Grid1D(nx=2), value=(-1, -2)).minmodFaceValue)
[-1 -1 -2]
>>> print(CellVariable(mesh=Grid1D(nx=2), value=(-1, 2)).minmodFaceValue)
[-1 0 2]
```

property old

Return the values of the *CellVariable* from the previous solution sweep.

Combinations of *CellVariable*'s should also return old values.

```
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx = 2)
>>> from fipy.variables.cellVariable import CellVariable
>>> var1 = CellVariable(mesh = mesh, value = (2, 3), hasOld = 1)
>>> var2 = CellVariable(mesh = mesh, value = (3, 4))
>>> v = var1 * var2
>>> print(v)
[ 6 12]
>>> var1.value = ((3, 2))
>>> print(v)
[9 8]
>>> print(v.old)
[ 6 12]
```

The following small test is to correct for a bug when the operator does not just use variables.

```
>>> v1 = var1 * 3
>>> print(v1)
[9 6]
>>> print(v1.old)
[6 9]
```

rdot(other, opShape=None, operatorClass=None)

Return the mesh-element-by-mesh-element (cell-by-cell, face-by-face, etc.) scalar product

$$\text{extother} \cdot \text{extself}$$

Both *self* and *other* can be of arbitrary rank, and *other* does not need to be a *MeshVariable*.

release(constraint)

Remove *constraint* from *self*

```
>>> from fipy import *
>>> m = Grid1D(nx=3)
>>> v = CellVariable(mesh=m, value=m.cellCenters[0])
>>> c = Constraint(0., where=m.facesLeft)
>>> v.constrain(c)
>>> print(v.faceValue)
[ 0.  1.  2.  2.5]
>>> v.release(constraint=c)
>>> print(v.faceValue)
[ 0.5  1.   2.   2.5]
```

setValue(value, unit=None, where=None)

Set the value of the Variable. Can take a masked array.

```
>>> a = Variable((1, 2, 3))
>>> a.setValue(5, where=(1, 0, 1))
>>> print(a)
[5 2 5]
```

```
>>> b = Variable((4, 5, 6))
>>> a.setValue(b, where=(1, 0, 1))
>>> print(a)
[4 2 6]
>>> print(b)
[4 5 6]
>>> a.value = 3
>>> print(a)
[3 3 3]
```

```
>>> b = numerix.array((3, 4, 5))
>>> a.value = b
>>> a[:] = 1
>>> print(b)
[3 4 5]
```

```
>>> a.setValue((4, 5, 6), where=(1, 0))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

property shape

```
>>> from fipy.meshes import Grid2D
>>> from fipy.variables.cellVariable import CellVariable
>>> mesh = Grid2D(nx=2, ny=3)
>>> var = CellVariable(mesh=mesh)
>>> print(numerix.allequal(var.shape, (6,)))
True
>>> print(numerix.allequal(var.arithmeticFaceValue.shape, (17,)))
True
>>> print(numerix.allequal(var.grad.shape, (2, 6)))
True
```

(continues on next page)

(continued from previous page)

```
>>> print(numerix.allequal(var.faceGrad.shape, (2, 17)))
True
```

Have to account for zero length arrays

```
>>> from fipy import Grid1D
>>> m = Grid1D(nx=0)
>>> v = CellVariable(mesh=m, elementshape=(2,))
>>> numerix.allequal((v * 1).shape, (2, 0))
True
```

`std(axis=None, **kwargs)`

Evaluate standard deviation of all the elements of a *MeshVariable*.

Adapted from <http://mpitutorial.com/tutorials/mpi-reduce-and-allreduce/>

```
>>> import fipy as fp
>>> mesh = fp.Grid2D(nx=2, ny=2, dx=2., dy=5.)
>>> var = fp.CellVariable(value=(1., 2., 3., 4.), mesh=mesh)
>>> print((var.std()**2).allclose(1.25))
True
```

`property unit`

Return the unit object of *self*.

```
>>> Variable(value="1 m").unit
<PhysicalUnit m>
```

`updateOld()`

Set the values of the previous solution sweep to the current values.

```
>>> from fipy import *
>>> v = CellVariable(mesh=Grid1D(), hasOld=False)
>>> v.updateOld()
Traceback (most recent call last):
...
AssertionError: The updateOld method requires the CellVariable to have an old_
value. Set hasOld to True when instantiating the CellVariable.
```

`property value`

“Evaluate” the *Variable* and return its value (longhand)

```
>>> a = Variable(value=3)
>>> print(a.value)
3
>>> b = a + 4
>>> b
(Variable(value=array(3)) + 4)
>>> b.value
7
```

22.10.36 fipy.variables.test

Test numeric implementation of the mesh

22.10.37 fipy.variables.unaryOperatorVariable

22.10.38 fipy.variables.uniformNoiseVariable

Classes

<i>UniformNoiseVariable</i> (*args, **kwds)	Represents a uniform distribution of random numbers.
---	--

```
class fipy.variables.uniformNoiseVariable.UniformNoiseVariable(*args, **kwds)
```

Bases: *NoiseVariable*

Represents a uniform distribution of random numbers.

We generate noise on a uniform Cartesian mesh


```
>>> from fipy.meshes import Grid2D  
>>> noise = UniformNoiseVariable(mesh=Grid2D(nx=100, ny=100))
```

and histogram the noise

```
>>> from fipy.variables.histogramVariable import HistogramVariable  
>>> histogram = HistogramVariable(distribution=noise, dx=0.01, nx=120, offset=-.1)
```

```
>>> if __name__ == '__main__':  
...     from fipy import Viewer  
...     viewer = Viewer(vars=noise,  
...                      datamin=0, datamax=1)  
...     histoplot = Viewer(vars=histogram)
```

```
>>> from builtins import range  
>>> for i in range(10):  
...     noise.scramble()  
...     if __name__ == '__main__':  
...         viewer.plot()  
...         histoplot.plot()
```

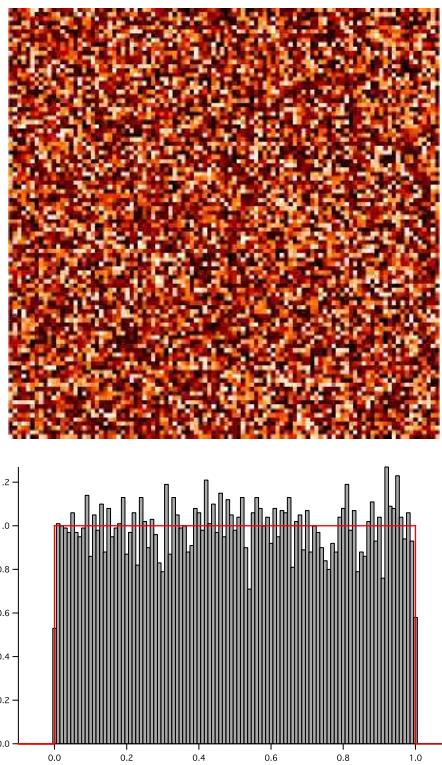

Parameters

- **mesh** (`Mesh`) – The mesh on which to define the noise.
- **minimum** (`float`) – The minimum (not-inclusive) value of the distribution.
- **maximum** (`float`) – The maximum (not-inclusive) value of the distribution.

`__abs__()`

Following test it to fix a bug with C inline string using `abs()` instead of `fabs()`

```
>>> print(abs(Variable(2.3) - Variable(1.2)))
1.1
```

Check representation works with different versions of numpy

```
>>> print(repr(abs(Variable(2.3))))
numerix.fabs(Variable(value=array(2.3)))
```

`__and__(other)`

This test case has been added due to a weird bug that was appearing.

```
>>> a = Variable(value=(0, 0, 1, 1))
>>> b = Variable(value=(0, 1, 0, 1))
>>> print(numerix.equal((a == 0) & (b == 1), [False, True, False, False]).all())
True
>>> print(a & b)
[0 0 0 1]
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx=4)
```

(continues on next page)

(continued from previous page)

```
>>> from fipy.variables.cellVariable import CellVariable
>>> a = CellVariable(value=(0, 0, 1, 1), mesh=mesh)
>>> b = CellVariable(value=(0, 1, 0, 1), mesh=mesh)
>>> print(numerix.allequal((a == 0) & (b == 1), [False, True, False, False]))
True
>>> print(a & b)
[0 0 0 1]
```

__array__(t=None)

Attempt to convert the *Variable* to a numerix *array* object

```
>>> v = Variable(value=[2, 3])
>>> print(numerix.array(v))
[2 3]
```

A dimensional *Variable* will convert to the numeric value in its base units

```
>>> v = Variable(value=[2, 3], unit="mm")
>>> numerix.array(v)
array([ 0.002,  0.003])
```

__array_wrap__(arr, context=None)

Required to prevent numpy not calling the reverse binary operations. Both the following tests are examples ufuncs.

```
>>> print(type(numerix.array([1.0, 2.0]) * Variable([1.0, 2.0])))
<class 'fipy.variables.binaryOperatorVariable...binOp'>
```

```
>>> from scipy.special import gamma as Gamma
>>> print(type(Gamma(Variable([1.0, 2.0]))))
<class 'fipy.variables.unaryOperatorVariable...unOp'>
```

__bool__()

```
>>> print(bool(Variable(value=0)))
0
>>> print(bool(Variable(value=(0, 0, 1, 1))))
Traceback (most recent call last):
...
ValueError: The truth value of an array with more than one element is ambiguous.
→ Use a.any() or a.all()
```

__call__(points=None, order=0, nearestCellIDs=None)

Interpolates the *CellVariable* to a set of points using a method that has a memory requirement on the order of *Ncells* by *Npoints* in general, but uses only *Ncells* when the *CellVariable*'s mesh is a *UniformGrid* object.

Tests

```
>>> from fipy import *
>>> m = Grid2D(nx=3, ny=2)
>>> v = CellVariable(mesh=m, value=m.cellCenters[0])
>>> print(v(((0., 1.1, 1.2), (0., 1., 1.))))
```

(continues on next page)

(continued from previous page)

```
[ 0.5  1.5  1.5]
>>> print(v((0., 1.1, 1.2), (0., 1., 1.)), order=1)
[ 0.25  1.1   1.2 ]
>>> m0 = Grid2D(nx=2, ny=2, dx=1., dy=1.)
>>> m1 = Grid2D(nx=4, ny=4, dx=.5, dy=.5)
>>> x, y = m0.cellCenters
>>> v0 = CellVariable(mesh=m0, value=x * y)
>>> print(v0(m1.cellCenters.globalValue))
[ 0.25  0.25  0.75  0.75  0.25  0.25  0.75  0.75  0.75  0.75  2.25  2.25
 0.75  0.75  2.25  2.25]
>>> print(v0(m1.cellCenters.globalValue, order=1))
[ 0.125  0.25   0.5    0.625  0.25   0.375  0.875  1.      0.5     0.875
 1.875  2.25   0.625  1.      2.25   2.625]
```

Parameters

- **points** (tuple or list of tuple) – A point or set of points in the format (X, Y, Z)
- **order** ({0, 1}) – The order of interpolation, default is 0
- **nearestCellIDs** (array_like) – Optional argument if user can calculate own nearest cell IDs array, shape should be same as points

`__eq__(other)`

Test if a *Variable* is equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a == 4)
>>> b
(Variable(value=array(3)) == 4)
>>> b()
()
```

`__ge__(other)`

Test if a *Variable* is greater than or equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a >= 4)
>>> b
(Variable(value=array(3)) >= 4)
>>> b()
()
>>> a.value = 4
>>> print(b())
1
>>> a.value = 5
>>> print(b())
1
```

`__getitem__(index)`

“Evaluate” the *Variable* and return the specified element

```
>>> a = Variable(value=((3., 4.), (5., 6.)), unit="m") + "4 m"
>>> print(a[1, 1])
10.0 m
```

It is an error to slice a *Variable* whose *value* is not sliceable

```
>>> Variable(value=3)[2]
Traceback (most recent call last):
...
IndexError: 0-d arrays can't be indexed
```

`__getstate__()`

Used internally to collect the necessary information to pickle the *CellVariable* to persistent storage.

`__gt__(other)`

Test if a *Variable* is greater than another quantity

```
>>> a = Variable(value=3)
>>> b = (a > 4)
>>> b
(Variable(value=array(3)) > 4)
>>> print(b())
0
>>> a.value = 5
>>> print(b())
1
```

`__hash__()`

Return hash(self).

`__invert__()`

Returns logical “not” of the *Variable*

```
>>> a = Variable(value=True)
>>> print(~a)
False
```

`__le__(other)`

Test if a *Variable* is less than or equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a <= 4)
>>> b
(Variable(value=array(3)) <= 4)
>>> b()
1
>>> a.value = 4
>>> print(b())
1
>>> a.value = 5
>>> print(b())
0
```

__lt__(other)

Test if a *Variable* is less than another quantity

```
>>> a = Variable(value=3)
>>> b = (a < 4)
>>> b
(Variable(value=array(3)) < 4)
>>> b()
1
>>> a.value = 4
>>> print(b())
0
>>> print(10000000000000000 * Variable(1) < 1.)
0
>>> print(1000 * Variable(1) < 1.)
0
```

Python automatically reverses the arguments when necessary

```
>>> 4 > Variable(value=3)
(Variable(value=array(3)) < 4)
```

__ne__(other)

Test if a *Variable* is not equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a != 4)
>>> b
(Variable(value=array(3)) != 4)
>>> b()
1
```

static __new__(cls, *args, **kwds)

__nonzero__()

```
>>> print(bool(Variable(value=0)))
0
>>> print(bool(Variable(value=(0, 0, 1, 1))))
Traceback (most recent call last):
...
ValueError: The truth value of an array with more than one element is ambiguous.
→ Use a.any() or a.all()
```

__or__(other)

This test case has been added due to a weird bug that was appearing.

```
>>> a = Variable(value=(0, 0, 1, 1))
>>> b = Variable(value=(0, 1, 0, 1))
>>> print(numerix.equal((a == 0) | (b == 1), [True, True, False, True]).all())
True
>>> print(a | b)
[0 1 1 1]
>>> from fipy.meshes import Grid1D
```

(continues on next page)

(continued from previous page)

```
>>> mesh = Grid1D(nx=4)
>>> from fipy.variables.cellVariable import CellVariable
>>> a = CellVariable(value=(0, 0, 1, 1), mesh=mesh)
>>> b = CellVariable(value=(0, 1, 0, 1), mesh=mesh)
>>> print(numerix.allequal((a == 0) | (b == 1), [True, True, False, True]))
True
>>> print(a | b)
[0 1 1 1]
```

__pow__(other)

return self**other, or self raised to power other

```
>>> print(Variable(1, "mol/l")**3)
1.0 mol**3/l**3
>>> print((Variable(1, "mol/l")**3).unit)
<PhysicalUnit mol**3/l**3>
```

__repr__()

Return repr(self).

__setstate__(dict)Used internally to create a new *CellVariable* from pickled persistent storage.**__str__()**

Return str(self).

all(axis=None)

```
>>> print(Variable(value=(0, 0, 1, 1)).all())
0
>>> print(Variable(value=(1, 1, 1, 1)).all())
1
```

allclose(other, rtol=1e-05, atol=1e-08)

```
>>> var = Variable((1, 1))
>>> print(var.allclose((1, 1)))
1
>>> print(var.allclose((1,)))
1
```

The following test is to check that the system does not run out of memory.

```
>>> from fipy.tools import numerix
>>> var = Variable(numerix.ones(10000))
>>> print(var.allclose(numerix.zeros(10000, '1')))
False
```

any(axis=None)

```
>>> print(Variable(value=0).any())
0
>>> print(Variable(value=(0, 0, 1, 1)).any())
1
```

property arithmeticFaceValue

Returns a *FaceVariable* whose value corresponds to the arithmetic interpolation of the adjacent cells:

$$\phi_f = (\phi_1 - \phi_2) \frac{d_{f2}}{d_{12}} + \phi_2$$

```
>>> from fipy.meshes import Grid1D
>>> from fipy import numerix
>>> mesh = Grid1D(dx = (1., 1.))
>>> L = 1
>>> R = 2
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (0.5 / 1.) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (2., 4.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (1.0 / 3.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (10., 100.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (5.0 / 55.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

property cellVolumeAverage

Return the cell-volume-weighted average of the *CellVariable*:

$$\langle \phi \rangle_{\text{vol}} = \frac{\sum_{\text{cells}} \phi_{\text{cell}} V_{\text{cell}}}{\sum_{\text{cells}} V_{\text{cell}}}$$

```
>>> from fipy.meshes import Grid2D
>>> from fipy.variables.cellVariable import CellVariable
>>> mesh = Grid2D(nx = 3, ny = 1, dx = .5, dy = .1)
>>> var = CellVariable(value = (1, 2, 6), mesh = mesh)
>>> print(var.cellVolumeAverage)
3.0
```

constraint(*value*, *where=None*)

Constrains the *CellVariable* to *value* at a location specified by *where*.

```
>>> from fipy import *
>>> m = Grid1D(nx=3)
>>> v = CellVariable(mesh=m, value=m.cellCenters[0])
>>> v.constrain(0., where=m.facesLeft)
>>> v.faceGrad.constrain([1.], where=m.facesRight)
```

(continues on next page)

(continued from previous page)

```
>>> print(v.faceGrad)
[[ 1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 0.  1.  2.  2.5]
```

Changing the constraint changes the dependencies

```
>>> v.constrain(1., where=m.facesLeft)
>>> print(v.faceGrad)
[[-1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 1.  1.  2.  2.5]
```

Constraints can be *Variable*

```
>>> c = Variable(0.)
>>> v.constrain(c, where=m.facesLeft)
>>> print(v.faceGrad)
[[ 1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 0.  1.  2.  2.5]
>>> c.value = 1.
>>> print(v.faceGrad)
[[-1.  1.  1.  1.]]
>>> print(v.faceValue)
[ 1.  1.  2.  2.5]
```

Constraints can have a *Variable* mask.

```
>>> v = CellVariable(mesh=m)
>>> mask = FaceVariable(mesh=m, value=m.facesLeft)
>>> v.constrain(1., where=mask)
>>> print(v.faceValue)
[ 1.  0.  0.  0.]
>>> mask[:] = mask | m.facesRight
>>> print(v.faceValue)
[ 1.  0.  0.  1.]
```

property constraintMask

Test that *constraintMask* returns a Variable that updates itself whenever the constraints change.

```
>>> from fipy import *
```

```
>>> m = Grid2D(nx=2, ny=2)
>>> x, y = m.cellCenters
>>> v0 = CellVariable(mesh=m)
>>> v0.constrain(1., where=m.facesLeft)
>>> print(v0.faceValue.constraintMask)
[False False False False False False True False False True False False]
>>> print(v0.faceValue)
[ 0.  0.  0.  0.  0.  0.  1.  0.  0.  1.  0.  0.]
>>> v0.constrain(3., where=m.facesRight)
```

(continues on next page)

(continued from previous page)

```
>>> print(v0.faceValue.constraintMask)
[False False False False False True False True True False True]
>>> print(v0.faceValue)
[ 0.  0.  0.  0.  0.  1.  0.  3.  1.  0.  3.]
>>> v1 = CellVariable(mesh=m)
>>> v1.constrain(1., where=(x < 1) & (y < 1))
>>> print(v1.constraintMask)
[ True False False False]
>>> print(v1)
[ 1.  0.  0.  0.]
>>> v1.constrain(3., where=(x > 1) & (y > 1))
>>> print(v1.constraintMask)
[ True False False  True]
>>> print(v1)
[ 1.  0.  0.  3.]
```

copy()

Copy the value of the *NoiseVariable* to a static *CellVariable*.

dot(*other*, *opShape=None*, *operatorClass=None*)

Return the mesh-element–by–mesh-element (cell-by-cell, face-by-face, etc.) scalar product

$$\text{extself} \cdot \text{extother}$$

Both *self* and *other* can be of arbitrary rank, and *other* does not need to be a *MeshVariable*.

property faceGrad

Return $\nabla\phi$ as a rank-1 *FaceVariable* using differencing for the normal direction(second-order gradient).

property faceGradAverage

Deprecated since version 3.3: use *grad.arithmeticFaceValue* instead

Return $\nabla\phi$ as a rank-1 *FaceVariable* using averaging for the normal direction(second-order gradient)

property faceValue

Returns a *FaceVariable* whose value corresponds to the arithmetic interpolation of the adjacent cells:

$$\phi_f = (\phi_1 - \phi_2) \frac{d_{f2}}{d_{12}} + \phi_2$$

```
>>> from fipy.meshes import Grid1D
>>> from fipy import numerix
>>> mesh = Grid1D(dx = (1., 1.))
>>> L = 1
>>> R = 2
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (0.5 / 1.) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (2., 4.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
```

(continues on next page)

(continued from previous page)

```
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (1.0 / 3.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (10., 100.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.arithmeticFaceValue[mesh.interiorFaces.value]
>>> answer = (R - L) * (5.0 / 55.0) + L
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

property gaussGrad

Return $\frac{1}{V_P} \sum_f \vec{n} \phi_f A_f$ as a rank-1 *CellVariable* (first-order gradient).

getSctype(*default=None*)

Returns the Numpy *sctype* of the underlying array.

```
>>> Variable(1).getSctype() == numerix.NUMERIX.obj2sctype(numerix.array(1))
True
>>> Variable(1.).getSctype() == numerix.NUMERIX.obj2sctype(numerix.array(1.))
True
>>> Variable((1, 1.)).getSctype() == numerix.NUMERIX.obj2sctype(numerix.
->>> array((1., 1.)))
True
```

property globalValue

Concatenate and return values from all processors

When running on a single processor, the result is identical to *value*.

property grad

Return $\nabla \phi$ as a rank-1 *CellVariable* (first-order gradient).

property harmonicFaceValue

Returns a *FaceVariable* whose value corresponds to the harmonic interpolation of the adjacent cells:

$$\phi_f = \frac{\phi_1 \phi_2}{(\phi_2 - \phi_1) \frac{d_{f2}}{d_{12}} + \phi_1}$$

```
>>> from fipy.meshes import Grid1D
>>> from fipy import numerix
>>> mesh = Grid1D(dx = (1., 1.))
>>> L = 1
>>> R = 2
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.harmonicFaceValue[mesh.interiorFaces.value]
>>> answer = L * R / ((R - L) * (0.5 / 1.) + L)
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (2., 4.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.harmonicFaceValue[mesh.interiorFaces.value]
>>> answer = L * R / ((R - L) * (1.0 / 3.0) + L)
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

```
>>> mesh = Grid1D(dx = (10., 100.))
>>> var = CellVariable(mesh = mesh, value = (L, R))
>>> faceValue = var.harmonicFaceValue[mesh.interiorFaces.value]
>>> answer = L * R / ((R - L) * (5.0 / 55.0) + L)
>>> print(numerix.allclose(faceValue, answer, atol = 1e-10, rtol = 1e-10))
True
```

`inBaseUnits()`

Return the value of the *Variable* with all units reduced to their base SI elements.

```
>>> e = Variable(value="2.7 Hartree*Nav")
>>> print(e.inBaseUnits().allclose("7088849.01085 kg*m**2/s**2/mol"))
1
```

`inUnitsOf(*units)`

Returns one or more *Variable* objects that express the same physical quantity in different units. The units are specified by strings containing their names. The units must be compatible with the unit of the object. If one unit is specified, the return value is a single *Variable*.

```
>>> freeze = Variable('0 degC')
>>> print(freeze.inUnitsOf('degF').allclose("32.0 degF"))
1
```

If several units are specified, the return value is a tuple of *Variable* instances with one element per unit such that the sum of all quantities in the tuple equals the the original quantity and all the values except for the last one are integers. This is used to convert to irregular unit systems like hour/minute/second. The original object will not be changed.

```
>>> t = Variable(value=314159., unit='s')
>>> from builtins import zip
>>> print(numerix.allclose([e.allclose(v) for (e, v) in zip(t.inUnitsOf('d', 'h',
-> 'min', 's'), ...
-> '15.0 min', '59.0 s')], ...
-> True))
1
```

`property leastSquaresGrad`

Return $\nabla\phi$, which is determined by solving for $\nabla\phi$ in the following matrix equation,

$$\nabla\phi \cdot \sum_f d_{AP}^2 \vec{n}_{AP} \otimes \vec{n}_{AP} = \sum_f d_{AP}^2 (\vec{n} \cdot \nabla\phi)_{AP}$$

The matrix equation is derived by minimizing the following least squares sum,

$$F(\phi_x, \phi_y) = \sqrt{\sum_f (d_{AP} \vec{n}_{AP} \cdot \nabla\phi - d_{AP} (\vec{n}_{AP} \cdot \nabla\phi)_{AP})^2}$$

Tests

```
>>> from fipy import Grid2D
>>> m = Grid2D(nx=2, ny=2, dx=0.1, dy=2.0)
>>> print(numerix.allclose(CellVariable(mesh=m, value=(0, 1, 3, 6)).
...leastSquaresGrad.globalValue, \
...
...
...
True
```

```
>>> from fipy import Grid1D
>>> print(numerix.allclose(CellVariable(mesh=Grid1D(dx=(2.0, 1.0, 0.5)),
...value=(0, 1, 2)).leastSquaresGrad.
...globalValue, [[0.461538461538, 0.8, 1.2]]))
True
```

property mag

The magnitude of the *Variable*, e.g., $|\vec{\psi}| = \sqrt{\vec{\psi} \cdot \vec{\psi}}$.

max(axis=None)

Return the maximum along a given axis.

min(axis=None)

```
>>> from fipy import Grid2D, CellVariable
>>> mesh = Grid2D(nx=5, ny=5)
>>> x, y = mesh.cellCenters
>>> v = CellVariable(mesh=mesh, value=x*y)
>>> print(v.min())
0.25
```

property minmodFaceValue

Returns a *FaceVariable* with a value that is the minimum of the absolute values of the adjacent cells. If the values are of opposite sign then the result is zero:

$$\phi_f = \begin{cases} \phi_1 & \text{when } |\phi_1| \leq |\phi_2|, \\ \phi_2 & \text{when } |\phi_2| < |\phi_1|, \\ 0 & \text{when } \phi_1\phi_2 < 0 \end{cases}$$

```
>>> from fipy import *
>>> print(CellVariable(mesh=Grid1D(nx=2), value=(1, 2)).minmodFaceValue)
[1 1 2]
>>> print(CellVariable(mesh=Grid1D(nx=2), value=(-1, -2)).minmodFaceValue)
[-1 -1 -2]
>>> print(CellVariable(mesh=Grid1D(nx=2), value=(-1, 2)).minmodFaceValue)
[-1 0 2]
```

property old

Return the values of the *CellVariable* from the previous solution sweep.

Combinations of *CellVariable*'s should also return old values.

```
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx = 2)
>>> from fipy.variables.cellVariable import CellVariable
>>> var1 = CellVariable(mesh = mesh, value = (2, 3), hasOld = 1)
>>> var2 = CellVariable(mesh = mesh, value = (3, 4))
>>> v = var1 * var2
>>> print(v)
[ 6 12]
>>> var1.value = ((3, 2))
>>> print(v)
[9 8]
>>> print(v.old)
[ 6 12]
```

The following small test is to correct for a bug when the operator does not just use variables.

```
>>> v1 = var1 * 3
>>> print(v1)
[9 6]
>>> print(v1.old)
[6 9]
```

rdot(*other*, *opShape=None*, *operatorClass=None*)

Return the mesh-element-by-mesh-element (cell-by-cell, face-by-face, etc.) scalar product

$$\text{exto}other \cdot \text{extsel}f$$

Both *self* and *other* can be of arbitrary rank, and *other* does not need to be a *MeshVariable*.

release(*constraint*)

Remove *constraint* from *self*

```
>>> from fipy import *
>>> m = Grid1D(nx=3)
>>> v = CellVariable(mesh=m, value=m.cellCenters[0])
>>> c = Constraint(0., where=m.facesLeft)
>>> v.constrain(c)
>>> print(v.faceValue)
[ 0.  1.  2.  2.5]
>>> v.release(constraint=c)
>>> print(v.faceValue)
[ 0.5  1.   2.   2.5]
```

scramble()

Generate a new random distribution.

setValue(*value*, *unit=None*, *where=None*)

Set the value of the Variable. Can take a masked array.

```
>>> a = Variable((1, 2, 3))
>>> a.setValue(5, where=(1, 0, 1))
>>> print(a)
[5 2 5]
```

```
>>> b = Variable((4, 5, 6))
>>> a.setValue(b, where=(1, 0, 1))
>>> print(a)
[4 2 6]
>>> print(b)
[4 5 6]
>>> a.value = 3
>>> print(a)
[3 3 3]
```

```
>>> b = numerix.array((3, 4, 5))
>>> a.value = b
>>> a[:] = 1
>>> print(b)
[3 4 5]
```

```
>>> a.setValue((4, 5, 6), where=(1, 0))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

property shape

```
>>> from fipy.meshes import Grid2D
>>> from fipy.variables.cellVariable import CellVariable
>>> mesh = Grid2D(nx=2, ny=3)
>>> var = CellVariable(mesh=mesh)
>>> print(numerix.allequal(var.shape, (6,)))
True
>>> print(numerix.allequal(var.arithmeticFaceValue.shape, (17,)))
True
>>> print(numerix.allequal(var.grad.shape, (2, 6)))
True
>>> print(numerix.allequal(var.faceGrad.shape, (2, 17)))
True
```

Have to account for zero length arrays

```
>>> from fipy import Grid1D
>>> m = Grid1D(nx=0)
>>> v = CellVariable(mesh=m, elementshape=(2,))
>>> numerix.allequal((v * 1).shape, (2, 0))
True
```

`std(axis=None, **kwargs)`

Evaluate standard deviation of all the elements of a *MeshVariable*.

Adapted from <http://mpitutorial.com/tutorials/mpi-reduce-and-allreduce/>

```
>>> import fipy as fp
>>> mesh = fp.Grid2D(nx=2, ny=2, dx=2., dy=5.)
>>> var = fp.CellVariable(value=(1., 2., 3., 4.), mesh=mesh)
```

(continues on next page)

(continued from previous page)

```
>>> print((var.std()**2).allclose(1.25))
True
```

property unit

Return the unit object of *self*.

```
>>> Variable(value="1 m").unit
<PhysicalUnit m>
```

updateOld()

Set the values of the previous solution sweep to the current values.

```
>>> from fipy import *
>>> v = CellVariable(mesh=Grid1D(), hasOld=False)
>>> v.updateOld()
Traceback (most recent call last):
...
AssertionError: The updateOld method requires the CellVariable to have an old
← value. Set hasOld to True when instantiating the CellVariable.
```

property value

“Evaluate” the *Variable* and return its value (longhand)

```
>>> a = Variable(value=3)
>>> print(a.value)
3
>>> b = a + 4
>>> b
(Variable(value=array(3)) + 4)
>>> b.value
7
```

22.10.39 fipy.variables.variable

Classes

<code>Variable(*args, **kwds)</code>	Lazily evaluated quantity with units.
--------------------------------------	---------------------------------------

`class fipy.variables.variable.Variable(*args, **kwds)`

Bases: `object`

Lazily evaluated quantity with units.

Using a *Variable* in a mathematical expression will create an automatic dependency *Variable*, e.g.,

```
>>> a = Variable(value=3)
>>> b = 4 * a
>>> b
(Variable(value=array(3)) * 4)
>>> b()
12
```

Changes to the value of a `Variable` will automatically trigger changes in any dependent `Variable` objects

```
>>> a.setValue(5)
>>> b
(Variable(value=array(5)) * 4)
>>> print(b())
20
```

Create a `Variable`.

```
>>> Variable(value=3)
Variable(value=array(3))
>>> Variable(value=3, unit="m")
Variable(value=PhysicalField(3, 'm'))
>>> Variable(value=3, unit="m", array=numerix.zeros((3, 2), 'l'))
Variable(value=PhysicalField(array([[3, 3],
[3, 3]]), 'm'))
```

Parameters

- `value` (int or float or *array-like*) –
- `unit` (*str* or `PhysicalUnit`) – The physical units of the variable
- `array` (*ndarray*, *optional*) – The storage array for the `Variable`
- `name` (*str*) – The user-readable name of the `Variable`
- `cached` (*bool*) – whether to cache or always recalculate the value

`__abs__()`

Following test it to fix a bug with C inline string using `abs()` instead of `fabs()`

```
>>> print(abs(Variable(2.3) - Variable(1.2)))
1.1
```

Check representation works with different versions of numpy

```
>>> print(repr(abs(Variable(2.3))))
numerix.fabs(Variable(value=array(2.3)))
```

`__and__(other)`

This test case has been added due to a weird bug that was appearing.

```
>>> a = Variable(value=(0, 0, 1, 1))
>>> b = Variable(value=(0, 1, 0, 1))
>>> print(numerix.equal((a == 0) & (b == 1), [False, True, False, False]).all())
True
>>> print(a & b)
[0 0 0 1]
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx=4)
>>> from fipy.variables.cellVariable import CellVariable
>>> a = CellVariable(value=(0, 0, 1, 1), mesh=mesh)
```

(continues on next page)

(continued from previous page)

```
>>> b = CellVariable(value=(0, 1, 0, 1), mesh=mesh)
>>> print(numerix.allequal((a == 0) & (b == 1), [False, True, False, False]))
True
>>> print(a & b)
[0 0 0 1]
```

__array__(t=None)

Attempt to convert the *Variable* to a numerix *array* object

```
>>> v = Variable(value=[2, 3])
>>> print(numerix.array(v))
[2 3]
```

A dimensional *Variable* will convert to the numeric value in its base units

```
>>> v = Variable(value=[2, 3], unit="mm")
>>> numerix.array(v)
array([ 0.002,  0.003])
```

__array_wrap__(arr, context=None)

Required to prevent numpy not calling the reverse binary operations. Both the following tests are examples ufuncs.

```
>>> print(type(numerix.array([1.0, 2.0]) * Variable([1.0, 2.0])))
<class 'fipy.variables.binaryOperatorVariable...binOp'>
```

```
>>> from scipy.special import gamma as Gamma
>>> print(type(Gamma(Variable([1.0, 2.0]))))
<class 'fipy.variables.unaryOperatorVariable...unOp'>
```

__bool__()

```
>>> print(bool(Variable(value=0)))
0
>>> print(bool(Variable(value=(0, 0, 1, 1))))
Traceback (most recent call last):
...
ValueError: The truth value of an array with more than one element is ambiguous.
→ Use a.any() or a.all()
```

__call__()

“Evaluate” the *Variable* and return its value

```
>>> a = Variable(value=3)
>>> print(a())
3
>>> b = a + 4
>>> b
(Variable(value=array(3)) + 4)
>>> b()
7
```

__eq__(other)

Test if a *Variable* is equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a == 4)
>>> b
(Variable(value=array(3)) == 4)
>>> b()
()
```

__ge__(other)

Test if a *Variable* is greater than or equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a >= 4)
>>> b
(Variable(value=array(3)) >= 4)
>>> b()
()
>>> a.value = 4
>>> print(b())
1
>>> a.value = 5
>>> print(b())
1
```

__getitem__(index)

“Evaluate” the *Variable* and return the specified element

```
>>> a = Variable(value=((3., 4.), (5., 6.)), unit="m") + "4 m"
>>> print(a[1, 1])
10.0 m
```

It is an error to slice a *Variable* whose *value* is not sliceable

```
>>> Variable(value=3)[2]
Traceback (most recent call last):
...
IndexError: 0-d arrays can't be indexed
```

__getstate__()

Used internally to collect the necessary information to pickle the *Variable* to persistent storage.

__gt__(other)

Test if a *Variable* is greater than another quantity

```
>>> a = Variable(value=3)
>>> b = (a > 4)
>>> b
(Variable(value=array(3)) > 4)
>>> print(b())
()
>>> a.value = 5
```

(continues on next page)

(continued from previous page)

```
>>> print(b())
1
```

__hash__(self)

Return hash(self).

__invert__(self)

Returns logical “not” of the *Variable*

```
>>> a = Variable(value=True)
>>> print(~a)
False
```

__le__(self, other)

Test if a *Variable* is less than or equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a <= 4)
>>> b
(Variable(value=array(3)) <= 4)
>>> b()
1
>>> a.value = 4
>>> print(b())
1
>>> a.value = 5
>>> print(b())
0
```

__lt__(self, other)

Test if a *Variable* is less than another quantity

```
>>> a = Variable(value=3)
>>> b = (a < 4)
>>> b
(Variable(value=array(3)) < 4)
>>> b()
1
>>> a.value = 4
>>> print(b())
0
>>> print(10000000000000000 * Variable(1) < 1.)
0
>>> print(1000 * Variable(1) < 1.)
0
```

Python automatically reverses the arguments when necessary

```
>>> 4 > Variable(value=3)
(Variable(value=array(3)) < 4)
```

__ne__(self, other)

Test if a *Variable* is not equal to another quantity

```
>>> a = Variable(value=3)
>>> b = (a != 4)
>>> b
(Variable(value=array(3)) != 4)
>>> b()
1
```

```
static __new__(cls, *args, **kwds)
__nonzero__()

>>> print(bool(Variable(value=0)))
0
>>> print(bool(Variable(value=(0, 0, 1, 1))))
Traceback (most recent call last):
...
ValueError: The truth value of an array with more than one element is ambiguous.
→ Use a.any() or a.all()
```

__or__(other)

This test case has been added due to a weird bug that was appearing.

```
>>> a = Variable(value=(0, 0, 1, 1))
>>> b = Variable(value=(0, 1, 0, 1))
>>> print(numerix.equal((a == 0) | (b == 1), [True, True, False, True]).all())
True
>>> print(a | b)
[0 1 1 1]
>>> from fipy.meshes import Grid1D
>>> mesh = Grid1D(nx=4)
>>> from fipy.variables.cellVariable import CellVariable
>>> a = CellVariable(value=(0, 0, 1, 1), mesh=mesh)
>>> b = CellVariable(value=(0, 1, 0, 1), mesh=mesh)
>>> print(numerix.allequal((a == 0) | (b == 1), [True, True, False, True]))
True
>>> print(a | b)
[0 1 1 1]
```

__pow__(other)

return self**other, or self raised to power other

```
>>> print(Variable(1, "mol/l")**3)
1.0 mol**3/l**3
>>> print((Variable(1, "mol/l")**3).unit)
<PhysicalUnit mol**3/l**3>
```

__repr__()

Return repr(self).

__setstate__(dict)

Used internally to create a new *Variable* from pickled persistent storage.

__str__()

Return str(self).

all(*axis=None*)

```
>>> print(Variable(value=(0, 0, 1, 1)).all())
0
>>> print(Variable(value=(1, 1, 1, 1)).all())
1
```

allclose(*other*, *rtol*=*1e-05*, *atol*=*1e-08*)

```
>>> var = Variable((1, 1))
>>> print(var.allclose((1, 1)))
1
>>> print(var.allclose((1,)))
1
```

The following test is to check that the system does not run out of memory.

```
>>> from fipy.tools import numerix
>>> var = Variable(numerix.ones(10000))
>>> print(var.allclose(numerix.zeros(10000, '1')))
False
```

any(*axis=None*)

```
>>> print(Variable(value=0).any())
0
>>> print(Variable(value=(0, 0, 1, 1)).any())
1
```

constraint(*value*, *where=None*)

Constrain the *Variable* to have a *value* at an index or mask location specified by *where*.

```
>>> v = Variable((0, 1, 2, 3))
>>> v.constrain(2, numerix.array((True, False, False, False)))
>>> print(v)
[2 1 2 3]
>>> v[:] = 10
>>> print(v)
[ 2 10 10 10]
>>> v.constrain(5, numerix.array((False, False, True, False)))
>>> print(v)
[ 2 10  5 10]
>>> v[:] = 6
>>> print(v)
[2 6 5 6]
>>> v.constrain(8)
>>> print(v)
[8 8 8 8]
>>> v[:] = 10
>>> print(v)
[8 8 8 8]
>>> del v.constraints[2]
>>> print(v)
[ 2 10  5 10]
```

```
>>> from fipy.variables.cellVariable import CellVariable
>>> from fipy.meshes import Grid2D
>>> m = Grid2D(nx=2, ny=2)
>>> x, y = m.cellCenters
>>> v = CellVariable(mesh=m, rank=1, value=(x, y))
>>> v.constrain(((0.,), (-1.,)), where=m.facesLeft)
>>> print(v.faceValue)
[[ 0.5  1.5  0.5  1.5  0.5  1.5  0.   1.   1.5  0.   1.   1.5]
 [ 0.5  0.5  1.   1.   1.5  1.5 -1.   0.5  0.5 -1.   1.5  1.5]]
```

Parameters

- **value** (float or *array_like*) – The value of the constraint
- **where** (*array_like* of `bool`) – The constraint mask or index specifying the location of the constraint

`copy()`

Make an duplicate of the *Variable*

```
>>> a = Variable(value=3)
>>> b = a.copy()
>>> b
Variable(value=array(3))
```

The duplicate will not reflect changes made to the original

```
>>> a.setValue(5)
>>> b
Variable(value=array(3))
```

Check that this works for arrays.

```
>>> a = Variable(value=numerix.array((0, 1, 2)))
>>> b = a.copy()
>>> b
Variable(value=array([0, 1, 2]))
>>> a[1] = 3
>>> b
Variable(value=array([0, 1, 2]))
```

`getsctype(default=None)`

Returns the Numpy *sctype* of the underlying array.

```
>>> Variable(1).getsctype() == numerix.NUMERIX.obj2sctype(numerix.array(1))
True
>>> Variable(1.).getsctype() == numerix.NUMERIX.obj2sctype(numerix.array(1.))
True
>>> Variable((1, 1.)).getsctype() == numerix.NUMERIX.obj2sctype(numerix.
->array((1., 1.)))
True
```

`inBaseUnits()`

Return the value of the *Variable* with all units reduced to their base SI elements.

```
>>> e = Variable(value="2.7 Hartree*Nav")
>>> print(e.inBaseUnits().allclose("7088849.01085 kg*m**2/s**2/mol"))
1
```

inUnitsOf(*units)

Returns one or more *Variable* objects that express the same physical quantity in different units. The units are specified by strings containing their names. The units must be compatible with the unit of the object. If one unit is specified, the return value is a single *Variable*.

```
>>> freeze = Variable('0 degC')
>>> print(freeze.inUnitsOf('degF').allclose("32.0 degF"))
1
```

If several units are specified, the return value is a tuple of *Variable* instances with one element per unit such that the sum of all quantities in the tuple equals the the original quantity and all the values except for the last one are integers. This is used to convert to irregular unit systems like hour/minute/second. The original object will not be changed.

```
>>> t = Variable(value=314159., unit='s')
>>> from builtins import zip
>>> print(numerix.allclose([e.allclose(v) for (e, v) in zip(t.inUnitsOf('d', 'h',
... , 'min', 's'),
... ,
... , '15.0 min', '59.0 s')], True))
1
```

property mag

The magnitude of the *Variable*, e.g., $|\vec{\psi}| = \sqrt{\vec{\psi} \cdot \vec{\psi}}$.

max(axis=None)

Return the maximum along a given axis.

min(axis=None)

Return the minimum along a given axis.

release(constraint)

Remove *constraint* from *self*

```
>>> v = Variable((0, 1, 2, 3))
>>> v.constrain(2, numerix.array((True, False, False, False)))
>>> v[:] = 10
>>> from fipy.boundaryConditions.constraint import Constraint
>>> c1 = Constraint(5, numerix.array((False, False, True, False)))
>>> v.constrain(c1)
>>> v[:] = 6
>>> v.constrain(8)
>>> v[:] = 10
>>> del v.constraints[2]
>>> v.release(constraint=c1)
>>> print(v)
[ 2 10 10 10]
```

setValue(*value*, *unit=None*, *where=None*)

Set the value of the Variable. Can take a masked array.

```
>>> a = Variable((1, 2, 3))
>>> a.setValue(5, where=(1, 0, 1))
>>> print(a)
[5 2 5]
```

```
>>> b = Variable((4, 5, 6))
>>> a.setValue(b, where=(1, 0, 1))
>>> print(a)
[4 2 6]
>>> print(b)
[4 5 6]
>>> a.value = 3
>>> print(a)
[3 3 3]
```

```
>>> b = numerix.array((3, 4, 5))
>>> a.value = b
>>> a[:] = 1
>>> print(b)
[3 4 5]
```

```
>>> a.setValue((4, 5, 6), where=(1, 0))
Traceback (most recent call last):
...
ValueError: shape mismatch: objects cannot be broadcast to a single shape
```

property shape

Tuple of array dimensions.

```
>>> Variable(value=3).shape
()
>>> numerix.allequal(Variable(value=(3,)).shape, (1,))
True
>>> numerix.allequal(Variable(value=(3, 4)).shape, (2,))
True
```

```
>>> Variable(value="3 m").shape
()
>>> numerix.allequal(Variable(value=(3,), unit="m").shape, (1,))
True
>>> numerix.allequal(Variable(value=(3, 4), unit="m").shape, (2,))
True
```

std(*axis=None*, ***kwargs*)

Return the standard deviation along a given axis.

property unit

Return the unit object of *self*.

```
>>> Variable(value="1 m").unit
<PhysicalUnit m>
```

property value

“Evaluate” the *Variable* and return its value (longhand)

```
>>> a = Variable(value=3)
>>> print(a.value)
3
>>> b = a + 4
>>> b
(Variable(value=array(3)) + 4)
>>> b.value
7
```

22.11 fipy.viewers

Tools for displaying the values of *Variable* objects

Functions

`Viewer(vars[, title, limits, FIPY_VIEWER])`

Generic function for creating a *Viewer*.

Classes

`DummyViewer(vars[, title])`

Substitute viewer that doesn't do anything

Exceptions

`MeshDimensionError`

`class fipy.viewers.DummyViewer(vars, title=None, **kwlimits)`

Bases: *AbstractViewer*

Substitute viewer that doesn't do anything

Create a *AbstractViewer* object.

Parameters

- **vars** (*CellVariable or list*) – the *CellVariable* objects to display.
- **title** (*str, optional*) – displayed at the top of the *Viewer* window
- **xmin** (*float, optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.

- **xmax** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **zmin** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **zmax** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **datamin** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.

plot(*filename=None*)

Update the display of the viewed variables.

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

plotMesh(*filename=None*)

Display a representation of the mesh

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

setLimits(*limits={}*, ***kwlimits*)

Update the limits.

Parameters

- **limits** (*dict*, *optional*) – a (deprecated) alternative to limit keyword arguments
- **xmin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

- **datamin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

property title

The text appearing at the top center.

(default: if `len(self.vars) == 1`, the name of the only *Variable*, otherwise "").)

property vars

The *Variable* or list of *Variable* objects to display.

exception fipy.viewers.MeshDimensionError

Bases: *IndexError*

__cause__

exception cause

__context__

exception context

__delattr__(name, /)

Implement delattr(self, name).

__getattribute__(name, /)

Return getattr(self, name).

__reduce__()

Helper for pickle.

__repr__()

Return repr(self).

__setattr__(name, value, /)

Implement setattr(self, name, value).

__str__()

Return str(self).

add_note()

`Exception.add_note(note)` – add a note to the exception

with_traceback()

`Exception.with_traceback(tb)` – set self.__traceback__ to tb and return self.

fipy.viewers.Viewer(vars, title=None, limits={}, FIPY_VIEWER=None, **kwlimits)

Generic function for creating a *Viewer*.

The *Viewer* factory will search the module tree and return an instance of the first *Viewer* it finds that supports the dimensions of *vars*. Setting the *FIPY_VIEWER* environment variable to either *matplotlib*, *mayavi*, *tsv*, or *vtk* will specify the viewer.

The *kwlimits* or *limits* parameters can be used to constrain the view. For example:

```
Viewer(vars=some1Dvar, xmin=0.5, xmax=None, datamax=3)
```

or:

```
Viewer(vars=some1Dvar,  
       limits={'xmin': 0.5, 'xmax': None, 'datamax': 3})
```

will return a viewer that displays a line plot from an x value of 0.5 up to the largest x value in the dataset. The data values will be truncated at an upper value of 3, but will have no lower limit.

Parameters

- **vars** (`CellVariable or list`) – the *Variable* objects to display.
- **title** (`str, optional`) – displayed at the top of the *Viewer* window
- **limits** (`dict`) – a (deprecated) alternative to limit keyword arguments
- **FIPY_VIEWER** – a specific viewer to attempt (possibly multiple times for multiple variables)
- **xmin** (`float, optional`) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (`float, optional`) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (`float, optional`) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (`float, optional`) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmin** (`float, optional`) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmax** (`float, optional`) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamin** (`float, optional`) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (`float, optional`) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

Modules

`fipy.viewers.matplotlibViewer`

`fipy.viewers.mayaviViewer`

`fipy.viewers.multiViewer`

`fipy.viewers.test`

Test implementation of the viewers

`fipy.viewers.testinteractive`

Interactively test the viewers

`fipy.viewers.tsvViewer`

`fipy.viewers.viewer`

`fipy.viewers.vtkViewer`

22.11.1 fipy.viewers.matplotlibViewer

Functions

`MatplotlibViewer(vars[, title, limits, ...])`

Generic function for creating a *MatplotlibViewer*.

`fipy.viewers.matplotlibViewer`.**MatplotlibViewer**(*vars*, *title=None*, *limits={}*, *cmap=None*, *colorbar='vertical'*, *axes=None*, ***kwlimits*)

Generic function for creating a *MatplotlibViewer*.

The *MatplotlibViewer* factory will search the module tree and return an instance of the first *MatplotlibViewer* it finds of the correct dimension and rank.

It is possible to view different *Variables* against different *Matplotlib Axes*

```
>>> from matplotlib import pyplot as plt
>>> from fipy import *
```

```
>>> plt.ion()
>>> fig = plt.figure()
```

```
>>> ax1 = plt.subplot((221))
>>> ax2 = plt.subplot((223))
>>> ax3 = plt.subplot((224))
```

```
>>> k = Variable(name="k", value=0.)
```

```
>>> mesh1 = Grid1D(nx=100)
>>> x, = mesh1.cellCenters
>>> xVar = CellVariable(mesh=mesh1, name="x", value=x)
>>> viewer1 = MatplotlibViewer(vars=(numerix.sin(0.1 * k * xVar), numerix.cos(0.1 * ↴k * xVar / numerix.pi)),
```

(continues on next page)

(continued from previous page)

```
...           limits={'xmin': 10, 'xmax': 90},
...           datamin=-0.9, datamax=2.0,
...           title="Grid1D test",
...           axes=ax1,
...           legend=None)
```

```
>>> mesh2 = Grid2D(nx=50, ny=100, dx=0.1, dy=0.01)
>>> x, y = mesh2.cellCenters
>>> xyVar = CellVariable(mesh=mesh2, name="x y", value=x * y)
>>> viewer2 = MatplotlibViewer(vars=numerix.sin(k * xyVar),
...                               limits={'ymin': 0.1, 'ymax': 0.9},
...                               datamin=-0.9, datamax=2.0,
...                               title="Grid2D test",
...                               axes=ax2,
...                               colorbar=None)
```

```
>>> mesh3 = (Grid2D(nx=5, ny=10, dx=0.1, dy=0.1)
...           + (Tri2D(nx=5, ny=5, dx=0.1, dy=0.1,
...                    + ((0.5,), (0.2,))))
...           x, y = mesh3.cellCenters
>>> xyVar = CellVariable(mesh=mesh3, name="x y", value=x * y)
>>> viewer3 = MatplotlibViewer(vars=numerix.sin(k * xyVar),
...                               limits={'ymin': 0.1, 'ymax': 0.9},
...                               datamin=-0.9, datamax=2.0,
...                               title="Irregular 2D test",
...                               axes=ax3,
...                               cmap = plt.cm.OrRd)
```

```
>>> viewer = MultiViewer(viewers=(viewer1, viewer2, viewer3))
>>> from builtins import range
>>> for kval in range(10):
...     k.setValue(kval)
...     viewer.plot()
```

```
>>> viewer._promptForOpinion()
```

Parameters

- **vars** (*CellVariable or list*) – the *Variable* objects to display.
- **title** (*str, optional*) – displayed at the top of the *Viewer* window
- **limits** (*dict*) – a (deprecated) alternative to limit keyword arguments
- **xmin** (*float, optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (*float, optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float, optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*. All viewers will use *datamin* and *datamax*.

Any limit set to a (default) value of *None* will autoscale.

- **ymax** (*float, optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamin** (*float, optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float, optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **cmap** (*Colormap, optional*) – the *Colormap*. Defaults to *matplotlib.cm.jet*
- **colorbar** (*bool, optional*) – plot a color bar in specified orientation if not *None*
- **axes** (*Axes, optional*) – if not *None*, *vars* will be plotted into this Matplotlib *Axes* object

Modules

<code>fipy.viewers.matplotlibViewer.</code>	
<code>abstractMatplotlib2DViewer</code>	
<code>fipy.viewers.matplotlibViewer.</code>	
<code>abstractMatplotlibViewer</code>	
<code>fipy.viewers.matplotlibViewer.</code>	
<code>matplotlib1DViewer</code>	
<code>fipy.viewers.matplotlibViewer.</code>	
<code>matplotlib2DContourViewer</code>	
<code>fipy.viewers.matplotlibViewer.</code>	
<code>matplotlib2DGridContourViewer</code>	
<code>fipy.viewers.matplotlibViewer.</code>	
<code>matplotlib2DGridViewer</code>	
<code>fipy.viewers.matplotlibViewer.</code>	
<code>matplotlib2DViewer</code>	
<code>fipy.viewers.matplotlibViewer.</code>	
<code>matplotlibSparseMatrixViewer</code>	
<code>fipy.viewers.matplotlibViewer.</code>	
<code>matplotlibStreamViewer</code>	
<code>fipy.viewers.matplotlibViewer.</code>	
<code>matplotlibVectorViewer</code>	
<code>fipy.viewers.matplotlibViewer.test</code>	Test numeric implementation of the mesh

fipy.viewers.matplotlibViewer.abstractMatplotlib2DViewer

Classes

<code>AbstractMatplotlib2DViewer(vars[, title, ...])</code>	Base class for plotting 2D <i>MeshVariable</i> objects with Matplotlib.
---	---

```
class fipy.viewers.matplotlibViewer.abstractMatplotlib2DViewer.AbstractMatplotlib2DViewer(vars,
    title=None,
    figaspect=1.0,
    cmap=None,
    colorbar=None,
    axes=None,
    log=False,
    **kwlimits)
```

Bases: *AbstractMatplotlibViewer*

Base class for plotting 2D *MeshVariable* objects with Matplotlib.

Create a *AbstractMatplotlibViewer*.

Parameters

- **vars** (*CellVariable or list*) – the *Variable* objects to display.
- **title** (*str, optional*) – displayed at the top of the *Viewer* window
- **figaspect** (*float, optional*) – desired aspect ratio of figure. If arg is a number, use that aspect ratio. If arg is *auto*, the aspect ratio will be determined from the Variable's mesh.
- **xmin** (*float, optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (*float, optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float, optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float, optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamin** (*float, optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float, optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **cmap** (*Colormap, optional*) – the *Colormap*. Defaults to *matplotlib.cm.jet*
- **colorbar** (*bool, optional*) – plot a color bar in specified orientation if not *None*
- **axes** (*Axes, optional*) – if not *None*, *vars* will be plotted into this *Matplotlib Axes* object
- **log** (*bool, optional*) – whether to logarithmically scale the data

property axes

The *Matplotlib Axes*.

property cmap

The *Matplotlib Colormap*.

property colorbar

The *Matplotlib Colorbar*.

property fig

The *Matplotlib Figure*.

property id

The *Matplotlib Figure* number.

property log

Whether data has logarithmic scaling (*bool*).

plot(filename=None)

Update the display of the viewed variables.

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

plotMesh(filename=None)

Display a representation of the mesh

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

setLimits(limits={}, **kwlimits)

Update the limits.

Parameters

- **limits** (*dict*, *optional*) – a (deprecated) alternative to limit keyword arguments
- **xmin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

- **datamax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

property title

The text appearing at the top center.

(default: if `len(self.vars) == 1`, the name of the only *Variable*, otherwise "").

property vars

The *Variable* or list of *Variable* objects to display.

fipy.viewers.matplotlibViewer.abstractMatplotlibViewer

Classes

`AbstractMatplotlibViewer(vars[, title, ...])`

Base class for the viewers that use the *Matplotlib* plotting package.

```
class fipy.viewers.matplotlibViewer.abstractMatplotlibViewer(vars,
                                                               ti-
                                                               tle=None,
                                                               fi-
                                                               gaspect=1.0,
                                                               cmap=None,
                                                               col-
                                                               or-
                                                               bar=None,
                                                               axes=None,
                                                               log=False,
                                                               **kwlim-
                                                               its)
```

Bases: *AbstractViewer*

Base class for the viewers that use the *Matplotlib* plotting package.

Attention: This class is abstract. Always create one of its subclasses.

Create a *AbstractMatplotlibViewer*.

Parameters

- **vars** (*CellVariable* or *list*) – the *Variable* objects to display.
- **title** (*str*, *optional*) – displayed at the top of the *Viewer* window
- **figaspect** (*float*, *optional*) – desired aspect ratio of figure. If arg is a number, use that aspect ratio. If arg is *auto*, the aspect ratio will be determined from the *Variable*'s mesh.
- **xmin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

- **xmax** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamin** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **cmap** (*Colormap*, *optional*) – the *Colormap*. Defaults to *matplotlib.cm.jet*
- **colorbar** (*bool*, *optional*) – plot a color bar in specified orientation if not *None*
- **axes** (*Axes*, *optional*) – if not *None*, *vars* will be plotted into this *Matplotlib Axes* object
- **log** (*bool*, *optional*) – whether to logarithmically scale the data

property axes

The *Matplotlib Axes*.

property cmap

The *Matplotlib Colormap*.

property colorbar

The *Matplotlib Colorbar*.

property fig

The *Matplotlib Figure*.

property id

The *Matplotlib Figure* number.

property log

Whether data has logarithmic scaling (*bool*).

plot(*filename=None*)

Update the display of the viewed variables.

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

plotMesh(*filename=None*)

Display a representation of the mesh

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

setLimits(*limits={}*, ***kwlimits*)

Update the limits.

Parameters

- **limits** (*dict*, *optional*) – a (deprecated) alternative to limit keyword arguments
- **xmin** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmin** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmax** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamin** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

property title

The text appearing at the top center.

(default: if `len(self.vars) == 1`, the name of the only `Variable`, otherwise "").)

property vars

The `Variable` or list of `Variable` objects to display.

fipy.viewers.matplotlibViewer.matplotlib1DViewer**Classes**

<code>Matplotlib1DViewer(vars[, title, xlog, ...])</code>	Displays a y vs.
---	------------------

```
class fipy.viewers.matplotlibViewer.matplotlib1DViewer.Matplotlib1DViewer(vars, title=None,
                                                                           xlog=False,
                                                                           ylog=False,
                                                                           limits={},
                                                                           legend='upper left',
                                                                           axes=None,
                                                                           **kwlimits)
```

Bases: `AbstractMatplotlibViewer`

Displays a y vs. x plot of one or more 1D *CellVariable* objects using [Matplotlib](#).

```
>>> import fipy as fp
>>> mesh = fp.Grid1D(nx=100)
>>> x, = mesh.cellCenters
>>> xVar = fp.CellVariable(mesh=mesh, name="x", value=x)
>>> k = fp.Variable(name="k", value=0.)
>>> viewer = Matplotlib1DViewer(vars=(fp.numerix.sin(k * xVar) + 2,
...                                 fp.numerix.cos(k * xVar / fp.numerix.pi) + 2),
...                                 xmin=10, xmax=90,
...                                 datamin=1.1, datamax=4.0,
...                                 title="Matplotlib1DViewer test")
>>> for kval in fp.numerix.arange(0, 0.3, 0.03):
...     k.setValue(kval)
...     viewer.plot()
>>> viewer._promptForOpinion()
```

```
>>> viewer.cmap = "ocean"
>>> viewer.log = True
```

```
>>> viewer.title = "Matplotlib1DViewer changed"
>>> viewer.plot()
>>> viewer._promptForOpinion()
```

Parameters

- **vars** (*CellVariable or list*) – *CellVariable* objects to plot
- **title** (*str, optional*) – displayed at the top of the *Viewer* window
- **xlog** (*bool*) – log scaling of x axis if *True*
- **ylog** (*bool*) – log scaling of y axis if *True*
- **limits** (*dict*) – a (deprecated) alternative to limit keyword arguments
- **xmin** (*float, optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale. (*ymin* and *ymax* are synonyms for *datamin* and *datamax*).
- **xmax** (*float, optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale. (*ymin* and *ymax* are synonyms for *datamin* and *datamax*).
- **datamin** (*float, optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale. (*ymin* and *ymax* are synonyms for *datamin* and *datamax*).
- **datamax** (*float, optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale. (*ymin* and *ymax* are synonyms for *datamin* and *datamax*).
- **legend** (*str*) – place a legend at the specified position, if not *None*
- **axes** (*Axes*) – if not *None*, *vars* will be plotted into this *Matplotlib Axes* object

property axes

The [Matplotlib Axes](#).

property cmap

The [Matplotlib Colormap](#).

property colorbar

The *Matplotlib* Colorbar.

property fig

The *Matplotlib* Figure.

property id

The *Matplotlib* Figure number.

property lines

The collection of *Matplotlib* Line2D objects representing the plotted data.

property log

Whether data has logarithmic scaling

plot(filename=None)

Update the display of the viewed variables.

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

plotMesh(filename=None)

Display a representation of the mesh

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

setLimits(limits={}, **kwlimits)

Update the limits.

Parameters

- **limits** (*dict*, *optional*) – a (deprecated) alternative to limit keyword arguments
- **xmin** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmin** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmax** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamin** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

- **datamax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

property title

The text appearing at the top center.

(default: if `len(self.vars) == 1`, the name of the only *Variable*, otherwise "").

property vars

The *Variable* or list of *Variable* objects to display.

fipy.viewers.matplotlibViewer.matplotlib2DContourViewer**Classes**

<code>Matplotlib2DContourViewer(vars[, title, ...])</code>	Displays a contour plot of a 2D <i>CellVariable</i> object.
--	---

```
class fipy.viewers.matplotlibViewer.matplotlib2DContourViewer.Matplotlib2DContourViewer(vars,
                                         title=None,
                                         limits={},
                                         cmap=None,
                                         colorbar='vertical',
                                         axes=None,
                                         numberer=None,
                                         levels=None,
                                         filgaspect='auto',
                                         **kwlimits)
```

Bases: *AbstractMatplotlib2DViewer*

Displays a contour plot of a 2D *CellVariable* object.

The *Matplotlib2DContourViewer* plots a 2D *CellVariable* using *Matplotlib*.

Creates a *Matplotlib2DContourViewer*.

Parameters

- **vars** (*CellVariable*) – *Variable* to display
- **title** (*str*, *optional*) – displayed at the top of the *Viewer* window
- **limits** (*dict*, *optional*) – a (deprecated) alternative to limit keyword arguments
- **xmin** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.

- **ymin** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **datamin** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **cmap** (*Colormap*, *optional*) – the Colormap. Defaults to *matplotlib.cm.jet*
- **colorbar** (*bool*, *optional*) – plot a color bar in specified orientation if not *None*
- **axes** (*Axes*, *optional*) – if not *None*, *vars* will be plotted into this Matplotlib Axes object
- **number** (*int*, *optional*) – Determines the number and positions of the contour lines / regions. (deprecated, use *levels*=).
- **levels** (*int* or *array_like*, *optional*) – Determines the number and positions of the contour lines / regions. If an int *n*, tries to automatically choose no more than *n+1* “nice” contour levels over the range of *vars*. If array_like, draw contour lines at the specified levels. The values must be in increasing order. E.g. to draw just the zero contour pass *levels*=[0].
- **figaspect** (*float*) – desired aspect ratio of figure. If arg is a number, use that aspect ratio. If arg is *auto*, the aspect ratio will be determined from the Variable’s mesh.

property axes

The *Matplotlib Axes*.

property cmap

The *Matplotlib Colormap*.

property colorbar

The *Matplotlib Colorbar*.

property fig

The *Matplotlib Figure*.

property id

The *Matplotlib Figure* number.

property levels

The number of automatically-chosen contours or their values.

property log

Whether data has logarithmic scaling (*bool*).

plot(*filename=None*)

Update the display of the viewed variables.

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

plotMesh(*filename=None*)

Display a representation of the mesh

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

setLimits(limits={}, **kwlimits)

Update the limits.

Parameters

- **limits** (*dict*, *optional*) – a (deprecated) alternative to limit keyword arguments
- **xmin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

property title

The text appearing at the top center.

(default: if `len(self.vars) == 1`, the name of the only *Variable*, otherwise "").)

property vars

The *Variable* or list of *Variable* objects to display.

fipy.viewers.matplotlibViewer.matplotlib2DGridContourViewer**Classes**

<code>Matplotlib2DGridContourViewer(vars[, title, ...])</code>	Displays a contour plot of a 2D <i>CellVariable</i> object.
--	---

```
class fipy.viewers.matplotlibViewer.matplotlib2DGridContourViewer.Matplotlib2DGridContourViewer(vars,
ti-
tle=None
lim-
its={},
cmap=None
col-
or-
bar='vert
axes=None
lev-
els=None
fi-
gaspect=
**kwlim-
its)
```

Bases: *AbstractMatplotlib2DViewer*

Displays a contour plot of a 2D *CellVariable* object.

The *Matplotlib2DGridContourViewer* plots a 2D *CellVariable* using *Matplotlib*.

```
>>> import fipy as fp
>>> mesh = fp.Grid2D(nx=50, ny=100, dx=0.1, dy=0.01)
>>> x, y = mesh.cellCenters
>>> xyVar = fp.CellVariable(mesh=mesh, name="x y", value=x * y)
>>> k = fp.Variable(name="k", value=0.)
>>> viewer = Matplotlib2DGridContourViewer(vars=fp.numerix.sin(k * xyVar) * 1000 + 1002,
...                                         ymin=0.1, ymax=0.9,
...                                         # datamin=1.1, datamax=4.0,
...                                         title="Matplotlib2DGridContourViewer test")
>>> from builtins import range
>>> for kval in range(10):
...     k.setValue(kval)
...     viewer.plot()
>>> viewer._promptForOpinion()

>>> viewer.levels = 2

>>> viewer.cmap = "ocean"
>>> viewer.log = True

>>> viewer.title = "Matplotlib2DGridContourViewer changed"
>>> viewer.plot()
>>> viewer._promptForOpinion()
```

Creates a *Matplotlib2DViewer*.

Parameters

- **vars** (*CellVariable*) – the *Variable* to display.
- **title** (*str, optional*) – displayed at the top of the *Viewer* window
- **limits** (*dict*) – a (deprecated) alternative to limit keyword arguments

- **xmin** (*float, optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (*float, optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float, optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float, optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **datamin** (*float, optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float, optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **cmap** (*Colormap, optional*) – the *Colormap*. Defaults to *matplotlib.cm.jet*
- **colorbar** (*bool, optional*) – plot a color bar if not *None*
- **axes** (*Axes, optional*) – if not *None*, *vars* will be plotted into this Matplotlib *Axes* object
- **levels** (*int or array_like, optional*) – Determines the number and positions of the contour lines / regions. If an int *n*, tries to automatically choose no more than *n+1* “nice” contour levels over the range of *vars*. If array_like, draw contour lines at the specified levels. The values must be in increasing order. E.g. to draw just the zero contour pass *levels*=[0].
- **figaspect** (*float, optional*) – desired aspect ratio of figure. If a number, use that aspect ratio. If *auto*, the aspect ratio will be determined from the *vars*’s mesh.

property axes

The *Matplotlib Axes*.

property cmap

The *Matplotlib Colormap*.

property colorbar

The *Matplotlib Colorbar*.

property fig

The *Matplotlib Figure*.

property id

The *Matplotlib Figure* number.

property levels

The number of automatically-chosen contours or their values.

property log

Whether data has logarithmic scaling (*bool*).

plot(*filename=None*)

Update the display of the viewed variables.

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

plotMesh(*filename=None*)

Display a representation of the mesh

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

setLimits(*limits={}*, *kwlimits*)**

Update the limits.

Parameters

- **limits** (*dict*, *optional*) – a (deprecated) alternative to limit keyword arguments
- **xmin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

property title

The text appearing at the top center.

(default: if `len(self.vars) == 1`, the name of the only *Variable*, otherwise "").

property vars

The *Variable* or list of *Variable* objects to display.

fipy.viewers.matplotlibViewer.matplotlib2DGridViewer**Classes**

<code>Matplotlib2DGridViewer(vars[, title, ...])</code>	Displays an image plot of a 2D <i>CellVariable</i> object using Matplotlib.
---	---

```
class fipy.viewers.matplotlibViewer.matplotlib2DGridViewer.Matplotlib2DGridViewer(vars, title=None, lim-its={}, cmap=None, colorbar='vertical', axes=None, figaspect='auto', **kwlim-its)
```

Bases: `AbstractMatplotlib2DViewer`

Displays an image plot of a 2D *CellVariable* object using Matplotlib.

```
>>> import fipy as fp
>>> mesh = fp.Grid2D(nx=50, ny=100, dx=0.1, dy=0.01)
>>> x, y = mesh.cellCenters
>>> xyVar = fp.CellVariable(mesh=mesh, name="x y", value=x * y)
>>> k = fp.Variable(name="k", value=0.)
>>> viewer = Matplotlib2DGridViewer(vars=fp.numerix.sin(k * xyVar) * 1000 + 1002,
...                                 ymin=0.1, ymax=0.9,
...                                 # datamin=1.1, datamax=4.0,
...                                 title="Matplotlib2DGridViewer test")
>>> from builtins import range
>>> for kval in range(10):
...     k.setValue(kval)
...     viewer.plot()
>>> viewer._promptForOpinion()
```

```
>>> viewer.cmap = "ocean"
>>> viewer.log = True
```

```
>>> viewer.title = "Matplotlib2DGridViewer changed"
>>> viewer.plot()
>>> viewer._promptForOpinion()
```

Creates a *Matplotlib2DGridViewer*.

Parameters

- `vars` (*CellVariable*) – the *Variable* to display.
- `title` (*str, optional*) – displayed at the top of the *Viewer* window
- `limits` (*dict, optional*) – a (deprecated) alternative to limit keyword arguments

- **cmap** (*Colormap*, *optional*) – the *Colormap*. Defaults to *matplotlib.cm.jet*
- **xmin** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **datamin** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **colorbar** (*bool*, *optional*) – plot a color bar in specified orientation if not *None*
- **axes** (*Axes*, *optional*) – if not *None*, *vars* will be plotted into this Matplotlib Axes object
- **figaspect** (*float*, *optional*) – desired aspect ratio of figure. If arg is a number, use that aspect ratio. If arg is *auto*, the aspect ratio will be determined from the Variable's mesh.

property axes

The *Matplotlib Axes*.

property cmap

The *Matplotlib Colormap*.

property colorbar

The *Matplotlib Colorbar*.

property fig

The *Matplotlib Figure*.

property id

The *Matplotlib Figure* number.

property log

Whether data has logarithmic scaling (*bool*).

plot(*filename=None*)

Update the display of the viewed variables.

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

plotMesh(*filename=None*)

Display a representation of the mesh

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

setLimits(*limits={}*, ***kwlimits*)

Update the limits.

Parameters

- **limits** (*dict*, *optional*) – a (deprecated) alternative to limit keyword arguments

- **xmin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

property title

The text appearing at the top center.

(default: if `len(self.vars) == 1`, the name of the only *Variable*, otherwise "").)

property vars

The *Variable* or list of *Variable* objects to display.

fipy.viewers.matplotlibViewer.matplotlib2DViewer**Classes**

<code>Matplotlib2DViewer(vars[, title, limits, ...])</code>	Displays a contour plot of a 2D <i>CellVariable</i> object.
---	---

```
class fipy.viewers.matplotlibViewer.matplotlib2DViewer.Matplotlib2DViewer(vars, title=None,
                                                               limits={},  

                                                               cmap=None,  

                                                               colorbar='vertical',  

                                                               axes=None,  

                                                               figaspect='auto',  

                                                               **kwlimits)
```

Bases: *AbstractMatplotlib2DViewer*

Displays a contour plot of a 2D *CellVariable* object.

The *Matplotlib2DViewer* plots a 2D *CellVariable* using *Matplotlib*.

```
>>> import fipy as fp
>>> mesh = (fp.Grid2D(nx=5, ny=10, dx=0.1, dy=0.1)
...         + (fp.Tri2D(nx=5, ny=5, dx=0.1, dy=0.1)
...             + ((0.5,), (0.2,))))
>>> x, y = mesh.cellCenters
>>> xyVar = fp.CellVariable(mesh=mesh, name="x y", value=x * y)
>>> k = fp.Variable(name="k", value=0.)
>>> viewer = Matplotlib2DViewer(vars=fp.numerix.sin(k * xyVar) * 1000 + 1002,
...                               ymin=0.1, ymax=0.9,
...                               # datamin=1.1, datamax=4.0,
...                               title="Matplotlib2DViewer test")
>>> from builtins import range
>>> for kval in range(10):
...     k.setValue(kval)
...     viewer.plot()
>>> viewer._promptForOpinion()
```

```
>>> viewer.cmap = "ocean"
>>> viewer.log = True
```

```
>>> viewer.title = "Matplotlib2DViewer changed"
>>> viewer.plot()
>>> viewer._promptForOpinion()
```

Creates a *Matplotlib2DViewer*.

Parameters

- **vars** (*CellVariable*) – the *Variable* to display.
- **title** (*str*, *optional*) – displayed at the top of the *Viewer* window
- **limits** (*dict*, *optional*) – a (deprecated) alternative to limit keyword arguments
- **cmap** (*Colormap*, *optional*) – the *Colormap*. Defaults to *matplotlib.cm.jet*
- **xmin** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **datamin** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **colorbar** (*bool*, *optional*) – plot a color bar in specified orientation if not *None*
- **axes** (*Axes*, *optional*) – if not *None*, *vars* will be plotted into this *Matplotlib Axes* object

- **figaspect** (*float*, *optional*) – desired aspect ratio of figure. If arg is a number, use that aspect ratio. If arg is *auto*, the aspect ratio will be determined from the Variable’s mesh.

property axes

The *Matplotlib Axes*.

property cmap

The *Matplotlib Colormap*.

property collection

The *Matplotlib PolyCollection* representing the cells.

property colorbar

The *Matplotlib Colorbar*.

property fig

The *Matplotlib Figure*.

property id

The *Matplotlib Figure* number.

property log

Whether data has logarithmic scaling (*bool*).

plot(filename=None)

Update the display of the viewed variables.

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

plotMesh(filename=None)

Display a representation of the mesh

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

setLimits(limits= {}, **kwlimits)

Update the limits.

Parameters

- **limits** (*dict*, *optional*) – a (deprecated) alternative to limit keyword arguments
- **xmin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

- **zmin** (*float, optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmax** (*float, optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamin** (*float, optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float, optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

property title

The text appearing at the top center.

(default: if `len(self.vars) == 1`, the name of the only *Variable*, otherwise "").)

property vars

The *Variable* or list of *Variable* objects to display.

fipy.viewers.matplotlibViewer.matplotlibSparseMatrixViewer

Classes

<code>MatplotlibSparseMatrixViewer([title])</code>	Displays <i>_SparseMatrix</i> objects using <i>Matplotlib</i> .
--	---

`class fipy.viewers.matplotlibViewer.matplotlibSparseMatrixViewer.MatplotlibSparseMatrixViewer(title='SparseMatrixViewer')`

Bases: `object`

Displays *_SparseMatrix* objects using *Matplotlib*.

fipy.viewers.matplotlibViewer.matplotlibStreamViewer

Classes

<code>MatplotlibStreamViewer(vars[, title, log, ...])</code>	Displays a stream plot of a 2D rank-1 <i>CellVariable</i> or <i>FaceVariable</i> object using <i>Matplotlib</i>
--	---

```
class fipy.viewers.matplotlibViewer.matplotlibStreamViewer.MatplotlibStreamViewer(vars, title=None, log=False, lims={}, axes=None, fit=True, gaspect='auto', density=1, linewidth=None, color=None, cmap=None, norm=None, arrowSize=1, arrowStyle='->', minLength=0.1, **kwlims)
```

Bases: *AbstractMatplotlib2DViewer*

Displays a stream plot of a 2D rank-1 *CellVariable* or *FaceVariable* object using *Matplotlib*

One issue is that this *Viewer* relies on *scipy.interpolate.griddata*, which interpolates on the convex hull of the data. The results is that streams are plotted across any concavities in the mesh.

Another issue is that it does not seem possible to remove the streams without calling *cla()*, which means that different set of streams cannot be overlaid.

```
>>> import fipy as fp
>>> mesh = fp.Grid2D(nx=50, ny=100, dx=0.1, dy=0.01)
>>> x, y = mesh.cellCenters
>>> xyVar = fp.CellVariable(mesh=mesh, name="x y", value=x * y)
>>> k = fp.Variable(name="k", value=1.)
>>> viewer = MatplotlibStreamViewer(vars=fp.numerix.sin(k * xyVar).grad,
...                                 title="MatplotlibStreamViewer test")
>>> for kval in fp.numerix.arange(1, 10):
...     k.setValue(kval)
...     viewer.plot()
>>> viewer._promptForOpinion()
```

```
>>> viewer = MatplotlibStreamViewer(vars=fp.numerix.sin(k * xyVar).faceGrad,
...                                 title="MatplotlibStreamViewer test")
>>> from builtins import range
>>> for kval in range(10):
...     k.setValue(kval)
...     viewer.plot()
>>> viewer._promptForOpinion()
```

```
>>> viewer.cmap = "ocean"
>>> viewer.log = True
```

```
>>> viewer.title = "MatplotlibStreamViewer changed"
>>> viewer.plot()
>>> viewer._promptForOpinion()
```

```
>>> import fipy as fp
>>> mesh = (fp.Grid2D(nx=5, ny=10, dx=0.1, dy=0.1)
...         + (fp.Tri2D(nx=5, ny=5, dx=0.1, dy=0.1)
...             + ((0.5,), (0.2,))))
>>> x, y = mesh.cellCenters
>>> xyVar = fp.CellVariable(mesh=mesh, name="x y", value=x * y)
>>> k = fp.Variable(name="k", value=1.)
>>> viewer = MatplotlibStreamViewer(vars=fp.numerix.sin(k * xyVar).grad,
...                                   title="MatplotlibStreamViewer test")
>>> for kval in fp.numerix.arange(1, 10):
...     k.setValue(kval)
...     viewer.plot()
>>> viewer._promptForOpinion()
```

```
>>> viewer = MatplotlibStreamViewer(vars=fp.numerix.sin(k * xyVar).faceGrad,
...                                   title="MatplotlibStreamViewer test")
>>> from builtins import range
>>> for kval in range(10):
...     k.setValue(kval)
...     viewer.plot()
>>> viewer._promptForOpinion()
```

```
>>> viewer.cmap = "ocean"
>>> viewer.log = True
```

```
>>> viewer.title = "MatplotlibStreamViewer changed"
>>> viewer.plot()
>>> viewer._promptForOpinion()
```

Creates a *MatplotlibStreamViewer*.

Parameters

- **vars** (*CellVariable or FaceVariable*) – rank-1 *Variable* to display
- **title** (*str, optional*) – displayed at the top of the *Viewer* window
- **log** (*bool, optional*) – if *True*, arrow length goes at the base-10 logarithm of the magnitude
- **limits** (*dict, optional*) – a (deprecated) alternative to limit keyword arguments
- **xmin** (*float*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (*float*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.

- **datamin** (*float*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **axes** (*Axes, optional*) – if not *None*, *vars* will be plotted into this Matplotlib *Axes* object
- **figaspect** (*float, optional*) – desired aspect ratio of figure. If arg is a number, use that aspect ratio. If arg is *auto*, the aspect ratio will be determined from the Variable's mesh.
- **density** (*float or (float, float), optional*) – Controls the closeness of streamlines. When density = 1, the domain is divided into a 30x30 grid. *density* linearly scales this grid. Each cell in the grid can have, at most, one traversing streamline. For different densities in each direction, use a tuple (density_x, density_y).
- **linewidth** (*array_like or CellVariable or FaceVariable, optional*) – The width of the stream lines. With a rank-0 *CellVariable* or *FaceVariable* the line width can be varied across the grid. The MeshVariable must have the same type and be defined on the same *Mesh* as *vars*.
- **color** (*str or CellVariable or FaceVariable, optional*) – The streamline color as a matplotlib color code or a field of numbers. If given a rank-0 *CellVariable* or *FaceVariable*, its values are converted to colors using *cmap* and *norm*. The MeshVariable must have the same type and be defined on the same *Mesh* as *vars*.
- **cmap** (*Colormap, optional*) – Colormap used to plot streamlines and arrows. This is only used if *color* is a MeshVariable.
- **norm** (*Normalize, optional*) – Normalize object used to scale luminance data to 0, 1. If None, stretch (min, max) to (0, 1). Only necessary when *color* is a MeshVariable.
- **arrowsize** (*float, optional*) – Scaling factor for the arrow size.
- **arrowstyle** (*str, optional*) – Arrow style specification. See *~matplotlib.patches.FancyArrowPatch*.
- **minlength** (*float, optional*) – Minimum length of streamline in axes coordinates.

property axes

The *Matplotlib Axes*.

property cmap

The *Matplotlib Colormap*.

property colorbar

The *Matplotlib Colorbar*.

property fig

The *Matplotlib Figure*.

property id

The *Matplotlib Figure* number.

property kwargs

keyword arguments to pass to `streamplot()`.

property log

Whether data has logarithmic scaling (*bool*).

plot(*filename=None*)

Update the display of the viewed variables.

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

plotMesh(*filename=None*)

Display a representation of the mesh

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

setLimits(*limits={}*, ***kwlimits*)

Update the limits.

Parameters

- **limits** (*dict*, *optional*) – a (deprecated) alternative to limit keyword arguments
- **xmin** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmin** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmax** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamin** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

property title

The text appearing at the top center.

(default: if `len(self.vars) == 1`, the name of the only *Variable*, otherwise "").)

property vars

The *Variable* or list of *Variable* objects to display.

fipy.viewers.matplotlibViewer.matplotlibVectorViewer**Classes**

<code>MatplotlibVectorViewer(vars[, title, scale, ...])</code>	Displays a vector plot of a 2D rank-1 <code>MeshVariable</code> using <code>Matplotlib</code>
--	---

```
class fipy.viewers.matplotlibViewer.matplotlibVectorViewer.MatplotlibVectorViewer(vars, title=None, scale=None, sparsity=None, log=False, limits={}, axes=None, fitAspect='auto', **kwlimits)
```

Bases: `AbstractMatplotlib2DViewer`

Displays a vector plot of a 2D rank-1 `MeshVariable` using `Matplotlib`

```
>>> import fipy as fp
>>> mesh = fp.Grid2D(nx=50, ny=100, dx=0.1, dy=0.01)
>>> x, y = mesh.cellCenters
>>> xyVar = fp.CellVariable(mesh=mesh, name="x y", value=x * y)
>>> k = fp.Variable(name="k", value=1.)
>>> viewer = MatplotlibVectorViewer(vars=fp.numerix.sin(k * xyVar).grad,
...                                 title="MatplotlibVectorViewer test")
>>> for kval in fp.numerix.arange(1, 10):
...     k.setValue(kval)
...     viewer.plot()
>>> viewer._promptForOpinion()
```

```
>>> viewer = MatplotlibVectorViewer(vars=fp.numerix.sin(k * xyVar).faceGrad,
...                                 title="MatplotlibVectorViewer test")
>>> from builtins import range
>>> for kval in range(10):
...     k.setValue(kval)
...     viewer.plot()
>>> viewer._promptForOpinion()
```

```
>>> for sparsity in numerix.arange(5000, 0, -500):
...     viewer.quiver(sparsity=sparsity)
...     viewer.plot()
>>> viewer._promptForOpinion()
```

```
>>> viewer.cmap = "ocean"
>>> viewer.log = True
```

```
>>> viewer.title = "MatplotlibVectorViewer changed"
>>> viewer.plot()
>>> viewer._promptForOpinion()
```

```
>>> import fipy as fp
>>> mesh = (fp.Grid2D(nx=5, ny=10, dx=0.1, dy=0.1)
...         + (fp.Tri2D(nx=5, ny=5, dx=0.1, dy=0.1)
...             + ((0.5,), (0.2,))))
>>> x, y = mesh.cellCenters
>>> xyVar = fp.CellVariable(mesh=mesh, name="x y", value=x * y)
>>> k = fp.Variable(name="k", value=1.)
>>> viewer = MatplotlibVectorViewer(vars=fp.numerix.sin(k * xyVar).grad,
...                                   title="MatplotlibVectorViewer test")
>>> for kval in fp.numerix.arange(1, 10):
...     k.setValue(kval)
...     viewer.plot()
>>> viewer._promptForOpinion()
```

```
>>> viewer = MatplotlibVectorViewer(vars=fp.numerix.sin(k * xyVar).faceGrad,
...                                   title="MatplotlibVectorViewer test")
>>> from builtins import range
>>> for kval in range(10):
...     k.setValue(kval)
...     viewer.plot()
>>> viewer._promptForOpinion()
```

```
>>> for sparsity in numerix.arange(5000, 0, -500):
...     viewer.quiver(sparsity=sparsity)
...     viewer.plot()
>>> viewer._promptForOpinion()
```

```
>>> viewer.cmap = "ocean"
>>> viewer.log = True
```

```
>>> viewer.title = "MatplotlibVectorViewer changed"
>>> viewer.plot()
>>> viewer._promptForOpinion()
```

Creates a *Matplotlib2DViewer*.

Parameters

- **vars** (*CellVariable* or *FaceVariable*) – rank-1 *Variable* to display
- **title** (*str*, optional) – displayed at the top of the *Viewer* window
- **scale** (*float*, optional) – if not *None*, scale all arrow lengths by this value
- **sparsity** (*int*, optional) – if not *None*, then this number of arrows will be randomly chosen (weighted by the cell volume or face area)
- **log** (*bool*, optional) – if *True*, arrow length goes at the base-10 logarithm of the magnitude
- **limits** (*dict*, optional) – a (deprecated) alternative to limit keyword arguments

- **xmin** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **datamin** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **axes** (*Axes*, *optional*) – if not *None*, *vars* will be plotted into this Matplotlib *Axes* object
- **figaspect** (*float*, *optional*) – desired aspect ratio of figure. If arg is a number, use that aspect ratio. If arg is *auto*, the aspect ratio will be determined from the Variable's mesh.

property axes

The [Matplotlib Axes](#).

property cmap

The [Matplotlib Colormap](#).

property colorbar

The [Matplotlib Colorbar](#).

property fig

The [Matplotlib Figure](#).

property id

The [Matplotlib Figure](#) number.

property log

Whether data has logarithmic scaling (*bool*).

plot(*filename=None*)

Update the display of the viewed variables.

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

plotMesh(*filename=None*)

Display a representation of the mesh

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

setLimits(*limits={}*, *kwlimits*)**

Update the limits.

Parameters

- **limits** (*dict*, *optional*) – a (deprecated) alternative to limit keyword arguments
- **xmin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

- **xmax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

property title

The text appearing at the top center.

(default: if `len(self.vars) == 1`, the name of the only *Variable*, otherwise "").)

property vars

The *Variable* or list of *Variable* objects to display.

fipy.viewers.matplotlibViewer.test

Test numeric implementation of the mesh

22.11.2 fipy.viewers.mayaviViewer

```
class fipy.viewers.mayaviViewer.MayaviClient(vars, title=None, daemon_file=None, fps=1.0,  
                                              **kwlimits)
```

Bases: *AbstractViewer*

The *MayaviClient* uses the *Mayavi* python plotting package.

```
>>> import fipy as fp  
>>> mesh = fp.Grid1D(nx=100)  
>>> x, = mesh.cellCenters  
>>> xVar = fp.CellVariable(mesh=mesh, name="x", value=x)  
>>> k = fp.Variable(name="k", value=0.)  
>>> viewer = MayaviClient(vars=(fp.numerix.sin(k * xVar) + 2,  
...                           fp.numerix.cos(k * xVar / fp.numerix.pi) + 2),  
...                           xmin=10, xmax=90,
```

(continues on next page)

(continued from previous page)

```

...
        datamin=1.1, datamax=4.0,
...
        title="MayaviClient test")
>>> for kval in fp.numerix.arange(0, 0.3, 0.03):
...
    k.setValue(kval)
...
    viewer.plot()
>>> viewer._promptForOpinion()

```

```

>>> import fipy as fp
>>> mesh = fp.Grid2D(nx=50, ny=100, dx=0.1, dy=0.01)
>>> x, y = mesh.cellCenters
>>> xyVar = fp.CellVariable(mesh=mesh, name="x y", value=x * y)
>>> k = fp.Variable(name="k", value=0.)
>>> viewer = MayaviClient(vars=fp.numerix.sin(k * xyVar) * 1000 + 1002,
...
...                         ymin=0.1, ymax=0.9,
...
...                         # datamin=1.1, datamax=4.0,
...
...                         title="MayaviClient test")
>>> from builtins import range
>>> for kval in range(10):
...
    k.setValue(kval)
...
    viewer.plot()
>>> viewer._promptForOpinion()

```

```

>>> import fipy as fp
>>> mesh = (fp.Grid2D(nx=5, ny=10, dx=0.1, dy=0.1)
...
...         + (fp.Tri2D(nx=5, ny=5, dx=0.1, dy=0.1)
...
...             + ((0.5,), (0.2,))))
>>> x, y = mesh.cellCenters
>>> xyVar = fp.CellVariable(mesh=mesh, name="x y", value=x * y)
>>> k = fp.Variable(name="k", value=0.)
>>> viewer = MayaviClient(vars=fp.numerix.sin(k * xyVar) * 1000 + 1002,
...
...                         ymin=0.1, ymax=0.9,
...
...                         # datamin=1.1, datamax=4.0,
...
...                         title="MayaviClient test")
>>> from builtins import range
>>> for kval in range(10):
...
    k.setValue(kval)
...
    viewer.plot()
>>> viewer._promptForOpinion()

```

```

>>> import fipy as fp
>>> mesh = fp.Grid3D(nx=50, ny=100, nz=10, dx=0.1, dy=0.01, dz=0.1)
>>> x, y, z = mesh.cellCenters
>>> xyzVar = fp.CellVariable(mesh=mesh, name=r"x y z", value=x * y * z)
>>> k = fp.Variable(name="k", value=0.)
>>> viewer = MayaviClient(vars=fp.numerix.sin(k * xyzVar) + 2,
...
...                         ymin=0.1, ymax=0.9,
...
...                         datamin=1.1, datamax=4.0,
...
...                         title="MayaviClient test")
>>> from builtins import range
>>> for kval in range(10):
...
    k.setValue(kval)

```

(continues on next page)

(continued from previous page)

```

...     viewer.plot()
>>> viewer._promptForOpinion()
```

Create a *MayaviClient*.

Parameters

- **vars** (*CellVariable or list*) – *CellVariable* objects to plot
- **title** (*str, optional*) – displayed at the top of the *Viewer* window
- **xmin** (*float, optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (*float, optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float, optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float, optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmin** (*float, optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmax** (*float, optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamin** (*float, optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float, optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **daemon_file** (*str, optional*) – the path to the script to run the separate Mayavi viewer process. Defaults to *fipy/viewers/mayaviViewer/mayaviDaemon.py*
- **fps** (*float, optional*) – frames per second to attempt to display

property fps

The frames per second to attempt to display.

plot(*filename=None*)

Update the display of the viewed variables.

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

plotMesh(*filename=None*)

Display a representation of the mesh

Parameters

filename (`str`) – If not *None*, the name of a file to save the image into.

setLimits(*limits*={}, ***kwlimits*)

Update the limits.

Parameters

- **limits** (`dict`, *optional*) – a (deprecated) alternative to limit keyword arguments
- **xmin** (`float`, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (`float`, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (`float`, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (`float`, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmin** (`float`, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmax** (`float`, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamin** (`float`, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (`float`, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

property title

The text appearing at the top center.

(default: if `len(self.vars)` == 1, the name of the only *Variable*, otherwise "").

property vars

The *Variable* or list of *Variable* objects to display.

Modules

`fipy.viewers.mayaviViewer.mayaviClient`

`fipy.viewers.mayaviViewer.mayaviDaemon`

A simple script that polls a data file for changes and then updates the Mayavi pipeline automatically.

`fipy.viewers.mayaviViewer.test`

Test numeric implementation of the mesh

fipy.viewers.mayaviViewer.mayaviClient

Classes

`MayaviClient(vars[, title, daemon_file, fps])`

The *MayaviClient* uses the `Mayavi` python plotting package.

```
class fipy.viewers.mayaviViewer.mayaviClient.MayaviClient(vars, title=None, daemon_file=None, fps=1.0, **kwlimits)
```

Bases: `AbstractViewer`

The *MayaviClient* uses the `Mayavi` python plotting package.

```
>>> import fipy as fp
>>> mesh = fp.Grid1D(nx=100)
>>> x, = mesh.cellCenters
>>> xVar = fp.CellVariable(mesh=mesh, name="x", value=x)
>>> k = fp.Variable(name="k", value=0.)
>>> viewer = MayaviClient(vars=(fp.numerix.sin(k * xVar) + 2,
...                           fp.numerix.cos(k * xVar / fp.numerix.pi) + 2),
...                         xmin=10, xmax=90,
...                         datamin=1.1, datamax=4.0,
...                         title="MayaviClient test")
>>> for kval in fp.numerix.arange(0, 0.3, 0.03):
...     k.setValue(kval)
...     viewer.plot()
>>> viewer._promptForOpinion()
```

```
>>> import fipy as fp
>>> mesh = fp.Grid2D(nx=50, ny=100, dx=0.1, dy=0.01)
>>> x, y = mesh.cellCenters
>>> xyVar = fp.CellVariable(mesh=mesh, name="x y", value=x * y)
>>> k = fp.Variable(name="k", value=0.)
>>> viewer = MayaviClient(vars=fp.numerix.sin(k * xyVar) * 1000 + 1002,
...                         ymin=0.1, ymax=0.9,
...                         # datamin=1.1, datamax=4.0,
...                         title="MayaviClient test")
>>> from builtins import range
>>> for kval in range(10):
...     k.setValue(kval)
...     viewer.plot()
>>> viewer._promptForOpinion()
```

```
>>> import fipy as fp
>>> mesh = (fp.Grid2D(nx=5, ny=10, dx=0.1, dy=0.1)
...         + (fp.Tri2D(nx=5, ny=5, dx=0.1, dy=0.1)
...             + ((0.5,), (0.2,))))
>>> x, y = mesh.cellCenters
>>> xyVar = fp.CellVariable(mesh=mesh, name="x y", value=x * y)
>>> k = fp.Variable(name="k", value=0.)
>>> viewer = MayaviClient(vars=fp.numerix.sin(k * xyVar) * 1000 + 1002,
...                         ymin=0.1, ymax=0.9,
...                         # datamin=1.1, datamax=4.0,
...                         title="MayaviClient test")
>>> from builtins import range
>>> for kval in range(10):
...     k.setValue(kval)
...     viewer.plot()
>>> viewer._promptForOpinion()
```

```
>>> import fipy as fp
>>> mesh = fp.Grid3D(nx=50, ny=100, nz=10, dx=0.1, dy=0.01, dz=0.1)
>>> x, y, z = mesh.cellCenters
>>> xyzVar = fp.CellVariable(mesh=mesh, name="x y z", value=x * y * z)
>>> k = fp.Variable(name="k", value=0.)
>>> viewer = MayaviClient(vars=fp.numerix.sin(k * xyzVar) + 2,
...                         ymin=0.1, ymax=0.9,
...                         datamin=1.1, datamax=4.0,
...                         title="MayaviClient test")
>>> from builtins import range
>>> for kval in range(10):
...     k.setValue(kval)
...     viewer.plot()
>>> viewer._promptForOpinion()
```

Create a *MayaviClient*.

Parameters

- **vars** (*CellVariable or list*) – *CellVariable* objects to plot
- **title** (*str, optional*) – displayed at the top of the *Viewer* window
- **xmin** (*float, optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (*float, optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float, optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float, optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmin** (*float, optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and

xmax, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

- **zmax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **daemon_file** (*str*, *optional*) – the path to the script to run the separate Mayavi viewer process. Defaults to *fipy/viewers/mayaviViewer/mayaviDaemon.py*
- **fps** (*float*, *optional*) – frames per second to attempt to display

property fps

The frames per second to attempt to display.

plot(filename=None)

Update the display of the viewed variables.

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

plotMesh(filename=None)

Display a representation of the mesh

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

setLimits(limits={}, **kwlimits)

Update the limits.

Parameters

- **limits** (*dict*, *optional*) – a (deprecated) alternative to limit keyword arguments
- **xmin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

- **zmax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

property title

The text appearing at the top center.

(default: if `len(self.vars) == 1`, the name of the only *Variable*, otherwise "").)

property vars

The *Variable* or list of *Variable* objects to display.

fipy.viewers.mayaviViewer.mayaviDaemon

A simple script that polls a data file for changes and then updates the Mayavi pipeline automatically.

This script is based heavily on the `poll_file.py` example in the Mayavi distribution.

This script is to be run like so:

```
$ mayavi2 -x mayaviDaemon.py <options>
```

Or:

```
$ python mayaviDaemon.py <options>
```

Run:

```
$ python mayaviDaemon.py --help
```

to see available options.

Functions

<code>main([argv])</code>	Simple helper to start up the mayavi application.
---------------------------	---

Classes

<code>MayaviDaemon(*args, **kwargs)</code>	Given a file name and a mayavi2 data reader object, this class polls the file for any changes and automatically updates the mayavi pipeline.
--	--

```
class fipy.viewers.mayaviViewer.mayaviDaemon.MayaviDaemon(*args: Any, **kwargs: Any)
```

Bases: Mayavi

Given a file name and a mayavi2 data reader object, this class polls the file for any changes and automatically updates the mayavi pipeline.

```
parse_command_line(argv)
```

Parse command line options.

Parameters

`argv` (`list` of `str`) – The command line arguments

```
setup_source(fname)
```

Given a VTK file name `fname`, this creates a mayavi2 reader for it and adds it to the pipeline. It returns the reader created.

```
update_pipeline(source)
```

Override this to do something else if needed.

```
view_data()
```

Sets up the mayavi pipeline for the visualization.

```
fipy.viewers.mayaviViewer.mayaviDaemon.main(argv=None)
```

Simple helper to start up the mayavi application.

This returns the running application.

fipy.viewers.mayaviViewer.test

Test numeric implementation of the mesh

22.11.3 fipy.viewers.multiViewer

Classes

<code>MultiViewer</code> (viewers)	Treat a collection of different viewers (such for different 2D plots or 1D plots with different axes) as a single viewer that will <code>plot()</code> all subviewers simultaneously.
------------------------------------	---

```
class fipy.viewers.multiViewer.MultiViewer(viewers)
```

Bases: `AbstractViewer`

Treat a collection of different viewers (such for different 2D plots or 1D plots with different axes) as a single viewer that will `plot()` all subviewers simultaneously.

Parameters

`viewers` (`list` of `~fipy.viewers.viewer.Viewer`) – the viewers to bind together

```
plot()
```

Update the display of the viewed variables.

Parameters

`filename` (`str`) – If not `None`, the name of a file to save the image into.

plotMesh(*filename=None*)

Display a representation of the mesh

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

setLimits(*limits={}*, *kwlimits*)**

Update the limits.

Parameters

- **limits** (*dict*, *optional*) – a (deprecated) alternative to limit keyword arguments
- **xmin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

property title

The text appearing at the top center.

(default: if `len(self.vars) == 1`, the name of the only *Variable*, otherwise "").

property vars

The *Variable* or list of *Variable* objects to display.

22.11.4 fipy.viewers.test

Test implementation of the viewers

22.11.5 fipy.viewers.testinteractive

Interactively test the viewers

22.11.6 fipy.viewers.tsvViewer

Classes

`TSVViewer(vars[, title, limits])`

"Views" one or more variables in tab-separated-value format.

`class fipy.viewers.tsvViewer.TSVViewer(vars, title=None, limits={}, **kwlimits)`

Bases: *AbstractViewer*

"Views" one or more variables in tab-separated-value format.

Output is a list of coordinates and variable values at each cell center.

File contents will be, e.g.:

```
title
x      y      ...      var0      var2      ...
0.0    0.0    ...    3.14    1.41    ...
1.0    0.0    ...    2.72    0.866   ...
:
:
```

Creates a *TSVViewer*.

Any cell centers that lie outside the limits provided will not be included. Any values that lie outside the *datamin* or *datamax* will be replaced with *nan*.

All variables must have the same mesh.

It tries to do something reasonable with rank-1 *CellVariable* and *FaceVariable* objects.

Parameters

- **vars** (*CellVariable* or *FaceVariable* or *list*) – the *MeshVariable* objects to display.
- **title** (*str*, optional) – displayed at the top of the *Viewer* window
- **limits** (*dict*, optional) – a (deprecated) alternative to limit keyword arguments
- **xmin** (*float*, optional) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (*float*, optional) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float*, optional) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.

- **ymax** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **zmin** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **zmax** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **datamin** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.

plot(*filename=None*)

“plot” the coordinates and values of the variables to *filename*. If *filename* is not provided, “plots” to *stdout*.

```
>>> from fipy.meshes import Grid1D
>>> m = Grid1D(nx = 3, dx = 0.4)
>>> from fipy.variables.cellVariable import CellVariable
>>> v = CellVariable(mesh = m, name = "var", value = (0, 2, 5))
>>> TSVViewer(vars = (v, v.grad)).plot()
x      var      var_gauss_grad_x
0.2    0        2.5
0.6    2        6.25
1      5        3.75
```

```
>>> from fipy.meshes import Grid2D
>>> m = Grid2D(nx = 2, dx = .1, ny = 2, dy = 0.3)
>>> v = CellVariable(mesh = m, name = "var", value = (0, 2, -2, 5))
>>> TSVViewer(vars = (v, v.grad)).plot()
x      y      var      var_gauss_grad_x      var_gauss_grad_y
0.05  0.15  0        10      -3.33333333333333
0.15  0.15  2        10      5
0.05  0.45  -2       35      -3.33333333333333
0.15  0.45  5        35      5
```

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

plotMesh(*filename=None*)

Display a representation of the mesh

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

setLimits(*limits={}*, ***kwlimits*)

Update the limits.

Parameters

- **limits** (*dict*, *optional*) – a (deprecated) alternative to limit keyword arguments
- **xmin** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

- **xmax** (*float, optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float, optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float, optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmin** (*float, optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmax** (*float, optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamin** (*float, optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float, optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

property title

The text appearing at the top center.

(default: if `len(self.vars) == 1`, the name of the only *Variable*, otherwise "").)

property vars

The *Variable* or list of *Variable* objects to display.

22.11.7 `fipy.viewers.viewer`

Classes

<code>AbstractViewer(vars[, title])</code>	Base class for FiPy Viewers
--	-----------------------------

`class fipy.viewers.viewer.AbstractViewer(vars, title=None, **kwlimits)`

Bases: `object`

Base class for FiPy Viewers

Attention: This class is abstract. Always create one of its subclasses.

Create a *AbstractViewer* object.

Parameters

- **vars** (*CellVariable or list*) – the *CellVariable* objects to display.
- **title** (*str, optional*) – displayed at the top of the *Viewer* window

- **xmin** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **zmin** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **zmax** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **datamin** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.

plot(*filename=None*)

Update the display of the viewed variables.

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

plotMesh(*filename=None*)

Display a representation of the mesh

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

setLimits(*limits={}*, ***kwlimits*)

Update the limits.

Parameters

- **limits** (*dict*, *optional*) – a (deprecated) alternative to limit keyword arguments
- **xmin** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmin** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

- **zmax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

property title

The text appearing at the top center.

(default: if `len(self.vars) == 1`, the name of the only *Variable*, otherwise "").)

property vars

The *Variable* or list of *Variable* objects to display.

22.11.8 fipy.viewers.vtkViewer

Functions

<code>VTKViewer(vars[, title, limits])</code>	Generic function for creating a <i>VTKViewer</i> .
---	--

`class fipy.viewers.vtkViewer.VTKCellViewer(vars, title=None, limits={}, **kwlimits)`

Bases: *VTKViewer*

Renders *CellVariable* data in VTK format

Creates a *VTKViewer*

Parameters

- **vars** (*CellVariable* or *FaceVariable* or *list*) – the *MeshVariable* objects to display.
- **title** (*str*, *optional*) – displayed at the top of the *Viewer* window
- **limits** (*dict*, *optional*) – a (deprecated) alternative to limit keyword arguments
- **xmin** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **zmin** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **zmax** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.

- **datamin** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.

plot(*filename=None*)

Update the display of the viewed variables.

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

plotMesh(*filename=None*)

Display a representation of the mesh

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

setLimits(*limits={}*, ***kwlimits*)

Update the limits.

Parameters

- **limits** (*dict*, *optional*) – a (deprecated) alternative to limit keyword arguments
- **xmin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

property title

The text appearing at the top center.

(default: if `len(self.vars)` == 1, the name of the only *Variable*, otherwise "").)

property vars

The `Variable` or list of `Variable` objects to display.

class `fipy.viewers.vtkViewer.VTKFaceViewer(vars, title=None, limits={}, **kwlimits)`

Bases: `VTKViewer`

Renders `MeshVariable` data in VTK format

Creates a `VTKViewer`

Parameters

- `vars` (`CellVariable` or `FaceVariable` or `list`) – the `MeshVariable` objects to display.
- `title` (`str`, optional) – displayed at the top of the *Viewer* window
- `limits` (`dict`, optional) – a (deprecated) alternative to limit keyword arguments
- `xmin` (`float`, optional) – displayed range of data. Any limit set to a (default) value of `None` will autoscale.
- `xmax` (`float`, optional) – displayed range of data. Any limit set to a (default) value of `None` will autoscale.
- `ymin` (`float`, optional) – displayed range of data. Any limit set to a (default) value of `None` will autoscale.
- `ymax` (`float`, optional) – displayed range of data. Any limit set to a (default) value of `None` will autoscale.
- `zmin` (`float`, optional) – displayed range of data. Any limit set to a (default) value of `None` will autoscale.
- `zmax` (`float`, optional) – displayed range of data. Any limit set to a (default) value of `None` will autoscale.
- `datamin` (`float`, optional) – displayed range of data. Any limit set to a (default) value of `None` will autoscale.
- `datamax` (`float`, optional) – displayed range of data. Any limit set to a (default) value of `None` will autoscale.

plot(`filename=None`)

Update the display of the viewed variables.

Parameters

`filename` (`str`) – If not `None`, the name of a file to save the image into.

plotMesh(`filename=None`)

Display a representation of the mesh

Parameters

`filename` (`str`) – If not `None`, the name of a file to save the image into.

setLimits(`limits={}, **kwlimits`)

Update the limits.

Parameters

- `limits` (`dict`, optional) – a (deprecated) alternative to limit keyword arguments

- **xmin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

property title

The text appearing at the top center.

(default: if `len(self.vars) == 1`, the name of the only *Variable*, otherwise "").)

property vars

The *Variable* or list of *Variable* objects to display.

`fipy.viewers.vtkViewer.VTKViewer(vars, title=None, limits={}, **kwlimits)`

Generic function for creating a *VTKViewer*.

The *VTKViewer* factory will search the module tree and return an instance of the first *VTKViewer* it finds of the correct dimension and rank.

Parameters

- **vars** (*CellVariable* or *FaceVariable* or *list*) – the *MeshVariable* objects to display.
- **title** (*str*, *optional*) – displayed at the top of the *Viewer* window
- **limits** (*dict*, *optional*) – a (deprecated) alternative to limit keyword arguments
- **xmin** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.

- **ymax** (*float, optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **zmin** (*float, optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **zmax** (*float, optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **datamin** (*float, optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float, optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.

Modules

<code>fipy.viewers.vtkViewer.test</code>	Test numeric implementation of the mesh
<code>fipy.viewers.vtkViewer.vtkCellViewer</code>	

<code>fipy.viewers.vtkViewer.vtkFaceViewer</code>	
---	--

<code>fipy.viewers.vtkViewer.vtkViewer</code>	
---	--

`fipy.viewers.vtkViewer.test`

Test numeric implementation of the mesh

`fipy.viewers.vtkViewer.vtkCellViewer`

Classes

<code>VTKCellViewer(vars[, title, limits])</code>	Renders <i>CellVariable</i> data in VTK format
---	--

`class fipy.viewers.vtkViewer.vtkCellViewer.VTKCellViewer(vars, title=None, limits={}, **kwlimits)`

Bases: `VTKViewer`

Renders *CellVariable* data in VTK format

Creates a `VTKViewer`

Parameters

- **vars** (`CellVariable or FaceVariable or list`) – the `MeshVariable` objects to display.
- **title** (*str, optional*) – displayed at the top of the *Viewer* window
- **limits** (*dict, optional*) – a (deprecated) alternative to limit keyword arguments
- **xmin** (*float, optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.

- **xmax** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **zmin** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **zmax** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **datamin** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.

plot(*filename=None*)

Update the display of the viewed variables.

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

plotMesh(*filename=None*)

Display a representation of the mesh

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

setLimits(*limits={}*, ***kwlimits*)

Update the limits.

Parameters

- **limits** (*dict*, *optional*) – a (deprecated) alternative to limit keyword arguments
- **xmin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

- **datamin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

property title

The text appearing at the top center.

(default: if `len(self.vars) == 1`, the name of the only *Variable*, otherwise "").)

property vars

The *Variable* or list of *Variable* objects to display.

fipy.viewers.vtkViewer.vtkFaceViewer**Classes**

<code>VTKFaceViewer(vars[, title, limits])</code>	Renders <i>MeshVariable</i> data in VTK format
---	--

class `fipy.viewers.vtkViewer.vtkFaceViewer.VTKFaceViewer(vars, title=None, limits={}, **kwlimits)`

Bases: *VTKViewer*

Renders *MeshVariable* data in VTK format

Creates a *VTKViewer*

Parameters

- **vars** (*CellVariable* or *FaceVariable* or *list*) – the *MeshVariable* objects to display.
- **title** (*str*, *optional*) – displayed at the top of the *Viewer* window
- **limits** (*dict*, *optional*) – a (deprecated) alternative to limit keyword arguments
- **xmin** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **zmin** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **zmax** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **datamin** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.

- **datamax** (*float*, *optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.

plot(*filename=None*)

Update the display of the viewed variables.

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

plotMesh(*filename=None*)

Display a representation of the mesh

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

setLimits(*limits={}*, ***kwlimits*)

Update the limits.

Parameters

- **limits** (*dict*, *optional*) – a (deprecated) alternative to limit keyword arguments
- **xmin** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmin** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmax** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamin** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

property title

The text appearing at the top center.

(default: if `len(self.vars) == 1`, the name of the only *Variable*, otherwise "").)

property vars

The *Variable* or list of *Variable* objects to display.

fipy.viewers.vtkViewer.vtkViewer**Classes**

<code>VTKViewer(vars[, title, limits])</code>	Renders <i>MeshVariable</i> data in VTK format
---	--

class fipy.viewers.vtkViewer.vtkViewer.VTKViewer(*vars*, *title=None*, *limits={}*, ***kwlimits*)

Bases: *AbstractViewer*

Renders *MeshVariable* data in VTK format

Creates a *VTKViewer*

Parameters

- **vars** (*CellVariable or FaceVariable or list*) – the *MeshVariable* objects to display.
- **title** (*str, optional*) – displayed at the top of the *Viewer* window
- **limits** (*dict, optional*) – a (deprecated) alternative to limit keyword arguments
- **xmin** (*float, optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (*float, optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float, optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float, optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **zmin** (*float, optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **zmax** (*float, optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **datamin** (*float, optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float, optional*) – displayed range of data. Any limit set to a (default) value of *None* will autoscale.

plot(*filename=None*)

Update the display of the viewed variables.

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

plotMesh(*filename=None*)

Display a representation of the mesh

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

setLimits(*limits*={}, *kwlimits*)**

Update the limits.

Parameters

- **limits** (*dict*, *optional*) – a (deprecated) alternative to limit keyword arguments
- **xmin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

property title

The text appearing at the top center.

(default: if `len(self.vars) == 1`, the name of the only *Variable*, otherwise "").)

property vars

The *Variable* or list of *Variable* objects to display.

examples

Demonstration scripts and high-level tests of the *fipy* package

Modules

`examples.benchmarking`

`examples.cahnHilliard`

`examples.chemotaxis`

`examples.convection`

`examples.diffusion`

`examples.elphf`

The following examples exhibit various parts of a model to study electrochemical interfaces.

`examples.flow`

`examples.levelSet`

`examples.meshing`

`examples.parallel`

`examples.phase`

`examples.reactiveWetting`

`examples.riemann`

`examples.test`

Run all the test cases in examples/

`examples.updating`

23.1 examples.benchmarking

Modules

<code>examples.benchmarking.benchmark</code>
<code>examples.benchmarking.size</code>
<code>examples.benchmarking.steps</code>
<code>examples.benchmarking.utils</code>
<code>examples.benchmarking.versions</code>

23.1.1 examples.benchmarking.benchmark

23.1.2 examples.benchmarking.size

23.1.3 examples.benchmarking.steps

23.1.4 examples.benchmarking.utils

23.1.5 examples.benchmarking.versions

23.2 examples.cahnHilliard

Modules

<code>examples.cahnHilliard.mesh2D</code>	The spinodal decomposition phenomenon is a spontaneous separation of an initially homogeneous mixture into two distinct regions of different properties (spin-up/spin-down, component A/component B).
<code>examples.cahnHilliard.mesh2DCoupled</code>	Solve the Cahn-Hilliard problem in two dimensions.
<code>examples.cahnHilliard.mesh3D</code>	Solves the Cahn-Hilliard problem in a 3D cube
<code>examples.cahnHilliard.sphere</code>	Solves the Cahn-Hilliard problem on the surface of a sphere.
<code>examples.cahnHilliard.sphereDaemon</code>	
<code>examples.cahnHilliard.tanh1D</code>	This example solves the Cahn-Hilliard equation given by,
<code>examples.cahnHilliard.test</code>	

23.2.1 examples.cahnHilliard.mesh2D

The spinodal decomposition phenomenon is a spontaneous separation of an initially homogeneous mixture into two distinct regions of different properties (spin-up/spin-down, component A/component B). It is a “barrierless” phase separation process, such that under the right thermodynamic conditions, any fluctuation, no matter how small, will tend to grow. This is in contrast to nucleation, where a fluctuation must exceed some critical magnitude before it will survive and grow. Spinodal decomposition can be described by the “Cahn-Hilliard” equation (also known as “conserved Ginsberg-Landau” or “model B” of Hohenberg & Halperin)

$$\frac{\partial \phi}{\partial t} = \nabla \cdot D \nabla \left(\frac{\partial f}{\partial \phi} - \epsilon^2 \nabla^2 \phi \right).$$

where ϕ is a conserved order parameter, possibly representing alloy composition or spin. The double-well free energy function $f = (a^2/2)\phi^2(1-\phi)^2$ penalizes states with intermediate values of ϕ between 0 and 1. The gradient energy term $\epsilon^2 \nabla^2 \phi$, on the other hand, penalizes sharp changes of ϕ . These two competing effects result in the segregation of ϕ into domains of 0 and 1, separated by abrupt, but smooth, transitions. The parameters a and ϵ determine the relative weighting of the two effects and D is a rate constant.

We can simulate this process in *FiPy* with a simple script:

```
>>> from fipy import CellVariable, Grid2D, GaussianNoiseVariable, TransientTerm,
...     DiffusionTerm, ImplicitSourceTerm, LinearLU Solver, Viewer
>>> from fipy.tools import numerix
```

(Note that all of the functionality of NumPy is imported along with *FiPy*, although much is augmented for *FiPy*'s needs.)

```
>>> if __name__ == "__main__":
...     nx = ny = 1000
... else:
...     nx = ny = 20
>>> mesh = Grid2D(nx=nx, ny=ny, dx=0.25, dy=0.25)
>>> phi = CellVariable(name=r"\phi", mesh=mesh)
```

We start the problem with random fluctuations about $\phi = 1/2$

```
>>> phi.setValue(GaussianNoiseVariable(mesh=mesh,
...                                     mean=0.5,
...                                     variance=0.01))
```

FiPy doesn't plot or output anything unless you tell it to:

```
>>> if __name__ == "__main__":
...     viewer = Viewer(vars=(phi,), datamin=0., datamax=1.)
```

For *FiPy*, we need to perform the partial derivative $\partial f / \partial \phi$ manually and then put the equation in the canonical form by decomposing the spatial derivatives so that each *Term* is of a single, even order:

$$\frac{\partial \phi}{\partial t} = \nabla \cdot D a^2 [1 - 6\phi(1-\phi)] \nabla \phi - \nabla \cdot D \nabla \epsilon^2 \nabla^2 \phi.$$

FiPy would automatically interpolate $D * a**2 * (1 - 6 * phi * (1 - phi))$ onto the faces, where the diffusive flux is calculated, but we obtain somewhat more accurate results by performing a linear interpolation from phi at cell centers to PHI at face centers. Some problems benefit from non-linear interpolations, such as harmonic or geometric means, and *FiPy* makes it easy to obtain these, too.


```
>>> PHI = phi.arithmeticFaceValue
>>> D = a = epsilon = 1.
>>> eq = (TransientTerm()
...     == DiffusionTerm(coeff=D * a**2 * (1 - 6 * PHI * (1 - PHI)))
...     - DiffusionTerm(coeff=(D, epsilon**2)))
```

Because the evolution of a spinodal microstructure slows with time, we use exponentially increasing time steps to keep the simulation “interesting”. The *FiPy* user always has direct control over the evolution of their problem.

```
>>> dexp = -5
>>> elapsed = 0.
>>> if __name__ == "__main__":
...     duration = 1000.
... else:
...     duration = 1000.
```

```
>>> while elapsed < duration:
...     dt = min(100, numerix.exp(dexp))
...     elapsed += dt
...     dexp += 0.01
...     eq.solve(phi, dt=dt, solver=LinearLUSolver())
...     if __name__ == "__main__":
...         viewer.plot()
...     elif (max(phi.globalValue) > 0.7) and (min(phi.globalValue) < 0.3) and elapsed > 10.:
...         break
... 
```

```
>>> print((max(phi.globalValue) > 0.7) and (min(phi.globalValue) < 0.3))
True
```

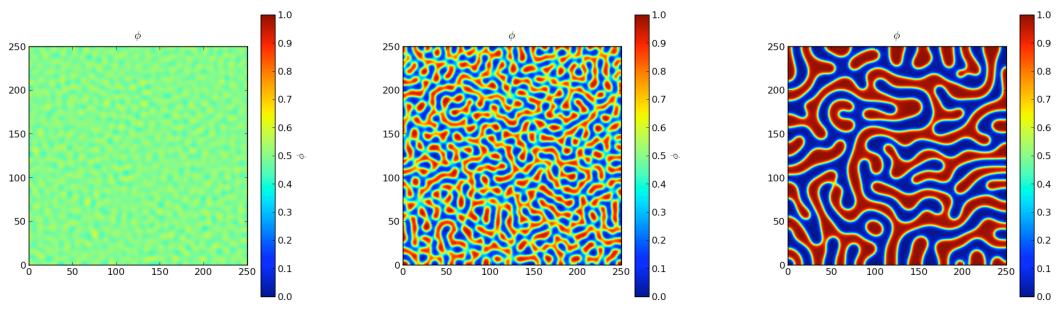(a) $t = 30$ (b) $t = 100$ (c) $t = 1000$

23.2.2 examples.cahnHilliard.mesh2DCoupled

Solve the Cahn-Hilliard problem in two dimensions.

Warning: This formulation has serious performance problems and is **not automatically tested**. Specifically, for non-trivial mesh sizes, *PySparse* requires enormous amounts of memory, *Trilinos* cannot solve the coupled form, and *PETSc* cannot solve the vector form.

The spinodal decomposition phenomenon is a spontaneous separation of an initially homogeneous mixture into two distinct regions of different properties (spin-up/spin-down, component A/component B). It is a “barrierless” phase separation process, such that under the right thermodynamic conditions, any fluctuation, no matter how small, will tend to grow. This is in contrast to nucleation, where a fluctuation must exceed some critical magnitude before it will survive and grow. Spinodal decomposition can be described by the “Cahn-Hilliard” equation (also known as “conserved Ginsberg-Landau” or “model B” of Hohenberg & Halperin)

$$\frac{\partial \phi}{\partial t} = \nabla \cdot D \nabla \left(\frac{\partial f}{\partial \phi} - \epsilon^2 \nabla^2 \phi \right).$$

where ϕ is a conserved order parameter, possibly representing alloy composition or spin. The double-well free energy function $f = (a^2/2)\phi^2(1-\phi)^2$ penalizes states with intermediate values of ϕ between 0 and 1. The gradient energy term $\epsilon^2 \nabla^2 \phi$, on the other hand, penalizes sharp changes of ϕ . These two competing effects result in the segregation of ϕ into domains of 0 and 1, separated by abrupt, but smooth, transitions. The parameters a and ϵ determine the relative weighting of the two effects and D is a rate constant.

We can simulate this process in *FiPy* with a simple script:

```
>>> from fipy import CellVariable, Grid2D, GaussianNoiseVariable, DiffusionTerm,
...     TransientTerm, ImplicitSourceTerm, Viewer
>>> from fipy.tools import numerix
```

(Note that all of the functionality of NumPy is imported along with *FiPy*, although much is augmented for *FiPy*'s needs.)

```
>>> if __name__ == "__main__":
...     nx = ny = 20
... else:
...     nx = ny = 10
>>> mesh = Grid2D(nx=nx, ny=ny, dx=0.25, dy=0.25)
>>> phi = CellVariable(name=r"\phi", mesh=mesh)
>>> psi = CellVariable(name=r"\psi", mesh=mesh)
```

We start the problem with random fluctuations about $\phi = 1/2$

```
>>> noise = GaussianNoiseVariable(mesh=mesh,
...                                 mean=0.5,
...                                 variance=0.01).value

>>> phi[:] = noise
```

FiPy doesn't plot or output anything unless you tell it to:

```
>>> if __name__ == "__main__":
...     viewer = Viewer(vars=(phi,), datamin=0., datamax=1.)
```

We factor the Cahn-Hilliard equation into two 2nd-order PDEs and place them in canonical form for *Fipy* to solve them as a coupled set of equations.

$$\frac{\partial \phi}{\partial t} = \nabla \cdot D \nabla \psi$$

$$\psi = \left(\frac{\partial f}{\partial \phi} - \frac{\partial^2 f}{\partial \phi^2} \phi \right)_{\text{old}} + \frac{\partial^2 f}{\partial \phi^2} \phi - \epsilon^2 \nabla^2 \phi$$

The source term in ψ , $\frac{\partial f}{\partial \phi}$, is expressed in linearized form after Taylor expansion at $\phi = \phi_{\text{old}}$, for the same reasons discussed in `examples.phase.simple`. We need to perform the partial derivatives

$$\frac{\partial f}{\partial \phi} = (a^2/2)2\phi(1-\phi)(1-2\phi)$$

$$\frac{\partial^2 f}{\partial \phi^2} = (a^2/2)2[1-6\phi(1-\phi)]$$

manually.

```
>>> D = a = epsilon = 1.
>>> dfdphi = a**2 * phi * (1 - phi) * (1 - 2 * phi)
>>> dfdphi_ = a**2 * (1 - phi) * (1 - 2 * phi)
>>> d2fdphi2 = a**2 * (1 - 6 * phi * (1 - phi))
>>> eq1 = (TransientTerm(var=phi) == DiffusionTerm(coef=D, var=psi))
>>> eq2 = (ImplicitSourceTerm(coef=1., var=psi)
...     == ImplicitSourceTerm(coef=d2fdphi2, var=phi) - d2fdphi2 * phi + dfdphi
...     - DiffusionTerm(coef=epsilon**2, var=phi))
>>> eq3 = (ImplicitSourceTerm(coef=1., var=psi)
...     == ImplicitSourceTerm(coef=dfdphi_, var=phi)
...     - DiffusionTerm(coef=epsilon**2, var=phi))
```


```
>>> eq = eq1 & eq2
```

Because the evolution of a spinodal microstructure slows with time, we use exponentially increasing time steps to keep the simulation “interesting”. The *Fipy* user always has direct control over the evolution of their problem.

```
>>> dexp = -5
>>> elapsed = 0.
>>> if __name__ == "__main__":
...     duration = 100.
... else:
...     duration = .5e-1
```

```
>>> while elapsed < duration:
...     dt = min(100, numerix.exp(dexp))
...     elapsed += dt
...     dexp += 0.01
...     eq.solve(dt=dt)
...     if __name__ == "__main__":
...         viewer.plot()
```

```
>>> from fipy import input
>>> if __name__ == '__main__':
...     input("Coupled equations. Press <return> to proceed...")
```

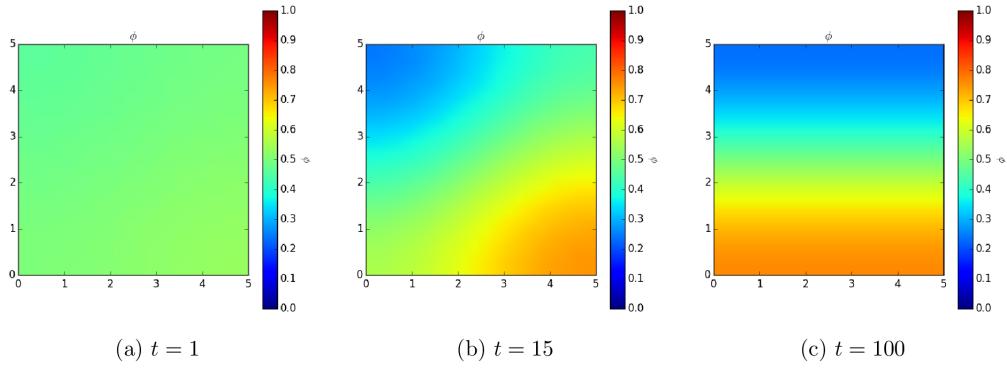

These equations can also be solved in *FiPy* using a vector equation. The variables ϕ and ψ are now stored in a single variable

```
>>> var = CellVariable(mesh=mesh, elementshape=(2,))  
>>> var[0] = noise
```

```
>>> if __name__ == "__main__":
...     viewer = Viewer(name=r"$\phi$",
...                     vars=var[0,],
...                     datamin=0.,
...                     datamax=1.)
```

```
>>> D = a = epsilon = 1.  
>>> v0 = var[0]  
>>> dfdphi = a**2 * v0 * (1 - v0) * (1 - 2 * v0)  
>>> dfdphi_ = a**2 * (1 - v0) * (1 - 2 * v0)  
>>> d2fdphi2 = a**2 * (1 - 6 * v0 * (1 - v0))
```

The source terms have to be shaped correctly for a vector. The implicit source coefficient has to have a shape of (2, 2) while the explicit source has a shape (2,)

```
>>> source = (- d2fdphi2 * v0 + dfdphi) * (0, 1)
>>> impCoeff = d2fdphi2 * ((0, 0),
...                                (1., 0)) + ((0, 0),
...                                (0, -1.))
...  
...
```

This is the same equation as the previous definition of eq , but now in a vector format.

```
>>> eq = (TransientTerm(((1., 0.),
...                     (0., 0.))) == DiffusionTerm([(0., D),
...                                         (-epsilon**2, 0.))])
...
... + ImplicitSourceTerm(impCoeff) + source)
```

```
>>> dexp = -5  
>>> elapsed = 0.
```

```
>>> while elapsed < duration:  
...     dt = min(100, numerix.exp(dexp))  
...     elapsed += dt  
...     dexp += 0.01  
...     eq.solve(var=var, dt=dt)
```

(continues on next page)

(continued from previous page)

```
...     if __name__ == "__main__":
...         viewer.plot()
```

```
>>> print(numerix.allclose(var, (phi, psi)))
True
```

23.2.3 examples.cahnHilliard.mesh3D

Solves the Cahn-Hilliard problem in a 3D cube

```
>>> from fipy import CellVariable, Grid3D, Viewer, GaussianNoiseVariable, TransientTerm,_
... DiffusionTerm, DefaultSolver
>>> from fipy.tools import numerix
```

The only difference from `examples.cahnHilliard.mesh2D` is the declaration of `mesh`.

```
>>> if __name__ == "__main__":
...     nx = ny = nz = 100
... else:
...     nx = ny = nz = 10
>>> mesh = Grid3D(nx=nx, ny=ny, nz=nz, dx=0.25, dy=0.25, dz=0.25)
>>> phi = CellVariable(name=r"\phi", mesh=mesh)
```

We start the problem with random fluctuations about $\phi = 1/2$

```
>>> phi.setValue(GaussianNoiseVariable(mesh=mesh,
...                                     mean=0.5,
...                                     variance=0.01))
```

FiPy doesn't plot or output anything unless you tell it to:

```
>>> if __name__ == "__main__":
...     viewer = Viewer(vars=(phi,), datamin=0., datamax=1.)
```

For *FiPy*, we need to perform the partial derivative $\partial f / \partial \phi$ manually and then put the equation in the canonical form by decomposing the spatial derivatives so that each `Term` is of a single, even order:


$$\frac{\partial \phi}{\partial t} = \nabla \cdot D a^2 [1 - 6\phi(1 - \phi)] \nabla \phi - \nabla \cdot D \nabla \epsilon^2 \nabla^2 \phi.$$

FiPy would automatically interpolate $D * a^{**2} * (1 - 6 * \phi * (1 - \phi))$ onto the faces, where the diffusive flux is calculated, but we obtain somewhat more accurate results by performing a linear interpolation from `phi` at cell centers to `PHI` at face centers. Some problems benefit from non-linear interpolations, such as harmonic or geometric means, and *FiPy* makes it easy to obtain these, too.

```
>>> PHI = phi.arithmeticFaceValue
>>> D = a = epsilon = 1.
>>> eq = (TransientTerm()
...       == DiffusionTerm(coeff=D * a**2 * (1 - 6 * PHI * (1 - PHI)))
...       - DiffusionTerm(coeff=(D, epsilon**2)))
```

Because the evolution of a spinodal microstructure slows with time, we use exponentially increasing time steps to keep the simulation “interesting”. The *FiPy* user always has direct control over the evolution of their problem.

```
>>> dexp = -5
>>> elapsed = 0.
>>> if __name__ == "__main__":
...     duration = 1000.
... else:
...     duration = 1e-2
>>> while elapsed < duration:
...     dt = min(100, numerix.exp(dexp))
...     elapsed += dt
...     dexp += 0.01
...     eq.solve(phi, dt=dt, solver=DefaultSolver(precon=None))
...     if __name__ == "__main__":
...         viewer.plot()
```

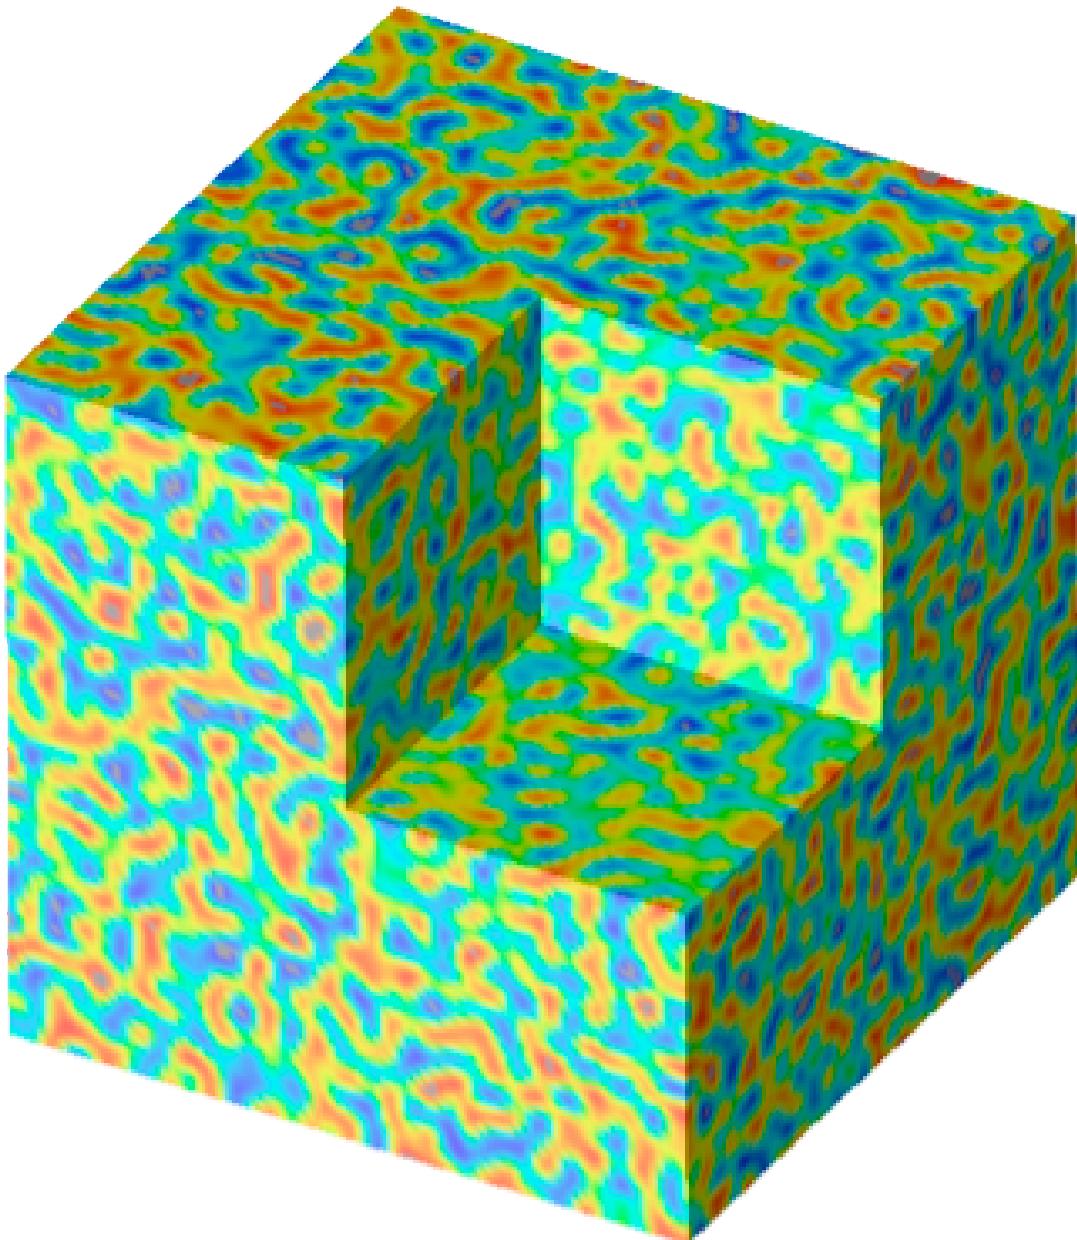

23.2.4 examples.cahnHilliard.sphere

Solves the Cahn-Hilliard problem on the surface of a sphere.

This phenomenon can occur on vesicles (http://www.youtube.com/watch?v=kDsFP67_ZSE).

```
>>> from fipy import CellVariable, Gmsh2DIn3DSpace, GaussianNoiseVariable, Viewer,
...     TransientTerm, DiffusionTerm, DefaultSolver
>>> from fipy.tools import numerix
```

The only difference from `examples.cahnHilliard.mesh2D` is the declaration of `mesh`.

```
>>> mesh = Gmsh2DIn3DSpace('''
...     radius = 5.0;
...     cellSize = 0.3;
...
...     // create inner 1/8 shell
...     Point(1) = {0, 0, 0, cellSize};
...     Point(2) = {-radius, 0, 0, cellSize};
...     Point(3) = {0, radius, 0, cellSize};
...     Point(4) = {0, 0, radius, cellSize};
...     Circle(1) = {2, 1, 3};
...     Circle(2) = {4, 1, 2};
...     Circle(3) = {4, 1, 3};
...     Line Loop(1) = {1, -3, 2} ;
...     Ruled Surface(1) = {1};
...
...     // create remaining 7/8 inner shells
...     t1[] = Rotate {{0,0,1},{0,0,0},Pi/2} {Duplicata{Surface{1}};};
...     t2[] = Rotate {{0,0,1},{0,0,0},Pi} {Duplicata{Surface{1}};};
...     t3[] = Rotate {{0,0,1},{0,0,0},Pi*3/2} {Duplicata{Surface{1}};};
...     t4[] = Rotate {{0,1,0},{0,0,0},-Pi/2} {Duplicata{Surface{1}};};
...     t5[] = Rotate {{0,0,1},{0,0,0},Pi/2} {Duplicata{Surface{t4[0]}};};
...     t6[] = Rotate {{0,0,1},{0,0,0},Pi} {Duplicata{Surface{t4[0]}};};
...     t7[] = Rotate {{0,0,1},{0,0,0},Pi*3/2} {Duplicata{Surface{t4[0]}};};
...
...     // create entire inner and outer shell
...     Surface Loop(100)={1,t1[0],t2[0],t3[0],t7[0],t4[0],t5[0],t6[0]};
... ''', overlap=2).extrude(extrudeFunc=lambda r: 1.1 * r)
>>> phi = CellVariable(name=r"$\phi$", mesh=mesh)
```

We start the problem with random fluctuations about $\phi = 1/2$

```
>>> phi.setValue(GaussianNoiseVariable(mesh=mesh,
...                                         mean=0.5,
...                                         variance=0.01))
```

FiPy doesn't plot or output anything unless you tell it to: If `MayaviClient` is available, we can customize the view with a subclass of `MayaviDaemon`.

```
>>> if __name__ == "__main__":
...     try:
...         viewer = MayaviClient(vars=phi,
...                               datamin=0., datamax=1.,
```

(continues on next page)

(continued from previous page)

```

...
    except:
        viewer = Viewer(vars=phi,
                         datamin=0.,
                         datamax=1.,
                         xmin=-2.5, zmax=2.5)

```

For *FiPy*, we need to perform the partial derivative $\partial f / \partial \phi$ manually and then put the equation in the canonical form by decomposing the spatial derivatives so that each *Term* is of a single, even order:

$$\frac{\partial \phi}{\partial t} = \nabla \cdot D a^2 [1 - 6\phi(1 - \phi)] \nabla \phi - \nabla \cdot D \nabla \epsilon^2 \nabla^2 \phi.$$

FiPy would automatically interpolate $D * a^{**2} * (1 - 6 * \phi * (1 - \phi))$ onto the faces, where the diffusive flux is calculated, but we obtain somewhat more accurate results by performing a linear interpolation from ϕ at cell centers to PHI at face centers. Some problems benefit from non-linear interpolations, such as harmonic or geometric means, and *FiPy* makes it easy to obtain these, too.

```

>>> PHI = phi.arithmeticFaceValue
>>> D = a = epsilon = 1.
>>> eq = (TransientTerm()
...     == DiffusionTerm(coeff=D * a**2 * (1 - 6 * PHI * (1 - PHI)))
...     - DiffusionTerm(coeff=(D, epsilon**2)))


```

Because the evolution of a spinodal microstructure slows with time, we use exponentially increasing time steps to keep the simulation “interesting”. The *FiPy* user always has direct control over the evolution of their problem.

```

>>> dexp = -5
>>> elapsed = 0.
>>> if __name__ == "__main__":
...     duration = 1000.
... else:
...     duration = 1e-2
>>> while elapsed < duration:
...     dt = min(100, numerix.exp(dexp))
...     elapsed += dt
...     dexp += 0.01
...     eq.solve(phi, dt=dt, solver=DefaultSolver(precon=None))
...     if __name__ == "__main__":
...         viewer.plot()

```

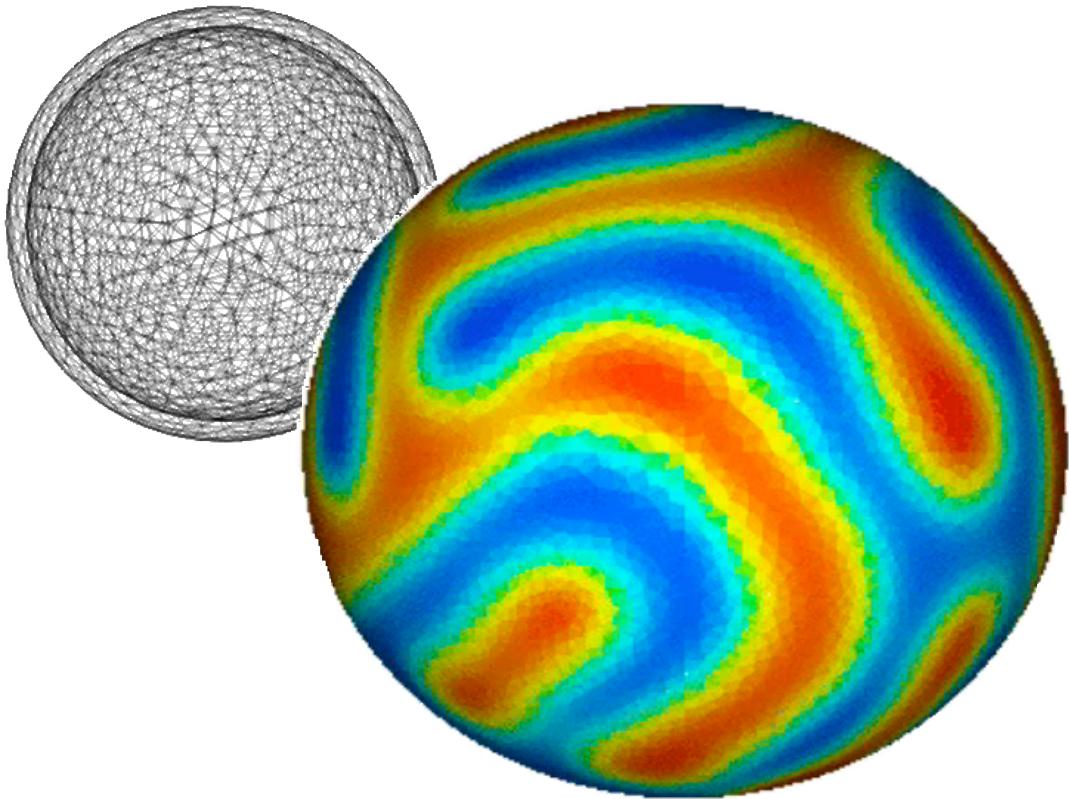

23.2.5 examples.cahnHilliard.sphereDaemon

23.2.6 examples.cahnHilliard.tanh1D

This example solves the Cahn-Hilliard equation given by,

$$\frac{\partial \phi}{\partial t} = \nabla \cdot D \nabla \left(\frac{\partial f}{\partial \phi} - \epsilon^2 \nabla^2 \phi \right)$$

where the free energy functional is given by,

$$f = \frac{a^2}{2} \phi^2 (1 - \phi)^2$$

The Cahn-Hilliard equation can be rewritten in the following form,

$$\frac{\partial \phi}{\partial t} = \nabla \cdot D \left(\frac{\partial^2 f}{\partial \phi^2} \nabla \phi - \epsilon^2 \nabla^3 \phi \right)$$

The above form of the equation makes the non-linearity part of the diffusion coefficient for the first term on the RHS. This is the correct way to express the equation to *FiPy*.

We solve the problem on a 1D mesh

```
>>> from fipy import CellVariable, Grid1D, NthOrderBoundaryCondition, DiffusionTerm, TransientTerm, LinearLUSolver, DefaultSolver, Viewer
>>> from fipy.tools import numerix
```

```
>>> L = 40.
>>> nx = 1000
>>> dx = L / nx
>>> mesh = Grid1D(dx=dx, nx=nx)
```

and create the solution variable

```
>>> var = CellVariable(
...     name="phase field",
...     mesh=mesh,
...     value=1.)
```

The boundary conditions for this problem are

$$\left. \begin{array}{l} \phi = \frac{1}{2} \\ \frac{\partial^2 \phi}{\partial x^2} = 0 \end{array} \right\} \quad \text{on } x = 0$$

and

$$\left. \begin{array}{l} \phi = 1 \\ \frac{\partial^2 \phi}{\partial x^2} = 0 \end{array} \right\} \quad \text{on } x = L$$

or

```
>>> BCs = (
...     NthOrderBoundaryCondition(faces=mesh.facesLeft, value=0, order=2),
...     NthOrderBoundaryCondition(faces=mesh.facesRight, value=0, order=2))
```

```
>>> var.constrain(1, mesh.facesRight)
>>> var.constrain(.5, mesh.facesLeft)
```

Using

```
>>> asq = 1.0
>>> epsilon = 1
>>> diffusionCoeff = 1
```

we create the Cahn-Hilliard equation:

```
>>> faceVar = var.arithmeticFaceValue
>>> freeEnergyDoubleDerivative = asq * (1 - 6 * faceVar * (1 - faceVar))
```

```
>>> diffTerm2 = DiffusionTerm(
...     coeff=diffusionCoeff * freeEnergyDoubleDerivative)
>>> diffTerm4 = DiffusionTerm(coeff=(diffusionCoeff, epsilon**2))
>>> eqch = TransientTerm() == diffTerm2 - diffTerm4
```

```
>>> import fipy.solvers.solver
>>> if fipy.solvers.solver_suite in ['pysparse', 'pyamgx']:
...     solver = LinearLUSolver(tolerance=1e-15, iterations=100)
... else:
...     solver = DefaultSolver()
```

The solution to this 1D problem over an infinite domain is given by,

$$\phi(x) = \frac{1}{1 + \exp\left(-\frac{a}{\epsilon}x\right)}$$

or

```
>>> a = numerix.sqrt(asq)
>>> answer = 1 / (1 + numerix.exp(-a * (mesh.cellCenters[0]) / epsilon))
```

If we are running interactively, we create a viewer to see the results

```
>>> if __name__ == '__main__':
...     viewer = Viewer(vars=var, datamin=0., datamax=1.0)
...     viewer.plot()
```

We iterate the solution to equilibrium and, if we are running interactively, we update the display and output data about the progression of the solution

```
>>> dexp=-5
>>> from builtins import range
>>> for step in range(100):
...     dt = numerix.exp(dexp)
...     dt = min(10, dt)
...     dexp += 0.5
...     eqch.solve(var=var, boundaryConditions=BCs, solver=solver, dt=dt)
...     if __name__ == '__main__':
...         diff = abs(answer - numerix.array(var))
...         maxarg = numerix.argmax(diff)
...         print('maximum error: {}'.format(diff[maxarg]))
...         print('element id:', maxarg)
...         print('value at element {} is {}'.format(maxarg, var[maxarg]))
...         print('solution value: {}'.format(answer[maxarg]))
...
...     viewer.plot()
```

We compare the analytical solution with the numerical result,

```
>>> print(var.allclose(answer, atol=1e-4))
1
```

23.2.7 examples.cahnHilliard.test

23.3 examples.chemotaxis

Modules

<code>examples.chemotaxis.input</code>	Input file for chemotaxis modeling.
<code>examples.chemotaxis.input2D</code>	Input file for chemotaxis modeling.
<code>examples.chemotaxis.parameters</code>	Input file for parameters
<code>examples.chemotaxis.test</code>	

23.3.1 examples.chemotaxis.input

Input file for chemotaxis modeling.

Here are some test cases for the model.

```
>>> from __future__ import division

>>> from builtins import input
>>> from builtins import range
>>> from examples.chemotaxis.parameters import parameters
>>> from fipy import CellVariable, Grid1D, TransientTerm, DiffusionTerm, ↵
    ImplicitSourceTerm, Viewer, numerix

>>> params = parameters['case 2']

>>> nx = 50
>>> dx = 1.
>>> L = nx * dx

>>> mesh = Grid1D(nx=nx, dx=dx)

>>> shift = 1.

>>> KMVar = CellVariable(mesh=mesh, value=params['KM'] * shift, hasOld=1)
>>> KCVar = CellVariable(mesh=mesh, value=params['KC'] * shift, hasOld=1)
>>> TMVar = CellVariable(mesh=mesh, value=params['TM'] * shift, hasOld=1)
>>> TCVar = CellVariable(mesh=mesh, value=params['TC'] * shift, hasOld=1)
>>> P3Var = CellVariable(mesh=mesh, value=params['P3'] * shift, hasOld=1)
>>> P2Var = CellVariable(mesh=mesh, value=params['P2'] * shift, hasOld=1)
>>> RVar = CellVariable(mesh=mesh, value=params['R'], hasOld=1)

>>> PN = P3Var + P2Var

>>> KMscCoeff = params['chik'] * (RVar + 1) * (1 - KCVar - KMVar.cellVolumeAverage)
>>> KMspCoeff = params['lambdaK'] / (1 + PN / params['kappaK'])
>>> KMEq = TransientTerm() - KMscCoeff + ImplicitSourceTerm(KMspCoeff)

>>> TMscCoeff = params['chit'] * (1 - TCVar - TMVar.cellVolumeAverage)
>>> TMspCoeff = params['lambdaT'] * (KMVar + params['zetaT'])
>>> TMEq = TransientTerm() - TMscCoeff + ImplicitSourceTerm(TMspCoeff)

>>> TCscCoeff = params['lambdaT'] * (TMVar * KMVar).cellVolumeAverage
>>> TCspCoeff = params['lambdaTstar']
>>> TCEq = TransientTerm() - TCscCoeff + ImplicitSourceTerm(TCspCoeff)

>>> PIP2PITP = PN / (PN / params['kappam'] + PN.cellVolumeAverage / params['kappac'] + ↵
    1) + params['zetaPITP']
```

```
>>> P3spCoeff = params['lambda3'] * (TMVar + params['zeta3T'])
>>> P3scCoeff = params['chi3'] * KMVar * (PIP2PITP / (1 + KMVar / params['kappa3']) +
-> params['zeta3PITP']) + params['zeta3']
>>> P3Eq = TransientTerm() - DiffusionTerm(params['diffusionCoeff']) - P3scCoeff +
-> ImplicitSourceTerm(P3spCoeff)
```

```
>>> P2scCoeff = scCoeff = params['chi2'] + params['lambda3'] * params['zeta3T'] * P3Var
>>> P2spCoeff = params['lambda2'] * (TMVar + params['zeta2T'])
>>> P2Eq = TransientTerm() - DiffusionTerm(params['diffusionCoeff']) - P2scCoeff +
-> ImplicitSourceTerm(P2spCoeff)
```

```
>>> KCscCoeff = params['alphaKstar'] * params['lambdaK'] * (KMVar / (1 + PN / params[
-> 'kappaK'])) .cellVolumeAverage
>>> KCspCoeff = params['lambdaKstar'] / (params['kappaKstar'] + KCVar)
>>> KCEq = TransientTerm() - KCscCoeff + ImplicitSourceTerm(KCspCoeff)
```

```
>>> eqs = ((KMVar, KMEq), (TMVar, TMEq), (TCVar, TCEq), (P3Var, P3Eq), (P2Var, P2Eq), +
-> (KCVar, KCEq))
```

```
>>> if __name__ == '__main__':
...     steps = 100
... else:
...     steps = 28
```

```
>>> for i in range(steps):
...     for var, eqn in eqs:
...         var.updateOld()
...     for var, eqn in eqs:
...         eqn.solve(var, dt=1.)
```

```
>>> accuracy = 1e-2
>>> print(KMVar.allclose(params['KM'], atol=accuracy))
1
>>> print(TMVar.allclose(params['TM'], atol=accuracy))
1
>>> print(TCVar.allclose(params['TC'], atol=accuracy))
1
>>> print(P2Var.allclose(params['P2'], atol=accuracy))
1
>>> print(P3Var.allclose(params['P3'], atol=accuracy))
1
>>> print(KCVar.allclose(params['KC'], atol=accuracy))
1
```

```
>>> PNView = PN / PN.cellVolumeAverage
>>> PNView.name = 'PN'
```

```
>>> KMView = KMVar / KMVar.cellVolumeAverage
>>> KMView.name = 'KM'
```

```
>>> TMView = TMVar / TMVar.cellVolumeAverage
>>> TMView.name = 'TM'
```

```
>>> RVar[:] = params['S'] + (1 + params['S']) * params['G'] * numerix.cos((2 * numerix.
-> pi * mesh.cellCenters[0]) / L)
```

```
>>> if __name__ == '__main__':
...     KMViewer = Viewer(PNView, KMView, TMView), title = 'Gradient Stimulus: Profile')
...
...     for i in range(100):
...         for var, eqn in eqs:
...             var.updateOld()
...         for var, eqn in eqs:
...             eqn.solve(var, dt=0.1)
...
...         KMViewer.plot()
...
...     input("finished")
```

23.3.2 examples.chemotaxis.input2D

Input file for chemotaxis modeling.

Here are some test cases for the model.

```
>>> from __future__ import division
```

```
>>> from builtins import input
>>> from builtins import range
>>> from examples.chemotaxis.parameters import parameters
>>> from fipy import CellVariable, Grid2D, TransientTerm, DiffusionTerm,_
-> ImplicitSourceTerm, Viewer, numerix
```

```
>>> params = parameters['case 2']
```

```
>>> nx = 50
>>> ny = 50
>>> dx = 1.
>>> L = nx * dx
```

```
>>> mesh = Grid2D(nx=nx, ny=ny, dx=dx, dy=1.)
```

```
>>> shift = 1.
```

```
>>> KMVar = CellVariable(mesh=mesh, value=params['KM'] * shift, hasOld=1)
>>> KCVar = CellVariable(mesh=mesh, value=params['KC'] * shift, hasOld=1)
>>> TMVar = CellVariable(mesh=mesh, value=params['TM'] * shift, hasOld=1)
>>> TCVar = CellVariable(mesh=mesh, value=params['TC'] * shift, hasOld=1)
>>> P3Var = CellVariable(mesh=mesh, value=params['P3'] * shift, hasOld=1)
```

(continues on next page)

(continued from previous page)

```
>>> P2Var = CellVariable(mesh=mesh, value=params['P2'] * shift, hasOld=1)
>>> RVar = CellVariable(mesh=mesh, value=params['R'], hasOld=1)
```

```
>>> PN = P3Var + P2Var
```

```
>>> KMscCoeff = params['chiK'] * (RVar + 1) * (1 - KCVar - KMVar.cellVolumeAverage)
>>> KMspCoeff = params['lambdaK'] / (1 + PN / params['kappaK'])
>>> KMEq = TransientTerm() - KMscCoeff + ImplicitSourceTerm(KMspCoeff)
```

```
>>> TMscCoeff = params['chiT'] * (1 - TCVar - TMVar.cellVolumeAverage)
>>> TMspCoeff = params['lambdaT'] * (KMVar + params['zetaT'])
>>> TMEq = TransientTerm() - TMscCoeff + ImplicitSourceTerm(TMspCoeff)
```

```
>>> TCscCoeff = params['lambdaT'] * (TMVar * KMVar).cellVolumeAverage
>>> TCspCoeff = params['lambdaTstar']
>>> TCEq = TransientTerm() - TCscCoeff + ImplicitSourceTerm(TCspCoeff)
```

```
>>> PIP2PITP = PN / (PN / params['kappam'] + PN.cellVolumeAverage / params['kappac'] + 1) + params['zetaPITP']
```

```
>>> P3spCoeff = params['lambda3'] * (TMVar + params['zeta3T'])
>>> P3scCoeff = params['chi3'] * KMVar * (PIP2PITP / (1 + KMVar / params['kappa3']) + params['zeta3PITP']) + params['zeta3']
>>> P3Eq = TransientTerm() - DiffusionTerm(params['diffusionCoeff']) - P3scCoeff + ImplicitSourceTerm(P3spCoeff)
```

```
>>> P2scCoeff = scCoeff = params['chi2'] + params['lambda3'] * params['zeta3T'] * P3Var
>>> P2spCoeff = params['lambda2'] * (TMVar + params['zeta2T'])
>>> P2Eq = TransientTerm() - DiffusionTerm(params['diffusionCoeff']) - P2scCoeff + ImplicitSourceTerm(P2spCoeff)
```

```
>>> KCscCoeff = params['alphaKstar'] * params['lambdaK'] * (KMVar / (1 + PN / params['kappaK'])).cellVolumeAverage
>>> KCspCoeff = params['lambdaKstar'] / (params['kappaKstar'] + KCVar)
>>> KCEq = TransientTerm() - KCscCoeff + ImplicitSourceTerm(KCspCoeff)
```

```
>>> eqs = ((KMVar, KMEq), (TMVar, TMEq), (TCVar, TCEq), (P3Var, P3Eq), (P2Var, P2Eq), (KCVar, KCEq))
```

```
>>> if __name__ == '__main__':
...     steps = 100
... else:
...     steps = 10
```

```
>>> for i in range(steps):
...     for var, eqn in eqs:
...         var.updateOld()
...     for var, eqn in eqs:
...         eqn.solve(var, dt=1.)
```

```
>>> accuracy = 1e-2
>>> print(KMVar.allclose(params['KM'], atol=accuracy))
1
>>> print(TMVar.allclose(params['TM'], atol=accuracy))
1
>>> print(TCVar.allclose(params['TC'], atol=accuracy))
1
>>> print(P2Var.allclose(params['P2'], atol=accuracy))
1
>>> print(P3Var.allclose(params['P3'], atol=accuracy))
1
>>> print(KCVar.allclose(params['KC'], atol=accuracy))
1
```

```
>>> PNView = PN / PN.cellVolumeAverage
>>> PNView.name = 'PN'
```

```
>>> KMView = KMVar / KMVar.cellVolumeAverage
>>> KMView.name = 'KM'
```

```
>>> TMView = TMVar / TMVar.cellVolumeAverage
>>> TMView.name = 'TM'
```

```
>>> x, y = mesh.cellCenters
>>> RVar[:] = L / numerix.sqrt((x - L / 2)**2 + (y - 2 * L)**2)
```

```
>>> if __name__ == '__main__':
...     PNViewer = Viewer(PNView, datamax=2., datamin=0., title='')
...     KMViewer = Viewer(KMView, datamax=2., datamin=0., title='')
...     TMViewer = Viewer(TMView, datamax=2., datamin=0., title='')

...
...     for i in range(100):
...         for var, eqn in eqs:
...             var.updateOld()
...             for var, eqn in eqs:
...                 eqn.solve(var, dt=1.)
...
...         PNViewer.plot()
...         KMViewer.plot()
...         TMViewer.plot()

...
...     input("finished")
```

23.3.3 examples.chemotaxis.parameters

Input file for parameters

23.3.4 examples.chemotaxis.test

23.4 examples.convection

Modules

`examples.convection.advection`

`examples.convection.exponential1D`

`examples.convection.exponential1DBack`

`examples.convection.exponential1DSource`

`examples.convection.exponential2D`

`examples.convection.peclet`

This example tests diffusion-convection for increasing Péclet numbers.

`examples.convection.powerLaw1D`

`examples.convection.robin`

Solve an advection-diffusion equation with a Robin boundary condition.

`examples.convection.source`

Solve a convection problem with a source.

`examples.convection.test`

23.4.1 examples.convection.advection

Modules

`examples.convection.advection.`

This example shows the failure of advecting a square pulse with a first order explicit upwind scheme.

`explicitUpwind`

This example shows the failure of advecting a square pulse with a first order implicit upwind scheme.

`examples.convection.advection.`

This example demonstrates the use of the `VanLeerConvectionTerm` as defined by <http://www.gre.ac.uk/~physica/phy2.12/theory/node173.htm>

`implicitUpwind`

`examples.convection.advection.`

`vanLeerUpwind`

examples.convection.advection.explicitUpwind

This example shows the failure of advecting a square pulse with a first order explicit upwind scheme.

examples.convection.advection.implicitUpwind

This example shows the failure of advecting a square pulse with a first order implicit upwind scheme.

examples.convection.advection.vanLeerUpwind

This example demonstrates the use of the *VanLeerConvectionTerm* as defined by <http://www.gre.ac.uk/~physica/phy2.12/theory/node173.htm>

In this example a square wave is advected. The Van Leer discretization should in theory do a good job of preserving the shape of the wave. This may or may not be happening in this case. This example needs further testing.

The test case is mainly to check that the periodic mesh is working correctly. We advect the wave on different meshes one periodic and one non-periodic but twice as long. The results are then compared. The periodic wave wraps around the mesh.

```
>>> from builtins import range
>>> for step in range(steps):
...     eq1.solve(var=var1, dt=dt, solver=DefaultAsymmetricSolver(tolerance=1e-11,
...     iterations=10000))
...     eq2.solve(var=var2, dt=dt, solver=DefaultAsymmetricSolver(tolerance=1e-11,
...     iterations=10000))

>>> print(numerix.allclose(var1.globalValue[nx // 2:3 * nx // 4],
...                         var2.globalValue[:nx // 4], atol=1e-6))
1
```

Currently after 20 steps the wave has lost 23% of its height. Van Leer should do better than this.

```
>>> print(var1.max() > 0.77)
1
```

23.4.2 examples.convection.exponential1D

Modules

<code>examples.convection.exponential1D.cylindricalMesh1D</code>	This example solves the steady-state cylindrical convection-diffusion equation given by
<code>examples.convection.exponential1D.cylindricalMesh1DNonUniform</code>	This example solves the steady-state cylindrical convection-diffusion equation given by
<code>examples.convection.exponential1D.mesh1D</code>	Solve the steady-state convection-diffusion equation in one dimension.
<code>examples.convection.exponential1D.tri2D</code>	This example solves the steady-state convection-diffusion equation as described in <code>examples.convection.exponential1D.mesh1D</code> but uses a <code>Tri2D</code> mesh.

examples.convection.exponential1D.cylindricalMesh1D

This example solves the steady-state cylindrical convection-diffusion equation given by

$$\nabla \cdot (D \nabla \phi + \vec{u} \phi) = 0$$

with coefficients $D = 1$ and $\vec{u} = (10, 0)$, or

```
>>> diffCoeff = 1.
>>> convCoeff = (10.,)
```

We define a 1D cylindrical mesh representing an annulus

```
>>> from fipy import CellVariable, CylindricalGrid1D, DiffusionTerm,
...     ExponentialConvectionTerm, Viewer
>>> from fipy.tools import numerix
```

```
>>> r0 = 1.
>>> r1 = 2.
>>> nr = 100
>>> mesh = CylindricalGrid1D(dr=(r1 - r0) / nr, nr=nr) + ((r0,),)
```

The solution variable is initialized to valueLeft:

```
>>> valueLeft = 0.
>>> valueRight = 1.
```

```
>>> var = CellVariable(mesh=mesh, name = "variable")
```

and impose the boundary conditions

$$\phi = \begin{cases} 0 & \text{at } r = r_0, \\ 1 & \text{at } r = r_1, \end{cases}$$

with

```
>>> var.constrain(valueLeft, mesh.facesLeft)
>>> var.constrain(valueRight, mesh.facesRight)
```

The equation is created with the `DiffusionTerm` and `ExponentialConvectionTerm`.

```
>>> eq = (DiffusionTerm(coeff=diffCoeff)
...       + ExponentialConvectionTerm(coeff=convCoeff))
```

More details of the benefits and drawbacks of each type of convection term can be found in [Numerical Schemes](#). Essentially, the `ExponentialConvectionTerm` and `PowerLawConvectionTerm` will both handle most types of convection-diffusion cases, with the `PowerLawConvectionTerm` being more efficient.

We solve the equation

```
>>> eq.solve(var=var)
```

and test the solution against the analytical result

$$\phi = \exp \frac{u}{D} (r_1 - r) \left(\frac{\mathrm{ei} \frac{ur_0}{D} - \mathrm{ei} \frac{ur}{D}}{\mathrm{ei} \frac{ur_0}{D} - \mathrm{ei} \frac{ur_1}{D}} \right)$$

or

```
>>> axis = 0
>>> try:
...     from scipy.special import expi
...     r = mesh.cellCenters[axis]
...     AA = numerix.exp(convCoeff[axis] / diffCoeff * (r1 - r))
...     BB = expi(convCoeff[axis] * r0 / diffCoeff) - expi(convCoeff[axis] * r / diffCoeff)
...     CC = expi(convCoeff[axis] * r0 / diffCoeff) - expi(convCoeff[axis] * r1 / diffCoeff)
...     analyticalArray = AA * BB / CC
... except ImportError:
...     print("The SciPy library is unavailable. It is required for testing purposes.")
```

```
>>> print(var.allclose(analyticalArray, atol=1e-3))
1
```

If the problem is run interactively, we can view the result:

```
>>> if __name__ == '__main__':
...     viewer = Viewer(vars=var)
...     viewer.plot()
```

examples.convection.exponential1D.cylindricalMesh1DNonUniform

This example solves the steady-state cylindrical convection-diffusion equation given by

$$\nabla \cdot (D \nabla \phi + \vec{u} \phi) = 0$$

with coefficients $D = 1$ and $\vec{u} = (10,)$, or

```
>>> diffCoeff = 1.
>>> convCoeff = ((10., ), )
```

We define a 1D cylindrical mesh representing an annulus. The mesh has a non-constant cell spacing.

```
>>> from fipy import CellVariable, CylindricalGrid1D, DiffusionTerm,
... ExponentialConvectionTerm, Viewer
>>> from fipy.tools import numerix
```

```
>>> r0 = 1.
>>> r1 = 2.
>>> nr = 100
>>> Rratio = (r1 / r0)**(1 / float(nr))
>>> dr = r0 * (Rratio - 1) * Rratio**numerix.arange(nr)
>>> mesh = CylindricalGrid1D(dr=dr) + ((r0,), )
```

```
>>> valueLeft = 0.
>>> valueRight = 1.
```

The solution variable is initialized to `valueLeft`:

```
>>> var = CellVariable(mesh=mesh, name = "variable")
```

and impose the boundary conditions

with

```
>>> var.constrain(valueLeft, mesh.facesLeft)
>>> var.constrain(valueRight, mesh.facesRight)
```

The equation is created with the *DiffusionTerm* and *ExponentialConvectionTerm*.

```
>>> eq = (DiffusionTerm(coeff=diffCoeff)
...       + ExponentialConvectionTerm(coeff=convCoeff))
```

More details of the benefits and drawbacks of each type of convection term can be found in *Numerical Schemes*. Essentially, the *ExponentialConvectionTerm* and *PowerLawConvectionTerm* will both handle most types of convection-diffusion cases, with the *PowerLawConvectionTerm* being more efficient.

We solve the equation

```
>>> eq.solve(var=var)
```

and test the solution against the analytical result

$$\phi = \exp \frac{u}{D} (r_1 - r) \left(\frac{\text{ei} \frac{ur_0}{D} - \text{ei} \frac{ur}{D}}{\text{ei} \frac{ur_0}{D} - \text{ei} \frac{ur_1}{D}} \right)$$

or

```
>>> axis = 0
```

```
>>> try:
...     U = convCoeff[0][0]
...     from scipy.special import expi
...     r = mesh.cellCenters[axis]
...     AA = numerix.exp(U / diffCoeff * (r1 - r))
...     BB = expi(U * r0 / diffCoeff) - expi(U * r / diffCoeff)
...     CC = expi(U * r0 / diffCoeff) - expi(U * r1 / diffCoeff)
...     analyticalArray = AA * BB / CC
... except ImportError:
...     print("The SciPy library is unavailable. It is required for testing purposes.")
```

```
>>> print(var.allclose(analyticalArray, atol=1e-3))
1
```

If the problem is run interactively, we can view the result:

```
>>> if __name__ == '__main__':
...     viewer = Viewer(vars=var)
...     viewer.plot()
```

examples.convection.exponential1D.mesh1D

Solve the steady-state convection-diffusion equation in one dimension.

This example solves the steady-state convection-diffusion equation given by

$$\nabla \cdot (D \nabla \phi + \vec{u} \phi) = 0$$

with coefficients $D = 1$ and $\vec{u} = 10\hat{i}$, or

```
>>> diffCoeff = 1.
>>> convCoeff = (10.,)
```

We define a 1D mesh

```
>>> from fipy import CellVariable, Grid1D, DiffusionTerm, ExponentialConvectionTerm, Viewer
>>> from fipy.tools import numerix
```

```
>>> L = 10.
>>> nx = 10
>>> mesh = Grid1D(dx=L / nx, nx=nx)
```

```
>>> valueLeft = 0.
>>> valueRight = 1.
```

The solution variable is initialized to `valueLeft`:

```
>>> var = CellVariable(mesh=mesh, name="variable")
```

and impose the boundary conditions

$$\phi = \begin{cases} 0 & \text{at } x = 0, \\ 1 & \text{at } x = L, \end{cases}$$

with

```
>>> var.constrain(valueLeft, mesh.facesLeft)
>>> var.constrain(valueRight, mesh.facesRight)
```

The equation is created with the `DiffusionTerm` and `ExponentialConvectionTerm`. The scheme used by the convection term needs to calculate a Péclet number and thus the diffusion term instance must be passed to the convection term.

```
>>> eq = (DiffusionTerm(coeff=diffCoeff)
...       + ExponentialConvectionTerm(coeff=convCoeff))
```

More details of the benefits and drawbacks of each type of convection term can be found in [Numerical Schemes](#). Essentially, the `ExponentialConvectionTerm` and `PowerLawConvectionTerm` will both handle most types of convection-diffusion cases, with the `PowerLawConvectionTerm` being more efficient.

We solve the equation

```
>>> eq.solve(var=var)
```

and test the solution against the analytical result

$$\phi = \frac{1 - \exp(-u_x x / D)}{1 - \exp(-u_x L / D)}$$

or

```
>>> axis = 0
>>> x = mesh.cellCenters[axis]
>>> CC = 1. - numerix.exp(-convCoeff[axis] * x / diffCoeff)
>>> DD = 1. - numerix.exp(-convCoeff[axis] * L / diffCoeff)
>>> analyticalArray = CC / DD
>>> print(var.allclose(analyticalArray))
1
```

If the problem is run interactively, we can view the result:

```
>>> if __name__ == '__main__':
...     viewer = Viewer(vars=var)
...     viewer.plot()
```

examples.convection.exponential1D.tri2D

This example solves the steady-state convection-diffusion equation as described in `examples.convection.exponential1D.mesh1D` but uses a `Tri2D` mesh.

Here the axes are reversed (`nx = 1`, `ny = 1000`) and

$$\vec{u} = (0, 10)$$

```
>>> from fipy import CellVariable, Tri2D, DiffusionTerm, ExponentialConvectionTerm,
... DefaultAsymmetricSolver, Viewer
>>> from fipy.tools import numerix
```

```
>>> L = 10.
>>> nx = 1
>>> ny = 1000
>>> mesh = Tri2D(dx = L / ny, dy = L / ny, nx = nx, ny = ny)
```

```
>>> valueBottom = 0.
>>> valueTop = 1.
```

```
>>> var = CellVariable(name = "concentration",
...                      mesh = mesh,
...                      value = valueBottom)
```

```
>>> var.constrain(valueBottom, mesh.facesBottom)
>>> var.constrain(valueTop, mesh.facesTop)
```

```
>>> diffCoeff = 1.
>>> convCoeff = numerix.array(((0.,), (10.,)))
```

```
>>> eq = (DiffusionTerm(coeff=diffCoeff)
...       + ExponentialConvectionTerm(coeff=convCoeff))
```

```
>>> eq.solve(var = var,
...           solver=DefaultAsymmetricSolver(iterations=10000))
```

The analytical solution test for this problem is given by:

```
>>> axis = 1
>>> y = mesh.cellCenters[axis]
>>> CC = 1. - numerix.exp(-convCoeff[axis] * y / diffCoeff)
>>> DD = 1. - numerix.exp(-convCoeff[axis] * L / diffCoeff)
>>> analyticalArray = CC / DD
```

```
>>> print(var.allclose(analyticalArray, rtol = 1e-6, atol = 1e-6))
1
```

```
>>> if __name__ == '__main__':
...     viewer = Viewer(vars = var)
...     viewer.plot()
```

23.4.3 examples.convection.exponential1DBack

Modules

`examples.convection.exponential1DBack.
mesh1D`

This example solves the steady-state convection-diffusion equation as described in `examples.convection.exponential1D.mesh1D` but with $\vec{u} = (-10,)$.

examples.convection.exponential1DBack.mesh1D

This example solves the steady-state convection-diffusion equation as described in `examples.convection.exponential1D.mesh1D` but with $\vec{u} = (-10,)$.

```
>>> from fipy import CellVariable, Grid1D, DiffusionTerm, ExponentialConvectionTerm, DefaultAsymmetricSolver, Viewer
>>> from fipy.tools import numerix
```

```
>>> L = 10.
>>> nx = 1000
>>> mesh = Grid1D(dx = L / nx, nx = nx)
```

```
>>> valueLeft = 0.
>>> valueRight = 1.
```

```
>>> var = CellVariable(name = "concentration",
...                      mesh = mesh,
...                      value = valueLeft)
```

```
>>> var.constrain(valueLeft, mesh.facesLeft)
>>> var.constrain(valueRight, mesh.facesRight)
```

```
>>> diffCoeff = 1.
>>> convCoeff = (-10.,)
```

```
>>> eq = (DiffusionTerm(coeff=diffCoeff)
...        + ExponentialConvectionTerm(coeff=convCoeff))
```

```
>>> eq.solve(var = var,
...           solver = DefaultAsymmetricSolver(tolerance=1.e-15, iterations=10000))
```

We test the solution against the analytical result:

```
>>> axis = 0
>>> x = mesh.cellCenters[axis]
>>> CC = 1. - numerix.exp(-convCoeff[axis] * x / diffCoeff)
>>> DD = 1. - numerix.exp(-convCoeff[axis] * L / diffCoeff)
>>> analyticalArray = CC / DD
>>> print(var.allclose(analyticalArray, rtol = 1e-10, atol = 1e-10))
1
```

```
>>> if __name__ == '__main__':
...     viewer = Viewer(vars = var)
...     viewer.plot()
```

23.4.4 examples.convection.exponential1DSource

Modules

`examples.convection.exponential1DSource.mesh1D`

Solve the steady-state convection-diffusion equation with a constant source.

`examples.convection.exponential1DSource.tri2D`

This example solves the steady-state convection-diffusion equation as described in `examples.convection.exponential1D.mesh1D` but uses a constant source value such that,

examples.convection.exponential1DSource.mesh1D

Solve the steady-state convection-diffusion equation with a constant source.

Like `examples.convection.exponential1D.mesh1D` this example solves a steady-state convection-diffusion equation, but adds a constant source, $S_0 = 1$, such that

$$\nabla \cdot (D \nabla \phi + \vec{u} \phi) + S_0 = 0.$$

```
>>> diffCoeff = 1.
>>> convCoeff = (10.,)
>>> sourceCoeff = 1.
```

We define a 1D mesh

```
>>> from fipy import CellVariable, Grid1D, DiffusionTerm, ExponentialConvectionTerm,
... DefaultAsymmetricSolver, Viewer
>>> from fipy.tools import numerix
```

```
>>> nx = 1000
>>> L = 10.
>>> mesh = Grid1D(dx=L / 1000, nx=nx)
```

```
>>> valueLeft = 0.
>>> valueRight = 1.
```

The solution variable is initialized to `valueLeft`:

```
>>> var = CellVariable(name="variable", mesh=mesh)
```

and impose the boundary conditions

$$\phi = \begin{cases} 0 & \text{at } x = 0, \\ 1 & \text{at } x = L, \end{cases}$$

with

```
>>> var.constrain(valueLeft, mesh.facesLeft)
>>> var.constrain(valueRight, mesh.facesRight)
```

We define the convection-diffusion equation with source

```
>>> eq = (DiffusionTerm(coeff=diffCoeff)
...       + ExponentialConvectionTerm(coeff=convCoeff)
...       + sourceCoeff)
```

```
>>> eq.solve(var=var,
...           solver=DefaultAsymmetricSolver(tolerance=1.e-15, iterations=10000))
```

and test the solution against the analytical result:

$$\phi = -\frac{S_0 x}{u_x} + \left(1 + \frac{S_0 x}{u_x}\right) \frac{1 - \exp(-u_x x/D)}{1 - \exp(-u_x L/D)}$$

or

```
>>> axis = 0
>>> x = mesh.cellCenters[axis]
>>> AA = -sourceCoeff * x / convCoeff[axis]
>>> BB = 1. + sourceCoeff * L / convCoeff[axis]
>>> CC = 1. - numerix.exp(-convCoeff[axis] * x / diffCoeff)
>>> DD = 1. - numerix.exp(-convCoeff[axis] * L / diffCoeff)
>>> analyticalArray = AA + BB * CC / DD
>>> print(var.allclose(analyticalArray, rtol=1e-4, atol=1e-4))
1
```

If the problem is run interactively, we can view the result:

```
>>> if __name__ == '__main__':
...     viewer = Viewer(vars=var)
...     viewer.plot()
```

`examples.convection.exponential1DSource.tri2D`

This example solves the steady-state convection-diffusion equation as described in `examples.convection.exponential1D.mesh1D` but uses a constant source value such that,

$$S_c = 1.$$

Here the axes are reversed (`nx = 1, ny = 1000`) and

$$\vec{u} = (0, 10)$$

```
>>> from fipy import CellVariable, Tri2D, DiffusionTerm, ExponentialConvectionTerm,
... DefaultAsymmetricSolver, Viewer
>>> from fipy.tools import numerix
```

```
>>> L = 10.
>>> nx = 1
>>> ny = 1000
>>> mesh = Tri2D(dx = L / ny, dy = L / ny, nx = nx, ny = ny)
```

```
>>> valueBottom = 0.
>>> valueTop = 1.
```

```
>>> var = CellVariable(name = "concentration",
...                      mesh = mesh,
...                      value = valueBottom)
```

```
>>> var.constrain(valueBottom, mesh.facesBottom)
>>> var.constrain(valueTop, mesh.facesTop)
```

```
>>> diffCoeff = 1.
>>> convCoeff = (0., 10.)
>>> sourceCoeff = 1.
```

```
>>> eq = (-sourceCoeff - DiffusionTerm(coeff = diffCoeff)
...         - ExponentialConvectionTerm(coeff = convCoeff))
```

```
>>> eq.solve(var=var,
...           solver=DefaultAsymmetricSolver(tolerance=1.e-15, iterations=10000))
```

The analytical solution test for this problem is given by:

```
>>> axis = 1
>>> y = mesh.cellCenters[axis]
>>> AA = -sourceCoeff * y / convCoeff[axis]
>>> BB = 1. + sourceCoeff * L / convCoeff[axis]
>>> CC = 1. - numerix.exp(-convCoeff[axis] * y / diffCoeff)
>>> DD = 1. - numerix.exp(-convCoeff[axis] * L / diffCoeff)
>>> analyticalArray = AA + BB * CC / DD
>>> print(var.allclose(analyticalArray, atol = 1e-5))
1
```

```
>>> if __name__ == '__main__':
...     viewer = Viewer(vars = var)
...     viewer.plot()
```

23.4.5 examples.convection.exponential2D

Modules

`examples.convection.exponential2D.
cylindricalMesh2D`

This example solves the steady-state cylindrical convection-diffusion equation given by:

`examples.convection.exponential2D.
cylindricalMesh2DNonUniform`

This example solves the steady-state cylindrical convection-diffusion equation given by:

`examples.convection.exponential2D.mesh2D`

This example solves the steady-state convection-diffusion equation as described in `examples.convection.exponential1D.mesh1D` on a 2D mesh with `nx = 10` and `ny = 10`:

`examples.convection.exponential2D.tri2D`

This example solves the steady-state convection-diffusion equation as described in `examples.convection.exponential1D.mesh1D` with `nx = 10` and `ny = 10`.

examples.convection.exponential2D.cylindricalMesh2D

This example solves the steady-state cylindrical convection-diffusion equation given by:

$$\nabla \cdot (D \nabla \phi + \vec{u} \phi) = 0$$

with coefficients $D = 1$ and $\vec{u} = (10,)$, or

```
>>> diffCoeff = 1.
>>> convCoeff = ((10., ), (0., ))
```

We define a 2D cylindrical mesh representing an annulus. The mesh is a pseudo 1D mesh, but is a good test case for the `CylindricalGrid2D()` mesh.

```
>>> from fipy import CellVariable, CylindricalGrid2D, DiffusionTerm,
...     ExponentialConvectionTerm, Viewer
>>> from fipy.tools import numerix
```

```
>>> r0 = 1.
>>> r1 = 2.
>>> nr = 100
>>> mesh = CylindricalGrid2D(dr=(r1 - r0) / nr, dz=1., nr=nr, nz=1) + ((r0,),)
```

The solution variable is initialized to `valueLeft`:

```
>>> valueLeft = 0.
>>> valueRight = 1.
>>> var = CellVariable(mesh=mesh, name = "variable")
```

and impose the boundary conditions

$$\phi = \begin{cases} 0 & \text{at } r = r_0, \\ 1 & \text{at } r = r_1, \end{cases}$$

with

```
>>> var.constrain(valueLeft, mesh.facesLeft)
>>> var.constrain(valueRight, mesh.facesRight)
```

The equation is created with the `DiffusionTerm` and `ExponentialConvectionTerm`.

```
>>> eq = (DiffusionTerm(coeff=diffCoeff)
...       + ExponentialConvectionTerm(coeff=convCoeff))
```

More details of the benefits and drawbacks of each type of convection term can be found in [Numerical Schemes](#). Essentially, the `ExponentialConvectionTerm` and `PowerLawConvectionTerm` will both handle most types of convection-diffusion cases, with the `PowerLawConvectionTerm` being more efficient.

We solve the equation

```
>>> eq.solve(var=var)
```

and test the solution against the analytical result

$$\phi = \exp \frac{u}{D} (r_1 - r) \left(\frac{\mathrm{ei} \frac{ur_0}{D} - \mathrm{ei} \frac{ur}{D}}{\mathrm{ei} \frac{ur_0}{D} - \mathrm{ei} \frac{ur_1}{D}} \right)$$

or

```
>>> axis = 0
>>> try:
...     from scipy.special import expi
...     U = convCoeff[0][0]
...     r = mesh.cellCenters[axis]
...     AA = numerix.exp(U / diffCoeff * (r1 - r))
...     BB = expi(U * r0 / diffCoeff) - expi(U * r / diffCoeff)
```

(continues on next page)

(continued from previous page)

```
...     CC = expi(U * r0 / diffCoeff) - expi(U * r1 / diffCoeff)
...     analyticalArray = AA * BB / CC
... except ImportError:
...     print("The SciPy library is unavailable. It is required for testing purposes.")
```

```
>>> print(var.allclose(analyticalArray, atol=1e-3))
1
```

If the problem is run interactively, we can view the result:

```
>>> if __name__ == '__main__':
...     viewer = Viewer(vars=var)
...     viewer.plot()
```

examples.convection.exponential2D.cylindricalMesh2DNonUniform

This example solves the steady-state cylindrical convection-diffusion equation given by:

$$\nabla \cdot (D \nabla \phi + \vec{u} \phi) = 0$$

with coefficients $D = 1$ and $\vec{u} = (10, 0)$, or

```
>>> diffCoeff = 1.
>>> convCoeff = ((10.,), (0.,))
```

We define a 2D cylindrical mesh representing an annulus. The mesh is a pseudo-1D mesh, but is a good test case for the [CylindricalGrid2D\(\)](#) mesh. The mesh has a non-constant cell spacing.

```
>>> from fipy import CellVariable, CylindricalGrid2D, DiffusionTerm,
...     ExponentialConvectionTerm, Viewer
>>> from fipy.tools import numerix
```

```
>>> r0 = 1.
>>> r1 = 2.
>>> nr = 100
>>> Rratio = (r1 / r0)**(1 / float(nr))
>>> dr = r0 * (Rratio - 1) * Rratio**numerix.arange(nr)
>>> mesh = CylindricalGrid2D(dr=dr, dz=1., nz=1) + ((r0,), (0.,))
```

The solution variable is initialized to `valueLeft`:

```
>>> valueLeft = 0.
>>> valueRight = 1.
>>> var = CellVariable(mesh=mesh, name = "variable")
```

and impose the boundary conditions

$$\phi = \begin{cases} 0 & \text{at } r = r_0, \\ 1 & \text{at } r = r_1, \end{cases}$$

with

```
>>> var.constrain(valueLeft, mesh.facesLeft)
>>> var.constrain(valueRight, mesh.facesRight)
```

The equation is created with the `DiffusionTerm` and `ExponentialConvectionTerm`.

```
>>> eq = (DiffusionTerm(coeff=diffCoeff)
...      + ExponentialConvectionTerm(coeff=convCoeff))
```

More details of the benefits and drawbacks of each type of convection term can be found in [Numerical Schemes](#). Essentially, the `ExponentialConvectionTerm` and `PowerLawConvectionTerm` will both handle most types of convection-diffusion cases, with the `PowerLawConvectionTerm` being more efficient.

We solve the equation

```
>>> eq.solve(var=var)
```

and test the solution against the analytical result

$$\phi = \exp \frac{u}{D} (r_1 - r) \left(\frac{\text{ei} \frac{ur_0}{D} - \text{ei} \frac{ur}{D}}{\text{ei} \frac{ur_0}{D} - \text{ei} \frac{ur_1}{D}} \right)$$

```
>>> axis = 0
>>> try:
...     from scipy.special import expi
...     r = mesh.cellCenters[axis]
...     U = convCoeff[0][0]
...     AA = numerix.exp(U / diffCoeff * (r1 - r))
...     BB = expi(U * r0 / diffCoeff) - expi(U * r / diffCoeff)
...     CC = expi(U * r0 / diffCoeff) - expi(U * r1 / diffCoeff)
...     analyticalArray = AA * BB / CC
... except ImportError:
...     print("The SciPy library is unavailable. It is required for testing purposes.")
```

```
>>> print(var.allclose(analyticalArray, atol=1e-3))
1
```

If the problem is run interactively, we can view the result:

```
>>> if __name__ == '__main__':
...     viewer = Viewer(vars=var)
...     viewer.plot()
```

examples.convection.exponential2D.mesh2D

This example solves the steady-state convection-diffusion equation as described in `examples.convection.exponential1D.mesh1D` on a 2D mesh with `nx = 10` and `ny = 10`:

```
>>> from fipy import CellVariable, Grid2D, DiffusionTerm, ExponentialConvectionTerm,
... DefaultAsymmetricSolver, Viewer
>>> from fipy.tools import numerix
```

```
>>> L = 10.
>>> nx = 10
>>> ny = 10
>>> mesh = Grid2D(L / nx, L / ny, nx, ny)
```

```
>>> valueLeft = 0.
>>> valueRight = 1.
```

```
>>> var = CellVariable(name = "concentration",
...                      mesh = mesh,
...                      value = valueLeft)
```

```
>>> var.constrain(valueLeft, mesh.facesLeft)
>>> var.constrain(valueRight, mesh.facesRight)
```

```
>>> diffCoeff = 1.
>>> convCoeff = (10., 0.)
```

```
>>> eq = DiffusionTerm(coeff=diffCoeff) + ExponentialConvectionTerm(coeff=convCoeff)
```

```
>>> eq.solve(var = var,
...           solver=DefaultAsymmetricSolver(tolerance=1.e-15, iterations=10000))
```

We test the solution against the analytical result:

```
>>> axis = 0
>>> x = mesh.cellCenters[axis]
>>> CC = 1. - numerix.exp(-convCoeff[axis] * x / diffCoeff)
>>> DD = 1. - numerix.exp(-convCoeff[axis] * L / diffCoeff)
>>> analyticalArray = CC / DD
>>> print(var.allclose(analyticalArray, rtol = 1e-10, atol = 1e-10))
1
```

```
>>> if __name__ == '__main__':
...     viewer = Viewer(vars = var)
...     viewer.plot()
```

examples.convection.exponential2D.tri2D

This example solves the steady-state convection-diffusion equation as described in `examples.convection.exponential1D.mesh1D` with `nx = 10` and `ny = 10`.

```
>>> from fipy import CellVariable, Tri2D, DiffusionTerm, ExponentialConvectionTerm, Viewer
>>> from fipy.tools import numerix
```

```
>>> L = 10.
>>> nx = 10
>>> ny = 10
>>> mesh = Tri2D(L / nx, L / ny, nx, ny)
```

```
>>> valueLeft = 0.  
>>> valueRight = 1.
```

```
>>> var = CellVariable(name = "concentration",  
...                      mesh = mesh,  
...                      value = valueLeft)
```

```
>>> var.constrain(valueLeft, mesh.facesLeft)  
>>> var.constrain(valueRight, mesh.facesRight)
```

```
>>> diffCoeff = 1.  
>>> convCoeff = (10., 0.)
```

```
>>> eq = (DiffusionTerm(coeff=diffCoeff)  
...         + ExponentialConvectionTerm(coeff=convCoeff))
```

```
>>> eq.solve(var = var)
```

The analytical solution test for this problem is given by:

```
>>> axis = 0  
>>> x = mesh.cellCenters[axis]  
>>> CC = 1. - numerix.exp(-convCoeff[axis] * x / diffCoeff)  
>>> DD = 1. - numerix.exp(-convCoeff[axis] * L / diffCoeff)  
>>> analyticalArray = CC / DD  
>>> print(var.allclose(analyticalArray, rtol = 1e-10, atol = 1e-10))  
1
```

```
>>> if __name__ == '__main__':  
...     viewer = Viewer(vars = var)  
...     viewer.plot()
```

23.4.6 examples.convection.pecllet

This example tests diffusion-convection for increasing Péclet numbers. This test case has been introduced because `LinearCGSSolver` was not working with Péclet numbers over 1. `LinearLUSolver` is now the default for `ConvectionTerm`. For `nx = 1000` the `LinearGMRESSolver` does not work.

```
>>> from fipy import CellVariable, Grid1D, TransientTerm, DiffusionTerm,  
... PowerLawConvectionTerm, Viewer  
>>> from fipy.tools import numerix
```

```
>>> L = 1.  
>>> nx = 1000  
>>> dx = L / nx  
>>> mesh = Grid1D(dx=dx, nx=nx)
```

```
>>> valueLeft = 0.  
>>> valueRight = 1.
```

```
>>> var = CellVariable(name = "solution variable", mesh=mesh, value=valueLeft)
```

```
>>> var.constrain(valueLeft, mesh.facesLeft)
>>> var.constrain(valueRight, mesh.facesRight)
```

```
>>> if __name__ == '__main__':
...     viewer = Viewer(vars = var)
```

```
>>> convCoeff = 1.0
>>> peclet = 1e-3
>>> allcloseList = []
>>> from fipy import input
>>> from builtins import str
>>> while peclet < 1e4:
...     var[:] = valueLeft
...     diffCoeff = convCoeff * dx / peclet
...     eq = (TransientTerm(1e-4)
...           == DiffusionTerm(coeff=diffCoeff)
...           + PowerLawConvectionTerm(coeff=(convCoeff,)))
...     eq.solve(var=var, dt=1.)
...     x = mesh.cellCenters[0]
...     arg0 = -convCoeff * x / diffCoeff
...     arg0 = numerix.where(arg0 < -200, -200, arg0)
...     arg1 = -convCoeff * L / diffCoeff
...     arg1 = (arg1 >= -200) * (arg1 + 200) - 200
...     CC = 1. - numerix.exp(arg0)
...     DD = 1. - numerix.exp(arg1)
...     analyticalArray = CC / DD
...     allcloseList.append(var.allclose(CC / DD, rtol = 1e-2, atol = 1e-2).value)
...     if __name__ == '__main__':
...         viewer.plot()
...         input("Peclet number: " + str(peclet) + ", press key")
...     peclet *= 10
```

```
>>> print(allcloseList)
[True, True, True, True, True, True]
```

23.4.7 examples.convection.powerLaw1D

Modules

`examples.convection.powerLaw1D.mesh1D`

This example solves the steady-state convection-diffusion equation as described in `examples.convection.exponential1D.mesh1D` but uses the `PowerLawConvectionTerm` rather than the `ExponentialConvectionTerm`.

`examples.convection.powerLaw1D.tri2D`

This example solves the steady-state convection-diffusion equation as described in `examples.convection.exponential1D.mesh1D` but uses the `PowerLawConvectionTerm` rather than the `ExponentialConvectionTerm` instantiator.

examples.convection.powerLaw1D.mesh1D

This example solves the steady-state convection-diffusion equation as described in `examples.convection.exponential1D.mesh1D` but uses the `PowerLawConvectionTerm` rather than the `ExponentialConvectionTerm`.

```
>>> from fipy import CellVariable, Grid1D, DiffusionTerm, PowerLawConvectionTerm, Viewer
>>> from fipy.tools import numerix
```

```
>>> L = 10.
>>> nx = 1000
>>> mesh = Grid1D(dx = L / nx, nx = nx)
```

```
>>> valueLeft = 0.
>>> valueRight = 1.
```

```
>>> var = CellVariable(name = "concentration",
...                      mesh = mesh,
...                      value = valueLeft)
```

```
>>> var.constrain(valueLeft, mesh.facesLeft)
>>> var.constrain(valueRight, mesh.facesRight)
```

```
>>> diffCoeff = 1.
>>> convCoeff = (10.,)
```

```
>>> eq = (DiffusionTerm(coeff=diffCoeff)
...        + PowerLawConvectionTerm(coeff=convCoeff))
```

```
>>> eq.solve(var = var)
```

We test the solution against the analytical result:

```
>>> axis = 0
>>> x = mesh.cellCenters[axis]
>>> CC = 1. - numerix.exp(-convCoeff[axis] * x / diffCoeff)
>>> DD = 1. - numerix.exp(-convCoeff[axis] * L / diffCoeff)
```

(continues on next page)

(continued from previous page)

```
>>> analyticalArray = CC / DD
>>> print(var.allclose(analyticalArray, rtol = 1e-2, atol = 1e-2))
1
```

If the problem is run interactively, we can view the result:

```
>>> if __name__ == '__main__':
...     viewer = Viewer(vars = var)
...     viewer.plot()
```

examples.convection.powerLaw1D.tri2D

This example solves the steady-state convection-diffusion equation as described in `examples.convection.exponential1D.mesh1D` but uses the `PowerLawConvectionTerm` rather than the `ExponentialConvectionTerm` instantiator.

```
>>> from fipy import CellVariable, Grid2D, DiffusionTerm, PowerLawConvectionTerm,
... DefaultAsymmetricSolver, Viewer
>>> from fipy.tools import numerix
```

```
>>> L = 10.
>>> nx = 1000
>>> mesh = Grid2D(dx = L / nx, nx = nx)
```

```
>>> valueLeft = 0.
>>> valueRight = 1.
```

```
>>> var = CellVariable(name = "concentration",
...                      mesh = mesh,
...                      value = valueLeft)
```

```
>>> var.constrain(valueLeft, mesh.facesLeft)
>>> var.constrain(valueRight, mesh.facesRight)
```

```
>>> diffCoeff = 1.
>>> convCoeff = (10., 0.)
```

```
>>> eq = (DiffusionTerm(coeff=diffCoeff)
...        + PowerLawConvectionTerm(coeff=convCoeff))
```

```
>>> eq.solve(var=var,
...           solver=DefaultAsymmetricSolver(tolerance=1.e-15, iterations=2000))
```

The analytical solution test for this problem is given by:

```
>>> axis = 0
>>> x = mesh.cellCenters[axis]
>>> CC = 1. - numerix.exp(-convCoeff[axis] * x / diffCoeff)
>>> DD = 1. - numerix.exp(-convCoeff[axis] * L / diffCoeff)
```

(continues on next page)

(continued from previous page)

```
>>> analyticalArray = CC / DD
>>> print(var.allclose(analyticalArray, rtol = 1e-2, atol = 1e-2))
1
```

```
>>> if __name__ == '__main__':
...     viewer = Viewer(vars = var)
...     viewer.plot()
```

23.4.8 examples.convection.robin

Solve an advection-diffusion equation with a Robin boundary condition.

This example demonstrates how to apply a Robin boundary condition to an advection-diffusion equation. The equation we wish to solve is given by,

$$\begin{aligned} 0 &= \frac{\partial^2 C}{\partial x^2} - P \frac{\partial C}{\partial x} - DC \quad 0 < x < 1 \\ x = 0 : P &= -\frac{\partial C}{\partial x} + PC \\ x = 1 : \frac{\partial C}{\partial x} &= 0 \end{aligned}$$

The analytical solution for this equation is given by,

$$C(x) = \frac{2P \exp\left(\frac{Px}{2}\right) \left[(P+A) \exp\left(\frac{A}{2}(1-x)\right) - (P-A) \exp\left(-\frac{A}{2}(1-x)\right)\right]}{(P+A)^2 \exp\left(\frac{A}{2}\right) - (P-A)^2 \exp\left(-\frac{A}{2}\right)}$$

where

$$A = \sqrt{P^2 + 4D}$$

```
>>> from fipy import CellVariable, FaceVariable, Grid1D, DiffusionTerm,
... PowerLawConvectionTerm, ImplicitSourceTerm, Viewer
>>> from fipy.tools import numerix
>>> nx = 100
>>> dx = 1.0 / nx
```

```
>>> mesh = Grid1D(nx=nx, dx=dx)
>>> C = CellVariable(mesh=mesh)
```

```
>>> D = 2.0
>>> P = 3.0
```

```
>>> C.faceGrad constrain([0], mesh.facesRight)
```

We note that the Robin condition exactly defines the flux on the left, so we introduce a corresponding divergence source to the equation.

Note: Zeroing out the coefficients of the equation at this boundary is probably not necessary due to the default no-flux boundary conditions of cell-centered finite volume, but it's a safe precaution.

```
>>> convectionCoeff = FaceVariable(mesh=mesh, value=[P])
>>> convectionCoeff[..., mesh.facesLeft.value] = 0.
>>> diffusionCoeff = FaceVariable(mesh=mesh, value=1.)
>>> diffusionCoeff[..., mesh.facesLeft.value] = 0.
```

```
>>> eq = (PowerLawConvectionTerm(coeff=convectionCoeff)
...      == DiffusionTerm(coeff=diffusionCoeff) - ImplicitSourceTerm(coeff=D)
...      - (P * mesh.facesLeft).divergence)
```

```
>>> A = numerix.sqrt(P**2 + 4 * D)
```

```
>>> x = mesh.cellCenters[0]
>>> CAnalytical = CellVariable(mesh=mesh)
>>> CAnalytical.setValue(2 * P * numerix.exp(P * x / 2)
...                      * ((P + A) * numerix.exp(A / 2 * (1 - x))
...                      - (P - A) * numerix.exp(-A / 2 * (1 - x)))
...                      / ((P + A)**2 * numerix.exp(A / 2)
...                      - (P - A)**2 * numerix.exp(-A / 2)))
```

```
>>> if __name__ == '__main__':
...     C.name = '$C$'
...     CAnalytical.name = '$C_{analytical}$'
...     viewer = Viewer(vars=(C, CAnalytical))
```

```
>>> if __name__ == '__main__':
...     restol = 1e-5
...     anstol = 1e-3
... else:
...     restol = 0.5
...     anstol = 0.15
```

```
>>> res = 1e+10
```

```
>>> while res > restol:
...     res = eq.sweep(var=C)
...     if __name__ == '__main__':
...         viewer.plot()
```

```
>>> print(C.allclose(CAnalytical, rtol=anstol, atol=anstol))
True
```

23.4.9 examples.convection.source

Solve a convection problem with a source.

This example solves the equation

$$\frac{\partial \phi}{\partial x} + \alpha \phi = 0$$

with $\phi(0) = 1$ at $x = 0$. The boundary condition at $x = L$ is an outflow boundary condition requiring the use of an artificial constraint to be set on the right hand side faces. Exterior faces without constraints are considered to have zero outflow. An `ImplicitSourceTerm` object will be used to represent this term. The derivative of ϕ can be represented by a `ConvectionTerm` with a constant unitary velocity field from left to right. The following is an example code that includes a test against the analytical result.

```
>>> from fipy import CellVariable, Grid1D, DiffusionTerm, PowerLawConvectionTerm,
   <implicit>
   >>> from fipy.tools import numerix
```

```
>>> L = 10.
>>> nx = 5000
>>> dx = L / nx
>>> mesh = Grid1D(dx=dx, nx=nx)
>>> phi0 = 1.0
>>> alpha = 1.0
>>> phi = CellVariable(name=r"\phi", mesh=mesh, value=phi0)
>>> solution = CellVariable(name=r"solution", mesh=mesh, value=phi0 * numerix.exp(-alpha *
   <implicit>* mesh.cellCenters[0]))
```

```
>>> from fipy import input
>>> if __name__ == "__main__":
...     viewer = Viewer(vars=(phi, solution))
...     viewer.plot()
...     input("press key to continue")
```

```
>>> phi.constrain(phi0, mesh.facesLeft)
>>> ## fake outflow condition
>>> phi.faceGrad.constrain([0], mesh.facesRight)
```

```
>>> eq = PowerLawConvectionTerm((1,)) + ImplicitSourceTerm(alpha)
>>> eq.solve(phi)
>>> print(numerix.allclose(phi, phi0 * numerix.exp(-alpha * mesh.cellCenters[0]),
   <implicit>atol=1e-3))
True
```

```
>>> from fipy import input
>>> if __name__ == "__main__":
...     viewer = Viewer(vars=(phi, solution))
...     viewer.plot()
...     input("finished")
```

23.4.10 examples.convection.test

23.5 examples.diffusion

Modules

<code>examples.diffusion.anisotropy</code>	Solve the diffusion equation with an anisotropic diffusion coefficient.
<code>examples.diffusion.circle</code>	Solve the diffusion equation in a circular domain meshed with triangles.
<code>examples.diffusion.circleQuad</code>	Solve the diffusion equation in a circular domain meshed with quadrangles.
<code>examples.diffusion.coupled</code>	Solve the biharmonic equation as a coupled pair of diffusion equations.
<code>examples.diffusion.electrostatics</code>	Solve the Poisson equation in one dimension.
<code>examples.diffusion.explicit</code>	
<code>examples.diffusion.mesh1D</code>	Solve a one-dimensional diffusion equation under different conditions.
<code>examples.diffusion.mesh20x20</code>	Solve a two-dimensional diffusion problem in a square domain.
<code>examples.diffusion.mesh20x20Coupled</code>	Solve a coupled set of diffusion equations in two dimensions.
<code>examples.diffusion.nthOrder</code>	
<code>examples.diffusion.steadyState</code>	
<code>examples.diffusion.test</code>	Run all the test cases in examples/diffusion/
<code>examples.diffusion.variable</code>	This example is a 1D steady state diffusion test case as in <code>./examples/diffusion/variable/mesh2x1/input.py</code> with then number of cells set to $nx = 10$.

23.5.1 examples.diffusion.anisotropy

Solve the diffusion equation with an anisotropic diffusion coefficient.

We wish to solve the problem

$$\frac{\partial \phi}{\partial t} = \partial_j \Gamma_{ij} \partial_i \phi$$

on a circular domain centered at $(0, 0)$. We can choose an anisotropy ratio of 5 such that

$$\Gamma' = \begin{pmatrix} 0.2 & 0 \\ 0 & 1 \end{pmatrix}$$

A new matrix is formed by rotating Γ' such that

$$R = \begin{pmatrix} \cos \theta & \sin \theta \\ -\sin \theta & \cos \theta \end{pmatrix}$$

and

$$\Gamma = R \Gamma' R^T$$

In the case of a point source at $(0, 0)$ a reference solution is given by,

$$\phi(X, Y, t) = Q \frac{\exp\left(-\frac{1}{4t}\left(\frac{X^2}{\Gamma'_{00}} + \frac{Y^2}{\Gamma'_{11}}\right)\right)}{4\pi t \sqrt{\Gamma'_{00} \Gamma'_{11}}}$$

where $(X, Y)^T = R(x, y)^T$ and Q is the initial mass.

```
>>> from fipy import CellVariable, Gmsh2D, Viewer, TransientTerm, DiffusionTermCorrection
>>> from fipy.tools import serialComm, numerix
```

Import a mesh previously created using *Gmsh*.

```
>>> import os
>>> mesh = Gmsh2D(os.path.splitext(__file__)[0] + '.msh', communicator=serialComm)
```

Set the center-most cell to have a value.

```
>>> var = CellVariable(mesh=mesh, hasOld=1)
>>> x, y = mesh.cellCenters
>>> var[numerix.argmin(x**2 + y**2)] = 1.
```

Choose an orientation for the anisotropy.

```
>>> theta = numerix.pi / 4.
>>> rotationMatrix = numerix.array(((numerix.cos(theta), numerix.sin(theta)), \
...                                     (-numerix.sin(theta), numerix.cos(theta))))
>>> gamma_prime = numerix.array((0.2, 0.), (0., 1.))
>>> DOT = numerix.NUMERIX.dot
>>> gamma = DOT(DOT(rotationMatrix, gamma_prime), numerix.transpose(rotationMatrix))
```

Make the equation, viewer and solve.

```
>>> eqn = TransientTerm() == DiffusionTermCorrection((gamma,))
```

```
>>> if __name__ == '__main__':
...     viewer = Viewer(var, datamin=0.0, datamax=0.001)
```

```
>>> mass = float(var.cellVolumeAverage * numerix.sum(mesh.cellVolumes))
>>> time = 0
>>> dt=0.00025
```

```
>>> from builtins import range
>>> for i in range(20):
...     var.updateOld()
...     res = 1.
...
...     while res > 1e-2:
...         res = eqn.sweep(var, dt=dt)
...
...     if __name__ == '__main__':
...         viewer.plot()
...     time += dt
```

Compare with the analytical solution (within 5% accuracy).

```
>>> X, Y = numerix.dot(mesh.cellCenters, CellVariable(mesh=mesh, rank=2,
... value=rotationMatrix))
>>> solution = mass * numerix.exp(-(X**2 / gamma_prime[0][0] + Y**2 / gamma_prime[1][1])_
... / (4 * time)) / (4 * numerix.pi * time * numerix.sqrt(gamma_prime[0][0] * gamma_
... prime[1][1]))
>>> print(max(abs((var - solution) / max(solution))) < 0.08)
True
```

23.5.2 examples.diffusion.circle

Solve the diffusion equation in a circular domain meshed with triangles.

This example demonstrates how to solve a simple diffusion problem on a non-standard mesh with varying boundary conditions. The *Gmsh* package is used to create the mesh. Firstly, define some parameters for the creation of the mesh,

```
>>> cellSize = 0.05
>>> radius = 1.
```

The *cellSize* is the preferred edge length of each mesh element and the *radius* is the radius of the circular mesh domain. In the following code section a file is created with the geometry that describes the mesh. For details of how to write such geometry files for *Gmsh*, see the [gmsh manual](#).

The mesh created by *Gmsh* is then imported into *FiPy* using the *Gmsh2D* object.

```
>>> from fipy import CellVariable, Gmsh2D, TransientTerm, DiffusionTerm, Viewer
>>> from fipy.tools import numerix
```

```
>>> mesh = Gmsh2D('''
...             cellSize = %(cellSize)g;
...             radius = %(radius)g;
...             Point(1) = {0, 0, 0, cellSize};
...             Point(2) = {-radius, 0, 0, cellSize};
...             Point(3) = {0, radius, 0, cellSize};
...             Point(4) = {radius, 0, 0, cellSize};
...             Point(5) = {0, -radius, 0, cellSize};
...             Circle(6) = {2, 1, 3};
...             Circle(7) = {3, 1, 4};
...             Circle(8) = {4, 1, 5};
...             Circle(9) = {5, 1, 2};
...             Line Loop(10) = {6, 7, 8, 9};
...             Plane Surface(11) = {10};
...             ''' % locals())
```

Using this mesh, we can construct a solution variable

```
>>> phi = CellVariable(name = "solution variable",
...                      mesh = mesh,
...                      value = 0.)
```


We can now create a *Viewer* to see the mesh

```
>>> viewer = None
>>> from fipy import input
```

(continues on next page)

(continued from previous page)

```
>>> if __name__ == '__main__':
...     viewer = Viewer(vars=phi, datamin=-1, datamax=1.)
...     viewer.plotMesh()
```

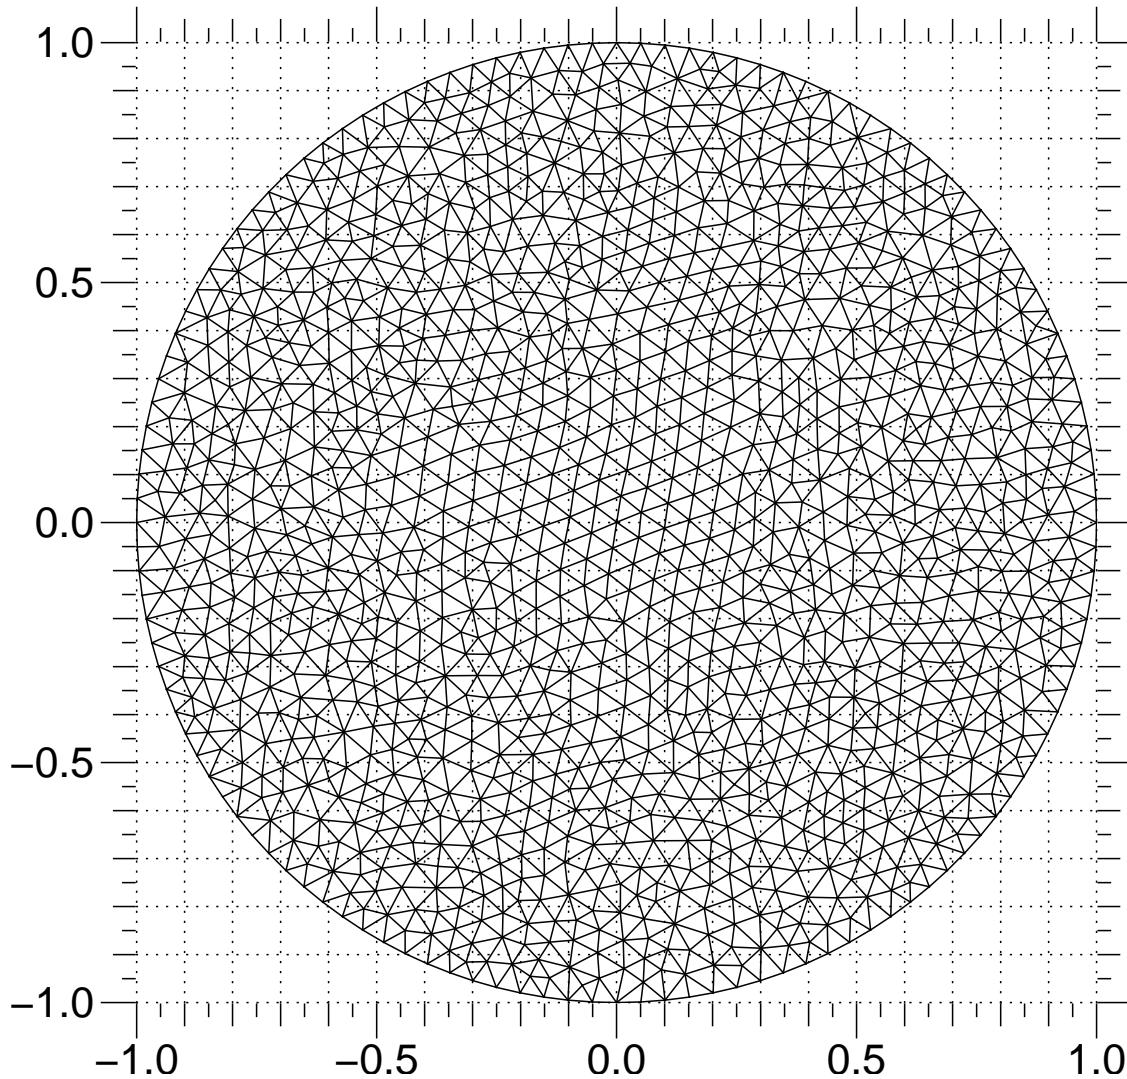

We set up a transient diffusion equation

```
>>> D = 1.
>>> eq = TransientTerm() == DiffusionTerm(coeff=D)
```


The following line extracts the x coordinate values on the exterior faces. These are used as the boundary condition fixed values.

```
>>> X, Y = mesh.faceCenters
```

```
>>> phi.constrain(X, mesh.exteriorFaces)
```

We first step through the transient problem

```
>>> timeStepDuration = 10 * 0.9 * cellSize**2 / (2 * D)
>>> steps = 10
>>> from builtins import range
>>> for step in range(steps):
...     eq.solve(var=phi,
...             dt=timeStepDuration)
...     if viewer is not None:
...         viewer.plot()
```

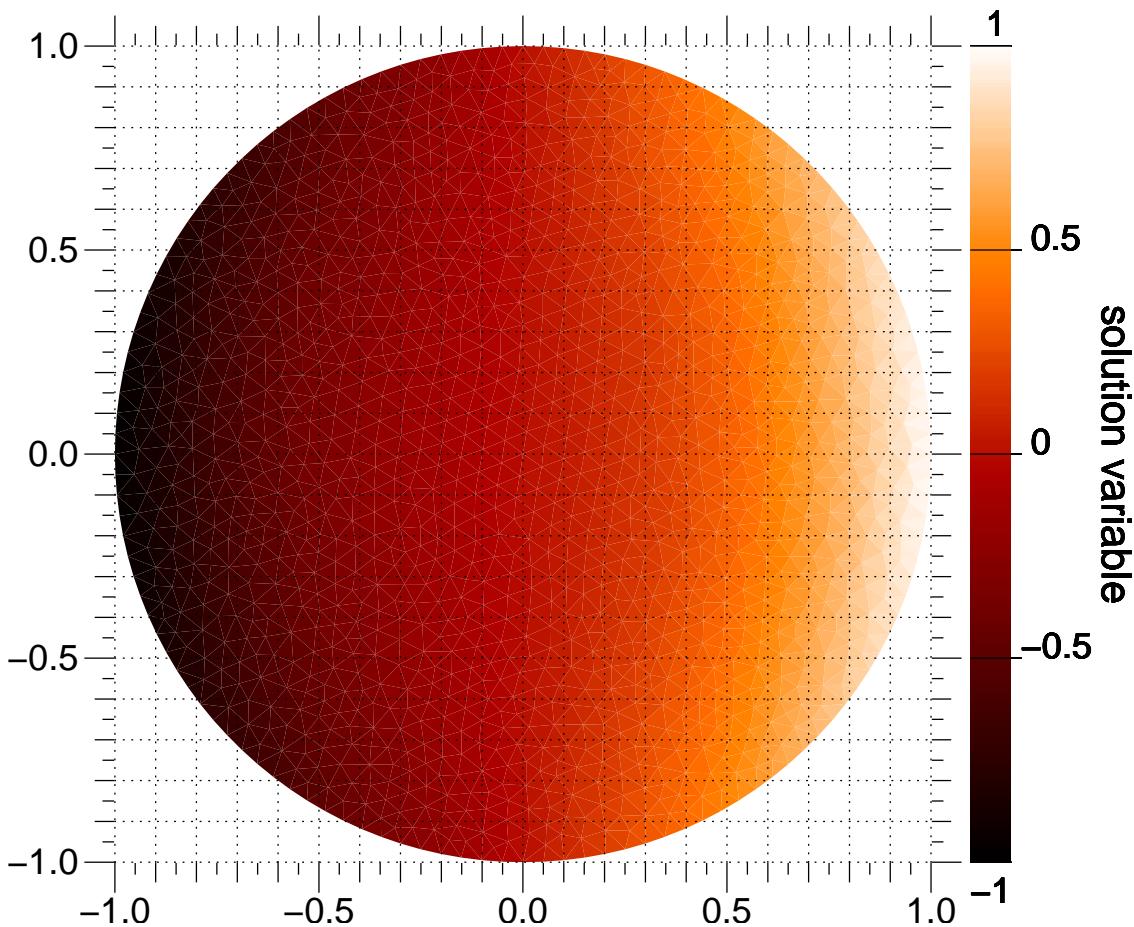

If we wanted to plot or analyze the results of this calculation with another application, we could export tab-separated-values with

```
TSVViewer(vars=(phi, phi.grad)).plot(filename="myTSV.tsv")
```

x	y	solution variable	solution variable_grad_x	solution_variable_grad_y
0.975559734792414	0.0755414402612554	0.964844363287199	-0.	
0.229687917881182	0.00757854476106331	0.0375859836421991	-0.	
0.0442864953037566	0.79191893162384	0.020853932412869	-0.	
0.773936613923853	-0.205560697612547			
0.0246775505084069	0.771959648896982			
0.723540342405813	-0.182589694334729			

(continues on next page)

(continued from previous page)

0.223345558247991	-0.807931073108895	0.203035857140125	-0.
~777466238738658	0.0401235242511506		
-0.00726763301939488	-0.775978916110686	-0.00412895434496877	-0.
~650055516507232	-0.183112882869288		
-0.0220279064527904	-0.187563765977912	-0.012771874945585	-0.
~35707168379437	-0.056072788439713		
0.111223320911545	-0.679586798311355	0.0911595298310758	-0.
~613455176718145	0.0256182541329463		
-0.78996770899909	-0.0173672729866294	-0.693887874335319	-1.
~00671109050419	-0.127611490372511		
-0.703545986179876	-0.435813500559859	-0.635004192597412	-0.
~896203033957194	-0.00855563518923689		
0.888641841567831	-0.408558914368324	0.877939107374768	-0.
~32195762184087	-0.22696791637322		
0.38212257821916	-0.51732949653553	0.292889724306196	-0.
~854466141879776	0.199715815696975		
-0.359068256998365	0.757882581524374	-0.323541041763627	-0.
~870534227755687	0.0792631912863636		
-0.459673905457569	-0.701526587772079	-0.417577664032421	-0.
~725460726303266	-0.119132299176163		
-0.338256179134518	-0.523565732643067	-0.254030052182524	-0.
~923505840608445	-0.192224240688976		
0.87498754712638	0.174119064688993	0.836057900916614	-1.
~11590500805745	-0.211010116496191		
-0.484106960369249	0.0705987421869745	-0.319827850867342	-0.
~867894407968447	0.051246727010685		
-0.0221203060940465	-0.216026820080053	-0.0152729438559779	-0.
~341246696530392	-0.0538476142281317		

The values are listed at the cell centers. Particularly for irregular meshes, no specific ordering should be relied upon. Vector quantities are listed in multiple columns, one for each mesh dimension.

This problem again has an analytical solution that depends on the error function, but it's a bit more complicated due to the varying boundary conditions and the different horizontal diffusion length at different vertical positions

```
>>> x, y = mesh.cellCenters
>>> t = timeStepDuration * steps
```

```
>>> phiAnalytical = CellVariable(name="analytical value",
...                                 mesh=mesh)
```

```
>>> x0 = radius * numerix.cos(numerix.arcsin(y))
>>> try:
...     from scipy.special import erf
...     ## This function can sometimes throw nans on OS X
...     ## see http://projects.scipy.org/scipy/scipy/ticket/325
...     phiAnalytical.setValue(x0 * (erf((x0+x) / (2 * numerix.sqrt(D * t)))
...                           - erf((x0-x) / (2 * numerix.sqrt(D * t)))))
... except ImportError:
...     print("The SciPy library is not available to test the solution to \
... the transient diffusion equation")
```

```
>>> print(phi.allclose(phiAnalytical, atol = 7e-2))
1
```

```
>>> from fipy import input
>>> if __name__ == '__main__':
...     input("Transient diffusion. Press <return> to proceed...")
```

As in the earlier examples, we can also directly solve the steady-state diffusion problem.


```
>>> DiffusionTerm(coeff=D).solve(var=phi)
```

The values at the elements should be equal to their x coordinate

```
>>> print(phi.allclose(x, atol = 0.03))
1
```

Display the results if run as a script.

```
>>> from fipy import input
>>> if viewer is not None:
...     viewer.plot()
...     input("Steady-state diffusion. Press <return> to proceed...")
```

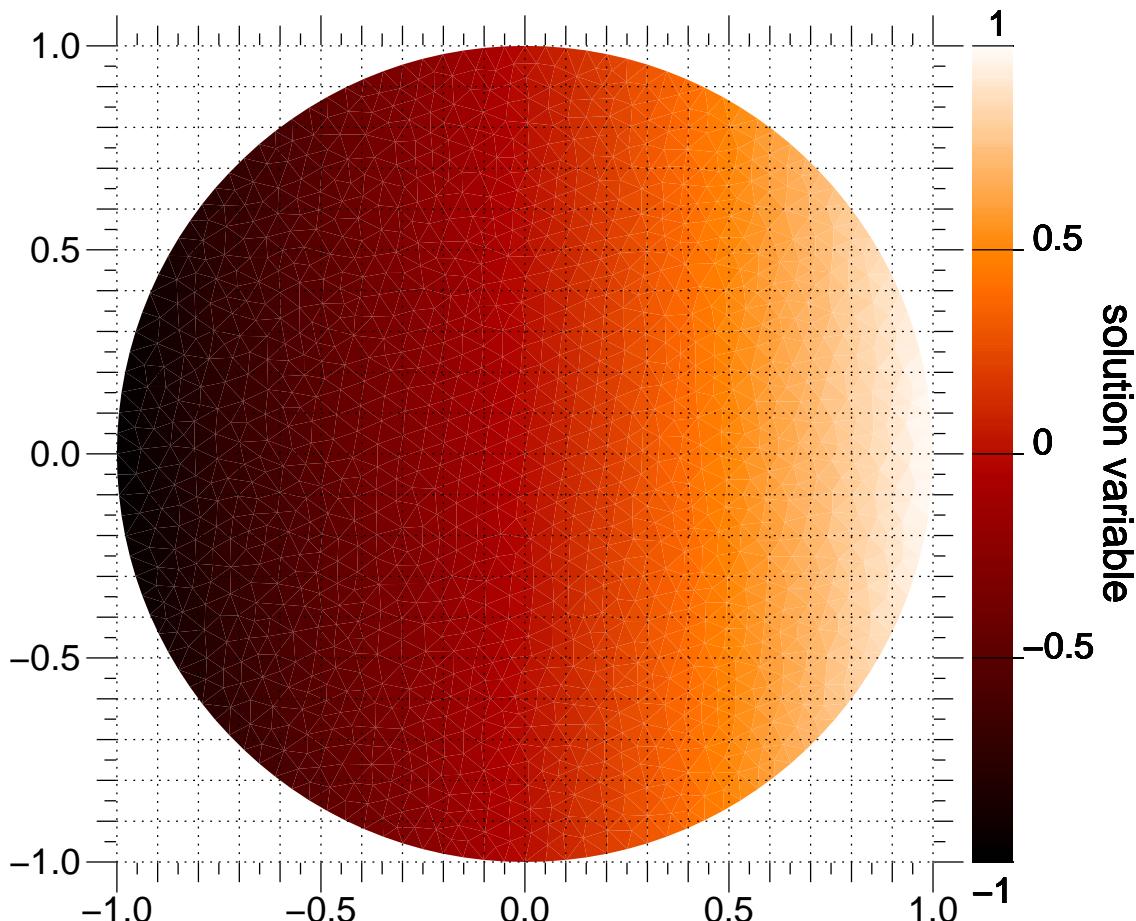

23.5.3 examples.diffusion.circleQuad

Solve the diffusion equation in a circular domain meshed with quadrangles.

This example demonstrates how to solve a simple diffusion problem on a non-standard mesh with varying boundary conditions. The [Gmsh](#) package is used to create the mesh. Firstly, define some parameters for the creation of the mesh,

```
>>> cellSize = 0.05
>>> radius = 1.
```

The *cellSize* is the preferred edge length of each mesh element and the *radius* is the radius of the circular mesh domain. In the following code section a file is created with the geometry that describes the mesh. For details of how to write such geometry files for [Gmsh](#), see the [gmsh](#) manual.

The mesh created by [Gmsh](#) is then imported into [FiPy](#) using the [Gmsh2D](#) object.

```
>>> from fipy import CellVariable, Gmsh2D, TransientTerm, DiffusionTerm, Viewer
>>> from fipy.tools import numerix
```


```
>>> mesh = Gmsh2D('''
...             cellSize = %(cellSize)g;
...             radius = %(radius)g;
...             Point(1) = {0, 0, 0, cellSize};
...             Point(2) = {-radius, 0, 0, cellSize};
...             Point(3) = {0, radius, 0, cellSize};
...             Point(4) = {radius, 0, 0, cellSize};
...             Point(5) = {0, -radius, 0, cellSize};
...             Circle(6) = {2, 1, 3};
...             Circle(7) = {3, 1, 4};
...             Circle(8) = {4, 1, 5};
...             Circle(9) = {5, 1, 2};
...             Line Loop(10) = {6, 7, 8, 9};
...             Plane Surface(11) = {10};
...             Recombine Surface{11};
...             ''' % locals())
```

Using this mesh, we can construct a solution variable

```
>>> phi = CellVariable(name = "solution variable",
...                      mesh = mesh,
...                      value = 0.)
```

We can now create a [Viewer](#) to see the mesh

```
>>> viewer = None
>>> from fipy import input
>>> if __name__ == '__main__':
...     viewer = Viewer(vars=phi, datamin=-1, datamax=1.)
...     viewer.plotMesh()
...     input("Irregular circular mesh. Press <return> to proceed...")
```

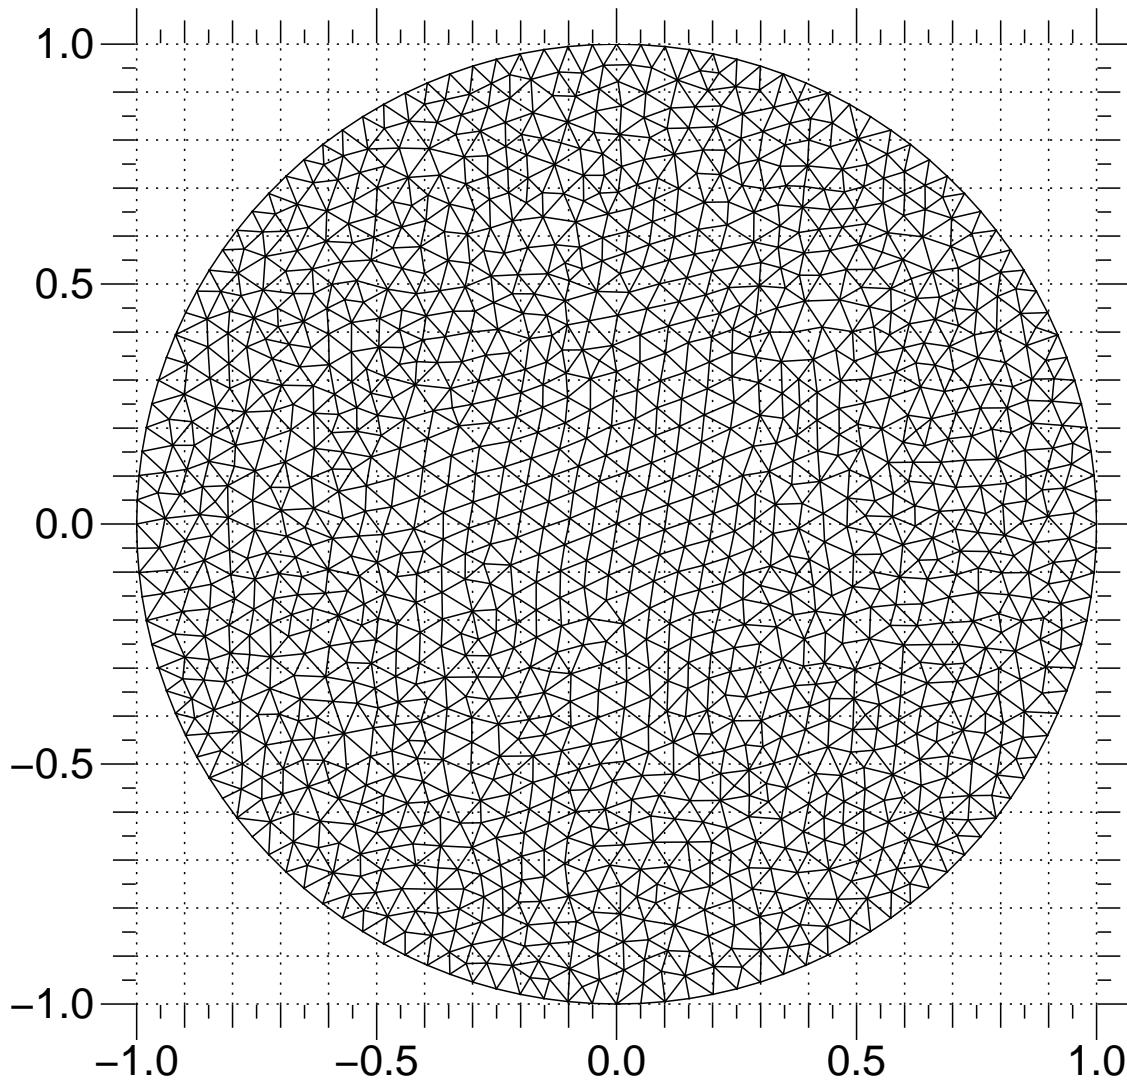

We set up a transient diffusion equation

```
>>> D = 1.
>>> eq = TransientTerm() == DiffusionTerm(coeff=D)
```

The following line extracts the x coordinate values on the exterior faces. These are used as the boundary condition fixed values.

```
>>> X, Y = mesh.faceCenters
>>> phi.constrain(X, mesh.exteriorFaces)
```


We first step through the transient problem

```
>>> timeStepDuration = 10 * 0.9 * cellSize**2 / (2 * D)
>>> steps = 10
>>> from builtins import range
>>> for step in range(steps):
...     eq.solve(var=phi,
...             dt=timeStepDuration)
...     if viewer is not None:
```

(continues on next page)

(continued from previous page)

```
... viewer.plot()
```

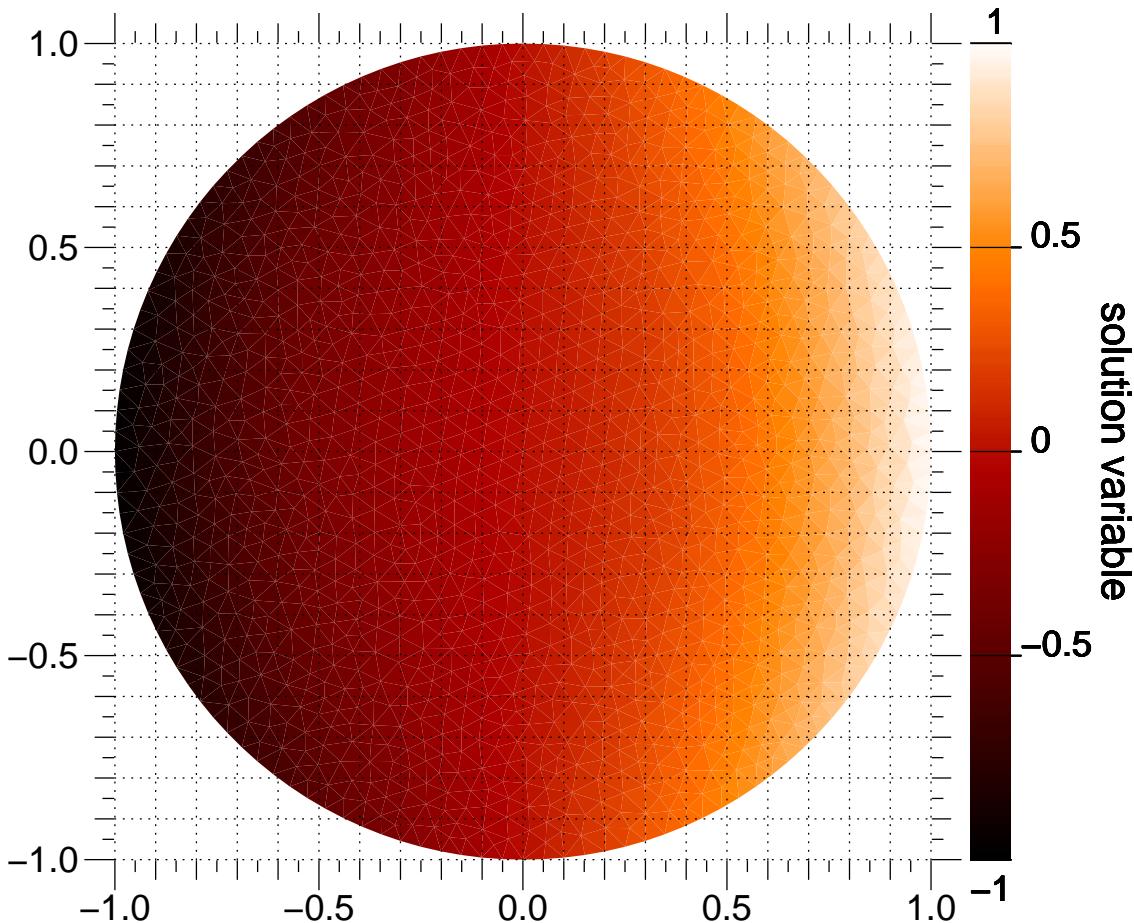

If we wanted to plot or analyze the results of this calculation with another application, we could export tab-separated-values with

```
TSVViewer(vars=(phi, phi.grad)).plot(filename="myTSV.tsv")
```

x	y	solution variable	solution variable_grad_x	solution_variable_grad_y
0.975559734792414	0.229687917881182	0.0755414402612554 0.00757854476106331	0.964844363287199	-0.
0.0442864953037566	-0.773936613923853	0.79191893162384 -0.205560697612547	0.0375859836421991	-0.
0.0246775505084069	-0.723540342405813	0.771959648896982 -0.182589694334729	0.020853932412869	-0.
0.223345558247991	-0.777466238738658	-0.807931073108895 0.0401235242511506	0.203035857140125	-0.
-0.00726763301939488	-0.650055516507232	-0.775978916110686 -0.183112882869288	-0.00412895434496877	-0.
-0.0220279064527904	-0.35707168379437	-0.187563765977912 -0.056072788439713	-0.012771874945585	-0.

(continues on next page)

(continued from previous page)

0.111223320911545	-0.679586798311355	0.0911595298310758	-0.
→ 613455176718145	0.0256182541329463		
-0.78996770899909	-0.0173672729866294	-0.693887874335319	-1.
→ 00671109050419	-0.127611490372511		
-0.703545986179876	-0.435813500559859	-0.635004192597412	-0.
→ 896203033957194	-0.00855563518923689		
0.888641841567831	-0.408558914368324	0.877939107374768	-0.
→ 32195762184087	-0.22696791637322		
0.38212257821916	-0.51732949653553	0.292889724306196	-0.
→ 854466141879776	0.199715815696975		
-0.359068256998365	0.757882581524374	-0.323541041763627	-0.
→ 870534227755687	0.0792631912863636		
-0.459673905457569	-0.701526587772079	-0.417577664032421	-0.
→ 725460726303266	-0.119132299176163		
-0.338256179134518	-0.523565732643067	-0.254030052182524	-0.
→ 923505840608445	-0.192224240688976		
0.87498754712638	0.174119064688993	0.836057900916614	-1.
→ 11590500805745	-0.211010116496191		
-0.484106960369249	0.0705987421869745	-0.319827850867342	-0.
→ 867894407968447	0.051246727010685		
-0.0221203060940465	-0.216026820080053	-0.0152729438559779	-0.
→ 341246696530392	-0.0538476142281317		

The values are listed at the cell centers. Particularly for irregular meshes, no specific ordering should be relied upon. Vector quantities are listed in multiple columns, one for each mesh dimension.

This problem again has an analytical solution that depends on the error function, but it's a bit more complicated due to the varying boundary conditions and the different horizontal diffusion length at different vertical positions

```
>>> x, y = mesh.cellCenters
>>> t = timeStepDuration * steps
```

```
>>> phiAnalytical = CellVariable(name="analytical value",
...                                 mesh=mesh)
```

```
>>> x0 = radius * numerix.cos(numerix.arcsin(y))
>>> try:
...     from scipy.special import erf
...     ## This function can sometimes throw nans on OS X
...     ## see http://projects.scipy.org/scipy/scipy/ticket/325
...     phiAnalytical.setValue(x0 * (erf((x0+x) / (2 * numerix.sqrt(D * t)))
...                            - erf((x0-x) / (2 * numerix.sqrt(D * t)))))
... except ImportError:
...     print("The SciPy library is not available to test the solution to \
... the transient diffusion equation")
```

```
>>> print(phi.allclose(phiAnalytical, atol = 7e-2))
1
```

```
>>> from fipy import input
>>> if __name__ == '__main__':
...     input("Transient diffusion. Press <return> to proceed...")
```

As in the earlier examples, we can also directly solve the steady-state diffusion problem.


```
>>> DiffusionTerm(coeff=D).solve(var=phi)
```

The values at the elements should be equal to their x coordinate

```
>>> print(phi.allclose(x, atol = 0.035))
1
```

Display the results if run as a script.

```
>>> from fipy import input
>>> if viewer is not None:
...     viewer.plot()
...     input("Steady-state diffusion. Press <return> to proceed...")
```

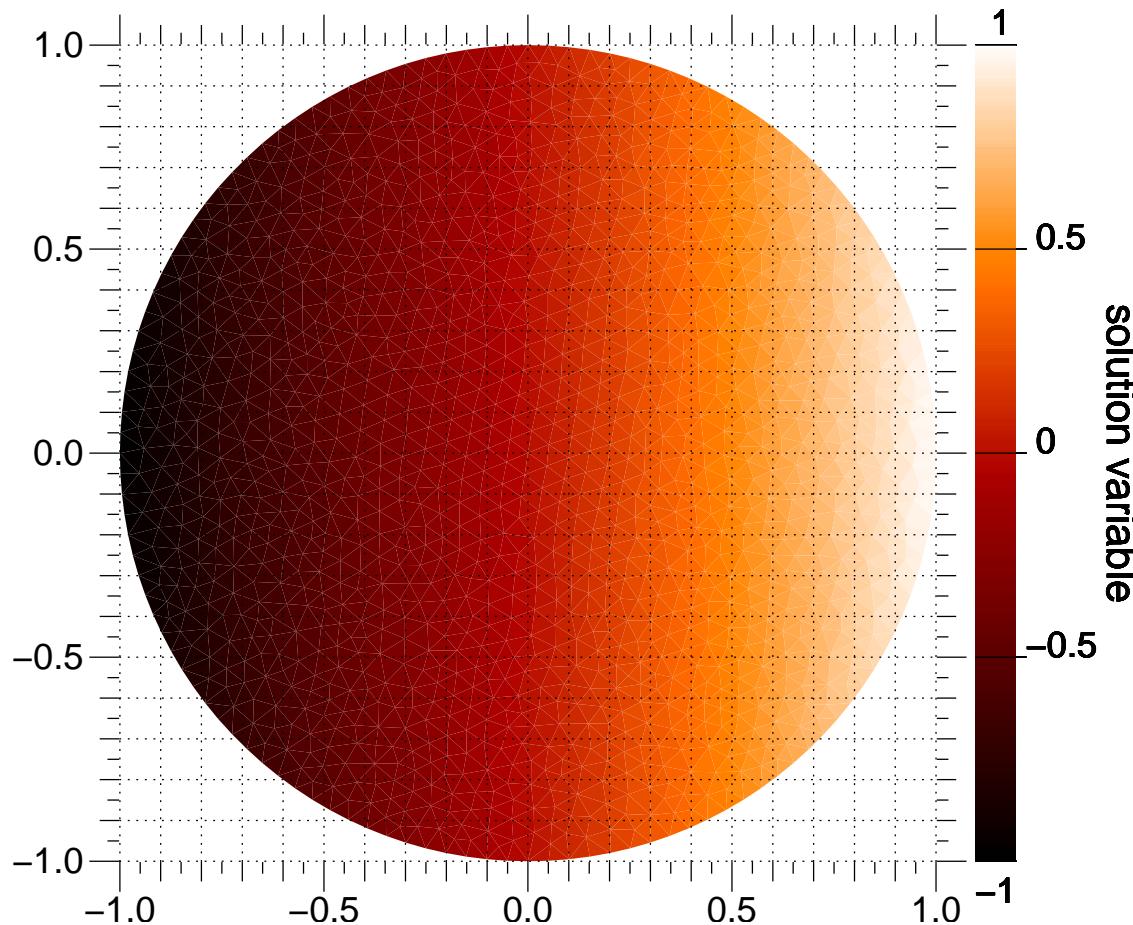

23.5.4 examples.diffusion.coupled

Solve the biharmonic equation as a coupled pair of diffusion equations.

FiPy has only first order time derivatives so equations such as the biharmonic wave equation written as

$$\frac{\partial^4 v}{\partial x^4} + \frac{\partial^2 v}{\partial t^2} = 0$$

cannot be represented as a single equation. We need to decompose the biharmonic equation into two equations that are first order in time in the following way,

$$\begin{aligned}\frac{\partial^2 v_0}{\partial x^2} + \frac{\partial v_1}{\partial t} &= 0 \\ \frac{\partial^2 v_1}{\partial x^2} - \frac{\partial v_0}{\partial t} &= 0\end{aligned}$$

Historically, *FiPy* required systems of coupled equations to be solved successively, “sweeping” the equations to convergence. As a practical example, we use the following system

$$\begin{aligned}\frac{\partial v_0}{\partial t} &= 0.01 \nabla^2 v_0 - \nabla^2 v_1 \\ \frac{\partial v_1}{\partial t} &= \nabla^2 v_0 + 0.01 \nabla^2 v_1\end{aligned}$$

subject to the boundary conditions

$$\begin{aligned}v_0|_{x=0} &= 0 & v_0|_{x=1} &= 1 \\ v_1|_{x=0} &= 1 & v_1|_{x=1} &= 0\end{aligned}$$

This system closely resembles the pure biharmonic equation, but has an additional diffusion contribution to improve numerical stability. The example system is solved with the following block of code using explicit coupling for the cross-coupled terms.

```
>>> from fipy import Grid1D, CellVariable, TransientTerm, DiffusionTerm, Viewer
```

```
>>> m = Grid1D(nx=100, Lx=1.)
```

```
>>> v0 = CellVariable(mesh=m, hasOld=True, value=0.5)
>>> v1 = CellVariable(mesh=m, hasOld=True, value=0.5)
```

```
>>> v0.constrain(0, m.facesLeft)
>>> v0.constrain(1, m.facesRight)
```

```
>>> v1.constrain(1, m.facesLeft)
>>> v1.constrain(0, m.facesRight)
```

```
>>> eq0 = TransientTerm() == DiffusionTerm(coeff=0.01) - v1.faceGrad.divergence
>>> eq1 = TransientTerm() == v0.faceGrad.divergence + DiffusionTerm(coeff=0.01)
```

```
>>> vi = Viewer((v0, v1))
```

```
>>> from builtins import range
>>> for t in range(100):
...     v0.updateOld()
...     v1.updateOld()
...     res0 = res1 = 1e100
...     while max(res0, res1) > 0.1:
...         res0 = eq0.sweep(var=v0, dt=1e-5)
...         res1 = eq1.sweep(var=v1, dt=1e-5)
...     if t % 10 == 0:
...         vi.plot()
```

The uncoupled method still works, but it can be advantageous to solve the two equations simultaneously. In this case, by coupling the equations, we can eliminate the explicit sources and dramatically increase the time steps:

```
>>> v0.value = 0.5
>>> v1.value = 0.5
```

```
>>> eqn0 = TransientTerm(var=v0) == DiffusionTerm(0.01, var=v0) - DiffusionTerm(1, var=v1)
>>> eqn1 = TransientTerm(var=v1) == DiffusionTerm(1, var=v0) + DiffusionTerm(0.01, var=v1)
```

```
>>> eqn = eqn0 & eqn1
```

```
>>> from builtins import range
>>> for t in range(1):
...     v0.updateOld()
...     v1.updateOld()
...     eqn.solve(dt=1.e-3)
...     vi.plot()
```

It is also possible to pose the same equations in vector form:

```
>>> v = CellVariable(mesh=m, hasOld=True, value=[[0.5], [0.5]], elementshape=(2,))
```

```
>>> v.constrain([[0], [1]], m.facesLeft)
>>> v.constrain([[1], [0]], m.facesRight)
```

```
>>> eqn = TransientTerm([[1, 0], [0, 1]]) == DiffusionTerm([[[0.01, -1], [1, 0.01]]])
```

```
>>> vi = Viewer((v[0], v[1]))
```

```
>>> from builtins import range
>>> for t in range(1):
...     v.updateOld()
...     eqn.solve(var=v, dt=1.e-3)
...     vi.plot()
```

Whether you pose your problem in coupled or vector form should be dictated by the underlying physics. If v_0 and v_1 represent the concentrations of two conserved species, then it is natural to write two separate governing equations

and to couple them. If they represent two components of a vector field, then the vector formulation is obviously more natural. FiPy will solve the same matrix system either way.

23.5.5 examples.diffusion.electrostatics

Solve the Poisson equation in one dimension.

The Poisson equation is a particular example of the steady-state diffusion equation. We examine a few cases in one dimension.

```
>>> from fipy import CellVariable, Grid1D, Viewer, DiffusionTerm
```

```
>>> nx = 200
>>> dx = 0.01
>>> L = nx * dx
>>> mesh = Grid1D(dx = dx, nx = nx)
```

Given the electrostatic potential ϕ ,

```
>>> potential = CellVariable(mesh=mesh, name='potential', value=0.)
```

the permittivity ϵ ,

```
>>> permittivity = 1
```

the concentration C_j of the j^{th} component with valence z_j (we consider only a single component C_{e^-} with valence with $z_{\text{e}^-} = -1$)

```
>>> electrons = CellVariable(mesh=mesh, name='e-')
>>> electrons.valence = -1
```

and the charge density ρ ,

```
>>> charge = electrons * electrons.valence
>>> charge.name = "charge"
```

The dimensionless Poisson equation is

$$\nabla \cdot (\epsilon \nabla \phi) = -\rho = - \sum_{j=1}^n z_j C_j$$

```
>>> potential.equation = (DiffusionTerm(coeff = permittivity)
... + charge == 0)
```

Because this equation admits an infinite number of potential profiles, we must constrain the solution by fixing the potential at one point:

```
>>> potential.constrain(0., mesh.facesLeft)
```

First, we obtain a uniform charge distribution by setting a uniform concentration of electrons $C_{\text{e}^-} = 1$.

```
>>> electrons.setValue(1.)
```

and we solve for the electrostatic potential

```
>>> potential.equation.solve(var=potential)
```

This problem has the analytical solution

$$\psi(x) = \frac{x^2}{2} - 2x$$


```
>>> x = mesh.cellCenters[0]
>>> analytical = CellVariable(mesh=mesh, name="analytical solution",
...                           value=(x**2)/2 - 2*x)
```

which has been satisfactorily obtained

```
>>> print(potential.allclose(analytical, rtol = 2e-5, atol = 2e-5))
1
```

If we are running the example interactively, we view the result

```
>>> from fipy import input
>>> if __name__ == '__main__':
...     viewer = Viewer(vars=(charge, potential, analytical))
...     viewer.plot()
...     input("Press any key to continue...")
```

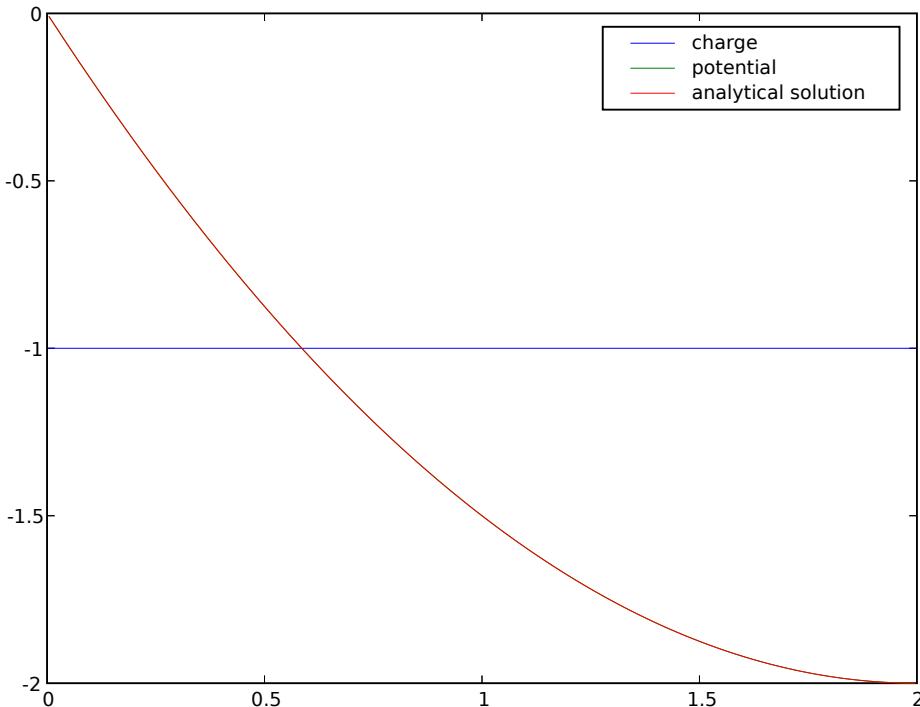

Next, we segregate all of the electrons to right side of the domain

$$C_{e^-} = \begin{cases} 0 & \text{for } x \leq L/2, \\ 1 & \text{for } x > L/2. \end{cases}$$

```
>>> x = mesh.cellCenters[0]
>>> electrons.setValue(0.)
>>> electrons.setValue(1., where=x > L / 2.)
```

and again solve for the electrostatic potential

```
>>> potential.equation.solve(var=potential)
```

which now has the analytical solution


$$\psi(x) = \begin{cases} -x & \text{for } x \leq L/2, \\ \frac{(x-1)^2}{2} - x & \text{for } x > L/2. \end{cases}$$

```
>>> analytical.setValue(-x)
>>> analytical.setValue(((x-1)**2)/2 - x, where=x > L/2)
```

```
>>> print(potential.allclose(analytical, rtol = 2e-5, atol = 2e-5))
1
```

and again view the result

```
>>> from fipy import input
>>> if __name__ == '__main__':
...     viewer.plot()
...     input("Press any key to continue...")
```

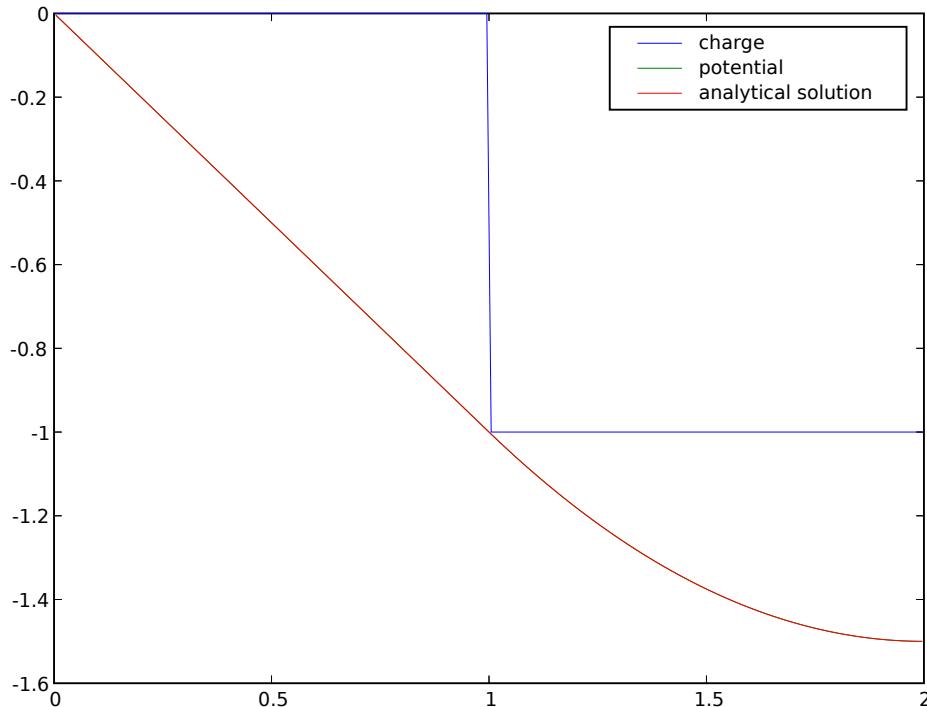

Finally, we segregate all of the electrons to the left side of the domain

$$C_{\text{e}^-} = \begin{cases} 1 & \text{for } x \leq L/2, \\ 0 & \text{for } x > L/2. \end{cases}$$

```
>>> electrons.setValue(1.)
>>> electrons.setValue(0., where=x > L / 2.)
```

and again solve for the electrostatic potential

```
>>> potential.equation.solve(var=potential)
```

which has the analytical solution

$$\psi(x) = \begin{cases} \frac{x^2}{2} - x & \text{for } x \leq L/2, \\ -\frac{1}{2} & \text{for } x > L/2. \end{cases}$$


We again verify that the correct equilibrium is attained

```
>>> analytical.setValue((x**2)/2 - x)
>>> analytical.setValue(-0.5, where=x > L / 2)
```

```
>>> print(potential.allclose(analytical, rtol = 2e-5, atol = 2e-5))
1
```

and once again view the result

```
>>> if __name__ == '__main__':
...     viewer.plot()
```

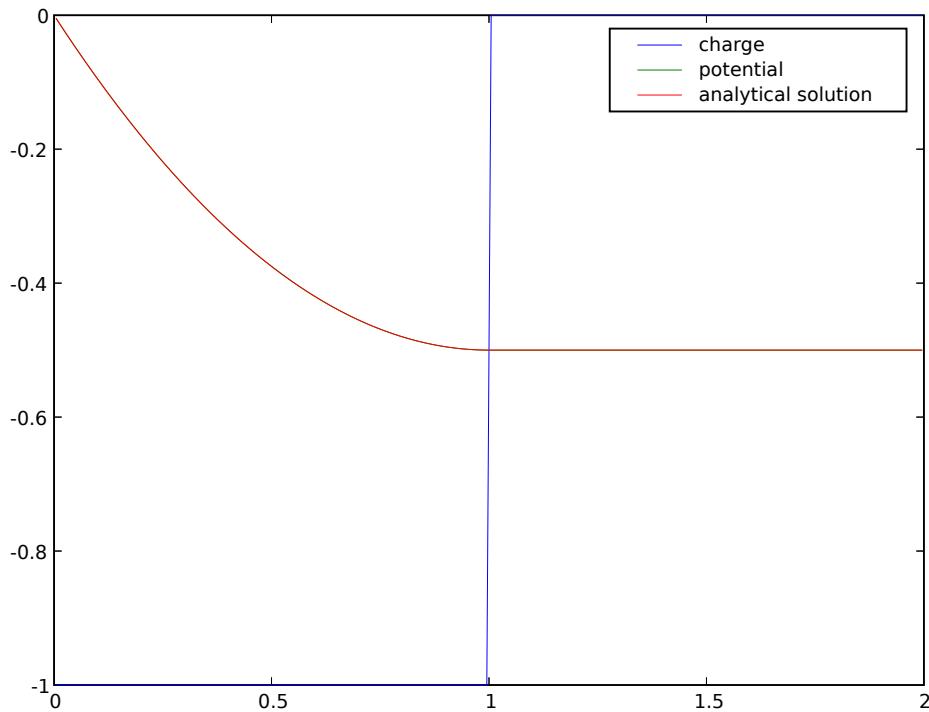

23.5.6 examples.diffusion.explicit

Modules

`examples.diffusion.explicit.mesh1D`

This input file again solves a 1D diffusion problem as in `examples.diffusion.steadyState.mesh1D`, the difference being that this transient example is solved explicitly.

`examples.diffusion.explicit.mixedelement`

This input file again solves an explicit 1D diffusion problem as in `./examples/diffusion/mesh1D.py` but on a mesh with both square and triangular elements.

`examples.diffusion.explicit.test`

`examples.diffusion.explicit.tri2D`

This input file again solves a 1D diffusion problem as in `./examples/diffusion/steadyState/mesh1D.py`.

examples.diffusion.explicit.mesh1D

This input file again solves a 1D diffusion problem as in `examples.diffusion.steadyState.mesh1D`, the difference being that this transient example is solved explicitly.

We create a 1D mesh:

```
>>> from fipy import CellVariable, Grid1D, TransientTerm, ExplicitDiffusionTerm, Viewer
>>> from fipy.tools import numerix
```

```
>>> nx = 100
>>> dx = 1.
>>> mesh = Grid1D(dx = dx, nx = nx)
```

and we initialize a `CellVariable` to `initialValue`:

```
>>> valueLeft = 0.
>>> initialValue = 1.
>>> var = CellVariable(
...     name = "concentration",
...     mesh = mesh,
...     value = initialValue)
```

The transient diffusion equation

$$\frac{\partial \phi}{\partial t} = \nabla \cdot (D \nabla \phi)$$

is represented by a `TransientTerm` and an `ExplicitDiffusionTerm`.

We take the diffusion coefficient $D = 1$

```
>>> diffusionCoeff = 1.
```

We build the equation:

```
>>> eq = TransientTerm() == ExplicitDiffusionTerm(coeff = diffusionCoeff)
```

and the boundary conditions:

```
>>> var.constrain(valueLeft, mesh.facesLeft)
```

In this case, many steps have to be taken to reach equilibrium. A loop is required to execute the necessary time steps:

```
>>> timeStepDuration = 0.1
>>> steps = 100
>>> from builtins import range
>>> for step in range(steps):
...     eq.solve(var=var, dt=timeStepDuration)
```

The analytical solution for this transient diffusion problem is given by $\phi = \text{erf}(x/2\sqrt{Dt})$.

The result is tested against the expected profile:

```
>>> Lx = nx * dx
>>> x = mesh.cellCenters[0]
>>> t = timeStepDuration * steps
```

(continues on next page)

(continued from previous page)

```
>>> epsi = x / numerix.sqrt(t * diffusionCoeff)
>>> from scipy.special import erf
>>> analyticalArray = erf(epsi/2)
>>> print(var.allclose(analyticalArray, atol = 2e-3))
1
```

If the problem is run interactively, we can view the result:

```
>>> if __name__ == '__main__':
...     viewer = Viewer(vars = (var,))
...     viewer.plot()
```

examples.diffusion.explicit.mixedelement

This input file again solves an explicit 1D diffusion problem as in *./examples/diffusion/mesh1D.py* but on a mesh with both square and triangular elements. The term used is the *ExplicitDiffusionTerm*. In this case many steps have to be taken to reach equilibrium. The *timeStepDuration* parameter specifies the size of each time step and *steps* is the number of time steps.

```
>>> from fipy import CellVariable, Grid2D, Tri2D, TransientTerm, ExplicitDiffusionTerm, ...
...     Viewer
>>> from fipy.tools import numerix
```

```
>>> dx = 1.
>>> dy = 1.
>>> nx = 10
```

```
>>> valueLeft = 0.
>>> valueRight = 1.
>>> D = 1.
>>> timeStepDuration = 0.01 * dx**2 / (2 * D)
>>> if __name__ == '__main__':
...     steps = 10000
... else:
...     steps = 10
```

```
>>> gridMesh = Grid2D(dx=dx, dy=dy, nx=nx, ny=2)
>>> triMesh = Tri2D(dx=dx, dy=dy, nx=nx, ny=1) + ((dx*nx,), (0,))
>>> otherGridMesh = Grid2D(dx=dx, dy=dy, nx=nx, ny=1) + ((dx*nx,), (1,))
>>> bigMesh = gridMesh + triMesh + otherGridMesh
```

```
>>> L = dx * nx * 2
```

```
>>> var = CellVariable(name="concentration",
...                     mesh=bigMesh,
...                     value=valueLeft)
```

```
>>> eqn = TransientTerm() == ExplicitDiffusionTerm(coeff=D)
```

```
>>> var.constrain(valueLeft, where=bigMesh.facesLeft)
>>> var.constrain(valueRight, where=bigMesh.facesRight)
```

In a semi-infinite domain, the analytical solution for this transient diffusion problem is given by $\phi = 1 - \text{erf}((L - x)/2\sqrt{Dt})$, which is a reasonable approximation at early times. At late times, the solution is just a straight line. If the *SciPy* library is available, the result is tested against the expected profile:

```
>>> x = bigMesh.cellCenters[0]
>>> t = timeStepDuration * steps
```

```
>>> if __name__ == '__main__':
...     varAnalytical = valueLeft + (valueRight - valueLeft) * x / L
...     atol = 0.2
... else:
...     try:
...         from scipy.special import erf
...         varAnalytical = 1 - erf((L - x) / (2 * numerix.sqrt(D * t)))
...         atol = 0.03
...     except ImportError:
...         print("The SciPy library is not available to test the solution to ...
... the transient diffusion equation")
```

```
>>> if __name__ == '__main__':
...     viewer = Viewer(var=var)
```

```
>>> from builtins import range
>>> for step in range(steps):
...     eqn.solve(var, dt=timeStepDuration)
...     if (step % 100) == 0 and (__name__ == '__main__'):
...         viewer.plot()
```

We check the answer against the analytical result

```
>>> print(var.allclose(varAnalytical, atol=atol))
1
```

```
>>> from fipy import input
>>> if __name__ == '__main__':
...     viewer.plot()
...     input('finished')
```

examples.diffusion.explicit.test

examples.diffusion.explicit.tri2D

This input file again solves a 1D diffusion problem as in *./examples/diffusion/steadyState/mesh1D.py*. The difference in this example is that the solution method is explicit. The equation used is the *ExplicitDiffusionEquation*. In this case many steps have to be taken to reach equilibrium. The *timeStepDuration* parameter specifies the size of each time step and *steps* is the number of time steps.

```
>>> dx = 1.
>>> dy = 1.
>>> nx = 10
>>> ny = 1
>>> valueLeft = 0.
>>> valueRight = 1.
>>> timeStepDuration = 0.02
>>> steps = 10
```

A loop is required to execute the necessary time steps:

```
>>> from builtins import range
>>> for step in range(steps):
...     eq.solve(var, solver=solver, dt=timeStepDuration)
```

The result is again tested in the same way:

```
>>> Lx = nx * dx
>>> x = mesh.cellCenters[0]
>>> print(var.allclose(answer, rtol = 1e-8))
1
```

23.5.7 examples.diffusion.mesh1D

Solve a one-dimensional diffusion equation under different conditions.

To run this example from the base *FiPy* directory, type:

```
$ python examples/diffusion/mesh1D.py
```

at the command line. Different stages of the example should be displayed, along with prompting messages in the terminal.

This example takes the user through assembling a simple problem with *FiPy*. It describes different approaches to a 1D diffusion problem with constant diffusivity and fixed value boundary conditions such that,

$$\frac{\partial \phi}{\partial t} = D \nabla^2 \phi. \quad (23.1)$$

The first step is to define a one dimensional domain with 50 solution points. The `Grid1D` object represents a linear structured grid. The parameter `dx` refers to the grid spacing (set to unity here).

```
>>> from fipy import Variable, FaceVariable, CellVariable, Grid1D, ExplicitDiffusionTerm,
...     TransientTerm, DiffusionTerm, Viewer
>>> from fipy.tools import numerix
```

```
>>> nx = 50
>>> dx = 1.
>>> mesh = Grid1D(nx=nx, dx=dx)
```

FiPy solves all equations at the centers of the cells of the mesh. We thus need a `CellVariable` object to hold the values of the solution, with the initial condition $\phi = 0$ at $t = 0$,

```
>>> phi = CellVariable(name="solution variable",
...                      mesh=mesh,
...                      value=0.)
```

We'll let

```
>>> D = 1.
```

for now.

The boundary conditions

$$\phi = \begin{cases} 0 & \text{at } x = 1, \\ 1 & \text{at } x = 0. \end{cases}$$

are formed with a value

```
>>> valueLeft = 1
>>> valueRight = 0
```

and a set of faces over which they apply.

Note: Only faces around the exterior of the mesh can be used for boundary conditions.

For example, here the exterior faces on the left of the domain are extracted by `mesh.facesLeft`. The boundary conditions are applied using `phi.constrain()` with these faces and a value (`valueLeft`).

```
>>> phi.constrain(valueRight, mesh.facesRight)
>>> phi.constrain(valueLeft, mesh.facesLeft)
```

Note: If no boundary conditions are specified on exterior faces, the default boundary condition is no-flux, $\vec{n} \cdot (D \nabla \phi)|_{\text{someFaces}} = 0$.

If you have ever tried to numerically solve Eq. (23.1), you most likely attempted “explicit finite differencing” with code something like:

```
for step in range(steps):
    for j in range(cells):
        phi_new[j] = phi_old[j] \
            + (D * dt / dx**2) * (phi_old[j+1] - 2 * phi_old[j] + phi_old[j-1])
    time += dt
```

plus additional code for the boundary conditions. In *FiPy*, you would write

```
>>> eqX = TransientTerm() == ExplicitDiffusionTerm(coeff=D)
```

The largest stable timestep that can be taken for this explicit 1D diffusion problem is $\Delta t \leq \Delta x^2/(2D)$.

We limit our steps to 90% of that value for good measure

```
>>> timeStepDuration = 0.9 * dx**2 / (2 * D)
>>> steps = 100
```

If we're running interactively, we'll want to view the result, but not if this example is being run automatically as a test. We accomplish this by having Python check if this script is the “`__main__`” script, which will only be true if we explicitly launched it and not if it has been imported by another script such as the automatic tester. The factory function `Viewer()` returns a suitable viewer depending on available viewers and the dimension of the mesh.

```
>>> phiAnalytical = CellVariable(name="analytical value",
...                                mesh=mesh)

>>> if __name__ == '__main__':
...     viewer = Viewer(vars=(phi, phiAnalytical),
...                      datamin=0., datamax=1.)
...     viewer.plot()
```

In a semi-infinite domain, the analytical solution for this transient diffusion problem is given by $\phi = 1 - \text{erf}(x/2\sqrt{Dt})$. If the `SciPy` library is available, the result is tested against the expected profile:

```
>>> x = mesh.cellCenters[0]
>>> t = timeStepDuration * steps
```


```
>>> try:
...     from scipy.special import erf
...     phiAnalytical.setValue(1 - erf(x / (2 * numerix.sqrt(D * t))))
... except ImportError:
...     print("The SciPy library is not available to test the solution to \
... the transient diffusion equation")
```

We then solve the equation by repeatedly looping in time:

```
>>> from builtins import range
>>> for step in range(steps):
...     eqX.solve(var=phi,
...               dt=timeStepDuration)
...     if __name__ == '__main__':
...         viewer.plot()

>>> print(phi.allclose(phiAnalytical, atol = 7e-4))
1
```

```
>>> from fipy import input
>>> if __name__ == '__main__':
...     input("Explicit transient diffusion. Press <return> to proceed...")
```

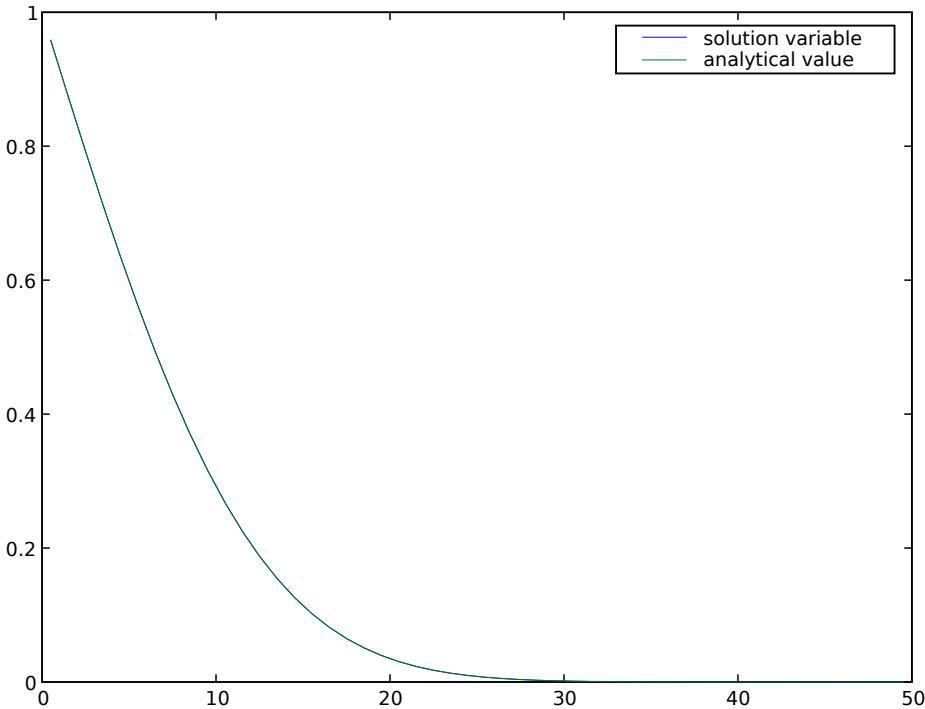

Although explicit finite differences are easy to program, we have just seen that this 1D transient diffusion problem is limited to taking rather small time steps. If, instead, we represent Eq. (23.1) as:

```
phi_new[j] = phi_old[j] \
+ (D * dt / dx**2) * (phi_new[j+1] - 2 * phi_new[j] + phi_new[j-1])
```

it is possible to take much larger time steps. Because `phi_new` appears on both the left and right sides of the equation, this form is called “implicit”. In general, the “implicit” representation is much more difficult to program than the “explicit” form that we just used, but in *FiPy*, all that is needed is to write

```
>>> eqI = TransientTerm() == DiffusionTerm(coeff=D)
```

reset the problem


```
>>> phi.setValue(valueRight)
```

and rerun with much larger time steps

```
>>> timeStepDuration *= 10
>>> steps // 10
>>> from builtins import range
>>> for step in range(steps):
...     eqI.solve(var=phi,
...               dt=timeStepDuration)
...     if __name__ == '__main__':
...         viewer.plot()
```

```
>>> print(phi.allclose(phiAnalytical, atol = 2e-2))
1
```

```
>>> from fipy import input
>>> if __name__ == '__main__':
...     input("Implicit transient diffusion. Press <return> to proceed...")
```

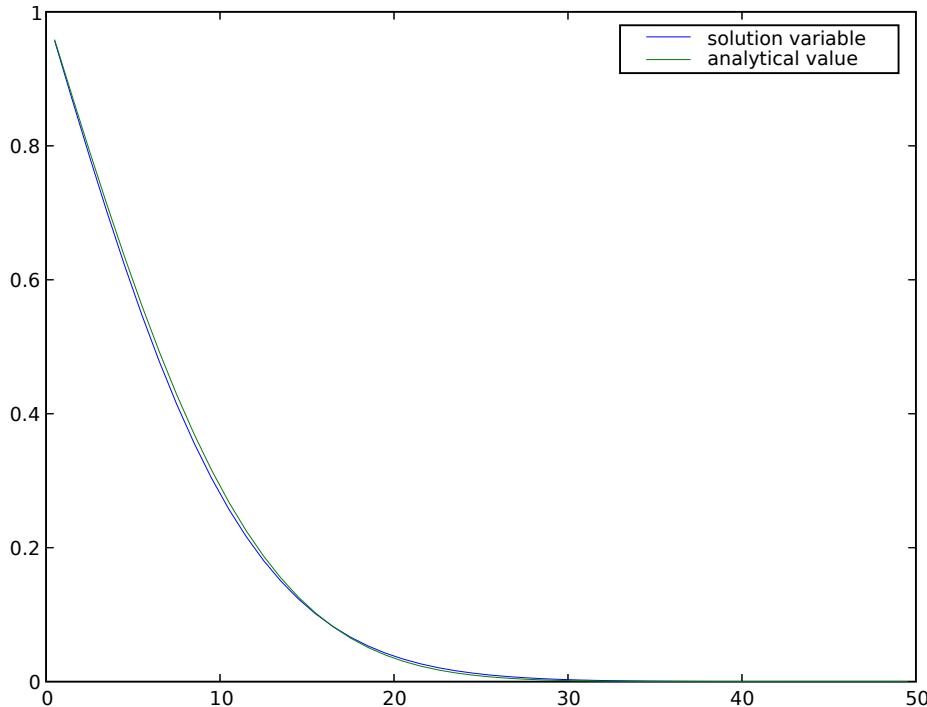

Note that although much larger *stable* timesteps can be taken with this implicit version (there is, in fact, no limit to how large an implicit timestep you can take for this particular problem), the solution is less *accurate*. One way to achieve a compromise between *stability* and *accuracy* is with the Crank-Nicholson scheme, represented by:

```
phi_new[j] = phi_old[j] + (D * dt / (2 * dx**2)) * \
    ((phi_new[j+1] - 2 * phi_new[j] + phi_new[j-1]) \
    + (phi_old[j+1] - 2 * phi_old[j] + phi_old[j-1]))
```

which is essentially an average of the explicit and implicit schemes from above. This can be rendered in *FiPy* as easily as

```
>>> eqCN = eqX + eqI
```

We again reset the problem

```
>>> phi.setValue(valueRight)
```

and apply the Crank-Nicholson scheme until the end, when we apply one step of the fully implicit scheme to drive down the error (see, *e.g.*, section 19.2 of [24]).

```
>>> from builtins import range
>>> for step in range(steps - 1):
...     eqCN.solve(var=phi,
...                dt=timeStepDuration)
...     if __name__ == '__main__':
...         viewer.plot()
>>> eqI.solve(var=phi,
...            dt=timeStepDuration)
>>> if __name__ == '__main__':
...     viewer.plot()
```

```
>>> print(phi.allclose(phiAnalytical, atol = 3e-3))
1
```

```
>>> from fipy import input
>>> if __name__ == '__main__':
...     input("Crank-Nicholson transient diffusion. Press <return> to proceed...")
```

As mentioned above, there is no stable limit to how large a time step can be taken for the implicit diffusion problem. In fact, if the time evolution of the problem is not interesting, it is possible to eliminate the time step altogether by omitting the *TransientTerm*. The steady-state diffusion equation

$$D\nabla^2\phi = 0$$

is represented in *FiPy* by


```
>>> DiffusionTerm(coeff=D).solve(var=phi)
```

```
>>> if __name__ == '__main__':
...     viewer.plot()
```

The analytical solution to the steady-state problem is no longer an error function, but simply a straight line, which we can confirm to a tolerance of 10^{-10} .

```
>>> L = nx * dx
>>> print(phi.allclose(valueLeft + (valueRight - valueLeft) * x / L,
...                      rtol = 1e-10, atol = 1e-10))
1
```

```
>>> from fipy import input
>>> if __name__ == '__main__':
...     input("Implicit steady-state diffusion. Press <return> to proceed...")
```

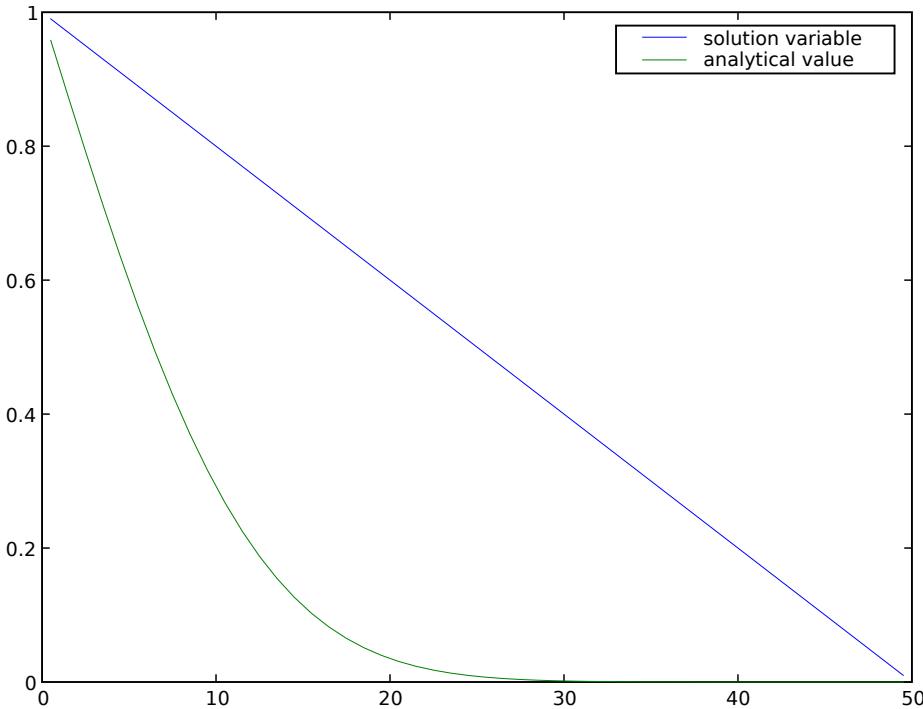

Often, boundary conditions may be functions of another variable in the system or of time.

For example, to have

$$\phi = \begin{cases} (1 + \sin t)/2 & \text{on } x = 0 \\ 0 & \text{on } x = L \end{cases}$$

we will need to declare time t as a *Variable*

```
>>> time = Variable()
```

and then declare our boundary condition as a function of this *Variable*

```
>>> def phi.faceConstraints
>>> valueLeft = 0.5 * (1 + numerix.sin(time))
>>> phi.constrain(valueLeft, mesh.facesLeft)
>>> phi.constrain(0., mesh.facesRight)
```

```
>>> eqI = TransientTerm() == DiffusionTerm(coeff=D)
```

When we update `time` at each timestep, the left-hand boundary condition will automatically update,


```
>>> dt = .1
>>> while time() < 15:
...     time.setValue(time() + dt)
```

(continues on next page)

(continued from previous page)

```
...     eqI.solve(var=phi, dt=dt)
...     if __name__ == '__main__':
...         viewer.plot()
```

```
>>> from fipy import input
>>> if __name__ == '__main__':
...     input("Time-dependent boundary condition. Press <return> to proceed...")
```

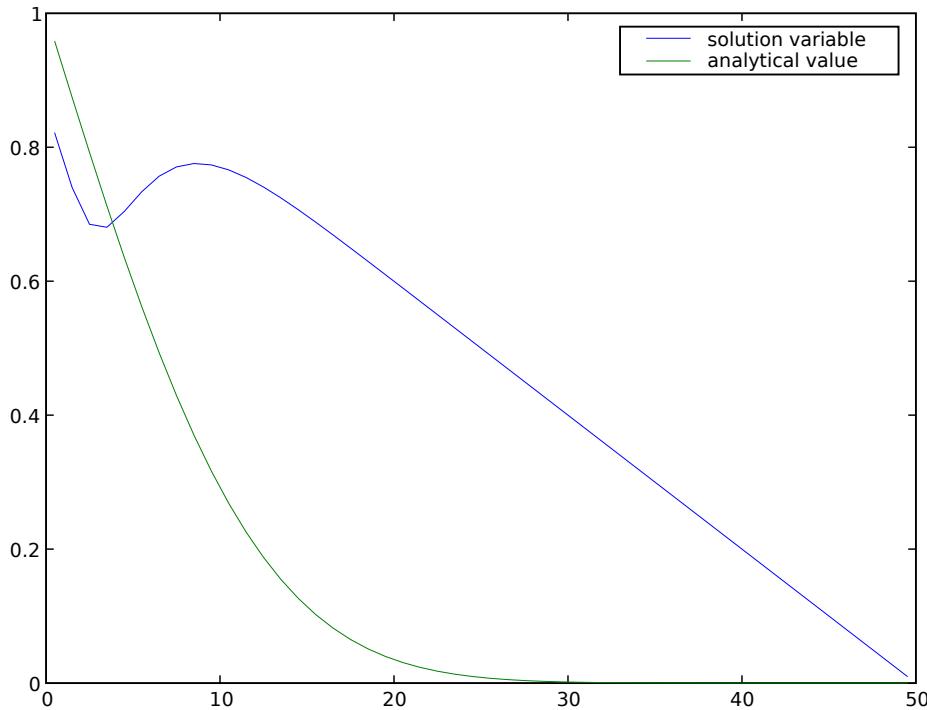

Many interesting problems do not have simple, uniform diffusivities. We consider a steady-state diffusion problem

$$\nabla \cdot (D \nabla \phi) = 0,$$

with a spatially varying diffusion coefficient

$$D = \begin{cases} 1 & \text{for } 0 < x < L/4, \\ 0.1 & \text{for } L/4 \leq x < 3L/4, \\ 1 & \text{for } 3L/4 \leq x < L, \end{cases}$$

and with boundary conditions $\phi = 0$ at $x = 0$ and $D \frac{\partial \phi}{\partial x} = 1$ at $x = L$, where L is the length of the solution domain. Exact numerical answers to this problem are found when the mesh has cell centers that lie at $L/4$ and $3L/4$, or when the number of cells in the mesh N_i satisfies $N_i = 4i + 2$, where i is an integer. The mesh we've been using thus far is satisfactory, with $N_i = 50$ and $i = 12$.

Because *FiPy* considers diffusion to be a flux from one cell to the next, through the intervening face, we must define the non-uniform diffusion coefficient on the mesh faces

```
>>> D = FaceVariable(mesh=mesh, value=1.0)
>>> X = mesh.faceCenters[0]
>>> D.setValue(0.1, where=(L / 4. <= X) & (X < 3. * L / 4.))
```

The boundary conditions are a fixed value of

```
>>> valueLeft = 0.
```

to the left and a fixed flux of

```
>>> fluxRight = 1.
```

to the right:

```
>>> phi = CellVariable(mesh=mesh)
>>> phi.faceGrad.constrain([fluxRight], mesh.facesRight)
>>> phi.constrain(valueLeft, mesh.facesLeft)
```

We re-initialize the solution variable

```
>>> phi.setValue(0)
```

and obtain the steady-state solution with one implicit solution step

```
>>> DiffusionTerm(coeff = D).solve(var=phi)
```

The analytical solution is simply


$$\phi = \begin{cases} x & \text{for } 0 < x < L/4, \\ 10x - 9L/4 & \text{for } L/4 \leq x < 3L/4, \\ x + 18L/4 & \text{for } 3L/4 \leq x < L, \end{cases}$$

or

```
>>> x = mesh.cellCenters[0]
>>> phiAnalytical.setValue(x)
>>> phiAnalytical.setValue(10 * x - 9. * L / 4.,
...                         where=(L / 4. <= x) & (x < 3. * L / 4.))
>>> phiAnalytical.setValue(x + 18. * L / 4.,
...                         where=3. * L / 4. <= x)
>>> print(phi.allclose(phiAnalytical, atol = 1e-8, rtol = 1e-8))
1
```

And finally, we can plot the result

```
>>> from fipy import input
>>> if __name__ == '__main__':
...     Viewer(vars=(phi, phiAnalytical)).plot()
...     input("Non-uniform steady-state diffusion. Press <return> to proceed...")
```

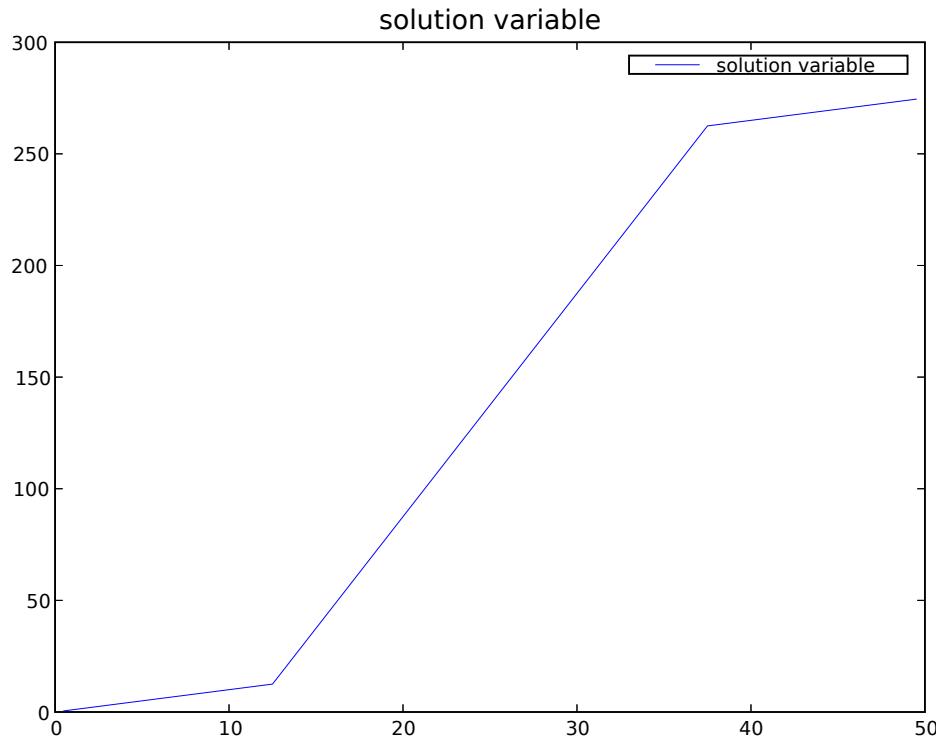

Note that for problems involving heat transfer and other similar conservation equations, it is important to ensure that we begin with the correct form of the equation. For example, for heat transfer with ϕ representing the temperature,

$$\frac{\partial}{\partial t} (\rho \hat{C}_p \phi) = \nabla \cdot [k \nabla \phi].$$

With constant and uniform density ρ , heat capacity \hat{C}_p and thermal conductivity k , this is often written like Eq. (23.1), but replacing D with $\alpha = \frac{k}{\rho \hat{C}_p}$. However, when these parameters vary either in position or time, it is important to be careful with the form of the equation used. For example, if $k = 1$ and

$$\rho \hat{C}_p = \begin{cases} 1 & \text{for } 0 < x < L/4, \\ 10 & \text{for } L/4 \leq x < 3L/4, \\ 1 & \text{for } 3L/4 \leq x < L, \end{cases}$$

then we have

$$\alpha = \begin{cases} 1 & \text{for } 0 < x < L/4, \\ 0.1 & \text{for } L/4 \leq x < 3L/4, \\ 1 & \text{for } 3L/4 \leq x < L, \end{cases}$$

However, using a `DiffusionTerm` with the same coefficient as that in the section above is incorrect, as the steady state governing equation reduces to $0 = \nabla^2 \phi$, which results in a linear profile in 1D, unlike that for the case above with spatially varying diffusivity. Similar care must be taken if there is time dependence in the parameters in transient problems.

We can illustrate the differences with an example. We define field variables for the correct and incorrect solution

```
>>> phiT = CellVariable(name="correct", mesh=mesh)
>>> phiF = CellVariable(name="incorrect", mesh=mesh)
>>> phiT.faceGrad constrain([fluxRight], mesh.facesRight)
>>> phiF.faceGrad constrain([fluxRight], mesh.facesRight)
>>> phiT.constrain(valueLeft, mesh.facesLeft)
>>> phiF.constrain(valueLeft, mesh.facesLeft)
>>> phiT.setValue(0)
>>> phiF.setValue(0)
```

The relevant parameters are


```
>>> k = 1.
>>> alpha_false = FaceVariable(mesh=mesh, value=1.0)
>>> X = mesh.faceCenters[0]
>>> alpha_false.setValue(0.1, where=(L / 4. <= X) & (X < 3. * L / 4.))
>>> eqF = 0 == DiffusionTerm(coeff=alpha_false)
>>> eqT = 0 == DiffusionTerm(coeff=k)
>>> eqF.solve(var=phiF)
>>> eqT.solve(var=phiT)
```

Comparing to the correct analytical solution, $\phi = x$

```
>>> x = mesh.cellCenters[0]
>>> phiAnalytical.setValue(x)
>>> print(phiT.allclose(phiAnalytical, atol = 1e-8, rtol = 1e-8))
1
```

and finally, plot

```
>>> from fipy import input
>>> if __name__ == '__main__':
...     Viewer(vars=(phiT, phiF)).plot()
...     input("Non-uniform thermal conductivity. Press <return> to proceed...")
```

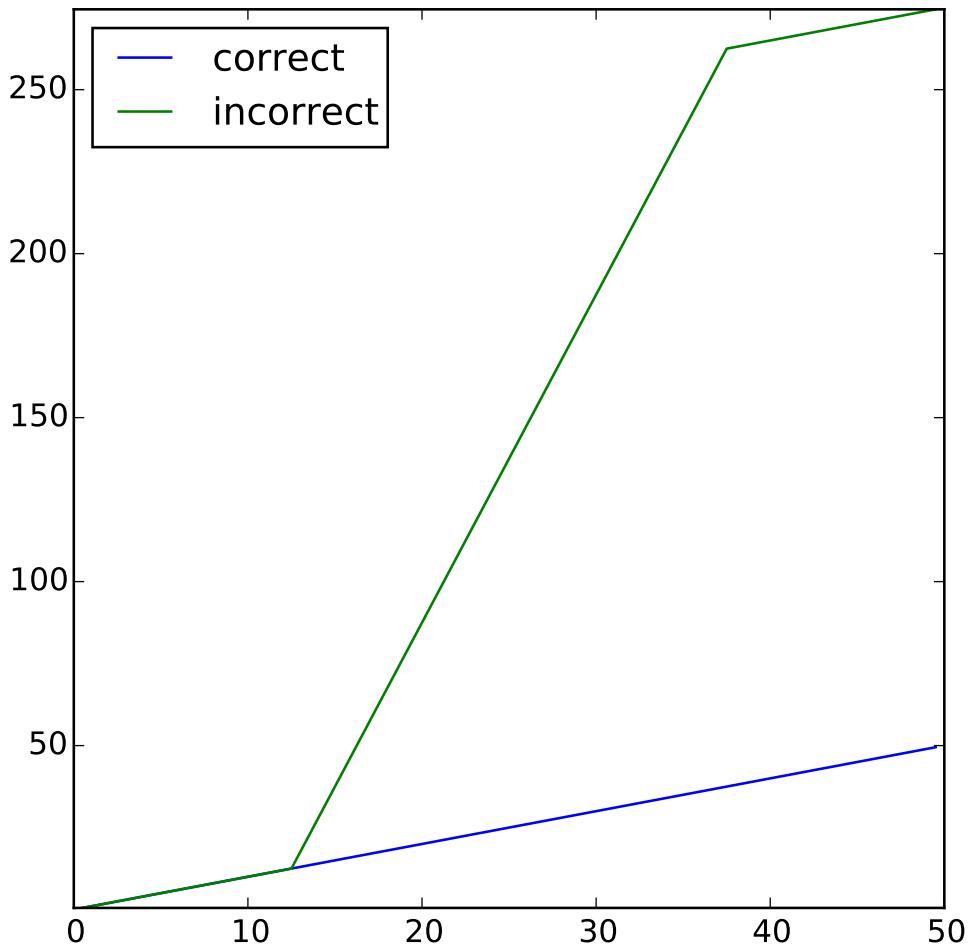

Often, the diffusivity is not only non-uniform, but also depends on the value of the variable, such that

$$\frac{\partial \phi}{\partial t} = \nabla \cdot [D(\phi) \nabla \phi]. \quad (23.2)$$

With such a non-linearity, it is generally necessary to “sweep” the solution to convergence. This means that each time step should be calculated over and over, using the result of the previous sweep to update the coefficients of the equation, without advancing in time. In *FiPy*, this is accomplished by creating a solution variable that explicitly retains its “old” value by specifying `hasOld` when you create it. The variable does not move forward in time until it is explicitly told to `updateOld()`. In order to compare the effects of different numbers of sweeps, let us create a list of variables: `phi[0]` will be the variable that is actually being solved and `phi[1]` through `phi[4]` will display the result of taking the corresponding number of sweeps (`phi[1]` being equivalent to not sweeping at all).

```
>>> valueLeft = 1.  
>>> valueRight = 0.  
>>> phi = [  
...     CellVariable(name="solution variable",
```

(continues on next page)

(continued from previous page)

```
    mesh=mesh,
    value=valueRight,
    hasOld=1),
CellVariable(name="1 sweep",
             mesh=mesh),
CellVariable(name="2 sweeps",
             mesh=mesh),
CellVariable(name="3 sweeps",
             mesh=mesh),
CellVariable(name="4 sweeps",
             mesh=mesh)
]
```

If, for example,

$$D = D_0(1 - \phi)$$

we would simply write Eq. (23.2) as

```
>>> D0 = 1.  
>>> eq = TransientTerm() == DiffusionTerm(coeff=D0 * (1 - phi[0]))
```

Note: Because of the non-linearity, the Crank-Nicholson scheme does not work for this problem.

We apply the same boundary conditions that we used for the uniform diffusivity cases

```
>>> phi[0].constrain(valueRight, mesh.facesRight)
>>> phi[0].constrain(valueLeft, mesh.facesLeft)
```

Although this problem does not have an exact transient solution, it can be solved in steady-state, with

$$\phi(x) = 1 - \sqrt{\frac{x}{L}}$$

```
>>> x = mesh.cellCenters[0]
>>> phiAnalytical.setValue(1. - numerix.sqrt(x/L))
```

We create a viewer to compare the different numbers of sweeps with the analytical solution from before.

```
>>> if __name__ == '__main__':
...     viewer = Viewer(vars=phi + [phiAnalytical],
...                      datamin=0., datamax=1.)
...     viewer.plot()
```

As described above, an inner “sweep” loop is generally required for the solution of non-linear or multiple equation sets. Often a conditional is required to exit this “sweep” loop given some convergence criteria. Instead of using the `solve()` method equation, when sweeping, it is often useful to call `sweep()` instead. The `sweep()` method behaves the same way as `solve()`, but returns the residual that can then be used as part of the exit condition.

We now repeatedly run the problem with increasing numbers of sweeps.

```

>>> from fipy import input
>>> from builtins import range
>>> for sweeps in range(1, 5):
...     phi[0].setValue(valueRight)
...     for step in range(steps):
...         # only move forward in time once per time step
...         phi[0].updateOld()
...
...         # but "sweep" many times per time step
...         for sweep in range(sweeps):
...             res = eq.sweep(var=phi[0],
...                            dt=timeStepDuration)
...             if __name__ == '__main__':
...                 viewer.plot()
...
...             # copy the final result into the appropriate display variable
...             phi[sweeps].setValue(phi[0])
...             if __name__ == '__main__':
...                 viewer.plot()
...                 input("Implicit variable diffusivity. %d sweep(s). \
... Residual = %f. Press <return> to proceed..." % (sweeps, (abs(res))))

```

As can be seen, sweeping does not dramatically change the result, but the “residual” of the equation (a measure of how accurately it has been solved) drops about an order of magnitude with each additional sweep.

Attention: Choosing an optimal balance between the number of time steps, the number of sweeps, the number of solver iterations, and the solver tolerance is more art than science and will require some experimentation on your part for each new problem.

Finally, we can increase the number of steps to approach equilibrium, or we can just solve for it directly

```
>>> eq = DiffusionTerm(coeff=D0 * (1 - phi[0]))
```

```

>>> phi[0].setValue(valueRight)
>>> res = 1e+10
>>> while res > 1e-6:
...     res = eq.sweep(var=phi[0],
...                    dt=timeStepDuration)

```

```


>>> print(phi[0].allclose(phiAnalytical, atol = 1e-1))
1

```

```

>>> from fipy import input
>>> if __name__ == '__main__':
...     viewer.plot()
...     input("Implicit variable diffusivity - steady-state. \
... Press <return> to proceed...")


```

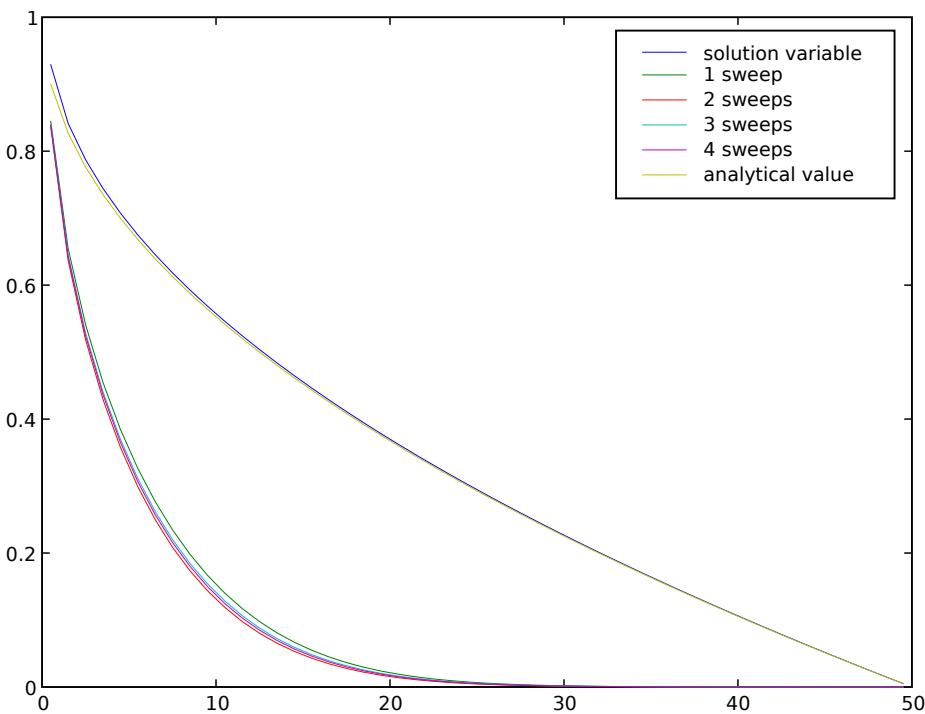

Fully implicit solutions are not without their pitfalls, particularly in steady state. Consider a localized block of material diffusing in a closed box.

```
>>> phi = CellVariable(mesh=mesh, name=r"\phi")
```

```
>>> phi.value = 0.
>>> phi.setValue(1., where=(x > L/2. - L/10.) & (x < L/2. + L/10.))
>>> if __name__ == '__main__':
...     viewer = Viewer(vars=phi, datamin=-0.1, datamax=1.1)
```

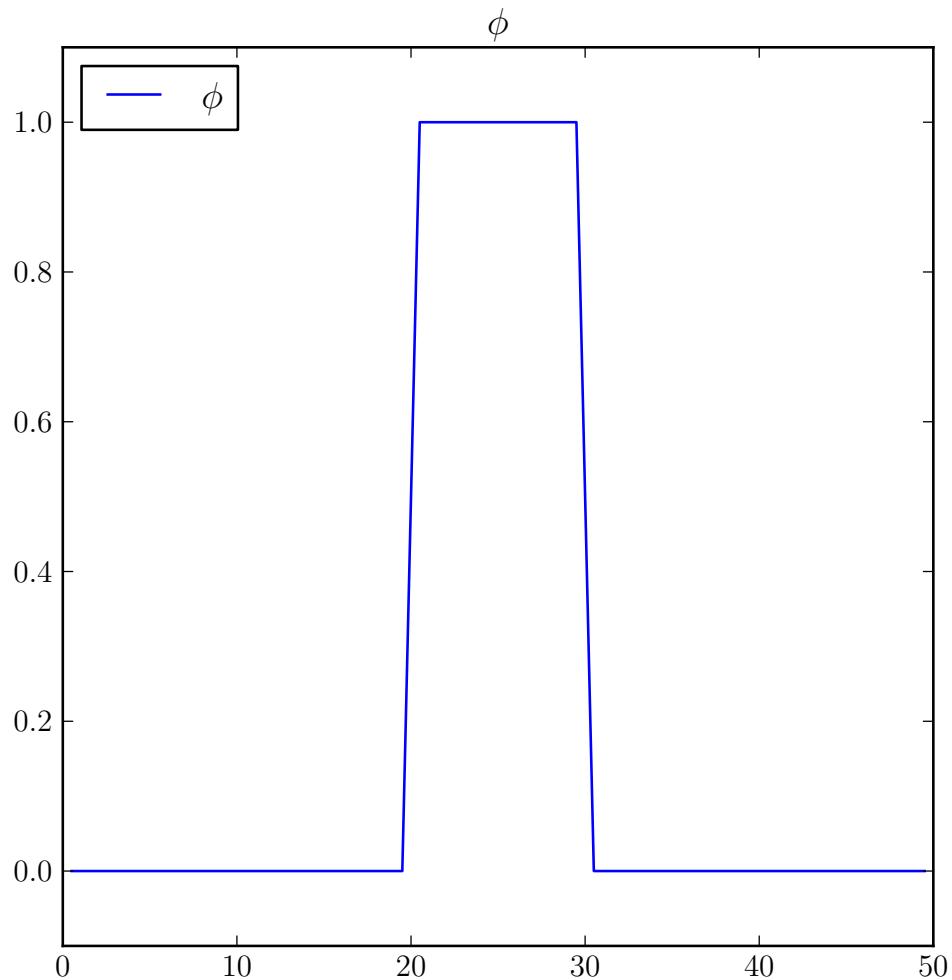

We assign no explicit boundary conditions, leaving the default no-flux boundary conditions, and solve

$$\partial\phi/\partial t = \nabla \cdot (D\nabla\phi)$$

```
>>> D = 1.
>>> eq = TransientTerm() == DiffusionTerm(D)
```


```
>>> dt = 10. * dx**2 / (2 * D)
>>> steps = 200
```

```
>>> from builtins import range
>>> for step in range(steps):
...     eq.solve(var=phi, dt=dt)
...     if __name__ == '__main__':
...         viewer.plot()
>>> from fipy import input
```

(continues on next page)

(continued from previous page)

```
>>> if __name__ == '__main__':
...     input("No-flux - transient. \
... Press <return> to proceed...")
```

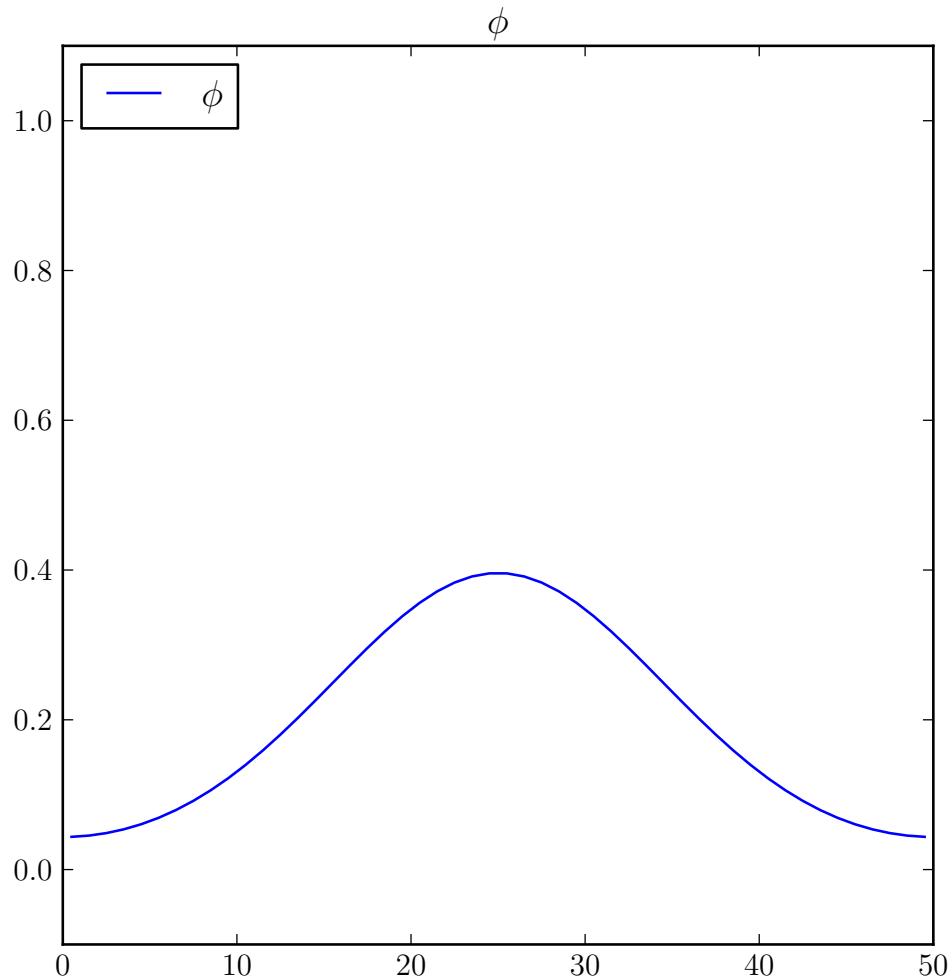

and see that ϕ dissipates to the expected average value of 0.2 with reasonable accuracy.

```
>>> print(numerix.allclose(phi, 0.2, atol=1e-5))
True
```


If we reset the initial condition

```
>>> phi.value = 0.
>>> phi.setValue(1., where=(x > L/2. - L/10.) & (x < L/2. + L/10.))
>>> if __name__ == '__main__':
...     viewer.plot()
```

and solve the steady-state problem

```
>>> DiffusionTerm(coeff=D).solve(var=phi)
>>> if __name__ == '__main__':
...     viewer.plot()
>>> from fipy import input
>>> if __name__ == '__main__':
...     input("No-flux - steady-state failure. \
... Press <return> to proceed...")
```

```
>>> print(numerix.allclose(phi, 0.0))
True
```

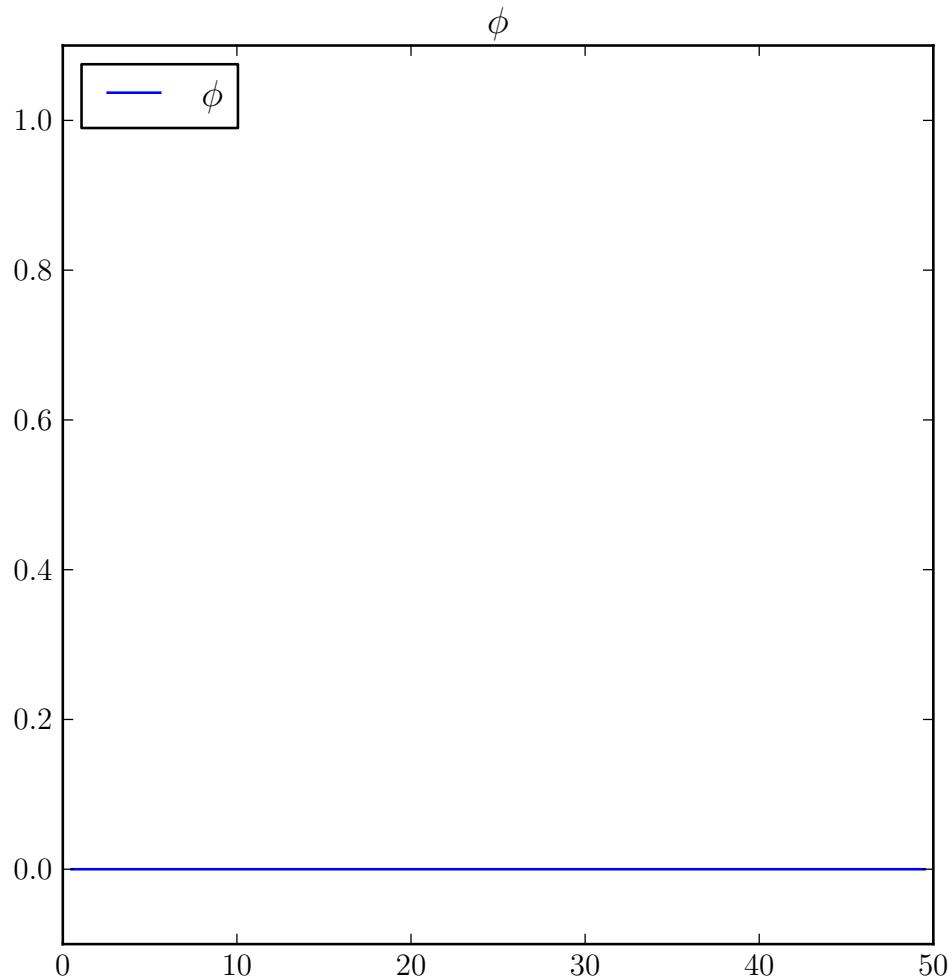

we find that the value is uniformly zero! What happened to our no-flux boundary conditions?

The problem is that in the implicit discretization of $\nabla \cdot (D \nabla \phi) = 0$,

$$\begin{vmatrix} \frac{D}{\Delta x^2} & -\frac{D}{\Delta x^2} & & & \\ & \ddots & \ddots & \ddots & \\ & & -\frac{D}{\Delta x^2} & \frac{2D}{\Delta x^2} & -\frac{D}{\Delta x^2} \\ & & & -\frac{D}{\Delta x^2} & \frac{2D}{\Delta x^2} & -\frac{D}{\Delta x^2} \\ & & & & -\frac{D}{\Delta x^2} & \frac{2D}{\Delta x^2} & -\frac{D}{\Delta x^2} \\ & & & & & \ddots & \ddots & \ddots \\ & & & & & & -\frac{D}{\Delta x^2} & \frac{D}{\Delta x^2} \end{vmatrix} \begin{pmatrix} \phi_0^{\text{new}} \\ \vdots \\ \phi_{j-1}^{\text{new}} \\ \phi_j^{\text{new}} \\ \phi_{j+1}^{\text{new}} \\ \vdots \\ \phi_{N-1}^{\text{new}} \end{pmatrix} = \begin{pmatrix} 0 \\ \vdots \\ 0 \\ 0 \\ 0 \\ \vdots \\ 0 \end{pmatrix}$$


the initial condition ϕ^{old} no longer appears and $\phi = 0$ is a perfectly legitimate solution to this matrix equation.

The solution is to run the transient problem and to take one enormous time step

```
>>> phi.value = 0.
>>> phi.setValue(1., where=(x > L/2. - L/10.) & (x < L/2. + L/10.))
>>> if __name__ == '__main__':
...     viewer.plot()
```

```
>>> (TransientTerm() == DiffusionTerm(D)).solve(var=phi, dt=1e6*dt)
>>> if __name__ == '__main__':
...     viewer.plot()
>>> from fipy import input
>>> if __name__ == '__main__':
...     input("No-flux - steady-state. \
... Press <return> to proceed...")
```

```
>>> print(numerix.allclose(phi, 0.2, atol=1e-5))
True
```

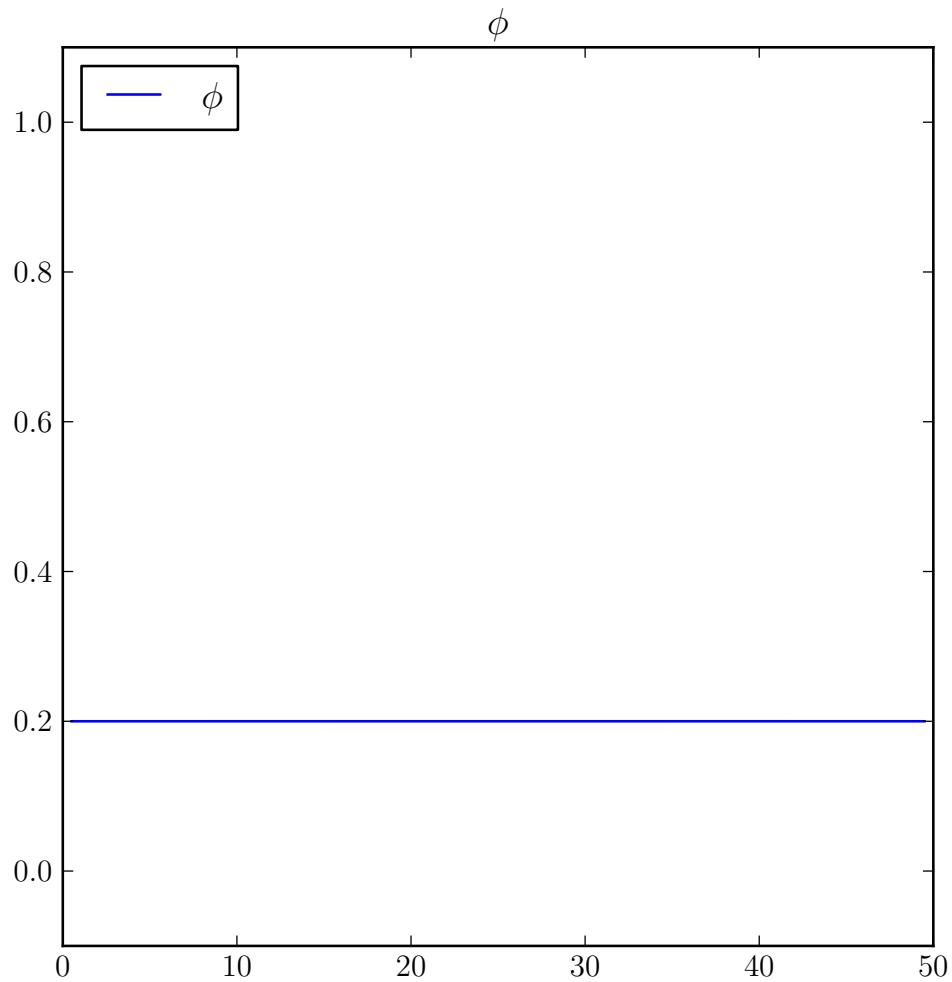

If this example had been written primarily as a script, instead of as documentation, we would delete every line that does not begin with either “`>>>`” or “`...`”, and then delete those prefixes from the remaining lines, leaving:

```
## This script was derived from
## 'examples/diffusion/mesh1D.py'

nx = 50
dx = 1.
mesh = Grid1D(nx = nx, dx = dx)
phi = CellVariable(name="solution variable",
                   mesh=mesh,
                   value=0)
```

```
eq = DiffusionTerm(coeff=D0 * (1 - phi[0]))
phi[0].setValue(valueRight)
res = 1e+10
```

(continues on next page)

(continued from previous page)

```

while res > 1e-6:
    res = eq.sweep(var=phi[0],
                  dt=timeStepDuration)

print phi[0].allclose(phiAnalytical, atol = 1e-1)
# Expect:
# 1
#
if __name__ == '__main__':
    viewer.plot()
    input("Implicit variable diffusivity - steady-state. \
Press <return> to proceed...")

```

Your own scripts will tend to look like this, although you can always write them as doctest scripts if you choose. You can obtain a plain script like this from some .../example.py by typing:

```
$ python setup.py copy_script --From .../example.py --To myExample.py
```

at the command line.

Most of the *FiPy* examples will be a mixture of plain scripts and doctest documentation/tests.

23.5.8 examples.diffusion.mesh20x20

Solve a two-dimensional diffusion problem in a square domain.

This example solves a diffusion problem and demonstrates the use of applying boundary condition patches.

```

>>> from fipy import CellVariable, Grid2D, Viewer, TransientTerm, DiffusionTerm
>>> from fipy.tools import numerix

```

```

>>> nx = 20
>>> ny = nx
>>> dx = 1.
>>> dy = dx
>>> L = dx * nx
>>> mesh = Grid2D(dx=dx, dy=dy, nx=nx, ny=ny)

```

We create a *CellVariable* and initialize it to zero:

```

>>> phi = CellVariable(name = "solution variable",
...                      mesh = mesh,
...                      value = 0.)

```

and then create a diffusion equation. This is solved by default with an iterative conjugate gradient solver.

```

>>> D = 1.
>>> eq = TransientTerm() == DiffusionTerm(coeff=D)

```

We apply Dirichlet boundary conditions

```

>>> valueTopLeft = 0
>>> valueBottomRight = 1

```

to the top-left and bottom-right corners. Neumann boundary conditions are automatically applied to the top-right and bottom-left corners.


```
>>> X, Y = mesh.faceCenters
>>> facesTopLeft = ((mesh.facesLeft & (Y > L / 2))
...           | (mesh.facesTop & (X < L / 2)))
>>> facesBottomRight = ((mesh.facesRight & (Y < L / 2))
...           | (mesh.facesBottom & (X > L / 2)))
...
>>> phi.constrain(valueTopLeft, facesTopLeft)
>>> phi.constrain(valueBottomRight, facesBottomRight)
```

We create a viewer to see the results

```
>>> if __name__ == '__main__':
...     viewer = Viewer(vars=phi, datamin=0., datamax=1.)
...     viewer.plot()
```

and solve the equation by repeatedly looping in time:

```
>>> timeStepDuration = 10 * 0.9 * dx**2 / (2 * D)
>>> steps = 10
>>> from builtins import range
>>> for step in range(steps):
...     eq.solve(var=phi,
...             dt=timeStepDuration)
...     if __name__ == '__main__':
...         viewer.plot()
```

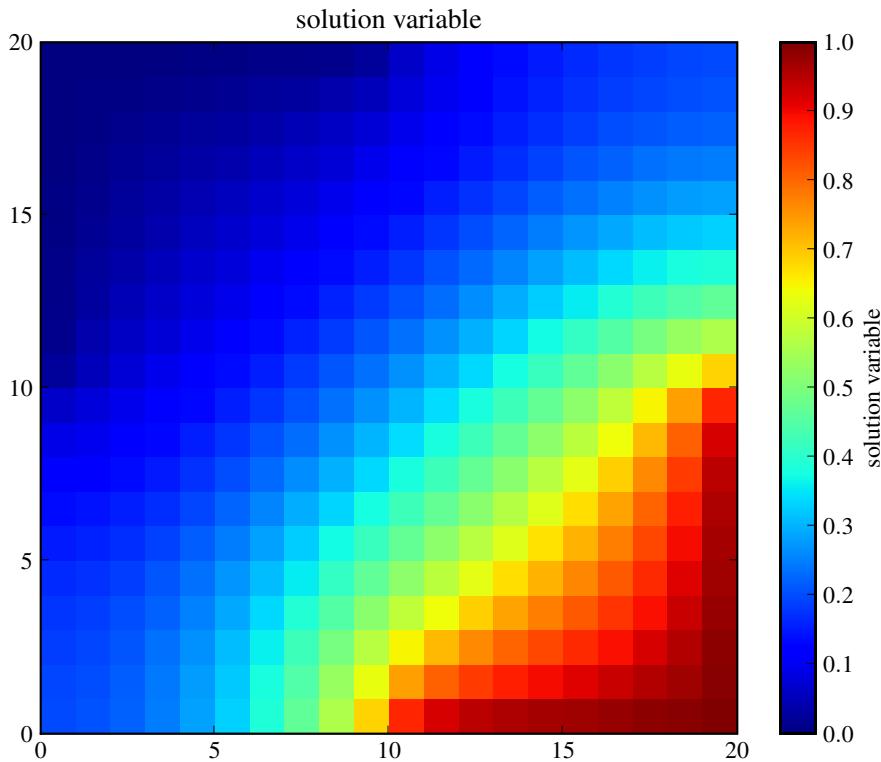


We can test the value of the bottom-right corner cell.

```
>>> print(numerix.allclose(phi((L,), (0,))), valueBottomRight, atol = 1e-2))
1
```

```
>>> from fipy import input
>>> if __name__ == '__main__':
...     input("Implicit transient diffusion. Press <return> to proceed...")
```

We can also solve the steady-state problem directly

```
>>> DiffusionTerm().solve(var=phi)
>>> if __name__ == '__main__':
...     viewer.plot()
```

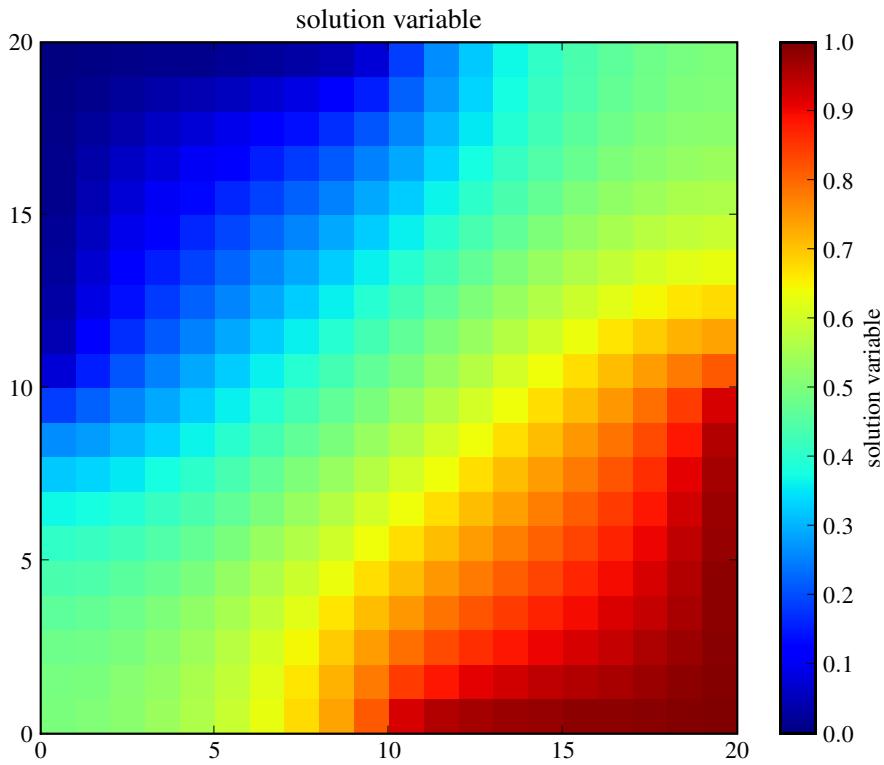

and test the value of the bottom-right corner cell.

```
>>> print(numerix.allclose(phi((L,), (0,))), valueBottomRight, atol = 1e-2))
1
```

```
>>> from fipy import input
>>> if __name__ == '__main__':
...     input("Implicit steady-state diffusion. Press <return> to proceed...")
```

23.5.9 examples.diffusion.mesh20x20Coupled

Solve a coupled set of diffusion equations in two dimensions.

This example solves a diffusion problem and demonstrates the use of applying boundary condition patches.

```
>>> from fipy import CellVariable, Grid2D, Viewer, TransientTerm, DiffusionTerm
>>> from fipy.tools import numerix
```

```
>>> nx = 20
>>> ny = nx
>>> dx = 1.
>>> dy = dx
>>> L = dx * nx
>>> mesh = Grid2D(dx=dx, dy=dy, nx=nx, ny=ny)
```

We create a `CellVariable` and initialize it to zero:

```
>>> phi = CellVariable(name = "solution variable",
...                      mesh = mesh,
...                      value = 0.)
```

and then create a diffusion equation. This is solved by default with an iterative conjugate gradient solver.

```
>>> D = 1.
>>> eq = TransientTerm(var=phi) == DiffusionTerm(coeff=D, var=phi)
```

We apply Dirichlet boundary conditions

```
>>> valueTopLeft = 0
>>> valueBottomRight = 1
```

to the top-left and bottom-right corners. Neumann boundary conditions are automatically applied to the top-right and bottom-left corners.

```
>>> x, y = mesh.faceCenters
>>> facesTopLeft = ((mesh.facesLeft & (y > L / 2))
...                   | (mesh.facesTop & (x < L / 2)))
>>> facesBottomRight = ((mesh.facesRight & (y < L / 2))
...                      | (mesh.facesBottom & (x > L / 2)))
```


```
>>> phi.constrain(valueTopLeft, facesTopLeft)
>>> phi.constrain(valueBottomRight, facesBottomRight)
```

We create a viewer to see the results

```
>>> if __name__ == '__main__':
...     viewer = Viewer(vars=phi, datamin=0., datamax=1.)
...     viewer.plot()
```

and solve the equation by repeatedly looping in time:

```
>>> timeStepDuration = 10 * 0.9 * dx**2 / (2 * D)
>>> steps = 10
>>> from builtins import range
>>> for step in range(steps):
...     eq.solve(dt=timeStepDuration)
...     if __name__ == '__main__':
...         viewer.plot()
```

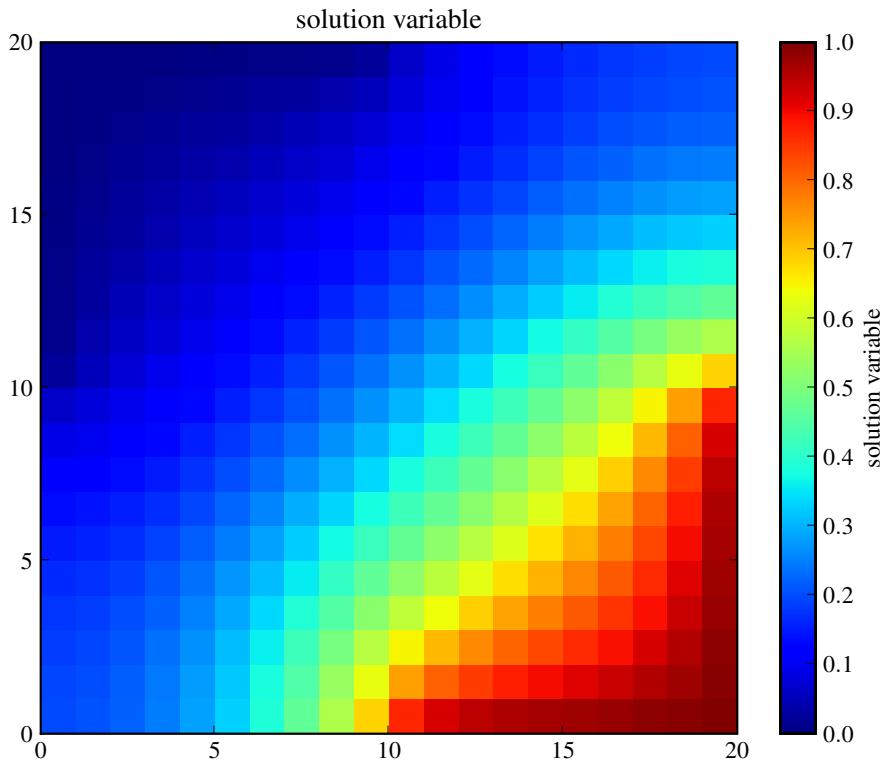


We can test the value of the bottom-right corner cell.

```
>>> print(numerix.allclose(phi((L,), (0,))), valueBottomRight, atol = 1e-2))  
1
```

```
>>> from fipy import input  
>>> if __name__ == '__main__':  
...     input("Implicit transient diffusion. Press <return> to proceed...")
```

We can also solve the steady-state problem directly

```
>>> DiffusionTerm(var=phi).solve()  
>>> if __name__ == '__main__':  
...     viewer.plot()
```

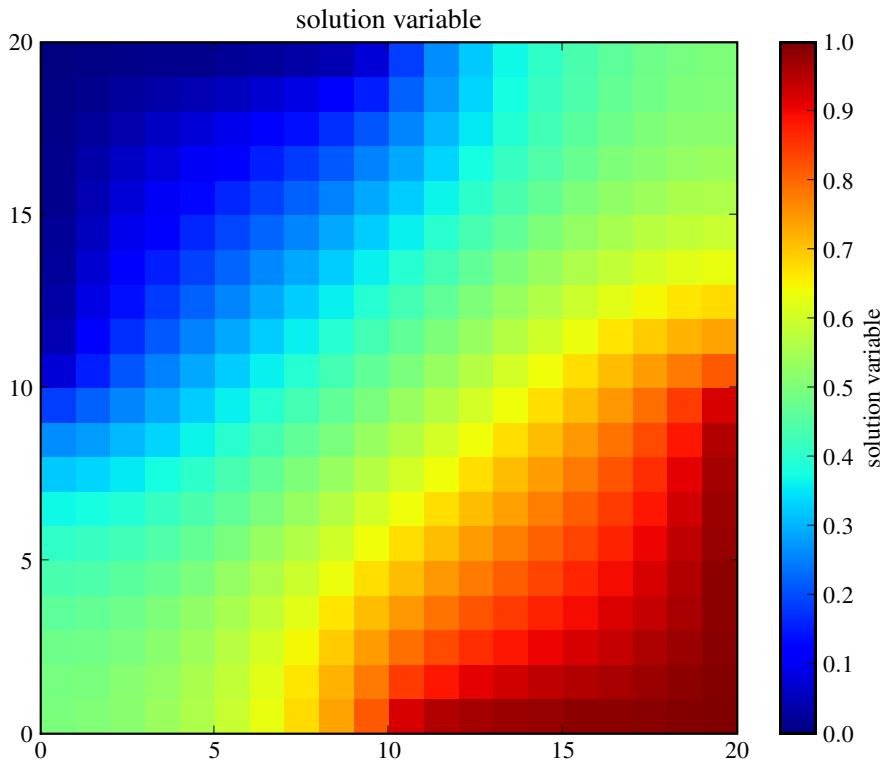

and test the value of the bottom-right corner cell.

```
>>> print(numerix.allclose(phi((L,), (0,))), valueBottomRight, atol = 1e-2))
1
```

```
>>> from fipy import input
>>> if __name__ == '__main__':
...     input("Implicit steady-state diffusion. Press <return> to proceed...")
```

23.5.10 examples.diffusion.nthOrder

Modules

`examples.diffusion.nthOrder.
input4thOrder1D`

Solve a fourth-order diffusion problem.

`examples.diffusion.nthOrder.
input4thOrder_line`

`>>> eq.solve(var,`

`examples.diffusion.nthOrder.test`

examples.diffusion.nthOrder.input4thOrder1D

Solve a fourth-order diffusion problem.

This example uses the *DiffusionTerm* class to solve the equation

$$\frac{\partial^4 \phi}{\partial x^4} = 0$$

on a 1D mesh of length

```
>>> L = 1000.
```

We create an appropriate mesh

```
>>> from fipy import CellVariable, Grid1D, NthOrderBoundaryCondition, DiffusionTerm,
...>>> Viewer, GeneralSolver
```

```
>>> nx = 500
>>> dx = L / nx
>>> mesh = Grid1D(dx=dx, nx=nx)
```

and initialize the solution variable to 0

```
>>> var = CellVariable(mesh=mesh, name='solution variable')
```

For this problem, we impose the boundary conditions:

$$\begin{aligned}\phi &= \alpha_1 & \text{at } x = 0 \\ \frac{\partial \phi}{\partial x} &= \alpha_2 & \text{at } x = L \\ \frac{\partial^2 \phi}{\partial x^2} &= \alpha_3 & \text{at } x = 0 \\ \frac{\partial^3 \phi}{\partial x^3} &= \alpha_4 & \text{at } x = L.\end{aligned}$$

or

```
>>> alpha1 = 2.
>>> alpha2 = 1.
>>> alpha3 = 4.
>>> alpha4 = -3.
```

```
>>> BCs = (NthOrderBoundaryCondition(faces=mesh.facesLeft, value=alpha3, order=2),
...          NthOrderBoundaryCondition(faces=mesh.facesRight, value=alpha4, order=3))
>>> var.faceGrad.constrain([alpha2], mesh.facesRight)
>>> var.constrain(alpha1, mesh.facesLeft)
```

We initialize the steady-state equation

```
>>> eq = DiffusionTerm(coeff=(1, 1)) == 0
```

```
>>> import fipy.solvers.solver
>>> if fipy.solvers.solver_suite == 'petsc':
...     solver = GeneralSolver(precon='lu')
... else:
...     solver = GeneralSolver()
```

We perform one implicit timestep to achieve steady state

```
>>> eq.solve(var=var,
...             boundaryConditions=BCs,
...             solver=solver)
```

The analytical solution is:

$$\phi = \frac{\alpha_4}{6}x^3 + \frac{\alpha_3}{2}x^2 + \left(\alpha_2 - \frac{\alpha_4}{2}L^2 - \alpha_3L\right)x + \alpha_1$$


or

```
>>> analytical = CellVariable(mesh=mesh, name='analytical value')
>>> x = mesh.cellCenters[0]
>>> analytical.setValue(alpha4 / 6. * x**3 + alpha3 / 2. * x**2 + \
...                      (alpha2 - alpha4 / 2. * L**2 - alpha3 * L) * x + alpha1)
```

```
>>> print(var.allclose(analytical, rtol=1e-4))
1
```

If the problem is run interactively, we can view the result:

```
>>> if __name__ == '__main__':
...     viewer = Viewer(vars=(var, analytical))
...     viewer.plot()
```

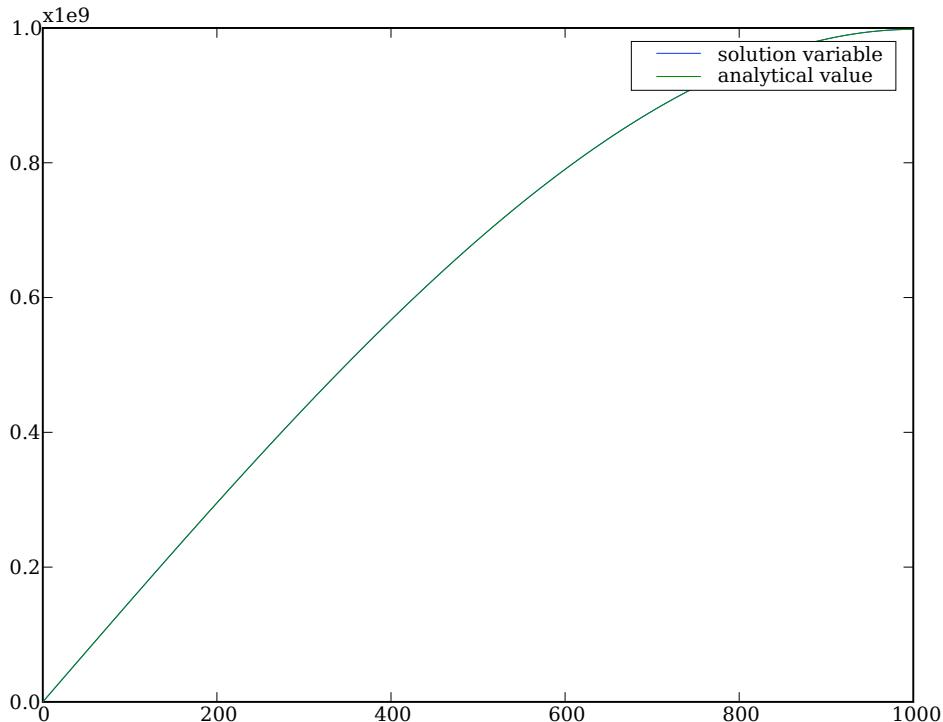

examples.diffusion.nthOrder.input4thOrder_line

```
>>> eq.solve(var,
...           boundaryConditions = BCs,
...           solver = solver)
```

Using the Pysparse solvers, the answer is totally inaccurate. This is due to the 4th order term having a high matrix condition number. In this particular example, multigrid preconditioners such as those provided by Trilinos allow a more accurate solution.

```
>>> print(var.allclose(mesh.cellCenters[0], atol = 10))
1
```

examples.diffusion.nthOrder.test**23.5.11 examples.diffusion.steadyState****Modules**

```
examples.diffusion.steadyState.mesh1D
examples.diffusion.steadyState.mesh20x20
examples.diffusion.steadyState.mesh50x50
examples.diffusion.steadyState.otherMeshes
examples.diffusion.steadyState.test
```

examples.diffusion.steadyState.mesh1D**Modules**

<code>examples.diffusion.steadyState.mesh1D. inputPeriodic</code>	One can then solve the same problem as in <i>examples/diffusion/steadyState/mesh1D/input.py</i> but with a periodic mesh and no boundary conditions.
<code>examples.diffusion.steadyState.mesh1D. tri2Dinput</code>	To run this example from the base FiPy directory type.

examples.diffusion.steadyState.mesh1D.inputPeriodic

One can then solve the same problem as in *examples/diffusion/steadyState/mesh1D/input.py* but with a periodic mesh and no boundary conditions. The periodic mesh is used to simulate periodic boundary conditions.

```
>>> from fipy import PeriodicGrid1D, CellVariable, TransientTerm, DiffusionTerm, Viewer
```

```
>>> nx = 50
>>> dx = 1.
>>> mesh = PeriodicGrid1D(nx = nx, dx = dx)
```

The variable is initially a line varying form *valueLeft* to *valueRight*.

```
>>> valueLeft = 0
>>> valueRight = 1
>>> x = mesh.cellCenters[0]
```

```
>>> Lx = nx * dx
>>> initialArray = valueLeft + (valueRight - valueLeft) * x / Lx
>>> var = CellVariable(name = "solution variable", mesh = mesh,
>>>                         value = initialArray)
>>> ...
```

```
>>> from fipy import input
>>> if __name__ == '__main__':
>>>     ...     viewer = Viewer(vars=var, datamin=0., datamax=1.)
>>>     ...     viewer.plot()
>>>     ...     input("press key to continue")
```

A *TransientTerm* is used to provide some fixed point, otherwise the solver has no fixed value and can become unstable.

```
>>> eq = TransientTerm(coeff=1e-8) - DiffusionTerm()
>>> eq.solve(var=var, dt=1.)
```

```
>>> if __name__ == '__main__':
>>>     ...     viewer.plot()
```

The result of the calculation will be the average value over the domain.

```
>>> print(var.allclose((valueLeft + valueRight) / 2., rtol = 1e-5))
1
```

examples.diffusion.steadyState.mesh1D.tri2Dinput

To run this example from the base FiPy directory type:

```
$ python examples/diffusion/steadyState/mesh1D/tri2Dinput.py
```

at the command line. A contour plot should appear and the word *finished* in the terminal.

This example is similar to the example found in *examples/diffusion.mesh1D*, however, the *mesh* is a *fipy.meshes.tri2D.Tri2D* object rather than a *Grid1D()* object.

Here, one time step is executed to implicitly find the steady state solution.

```
>>> DiffusionTerm().solve(var)
```

To test the solution, the analytical result is required. The x coordinates from the mesh are gathered and the length of the domain, Lx , is calculated. An array, *analyticalArray*, is calculated to compare with the numerical result,

```
>>> x = mesh.cellCenters[0]
>>> Lx = nx * dx
>>> analyticalArray = valueLeft + (valueRight - valueLeft) * x / Lx
```

Finally the analytical and numerical results are compared with a tolerance of $1e-10$.

```
>>> print(var.allclose(analyticalArray))
1
```

examples.diffusion.steadyState.mesh20x20

Modules

<code>examples.diffusion.steadyState.mesh20x20.gmshinput</code>	This input file again solves a 1D diffusion problem as in <code>./examples/diffusion/steadyState/mesh1D/input.py</code> .
<code>examples.diffusion.steadyState.mesh20x20.isotropy</code>	This input file solves a steady-state 1D diffusion problem as in <code>./examples/diffusion/mesh1D.py</code> .
<code>examples.diffusion.steadyState.mesh20x20.modifiedMeshInput</code>	This input file again solves a 1D diffusion problem as in <code>./examples/diffusion/steadyState/mesh1D/input.py</code> .
<code>examples.diffusion.steadyState.mesh20x20.orthoerror</code>	This test file generates lots of different <i>SkewedGrid2D</i> meshes, each with a different non-orthogonality, and runs a 1D diffusion problem on them all.
<code>examples.diffusion.steadyState.mesh20x20.tri2Dinput</code>	This input file again solves a 2D diffusion problem on a triangular mesh.

examples.diffusion.steadyState.mesh20x20.gmshinput

This input file again solves a 1D diffusion problem as in `./examples/diffusion/steadyState/mesh1D/input.py`. In order to test the non-orthogonality error, this uses a *SkewedGrid2D*, which is a *Grid2D* with each interior vertex moved in a random direction.

examples.diffusion.steadyState.mesh20x20.isotropy

This input file solves a steady-state 1D diffusion problem as in `./examples/diffusion/mesh1D.py`. The difference being that it uses a tensor for the diffusion coefficient, even though the coefficient is isotropic.

```
>>> from fipy import Grid2D, CellVariable, DiffusionTerm, Viewer
```

```
>>> Lx = 20
>>> mesh = Grid2D(nx=20, ny=20)
>>> x, y = mesh.cellCenters
```

```

>>> valueLeft = 0.
>>> valueRight = 1.

>>> var = CellVariable(name = "solution variable",
...                      mesh = mesh,
...                      value = valueLeft)

>>> var.constrain(valueLeft, mesh.facesLeft)
>>> var.constrain(valueRight, mesh.facesRight)

>>> DiffusionTerm(coeff=((1., 0.),
...                      (0., 1.))).solve(var)

>>> if __name__ == '__main__':
...     viewer = Viewer(vars=var).plot()

>>> analyticalArray = valueLeft + (valueRight - valueLeft) * x / Lx
>>> print(var.allclose(analyticalArray, atol = 0.025))
1

```

examples.diffusion.steadyState.mesh20x20.modifiedMeshInput

This input file again solves a 1D diffusion problem as in *./examples/diffusion/steadyState/mesh1D/input.py*. The difference being that it uses a triangular mesh loaded in using the *Gmsh2D* object.

The result is again tested in the same way:

```

>>> from fipy import Gmsh2D, CellVariable, DiffusionTerm, Viewer
>>> from fipy.tools import numerix

>>> valueLeft = 0.
>>> valueRight = 1.

>>> Lx = 20
>>> mesh = Gmsh2D('''
...     cellSize = 0.5;
...     Point(2) = {0, 0, 0, cellSize};
...     Point(3) = {%(Lx)g, 0, 0, cellSize};
...     Point(4) = {%(Lx)g, %(Lx)g, 0, cellSize};
...     Point(5) = {0, %(Lx)g, 0, cellSize};
...
...     Line(6) = {2, 3};
...     Line(7) = {3, 4};
...     Line(8) = {4, 5};
...     Line(9) = {5, 2};
...
...     Line Loop(10) = {6, 7, 8, 9};
...
...     Plane Surface(11) = {10};
...     ''' % locals())

```

```
>>> var = CellVariable(name = "solution variable",
...                      mesh = mesh,
...                      value = valueLeft)
```

```
>>> var.constrain(valueLeft, mesh.facesLeft)
>>> var.constrain(valueRight, mesh.facesRight)
```

```
>>> DiffusionTerm().solve(var)
```

```
>>> from fipy import input
>>> x = mesh.cellCenters[0]
>>> analyticalArray = valueLeft + (valueRight - valueLeft) * x / Lx
>>> print(var.allclose(analyticalArray, atol=0.025))
True
```

```
>>> errorVar = abs(var - analyticalArray)
>>> errorVar.name = "absolute error"
```

```
>>> NonOrthoVar = CellVariable(name="non-orthogonality",
...                               mesh=mesh,
...                               value=mesh._nonOrthogonality)
>>> print(max(NonOrthoVar) < 0.51)
True
```

```
>>> if __name__ == '__main__':
...     viewer = Viewer(vars=var)
...     viewer.plot()
...
...     errorViewer = Viewer(vars=errorVar)
...     errorViewer.plot()
...
...     NOViewer = Viewer(vars=NonOrthoVar)
...     NOViewer.plot()
...
...     input("finished")
```

examples.diffusion.steadyState.mesh20x20.orthoerror

This test file generates lots of different *SkewedGrid2D* meshes, each with a different non-orthogonality, and runs a 1D diffusion problem on them all. It computes the RMS non-orthogonality and the RMS error for each mesh and displays them in a graph, allowing the relationship of error to non-orthogonality to be investigated.

examples.diffusion.steadyState.mesh20x20.tri2Dinput

This input file again solves a 2D diffusion problem on a triangular mesh.

```
>>> DiffusionTerm().solve(var)
```

The result is again tested in the same way:

```
>>> Lx = nx * dx
>>> x = mesh.cellCenters[0]
>>> analyticalArray = valueLeft + (valueRight - valueLeft) * x / Lx
>>> print(var.allclose(analyticalArray, rtol = 1e-8))
1
```

examples.diffusion.steadyState.mesh50x50**Modules**

<i>examples.diffusion.steadyState.mesh50x50.input</i>	This input file again solves a 1D diffusion problem as in <i>examples.diffusion.mesh1D</i> .
<i>examples.diffusion.steadyState.mesh50x50.tri2Dinput</i>	This input file again solves a 1D diffusion problem as in <i>./examples/diffusion/steadyState/mesh1D/input.py</i> .

examples.diffusion.steadyState.mesh50x50.input

This input file again solves a 1D diffusion problem as in *examples.diffusion.mesh1D*. The difference being that the mesh is two dimensional.

The result is again tested in the same way:

```
>>> DiffusionTerm().solve(var)
>>> Lx = nx * dx
>>> x = mesh.cellCenters[0]
>>> analyticalArray = valueLeft + (valueRight - valueLeft) * x / Lx
>>> print(var.allclose(analyticalArray, rtol = 1e-9))
1
```

examples.diffusion.steadyState.mesh50x50.tri2Dinput

This input file again solves a 1D diffusion problem as in *./examples/diffusion/steadyState/mesh1D/input.py*. The difference being that the mesh size is given by

```
>>> nx = 50
>>> ny = 50
```

The result is again tested in the same way:

```
>>> DiffusionTerm().solve(var)
>>> Lx = nx * dx
>>> x = mesh.cellCenters[0]
>>> analyticalArray = valueLeft + (valueRight - valueLeft) * x / Lx
>>> print(var.allclose(analyticalArray, atol = 1e-7))
1
```

examples.diffusion.steadyState.otherMeshes

Modules

<code>examples.diffusion.steadyState. otherMeshes.cubicalProblem</code>	Test case for the <i>Grid3D</i> .
<code>examples.diffusion.steadyState. otherMeshes.grid3Dinput</code>	Test case for the <i>Grid3D</i> .
<code>examples.diffusion.steadyState. otherMeshes.prism</code>	This input file again solves a 1D diffusion problem as in <code>./examples/diffusion/steadyState/mesh1D/input.py</code> .

examples.diffusion.steadyState.otherMeshes.cubicalProblem

Test case for the *Grid3D*. Diffusion problem with boundary conditions: 0 on front, 10 on back, and 5 on all other sides.

examples.diffusion.steadyState.otherMeshes.grid3Dinput

Test case for the *Grid3D*.

```
>>> DiffusionTerm().solve(var)
>>> DiffusionTerm().solve(var2)
>>> a = numerix.array(var.globalValue)
>>> b = numerix.array(var2.globalValue)
>>> c = numerix.ravel(numerix.array((b, b, b)))
>>> print(numerix.allclose(a, c))
1
```

examples.diffusion.steadyState.otherMeshes.prism

This input file again solves a 1D diffusion problem as in `./examples/diffusion/steadyState/mesh1D/input.py`. The difference being that it uses a triangular mesh loaded in using the Gmsh.

The result is again tested in the same way:

```
>>> from fipy import CellVariable, GmshGrid3D, DiffusionTerm
```

```
>>> valueLeft = 0.
>>> valueRight = 1.
```

```

>>> mesh = GmshGrid3D(dx=1, dy=1, dz=1, nx=20, ny=1, nz=1)

>>> var = CellVariable(name = "solution variable",
...                      mesh = mesh,
...                      value = valueLeft)

>>> exteriorFaces = mesh.exteriorFaces
>>> xFace = mesh.faceCenters[0]

>>> var.constrain(valueLeft, exteriorFaces & (xFace ** 2 < 0.0000000000000001))
>>> var.constrain(valueRight, exteriorFaces & ((xFace - 20) ** 2 < 0.0000000000000001))

>>> DiffusionTerm().solve(var)
>>> Lx = 20
>>> x = mesh.cellCenters[0]
>>> analyticalArray = valueLeft + (valueRight - valueLeft) * x / Lx
>>> print(var.allclose(analyticalArray, atol = 0.027))
1

```

`examples.diffusion.steadyState.test`

23.5.12 examples.diffusion.test

Run all the test cases in `examples/diffusion/`

23.5.13 examples.diffusion.variable

This example is a 1D steady state diffusion test case as in `./examples/diffusion/variable/mesh2x1/input.py` with then number of cells set to $nx = 10$.

A simple analytical answer can be used to test the result:

```

>>> DiffusionTerm(coeff = diffCoeff).solve(var)
>>> if __name__ == "__main__":
...     viewer = Viewer(vars = var)
...     viewer.plot()
>>> x = mesh.cellCenters[0]
>>> values = numerix.where(x < 3. * L / 4., 10 * x - 9. * L / 4., x + 18. * L / 4.)
>>> values = numerix.where(x < L / 4., x, values)
>>> print(var.allclose(values, atol = 1e-8, rtol = 1e-8))
1

```

23.6 examples.elphf

The following examples exhibit various parts of a model to study electrochemical interfaces. In a pair of papers, Guyer, Boettinger, Warren and McFadden [22] [23] have shown that an electrochemical interface can be modeled by an equation for the phase field ξ

$$\underbrace{\frac{1}{M_\xi} \frac{\partial \xi}{\partial t}}_{\text{transient}} = \underbrace{\kappa_\xi \nabla^2 \xi}_{\text{diffusion}} - \underbrace{\sum_{j=1}^n C_j [p'(\xi) \Delta \mu_j^\circ + g'(\xi) W_j]}_{\text{source}} + \underbrace{\frac{\epsilon'(\xi)}{2} (\nabla \phi)^2}_{\text{dielectric}} \quad (23.3)$$

a set of diffusion equations for the concentrations C_j , for the substitutional elements $j = 2, \dots, n - 1$

$$\underbrace{\frac{\partial C_j}{\partial t}}_{\text{transient}} = \underbrace{D_j \nabla^2 C_j}_{\text{diffusion}} + D_j \nabla \cdot \frac{C_j}{1 - \sum_{\substack{k=2 \\ k \neq j}}^{n-1} C_k} \underbrace{\left\{ \begin{array}{l} \text{counter diffusion} \\ \sum_{\substack{i=2 \\ i \neq j}}^{n-1} \nabla C_i + C_n [p'(\xi) \Delta \mu_{jn}^\circ + g'(\xi) W_{jn}] \nabla \xi + C_n z_{jn} \nabla \phi \end{array} \right\}}_{\text{convection}} \quad (23.4)$$

a diffusion equation for the concentration C_{e^-} of electrons

$$\frac{\partial C_{e^-}}{\partial t} = D_{e^-} \nabla^2 C_{e^-} + D_{e^-} \nabla \cdot C_{e^-} \underbrace{\left\{ \begin{array}{l} \text{phase transformation} \\ [p'(\xi) \Delta \mu_{e^-}^\circ + g'(\xi) W_{e^-}] \nabla \xi + z_{e^-} \nabla \phi \end{array} \right\}}_{\text{convection}} \quad (23.5)$$

and Poisson's equation for the electrostatic potential ϕ

$$\underbrace{\nabla \cdot (\epsilon \nabla \phi)}_{\text{diffusion}} + \sum_{j=1}^n z_j C_j = 0 \quad (23.6)$$

M_ξ is the phase field mobility, κ_ξ is the phase field gradient energy coefficient, $p'(\xi) = 30\xi^2(1-\xi)^2$, and $g'(\xi) = 2\xi(1-\xi)(1-2\xi)$. For a given species j , $\Delta \mu_j^\circ$ is the standard chemical potential difference between the electrode and electrolyte for a pure material, W_j is the magnitude of the energy barrier in the double-well free energy function, z_j is the valence, and D_j is the self diffusivity. $\Delta \mu_{jn}^\circ$, W_{jn} , and z_{jn} are the differences of the respective quantities $\Delta \mu_j^\circ$, W_j , and z_j between substitutional species j and the solvent species n . The total charge is denoted by $\sum_{j=1}^n z_j C_j$.

Although unresolved stiffnesses make the full solution of this coupled set of equations intractable in *FiPy*, the following examples demonstrate the setup and solution of various parts.

Modules

`examples.elphf.diffusion`

`examples.elphf.input`

This example adds two more components to `examples/elphf/input1DphaseBinary.py` one of which is another substitutional species and the other represents electrons and diffuses interstitially.

`examples.elphf.phase`

A simple 1D example to test the setup of the phase field equation.

`examples.elphf.phaseDiffusion`

This example combines a phase field problem, as given in `examples.elphf.phase`, with a binary diffusion problem, such as described in the ternary example `examples.elphf.diffusion.mesh1D`, on a 1D mesh

`examples.elphf.poisson`

A simple 1D example to test the setup of the Poisson equation.

`examples.elphf.test`

23.6.1 examples.elphf.diffusion

Modules

`examples.elphf.diffusion.mesh1D`

A simple 1D example to test the setup of the multicomponent diffusion equations.

`examples.elphf.diffusion.mesh1Ddimensional`

In this example, we present the same three-component diffusion problem introduced in `examples/elphf/diffusion/mesh1D.py` but we demonstrate FiPy's facility to use dimensional quantities.

`examples.elphf.diffusion.mesh2D`

The same three-component diffusion problem as introduced in `examples.elphf.diffusion.mesh1D` but in 2D:

examples.elphf.diffusion.mesh1D

A simple 1D example to test the setup of the multicomponent diffusion equations. The diffusion equation for each species in single-phase multicomponent system can be expressed as

$$\frac{\partial C_j}{\partial t} = D_{jj} \nabla^2 C_j + D_j \nabla \cdot \frac{C_j}{1 - \sum_{\substack{k=2 \\ k \neq j}}^{n-1} C_k} \sum_{\substack{i=2 \\ i \neq j}}^{n-1} \nabla C_i$$

where C_j is the concentration of the j^{th} species, t is time, D_{jj} is the self-diffusion coefficient of the j^{th} species, and $\sum_{\substack{i=2 \\ i \neq j}}^{n-1}$ represents the summation over all substitutional species in the system, excluding the solvent and the component of interest.

We solve the problem on a 1D mesh

```
>>> nx = 400
>>> dx = 0.01
>>> L = nx * dx
```

```
>>> from fipy import CellVariable, FaceVariable, Grid1D, TransientTerm, DiffusionTerm,
...     PowerLawConvectionTerm, DefaultAsymmetricSolver, Viewer
>>> mesh = Grid1D(dx = dx, nx = nx)
```

One component in this ternary system will be designated the “solvent”

```
>>> class ComponentVariable(CellVariable):
...     def __init__(self, mesh, value = 0., name = '',
...                  standardPotential = 0., barrier = 0.,
...                  diffusivity = None, valence = 0, equation = None):
...         CellVariable.__init__(self, mesh = mesh, value = value,
...                               name = name)
...         self.standardPotential = standardPotential
...         self.barrier = barrier
...         self.diffusivity = diffusivity
...         self.valence = valence
...         self.equation = equation
...
...     def copy(self):
...         return self.__class__(mesh = self.mesh,
...                               value = self.value,
...                               name = self.name,
...                               standardPotential =
...                                   self.standardPotential,
...                               barrier = self.barrier,
...                               diffusivity = self.diffusivity,
...                               valence = self.valence,
...                               equation = self.equation)
```

```
>>> solvent = ComponentVariable(mesh = mesh, name = 'Cn', value = 1.)
```

We can create an arbitrary number of components, simply by providing a `tuple` or `list` of components

```
>>> substitutionals = [
...     ComponentVariable(mesh = mesh, name = 'C1', diffusivity = 1.,
...                       standardPotential = 1., barrier = 1.),
...     ComponentVariable(mesh = mesh, name = 'C2', diffusivity = 1.,
...                       standardPotential = 1., barrier = 1.),
... ]
```

```
>>> interstitials = []
```

```
>>> for component in substitutionals:
...     solvent -= component
```

We separate the solution domain into two different concentration regimes

```
>>> x = mesh.cellCenters[0]
>>> substitutionals[0].setValue(0.3)
>>> substitutionals[0].setValue(0.6, where=x > L / 2)
>>> substitutionals[1].setValue(0.6)
>>> substitutionals[1].setValue(0.3, where=x > L / 2)
```

We create one diffusion equation for each substitutional component

```
>>> for Cj in substitutionals:
...     CkSum = ComponentVariable(mesh = mesh, value = 0.)
...     CkFaceSum = FaceVariable(mesh = mesh, value = 0.)
...     for Ck in [Ck for Ck in substitutionals if Ck is not Cj]:
...         CkSum += Ck
...         CkFaceSum += Ck.harmonicFaceValue
...
...     convectionCoeff = CkSum.faceGrad \
...                       * (Cj.diffusivity / (1. - CkFaceSum))
...
...     Cj.equation = (TransientTerm()
...                   == DiffusionTerm(coeff=Cj.diffusivity)
...                   + PowerLawConvectionTerm(coeff=convectionCoeff))
...     Cj.solver = DefaultAsymmetricSolver(precon=None, iterations=3200)
```

If we are running interactively, we create a viewer to see the results

```
>>> if __name__ == '__main__':
...     viewer = Viewer(vars=[solvent] + substitutionals,
...                     datamin=0, datamax=1)
...     viewer.plot()
```

Now, we iterate the problem to equilibrium, plotting as we go

```
>>> from builtins import range
>>> for i in range(40):
...     for Cj in substitutionals:
...         Cj.equation.solve(var=Cj,
...                           dt=10000.,
...                           solver=Cj.solver)
...     if __name__ == '__main__':
...         viewer.plot()
```

Since there is nothing to maintain the concentration separation in this problem, we verify that the concentrations have become uniform

Note: Between $\text{petsc}=3.13.2=h82b89f7_0$ and $\text{petsc}=3.13.4=h82b89f7_0$, PETSc ceased achieving $1e-7$ tolerance when solving on 2 processors on Linux. Solving on macOS is OK. Solving on 1, 3, or 4 processors is OK.

```
>>> print(substitutionals[0].allclose(0.45, rtol = 2e-7, atol = 2e-7))
True
>>> print(substitutionals[1].allclose(0.45, rtol = 2e-7, atol = 2e-7))
True
```

examples.elphf.diffusion.mesh1Ddimensional

In this example, we present the same three-component diffusion problem introduced in `examples/elphf/diffusion/mesh1D.py` but we demonstrate FiPy's facility to use dimensional quantities.

```
>>> import warnings
>>> warnings.warn("\n\n\tSupport for physical dimensions is incomplete.\n\tIt is not\n\tpossible to solve dimensional equations.\n")
```

```
>>> from fipy import CellVariable, FaceVariable, PhysicalField, Grid1D, TransientTerm,
>>> DiffusionTerm, PowerLawConvectionTerm, LinearLUSolver, Viewer
>>> from fipy.tools import numerix
```

We solve the problem on a 40 mm long 1D mesh

```
>>> nx = 40
>>> dx = PhysicalField(1., "mm")
>>> L = nx * dx
>>> mesh = Grid1D(dx = dx, nx = nx)
```

Again, one component in this ternary system will be designated the “solvent”

```
>>> class ComponentVariable(CellVariable):
...     def __init__(self, mesh, value = 0., name = '',
...                  standardPotential = 0., barrier = 0.,
...                  diffusivity = None, valence = 0, equation = None):
...         CellVariable.__init__(self, mesh = mesh, value = value,
...                               name = name)
...         self.standardPotential = Variable(standardPotential)
...         self.barrier = Variable(barrier)
...         self.diffusivity = Variable(diffusivity)
...         self.valence = valence
...         self.equation = equation
...
...     def copy(self):
...         return self.__class__(mesh = self.mesh,
...                               value = self.value,
...                               name = self.name,
...                               standardPotential =
...                                   self.standardPotential,
...                               barrier = self.barrier,
...                               diffusivity = self.diffusivity,
...                               valence = self.valence,
...                               equation = self.equation)
```

```
>>> solvent = ComponentVariable(mesh = mesh, name = 'Cn', value = "1 mol/m**3")
```

We can create an arbitrary number of components, simply by providing a *Tuple* or *list* of components

```
>>> substitutionals = [
...     ComponentVariable(mesh = mesh, name = 'C1', diffusivity = "1e-9 m**2/s",
...                       standardPotential = 1., barrier = 1., value = "0.3 mol/m**3"),
...     ComponentVariable(mesh = mesh, name = 'C2', diffusivity = "1e-9 m**2/s",
```

(continues on next page)

(continued from previous page)

```
...     standardPotential = 1., barrier = 1., value = "0.6 mol/m**3"),
... ]
```

```
>>> interstitials = []
```

```
>>> for component in substitutionals:
...     solvent -= component
```

We separate the solution domain into two different concentration regimes

```
>>> x = mesh.cellCenters[0]
>>> substitutionals[0].setValue("0.3 mol/m**3")
>>> substitutionals[0].setValue("0.6 mol/m**3", where=x > L / 2)
>>> substitutionals[1].setValue("0.6 mol/m**3")
>>> substitutionals[1].setValue("0.3 mol/m**3", where=x > L / 2)
```

We create one diffusion equation for each substitutional component

```
>>> for Cj in substitutionals:
...     CkSum = ComponentVariable(mesh = mesh, value = 0.)
...     CkFaceSum = FaceVariable(mesh = mesh, value = 0.)
...     for Ck in [Ck for Ck in substitutionals if Ck is not Cj]:
...         CkSum += Ck
...         CkFaceSum += Ck.harmonicFaceValue
...
...     convectionCoeff = CkSum.faceGrad \
...         * (Cj.diffusivity / (1. - CkFaceSum))
...
...     Cj.equation = (TransientTerm()
...                   == DiffusionTerm(coeff=Cj.diffusivity)
...                   + PowerLawConvectionTerm(coeff = convectionCoeff))
```

If we are running interactively, we create a viewer to see the results

```
>>> if __name__ == '__main__':
...     viewer = Viewer(vars=[solvent] + substitutionals,
...                     datamin=0, datamax=1)
...     viewer.plot()
```

Now, we iterate the problem to equilibrium, plotting as we go

```
>>> solver = LinearLUSolver()
```

```
>>> from builtins import range
>>> for i in range(40):
...     for Cj in substitutionals:
...         Cj.updateOld()
...     for Cj in substitutionals:
...         Cj.equation.solve(var = Cj,
...                           dt = "1000 s",
...                           solver = solver)
```

(continues on next page)

(continued from previous page)

```
...     if __name__ == '__main__':
...         viewer.plot()
```

Since there is nothing to maintain the concentration separation in this problem, we verify that the concentrations have become uniform

```
>>> print(substitutionals[0].scaled.allclose("0.45 mol/m**3",
...     atol = "1e-7 mol/m**3", rtol = 1e-7))
1
>>> print(substitutionals[1].scaled.allclose("0.45 mol/m**3",
...     atol = "1e-7 mol/m**3", rtol = 1e-7))
1
```

Note: The absolute tolerance *atol* must be in units compatible with the value to be checked, but the relative tolerance *rtol* is dimensionless.

examples.elphf.diffusion.mesh2D

The same three-component diffusion problem as introduced in [examples.elphf.diffusion.mesh1D](#) but in 2D:

```
>>> from fipy import CellVariable, FaceVariable, Grid2D, TransientTerm,
...     DiffusionTerm, PowerLawConvectionTerm, Viewer

>>> nx = 40
>>> dx = 1.
>>> L = nx * dx
>>> mesh = Grid2D(dx = dx, dy = dx, nx = nx, ny = nx)
```

One component in this ternary system will be designated the “solvent”

```
>>> class ComponentVariable(CellVariable):
...     def __init__(self, mesh, value = 0., name = '', standardPotential = 0.,
...                  barrier = 0., diffusivity = None, valence = 0, equation = None):
...         CellVariable.__init__(self, mesh = mesh, value = value, name = name)
...         self.standardPotential = standardPotential
...         self.barrier = barrier
...         self.diffusivity = diffusivity
...         self.valence = valence
...         self.equation = equation
...
...     def copy(self):
...         return self.__class__(mesh = self.mesh, value = self.value,
...                             name = self.name,
...                             standardPotential = self.standardPotential,
...                             barrier = self.barrier,
...                             diffusivity = self.diffusivity,
...                             valence = self.valence,
...                             equation = self.equation)
```

```
>>> solvent = ComponentVariable(mesh = mesh, name = 'Cn', value = 1.)
```

We can create an arbitrary number of components, simply by providing a *Tuple* or *list* of components

```
>>> substitutionals = [
...     ComponentVariable(mesh = mesh, name = 'C1', diffusivity = 1.,
...                       standardPotential = 1., barrier = 1.),
...     ComponentVariable(mesh = mesh, name = 'C2', diffusivity = 1.,
...                       standardPotential = 1., barrier = 1.),
... ]
... ]
```

```
>>> interstitials = []
```

```
>>> for component in substitutionals:
...     solvent -= component
```

Although we are not interested in them for this problem, we create one field to represent the “phase” (1 everywhere)

```
>>> phase = CellVariable(mesh = mesh, name = 'xi', value = 1.)
```

and one field to represent the electrostatic potential (0 everywhere)

```
>>> potential = CellVariable(mesh = mesh, name = 'phi', value = 0.)
```

Although it is constant in this problem, in later problems we will need the following functions of the phase field

```
>>> def pPrime(xi):
...     return 30. * (xi * (1 - xi))**2
```

```
>>> def gPrime(xi):
...     return 2 * xi * (1 - xi) * (1 - 2 * xi)
```

We separate the solution domain into two different concentration regimes

```
>>> x = mesh.cellCenters[0]
>>> substitutionals[0].setValue(0.3)
>>> substitutionals[0].setValue(0.6, where=x > L / 2)
>>> substitutionals[1].setValue(0.6)
>>> substitutionals[1].setValue(0.3, where=x > L / 2)
```

We create one diffusion equation for each substitutional component

```
>>> for Cj in substitutionals:
...     CkSum = ComponentVariable(mesh = mesh, value = 0.)
...     CkFaceSum = FaceVariable(mesh = mesh, value = 0.)
...     for Ck in [Ck for Ck in substitutionals if Ck is not Cj]:
...         CkSum += Ck
...         CkFaceSum += Ck.harmonicFaceValue
...
...     counterDiffusion = CkSum.faceGrad
...     phaseTransformation = \
...         (pPrime(phase.harmonicFaceValue) * Cj.standardPotential \
...          + gPrime(phase.harmonicFaceValue) * Cj.barrier) \
```

(continues on next page)

(continued from previous page)

```

...      * phase.faceGrad
... electromigration = Cj.valence * potential.faceGrad
... convectionCoeff = counterDiffusion \
...     + solvent.harmonicFaceValue \
...     * (phaseTransformation + electromigration)
... convectionCoeff *= (Cj.diffusivity / (1. - CkFaceSum))

... Cj.equation = (TransientTerm()
...                 == DiffusionTerm(coef=Cj.diffusivity)
...                 + PowerLawConvectionTerm(coef=convectionCoeff))

```

If we are running interactively, we create a viewer to see the results

```

>>> if __name__ == '__main__':
...     viewers = [Viewer(vars=field, datamin=0, datamax=1)
...               for field in [solvent] + substitutionals]
...     for viewer in viewers:
...         viewer.plot()
...     steps = 40
...     tol = 1e-7
... else:
...     steps = 20
...     tol = 1e-4

```

Now, we iterate the problem to equilibrium, plotting as we go

```

>>> from builtins import range
>>> for i in range(steps):
...     for Cj in substitutionals:
...         Cj.equation.solve(var = Cj,
...                           dt = 10000)
...     if __name__ == '__main__':
...         for viewer in viewers:
...             viewer.plot()

```

Since there is nothing to maintain the concentration separation in this problem, we verify that the concentrations have become uniform

```

>>> substitutionals[0].allclose(0.45, rtol = tol, atol = tol).value
1
>>> substitutionals[1].allclose(0.45, rtol = tol, atol = tol).value
1

```

We now rerun the problem with an initial condition that only has a concentration step in one corner.

```

>>> x, y = mesh.cellCenters
>>> substitutionals[0].setValue(0.3)
>>> substitutionals[0].setValue(0.6, where=(x > L / 2.) & (y > L / 2.))
>>> substitutionals[1].setValue(0.6)
>>> substitutionals[1].setValue(0.3, where=(x > L / 2.) & (y > L / 2.))

```

We iterate the problem to equilibrium again

```
>>> from builtins import range
>>> for i in range(steps):
...     for Cj in substitutionals:
...         Cj.equation.solve(var = Cj,
...                           dt = 10000)
...     if __name__ == '__main__':
...         for viewer in viewers:
...             viewer.plot()
```

and verify that the correct uniform concentrations are achieved

```
>>> substitutionals[0].allclose(0.375, rtol = tol, atol = tol).value
1
>>> substitutionals[1].allclose(0.525, rtol = tol, atol = tol).value
1
```

23.6.2 examples.elphf.input

This example adds two more components to examples/elphf/input1DphaseBinary.py one of which is another substitutional species and the other represents electrons and diffuses interstitially.

Parameters from 2004/January/21/elphf0214

We start by defining a 1D mesh

```
>>> from fipy import PhysicalField as PF
```

```
>>> RT = (PF("1 Nav*kB") * PF("298 K"))
>>> molarVolume = PF("1.80000006366754e-05 m**3/mol")
>>> Faraday = PF("1 Nav*e")
```

```
>>> L = PF("3 nm")
>>> nx = 1200
>>> dx = L / nx
>>> # nx = 200
>>> # dx = PF("0.01 nm")
>>> ## dx = PF("0.001 nm") * (1.001 - 1/cosh(arange(-10, 10, .01)))
>>> # L = nx * dx
>>> mesh = Grid1D(dx = dx, nx = nx)
>>> # mesh = Grid1D(dx = dx)
>>> # L = mesh.facesRight[0].center[0] - mesh.facesLeft[0].center[0]
>>> # L = mesh.cellCenters[0,-1] - mesh.cellCenters[0,0]
```

We create the phase field

```
>>> timeStep = PF("1e-12 s")
```

```
>>> phase = CellVariable(mesh = mesh, name = 'xi', value = 1, hasOld = 1)
>>> phase.mobility = PF("1 m**3/J/s") / (molarVolume / (RT * timeStep))
>>> phase.gradientEnergy = PF("3.6e-11 J/m") / (mesh.scale**2 * RT / molarVolume)
```

```
>>> def p(xi):
...     return xi**3 * (6 * xi**2 - 15 * xi + 10.)
```

```
>>> def g(xi):
...     return (xi * (1 - xi))**2
```

```
>>> def pPrime(xi):
...     return 30. * (xi * (1 - xi))**2
```

```
>>> def gPrime(xi):
...     return 4 * xi * (1 - xi) * (0.5 - xi)
```

We create four components

```
>>> class ComponentVariable(CellVariable):
...     def __init__(self, mesh, value = 0., name = '', standardPotential = 0., barrier = 0.,
...                  diffusivity = None, valence = 0, equation = None, hasOld = 1):
...         self.standardPotential = standardPotential
...         self.barrier = barrier
...         self.diffusivity = diffusivity
...         self.valence = valence
...         self.equation = equation
...         CellVariable.__init__(self, mesh = mesh, value = value, name = name, hasOld = hasOld)
...
...     def copy(self):
...         return self.__class__(mesh = self.mesh, value = self.value,
...                               name = self.name,
...                               standardPotential = self.standardPotential,
...                               barrier = self.barrier,
...                               diffusivity = self.diffusivity,
...                               valence = self.valence,
...                               equation = self.equation,
...                               hasOld = 0)
```

the solvent

```
>>> solvent = ComponentVariable(mesh = mesh, name = 'H2O', value = 1.)
>>> CnStandardPotential = PF("34139.7265625 J/mol") / RT
>>> CnBarrier = PF("3.6e5 J/mol") / RT
>>> CnValence = 0
```

and two solute species

```
>>> substitutionals = [
...     ComponentVariable(mesh = mesh, name = 'SO4',
...                       diffusivity = PF("1e-9 m**2/s") / (mesh.scale**2/timeStep),
...                       standardPotential = PF("24276.6640625 J/mol") / RT,
...                       barrier = CnBarrier,
...                       valence = -2,
...                       value = PF("0.000010414586295976 mol/l") * molarVolume),
...     ComponentVariable(mesh = mesh, name = 'Cu',
```

(continues on next page)

(continued from previous page)

```

...
    diffusivity = PF("1e-9 m**2/s") / (mesh.scale**2/timeStep),
    standardPotential = PF("-7231.81396484375 J/mol") / RT,
    barrier = CnBarrier,
    valence = +2,
    value = PF("55.5553718417909 mol/l") * molarVolume)
...

```

and one interstitial

```

>>> interstitials = [
...     ComponentVariable(mesh = mesh, name = 'e-',
...         diffusivity = PF("1e-9 m**2/s") / (mesh.scale**2/timeStep),
...         standardPotential = PF("-33225.9453125 J/mol") / RT,
...         barrier = 0.,
...         valence = -1,
...         value = PF("111.110723815414 mol/l") * molarVolume)]
...

```

```

>>> for component in substitutionals:
...     solvent -= component
...     component.standardPotential -= CnStandardPotential
...     component.barrier -= CnBarrier
...     component.valence -= CnValence
...

```

Finally, we create the electrostatic potential field

```

>>> potential = CellVariable(mesh = mesh, name = 'phi', value = 0.)
...
>>> permittivity = PF("78.49 eps0") / (Faraday**2 * mesh.scale**2 / (RT * molarVolume))
...
>>> permittivity = 1.
>>> permittivityPrime = 0.

```

The thermodynamic parameters are chosen to give a solid phase rich in electrons and the solvent and a liquid phase rich in the two substitutional species

```

>>> solvent.standardPotential = CnStandardPotential
>>> solvent.barrier = CnBarrier
>>> solvent.valence = CnValence
...

```

Once again, we start with a sharp phase boundary

```

>>> x = mesh.cellCenters[0]
>>> phase.setValue(x < L / 2)
>>> interstitials[0].setValue("0.00011111503177394 mol/l" * molarVolume, where=x > L / 2)
>>> substitutionals[0].setValue("0.249944439430068 mol/l" * molarVolume, where=x > L / 2)
>>> substitutionals[1].setValue("0.24999982581341 mol/l" * molarVolume, where=x > L / 2)

```

We again create the phase equation as in `examples.elphf.phase.input1D`

```

>>> mesh.setScale(1)

```

```
>>> phase.equation = TransientTerm(coeff = 1/phase.mobility) \
...     == DiffusionTerm(coeff = phase.gradientEnergy) \
...     - (permittivityPrime / 2.) * potential.grad.dot(potential.grad)
```

We linearize the source term in the same way as in `example.phase.simple.input1D`.

```
>>> enthalpy = solvent.standardPotential
>>> barrier = solvent.barrier
>>> for component in substitutionals + interstitials:
...     enthalpy += component * component.standardPotential
...     barrier += component * component.barrier
```

```
>>> mXi = -(30 * phase * (1 - phase) * enthalpy + 4 * (0.5 - phase) * barrier)
>>> dmXidXi = (-60 * (0.5 - phase) * enthalpy + 4 * barrier)
>>> S1 = dmXidXi * phase * (1 - phase) + mXi * (1 - 2 * phase)
>>> S0 = mXi * phase * (1 - phase) - phase * S1
```

```
>>> phase.equation -= S0 + ImplicitSourceTerm(coeff = S1)
```

and we create the diffusion equation for the solute as in `examples.elphf.diffusion.input1D`

```
>>> for Cj in substitutionals:
...     CkSum = ComponentVariable(mesh = mesh, value = 0.)
...     CkFaceSum = FaceVariable(mesh = mesh, value = 0.)
...     for Ck in [Ck for Ck in substitutionals if Ck is not Cj]:
...         CkSum += Ck
...         CkFaceSum += Ck.harmonicFaceValue
...
...     counterDiffusion = CkSum.faceGrad
...     # phaseTransformation = (pPrime(phase.harmonicFaceValue) * Cj.standardPotential
...     #                         + gPrime(phase.harmonicFaceValue) * Cj.barrier) * phase.faceGrad
...     phaseTransformation = (pPrime(phase).harmonicFaceValue * Cj.standardPotential
...                           + gPrime(phase).harmonicFaceValue * Cj.barrier) * phase.faceGrad
...     # phaseTransformation = (p(phase).faceGrad * Cj.standardPotential
...     #                         + g(phase).faceGrad * Cj.barrier)
...     electromigration = Cj.valence * potential.faceGrad
...     convectionCoeff = counterDiffusion + \
...         solvent.harmonicFaceValue * (phaseTransformation + electromigration)
...     convectionCoeff *= (Cj.diffusivity / (1. - CkFaceSum))
...
...     Cj.equation = (TransientTerm()
...                   == DiffusionTerm(coeff=Cj.diffusivity)
...                   + PowerLawConvectionTerm(coeff=convectionCoeff))
```

```
>>> for Cj in interstitials:
...     # phaseTransformation = (pPrime(phase.harmonicFaceValue) * Cj.standardPotential
...     #                         + gPrime(phase.harmonicFaceValue) * Cj.barrier) * phase.faceGrad
...     phaseTransformation = (pPrime(phase).harmonicFaceValue * Cj.standardPotential
...                           + gPrime(phase).harmonicFaceValue * Cj.barrier) * phase.faceGrad
...     # phaseTransformation = (p(phase).faceGrad * Cj.standardPotential
...     #                         + g(phase).faceGrad * Cj.barrier)
...     electromigration = Cj.valence * potential.faceGrad
```

(continues on next page)

(continued from previous page)

```

...
    convectionCoeff = Cj.diffusivity * (1 + Cj.harmonicFaceValue) * \
        (phaseTransformation + electromigration)

...
Cj.equation = (TransientTerm() == DiffusionTerm(coeff=Cj.diffusivity)
    + PowerLawConvectionTerm(coeff=convectionCoeff))

```

And Poisson's equation

```

>>> charge = 0.
>>> for Cj in interstitials + substitutionals:
...     charge += Cj * Cj.valence

```

```
>>> potential.equation = DiffusionTerm(coeff = permittivity) + charge == 0
```

If running interactively, we create viewers to display the results

```

>>> from fipy import input
>>> if __name__ == '__main__':
...     phaseViewer = Viewer(vars=phase, datamin=0, datamax=1)
...     concViewer = Viewer(vars=[solvent] + substitutionals + interstitials, ylog=True)
...     potentialViewer = Viewer(vars = potential)
...     phaseViewer.plot()
...     concViewer.plot()
...     potentialViewer.plot()
...     input("Press a key to continue")

```

Again, this problem does not have an analytical solution, so after iterating to equilibrium

```
>>> solver = LinearLUSolver(tolerance = 1e-3)
```

```
>>> potential.constrain(0., mesh.facesLeft)
```

```

>>> phase.residual = CellVariable(mesh = mesh)
>>> potential.residual = CellVariable(mesh = mesh)
>>> for Cj in substitutionals + interstitials:
...     Cj.residual = CellVariable(mesh = mesh)
>>> residualViewer = Viewer(vars = [phase.residual, potential.residual] + [Cj.residual,
...     for Cj in substitutionals + interstitials])

```

```
>>> tsv = TSVViewer(vars = [phase, potential] + substitutionals + interstitials)
```

```

>>> dt = substitutionals[0].diffusivity * 100
>>> # dt = 1.
>>> elapsed = 0.
>>> maxError = 1e-1
>>> SAFETY = 0.9
>>> ERRCON = 1.89e-4
>>> desiredTimestep = 1.
>>> thisTimeStep = 0.
>>> print("%3s: %20s | %20s | %20s | %20s" % ("i", "elapsed", "this", "next dt",

```

(continues on next page)

(continued from previous page)

```

→ "residual"))
>>> residual = 0.
>>> from builtins import range
>>> from builtins import str
>>> for i in range(500): # iterate
...     if thisTimeStep == 0.:
...         tsv.plot(filename = "%s.tsv" % str(elapsed * timeStep))
...
...     for field in [phase, potential] + substitutionals + interstitials:
...         field.updateOld()
...
...     while True:
...         for j in range(10): # sweep
...             print(i, j, dt * timeStep, residual)
...             # raw_input()
...             residual = 0.
...
...             phase.equation.solve(var = phase, dt = dt)
...             # print phase.name, phase.equation.residual.max()
...             residual = max(phase.equation.residual.max(), residual)
...             phase.residual[:] = phase.equation.residual
...
...             potential.equation.solve(var = potential, dt = dt)
...             # print potential.name, potential.equation.residual.max()
...             residual = max(potential.equation.residual.max(), residual)
...             potential.residual[:] = potential.equation.residual
...
...             for Cj in substitutionals + interstitials:
...                 Cj.equation.solve(var = Cj,
...                               dt = dt,
...                               solver = solver)
...                 # print Cj.name, Cj.equation.residual.max()
...                 residual = max(Cj.equation.residual.max(), residual)
...                 Cj.residual[:] = Cj.equation.residual
...
...                 # print
...                 # phaseViewer.plot()
...                 # concViewer.plot()
...                 # potentialViewer.plot()
...                 # residualViewer.plot()
...
...             residual /= maxError
...             if residual <= 1.:
...                 break      # step succeeded
...
...             dt = max(SAFETY * dt * residual**-0.2, 0.1 * dt)
...             if thisTimeStep + dt == thisTimeStep:
...                 raise FloatingPointError("step size underflow")
...
...             thisTimeStep += dt
...
...             if residual > ERRCON:

```

(continues on next page)

(continued from previous page)

```

...
    dt *= SAFETY * residual**-0.2
...
else:
    dt *= 5.

...
# dt *= (maxError / residual)**0.5

...
if thisTimeStep >= desiredTimestep:
    elapsed += thisTimeStep
    thisTimeStep = 0.
else:
    dt = min(dt, desiredTimestep - thisTimeStep)

...
if __name__ == '__main__':
    phaseViewer.plot()
    concViewer.plot()
    potentialViewer.plot()
    print("%3d: %20s | %20s | %20s | %g" % (i, str(elapsed * timeStep),_
    str(thisTimeStep * timeStep), str(dt * timeStep), residual))

```

we confirm that the far-field phases have remained separated

```

>>> ends = take(phase, (0, -1))
>>> allclose(ends, (1.0, 0.0), rtol = 1e-5, atol = 1e-5)
1

```

and that the concentration fields has appropriately segregated into into their respective phases

```

>>> ends = take(interstitials[0], (0, -1))
>>> allclose(ends, (0.4, 0.3), rtol = 3e-3, atol = 3e-3)
1
>>> ends = take(substitutionals[0], (0, -1))
>>> allclose(ends, (0.3, 0.4), rtol = 3e-3, atol = 3e-3)
1
>>> ends = take(substitutionals[1], (0, -1))
>>> allclose(ends, (0.1, 0.2), rtol = 3e-3, atol = 3e-3)
1

```

23.6.3 examples.elphf.phase

A simple 1D example to test the setup of the phase field equation.

We rearrange Eq. (23.3) to

$$\frac{1}{M_\xi} \frac{\partial \xi}{\partial t} = \kappa_\xi \nabla^2 \xi + \frac{\epsilon'(\xi)}{2} (\nabla \phi)^2 - [p'(\xi) \Delta \mu_n^\circ + g'(\xi) W_n] - \sum_{j=2}^{n-1} C_j [p'(\xi) \Delta \mu_{jn}^\circ + g'(\xi) W_{jn}] - C_{e^-} [p'(\xi) \Delta \mu_{e^-}^\circ + g'(\xi) W_{e^-}]$$

The single-component phase field governing equation can be represented as

$$\frac{1}{M_\xi} \frac{\partial \xi}{\partial t} = \kappa_\xi \nabla^2 \xi - 2\xi(1-\xi)(1-2\xi)W$$

where ξ is the phase field, t is time, M_ξ is the phase field mobility, κ_ξ is the phase field gradient energy coefficient, and W is the phase field barrier energy.

We solve the problem on a 1D mesh

```
>>> from fipy import CellVariable, Grid1D, TransientTerm, DiffusionTerm,_
... ImplicitSourceTerm, Viewer
>>> from fipy.tools import numerix
```

```
>>> nx = 400
>>> dx = 0.01
>>> L = nx * dx
>>> mesh = Grid1D(dx = dx, nx = nx)
```

We create the phase field

```
>>> phase = CellVariable(mesh = mesh, name = 'xi')
>>> phase.mobility = numerix.inf
>>> phase.gradientEnergy = 0.025
```

Although we are not interested in them for this problem, we create one field to represent the “solvent” component (1 everywhere)

```
>>> class ComponentVariable(CellVariable):
...     def copy(self):
...         new = self.__class__(mesh = self.mesh,
...                             name = self.name,
...                             value = self.value)
...         new.standardPotential = self.standardPotential
...         new.barrier = self.barrier
...         return new
```

```
>>> solvent = ComponentVariable(mesh = mesh, name = 'Cn', value = 1.)
>>> solvent.standardPotential = 0.
>>> solvent.barrier = 1.
```

and one field to represent the electrostatic potential (0 everywhere)

```
>>> potential = CellVariable(mesh = mesh, name = 'phi', value = 0.)
>>> permittivityPrime = 0.
```

We'll have no substitutional species and no interstitial species in this first example

```
>>> substitutionals = []
>>> interstitials = []
```

```
>>> for component in substitutionals:
...     solvent -= component
```

```
>>> phase.equation = TransientTerm(coeff = 1/phase.mobility) \
...     == DiffusionTerm(coeff = phase.gradientEnergy) \
...     - (permittivityPrime / 2.) \
...     * potential.grad.dot(potential.grad)
```

```
>>> enthalpy = solvent.standardPotential
>>> barrier = solvent.barrier
>>> for component in substitutionals + interstitials:
...     enthalpy += component * component.standardPotential
...     barrier += component * component.barrier
```

We linearize the source term in the same way as in `examples.phase.simple`.

```
>>> mXi = -(30 * phase * (1. - phase) * enthalpy \
...           + 4 * (0.5 - phase) * barrier)
>>> dmXidXi = (-60 * (0.5 - phase) * enthalpy + 4 * barrier)
>>> S1 = dmXidXi * phase * (1 - 2 * phase) + mXi * (1 - 2 * phase)
>>> S0 = mXi * phase * (1 - phase) - phase * S1

>>> phase.equation -= S0 + ImplicitSourceTerm(coeff = S1)
```

Note: Adding a `Term` to an equation formed with `==` will add to the left-hand side of the equation and subtracting a `Term` will add to the right-hand side of the equation

We separate the phase field into electrode and electrolyte regimes

```
>>> phase.setValue(1.)
>>> phase.setValue(0., where=mesh.cellCenters[0] > L / 2)
```

Even though we are solving the steady-state problem ($M_\phi = \infty$) we still must sweep the solution several times to equilibrate

```
>>> from builtins import range
>>> for step in range(10):
...     phase.equation.solve(var = phase, dt=1.)
```

Since we have only a single component n , with $\Delta\mu_n^\circ = 0$, and the electrostatic potential is uniform, Eq. (23.3) reduces to

$$\frac{1}{M_\xi} \frac{\partial \xi}{\partial t} = \kappa_\xi \nabla^2 \xi - g'(\xi) W_n$$

which we know from `examples.phase.simple` has the analytical solution

$$\xi(x) = \frac{1}{2}(1 - \tanh \frac{x - L/2}{2d})$$

with an interfacial thickness $d = \sqrt{\kappa_\xi/2W_n}$.

We verify that the correct equilibrium solution is attained


```
>>> x = mesh.cellCenters[0]

>>> d = numerix.sqrt(phase.gradientEnergy / (2 * solvent.barrier))
>>> analyticalArray = (1. - numerix.tanh((x - L/2.)/(2 * d))) / 2.

>>> phase.allclose(analyticalArray, rtol = 1e-4, atol = 1e-4).value
1
```

If we are running interactively, we plot the error

```
>>> if __name__ == '__main__':
...     viewer = Viewer(vars = (phase - \
...         CellVariable(name = "analytical", mesh = mesh,
...                     value = analyticalArray),))
...     viewer.plot()
```

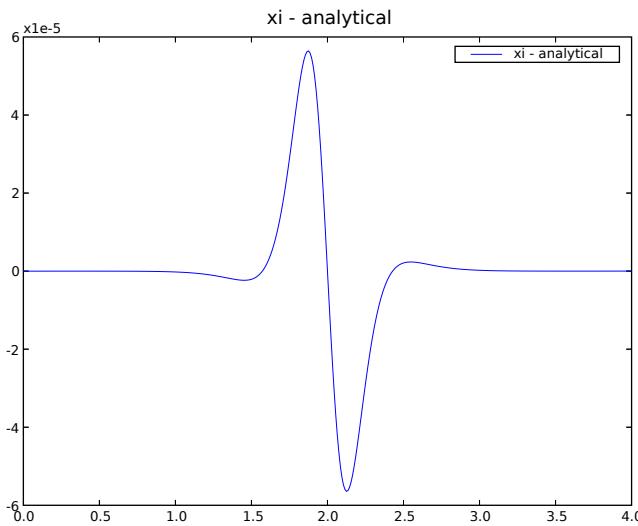

23.6.4 examples.elphf.phaseDiffusion

This example combines a phase field problem, as given in `examples.elphf.phase`, with a binary diffusion problem, such as described in the ternary example `examples.elphf.diffusion.mesh1D`, on a 1D mesh

```
>>> from fipy import CellVariable, FaceVariable, Grid1D, TransientTerm, DiffusionTerm, \
...     ImplicitSourceTerm, PowerLawConvectionTerm, Viewer
>>> from fipy.tools import numerix
```

```
>>> nx = 400
>>> dx = 0.01
>>> L = nx * dx
>>> mesh = Grid1D(dx = dx, nx = nx)
```

We create the phase field

```
>>> phase = CellVariable(mesh=mesh, name='xi', value=1., hasOld=1)
>>> phase.mobility = 1.
>>> phase.gradientEnergy = 0.025
```

```
>>> def pPrime(xi):
...     return 30. * (xi * (1 - xi))**2
```

```
>>> def gPrime(xi):
...     return 4 * xi * (1 - xi) * (0.5 - xi)
```

and a dummy electrostatic potential field

```
>>> potential = CellVariable(mesh = mesh, name = 'phi', value = 0.)
>>> permittivityPrime = 0.
```

We start with a binary substitutional system

```
>>> class ComponentVariable(CellVariable):
...     def __init__(self, mesh, value = 0., name = '',
...                  standardPotential = 0., barrier = 0.,
...                  diffusivity = None, valence = 0, equation = None,
...                  hasOld = 1):
...         self.standardPotential = standardPotential
...         self.barrier = barrier
...         self.diffusivity = diffusivity
...         self.valence = valence
...         self.equation = equation
...         CellVariable.__init__(self, mesh = mesh, value = value,
...                               name = name, hasOld = hasOld)
...
...     def copy(self):
...         return self.__class__(mesh = self.mesh,
...                               value = self.value,
...                               name = self.name,
...                               standardPotential =
...                                   self.standardPotential,
...                               barrier = self.barrier,
...                               diffusivity = self.diffusivity,
...                               valence = self.valence,
...                               equation = self.equation,
...                               hasOld = 0)
```

consisting of the solvent

```
>>> solvent = ComponentVariable(mesh = mesh, name = 'Cn', value = 1.)
```

and the solute

```
>>> substitutionals = [
...     ComponentVariable(mesh = mesh, name = 'C1',
...                       diffusivity = 1., barrier = 0.,
...                       standardPotential = numerix.log(.3/.7) - numerix.log(.7/.3))]
>>> interstitials = []
```

```
>>> for component in substitutionals:
...     solvent -= component
```

The thermodynamic parameters are chosen to give a solid phase rich in the solute and a liquid phase rich in the solvent.

```
>>> solvent.standardPotential = numerix.log(.7/.3)
>>> solvent.barrier = 1.
```

We create the phase equation as in `examples.elphf.phase` and create the diffusion equations for the different species as in `examples.elphf.diffusion.mesh1D`

```

>>> def makeEquations(phase, substitutionals, interstitials):
...     phase.equation = TransientTerm(coeff = 1/phase.mobility) \
...         == DiffusionTerm(coeff = phase.gradientEnergy) \
...         - (permittivityPrime / 2.) \
...             * potential.grad.dot(potential.grad)
...     enthalpy = solvent.standardPotential
...     barrier = solvent.barrier
...     for component in substitutionals + interstitials:
...         enthalpy += component * component.standardPotential
...         barrier += component * component.barrier
...
...     mXi = -(30 * phase * (1 - phase) * enthalpy
...             + 4 * (0.5 - phase) * barrier)
...     dmXidXi = (-60 * (0.5 - phase) * enthalpy + 4 * barrier)
...     S1 = dmXidXi * phase * (1 - phase) + mXi * (1 - 2 * phase)
...     S0 = mXi * phase * (1 - phase) - phase * S1
...
...     phase.equation -= S0 + ImplicitSourceTerm(coeff = S1)
...
...     for Cj in substitutionals:
...         CkSum = ComponentVariable(mesh = mesh, value = 0.)
...         CkFaceSum = FaceVariable(mesh = mesh, value = 0.)
...         for Ck in [Ck for Ck in substitutionals if Ck is not Cj]:
...             CkSum += Ck
...             CkFaceSum += Ck.harmonicFaceValue
...
...         counterDiffusion = CkSum.faceGrad
...         phaseTransformation = (pPrime(phase.harmonicFaceValue) \
...             * Cj.standardPotential
...             + gPrime(phase.harmonicFaceValue) \
...                 * Cj.barrier) * phase.faceGrad
...         electromigration = Cj.valence * potential.faceGrad
...         convectionCoeff = counterDiffusion + \
...             solvent.harmonicFaceValue \
...             * (phaseTransformation + electromigration)
...         convectionCoeff *= \
...             (Cj.diffusivity / (1. - CkFaceSum))
...
...         Cj.equation = (TransientTerm()
...                         == DiffusionTerm(coeff=Cj.diffusivity)
...                         + PowerLawConvectionTerm(coeff=convectionCoeff))
...
...     for Cj in interstitials:
...         phaseTransformation = (pPrime(phase.harmonicFaceValue) \
...             * Cj.standardPotential \
...             + gPrime(phase.harmonicFaceValue) \
...                 * Cj.barrier) * phase.faceGrad
...         electromigration = Cj.valence * potential.faceGrad
...         convectionCoeff = Cj.diffusivity \
...             * (1 + Cj.harmonicFaceValue) \
...             * (phaseTransformation + electromigration)
...
...         Cj.equation = (TransientTerm())

```

(continues on next page)

(continued from previous page)

```
...           == DiffusionTerm(coeff=Cj.diffusivity)
...           + PowerLawConvectionTerm(coeff=convectionCoeff))
```

```
>>> makeEquations(phase, substitutionals, interstitials)
```

We start with a sharp phase boundary

$$\xi = \begin{cases} 1 & \text{for } x \leq L/2, \\ 0 & \text{for } x > L/2, \end{cases}$$

or

```
>>> x = mesh.cellCenters[0]
>>> phase.setValue(1.)
>>> phase.setValue(0., where=x > L / 2)
```

and with a uniform concentration field $C_1 = 0.5$ or


```
>>> substitutionals[0].setValue(0.5)
```

If running interactively, we create viewers to display the results

```
>>> if __name__ == '__main__':
...     viewer = Viewer(vars=[phase, solvent]
...                   + substitutionals + interstitials),
...     datamin=0, datamax=1)
...     viewer.plot()
```

This problem does not have an analytical solution, so after iterating to equilibrium

```
>>> dt = 10000
>>> from builtins import range
>>> for i in range(5):
...     for field in [phase] + substitutionals + interstitials:
...         field.updateOld()
...     phase.equation.solve(var = phase, dt = dt)
...     for field in substitutionals + interstitials:
...         field.equation.solve(var = field,
...                             dt = dt)
...     if __name__ == '__main__':
...         viewer.plot()
```

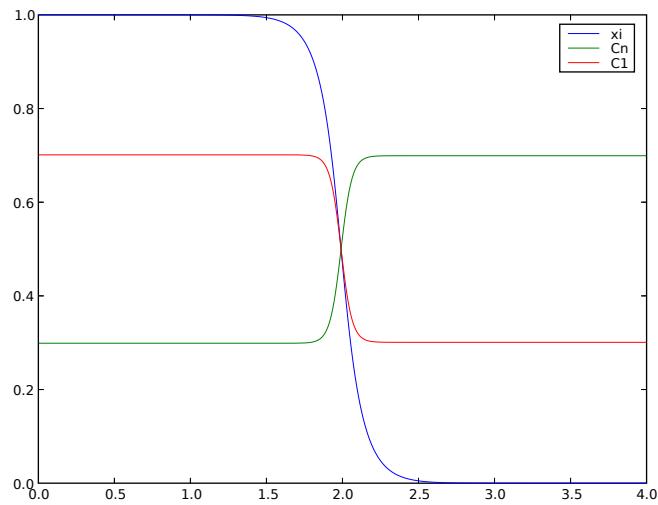

we confirm that the far-field phases have remained separated

```
>>> numerix.allclose(phase(((0., L),)), (1.0, 0.0), rtol = 1e-5, atol = 1e-5)
1
```

and that the solute concentration field has appropriately segregated into solute-rich and solute-poor phases.

```
>>> print(numerix.allclose(substitutionals[0](((0., L),)), (0.7, 0.3), rtol = 2e-3, atol = 2e-3))
1
```

The same system of equations can model a quaternary substitutional system as easily as a binary. Because it depends on the number of substitutional solute species in question, we recreate the solvent

```
>>> solvent = ComponentVariable(mesh = mesh, name = 'Cn', value = 1.)
```

and make three new solute species

```
>>> substitutionals = [
...     ComponentVariable(mesh = mesh, name = 'C1',
...                       diffusivity = 1., barrier = 0.,
...                       standardPotential = numerix.log(.3/.4) - numerix.log(.1/.2)),
...     ComponentVariable(mesh = mesh, name = 'C2',
...                       diffusivity = 1., barrier = 0.,
...                       standardPotential = numerix.log(.4/.3) - numerix.log(.1/.2)),
...     ComponentVariable(mesh = mesh, name = 'C3',
...                       diffusivity = 1., barrier = 0.,
...                       standardPotential = numerix.log(.2/.1) - numerix.log(.1/.2))]
```

```
>>> for component in substitutionals:
...     solvent -= component
>>> solvent.standardPotential = numerix.log(.1/.2)
>>> solvent.barrier = 1.
```

These thermodynamic parameters are chosen to give a solid phase rich in the solvent and the first substitutional com-

ponent and a liquid phase rich in the remaining two substitutional species.

Again, if we're running interactively, we create a viewer

```
>>> if __name__ == '__main__':
...     viewer = Viewer(vars=[phase, solvent]
...                     + substitutionals + interstitials),
...     datamin=0, datamax=1)
...     viewer.plot()
```

We reinitialize the sharp phase boundary

```
>>> phase.setValue(1.)
>>> phase.setValue(0., where=x > L / 2)
```

and the uniform concentration fields, with the substitutional concentrations $C_1 = C_2 = 0.35$ and $C_3 = 0.15$.


```
>>> substitutionals[0].setValue(0.35)
>>> substitutionals[1].setValue(0.35)
>>> substitutionals[2].setValue(0.15)
```

We make new equations

```
>>> makeEquations(phase, substitutionals, interstitials)
```

and again iterate to equilibrium

```
>>> dt = 10000
>>> from builtins import range
>>> for i in range(5):
...     for field in [phase] + substitutionals + interstitials:
...         field.updateOld()
...     phase.equation.solve(var = phase, dt = dt)
...     for field in substitutionals + interstitials:
...         field.equation.solve(var = field,
...                             dt = dt)
...     if __name__ == '__main__':
...         viewer.plot()
```

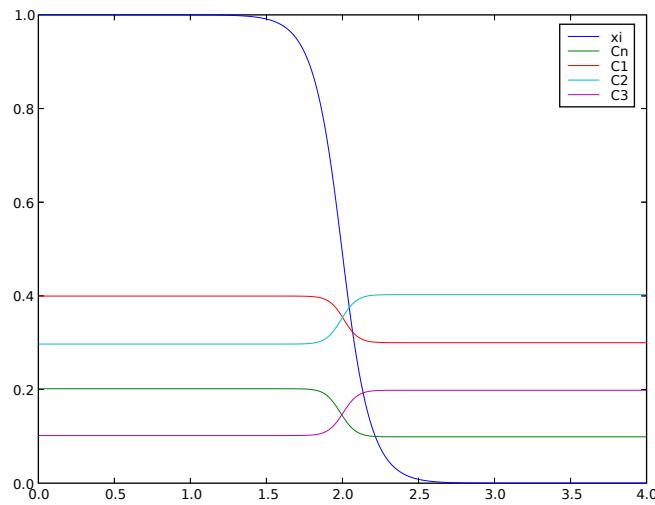

We confirm that the far-field phases have remained separated

```
>>> numerix.allclose(phase(((0., L,)), (1.0, 0.0), rtol = 1e-5, atol = 1e-5)
1
```

and that the concentration fields have appropriately segregated into their respective phases

```
>>> numerix.allclose(substitutionals[0](((0., L,)), (0.4, 0.3), rtol = 3e-3, atol = 3e-
->3)
1
>>> numerix.allclose(substitutionals[1](((0., L,)), (0.3, 0.4), rtol = 3e-3, atol = 3e-
->3)
1
>>> numerix.allclose(substitutionals[2](((0., L,)), (0.1, 0.2), rtol = 3e-3, atol = 3e-
->3)
1
```

Finally, we can represent a system that contains both substitutional and interstitial species. We recreate the solvent

```
>>> solvent = ComponentVariable(mesh = mesh, name = 'Cn', value = 1.)
```

and two new solute species

```
>>> substitutionals = [
...     ComponentVariable(mesh = mesh, name = 'C2',
...                       diffusivity = 1., barrier = 0.,
...                       standardPotential = numerix.log(.4/.3) - numerix.log(.4/.6)),
...     ComponentVariable(mesh = mesh, name = 'C3',
...                       diffusivity = 1., barrier = 0.,
...                       standardPotential = numerix.log(.2/.1) - numerix.log(.4/.6))]
```

and one interstitial

```
>>> interstitials = [
...     ComponentVariable(mesh = mesh, name = 'C1',
```

(continues on next page)

(continued from previous page)

```
...
    diffusivity = 1., barrier = 0.,
    standardPotential = numerix.log(.3/.4) - numerix.log(1.3/1.4)]
```

```
>>> for component in substitutionals:
...     solvent -= component
>>> solvent.standardPotential = numerix.log(.4/.6) - numerix.log(1.3/1.4)
>>> solvent.barrier = 1.
```

These thermodynamic parameters are chosen to give a solid phase rich in interstitials and the solvent and a liquid phase rich in the two substitutional species.

Once again, if we're running interactively, we create a viewer

```
>>> if __name__ == '__main__':
...     viewer = Viewer(vars=[phase, solvent]
...                   + substitutionals + interstitials),
...     datamin=0, datamax=1)
...     viewer.plot()
```

We reinitialize the sharp phase boundary

```
>>> phase.setValue(1.)
>>> phase.setValue(0., where=x > L / 2)
```

and the uniform concentration fields, with the interstitial concentration $C_1 = 0.35$

```
>>> interstitials[0].setValue(0.35)
```

and the substitutional concentrations $C_2 = 0.35$ and $C_3 = 0.15$.


```
>>> substitutionals[0].setValue(0.35)
>>> substitutionals[1].setValue(0.15)
```

We make new equations

```
>>> makeEquations(phase, substitutionals, interstitials)
```

and again iterate to equilibrium

```
>>> dt = 10000
>>> from builtins import range
>>> for i in range(5):
...     for field in [phase] + substitutionals + interstitials:
...         field.updateOld()
...     phase.equation.solve(var = phase, dt = dt)
...     for field in substitutionals + interstitials:
...         field.equation.solve(var = field,
...                             dt = dt)
...     if __name__ == '__main__':
...         viewer.plot()
```

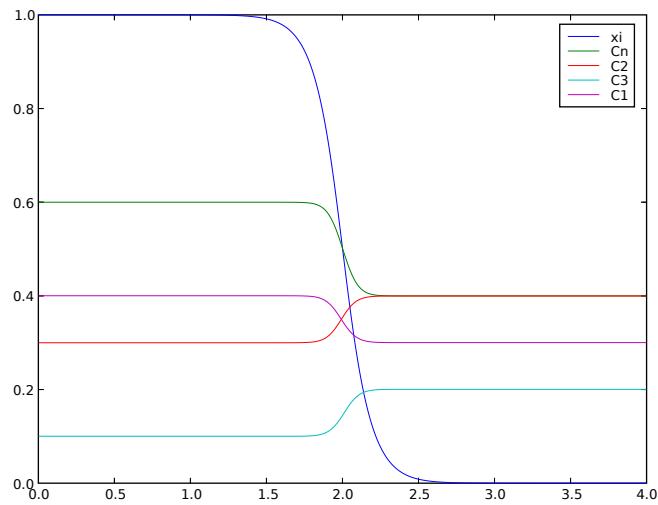

We once more confirm that the far-field phases have remained separated

```
>>> numerix.allclose(phase(((0., L,)), (1.0, 0.0), rtol = 1e-5, atol = 1e-5)
1
```

and that the concentration fields have appropriately segregated into their respective phases

```
>>> numerix.allclose(interstitials[0](((0., L,)), (0.4, 0.3), rtol = 3e-3, atol = 3e-3)
1
>>> numerix.allclose(substitutionals[0](((0., L,)), (0.3, 0.4), rtol = 3e-3, atol = 3e-
-3)
1
>>> numerix.allclose(substitutionals[1](((0., L,)), (0.1, 0.2), rtol = 3e-3, atol = 3e-
-3)
1
```

23.6.5 examples.elphf.poisson

A simple 1D example to test the setup of the Poisson equation.

```
>>> from fipy import CellVariable, Grid1D, DiffusionTerm, Viewer
>>> from fipy.tools import numerix
```

```
>>> nx = 200
>>> dx = 0.01
>>> L = nx * dx
>>> mesh = Grid1D(dx = dx, nx = nx)
```

The dimensionless Poisson equation is

$$\nabla \cdot (\epsilon \nabla \phi) = -\rho = - \sum_{j=1}^n z_j C_j$$

where ϕ is the electrostatic potential, ϵ is the permittivity, ρ is the charge density, C_j is the concentration of the j^{th} component, and z_j is the valence of the j^{th} component.

We will be solving for the electrostatic potential

```
>>> potential = CellVariable(mesh = mesh, name = 'phi', value = 0.)
>>> permittivity = 1.
```

We examine a fixed distribution of electrons with $z_{\text{e}^-} = -1$.

```
>>> class ComponentVariable(CellVariable):
...     def __init__(self, mesh, value = 0., name = '',
...                  standardPotential = 0., barrier = 0.,
...                  diffusivity = None, valence = 0, equation = None):
...         CellVariable.__init__(self, mesh = mesh,
...                               value = value, name = name)
...         self.standardPotential = standardPotential
...         self.barrier = barrier
...         self.diffusivity = diffusivity
...         self.valence = valence
...         self.equation = equation
...
...     def copy(self):
...         return self.__class__(mesh = self.mesh,
...                               value = self.value,
...                               name = self.name,
...                               standardPotential =
...                                     self.standardPotential,
...                               barrier = self.barrier,
...                               diffusivity = self.diffusivity,
...                               valence = self.valence,
...                               equation = self.equation)
```

Since we're only interested in a single species, electrons, we could simplify the following, but since we will in general be studying multiple components, we explicitly allow for multiple substitutional species and multiple interstitial species:

```
>>> interstitials = [
...     ComponentVariable(mesh = mesh, name = 'e-', valence = -1)]
>>> substitutionals = []
```

Because Poisson's equation admits an infinite number of potential profiles, we must constrain the solution by fixing the potential at one point:

```
>>> potential.constrain(0., mesh.facesLeft)
```

```
>>> charge = 0.
>>> for Cj in interstitials + substitutionals:
...     charge += Cj * Cj.valence
```

```
>>> potential.equation = DiffusionTerm(coeff = permittivity) \
... + charge == 0
```

First, we obtain a uniform charge distribution by setting a uniform concentration of electrons $C_{\text{e}^-} = 1$.

```
>>> interstitials[0].setValue(1.)
```

and we solve for the electrostatic potential

```
>>> potential.equation.solve(var = potential)
```

This problem has the analytical solution

$$\psi(x) = \frac{x^2}{2} - 2x$$

We verify that the correct equilibrium is attained

```
>>> x = mesh.cellCenters[0]
>>> analyticalArray = (x**2)/2 - 2*x
```

```
>>> print(potential.allclose(analyticalArray, rtol = 2e-5, atol = 2e-5))
1
```

If we are running the example interactively, we view the result

```
>>> from fipy import input
>>> if __name__ == '__main__':
...     viewer = Viewer(vars = (charge, potential))
...     viewer.plot()
...     input("Press any key to continue...")
```

Next, we segregate all of the electrons to right side of the domain

$$C_{e^-} = \begin{cases} 0 & \text{for } x \leq L/2, \\ 1 & \text{for } x > L/2. \end{cases}$$

```
>>> x = mesh.cellCenters[0]
>>> interstitials[0].setValue(0.)
>>> interstitials[0].setValue(1., where=x > L / 2.)
```

and again solve for the electrostatic potential

```
>>> potential.equation.solve(var = potential)
```

which now has the analytical solution

$$\psi(x) = \begin{cases} -x & \text{for } x \leq L/2, \\ \frac{(x-1)^2}{2} - x & \text{for } x > L/2. \end{cases}$$

We verify that the correct equilibrium is attained

```
>>> analyticalArray = numerix.where(x < L/2, -x, ((x-1)**2)/2 - x)
```

```
>>> potential.allclose(analyticalArray, rtol = 2e-5, atol = 2e-5).value
1
```

and again view the result

```
>>> from fipy import input
>>> if __name__ == '__main__':
...     viewer.plot()
...     input("Press any key to continue...")
```

Finally, we segregate all of the electrons to left side of the domain

$$C_{e^-} = \begin{cases} 1 & \text{for } x \leq L/2, \\ 0 & \text{for } x > L/2. \end{cases}$$

```
>>> interstitials[0].setValue(1.)
>>> interstitials[0].setValue(0., where=x > L / 2.)
```

and again solve for the electrostatic potential

```
>>> potential.equation.solve(var = potential)
```

which has the analytical solution

$$\psi(x) = \begin{cases} \frac{x^2}{2} - x & \text{for } x \leq L/2, \\ -\frac{1}{2} & \text{for } x > L/2. \end{cases}$$

We again verify that the correct equilibrium is attained

```
>>> analyticalArray = numerix.where(x < 1, (x**2)/2 - x, -0.5)
```

```
>>> potential.allclose(analyticalArray, rtol = 2e-5, atol = 2e-5).value
1
```

and again view the result

```
>>> if __name__ == '__main__':
...     viewer.plot()
```

23.6.6 examples.elphf.test

23.7 examples.flow

Modules

`examples.flow.stokesCavity`
`examples.flow.test`

Solve the Navier-Stokes equation in the viscous limit.

23.7.1 examples.flow.stokesCavity

Solve the Navier-Stokes equation in the viscous limit.

Many thanks to Benny Malengier <bm@cage.ugent.be> for reworking this example and actually making it work correctly... see #209

This example is an implementation of a rudimentary Stokes solver on a collocated grid. It solves the Navier-Stokes equation in the viscous limit,

$$\nabla \cdot (\mu \nabla \vec{u}) = \nabla p$$

and the continuity equation,

$$\nabla \cdot \vec{u} = 0$$

where \vec{u} is the fluid velocity, p is the pressure and μ is the viscosity. The domain in this example is a square cavity of unit dimensions with a moving lid of unit speed. This example uses the SIMPLE algorithm with Rhie-Chow interpolation for collocated grids to solve the pressure-momentum coupling. Some of the details of the algorithm will be highlighted below but a good reference for this material is Ferziger and Peric [25] and Rossow [26]. The solution has a high degree of error close to the corners of the domain for the pressure but does a reasonable job of predicting the velocities away from the boundaries. A number of aspects of *FiPy* need to be improved to have a first class flow solver. These include, higher order spatial diffusion terms, proper wall boundary conditions, improved mass flux evaluation and extrapolation of cell values to the boundaries using gradients.

In the table below a comparison is made with the *Dolfin* open source code on a 100 by 100 grid. The table shows the frequency of values that fall within the given error confidence bands. *Dolfin* has the added features described above. When these features are switched off the results of *Dolfin* and *FiPy* are identical.

% frequency of cells	x-velocity error (%)	y-velocity error (%)	pressure error (%)
90	< 0.1	< 0.1	< 5
5	0.1 to 0.6	0.1 to 0.3	5 to 11
4	0.6 to 7	0.3 to 4	11 to 35
1	7 to 96	4 to 80	35 to 179
0	> 96	> 80	> 179

To start, some parameters are declared.

```
>>> from fipy import CellVariable, FaceVariable, Grid2D, DiffusionTerm, Viewer
>>> from fipy.tools import numerix
```

```
>>> L = 1.0
>>> N = 50
>>> dL = L / N
>>> viscosity = 1
>>> U = 1.
>>> #0.8 for pressure and 0.5 for velocity are typical relaxation values for SIMPLE
>>> pressureRelaxation = 0.8
>>> velocityRelaxation = 0.5
>>> if __name__ == '__main__':
...     sweeps = 300
... else:
...     sweeps = 5
```

Build the mesh.

```
>>> mesh = Grid2D(nx=N, ny=N, dx=dL, dy=dL)
```

Declare the variables.

```
>>> pressure = CellVariable(mesh=mesh, name='pressure')
>>> pressureCorrection = CellVariable(mesh=mesh)
>>> xVelocity = CellVariable(mesh=mesh, name='X velocity')
>>> yVelocity = CellVariable(mesh=mesh, name='Y velocity')
```

The velocity is required as a rank-1 *FaceVariable* for calculating the mass flux. This is required by the Rhie-Chow correction to avoid pressure/velocity decoupling.

```
>>> velocity = FaceVariable(mesh=mesh, rank=1)
```

Build the Stokes equations in the cell centers.

```
>>> xVelocityEq = DiffusionTerm(coeff=viscosity) - pressure.grad.dot([1., 0.])
>>> yVelocityEq = DiffusionTerm(coeff=viscosity) - pressure.grad.dot([0., 1.])
```

In this example the SIMPLE algorithm is used to couple the pressure and momentum equations. Let us assume we have solved the discretized momentum equations using a guessed pressure field p^* to obtain a velocity field \vec{u}^* . That is \vec{u}^* is found from

$$a_P \vec{u}_P^* = \sum_f a_A \vec{u}_A^* - V_P (\nabla p^*)_P$$

We would like to somehow correct these initial fields to satisfy both the discretized momentum and continuity equations. We now try to correct these initial fields with a correction such that $\vec{u} = \vec{u}^* + \vec{u}'$ and $p = p^* + p'$, where \vec{u} and p now satisfy the momentum and continuity equations. Substituting the exact solution into the equations we obtain,

$$\nabla \cdot (\mu \nabla \vec{u}') = \nabla p'$$

and

$$\nabla \cdot \vec{u}^* + \nabla \cdot \vec{u}' = 0$$

We now use the discretized form of the equations to write the velocity correction in terms of the pressure correction. The discretized form of the above equation results in an equation for $p = p'$,

$$a_P \vec{u}'_P = \sum_f a_A \vec{u}'_A - V_P (\nabla p')_P$$

where notation from *Linear Equations* is used. The SIMPLE algorithm drops the second term in the above equation to leave,

$$\vec{u}'_P = -\frac{V_P (\nabla p')_P}{a_P}$$

By substituting the above expression into the continuity equations we obtain the pressure correction equation,

$$\nabla \frac{V_P}{a_P} \cdot \nabla p' = \nabla \cdot \vec{u}^*$$

In the discretized version of the above equation V_P/a_P is approximated at the face by $A_f d_{AP}/(a_P)_f$. In *FiPy* the pressure correction equation can be written as,

```
>>> ap = CellVariable(mesh=mesh, value=1.)
>>> coeff = 1./ ap.arithmetricFaceValue*mesh._faceAreas * mesh._cellDistances
>>> pressureCorrectionEq = DiffusionTerm(coeff=coeff) - velocity.divergence
```

Above would work good on a staggered grid, however, on a colocated grid as *FiPy* uses, the term `velocity.divergence` will cause oscillations in the pressure solution as velocity is a face variable. We can apply the Rhee-Chow correction terms for this. In this an intermediate velocity term \vec{u}^\diamond is considered which does not contain the pressure corrections:

$$\vec{u}_P^\diamond = \vec{u}_P^* + \frac{V_P}{a_P} (\nabla p^*)_P = \sum_f \frac{a_A}{a_P} \vec{u}_A^*$$

This velocity is interpolated at the edges, after which the pressure correction term is added again, but now considered at the edge:

$$\vec{u}_f = \frac{1}{2} (\vec{u}_L^\diamond + \vec{u}_R^\diamond) - \left(\frac{V}{a_P} \right)_{\text{avg L,R}} (\nabla p_f^*)$$

where $\left(\frac{V}{a_P} \right)_{\text{avg L,R}}$ is assumed a good approximation at the edge. Here L and R denote the two cells adjacent to the face. Expanding the not calculated terms we arrive at

$$\vec{u}_f = \frac{1}{2} (\vec{u}_L^* + \vec{u}_R^*) + \frac{1}{2} \left(\frac{V}{a_P} \right)_{\text{avg L,R}} (\nabla p_L^* + \nabla p_R^*) - \left(\frac{V}{a_P} \right)_{\text{avg L,R}} (\nabla p_f^*)$$

where we have replaced the coefficients of the cell pressure gradients by an averaged value over the edge. This formula has the consequence that the velocity on a face depends not only on the pressure of the adjacent cells, but also on the cells further away, which removes the unphysical pressure oscillations. We start by introducing needed terms

```
>>> from fipy.variables.faceGradVariable import _FaceGradVariable
>>> volume = CellVariable(mesh=mesh, value=mesh.cellVolumes, name='Volume')
>>> contrvolume=volume.arithmetricFaceValue
```

And set up the velocity with this formula in the SIMPLE loop. Now, set up the no-slip boundary conditions

```
>>> xVelocity.constrain(0., mesh.facesRight | mesh.facesLeft | mesh.facesBottom)
>>> xVelocity.constrain(U, mesh.facesTop)
>>> yVelocity.constrain(0., mesh.exteriorFaces)
>>> X, Y = mesh.faceCenters
>>> pressureCorrection.constrain(0., mesh.facesLeft & (Y < dL))
```

Set up the viewers,

```
>>> if __name__ == '__main__':
...     viewer = Viewer(vars=(pressure, xVelocity, yVelocity, velocity),
...                   xmin=0., xmax=1., ymin=0., ymax=1., colorbar='vertical', scale=5)
```

Below, we iterate for a set number of sweeps. We use the `sweep()` method instead of `solve()` because we require the residual for output. We also use the `cacheMatrix()`, `matrix`, `cacheRHsVector()` and `RHSvector` because both the matrix and RHS vector are required by the SIMPLE algorithm. Additionally, the `sweep()` method is passed an underRelaxation factor to relax the solution. This argument cannot be passed to `solve()`.

```
>>> from builtins import range
>>> for sweep in range(sweeps):
...

```

(continues on next page)

(continued from previous page)

```

.... ## solve the Stokes equations to get starred values
.... xVelocityEq.cacheMatrix()
.... xres = xVelocityEq.sweep(var=xVelocity,
....                         underRelaxation=velocityRelaxation)
.... xmat = xVelocityEq.matrix

.... yres = yVelocityEq.sweep(var=yVelocity,
....                         underRelaxation=velocityRelaxation)

.... ## update the ap coefficient from the matrix diagonal
.... ap[:] = -numerix.asarray(xmat.takeDiagonal())

.... ## update the face velocities based on starred values with the
.... ## Rhie-Chow correction.
.... ## cell pressure gradient
.... presgrad = pressure.grad
.... ## face pressure gradient
.... facepresgrad = _FaceGradVariable(pressure)

.... velocity[0] = xVelocity.arithmetricFaceValue \
.... + contrvvolume / ap.arithmetricFaceValue * \
.... (presgrad[0].arithmetricFaceValue-facepresgrad[0])
.... velocity[1] = yVelocity.arithmetricFaceValue \
.... + contrvvolume / ap.arithmetricFaceValue * \
.... (presgrad[1].arithmetricFaceValue-facepresgrad[1])
.... velocity[..., mesh.exteriorFaces.value] = 0.
.... velocity[0, mesh.facesTop.value] = U


.... ## solve the pressure correction equation
.... pressureCorrectionEq.cacheRHSvector()
.... ## left bottom point must remain at pressure 0, so no correction
.... pres = pressureCorrectionEq.sweep(var=pressureCorrection)
.... rhs = pressureCorrectionEq.RHSvector

.... ## update the pressure using the corrected value
.... pressure.setValue(pressure + pressureRelaxation * pressureCorrection )
.... ## update the velocity using the corrected pressure
.... xVelocity.setValue(xVelocity - pressureCorrection.grad[0] / \
....                     ap * mesh.cellVolumes)
.... yVelocity.setValue(yVelocity - pressureCorrection.grad[1] / \
....                     ap * mesh.cellVolumes)

.... if __name__ == '__main__':
....     if sweep%10 == 0:
....         print('sweep:', sweep, ', x residual:', xres, \
....               ', y residual', yres, \
....               ', p residual:', pres, \
....               ', continuity:', max(abs(rhs)))

....     viewer.plot()

```

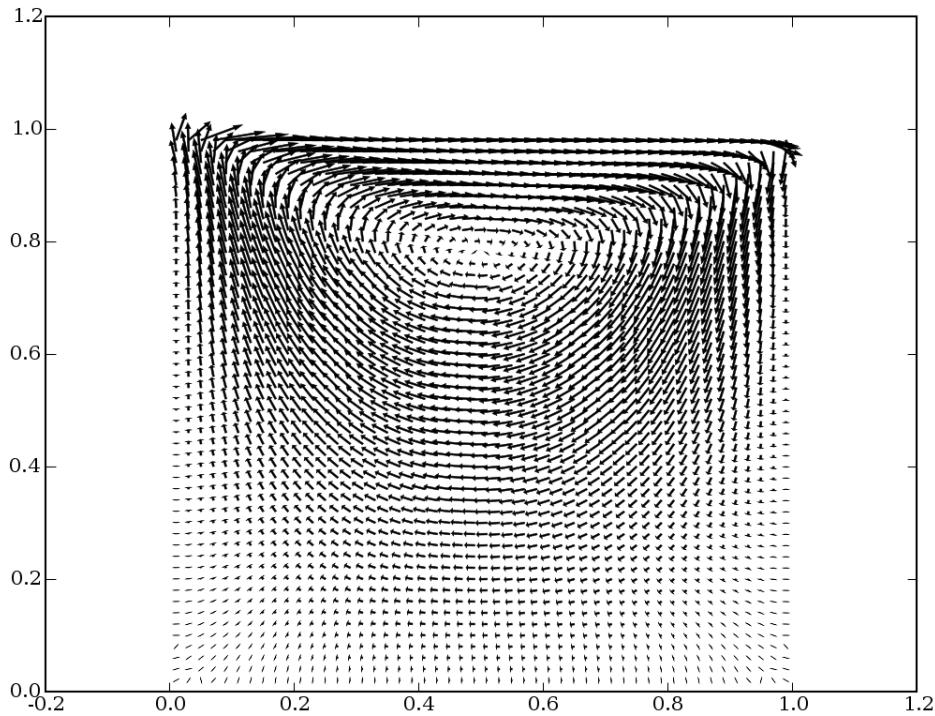

Test values in the last cell.

```
>>> print(numerix.allclose(pressure.globalValue[..., -1], 162.790867927))  
1  
>>> print(numerix.allclose(xVelocity.globalValue[..., -1], 0.265072740929))  
1  
>>> print(numerix.allclose(yVelocity.globalValue[..., -1], -0.150290488304))  
1
```

23.7.2 examples.flow.test

23.8 examples.levelSet

Modules

`examples.levelSet.advection`

`examples.levelSet.distanceFunction`

`examples.levelSet.electroChem`

`examples.levelSet.surfactant`

`examples.levelSet.test`

Run all the test cases in examples/

23.8.1 examples.levelSet.advection

Modules

<code>examples.levelSet.advection.circle</code>	Solve a circular distance function equation and then advect it.
<code>examples.levelSet.advection.mesh1D</code>	Solve the distance function equation in one dimension and then advect it.
<code>examples.levelSet.advection.test</code>	
<code>examples.levelSet.advection.trench</code>	This example creates a trench with the following zero level set:

examples.levelSet.advection.circle

Solve a circular distance function equation and then advect it.

This example first imposes a circular distance function:

$$\phi(x, y) = \left[\left(x - \frac{L}{2} \right)^2 + \left(y - \frac{L}{2} \right)^2 \right]^{1/2} - \frac{L}{4}$$

The variable is advected with,

$$\frac{\partial \phi}{\partial t} + \vec{u} \cdot \nabla \phi = 0$$

The scheme used in the `FirstOrderAdvectionTerm` preserves the `var` as a distance function. The solution to this problem will be demonstrated in the following script. Firstly, setup the parameters.

```
>>> from fipy import CellVariable, Grid2D, DistanceVariable, TransientTerm,
... FirstOrderAdvectionTerm, AdvectionTerm, Viewer
>>> from fipy.tools import numerix
```

```
>>> L = 1.
>>> N = 25
>>> velocity = 1.
>>> cfl = 0.1
>>> velocity = 1.
>>> distanceToTravel = L / 10.
>>> radius = L / 4.
>>> dL = L / N
>>> timeStepDuration = cfl * dL / velocity
>>> steps = int(distanceToTravel / dL / cfl)
```

Construct the mesh.

```
>>> mesh = Grid2D(dx=dL, dy=dL, nx=N, ny=N)
```

Construct a `distanceVariable` object.

```
>>> var = DistanceVariable(
...     name = 'level set variable',
...     mesh = mesh,
...     value = 1.,
...     hasOld = 1)
```

Initialize the *distanceVariable* to be a circular distance function.

```
>>> x, y = mesh.cellCenters
>>> initialArray = numerix.sqrt((x - L / 2.)**2 + (y - L / 2.)**2) - radius
>>> var.setValue(initialArray)
```

The advection equation is constructed.

```
>>> advEqn = TransientTerm() + FirstOrderAdvectionTerm(velocity)
```

The problem can then be solved by executing a series of time steps.

```
>>> from builtins import range
>>> if __name__ == '__main__':
...     viewer = Viewer(vars=var, datamin=-radius, datamax=radius)
...     viewer.plot()
...     for step in range(steps):
...         var.updateOld()
...         advEqn.solve(var, dt=timeStepDuration)
...         viewer.plot()
```

The result can be tested with the following commands.

```
>>> from builtins import range
>>> for step in range(steps):
...     var.updateOld()
...     advEqn.solve(var, dt=timeStepDuration)
>>> x = numerix.array(mesh.cellCenters[0])
>>> distanceTravelled = timeStepDuration * steps * velocity
>>> answer = initialArray - distanceTravelled
>>> answer = numerix.where(answer < 0., -1001., answer)
>>> solution = numerix.where(answer < 0., -1001., numerix.array(var))
>>> numerix.allclose(answer, solution, atol=4.7e-3)
1
```

If the advection equation is built with the *AdvectionTerm()* the result is more accurate,

```
>>> var.setValue(initialArray)
>>> advEqn = TransientTerm() + AdvectionTerm(velocity)
>>> from builtins import range
>>> for step in range(steps):
...     var.updateOld()
...     advEqn.solve(var, dt=timeStepDuration)
>>> solution = numerix.where(answer < 0., -1001., numerix.array(var))
>>> numerix.allclose(answer, solution, atol=1.02e-3)
1
```

examples.levelSet.advection.mesh1D

Solve the distance function equation in one dimension and then advect it.

This example first solves the distance function equation in one dimension:

$$|\nabla \phi| = 1$$

with $\phi = 0$ at $x = L/5$.

The variable is then advected with,

$$\frac{\partial \phi}{\partial t} + \vec{u} \cdot \nabla \phi = 0$$

The scheme used in the *FirstOrderAdvectionTerm* preserves the *var* as a distance function.

The solution to this problem will be demonstrated in the following script. Firstly, setup the parameters.

```
>>> from fipy import CellVariable, Grid1D, DistanceVariable, TransientTerm,
...     FirstOrderAdvectionTerm, AdvectionTerm, Viewer
>>> from fipy.tools import numerix, serialComm
```

```
>>> velocity = 1.
>>> dx = 1.
>>> nx = 10
>>> timeStepDuration = 1.
>>> steps = 2
>>> L = nx * dx
>>> interfacePosition = L / 5.
```

Construct the mesh.

```
>>> mesh = Grid1D(dx=dx, nx=nx, communicator=serialComm)
```

Construct a *distanceVariable* object.

```
>>> var = DistanceVariable(name='level set variable',
...                         mesh=mesh,
...                         value=-1.,
...                         hasOld=1)
>>> var.setValue(1., where=mesh.cellCenters[0] > interfacePosition)
>>> var.calcDistanceFunction()
```

The *advectionEquation* is constructed.

```
>>> advEqn = TransientTerm() + FirstOrderAdvectionTerm(velocity)
```

The problem can then be solved by executing a series of time steps.

```
>>> from builtins import range
>>> if __name__ == '__main__':
...     viewer = Viewer(vars=var, datamin=-10., datamax=10.)
...     viewer.plot()
...     for step in range(steps):
...         var.updateOld()
...         advEqn.solve(var, dt=timeStepDuration)
...         viewer.plot()
```

The result can be tested with the following code:

```
>>> from builtins import range
>>> for step in range(steps):
...     var.updateOld()
...     advEqn.solve(var, dt=timeStepDuration)
>>> x = mesh.cellCenters[0]
>>> distanceTravelled = timeStepDuration * steps * velocity
>>> answer = x - interfacePosition - timeStepDuration * steps * velocity
>>> answer = numerix.where(x < distanceTravelled,
...                         x[0] - interfacePosition, answer)
>>> print(var.allclose(answer))
1
```

examples.levelSet.advection.test

examples.levelSet.advection.trench

This example creates a trench with the following zero level set:

$$\begin{aligned}\phi(x, y) &= 0 \text{when } y = L_y/5 \text{ and } x \geq L_x/2 \\ \phi(x, y) &= 0 \text{when } L_y/5 \leq y \leq 3L_y/5 \text{ and } x = L_x/2 \\ \phi(x, y) &= 0 \text{when } y = 3L_y/5 \text{ and } x \leq L_x/2\end{aligned}$$

```
>>> from fipy import CellVariable, Grid2D, DistanceVariable, TransientTerm,
... FirstOrderAdvectionTerm, AdvectionTerm, Viewer
>>> from fipy.tools import numerix, serialComm
```

```
>>> height = 0.5
>>> Lx = 0.4
>>> Ly = 1.
>>> dx = 0.01
>>> velocity = 1.
>>> cfl = 0.1
```

```
>>> nx = int(Lx / dx)
>>> ny = int(Ly / dx)
>>> timeStepDuration = cfl * dx / velocity
>>> steps = 200
```

```
>>> mesh = Grid2D(dx = dx, dy = dx, nx = nx, ny = ny, communicator=serialComm)
```

```
>>> var = DistanceVariable(name = 'level set variable',
...                         mesh = mesh,
...                         value = -1.,
...                         hasOld = 1
... )
```

```
>>> x, y = mesh.cellCenters
>>> var.setValue(1, where=(y > 0.6 * Ly) | ((y > 0.2 * Ly) & (x > 0.5 * Lx)))
```

```
>>> var.calcDistanceFunction()
```

```
>>> advEqn = TransientTerm() + FirstOrderAdvectionTerm(velocity)
```

The trench is then advected with a unit velocity. The following test can be made for the initial position of the interface:

```
>>> r1 = -numerix.sqrt((x - Lx / 2)**2 + (y - Ly / 5)**2)
>>> r2 = numerix.sqrt((x - Lx / 2)**2 + (y - 3 * Ly / 5)**2)
>>> d = numerix.zeros((len(x), 3), 'd')
>>> d[:, 0] = numerix.where(x >= Lx / 2, y - Ly / 5, r1)
>>> d[:, 1] = numerix.where(x <= Lx / 2, y - 3 * Ly / 5, r2)
>>> d[:, 2] = numerix.where(numerix.logical_and(Ly / 5 <= y, y <= 3 * Ly / 5), x - Lx / 2, d[:, 0])
>>> argmins = numerix.argmin(numerix.absolute(d), axis = 1)
>>> answer = numerix.take(d.ravel(), numerix.arange(len(argmins))*3 + argmins)
>>> print(var.allclose(answer, atol = 1e-1))
1
```

Advect the interface and check the position.

```
>>> if __name__ == '__main__':
...     viewer = Viewer(vars=var, datamin=-0.1, datamax=0.1)
...
...     viewer.plot()
```

```
>>> from builtins import range
>>> for step in range(steps):
...     var.updateOld()
...     advEqn.solve(var, dt = timeStepDuration)
...     if __name__ == '__main__':
...         viewer.plot()
```

```
>>> distanceMoved = timeStepDuration * steps * velocity
>>> answer = answer - distanceMoved
>>> answer = numerix.where(answer < 0., 0., answer)
>>> var.setValue(numerix.where(var < 0., 0., var))
>>> print(var.allclose(answer, atol = 1e-1))
1
```

23.8.2 examples.levelSet.distanceFunction

Modules

<code>examples.levelSet.distanceFunction.circle</code>	Solve the level set equation in two dimensions for a circle.
<code>examples.levelSet.distanceFunction.interior</code>	Here we solve the level set equation in two dimension for an interior region.
<code>examples.levelSet.distanceFunction.mesh1D</code>	Create a level set variable in one dimension.
<code>examples.levelSet.distanceFunction.square</code>	Here we solve the level set equation in two dimensions for a square.
<code>examples.levelSet.distanceFunction.test</code>	

examples.levelSet.distanceFunction.circle

Solve the level set equation in two dimensions for a circle.

The 2D level set equation can be written,

$$|\nabla \phi| = 1$$

and the boundary condition for a circle is given by, $\phi = 0$ at $(x - L/2)^2 + (y - L/2)^2 = (L/4)^2$.

The solution to this problem will be demonstrated in the following script. Firstly, setup the parameters.

```
>>> from fipy import CellVariable, Grid2D, DistanceVariable, TransientTerm,
... FirstOrderAdvectionTerm, AdvectionTerm, Viewer
>>> from fipy.tools import numerix, serialComm
```

```
>>> dx = 1.
>>> dy = 1.
>>> nx = 11
>>> ny = 11
>>> Lx = nx * dx
>>> Ly = ny * dy
```

Construct the mesh.

```
>>> mesh = Grid2D(dx=dx, dy=dy, nx=nx, ny=ny, communicator=serialComm)
```

Construct a *distanceVariable* object.

```
>>> var = DistanceVariable(name='level set variable',
...                         mesh=mesh,
...                         value=-1.,
...                         hasOld=1)
```

```
>>> x, y = mesh.cellCenters
>>> var.setValue(1, where=(x - Lx / 2.)**2 + (y - Ly / 2.)**2 < (Lx / 4.)**2)
```

```
>>> var.calcDistanceFunction(order=1)
```

```
>>> if __name__ == '__main__':
...     viewer = Viewer(vars=var, datamin=-5., datamax=5.)
...     viewer.plot()
```

The result can be tested with the following commands.

```
>>> dY = dy / 2.
>>> dX = dx / 2.
>>> mm = min (dX, dY)
>>> m1 = dY * dX / numerix.sqrt(dY**2 + dX**2)
>>> def evalCell(phix, phiy, dx, dy):
...     aa = dy**2 + dx**2
...     bb = -2 * (phix * dy**2 + phiy * dx**2)
...     cc = dy**2 * phix**2 + dx**2 * phiy**2 - dx**2 * dy**2
...     sqr = numerix.sqrt(bb**2 - 4. * aa * cc)
...     return ((-bb - sqr) / 2. / aa, (-bb + sqr) / 2. / aa)
>>> v1 = evalCell(-dY, -m1, dx, dy)[0]
>>> v2 = evalCell(-m1, -dX, dx, dy)[0]
>>> v3 = evalCell(m1, m1, dx, dy)[1]
>>> v4 = evalCell(v3, dY, dx, dy)[1]
>>> v5 = evalCell(dX, v3, dx, dy)[1]
>>> MASK = -1000.
>>> trialValues = CellVariable(mesh=mesh, value=
...     numerix.array((
...         MASK, MASK, MASK, MASK, MASK, MASK, MASK, MASK, MASK,
...         MASK, MASK, MASK, MASK, -3*dY, -3*dY, MASK, MASK, MASK,
...         MASK, MASK, MASK, v1, -dY, -dY, -dY, v1, MASK, MASK, MASK,
...         MASK, MASK, v2, -m1, m1, dY, m1, -m1, v2, MASK, MASK,
...         MASK, -dX*3, -dX, m1, v3, v4, v3, m1, -dX, -dX*3, MASK,
...         MASK, -dX*3, -dX, dX, v5, MASK, v5, dX, -dX, -dX*3, MASK,
...         MASK, -dX*3, -dX, m1, v3, v4, v3, m1, -dX, -dX*3, MASK,
...         MASK, MASK, v2, -m1, m1, dY, m1, -m1, v2, MASK, MASK,
...         MASK, MASK, MASK, v1, -dY, -dY, -dY, v1, MASK, MASK, MASK,
...         MASK, MASK, MASK, MASK, -3*dY, -3*dY, MASK, MASK, MASK,
...         MASK, MASK, MASK, MASK, MASK, MASK, MASK, MASK, MASK), 'd'))
```

```
>>> var[numerix.array(trialValues == MASK)] = MASK
>>> print(numerix.allclose(var, trialValues))
True
```

examples.levelSet.distanceFunction.interior

Here we solve the level set equation in two dimension for an interior region. The equation is given by:

$$|\nabla \phi| = 1$$

$$\phi = 0 \text{ at } \begin{cases} x = (d, L-d) \text{ for } d \leq y \leq L-d \\ y = (d, L-d) \text{ for } d \leq x \leq L-d \end{cases}$$

Do the tests:

```
>>> var.calcDistanceFunction(order=1)
```

```
>>> dX = dx / 2.
>>> dY = dy / 2.
>>> mm = dX * dY / numerix.sqrt(dX**2 + dY**2)
>>> def evalCell(phi_x, phi_y, dx, dy):
...     aa = dy**2 + dx**2
...     bb = -2 * (phi_x * dy**2 + phi_y * dx**2)
...     cc = dy**2 * phi_x**2 + dx**2 * phi_y**2 - dx**2 * dy**2
...     sqr = numerix.sqrt(bb**2 - 4. * aa * cc)
...     return ((-bb - sqr) / 2. / aa, (-bb + sqr) / 2. / aa)
>>> v1 = evalCell(dY, dX, dx, dy)[1]
>>> v2 = max(-dY**3, -dX**3)
>>> values = numerix.array((v1, dY, dY, v1,
...                           dX, -mm, -dY, -mm, dX,
...                           dX, -dX, -v1, -dX, dX,
...                           dX, -mm, -dY, -mm, dX,
...                           v1, dY, dY, dY, v1))
>>> print(var.allclose(values, atol = 1e-10))
1
```

examples.levelSet.distanceFunction.mesh1D

Create a level set variable in one dimension.

The level set variable calculates its value over the domain to be the distance from the zero level set. This can be represented succinctly in the following equation with a boundary condition at the zero level set such that,

$$\frac{\partial \phi}{\partial x} = 1$$

with the boundary condition, $\phi = 0$ at $x = L/2$.

The solution to this problem will be demonstrated in the following script. Firstly, setup the parameters.

```
>>> from fipy import CellVariable, Grid1D, DistanceVariable, TransientTerm,
... FirstOrderAdvectionTerm, AdvectionTerm, Viewer
>>> from fipy.tools import numerix, serialComm
```

```
>>> dx = 0.5
>>> nx = 10
```

Construct the mesh.

```
>>> mesh = Grid1D(dx=dx, nx=nx, communicator=serialComm)
```

Construct a *distanceVariable* object.

```
>>> var = DistanceVariable(name='level set variable',
...                         mesh=mesh,
...                         value=-1.,
...                         hasOld=1)
>>> x = mesh.cellCenters[0]
>>> var.setValue(1, where=x > dx * nx / 2)
```

Once the initial positive and negative regions have been initialized the `calcDistanceFunction()` method can be used to recalculate `var` as a distance function from the zero level set.

```
>>> var.calcDistanceFunction()
```

The problem can then be solved by executing the `solve()` method of the equation.

```
>>> if __name__ == '__main__':
...     viewer = Viewer(vars=var, datamin=-5., datamax=5.)
...     viewer.plot()
```

The result can be tested with the following commands.

```
>>> print(numerix.allclose(var, x - dx * nx / 2))
1
```

examples.levelSet.distanceFunction.square

Here we solve the level set equation in two dimensions for a square. The equation is given by:

$$|\nabla \phi| = 1$$

$$\phi = 0 \quad \text{at} \quad \begin{cases} x = (L/3, 2L/3) & \text{for } L/3 \leq y \leq 2L/3 \\ y = (L/3, 2L/3) & \text{for } L/3 \leq x \leq 2L/3 \end{cases}$$

Do the tests:

```
>>> var.calcDistanceFunction(order=1)
```

```
>>> def evalCell(phi_x, phi_y, dx, dy):
...     aa = dy**2 + dx**2
...     bb = -2 * (phi_x * dy**2 + phi_y * dx**2)
...     cc = dy**2 * phi_x**2 + dx**2 * phi_y**2 - dx**2 * dy**2
...     sqr = numerix.sqrt(bb**2 - 4. * aa * cc)
...     return ((-bb - sqr) / 2. / aa, (-bb + sqr) / 2. / aa)
>>> val = evalCell(-dy / 2., -dx / 2., dx, dy)[0]
>>> v1 = evalCell(val, -3. * dx / 2., dx, dy)[0]
>>> v2 = evalCell(-3. * dy / 2., val, dx, dy)[0]
>>> v3 = evalCell(v2, v1, dx, dy)[0]
>>> v4 = dx * dy / numerix.sqrt(dx**2 + dy**2) / 2
>>> arr = numerix.array((
...     v3, v2, -3. * dy / 2., v2, v3,
...     v1, val, -dy / 2., val, v1,
...     -3. * dx / 2., -dx / 2., v4, -dx / 2., -3. * dx / 2.,
...     v1, val, -dy / 2., val, v1,
...     v3, v2, -3. * dy / 2., v2, v3
... ))
>>> print(var.allclose(arr))
1
```

examples.levelSet.distanceFunction.test**23.8.3 examples.levelSet.electroChem****Modules**

<code>examples.levelSet.electroChem. adsorbingSurfactantEquation</code>	This example tests 1D adsorption onto an interface and subsequent depletion from the bulk.
<code>examples.levelSet.electroChem. gapFillDistanceVariable</code>	The <code>gapFillMesh</code> function glues 3 meshes together to form a composite mesh.
<code>examples.levelSet.electroChem.gold</code>	Model electrochemical superfill of gold using the CEAC mechanism.
<code>examples.levelSet.electroChem. howToWriteAScript</code>	Tutorial for writing an electrochemical superfill script.
<code>examples.levelSet.electroChem.leveler</code>	Model electrochemical superfill of copper with leveler and accelerator additives.
<code>examples.levelSet.electroChem.lines</code>	
<code>examples.levelSet.electroChem. matplotlibSurfactantViewer</code>	
<code>examples.levelSet.electroChem. mayaviSurfactantViewer</code>	
<code>examples.levelSet.electroChem. metalIonDiffusionEquation</code>	
<code>examples.levelSet.electroChem. simpleTrenchSystem</code>	Model electrochemical superfill using the CEAC mechanism.
<code>examples.levelSet.electroChem. surfactantBulkDiffusionEquation</code>	
<code>examples.levelSet.electroChem.test</code>	
<code>examples.levelSet.electroChem.trenchMesh</code>	

examples.levelSet.electroChem.adsorbingSurfactantEquation**examples.levelSet.electroChem.adsorption**

This example tests 1D adsorption onto an interface and subsequent depletion from the bulk. The governing equations are given by,

$$\begin{aligned} c_t &= Dc_{xx} \\ Dc_x &= \Gamma k c(1 - \theta) \quad \text{at } x = 0 \end{aligned}$$

and

$$c = c^\infty \quad \text{at } x = L$$

and on the interface

$$Dc_x = -kc(1 - \theta) \quad \text{at } x = 0$$

There is a dimensionless number M that governs whether the system is in an interface limited ($M \gg 1$) or diffusion limited ($M \ll 1$) regime. There are analytical solutions for both regimes. The dimensionless number is given by:

$$M = \frac{D}{L^2 k c_{\text{inf}}}.$$

The test solution provided here is for the case of interface limited kinetics. The analytical solutions are given by,

$$-D \ln(1 - \theta) + kL\Gamma_0\theta = \frac{kDc^\infty t}{\Gamma_0}$$

and

$$c(x) = \frac{c^\infty [k\Gamma_0(1 - \theta)x/D]}{1 + k\Gamma_0(1 - \theta)L/D}$$

Make sure the dimensionless parameter is large enough

```
>>> (diffusion / cinf / L / L / rateConstant) > 100
True
```

Start time stepping:

```
>>> currentTime = 0.
>>> from builtins import range
>>> for i in range(totalTimeSteps):
...     surfEqn.solve(surfactantVar, dt = dt)
...     bulkEqn.solve(bulkVar, dt = dt)
...     currentTime += dt
```

Compare the analytical and numerical results:

```
>>> theta = surfactantVar.interfaceVar[1]

>>> numerix.allclose(currentTimeFunc(theta), currentTime, rtol = 1e-4)
1
>>> numerix.allclose(concentrationFunc(theta), bulkVar[1:], rtol = 1e-4)
1
```

examples.levelSet.electroChem.gapFillDistanceVariable

examples.levelSet.electroChem.gapFillMesh

The `gapFillMesh` function glues 3 meshes together to form a composite mesh. The first mesh is a `Grid2D` object that is fine and deals with the area around the trench or via. The second mesh is a `Gmsh2D` object that forms a transition mesh from a fine to a coarse region. The third mesh is another `Grid2D` object that forms the boundary layer. This region consists of very large elements and is only used for the diffusion in the boundary layer.

examples.levelSet.electroChem.gold

Model electrochemical superfill of gold using the CEAC mechanism.

This input file is a demonstration of the use of *FiPy* for modeling gold superfill. The material properties and experimental parameters used are roughly those that have been previously published [27].

To run this example from the base FiPy directory type:

```
$ python examples/levelSet/electroChem/gold.py
```

at the command line. The results of the simulation will be displayed and the word `finished` in the terminal at the end of the simulation. The simulation will only run for 10 time steps. To run with a different number of time steps change the `numberOfSteps` argument as follows,

```
>>> runGold(numberOfSteps=10, displayViewers=False)  
1
```

Change the `displayViewers` argument to `True` if you wish to see the results displayed on the screen. This example has a more realistic default boundary layer depth and thus requires `gmsh` to construct a more complex mesh.

There are a few differences between the gold superfill model presented in this example and in `examples.levelSet.electroChem.simpleTrenchSystem`. Most default values have changed to account for a different metal ion (gold) and catalyst (lead). In this system the catalyst is not present in the electrolyte but instead has a non-zero initial coverage. Thus quantities associated with bulk catalyst and catalyst accumulation are not defined. The current density is given by,


$$i = \frac{c_m}{c_m^\infty} (b_0 + b_1 \theta).$$

The more common representation of the current density includes an exponential part. Here it is buried in b_0 and b_1 . The governing equation for catalyst evolution includes a term for catalyst consumption on the interface and is given by

$$\dot{\theta} = Jv\theta - k_c v\theta$$

where k_c is the consumption coefficient (`consumptionRateConstant`). The trench geometry is also given a slight taper, given by `taperAngle`.

If the Mayavi plotting software is installed (see [Installation](#)) then a plot should appear that is updated every 10 time steps and will eventually resemble the image below.

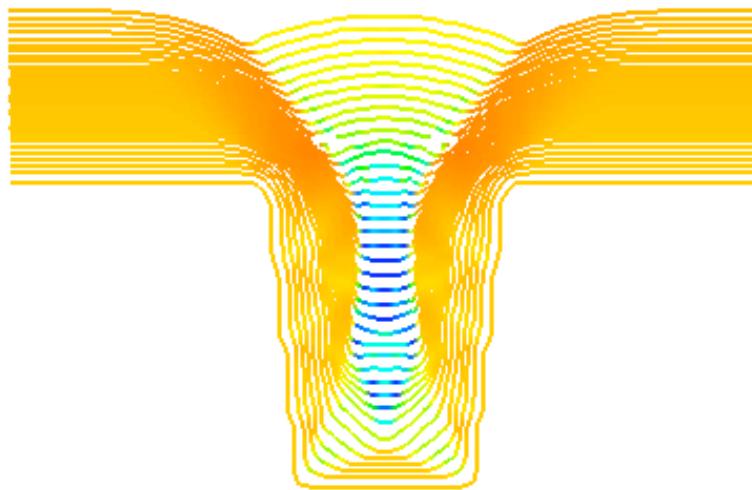

[examples.levelSet.electroChem.howToWriteAScript](#)

Tutorial for writing an electrochemical superfill script.

This input file demonstrates how to create a new superfill script if the existing suite of scripts do not meet the required needs. It provides the functionality of [examples.levelSet.electroChem.simpleTrenchSystem](#).

To run this example from the base FiPy directory type:

```
$ python examples/levelSet/electroChem/howToWriteAScript.py --numberOfElements=10000 --
˓→numberOfSteps=800
```

at the command line. The results of the simulation will be displayed and the word `finished` in the terminal at the end of the simulation. To obtain this example in a plain script file in order to edit and run type:

```
$ python setup.py copy_script --From examples/levelSet/electroChem/howToWriteAScript.py -
˓→-To myScript.py
```

in the base `FiPy` directory. The file `myScript.py` will contain the script.

The following is an explicit explanation of the input commands required to set up and run the problem. At the top of the file all the parameter values are set. Their use will be explained during the instantiation of various objects and are the same as those explained in [examples.levelSet.electroChem.simpleTrenchSystem](#).

The following parameters (all in S.I. units) represent,

- physical constants,

```
>>> faradaysConstant = 9.6e4
>>> gasConstant = 8.314
>>> transferCoefficient = 0.5
```

- properties associated with the catalyst species,

```
>>> rateConstant0 = 1.76
>>> rateConstant3 = -245e-6
>>> catalystDiffusion = 1e-9
>>> siteDensity = 9.8e-6
```

- properties of the cupric ions,

```
>>> molarVolume = 7.1e-6
>>> charge = 2
>>> metalDiffusionCoefficient = 5.6e-10
```

- parameters dependent on experimental constraints,

```
>>> temperature = 298.
>>> overpotential = -0.3
>>> bulkMetalConcentration = 250.
>>> catalystConcentration = 5e-3
>>> catalystCoverage = 0.
```

- parameters obtained from experiments on flat copper electrodes,

```
>>> currentDensity0 = 0.26
>>> currentDensity1 = 45.
```

- general simulation control parameters,

```
>>> cflNumber = 0.2
>>> number_of_Cells_in_Narrow_Band = 10
>>> cellsBelowTrench = 10
>>> cellSize = 0.1e-7
```

- parameters required for a trench geometry,

```
>>> trenchDepth = 0.5e-6
>>> aspectRatio = 2.
>>> trenchSpacing = 0.6e-6
>>> boundaryLayerDepth = 0.3e-6
```

The hydrodynamic boundary layer depth (boundaryLayerDepth) is intentionally small in this example to keep the mesh at a reasonable size.

Build the mesh:

```
>>> from fipy.tools.parser import parse
>>> number_of_elements = parse('--number_of_elements', action='store',
...     type='int', default=-1)
>>> number_of_steps = parse('--number_of_steps', action='store',
...     type='int', default=2)
```

```
>>> from fipy import *
```

```
>>> if numberOfElements != -1:
...     pos = trenchSpacing * cellsBelowTrench / 4 / numberOfElements
...     sqr = trenchSpacing * (trenchDepth + boundaryLayerDepth) \
...           / (2 * numberOfElements)
...     cellSize = pos + numerix.sqrt(pos**2 + sqr)
... else:
...     cellSize = 0.1e-7
```

```
>>> yCells = cellsBelowTrench \
...         + int((trenchDepth + boundaryLayerDepth) / cellSize)
>>> xCells = int(trenchSpacing / 2 / cellSize)
```

```
>>> from .metalIonDiffusionEquation import buildMetalIonDiffusionEquation
>>> from .adsorbingSurfactantEquation import AdsorbingSurfactantEquation
```

```
>>> from fipy import serialComm
>>> mesh = Grid2D(dx=cellSize,
...                 dy=cellSize,
...                 nx=xCells,
...                 ny=yCells,
...                 communicator=serialComm)
```

A `distanceVariable` object, ϕ , is required to store the position of the interface.

The `distanceVariable` calculates its value so that it is a distance function (*i.e.* holds the distance at any point in the mesh from the electrolyte/metal interface at $\phi = 0$) and $|\nabla\phi| = 1$.

First, create the ϕ variable, which is initially set to -1 everywhere. Create an initial variable,

```
>>> narrowBandWidth = numberOfCellsInNarrowBand * cellSize
>>> distanceVar = DistanceVariable(
...     name='distance variable',
...     mesh=mesh,
...     value=-1.,
...     hasOld=1)
```

The electrolyte region will be the positive region of the domain while the metal region will be negative.

```
>>> bottomHeight = cellsBelowTrench * cellSize
>>> trenchHeight = bottomHeight + trenchDepth
>>> trenchWidth = trenchDepth / aspectRatio
>>> sideWidth = (trenchSpacing - trenchWidth) / 2
```

```
>>> x, y = mesh.cellCenters
>>> distanceVar.setValue(1., where=(y > trenchHeight)
...                         | ((y > bottomHeight)
...                           & (x < xCells * cellSize - sideWidth)))
```

```
>>> distanceVar.calcDistanceFunction(order=2)
```

The `distanceVariable` has now been created to mark the interface. Some other variables need to be created that govern the concentrations of various species.

Create the catalyst surfactant coverage, θ , variable. This variable influences the deposition rate.

```
>>> catalystVar = SurfactantVariable(
...     name="catalyst variable",
...     value=catalystCoverage,
...     distanceVar=distanceVar)
```

Create the bulk catalyst concentration, c_θ , in the electrolyte,

```
>>> bulkCatalystVar = CellVariable(
...     name='bulk catalyst variable',
...     mesh=mesh,
...     value=catalystConcentration)
```

Create the bulk metal ion concentration, c_m , in the electrolyte.

```
>>> metalVar = CellVariable(
...     name='metal variable',
...     mesh=mesh,
...     value=bulkMetalConcentration)
```

The following commands build the `depositionRateVariable`, v . The `depositionRateVariable` is given by the following equation.

$$v = \frac{i\Omega}{nF}$$

where Ω is the metal molar volume, n is the metal ion charge and F is Faraday's constant. The current density is given by

$$i = i_0 \frac{c_m^i}{c_m^\infty} \exp\left(\frac{-\alpha F}{RT} \eta\right)$$

where c_m^i is the metal ion concentration in the bulk at the interface, c_m^∞ is the far-field bulk concentration of metal ions, α is the transfer coefficient, R is the gas constant, T is the temperature and η is the overpotential. The exchange current density is an empirical function of catalyst coverage,

$$i_0(\theta) = b_0 + b_1\theta$$

The commands needed to build this equation are,

```
>>> expoConstant = -transferCoefficient * faradaysConstant \
...     / (gasConstant * temperature)
>>> tmp = currentDensity1 \
...     * catalystVar.interfaceVar
>>> exchangeCurrentDensity = currentDensity0 + tmp
>>> expo = numerix.exp(expoConstant * overpotential)
>>> currentDensity = expo * exchangeCurrentDensity * metalVar \
...     / bulkMetalConcentration
>>> depositionRateVariable = currentDensity * molarVolume \
...     / (charge * faradaysConstant)
```

Build the extension velocity variable v_{ext} . The extension velocity uses the `extensionEquation` to spread the velocity at the interface to the rest of the domain.

```
>>> extensionVelocityVariable = CellVariable(
...     name='extension velocity',
...     mesh=mesh,
...     value=depositionRateVariable)
```

Using the variables created above the governing equations will be built. The governing equation for surfactant conservation is given by,

$$\dot{\theta} = Jv\theta + kc_\theta^i(1 - \theta)$$

where θ is the coverage of catalyst at the interface, J is the curvature of the interface, v is the normal velocity of the interface, c_θ^i is the concentration of catalyst in the bulk at the interface. The value k is given by an empirical function of overpotential,

$$k = k_0 + k_3\eta^3$$

The above equation is represented by the `AdsorbingSurfactantEquation` in *FiPy*:

```
>>> surfactantEquation = AdsorbingSurfactantEquation(
...     surfactantVar=catalystVar,
...     distanceVar=distanceVar,
...     bulkVar=bulkCatalystVar,
...     rateConstant=rateConstant0 \
...                 + rateConstant3 * overpotential**3)
```

The variable ϕ is advected by the `advectionEquation` given by,

$$\frac{\partial \phi}{\partial t} + v_{\text{ext}}|\nabla \phi| = 0$$

and is set up with the following commands:

```
>>> advectionEquation = TransientTerm() + AdvectionTerm(extensionVelocityVariable)
```

The diffusion of metal ions from the far field to the interface is governed by,

$$\frac{\partial c_m}{\partial t} = \nabla \cdot D \nabla c_m$$

where,

$$D = \begin{cases} D_m & \text{when } \phi > 0, \\ 0 & \text{when } \phi \leq 0 \end{cases}$$

The following boundary condition applies at $\phi = 0$,

$$D\hat{n} \cdot \nabla c = \frac{v}{\Omega}.$$

The metal ion diffusion equation is set up with the following commands.

```
>>> metalEquation = buildMetalIonDiffusionEquation(
...     ionVar=metalVar,
...     distanceVar=distanceVar,
...     depositionRate=depositionRateVariable,
...     diffusionCoeff=metalDiffusionCoefficient,
...     metalIonMolarVolume=molarVolume,
... )
```

```
>>> metalVar.constrain(bulkMetalConcentration, mesh.facesTop)
```

The surfactant bulk diffusion equation solves the bulk diffusion of a species with a source term for the jump from the bulk to an interface. The governing equation is given by,

$$\frac{\partial c}{\partial t} = \nabla \cdot D \nabla c$$

where,

$$D = \begin{cases} D_\theta & \text{when } \phi > 0 \\ 0 & \text{when } \phi \leq 0 \end{cases}$$

The jump condition at the interface is defined by Langmuir adsorption. Langmuir adsorption essentially states that the ability for a species to jump from an electrolyte to an interface is proportional to the concentration in the electrolyte, available site density and a jump coefficient. The boundary condition at $\phi = 0$ is given by,

$$D\hat{n} \cdot \nabla c = -kc(1 - \theta).$$

The surfactant bulk diffusion equation is set up with the following commands.

```
>>> from .surfactantBulkDiffusionEquation import buildSurfactantBulkDiffusionEquation
>>> bulkCatalystEquation = buildSurfactantBulkDiffusionEquation(
...     bulkVar=bulkCatalystVar,
...     distanceVar=distanceVar,
...     surfactantVar=catalystVar,
...     diffusionCoeff=catalystDiffusion,
...     rateConstant=rateConstant0 * siteDensity
... )
```

```
>>> bulkCatalystVar.constrain(catalystConcentration, mesh.facesTop)
```

If running interactively, create viewers.

```
>>> if __name__ == '__main__':
...     try:
...         from .mayaviSurfactantViewer import MayaviSurfactantViewer
...         viewer = MayaviSurfactantViewer(distanceVar,
...                                         catalystVar.interfaceVar,
...                                         zoomFactor=1e6,
...                                         datamax=1.0,
...                                         datamin=0.0,
...                                         smooth=1)
...
...     except:
...         viewer = MultiViewer(viewers=(
...             Viewer(distanceVar, datamin=-1e-9, datamax=1e-9),
...             Viewer(catalystVar.interfaceVar)))
...     from fipy.models.levelSet.surfactant.matplotlibSurfactantViewer import
...     MatplotlibSurfactantViewer
...     viewer = MatplotlibSurfactantViewer(catalystVar.interfaceVar)
... else:
...     viewer = None
```

The `levelSetUpdateFrequency` defines how often to call the `distanceEquation` to reinitialize the `distanceVariable` to a distance function.

```
>>> levelSetUpdateFrequency = int(0.8 * narrowBandWidth \
...                               / (cellSize * cflNumber * 2))
```

The following loop runs for `numberOfSteps` time steps. The time step is calculated with the CFL number and the maximum extension velocity, v to v_{ext} throughout the whole domain using $\nabla\phi \cdot \nabla v_{\text{ext}} = 0$.

```
>>> from builtins import range
>>> for step in range(numberOfSteps):
...
...     if viewer is not None:
...         viewer.plot()
...
...     if step % levelSetUpdateFrequency == 0:
...         distanceVar.calcDistanceFunction(order=2)
...
...     extensionVelocityVariable.setValue(depositionRateVariable())
...
...     distanceVar.updateOld()
...     distanceVar.extendVariable(extensionVelocityVariable, order=2)
...     dt = cflNumber * cellSize / extensionVelocityVariable.max()
...     advectionEquation.solve(distanceVar, dt=dt)
...     surfactantEquation.solve(catalystVar, dt=dt)
...     metalEquation.solve(var=metalVar, dt=dt)
...     bulkCatalystEquation.solve(var=bulkCatalystVar, dt=dt, solver=GeneralSolver())
```

The following is a short test case. It uses saved data from a simulation with 5 time steps. It is not a test for accuracy but a way to tell if something has changed or been broken.

```
>>> import os
```

```
>>> filepath = os.path.join(os.path.split(__file__)[0],
...                         "simpleTrenchSystem.gz")
>>> ##numerix.savetxt(filepath, numerix.array(catalystVar))
>>> print(catalystVar.allclose(numerix.loadtxt(filepath), rtol=1e-4))
1
```

```
>>> from fipy import input
>>> if __name__ == '__main__':
...     input('finished')
```

examples.levelSet.electroChem.leveler

Model electrochemical superfill of copper with leveler and accelerator additives.

This input file is a demonstration of the use of *FiPy* for modeling copper superfill with leveler and accelerator additives. The material properties and experimental parameters used are roughly those that have been previously published [28].

To run this example from the base FiPy directory type:

```
$ python examples/levelSet/electroChem/leveler.py
```

at the command line. The results of the simulation will be displayed and the word `finished` in the terminal at the end of the simulation. The simulation will only run for 200 time steps. To run with a different number of time steps change the `numberOfSteps` argument as follows,

```
>>> runLeveler(numberOfSteps=10, displayViewers=False, cellSize=0.25e-7)
1
```

Change the `displayViewers` argument to `True` if you wish to see the results displayed on the screen. This example requires `gmsh` to construct the mesh.

This example models the case when suppressor, accelerator and leveler additives are present in the electrolyte. The suppressor is assumed to absorb quickly compared with the other additives. Any unoccupied surface sites are immediately covered with suppressor. The accelerator additive has more surface affinity than suppressor and is thus preferential adsorbed. The accelerator can also remove suppressor when the surface reaches full coverage. Similarly, the leveler additive has more surface affinity than both the suppressor and accelerator. This forms a simple set of assumptions for understanding the behavior of these additives.

The following is a complete description of the equations for the model described here. Any equations that have been omitted are the same as those given in `examples.levelSet.electroChem.simpleTrenchSystem`. The current density is governed by

$$i = \frac{c_m}{c_m^\infty} \sum_j \left[i_j \theta_j \left(\exp \frac{-\alpha_j F \eta}{RT} - \exp \frac{(1 - \alpha_j) F \eta}{RT} \right) \right]$$

where j represents S for suppressor, A for accelerator, L for leveler and V for vacant. This model assumes a linear interpolation between the three cases of complete coverage for each additive or vacant substrate. The governing equations for the surfactants are given by,

$$\begin{aligned} \dot{\theta}_L &= \kappa v \theta_L + k_L^+ c_L (1 - \theta_L) - k_L^- v \theta_L, \\ \dot{\theta}_A &= \kappa v \theta_A + k_A^+ c_A (1 - \theta_A - \theta_L) - k_L c_L \theta_A - k_A^- \theta_A^{q-1}, \\ \theta_S &= 1 - \theta_A - \theta_L \\ \theta_V &= 0. \end{aligned}$$

It has been found experimentally that $i_L = i_S$.

If the surface reaches full coverage, the equations do not naturally prevent the coverage rising above full coverage due to the curvature terms. Thus, when $\theta_L + \theta_A = 1$ then the equation for accelerator becomes $\dot{\theta}_A = -\dot{\theta}_L$ and when $\theta_L = 1$, the equation for leveler becomes $\dot{\theta}_L = -k_L^- v \theta_L$.

The parameters k_A^+ , k_A^- and q are both functions of η given by,


$$\begin{aligned} k_A^+ &= k_{A0}^+ \exp \frac{-\alpha_k F \eta}{RT}, \\ k_A^- &= B_d + \frac{A}{\exp(B_a(\eta + V_d))} + \exp(B_b(\eta + V_d)) \\ q &= m\eta + b. \end{aligned}$$


The following table shows the symbols used in the governing equations and their corresponding arguments for the

`runLeveler()` function.

Symbol	Description	Keyword Argument	Value	Unit
Deposition Rate Parameters				
v	deposition rate			m s^{-1}
i_A	accelerator current density	<code>i0Accelerator</code>		A m^{-2}
i_L	leveler current density	<code>i0Leveler</code>		A m^{-2}
Ω	molar volume	<code>molarVolume</code>	7.1×10^{-6}	$\text{m}^3 \text{ mol}^{-1}$
n	ion charge	<code>charge</code>	2	
F	Faraday's constant	<code>faradaysConstant</code>	9.6×10^{-4}	C mol^{-1}
i_0	exchange current density			A m^{-2}
α_A	accelerator transfer coefficient	<code>alphaAccelerator</code>	0.4	
α_S	leveler transfer coefficient	<code>alphaLeveler</code>	0.5	
η	overpotential	<code>overpotential</code>	-0.3	V
R	gas constant	<code>gasConstant</code>	8.314	J K mol^{-1}
T	temperature	<code>temperature</code>	298.0	K
Ion Parameters				
c_I	ion concentration	<code>ionConcentration</code>	250.0	mol m^{-3}
c_I^∞	far field ion concentration	<code>ionConcentration</code>	250.0	mol m^{-3}
D_I	ion diffusion coefficient	<code>ionDiffusion</code>	5.6×10^{-10}	$\text{m}^2 \text{ s}^{-1}$
Accelerator Parameters				
θ_A	accelerator coverage	<code>acceleratorCoverage</code>	0.0	
c_A	accelerator concentration	<code>acceleratorConcentration</code>	5.0×10^{-3}	mol m^{-3}
c_A^∞	far field accelerator concentration	<code>acceleratorConcentration</code>	5.0×10^{-3}	mol m^{-3}
D_A	catalyst diffusion coefficient	<code>catalystDiffusion</code>	1.0×10^{-9}	$\text{m}^2 \text{ s}^{-1}$
Γ_A	accelerator site density	<code>siteDensity</code>	9.8×10^{-6}	mol m^{-2}
k_A^+	accelerator adsorption			$\text{m}^3 \text{ mol}^{-1} \text{ s}^{-1}$
k_{A0}^+	accelerator adsorption coeff	<code>kAccelerator0</code>	2.6×10^{-4}	$\text{m}^3 \text{ mol}^{-1} \text{ s}^{-1}$
α_k	accelerator adsorption coeff	<code>alphaAdsorption</code>	0.62	
k_A^-	accelerator consumption coeff			
B_a	experimental parameter	<code>Bd</code>	-40.0	
B_b	experimental parameter	<code>Bd</code>	60.0	
V_d	experimental parameter	<code>Bd</code>	9.8×10^{-2}	
B_d	experimental parameter	<code>Bd</code>	8.0×10^{-4}	
Geometry Parameters				
D	trench depth	<code>trenchDepth</code>	0.5×10^{-6}	m
D/W	trench aspect ratio	<code>aspectRatio</code>	2.0	
S	trench spacing	<code>trenchSpacing</code>	0.6×10^{-6}	m
δ	boundary layer depth	<code>boundaryLayerDepth</code>	0.3×10^{-6}	m
Simulation Control Parameters				
computational cell size		<code>cellSize</code>	0.1×10^{-7}	m
number of time steps		<code>numberOfSteps</code>	5	
whether to display the viewers		<code>displayViewers</code>	True	

The following images show accelerator and leveler contour plots that can be obtained by running this example.

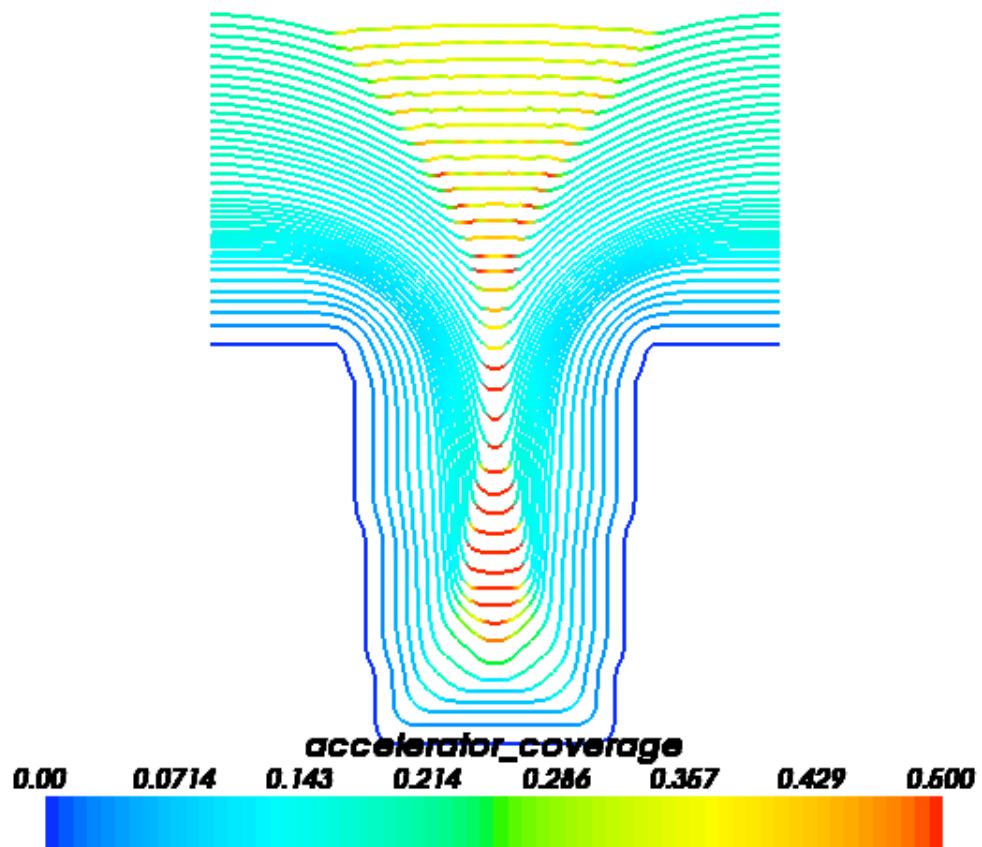

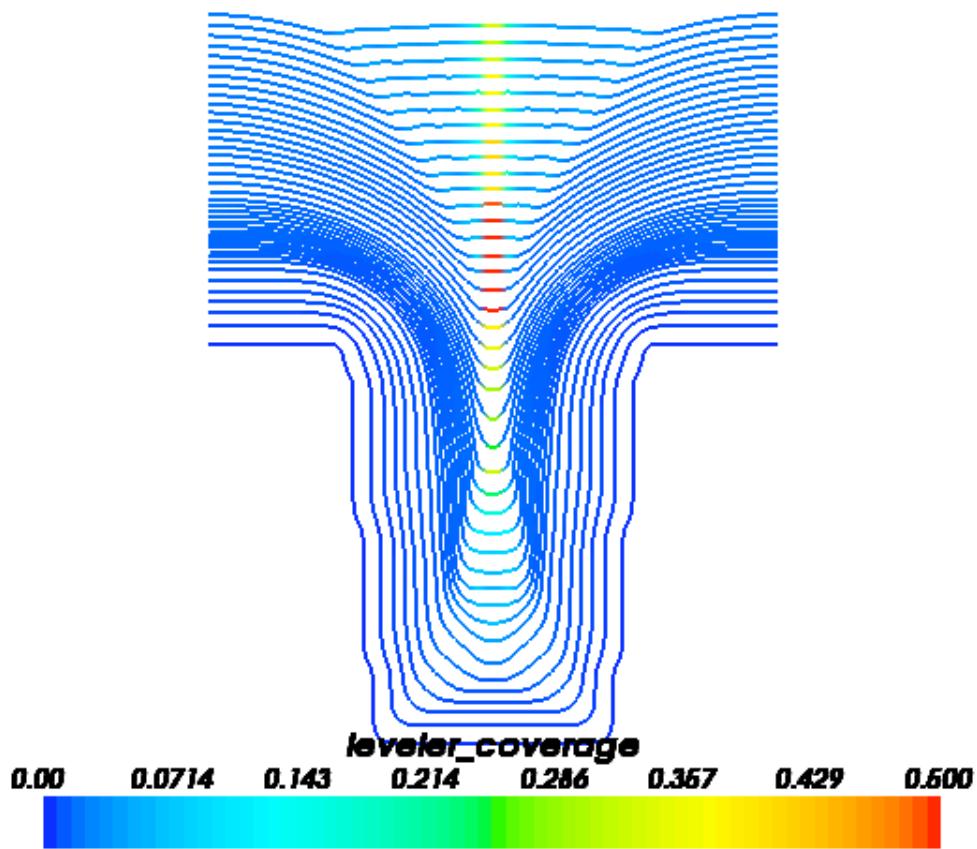

`examples.levelSet.electroChem.lines`

`examples.levelSet.electroChem.matplotlibSurfactantViewer`

Classes

`MatplotlibSurfactantViewer(distanceVar[, ...])`

The `MatplotlibSurfactantViewer` creates a viewer with the `Matplotlib` python plotting package that displays a `DistanceVariable`.

```
class examples.levelSet.electroChem.matplotlibSurfactantViewer.MatplotlibSurfactantViewer(distanceVar,
                                         sur-
                                         fac-
                                         tant-
                                         Var=None,
                                         lev-
                                         elSet-
                                         Value=0.0,
                                         ti-
                                         tle=None,
                                         smooth=0,
                                         zoom-
                                         Fac-
                                         tor=1.0,
                                         an-
                                         i-
                                         mate=False,
                                         lim-
                                         its={},
                                         **kwlim-
                                         its)
```

Bases: *AbstractMatplotlibViewer*

The *MatplotlibSurfactantViewer* creates a viewer with the *Matplotlib* python plotting package that displays a *DistanceVariable*.

Create a *MatplotlibSurfactantViewer*.

```
>>> from fipy import *
>>> m = Grid2D(nx=100, ny=100)
>>> x, y = m.cellCenters
>>> v = CellVariable(mesh=m, value=x**2 + y**2 - 10**2)
>>> s = CellVariable(mesh=m, value=sin(x / 10) * cos(y / 30))
>>> viewer = MatplotlibSurfactantViewer(distanceVar=v, surfactantVar=s)
>>> from builtins import range
>>> for r in range(1, 200):
...     v.setValue(x**2 + y**2 - r**2)
...     viewer.plot()
```

```
>>> from fipy import *
>>> dx = 1.
>>> dy = 1.
>>> nx = 11
>>> ny = 11
>>> Lx = ny * dy
>>> Ly = nx * dx
>>> mesh = Grid2D(dx = dx, dy = dy, nx = nx, ny = ny)
>>> # from fipy.models.levelSet.distanceFunction import DistanceVariable
>>> var = DistanceVariable(mesh = mesh, value = -1)
```

```
>>> x, y = mesh.cellCenters
```

```
>>> var.setValue(1, where=(x - Lx / 2.)**2 + (y - Ly / 2.)**2 < (Lx / 4.)**2)
>>> var.calcDistanceFunction()
>>> viewer = MatplotlibSurfactantViewer(var, smooth = 2)
>>> viewer.plot()
>>> viewer._promptForOpinion()
>>> del viewer
```

```
>>> var = DistanceVariable(mesh = mesh, value = -1)
```

```
>>> var.setValue(1, where=(y > 2. * Ly / 3.) | ((x > Lx / 2.) & (y > Ly / 3.)) |_
-> ((y < Ly / 6.) & (x > Lx / 2)))
>>> var.calcDistanceFunction()
>>> viewer = MatplotlibSurfactantViewer(var)
>>> viewer.plot()
>>> viewer._promptForOpinion()
>>> del viewer
```

```
>>> viewer = MatplotlibSurfactantViewer(var, smooth = 2)
>>> viewer.plot()
>>> viewer._promptForOpinion()
>>> del viewer
```

Parameters

- **distanceVar** (*DistanceVariable*) –
- **levelSetValue** (*float*) – the value of the contour to be displayed
- **title** (*str*) – displayed at the top of the *Viewer* window
- **animate** (*bool*) – whether to show only the initial condition and the moving top boundary or to show all contours (Default)
- **limits** (*dict*, *optional*) – a (deprecated) alternative to limit keyword arguments
- **xmin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

- **datamin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

property axes

The *Matplotlib Axes*.

property cmap

The *Matplotlib Colormap*.

property colorbar

The *Matplotlib Colorbar*.

property fig

The *Matplotlib Figure*.

property id

The *Matplotlib Figure* number.

property log

Whether data has logarithmic scaling (*bool*).

plot(*filename=None*)

Update the display of the viewed variables.

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

plotMesh(*filename=None*)

Display a representation of the mesh

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

setLimits(*limits={}*, ***kwlimits*)

Update the limits.

Parameters

- **limits** (*dict*, *optional*) – a (deprecated) alternative to limit keyword arguments
- **xmin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

- **`zmin`** (`float`, *optional*) – displayed range of data. A 1D *Viewer* will only use `xmin` and `xmax`, a 2D viewer will also use `ymin` and `ymax`, and so on. All viewers will use `datamin` and `datamax`. Any limit set to a (default) value of `None` will autoscale.
- **`zmax`** (`float`, *optional*) – displayed range of data. A 1D *Viewer* will only use `xmin` and `xmax`, a 2D viewer will also use `ymin` and `ymax`, and so on. All viewers will use `datamin` and `datamax`. Any limit set to a (default) value of `None` will autoscale.
- **`datamin`** (`float`, *optional*) – displayed range of data. A 1D *Viewer* will only use `xmin` and `xmax`, a 2D viewer will also use `ymin` and `ymax`, and so on. All viewers will use `datamin` and `datamax`. Any limit set to a (default) value of `None` will autoscale.
- **`datamax`** (`float`, *optional*) – displayed range of data. A 1D *Viewer* will only use `xmin` and `xmax`, a 2D viewer will also use `ymin` and `ymax`, and so on. All viewers will use `datamin` and `datamax`. Any limit set to a (default) value of `None` will autoscale.

property title

The text appearing at the top center.

(default: if `len(self.vars) == 1`, the name of the only `Variable`, otherwise `" "`.)

property vars

The `Variable` or list of `Variable` objects to display.

examples.levelSet.electroChem.mayaviSurfactantViewer**Classes**

`MayaviSurfactantViewer`(`distanceVar[, ...]`)

The *MayaviSurfactantViewer* creates a viewer with the `Mayavi` python plotting package that displays a *Distance-Variable*.

```
class examples.levelSet.electroChem.mayaviSurfactantViewer.MayaviSurfactantViewer(distanceVar,
surfac-
tant-
Var=None,
levelSet-
Value=0.0,
ti-
tle=None,
smooth=0,
zoomFac-
tor=1.0,
ani-
mate=False,
lim-
its={},
**kwlim-
its)
```

Bases: `AbstractViewer`

The *MayaviSurfactantViewer* creates a viewer with the `Mayavi` python plotting package that displays a *Distance-Variable*.

Create a *MayaviSurfactantViewer*.

```
>>> from fipy import *
>>> dx = 1.
>>> dy = 1.
>>> nx = 11
>>> ny = 11
>>> Lx = ny * dy
>>> Ly = nx * dx
>>> mesh = Grid2D(dx = dx, dy = dy, nx = nx, ny = ny)
>>> # from fipy.models.levelSet.distanceFunction.distanceVariable import_
>>> DistanceVariable
>>> var = DistanceVariable(mesh = mesh, value = -1)
```

```
>>> x, y = mesh.cellCenters
```

```
>>> var.setValue(1, where=(x - Lx / 2.)**2 + (y - Ly / 2.)**2 < (Lx / 4.)**2)
>>> var.calcDistanceFunction()
>>> viewer = MayaviSurfactantViewer(var, smooth = 2)
>>> viewer.plot()
>>> viewer._promptForOpinion()
>>> del viewer
```

```
>>> var = DistanceVariable(mesh = mesh, value = -1)
```

```
>>> var.setValue(1, where=(y > 2. * Ly / 3.) | ((x > Lx / 2.) & (y > Ly / 3.)) |_
>>> ((y < Ly / 6.) & (x > Lx / 2.)))
>>> var.calcDistanceFunction()
>>> viewer = MayaviSurfactantViewer(var)
>>> viewer.plot()
>>> viewer._promptForOpinion()
>>> del viewer
```

```
>>> viewer = MayaviSurfactantViewer(var, smooth = 2)
>>> viewer.plot()
>>> viewer._promptForOpinion()
>>> del viewer
```

Parameters

- **distanceVar** (`DistanceVariable`) –
- **levelSetValue** (`float`) – the value of the contour to be displayed
- **title** (`str`) – displayed at the top of the *Viewer* window
- **animate** (`bool`) – whether to show only the initial condition and the moving top boundary or to show all contours (Default)
- **limits** (`dict, optional`) – a (deprecated) alternative to limit keyword arguments
- **xmin** (`float, optional`) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (`float, optional`) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and

datamax. Any limit set to a (default) value of *None* will autoscale.

- **ymin** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmin** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmax** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamin** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

`plotMesh(filename=None)`

Display a representation of the mesh

Parameters

filename (*str*) – If not *None*, the name of a file to save the image into.

`setLimits(limits={}, **kwlimits)`

Update the limits.

Parameters

- **limits** (*dict*, *optional*) – a (deprecated) alternative to limit keyword arguments
- **xmin** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **xmax** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymin** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **ymax** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmin** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **zmax** (*float*, *optional*) – displayed range of data. A 1D Viewer will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

- **datamin** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.
- **datamax** (*float*, *optional*) – displayed range of data. A 1D *Viewer* will only use *xmin* and *xmax*, a 2D viewer will also use *ymin* and *ymax*, and so on. All viewers will use *datamin* and *datamax*. Any limit set to a (default) value of *None* will autoscale.

property title

The text appearing at the top center.

(default: if `len(self.vars) == 1`, the name of the only *Variable*, otherwise "").)

property vars

The *Variable* or list of *Variable* objects to display.

examples.levelSet.electroChem.metallonDiffusionEquation**examples.levelSet.electroChem.simpleTrenchSystem**

Model electrochemical superfill using the CEAC mechanism.

This input file is a demonstration of the use of *FiPy* for modeling electrodeposition using the CEAC mechanism. The material properties and experimental parameters used are roughly those that have been previously published [29].

To run this example from the base *FiPy* directory type:

```
$ python examples/levelSet/electroChem/simpleTrenchSystem.py
```

at the command line. The results of the simulation will be displayed and the word *finished* in the terminal at the end of the simulation. To run with a different number of time steps change the `numberOfSteps` argument as follows,


```
>>> runSimpleTrenchSystem(numberOfSteps=2, displayViewers=False)  
1
```

Change the `displayViewers` argument to `True` if you wish to see the results displayed on the screen. Example `examples.levelSet.electroChem.simpleTrenchSystem` gives explanation for writing new scripts or modifying existing scripts that are encapsulated by functions.

Any argument parameter can be changed. For example if the initial catalyst coverage is not 0, then it can be reset,

```
>>> runSimpleTrenchSystem(numberOfSteps=2, catalystCoverage=0.1, displayViewers=False)  
0
```


The following image shows a schematic of a trench geometry along with the governing equations for modeling electrodeposition with the CEAC mechanism. All of the given equations are implemented in the `examples.levelSet.electroChem.simpleTrenchSystem.runSimpleTrenchSystem()` function. As stated above, all the parameters in the equations can be changed with function arguments.

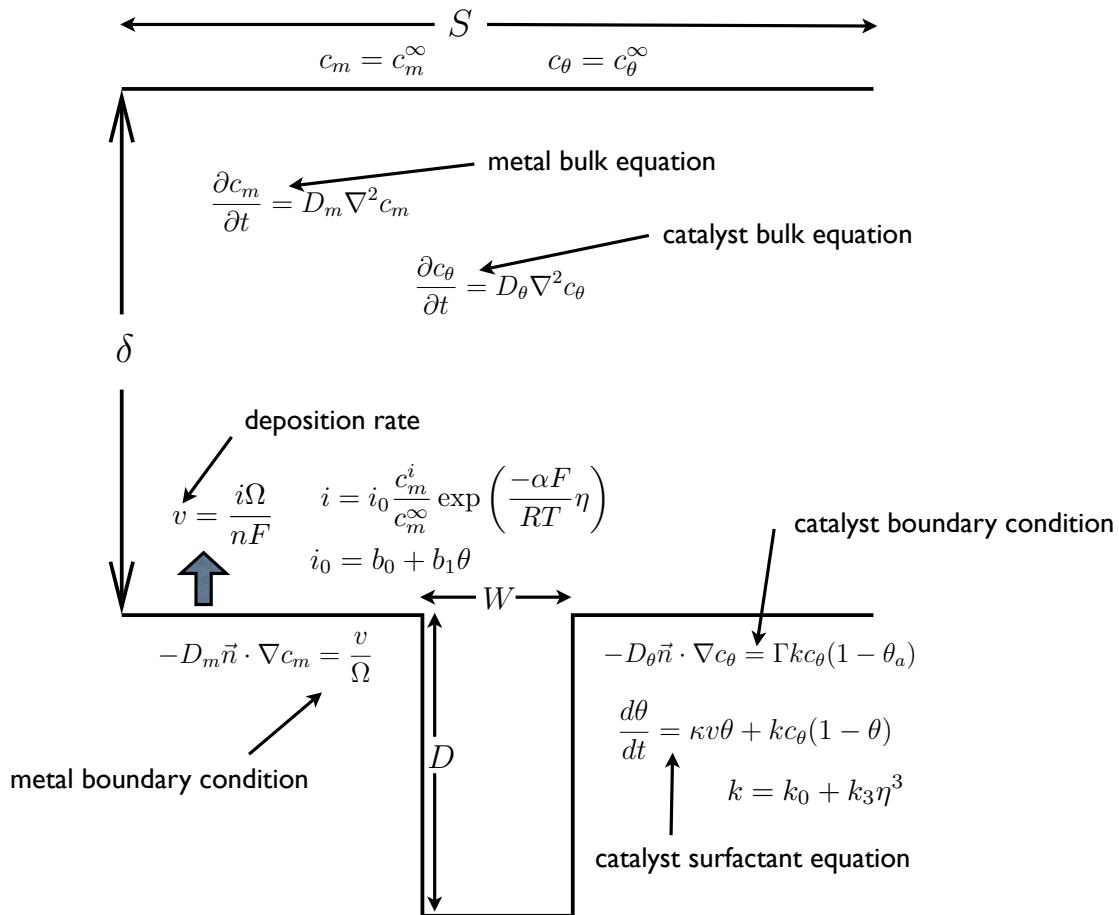

The following table shows the symbols used in the governing equations and their corresponding arguments to the `runSimpleTrenchSystem()` function. The boundary layer depth is intentionally small in this example in order not to complicate the mesh. Further examples will simulate more realistic boundary layer depths but will also have more complex meshes requiring the `gmsh` software.

Symbol	Description	Keyword Argument	Value	Unit
Deposition Rate Parameters				
v	deposition rate			m s^{-1}
i	current density			A m^{-2}
Ω	molar volume	<code>molarVolume</code>	7.1×10^{-6}	$\text{m}^3 \text{ mol}^{-1}$
n	ion charge	<code>charge</code>	2	
F	Faraday's constant	<code>faradaysConstant</code>	9.6×10^{-4}	C mol^{-1}
i_0	exchange current density			A m^{-2}
α	transfer coefficient	<code>transferCoefficient</code>	0.5	
η	overpotential	<code>overpotential</code>	-0.3	V
R	gas constant	<code>gasConstant</code>	8.314	$\text{J K}^{-1} \text{ mol}^{-1}$
T	temperature	<code>temperature</code>	298.0	K
b_0	current density for θ^0	<code>currentDensity0</code>	0.26	A m^{-2}
b_1	current density for θ	<code>currentDensity1</code>	45.0	A m^{-2}
Metal Ion Parameters				
c_m	metal ion concentration	<code>metalConcentration</code>	250.0	mol m^{-3}
c_θ^∞	far field metal ion concentration	<code>metalConcentration</code>	250.0	mol m^{-3}
D_m	metal ion diffusion coefficient	<code>metalDiffusion</code>	5.6×10^{-10}	$\text{m}^2 \text{ s}^{-1}$
Catalyst Parameters				
θ	catalyst surfactant concentration	<code>catalystCoverage</code>	0.0	
c_θ	bulk catalyst concentration	<code>catalystConcentration</code>	5.0×10^{-3}	mol m^{-3}
c_θ^∞	far field catalyst concentration	<code>catalystConcentration</code>	5.0×10^{-3}	mol m^{-3}
D_θ	catalyst diffusion coefficient	<code>catalystDiffusion</code>	1.0×10^{-9}	$\text{m}^2 \text{ s}^{-1}$
Γ	catalyst site density	<code>siteDensity</code>	9.8×10^{-6}	mol m^{-2}
k	rate constant			$\text{m}^3 \text{ mol}^{-1} \text{ s}^{-1}$
k_0	rate constant for η^0	<code>rateConstant0</code>	1.76	$\text{m}^3 \text{ mol}^{-1} \text{ s}^{-1}$
k_3	rate constant for η^3	<code>rateConstant3</code>	-245.0×10^{-6}	$\text{m}^3 \text{ mol}^{-1} \text{ s}^{-1} \text{ V}^{-3}$
Geometry Parameters				
D	trench depth	<code>trenchDepth</code>	0.5×10^{-6}	m
D/W	trench aspect ratio	<code>aspectRatio</code>	2.0	
S	trench spacing	<code>trenchSpacing</code>	0.6×10^{-6}	m
δ	boundary layer depth	<code>boundaryLayerDepth</code>	0.3×10^{-6}	m
Simulation Control Parameters				
computational cell size		<code>cellSize</code>	0.1×10^{-7}	m
number of time steps		<code>numberOfSteps</code>	5	
whether to display the viewers		<code>displayViewers</code>	True	

If the Mayavi plotting software is installed (see [Installation](#)) then a plot should appear that is updated every 20 time steps and will eventually resemble the image below.

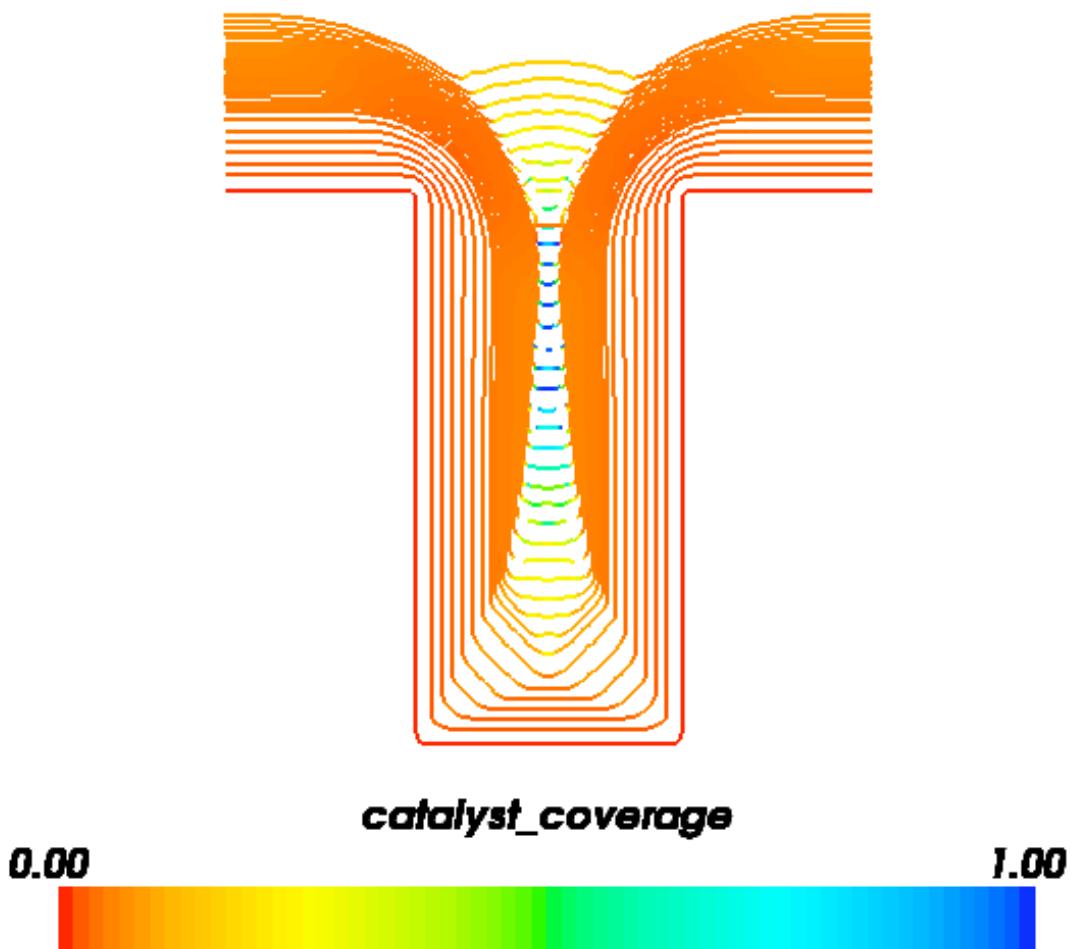

`examples.levelSet.electroChem.surfactantBulkDiffusionEquation`

`examples.levelSet.electroChem.test`

`examples.levelSet.electroChem.trenchMesh`

23.8.4 examples.levelSet.surfactant

Modules

`examples.levelSet.surfactant.circle`

`examples.levelSet.surfactant.
expandingCircle`

`examples.levelSet.surfactant.square`

`examples.levelSet.surfactant.test`

This example first imposes a circular distance function:
This example represents an expanding circular interface
with an initial coverage of surfactant.

This example advects a 2 by 2 initially square region outwards.

examples.levelSet.surfactant.circle

This example first imposes a circular distance function:

$$\phi(x, y) = \left[\left(x - \frac{L}{2} \right)^2 + \left(y - \frac{L}{2} \right)^2 \right]^{1/2} - \frac{L}{4}$$

then the variable is advected with,

$$\frac{\partial \phi}{\partial t} + \vec{u} \cdot \nabla \phi = 0$$

Also a surfactant is present of the interface, governed by the equation:

$$\frac{d\theta}{dt} = Jv\theta$$

The result can be tested with the following code:

```
>>> surfactantBefore = numerix.sum(surfactantVariable * mesh.cellVolumes)
>>> from builtins import range
>>> for step in range(steps):
...     distanceVariable.updateOld()
...     surfactantEquation.solve(surfactantVariable, dt=1.)
...     advectionEquation.solve(distanceVariable, dt = timeStepDuration)
>>> surfactantEquation.solve(surfactantVariable, dt=1.)
>>> surfactantAfter = numerix.sum(surfactantVariable * mesh.cellVolumes)
>>> print(surfactantBefore.allclose(surfactantAfter))
1
>>> areas = (distanceVariable.cellInterfaceAreas < 1e-6) * 1e+10 + distanceVariable.
->>> cellInterfaceAreas
>>> answer = initialSurfactantValue * initialRadius / (initialRadius + distanceToTravel)
>>> coverage = surfactantVariable * mesh.cellVolumes / areas
>>> error = (coverage / answer - 1)**2 * (coverage > 1e-3)
>>> print(numerix.sqrt(numerix.sum(error) / numerix.sum(error > 0)))
0.00813776069241
```

examples.levelSet.surfactant.expandingCircle

This example represents an expanding circular interface with an initial coverage of surfactant. The rate of expansion is dependent on the coverage of surfactant, The governing equations are given by:

$$\begin{aligned}\dot{\theta} &= -\frac{\dot{r}}{r}\theta \\ \dot{r} &= k\theta\end{aligned}$$

The solution for these set of equations is given by:

$$\begin{aligned}r &= \sqrt{2kr_0\theta_0 t + r_0^2} \\ \theta &= \frac{r_0\theta_0}{\sqrt{2kr_0\theta_0 t + r_0^2}}\end{aligned}$$

The following tests can be performed. First test for global conservation of surfactant:

```

>>> surfactantBefore = numerix.sum(surfactantVariable * mesh.cellVolumes)
>>> totalTime = 0
>>> steps = 5
>>> from builtins import range
>>> for step in range(steps):
...     velocity.setValue(surfactantVariable.interfaceVar * k)
...     distanceVariable.extendVariable(velocity)
...     timeStepDuration = cfl * dx / velocity.max()
...     distanceVariable.updateOld()
...     advectionEquation.solve(distanceVariable, dt = timeStepDuration)
...     surfactantEquation.solve(surfactantVariable, dt=1)
...     totalTime += timeStepDuration
>>> surfactantEquation.solve(surfactantVariable, dt=1)
>>> surfactantAfter = numerix.sum(surfactantVariable * mesh.cellVolumes)
>>> print(surfactantBefore.allclose(surfactantAfter))
1

```

Next test for the correct local value of surfactant:

```

>>> finalRadius = numerix.sqrt(2 * k * initialRadius * initialSurfactantValue * totalTime + initialRadius**2)
>>> answer = initialSurfactantValue * initialRadius / finalRadius
>>> coverage = surfactantVariable.interfaceVar
>>> error = (coverage / answer - 1)**2 * (coverage > 1e-3)
>>> print(numerix.sqrt(numerix.sum(error) / numerix.sum(error > 0)) < 0.04)
1

```

Test for the correct position of the interface:

```

>>> x, y = mesh.cellCenters
>>> radius = numerix.sqrt((x - L / 2)**2 + (y - L / 2)**2)
>>> solution = radius - distanceVariable
>>> error = (solution / finalRadius - 1)**2 * (coverage > 1e-3)
>>> print(numerix.sqrt(numerix.sum(error) / numerix.sum(error > 0)) < 0.02)
1

```

examples.levelSet.surfactant.square

This example advects a 2 by 2 initially square region outwards. The example checks for global conservation of surfactant.

Advect the interface and check the position.

```

>>> distanceVariable.calcDistanceFunction()
>>> initialSurfactant = numerix.sum(surfactantVariable)
>>> from builtins import range
>>> for step in range(steps):
...     distanceVariable.updateOld()
...     surfactantEquation.solve(surfactantVariable, dt=1)
...     advectionEquation.solve(distanceVariable, dt = timeStepDuration)
>>> print(numerix.allclose(initialSurfactant, numerix.sum(surfactantVariable)))
1

```

examples.levelSet.surfactant.test**23.8.5 examples.levelSet.test**

Run all the test cases in examples/

23.9 examples.meshing

Modules

examples.meshing.gmshRefinement

examples.meshing.inputGrid2D

examples.meshing.sphere

examples.meshing.test

To run this example from the base FiPy directory, type.
An interesting problem is to solve an equation on a 2D geometry that is embedded in 3D space, such as diffusion on the surface of a sphere (with nothing either inside or outside the sphere).

Run all the test cases in examples/meshing/

23.9.1 examples.meshing.gmshRefinement

23.9.2 examples.meshing.inputGrid2D

To run this example from the base FiPy directory, type:

```
$ python examples/meshing/inputGrid2D.py --numberOfElements=X
```

This example demonstrates how to build a 1D mesh and obtain basic mesh information. The command line argument, X, controls the number of elements on the mesh. Firstly parse the command line argument for *numberOfElements*, with the default set at 100.

```
>>> from fipy.tools.parser import parse
>>> numberOfElements = parse('--numberOfElements', action = 'store', type = 'int',
   <--> default = 100)
```

A *Grid2D* object is invoked in the following way,

```
>>> from fipy import Grid2D, CellVariable, Viewer
>>> from fipy.tools import numerix
```

```
>>> nx = int(numerix.sqrt(numberOfElements))
>>> ny = nx
>>> dx = 1.
>>> dy = 1.
>>> mesh = Grid2D(nx = nx, ny = ny, dx = dx, dy = dy)
```

Once the mesh has been built information about the mesh can be obtained. For example the mesh volumes can be obtained with the *getCellVolumes()* method.

```
>>> vols = mesh.cellVolumes
>>> numerix.allclose(dx * dy * numerix.ones(nx * ny), vols)
1
```

Obtain the number of cells in the mesh

```
>>> N = mesh.numberOfCells
>>> numerix.allclose(N, numberElements)
1
```

Obtain all the left exterior faces, this is equal to ny .

```
>>> faces = mesh.facesLeft
>>> len(faces) == ny
1
```

One can view the mesh with the following code,

```
>>> if __name__ == '__main__':
...     viewer = Viewer(CellVariable(value = 0, mesh = mesh))
...     viewer.plot()
```

23.9.3 examples.meshing.sphere

An interesting problem is to solve an equation on a 2D geometry that is embedded in 3D space, such as diffusion on the surface of a sphere (with nothing either inside or outside the sphere). This example demonstrates how to create the required mesh.

```
>>> from fipy import Gmsh2DIn3DSpace, CellVariable, MayaviClient
>>> from fipy.tools import numerix

>>> mesh = Gmsh2DIn3DSpace('''
...     radius = 5.0;
...     cellSize = 0.3;
...
...     // create inner 1/8 shell
...     Point(1) = {0, 0, 0, cellSize};
...     Point(2) = {-radius, 0, 0, cellSize};
...     Point(3) = {0, radius, 0, cellSize};
...     Point(4) = {0, 0, radius, cellSize};
...     Circle(1) = {2, 1, 3};
...     Circle(2) = {4, 1, 2};
...     Circle(3) = {4, 1, 3};
...     Line Loop(1) = {1, -3, 2} ;
...     Ruled Surface(1) = {1};
...
...     // create remaining 7/8 inner shells
...     t1[] = Rotate {{0,0,1},{0,0,0},Pi/2} {Duplicate{Surface{1};}};
...     t2[] = Rotate {{0,0,1},{0,0,0},Pi} {Duplicate{Surface{1};}};
...     t3[] = Rotate {{0,0,1},{0,0,0},Pi*3/2} {Duplicate{Surface{1};}};
...     t4[] = Rotate {{0,1,0},{0,0,0},-Pi/2} {Duplicate{Surface{1};}};
...     t5[] = Rotate {{0,0,1},{0,0,0},Pi/2} {Duplicate{Surface{t4[0]};}};
```

(continues on next page)

(continued from previous page)

```
...     t6[] = Rotate {{0,0,1},{0,0,0},Pi} {Duplicata{Surface{t4[0]}};};
...     t7[] = Rotate {{0,0,1},{0,0,0},Pi*3/2} {Duplicata{Surface{t4[0]}};};
...
...     // create entire inner and outer shell
...     Surface Loop(100)={1,t1[0],t2[0],t3[0],t7[0],t4[0],t5[0],t6[0]};
...     ''').extrude(extrudeFunc=lambda r: 1.1 * r)
```

```
>>> x, y, z = mesh.cellCenters
```

```
>>> var = CellVariable(mesh=mesh, value=x * y * z, name="x*y*z")
```

```
>>> if __name__ == '__main__':
...     viewer = MayaviClient(vars=var)
...     viewer.plot()
```

```
>>> max(numerix.sqrt(x**2 + y**2 + z**2)) < 5.3
```

```
True
```

```
>>> min(numerix.sqrt(x**2 + y**2 + z**2)) > 5.2
```

```
True
```

23.9.4 examples.meshing.test

Run all the test cases in examples/meshing/

23.10 examples.parallel

23.11 examples.phase

Modules

<code>examples.phase.anisotropy</code>	Solve a dendritic solidification problem.
<code>examples.phase.anisotropyOLD</code>	
<code>examples.phase.binary</code>	It is straightforward to extend a phase field model to include binary alloys.
<code>examples.phase.binaryCoupled</code>	Simultaneously solve a phase-field evolution and solute diffusion problem in one-dimension.
<code>examples.phase.impingement</code>	
<code>examples.phase.missOrientation</code>	
<code>examples.phase.polyxtal</code>	Solve the dendritic growth of nuclei and subsequent grain impingement.
<code>examples.phase.polyxtalCoupled</code>	Simultaneously solve the dendritic growth of nuclei and subsequent grain impingement.
<code>examples.phase.quaternary</code>	Solve a phase-field evolution and diffusion of four species in one-dimension.
<code>examples.phase.simple</code>	Solve a phase-field (Allen-Cahn) problem in one-dimension.
<code>examples.phase.symmetry</code>	This example creates four symmetric quadrilateral regions in a box.
<code>examples.phase.test</code>	

23.11.1 examples.phase.anisotropy

Solve a dendritic solidification problem.

To convert a liquid material to a solid, it must be cooled to a temperature below its melting point (known as “undercooling” or “supercooling”). The rate of solidification is often assumed (and experimentally found) to be proportional to the undercooling. Under the right circumstances, the solidification front can become unstable, leading to dendritic patterns. Warren, Kobayashi, Lobkovsky and Carter [13] have described a phase field model (“Allen-Cahn”, “non-conserved Ginsberg-Landau”, or “model A” of Hohenberg & Halperin) of such a system, including the effects of discrete crystalline orientations (anisotropy).

We start with a regular 2D Cartesian mesh

```
>>> from fipy import Variable, CellVariable, Grid2D, TransientTerm, DiffusionTerm, ↵
    ImplicitSourceTerm, Viewer, Matplotlib2DGridViewer
>>> from fipy.tools import numerix
>>> dx = dy = 0.025
>>> if __name__ == '__main__':
...     nx = ny = 500
... else:
...     nx = ny = 20
>>> mesh = Grid2D(dx=dx, dy=dy, nx=nx, ny=ny)
```

and we'll take fixed timesteps

```
>>> dt = 5e-4
```

We consider the simultaneous evolution of a “phase field” variable ϕ (taken to be 0 in the liquid phase and 1 in the solid)

```
>>> phase = CellVariable(name=r'$\phi$', mesh=mesh, hasOld=True)
```

and a dimensionless undercooling ΔT ($\Delta T = 0$ at the melting point)

```
>>> dT = CellVariable(name=r'$\Delta T$', mesh=mesh, hasOld=True)
```

The `hasOld` flag causes the storage of the value of variable from the previous timestep. This is necessary for solving equations with non-linear coefficients or for coupling between PDEs.

The governing equation for the temperature field is the heat flux equation, with a source due to the latent heat of solidification

$$\frac{\partial \Delta T}{\partial t} = D_T \nabla^2 \Delta T + \frac{\partial \phi}{\partial t}$$

```
>>> DT = 2.25
>>> heatEq = (TransientTerm()
...     == DiffusionTerm(DT)
...     + (phase - phase.old) / dt)
```

The governing equation for the phase field is

$$\tau_\phi \frac{\partial \phi}{\partial t} = \nabla \cdot D \nabla \phi + \phi(1-\phi)m(\phi, \Delta T)$$

where

$$m(\phi, \Delta T) = \phi - \frac{1}{2} - \frac{\kappa_1}{\pi} \arctan(\kappa_2 \Delta T)$$

represents a source of anisotropy. The coefficient D is an anisotropic diffusion tensor in two dimensions

$$D = \alpha^2 (1 + c\beta) \begin{bmatrix} 1 + c\beta & -c \frac{\partial \beta}{\partial \psi} \\ c \frac{\partial \beta}{\partial \psi} & 1 + c\beta \end{bmatrix}$$

where $\beta = \frac{1-\Phi^2}{1+\Phi^2}$, $\Phi = \tan\left(\frac{N}{2}\psi\right)$, $\psi = \theta + \arctan\frac{\partial\phi/\partial y}{\partial\phi/\partial x}$, θ is the orientation, and N is the symmetry.

```
>>> alpha = 0.015
>>> c = 0.02
>>> N = 6.
>>> theta = numerix.pi / 8.
>>> psi = theta + numerix.arctan2(phase.faceGrad[1],
...                                     phase.faceGrad[0])
>>> Phi = numerix.tan(N * psi / 2)
>>> PhiSq = Phi**2
>>> beta = (1. - PhiSq) / (1. + PhiSq)
>>> DbetaDpsi = -N * 2 * Phi / (1 + PhiSq)
>>> Ddia = (1. + c * beta)
>>> Doff = c * DbetaDpsi
>>> I0 = Variable(value=((1, 0), (0, 1)))
>>> I1 = Variable(value=((0, -1), (1, 0)))
>>> D = alpha**2 * (1. + c * beta) * (Ddia * I0 + Doff * I1)
```

With these expressions defined, we can construct the phase field equation as

```
>>> tau = 3e-4
>>> kappa1 = 0.9
>>> kappa2 = 20.
>>> phaseEq = (TransientTerm(tau)
...           == DiffusionTerm(D)
...           + ImplicitSourceTerm((phase - 0.5 - kappa1 / numerix.pi * numerix.
... arctan(kappa2 * dT))
...                         * (1 - phase)))
```

We seed a circular solidified region in the center

```
>>> radius = dx * 5.
>>> C = (nx * dx / 2, ny * dy / 2)
>>> x, y = mesh.cellCenters
>>> phase.setValue(1., where=((x - C[0])**2 + (y - C[1])**2) < radius**2)
```

and quench the entire simulation domain below the melting point

```
>>> dT.setValue(-0.5)
```

In a real solidification process, dendritic branching is induced by small thermal fluctuations along an otherwise smooth surface, but the granularity of the *Mesh* is enough “noise” in this case, so we don’t need to explicitly introduce randomness, the way we did in the Cahn-Hilliard problem.

FiPy’s viewers are utilitarian, striving to let the user see *something*, regardless of their operating system or installed packages, so you won’t be able to simultaneously view two fields “out of the box”, but, because all of Python is accessible and FiPy is object oriented, it is not hard to adapt one of the existing viewers to create a specialized display:

```
>>> if __name__ == "__main__":
...     try:
...         import pylab
...         class DendriteViewer(Matplotlib2DGridViewer):
...             def __init__(self, phase, dT, title=None, limits={}, **kwlimits):
...                 self.phase = phase
...                 self.contour = None
...                 Matplotlib2DGridViewer.__init__(self, vars=(dT,), title=title,
...                                         cmap=pylab.cm.hot,
...                                         limits=limits, **kwlimits)
...
...             def _plot(self):
...                 Matplotlib2DGridViewer._plot(self)
...
...             if self.contour is not None:
...                 for c in self.contour.collections:
...                     c.remove()
...
...             mesh = self.phase.mesh
...             shape = mesh.shape
...             x, y = mesh.cellCenters
...             z = self.phase.value
...             x, y, z = [a.reshape(shape, order='F') for a in (x, y, z)]
...
...             self.contour = self.axes.contour(x, y, z, (0.5,))
```


(continues on next page)

(continued from previous page)

```
...     viewer = DendriteViewer(phase=phase, dT=dT,
...                             title=r"%s & %s" % (phase.name, dT.name),
...                             datamin=-0.1, datamax=0.05)
...
... except ImportError:
...     viewer = MultiViewer(viewers=(Viewer(vars=phase),
...                           Viewer(vars=dT,
...                                 datamin=-0.5,
...                                 datamax=0.5)))
...
```

and iterate the solution in time, plotting as we go,

```
>>> if __name__ == '__main__':
...     steps = 10000
... else:
...     steps = 10
>>> from builtins import range
>>> for i in range(steps):
...     phase.updateOld()
...     dT.updateOld()
...     phaseEq.solve(phase, dt=dt)
...     heatEq.solve(dT, dt=dt)
...     if __name__ == "__main__" and (i % 10 == 0):
...         viewer.plot()
```

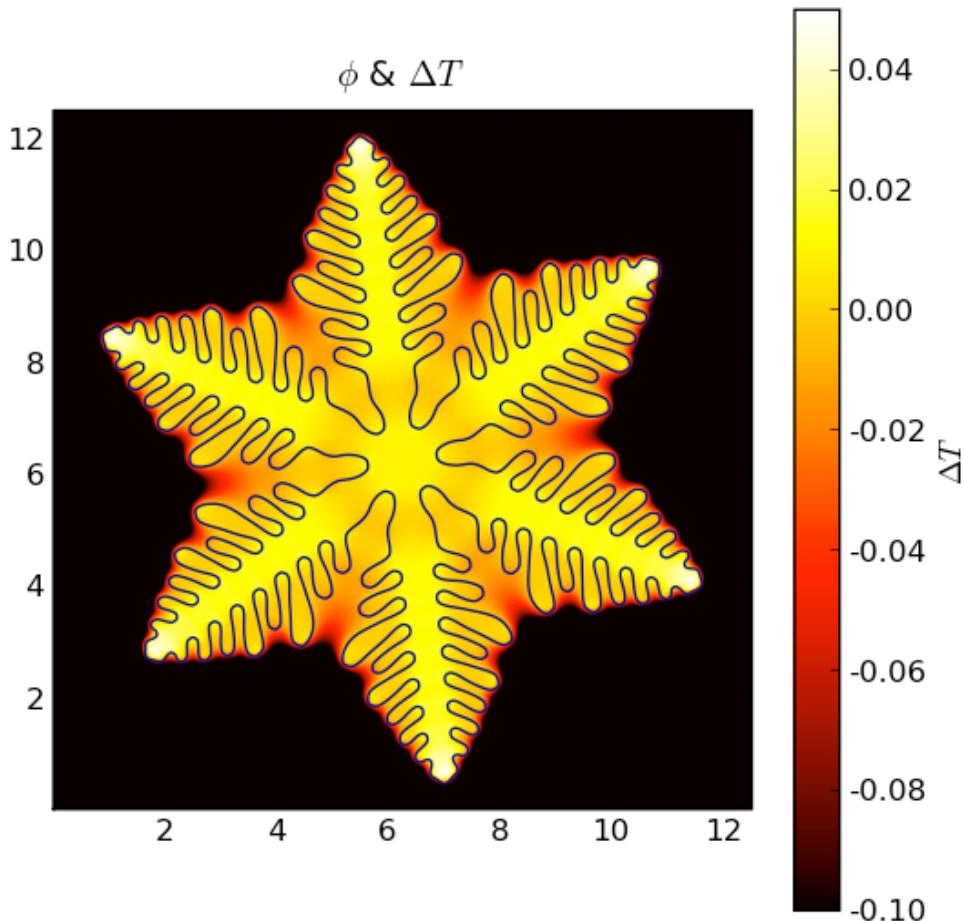

The non-uniform temperature results from the release of latent heat at the solidifying interface. The dendrite arms grow fastest where the temperature gradient is steepest.

We note that this FiPy simulation is written in about 50 lines of code (excluding the custom viewer), compared with over 800 lines of (fairly lucid) FORTRAN code used for the figures in [13].

23.11.2 examples.phase.anisotropyOLD

Attention: This example remains only for exact comparison against Ryo Kobayashi's FORTRAN code. See [examples.phase.anisotropy](#) for a better, although not numerically identical implementation.

In this example we solve a coupled phase and temperature equation to model solidification, and eventually dendritic growth, based on the work of Warren, Kobayashi, Lobkovsky and Carter [13].

We start from a circular seed in a 2D mesh:

```
>>> from fipy import CellVariable, Grid2D, TransientTerm, DiffusionTerm, ↵
    ↵ExplicitDiffusionTerm, ImplicitSourceTerm, Viewer
>>> from fipy.tools import numerix
```

```
>>> numberOfCells = 40
>>> Length = numberOfCells * 2.5 / 100.
>>> nx = numberOfCells
>>> ny = numberOfCells
>>> dx = Length / nx
>>> dy = Length / ny
>>> radius = Length / 4.
>>> seedCenter = (Length / 2., Length / 2.)
>>> initialTemperature = -0.4
>>> mesh = Grid2D(dx=dx, dy=dy, nx=nx, ny=ny)
```

Dendritic growth will not be observed with this small test system. If you wish to see dendritic growth reset the following parameters such that `numberOfCells = 500`, `steps = 10000`, `radius = dx * 5.` `seedCenter = (0., 0.)` and `initialTemperature = -0.5`.

The governing equation for the phase field is given by:

$$\tau_\phi \frac{\partial \phi}{\partial t} = \nabla \cdot [D \nabla \phi + A \nabla \xi] + \phi(1-\phi)m(\phi, T)$$

where

$$m(\phi, T) = \phi - \frac{1}{2} - \frac{\kappa_1}{\pi} \arctan(\kappa_2 T).$$

The coefficients D and A are given by,

$$D = \alpha^2 [1 + c\beta]^2$$

and

$$A = \alpha^2 c [1 + c\beta] \beta_\psi$$

where $\beta = \frac{1-\Phi^2}{1+\Phi^2}$, $\Phi = \tan\left(\frac{N}{2}\psi\right)$, $\psi = \theta + \arctan\left(\frac{\phi_x}{\phi_y}\right)$ and $\xi_x = -\phi_y$ and $\xi_y = \phi_x$.

The governing equation for temperature is given by:

$$\frac{\partial T}{\partial t} = D_T \nabla^2 T + \frac{\partial \phi}{\partial t}$$

Here the phase and temperature equations are solved with an explicit and implicit technique, respectively.

The parameters for these equations are

```
>>> timeStepDuration = 5e-5
>>> tau = 3e-4
>>> alpha = 0.015
>>> c = 0.02
>>> N = 4.
>>> kappa1 = 0.9
>>> kappa2 = 20.
>>> tempDiffusionCoeff = 2.25
>>> theta = 0.
```

The phase variable is 0 for a liquid and 1 for a solid. Here, the ``phase variable is initialized as a liquid,

```
>>> phase = CellVariable(name='phase field', mesh=mesh, hasOld=1)
```

The `hasOld` flag keeps the old value of the variable. This is necessary for a transient solution. In this example we wish to set up an interior region that is solid. The domain is seeded with a circular solidified region with parameters `seedCenter` and `radius` representing the center and radius of the seed.

```
>>> x, y = mesh.cellCenters
>>> phase.setValue(1., where=((x - seedCenter[0])**2
...                         + (y - seedCenter[1])**2) < radius**2)
```

The temperature field is initialized to a value of -0.4 throughout:

```
>>> temperature = CellVariable(
...     name='temperature',
...     mesh=mesh,
...     value=initialTemperature,
...     hasOld=1)
```

The $m(\phi, T)$ variable

is created from the `phase` and `temperature` variables.

```
>>> mVar = phase - 0.5 - kappa1 / numerix.pi * numerix.arctan(kappa2 * temperature)
```

The following section of code builds up the A and D coefficients.

```
>>> phaseY = phase.faceGrad.dot((0, 1))
>>> phaseX = phase.faceGrad.dot((1, 0))
>>> psi = theta + numerix.arctan2(phaseY, phaseX)
>>> Phi = numerix.tan(N * psi / 2)
>>> PhiSq = Phi**2
>>> beta = (1. - PhiSq) / (1. + PhiSq)
>>> betaPsi = -N * 2 * Phi / (1 + PhiSq)
>>> A = alpha**2 * c * (1. + c * beta) * betaPsi
>>> D = alpha**2 * (1. + c * beta)**2
```

The $\nabla\xi$ variable (`dxi`), given by $(\xi_x, \xi_y) = (-\phi_y, \phi_x)$, is constructed by first obtaining $\nabla\phi$ using `faceGrad`. The axes are rotated ninety degrees.

```
>>> dxi = phase.faceGrad.dot((0, 1), (-1, 0))
>>> anisotropySource = (A * dxi).divergence
```

The phase equation can now be constructed.

```
>>> phaseEq = TransientTerm(tau) == ExplicitDiffusionTerm(D) + \
...     ImplicitSourceTerm(mVar * ((mVar < 0) - phase)) + \
...     ((mVar > 0.) * mVar * phase + anisotropySource)
```

The temperature equation is built in the following way,

```
>>> temperatureEq = TransientTerm() == \
...     DiffusionTerm(tempDiffusionCoeff) + \
...     (phase - phase.old) / timeStepDuration
```

If we are running this example interactively, we create viewers for the phase and temperature fields

```
>>> if __name__ == '__main__':
...     phaseViewer = Viewer(vars=phase)
...     temperatureViewer = Viewer(vars=temperature,
...                                 datamin=-0.5, datamax=0.5)
...     phaseViewer.plot()
...     temperatureViewer.plot()
```

we iterate the solution in time, plotting as we go if running interactively,

```
>>> steps = 10
>>> from builtins import range
>>> for i in range(steps):
...     phase.updateOld()
...     temperature.updateOld()
...     phaseEq.solve(phase, dt=timeStepDuration)
...     temperatureEq.solve(temperature, dt=timeStepDuration)
...     if i%10 == 0 and __name__ == '__main__':
...         phaseViewer.plot()
...         temperatureViewer.plot()
```

The solution is compared with test data. The test data was created for `steps = 10` with a FORTRAN code written by Ryo Kobayashi for phase field modeling. The following code opens the file `anisotropy.gz` extracts the data and compares it with the `phase` variable.

```
>>> import os
>>> from future.utils import text_to_native_str
>>> testData = numerix.loadtxt(os.path.splitext(__file__)[0] + text_to_native_str('.gz'))
>>> print(phase.allclose(testData))
1
```

23.11.3 examples.phase.binary

It is straightforward to extend a phase field model to include binary alloys. As in `examples.phase.simple`, we will examine a 1D problem

```
>>> from fipy import CellVariable, Variable, Grid1D, TransientTerm, DiffusionTerm,
...     ImplicitSourceTerm, PowerLawConvectionTerm, DefaultAsymmetricSolver, Viewer
>>> from fipy.tools import numerix
```

```
>>> nx = 400
>>> dx = 5e-6 # cm
>>> L = nx * dx
>>> mesh = Grid1D(dx=dx, nx=nx)
```

The Helmholtz free energy functional can be written as the integral [1] [3] [30]

$$\mathcal{F}(\phi, C, T) = \int_{\mathcal{V}} \left\{ f(\phi, C, T) + \frac{\kappa_\phi}{2} |\nabla \phi|^2 + \frac{\kappa_C}{2} |\nabla C|^2 \right\} dV$$

over the volume \mathcal{V} as a function of phase ϕ ¹

¹ We will find that we need to “sweep” this non-linear problem (see e.g. the composition-dependent diffusivity example in `examples.diffusion.mesh1D`), so we declare ϕ and C to retain an “old” value.

```
>>> phase = CellVariable(name="phase", mesh=mesh, hasOld=1)
```

composition C

```
>>> C = CellVariable(name="composition", mesh=mesh, hasOld=1)
```

and temperature T^2

```
>>> T = Variable(name="temperature")
```

Frequently, the gradient energy term in concentration is ignored and we can derive governing equations

$$\frac{\partial \phi}{\partial t} = M_\phi \left(\kappa_\phi \nabla^2 \phi - \frac{\partial f}{\partial \phi} \right) \quad (23.7)$$

for phase and

$$\frac{\partial C}{\partial t} = \nabla \cdot \left(M_C \nabla \frac{\partial f}{\partial C} \right) \quad (23.8)$$

for solute.

The free energy density $f(\phi, C, T)$ can be constructed in many different ways. One approach is to construct free energy densities for each of the pure components, as functions of phase, *e.g.*

$$f_A(\phi, T) = p(\phi) f_A^S(T) + (1 - p(\phi)) f_A^L(T) + \frac{W_A}{2} g(\phi)$$

where $f_A^L(T)$, $f_B^L(T)$, $f_A^S(T)$, and $f_B^S(T)$ are the free energy densities of the pure components. There are a variety of choices for the interpolation function $p(\phi)$ and the barrier function $g(\phi)$,

such as those shown in `examples.phase.simple`

```
>>> def p(phi):
...     return phi**3 * (6 * phi**2 - 15 * phi + 10)
```

```
>>> def g(phi):
...     return (phi * (1 - phi))**2
```

The desired thermodynamic model can then be applied to obtain $f(\phi, C, T)$, such as for a regular solution,

$$f(\phi, C, T) = (1 - C) f_A(\phi, T) + C f_B(\phi, T) + RT [(1 - C) \ln(1 - C) + C \ln C] + C(1 - C) [\Omega_S p(\phi) + \Omega_L (1 - p(\phi))]$$

where

```
>>> R = 8.314 # J / (mol K)
```

is the gas constant and Ω_S and Ω_L are the regular solution interaction parameters for solid and liquid.

Another approach is useful when the free energy densities $f^L(C, T)$ and $f^S(C, T)$ of the alloy in the solid and liquid phases are known. This might be the case when the two different phases have different thermodynamic models or when one or both is obtained from a Calphad code. In this case, we can construct

$$f(\phi, C, T) = p(\phi) f^S(C, T) + (1 - p(\phi)) f^L(C, T) + \left[(1 - C) \frac{W_A}{2} + C \frac{W_B}{2} \right] g(\phi).$$

² we are going to want to examine different temperatures in this example, so we declare T as a `Variable`

When the thermodynamic models are the same in both phases, both approaches should yield the same result.

We choose the first approach and make the simplifying assumptions of an ideal solution and that

$$f_A^L(T) = 0$$

$$f_A^S(T) - f_A^L(T) = \frac{L_A (T - T_M^A)}{T_M^A}$$

and likewise for component B .

```
>>> LA = 2350. # J / cm**3
>>> LB = 1728. # J / cm**3
>>> TmA = 1728. # K
>>> TmB = 1358. # K
```

```
>>> enthalpyA = LA * (T - TmA) / TmA
>>> enthalpyB = LB * (T - TmB) / TmB
```

This relates the difference between the free energy densities of the pure solid and pure liquid phases to the latent heat L_A and the pure component melting point T_M^A , such that

$$f_A(\phi, T) = \frac{L_A (T - T_M^A)}{T_M^A} p(\phi) + \frac{W_A}{2} g(\phi).$$

With these assumptions

$$\begin{aligned} \frac{\partial f}{\partial \phi} &= (1 - C) \frac{\partial f_A}{\partial \phi} + C \frac{\partial f_B}{\partial \phi} \\ &= \left\{ (1 - C) \frac{L_A (T - T_M^A)}{T_M^A} + C \frac{L_B (T - T_M^B)}{T_M^B} \right\} p'(\phi) + \left\{ (1 - C) \frac{W_A}{2} + C \frac{W_B}{2} \right\} g'(\phi) \end{aligned}$$

and

$$\begin{aligned} \frac{\partial f}{\partial C} &= \left[f_B(\phi, T) + \frac{RT}{V_m} \ln C \right] - \left[f_A(\phi, T) + \frac{RT}{V_m} \ln(1 - C) \right] \\ &= [\mu_B(\phi, C, T) - \mu_A(\phi, C, T)] / V_m \end{aligned}$$

where μ_A and μ_B are the classical chemical potentials for the binary species. $p'(\phi)$ and $g'(\phi)$ are the partial derivatives of p and g with respect to ϕ

```
>>> def pPrime(phi):
...     return 30. * g(phi)
```

```
>>> def gPrime(phi):
...     return 2. * phi * (1 - phi) * (1 - 2 * phi)
```

V_m is the molar volume, which we take to be independent of concentration and phase

```
>>> Vm = 7.42 # cm**3 / mol
```

On comparison with `examples.phase.simple`, we can see that the present form of the phase field equation is identical to the one found earlier, with the source now composed of the concentration-weighted average of the source for either pure component. We let the pure component barriers equal the previous value

```
>>> deltaA = deltaB = 1.5 * dx
>>> sigmaA = 3.7e-5 # J / cm**2
>>> sigmaB = 2.9e-5 # J / cm**2
>>> betaA = 0.33 # cm / (K s)
>>> betaB = 0.39 # cm / (K s)
>>> kappaA = 6 * sigmaA * deltaA # J / cm
>>> kappaB = 6 * sigmaB * deltaB # J / cm
>>> WA = 6 * sigmaA / deltaA # J / cm**3
>>> WB = 6 * sigmaB / deltaB # J / cm**3
```

and define the averages

```
>>> W = (1 - C) * WA / 2. + C * WB / 2.
>>> enthalpy = (1 - C) * enthalpyA + C * enthalpyB
```

We can now linearize the source exactly as before

```
>>> mPhi = -((1 - 2 * phase) * W + 30 * phase * (1 - phase) * enthalpy)
>>> dmPhidPhi = 2 * W - 30 * (1 - 2 * phase) * enthalpy
>>> S1 = dmPhidPhi * phase * (1 - phase) + mPhi * (1 - 2 * phase)
>>> S0 = mPhi * phase * (1 - phase) - S1 * phase
```

Using the same gradient energy coefficient and phase field mobility

```
>>> kappa = (1 - C) * kappaA + C * kappaB
>>> Mphi = TmA * betaA / (6 * LA * deltaA)
```

we define the phase field equation

```
>>> phaseEq = (TransientTerm(1/Mphi) == DiffusionTerm(coeff=kappa)
...           + S0 + ImplicitSourceTerm(coeff=S1))
```

When coding explicitly, it is typical to simply write a function to evaluate the chemical potentials μ_A and μ_B and then perform the finite differences necessary to calculate their gradient and divergence, e.g.:

```
def deltaChemPot(phase, C, T):
    return ((Vm * (enthalpyB * p(phase) + WA * g(phase)) + R * T * log(1 - C)) -
            (Vm * (enthalpyA * p(phase) + WA * g(phase)) + R * T * log(C)))

for j in range(faces):
    flux[j] = ((Mc[j+.5] + Mc[j-.5]) / 2) * (deltaChemPot(phase[j+.5], C[j+.5],
    T) - deltaChemPot(phase[j-.5], C[j-.5], T)) / dx

for j in range(cells):
    diffusion = (flux[j+.5] - flux[j-.5]) / dx
```

where we neglect the details of the outer boundaries ($j = 0$ and $j = N$) or exactly how to translate $j+.5$ or $j-.5$ into an array index, much less the complexities of higher dimensions. FiPy can handle all of these issues automatically, so we could just write:

```
chemPotA = Vm * (enthalpyA * p(phase) + WA * g(phase)) + R * T * log(C)
chemPotB = Vm * (enthalpyB * p(phase) + WB * g(phase)) + R * T * log(1-C)
```

(continues on next page)

(continued from previous page)

```
flux = Mc * (chemPotB - chemPotA).faceGrad
eq = TransientTerm() == flux.divergence
```

Although the second syntax would essentially work as written, such an explicit implementation would be very slow. In order to take advantage of *FiPy*'s implicit solvers, it is necessary to reduce Eq. (23.8) to the canonical form of Eq. (12.2), hence we must expand Eq. (23.9) as

$$\frac{\partial f}{\partial C} = \left[\frac{L_B(T - T_M^B)}{T_M^B} - \frac{L_A(T - T_M^A)}{T_M^A} \right] p(\phi) + \frac{RT}{V_m} [\ln C - \ln(1 - C)] + \frac{W_B - W_A}{2} g(\phi)$$

In either bulk phase, $\nabla p(\phi) = \nabla g(\phi) = 0$, so we can then reduce Eq. (23.8) to

$$\begin{aligned} \frac{\partial C}{\partial t} &= \nabla \cdot \left(M_C \nabla \left\{ \frac{RT}{V_m} [\ln C - \ln(1 - C)] \right\} \right) \\ &= \nabla \cdot \left[\frac{M_C RT}{C(1 - C)V_m} \nabla C \right] \end{aligned}$$

and, by comparison with Fick's second law

$$\frac{\partial C}{\partial t} = \nabla \cdot [D \nabla C],$$

we can associate the mobility M_C with the intrinsic diffusivity D by $M_C \equiv DC(1 - C)V_m/RT$ and write Eq. (23.8) as

$$\begin{aligned} \frac{\partial C}{\partial t} &= \nabla \cdot (D \nabla C) \\ &+ \nabla \cdot \left(\frac{DC(1 - C)V_m}{RT} \left\{ \left[\frac{L_B(T - T_M^B)}{T_M^B} - \frac{L_A(T - T_M^A)}{T_M^A} \right] \nabla p(\phi) + \frac{W_B - W_A}{2} \nabla g(\phi) \right\} \right). \end{aligned}$$

The first term is clearly a *DiffusionTerm*. The second is less obvious, but by factoring out C , we can see that this is a *ConvectionTerm* with a velocity

$$\vec{u}_\phi = \frac{D(1 - C)V_m}{RT} \left\{ \left[\frac{L_B(T - T_M^B)}{T_M^B} - \frac{L_A(T - T_M^A)}{T_M^A} \right] \nabla p(\phi) + \frac{W_B - W_A}{2} \nabla g(\phi) \right\}$$

due to phase transformation, such that

$$\frac{\partial C}{\partial t} = \nabla \cdot (D \nabla C) + \nabla \cdot (C \vec{u}_\phi)$$

or

```
>>> Dl = Variable(value=1e-5) # cm**2 / s
>>> Ds = Variable(value=1e-9) # cm**2 / s
>>> D = (Ds - Dl) * phase.arithmaticFaceValue + Dl
```

```
>>> phaseTransformationVelocity = (((enthalpyB - enthalpyA) * p(phase).faceGrad
...           + 0.5 * (WB - WA) * g(phase).faceGrad)
...           * D * (1. - C).harmonicFaceValue * Vm / (R * T))
```

```
>>> diffusionEq = (TransientTerm()
...                   == DiffusionTerm(coeff=D)
...                   + PowerLawConvectionTerm(coeff=phaseTransformationVelocity))
```

We initialize the phase field to a step function in the middle of the domain

```
>>> phase.setValue(1.)
>>> phase.setValue(0., where=mesh.cellCenters[0] > L/2.)
```

and start with a uniform composition field $C = 1/2$

```
>>> C.setValue(0.5)
```

In equilibrium, $\mu_A(0, C_L, T) = \mu_A(1, C_S, T)$ and $\mu_B(0, C_L, T) = \mu_B(1, C_S, T)$ and, for ideal solutions, we can deduce the liquidus and solidus compositions as

$$C_L = \frac{1 - \exp\left(-\frac{L_A(T-T_M^A)}{T_M^A} \frac{V_m}{RT}\right)}{\exp\left(-\frac{L_B(T-T_M^B)}{T_M^B} \frac{V_m}{RT}\right) - \exp\left(-\frac{L_A(T-T_M^A)}{T_M^A} \frac{V_m}{RT}\right)}$$

$$C_S = \exp\left(-\frac{L_B(T-T_M^B)}{T_M^B} \frac{V_m}{RT}\right) C_L$$

```
>>> Cl = ((1. - numerix.exp(-enthalpyA * Vm / (R * T)))
...         / (numerix.exp(-enthalpyB * Vm / (R * T)) - numerix.exp(-enthalpyA * Vm / (R * T))))
>>> Cs = numerix.exp(-enthalpyB * Vm / (R * T)) * Cl
```

The phase fraction is predicted by the lever rule

```
>>> Cavg = C.cellVolumeAverage
>>> fraction = (Cl - Cavg) / (Cl - Cs)
```

For the special case of `fraction = Cavg = 0.5`, a little bit of algebra reveals that the temperature that leaves the phase fraction unchanged is given by

```
>>> T.setValue((LA + LB) * TmA * TmB / (LA * TmB + LB * TmA))
```

In this simple, binary, ideal solution case, we can derive explicit expressions for the solidus and liquidus compositions. In general, this may not be possible or practical. In that event, the root-finding facilities in SciPy can be used.

We'll need a function to return the two conditions for equilibrium

$$0 = \mu_A(1, C_S, T) - \mu_A(0, C_L, T) = \frac{L_A(T-T_M^A)}{T_M^A} V_m + RT \ln(1 - C_S) - RT \ln(1 - C_L)$$

$$0 = \mu_B(1, C_S, T) - \mu_B(0, C_L, T) = \frac{L_B(T-T_M^B)}{T_M^B} V_m + RT \ln C_S - RT \ln C_L$$

```
>>> def equilibrium(C):
...     return [numerix.array(enthalpyA * Vm
...                           + R * T * numerix.log(1 - C[0]))
...             - R * T * numerix.log(1 - C[1])),
...     numerix.array(enthalpyB * Vm
...                           + R * T * numerix.log(C[0])
...             - R * T * numerix.log(C[1]))]
```

and we'll have much better luck if we also supply the Jacobian

$$\begin{bmatrix} \frac{\partial(\mu_A^S - \mu_A^L)}{\partial C_S} & \frac{\partial(\mu_A^S - \mu_A^L)}{\partial C_L} \\ \frac{\partial(\mu_B^S - \mu_B^L)}{\partial C_S} & \frac{\partial(\mu_B^S - \mu_B^L)}{\partial C_L} \end{bmatrix} = RT \begin{bmatrix} -\frac{1}{1-C_S} & \frac{1}{1-C_L} \\ \frac{1}{C_S} & -\frac{1}{C_L} \end{bmatrix}$$

```
>>> def equilibriumJacobian(C):
...     return R * T * numerix.array([[1. / (1 - C[0]), 1. / (1 - C[1])],
...                                     [1. / C[0], -1. / C[1]]])
```

```
>>> try:
...     from scipy.optimize import fsolve
...     CsRoot, ClRoot = fsolve(func=equilibrium, x0=[0.5, 0.5],
...                             fprime=equilibriumJacobian)
... except ImportError:
...     ClRoot = CsRoot = 0
...     print("The SciPy library is not available to calculate the solidus and ..."
...          "liquidus concentrations")
```

```
>>> print(Cl.allclose(ClRoot))
1
>>> print(Cs.allclose(CsRoot))
1
```

We plot the result against the sharp interface solution

```
>>> sharp = CellVariable(name="sharp", mesh=mesh)
>>> x = mesh.cellCenters[0]
>>> sharp.setValue(Cs, where=x < L * fraction)
>>> sharp.setValue(Cl, where=x >= L * fraction)
```

```
>>> if __name__ == '__main__':
...     viewer = Viewer(vars=(phase, C, sharp),
...                     datamin=0., datamax=1.)
...     viewer.plot()
```

Because the phase field interface will not move, and because we've seen in earlier examples that the diffusion problem is unconditionally stable, we need take only one very large timestep to reach equilibrium

```
>>> dt = 1.e5
```

Because the phase field equation is coupled to the composition through enthalpy and \mathbf{W} and the diffusion equation is coupled to the phase field through `phaseTransformationVelocity`, it is necessary sweep this non-linear problem to convergence. We use the “residual” of the equations (a measure of how well they think they have solved the given set of linear equations) as a test for how long to sweep. Because of the `ConvectionTerm`, the solution matrix for `diffusionEq` is asymmetric and cannot be solved by the default `LinearPCGSolver`. Therefore, we use a `DefaultAsymmetricSolver` for this equation.


We now use the “`sweep()`” method instead of “`solve()`” because we require the residual.

```
>>> solver = DefaultAsymmetricSolver(tolerance=1e-10)
```

```

>>> phase.updateOld()
>>> C.updateOld()
>>> phaseRes = 1e+10
>>> diffRes = 1e+10
>>> while phaseRes > 1e-3 or diffRes > 1e-3:
...     phaseRes = phaseEq.sweep(var=phase, dt=dt)
...     diffRes = diffusionEq.sweep(var=C, dt=dt, solver=solver)
>>> from fipy import input
>>> if __name__ == '__main__':
...     viewer.plot()
...     input("Stationary phase field. Press <return> to proceed...")

```

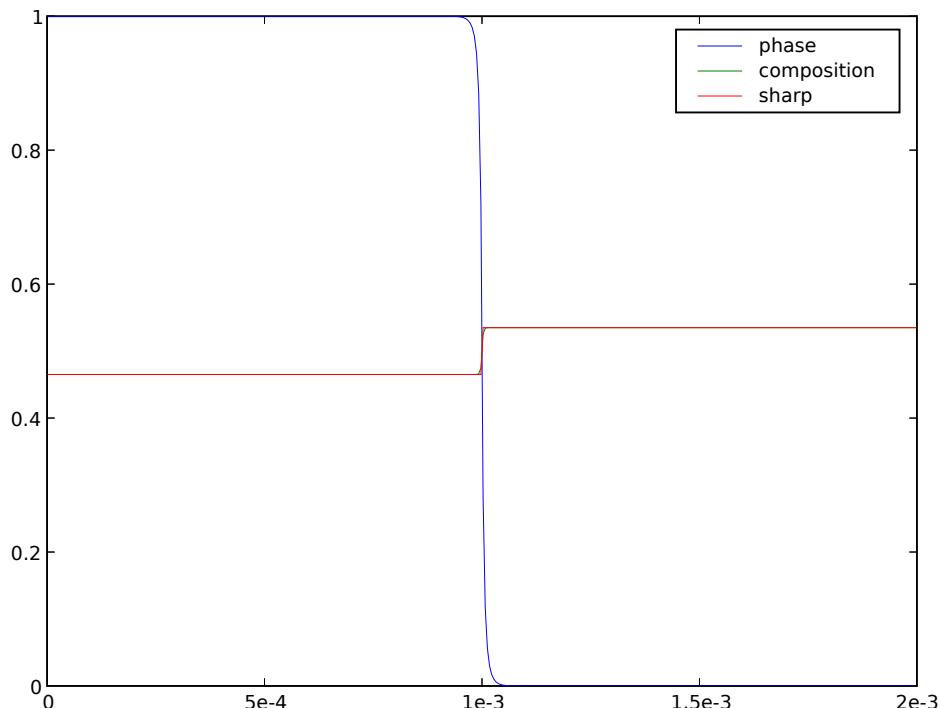

We verify that the bulk phases have shifted to the predicted solidus and liquidus compositions

```

>>> X = mesh.faceCenters[0]
>>> print(Cs.allclose(C.faceValue[X.value==0], atol=2e-4))
True
>>> print(Cl.allclose(C.faceValue[X.value==L], atol=2e-4))
True

```

and that the phase fraction remains unchanged

```

>>> print(fraction.allclose(phase.cellVolumeAverage, atol=2e-4))
1

```

while conserving mass overall

```
>>> print(Cavg.allclose(0.5, atol=1e-8))
1
```

We now quench by ten degrees

```
>>> T.setValue(T() - 10.) # K
```

```
>>> sharp.setValue(Cs, where=x < L * fraction)
>>> sharp.setValue(Cl, where=x >= L * fraction)
```

Because this lower temperature will induce the phase interface to move (solidify), we will need to take much smaller timesteps (the time scales of diffusion and of phase transformation compete with each other).

The [CFL limit](#) requires that no interface should advect more than one grid spacing in a timestep. We can get a rough idea for the maximum timestep we can take by looking at the velocity of convection induced by phase transformation in Eq. (23.9). If we assume that the phase changes from 1 to 0 in a single grid spacing, that the diffusivity is Dl at the interface, and that the term due to the difference in barrier heights is negligible:

$$\begin{aligned}\vec{u}_\phi &= \frac{D_\phi}{C} \nabla \phi \\ &\approx \frac{Dl \frac{1}{2} V_m}{RT} \left[\frac{L_B (T - T_M^B)}{T_M^B} - \frac{L_A (T - T_M^A)}{T_M^A} \right] \frac{1}{\Delta x} \\ &\approx \frac{Dl \frac{1}{2} V_m}{RT} (L_B + L_A) \frac{T_M^A - T_M^B}{T_M^A + T_M^B} \frac{1}{\Delta x} \\ &\approx 0.28 \text{ cm/s}\end{aligned}$$


To get a $\text{CFL} = \vec{u}_\phi \Delta t / \Delta x < 1$, we need a time step of about 10^{-5} s.

```
>>> dt = 1.e-5
```

```
>>> if __name__ == '__main__':
...     timesteps = 100
... else:
...     timesteps = 10
```

```
>>> from builtins import range
>>> for i in range(timesteps):
...     phase.updateOld()
...     C.updateOld()
...     phaseRes = 1e+10
...     diffRes = 1e+10
...     while phaseRes > 1e-3 or diffRes > 1e-3:
...         phaseRes = phaseEq.sweep(var=phase, dt=dt)
...         diffRes = diffusionEq.sweep(var=C, dt=dt, solver=solver)
...     if __name__ == '__main__':
...         viewer.plot()
```

```
>>> from fipy import input
>>> if __name__ == '__main__':
...     input("Moving phase field. Press <return> to proceed...")
```

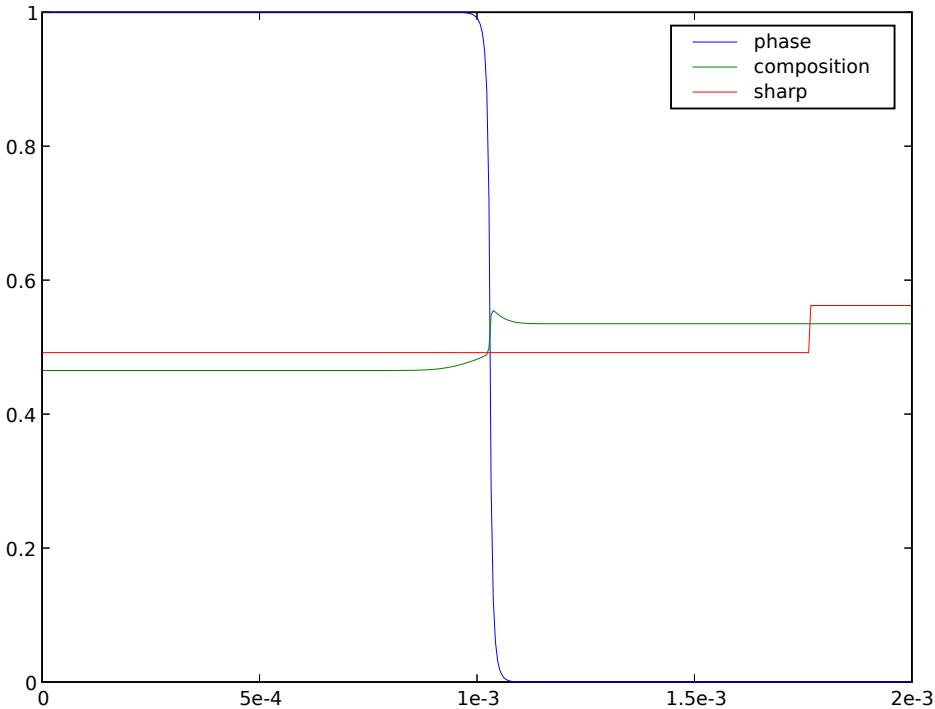

We see that the composition on either side of the interface approach the sharp-interface solidus and liquidus, but it will take a great many more timesteps to reach equilibrium. If we waited sufficiently long, we could again verify the final concentrations and phase fraction against the expected values.

23.11.4 examples.phase.binaryCoupled

Simultaneously solve a phase-field evolution and solute diffusion problem in one-dimension.

It is straightforward to extend a phase field model to include binary alloys. As in `examples.phase.simple`, we will examine a 1D problem

```
>>> from fipy import CellVariable, Variable, Grid1D, TransientTerm, DiffusionTerm,_
... ImplicitSourceTerm, LinearLUSolver, Viewer
>>> from fipy.tools import numerix
```

```
>>> nx = 400
>>> dx = 5e-6 # cm
>>> L = nx * dx
>>> mesh = Grid1D(dx=dx, nx=nx)
```

The Helmholtz free energy functional can be written as the integral [1] [3] [30]

$$\mathcal{F}(\phi, C, T) = \int_{\mathcal{V}} \left\{ f(\phi, C, T) + \frac{\kappa_\phi}{2} |\nabla \phi|^2 + \frac{\kappa_C}{2} |\nabla C|^2 \right\} dV$$

over the volume \mathcal{V} as a function of phase ϕ ¹

¹ We will find that we need to “sweep” this non-linear problem (see e.g. the composition-dependent diffusivity example in `examples`.

```
>>> phase = CellVariable(name="phase", mesh=mesh, hasOld=1)
```

composition C

```
>>> C = CellVariable(name="composition", mesh=mesh, hasOld=1)
```

and temperature T^2

```
>>> T = Variable(name="temperature")
```

Frequently, the gradient energy term in concentration is ignored and we can derive governing equations

$$\frac{\partial \phi}{\partial t} = M_\phi \left(\kappa_\phi \nabla^2 \phi - \frac{\partial f}{\partial \phi} \right) \quad (23.9)$$

for phase and

$$\frac{\partial C}{\partial t} = \nabla \cdot \left(M_C \nabla \frac{\partial f}{\partial C} \right) \quad (23.10)$$

for solute.

The free energy density $f(\phi, C, T)$ can be constructed in many different ways. One approach is to construct free energy densities for each of the pure components, as functions of phase, *e.g.*

$$f_A(\phi, T) = p(\phi) f_A^S(T) + (1 - p(\phi)) f_A^L(T) + \frac{W_A}{2} g(\phi)$$

where $f_A^L(T)$, $f_B^L(T)$, $f_A^S(T)$, and $f_B^S(T)$ are the free energy densities of the pure components. There are a variety of choices for the interpolation function $p(\phi)$ and the barrier function $g(\phi)$,

such as those shown in `examples.phase.simple`

```
>>> def p(phi):
...     return phi**3 * (6 * phi**2 - 15 * phi + 10)
```

```
>>> def g(phi):
...     return (phi * (1 - phi))**2
```

The desired thermodynamic model can then be applied to obtain $f(\phi, C, T)$, such as for a regular solution,

$$f(\phi, C, T) = (1 - C) f_A(\phi, T) + C f_B(\phi, T) \\ + RT [(1 - C) \ln(1 - C) + C \ln C] + C(1 - C) [\Omega_S p(\phi) + \Omega_L (1 - p(\phi))]$$

where

```
>>> R = 8.314 # J / (mol K)
```

is the gas constant and Ω_S and Ω_L are the regular solution interaction parameters for solid and liquid.

Another approach is useful when the free energy densities $f^L(C, T)$ and $f^S(C, T)$ of the alloy in the solid and liquid phases are known. This might be the case when the two different phases have different thermodynamic models or when one or both is obtained from a Calphad code. In this case, we can construct

$$f(\phi, C, T) = p(\phi) f^S(C, T) + (1 - p(\phi)) f^L(C, T) + \left[(1 - C) \frac{W_A}{2} + C \frac{W_B}{2} \right] g(\phi).$$

`diffusion.mesh1D`), so we declare ϕ and C to retain an “old” value.

² we are going to want to examine different temperatures in this example, so we declare T as a `Variable`

When the thermodynamic models are the same in both phases, both approaches should yield the same result.

We choose the first approach and make the simplifying assumptions of an ideal solution and that

$$\begin{aligned}f_A^L(T) &= 0 \\f_A^S(T) - f_A^L(T) &= \frac{L_A (T - T_M^A)}{T_M^A}\end{aligned}$$

and likewise for component B .

```
>>> LA = 2350. # J / cm**3
>>> LB = 1728. # J / cm**3
>>> TmA = 1728. # K
>>> TmB = 1358. # K
```

```
>>> enthalpyA = LA * (T - TmA) / TmA
>>> enthalpyB = LB * (T - TmB) / TmB
```

This relates the difference between the free energy densities of the pure solid and pure liquid phases to the latent heat L_A and the pure component melting point T_M^A , such that

$$f_A(\phi, T) = \frac{L_A (T - T_M^A)}{T_M^A} p(\phi) + \frac{W_A}{2} g(\phi).$$

With these assumptions

$$\begin{aligned}\frac{\partial f}{\partial \phi} &= (1 - C) \frac{\partial f_A}{\partial \phi} + C \frac{\partial f_B}{\partial \phi} \\&= \left\{ (1 - C) \frac{L_A (T - T_M^A)}{T_M^A} + C \frac{L_B (T - T_M^B)}{T_M^B} \right\} p'(\phi) + \left\{ (1 - C) \frac{W_A}{2} + C \frac{W_B}{2} \right\} g'(\phi)\end{aligned}$$

and

$$\begin{aligned}\frac{\partial f}{\partial C} &= \left[f_B(\phi, T) + \frac{RT}{V_m} \ln C \right] - \left[f_A(\phi, T) + \frac{RT}{V_m} \ln(1 - C) \right] \\&= [\mu_B(\phi, C, T) - \mu_A(\phi, C, T)] / V_m\end{aligned}$$

where μ_A and μ_B are the classical chemical potentials for the binary species. $p'(\phi)$ and $g'(\phi)$ are the partial derivatives of p and g with respect to ϕ

```
>>> def pPrime(phi):
...     return 30. * g(phi)
```

```
>>> def gPrime(phi):
...     return 2. * phi * (1 - phi) * (1 - 2 * phi)
```

V_m is the molar volume, which we take to be independent of concentration and phase

```
>>> Vm = 7.42 # cm**3 / mol
```

On comparison with `examples.phase.simple`, we can see that the present form of the phase field equation is identical to the one found earlier, with the source now composed of the concentration-weighted average of the source for either pure component. We let the pure component barriers equal the previous value

```
>>> deltaA = deltaB = 1.5 * dx
>>> sigmaA = 3.7e-5 # J / cm**2
>>> sigmaB = 2.9e-5 # J / cm**2
>>> betaA = 0.33 # cm / (K s)
>>> betaB = 0.39 # cm / (K s)
>>> kappaA = 6 * sigmaA * deltaA # J / cm
>>> kappaB = 6 * sigmaB * deltaB # J / cm
>>> WA = 6 * sigmaA / deltaA # J / cm**3
>>> WB = 6 * sigmaB / deltaB # J / cm**3
```

and define the averages

```
>>> W = (1 - C) * WA / 2. + C * WB / 2.
>>> enthalpy = (1 - C) * enthalpyA + C * enthalpyB
```

We can now linearize the source exactly as before

```
>>> mPhi = -((1 - 2 * phase) * W + 30 * phase * (1 - phase) * enthalpy)
>>> dmPhidPhi = 2 * W - 30 * (1 - 2 * phase) * enthalpy
>>> S1 = dmPhidPhi * phase * (1 - phase) + mPhi * (1 - 2 * phase)
>>> S0 = mPhi * phase * (1 - phase) - S1 * phase
```

Using the same gradient energy coefficient and phase field mobility

```
>>> kappa = (1 - C) * kappaA + C * kappaB
>>> Mphi = TmA * betaA / (6 * LA * deltaA)
```

we define the phase field equation

```
>>> phaseEq = (TransientTerm(1/Mphi, var=phase) == DiffusionTerm(coeff=kappa, var=phase)
...           + S0 + ImplicitSourceTerm(coeff=S1, var=phase))
```

When coding explicitly, it is typical to simply write a function to evaluate the chemical potentials μ_A and μ_B and then perform the finite differences necessary to calculate their gradient and divergence, e.g.:

```
def deltaChemPot(phase, C, T):
    return ((Vm * (enthalpyB * p(phase) + WA * g(phase)) + R * T * log(1 - C)) -
            (Vm * (enthalpyA * p(phase) + WA * g(phase)) + R * T * log(C)))

for j in range(faces):
    flux[j] = ((Mc[j+.5] + Mc[j-.5]) / 2) \
              * (deltaChemPot(phase[j+.5], C[j+.5], T) \
                  - deltaChemPot(phase[j-.5], C[j-.5], T)) / dx

for j in range(cells):
    diffusion = (flux[j+.5] - flux[j-.5]) / dx
```

where we neglect the details of the outer boundaries ($j = 0$ and $j = N$) or exactly how to translate $j+.5$ or $j-.5$ into an array index, much less the complexities of higher dimensions. FiPy can handle all of these issues automatically, so we could just write:

```

chemPotA = Vm * (enthalpyA * p(phase) + WA * g(phase)) + R * T * log(C)
chemPotB = Vm * (enthalpyB * p(phase) + WB * g(phase)) + R * T * log(1-C)
flux = Mc * (chemPotB - chemPotA).faceGrad
eq = TransientTerm() == flux.divergence

```

Although the second syntax would essentially work as written, such an explicit implementation would be very slow. In order to take advantage of *FiPy*'s implicit solvers, it is necessary to reduce Eq. (23.10) to the canonical form of Eq. (12.2), hence we must expand Eq. (23.11) as

$$\frac{\partial f}{\partial C} = \left[\frac{L_B(T - T_M^B)}{T_M^B} - \frac{L_A(T - T_M^A)}{T_M^A} \right] p(\phi) + \frac{RT}{V_m} [\ln C - \ln(1 - C)] + \frac{W_B - W_A}{2} g(\phi)$$

In either bulk phase, $\nabla p(\phi) = \nabla g(\phi) = 0$, so we can then reduce Eq. (23.10) to

$$\begin{aligned} \frac{\partial C}{\partial t} &= \nabla \cdot \left(M_C \nabla \left\{ \frac{RT}{V_m} [\ln C - \ln(1 - C)] \right\} \right) \\ &= \nabla \cdot \left[\frac{M_C RT}{C(1 - C)V_m} \nabla C \right] \end{aligned}$$

and, by comparison with Fick's second law

$$\frac{\partial C}{\partial t} = \nabla \cdot [D \nabla C],$$

we can associate the mobility M_C with the intrinsic diffusivity D_C by $M_C \equiv D_C C(1 - C)V_m/RT$ and write Eq. (23.10) as

$$\begin{aligned} \frac{\partial C}{\partial t} &= \nabla \cdot (D_C \nabla C) \\ &\quad + \nabla \cdot \left(\frac{D_C C(1 - C)V_m}{RT} \left\{ \left[\frac{L_B(T - T_M^B)}{T_M^B} - \frac{L_A(T - T_M^A)}{T_M^A} \right] \nabla p(\phi) + \frac{W_B - W_A}{2} \nabla g(\phi) \right\} \right). \\ &= \nabla \cdot (D_C \nabla C) \\ &\quad + \nabla \cdot \left(\frac{D_C C(1 - C)V_m}{RT} \left\{ \left[\frac{L_B(T - T_M^B)}{T_M^B} - \frac{L_A(T - T_M^A)}{T_M^A} \right] p'(\phi) + \frac{W_B - W_A}{2} g'(\phi) \right\} \nabla \phi \right). \end{aligned}$$

The first term is clearly a *DiffusionTerm* in C . The second is a *DiffusionTerm* in ϕ with a diffusion coefficient

$$D_\phi(C, \phi) = \frac{D_C C(1 - C)V_m}{RT} \left\{ \left[\frac{L_B(T - T_M^B)}{T_M^B} - \frac{L_A(T - T_M^A)}{T_M^A} \right] p'(\phi) + \frac{W_B - W_A}{2} g'(\phi) \right\},$$

such that

$$\frac{\partial C}{\partial t} = \nabla \cdot (D_C \nabla C) + \nabla \cdot (D_\phi \nabla \phi)$$

or

```

>>> Dl = Variable(value=1e-5) # cm**2 / s
>>> Ds = Variable(value=1e-9) # cm**2 / s
>>> Dc = (Ds - Dl) * phase.arithmeticFaceValue + Dl

```

```

>>> Dphi = ((Dc * C.harmonicFaceValue * (1 - C.harmonicFaceValue) * Vm / (R * T))
...           * ((enthalpyB - enthalpyA) * pPrime(phase.arithmeticFaceValue)
...           + 0.5 * (WB - WA) * gPrime(phase.arithmeticFaceValue)))

```

```
>>> diffusionEq = (TransientTerm(var=C)
...           == DiffusionTerm(coeff=Dc, var=C)
...           + DiffusionTerm(coeff=Dphi, var=phase))
```

```
>>> eq = phaseEq & diffusionEq
```

We initialize the phase field to a step function in the middle of the domain

```
>>> phase.setValue(1.)
>>> phase.setValue(0., where=mesh.cellCenters[0] > L/2.)
```

and start with a uniform composition field $C = 1/2$

```
>>> C.setValue(0.5)
```

In equilibrium, $\mu_A(0, C_L, T) = \mu_A(1, C_S, T)$ and $\mu_B(0, C_L, T) = \mu_B(1, C_S, T)$ and, for ideal solutions, we can deduce the liquidus and solidus compositions as

$$C_L = \frac{1 - \exp\left(-\frac{L_A(T-T_M^A)}{T_M^A} \frac{V_m}{RT}\right)}{\exp\left(-\frac{L_B(T-T_M^B)}{T_M^B} \frac{V_m}{RT}\right) - \exp\left(-\frac{L_A(T-T_M^A)}{T_M^A} \frac{V_m}{RT}\right)}$$

$$C_S = \exp\left(-\frac{L_B(T-T_M^B)}{T_M^B} \frac{V_m}{RT}\right) C_L$$

```
>>> Cl = ((1. - numerix.exp(-enthalpyA * Vm / (R * T)))
...         / (numerix.exp(-enthalpyB * Vm / (R * T)) - numerix.exp(-enthalpyA * Vm / (R * T))))
>>> Cs = numerix.exp(-enthalpyB * Vm / (R * T)) * Cl
```

The phase fraction is predicted by the lever rule

```
>>> Cavg = C.cellVolumeAverage
>>> fraction = (Cl - Cavg) / (Cl - Cs)
```

For the special case of `fraction = Cavg = 0.5`, a little bit of algebra reveals that the temperature that leaves the phase fraction unchanged is given by

```
>>> T.setValue((LA + LB) * TmA * TmB / (LA * TmB + LB * TmA))
```

In this simple, binary, ideal solution case, we can derive explicit expressions for the solidus and liquidus compositions. In general, this may not be possible or practical. In that event, the root-finding facilities in SciPy can be used.

We'll need a function to return the two conditions for equilibrium

$$0 = \mu_A(1, C_S, T) - \mu_A(0, C_L, T) = \frac{L_A(T-T_M^A)}{T_M^A} V_m + RT \ln(1-C_S) - RT \ln(1-C_L)$$

$$0 = \mu_B(1, C_S, T) - \mu_B(0, C_L, T) = \frac{L_B(T-T_M^B)}{T_M^B} V_m + RT \ln C_S - RT \ln C_L$$

```
>>> def equilibrium(C):
...     return [numerix.array(enthalpyA * Vm
...                         + R * T * numerix.log(1 - C[0]))
...             - R * T * numerix.log(1 - C[1])),
...     numerix.array(enthalpyB * Vm
...                         + R * T * numerix.log(C[0])
...                         - R * T * numerix.log(C[1]))]
```

and we'll have much better luck if we also supply the Jacobian

$$\begin{bmatrix} \frac{\partial(\mu_A^S - \mu_A^L)}{\partial C_S} & \frac{\partial(\mu_A^S - \mu_A^L)}{\partial C_L} \\ \frac{\partial(\mu_B^S - \mu_B^L)}{\partial C_S} & \frac{\partial(\mu_B^S - \mu_B^L)}{\partial C_L} \end{bmatrix} = RT \begin{bmatrix} -\frac{1}{1-C_S} & \frac{1}{1-C_L} \\ \frac{1}{C_S} & -\frac{1}{C_L} \end{bmatrix}$$

```
>>> def equilibriumJacobian(C):
...     return R * T * numerix.array([[-1. / (1 - C[0]), 1. / (1 - C[1])],
...                                    [1. / C[0], -1. / C[1]]])
```

```
>>> try:
...     from scipy.optimize import fsolve
...     CsRoot, ClRoot = fsolve(func=equilibrium, x0=[0.5, 0.5],
...                             fprime=equilibriumJacobian)
... except ImportError:
...     ClRoot = CsRoot = 0
...     print("The SciPy library is not available to calculate the solidus and ..."
...          "liquidus concentrations")
```

```
>>> print(Cl.allclose(ClRoot))
1
>>> print(Cs.allclose(CsRoot))
1
```

We plot the result against the sharp interface solution

```
>>> sharp = CellVariable(name="sharp", mesh=mesh)
>>> x = mesh.cellCenters[0]
>>> sharp.setValue(Cs, where=x < L * fraction)
>>> sharp.setValue(Cl, where=x >= L * fraction)
```

```
>>> if __name__ == '__main__':
...     viewer = Viewer(vars=(phase, C, sharp),
...                     datamin=0., datamax=1.)
...     viewer.plot()
```

Because the phase field interface will not move, and because we've seen in earlier examples that the diffusion problem is unconditionally stable, we need take only one very large timestep to reach equilibrium

```
>>> dt = 1.e5
```

Because the phase field equation is coupled to the composition through enthalpy and W and the diffusion equation is coupled to the phase field through phaseTransformationVelocity, it is necessary sweep this non-linear problem to convergence. We use the “residual” of the equations (a measure of how well they think they have solved the given set of linear equations) as a test for how long to sweep.


We now use the “`sweep()`” method instead of “`solve()`” because we require the residual.

```
>>> solver = LinearLUSolver(tolerance=1e-10)

>>> phase.updateOld()
>>> C.updateOld()
>>> res = 1.
>>> initialRes = None
>>> sweep = 0

>>> while res > 1e-4 and sweep < 20:
...     res = eq.sweep(dt=dt, solver=solver)
...     if initialRes is None:
...         initialRes = res
...     res = res / initialRes
...     sweep += 1

>>> from fipy import input
>>> if __name__ == '__main__':
...     viewer.plot()
...     input("Stationary phase field. Press <return> to proceed...")
```

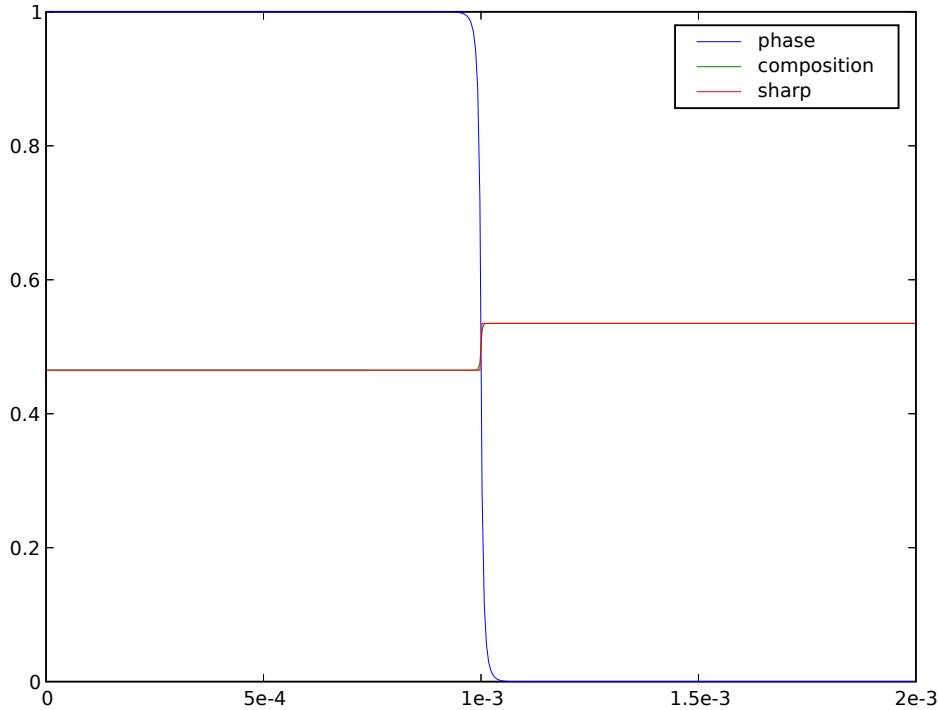

We verify that the bulk phases have shifted to the predicted solidus and liquidus compositions

```
>>> X = mesh.faceCenters[0]
>>> print(Cs.allclose(C.faceValue[X.value==0], atol=1e-2))
```

(continues on next page)

(continued from previous page)

```
True
>>> print(Cl.allclose(C.faceValue[X.value==L], atol=1e-2))
True
```

and that the phase fraction remains unchanged

```
>>> print(fraction.allclose(phase.cellVolumeAverage, atol=2e-4))
1
```

while conserving mass overall

```
>>> print(Cavg.allclose(0.5, atol=1e-8))
1
```

We now quench by ten degrees

```
>>> T.setValue(T() - 10.) # K
```

```
>>> sharp.setValue(Cs, where=x < L * fraction)
>>> sharp.setValue(Cl, where=x >= L * fraction)
```

Because this lower temperature will induce the phase interface to move (solidify), we will need to take much smaller timesteps (the time scales of diffusion and of phase transformation compete with each other).

The [CFL limit](#) requires that no interface should advect more than one grid spacing in a timestep. We can get a rough idea for the maximum timestep we can take by looking at the velocity of convection induced by phase transformation in Eq. (23.11) (even though there is no explicit convection in the coupled form used for this example, the principle remains the same). If we assume that the phase changes from 1 to 0 in a single grid spacing, that the diffusivity is Dl at the interface, and that the term due to the difference in barrier heights is negligible:

$$\begin{aligned}\vec{u}_\phi &= \frac{D_\phi}{C} \nabla \phi \\ &\approx \frac{Dl \frac{1}{2} V_m}{RT} \left[\frac{L_B (T - T_M^B)}{T_M^B} - \frac{L_A (T - T_M^A)}{T_M^A} \right] \frac{1}{\Delta x} \\ &\approx \frac{Dl \frac{1}{2} V_m}{RT} (L_B + L_A) \frac{T_M^A - T_M^B}{T_M^A + T_M^B} \frac{1}{\Delta x} \\ &\approx 0.28 \text{ cm/s}\end{aligned}$$

To get a $\text{CFL} = \vec{u}_\phi \Delta t / \Delta x < 1$, we need a time step of about 10^{-5} s.

```
>>> dt = 1.e-5
```

```
>>> if __name__ == '__main__':
...     timesteps = 100
... else:
...     timesteps = 10
```

```
>>> from builtins import range
>>> for i in range(timesteps):
...     phase.updateOld()
```

(continues on next page)

(continued from previous page)

```


...
C.updateOld()
...
res = 1e+10
sweep = 0
while res > 1e-3 and sweep < 20:
    res = eq.sweep(dt=dt, solver=solver)
    sweep += 1
if __name__ == '__main__':
    viewer.plot()

```

```

>>> from fipy import input
>>> if __name__ == '__main__':
...     input("Moving phase field. Press <return> to proceed...")

```

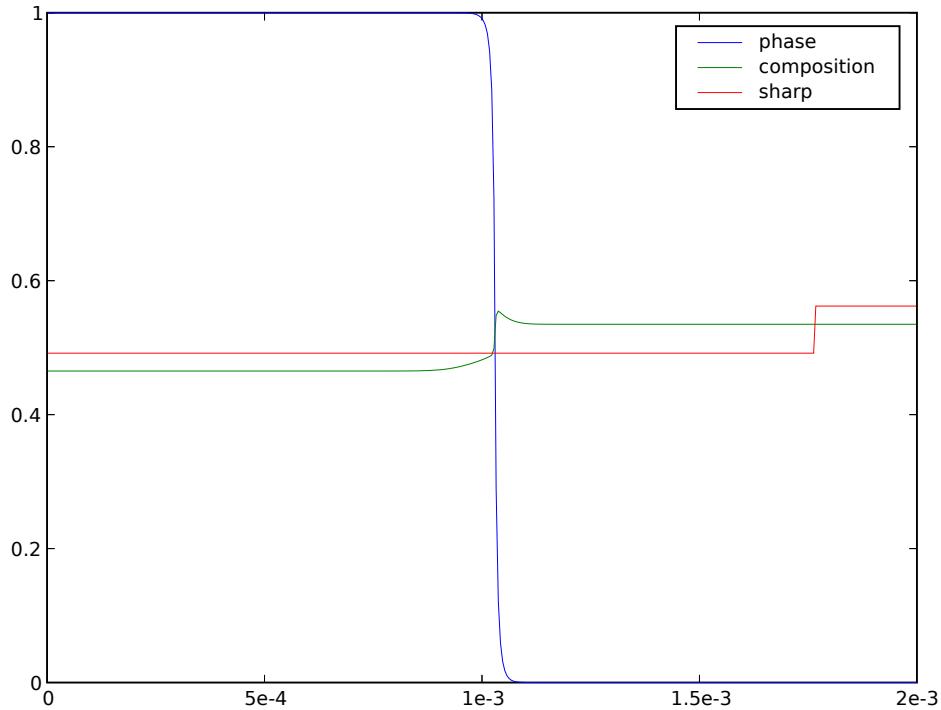

We see that the composition on either side of the interface approach the sharp-interface solidus and liquidus, but it will take a great many more timesteps to reach equilibrium. If we waited sufficiently long, we could again verify the final concentrations and phase fraction against the expected values.

23.11.5 examples.phase.impingement

Modules

<code>examples.phase.impingement.mesh20x20</code>	Solve for the impingement of four grains in two dimensions.
<code>examples.phase.impingement.mesh40x1</code>	Solve for the impingement of two grains in one dimension.
<code>examples.phase.impingement.test</code>	

examples.phase.impingement.mesh20x20

Solve for the impingement of four grains in two dimensions.

In the following examples, we solve the same set of equations as in `examples.phase.impingement.mesh40x1` with different initial conditions and a 2D mesh:

```
>>> from fipy.tools.parser import parse
```

```
>>> numberElements = parse('--numberElements', action = 'store',
...                         type = 'int', default = 400)
>>> numberSteps = parse('--numberSteps', action = 'store',
...                       type = 'int', default = 10)
```

```
>>> from fipy import CellVariable, ModularVariable, Grid2D, TransientTerm, DiffusionTerm,
...     ExplicitDiffusionTerm, ImplicitSourceTerm, GeneralSolver, Viewer
>>> from fipy.tools import numerix, dump
```

```
>>> steps = numberSteps
>>> N = int(numerix.sqrt(numberElements))
>>> L = 2.5 * N / 100.
>>> dL = L / N
>>> mesh = Grid2D(dx=dL, dy=dL, nx=N, ny=N)
```

The initial conditions are given by $\phi = 1$ and

$$\theta = \begin{cases} \frac{2\pi}{3} & \text{for } x^2 - y^2 < L/2, \\ \frac{-2\pi}{3} & \text{for } (x - L)^2 - y^2 < L/2, \\ \frac{-2\pi}{3} + 0.3 & \text{for } x^2 - (y - L)^2 < L/2, \\ \frac{2\pi}{3} & \text{for } (x - L)^2 - (y - L)^2 < L/2. \end{cases}$$

This defines four solid regions with different orientations. Solidification occurs and then boundary wetting occurs where the orientation varies.

The parameters for this example are

```
>>> timeStepDuration = 0.02
>>> phaseTransientCoeff = 0.1
>>> thetaSmallValue = 1e-6
>>> beta = 1e5
```

(continues on next page)

(continued from previous page)

```
>>> mu = 1e3
>>> thetaTransientCoeff = 0.01
>>> gamma= 1e3
>>> epsilon = 0.008
>>> s = 0.01
>>> alpha = 0.015
```

The system is held isothermal at

```
>>> temperature = 10.
```

and is initialized to liquid everywhere

```
>>> phase = CellVariable(name='phase field', mesh=mesh)
```

The orientation is initialized to a uniform value to denote the randomly oriented liquid phase

```
>>> theta = ModularVariable(
...     name='theta',
...     mesh=mesh,
...     value=numerix.pi + 0.0001,
...     hasOld=1
... )
```

Four different solid circular domains are created at each corner of the domain with appropriate orientations

```
>>> x, y = mesh.cellCenters
>>> for a, b, thetaValue in ((0., 0., 2. * numerix.pi / 3.),
...                           (L, 0., -2. * numerix.pi / 3.),
...                           (0., L, -2. * numerix.pi / 3. + 0.3),
...                           (L, L, 2. * numerix.pi / 3.)):
...     segment = (x - a)**2 + (y - b)**2 < (L / 2.)**2
...     phase.setValue(1., where=segment)
...     theta.setValue(thetaValue, where=segment)
```

The phase equation is built in the following way. The source term is linearized in the manner demonstrated in `examples.phase.simple` (Kobayashi, semi-implicit). Here we use a function to build the equation, so that it can be reused later.

```
>>> def buildPhaseEquation(phase, theta):
...     mPhiVar = phase - 0.5 + temperature * phase * (1 - phase)
...     thetaMag = theta.old.grad.mag
...     implicitSource = mPhiVar * (phase - (mPhiVar < 0))
...     implicitSource += (2 * s + epsilon**2 * thetaMag) * thetaMag
...
...     return TransientTerm(phaseTransientCoeff) == \
...             ExplicitDiffusionTerm(alpha**2) \
...             - ImplicitSourceTerm(implicitSource) \
...             + (mPhiVar > 0) * mPhiVar * phase
```

```
>>> phaseEq = buildPhaseEquation(phase, theta)
```

The `theta` equation is built in the following way. The details for this equation are fairly involved, see J. A. Warren *et al.*. The main detail is that a source must be added to correct for the discretization of `theta` on the circle. The source term requires the evaluation of the face gradient without the modular operators.

```
>>> def buildThetaEquation(phase, theta):
...
    phaseMod = phase + (phase < thetaSmallValue) * thetaSmallValue
    phaseModSq = phaseMod * phaseMod
    expo = epsilon * beta * theta.grad.mag
    expo = (expo < 100.) * (expo - 100.) + 100.
    pFunc = 1. + numerix.exp(-expo) * (mu / epsilon - 1.)

...
    phaseFace = phase.arithmeticFaceValue
    phaseSq = phaseFace * phaseFace
    gradMag = theta.faceGrad.mag
    eps = 1. / gamma / 10.
    gradMag += (gradMag < eps) * eps
    IGamma = (gradMag > 1. / gamma) * (1 / gradMag - gamma) + gamma
    diffusionCoeff = phaseSq * (s * IGamma + epsilon**2)

...
    thetaGradDiff = theta.faceGrad - theta.faceGradNoMod
    sourceCoeff = (diffusionCoeff * thetaGradDiff).divergence

...
    return TransientTerm(thetaTransientCoeff * phaseModSq * pFunc) == \
        DiffusionTerm(diffusionCoeff) \
        + sourceCoeff
```

```
>>> thetaEq = buildThetaEquation(phase, theta)
```

If the example is run interactively, we create viewers for the phase and orientation variables. Rather than viewing the raw orientation, which is not meaningful in the liquid phase, we weight the orientation by the phase

```
>>> if __name__ == '__main__':
...
    phaseViewer = Viewer(vars=phase, datamin=0., datamax=1.)
    thetaProd = -numerix.pi + phase * (theta + numerix.pi)
    thetaProductViewer = Viewer(vars=thetaProd,
                                 datamin=-numerix.pi, datamax=numerix.pi)
...
    phaseViewer.plot()
    thetaProductViewer.plot()
```

The solution will be tested against data that was created with `steps = 10` with a FORTRAN code written by Ryo Kobayashi for phase field modeling. The following code opens the file `mesh20x20.gz` extracts the data and compares it with the `theta` variable.

```
>>> import os
>>> from future.utils import text_to_native_str
>>> testData = numerix.loadtxt(os.path.splitext(__file__)[0] + text_to_native_str('.gz
˓→')).flat
```

We step the solution in time, plotting as we go if running interactively,

```
>>> from builtins import range
>>> for i in range(steps):
...
    theta.updateOld()
```

(continues on next page)

(continued from previous page)

```
...     thetaEq.solve(theta, dt=timeStepDuration, solver=GeneralSolver(iterations=2000,
... tolerance=1e-15))
...     phaseEq.solve(phase, dt=timeStepDuration, solver=GeneralSolver(iterations=2000,
... tolerance=1e-15))
...     if __name__ == '__main__':
...         phaseViewer.plot()
...         thetaProductViewer.plot()
```

The solution is compared against Ryo Kobayashi's test data

```
>>> print(theta.allclose(testData, rtol=1e-7, atol=1e-7))
1
```

The following code shows how to restart a simulation from some saved data. First, reset the variables to their original values.

```
>>> phase.setValue(0)
>>> theta.setValue(-numerix.pi + 0.0001)
>>> x, y = mesh.cellCenters
>>> for a, b, thetaValue in ((0., 0., 2. * numerix.pi / 3.),
...                           (L, 0., -2. * numerix.pi / 3.),
...                           (0., L, -2. * numerix.pi / 3. + 0.3),
...                           (L, L, 2. * numerix.pi / 3.)):
...     segment = (x - a)**2 + (y - b)**2 < (L / 2.)**2
...     phase.setValue(1., where=segment)
...     theta.setValue(thetaValue, where=segment)
```

Step through half the time steps.

```
>>> from builtins import range
>>> for i in range(steps // 2):
...     theta.updateOld()
...     thetaEq.solve(theta, dt=timeStepDuration, solver=GeneralSolver(iterations=2000,
... tolerance=1e-15))
...     phaseEq.solve(phase, dt=timeStepDuration, solver=GeneralSolver(iterations=2000,
... tolerance=1e-15))
```

We confirm that the solution has not yet converged to that given by Ryo Kobayashi's FORTRAN code:

```
>>> print(theta.allclose(testData))
0
```

We save the variables to disk.

```
>>> (f, filename) = dump.write({'phase' : phase, 'theta' : theta}, extension = '.gz')
```

and then recall them to test the data pickling mechanism

```
>>> data = dump.read(filename, f)
>>> newPhase = data['phase']
>>> newTheta = data['theta']
>>> newThetaEq = buildThetaEquation(newPhase, newTheta)
>>> newPhaseEq = buildPhaseEquation(newPhase, newTheta)
```

and finish the iterations,

```
>>> from builtins import range
>>> for i in range(steps // 2):
...     newTheta.updateOld()
...     newThetaEq.solve(newTheta, dt=timeStepDuration,
... solver=GeneralSolver(iterations=2000, tolerance=1e-15))
...     newPhaseEq.solve(newPhase, dt=timeStepDuration,
... solver=GeneralSolver(iterations=2000, tolerance=1e-15))
```

The solution is compared against Ryo Kobayashi's test data

```
>>> print(newTheta.allclose(testData, rtol=1e-7))
1
```

examples.phase.impingement.mesh40x1

Solve for the impingement of two grains in one dimension.

In this example we solve a coupled phase and orientation equation on a one dimensional grid. This is another aspect of the model of Warren, Kobayashi, Lobkovsky and Carter [13]

```
>>> from fipy import CellVariable, ModularVariable, Grid1D, TransientTerm, DiffusionTerm,
... ExplicitDiffusionTerm, ImplicitSourceTerm, GeneralSolver, Viewer
>>> from fipy.tools import numerix
```

```
>>> nx = 40
>>> Lx = 2.5 * nx / 100.
>>> dx = Lx / nx
>>> mesh = Grid1D(dx=dx, nx=nx)
```

This problem simulates the wet boundary that forms between grains of different orientations. The phase equation is given by

$$\tau_\phi \frac{\partial \phi}{\partial t} = \alpha^2 \nabla^2 \phi + \phi(1 - \phi)m_1(\phi, T) - 2s\phi|\nabla\theta| - \epsilon^2\phi|\nabla\theta|^2$$

where

$$m_1(\phi, T) = \phi - \frac{1}{2} - T\phi(1 - \phi)$$

and the orientation equation is given by

$$P(\epsilon|\nabla\theta|)\tau_\theta\phi^2\frac{\partial\theta}{\partial t} = \nabla \cdot \left[\phi^2 \left(\frac{s}{|\nabla\theta|} + \epsilon^2 \right) \nabla\theta \right]$$

where

$$P(w) = 1 - \exp(-\beta w) + \frac{\mu}{\epsilon} \exp(-\beta w)$$

The initial conditions for this problem are set such that $\phi = 1$ for $0 \leq x \leq L_x$ and

$$\theta = \begin{cases} 1 & \text{for } 0 \leq x < L_x/2, \\ 0 & \text{for } L_x/2 \leq x \leq L_x. \end{cases}$$

Here the phase and orientation equations are solved with an explicit and implicit technique respectively.

The parameters for these equations are

```
>>> timeStepDuration = 0.02
>>> phaseTransientCoeff = 0.1
>>> thetaSmallValue = 1e-6
>>> beta = 1e5
>>> mu = 1e3
>>> thetaTransientCoeff = 0.01
>>> gamma= 1e3
>>> epsilon = 0.008
>>> s = 0.01
>>> alpha = 0.015
```

The system is held isothermal at

```
>>> temperature = 1.
```

and is initially solid everywhere

```
>>> phase = CellVariable(
...     name='phase field',
...     mesh=mesh,
...     value=1.
... )
```

Because `theta` is an S^1 -valued variable (i.e. it maps to the circle) and thus intrinsically has 2π -periodicity, we must use `ModularVariable` instead of a `CellVariable`. A `ModularVariable` confines `theta` to $-\pi < \theta \leq \pi$ by adding or subtracting 2π where necessary and by defining a new subtraction operator between two angles.

```
>>> theta = ModularVariable(
...     name='theta',
...     mesh=mesh,
...     value=1.,
...     hasOld=1
... )
```

The left and right halves of the domain are given different orientations.

```
>>> theta.setValue(0., where=mesh.cellCenters[0] > Lx / 2.)
```

The phase equation is built in the following way.

```
>>> mPhiVar = phase - 0.5 + temperature * phase * (1 - phase)
```

The source term is linearized in the manner demonstrated in `examples.phase.simple` (Kobayashi, semi-implicit).

```
>>> thetaMag = theta.old.grad.mag
>>> implicitSource = mPhiVar * (phase - (mPhiVar < 0))
>>> implicitSource += (2 * s + epsilon**2 * thetaMag) * thetaMag
```

The phase equation is constructed.

```
>>> phaseEq = TransientTerm(phaseTransientCoeff) \
... == ExplicitDiffusionTerm(alpha**2) \
... - ImplicitSourceTerm(implicitSource) \
... + (mPhiVar > 0) * mPhiVar * phase
```

The theta equation is built in the following way. The details for this equation are fairly involved, see J. A. Warren *et al.*. The main detail is that a source must be added to correct for the discretization of theta on the circle.

```
>>> phaseMod = phase + ( phase < thetaSmallValue ) * thetaSmallValue
>>> phaseModSq = phaseMod * phaseMod
>>> expo = epsilon * beta * theta.grad.mag
>>> expo = (expo < 100.) * (expo - 100.) + 100.
>>> pFunc = 1. + numerix.exp(-expo) * (mu / epsilon - 1.)
```

```
>>> phaseFace = phase.arithmeticFaceValue
>>> phaseSq = phaseFace * phaseFace
>>> gradMag = theta.faceGrad.mag
>>> eps = 1. / gamma / 10.
>>> gradMag += (gradMag < eps) * eps
>>> IGamma = (gradMag > 1. / gamma) * (1 / gradMag - gamma) + gamma
>>> diffusionCoeff = phaseSq * (s * IGamma + epsilon**2)
```

The source term requires the evaluation of the face gradient without the modular operator. `theta.faceGradNoMod` evaluates the gradient without modular arithmetic.

```
>>> thetaGradDiff = theta.faceGrad - theta.faceGradNoMod
>>> sourceCoeff = (diffusionCoeff * thetaGradDiff).divergence
```

Finally the theta equation can be constructed.

```
>>> thetaEq = TransientTerm(thetaTransientCoeff * phaseModSq * pFunc) == \
...     DiffusionTerm(diffusionCoeff) \
...     + sourceCoeff
```

If the example is run interactively, we create viewers for the phase and orientation variables.

```
>>> if __name__ == '__main__':
...     phaseViewer = Viewer(vars=phase, datamin=0., datamax=1.)
...     thetaProductViewer = Viewer(vars=theta,
...                                 datamin=-numerix.pi, datamax=numerix.pi)
...     phaseViewer.plot()
...     thetaProductViewer.plot()
```

we iterate the solution in time, plotting as we go if running interactively,

```
>>> steps = 10
>>> from builtins import range
>>> for i in range(steps):
...     theta.updateOld()
...     thetaEq.solve(theta, dt = timeStepDuration)
...     phaseEq.solve(phase, dt = timeStepDuration)
...     if __name__ == '__main__':
...         phaseViewer.plot()
...         thetaProductViewer.plot()
```

The solution is compared with test data. The test data was created with `steps = 10` with a FORTRAN code written by Ryo Kobayashi for phase field modeling. The following code opens the file `mesh40x1.gz` extracts the data and compares it with the `theta` variable.

```
>>> import os
>>> from future.utils import text_to_native_str
>>> testData = numerix.loadtxt(os.path.splitext(__file__)[0] + text_to_native_str('.gz'))
>>> testData = CellVariable(mesh=mesh, value=testData)
>>> print(theta.allclose(testData))
1
```

`examples.phase.impingement.test`

23.11.6 examples.phase.missOrientation

Modules

`examples.phase.missOrientation.circle`

In this example, a phase equation is solved in one dimension with a misorientation between two solid domains.

`examples.phase.missOrientation.mesh1D`

In this example a phase equation is solved in 1 dimension with a misorientation present.

`examples.phase.missOrientation.modCircle`

In this example a phase equation is solved in one dimension with a misorientation present.

`examples.phase.missOrientation.test`

examples.phase.missOrientation.circle

In this example, a phase equation is solved in one dimension with a misorientation between two solid domains. The phase equation is given by:

$$\tau_\phi \frac{\partial \phi}{\partial t} = \alpha^2 \nabla^2 \phi + \phi(1 - \phi)m_1(\phi, T) - 2s\phi|\nabla\theta| - \epsilon^2\phi|\nabla\theta|^2$$

where

$$m_1(\phi, T) = \phi - \frac{1}{2} - T\phi(1 - \phi)$$

The initial conditions are:

$$\begin{aligned} \phi &= 1 & \forall x \\ \theta &= \begin{cases} 1 & \text{for } (x - L/2)^2 + (y - L/2)^2 > (L/4)^2 \\ 0 & \text{for } (x - L/2)^2 + (y - L/2)^2 \leq (L/4)^2 \end{cases} \\ T &= 1 & \forall x \end{aligned}$$

and boundary conditions $\phi = 1$ for $x = 0$ and $x = L$.

Here the phase equation is solved with an explicit technique.

The solution is allowed to evolve for `steps = 100` time steps.

```
>>> from builtins import range
>>> for step in range(steps):
...     phaseEq.solve(phase, dt = timeStepDuration)
```

The solution is compared with test data. The test data was created with a FORTRAN code written by Ryo Kobayashi for phase field modeling. The following code opens the file `circle.gz` extracts the data and compares it with the phase variable.

```
>>> import os
>>> from future.utils import text_to_native_str
>>> testData = numerix.loadtxt(os.path.splitext(__file__)[0] + text_to_native_str('.gz'))
>>> print(phase.allclose(testData))
1
```

examples.phase.missOrientation.mesh1D

In this example a phase equation is solved in 1 dimension with a misorientation present. The phase equation is given by:

$$\tau_\phi \frac{\partial \phi}{\partial t} = \alpha^2 \nabla^2 \phi + \phi(1 - \phi)m_1(\phi, T) - 2s\phi|\nabla\theta| - \epsilon^2\phi|\nabla\theta|^2$$

where

$$m_1(\phi, T) = \phi - \frac{1}{2} - T\phi(1 - \phi)$$

The initial conditions are:

$$\begin{aligned}\phi &= 1 && \text{for } 0 \leq x \leq L \\ \theta &= \begin{cases} 1 & \text{for } 0 \leq x \leq L/2 \\ 0 & \text{for } L/2 < x \leq L \end{cases} \\ T &= 1 && \text{for } 0 \leq x \leq L\end{aligned}$$

and boundary conditions $\phi = 1$ for $x = 0$ and $x = L$.

Here the phase equation is solved with an explicit technique.

The solution is allowed to evolve for `steps = 100` time steps.

```
>>> from builtins import range
>>> for step in range(steps):
...     phaseEq.solve(phase, dt = timeStepDuration)
```

The solution is compared with test data. The test data was created with a FORTRAN code written by Ryo Kobayashi for phase field modeling. The following code opens the file `mesh1D.gz` extracts the data and compares it with the `theta` variable.

```
>>> import os
>>> from future.utils import text_to_native_str
>>> testData = numerix.loadtxt(os.path.splitext(__file__)[0] + text_to_native_str('.gz'))
>>> print(phase.allclose(testData))
1
```

examples.phase.missOrientation.modCircle

In this example a phase equation is solved in one dimension with a misorientation present. The phase equation is given by:

$$\tau_\phi \frac{\partial \phi}{\partial t} = \alpha^2 \nabla^2 \phi + \phi(1 - \phi)m_1(\phi, T) - 2s\phi|\nabla\theta| - \epsilon^2\phi|\nabla\theta|^2$$

where

$$m_1(\phi, T) = \phi - \frac{1}{2} - T\phi(1 - \phi)$$

The initial conditions are:

$$\begin{aligned}\phi &= 1 && \forall x \\ \theta &= \begin{cases} 2\pi/3 & \text{for } (x - L/2)^2 + (y - L/2)^2 > (L/4)^2 \\ -2\pi/3 & \text{for } (x - L/2)^2 + (y - L/2)^2 \leq (L/4)^2 \end{cases} \\ T &= 1 && \forall x\end{aligned}$$

and boundary conditions $\phi = 1$ for $x = 0$ and $x = L$.

Here the phase equation is solved with an explicit technique.

The solution is allowed to evolve for `steps = 100` time steps.

```
>>> from builtins import range
>>> for step in range(steps):
...     phaseEq.solve(phase, dt = timeStepDuration)
```

The solution is compared with test data. The test data was created with a FORTRAN code written by Ryo Kobayashi for phase field modeling. The following code opens the file `modCircle.gz` extracts the data and compares it with the `phase` variable.

```
>>> import os
>>> from future.utils import text_to_native_str
>>> testData = numerix.loadtxt(os.path.splitext(__file__)[0] + text_to_native_str('.gz'))
>>> print(phase.allclose(testData))
1
```

examples.phase.missOrientation.test**23.11.7 examples.phase.polyxtal**

Solve the dendritic growth of nuclei and subsequent grain impingement.

To convert a liquid material to a solid, it must be cooled to a temperature below its melting point (known as “undercooling” or “supercooling”). The rate of solidification is often assumed (and experimentally found) to be proportional to the undercooling. Under the right circumstances, the solidification front can become unstable, leading to dendritic patterns. Warren, Kobayashi, Lobkovsky and Carter [13] have described a phase field model (“Allen-Cahn”, “non-conserved Ginsberg-Landau”, or “model A” of Hohenberg & Halperin) of such a system, including the effects of discrete crystalline orientations (anisotropy).

We start with a regular 2D Cartesian mesh

```
>>> from fipy import CellVariable, Variable, ModularVariable, Grid2D, TransientTerm,
-> DiffusionTerm, ImplicitSourceTerm, MatplotlibViewer, Matplotlib2DGridViewer,
-> MultiViewer
>>> from fipy.tools import numerix
>>> dx = dy = 0.025
>>> if __name__ == "__main__":
...     nx = ny = 200
... else:
...     nx = ny = 200
>>> mesh = Grid2D(dx=dx, dy=dy, nx=nx, ny=ny)
```

and we'll take fixed timesteps

```
>>> dt = 5e-4
```

We consider the simultaneous evolution of a “phase field” variable ϕ (taken to be 0 in the liquid phase and 1 in the solid)

```
>>> phase = CellVariable(name=r'$\phi$', mesh=mesh, hasOld=True)
```

a dimensionless undercooling ΔT ($\Delta T = 0$ at the melting point)

```
>>> dT = CellVariable(name=r'$\Delta T$', mesh=mesh, hasOld=True)
```

and an orientation $-\pi < \theta \leq \pi$

```
>>> theta = ModularVariable(name=r'$\theta$', mesh=mesh, hasOld=True)
>>> theta.value = -numerix.pi + 0.0001
```

The `hasOld` flag causes the storage of the value of variable from the previous timestep. This is necessary for solving equations with non-linear coefficients or for coupling between PDEs.

The governing equation for the temperature field is the heat flux equation, with a source due to the latent heat of solidification

$$\frac{\partial \Delta T}{\partial t} = D_T \nabla^2 \Delta T + \frac{\partial \phi}{\partial t} + c(T_0 - T)$$

```
>>> DT = 2.25
>>> q = Variable(0.)
>>> T_0 = -0.1
>>> heatEq = (TransientTerm()
...             == DiffusionTerm(DT)
...             + (phase - phase.old) / dt
...             + q * T_0 - ImplicitSourceTerm(q))
```

The governing equation for the phase field is

$$\tau_\phi \frac{\partial \phi}{\partial t} = \nabla \cdot D \nabla \phi + \phi(1 - \phi)m(\phi, \Delta T) - 2s\phi|\nabla\theta| - \epsilon^2\phi|\nabla\theta|^2$$

where

$$m(\phi, \Delta T) = \phi - \frac{1}{2} - \frac{\kappa_1}{\pi} \arctan(\kappa_2 \Delta T)$$

represents a source of anisotropy. The coefficient D is an anisotropic diffusion tensor in two dimensions

$$D = \alpha^2 (1 + c\beta) \begin{bmatrix} 1 + c\beta & -c \frac{\partial \beta}{\partial \psi} \\ c \frac{\partial \beta}{\partial \psi} & 1 + c\beta \end{bmatrix}$$

where $\beta = \frac{1-\Phi^2}{1+\Phi^2}$, $\Phi = \tan\left(\frac{N}{2}\psi\right)$, $\psi = \theta + \arctan\frac{\partial\phi/\partial y}{\partial\phi/\partial x}$, θ is the orientation, and N is the symmetry.

```
>>> alpha = 0.015
>>> c = 0.02
>>> N = 4.
```

```
>>> psi = theta.arithmeticFaceValue + numerix.arctan2(phase.faceGrad[1],
...                                         phase.faceGrad[0])
>>> Phi = numerix.tan(N * psi / 2)
>>> PhiSq = Phi**2
>>> beta = (1. - PhiSq) / (1. + PhiSq)
>>> DbetaDpsi = -N * 2 * Phi / (1 + PhiSq)
>>> Ddia = (1.+ c * beta)
```

```
>>> Doff = c * DbetaDpsi
>>> I0 = Variable(value=((1, 0), (0, 1)))
>>> I1 = Variable(value=((0, -1), (1, 0)))
>>> D = alpha**2 * Ddia * (Ddia * I0 + Doff * I1)
```

With these expressions defined, we can construct the phase field equation as

```
>>> tau_phase = 3e-4
>>> kappa1 = 0.9
>>> kappa2 = 20.
>>> epsilon = 0.008
>>> s = 0.01
>>> thetaMag = theta.grad.mag
>>> phaseEq = (TransientTerm(tau_phase)
...             == DiffusionTerm(D)
...             + ImplicitSourceTerm((phase - 0.5 - kappa1 / numerix.pi * numerix.
... arctan(kappa2 * dT))
...                         * (1 - phase)
...                         - (2 * s + epsilon**2 * thetaMag) * thetaMag))
```

The governing equation for orientation is given by

$$P(\epsilon|\nabla\theta|)\tau_\theta\phi^2\frac{\partial\theta}{\partial t} = \nabla \cdot \left[\phi^2 \left(\frac{s}{|\nabla\theta|} + \epsilon^2 \right) \nabla\theta \right]$$

where

$$P(w) = 1 - \exp(-\beta w) + \frac{\mu}{\epsilon} \exp(-\beta w)$$

The `theta` equation is built in the following way. The details for this equation are fairly involved, see J. A. Warren *et al.*. The main detail is that a source must be added to correct for the discretization of `theta` on the circle.

```
>>> tau_theta = 3e-3
>>> mu = 1e3
>>> gamma = 1e3
```

(continues on next page)

(continued from previous page)

```
>>> thetaSmallValue = 1e-6
>>> phaseMod = phase + (phase < thetaSmallValue) * thetaSmallValue
>>> beta_theta = 1e5
>>> expo = epsilon * beta_theta * theta.grad.mag
>>> expo = (expo < 100.) * (expo - 100.) + 100.
>>> Pfunc = 1. + numerix.exp(-expo) * (mu / epsilon - 1.)
```

```
>>> gradMagTheta = theta.faceGrad.mag
>>> eps = 1. / gamma / 10.
>>> gradMagTheta += (gradMagTheta < eps) * eps
>>> IGamma = (gradMagTheta > 1. / gamma) * (1 / gradMagTheta - gamma) + gamma
>>> v_theta = phase.arithmetricFaceValue * (s * IGamma + epsilon**2)
>>> D_theta = phase.arithmetricFaceValue**2 * (s * IGamma + epsilon**2)
```

The source term requires the evaluation of the face gradient without the modular operator. `theta.faceGradNoMod` evaluates the gradient without modular arithmetic.

```
>>> thetaEq = (TransientTerm(tau_theta * phaseMod**2 * Pfunc)
...     == DiffusionTerm(D_theta)
...     + (D_theta * (theta.faceGrad - theta.faceGradNoMod)).divergence)
```

We seed a circular solidified region in the center

```
>>> x, y = mesh.cellCenters
>>> numSeeds = 10
>>> numerix.random.seed(12345)
>>> for Cx, Cy, orientation in numerix.random.random([numSeeds, 3]):
...     radius = dx * 5.
...     seed = ((x - Cx * nx * dx)**2 + (y - Cy * ny * dy)**2) < radius**2
...     phase[seed] = 1.
...     theta[seed] = numerix.pi * (2 * orientation - 1)
```

and quench the entire simulation domain below the melting point

```
>>> dT.setValue(-0.5)
```

In a real solidification process, dendritic branching is induced by small thermal fluctuations along an otherwise smooth surface, but the granularity of the `Mesh` is enough “noise” in this case, so we don’t need to explicitly introduce randomness, the way we did in the Cahn-Hilliard problem.

FiPy’s viewers are utilitarian, striving to let the user see *something*, regardless of their operating system or installed packages, so you the default color scheme of grain orientation won’t be very informative “out of the box”. Because all of Python is accessible and FiPy is object oriented, it is not hard to adapt one of the existing viewers to create a specialized display:

```
>>> from builtins import zip
>>> if __name__ == "__main__":
...     try:
...         class OrientationViewer(Matplotlib2DGridViewer):
...             def __init__(self, phase, orientation, title=None, limits={}, **kwlimits):
...                 self.phase = phase
...                 Matplotlib2DGridViewer.__init__(self, vars=(orientation,),
```

(continues on next page)

(continued from previous page)

```

    title=title,
    .....
    **kwlimits)

.....
# make room for non-existent colorbar
# stolen from matplotlib.colorbar.make_axes
# https://github.com/matplotlib/matplotlib/blob
# /ec1cd2567521c105a451ce15e06de10715f8b54d/lib
# /matplotlib/colorbar.py#L838
fraction = 0.15
pb = self.axes.get_position(original=True).frozen()
pad = 0.05
x1 = 1.0-fraction
pb1, pbx, pbcb = pb.splitx(x1-pad, x1)
panchor = (1.0, 0.5)
self.axes.set_position(pb1)
self.axes.set_anchor(panchor)

.....
# make the gnomon
fig = self.axes.get_figure()
self.gnomon = fig.add_axes([0.85, 0.425, 0.15, 0.15], polar=True)
self.gnomon.set_thetagrids([180, 270, 0, 90],
                           [r"\pm\pi", r"-frac{\pi}{2}", "0",
                            r"+frac{\pi}{2}"],
                           frac=1.3)
self.gnomon.set_theta_zero_location("N")
self.gnomon.set_theta_direction(-1)
self.gnomon.set_rgrids([1.], [""])
N = 100
theta = numerix.arange(-numerix.pi, numerix.pi, 2 * numerix.pi / N)
radii = numerix.ones((N,))
bars = self.gnomon.bar(theta, radii, width=2 * numerix.pi / N,
bottom=0.0)
colors = self._orientation_and_phase_to_rgb(orientation=numerix.
array([theta]), phase=1.)
for c, t, bar in zip(colors[0], theta, bars):
    bar.set_facecolor(c)
    bar.set_edgecolor(c)

.....
def _reshape(self, var):
    "return values of var in an 2D array"
    return numerix.reshape(numerix.array(var),
                           var.mesh.shape[:-1])[:-1]

.....
@staticmethod
def _orientation_and_phase_to_rgb(orientation, phase):
    from matplotlib import colors

    hsv = numerix.empty(orientation.shape + (3,))
    hsv[:, :, 0] = (orientation / numerix.pi + 1) / 2.
    hsv[:, :, 1] = 1.
    hsv[:, :, 2] = phase

```

(continues on next page)

(continued from previous page)

```

.....
    return colors.hsv_to_rgb(hsv)

.....
@property
def _data(self):
    """convert phase and orientation to rgb image array

    orientation (-pi, pi) -> hue (0, 1)
    phase (0, 1) -> value (0, 1)
    """
    orientation = self._reshape(self.vars[0])
    phase = self._reshape(self.phase)

    return self._orientation_and_phase_to_rgb(orientation, phase)

.....
def _plot(self):
    self.image.set_data(self._data)

.....
from matplotlib import pyplot
pyplot.ion()
w, h = pyplot.figaspect(1.)
fig = pyplot.figure(figsize=(2*w, h))
timer = fig.text(0.1, 0.9, "t = %.3f" % 0, fontsize=18)

viewer = MultiViewer(viewers=(MatplotlibViewer(vars=dT,
                                              cmap=pyplot.cm.hot,
                                              datamin=-0.5,
                                              datamax=0.5,
                                              axes=fig.add_subplot(121)),
                           OrientationViewer(phase=phase,
                                              orientation=theta,
                                              title=theta.name,
                                              axes=fig.add_subplot(122)))
.....
except ImportError:
    viewer = MultiViewer(viewers=(Viewer(vars=dT,
                                          datamin=-0.5,
                                          datamax=0.5),
                                 Viewer(vars=phase,
                                         datamin=0.,
                                         datamax=1.),
                                 Viewer(vars=theta,
                                         datamin=-numerix.pi,
                                         datamax=numerix.pi)))
.....
viewer.plot()

```

and iterate the solution in time, plotting as we go,

```

>>> if __name__ == "__main__":
....     total_time = 2.
.... else:
....     total_time = dt * 10
>>> elapsed = 0.


```

(continues on next page)

(continued from previous page)

```
>>> save_interval = 0.002
>>> save_at = save_interval
```

```
>>> while elapsed < total_time:
...     if elapsed > 0.3:
...         q.value = 100
...         phase.updateOld()
...         dT.updateOld()
...         theta.updateOld()
...         thetaEq.solve(theta, dt=dt)
...         phaseEq.solve(phase, dt=dt)
...         heatEq.solve(dT, dt=dt)
...         elapsed += dt
...     if __name__ == "__main__" and elapsed >= save_at:
...         timer.set_text("t = %.3f" % elapsed)
...         viewer.plot()
...         save_at += save_interval
```

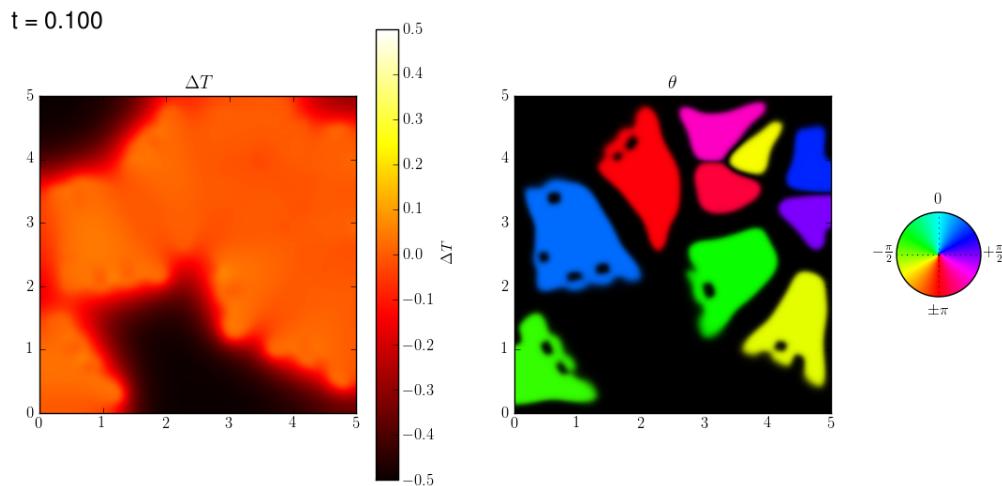

The non-uniform temperature results from the release of latent heat at the solidifying interface. The dendrite arms grow fastest where the temperature gradient is steepest.

23.11.8 examples.phase.polyxtalCoupled

Simultaneously solve the dendritic growth of nuclei and subsequent grain impingement.

To convert a liquid material to a solid, it must be cooled to a temperature below its melting point (known as “undercooling” or “supercooling”). The rate of solidification is often assumed (and experimentally found) to be proportional to the undercooling. Under the right circumstances, the solidification front can become unstable, leading to dendritic patterns. Warren, Kobayashi, Lobkovsky and Carter [13] have described a phase field model (“Allen-Cahn”, “non-conserved Ginsberg-Landau”, or “model A” of Hohenberg & Halperin) of such a system, including the effects of discrete crystalline orientations (anisotropy).

We start with a regular 2D Cartesian mesh

```
>>> from fipy import CellVariable, Variable, ModularVariable, Grid2D, TransientTerm,
->>> DiffusionTerm, ImplicitSourceTerm, PowerLawConvectionTerm, MatplotlibViewer,
->>> Matplotlib2DGridViewer, MultiViewer
>>> from fipy.tools import numerix
>>> dx = dy = 0.025
>>> if __name__ == "__main__":
...     nx = ny = 200
... else:
...     nx = ny = 20
>>> mesh = Grid2D(dx=dx, dy=dy, nx=nx, ny=ny)
```

and we'll take fixed timesteps

```
>>> dt = 5e-4
```

We consider the simultaneous evolution of a “phase field” variable ϕ (taken to be 0 in the liquid phase and 1 in the solid)

```
>>> phase = CellVariable(name=r'$\phi$', mesh=mesh, hasOld=True)
```

a dimensionless undercooling ΔT ($\Delta T = 0$ at the melting point)

```
>>> dT = CellVariable(name=r'$\Delta T$', mesh=mesh, hasOld=True)
```

and an orientation $-\pi < \theta \leq \pi$

```
>>> theta = ModularVariable(name=r'$\theta$', mesh=mesh, hasOld=True)
>>> theta.value = -numerix.pi + 0.0001
```

The `hasOld` flag causes the storage of the value of variable from the previous timestep. This is necessary for solving equations with non-linear coefficients or for coupling between PDEs.

The governing equation for the temperature field is the heat flux equation, with a source due to the latent heat of solidification

$$\frac{\partial \Delta T}{\partial t} = D_T \nabla^2 \Delta T + \frac{\partial \phi}{\partial t} + c(T_0 - T)$$

```
>>> DT = 2.25
>>> q = Variable(0.)
>>> T_0 = -0.1
>>> heatEq = (TransientTerm(var=dT)
...             == DiffusionTerm(coeff=DT, var=dT)
...             + TransientTerm(var=phase)
...             + q * T_0 - ImplicitSourceTerm(coeff=q, var=dT))
```

The governing equation for the phase field is

$$\tau_\phi \frac{\partial \phi}{\partial t} = \nabla \cdot D \nabla \phi + \phi(1 - \phi)m(\phi, \Delta T) - 2s\phi|\nabla\theta| - \epsilon^2\phi|\nabla\theta|^2$$

where

$$m(\phi, \Delta T) = \phi - \frac{1}{2} - \frac{\kappa_1}{\pi} \arctan(\kappa_2 \Delta T)$$

represents a source of anisotropy. The coefficient D is an anisotropic diffusion tensor in two dimensions

$$D = \alpha^2 (1 + c\beta) \begin{bmatrix} 1 + c\beta & -c\frac{\partial\beta}{\partial\psi} \\ c\frac{\partial\beta}{\partial\psi} & 1 + c\beta \end{bmatrix}$$

where $\beta = \frac{1-\Phi^2}{1+\Phi^2}$, $\Phi = \tan\left(\frac{N}{2}\psi\right)$, $\psi = \theta + \arctan\frac{\partial\phi/\partial y}{\partial\phi/\partial x}$, θ is the orientation, and N is the symmetry.

```
>>> alpha = 0.015
>>> c = 0.02
>>> N = 4.
```

```
>>> psi = theta.arithmeticFaceValue + numerix.arctan2(phase.faceGrad[1],
...                                         phase.faceGrad[0])
>>> Phi = numerix.tan(N * psi / 2)
>>> PhiSq = Phi**2
>>> beta = (1. - PhiSq) / (1. + PhiSq)
>>> DbetaDpsi = -N * 2 * Phi / (1 + PhiSq)
>>> Ddia = (1.+ c * beta)
```

```
>>> Doff = c * DbetaDpsi
>>> I0 = Variable(value=((1, 0), (0, 1)))
>>> I1 = Variable(value=((0, -1), (1, 0)))
>>> D = alpha**2 * Ddia * (Ddia * I0 + Doff * I1)
```

With these expressions defined, we can construct the phase field equation as

```
>>> tau_phase = 3e-4
>>> kappa1 = 0.9
>>> kappa2 = 20.
>>> epsilon = 0.008
>>> s = 0.01
>>> thetaMag = theta.grad.mag
>>> phaseEq = (TransientTerm(coeff=tau_phase, var=phase)
...             == DiffusionTerm(coeff=D, var=phase)
...             + ImplicitSourceTerm(coeff=((phase - 0.5 - kappa1 / numerix.pi * numerix.
... arctan(kappa2 * dT))
...                         * (1 - phase)
...                         - (2 * s + epsilon**2 * thetaMag) * thetaMag),
...             var=phase))
```

The governing equation for orientation is given by

$$P(\epsilon|\nabla\theta|)\tau_\theta\phi^2\frac{\partial\theta}{\partial t} = \nabla \cdot \left[\phi^2 \left(\frac{s}{|\nabla\theta|} + \epsilon^2 \right) \nabla\theta \right]$$

where

$$P(w) = 1 - \exp(-\beta w) + \frac{\mu}{\epsilon} \exp(-\beta w)$$

The `theta` equation is built in the following way. The details for this equation are fairly involved, see J. A. Warren *et al.*. The main detail is that a source must be added to correct for the discretization of `theta` on the circle.

```
>>> tau_theta = 3e-3
>>> mu = 1e3
```

(continues on next page)

(continued from previous page)

```
>>> gamma = 1e3
>>> thetaSmallValue = 1e-6
>>> phaseMod = phase + (phase < thetaSmallValue) * thetaSmallValue
>>> beta_theta = 1e5
>>> expo = epsilon * beta_theta * theta.grad.mag
>>> expo = (expo < 100.) * (expo - 100.) + 100.
>>> Pfunc = 1. + numerix.exp(-expo) * (mu / epsilon - 1.)
```

```
>>> gradMagTheta = theta.faceGrad.mag
>>> eps = 1. / gamma / 10.
>>> gradMagTheta += (gradMagTheta < eps) * eps
>>> IGamma = (gradMagTheta > 1. / gamma) * (1 / gradMagTheta - gamma) + gamma
>>> v_theta = phase.arithmetricFaceValue * (s * IGamma + epsilon**2)
>>> D_theta = phase.arithmetricFaceValue**2 * (s * IGamma + epsilon**2)
```

The source term requires the evaluation of the face gradient without the modular operator. `theta.faceGradNoMod` evaluates the gradient without modular arithmetic.

```
>>> thetaEq = (TransientTerm(coeff=tau_theta * phaseMod**2 * Pfunc, var=theta)
...     == DiffusionTerm(coeff=D_theta, var=theta)
...     + PowerLawConvectionTerm(coeff=v_theta * (theta.faceGrad - theta.
... faceGradNoMod), var=phase))
```

We seed a circular solidified region in the center

```
>>> x, y = mesh.cellCenters
>>> numSeeds = 10
>>> numerix.random.seed(12345)
>>> for Cx, Cy, orientation in numerix.random.random([numSeeds, 3]):
...     radius = dx * 5.
...     seed = ((x - Cx * nx * dx)**2 + (y - Cy * ny * dy)**2) < radius**2
...     phase[seed] = 1.
...     theta[seed] = numerix.pi * (2 * orientation - 1)
```

and quench the entire simulation domain below the melting point

```
>>> dT.setValue(-0.5)
```

In a real solidification process, dendritic branching is induced by small thermal fluctuations along an otherwise smooth surface, but the granularity of the `Mesh` is enough “noise” in this case, so we don’t need to explicitly introduce randomness, the way we did in the Cahn-Hilliard problem.

FiPy’s viewers are utilitarian, striving to let the user see *something*, regardless of their operating system or installed packages, so you the default color scheme of grain orientation won’t be very informative “out of the box”. Because all of Python is accessible and FiPy is object oriented, it is not hard to adapt one of the existing viewers to create a specialized display:

```
>>> from builtins import zip
>>> if __name__ == "__main__":
...     try:
...         class OrientationViewer(Matplotlib2DGridViewer):
...             def __init__(self, phase, orientation, title=None, limits={}, **
... kwlimits):
```

(continues on next page)

(continued from previous page)

```

.....
    self.phase = phase
    Matplotlib2DGridViewer.__init__(self, vars=(orientation,),_
.....
    title=title,
.....
    limits=limits, colorbar=None,_
.....
    **kwlimits)

.....
    # make room for non-existent colorbar
    # stolen from matplotlib.colorbar.make_axes
    # https://github.com/matplotlib/matplotlib/blob
    # /ec1cd2567521c105a451ce15e06de10715f8b54d/lib
    # /matplotlib/colorbar.py#L838
    fraction = 0.15
    pb = self.axes.get_position(original=True).frozen()
    pad = 0.05
    x1 = 1.0-fraction
    pb1, pbx, pbc = pb.splitx(x1-pad, x1)
    panchor = (1.0, 0.5)
    self.axes.set_position(pb1)
    self.axes.set_anchor(panchor)

.....
    # make the gnomon
    fig = self.axes.get_figure()
    self.gnomon = fig.add_axes([0.85, 0.425, 0.15, 0.15], polar=True)
    self.gnomon.set_thetagrids([180, 270, 0, 90],
                               [r"\pm\pi", r"-frac{\pi}{2}", "\$0\$",_
.....
    r"+frac{\pi}{2}"],_
                               frac=1.3)
    self.gnomon.set_theta_zero_location("N")
    self.gnomon.set_theta_direction(-1)
    self.gnomon.set_rgrids([1.], [""])
    N = 100
    theta = numerix.arange(-numerix.pi, numerix.pi, 2 * numerix.pi / N)
    radii = numerix.ones((N,))
    bars = self.gnomon.bar(theta, radii, width=2 * numerix.pi / N,_
.....
    bottom=0.0)
    colors = self._orientation_and_phase_to_rgb(orientation=numerix.
.....
    array([theta]), phase=1.)
    for c, t, bar in zip(colors[0], theta, bars):
        bar.set_facecolor(c)
        bar.set_edgecolor(c)

.....
    def _reshape(self, var):
        "return values of var in an 2D array"
        return numerix.reshape(numerix.array(var),
                               var.mesh.shape[:-1])[:-1]

.....
    @staticmethod
    def _orientation_and_phase_to_rgb(orientation, phase):
        from matplotlib import colors

.....
        hsv = numerix.empty(orientation.shape + (3,))
        hsv[..., 0] = (orientation / numerix.pi + 1) / 2.

```

(continues on next page)

(continued from previous page)

```

.....
    hsv[..., 1] = 1.
    hsv[..., 2] = phase

    return colors.hsv_to_rgb(hsv)

.....
@property
def _data(self):
    "convert phase and orientation to rgb image array

    orientation (-pi, pi) -> hue (0, 1)
    phase (0, 1) -> value (0, 1)
    ""

    orientation = self._reshape(self.vars[0])
    phase = self._reshape(self.phase)

    return self._orientation_and_phase_to_rgb(orientation, phase)

.....
def _plot(self):
    self.image.set_data(self._data)

.....
from matplotlib import pyplot
pyplot.ion()
w, h = pyplot.figaspect(1.)
fig = pyplot.figure(figsize=(2*w, h))
timer = fig.text(0.1, 0.9, "t = %.3f" % 0, fontsize=18)

viewer = MultiViewer(viewers=(MatplotlibViewer(vars=dT,
                                              cmap=pyplot.cm.hot,
                                              datamin=-0.5,
                                              datamax=0.5,
                                              axes=fig.add_subplot(121)),
                           OrientationViewer(phase=phase,
                                              orientation=theta,
                                              title=theta.name,
                                              axes=fig.add_subplot(122)))
.....
except ImportError:
    viewer = MultiViewer(viewers=(Viewer(vars=dT,
                                          datamin=-0.5,
                                          datamax=0.5),
                                 Viewer(vars=phase,
                                         datamin=0.,
                                         datamax=1.),
                                 Viewer(vars=theta,
                                         datamin=-numerix.pi,
                                         datamax=numerix.pi)))
.....
viewer.plot()

```

and iterate the solution in time, plotting as we go,

```
>>> eq = thetaEq & phaseEq & heatEq
```

```
>>> if __name__ == "__main__":
```

(continues on next page)

(continued from previous page)

```


...     total_time = 2.
... else:
...     total_time = dt * 10
>>> elapsed = 0.
>>> save_interval = 0.002
>>> save_at = save_interval

```

```

>>> while elapsed < total_time:
...     if elapsed > 0.3:
...         q.value = 100
...     phase.updateOld()
...     dT.updateOld()
...     theta.updateOld()
...     eq.solve(dt=dt)
...     elapsed += dt
...     if __name__ == "__main__":
...         timer.set_text("t = %.3f" % elapsed)
...         viewer.plot()
...         save_at += save_interval

```

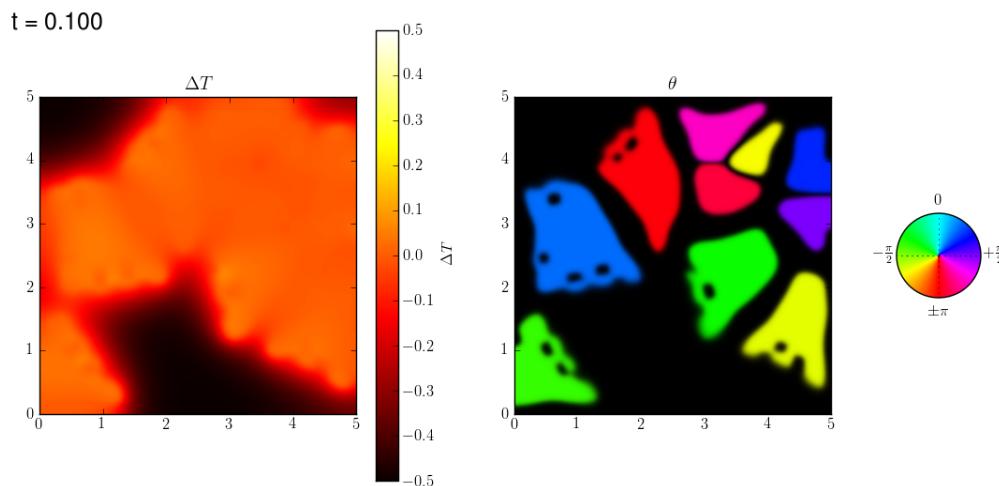

The non-uniform temperature results from the release of latent heat at the solidifying interface. The dendrite arms grow fastest where the temperature gradient is steepest.

23.11.9 examples.phase.quaternary

Solve a phase-field evolution and diffusion of four species in one-dimension.

The same procedure used to construct the two-component phase field diffusion problem in `examples.phase.binary` can be used to build up a system of multiple components. Once again, we'll focus on 1D.

```

>>> from fipy import CellVariable, Grid1D, TransientTerm, DiffusionTerm,
...     ImplicitSourceTerm, PowerLawConvectionTerm, DefaultAsymmetricSolver, Viewer
>>> from fipy.tools import numerix

```

```
>>> nx = 400
>>> dx = 0.01
>>> L = nx * dx
>>> mesh = Grid1D(dx = dx, nx = nx)
```

We consider a free energy density $f(\phi, C_0, \dots, C_N, T)$ that is a function of phase ϕ

```
>>> phase = CellVariable(mesh=mesh, name='phase', value=1., hasOld=1)
```

interstitial components $C_0 \dots C_M$

```
>>> interstitials = [
...     CellVariable(mesh=mesh, name='C0', hasOld=1)
... ]
```

substitutional components $C_{M+1} \dots C_{N-1}$

```
>>> substitutionals = [
...     CellVariable(mesh=mesh, name='C1', hasOld=1),
...     CellVariable(mesh=mesh, name='C2', hasOld=1),
... ]
```

a “solvent” C_N that is constrained by the concentrations of the other substitutional species, such that $C_N = 1 - \sum_{j=M}^{N-1} C_j$,

```
>>> solvent = 1
>>> for Cj in substitutionals:
...     solvent -= Cj
>>> solvent.name = 'CN'
```

and temperature T

```
>>> T = 1000
```

The free energy density of such a system can be written as

$$f(\phi, C_0, \dots, C_N, T) = \sum_{j=0}^N C_j \left[\mu_j^\circ(\phi, T) + RT \ln \frac{C_j}{\rho} \right]$$

where

```
>>> R = 8.314 # J / (mol K)
```

is the gas constant. As in the binary case,

$$\mu_j^\circ(\phi, T) = p(\phi) \mu_j^\circ S(T) + (1 - p(\phi)) \mu_j^\circ L(T) + \frac{W_j}{2} g(\phi)$$

is constructed with the free energies of the pure components in each phase, given the “tilting” function

```
>>> def p(phi):
...     return phi**3 * (6 * phi**2 - 15 * phi + 10)
```

and the “double well” function

```
>>> def g(phi):
...     return (phi * (1 - phi))**2
```

We consider a very simplified model that has partial molar volumes $\bar{V}_0 = \dots = \bar{V}_M = 0$ for the “interstitials” and $\bar{V}_{M+1} = \dots = \bar{V}_N = 1$ for the “substitutionals”. This approximation has been used in a number of models where density effects are ignored, including the treatment of electrons in electrodeposition processes [22] [23]. Under these constraints

$$\begin{aligned}\frac{\partial f}{\partial \phi} &= \sum_{j=0}^N C_j \frac{\partial f_j}{\partial \phi} \\ &= \sum_{j=0}^N C_j \left[\mu_j^{\circ SL}(T) p'(\phi) + \frac{W_j}{2} g'(\phi) \right] \\ \frac{\partial f}{\partial C_j} &= \left[\mu_j^{\circ}(T) + RT \ln \frac{C_j}{\rho} \right] \\ &= \mu_j(\phi, C_j, T) \quad \text{for } j = 0 \dots M\end{aligned}$$

and

$$\begin{aligned}\frac{\partial f}{\partial C_j} &= \left[\mu_j^{\circ}(\phi, T) + RT \ln \frac{C_j}{\rho} \right] - \left[\mu_N^{\circ}(\phi, T) + RT \ln \frac{C_N}{\rho} \right] \\ &= [\mu_j(\phi, C_j, T) - \mu_N(\phi, C_N, T)] \quad \text{for } j = M+1 \dots N-1\end{aligned}$$

where $\mu_j^{\circ SL}(T) \equiv \mu_j^{\circ S}(T) - \mu_j^{\circ L}(T)$ and where μ_j is the classical chemical potential of component j for the binary species and $\rho = 1 + \sum_{j=0}^M C_j$ is the total molar density.

```
>>> rho = 1.
>>> for Cj in interstitials:
...     rho += Cj
```

$p'(\phi)$ and $g'(\phi)$ are the partial derivatives of p and g with respect to ϕ

```
>>> def pPrime(phi):
...     return 30. * g(phi)
```

```
>>> def gPrime(phi):
...     return 2. * phi * (1 - phi) * (1 - 2 * phi)
```

We “cook” the standard potentials to give the desired solid and liquid concentrations, with a solid phase rich in interstitials and the solvent and a liquid phase rich in the two substitutional species.

```
>>> interstitials[0].S = 0.3
>>> interstitials[0].L = 0.4
>>> substitutionals[0].S = 0.4
>>> substitutionals[0].L = 0.3
>>> substitutionals[1].S = 0.2
>>> substitutionals[1].L = 0.1
>>> solvent.S = 1.
>>> solvent.L = 1.
>>> for Cj in substitutionals:
...     solvent.S -= Cj.S
...     solvent.L -= Cj.L
```

```
>>> rhoS = rhoL = 1.
>>> for Cj in interstitials:
...     rhoS += Cj.S
...     rhoL += Cj.L
```

```
>>> for Cj in interstitials + substitutionals + [solvent]:
...     Cj.standardPotential = R * T * (numerix.log(Cj.L/rhoL)
...                                     - numerix.log(Cj.S/rhoS))
```

```
>>> for Cj in interstitials:
...     Cj.diffusivity = 1.
...     Cj.barrier = 0.
```

```
>>> for Cj in substitutionals:
...     Cj.diffusivity = 1.
...     Cj.barrier = R * T
```

```
>>> solvent.barrier = R * T
```

We create the phase equation

$$\frac{1}{M_\phi} \frac{\partial \phi}{\partial t} = \kappa_\phi \nabla^2 \phi - \sum_{j=0}^N C_j \left[\mu_j^{\circ SL}(T) p'(\phi) + \frac{W_j}{2} g'(\phi) \right]$$

with a semi-implicit source just as in `examples.phase.simple` and `examples.phase.binary`

```
>>> enthalpy = 0.
>>> barrier = 0.
>>> for Cj in interstitials + substitutionals + [solvent]:
...     enthalpy += Cj * Cj.standardPotential
...     barrier += Cj * Cj.barrier
```

```
>>> mPhi = -((1 - 2 * phase) * barrier + 30 * phase * (1 - phase) * enthalpy)
>>> dmPhidPhi = 2 * barrier - 30 * (1 - 2 * phase) * enthalpy
>>> S1 = dmPhidPhi * phase * (1 - phase) + mPhi * (1 - 2 * phase)
>>> S0 = mPhi * phase * (1 - phase) - S1 * phase
```

```
>>> phase.mobility = 1.
>>> phase.gradientEnergy = 25
>>> phase.equation = TransientTerm(coeff=1/phase.mobility) \
... == DiffusionTerm(coeff=phase.gradientEnergy) \
... + S0 + ImplicitSourceTerm(coeff = S1)
```

We could construct the diffusion equations one-by-one, in the manner of `examples.phase.binary`, but it is better to take advantage of the full scripting power of the Python language, where we can easily loop over components or even

make “factory” functions if we desire. For the interstitial diffusion equations, we arrange in canonical form as before:

$$\underbrace{\frac{\partial C_j}{\partial t}}_{\text{transient}} = \underbrace{D_j \nabla^2 C_j}_{\text{diffusion}} + D_j \nabla \cdot \underbrace{\frac{C_j}{1 + \sum_{\substack{k=0 \\ k \neq j}}^M C_k} \left\{ \underbrace{\frac{\rho}{RT} \left[\mu_j^{\circ SL} \nabla p(\phi) + \frac{W_j}{2} \nabla g(\phi) \right]}_{\text{phase transformation}} - \underbrace{\sum_{\substack{i=0 \\ i \neq j}}^M \nabla C_i}_{\text{counter diffusion}} \right\}}_{\text{convection}}$$

```
>>> for Cj in interstitials:
...     phaseTransformation = (rho.harmonicFaceValue / (R * T)) \
...         * (Cj.standardPotential * p(phase).faceGrad
...             + 0.5 * Cj.barrier * g(phase).faceGrad)
...
...     CkSum = CellVariable(mesh=mesh, value=0.)
...     for Ck in [Ck for Ck in interstitials if Ck is not Cj]:
...         CkSum += Ck
...
...     counterDiffusion = CkSum.faceGrad
...
...     convectionCoeff = counterDiffusion + phaseTransformation
...     convectionCoeff *= (Cj.diffusivity
...                         / (1. + CkSum.harmonicFaceValue))
...
...     Cj.equation = (TransientTerm()
...                     == DiffusionTerm(coeff=Cj.diffusivity)
...                     + PowerLawConvectionTerm(coeff=convectionCoeff))
```

The canonical form of the substitutional diffusion equations is

$$\underbrace{\frac{\partial C_j}{\partial t}}_{\text{transient}} = \underbrace{D_j \nabla^2 C_j}_{\text{diffusion}} + D_j \nabla \cdot \underbrace{\frac{C_j}{1 - \sum_{\substack{k=M+1 \\ k \neq j}}^{N-1} C_k} \left\{ \underbrace{\frac{C_N}{RT} \left[(\mu_j^{\circ SL} - \mu_N^{\circ SL}) \nabla p(\phi) + \frac{W_j - W_N}{2} \nabla g(\phi) \right]}_{\text{phase transformation}} + \underbrace{\sum_{\substack{i=M+1 \\ i \neq j}}^{N-1} \nabla C_i}_{\text{counter diffusion}} \right\}}_{\text{convection}}$$

```
>>> for Cj in substitutionals:
...     phaseTransformation = (solvent.harmonicFaceValue / (R * T)) \
...         * ((Cj.standardPotential - solvent.standardPotential) * p(phase).faceGrad
...             + 0.5 * (Cj.barrier - solvent.barrier) * g(phase).faceGrad)
```

(continues on next page)

(continued from previous page)

```

...     CkSum = CellVariable(mesh=mesh, value=0.)
...     for Ck in [Ck for Ck in substitutionals if Ck is not Cj]:
...         CkSum += Ck
...
...     counterDiffusion = CkSum.faceGrad
...
...     convectionCoeff = counterDiffusion + phaseTransformation
...     convectionCoeff *= (Cj.diffusivity
...                           / (1. - CkSum.harmonicFaceValue))
...
...     Cj.equation = (TransientTerm()
...                     == DiffusionTerm(coeff=Cj.diffusivity)
...                     + PowerLawConvectionTerm(coeff=convectionCoeff))

```

We start with a sharp phase boundary

$$\xi = \begin{cases} 1 & \text{for } x \leq L/2, \\ 0 & \text{for } x > L/2, \end{cases}$$

```

>>> x = mesh.cellCenters[0]
>>> phase.setValue(1.)
>>> phase.setValue(0., where=x > L / 2)

```

and with uniform concentration fields, initially equal to the average of the solidus and liquidus concentrations

```

>>> for Cj in interstitials + substitutionals:
...     Cj.setValue((Cj.S + Cj.L) / 2.)

```

If we're running interactively, we create a viewer

```

>>> if __name__ == '__main__':
...     viewer = Viewer(vars=[phase]
...                   + interstitials + substitutionals
...                   + [solvent]),
...     datamin=0, datamax=1)
...     viewer.plot()

```

and again iterate to equilibrium

```

>>> solver = DefaultAsymmetricSolver(tolerance=1e-10)

```

```

>>> dt = 10000
>>> from builtins import range
>>> for i in range(5):
...     for field in [phase] + substitutionals + interstitials:
...         field.updateOld()
...     phase.equation.solve(var = phase, dt = dt)
...     for field in substitutionals + interstitials:
...         field.equation.solve(var = field,
...                             dt = dt,

```


(continues on next page)

(continued from previous page)

```

...
    solver = solver)
...
if __name__ == '__main__':
    viewer.plot()

```

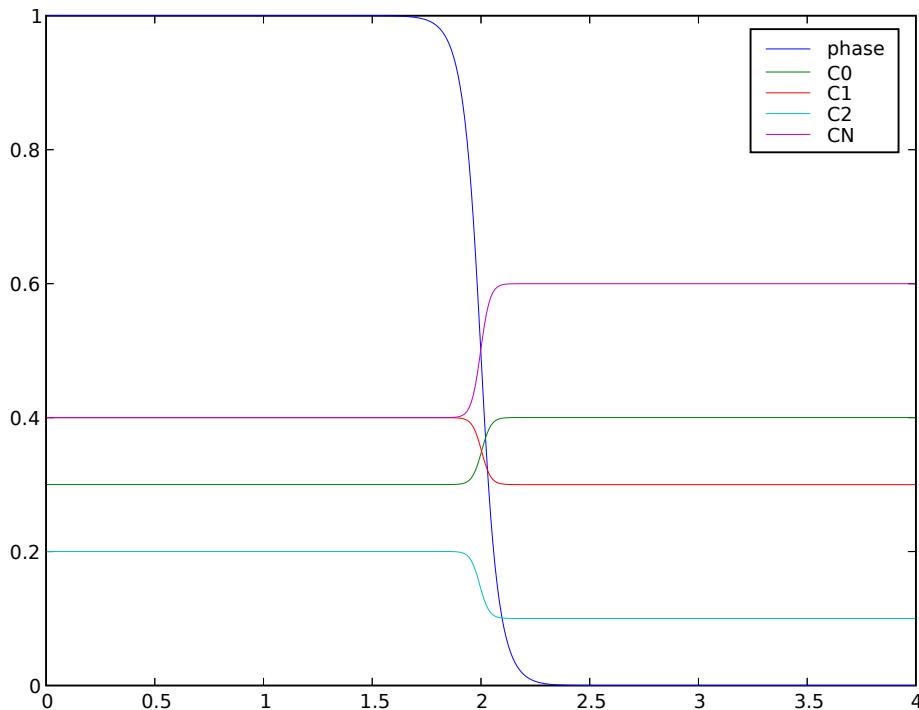

We can confirm that the far-field phases have remained separated

```

>>> X = mesh.faceCenters[0]
>>> print(numerix.allclose(phase.faceValue[X.value==0], 1.0, rtol = 1e-5, atol = 1e-5))
True
>>> print(numerix.allclose(phase.faceValue[X.value==L], 0.0, rtol = 1e-5, atol = 1e-5))
True

```

and that the concentration fields have appropriately segregated into their equilibrium values in each phase

```

>>> equilibrium = True
>>> for Cj in interstitials + substitutionals:
...     equilibrium &= numerix.allclose(Cj.faceValue[X.value==0], Cj.S, rtol = 3e-3,
...     atol = 3e-3).value
...     equilibrium &= numerix.allclose(Cj.faceValue[X.value==L], Cj.L, rtol = 3e-3,
...     atol = 3e-3).value
>>> print(equilibrium)
True

```

23.11.10 examples.phase.simple

Solve a phase-field (Allen-Cahn) problem in one-dimension.

To run this example from the base FiPy directory, type `python examples/phase/simple/input.py` at the command line. A viewer object should appear and, after being prompted to step through the different examples, the word `finished` in the terminal.

This example takes the user through assembling a simple problem with FiPy. It describes a steady 1D phase field problem with no-flux boundary conditions such that,

$$\frac{1}{M_\phi} \frac{\partial \phi}{\partial t} = \kappa_\phi \nabla^2 \phi - \frac{\partial f}{\partial \phi} \quad (23.11)$$

For solidification problems, the Helmholtz free energy is frequently given by

$$f(\phi, T) = \frac{W}{2} g(\phi) + L_v \frac{T - T_M}{T_M} p(\phi)$$

where W is the double-well barrier height between phases, L_v is the latent heat, T is the temperature, and T_M is the melting point.

One possible choice for the double-well function is

$$g(\phi) = \phi^2(1 - \phi)^2$$

and for the interpolation function is

$$p(\phi) = \phi^3(6\phi^2 - 15\phi + 10).$$

We create a 1D solution mesh

```
>>> from fipy import CellVariable, Variable, Grid1D, DiffusionTerm, TransientTerm,
      ImplicitSourceTerm, DummySolver, Viewer
>>> from fipy.tools import numerix
```

```
>>> L = 1.
>>> nx = 400
>>> dx = L / nx
```

```
>>> mesh = Grid1D(dx = dx, nx = nx)
```

We create the phase field variable

```
>>> phase = CellVariable(name = "phase",
...                      mesh = mesh)
```


and set a step-function initial condition

$$\phi = \begin{cases} 1 & \text{for } x \leq L/2 \\ 0 & \text{for } x > L/2 \end{cases} \quad \text{at } t = 0$$

```
>>> x = mesh.cellCenters[0]
>>> phase.setValue(1.)
>>> phase.setValue(0., where=x > L/2)
```

If we are running interactively, we'll want a viewer to see the results

```
>>> from fipy import input
>>> if __name__ == '__main__':
...     viewer = Viewer(vars = (phase,))
...     viewer.plot()
...     input("Initial condition. Press <return> to proceed...")
```

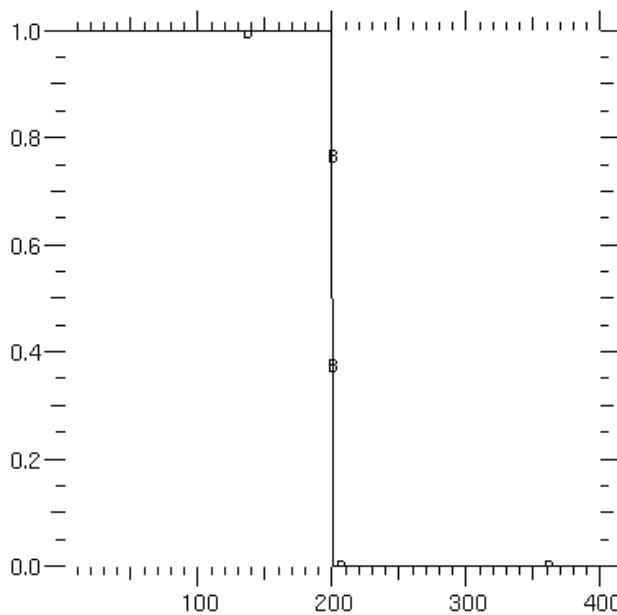

We choose the parameter values,

```
>>> kappa = 0.0025
>>> W = 1.
>>> Lv = 1.
>>> Tm = 1.
>>> T = Tm
>>> enthalpy = Lv * (T - Tm) / Tm
```

We build the equation by assembling the appropriate terms. Since, with $T = T_M$ we are interested in a steady-state solution, we omit the transient term $(1/M_\phi)\frac{\partial\phi}{\partial t}$.

The analytical solution for this steady-state phase field problem, in an infinite domain, is

$$\phi = \frac{1}{2} \left[1 - \tanh \frac{x - L/2}{2\sqrt{\kappa/W}} \right] \quad (23.12)$$

or

```
>>> x = mesh.cellCenters[0]
>>> analyticalArray = 0.5*(1 - numerix.tanh((x - L/2)/(2*numerix.sqrt(kappa/W))))
```

We treat the diffusion term $\kappa_\phi \nabla^2 \phi$ implicitly,

Note: “Diffusion” in *FiPy* is not limited to the movement of atoms, but rather refers to the spontaneous spreading of any quantity (e.g., solute, temperature, or in this case “phase”) by flow “down” the gradient of that quantity.

The source term is

$$\begin{aligned} S &= -\frac{\partial f}{\partial \phi} = -\frac{W}{2}g'(\phi) - L\frac{T-T_M}{T_M}p'(\phi) \\ &= -\left[W\phi(1-\phi)(1-2\phi) + L\frac{T-T_M}{T_M}30\phi^2(1-\phi)^2\right] \\ &= m_\phi\phi(1-\phi) \end{aligned}$$

where $m_\phi \equiv -[W(1-2\phi) + 30\phi(1-\phi)L\frac{T-T_M}{T_M}]$.

The simplest approach is to add this source explicitly


```
>>> mPhi = -((1 - 2 * phase) * W + 30 * phase * (1 - phase) * enthalpy)
>>> S0 = mPhi * phase * (1 - phase)
>>> eq = S0 + DiffusionTerm(coeff=kappa)
```

After solving this equation

```
>>> eq.solve(var = phase, solver=DummySolver())
```

we obtain the surprising result that ϕ is zero everywhere.

```
>>> print(phase.allclose(analyticalArray, rtol = 1e-4, atol = 1e-4))
0
>>> from fipy import input
>>> if __name__ == '__main__':
...     viewer.plot()
...     input("Fully explicit source. Press <return> to proceed...")
```

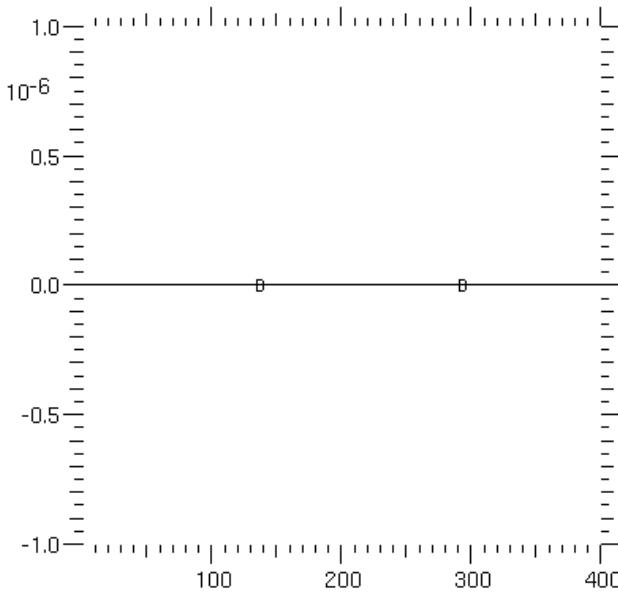

On inspection, we can see that this occurs because, for our step-function initial condition, $m_\phi = 0$ everywhere, hence we are actually only solving the simple implicit diffusion equation $\kappa_\phi \nabla^2 \phi = 0$, which has exactly the uninteresting solution we obtained.

The resolution to this problem is to apply relaxation to obtain the desired answer, i.e., the solution is allowed to relax in time from the initial condition to the desired equilibrium solution. To do so, we reintroduce the transient term from Equation (23.11)


```
>>> eq = TransientTerm() == DiffusionTerm(coeff=kappa) + S0
```

```
>>> phase.setValue(1.)
>>> phase.setValue(0., where=x > L/2)
```

```
>>> from builtins import range
>>> for i in range(13):
...     eq.solve(var = phase, dt=1.)
...     if __name__ == '__main__':
...         viewer.plot()
```

After 13 time steps, the solution has converged to the analytical solution

```
>>> print(phase.allclose(analyticalArray, rtol = 1e-4, atol = 1e-4))
1
>>> from fipy import input
>>> if __name__ == '__main__':
...     input("Relaxation, explicit. Press <return> to proceed...")
```

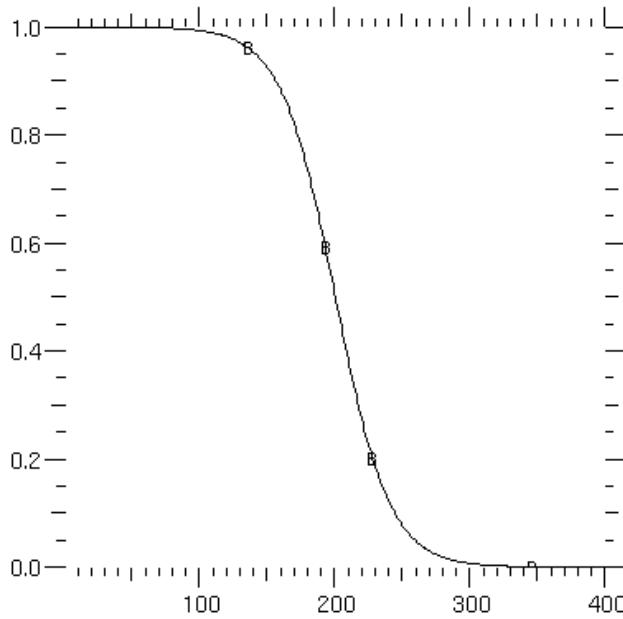

Note: The solution is only found accurate to $\approx 4.3 \times 10^{-5}$ because the infinite-domain analytical solution (23.12) is not an exact representation for the solution in a finite domain of length L .

Setting fixed-value boundary conditions of 1 and 0 would still require the relaxation method with the fully explicit source.

Solution performance can be improved if we exploit the dependence of the source on ϕ . By doing so, we can make the source semi-implicit, improving the rate of convergence over the fully explicit approach. The source can only be semi-implicit because we employ sparse linear algebra routines to solve the PDEs, i.e., there is no fully implicit way to represent a term like ϕ^4 in the linear set of equations $M\vec{\phi} - \vec{b} = 0$.

By linearizing a source as $S = S_0 - S_1\phi$, we make it more implicit by adding the coefficient S_1 to the matrix diagonal. For numerical stability, this linear coefficient must never be negative.

There are an infinite number of choices for this linearization, but many do not converge very well. One choice is that used by Ryo Kobayashi:

```
>>> S0 = mPhi * phase * (mPhi > 0)
>>> S1 = mPhi * ((mPhi < 0) - phase)
>>> eq = DiffusionTerm(coeff=kappa) + S0 \
...     + ImplicitSourceTerm(coeff = S1)
```

Note: Because `mPhi` is a variable field, the quantities `(mPhi > 0)` and `(mPhi < 0)` evaluate to variable *fields* of *True* and *False*, instead of single Boolean values.

This expression converges to the same value given by the explicit relaxation approach, but in only 8 sweeps (note that because there is no transient term, these sweeps are not time steps, but rather repeated iterations at the same time step to reach a converged solution).

Note: We use `solve()` instead of `sweep()` because we don't care about the residual. Either function would work, but `solve()` is a bit faster.

```
>>> phase.setValue(1.)
>>> phase.setValue(0., where=x > L/2)
```

```
>>> from builtins import range
>>> for i in range(8):
...     eq.solve(var = phase)
>>> print(phase.allclose(analyticalArray, rtol = 1e-4, atol = 1e-4))
1
>>> from fipy import input
>>> if __name__ == '__main__':
...     viewer.plot()
...     input("Kobayashi, semi-implicit. Press <return> to proceed...")
```

In general, the best convergence is obtained when the linearization gives a good representation of the relationship between the source and the dependent variable. The best practical advice is to perform a Taylor expansion of the source about the previous value of the dependent variable such that $S = S_{\text{old}} + \frac{\partial S}{\partial \phi} \Big|_{\text{old}} (\phi - \phi_{\text{old}}) = (S - \frac{\partial S}{\partial \phi} \phi)_{\text{old}} + \frac{\partial S}{\partial \phi} \Big|_{\text{old}} \phi$.

Now, if our source term is represented by $S = S_0 + S_1 \phi$, then $S_1 = \frac{\partial S}{\partial \phi} \Big|_{\text{old}}$ and $S_0 = (S - \frac{\partial S}{\partial \phi} \phi)_{\text{old}} = S_{\text{old}} - S_1 \phi_{\text{old}}$. In this way, the linearized source will be tangent to the curve of the actual source as a function of the dependent variable.

For our source, $S = m_\phi \phi (1 - \phi)$,

$$\frac{\partial S}{\partial \phi} = \frac{\partial m_\phi}{\partial \phi} \phi (1 - \phi) + m_\phi (1 - 2\phi)$$

and

$$\frac{\partial m_\phi}{\partial \phi} = 2W - 30(1 - 2\phi)L \frac{T - T_M}{T_M},$$

or

```
>>> dmPhidPhi = 2 * W - 30 * (1 - 2 * phase) * enthalpy
>>> S1 = dmPhidPhi * phase * (1 - phase) + mPhi * (1 - 2 * phase)
>>> S0 = mPhi * phase * (1 - phase) - S1 * phase
```

(continues on next page)

(continued from previous page)

```
>>> eq = DiffusionTerm(coeff=kappa) + S0 \
...     + ImplicitSourceTerm(coeff = S1)
```

Using this scheme, where the coefficient of the implicit source term is tangent to the source, we reach convergence in only 5 sweeps

```
>>> phase.setValue(1.)
>>> phase.setValue(0., where=x > L/2)
```

```
>>> from builtins import range
>>> for i in range(5):
...     eq.solve(var = phase)
>>> print(phase.allclose(analyticalArray, rtol = 1e-4, atol = 1e-4))
1
>>> from fipy import input
>>> if __name__ == '__main__':
...     viewer.plot()
...     input("Tangent, semi-implicit. Press <return> to proceed...")
```

Although, for this simple problem, there is no appreciable difference in run-time between the fully explicit source and the optimized semi-implicit source, the benefit of 60% fewer sweeps should be obvious for larger systems and longer iterations.

This example has focused on just the region of the phase field interface in equilibrium. Problems of interest, though, usually involve the dynamics of one phase transforming to another. To that end, let us recast the problem using physical parameters and dimensions. We'll need a new mesh

```
>>> nx = 400
>>> dx = 5e-6 # cm
>>> L = nx * dx
```

```
>>> mesh = Grid1D(dx = dx, nx = nx)
```

and thus must redeclare ϕ on the new mesh

```
>>> phase = CellVariable(name="phase",
...                       mesh=mesh,
...                       hasOld=1)
>>> x = mesh.cellCenters[0]
>>> phase.setValue(1.)
>>> phase.setValue(0., where=x > L/2)
```

We choose the parameter values appropriate for nickel, given in [31]

```
>>> Lv = 2350 # J / cm**3
>>> Tm = 1728. # K
>>> T = Variable(value=Tm)
>>> enthalpy = Lv * (T - Tm) / Tm # J / cm**3
```

The parameters of the phase field model can be related to the surface energy σ and the interfacial thickness δ by

$$\begin{aligned}\kappa &= 6\sigma\delta \\ W &= \frac{6\sigma}{\delta} \\ M_\phi &= \frac{T_m\beta}{6L\delta}.\end{aligned}$$

We take $\delta \approx \Delta x$.

```
>>> delta = 1.5 * dx
>>> sigma = 3.7e-5 # J / cm**2
>>> beta = 0.33 # cm / (K s)
>>> kappa = 6 * sigma * delta # J / cm
>>> W = 6 * sigma / delta # J / cm**3
>>> Mphi = Tm * beta / (6. * Lv * delta) # cm**3 / (J s)
```

```
>>> if __name__ == '__main__':
...     displacement = L * 0.1
... else:
...     displacement = L * 0.025
```

```
>>> analyticalArray = CellVariable(name="tanh", mesh=mesh,
...                                 value=0.5 * (1 - numerix.tanh((x - (L / 2. +
... displacement)) / (2 * delta))))
```

and make a new viewer

```
>>> if __name__ == '__main__':
...     viewer2 = Viewer(vars = (phase, analyticalArray))
...     viewer2.plot()
```

Now we can redefine the transient phase field equation, using the optimal form of the source term shown above

```
>>> mPhi = -((1 - 2 * phase) * W + 30 * phase * (1 - phase) * enthalpy)
>>> dmPhidPhi = 2 * W - 30 * (1 - 2 * phase) * enthalpy
>>> S1 = dmPhidPhi * phase * (1 - phase) + mPhi * (1 - 2 * phase)
>>> S0 = mPhi * phase * (1 - phase) - S1 * phase
>>> eq = TransientTerm(coeff=1/Mphi) == DiffusionTerm(coeff=kappa) \
... + S0 + ImplicitSourceTerm(coeff = S1)
```

In order to separate the effect of forming the phase field interface from the kinetics of moving it, we first equilibrate at the melting point. We now use the `sweep()` method instead of `solve()` because we require the residual.

```
>>> timeStep = 1e-6
>>> from builtins import range
>>> for i in range(10):
...     phase.updateOld()
...     res = 1e+10
...     while res > 1e-5:
...         res = eq.sweep(var=phase, dt=timeStep)
>>> if __name__ == '__main__':
...     viewer2.plot()
```

and then quench by 1 K

```
>>> T.setValue(T() - 1)
```

In order to have a stable numerical solution, the interface must not move more than one grid point per time step, we thus set the timestep according to the grid spacing Δx , the linear kinetic coefficient β , and the undercooling $|T_m - T|$. Again we use the `sweep()` method as a replacement for `solve()`.

```
>>> velocity = beta * abs(Tm - T()) # cm / s
>>> timeStep = .1 * dx / velocity # s
>>> elapsed = 0
>>> while elapsed < displacement / velocity:
...     phase.updateOld()
...     res = 1e+10
...     while res > 1e-5:
...         res = eq.sweep(var=phase, dt=timeStep)
...     elapsed += timeStep
...     if __name__ == '__main__':
...         viewer2.plot()
```

A hyperbolic tangent is not an exact steady-state solution given the quintic polynomial we chose for the p function, but it gives a reasonable approximation.


```
>>> print(phase.allclose(analyticalArray, rtol = 5, atol = 2e-3))
1
```

If we had made another common choice of $p(\phi) = \phi^2(3 - 2\phi)$, we would have found much better agreement, as that case does give an exact tanh solution in steady state. If SciPy is available, another way to compare against the expected result is to do a least-squared fit to determine the interface velocity and thickness

```
>>> try:
...     def tanhResiduals(p, y, x, t):
...         V, d = p
...         return y - 0.5 * (1 - numerix.tanh((x - V * t - L / 2.) / (2*d)))
...     from scipy.optimize import leastsq
...     x = mesh.cellCenters[0]
...     (V_fit, d_fit), msg = leastsq(tanhResiduals, [L/2., delta],
...                                     args=(phase.globalValue, x.globalValue, elapsed))
... except ImportError:
...     V_fit = d_fit = 0
...     print("The SciPy library is unavailable to fit the interface \
... thickness and velocity")
```

```
>>> print(abs(1 - V_fit / velocity) < 4.1e-2)
True
>>> print(abs(1 - d_fit / delta) < 2e-2)
True
```

```
>>> from fipy import input
>>> if __name__ == '__main__':
...     input("Dimensional, semi-implicit. Press <return> to proceed...")
```

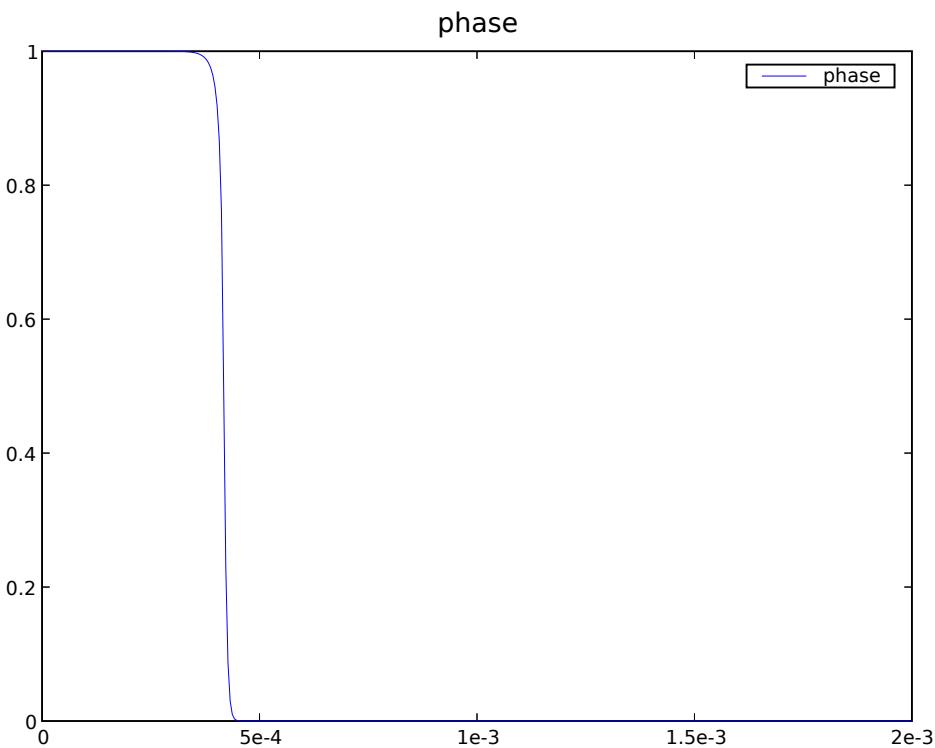

23.11.11 examples.phase.symmetry

This example creates four symmetric quadrilateral regions in a box. We start with a `CellVariable` object that contains the following values:

$$\phi(x, y) = xy, 0 \leq x \leq L, 0 \leq y \leq L$$

We wish to create 4 symmetric regions such that

$$\phi(x, y) = \phi(L - x, y) = \phi(L - x, L - y) = \phi(L - x, L - y), 0 \leq x \leq L/2, 0 \leq y \leq L/2$$

We create a square domain

```
>>> from fipy import CellVariable, Grid2D, Viewer
>>> from fipy.tools import numerix
```

```
>>> N = 20
>>> L = 1.
>>> dx = L / N
>>> dy = L / N
```

```
>>> mesh = Grid2D(
...     dx = dx,
...     dy = dy,
...     nx = N,
...     ny = N)
```

```
>>> var = CellVariable(name = "test", mesh = mesh)
```

First set the values as given in the above equation:

```
>>> x, y = mesh.cellCenters
>>> var.setValue(x * y)
```

```
>>> if __name__ == '__main__':
...     viewer = Viewer(vars=var, datamin=0, datamax=L * L / 4.)
...     viewer.plot()
```

The bottom-left quadrant is mirrored into each of the other three quadrants

```
>>> q = (x > L / 2.) & (y < L / 2.)
>>> var[q] = var((L - x)[q], y[q])
>>> q = (x < L / 2.) & (y > L / 2.)
>>> var[q] = var((x[q], (L - y)[q]))
>>> q = (x > L / 2.) & (y > L / 2.)
>>> var[q] = var((L - x)[q], (L - y)[q]))
```

```
>>> if __name__ == '__main__':
...     viewer.plot()
```

The following code tests the results with a different algorithm:

```
>>> testResult = numerix.zeros((N // 2, N // 2), 'd')
>>> bottomRight = numerix.zeros((N // 2, N // 2), 'd')
>>> topLeft = numerix.zeros((N // 2, N // 2), 'd')
>>> topRight = numerix.zeros((N // 2, N // 2), 'd')
>>> from builtins import range
>>> for j in range(N // 2):
...     for i in range(N // 2):
...         x = dx * (i + 0.5)
...         y = dx * (j + 0.5)
...         testResult[i, j] = x * y
...         bottomRight[i, j] = var(((L - x,), (y,)))[0]
...         topLeft[i, j] = var(((x,), (L - y,)))[0]
...         topRight[i, j] = var(((L - x,), (L - y,)))[0]
>>> numerix.allclose(testResult, bottomRight, atol = 1e-10)
1
>>> numerix.allclose(testResult, topLeft, atol = 1e-10)
1
>>> numerix.allclose(testResult, topRight, atol = 1e-10)
1
```

23.11.12 examples.phase.test

23.12 examples.reactiveWetting

Modules

<code>examples.reactiveWetting.liquidVapor1D</code>	Solve a single-component, liquid-vapor, van der Waals system.
<code>examples.reactiveWetting.liquidVapor2D</code>	A 2D version of the 1D example.
<code>examples.reactiveWetting.test</code>	Run all the test cases in <code>examples/reactiveWetting/</code>

23.12.1 examples.reactiveWetting.liquidVapor1D

Solve a single-component, liquid-vapor, van der Waals system.

This example solves a single-component, liquid-vapor, van der Waals system as described by Wheeler *et al.* [5]. The free energy for this system takes the form,

$$f = -\frac{e\rho^2}{m^2} + \frac{RT}{m} \left(\ln \frac{\rho}{m - \bar{v}\rho} \right) \quad (23.13)$$

where ρ is the density. This free energy supports a two phase equilibrium with densities given by ρ^l and ρ^v in the liquid and vapor phases, respectively. The densities are determined by solving the following system of equations,

$$P(\rho^l) = P(\rho^v) \quad (23.14)$$

and

$$\mu(\rho^l) = \mu(\rho^v) \quad (23.15)$$

where μ is the chemical potential,

$$\mu = \frac{\partial f}{\partial \rho} \quad (23.16)$$

and P is the pressure,

$$P = \rho\mu - f \quad (23.17)$$

One choice of thermodynamic parameters that yields a relatively physical two phase system is

```
>>> molarWeight = 0.118
>>> ee = -0.455971
>>> gasConstant = 8.314
>>> temperature = 650.
>>> vbar = 1.3e-05
```

with equilibrium density values of

```
>>> liquidDensity = 7354.3402662299995
>>> vaporDensity = 82.855803327810008
```

The equilibrium densities are verified by substitution into Eqs. (23.14) and (23.15). Firstly, Eqs. (23.13), (23.16) and (23.17) are defined as python functions,

```
>>> from fipy import CellVariable, Grid1D, TransientTerm, VanLeerConvectionTerm,
   -> DiffusionTerm, ImplicitSourceTerm, ConvectionTerm, CentralDifferenceConvectionTerm,
   -> Viewer
>>> from fipy.tools import numerix
```

```
>>> def f(rho):
...     return ee * rho**2 / molarWeight**2 + gasConstant * temperature * rho / 
   -> molarWeight * \
...         numerix.log(rho / (molarWeight - vbar * rho))
```

```
>>> def mu(rho):
...     return 2 * ee * rho / molarWeight**2 + gasConstant * temperature / molarWeight * \
   -> \
...         (numerix.log(rho / (molarWeight - vbar * rho)) + molarWeight / 
   -> (molarWeight - vbar * rho))
```

```
>>> def P(rho):
...     return rho * mu(rho) - f(rho)
```

The equilibrium densities values are verified with

```
>>> print(numerix.allclose(mu(liquidDensity), mu(vaporDensity)))
True
```

and

```
>>> print(numerix.allclose(P(liquidDensity), P(vaporDensity)))
True
```

In order to derive governing equations, the free energy functional is defined.

$$F = \int \left[f + \frac{\epsilon T}{2} (\partial_j \rho)^2 \right] dV$$

Using standard dissipation laws, we write the governing equations for mass and momentum conservation,

$$\frac{\partial \rho}{\partial t} + \partial_j (\rho u_j) = 0 \quad (23.18)$$

and

$$\frac{\partial (\rho u_i)}{\partial t} + \partial_j (\rho u_i u_j) = \partial_j (\nu [\partial_j u_i + \partial_i u_j]) - \rho \partial_i \mu^{NC} \quad (23.19)$$

where the non-classical potential, μ^{NC} , is given by,

$$\mu^{NC} = \frac{\delta F}{\delta \rho} = \mu - \epsilon T \partial_j^2 \rho \quad (23.20)$$

As usual, to proceed, we define a mesh

```
>>> Lx = 1e-6
>>> nx = 100
>>> dx = Lx / nx
>>> mesh = Grid1D(nx=nx, dx=dx)
```

and the independent variables.

```
>>> density = CellVariable(mesh=mesh, hasOld=True, name=r'$\rho$')
>>> velocity = CellVariable(mesh=mesh, hasOld=True, name=r'$u$')
>>> densityPrevious = density.copy()
>>> velocityPrevious = velocity.copy()
```

The system of equations is solved in a fully coupled manner using a block matrix. Defining μ^{NC} as an independent variable makes it easier to script the equations without using higher order terms.

```
>>> potentialNC = CellVariable(mesh=mesh, name=r'$\mu^{NC}$')
```

```
>>> epsilon = 1e-16
>>> freeEnergy = (f(density) + epsilon * temperature / 2 * density.grad.mag**2).
->cellVolumeAverage
```

In order to solve the equations numerically, an interpolation method is used to prevent the velocity and density fields decoupling. The following velocity correction equation (expressed in discretized form) prevents decoupling from occurring,

$$u_{i,f}^c = \frac{A_f d_f}{\bar{d}_f} \left(\overline{\rho \partial_i \mu^{NC}}_f - \bar{\rho}_f \partial_{i,f} \mu^{NC} \right) \quad (23.21)$$

where A_f is the face area, d_f is the distance between the adjacent cell centers and \bar{a}_f is the momentum conservation equation's matrix diagonal. The overbar refers to an averaged value between the two adjacent cells to the face. The notation $\partial_{i,f}$ refers to a derivative evaluated directly at the face (not averaged). The variable u_i^c is used to modify the velocity used in Eq. (23.18) such that,

$$\frac{\partial \rho}{\partial t} + \partial_j (\rho [u_j + u_i^c]) = 0 \quad (23.22)$$

Equation (23.22) becomes

```
>>> matrixDiagonal = CellVariable(mesh=mesh, name=r'$a_f$', value=1e+20, hasOld=True)
>>> correctionCoeff = mesh._faceAreas * mesh._cellDistances / matrixDiagonal.faceValue
>>> massEqn = TransientTerm(var=density) \
...     + VanLeerConvectionTerm(coeff=velocity.faceValue + correctionCoeff \
...                             * (density * potentialNC.grad).faceValue, \
...                             var=density) \
...     - DiffusionTerm(coeff=correctionCoeff * density.faceValue**2, \
->var=potentialNC)
```

where the first term on the LHS of Eq. (23.21) is calculated in an explicit manner in the VanLeerConvectionTerm and the second term is calculated implicitly as a DiffusionTerm with μ^{NC} as the independent variable.

In order to write Eq. (23.19) as a *FiPy* expression, the last term is rewritten such that,

$$\rho \partial_i \mu^{NC} = \partial_i (\rho \mu^{NC}) - \mu^{NC} \partial_i \rho$$

which results in

```
>>> viscosity = 1e-3
>>> ConvectionTerm = CentralDifferenceConvectionTerm
>>> momentumEqn = TransientTerm(coeff=density, var=velocity) \
...     + ConvectionTerm(coeff=[[1]] * density.faceValue * velocity.faceValue, \
->var=velocity) \

```

(continues on next page)

(continued from previous page)

```
...
    == DiffusionTerm(coeff=2 * viscosity, var=velocity) \
- ConvectionTerm(coeff=density.faceValue * [[1]], var=potentialNC) \
+ ImplicitSourceTerm(coeff=density.grad[0], var=potentialNC)
```

The only required boundary condition eliminates flow in or out of the domain.

```
>>> velocity.constrain(0, mesh.exteriorFaces)
```

As previously stated, the μ^{NC} variable will be solved implicitly. To do this the Eq. (23.20) is linearized in ρ such that

$$\mu^{NC} = \mu^* + \left(\frac{\partial \mu}{\partial \rho} \right)^* (\rho - \rho^*) - \epsilon T \partial_j^2 \rho \quad (23.23)$$

The $*$ superscript denotes the current held value. In *FiPy*, $\frac{\partial \mu}{\partial \rho}$ is written as,

```
>>> potentialDerivative = ee / molarWeight**2 + gasConstant * temperature * \
- molarWeight / density / (molarWeight - vbar * density)**2
```

and μ^* is simply,

```
>>> potential = mu(density)
```

Eq. (23.23) can be scripted as

```
>>> potentialNCEqn = ImplicitSourceTerm(coeff=1, var=potentialNC) \
...
    == potential \
+ ImplicitSourceTerm(coeff=potentialDerivative, var=density) \
- potentialDerivative * density \
- DiffusionTerm(coeff=epsilon * temperature, var=density)
```

Due to a quirk in *FiPy*, the gradient of μ^{NC} needs to be constrained on the boundary. This is because `ConvectionTerm`'s will automatically assume a zero flux, which is not what we need in this case.

```
>>> potentialNC.faceGrad.constrain(value=[0], where=mesh.exteriorFaces)
```

All three equations are defined and are combined together with

```
>>> coupledEqn = massEqn & momentumEqn & potentialNCEqn
```

The system will be solved as a phase separation problem with an initial density close to the average density, but with some small amplitude noise. Under these circumstances, the final condition should be two separate phases of roughly equal volume. The initial condition for the density is defined by

```
>>> numerix.random.seed(2011)
>>> density[:] = (liquidDensity + vaporDensity) / 2 * \
...     (1 + 0.01 * (2 * numerix.random(mesh.numberOfCells) - 1))
```

Viewers are also defined.

```
>>> from fipy import input
>>> if __name__ == '__main__':
...     viewers = Viewer(density), Viewer(velocity), Viewer(potentialNC)
...     for viewer in viewers:
...         viewer.plot()
```

(continues on next page)

(continued from previous page)

```
...     input('Arrange viewers, then press <return> to proceed...')
...     for viewer in viewers:
...         viewer.plot()
```

The following section defines the required control parameters. The *cfl* parameter limits the size of the time step so that $dt = cfl * dx / \max(velocity)$.

```
>>> cfl = 0.1
>>> tolerance = 1e-1
>>> dt = 1e-14
>>> timestep = 0
>>> relaxation = 0.5
>>> if __name__ == '__main__':
...     totalSteps = 1e10
... else:
...     totalSteps = 10
```

In the following time stepping scheme a time step is recalculated if the residual increases between sweeps or the required tolerance is not attained within 20 sweeps. The major quirk in this scheme is the requirement of updating the `matrixDiagonal` using the entire coupled matrix. This could be achieved more elegantly by calling `cacheMatrix()` only on the necessary part of the equation. This currently doesn't work properly in *FiPy*.

```
>>> while timestep < totalSteps:
...
...     sweep = 0
...     dt *= 1.1
...     residual = 1.
...     initialResidual = None
...
...     density.updateOld()
...     velocity.updateOld()
...     matrixDiagonal.updateOld()
...
...     while residual > tolerance:
...
...         densityPrevious[:] = density
...         velocityPrevious[:] = velocity
...         previousResidual = residual
...
...         dt = min(dt, dx / max(abs(velocity)) * cfl)
...
...         coupledEqn.cacheMatrix()
...         residual = coupledEqn.sweep(dt=dt)
...
...         if initialResidual is None:
...             initialResidual = residual
...
...         residual = residual / initialResidual
...
...         if residual > previousResidual * 1.1 or sweep > 20:
...             density[:] = density.old
...             velocity[:] = velocity.old
```

(continues on next page)

(continued from previous page)

```

...
    matrixDiagonal[:] = matrixDiagonal.old
    dt = dt / 10.
    if __name__ == '__main__':
        print('Recalculate the time step')
    timestep -= 1
    break
else:
    matrixDiagonal[:] = coupledEqn.matrix.takeDiagonal()[mesh.
->number0fCells:2 * mesh.numberOfCells]
    density[:] = relaxation * density + (1 - relaxation) * densityPrevious
    velocity[:] = relaxation * velocity + (1 - relaxation) * velocityPrevious
    ...
    sweep += 1
...
    if __name__ == '__main__' and timestep % 10 == 0:
        print('timestep: %e / %e, dt: %1.5e, free energy: %1.5e' % (timestep,
->totalSteps, dt, freeEnergy))
    for viewer in viewers:
        viewer.plot()
...
    timestep += 1

```

```

>>> from fipy import input
>>> if __name__ == '__main__':
...     input('finished')

```

```

>>> print(freeEnergy < 1.5e9)
True

```

23.12.2 examples.reactiveWetting.liquidVapor2D

A 2D version of the 1D example.

```

>>> molarWeight = 0.118
>>> ee = -0.455971
>>> gasConstant = 8.314
>>> temperature = 650.
>>> vbar = 1.3e-05

```

```

>>> liquidDensity = 7354.3402662299995
>>> vaporDensity = 82.855803327810008

```

```

>>> from fipy import CellVariable, Grid2D, TransientTerm, VanLeerConvectionTerm,
-> DiffusionTerm, ImplicitSourceTerm, ConvectionTerm, CentralDifferenceConvectionTerm,
-> Viewer
>>> from fipy.tools import numerix

```

```

>>> def f(rho):
...     return ee * rho**2 / molarWeight**2 + gasConstant * temperature * rho /

```

(continues on next page)

(continued from previous page)

```

→ molarWeight * \
...
    numerix.log(rho / (molarWeight - vbar * rho))

```

```

>>> def mu(rho):
...     return 2 * ee * rho / molarWeight**2 + gasConstant * temperature / molarWeight * \
→ \
...     (numerix.log(rho / (molarWeight - vbar * rho)) + molarWeight / \
→ (molarWeight - vbar * rho))

```

```

>>> Lx = 1e-6
>>> nx = 100
>>> dx = Lx / nx
>>> mesh = Grid2D(nx=nx, ny=nx, dx=dx, dy=dx)

```

```

>>> density = CellVariable(mesh=mesh, hasOld=True, name=r'$\rho$')
>>> velocityX = CellVariable(mesh=mesh, hasOld=True, name=r'$u_x$')
>>> velocityY = CellVariable(mesh=mesh, hasOld=True, name=r'$u_y$')
>>> velocityVector = CellVariable(mesh=mesh, name=r'$\vec{u}$', rank=1)
>>> densityPrevious = density.copy()
>>> velocityXPrevious = velocityX.copy()
>>> velocityYPrevious = velocityY.copy()

```

```
>>> potentialNC = CellVariable(mesh=mesh, name=r'$\mu^{NC}$')
```

```

>>> epsilon = 1e-16
>>> freeEnergy = (f(density) + epsilon * temperature / 2 * density.grad.mag**2) .
→ cellVolumeAverage

```

```

>>> matrixDiagonal = CellVariable(mesh=mesh, name=r'$a_f$', value=1e+20, hasOld=True)
>>> correctionCoeff = mesh._faceAreas * mesh._cellDistances / matrixDiagonal.faceValue
>>> massEqn = TransientTerm(var=density) \
...     + VanLeerConvectionTerm(coeff=velocityVector.faceValue + correctionCoeff \
...                             * (density * potentialNC.grad).faceValue, \
...                             var=density) \
...     - DiffusionTerm(coeff=correctionCoeff * density.faceValue**2, \
→ var=potentialNC)

```

```

>>> viscosity = 1e-3
>>> ConvectionTerm = CentralDifferenceConvectionTerm
>>> ##matXX = numerix.array([[2, [0]], [[0], [1]]])
>>> ##matYY = numerix.array([[1, [0]], [[0], [2]]])
>>> ##matXY = numerix.array([[0, [0.5]], [[0.5], [0]]])
>>> ##matYX = matXY
>>> matXX = 1
>>> matYY = 1
>>> matXY = 0
>>> matYX = 0
>>> momentumXEqn = TransientTerm(coeff=density, var=velocityX) \
...     + ConvectionTerm(coeff=density.faceValue * velocityVector.faceValue, \
→ var=velocityX) \

```

(continues on next page)

(continued from previous page)

```

...
    == DiffusionTerm(coeff=(viscosity * matXX,), var=velocityX) \
+ DiffusionTerm(coeff=(viscosity * matXY,), var=velocityY) \
- ConvectionTerm(coeff=density.faceValue * [[1], [0]], \
var=potentialNC) \
...
    + ImplicitSourceTerm(coeff=density.grad[0], var=potentialNC)

```

```

>>> momentumYEqn = TransientTerm(coeff=density, var=velocityY) \
...     + ConvectionTerm(coeff=density.faceValue * velocityVector.faceValue, \
var=velocityY) \
...
    == DiffusionTerm(coeff=(viscosity * matYY,), var=velocityY) \
+ DiffusionTerm(coeff=(viscosity * matYX,), var=velocityX) \
- ConvectionTerm(coeff=density.faceValue * [[0], [1]], \
var=potentialNC) \
...
    + ImplicitSourceTerm(coeff=density.grad[1], var=potentialNC)

```

```

>>> velocityX.constrain(0, mesh.facesLeft & mesh.facesRight)
>>> velocityY.constrain(0, mesh.facesTop & mesh.facesBottom)

```

```

>>> potentialDerivative = 2 * ee / molarWeight**2 + \
...     gasConstant * temperature * molarWeight / density / \
...     (molarWeight - vbar * density)**2

```

```

>>> potential = mu(density)

```

```

>>> potentialNCEqn = ImplicitSourceTerm(coeff=1, var=potentialNC) \
...     == potential \
...     + ImplicitSourceTerm(coeff=potentialDerivative, var=density) \
...     - potentialDerivative * density \
...     - DiffusionTerm(coeff=epsilon * temperature, var=density)

```

```

>>> potentialNC.faceGrad constrain(value=[[0], [0]], where=mesh.exteriorFaces)

```

```

>>> coupledEqn = massEqn & momentumXEqn & momentumYEqn & potentialNCEqn

```

```

>>> numerix.random.seed(2012)
>>> density[:] = (liquidDensity + vaporDensity) / 2 * \
...     (1 + 0.01 * (2 * numerix.random(mesh.numberOfCells) - 1))

```

```

>>> from fipy import input
>>> if __name__ == '__main__':
...     viewers = Viewer(density), Viewer(velocityVector), Viewer(potentialNC)
...     for viewer in viewers:
...         viewer.plot()
...     input('arrange viewers')
...     for viewer in viewers:
...         viewer.plot()

```

```

>>> cfl = 0.1
>>> tolerance = 1e-1

```

(continues on next page)

(continued from previous page)

```
>>> dt = 1e-14
>>> timestep = 0
>>> relaxation = 0.5
>>> sweeps = 0
>>> if __name__ == '__main__':
...     totalSteps = 1e+10
...     totalSweeps = 1e+10
... else:
...     totalSteps = 1
...     totalSweeps = 1
```

```
>>> while timestep < totalSteps:
...     sweep = 0
...     dt *= 1.1
...     residual = 1.
...     initialResidual = None
...
...     density.updateOld()
...     velocityX.updateOld()
...     velocityY.updateOld()
...     matrixDiagonal.updateOld()
...
...     while residual > tolerance and sweeps < totalSweeps:
...         sweeps += 1
...         densityPrevious[:] = density
...         velocityXPrevious[:] = velocityX
...         velocityYPrevious[:] = velocityY
...         previousResidual = residual
...         velocityVector[0] = velocityX
...         velocityVector[1] = velocityY
...
...         dt = min(dt, dx / max(abs(velocityVector.mag)) * cfl)
...
...         coupledEqn.cacheMatrix()
...         residual = coupledEqn.sweep(dt=dt)
...
...         if initialResidual is None:
...             initialResidual = residual
...
...         residual = residual / initialResidual
...
...         if residual > previousResidual * 1.1 or sweep > 20:
...             density[:] = density.old
...             velocityX[:] = velocityX.old
...             velocityY[:] = velocityY.old
...             matrixDiagonal[:] = matrixDiagonal.old
...             dt = dt / 10.
...             if __name__ == '__main__':
...                 print('Recalculate the time step')
...             timestep -= 1
...             break
```

(continues on next page)

(continued from previous page)

```

...
    else:
        matrixDiagonal[:] = coupledEqn.matrix.takeDiagonal()[mesh.
- number0fCells:2 * mesh.number0fCells]
        density[:] = relaxation * density + (1 - relaxation) * densityPrevious
        velocityX[:] = relaxation * velocityX + (1 - relaxation) *_
- velocityXPrevious
        velocityY[:] = relaxation * velocityY + (1 - relaxation) *_
- velocityYPrevious
...
        sweep += 1
...
        if __name__ == '__main__' and timestep % 1 == 0:
            print('timestep: %e / %e, dt: %1.5e, free energy: %1.5e' % (timestep,_
- totalSteps, dt, freeEnergy))
        for viewer in viewers:
            viewer.plot()
...
        timestep += 1

```

```

>>> from fipy import input
>>> if __name__ == '__main__':
...     input('finished')

```

23.12.3 examples.reactiveWetting.test

Run all the test cases in *examples/reactiveWetting/*

23.13 examples.riemann

Modules

<i>examples.riemann.acoustics</i>	Test
<i>examples.riemann.test</i>	

23.13.1 examples.riemann.acoustics

Test

```

>>> print((0.4 < max(q.globalValue[0])) < 0.5))
True

```

23.13.2 examples.riemann.test

23.14 examples.test

Run all the test cases in examples/

23.15 examples.updating

Modules

<code>examples.updating.update0_1to1_0</code>	How to update scripts from version 0.1 to 1.0.
<code>examples.updating.update1_0to2_0</code>	How to update scripts from version 1.0 to 2.0.
<code>examples.updating.update2_0to3_0</code>	How to update scripts from version 2.0 to 3.0.

23.15.1 examples.updating.update0_1to1_0

How to update scripts from version 0.1 to 1.0.

It seems unlikely that many users are still running *FiPy* 0.1, but for those that are, the syntax of *FiPy* scripts changed considerably between version 0.1 and version 1.0. We incremented the full version-number to stress that previous scripts are incompatible. We strongly believe that these changes are for the better, resulting in easier code to write and read as well as slightly improved efficiency, but we realize that this represents an inconvenience to our users that have already written scripts of their own. We will strive to avoid any such incompatible changes in the future.

Any scripts you have written for *FiPy* 0.1 should be updated in two steps, first to work with *FiPy* 1.0, and then with *FiPy* 2.0. As a tutorial for updating your scripts, we will walk through updating `examples/convection/exponential1D/input.py` from *FiPy* 0.1. If you attempt to run that script with *FiPy* 1.0, the script will fail and you will see the errors shown below:

This example solves the steady-state convection-diffusion equation given by:

$$\nabla \cdot (D \nabla \phi + \vec{u} \phi) = 0$$

with coefficients $D = 1$ and $\vec{u} = (10, 0)$, or

```
>>> diffCoeff = 1.
>>> convCoeff = (10., 0.)
```

We define a 1D mesh

```
>>> L = 10.
>>> nx = 1000
>>> ny = 1
>>> from fipy.meshes.grid2D import Grid2D
>>> mesh = Grid2D(L / nx, L / ny, nx, ny)
```

and impose the boundary conditions

$$\phi = \begin{cases} 0 & \text{at } x = 0, \\ 1 & \text{at } x = L, \end{cases}$$

or

```
>>> valueLeft = 0.
>>> valueRight = 1.
>>> from fipy.boundaryConditions.fixedValue import FixedValue
>>> from fipy.boundaryConditions.fixedFlux import FixedFlux
>>> boundaryConditions = (
...     FixedValue(mesh.getFacesLeft(), valueLeft),
...     FixedValue(mesh.getFacesRight(), valueRight),
...     FixedFlux(mesh.getFacesTop(), 0.),
...     FixedFlux(mesh.getFacesBottom(), 0.)
... )
```

The solution variable is initialized to *valueLeft*:

```
>>> from fipy.variables.cellVariable import CellVariable
>>> var = CellVariable(
...     name = "concentration",
...     mesh = mesh,
...     value = valueLeft)
```

The SteadyConvectionDiffusionScEquation object is used to create the equation. It needs to be passed a convection term instantiator as follows:

```
>>> from fipy.terms.exponentialConvectionTerm import ExponentialConvectionTerm
>>> from fipy.solvers import *
>>> from fipy.equations.stdyConvDiffScEquation import SteadyConvectionDiffusionScEquation
Traceback (most recent call last):
...
ImportError: No module named equations.stdyConvDiffScEquation
>>> eq = SteadyConvectionDiffusionScEquation(
...     var = var,
...     diffusionCoeff = diffCoeff,
...     convectionCoeff = convCoeff,
...     solver = LinearLUSolver(tolerance = 1.e-15, steps = 2000),
...     convectionScheme = ExponentialConvectionTerm,
...     boundaryConditions = boundaryConditions
... )
Traceback (most recent call last):
...
NameError: name 'SteadyConvectionDiffusionScEquation' is not defined
```

More details of the benefits and drawbacks of each type of convection term can be found in the numerical section of the manual. Essentially the *ExponentialConvectionTerm* and *PowerLawConvectionTerm* will both handle most types of convection diffusion cases with the *PowerLawConvectionTerm* being more efficient.

We iterate to equilibrium

```
>>> from fipy.iterators.iterator import Iterator
>>> it = Iterator((eq,))
Traceback (most recent call last):
...
NameError: name 'eq' is not defined
>>> it.timestep()
Traceback (most recent call last):
... 
```

(continues on next page)

(continued from previous page)

```
NameError: name 'it' is not defined
```

and test the solution against the analytical result

$$\phi = \frac{1 - \exp(-u_x x / D)}{1 - \exp(-u_x L / D)}$$

or

```
>>> axis = 0
>>> x = mesh.getCellCenters()[:, axis]
>>> from fipy.tools import numerix
>>> CC = 1. - numerix.exp(-convCoeff[axis] * x / diffCoeff)
>>> DD = 1. - numerix.exp(-convCoeff[axis] * L / diffCoeff)
>>> analyticalArray = CC / DD
>>> numerix.allclose(analyticalArray, var, rtol = 1e-10, atol = 1e-10)
0
```

If the problem is run interactively, we can view the result:

```
>>> if __name__ == '__main__':
...     from fipy.viewers.grid2DGistViewer import Grid2DGistViewer
Traceback (most recent call last):
...
ImportError: No module named grid2DGistViewer
```



```
...     viewer = Grid2DGistViewer(var)
...     viewer.plot()
```

We see that a number of errors are thrown:

- ImportError: No module named equations.stdyConvDiffScEquation
- NameError: name 'SteadyConvectionDiffusionScEquation' is not defined
- NameError: name 'eq' is not defined
- NameError: name 'it' is not defined
- ImportError: No module named grid2DGistViewer

As is usually the case with computer programming, many of these errors are caused by earlier errors. Let us update the script, section by section:

Although no error was generated by the use of `Grid2D`, *FiPy* 1.0 supports a true 1D mesh class, so we instantiate the mesh as

```
>>> L = 10.
>>> nx = 1000
>>> from fipy.meshes.grid1D import Grid1D
>>> mesh = Grid1D(dx = L / nx, nx = nx)
```

The `Grid2D` class with `ny = 1` still works perfectly well for 1D problems, but the `Grid1D` class is slightly more efficient, and it makes the code clearer when a 1D geometry is actually desired.

Because the mesh is now 1D, we must update the convection coefficient vector to be 1D as well

```
>>> diffCoeff = 1.
>>> convCoeff = (10.,)
```

The `FixedValue` boundary conditions at the left and right are unchanged, but a `Grid1D` mesh does not even have top and bottom faces:

```
>>> valueLeft = 0.
>>> valueRight = 1.
>>> from fipy.boundaryConditions.fixedValue import FixedValue
>>> boundaryConditions = (
...     FixedValue(mesh.getFacesLeft(), valueLeft),
...     FixedValue(mesh.getFacesRight(), valueRight))
```

The creation of the solution variable is unchanged:

```
>>> from fipy.variables.cellVariable import CellVariable
>>> var = CellVariable(name = "concentration",
...                     mesh = mesh,
...                     value = valueLeft)
```

The biggest change between `FiPy` 0.1 and `FiPy` 1.0 is that `Equation` objects no longer exist at all. Instead, `Term` objects can be simply added, subtracted, and equated to assemble an equation. Where before the assembly of the equation occurred in the black-box of `SteadyConvectionDiffusionScEquation`, we now assemble it directly:

```
>>> from fipy.terms.implicitDiffusionTerm import ImplicitDiffusionTerm
>>> diffTerm = ImplicitDiffusionTerm(coeff = diffCoeff)
```

```
>>> from fipy.terms.exponentialConvectionTerm import ExponentialConvectionTerm
>>> eq = diffTerm + ExponentialConvectionTerm(coeff = convCoeff,
...                                              diffusionTerm = diffTerm)
... 
```

One thing that `SteadyConvectionDiffusionScEquation` took care of automatically was that a `ConvectionTerm` must know about any `DiffusionTerm` in the equation in order to calculate a Péclet number. Now, the `DiffusionTerm` must be explicitly passed to the `ConvectionTerm` in the `diffusionTerm` parameter.

The `Iterator` class still exists, but it is no longer necessary. Instead, the solution to an implicit steady-state problem like this can simply be obtained by telling the equation to solve itself (with an appropriate `solver` if desired, although the default `LinearPCGSolver` is usually suitable):

```
>>> from fipy.solvers import *
>>> eq.solve(var = var,
...           solver = LinearLUSolver(tolerance = 1.e-15, steps = 2000),
...           boundaryConditions = boundaryConditions)
```

Note: In version 0.1, the `Equation` object had to be told about the `Variable`, `Solver`, and `BoundaryCondition` objects when it was created (and it, in turn, passed much of this information to the `Term` objects in order to create them). In version 1.0, the `Term` objects (and the equation assembled from them) are abstract. The `Variable`, `Solver`, and `BoundaryCondition` objects are only needed by the `solve()` method (and, in fact, the same equation could be used to solve different variables, with different solvers, subject to different boundary conditions, if desired).

The analytical solution is unchanged, and we can test as before

```
>>> numerix.allclose(analyticalArray, var, rtol = 1e-10, atol = 1e-10)
1
```

or we can use the slightly simpler syntax

```
>>> print(var.allclose(analyticalArray, rtol = 1e-10, atol = 1e-10))
1
```

The `ImportError: No module named grid2DGistViewer` results because the `Viewer` classes have been moved and renamed. This error could be resolved by changing the `import` statement appropriately:

```
>>> if __name__ == '__main__':
...     from fipy.viewers.gistViewer.gist1DViewer import Gist1DViewer
...     viewer = Gist1DViewer(vars = var)
...     viewer.plot()
```

Instead, rather than instantiating a particular `Viewer` (which you can still do, if you desire), a generic “factory” method will return a `Viewer` appropriate for the supplied `Variable` object(s):

```
>>> if __name__ == '__main__':
...     import fipy.viewers
...     viewer = fipy.viewers.make(vars = var)
...     viewer.plot()
```

Please do not hesitate to contact us if this example does not help you convert your existing scripts to *FiPy* 1.0.

23.15.2 examples.updating.update1_0to2_0

How to update scripts from version 1.0 to 2.0.

FiPy 2.0 introduces several syntax changes from *FiPy* 1.0. We appreciate that this is very inconvenient for our users, but we hope you’ll agree that the new syntax is easier to read and easier to use. We assure you that this is not something we do casually; it has been over three years since our last incompatible change (when *FiPy* 1.0 superceded *FiPy* 0.1).

All examples included with version 2.0 have been updated to use the new syntax, but any scripts you have written for *FiPy* 1.0 will need to be updated. A complete listing of the changes needed to take the *FiPy* examples scripts from version 1.0 to version 2.0 can be found with:

```
$ git diff version-1_2 version-2_0 examples/
```

but we summarize the necessary changes here. If these tips are not sufficient to make your scripts compatible with *FiPy* 2.0, please don’t hesitate to ask for help on the [mailing list](#).

The following items **must** be changed in your scripts

- The dimension axis of a `Variable` is now first, not last

```
>>> x = mesh.getCellCenters()[0]
```

instead of

```
>>> x = mesh.getCellCenters()[..., 0]
```

This seemingly arbitrary change simplifies a great many things in *FiPy*, but the one most noticeable to the user is that you can now write

```
>>> x, y = mesh.getCellCenters()
```

instead of

```
>>> x = mesh.getCellCenters()[:, 0]
>>> y = mesh.getCellCenters()[:, 1]
```

Unfortunately, we cannot reliably automate this conversion, but we find that searching for “`...,`” and “`:`” finds almost everything. Please don’t blindly “search & replace all” as that is almost bound to create more problems than it’s worth.

Note: Any vector constants must be reoriented. For instance, in order to offset a `Mesh`, you must write

```
>>> mesh = Grid2D(...) + ((deltax,), (deltay,))
```

or

```
>>> mesh = Grid2D(...) + [[deltax], [deltay]]
```

instead of

```
>>> mesh = Grid2D(...) + (deltax, deltax)
```

-
- `VectorCellVariable` and `VectorFaceVariable` no longer exist. `CellVariable` and `FaceVariable` now both inherit from `MeshVariable`, which can have arbitrary rank. A field of scalars (default) will have `rank=0`, a field of vectors will have `rank=1`, etc. You should write

```
>>> vectorField = CellVariable(mesh=mesh, rank=1)
```

instead of

```
>>> vectorField = VectorCellVariable(mesh=mesh)
```

Note: Because vector fields are properly supported, use vector operations to manipulate them, such as

```
>>> phase.getFaceGrad().dot((0, 1),
...                           (-1, 0)))
```

instead of the hackish

```
>>> phase.getFaceGrad()._take((1, 0), axis=1) * (-1, 1)
```

-
- For internal reasons, `FiPy` now supports `CellVariable` and `FaceVariable` objects that contain integers, but it is not meaningful to solve a PDE for an integer field (`FiPy` should issue a warning if you try). As a result, when given, initial values must be specified as floating-point values:

```
>>> var = CellVariable(mesh=mesh, value=1.)
```

where they used to be quietly accepted as integers

```
>>> var = CellVariable(mesh=mesh, value=1)
```

If the `value` argument is not supplied, the `CellVariable` will contain floats, as before.

- The `faces` argument to `BoundaryCondition` now takes a mask, instead of a list of Face IDs. Now you write

```
>>> X, Y = mesh.getFaceCenters()
>>> FixedValue(faces=mesh.getExteriorFaces() & (X**2 < 1e-6), value=...)
```

instead of

```
>>> exteriorFaces = mesh.getExteriorFaces()
>>> X = exteriorFaces.getCenters()[:, 0]
>>> FixedValue(faces=exteriorFaces.where(X**2 < 1e-6), value=...)
```

With the old syntax, a different call to `getCenters()` had to be made for each set of Face objects. It was also extremely difficult to specify boundary conditions that depended both on position in space and on the current values of any other `Variable`.

```
>>> FixedValue(faces=(mesh.getExteriorFaces()
...     & ((X**2 < 1e-6)
...     & (Y > 3.))
...     | (phi.getArithmetricFaceValue()
...         < sin(gamma.getArithmetricFaceValue()))), value=...)
```

although it probably could have been done with a rather convoluted (and slow!) `filter` function passed to `where`. There no longer are any `filter` methods used in `FiPy`. You now would write

```
>>> x, y = mesh.cellCenters
>>> initialArray[(x < dx) | (x > (Lx - dx)) | (y < dy) | (y > (Ly - dy))] = 1.
```

instead of the *much* slower

```
>>> def cellFilter(cell):
...     return ((cell.center[0] < dx)
...             or (cell.center[0] > (Lx - dx))
...             or (cell.center[1] < dy)
...             or (cell.center[1] > (Ly - dy)))
```

```
>>> positiveCells = mesh.getCells(filter=cellFilter)
>>> for cell in positiveCells:
...     initialArray[cell.ID] = 1.
```

Although they still exist, we find very little cause to ever call `getCells()` or `fipy.meshes.Mesh.getFaces()`.

- Some modules, such as `fipy.solvers`, have been significantly rearranged. For example, you need to change

```
>>> from fipy.solvers.linearPCGSolver import LinearPCGSolver
```

to either

```
>>> from fipy import LinearPCGSolver
```

or

```
>>> from fipy.solvers.pysparse.linearPCGSolver import LinearPCGSolver
```

- The `numerix.max()` and `numerix.min()` functions no longer exist. Either call `max()` and `min()` or the `max()` and `min()` methods of a `Variable`.
- The `Numeric` module has not been supported for a long time. Be sure to use

```
>>> from fipy import numerix
```

instead of

```
>>> import Numeric
```

The remaining changes are not *required*, but they make scripts easier to read and we recommend them. `FiPy` may issue a `DeprecationWarning` for some cases, to indicate that we may not maintain the old syntax indefinitely.

- All of the most commonly used classes and functions in `FiPy` are directly accessible in the `fipy` namespace. For brevity, our examples now start with

```
>>> from fipy import *
```

instead of the explicit

```
>>> from fipy.meshes.grid1D import Grid1D
>>> from fipy.terms.powerLawConvectionTerm import PowerLawConvectionTerm
>>> from fipy.variables.cellVariable import CellVariable
```

imports that we used to use. Most of the explicit imports should continue to work, so you do not need to change them if you don't wish to, but we find our own scripts much easier to read without them.

All of the `numerix` module is now imported into the `fipy` namespace, so you can call `numerix` functions a number of different ways, including:

```
>>> from fipy import *
>>> y = exp(x)
```

or

```
>>> from fipy import numerix
>>> y = numerix.exp(x)
```

or

```
>>> from fipy.tools.numerix import exp
>>> y = exp(x)
```

We generally use the first, but you may see us use the others, and should feel free to use whichever form you find most comfortable.

Note: Internally, `FiPy` uses explicit imports, as is considered best Python practice, but we feel that clarity trumps orthodoxy when it comes to the examples.

- The function `fipy.viewers.make()` has been renamed to `fipy.viewers.Viewer()`. All of the `limits` can now be supplied as direct arguments, as well (although this is not required). The result is a more natural syntax:

```
>>> from fipy import Viewer
>>> viewer = Viewer(vars=(alpha, beta, gamma), datamin=0, datamax=1)
```

instead of

```
>>> from fipy import viewers
>>> viewer = viewers.make(vars=(alpha, beta, gamma),
...                         limits={'datamin': 0, 'datamax': 1})
```

With the old syntax, there was also a temptation to write

```
>>> from fipy.viewers import make
>>> viewer = make(vars=(alpha, beta, gamma))
```

which can be very hard to understand after the fact (make? make what?).

- A ConvectionTerm can now calculate its Péclet number automatically, so the diffusionTerm argument is no longer required

```
>>> eq = (TransientTerm()
...       == DiffusionTerm(coeff=diffCoeff)
...       + PowerLawConvectionTerm(coeff=convCoeff))
```

instead of

```
>>> diffTerm = DiffusionTerm(coeff=diffCoeff)
>>> eq = (TransientTerm()
...       == diffTerm
...       + PowerLawConvectionTerm(coeff=convCoeff, diffusionTerm=diffTerm))
```

- An ImplicitSourceTerm now “knows” how to partition itself onto the solution matrix, so you can write

```
>>> S0 = mXi * phase * (1 - phase) - phase * S1
>>> source = S0 + ImplicitSourceTerm(coeff=S1)
```

instead of

```
>>> S0 = mXi * phase * (1 - phase) - phase * S1 * (S1 < 0)
>>> source = S0 + ImplicitSourceTerm(coeff=S1 * (S1 < 0))
```

It is definitely still advantageous to hand-linearize your source terms, but it is no longer necessary to worry about putting the “wrong” sign on the diagonal of the matrix.

- To make clearer the distinction between iterations, timesteps, and sweeps (see FAQ *Iterations, timesteps, and sweeps? Oh, my!*) the steps argument to a *Solver* object has been renamed *iterations*.
- *ImplicitDiffusionTerm* has been renamed to *DiffusionTerm*.

23.15.3 examples.updating.update2_0to3_0

How to update scripts from version 2.0 to 3.0.

FiPy 3.0 introduces several syntax changes from *FiPy* 2.0. We appreciate that this is very inconvenient for our users, but we hope you’ll agree that the new syntax is easier to read and easier to use. We assure you that this is not something we do casually; it has been over two and a half years since our last incompatible change (when *FiPy* 2.0 superceded *FiPy* 1.0).

All examples included with version 3.0 have been updated to use the new syntax, but any scripts you have written for *FiPy* 2.0 will need to be updated. A complete listing of the changes needed to take the *FiPy* examples scripts from version 2.0 to version 3.0 can be found with

```
$ git diff version-2_1 version-3_0 examples/
```

but we summarize the necessary changes here. If these tips are not sufficient to make your scripts compatible with *FiPy* 3.0, please don't hesitate to ask for help on the [mailing list](#).

The following items **must** be changed in your scripts

- We have reconsidered the change in FiPy 2.0 that included all of the functions of the `numerix` module in the `fipy` namespace. You now must be more explicit when referring to any of these functions:

```
>>> from fipy import *
>>> y = numerix.exp(x)
```

```
>>> from fipy.tools.numerix import exp
>>> y = exp(x)
```

We generally use the first, but you may see us import specific functions if we feel it improves readability. You should feel free to use whichever form you find most comfortable.

Note: the old behavior can be obtained, at least for now, by setting the `FIPY_INCLUDE_NUMERIX_ALL` environment variable.

- If your equation contains a `TransientTerm`, then you must specify the timestep by passing a `dt=` argument when calling `solve()` or `sweep()`.

The remaining changes are not *required*, but they make scripts easier to read and we recommend them. *FiPy* may issue a [DeprecationWarning](#) for some cases, to indicate that we may not maintain the old syntax indefinitely.

- “getter” and “setter” methods have been replaced with properties, e.g., use

```
>>> x, y = mesh.cellCenters
```

instead of

```
>>> x, y = mesh.getCellCenters()
```

- Boundary conditions are better applied with the `constrain()` method than with the old `FixedValue` and `FixedFlux` classes. See [Boundary Conditions](#).
- Individual `Mesh` classes should be imported directly from `fipy.meshes` and not `fipy.meshes.numMesh`.
- The `Gmsh` meshes now have simplified names: `Gmsh2D` instead of `GmshImporter2D`, `Gmsh3D` instead of `GmshImporter3D`, and `Gmsh2DIn3DSpace` instead of `GmshImporter2DIn3DSpace`.

Bibliography

- [1] W. J. Boettinger, J. A. Warren, C. Beckermann, and A. Karma. Phase-field simulation of solidification. *Annual Review of Materials Research*, 32:163–194, 2002. doi:10.1146/annurev.matsci.32.101901.155803.
- [2] L. Q. Chen. Phase-field models for microstructure evolution. *Annual Review of Materials Research*, 32:113–140, 2002. doi:10.1146/annurev.matsci.32.112001.132041.
- [3] G. B. McFadden. Phase-field models of solidification. *Contemporary Mathematics*, 306:107–145, 2002.
- [4] David M Saylor, Jonathan E Guyer, Daniel Wheeler, and James A Warren. Predicting microstructure development during casting of drug-eluting coatings. *Acta Biomaterialia*, 7(2):604–613, Jan 2011. doi:10.1016/j.actbio.2010.09.019.
- [5] Daniel Wheeler, James A. Warren, and William J. Boettinger. Modeling the early stages of reactive wetting. *Physical Review E*, 82(5):051601, Nov 2010. doi:10.1103/PhysRevE.82.051601.
- [6] C. M Hangarter, B. H Hamadani, J. E Guyer, H Xu, R Need, and D Josell. Three dimensionally structured interdigitated back contact thin film heterojunction solar cells. *Journal of Applied Physics*, 109(7):073514, Jan 2011. doi:10.1063/1.3561487.
- [7] D. Josell, D. Wheeler, W. H. Huber, and T. P. Moffat. Superconformal electrodeposition in submicron features. *Physical Review Letters*, 87(1):016102, 2001. doi:10.1103/PhysRevLett.87.016102.
- [8] J. A. Sethian. *Level Set Methods and Fast Marching Methods*. Cambridge University Press, 1996.
- [9] Scott Chacon. *Pro Git*. Apress, 2009. URL: <http://git-scm.com/book>.
- [10] Guido van Rossum. *Python Tutorial*. URL: <http://docs.python.org/tut/>.
- [11] Mark Pilgrim. *Dive Into Python*. Apress, 2004. ISBN 1590593561. URL: <http://diveintopython.org>.
- [12] Guido van Rossum. *Python Reference Manual*. URL: <http://docs.python.org/ref/>.
- [13] James A. Warren, Ryo Kobayashi, Alexander E. Lobkovsky, and W. Craig Carter. Extending phase field models of solidification to polycrystalline materials. *Acta Materialia*, 51(20):6035–6058, 2003. doi:10.1016/S1359-6454(03)00388-4.
- [14] T. N. Croft. *Unstructured Mesh - Finite Volume Algorithms for Swirling, Turbulent Reacting Flows*. PhD thesis, University of Greenwich, 1998. URL: <http://gala.gre.ac.uk/id/eprint/6371/>.
- [15] S. V. Patankar. *Numerical Heat Transfer and Fluid Flow*. Taylor and Francis, 1980.
- [16] H. K. Versteeg and W. Malalasekera. *An Introduction to Computational Fluid Dynamics*. Longman Scientific and Technical, 1995.

- [17] C. Mattiussi. An analysis of finite volume, finite element, and finite difference methods using some concepts from algebraic topology. *Journal of Computational Physics*, 133:289–309, 1997. URL: <http://lis.epfl.ch/publications/JCP1997.pdf>.
- [18] John W. Cahn and John E. Hilliard. Free energy of a nonuniform system. I. Interfacial free energy. *Journal of Chemical Physics*, 28(2):258–267, 1958.
- [19] John W. Cahn. Free energy of a nonuniform system. II. Thermodynamic basis. *Journal of Chemical Physics*, 30(5):1121–1124, 1959.
- [20] John W. Cahn and John E. Hilliard. Free energy of a nonuniform system. III. Nucleation in a two-component incompressible fluid. *Journal of Chemical Physics*, 31(3):688–699, 1959.
- [21] K. R Elder, K Thornton, and J. J Hoyt. The kirkendall effect in the phase field crystal model. *Philosophical Magazine*, 91(1):151–164, Jan 2011. doi:[10.1080/14786435.2010.506427](https://doi.org/10.1080/14786435.2010.506427).
- [22] J. E. Guyer, W. J. Boettinger, J. A. Warren, and G. B. McFadden. Phase field modeling of electrochemistry I: Equilibrium. *Physical Review E*, 69:021603, 2004. arXiv:cond-mat/0308173, doi:[10.1103/PhysRevE.69.021603](https://doi.org/10.1103/PhysRevE.69.021603).
- [23] J. E. Guyer, W. J. Boettinger, J. A. Warren, and G. B. McFadden. Phase field modeling of electrochemistry II: Kinetics. *Physical Review E*, 69:021604, 2004. arXiv:cond-mat/0308179, doi:[10.1103/PhysRevE.69.021604](https://doi.org/10.1103/PhysRevE.69.021604).
- [24] William H. Press, Saul A. Teukolsky, William T. Vetterling, and Brian P. Flannery. *Numerical Recipes in C: the Art of Scientific Computing*. Cambridge University Press, 2nd edition, 1999.
- [25] J. H. Ferziger and M. Perić. *Computational Methods for Fluid Dynamics*. Springer, 1996.
- [26] C.-C. Rossow. A blended pressure/density based method for the computation of incompressible and compressible flows. *Journal of Computational Physics*, 185(2):375–398, 2003. doi:[10.1016/S0021-9991\(02\)00059-1](https://doi.org/10.1016/S0021-9991(02)00059-1).
- [27] D. Josell, D. Wheeler, and T. P. Moffat. Gold superfill in submicrometer trenches: experiment and prediction. *Journal of The Electrochemical Society*, 153(1):C11–C18, 2006. doi:[10.1149/1.2128765](https://doi.org/10.1149/1.2128765).
- [28] T. P. Moffat, D. Wheeler, S. K. Kim, and D. Josell. Curvature enhanced adsorbate coverage model for electrodeposition. *Journal of The Electrochemical Society*, 153(2):C127–C132, 2006. doi:[10.1149/1.2165580](https://doi.org/10.1149/1.2165580).
- [29] D. Wheeler, D. Josell, and T. P. Moffat. Modeling superconformal electrodeposition using the level set method. *Journal of The Electrochemical Society*, 150(5):C302–C310, 2003. doi:[10.1149/1.1562598](https://doi.org/10.1149/1.1562598).
- [30] A. A. Wheeler, W. J. Boettinger, and G. B. McFadden. Phase-field model for isothermal phase transitions in binary alloys. *Physical Review A*, 45(10):7424–7439, 1992.
- [31] J. A. Warren and W. J. Boettinger. Prediction of dendritic growth and microsegregation in a binary alloy using the phase field method. *Acta Metallurgica et Materialia*, 43(2):689–703, 1995.
- [32] Greg Ward. *Installing Python Modules*. URL: <http://docs.python.org/inst/>.
- [33] T. P. Moffat, D. Wheeler, and D. Josell. Superfilling and the curvature enhanced accelerator coverage mechanism. *The Electrochemical Society, Interface*, 13(4):46–52, 2004. URL: <http://www.electrochem.org/publications/interface/winter2004/IF12-04-Pg46.pdf>.

Python Module Index

e

examples, 919
examples.benchmarking, 920
examples.benchmarking.benchmark, 920
examples.benchmarking.size, 920
examples.benchmarking.steps, 920
examples.benchmarking.utils, 920
examples.benchmarking.versions, 920
examples.cahnHilliard, 920
examples.cahnHilliard.mesh2D, 921
examples.cahnHilliard.mesh2DCoupled, 923
examples.cahnHilliard.mesh3D, 926
examples.cahnHilliard.sphere, 928
examples.cahnHilliard.sphereDaemon, 930
examples.cahnHilliard.tanh1D, 930
examples.cahnHilliard.test, 932
examples.chemotaxis, 932
examples.chemotaxis.input, 933
examples.chemotaxis.input2D, 935
examples.chemotaxis.parameters, 938
examples.chemotaxis.test, 938
examples.convection, 938
examples.convection.advection, 938
examples.convection.advection.explicitUpwind, 939
examples.convection.advection.implicitUpwind, 939
examples.convection.advection.vanLeerUpwind, 939
examples.convection.exponential1D, 939
examples.convection.exponential1D.cylindricalMesh1D, 940
examples.convection.exponential1D.cylindricalMesh1DNONUNIFORM, 941
examples.convection.exponential1D.mesh1D, 943
examples.convection.exponential1D.tri2D, 944
examples.convection.exponential1DBack, 945
examples.convection.exponential1DBack.mesh1D, 945
examples.convection.exponential1DSource, 946
examples.convection.exponential1DSource.mesh1D,

947
examples.convection.exponential1DSource.tri2D, 948
examples.convection.exponential2D, 949
examples.convection.exponential2D.cylindricalMesh2D, 949
examples.convection.exponential2D.cylindricalMesh2DNonUniform, 951
examples.convection.exponential2D.mesh2D, 952
examples.convection.exponential2D.tri2D, 953
examples.convection.peclet, 954
examples.convection.powerLaw1D, 955
examples.convection.powerLaw1D.mesh1D, 956
examples.convection.powerLaw1D.tri2D, 957
examples.convection.robin, 958
examples.convection.source, 960
examples.convection.test, 961
examples.diffusion, 961
examples.diffusion.anisotropy, 961
examples.diffusion.circle, 963
examples.diffusion.circleQuad, 968
examples.diffusion.coupled, 973
examples.diffusion.electrostatics, 975
examples.diffusion.explicit, 979
examples.diffusion.explicit.mesh1D, 980
examples.diffusion.explicit.mixedelement, 981
examples.diffusion.explicit.test, 982
examples.diffusion.explicit.tri2D, 982
examples.diffusion.mesh1D, 983
examples.diffusion.mesh20x20, 1003
examples.diffusion.mesh20x20Coupled, 1006
examples.diffusion.nthOrder, 1009
examples.diffusion.nthOrder.input4thOrder1D, 1010
examples.diffusion.nthOrder.input4thOrder_line, 1012
examples.diffusion.nthOrder.test, 1012
examples.diffusion.steadyState, 1012
examples.diffusion.steadyState.mesh1D, 1012
examples.diffusion.steadyState.mesh1D.inputPeriodic, 1013

```
examples.diffusion.steadyState.mesh1D.tri2Dinput, 1013
examples.levelSet.distanceFunction.interior, 1061
examples.levelSet.distanceFunction.mesh1D, 1062
examples.levelSet.distanceFunction.square, 1063
examples.levelSet.distanceFunction.test, 1064
examples.levelSet.electroChem, 1064
examples.levelSet.electroChem.adsorbingSurfactantEquation, 1064
examples.levelSet.electroChem.adsorption, 1064
examples.levelSet.electroChem.gapFillDistanceVariable, 1065
examples.levelSet.electroChem.gapFillMesh, 1065
examples.levelSet.electroChem.gold, 1066
examples.levelSet.electroChem.howToWriteAScript, 1066
examples.levelSet.electroChem.leveler, 1073
examples.levelSet.electroChem.lines, 1077
examples.levelSet.electroChem.matplotlibSurfactantViewer, 1077
examples.levelSet.electroChem.mayaviSurfactantViewer, 1077
examples.levelSet.electroChem.metalIonDiffusionEquation, 1081
examples.levelSet.electroChem.simpleTrenchSystem, 1084
examples.levelSet.electroChem.surfactantBulkDiffusionEquation, 1087
examples.levelSet.electroChem.test, 1087
examples.levelSet.electroChem.trenchMesh, 1087
examples.levelSet.surfactant, 1087
examples.levelSet.surfactant.circle, 1088
examples.levelSet.surfactant.expandingCircle, 1088
examples.levelSet.surfactant.square, 1089
examples.levelSet.surfactant.test, 1090
examples.levelSet.test, 1090
examples.meshing, 1090
examples.meshing.gmshRefinement, 1090
examples.meshing.inputGrid2D, 1090
examples.meshing.sphere, 1091
examples.meshing.test, 1092
examples.parallel, 1092
examples.phase, 1092
examples.phase.anisotropy, 1093
examples.phase.anisotropyOLD, 1097
examples.phase.binary, 1100
examples.phase.binaryCoupled, 1109
examples.phase.impingement, 1119
examples.phase.impingement.mesh20x20, 1119
examples.levelSet.advection, 1055
examples.levelSet.advection.circle, 1055
examples.levelSet.advection.mesh1D, 1057
examples.levelSet.advection.test, 1058
examples.levelSet.advection.trench, 1058
examples.levelSet.distanceFunction, 1060
examples.levelSet.distanceFunction.circle, 1060
examples.levelSet.otherMeshes, 1018
examples.levelSet.otherMeshes.cubicalProblem, 1018
examples.levelSet.otherMeshes.grid3Dinput, 1018
examples.levelSet.otherMeshes.prism, 1018
examples.levelSet.test, 1019
examples.levelSet.variable, 1019
examples.elphf, 1020
examples.elphf.diffusion, 1021
examples.elphf.diffusion.mesh1D, 1021
examples.elphf.diffusion.mesh1Ddimensional, 1024
examples.elphf.diffusion.mesh2D, 1026
examples.elphf.input, 1029
examples.elphf.phase, 1035
examples.elphf.phaseDiffusion, 1038
examples.elphf.poisson, 1046
examples.elphf.test, 1049
examples.flow, 1049
examples.flow.stokesCavity, 1050
examples.flow.test, 1054
examples.levelSet, 1054
examples.levelSet.advection, 1055
examples.levelSet.advection.circle, 1055
examples.levelSet.advection.mesh1D, 1057
examples.levelSet.advection.test, 1058
examples.levelSet.advection.trench, 1058
examples.levelSet.distanceFunction, 1060
examples.levelSet.distanceFunction.circle, 1060
```

f
 examples.phase.impingement.mesh40x1, 1123
 examples.phase.impingement.test, 1126
 examples.phase.missOrientation, 1126
 examples.phase.missOrientation.circle, 1126
 examples.phase.missOrientation.mesh1D, 1127
 examples.phase.missOrientation.modCircle, 1128
 examples.phase.missOrientation.test, 1128
 examples.phase.polyxtal, 1128
 examples.phase.polyxtalCoupled, 1134
 examples.phase.quaternary, 1140
 examples.phase.simple, 1147
 examples.phase.symmetry, 1155
 examples.phase.test, 1157
 examples.reactiveWetting, 1157
 examples.reactiveWetting.liquidVapor1D, 1157
 examples.reactiveWetting.liquidVapor2D, 1162
 examples.reactiveWetting.test, 1166
 examples.riemann, 1166
 examples.riemann.acoustics, 1166
 examples.riemann.test, 1167
 examples.test, 1167
 examples.updating, 1167
 examples.updating.update0_1to1_0, 1167
 examples.updating.update1_0to2_0, 1171
 examples.updating.update2_0to3_0, 1175

f
 fipy, 125
 fipy.boundaryConditions, 126
 fipy.boundaryConditions.boundaryCondition, 127
 fipy.boundaryConditions.constraint, 127
 fipy.boundaryConditions.fixedFlux, 128
 fipy.boundaryConditions.fixedValue, 128
 fipy.boundaryConditions.nthOrderBoundaryCondition, 129
 fipy.boundaryConditions.test, 129
 fipy.matrices, 130
 fipy.matrices.offsetSparseMatrix, 130
 fipy.matrices.petscMatrix, 130
 fipy.matrices.pysparseMatrix, 130
 fipy.matrices.scipyMatrix, 130
 fipy.matrices.sparseMatrix, 130
 fipy.matrices.test, 130
 fipy.matrices.trilinosMatrix, 130
 fipy.meshes, 130
 fipy.meshes.abstractMesh, 132
 fipy.meshes.builders, 139
 fipy.meshes.builders.abstractGridBuilder, 140
 fipy.meshes.builders.grid1DBuilder, 140
 fipy.meshes.builders.grid2DBuilder, 140
 fipy.meshes.builders.grid3DBuilder, 140

fipy.meshes.builders.periodicGrid1DBuilder, 140
 fipy.meshes.builders.utilityClasses, 140
 fipy.meshes.cylindricalGrid1D, 140
 fipy.meshes.cylindricalGrid2D, 140
 fipy.meshes.cylindricalNonUniformGrid1D, 140
 fipy.meshes.cylindricalNonUniformGrid2D, 149
 fipy.meshes.cylindricalUniformGrid1D, 158
 fipy.meshes.cylindricalUniformGrid2D, 165
 fipy.meshes.factoryMeshes, 172
 fipy.meshes.gmshMesh, 175
 fipy.meshes.grid1D, 223
 fipy.meshes.grid2D, 223
 fipy.meshes.grid3D, 223
 fipy.meshes.mesh, 223
 fipy.meshes.mesh1D, 232
 fipy.meshes.mesh2D, 240
 fipy.meshes.nonUniformGrid1D, 249
 fipy.meshes.nonUniformGrid2D, 257
 fipy.meshes.nonUniformGrid3D, 266
 fipy.meshes.periodicGrid1D, 274
 fipy.meshes.periodicGrid2D, 283
 fipy.meshes.periodicGrid3D, 309
 fipy.meshes.representations, 365
 fipy.meshes.representations.abstractRepresentation, 365
 fipy.meshes.representations.gridRepresentation, 365
 fipy.meshes.representations.meshRepresentation, 365
 fipy.meshes.skewedGrid2D, 365
 fipy.meshes.sphericalNonUniformGrid1D, 374
 fipy.meshes.sphericalUniformGrid1D, 383
 fipy.meshes.test, 390
 fipy.meshes.topologies, 390
 fipy.meshes.topologies.abstractTopology, 390
 fipy.meshes.topologies.gridTopology, 390
 fipy.meshes.topologies.meshTopology, 390
 fipy.meshes.tri2D, 390
 fipy.meshes.uniformGrid, 399
 fipy.meshes.uniformGrid1D, 406
 fipy.meshes.uniformGrid2D, 413
 fipy.meshes.uniformGrid3D, 420
 fipy.solvers, 427
 fipy.solvers.petsc, 429
 fipy.solvers.petsc.comms, 430
 fipy.solvers.petsc.comms.parallelPETScCommWrapper, 430
 fipy.solvers.petsc.comms.petscCommWrapper, 430
 fipy.solvers.petsc.comms.serialPETScCommWrapper, 431
 fipy.solvers.petsc.dummySolver, 431
 fipy.solvers.petsc.linearBicG Solver, 431

fipy.solvers.petsc.linearCGSSolver, 432
fipy.solvers.petsc.linearGMRESSolver, 432
fipy.solvers.petsc.linearLUSolver, 433
fipy.solvers.petsc.linearPCGSolver, 433
fipy.solvers.petsc.petscKrylovSolver, 434
fipy.solvers.petsc.petscSolver, 435
fipy.solvers.pyAMG, 435
fipy.solvers.pyAMG.linearCGSSolver, 436
fipy.solvers.pyAMG.linearGeneralSolver, 437
fipy.solvers.pyAMG.linearGMRESSolver, 436
fipy.solvers.pyAMG.linearLUSolver, 438
fipy.solvers.pyAMG.linearPCGSolver, 438
fipy.solvers.pyAMG.preconditioners, 439
fipy.solvers.pyAMG.preconditioners.smoothedAggregationPreconditioner, 439
fipy.solvers.pyamgx, 439
fipy.solvers.pyamgx.aggregationAMGSolver, 440
fipy.solvers.pyamgx.classicalAMGSolver, 440
fipy.solvers.pyamgx.linearBicgstabSolver, 441
fipy.solvers.pyamgx.linearCGSolver, 441
fipy.solvers.pyamgx.linearFGMRESSolver, 442
fipy.solvers.pyamgx.linearGMRESSolver, 443
fipy.solvers.pyamgx.linearLUSolver, 443
fipy.solvers.pyamgx.preconditioners, 444
fipy.solvers.pyamgx.preconditioners.preconditioners, 444
fipy.solvers.pyamgx.pyAMGXSolver, 444
fipy.solvers.pyamgx.smoothers, 445
fipy.solvers.pyamgx.smoothers.smoothers, 445
fipy.solvers.pysparse, 445
fipy.solvers.pysparse.linearCGSSolver, 446
fipy.solvers.pysparse.linearGMRESSolver, 446
fipy.solvers.pysparse.linearJORSolver, 447
fipy.solvers.pysparse.linearLUSolver, 447
fipy.solvers.pysparse.linearPCGSolver, 448
fipy.solvers.pysparse.preconditioners, 448
fipy.solvers.pysparse.preconditioners.jacobiPreconditioner, 448
fipy.solvers.pysparse.preconditioners.preconditioners, 449
fipy.solvers.pysparse.preconditioners.ssorPreconditioners, 449
fipy.solvers.pysparse.pysparseSolver, 449
fipy.solvers.pysparseMatrixSolver, 450
fipy.solvers.scipy, 450
fipy.solvers.scipy.linearBicgstabSolver, 450
fipy.solvers.scipy.linearCGSSolver, 451
fipy.solvers.scipy.linearGMRESSolver, 451
fipy.solvers.scipy.linearLUSolver, 452
fipy.solvers.scipy.linearPCGSolver, 452
fipy.solvers.scipy.scipyKrylovSolver, 453
fipy.solvers.scipy.scipySolver, 453
fipy.solvers.solver, 453
fipy.solvers.test, 458
fipy.solvers.trilinos, 458
fipy.solvers.trilinos.comms, 459
fipy.solvers.trilinos.comms.epetraCommWrapper, 459
fipy.solvers.trilinos.comms.parallelEpetraCommWrapper, 460
fipy.solvers.trilinos.comms.serialEpetraCommWrapper, 460
fipy.solvers.trilinos.linearBicgstabSolver, 461
fipy.solvers.trilinos.linearCGSSolver, 461
fipy.solvers.trilinos.linearGMRESSolver, 462
fipy.solvers.trilinos.linearLUSolver, 462
fipy.solvers.trilinos.linearPCGSolver, 463
fipy.solvers.trilinos.preconditioners, 464
fipy.solvers.trilinos.preconditioners.domDecompPreconditioner, 464
fipy.solvers.trilinos.preconditioners.icPreconditioner, 464
fipy.solvers.trilinos.preconditioners.jacobiPreconditioner, 465
fipy.solvers.trilinos.preconditioners.multilevelDDMLPreconditioner, 465
fipy.solvers.trilinos.preconditioners.multilevelDDPPreconditioner, 465
fipy.solvers.trilinos.preconditioners.multilevelNSSAPreconditioner, 466
fipy.solvers.trilinos.preconditioners.multilevelSAPreconditioner, 466
fipy.solvers.trilinos.preconditioners.multilevelSGSPreconditioner, 466
fipy.solvers.trilinos.preconditioners.multilevelSolverSmoothers, 467
fipy.solvers.trilinos.preconditioners.preconditioner, 467
fipy.solvers.trilinos.trilinosAztecOOsolver, 468
fipy.solvers.trilinos.trilinosMLTest, 469
fipy.solvers.trilinos.trilinosNonlinearSolver, 469
fipy.solvers.trilinos.trilinosSolver, 470
fipy.steppers, 471
fipy.steppers.pidStepper, 473
fipy.steppers.pseudoRKQSStepper, 474
fipy.steppers.stepper, 474
fipy.terms, 474
fipy.terms.abstractBinaryTerm, 481
fipy.terms.abstractConvectionTerm, 481
fipy.terms.abstractDiffusionTerm, 481
fipy.terms.abstractUpwindConvectionTerm, 481
fipy.terms.advectionTerm, 481
fipy.terms.asymmetricConvectionTerm, 488
fipy.terms.binaryTerm, 488
fipy.terms.cellTerm, 488

fipy.terms.centralDiffConvectionTerm, 492
fipy.terms.coupledBinaryTerm, 497
fipy.terms.diffusionTerm, 497
fipy.terms.diffusionTermCorrection, 501
fipy.terms.diffusionTermNoCorrection, 504
fipy.terms.explicitDiffusionTerm, 508
fipy.terms.explicitSourceTerm, 511
fipy.terms.explicitUpwindConvectionTerm, 511
fipy.terms.exponentialConvectionTerm, 516
fipy.terms.faceTerm, 522
fipy.terms.firstOrderAdvectionTerm, 526
fipy.terms.hybridConvectionTerm, 531
fipy.terms.implicitDiffusionTerm, 536
fipy.terms.implicitSourceTerm, 536
fipy.terms.nonDiffusionTerm, 540
fipy.terms.powerLawConvectionTerm, 540
fipy.terms.residualTerm, 546
fipy.terms.sourceTerm, 550
fipy.terms.term, 554
fipy.terms.test, 558
fipy.terms.transientTerm, 558
fipy.terms.unaryTerm, 563
fipy.terms.upwindConvectionTerm, 563
fipy.terms.vanLeerConvectionTerm, 568
fipy.tests.FiPy, 573
fipy.tests, 573
fipy.tests doctestPlus, 573
fipy.tests.lateImportTest, 575
fipy.tests.test, 575
fipy.tests.testProgram, 576
fipy.tools, 576
fipy.tools.comms, 594
fipy.tools.comms.commWrapper, 594
fipy.tools.comms.dummyComm, 595
fipy.tools.debug, 595
fipy.tools.decorators, 595
fipy.tools.dimensions, 596
fipy.tools.dimensions.DictWithDefault, 596
fipy.tools.dimensions.NumberDict, 596
fipy.tools.dimensions.physicalField, 596
fipy.tools.dump, 621
fipy.tools.inline, 622
fipy.tools.logging, 622
fipy.tools.numerix, 622
fipy.tools.parser, 628
fipy.tools.sharedtempfile, 629
fipy.tools.test, 630
fipy.tools.vector, 630
fipy.tools.version, 630
fipy.tools.vitals, 631
fipy.variables, 631
fipy.variables.addOverFacesVariable, 633
fipy.variables.arithmeticCellToFaceVariable, 633
fipy.variables.betaNoiseVariable, 633
fipy.variables.binaryOperatorVariable, 649
fipy.variables.cellToFaceVariable, 649
fipy.variables.cellVariable, 649
fipy.variables.constant, 664
fipy.variables.constraintMask, 664
fipy.variables.coupledCellVariable, 664
fipy.variables.distanceVariable, 664
fipy.variables.exponentialNoiseVariable, 683
fipy.variables.faceGradContributionsVariable, 698
fipy.variables.faceGradVariable, 698
fipy.variables.faceVariable, 698
fipy.variables.gammaNoiseVariable, 709
fipy.variables.gaussCellGradVariable, 725
fipy.variables.gaussianNoiseVariable, 725
fipy.variables.harmonicCellToFaceVariable, 742
fipy.variables.histogramVariable, 742
fipy.variables.interfaceAreaVariable, 756
fipy.variables.interfaceFlagVariable, 756
fipy.variables.leastSquaresCellGradVariable, 756
fipy.variables.levelSetDiffusionVariable, 756
fipy.variables.meshVariable, 756
fipy.variables.minmodCellToFaceVariable, 767
fipy.variables.modCellGradVariable, 767
fipy.variables.modCellToFaceVariable, 767
fipy.variables.modFaceGradVariable, 767
fipy.variables.modPhysicalField, 767
fipy.variables.modularVariable, 767
fipy.variables.noiseVariable, 782
fipy.variables.operatorVariable, 798
fipy.variables.scharfetterGummelFaceVariable, 798
fipy.variables.surfactantConvectionVariable, 809
fipy.variables.surfactantVariable, 820
fipy.variables.test, 836
fipy.variables.unaryOperatorVariable, 836
fipy.variables.uniformNoiseVariable, 836
fipy.variables.variable, 851
fipy.viewers, 861
fipy.viewers.matplotlibViewer, 865
fipy.viewers.matplotlibViewer.abstractMatplotlib2DViewer, 867
fipy.viewers.matplotlibViewer.abstractMatplotlibViewer, 870
fipy.viewers.matplotlibViewer.matplotlib1DViewer, 872
fipy.viewers.matplotlibViewer.matplotlib2DContourViewer, 875
fipy.viewers.matplotlibViewer.matplotlib2DGridContourViewer, 877

```
fipy.viewers.matplotlibViewer.matplotlib2DGridViewer,  
    881  
fipy.viewers.matplotlibViewer.matplotlib2DViewer,  
    883  
fipy.viewers.matplotlibViewer.matplotlibSparseMatrixViewer,  
    886  
fipy.viewers.matplotlibViewer.matplotlibStreamViewer,  
    886  
fipy.viewers.matplotlibViewer.matplotlibVectorViewer,  
    891  
fipy.viewers.matplotlibViewer.test, 894  
fipy.viewers.mayaviViewer, 894  
fipy.viewers.mayaviViewer.mayaviClient, 898  
fipy.viewers.mayaviViewer.mayaviDaemon, 901  
fipy.viewers.mayaviViewer.test, 902  
fipy.viewers.multiViewer, 902  
fipy.viewers.test, 904  
fipy.viewers.testinteractive, 904  
fipy.viewers.tsvViewer, 904  
fipy.viewers.viewer, 906  
fipy.viewers.vtkViewer, 908  
fipy.viewers.vtkViewer.test, 912  
fipy.viewers.vtkViewer.vtkCellViewer, 912  
fipy.viewers.vtkViewer.vtkFaceViewer, 914  
fipy.viewers.vtkViewer.vtkViewer, 916
```

p

```
package, 121  
package.subpackage, 121  
package.subpackage.base, 122  
package.subpackage.object, 123
```

Index

Symbols

:math:`\backslash pi`^{1094, 1099, 1120, 1125}
__abs__(*fipy.tools.PhysicalField method*)⁵⁷⁷
__abs__(*fipy.tools.dimensions.physicalField.PhysicalField method*)⁶⁰⁰
__abs__(*fipy.variables.betaNoiseVariable.BetaNoiseVariable method*)⁶³⁵
__abs__(*fipy.variables.cellVariable.CellVariable method*)⁶⁵⁰
__abs__(*fipy.variables.distanceVariable.DistanceVariable method*)⁶⁶⁷
__abs__(*fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable method*)⁶⁸⁴
__abs__(*fipy.variables.faceVariable.FaceVariable method*)⁶⁹⁹
__abs__(*fipy.variables.gammaNoiseVariable.GammaNoiseVariable method*)⁷¹¹
__abs__(*fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable method*)⁷²⁷
__abs__(*fipy.variables.histogramVariable.HistogramVariable method*)⁷⁴²
__abs__(*fipy.variables.meshVariable.MeshVariable method*)⁷⁵⁷
__abs__(*fipy.variables.modularVariable.ModularVariable method*)⁷⁶⁸
__abs__(*fipy.variables.noiseVariable.NoiseVariable method*)⁷⁸³
__abs__(*fipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable method*)⁷⁹⁸
__abs__(*fipy.variables.surfactantConvectionVariable.SurfactantConvectionVariable method*)⁸¹⁰
__abs__(*fipy.variables.surfactantVariable.SurfactantVariable method*)⁸²¹
__abs__(*fipy.variables.uniformNoiseVariable.UniformNoiseVariable method*)⁸³⁷
__abs__(*fipy.variables.variable.Variable method*)⁸⁵²
__add__(*fipy.meshes.abstractMesh.AbstractMesh method*)¹³²
__add__(*fipy.meshes.cylindricalNonUniformGrid1D.CylindricalNonUniformGrid1D method*)¹⁴¹
__add__(*fipy.meshes.cylindricalNonUniformGrid2D.CylindricalNonUniformGrid2D method*)¹⁴⁹
__add__(*fipy.meshes.cylindricalUniformGrid1D.CylindricalUniformGrid1D method*)¹⁵⁸
__add__(*fipy.meshes.cylindricalUniformGrid2D.CylindricalUniformGrid2D method*)¹⁶⁵
__add__(*fipy.meshes.gmshMesh.Gmsh2D method*)¹⁷⁹
__add__(*fipy.meshes.gmshMesh.Gmsh2DIn3DSpace method*)¹⁸⁸
__add__(*fipy.meshes.gmshMesh.Gmsh3D method*)¹⁹⁶
__add__(*fipy.meshes.gmshMesh.GmshGrid2D method*)²⁰⁵
__add__(*fipy.meshes.gmshMesh.GmshGrid3D method*)²¹³
__add__(*fipy.meshes.mesh.Mesh method*)²²³
__add__(*fipy.meshes.mesh1D.Mesh1D method*)²³²
__add__(*fipy.meshes.mesh2D.Mesh2D method*)²⁴⁰
__add__(*fipy.meshes.nonUniformGrid1D.NonUniformGrid1D method*)²⁴⁹
__add__(*fipy.meshes.nonUniformGrid2D.NonUniformGrid2D method*)²⁵⁷
__add__(*fipy.meshes.nonUniformGrid3D.NonUniformGrid3D method*)²⁶⁶
__add__(*fipy.meshes.periodicGrid1D.PeriodicGrid1D method*)²⁷⁵
__add__(*fipy.meshes.periodicGrid2D.PeriodicGrid2D method*)²⁸⁴
__add__(*fipy.meshes.periodicGrid2D.PeriodicGrid2DLeftRight method*)²⁹²
__add__(*fipy.meshes.periodicGrid2D.PeriodicGrid2DTopBottom method*)³⁰¹
__add__(*fipy.meshes.periodicGrid3D.PeriodicGrid3D method*)³¹¹
__add__(*fipy.meshes.periodicGrid3D.PeriodicGrid3DFrontBack method*)³¹⁸
__add__(*fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRight method*)³²⁶
__add__(*fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightFrontBack method*)³³⁴
__add__(*fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightTopBottom method*)³⁴²
__add__(*fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottom method*)³⁵⁰
__add__(*fipy.meshes.periodicGrid3D.PeriodicGrid3DFrontBack method*)³⁵⁷
__add__(*fipy.meshes.skewedGrid2D.SkewedGrid2D method*)³⁶⁶
__add__(*fipy.meshes.sphericalNonUniformGrid1D.SphericalNonUniformGrid1D method*)³⁷⁵
__add__(*fipy.meshes.sphericalUniformGrid1D.SphericalUniformGrid1D method*)³⁸³
__add__(*fipy.meshes.tri2D.Tri2D method*)³⁹¹
__add__(*fipy.meshes.uniformGrid.UniformGrid method*)³⁹⁹
__add__(*fipy.meshes.uniformGrid1D.UniformGrid1D method*)⁴⁰⁶
__add__(*fipy.meshes.uniformGrid2D.UniformGrid2D method*)⁴¹³
__add__(*fipy.meshes.uniformGrid3D.UniformGrid3D method*)⁴²¹
__add__(*fipy.tools.PhysicalField method*)⁵⁷⁷
__add__(*fipy.tools.dimensions.physicalField.PhysicalField method*)⁶⁰⁰

```

__and__(fipy.variables.betaNoiseVariable.BetaNoiseVariable
       method), 635
__and__(fipy.variables.cellVariable.CellVariable method), 650
__and__(fipy.variables.distanceVariable.DistanceVariable method),
       667
__and__(fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable
       method), 684
__and__(fipy.variables.faceVariable.FaceVariable method), 699
__and__(fipy.variables.gammaNoiseVariable.GammaNoiseVariable
       method), 711
__and__(fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable
       method), 728
__and__(fipy.variables.histogramVariable.HistogramVariable
       method), 742
__and__(fipy.variables.meshVariable.MeshVariable method), 757
__and__(fipy.variables.modularVariable.ModularVariable method),
       768
__and__(fipy.variables.noiseVariable.NoiseVariable method), 784
__and__(fipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable
       method), 798
__and__(fipy.variables.surfactantConvectionVariable.SurfactantConvectionVariable
       method), 810
__and__(fipy.variables.surfactantVariable.SurfactantVariable
       method), 821
__and__(fipy.variables.uniformNoiseVariable.UniformNoiseVariable
       method), 837
__and__(fipy.variables.variable.Variable method), 852
__array__(fipy.tools.PhysicalField method), 577
__array__(fipy.tools.dimensions.physicalField.PhysicalField
       method), 600
__array__(fipy.variables.betaNoiseVariable.BetaNoiseVariable
       method), 635
__array__(fipy.variables.cellVariable.CellVariable method), 650
__array__(fipy.variables.distanceVariable.DistanceVariable
       method), 668
__array__(fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable
       method), 685
__array__(fipy.variables.faceVariable.FaceVariable method), 699
__array__(fipy.variables.gammaNoiseVariable.GammaNoiseVariable
       method), 712
__array__(fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable
       method), 728
__array__(fipy.variables.histogramVariable.HistogramVariable
       method), 743
__array__(fipy.variables.meshVariable.MeshVariable method), 758
__array__(fipy.variables.modularVariable.ModularVariable
       method), 769
__array__(fipy.variables.noiseVariable.NoiseVariable method), 784
__array__(fipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable
       method), 799
__array__(fipy.variables.surfactantConvectionVariable.SurfactantConvectionVariable
       method), 811
__array__(fipy.variables.surfactantVariable.SurfactantVariable
       method), 822
__array__(fipy.variables.uniformNoiseVariable.UniformNoiseVariable
       method), 838
__array__(fipy.variables.variable.Variable method), 853
__bool__(fipy.tools.PhysicalField method), 578
__bool__(fipy.tools.dimensions.physicalField.PhysicalField
       method), 601
__bool__(fipy.variables.betaNoiseVariable.BetaNoiseVariable
       method), 636
__bool__(fipy.variables.cellVariable.CellVariable method), 651
__bool__(fipy.variables.distanceVariable.DistanceVariable
       method), 668
__bool__(fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable
       method), 685
__bool__(fipy.variables.faceVariable.FaceVariable method), 700
__bool__(fipy.variables.gammaNoiseVariable.GammaNoiseVariable
       method), 712
__bool__(fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable
       method), 728
__bool__(fipy.variables.histogramVariable.HistogramVariable
       method), 743
__bool__(fipy.variables.meshVariable.MeshVariable method), 758
__bool__(fipy.variables.modularVariable.ModularVariable
       method), 769

```

```

__bool__(fipy.variables.noiseVariable.NoiseVariable method), 784      __cause__(fipy.solvers.solver.ScalarQuantityOutOfRangeWarning
__bool__(fipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable attribute), 456
method), 799
__bool__(fipy.variables.surfactantConvectionVariable.SurfactantConvectionVariable attribute), 457
method), 811
__bool__(fipy.variables.surfactantVariable.SurfactantVariable attribute), 458
method), 822
__bool__(fipy.variables.uniformNoiseVariable.UniformNoiseVariable attribute), 459
method), 838
__bool__(fipy.variables.variable.Variable method), 853
__call__(fipy.solvers.pyamgx.preconditioners.preconditioners.Preconditioner method), 444
__call__(fipy.solvers.pyamgx.smoothers.smoothers.Smooth method), 445
__call__(fipy.variables.betanoiseVariable.BetaNoiseVariable method), 446
__call__(fipy.variables.cellVariable.CellVariable method), 447
__call__(fipy.variables.distanceVariable.DistanceVariable method), 448
__call__(fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable method), 449
__call__(fipy.variables.faceVariable.FaceVariable method), 450
__call__(fipy.variables.gammaNoiseVariable.GammaNoiseVariable method), 451
__call__(fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable method), 452
__call__(fipy.variables.histogramVariable.HistogramVariable method), 453
__call__(fipy.variables.meshVariable.MeshVariable method), 454
__call__(fipy.variables.modularVariable.ModularVariable method), 455
__call__(fipy.variables.noiseVariable.NoiseVariable method), 456
__call__(fipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable attribute), 457
method), 459
__call__(fipy.variables.surfactantConvectionVariable.SurfactantConvectionVariable attribute), 460
method), 461
__call__(fipy.variables.surfactantVariable.SurfactantVariable attribute), 462
method), 463
__call__(fipy.variables.uniformNoiseVariable.UniformNoiseVariable attribute), 464
method), 465
__cause__(fipy.meshes.abstractMesh.MeshAdditionError attribute), 465
__cause__(fipy.solvers.solver.ScalarQuantityOutOfRangeWarning attribute), 466
__cause__(fipy.solvers.solver.SolverConvergenceWarning attribute), 467
__cause__(fipy.solvers.solver.StagnatedSolverWarning attribute), 468
__cause__(fipy.terms.AbstractBaseClassError attribute), 469
__cause__(fipy.terms.ExplicitVariableError attribute), 470
__cause__(fipy.terms.IncorrectSolutionVariable attribute), 471
__cause__(fipy.terms.SolutionVariableNumberError attribute), 472
__cause__(fipy.terms.SolutionVariableRequiredError attribute), 473
__cause__(fipy.terms.TermMultiplyError attribute), 474
__cause__(fipy.terms.TransientTermError attribute), 475
__cause__(fipy.terms.VectorCoeffError attribute), 476
__cause__(fipy.viewers.MeshDimensionError attribute), 477
__context__(fipy.meshes.abstractMesh.MeshAdditionError attribute), 478
__context__(fipy.meshes.gmshMesh.GmshException attribute), 479
__context__(fipy.meshes.gmshMesh.MeshExportError attribute), 480
__context__(fipy.meshes.mesh.MeshAdditionError attribute), 481
__context__(fipy.solvers.SerialSolverError attribute), 482
__context__(fipy.solvers.solver.IllConditionedPreconditionerWarning attribute), 483
__context__(fipy.solvers.solver.MatrixIllConditionedWarning attribute), 484
__context__(fipy.solvers.solver.MaximumIterationWarning attribute), 485
__context__(fipy.solvers.solver.PreconditionerNotPositiveDefiniteWarning attribute), 486
__context__(fipy.solvers.solver.PreconditionerWarning attribute), 487
__context__(fipy.terms.AbstractBaseClassError attribute), 488
__context__(fipy.terms.ExplicitVariableError attribute), 489
__context__(fipy.terms.IncorrectSolutionVariable attribute), 490
__context__(fipy.terms.SolutionVariableNumberError attribute), 491
__context__(fipy.terms.SolutionVariableRequiredError attribute), 492
__context__(fipy.terms.TermMultiplyError attribute), 493
__context__(fipy.terms.TransientTermError attribute), 494
__context__(fipy.terms.VectorCoeffError attribute), 495
__context__(fipy.viewers.MeshDimensionError attribute), 496
__delattr__(fipy.meshes.abstractMesh.MeshAdditionError method), 497
__delattr__(fipy.meshes.gmshMesh.GmshException method), 498
__delattr__(fipy.meshes.gmshMesh.MeshExportError method), 499
__delattr__(fipy.meshes.mesh.MeshAdditionError method), 500
__delattr__(fipy.solvers.SerialSolverError method), 501
__delattr__(fipy.solvers.solver.IllConditionedPreconditionerWarning method), 502
__delattr__(fipy.solvers.solver.MatrixIllConditionedWarning method), 503
__delattr__(fipy.solvers.solver.MaximumIterationWarning method), 504
__delattr__(fipy.solvers.solver.PreconditionerNotPositiveDefiniteWarning method), 505
__delattr__(fipy.solvers.solver.PreconditionerWarning method), 506

```

```

__delattr__(fipy.solvers.solver.ScalarQuantityOutOfRangeWarning method), 456
__delattr__(fipy.solvers.solver.SolverConvergenceWarning method), 457
__delattr__(fipy.solvers.solver.StagnatedSolverWarning method), 458
__delattr__(fipy.terms.AbstractBaseClassError method), 475
__delattr__(fipy.terms.ExplicitVariableError method), 476
__delattr__(fipy.terms.IncorrectSolutionVariable method), 476
__delattr__(fipy.terms.SolutionVariableNumberError method), 477
__delattr__(fipy.terms.SolutionVariableRequiredError method), 477
__delattr__(fipy.terms.TermMultiplyError method), 478
__delattr__(fipy.terms.TransientTermError method), 478
__delattr__(fipy.terms.VectorCoeffError method), 479
__delattr__(fipy.viewers.MeshDimensionError method), 863
__div__(fipy.meshes.abstractMesh.AbstractMesh method), 134
__div__(fipy.meshes.cylindricalNonUniformGrid1D.CylindricalNonUniformGrid1D method), 143
__div__(fipy.meshes.cylindricalNonUniformGrid2D.CylindricalNonUniformGrid2D method), 151
__div__(fipy.meshes.cylindricalUniformGrid1D.CylindricalUniformGrid1D method), 160
__div__(fipy.meshes.cylindricalUniformGrid2D.CylindricalUniformGrid2D method), 167
__div__(fipy.meshes.gmshMesh.Gmsh2D method), 181
__div__(fipy.meshes.gmshMesh.Gmsh2DIn3DSpace method), 189
__div__(fipy.meshes.gmshMesh.Gmsh3D method), 198
__div__(fipy.meshes.gmshMesh.GmshGrid2D method), 206
__div__(fipy.meshes.gmshMesh.GmshGrid3D method), 215
__div__(fipy.meshes.mesh.Mesh method), 225
__div__(fipy.meshes.mesh1D.Mesh1D method), 234
__div__(fipy.meshes.mesh2D.Mesh2D method), 242
__div__(fipy.meshes.nonUniformGrid1D.NonUniformGrid1D method), 251
__div__(fipy.meshes.nonUniformGrid2D.NonUniformGrid2D method), 259
__div__(fipy.meshes.nonUniformGrid3D.NonUniformGrid3D method), 268
__div__(fipy.meshes.periodicGrid1D.PeriodicGrid1D method), 276
__div__(fipy.meshes.periodicGrid2D.PeriodicGrid2D method), 286
__div__(fipy.meshes.periodicGrid2D.PeriodicGrid2DLeftRight method), 294
__div__(fipy.meshes.periodicGrid2D.PeriodicGrid2DTopBottom method), 302
__div__(fipy.meshes.periodicGrid3D.PeriodicGrid3D method), 312
__div__(fipy.meshes.periodicGrid3D.PeriodicGrid3DFrontBack method), 320
__div__(fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRight method), 328
__div__(fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightFrontBack method), 336
__div__(fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightTopBottom method), 343
__div__(fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottom method), 351
__div__(fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottomFrontBack method), 359
__div__(fipy.meshes.skewedGrid2D.SkewedGrid2D method), 367
__div__(fipy.meshes.sphericalNonUniformGrid1D.SphericalNonUniformGrid1D method), 376
__div__(fipy.meshes.sphericalUniformGrid1D.SphericalUniformGrid1D method), 385
__div__(fipy.meshes.tri2D.Tri2D method), 392
__div__(fipy.meshes.uniformGrid.UniformGrid method), 401
__div__(fipy.meshes.uniformGrid1D.UniformGrid1D method), 408
__div__(fipy.meshes.uniformGrid2D.UniformGrid2D method), 415
__div__(fipy.meshes.uniformGrid3D.UniformGrid3D method), 422
__div__(fipy.tools.PhysicalField method), 578
__div__(fipy.tools.dimensions.physicalField.PhysicalField method), 601
__div__(fipy.tools.dimensions.physicalField.PhysicalUnit method), 615
__eq__(fipy.terms.advectionTerm.AdvectionTerm method), 484
__eq__(fipy.terms.cellTerm.CellTerm method), 488
__eq__(fipy.terms.centralDiffConvectionTerm.CentralDifferenceConvectionTerm method), 493
__eq__(fipy.terms.diffusionTerm.DiffusionTerm method), 498
__eq__(fipy.terms.diffusionTermCorrection.DiffusionTermCorrection method), 501
__eq__(fipy.terms.diffusionTermNoCorrection.DiffusionTermNoCorrection method), 504
__eq__(fipy.terms.explicitDiffusionTerm.ExplicitDiffusionTerm method), 508
__eq__(fipy.terms.explicitUpwindConvectionTerm.ExplicitUpwindConvectionTerm method), 513
__eq__(fipy.terms.exponentialConvectionTerm.ExponentialConvectionTerm method), 518
__eq__(fipy.terms.faceTerm.FaceTerm method), 522
__eq__(fipy.terms.firstOrderAdvectionTerm.FirstOrderAdvectionTerm method), 527
__eq__(fipy.terms.hybridConvectionTerm.HybridConvectionTerm method), 532
__eq__(fipy.terms.implicitSourceTerm.ImplicitSourceTerm method), 537
__eq__(fipy.terms.powerLawConvectionTerm.PowerLawConvectionTerm method), 542
__eq__(fipy.terms.residualTerm.ResidualTerm method), 546
__eq__(fipy.terms.sourceTerm.SourceTerm method), 550
__eq__(fipy.terms.term.Term method), 555
__eq__(fipy.terms.transientTerm.TransientTerm method), 559
__eq__(fipy.terms.upwindConvectionTerm.UpwindConvectionTerm method), 564
__eq__(fipy.terms.vanLeerConvectionTerm.VanLeerConvectionTerm method), 569
__eq__(fipy.tools.PhysicalField method), 578
__eq__(fipy.tools.dimensions.physicalField.PhysicalField method), 601
__eq__(fipy.tools.dimensions.physicalField.PhysicalUnit method), 615
__eq__(fipy.variables.betaNoiseVariable.BetaNoiseVariable method), 637
__eq__(fipy.variables.cellVariable.CellVariable method), 651

```

```

__eq__(fipy.variables.distanceVariable.DistanceVariable method), 669
__eq__(fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable method), 686
__eq__(fipy.variables.faceVariable.FaceVariable method), 700
__eq__(fipy.variables.gammaNoiseVariable.GammaNoiseVariable method), 713
__eq__(fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable method), 729
__eq__(fipy.variables.histogramVariable.HistogramVariable method), 744
__eq__(fipy.variables.meshVariable.MeshVariable method), 758
__eq__(fipy.variables.modularVariable.ModularVariable method), 770
__eq__(fipy.variables.noiseVariable.NoiseVariable method), 785
__eq__(fipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable method), 799
__eq__(fipy.variables.surfactantConvectionVariable.SurfactantConvectionVariable method), 811
__eq__(fipy.variables.surfactantVariable.SurfactantVariable method), 823
__eq__(fipy.variables.uniformNoiseVariable.UniformNoiseVariable method), 839
__eq__(fipy.variables.variable.Variable method), 853
__float__(fipy.tools.PhysicalField method), 578
__float__(fipy.tools.dimensions.physicalField.PhysicalField method), 601
__ge__(fipy.tools.PhysicalField method), 579
__ge__(fipy.tools.dimensions.physicalField.PhysicalField method), 602
__ge__(fipy.tools.dimensions.physicalField.PhysicalUnit method), 616
__ge__(fipy.variables.betaNoiseVariable.BetaNoiseVariable method), 637
__ge__(fipy.variables.cellVariable.CellVariable method), 652
__ge__(fipy.variables.distanceVariable.DistanceVariable method), 669
__ge__(fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable method), 686
__ge__(fipy.variables.faceVariable.FaceVariable method), 700
__ge__(fipy.variables.gammaNoiseVariable.GammaNoiseVariable method), 713
__ge__(fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable method), 729
__ge__(fipy.variables.histogramVariable.HistogramVariable method), 744
__ge__(fipy.variables.meshVariable.MeshVariable method), 759
__ge__(fipy.variables.modularVariable.ModularVariable method), 770
__ge__(fipy.variables.noiseVariable.NoiseVariable method), 785
__ge__(fipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable method), 800
__ge__(fipy.variables.surfactantConvectionVariable.SurfactantConvectionVariable method), 811
__ge__(fipy.variables.surfactantVariable.SurfactantVariable method), 823
__ge__(fipy.variables.uniformNoiseVariable.UniformNoiseVariable method), 839
__ge__(fipy.variables.variable.Variable method), 854
__getattribute__(fipy.meshes.abstractMesh.MeshAdditionError method), 139
__getattribute__(fipy.meshes.gmshMesh.GmshException method), 204
__getattribute__(fipy.meshes.gmshMesh.MeshExportError method), 222
__getattribute__(fipy.meshes.mesh.MeshAdditionError method), 231
__getattribute__(fipy.solvers.SerialSolverError method), 428
__getattribute__(fipy.solvers.solver.IllConditionedPreconditionerWarning method), 454
__getattribute__(fipy.solvers.solver.MatrixIllConditionedWarning method), 454
__getattribute__(fipy.solvers.solver.MaximumIterationWarning method), 455
__getattribute__(fipy.solvers.solver.PreconditionerNotPositiveDefiniteWarning method), 455
__getattribute__(fipy.solvers.solver.PreconditionerWarning method), 456
__getattribute__(fipy.solvers.solver.ScalarQuantityOutOfRangeWarning method), 456
__getattribute__(fipy.solvers.solver.SolverConvergenceWarning method), 457
__getattribute__(fipy.solvers.solver.StagnatedSolverWarning method), 458
__getattribute__(fipy.terms.AbstractBaseClassError method), 475
__getattribute__(fipy.terms.ExplicitVariableError method), 476
__getattribute__(fipy.terms.IncorrectSolutionVariable method), 476
__getattribute__(fipy.terms.SolutionVariableNumberError method), 477
__getattribute__(fipy.terms.SolutionVariableRequiredError method), 477
__getattribute__(fipy.terms.TermMultiplyError method), 478
__getattribute__(fipy.terms.TransientTermError method), 479
__getattribute__(fipy.terms.VectorCoeffError method), 479
__getattribute__(fipy.viewers.MeshDimensionError method), 863
__getitem__(fipy.tools.PhysicalField method), 579
__getitem__(fipy.tools.dimensions.physicalField.PhysicalField method), 602
__getitem__(fipy.variables.betaNoiseVariable.BetaNoiseVariable method), 637
__getitem__(fipy.variables.cellVariable.CellVariable method), 652
__getitem__(fipy.variables.distanceVariable.DistanceVariable method), 669
__getitem__(fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable method), 686
__getitem__(fipy.variables.faceVariable.FaceVariable method), 701
__getitem__(fipy.variables.gammaNoiseVariable.GammaNoiseVariable method), 713
__getitem__(fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable method), 730
__getitem__(fipy.variables.histogramVariable.HistogramVariable method), 744
__getitem__(fipy.variables.meshVariable.MeshVariable method), 759
__getitem__(fipy.variables.modularVariable.ModularVariable method), 771

```

```

__getitem__(fipy.variables.noiseVariable.NoiseVariable method),  
    786  
__getitem__(fipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable method), 800  
__getitem__(fipy.variables.surfactantConvectionVariable.SurfactantConvectionVariable method), 812  
__getitem__(fipy.variables.surfactantVariable.SurfactantVariable method), 824  
__getitem__(fipy.variables.uniformNoiseVariable.UniformNoiseVariable method), 839  
__getitem__(fipy.variables.variable.Variable method), 854  
__getstate__(fipy.meshes.abstractMesh.AbstractMesh method),  
    134  
__getstate__(fipy.meshes.cylindricalNonUniformGrid1D.CylindricalNonUniformGrid1D method), 143  
__getstate__(fipy.meshes.cylindricalNonUniformGrid2D.CylindricalNonUniformGrid2D method), 151  
__getstate__(fipy.meshes.cylindricalUniformGrid1D.CylindricalUniformGrid1D method), 160  
__getstate__(fipy.meshes.cylindricalUniformGrid2D.CylindricalUniformGrid2D method), 167  
__getstate__(fipy.meshes.gmshMesh.Gmsh2D method), 181  
__getstate__(fipy.meshes.gmshMesh.Gmsh2DIn3DSpace method), 189  
__getstate__(fipy.meshes.gmshMesh.Gmsh3D method), 198  
__getstate__(fipy.meshes.gmshMesh.GmshGrid2D method), 207  
__getstate__(fipy.meshes.gmshMesh.GmshGrid3D method), 215  
__getstate__(fipy.meshes.mesh.Mesh method), 225  
__getstate__(fipy.meshes.mesh1D.Mesh1D method), 234  
__getstate__(fipy.meshes.mesh2D.Mesh2D method), 242  
__getstate__(fipy.meshes.nonUniformGrid1D.NonUniformGrid1D method), 251  
__getstate__(fipy.meshes.nonUniformGrid2D.NonUniformGrid2D method), 259  
__getstate__(fipy.meshes.nonUniformGrid3D.NonUniformGrid3D method), 268  
__getstate__(fipy.meshes.periodicGrid1D.PeriodicGrid1D method), 276  
__getstate__(fipy.meshes.periodicGrid2D.PeriodicGrid2D method), 286  
__getstate__(fipy.meshes.periodicGrid2D.PeriodicGrid2DLeftRight method), 294  
__getstate__(fipy.meshes.periodicGrid2D.PeriodicGrid2DTopBottom method), 303  
__getstate__(fipy.meshes.periodicGrid3D.PeriodicGrid3D method), 312  
__getstate__(fipy.meshes.periodicGrid3D.PeriodicGrid3DFrontBack method), 320  
__getstate__(fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRight method), 328  
__getstate__(fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightFrontBack method), 336  
__getstate__(fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightTopBottom method), 344  
__getstate__(fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottom method), 351  
__getstate__(fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottomFrontBack method), 359  
__getstate__(fipy.meshes.skewedGrid2D.SkewedGrid2D method), 367  
__getstate__(fipy.meshes.sphericalNonUniformGrid1D.SphericalNonUniformGrid1D method), 377  
__getstate__(fipy.meshes.sphericalUniformGrid1D.SphericalUniformGrid1D method), 385  
__getstate__(fipy.meshes.tri2D.Tri2D method), 393  
__getstate__(fipy.meshes.uniformGrid1D.UniformGrid method),  
    401  
__getstate__(fipy.meshes.uniformGrid2D.UniformGrid2D method), 408  
__getstate__(fipy.meshes.uniformGrid2D.UniformGrid2D method), 415  
__getstate__(fipy.meshes.uniformGrid3D.UniformGrid3D method), 422  
__getstate__(fipy.solvers.petsc.comms.parallelPETScCommWrapper.ParallelPETScCommWrapper method), 430  
__getstate__(fipy.solvers.petsc.comms.petscCommWrapper.PETScCommWrapper method), 430  
__getstate__(fipy.solvers.petsc.comms.serialPETScCommWrapper.SerialPETScCommWrapper method), 431  
__getstate__(fipy.solvers.trilinos.comms.epetraCommWrapper.EpetraCommWrapper method), 459  
__getstate__(fipy.solvers.trilinos.comms.parallelEpetraCommWrapper.ParallelEpetraCommWrapper method), 460  
__getstate__(fipy.solvers.trilinos.comms.serialEpetraCommWrapper.SerialEpetraCommWrapper method), 460  
__getstate__(fipy.tools.comms.commWrapper.CommWrapper method), 595  
__getstate__(fipy.tools.comms.dummyComm.DummyComm method), 595  
__getstate__(fipy.variables.bettaNoiseVariable.BetaNoiseVariable method), 637  
__getstate__(fipy.variables.cellVariable.CellVariable method),  
    652  
__getstate__(fipy.variables.distanceVariable.DistanceVariable method), 670  
__getstate__(fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable method), 687  
__getstate__(fipy.variables.faceVariable.FaceVariable method),  
    701  
__getstate__(fipy.variables.gammaNoiseVariable.GammaNoiseVariable method), 714  
__getstate__(fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable method), 730  
__getstate__(fipy.variables.histogramVariable.HistogramVariable method), 744  
__getstate__(fipy.variables.meshVariable.MeshVariable method),

```

```

    759
__getstate__(fipy.variables.modularVariable.ModularVariable
    method), 771
__getstate__(fipy.variables.noiseVariable.NoiseVariable method),
    786
__getstate__()
    (fipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable
        method), 800
__getstate__()
    (fipy.variables.surfactantConvectionVariable.SurfactantConvectionVariable
        method), 812
__getstate__()
    (fipy.variables.surfactantVariable.SurfactantVariable
        method), 824
__getstate__()
    (fipy.variables.uniformNoiseVariable.UniformNoiseVariable
        method), 840
__getstate__(fipy.variables.variable.Variable method), 854
__gt__(fipy.tools.PhysicalField method), 579
__gt__(fipy.tools.dimensions.physicalField.PhysicalField method),
    602
__gt__(fipy.tools.dimensions.physicalField.PhysicalUnit method),
    616
__gt__(fipy.variables.betaNoiseVariable.BetaNoiseVariable
    method), 637
__gt__(fipy.variables.cellVariable.CellVariable method), 652
__gt__(fipy.variables.distanceVariable.DistanceVariable method),
    670
__gt__()
    (fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable
        method), 687
__gt__(fipy.variables.faceVariable.FaceVariable method), 701
__gt__(fipy.variables.gammaNoiseVariable.GammaNoiseVariable
    method), 714
__gt__()
    (fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable
        method), 730
__gt__(fipy.variables.histogramVariable.HistogramVariable
    method), 745
__gt__(fipy.variables.meshVariable.MeshVariable method), 759
__gt__(fipy.variables.modularVariable.ModularVariable method),
    771
__gt__(fipy.variables.noiseVariable.NoiseVariable method), 786
__gt__()
    (fipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable
        method), 800
__gt__()
    (fipy.variables.surfactantConvectionVariable.SurfactantConvectionVariable
        method), 812
__gt__(fipy.variables.surfactantVariable.SurfactantVariable
    method), 824
__gt__(fipy.variables.uniformNoiseVariable.UniformNoiseVariable
    method), 840
__gt__(fipy.variables.variable.Variable method), 854
__hash__(fipy.tools.dimensions.physicalField.PhysicalUnit attribute),
    616
__hash__(fipy.terms.advectionTerm.AdvectionTerm method), 484
__hash__(fipy.terms.cellTerm.CellTerm method), 488
__hash__()
    (fipy.terms.centralDiffConvectionTerm.CentralDifferenceConvectionTerm
        method), 494
__hash__(fipy.terms.diffusionTerm.DiffusionTerm method), 498
__hash__()
    (fipy.terms.diffusionTermCorrection.DiffusionTermCorrection
        method), 501
__hash__()
    (fipy.terms.diffusionTermNoCorrection.DiffusionTermNoCorrection
        method), 505
__hash__(fipy.terms.explicitDiffusionTerm.ExplicitDiffusionTerm
    method), 508
__hash__(fipy.terms.explicitUpwindConvectionTerm.ExplicitUpwindConvectionTerm
    method), 513
__hash__()
    (fipy.terms.exponentialConvectionTerm.ExponentialConvectionTerm
        method), 518
__hash__(fipy.terms.faceTerm.FaceTerm method), 522
__hash__()
    (fipy.terms.firstOrderAdvectionTerm.FirstOrderAdvectionTerm
        method), 527
__hash__(fipy.terms.hybridConvectionTerm.HybridConvectionTerm
    method), 533
__hash__(fipy.terms.implicitSourceTerm.ImplicitSourceTerm
    method), 537
__hash__()
    (fipy.terms.powerLawConvectionTerm.PowerLawConvectionTerm
        method), 542
__hash__(fipy.terms.residualTerm.ResidualTerm method), 546
__hash__(fipy.terms.sourceTerm.SourceTerm method), 550
__hash__(fipy.terms.term.Term method), 555
__hash__(fipy.terms.transientTerm.TransientTerm method), 559
__hash__()
    (fipy.terms.upwindConvectionTerm.UpwindConvectionTerm
        method), 564
__hash__(fipy.terms.vanLeerConvectionTerm.VanLeerConvectionTerm
    method), 569
__hash__(fipy.tools.PhysicalField method), 580
__hash__(fipy.tools.dimensions.physicalField.PhysicalField
    method), 602
__hash__(fipy.variables.betaNoiseVariable.BetaNoiseVariable
    method), 638
__hash__(fipy.variables.cellVariable.CellVariable method), 652
__hash__(fipy.variables.distanceVariable.DistanceVariable
    method), 670
__hash__()
    (fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable
        method), 687
__hash__(fipy.variables.faceVariable.FaceVariable method), 701
__hash__()
    (fipy.variables.gammaNoiseVariable.GammaNoiseVariable
        method), 714
__hash__(fipy.variables.histogramVariable.HistogramVariable
    method), 730
__hash__(fipy.variables.meshVariable.MeshVariable method), 759
__hash__(fipy.variables.modularVariable.ModularVariable
    method), 771
__hash__(fipy.variables.noiseVariable.NoiseVariable method), 786
__hash__()
    (fipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable
        method), 801
__hash__()
    (fipy.variables.surfactantConvectionVariable.SurfactantConvectionVariable
        method), 812
__hash__(fipy.variables.surfactantVariable.SurfactantVariable
    method), 824
__hash__(fipy.variables.uniformNoiseVariable.UniformNoiseVariable
    method), 840
__hash__(fipy.variables.variable.Variable method), 855
__invert__(fipy.variables.betaNoiseVariable.BetaNoiseVariable
    method), 638
__invert__(fipy.variables.cellVariable.CellVariable method), 652

```

`__invert__(fipy.variables.distanceVariable.DistanceVariable method), 670`

`__invert__(fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable method), 687`

`__invert__(fipy.variables.faceVariable.FaceVariable method), 701`

`__invert__(fipy.variables.gammaNoiseVariable.GammaNoiseVariable method), 714`

`__invert__(fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable method), 730`

`__invert__(fipy.variables.histogramVariable.HistogramVariable method), 745`

`__invert__(fipy.variables.meshVariable.MeshVariable method), 760`

`__invert__(fipy.variables.modularVariable.ModularVariable method), 771`

`__invert__(fipy.variables.noiseVariable.NoiseVariable method), 786`

`__invert__(fipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable method), 801`

`__invert__(fipy.variables.surfactantConvectionVariable.SurfactantConvectionVariable method), 812`

`__invert__(fipy.variables.surfactantVariable.SurfactantVariable method), 824`

`__invert__(fipy.variables.uniformNoiseVariable.UniformNoiseVariable method), 840`

`__invert__(fipy.variables.variable.Variable method), 855`

`_le__(fipy.tools.PhysicalField method), 580`

`_le__(fipy.tools.dimensions.physicalField.PhysicalField method), 602`

`_le__(fipy.tools.dimensions.physicalField.PhysicalUnit method), 616`

`_le__(fipy.variables.betaNoiseVariable.BetaNoiseVariable method), 638`

`_le__(fipy.variables.cellVariable.CellVariable method), 653`

`_le__(fipy.variables.distanceVariable.DistanceVariable method), 670`

`_le__(fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable method), 687`

`_le__(fipy.variables.faceVariable.FaceVariable method), 701`

`_le__(fipy.variables.gammaNoiseVariable.GammaNoiseVariable method), 714`

`_le__(fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable method), 730`

`_le__(fipy.variables.histogramVariable.HistogramVariable method), 745`

`_le__(fipy.variables.meshVariable.MeshVariable method), 760`

`_le__(fipy.variables.modularVariable.ModularVariable method), 771`

`_le__(fipy.variables.noiseVariable.NoiseVariable method), 786`

`_le__(fipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable method), 801`

`_lt__(fipy.variables.surfactantConvectionVariable.SurfactantConvectionVariable method), 812`

`_lt__(fipy.variables.surfactantVariable.SurfactantVariable method), 824`

`_lt__(fipy.variables.uniformNoiseVariable.UniformNoiseVariable method), 840`

`_lt__(fipy.variables.variable.Variable method), 855`

`_mod__(fipy.tools.PhysicalField method), 580`

`_mod__(fipy.tools.dimensions.physicalField.PhysicalField method), 603`

`_mul__(fipy.meshes.cylindricalNonUniformGrid1D.CylindricalNonUniformGrid1D method), 143`

`_mul__(fipy.meshes.cylindricalNonUniformGrid2D.CylindricalNonUniformGrid2D method), 151`

`_mul__(fipy.meshes.gmshMesh.Gmsh2D method), 181`

`_mul__(fipy.meshes.gmshMesh.Gmsh2DIn3DSpace method), 189`

`_mul__(fipy.meshes.gmshMesh.Gmsh3D method), 198`

`_mul__(fipy.meshes.gmshMesh.GmshGrid2D method), 207`

`_mul__(fipy.meshes.gmshMesh.GmshGrid3D method), 215`

`_mul__(fipy.meshes.mesh.Mesh method), 225`

`_mul__(fipy.meshes.mesh1D.Mesh1D method), 234`

`_mul__(fipy.meshes.mesh2D.Mesh2D method), 242`

`_mul__(fipy.meshes.nonUniformGrid1D.NonUniformGrid1D method), 251`

`_mul__(fipy.meshes.nonUniformGrid2D.NonUniformGrid2D method), 259`

`_mul__(fipy.meshes.nonUniformGrid3D.NonUniformGrid3D method), 268`

`_mul__(fipy.meshes.periodicGrid1D.PeriodicGrid1D method), 276`

`_mul__(fipy.meshes.periodicGrid2D.PeriodicGrid2D method), 286`

`_mul__(fipy.meshes.periodicGrid2D.PeriodicGrid2DLeftRight method), 294`

`_mul__(fipy.meshes.periodicGrid2D.PeriodicGrid2DTopBottom method), 303`

`__mul__(fipy.meshes.periodicGrid3D.PeriodicGrid3D method), 312`
`__mul__(fipy.meshes.periodicGrid3D.PeriodicGrid3DFrontBack method), 320`
`__mul__(fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRight method), 328`
`__mul__(fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightFrontBack method), 336`
`__mul__(fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightTopBottom method), 344`
`__mul__(fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottom method), 351`
`__mul__(fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottomFrontBack method), 359`
`__mul__(fipy.meshes.skewedGrid2D.SkewedGrid2D method), 367`
`__mul__(fipy.meshes.sphericalNonUniformGrid1D.SphericalNonUniformGrid1D method), 377`
`__mul__(fipy.meshes.tri2D.Tri2D method), 393`
`__mul__(fipy.terms.advectionTerm.AdvectionTerm method), 484`
`__mul__(fipy.terms.cellTerm.CellTerm method), 488`
`__mul__(fipy.terms.centralDiffConvectionTerm.CentralDifferenceConvectionTerm method), 494`
`__mul__(fipy.terms.explicitUpwindConvectionTerm.ExplicitUpwindConvectionTerm method), 513`
`__mul__(fipy.terms.exponentialConvectionTerm.ExponentialConvectionTerm method), 518`
`__mul__(fipy.terms.faceTerm.FaceTerm method), 522`
`__mul__(fipy.terms.firstOrderAdvectionTerm.FirstOrderAdvectionTerm method), 527`
`__mul__(fipy.terms.hybridConvectionTerm.HybridConvectionTerm method), 533`
`__mul__(fipy.terms.implicitSourceTerm.ImplicitSourceTerm method), 537`
`__mul__(fipy.terms.powerLawConvectionTerm.PowerLawConvectionTerm method), 542`
`__mul__(fipy.terms.residualTerm.ResidualTerm method), 546`
`__mul__(fipy.terms.sourceTerm.SourceTerm method), 550`
`__mul__(fipy.terms.transientTerm.TransientTerm method), 559`
`__mul__(fipy.terms.upwindConvectionTerm.UpwindConvectionTerm method), 564`
`__mul__(fipy.terms.vanLeerConvectionTerm.VanLeerConvectionTerm method), 569`
`__mul__(fipy.tools.PhysicalField method), 580`
`__mul__(fipy.tools.dimensions.physicalField.PhysicalField method), 603`
`__mul__(fipy.tools.dimensions.physicalField.PhysicalUnit method), 616`
`__ne__(fipy.tools.PhysicalField method), 580`
`__ne__(fipy.tools.dimensions.physicalField.PhysicalField method), 603`
`__ne__(fipy.tools.dimensions.physicalField.PhysicalUnit method), 616`
`__ne__(fipy.variables.betanoiseVariable.BetaNoiseVariable method), 639`
`__ne__(fipy.variables.cellVariable.CellVariable method), 653`
`__ne__(fipy.variables.distanceVariable.DistanceVariable method), 671`

`__ne__(fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable method), 688`
`__ne__(fipy.variables.faceVariable.FaceVariable method), 702`
`__ne__(fipy.variables.gammaNoiseVariable.GammaNoiseVariable method), 715`
`__ne__(fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable method), 731`
`__ne__(fipy.variables.histogramVariable.HistogramVariable method), 746`
`__ne__(fipy.variables.meshVariable.MeshVariable method), 760`
`__ne__(fipy.variables.modularVariable.ModularVariable method), 772`
`__ne__(fipy.variables.noiseVariable.NoiseVariable method), 787`
`__ne__(fipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable method), 801`
`__ne__(fipy.variables.surfactantConvectionVariable.SurfactantConvectionVariable method), 813`
`__ne__(fipy.variables.surfactantVariable.SurfactantVariable method), 825`
`__ne__(fipy.variables.uniformNoiseVariable.UniformNoiseVariable method), 841`
`__neg__(fipy.terms.centralDiffConvectionTerm.CentralDifferenceConvectionTerm method), 494`
`__neg__(fipy.terms.explicitUpwindConvectionTerm.ExplicitUpwindConvectionTerm method), 513`
`__neg__(fipy.terms.exponentialConvectionTerm.ExponentialConvectionTerm method), 518`
`__neg__(fipy.terms.faceTerm.FaceTerm method), 523`
`__neg__(fipy.terms.firstOrderAdvectionTerm.FirstOrderAdvectionTerm method), 528`
`__neg__(fipy.terms.hybridConvectionTerm.HybridConvectionTerm method), 533`
`__neg__(fipy.terms.implicitSourceTerm.ImplicitSourceTerm method), 537`
`__neg__(fipy.terms.powerLawConvectionTerm.PowerLawConvectionTerm method), 542`
`__neg__(fipy.terms.residualTerm.ResidualTerm method), 546`
`__neg__(fipy.terms.sourceTerm.SourceTerm method), 551`
`__neg__(fipy.terms.transientTerm.TransientTerm method), 559`
`__neg__(fipy.terms.upwindConvectionTerm.UpwindConvectionTerm method), 564`
`__neg__(fipy.terms.vanLeerConvectionTerm.VanLeerConvectionTerm method), 569`
`__neg__(fipy.tools.PhysicalField method), 580`
`__neg__(fipy.tools.dimensions.physicalField.PhysicalField method), 603`
`__new__(fipy.variables.betanoiseVariable.BetaNoiseVariable static method), 639`
`__new__(fipy.variables.cellVariable.CellVariable static method), 653`
`__new__(fipy.variables.distanceVariable.DistanceVariable static method), 671`
`__new__(fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable static method), 688`

```
    static method), 688
__new__(fipy.variables.faceVariable.FaceVariable static method),
    702
__new__(fipy.variables.gammaNoiseVariable.GammaNoiseVariable
    static method), 715
__new__(fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable
    static method), 731
__new__(fipy.variables.histogramVariable.HistogramVariable static
    method), 746
__new__(fipy.variables.meshVariable.MeshVariable static method),
    761
__new__(fipy.variables.modularVariable.ModularVariable static
    method), 772
__new__(fipy.variables.noiseVariable.NoiseVariable static method),
    787
__new__(fipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable
    static method), 802
__new__(fipy.variables.surfactantConvectionVariable.SurfactantConvectionVariable
    static method), 813
__new__(fipy.variables.surfactantVariable.SurfactantVariable static
    method), 825
__new__(fipy.variables.uniformNoiseVariable.UniformNoiseVariable
    static method), 841
__new__(fipy.variables.variable.Variable static method), 856
 nonzero_(fipy.tools.PhysicalField method), 580
 nonzero_(fipy.tools.dimensions.physicalField.PhysicalField
    method), 603
 nonzero_(fipy.variables.betanoiseVariable.BetaNoiseVariable
    method), 639
 nonzero_(fipy.variables.cellVariable.CellVariable method), 654
 nonzero_(fipy.variables.distanceVariable.DistanceVariable
    method), 671
 nonzero_(fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable
    method), 688
 nonzero_(fipy.variables.faceVariable.FaceVariable method),
    702
 nonzero_(fipy.variables.gammaNoiseVariable.GammaNoiseVariable
    method), 715
 nonzero_(fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable
    method), 731
 nonzero_(fipy.variables.histogramVariable.HistogramVariable
    method), 746
 nonzero_(fipy.variables.meshVariable.MeshVariable method),
    761
 nonzero_(fipy.variables.modularVariable.ModularVariable
    method), 772
 nonzero_(fipy.variables.noiseVariable.NoiseVariable method),
    787
 nonzero_(fipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable
    method), 802
 nonzero_(fipy.variables.surfactantConvectionVariable.SurfactantConvectionVariable
    method), 814
 nonzero_(fipy.variables.surfactantVariable.SurfactantVariable
    method), 825
 nonzero_(fipy.variables.uniformNoiseVariable.UniformNoiseVariable
    method), 841
 nonzero_(fipy.variables.variable.Variable method), 856
 or_(fipy.variables.betanoiseVariable.BetaNoiseVariable
    method), 639
 or_(fipy.variables.cellVariable.CellVariable method), 654
 or_(fipy.variables.distanceVariable.DistanceVariable method),
    671
 or_(fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable
    method), 688
 or_(fipy.variables.faceVariable.FaceVariable method), 702
 or_(fipy.variables.gammaNoiseVariable.GammaNoiseVariable
    method), 715
 or_(fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable
    method), 732
 or_(fipy.variables.histogramVariable.HistogramVariable
    method), 746
 or_(fipy.variables.meshVariable.MeshVariable method), 761
 or_(fipy.variables.modularVariable.ModularVariable method),
    772
 or_(fipy.variables.noiseVariable.NoiseVariable method), 788
 or_(fipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable
    method), 802
 or_(fipy.variables.surfactantConvectionVariable.SurfactantConvectionVariable
    method), 814
 or_(fipy.variables.surfactantVariable.SurfactantVariable
    method), 825
 or_(fipy.variables.uniformNoiseVariable.UniformNoiseVariable
    method), 841
 or_(fipy.variables.variable.Variable method), 856
 radd_(fipy.meshes.abstractMesh.AbstractMesh method), 134
```

```

__radd__(fipy.meshes.cylindricalNonUniformGrid1D.CylindricalNonUniformGrid1D method), 143
__radd__(fipy.meshes.cylindricalNonUniformGrid2D.CylindricalNonUniformGrid2D method), 151
__radd__(fipy.meshes.cylindricalUniformGrid1D.CylindricalUniformGrid1D method), 160
__radd__(fipy.meshes.cylindricalUniformGrid2D.CylindricalUniformGrid2D method), 167
__radd__(fipy.meshes.gmshMesh.Gmsh2D method), 181
__radd__(fipy.meshes.gmshMesh.Gmsh2DIn3DSpace method), 190
__radd__(fipy.meshes.gmshMesh.Gmsh3D method), 199
__radd__(fipy.meshes.gmshMesh.GmshGrid2D method), 207
__radd__(fipy.meshes.gmshMesh.GmshGrid3D method), 215
__radd__(fipy.meshes.mesh.Mesh method), 226
__radd__(fipy.meshes.mesh1D.Mesh1D method), 234
__radd__(fipy.meshes.mesh2D.Mesh2D method), 242
__radd__(fipy.meshes.nonUniformGrid1D.NonUniformGrid1D method), 252
__radd__(fipy.meshes.nonUniformGrid2D.NonUniformGrid2D method), 260
__radd__(fipy.meshes.nonUniformGrid3D.NonUniformGrid3D method), 268
__radd__(fipy.meshes.periodicGrid1D.PeriodicGrid1D method), 277
__radd__(fipy.meshes.periodicGrid2D.PeriodicGrid2D method), 286
__radd__(fipy.meshes.periodicGrid2D.PeriodicGrid2DLeftRight method), 295
__radd__(fipy.meshes.periodicGrid2D.PeriodicGrid2DTopBottom method), 303
__radd__(fipy.meshes.periodicGrid3D.PeriodicGrid3D method), 313
__radd__(fipy.meshes.periodicGrid3D.PeriodicGrid3DFrontBack method), 321
__radd__(fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRight method), 329
__radd__(fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightFrontBack method), 336
__radd__(fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightTopBottom method), 344
__radd__(fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottom method), 352
__radd__(fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottomFrontBack method), 360
__radd__(fipy.meshes.skewedGrid2D.SkewedGrid2D method), 368
__radd__(fipy.meshes.sphericalNonUniformGrid1D.SphericalNonUniformGrid1D method), 377
__radd__(fipy.meshes.sphericalUniformGrid1D.SphericalUniformGrid1D method), 385
__radd__(fipy.meshes.tri2D.Tri2D method), 393
__radd__(fipy.meshes.uniformGrid.UniformGrid method), 401
__radd__(fipy.meshes.uniformGrid1D.UniformGrid1D method), 408
__radd__(fipy.meshes.uniformGrid2D.UniformGrid2D method), 415
__radd__(fipy.meshes.uniformGrid3D.UniformGrid3D method), 422
__radd__(fipy.tools.PhysicalField method), 581
__radd__(fipy.tools.dimensions.physicalField.PhysicalField method), 603
__rdiv__(fipy.tools.dimensions.physicalField.PhysicalUnit method), 617
__reduce__(fipy.meshes.abstractMesh.MeshAdditionError method), 139
__reduce__(fipy.meshes.gmshMesh.GmshException method), 204
__reduce__(fipy.meshes.gmshMesh.MeshExportError method), 222
__reduce__(fipy.meshes.mesh.MeshAdditionError method), 231
__reduce__(fipy.solvers.SerialSolverError method), 428
__reduce__(fipy.solvers.solver.IllConditionedPreconditionerWarning method), 454
__reduce__(fipy.solvers.solver.MatrixIllConditionedWarning method), 454
__reduce__(fipy.solvers.solver.MaximumIterationWarning method), 455
__reduce__(fipy.solvers.solver.PreconditionerNotPositiveDefiniteWarning method), 455
__reduce__(fipy.solvers.solver.PreconditionerWarning method), 456
__reduce__(fipy.solvers.solver.ScalarQuantityOutOfRangeWarning method), 456
__reduce__(fipy.solvers.solver.SolverConvergenceWarning method), 457
__reduce__(fipy.solvers.solver.StagnatedSolverWarning method), 458
__reduce__(fipy.terms.AbstractBaseClassError method), 475
__reduce__(fipy.terms.ExplicitVariableError method), 476
__reduce__(fipy.terms.IncorrectSolutionVariable method), 476
__reduce__(fipy.terms.SolutionVariableNumberError method), 477
__reduce__(fipy.terms.SolutionVariableRequiredError method), 477
__reduce__(fipy.boundaryConditions.boundaryCondition.BoundaryCondition method), 127
__repr__(fipy.boundaryConditions.constraint.Constraint method), 127
__repr__(fipy.boundaryConditions.fixedFlux.FixedFlux method), 128
__repr__(fipy.boundaryConditions.fixedValue.FixedValue method), 129
__repr__(fipy.boundaryConditions.nthOrderBoundaryCondition.NthOrderBoundaryCondition method), 129
__repr__(fipy.meshes.abstractMesh.AbstractMesh method), 136
__repr__(fipy.meshes.abstractMesh.MeshAdditionError method), 139
__repr__(fipy.meshes.cylindricalNonUniformGrid1D.CylindricalNonUniformGrid1D method), 145
__repr__(fipy.meshes.cylindricalNonUniformGrid2D.CylindricalNonUniformGrid2D method), 153
__repr__(fipy.meshes.cylindricalUniformGrid1D.CylindricalUniformGrid1D method), 161
__repr__(fipy.meshes.cylindricalUniformGrid2D.CylindricalUniformGrid2D method), 169
__repr__(fipy.meshes.gmshMesh.Gmsh2D method), 183
__repr__(fipy.meshes.gmshMesh.Gmsh2DIn3DSpace method), 192

```

```
__repr__(fipy.meshes.gmshMesh.Gmsh3D method), 200
__repr__(fipy.meshes.gmshMesh.GmshException method), 204
__repr__(fipy.meshes.gmshMesh.GmshGrid2D method), 209
__repr__(fipy.meshes.gmshMesh.GmshGrid3D method), 217
__repr__(fipy.meshes.gmshMesh.MeshExportError method), 222
__repr__(fipy.meshes.mesh.Mesh method), 227
__repr__(fipy.meshes.mesh.MeshAdditionError method), 231
__repr__(fipy.meshes.mesh1D.Mesh1D method), 236
__repr__(fipy.meshes.mesh2D.Mesh2D method), 244
__repr__(fipy.meshes.nonUniformGrid1D.NonUniformGrid1D
    method), 253
__repr__(fipy.meshes.nonUniformGrid2D.NonUniformGrid2D
    method), 261
__repr__(fipy.meshes.nonUniformGrid3D.NonUniformGrid3D
    method), 270
__repr__(fipy.meshes.periodicGrid1D.PeriodicGrid1D method),
    279
__repr__(fipy.meshes.periodicGrid2D.PeriodicGrid2D method),
    288
__repr__(fipy.meshes.periodicGrid2D.PeriodicGrid2DLeftRight
    method), 296
__repr__(fipy.meshes.periodicGrid2D.PeriodicGrid2DTopBottom
    method), 305
__repr__(fipy.meshes.periodicGrid3D.PeriodicGrid3D method),
    315
__repr__(fipy.meshes.periodicGrid3D.PeriodicGrid3DFrontBack
    method), 322
__repr__(fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRight
    method), 330
__repr__(fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightFrontBack
    method), 338
__repr__(fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightTopBottom
    method), 346
__repr__(fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottom
    method), 353
__repr__(fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottomFrontBack
    method), 361
__repr__(fipy.meshes.skewedGrid2D.SkewedGrid2D method), 370
__repr__(fipy.meshes.sphericalNonUniformGrid1D.SphericalNonUniformGrid1D
    method), 379
__repr__(fipy.meshes.sphericalUniformGrid1D.SphericalUniformGrid1D
    method), 386
__repr__(fipy.meshes.tri2D.Tri2D method), 395
__repr__(fipy.meshes.uniformGrid.UniformGrid method), 403
__repr__(fipy.meshes.uniformGrid1D.UniformGrid1D method),
    410
__repr__(fipy.meshes.uniformGrid2D.UniformGrid2D method),
    417
__repr__(fipy.meshes.uniformGrid3D.UniformGrid3D method),
    424
__repr__(fipy.solvers.SerialSolverError method), 428
__repr__(fipy.solvers.petsc.comms.parallelPETScCommWrapper.ParallelPETScCommWrapper
    method), 430
__repr__(fipy.solvers.petsc.comms.petscCommWrapper.PETScCommWrapper
    method), 430
__repr__(fipy.solvers.petsc.comms.serialPETScCommWrapper.SerialPETScCommWrapper
    method), 431
__repr__(fipy.solvers.petsc.dummySolver.DummySolver method),
    431
__repr__(fipy.solvers.petsc.linearBicgSolver.LinearBicgSolver
    method), 432
__repr__(fipy.solvers.petsc.linearCGSSolver.LinearCGSSolver
    method), 432
__repr__(fipy.solvers.petsc.linearGMRESSolver.LinearGMRESSolver
    method), 433
__repr__(fipy.solvers.petsc.linearLUSolver.LinearLUSolver
    method), 433
__repr__(fipy.solvers.petsc.linearPCGSolver.LinearPCGSolver
    method), 434
__repr__(fipy.solvers.petsc.petScKrylovSolver.PETScKrylovSolver
    method), 434
__repr__(fipy.solvers.petsc.petScSolver.PETScSolver method), 435
__repr__(fipy.solvers.pyAMG.linearCGSSolver.LinearCGSSolver
    method), 436
__repr__(fipy.solvers.pyAMG.linearGMRESSolver.LinearGMRESSolver
    method), 437
__repr__(fipy.solvers.pyAMG.linearGeneralSolver.LinearGeneralSolver
    method), 437
__repr__(fipy.solvers.pyAMG.linearLUSolver.LinearLUSolver
    method), 438
__repr__(fipy.solvers.pyAMG.linearPCGSolver.LinearPCGSolver
    method), 438
__repr__(fipy.solvers.pyamgx.aggregationAMGSolver.AggregationAMGSolver
    method), 440
__repr__(fipy.solvers.pyamgx.classicalAMGSolver.ClassicalAMGSolver
    method), 441
__repr__(fipy.solvers.pyamgx.linearBiCGStabSolver.LinearBiCGStabSolver
    method), 441
__repr__(fipy.solvers.pyamgx.linearCGSolver.LinearCGSolver
    method), 442
__repr__(fipy.solvers.pyamgx.linearFGMRESSolver.LinearFGMRESSolver
    method), 442
__repr__(fipy.solvers.pyamgx.linearGMRESSolver.LinearGMRESSolver
    method), 443
__repr__(fipy.solvers.pyamgx.linearLUSolver.LinearLUSolver
    method), 443
__repr__(fipy.solvers.pyamgx.pyAMGSolver.PyAMGSolver
    method), 444
__repr__(fipy.solvers.pysparse.linearCGSSolver.LinearCGSSolver
    method), 446
__repr__(fipy.solvers.pysparse.linearGMRESSolver.LinearGMRESSolver
    method), 446
__repr__(fipy.solvers.pysparse.linearJORSolver.LinearJORSolver
    method), 447
__repr__(fipy.solvers.pysparse.linearLUSolver.LinearLUSolver
    method), 447
__repr__(fipy.solvers.pysparse.linearPCGSolver.LinearPCGSolver
    method), 448
__repr__(fipy.solvers.pysparse.pysparseSolver.PysparseSolver
    method), 450
__repr__(fipy.solvers.scipy.linearBicgstabSolver.LinearBicgstabSolver
    method), 450
__repr__(fipy.solvers.scipy.linearCGSSolver.LinearCGSSolver
    method), 451
__repr__(fipy.solvers.scipy.linearGMRESSolver.LinearGMRESSolver
    method), 451
```

```

__repr__(fipy.solvers.scipy.linearLUSolver.LinearLUSolver
        method), 452
__repr__(fipy.solvers.scipy.linearPCGSolver.LinearPCGSolver
        method), 452
__repr__(fipy.solvers.solver.IllConditionedPreconditionerWarning
        method), 454
__repr__(fipy.solvers.solver.MatrixIllConditionedWarning
        method), 454
__repr__(fipy.solvers.solver.MaximumIterationWarning method),
        455
__repr__()
    (fipy.solvers.solver.PreconditionerNotPositiveDefiniteWarning
        method), 455
__repr__(fipy.solvers.solver.PreconditionerWarning method), 456
__repr__(fipy.solvers.solver.ScalarQuantityOutOfRangeWarning
        method), 457
__repr__(fipy.solvers.solver.Solver method), 457
__repr__(fipy.solvers.solver.SolverConvergenceWarning method),
        457
__repr__(fipy.solvers.solver.StagnatedSolverWarning method), 458
__repr__()
    (fipy.solvers.trilinos.comms.epetraCommWrapper.EpetraCommWrapper
        method), 460
__repr__()
    (fipy.solvers.trilinos.comms.parallelEpetraCommWrapper.ParallelEpetraCommWrapper
        method), 460
__repr__()
    (fipy.solvers.trilinos.comms.serialEpetraCommWrapper.SerialEpetraComm
        method), 461
__repr__(fipy.solvers.trilinos.linearBicgstabSolver.LinearBicgstabSolver
        method), 461
__repr__(fipy.solvers.trilinos.linearCGSSolver.LinearCGSSolver
        method), 462
__repr__(fipy.solvers.trilinos.linearGMRESSolver.LinearGMRESSolver
        method), 462
__repr__(fipy.solvers.trilinos.linearLUSolver.LinearLUSolver
        method), 463
__repr__(fipy.solvers.trilinos.linearPCGSolver.LinearPCGSolver
        method), 463
__repr__(fipy.solvers.trilinos.trilinosAztecOOSolver.TrilinosAztecOOSolver
        method), 468
__repr__(fipy.solvers.trilinos.trilinosMLTest.TrilinosMLTest
        method), 469
__repr__()
    (fipy.solvers.trilinos.trilinosNonlinearSolver.TrilinosNonlinearSolver
        method), 470
__repr__(fipy.solvers.trilinos.trilinosSolver.TrilinosSolver method),
        471
__repr__(fipy.terms.AbstractBaseClassError method), 475
__repr__(fipy.terms.ExplicitVariableError method), 476
__repr__(fipy.terms.IncorrectSolutionVariable method), 476
__repr__(fipy.terms.SolutionVariableNumberError method), 477
__repr__(fipy.terms.SolutionVariableRequiredError method), 477
__repr__(fipy.terms.TermMultiplyError method), 478
__repr__(fipy.terms.TransientTermError method), 479
__repr__(fipy.terms.VectorCoeffError method), 479
__repr__(fipy.terms.advectionTerm.AdvectionTerm method), 484
__repr__(fipy.terms.cellTerm.CellTerm method), 489
__repr__()
    (fipy.terms.centralDiffConvectionTerm.CentralDifferenceConvectionTerm
        method), 494
__repr__(fipy.terms.diffusionTerm.DiffusionTerm method), 498
__repr__()
    (fipy.terms.diffusionTermCorrection.DiffusionTermCorrection
        method), 501
__repr__()
    (fipy.terms.diffusionTermNoCorrection.DiffusionTermNoCorrection
        method), 505
__repr__(fipy.terms.explicitDiffusionTerm.ExplicitDiffusionTerm
        method), 508
__repr__()
    (fipy.terms.explicitUpwindConvectionTerm.ExplicitUpwindConvectionTerm
        method), 513
__repr__()
    (fipy.terms.exponentialConvectionTerm.ExponentialConvectionTerm
        method), 518
__repr__(fipy.terms.faceTerm.FaceTerm method), 523
__repr__()
    (fipy.terms.firstOrderAdvectionTerm.FirstOrderAdvectionTerm
        method), 528
__repr__(fipy.terms.hybridConvectionTerm.HybridConvectionTerm
        method), 533
__repr__(fipy.terms.implicitSourceTerm.ImplicitSourceTerm
        method), 537
__repr__()
    (fipy.terms.powerLawConvectionTerm.PowerLawConvectionTerm
        method), 542
__repr__(fipy.terms.residualTerm.ResidualTerm method), 546
__repr__(fipy.terms.sourceTerm.SourceTerm method), 551
__repr__(fipy.terms.upwindConvectionTerm.UpwindConvectionTerm
        method), 564
__repr__()
    (fipy.terms.vanLeerConvectionTerm.VanLeerConvectionTerm
        method), 569
__repr__(fipy.tools.PhysicalField method), 581
__repr__(fipy.tools.comms.commWrapper.CommWrapper method),
        595
__repr__(fipy.tools.comms.dummyComm.DummyComm method),
        595
__repr__(fipy.tools.dimensions.physicalField.PhysicalField
        method), 603
__repr__(fipy.tools.dimensions.physicalField.PhysicalUnit
        method), 617
__repr__(fipy.variables.betaNoiseVariable.BetaNoiseVariable
        method), 639
__repr__(fipy.variables.cellVariable.CellVariable method), 654
__repr__(fipy.variables.distanceVariable.DistanceVariable
        method), 672
__repr__()
    (fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable
        method), 689
__repr__(fipy.variables.faceVariable.FaceVariable method), 703
__repr__()
    (fipy.variables.gammaNoiseVariable.GammaNoiseVariable
        method), 716
__repr__()
    (fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable
        method), 732
__repr__(fipy.variables.histogramVariable.HistogramVariable
        method), 747
__repr__(fipy.variables.meshVariable.MeshVariable method), 761
__repr__(fipy.variables.modularVariable.ModularVariable
        method), 773
__repr__(fipy.variables.noiseVariable.NoiseVariable method), 788
__repr__(fipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable
        method), 802
__repr__()
    (fipy.variables.surfactantConvectionVariable.SurfactantConvectionVariable
        method), 814

```

```

__repr__(fipy.variables.surfactantVariable.SurfactantVariable
        method), 826
__repr__(fipy.variables.uniformNoiseVariable.UniformNoiseVariable
        method), 842
__repr__(fipy.variables.variable.Variable method), 856
__repr__(fipy.viewers.MeshDimensionError method), 863
__rmul__(fipy.meshes.cylindricalNonUniformGrid1D.CylindricalNonUniformGrid1D
        method), 145
__rmul__(fipy.meshes.cylindricalNonUniformGrid2D.CylindricalNonUniformGrid2D
        method), 153
__rmul__(fipy.meshes.gmshMesh.Gmsh2D method), 183
__rmul__(fipy.meshes.gmshMesh.Gmsh2DIn3DSpace method), 192
__rmul__(fipy.meshes.gmshMesh.Gmsh3D method), 200
__rmul__(fipy.meshes.gmshMesh.GmshGrid2D method), 209
__rmul__(fipy.meshes.gmshMesh.GmshGrid3D method), 217
__rmul__(fipy.meshes.mesh.Mesh method), 227
__rmul__(fipy.meshes.mesh1D.Mesh1D method), 236
__rmul__(fipy.meshes.mesh2D.Mesh2D method), 244
__rmul__(fipy.meshes.nonUniformGrid1D.NonUniformGrid1D
        method), 253
__rmul__(fipy.meshes.nonUniformGrid2D.NonUniformGrid2D
        method), 261
__rmul__(fipy.meshes.nonUniformGrid3D.NonUniformGrid3D
        method), 270
__rmul__(fipy.meshes.periodicGrid1D.PeriodicGrid1D method),
        279
__rmul__(fipy.meshes.periodicGrid2D.PeriodicGrid2D method),
        288
__rmul__(fipy.meshes.periodicGrid2D.PeriodicGrid2DLeftRight
        method), 296
__rmul__(fipy.meshes.periodicGrid2D.PeriodicGrid2DTopBottom
        method), 305
__rmul__(fipy.meshes.periodicGrid3D.PeriodicGrid3D method),
        315
__rmul__(fipy.meshes.periodicGrid3D.PeriodicGrid3DFrontBack
        method), 323
__rmul__(fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRight
        method), 330
__rmul__(fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightFrontBack
        method), 338
__rmul__(fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightTopBottom
        method), 346
__rmul__(fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottom
        method), 354
__rmul__(fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottomFrontBack
        method), 361
__rmul__(fipy.meshes.skewedGrid2D.SkewedGrid2D method), 370
__rmul__(fipy.meshes.sphericalNonUniformGrid1D.SphericalNonUniformGrid1D
        method), 379
__rmul__(fipy.meshes.tri2D.Tri2D method), 395
__rmul__(fipy.terms.advectionTerm.AdvectionTerm method), 484
__rmul__(fipy.terms.cellTerm.CellTerm method), 489
__rmul__(fipy.terms.centralDiffConvectionTerm.CentralDifferenceConvectionTerm
        method), 494
__rmul__(fipy.terms.explicitUpwindConvectionTerm.ExplicitUpwindConvectionTerm
        method), 513
__rmul__(fipy.terms.exponentialConvectionTerm.ExponentialConvectionTerm
        method), 518
__rmul__(fipy.terms.faceTerm.FaceTerm method), 523
__rmul__(fipy.terms.firstOrderAdvectionTerm.FirstOrderAdvectionTerm
        method), 528
__rmul__(fipy.terms.hybridConvectionTerm.HybridConvectionTerm
        method), 533
__rmul__(fipy.terms.implicitSourceTerm.ImplicitSourceTerm
        method), 537
__rmul__(fipy.terms.powerLawConvectionTerm.PowerLawConvectionTerm
        method), 542
__rmul__(fipy.terms.residualTerm.ResidualTerm method), 546
__rmul__(fipy.terms.sourceTerm.SourceTerm method), 551
__rmul__(fipy.terms.transientTerm.TransientTerm method), 559
__rmul__(fipy.terms.upwindConvectionTerm.UpwindConvectionTerm
        method), 565
__rmul__(fipy.terms.vanLeerConvectionTerm.VanLeerConvectionTerm
        method), 570
__rmul__(fipy.tools.PhysicalField method), 581
__rmul__(fipy.tools.dimensions.physicalField.PhysicalField
        method), 604
__rmul__(fipy.tools.dimensions.physicalField.PhysicalUnit
        method), 617
__rtruediv__(fipy.tools.dimensions.physicalField.PhysicalUnit
        method), 618
__setattr__(fipy.meshes.abstractMesh.MeshAdditionError
        method), 139
__setattr__(fipy.meshes.gmshMesh.GmshException method), 204
__setattr__(fipy.meshes.gmshMesh.MeshExportError method),
        222
__setattr__(fipy.meshes.mesh.MeshAdditionError method), 231
__setattr__(fipy.solvers.SerialSolverError method), 428
__setattr__(fipy.solvers.solver.IllConditionedPreconditionerWarning
        method), 454
__setattr__(fipy.solvers.solver.MatrixIllConditionedWarning
        method), 454
__setattr__(fipy.solvers.solver.MaximumIterationWarning
        method), 455
__setattr__(fipy.solvers.solver.PreconditionerNotPositiveDefiniteWarning
        method), 455
__setattr__(fipy.solvers.solver.PreconditionerWarning method),
        456
__setattr__(fipy.solvers.solver.ScalarQuantityOutOfRangeWarning
        method), 457
__setattr__(fipy.solvers.solver.SolverConvergenceWarning
        method), 457
__setattr__(fipy.solvers.solver.StagnatedSolverWarning method),
        458
__setattr__(fipy.terms.AbstractBaseClassError method), 475
__setattr__(fipy.terms.ExplicitVariableError method), 476
__setattr__(fipy.terms.IncorrectSolutionVariable method), 476
__setattr__(fipy.terms.SolutionVariableNumberError method),
        477
__setattr__(fipy.terms.SolutionVariableRequiredError method),
        478
__setattr__(fipy.terms.TermMultiplyError method), 478
__setattr__(fipy.terms.TransientTermError method), 479
__setattr__(fipy.terms.VectorCoeffError method), 479
__setitem__(fipy.viewers.MeshDimensionError method), 863
__setitem__(fipy.tools.PhysicalField method), 581
__setitem__(fipy.tools.dimensions.physicalField.PhysicalField
        method), 604

```

```

__setstate__(fipy.variables.betaNoiseVariable.BetaNoiseVariable
    method), 640
__setstate__(fipy.variables.cellVariable.CellVariable method),
    654
__setstate__(fipy.variables.distanceVariable.DistanceVariable
    method), 672
__setstate__()
    (fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable
    method), 689
__setstate__(fipy.variables.faceVariable.FaceVariable method),
    703
__setstate__()
    (fipy.variables.gammaNoiseVariable.GammaNoiseVariable
    method), 716
__setstate__()
    (fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable
    method), 732
__setstate__()
    (fipy.variables.histogramVariable.HistogramVariable
    method), 747
__setstate__(fipy.variables.meshVariable.MeshVariable method),
    761
__setstate__(fipy.variables.modularVariable.ModularVariable
    method), 773
__setstate__(fipy.variables.noiseVariable.NoiseVariable method),
    788
__setstate__()
    (fipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFace
    method), 802
__setstate__()
    (fipy.variables.surfactantConvectionVariable.SurfactantConvection
    method), 814
__setstate__()
    (fipy.variables.surfactantVariable.SurfactantVariable
    method), 826
__setstate__()
    (fipy.variables.uniformNoiseVariable.UniformNoiseVariable
    method), 842
__setstate__(fipy.variables.variable.Variable method), 856
__str__(fipy.meshes.abstractMesh.MeshAdditionError method),
    139
__str__(fipy.meshes.gmshMesh.GmshException method), 204
__str__(fipy.meshes.gmshMesh.MeshExportError method), 222
__str__(fipy.meshes.mesh.MeshAdditionError method), 231
__str__(fipy.solvers.SerialSolverError method), 428
__str__(fipy.solvers.solver.IllConditionedPreconditionerWarning
    method), 454
__str__(fipy.solvers.solver.MatrixIllConditionedWarning method),
    454
__str__(fipy.solvers.solver.MaximumIterationWarning method),
    455
__str__()
    (fipy.solvers.solver.PreconditionerNotPositiveDefiniteWarning
    method), 455
__str__(fipy.solvers.solver.PreconditionerWarning method), 456
__str__(fipy.solvers.solver.ScalarQuantityOutOfRangeWarning
    method), 457
__str__(fipy.solvers.solver.SolverConvergenceWarning method),
    458
__str__(fipy.solvers.solver.StagnatedSolverWarning method), 458
__str__(fipy.terms.AbstractBaseClassError method), 475
__str__(fipy.terms.ExplicitVariableError method), 476
__str__(fipy.terms.IncorrectSolutionVariable method), 476
__str__(fipy.terms.SolutionVariableNumberError method), 477
__str__(fipy.terms.SolutionVariableRequiredError method), 478
__str__(fipy.terms.TermMultiplyError method), 478
__str__(fipy.terms.TransientTermError method), 479
__str__(fipy.terms.VectorCoeffError method), 479
__str__(fipy.tools.PhysicalField method), 581
__str__(fipy.tools.Vitals method), 593
__str__(fipy.tools.dimensions.physicalField.PhysicalField
    method), 604
__str__(fipy.tools.dimensions.physicalField.PhysicalUnit method),
    618
__str__(fipy.tools.vitals.Vitals method), 631
__str__(fipy.variables.betaNoiseVariable.BetaNoiseVariable
    method), 640
__str__(fipy.variables.cellVariable.CellVariable method), 654
__str__(fipy.variables.distanceVariable.DistanceVariable method),
    672
__str__()
    (fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable
    method), 689
__str__(fipy.variables.faceVariable.FaceVariable method), 703
__str__(fipy.variables.gammaNoiseVariable.GammaNoiseVariable
    method), 716
__str__()
    (fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable
    method), 732
__str__(fipy.variables.histogramVariable.HistogramVariable
    method), 747
__str__(fipy.variables.meshVariable.MeshVariable method), 761
__str__(fipy.variables.modularVariable.ModularVariable method),
    773
__str__(fipy.variables.noiseVariable.NoiseVariable method), 788
__str__(fipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFace
    method), 802
__str__(fipy.variables.surfactantConvectionVariable.SurfactantConvection
    method), 814
__str__(fipy.variables.surfactantVariable.SurfactantVariable
    method), 826
__str__()
    (fipy.variables.uniformNoiseVariable.UniformNoiseVariable
    method), 842
__str__(fipy.variables.variable.Variable method), 856
__str__(fipy.viewers.MeshDimensionError method), 863
__sub__(fipy.meshes.abstractMesh.AbstractMesh method), 136
__sub__()
    (fipy.meshes.cylindricalNonUniformGrid1D.CylindricalNonUniformGrid1D
    method), 146
__sub__()
    (fipy.meshes.cylindricalNonUniformGrid2D.CylindricalNonUniformGrid2D
    method), 154
__sub__()
    (fipy.meshes.cylindricalUniformGrid1D.CylindricalUniformGrid1D
    method), 162
__sub__()
    (fipy.meshes.cylindricalUniformGrid2D.CylindricalUniformGrid2D
    method), 169
__sub__(fipy.meshes.gmshMesh.Gmsh2D method), 184
__sub__(fipy.meshes.gmshMesh.Gmsh2DIn3DSpace method), 192
__sub__(fipy.meshes.gmshMesh.Gmsh3D method), 201
__sub__(fipy.meshes.gmshMesh.GmshGrid2D method), 209
__sub__(fipy.meshes.gmshMesh.GmshGrid3D method), 218
__sub__(fipy.meshes.mesh.Mesh method), 228
__sub__(fipy.meshes.mesh1D.Mesh1D method), 237
__sub__(fipy.meshes.mesh2D.Mesh2D method), 245
__sub__(fipy.meshes.nonUniformGrid1D.NonUniformGrid1D
    method), 254
__sub__(fipy.meshes.nonUniformGrid2D.NonUniformGrid2D
    method), 262
__sub__(fipy.meshes.nonUniformGrid3D.NonUniformGrid3D
    method), 271

```

```

__sub__(fipy.meshes.periodicGrid1D.PeriodicGrid1D method), 279
__sub__(fipy.meshes.periodicGrid2D.PeriodicGrid2D method), 289
__sub__(fipy.meshes.periodicGrid2D.PeriodicGrid2DLeftRight method), 297
__sub__(fipy.meshes.periodicGrid2D.PeriodicGrid2DTopBottom method), 305
__sub__(fipy.meshes.periodicGrid3D.PeriodicGrid3D method), 315
__sub__(fipy.meshes.periodicGrid3D.PeriodicGrid3DFrontBack method), 323
__sub__(fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRight method), 331
__sub__(fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightFrontBack method), 339
__sub__(fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightTopBottom method), 346
__sub__(fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottom method), 354
__sub__(fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottomFrontBack method), 362
__sub__(fipy.meshes.skewedGrid2D.SkewedGrid2D method), 370
__sub__(fipy.meshes.sphericalNonUniformGrid1D.SphericalNonUniformGrid1D method), 379
__sub__(fipy.meshes.sphericalUniformGrid1D.SphericalUniformGrid1D method), 387
__sub__(fipy.meshes.tri2D.Tri2D method), 395
__sub__(fipy.meshes.uniformGrid.UniformGrid method), 403
__sub__(fipy.meshes.uniformGrid1D.UniformGrid1D method), 410
__sub__(fipy.meshes.uniformGrid2D.UniformGrid2D method), 417
__sub__(fipy.meshes.uniformGrid3D.UniformGrid3D method), 424
__sub__(fipy.tools.PhysicalField method), 582
__sub__(fipy.tools.dimensions.physicalField.PhysicalField method), 604
__truediv__(fipy.meshes.abstractMesh.AbstractMesh method), 136
__truediv__(fipy.meshes.cylindricalNonUniformGrid1D.CylindricalNonUniformGrid1D method), 146
__truediv__(fipy.meshes.cylindricalNonUniformGrid2D.CylindricalNonUniformGrid2D method), 154
__truediv__(fipy.meshes.cylindricalUniformGrid1D.CylindricalUniformGrid1D method), 162
__truediv__(fipy.meshes.cylindricalUniformGrid2D.CylindricalUniformGrid2D method), 169
__truediv__(fipy.meshes.gmshMesh.Gmsh2D method), 184
__truediv__(fipy.meshes.gmshMesh.Gmsh2DIn3DSpace method), 192
__truediv__(fipy.meshes.gmshMesh.Gmsh3D method), 201
__truediv__(fipy.meshes.gmshMesh.GmshGrid2D method), 209
__truediv__(fipy.meshes.gmshMesh.GmshGrid3D method), 218
__truediv__(fipy.meshes.mesh.Mesh method), 228
__truediv__(fipy.meshes.mesh1D.Mesh1D method), 237
__truediv__(fipy.meshes.mesh2D.Mesh2D method), 245
__truediv__(fipy.meshes.nonUniformGrid1D.NonUniformGrid1D method), 254
__truediv__(fipy.meshes.nonUniformGrid2D.NonUniformGrid2D method), 262

__truediv__(fipy.meshes.nonUniformGrid3D.NonUniformGrid3D method), 271
__truediv__(fipy.meshes.periodicGrid1D.PeriodicGrid1D method), 279
__truediv__(fipy.meshes.periodicGrid2D.PeriodicGrid2D method), 289
__truediv__(fipy.meshes.periodicGrid2D.PeriodicGrid2DLeftRight method), 297
__truediv__(fipy.meshes.periodicGrid2D.PeriodicGrid2DTopBottom method), 305
__truediv__(fipy.meshes.periodicGrid3D.PeriodicGrid3D method), 315
__truediv__(fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRight method), 331
__truediv__(fipy.meshes.periodicGrid3D.PeriodicGrid3DFrontBack method), 323
__truediv__(fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRight method), 331
__truediv__(fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightFrontBack method), 339
__truediv__(fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightTopBottom method), 346
__truediv__(fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottom method), 354
__truediv__(fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottomFrontBack method), 362
__truediv__(fipy.meshes.skewedGrid2D.SkewedGrid2D method), 370
__truediv__(fipy.meshes.sphericalNonUniformGrid1D.SphericalNonUniformGrid1D method), 379
__truediv__(fipy.meshes.sphericalUniformGrid1D.SphericalUniformGrid1D method), 387
__truediv__(fipy.meshes.tri2D.Tri2D method), 395
__truediv__(fipy.meshes.uniformGrid.UniformGrid method), 403
__truediv__(fipy.meshes.uniformGrid1D.UniformGrid1D method), 410
__truediv__(fipy.meshes.uniformGrid2D.UniformGrid2D method), 417
__truediv__(fipy.tools.PhysicalField method), 582
__truediv__(fipy.tools.dimensions.physicalField.PhysicalField method), 604
__truediv__(fipy.tools.dimensions.physicalField.PhysicalUnit method), 618
--cache
    command line option, 33
--inline
    command line option, 33
--lsmlib
    command line option, 34
--no-cache
    command line option, 33
--no-pysparse
    command line option, 34
--pyamg
    command line option, 34
--pyamgx
    command line option, 34
--pysparse

```

```

    command line option, 34
--scipy
    command line option, 34
--skfmm
    command line option, 34
--trilinos
    command line option, 34

A
AbstractBaseClassError, 475
AbstractMatplotlib2DViewer (class in
    fiipy.viewers.matplotlibViewer.abstractMatplotlib2DViewer), 867
AbstractMatplotlibViewer (class in
    fiipy.viewers.matplotlibViewer.abstractMatplotlibViewer), 870
AbstractMesh (class in fiipy.meshes.abstractMesh), 132
AbstractViewer (class in fiipy.viewers.viewer), 906
add () (fiipy.tools.dimensions.physicalField.PhysicalField method), 605
add () (fiipy.tools.PhysicalField method), 582
add_note () (fiipy.meshes.abstractMesh.MeshAdditionError method), 139
add_note () (fiipy.meshes.gmshMesh.GmshException method), 204
add_note () (fiipy.meshes.gmshMesh.MeshExportError method), 222
add_note () (fiipy.meshes.mesh.MeshAdditionError method), 231
add_note () (fiipy.solvers.SerialSolverError method), 428
add_note () (fiipy.solvers.solver.IllConditionedPreconditionerWarning method), 454
add_note () (fiipy.solvers.solver.MatrixIllConditionedWarning method), 454
add_note () (fiipy.solvers.solver.MaximumIterationWarning method), 455
add_note ()
    (fiipy.solvers.solver.PreconditionerNotPositiveDefiniteWarning method), 456
add_note () (fiipy.solvers.solver.PreconditionerWarning method), 456
add_note () (fiipy.solvers.solver.ScalarQuantityOutOfRangeWarning method), 457
add_note () (fiipy.solvers.solver.SolverConvergenceWarning method), 458
add_note () (fiipy.solvers.solver.StagnatedSolverWarning method), 458
add_note () (fiipy.terms.AbstractBaseClassError method), 475
add_note () (fiipy.terms.ExplicitVariableError method), 476
add_note () (fiipy.terms.IncorrectSolutionVariable method), 476
add_note () (fiipy.terms.SolutionVariableNumberError method), 477
add_note () (fiipy.terms.SolutionVariableRequiredError method), 478
add_note () (fiipy.terms.TermMultiplyError method), 478
add_note () (fiipy.terms.TransientTermError method), 479
add_note () (fiipy.terms.VectorCoeffError method), 479
add_note () (fiipy.viewers.MeshDimensionError method), 863
AdvectionTerm, 1071
AdvectionTerm (class in fiipy.terms.advectionTerm), 481
AggregationAMGSolver (class in
    fiipy.solvers.pyamgx.aggregationAMGSolver), 440
all () (fiipy.variables.betaNoiseVariable.BetaNoiseVariable method), 640
all () (fiipy.variables.cellVariable.CellVariable method), 654
all () (fiipy.variables.distanceVariable.DistanceVariable method), 672
all ()
    (fiipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable method), 689
all () (fiipy.variables.faceVariable.FaceVariable method), 703
all () (fiipy.variables.gammaNoiseVariable.GammaNoiseVariable method), 716
all () (fiipy.variables.gaussianNoiseVariable.GaussianNoiseVariable method), 732
all () (fiipy.variables.histogramVariable.HistogramVariable method), 747
all () (fiipy.variables.meshVariable.MeshVariable method), 761
all () (fiipy.variables.modularVariable.ModularVariable method), 773
all () (fiipy.variables.noiseVariable.NoiseVariable method), 788
all ()
    (fiipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable method), 802
all ()
    (fiipy.variables.surfactantConvectionVariable.SurfactantConvectionVariable method), 814
all () (fiipy.variables.surfactantVariable.SurfactantVariable method), 826
all () (fiipy.variables.uniformNoiseVariable.UniformNoiseVariable method), 842
all () (fiipy.variables.variable.Variable method), 856
all () (in module fiipy.tools.numerix), 625
allclose, 1100, 1146
allclose () (fiipy.tools.dimensions.physicalField.PhysicalField method), 605
allclose () (fiipy.tools.PhysicalField method), 582
allclose () (fiipy.variables.betanoiseVariable.BetaNoiseVariable method), 640
allclose () (fiipy.variables.cellVariable.CellVariable method), 654
allclose () (fiipy.variables.distanceVariable.DistanceVariable method), 672
allclose ()
    (fiipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable method), 689
allclose () (fiipy.variables.faceVariable.FaceVariable method), 703
allclose ()
    (fiipy.variables.gammaNoiseVariable.GammaNoiseVariable method), 716
allclose ()
    (fiipy.variables.gaussianNoiseVariable.GaussianNoiseVariable method), 732
allclose () (fiipy.variables.histogramVariable.HistogramVariable method), 747
allclose () (fiipy.variables.meshVariable.MeshVariable method), 762
allclose () (fiipy.variables.modularVariable.ModularVariable method), 773
allclose () (fiipy.variables.noiseVariable.NoiseVariable method), 788
allclose ()
    (fiipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable method), 803
allclose ()
    (fiipy.variables.surfactantConvectionVariable.SurfactantConvectionVariable method), 814
allclose () (fiipy.variables.surfactantVariable.SurfactantVariable method), 826
allclose ()
    (fiipy.variables.uniformNoiseVariable.UniformNoiseVariable method), 842
allclose () (fiipy.variables.variable.Variable method), 856
allclose () (in module fiipy.tools.numerix), 625
allequal () (fiipy.tools.dimensions.physicalField.PhysicalField method), 605
allequal () (fiipy.tools.PhysicalField method), 582
allequal () (in module fiipy.tools.numerix), 625
allgather ()
    (fiipy.solvers.trilinos.comms.parallelEpetraCommWrapper.ParallelEpetraCommWr
    method), 460
any () (fiipy.variables.betanoiseVariable.BetaNoiseVariable method), 640
any () (fiipy.variables.cellVariable.CellVariable method), 655
any () (fiipy.variables.distanceVariable.DistanceVariable method), 672
any ()
    (fiipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable method)

```

```

        method), 689
any() (fipy.variables.faceVariable.FaceVariable method), 704
any() (fipy.variables.gammaNoiseVariable.GammaNoiseVariable
      method), 716
any() (fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable
      method), 733
any() (fipy.variables.histogramVariable.HistogramVariable method),
      747
any() (fipy.variables.meshVariable.MeshVariable method), 762
any() (fipy.variables.modularVariable.ModularVariable method), 773
any() (fipy.variables.noiseVariable.NoiseVariable method), 789
any()
  (fipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFace
   Variable method), 803
any()
  (fipy.variables.surfactantConvectionVariable.SurfactantConvection
   Variable method), 815
any() (fipy.variables.surfactantVariable.SurfactantVariable method),
      826
any() (fipy.variables.uniformNoiseVariable.UniformNoiseVariable
      method), 842
any() (fipy.variables.variable.Variable method), 857
appendInfo() (fipy.tools.Vitals method), 593
appendInfo() (fipy.tools.vitals.Vitals method), 631
AppVeyor, 107
arccos() (fipy.tools.dimensions.physicalField.PhysicalField method),
      605
arccos() (fipy.tools.PhysicalField method), 582
arccosh() (fipy.tools.dimensions.physicalField.PhysicalField
      method), 605
arccosh() (fipy.tools.PhysicalField method), 583
arcsin() (fipy.tools.dimensions.physicalField.PhysicalField method),
      606
arcsin() (fipy.tools.PhysicalField method), 583
arctan, 1094, 1099
arctan() (fipy.tools.dimensions.physicalField.PhysicalField method),
      606
arctan() (fipy.tools.PhysicalField method), 583
arctan2, 1094, 1099
arctan2() (fipy.tools.dimensions.physicalField.PhysicalField
      method), 606
arctan2() (fipy.tools.PhysicalField method), 583
arctanh() (fipy.tools.dimensions.physicalField.PhysicalField
      method), 606
arctanh() (fipy.tools.PhysicalField method), 584
arithmeticFaceValue
  (fipy.variables.betanoiseVariable.BetaNoiseVariable
   property), 640
arithmeticFaceValue (fipy.variables.cellVariable.CellVariable
      property), 655
arithmeticFaceValue
  (fipy.variables.distanceVariable.DistanceVariable
   property), 672
arithmeticFaceValue
  (fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable
   property), 689
arithmeticFaceValue
  (fipy.variables.gammanoiseVariable.GammaNoiseVariable
   property), 716
arithmeticFaceValue
  (fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable
   property), 733
arithmeticFaceValue
  (fipy.variables.histogramVariable.HistogramVariable
   property), 747
arithmeticFaceValue
  (fipy.variables.modularVariable.ModularVariable
   property), 774
arithmeticFaceValue (fipy.variables.noiseVariable.NoiseVariable
      property), 789
arithmeticFaceValue
  (fipy.variables.surfactantVariable.SurfactantVariable
   property), 827
arithmeticFaceValue
  (fipy.variables.uniformNoiseVariable.UniformNoiseVariable
   property), 842
array, 1105, 1114
aspect2D (fipy.meshes.abstractMesh.AbstractMesh property), 136
aspect2D
  (fipy.meshes.cylindricalNonUniformGrid1D.CylindricalNonUniformGrid1D
   property), 146
aspect2D
  (fipy.meshes.cylindricalNonUniformGrid2D.CylindricalNonUniformGrid2D
   property), 154
aspect2D
  (fipy.meshes.cylindricalUniformGrid1D.CylindricalUniformGrid1D
   property), 162
aspect2D
  (fipy.meshes.cylindricalUniformGrid2D.CylindricalUniformGrid2D
   property), 169
aspect2D (fipy.meshes.gmshMesh.Gmsh2D property), 184
aspect2D (fipy.meshes.gmshMesh.Gmsh2DIn3DSpace property), 192
aspect2D (fipy.meshes.gmshMesh.Gmsh3D property), 201
aspect2D (fipy.meshes.gmshMesh.GmshGrid2D property), 210
aspect2D (fipy.meshes.gmshMesh.GmshGrid3D property), 218
aspect2D (fipy.meshes.mesh.Mesh property), 228
aspect2D (fipy.meshes.mesh1D.Mesh1D property), 237
aspect2D (fipy.meshes.mesh2D.Mesh2D property), 245
aspect2D (fipy.meshes.nonUniformGrid1D.NonUniformGrid1D
      property), 254
aspect2D (fipy.meshes.nonUniformGrid2D.NonUniformGrid2D
      property), 262
aspect2D (fipy.meshes.nonUniformGrid3D.NonUniformGrid3D
      property), 271
aspect2D (fipy.meshes.periodicGrid1D.PeriodicGrid1D property), 279
aspect2D (fipy.meshes.periodicGrid2D.PeriodicGrid2D property), 289
aspect2D (fipy.meshes.periodicGrid2D.PeriodicGrid2DLeftRight
      property), 297
aspect2D (fipy.meshes.periodicGrid2D.PeriodicGrid2DTopBottom
      property), 306
aspect2D (fipy.meshes.periodicGrid3D.PeriodicGrid3D property), 315
aspect2D (fipy.meshes.periodicGrid3D.PeriodicGrid3DFrontBack
      property), 323
aspect2D (fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRight
      property), 331
aspect2D
  (fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightFrontBack
   property), 339
aspect2D
  (fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightTopBottom
   property), 347
aspect2D (fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottom
      property), 354
aspect2D
  (fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottomFrontBack
   property), 362
aspect2D (fipy.meshes.skewedGrid2D.SkewedGrid2D property), 370
aspect2D
  (fipy.meshes.sphericalNonUniformGrid1D.SphericalNonUniformGrid1D
   property), 380
aspect2D
  (fipy.meshes.sphericalUniformGrid1D.SphericalUniformGrid1D
   property), 387
aspect2D (fipy.meshes.tri2D.Tri2D property), 396
aspect2D (fipy.meshes.uniformGrid.UniformGrid property), 403
aspect2D (fipy.meshes.uniformGrid1D.UniformGrid1D property), 410

```

`aspect2D (fipy.meshes.uniformGrid2D.UniformGrid2D property), 417`

`aspect2D (fipy.meshes.uniformGrid3D.UniformGrid3D property), 424`

`axes (exam-`

- `ples.levelSet.electroChem.matplotlibSurfactantViewer.Matplot`
- `cacheMatrix() (fipy.terms.firstOrderAdvectionTerm.FirstOrderAdvectionTerm method), 528`
- `property), 1080`

`axes`

- `(fipy.viewers.matplotlibViewer.abstractMatplotlib2DViewer.AbstractMatplotlib2DViewer property), 868`

`axes`

- `(fipy.viewers.matplotlibViewer.abstractMatplotlibViewer.AbstractMatplotlibViewer property), 871`

`axes`

- `(fipy.viewers.matplotlibViewer.matplotlib1DViewer.Matplotlib1DViewer property), 873`

`axes`

- `(fipy.viewers.matplotlibViewer.matplotlib2DContourViewer.Matplotlib2DContourViewer property), 876`

`axes`

- `(fipy.viewers.matplotlibViewer.matplotlib2DGridContourViewer.Matplotlib2DGridContourViewer property), 879`

`axes`

- `(fipy.viewers.matplotlibViewer.matplotlib2DGridViewer.Matplotlib2DGridViewer property), 882`

`axes`

- `(fipy.viewers.matplotlibViewer.matplotlib2DViewer.Matplotlib2DViewer property), 885`

`axes`

- `(fipy.viewers.matplotlibViewer.matplotlibStreamViewer.MatplotlibStreamViewer property), 889`

`axes`

- `(fipy.viewers.matplotlibViewer.matplotlibVectorViewer.MatplotlibVectorViewer property), 893`

`Azure, 107`

B

`Base (class in package.subpackage.base), 122`

`BetaNoiseVariable (class in fipy.variables.betaNoiseVariable), 633`

`BoundaryCondition (class in fipy.boundaryConditions.boundaryCondition), 127`

`Buildbot, 107`

C

`cacheMatrix, 1052`

`cacheMatrix() (fipy.terms.advectionTerm.AdvectionTerm method), 485`

`cacheMatrix() (fipy.terms.cellTerm.CellTerm method), 489`

`cacheMatrix() (fipy.terms.centralDiffConvectionTerm.CentralDifferenceConvectionTerm method), 494`

`cacheMatrix() (fipy.terms.diffusionTerm.DiffusionTerm method), 498`

`cacheMatrix() (fipy.terms.diffusionTermCorrection.DiffusionTermCorrection method), 501`

`cacheMatrix() (fipy.terms.diffusionTermNoCorrection.DiffusionTermNoCorrection method), 505`

`cacheMatrix() (fipy.terms.explicitDiffusionTerm.ExplicitDiffusionTerm method), 508`

`cacheMatrix() (fipy.terms.explicitUpwindConvectionTerm.ExplicitUpwindConvectionTerm method), 513`

`cacheMatrix() (fipy.terms.exponentialConvectionTerm.ExponentialConvectionTerm method), 518`

`cacheMatrix() (fipy.terms.faceTerm.FaceTerm method), 523`

`cacheMatrix() (fipy.terms.firstOrderAdvectionTerm.FirstOrderAdvectionTerm method), 528`

`cacheMatrix() (fipy.terms.hybridConvectionTerm.HybridConvectionTerm method), 533`

`cacheMatrix() (fipy.terms.implicitSourceTerm.ImplicitSourceTerm method), 537`

`cacheMatrix()`

`(fipy.terms.powerLawConvectionTerm.PowerLawConvectionTerm method), 543`

`cacheMatrix() (fipy.terms.residualTerm.ResidualTerm method), 547`

`cacheMatrix() (fipy.terms.sourceTerm.SourceTerm method), 551`

`cacheMatrix() (fipy.terms.term.Term method), 555`

`cacheMatrix() (fipy.terms.transientTerm.TransientTerm method), 560`

`cacheMatrix() (fipy.terms.upwindConvectionTerm.UpwindConvectionTerm method), 565`

`cacheMatrix() (fipy.terms.vanLeerConvectionTerm.VanLeerConvectionTerm method), 570`

`cacheMatrix() (fipy.terms.vanLeerConvectionTerm.VanLeerConvectionTerm method), 570`

`cacheRHsvector, 1052`

`cacheRHsvector() (fipy.terms.advectionTerm.AdvectionTerm method), 485`

`cacheRHsvector() (fipy.terms.cellTerm.CellTerm method), 489`

`cacheRHsvector() (fipy.terms.centralDiffConvectionTerm.CentralDifferenceConvectionTerm method), 494`

`cacheRHsvector() (fipy.terms.diffusionTerm.DiffusionTerm method), 498`

`cacheRHsvector() (fipy.terms.diffusionTermCorrection.DiffusionTermCorrection method), 501`

`cacheRHsvector() (fipy.terms.diffusionTermNoCorrection.DiffusionTermNoCorrection method), 505`

`cacheRHsvector() (fipy.terms.explicitDiffusionTerm.ExplicitDiffusionTerm method), 508`

`cacheRHsvector() (fipy.terms.explicitUpwindConvectionTerm.ExplicitUpwindConvectionTerm method), 513`

`cacheRHsvector() (fipy.terms.exponentialConvectionTerm.ExponentialConvectionTerm method), 518`

`cacheRHsvector() (fipy.terms.faceTerm.FaceTerm method), 523`

`cacheRHsvector() (fipy.terms.firstOrderAdvectionTerm.FirstOrderAdvectionTerm method), 528`

`cacheRHsvector() (fipy.terms.hybridConvectionTerm.HybridConvectionTerm method), 533`

`cacheRHsvector() (fipy.terms.implicitSourceTerm.ImplicitSourceTerm method), 537`

`CacheRHsvector()`

`(fipy.terms.powerLawConvectionTerm.PowerLawConvectionTerm method), 543`

`cacheRHsvector() (fipy.terms.residualTerm.ResidualTerm method), 547`

`cacheRHsvector() (fipy.terms.sourceTerm.SourceTerm method), 551`

`cacheRHsvector() (fipy.terms.term.Term method), 555`

`cacheRHsvector() (fipy.terms.transientTerm.TransientTerm method), 560`

`cacheRHsvector()`

`(fipy.terms.upwindConvectionTerm.UpwindConvectionTerm method), 565`

`cacheRHsvector()`

```

(fipy.terms.vanLeerConvectionTerm.VanLeerConvectionTerm
method), 570
calcDistanceFunction()
(fipy.variables.distanceVariable.DistanceVariable method),
673
ceil() (fipy.tools.dimensions.physicalField.PhysicalField method),
607
ceil() (fipy.tools.PhysicalField method), 584
cellCenters (fipy.meshes.abstractMesh.AbstractMesh property), 136
cellCenters
(fipy.meshes.cylindricalNonUniformGrid1D.CylindricalNonUniformGrid1D
property), 146
cellCenters
(fipy.meshes.cylindricalNonUniformGrid2D.CylindricalNonUniformGrid2D
property), 154
cellCenters
(fipy.meshes.cylindricalUniformGrid1D.CylindricalUniformGrid1D
property), 162
cellCenters
(fipy.meshes.cylindricalUniformGrid2D.CylindricalUniformGrid2D
property), 169
cellCenters (fipy.meshes.gmshMesh.Gmsh2D property), 184
cellCenters (fipy.meshes.gmshMesh.Gmsh2DIn3DSpace property),
193
cellCenters (fipy.meshes.gmshMesh.Gmsh3D property), 201
cellCenters (fipy.meshes.gmshMesh.GmshGrid2D property), 210
cellCenters (fipy.meshes.gmshMesh.GmshGrid3D property), 218
cellCenters (fipy.meshes.mesh.Mesh property), 228
cellCenters (fipy.meshes.mesh1D.Mesh1D property), 237
cellCenters (fipy.meshes.mesh2D.Mesh2D property), 245
cellCenters (fipy.meshes.nonUniformGrid1D.NonUniformGrid1D
property), 254
cellCenters (fipy.meshes.nonUniformGrid2D.NonUniformGrid2D
property), 262
cellCenters (fipy.meshes.nonUniformGrid3D.NonUniformGrid3D
property), 271
cellCenters (fipy.meshes.periodicGrid1D.PeriodicGrid1D property),
280
cellCenters (fipy.meshes.periodicGrid2D.PeriodicGrid2D property),
289
cellCenters (fipy.meshes.periodicGrid2D.PeriodicGrid2DLeftRight
property), 297
cellCenters (fipy.meshes.periodicGrid2D.PeriodicGrid2DTopBottom
property), 306
cellCenters (fipy.meshes.periodicGrid3D.PeriodicGrid3D property),
316
cellCenters (fipy.meshes.periodicGrid3D.PeriodicGrid3DFrontBack
property), 323
cellCenters (fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRight
property), 331
cellCenters
(fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightFrontBack
property), 339
cellCenters
(fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightTopBottom
property), 347
cellCenters (fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottom
property), 354
cellCenters
(fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottomFrontBack
property), 362
cellCenters (fipy.meshes.skewedGrid2D.SkewedGrid2D property),
371
cellCenters
(fipy.meshes.sphericalNonUniformGrid1D.SphericalNonUniformGrid1D
property), 380
cellCenters
(fipy.meshes.sphericalUniformGrid1D.SphericalUniformGrid1D
property), 387
cellCenters (fipy.meshes.tri2D.Tri2D property), 396
cellCenters (fipy.meshes.uniformGrid.UniformGrid property), 403
cellCenters (fipy.meshes.uniformGrid1D.UniformGrid1D property),
410
cellCenters (fipy.meshes.uniformGrid2D.UniformGrid2D property),
417
cellCenters (fipy.meshes.uniformGrid3D.UniformGrid3D property),
424
cellFaceIDs (fipy.meshes.abstractMesh.AbstractMesh property), 136
cellFaceIDs
(fipy.meshes.cylindricalNonUniformGrid1D.CylindricalNonUniformGrid1D
property), 146
cellFaceIDs
(fipy.meshes.cylindricalNonUniformGrid2D.CylindricalNonUniformGrid2D
property), 154
cellFaceIDs
(fipy.meshes.cylindricalUniformGrid1D.CylindricalUniformGrid1D
property), 162
cellFaceIDs (fipy.meshes.cylindricalUniformGrid2D.CylindricalUniformGrid2D
property), 169
cellFaceIDs (fipy.meshes.gmshMesh.Gmsh2D property), 184
cellFaceIDs (fipy.meshes.gmshMesh.Gmsh2DIn3DSpace property),
193
cellFaceIDs (fipy.meshes.gmshMesh.Gmsh3D property), 201
cellFaceIDs (fipy.meshes.gmshMesh.GmshGrid2D property), 210
cellFaceIDs (fipy.meshes.gmshMesh.GmshGrid3D property), 218
cellFaceIDs (fipy.meshes.mesh.Mesh property), 228
cellFaceIDs (fipy.meshes.mesh1D.Mesh1D property), 237
cellFaceIDs (fipy.meshes.mesh2D.Mesh2D property), 245
cellFaceIDs (fipy.meshes.nonUniformGrid1D.NonUniformGrid1D
property), 254
cellFaceIDs (fipy.meshes.nonUniformGrid2D.NonUniformGrid2D
property), 262
cellFaceIDs (fipy.meshes.nonUniformGrid3D.NonUniformGrid3D
property), 271
cellFaceIDs (fipy.meshes.periodicGrid1D.PeriodicGrid1D property),
280
cellFaceIDs (fipy.meshes.periodicGrid2D.PeriodicGrid2D property),
289
cellFaceIDs (fipy.meshes.periodicGrid2D.PeriodicGrid2DLeftRight
property), 297
cellFaceIDs (fipy.meshes.periodicGrid2D.PeriodicGrid2DTopBottom
property), 306
cellFaceIDs (fipy.meshes.periodicGrid3D.PeriodicGrid3D property),
316
cellFaceIDs (fipy.meshes.periodicGrid3D.PeriodicGrid3DFrontBack
property), 323
cellFaceIDs (fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRight
property), 331
cellFaceIDs
(fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightFrontBack
property), 339
cellFaceIDs
(fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightTopBottom
property), 347
cellFaceIDs (fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottom
property), 354
cellFaceIDs
(fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottomFrontBack
property), 362
cellFaceIDs (fipy.meshes.skewedGrid2D.SkewedGrid2D property),
371
cellFaceIDs
(fipy.meshes.sphericalNonUniformGrid1D.SphericalNonUniformGrid1D
property), 380
cellFaceIDs
(fipy.meshes.sphericalUniformGrid1D.SphericalUniformGrid1D
property), 387

```

(*fipy.meshes.sphericalUniformGrid1D.SphericalUniformGrid1D*
property), 387

cellFaceIDs (*fipy.meshes.tri2D.Tri2D* *property*), 396

cellFaceIDs (*fipy.meshes.uniformGrid.UniformGrid* *property*), 403

cellFaceIDs (*fipy.meshes.uniformGrid1D.UniformGrid1D* *property*),
 410

cellFaceIDs (*fipy.meshes.uniformGrid2D.UniformGrid2D* *property*),
 417

cellFaceIDs (*fipy.meshes.uniformGrid3D.UniformGrid3D* *property*),
 424

cellInterfaceAreas
 (*fipy.variables.distanceVariable.DistanceVariable*
property), 673

CellTerm (*class in fipy.terms.cellTerm*), 488

CellVariable, 931, 947, 1010, 1051, 1070, 1098, 1100, 1109, 1120,
 1124, 1141, 1147, 1168, 1170

CellVariable (*class in fipy.variables.cellVariable*), 649

cellVolumeAverage
 (*fipy.variables.betaNoiseVariable.BetaNoiseVariable*
property), 641

cellVolumeAverage (*fipy.variables.cellVariable.CellVariable*
property), 655

cellVolumeAverage
 (*fipy.variables.distanceVariable.DistanceVariable*
property), 674

cellVolumeAverage
 (*fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable*
property), 690

cellVolumeAverage
 (*fipy.variables.gammaNoiseVariable.GammaNoiseVariable*
property), 717

cellVolumeAverage
 (*fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable*
property), 733

cellVolumeAverage
 (*fipy.variables.histogramVariable.HistogramVariable*
property), 748

cellVolumeAverage
 (*fipy.variables.modularVariable.ModularVariable*
property), 774

cellVolumeAverage (*fipy.variables.noiseVariable.NoiseVariable*
property), 789

cellVolumeAverage
 (*fipy.variables.surfactantVariable.SurfactantVariable*
property), 827

cellVolumeAverage
 (*fipy.variables.uniformNoiseVariable.UniformNoiseVariable*
property), 843

CentralDifferenceConvectionTerm (*class in*
fipy.terms.centralDiffConvectionTerm), 492

CircleCI, 107

ClassicalAMGSolver (*class in*
fipy.solvers.pyamgx.classicalAMGSolver), 440

cmap (*exam-*
ples.levelSet.electroChem.matplotlibSurfactantViewer.*MatplotlibSurf-*
*pyt**acer*
property), 1080

cmap (*fipy.viewers.matplotlibViewer.abstractMatplotlib2DViewer*.*AbstractMat-*
*plotlib2D**Viewer*
property), 868

cmap (*fipy.viewers.matplotlibViewer.abstractMatplotlibViewer*.*AbstractMat-*
*plotlib**Viewer*
property), 871

cmap (*fipy.viewers.matplotlibViewer.matplotlib1DViewer*.*Matplotlib1D**Viewer*
property), 873

cmap (*fipy.viewers.matplotlibViewer.matplotlib2DContourViewer*.*Matplotlib2D**Contour*
Viewer
property), 876

cmap (*fipy.viewers.matplotlibViewer.matplotlib2DGridContourViewer*.*Matplotlib2D**Grid*
*Contour**Viewer*
property), 879

cmap (*fipy.viewers.matplotlibViewer.matplotlib2DGridViewer*.*Matplotlib2D**Grid**Viewer*
property), 882

cmap (*fipy.viewers.matplotlibViewer.matplotlib2DViewer*.*Matplotlib2D**Viewer*
property), 885

cmap (*fipy.viewers.matplotlibViewer.matplotlibStreamViewer*.*MatplotlibStream**Viewer*
property), 889

collection
 (*fipy.viewers.matplotlibViewer.matplotlibVectorViewer*.*MatplotlibVector**Viewer*
property), 893

colorbar (*exam-*
ples.levelSet.electroChem.matplotlibSurfactantViewer.*MatplotlibSurfactant**Viewer*
property), 1080

colorbar (*fipy.viewers.matplotlibViewer.abstractMatplotlib2DViewer*.*AbstractMatplotlib2D**Viewer*
property), 869

colorbar (*fipy.viewers.matplotlibViewer.abstractMatplotlibViewer*.*AbstractMatplotlibView-*
er
property), 871

colorbar (*fipy.viewers.matplotlibViewer.matplotlib1DViewer*.*Matplotlib1D**Viewer*
property), 873

colorbar (*fipy.viewers.matplotlibViewer.matplotlib2DContourViewer*.*Matplotlib2D**Contour**Viewer*
property), 876

colorbar (*fipy.viewers.matplotlibViewer.matplotlib2DGridContourViewer*.*Matplotlib2D**Grid**Contour**Viewer*
property), 879

colorbar (*fipy.viewers.matplotlibViewer.matplotlib2DGridViewer*.*Matplotlib2D**Grid**Viewer*
property), 882

colorbar (*fipy.viewers.matplotlibViewer.matplotlib2DViewer*.*Matplotlib2D**Viewer*
property), 885

colorbar (*fipy.viewers.matplotlibViewer.matplotlibStreamViewer*.*MatplotlibStream**Viewer*
property), 889

colorbar (*fipy.viewers.matplotlibViewer.matplotlibVectorViewer*.*MatplotlibVector**Viewer*
property), 893

command line option
 --cache, 33
 --inline, 33
 --lsmllib, 34
 --no-cache, 33
 --no-pysparse, 34

comms (*parent class in fipy.tools.comms.commWrapper*), 594

conda, 107

conjugate() (*fipy.tools.dimensions.physicalField.PhysicalField*
method), 607

conjugate() (*fipy.tools.PhysicalField* *method*), 584

constrain() (*fipy.variables.betaNoiseVariable.BetaNoiseVariable*
method), 662

constrain() (*fipy.variables.cellVariable.CellVariable* *method*), 656

```

constraint() (fipy.variables.distanceVariable.DistanceVariable  

   method), 674
constraint()  

   (fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable  

   method), 690
constraint() (fipy.variables.faceVariable.FaceVariable method), 704
constraint()  

   (fipy.variables.gammaNoiseVariable.GammaNoiseVariable  

   method), 717
constraint()  

   (fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable  

   method), 734
constraint() (fipy.variables.histogramVariable.HistogramVariable  

   method), 748
constraint() (fipy.variables.meshVariable.MeshVariable method),  

   762
constraint() (fipy.variables.modularVariable.ModularVariable  

   method), 774
constraint() (fipy.variables.noiseVariable.NoiseVariable method),  

   790
constraint()  

   (fipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable  

   method), 803
constraint()  

   (fipy.variables.surfactantConvectionVariable.SurfactantConvectionVariable  

   method), 815
constraint() (fipy.variables.surfactantVariable.SurfactantVariable  

   method), 827
constraint()  

   (fipy.variables.uniformNoiseVariable.UniformNoiseVariable  

   method), 843
constraint() (fipy.variables.variable.Variable method), 857
Constraint (class in fipy.boundaryConditions.constraint), 127
constraintMask (fipy.variables.betaNoiseVariable.BetaNoiseVariable  

   property), 642
constraintMask (fipy.variables.cellVariable.CellVariable property),  

   657
constraintMask (fipy.variables.distanceVariable.DistanceVariable  

   property), 675
constraintMask  

   (fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable  

   property), 691
constraintMask (fipy.variables.faceVariable.FaceVariable property),  

   705
constraintMask  

   (fipy.variables.gammaNoiseVariable.GammaNoiseVariable  

   property), 718
constraintMask  

   (fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable  

   property), 734
constraintMask  

   (fipy.variables.histogramVariable.HistogramVariable  

   property), 749
constraintMask (fipy.variables.meshVariable.MeshVariable  

   property), 763
constraintMask (fipy.variables.modularVariable.ModularVariable  

   property), 775
constraintMask (fipy.variables.noiseVariable.NoiseVariable  

   property), 790
constraintMask  

   (fipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable  

   property), 804
constraintMask  

   (fipy.variables.surfactantConvectionVariable.SurfactantConvectionVariable  

   property), 816
constraintMask  

   (fipy.variables.surfactantVariable.SurfactantVariable  

   property), 828

constraintMask  

   (fipy.variables.uniformNoiseVariable.UniformNoiseVariable  

   property), 844
continuous Integration, 107
conversionFactorTo()  

   (fipy.tools.dimensions.physicalField.PhysicalUnit method),  

   619
conversionTupleTo()  

   (fipy.tools.dimensions.physicalField.PhysicalUnit method),  

   620
convertToUnit() (fipy.tools.dimensions.physicalField.PhysicalField  

   method), 607
convertToUnit() (fipy.tools.PhysicalField method), 584
copy() (fipy.tools.dimensions.physicalField.PhysicalField method),  

   607
copy() (fipy.tools.PhysicalField method), 584
copy() (fipy.variables.betaNoiseVariable.BetaNoiseVariable method),  

   642
copy() (fipy.variables.cellVariable.CellVariable method), 657
copy() (fipy.variables.distanceVariable.DistanceVariable method), 676
copy()  

   (fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable  

   method), 692
copy() (fipy.variables.faceVariable.FaceVariable method), 705
copy() (fipy.variables.gammaNoiseVariable.GammaNoiseVariable  

   method), 719
copy() (fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable  

   method), 735
copy() (fipy.variables.histogramVariable.HistogramVariable method),  

   750
copy() (fipy.variables.meshVariable.MeshVariable method), 763
copy() (fipy.variables.modularVariable.ModularVariable method),  

   775
copy() (fipy.variables.noiseVariable.NoiseVariable method), 791
copy()  

   (fipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable  

   method), 804
copy()  

   (fipy.variables.surfactantConvectionVariable.SurfactantConvectionVariable  

   method), 816
copy() (fipy.variables.uniformNoiseVariable.UniformNoiseVariable  

   method), 845
copy() (fipy.variables.variable.Variable method), 858
cos() (fipy.tools.dimensions.physicalField.PhysicalField method), 607
cos() (fipy.tools.PhysicalField method), 585
cosh() (fipy.tools.dimensions.physicalField.PhysicalField method),  

   608
cosh() (fipy.tools.PhysicalField method), 585
CylindricalGrid1D() (in module fipy.meshes.factoryMeshes), 172
CylindricalGrid2D() (in module fipy.meshes.factoryMeshes), 172
CylindricalNonUniformGrid1D (class in  

   fipy.meshes.cylindricalNonUniformGrid1D), 140
CylindricalNonUniformGrid2D (class in  

   fipy.meshes.cylindricalNonUniformGrid2D), 149
CylindricalUniformGrid1D (class in  

   fipy.meshes.cylindricalUniformGrid1D), 158
CylindricalUniformGrid2D (class in  

   fipy.meshes.cylindricalUniformGrid2D), 165

D
DefaultAsymmetricSolver, 947, 1145
DefaultAsymmetricSolver (in module fipy.solvers), 427
DefaultSolver, 931
DefaultSolver (in module fipy.solvers), 427
deprecate() (in module fipy.tools.decorators), 595

```

DeprecationErroringTestProgram (*class in fipy.tests.test*), 575
 DiffusionTerm (*class in fipy.terms.diffusionTerm*), 497
 DiffusionTermCorrection (*class in fipy.terms.diffusionTermCorrection*), 501
 DiffusionTermNoCorrection (*class in fipy.terms.diffusionTermNoCorrection*), 504
 DistanceVariable, 1069
 DistanceVariable (*class in fipy.variables.distanceVariable*), 664
 divergence (*fipy.variables.faceVariable.FaceVariable property*), 705
 divergence (*fipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable property*), 805
 divergence
 (*fipy.variables.surfactantConvectionVariable.SurfactantConvectionVariable property*), 817
 divide() (*fipy.tools.dimensions.physicalField.PhysicalField method*), 608
 divide() (*fipy.tools.PhysicalField method*), 585
 doctest_raw_input() (*in module fipy*), 125
 documentElement (*fipy.tools.Vitals property*), 593
 documentElement (*fipy.tools.vitals.Vitals property*), 631
 DomDecompPreconditioner (*class in fipy.solvers.trilinos.preconditioners.domDecompPreconditioner*), 464
 dot() (*fipy.tools.dimensions.physicalField.PhysicalField method*), 608
 dot() (*fipy.tools.PhysicalField method*), 586
 dot() (*fipy.variables.betaNoiseVariable.BetaNoiseVariable method*), 643
 dot() (*fipy.variables.cellVariable.CellVariable method*), 658
 dot() (*fipy.variables.distanceVariable.DistanceVariable method*), 676
 dot()
 (*fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable method*), 692
 dot() (*fipy.variables.faceVariable.FaceVariable method*), 706
 dot() (*fipy.variables.gammaNoiseVariable.GammaNoiseVariable method*), 719
 dot() (*fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable method*), 735
 dot() (*fipy.variables.histogramVariable.HistogramVariable method*), 750
 dot() (*fipy.variables.meshVariable.MeshVariable method*), 764
 dot() (*fipy.variables.modularVariable.ModularVariable method*), 776
 dot() (*fipy.variables.noiseVariable.NoiseVariable method*), 791
 dot()
 (*fipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable method*), 805
 dot()
 (*fipy.variables.surfactantConvectionVariable.SurfactantConvectionVariable method*), 817
 dot() (*fipy.variables.surfactantVariable.SurfactantVariable method*), 829
 dot() (*fipy.variables.uniformNoiseVariable.UniformNoiseVariable method*), 845
 dot() (*in module fipy.tools.numerix*), 625
 DummyComm (*class in fipy.tools.comms.dummyComm*), 595
 DummySolver (*class in fipy.solvers.petsc.dummySolver*), 431
 DummySolver (*in module fipy.solvers*), 428
 DummyViewer (*class in fipy.viewers*), 861

E

environment variable
 FIPY_CACHE, 35
 FIPY_DISPLAY_MATRIX, 34
 FIPY_INCLUDE_NUMERIX_ALL, 35, 1176
 FIPY_INLINE, 34
 FIPY_INLINE_COMMENT, 34
 FIPY_LOG_CONFIG, 32, 34, 35

FIPY_SOLVERS, 25, 34
 FIPY_VERBOSE_SOLVER, 34
 FIPY_VIEWER, 35
 PETSC_OPTIONS, 35
 EpetraCommWrapper (*class in fipy.solvers.trilinos.comms.epetraCommWrapper*), 459
 error() (*in module fipy.steppers*), 472
 examples
 module, 919
 examples.benchmarking
 module, 920
 examples.benchmarking.benchmark
 module, 920
 examples.benchmarking.size
 module, 920
 examples.benchmarking.steps
 module, 920
 examples.benchmarking.utils
 module, 920
 examples.benchmarking.versions
 module, 920
 examples.ahnHilliard
 module, 920
 examples.ahnHilliard.mesh2D
 module, 921
 examples.ahnHilliard.mesh2DCoupled
 module, 923
 examples.ahnHilliard.mesh3D
 module, 926
 examples.ahnHilliard.sphere
 module, 928
 examples.ahnHilliard.sphereDaemon
 module, 930
 examples.ahnHilliard.tanh1D
 module, 930
 examples.ahnHilliard.test
 module, 932
 examples.chemotaxis
 module, 932
 examples.chemotaxis.input
 module, 933
 examples.chemotaxis.input2D
 module, 935
 examples.chemotaxis.parameters
 module, 936
 examples.chemotaxis.test
 module, 938
 examples.convection
 module, 938
 examples.convection.advection
 module, 938
 examples.convection.advection.explicitUpwind
 module, 939
 examples.convection.advection.implicitUpwind
 module, 939
 examples.convection.advection.vanLeerUpwind
 module, 939
 examples.convection.exponential1D
 module, 939
 examples.convection.exponential1D.cylindricalMesh1D
 module, 940
 examples.convection.exponential1D.cylindricalMesh1DNonUniform
 module, 941
 examples.convection.exponential1D.mesh1D
 module, 943
 examples.convection.exponential1D.tri2D
 module, 944
 examples.convection.exponential1DBack

```
    module, 945
examples.convection.exponential1DBack.mesh1D
    module, 945
examples.convection.exponential1DSource
    module, 946
examples.convection.exponential1DSource.mesh1D
    module, 947
examples.convection.exponential1DSource.tri2D
    module, 948
examples.convection.exponential2D
    module, 949
examples.convection.exponential2D.cylindricalMesh2D
    module, 949
examples.convection.exponential2D.cylindricalMesh2DNonUniform
    module, 951
examples.convection.exponential2D.mesh2D
    module, 952
examples.convection.exponential2D.tri2D
    module, 953
examples.convection.peclet
    module, 954
examples.convection.powerLaw1D
    module, 955
examples.convection.powerLaw1D.mesh1D
    module, 956
examples.convection.powerLaw1D.tri2D
    module, 957
examples.convection.robin
    module, 958
examples.convection.source
    module, 960
examples.convection.test
    module, 961
examples.diffusion
    module, 961
examples.diffusion.anisotropy
    module, 961
examples.diffusion.circle
    module, 963
examples.diffusion.circleQuad
    module, 968
examples.diffusion.coupled
    module, 973
examples.diffusion.electrostatics
    module, 975
examples.diffusion.explicit
    module, 979
examples.diffusion.explicit.mesh1D
    module, 980
examples.diffusion.explicit.mixedelement
    module, 981
examples.diffusion.explicit.test
    module, 982
examples.diffusion.explicit.tri2D
    module, 982
examples.diffusion.mesh1D
    module, 983
examples.diffusion.mesh20x20
    module, 1003
examples.diffusion.mesh20x20Coupled
    module, 1006
examples.diffusion.nthOrder
    module, 1009
examples.diffusion.nthOrder.input4thOrder1D
    module, 1010
examples.diffusion.nthOrder.input4thOrder_line
    module, 1012
examples.diffusion.nthOrder.test
    module, 1012
examples.diffusion.steadyState
    module, 1012
examples.diffusion.steadyState.mesh1D
    module, 1012
examples.diffusion.steadyState.mesh1D.inputPeriodic
    module, 1013
examples.diffusion.steadyState.mesh1D.tri2Dinput
    module, 1013
examples.diffusion.steadyState.mesh20x20
    module, 1014
examples.diffusion.steadyState.mesh20x20.gmshinput
    module, 1014
examples.diffusion.steadyState.mesh20x20.isotropy
    module, 1014
examples.diffusion.steadyState.mesh20x20.modifiedMeshInput
    module, 1015
examples.diffusion.steadyState.mesh20x20.orthoerror
    module, 1016
examples.diffusion.steadyState.mesh20x20.tri2Dinput
    module, 1017
examples.diffusion.steadyState.mesh50x50
    module, 1017
examples.diffusion.steadyState.mesh50x50.input
    module, 1017
examples.diffusion.steadyState.mesh50x50.tri2Dinput
    module, 1017
examples.diffusion.steadyState.otherMeshes
    module, 1018
examples.diffusion.steadyState.otherMeshes.cubicalProblem
    module, 1018
examples.diffusion.steadyState.otherMeshes.grid3Dinput
    module, 1018
examples.diffusion.steadyState.otherMeshes.prism
    module, 1018
examples.diffusion.steadyState.test
    module, 1019
examples.diffusion.test
    module, 1019
examples.diffusion.variable
    module, 1019
examples.elphf
    module, 1020
examples.elphf.diffusion
    module, 1021
examples.elphf.diffusion.mesh1D
    module, 1021
examples.elphf.diffusion.mesh1Ddimensional
    module, 1024
examples.elphf.diffusion.mesh2D
    module, 1026
examples.elphf.input
    module, 1029
examples.elphf.phase
    module, 1035
examples.elphf.phaseDiffusion
    module, 1038
examples.elphf.poisson
    module, 1046
examples.elphf.test
    module, 1049
examples.flow
    module, 1049
examples.flow.stokesCavity
    module, 1050
examples.flow.test
    module, 1054
examples.levelSet
```

```

    module, 1054
examples.levelSet.advection
    module, 1055
examples.levelSet.advection.circle
    module, 1055
examples.levelSet.advection.mesh1D
    module, 1057
examples.levelSet.advection.test
    module, 1058
examples.levelSet.advection.trench
    module, 1058
examples.levelSet.distanceFunction
    module, 1060
examples.levelSet.distanceFunction.circle
    module, 1060
examples.levelSet.distanceFunction.interior
    module, 1061
examples.levelSet.distanceFunction.mesh1D
    module, 1062
examples.levelSet.distanceFunction.square
    module, 1063
examples.levelSet.distanceFunction.test
    module, 1064
examples.levelSet.electroChem
    module, 1064
examples.levelSet.electroChem.adsorbingSurfactantEquation
    module, 1064
examples.levelSet.electroChem.adsorption
    module, 1064
examples.levelSet.electroChem.gapFillDistanceVariable
    module, 1065
examples.levelSet.electroChem.gapFillMesh
    module, 1065
examples.levelSet.electroChem.gold
    module, 1066
examples.levelSet.electroChem.howToWriteAScript
    module, 1067
examples.levelSet.electroChem.leveler
    module, 1073
examples.levelSet.electroChem.lines
    module, 1077
examples.levelSet.electroChem.matplotlibSurfactantViewer
    module, 1077
examples.levelSet.electroChem.mayaviSurfactantViewer
    module, 1081
examples.levelSet.electroChem.metalIonDiffusionEquation
    module, 1084
examples.levelSet.electroChem.simpleTrenchSystem
    module, 1084
examples.levelSet.electroChem.surfactantBulkDiffusionEquation
    module, 1087
examples.levelSet.electroChem.test
    module, 1087
examples.levelSet.electroChem.trenchMesh
    module, 1087
examples.levelSet.surfactant
    module, 1087
examples.levelSet.surfactant.circle
    module, 1088
examples.levelSet.surfactant.expandingCircle
    module, 1088
examples.levelSet.surfactant.square
    module, 1089
examples.levelSet.surfactant.test
    module, 1090
examples.levelSet.test
    module, 1090
examples.meshing
    module, 1090
examples.meshing.gmshRefinement
    module, 1090
examples.meshing.inputGrid2D
    module, 1090
examples.meshing.sphere
    module, 1091
examples.meshing.test
    module, 1092
examples.parallel
    module, 1092
examples.phase
    module, 1092
examples.phase.anisotropy
    module, 1093
examples.phase.anisotropyOLD
    module, 1097
examples.phase.binary
    module, 1100
examples.phase.binaryCoupled
    module, 1109
examples.phase.impingement
    module, 1119
examples.phase.impingement.mesh20x20
    module, 1119
examples.phase.impingement.mesh40x1
    module, 1123
examples.phase.impingement.test
    module, 1126
examples.phase.missOrientation
    module, 1126
examples.phase.missOrientation.circle
    module, 1126
examples.phase.missOrientation.mesh1D
    module, 1127
examples.phase.missOrientation.modCircle
    module, 1128
examples.phase.missOrientation.test
    module, 1128
examples.phase.polyxtal
    module, 1128
examples.phase.polyxtalCoupled
    module, 1134
examples.phase.quaternary
    module, 1140
examples.phase.simple
    module, 1147
examples.phase.symmetry
    module, 1155
examples.phase.test
    module, 1157
examples.reactiveWetting
    module, 1157
examples.reactiveWetting.liquidVapor1D
    module, 1157
examples.reactiveWetting.liquidVapor2D
    module, 1162
examples.reactiveWetting.test
    module, 1166
examples.riemann
    module, 1166
examples.riemann.acoustics
    module, 1166
examples.riemann.test
    module, 1167
examples.test
    module, 1167
examples.updating
    module, 1167

```

```

    module, 1167
examples.updating.update0_1to1_0
    module, 1167
examples.updating.update1_0to2_0
    module, 1171
examples.updating.update2_0to3_0
    module, 1175
execButNoTest() (in module fipy.tests doctestPlus), 573
exp, 932, 940, 942, 944, 947, 950, 952, 1068, 1105, 1114, 1121, 1125
ExplicitDiffusionTerm, 984, 1099, 1120, 1124
ExplicitDiffusionTerm (class in fipy.terms.explicitDiffusionTerm), 508
ExplicitUpwindConvectionTerm (class in
    fipy.terms.explicitUpwindConvectionTerm), 511
ExplicitVariableError, 475
ExponentialConvectionTerm, 1168
ExponentialConvectionTerm (class in
    fipy.terms.exponentialConvectionTerm), 516
ExponentialNoiseVariable (class in
    fipy.variables.exponentialNoiseVariable), 683
extendVariable() (fipy.variables.distanceVariable.DistanceVariable
    method), 676
exteriorFaces
    (fipy.meshes.cylindricalUniformGrid1D.CylindricalUniformGrid1D
    property), 162
exteriorFaces
    (fipy.meshes.sphericalUniformGrid1D.SphericalUniformGrid1D
    property), 387
exteriorFaces (fipy.meshes.uniformGrid1D.UniformGrid1D
    property), 410
extrude()
    (fipy.meshes.cylindricalNonUniformGrid2D.CylindricalNonUniformGrid2D
    method), 154
extrude() (fipy.meshes.gmshMesh.Gmsh2D method), 184
extrude() (fipy.meshes.gmshMesh.Gmsh2DIn3DSpace method), 193
extrude() (fipy.meshes.gmshMesh.GmshGrid2D method), 210
extrude() (fipy.meshes.mesh2D.Mesh2D method), 245
extrude() (fipy.meshes.nonUniformGrid2D.NonUniformGrid2D
    method), 262
extrude() (fipy.meshes.periodicGrid2D.PeriodicGrid2D method),
    289
extrude() (fipy.meshes.periodicGrid2D.PeriodicGrid2DLeftRight
    method), 297
extrude() (fipy.meshes.periodicGrid2D.PeriodicGrid2DTopBottom
    method), 306
extrude() (fipy.meshes.skewedGrid2D.SkewedGrid2D method), 371
extrude() (fipy.meshes.tri2D.Tri2D method), 396

F
faceGrad (fipy.variables.betaNoiseVariable.BetaNoiseVariable
    property), 643
faceGrad (fipy.variables.cellVariable.CellVariable property), 658
faceGrad (fipy.variables.distanceVariable.DistanceVariable property),
    677
faceGrad
    (fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable
    property), 692
faceGrad (fipy.variables.gammaNoiseVariable.GammaNoiseVariable
    property), 719
faceGrad
    (fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable
    property), 735
faceGrad (fipy.variables.histogramVariable.HistogramVariable
    property), 750
faceGrad (fipy.variables.modularVariable.ModularVariable property),
    776
faceGrad (fipy.variables.noiseVariable.NoiseVariable property), 791

faceGrad (fipy.variables.surfactantVariable.SurfactantVariable
    property), 829
faceGrad (fipy.variables.uniformNoiseVariable.UniformNoiseVariable
    property), 845
faceGradAverage
    (fipy.variables.betanoiseVariable.BetaNoiseVariable
    property), 643
faceGradAverage (fipy.variables.cellVariable.CellVariable property),
    658
faceGradAverage (fipy.variables.distanceVariable.DistanceVariable
    property), 677
faceGradAverage
    (fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable
    property), 692
faceGradAverage
    (fipy.variables.gammanoiseVariable.GammaNoiseVariable
    property), 719
faceGradAverage
    (fipy.variables.gaussiannoiseVariable.GaussianNoiseVariable
    property), 735
faceGradAverage
    (fipy.variables.histogramVariable.HistogramVariable
    property), 750
faceGradAverage (fipy.variables.modularVariable.ModularVariable
    property), 776
faceGradAverage (fipy.variables.noiseVariable.NoiseVariable
    property), 791
faceGradAverage
    (fipy.variables.surfactantVariable.SurfactantVariable
    property), 829
faceGradAverage
    (fipy.variables.uniformnoiseVariable.UniformNoiseVariable
    property), 845
faceGradNoMod (fipy.variables.modularVariable.ModularVariable
    property), 776
facesBack (fipy.meshes.abstractMesh.AbstractMesh property), 136
facesBack
    (fipy.meshes.cylindricalNonUniformGrid1D.CylindricalNonUniformGrid1D
    property), 146
facesBack
    (fipy.meshes.cylindricalNonUniformGrid2D.CylindricalNonUniformGrid2D
    property), 155
facesBack
    (fipy.meshes.cylindricalUniformGrid1D.CylindricalUniformGrid1D
    property), 162
facesBack
    (fipy.meshes.cylindricalUniformGrid2D.CylindricalUniformGrid2D
    property), 169
facesBack (fipy.meshes.gmshMesh.Gmsh2D property), 185
facesBack (fipy.meshes.gmshMesh.Gmsh2DIn3DSpace property), 193
facesBack (fipy.meshes.gmshMesh.Gmsh3D property), 201
facesBack (fipy.meshes.gmshMesh.GmshGrid2D property), 210
facesBack (fipy.meshes.gmshMesh.GmshGrid3D property), 218
facesBack (fipy.meshes.mesh.Mesh property), 228
facesBack (fipy.meshes.mesh1D.Mesh1D property), 237
facesBack (fipy.meshes.mesh2D.Mesh2D property), 246
facesBack (fipy.meshes.nonUniformGrid1D.NonUniformGrid1D
    property), 254
facesBack (fipy.meshes.nonUniformGrid2D.NonUniformGrid2D
    property), 263
facesBack (fipy.meshes.nonUniformGrid3D.NonUniformGrid3D
    property), 271
facesBack (fipy.meshes.periodicGrid1D.PeriodicGrid1D property),
    280
facesBack (fipy.meshes.periodicGrid2D.PeriodicGrid2D property),
    289
facesBack (fipy.meshes.periodicGrid2D.PeriodicGrid2DLeftRight
    property), 298

```

`facesBack (fipy.meshes.periodicGrid2D.PeriodicGrid2DTopBottom property), 306`

`facesBack (fipy.meshes.periodicGrid3D.PeriodicGrid3D property), 316`

`facesBack (fipy.meshes.periodicGrid3D.PeriodicGrid3DFrontBack property), 323`

`facesBack (fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRight property), 331`

`facesBack (fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightFrontBack property), 339`

`facesBack (fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightTopBottom property), 347`

`facesBack (fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottom property), 354`

`facesBack (fipy.meshes.skewedGrid2D.SkewedGrid2D property), 371`

`facesBack (fipy.meshes.sphericalNonUniformGrid1D.SphericalNonUniformGrid1D property), 380`

`facesBack (fipy.meshes.sphericalUniformGrid1D.SphericalUniformGrid1D property), 387`

`facesBack (fipy.meshes.tri2D.Tri2D property), 396`

`facesBack (fipy.meshes.uniformGrid.UniformGrid property), 403`

`facesBack (fipy.meshes.uniformGrid1D.UniformGrid1D property), 410`

`facesBack (fipy.meshes.uniformGrid2D.UniformGrid2D property), 417`

`facesBack (fipy.meshes.uniformGrid3D.UniformGrid3D property), 424`

`facesBottom (fipy.meshes.abstractMesh.AbstractMesh property), 136`

`facesBottom (fipy.meshes.cylindricalNonUniformGrid1D.CylindricalNonUniformGrid1D property), 146`

`facesBottom (fipy.meshes.cylindricalNonUniformGrid2D.CylindricalNonUniformGrid2D property), 155`

`facesBottom (fipy.meshes.cylindricalUniformGrid1D.CylindricalUniformGrid1D property), 162`

`facesBottom (fipy.meshes.cylindricalUniformGrid2D.CylindricalUniformGrid2D property), 169`

`facesBottom (fipy.meshes.gmshMesh.Gmsh2D property), 185`

`facesBottom (fipy.meshes.gmshMesh.Gmsh2DIn3DSpace property), 193`

`facesBottom (fipy.meshes.gmshMesh.Gmsh3D property), 201`

`facesBottom (fipy.meshes.gmshMesh.GmshGrid2D property), 210`

`facesBottom (fipy.meshes.gmshMesh.GmshGrid3D property), 218`

`facesBottom (fipy.meshes.mesh.Mesh property), 228`

`facesBottom (fipy.meshes.mesh1D.Mesh1D property), 237`

`facesBottom (fipy.meshes.mesh2D.Mesh2D property), 246`

`facesBottom (fipy.meshes.nonUniformGrid1D.NonUniformGrid1D property), 254`

`facesBottom (fipy.meshes.nonUniformGrid2D.NonUniformGrid2D property), 263`

`facesBottom (fipy.meshes.nonUniformGrid3D.NonUniformGrid3D property), 271`

`facesBottom (fipy.meshes.periodicGrid1D.PeriodicGrid1D property), 280`

`facesBottom (fipy.meshes.periodicGrid2D.PeriodicGrid2D property), 290`

`facesBottom (fipy.meshes.periodicGrid2D.PeriodicGrid2DLeftRight property), 298`

`facesBottom (fipy.meshes.periodicGrid2D.PeriodicGrid2DTopBottom property), 306`

`facesBottom (fipy.meshes.periodicGrid3D.PeriodicGrid3D property), 316`

`facesBottom (fipy.meshes.periodicGrid3D.PeriodicGrid3DFrontBack property), 324`

`facesBottom (fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRight property), 331`

`facesBottom (fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightFrontBack property), 339`

`facesBottom (fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightTopBottom property), 347`

`facesBottom (fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottom property), 355`

`facesBottom (fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottomFrontBack property), 362`

`facesBottom (fipy.meshes.skewedGrid2D.SkewedGrid2D property), 371`

`facesBottom (fipy.meshes.sphericalNonUniformGrid1D.SphericalNonUniformGrid1D property), 380`

`facesBottom (fipy.meshes.sphericalUniformGrid1D.SphericalUniformGrid1D property), 387`

`facesBottom (fipy.meshes.tri2D.Tri2D property), 396`

`facesBottom (fipy.meshes.uniformGrid.UniformGrid property), 403`

`facesBottom (fipy.meshes.uniformGrid1D.UniformGrid1D property), 410`

`facesBottom (fipy.meshes.uniformGrid2D.UniformGrid2D property), 417`

`facesBottom (fipy.meshes.uniformGrid3D.UniformGrid3D property), 425`

`facesDown (fipy.meshes.abstractMesh.AbstractMesh property), 136`

`facesDown (fipy.meshes.cylindricalNonUniformGrid1D.CylindricalNonUniformGrid1D property), 146`

`facesDown (fipy.meshes.cylindricalNonUniformGrid2D.CylindricalNonUniformGrid2D property), 155`

`facesDown (fipy.meshes.cylindricalUniformGrid1D.CylindricalUniformGrid1D property), 162`

`facesDown (fipy.meshes.cylindricalUniformGrid2D.CylindricalUniformGrid2D property), 169`

`facesDown (fipy.meshes.gmshMesh.Gmsh2D property), 185`

`facesDown (fipy.meshes.gmshMesh.Gmsh2DIn3DSpace property), 194`

`facesDown (fipy.meshes.gmshMesh.Gmsh3D property), 202`

`facesDown (fipy.meshes.gmshMesh.GmshGrid2D property), 211`

`facesDown (fipy.meshes.gmshMesh.GmshGrid3D property), 218`

`facesDown (fipy.meshes.mesh.Mesh property), 229`

`facesDown (fipy.meshes.mesh1D.Mesh1D property), 237`

`facesDown (fipy.meshes.mesh2D.Mesh2D property), 246`

`facesDown (fipy.meshes.nonUniformGrid1D.NonUniformGrid1D property), 255`

`facesDown (fipy.meshes.nonUniformGrid2D.NonUniformGrid2D property), 263`

`facesDown (fipy.meshes.nonUniformGrid3D.NonUniformGrid3D property), 271`

`facesDown (fipy.meshes.periodicGrid1D.PeriodicGrid1D property), 280`

`facesDown (fipy.meshes.periodicGrid2D.PeriodicGrid2D property), 290`

`facesDown (fipy.meshes.periodicGrid2D.PeriodicGrid2DLeftRight property), 298`

```

facesDown (fipy.meshes.periodicGrid2D.PeriodicGrid2DTopBottom
    property), 307
facesDown (fipy.meshes.periodicGrid3D.PeriodicGrid3D property),
    316
facesDown (fipy.meshes.periodicGrid3D.PeriodicGrid3DFrontBack
    property), 324
facesDown (fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRight
    property), 332
facesDown
    (fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightFrontBack
        property), 339
facesDown
    (fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightTopBottom
        property), 347
facesDown (fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottom
    property), 355
facesDown
    (fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottomFrontBack
        property), 363
facesDown (fipy.meshes.skewedGrid2D.SkewedGrid2D property), 372
facesDown
    (fipy.meshes.sphericalNonUniformGrid1D.SphericalNonUniformGrid1D
        property), 380
facesDown
    (fipy.meshes.sphericalUniformGrid1D.SphericalUniformGrid1D
        property), 387
facesDown (fipy.meshes.tri2D.Tri2D property), 397
facesDown (fipy.meshes.uniformGrid.UniformGrid property), 404
facesDown (fipy.meshes.uniformGrid1D.UniformGrid1D property),
    411
facesDown (fipy.meshes.uniformGrid2D.UniformGrid2D property),
    418
facesDown (fipy.meshes.uniformGrid3D.UniformGrid3D property),
    425
facesFront (fipy.meshes.abstractMesh.AbstractMesh property), 137
facesFront
    (fipy.meshes.cylindricalNonUniformGrid1D.CylindricalNonUniformGrid1D
        property), 147
facesFront
    (fipy.meshes.cylindricalNonUniformGrid2D.CylindricalNonUniformGrid2D
        property), 155
facesFront
    (fipy.meshes.cylindricalUniformGrid1D.CylindricalUniformGrid1D
        property), 163
facesFront
    (fipy.meshes.cylindricalUniformGrid2D.CylindricalUniformGrid2D
        property), 170
facesFront (fipy.meshes.gmshMesh.Gmsh2D property), 185
facesFront (fipy.meshes.gmshMesh.Gmsh2DIn3DSpace property),
    194
facesFront (fipy.meshes.gmshMesh.Gmsh3D property), 202
facesFront (fipy.meshes.gmshMesh.GmshGrid2D property), 211
facesFront (fipy.meshes.gmshMesh.GmshGrid3D property), 219
facesFront (fipy.meshes.mesh.Mesh property), 229
facesFront (fipy.meshes.mesh1D.Mesh1D property), 238
facesFront (fipy.meshes.mesh2D.Mesh2D property), 246
facesFront (fipy.meshes.nonUniformGrid1D.NonUniformGrid1D
    property), 255
facesFront (fipy.meshes.nonUniformGrid2D.NonUniformGrid2D
    property), 264
facesFront (fipy.meshes.nonUniformGrid3D.NonUniformGrid3D
    property), 272
facesFront (fipy.meshes.periodicGrid1D.PeriodicGrid1D property),
    280
facesFront (fipy.meshes.periodicGrid2D.PeriodicGrid2D property),
    290
facesFront (fipy.meshes.periodicGrid2D.PeriodicGrid2DLeftRight
    property), 299
facesFront (fipy.meshes.periodicGrid2D.PeriodicGrid2DTopBottom
    property), 307
facesFront (fipy.meshes.periodicGrid3D.PeriodicGrid3D property),
    316
facesFront (fipy.meshes.periodicGrid3D.PeriodicGrid3DFrontBack
    property), 324
facesFront (fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRight
    property), 332
facesFront
    (fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightFrontBack
        property), 340
facesFront
    (fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightTopBottom
        property), 347
facesFront (fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottom
    property), 355
facesFront
    (fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottomFrontBack
        property), 363
facesFront (fipy.meshes.skewedGrid2D.SkewedGrid2D property),
    372
facesFront
    (fipy.meshes.sphericalNonUniformGrid1D.SphericalNonUniformGrid1D
        property), 380
facesFront
    (fipy.meshes.sphericalUniformGrid1D.SphericalUniformGrid1D
        property), 387
facesFront (fipy.meshes.tri2D.Tri2D property), 397
facesFront (fipy.meshes.uniformGrid.UniformGrid property), 404
facesFront (fipy.meshes.uniformGrid1D.UniformGrid1D property),
    411
facesFront (fipy.meshes.uniformGrid2D.UniformGrid2D property),
    418
facesFront (fipy.meshes.uniformGrid3D.UniformGrid3D property),
    425
facesLeft (fipy.meshes.abstractMesh.AbstractMesh property), 137
facesLeft
    (fipy.meshes.cylindricalNonUniformGrid1D.CylindricalNonUniformGrid1D
        property), 147
facesLeft
    (fipy.meshes.cylindricalNonUniformGrid2D.CylindricalNonUniformGrid2D
        property), 155
facesLeft
    (fipy.meshes.cylindricalUniformGrid1D.CylindricalUniformGrid1D
        property), 163
facesLeft
    (fipy.meshes.cylindricalUniformGrid2D.CylindricalUniformGrid2D
        property), 170
facesLeft (fipy.meshes.gmshMesh.Gmsh2D property), 185
facesLeft (fipy.meshes.gmshMesh.Gmsh2DIn3DSpace property), 194
facesLeft (fipy.meshes.gmshMesh.Gmsh3D property), 202
facesLeft (fipy.meshes.gmshMesh.GmshGrid2D property), 211
facesLeft (fipy.meshes.gmshMesh.GmshGrid3D property), 219
facesLeft (fipy.meshes.mesh.Mesh property), 229
facesLeft (fipy.meshes.mesh1D.Mesh1D property), 238
facesLeft (fipy.meshes.mesh2D.Mesh2D property), 247
facesLeft (fipy.meshes.nonUniformGrid1D.NonUniformGrid1D
    property), 255
facesLeft (fipy.meshes.nonUniformGrid2D.NonUniformGrid2D
    property), 264
facesLeft (fipy.meshes.nonUniformGrid3D.NonUniformGrid3D
    property), 272
facesLeft (fipy.meshes.periodicGrid1D.PeriodicGrid1D property),
    281
facesLeft (fipy.meshes.periodicGrid2D.PeriodicGrid2D property),
    290
facesLeft (fipy.meshes.periodicGrid2D.PeriodicGrid2DLeftRight
    property), 299

```

`facesLeft (fipy.meshes.periodicGrid2D.PeriodicGrid2DTopBottom property), 307`

`facesLeft (fipy.meshes.periodicGrid3D.PeriodicGrid3D property), 317`

`facesLeft (fipy.meshes.periodicGrid3D.PeriodicGrid3DFrontBack property), 324`

`facesLeft (fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRight property), 332`

`facesLeft (fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightFrontBack property), 340`

`facesLeft (fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightTopBottom property), 348`

`facesLeft (fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottom property), 355`

`facesLeft (fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottomFrontBack property), 363`

`facesLeft (fipy.meshes.skewedGrid2D.SkewedGrid2D property), 372`

`facesLeft (fipy.meshes.sphericalNonUniformGrid1D.SphericalNonUniformGrid1D property), 381`

`facesLeft (fipy.meshes.sphericalUniformGrid1D.SphericalUniformGrid1D property), 388`

`facesLeft (fipy.meshes.tri2D.Tri2D property), 397`

`facesLeft (fipy.meshes.uniformGrid.UniformGrid property), 404`

`facesLeft (fipy.meshes.uniformGrid1D.UniformGrid1D property), 411`

`facesLeft (fipy.meshes.uniformGrid2D.UniformGrid2D property), 418`

`facesLeft (fipy.meshes.uniformGrid3D.UniformGrid3D property), 425`

`facesRight (fipy.meshes.abstractMesh.AbstractMesh property), 137`

`facesRight (fipy.meshes.cylindricalNonUniformGrid1D.CylindricalNonUniformGrid1D property), 147`

`facesRight (fipy.meshes.cylindricalNonUniformGrid2D.CylindricalNonUniformGrid2D property), 156`

`facesRight (fipy.meshes.cylindricalUniformGrid1D.CylindricalUniformGrid1D property), 163`

`facesRight (fipy.meshes.cylindricalUniformGrid2D.CylindricalUniformGrid2D property), 170`

`facesRight (fipy.meshes.gmshMesh.Gmsh2D property), 186`

`facesRight (fipy.meshes.gmshMesh.Gmsh2DIn3DSpace property), 194`

`facesRight (fipy.meshes.gmshMesh.Gmsh3D property), 202`

`facesRight (fipy.meshes.gmshMesh.GmshGrid2D property), 211`

`facesRight (fipy.meshes.gmshMesh.GmshGrid3D property), 219`

`facesRight (fipy.meshes.mesh.Mesh property), 229`

`facesRight (fipy.meshes.mesh1D.Mesh1D property), 238`

`facesRight (fipy.meshes.mesh2D.Mesh2D property), 247`

`facesRight (fipy.meshes.nonUniformGrid1D.NonUniformGrid1D property), 255`

`facesRight (fipy.meshes.nonUniformGrid2D.NonUniformGrid2D property), 264`

`facesRight (fipy.meshes.nonUniformGrid3D.NonUniformGrid3D property), 272`

`facesRight (fipy.meshes.periodicGrid1D.PeriodicGrid1D property), 281`

`facesRight (fipy.meshes.periodicGrid2D.PeriodicGrid2D property), 291`

`facesRight (fipy.meshes.periodicGrid2D.PeriodicGrid2DLeftRight property), 299`

`facesRight (fipy.meshes.periodicGrid2D.PeriodicGrid2DTopBottom property), 307`

`facesRight (fipy.meshes.periodicGrid3D.PeriodicGrid3D property), 317`

`facesRight (fipy.meshes.periodicGrid3D.PeriodicGrid3DFrontBack property), 325`

`facesRight (fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRight property), 332`

`facesRight (fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightFrontBack property), 340`

`facesRight (fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightTopBottom property), 348`

`facesRight (fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottom property), 356`

`facesRight (fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottomFrontBack property), 363`

`facesRight (fipy.meshes.skewedGrid2D.SkewedGrid2D property), 372`

`facesRight (fipy.meshes.sphericalNonUniformGrid1D.SphericalNonUniformGrid1D property), 381`

`facesRight (fipy.meshes.sphericalUniformGrid1D.SphericalUniformGrid1D property), 388`

`facesRight (fipy.meshes.tri2D.Tri2D property), 397`

`facesRight (fipy.meshes.uniformGrid.UniformGrid property), 404`

`facesRight (fipy.meshes.uniformGrid1D.UniformGrid1D property), 411`

`facesRight (fipy.meshes.uniformGrid2D.UniformGrid2D property), 418`

`facesRight (fipy.meshes.uniformGrid3D.UniformGrid3D property), 426`

`facesTop (fipy.meshes.abstractMesh.AbstractMesh property), 137`

`facesTop (fipy.meshes.cylindricalNonUniformGrid1D.CylindricalNonUniformGrid1D property), 147`

`facesTop (fipy.meshes.cylindricalNonUniformGrid2D.CylindricalNonUniformGrid2D property), 156`

`facesTop (fipy.meshes.cylindricalUniformGrid1D.CylindricalUniformGrid1D property), 163`

`facesTop (fipy.meshes.cylindricalUniformGrid2D.CylindricalUniformGrid2D property), 170`

`facesTop (fipy.meshes.gmshMesh.Gmsh2D property), 186`

`facesTop (fipy.meshes.gmshMesh.Gmsh2DIn3DSpace property), 195`

`facesTop (fipy.meshes.gmshMesh.Gmsh3D property), 203`

`facesTop (fipy.meshes.gmshMesh.GmshGrid2D property), 212`

`facesTop (fipy.meshes.gmshMesh.GmshGrid3D property), 219`

`facesTop (fipy.meshes.mesh.Mesh property), 230`

`facesTop (fipy.meshes.mesh1D.Mesh1D property), 238`

`facesTop (fipy.meshes.mesh2D.Mesh2D property), 247`

`facesTop (fipy.meshes.nonUniformGrid1D.NonUniformGrid1D property), 256`

`facesTop (fipy.meshes.nonUniformGrid2D.NonUniformGrid2D property), 264`

`facesTop (fipy.meshes.nonUniformGrid3D.NonUniformGrid3D property), 272`

`facesTop (fipy.meshes.periodicGrid1D.PeriodicGrid1D property), 281`

`facesTop (fipy.meshes.periodicGrid2D.PeriodicGrid2D property), 291`

`facesTop (fipy.meshes.periodicGrid2D.PeriodicGrid2DLeftRight property), 299`

`facesTop (fipy.meshes.periodicGrid2D.PeriodicGrid2DTopBottom property), 308`

```

facesTop (fipy.meshes.periodicGrid3D.PeriodicGrid3D property), 317
facesTop (fipy.meshes.periodicGrid3D.PeriodicGrid3DFrontBack
    property), 325
facesTop (fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRight
    property), 333
facesTop
    (fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightFrontBack
        property), 340
facesTop
    (fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightTopBottom
        property), 348
facesTop (fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottom
    property), 356
facesTop
    (fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottomFrontBack
        property), 364
facesTop (fipy.meshes.skewedGrid2D.SkewedGrid2D property), 373
facesTop
    (fipy.meshes.sphericalNonUniformGrid1D.SphericalNonUniformGrid1D
        property), 381
facesTop
    (fipy.meshes.sphericalUniformGrid1D.SphericalUniformGrid1D
        property), 388
facesTop (fipy.meshes.tri2D.Tri2D property), 398
facesTop (fipy.meshes.uniformGrid.UniformGrid property), 405
facesTop (fipy.meshes.uniformGrid1D.UniformGrid1D property), 412
facesTop (fipy.meshes.uniformGrid2D.UniformGrid2D property), 419
facesTop (fipy.meshes.uniformGrid3D.UniformGrid3D property), 426
facesUp (fipy.meshes.abstractMesh.AbstractMesh property), 138
facesUp
    (fipy.meshes.cylindricalNonUniformGrid1D.CylindricalNonUniformGrid1D
        property), 148
facesUp
    (fipy.meshes.cylindricalNonUniformGrid2D.CylindricalNonUniformGrid2D
        property), 156
facesUp
    (fipy.meshes.cylindricalUniformGrid1D.CylindricalUniformGrid1D
        property), 164
facesUp
    (fipy.meshes.cylindricalUniformGrid2D.CylindricalUniformGrid2D
        property), 171
facesUp (fipy.meshes.gmsh.Mesh.Gmsh2D property), 186
facesUp (fipy.meshes.gmsh.Mesh.Gmsh2DIn3DSpace property), 195
facesUp (fipy.meshes.gmsh.Mesh.Gmsh3D property), 203
facesUp (fipy.meshes.gmsh.Mesh.GmshGrid2D property), 212
facesUp (fipy.meshes.gmsh.Mesh.GmshGrid3D property), 220
facesUp (fipy.meshes.mesh.Mesh property), 230
facesUp (fipy.meshes.mesh1D.Mesh1D property), 239
facesUp (fipy.meshes.mesh2D.Mesh2D property), 247
facesUp (fipy.meshes.nonUniformGrid1D.NonUniformGrid1D
    property), 256
facesUp (fipy.meshes.nonUniformGrid2D.NonUniformGrid2D
    property), 265
facesUp (fipy.meshes.nonUniformGrid3D.NonUniformGrid3D
    property), 273
facesUp (fipy.meshes.periodicGrid1D.PeriodicGrid1D property), 281
facesUp (fipy.meshes.periodicGrid2D.PeriodicGrid2D property), 291
facesUp (fipy.meshes.periodicGrid2D.PeriodicGrid2DLeftRight
    property), 300
facesUp (fipy.meshes.periodicGrid2D.PeriodicGrid2DTopBottom
    property), 308
facesUp (fipy.meshes.periodicGrid3D.PeriodicGrid3D property), 317
facesUp (fipy.meshes.periodicGrid3D.PeriodicGrid3DFrontBack
    property), 325
facesUp (fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRight
    property), 333
facesUp
    (fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightFrontBack
        property), 341
facesUp
    (fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightTopBottom
        property), 348
facesUp (fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottom
    property), 356
facesUp
    (fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottomFrontBack
        property), 364
facesUp (fipy.meshes.skewedGrid2D.SkewedGrid2D property), 373
facesUp
    (fipy.meshes.sphericalNonUniformGrid1D.SphericalNonUniformGrid1D
        property), 381
facesUp
    (fipy.meshes.sphericalUniformGrid1D.SphericalUniformGrid1D
        property), 389
facesUp (fipy.meshes.tri2D.Tri2D property), 398
facesUp (fipy.meshes.uniformGrid.UniformGrid property), 405
facesUp (fipy.meshes.uniformGrid1D.UniformGrid1D property), 412
facesUp (fipy.meshes.uniformGrid2D.UniformGrid2D property), 419
facesUp (fipy.meshes.uniformGrid3D.UniformGrid3D property), 426
FaceTerm (class in fipy.terms.faceTerm), 522
faceValue (fipy.variables.betaNoiseVariable.BetaNoiseVariable
    property), 643
faceValue (fipy.variables.cellVariable.CellVariable property), 658
faceValue (fipy.variables.distanceVariable.DistanceVariable
    property), 677
faceValue
    (fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable
        property), 692
faceValue (fipy.variables.gammaNoiseVariable.GammaNoiseVariable
    property), 719
faceValue
    (fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable
        property), 735
faceValue (fipy.variables.histogramVariable.HistogramVariable
    property), 750
faceValue (fipy.variables.modularVariable.ModularVariable
    property), 776
faceValue (fipy.variables.noiseVariable.NoiseVariable property), 791
faceValue (fipy.variables.surfactantVariable.SurfactantVariable
    property), 830
faceValue
    (fipy.variables.uniformNoiseVariable.UniformNoiseVariable
        property), 845
FaceVariable, 990
FaceVariable (class in fipy.variables.faceVariable), 698
fig (exam-
    ples.levelSet.electroChem.matplotlibSurfactantViewer.MatplotlibSurfactantViewer
    property), 1080
fig
    (fipy.viewers.matplotlibViewer.abstractMatplotlib2DViewer.AbstractMatplotlib2D
        property), 869
fig
    (fipy.viewers.matplotlibViewer.abstractMatplotlibViewer.AbstractMatplotlibViewer
        property), 871
fig
    (fipy.viewers.matplotlibViewer.matplotlib1DViewer.Matplotlib1DViewer
        property), 874
fig
    (fipy.viewers.matplotlibViewer.matplotlib2DContourViewer.Matplotlib2DContour
        property), 876
fig
    (fipy.viewers.matplotlibViewer.matplotlib2DGridContourViewer.Matplotlib2DGrid
        property), 879
fig
    (fipy.viewers.matplotlibViewer.matplotlib2DGridViewer.Matplotlib2DGridViewer
        property), 882

```

```

fig                                         module, 149
    (fipy.viewers.matplotlibViewer.matplotlib2DViewer.Matplotlib2DViewer.
     property), 885
fig                                         module, 158
    (fipy.viewers.matplotlibViewer.matplotlibStreamViewer.MatplotlibStreamViewer.
     property), 899
fig                                         module, 172
    (fipy.viewers.matplotlibViewer.matplotlibVectorViewer.MatplotlibVectorViewer.
     property), 893
finalize_options() (fipy.tests.test.test method), 575
FiPy, 107
fipy                                         module, 125
fipy.boundaryConditions                      module, 126
fipy.boundaryConditions.boundaryCondition   module, 127
fipy.boundaryConditions.constraint          module, 127
fipy.boundaryConditions.fixedFlux           module, 128
fipy.boundaryConditions.fixedValue          module, 128
fipy.boundaryConditions.nthOrderBoundaryCondition module, 129
fipy.boundaryConditions.test                module, 129
fipy.matrices                                    module, 130
fipy.matrices.offsetSparseMatrix             module, 130
fipy.matrices.petScMatrix                    module, 130
fipy.matrices.pysparseMatrix                 module, 130
fipy.matrices.scipyMatrix                   module, 130
fipy.matrices.sparseMatrix                  module, 130
fipy.matrices.test                           module, 130
fipy.matrices.trilinosMatrix                module, 130
fipy.meshes                                     module, 130
fipy.meshes.abstractMesh                    module, 132
fipy.meshes.builders                         module, 139
fipy.meshes.builders.abstractGridBuilder   module, 140
fipy.meshes.builders.grid1DBuilder         module, 140
fipy.meshes.builders.grid2DBuilder         module, 140
fipy.meshes.builders.grid3DBuilder         module, 140
fipy.meshes.builders.periodicGrid1DBuilder module, 140
fipy.meshes.builders.utilityClasses        module, 140
fipy.meshes.cylindricalGrid1D              module, 140
fipy.meshes.cylindricalGrid2D              module, 140
fipy.meshes.cylindricalNonUniformGrid1D    module, 140
fipy.meshes.cylindricalNonUniformGrid2D    module, 140
fipy.meshes.cylindricalUniformGrid1D       module, 149
fipy.meshes.cylindricalUniformGrid2D       module, 158
fipy.meshes.factoryMeshes                  module, 165
fipy.meshes.gmshMesh                       module, 175
fipy.meshes.grid1D                          module, 223
fipy.meshes.grid2D                          module, 223
fipy.meshes.grid3D                          module, 223
fipy.meshes.mesh                           module, 223
fipy.meshes.mesh1D                         module, 232
fipy.meshes.mesh2D                         module, 240
fipy.meshes.nonUniformGrid1D              module, 249
fipy.meshes.nonUniformGrid2D              module, 257
fipy.meshes.nonUniformGrid3D              module, 266
fipy.meshes.periodicGrid1D               module, 274
fipy.meshes.periodicGrid2D               module, 283
fipy.meshes.periodicGrid3D               module, 309
fipy.meshes.representations             module, 365
fipy.meshes.representations.abstractRepresentation module, 365
fipy.meshes.representations.gridRepresentation module, 365
fipy.meshes.representations.meshRepresentation module, 365
fipy.meshes.skewedGrid2D                 module, 365
fipy.meshes.sphericalNonUniformGrid1D    module, 374
fipy.meshes.sphericalUniformGrid1D       module, 383
fipy.meshes.test                           module, 390
fipy.meshes.topologies                   module, 390
fipy.meshes.topologies.abstractTopology  module, 390
fipy.meshes.topologies.gridTopology      module, 390
fipy.meshes.topologies.meshTopology      module, 390
fipy.meshes.tri2D                         module, 390
fipy.meshes.uniformGrid                  module, 399
fipy.meshes.uniformGrid1D                module, 406
fipy.meshes.uniformGrid2D                module, 413
fipy.meshes.uniformGrid3D                module, 420
fipy.numerix

```

```
    module, 1169
fipy.solvers
    module, 427
fipy.solvers.petsc
    module, 429
fipy.solvers.petsc.comms
    module, 430
fipy.solvers.petsc.comms.parallelPETScCommWrapper
    module, 430
fipy.solvers.petsc.comms.petscCommWrapper
    module, 430
fipy.solvers.petsc.comms.serialPETScCommWrapper
    module, 431
fipy.solvers.petsc.dummySolver
    module, 431
fipy.solvers.petsc.linearBicgSolver
    module, 431
fipy.solvers.petsc.linearCGSSolver
    module, 432
fipy.solvers.petsc.linearGMRESSolver
    module, 432
fipy.solvers.petsc.linearLUSolver
    module, 433
fipy.solvers.petsc.linearPCGSolver
    module, 433
fipy.solvers.petsc.petscKrylovSolver
    module, 434
fipy.solvers.petsc.petscSolver
    module, 435
fipy.solvers.pyAMG
    module, 435
fipy.solvers.pyAMG.linearCGSSolver
    module, 436
fipy.solvers.pyAMG.linearGeneralSolver
    module, 437
fipy.solvers.pyAMG.linearGMRESSolver
    module, 436
fipy.solvers.pyAMG.linearLUSolver
    module, 438
fipy.solvers.pyAMG.linearPCGSolver
    module, 438
fipy.solvers.pyAMG.preconditioners
    module, 439
fipy.solvers.pyAMG.preconditioners.smoothedAggregationPref
    module, 439
fipy.solvers.pyamgx
    module, 439
fipy.solvers.pyamgx.aggregationAMGSolver
    module, 440
fipy.solvers.pyamgx.classicalAMGSolver
    module, 440
fipy.solvers.pyamgx.linearBiCGStabSolver
    module, 441
fipy.solvers.pyamgx.linearCGSolver
    module, 441
fipy.solvers.pyamgx.linearFGMRESSolver
    module, 442
fipy.solvers.pyamgx.linearGMRESSolver
    module, 443
fipy.solvers.pyamgx.linearLUSolver
    module, 443
fipy.solvers.pyamgx.preconditioners
    module, 444
fipy.solvers.pyamgx.preconditioners.preconditioners
    module, 444
fipy.solvers.pyamgx.pyAMGXSolver
    module, 444
fipy.solvers.pyamgx.smoothers
    module, 445
fipy.solvers.pyamgx.smoothers.smoothers
    module, 445
fipy.solvers.pysparse
    module, 445
fipy.solvers.pysparse.linearCGSSolver
    module, 446
fipy.solvers.pysparse.linearGMRESSolver
    module, 446
fipy.solvers.pysparse.linearJORSolver
    module, 447
fipy.solvers.pysparse.linearLUSolver
    module, 447
fipy.solvers.pysparse.linearPCGSolver
    module, 448
fipy.solvers.pysparse.preconditioners
    module, 448
fipy.solvers.pysparse.preconditioners.jacobiPreconditioner
    module, 448
fipy.solvers.pysparse.preconditioners.preconditioner
    module, 449
fipy.solvers.pysparse.preconditioners.ssorPreconditioner
    module, 449
fipy.solvers.pysparse.pysparseSolver
    module, 449
fipy.solvers.pysparseMatrixSolver
    module, 450
fipy.solvers.scipy
    module, 450
fipy.solvers.scipy.linearBicgstabSolver
    module, 450
fipy.solvers.scipy.linearCGSSolver
    module, 451
fipy.solvers.scipy.linearGMRESSolver
    module, 451
fipy.solvers.scipy.linearLUSolver
    module, 452
fipy.solvers.scipy.linearPCGSolver
    module, 452
fipy.solvers.scipy.scipyKrylovSolver
    module, 453
fipy.solvers.scipy.scipySolver
    module, 453
fipy.solvers.solver
    module, 453
fipy.solvers.test
    module, 458
fipy.solvers.trilinos
    module, 458
fipy.solvers.trilinos.comms
    module, 459
fipy.solvers.trilinos.comms.epetraCommWrapper
    module, 459
fipy.solvers.trilinos.comms.parallelEpetraCommWrapper
    module, 460
fipy.solvers.trilinos.comms.serialEpetraCommWrapper
    module, 460
fipy.solvers.trilinos.linearBicgstabSolver
    module, 461
fipy.solvers.trilinos.linearCGSSolver
    module, 461
fipy.solvers.trilinos.linearGMRESSolver
    module, 462
fipy.solvers.trilinos.linearLUSolver
    module, 462
fipy.solvers.trilinos.linearPCGSolver
    module, 463
fipy.solvers.trilinos.preconditioners
```

```

    module, 464
fipy.solvers.trilinos.preconditioners.domDecompPreconditioner module, 464
fipy.solvers.trilinos.preconditioners.icPreconditioner module, 464
fipy.solvers.trilinos.preconditioners.jacobiPreconditioner module, 465
fipy.solvers.trilinos.preconditioners.multilevelDDMLPreconditioner module, 465
fipy.solvers.trilinos.preconditioners.multilevelDDPReconditioner module, 465
fipy.solvers.trilinos.preconditioners.multilevelNSSAPreconditioner module, 466
fipy.solvers.trilinos.preconditioners.multilevelSAPreconditioner module, 466
fipy.solvers.trilinos.preconditioners.multilevelSGSPreconditioner module, 466
fipy.solvers.trilinos.preconditioners.multilevelSolverSmoothing module, 467
fipy.solvers.trilinos.preconditioners.preconditioner module, 467
fipy.solvers.trilinos.trilinosAztecOO Solver module, 468
fipy.solvers.trilinos.trilinosMLTest module, 469
fipy.solvers.trilinos.trilinosNonlinearSolver module, 469
fipy.solvers.trilinos.trilinosSolver module, 470
fipy.steppers
    module, 471
fipy.steppers.pidStepper module, 473
fipy.steppers.pseudoRKQSStepper module, 474
fipy.steppers.stepper module, 474
fipy.terms
    module, 474
fipy.terms.abstractBinaryTerm module, 481
fipy.terms.abstractConvectionTerm module, 481
fipy.terms.abstractDiffusionTerm module, 481
fipy.terms.abstractUpwindConvectionTerm module, 481
fipy.terms.advectionTerm module, 481
fipy.terms.asymmetricConvectionTerm module, 488
fipy.terms.binaryTerm module, 488
fipy.terms.cellTerm module, 488
fipy.terms.centralDiffConvectionTerm module, 492
fipy.terms.coupledBinaryTerm module, 497
fipy.terms.diffusionTerm module, 497
fipy.terms.diffusionTermCorrection module, 501
fipy.terms.diffusionTermNoCorrection module, 504
fipy.terms.explicitDiffusionTerm module, 508
fipy.terms.explicitSourceTerm module, 511
fipy.terms.explicitUpwindConvectionTerm module, 511
fipy.terms.exponentialConvectionTerm module, 516
fipy.terms.faceTerm module, 522
fipy.terms.firstOrderAdvectionTerm module, 526
fipy.terms.hybridConvectionTerm module, 531
fipy.terms.implicitDiffusionTerm module, 536
fipy.terms.implicitDiffusionTerm.DiffusionTerm object, 964, 969
fipy.terms.implicitSourceTerm module, 536
fipy.terms.residualTerm module, 546
fipy.terms.sourceTerm module, 550
fipy.terms.term module, 554
fipy.terms.test module, 558
fipy.terms.transientTerm module, 558
fipy.terms.transientTerm.TransientTerm object, 964, 969
fipy.terms.unaryTerm module, 563
fipy.terms.upwindConvectionTerm module, 563
fipy.terms.vanLeerConvectionTerm module, 568
fipy.testFiPy module, 573
fipy.tests
    module, 573
fipy.tests.doctestPlus module, 573
fipy.tests.lateImportTest module, 575
fipy.tests.test module, 575
fipy.tests.testProgram module, 576
fipy.tools
    module, 576
fipy.tools.comms
    module, 594
fipy.tools.comms.commWrapper module, 594
fipy.tools.comms.dummyComm module, 595
fipy.tools.debug module, 595
fipy.tools.decorators
    module, 595
fipy.tools.dimensions
    module, 596
fipy.tools.dimensions.DictWithDefault module, 596
fipy.tools.dimensions.NumberDict

```

```
    module, 596
fipy.tools.dimensions.physicalField
    module, 596
fipy.tools.dump
    module, 621, 1122
fipy.tools.inline
    module, 622
fipy.tools.logging
    module, 622
fipy.tools.numerix
    module, 622
fipy.tools.parser
    module, 628, 1068, 1119
fipy.tools.sharedtempfile
    module, 629
fipy.tools.test
    module, 630
fipy.tools.vector
    module, 630
fipy.tools.version
    module, 630
fipy.tools.vitals
    module, 631
fipy.variables
    module, 631
fipy.variables.addOverFacesVariable
    module, 633
fipy.variables.arithmeticCellToFaceVariable
    module, 633
fipy.variables.betaNoiseVariable
    module, 633
fipy.variables.binaryOperatorVariable
    module, 649
fipy.variables.cellToFaceVariable
    module, 649
fipy.variables.cellVariable
    module, 649
fipy.variables.cellVariable.CellVariable
    object, 963, 968
fipy.variables.constant
    module, 664
fipy.variables.constraintMask
    module, 664
fipy.variables.coupledCellVariable
    module, 664
fipy.variables.distanceVariable
    module, 664
fipy.variables.exponentialNoiseVariable
    module, 683
fipy.variables.faceGradContributionsVariable
    module, 698
fipy.variables.faceGradVariable
    module, 698
fipy.variables.faceVariable
    module, 698
fipy.variables.gammaNoiseVariable
    module, 709
fipy.variables.gaussCellGradVariable
    module, 725
fipy.variables.gaussianNoiseVariable
    module, 725
fipy.variables.harmonicCellToFaceVariable
    module, 742
fipy.variables.histogramVariable
    module, 742
fipy.variables.interfaceAreaVariable
    module, 756
fipy.variables.interfaceFlagVariable
    module, 756
fipy.variables.leastSquaresCellGradVariable
    module, 756
fipy.variables.levelSetDiffusionVariable
    module, 756
fipy.variables.meshVariable
    module, 756
fipy.variables.minmodCellToFaceVariable
    module, 767
fipy.variables.modCellGradVariable
    module, 767
fipy.variables.modCellToFaceVariable
    module, 767
fipy.variables.modFaceGradVariable
    module, 767
fipy.variables.modPhysicalField
    module, 767
fipy.variables.modularVariable
    module, 767
fipy.variables.noiseVariable
    module, 782
fipy.variables.operatorVariable
    module, 798
fipy.variables.scharfetterGummelFaceVariable
    module, 798
fipy.variables.surfactantConvectionVariable
    module, 809
fipy.variables.surfactantVariable
    module, 820
fipy.variables.test
    module, 836
fipy.variables.unaryOperatorVariable
    module, 836
fipy.variables.uniformNoiseVariable
    module, 836
fipy.variables.variable
    module, 851
fipy.viewers, 1171
    module, 861, 932, 941, 942, 944, 948, 951, 952, 985, 1004,
        1007, 1011, 1052, 1099, 1106, 1115, 1121, 1125, 1147
fipy.viewers.matplotlibViewer
    module, 865
fipy.viewers.matplotlibViewer.abstractMatplotlib2DViewer
    module, 867
fipy.viewers.matplotlibViewer.abstractMatplotlibViewer
    module, 870
fipy.viewers.matplotlibViewer.matplotlib1DViewer
    module, 872
fipy.viewers.matplotlibViewer.matplotlib2DContourViewer
    module, 875
fipy.viewers.matplotlibViewer.matplotlib2DGridContourViewer
    module, 877
fipy.viewers.matplotlibViewer.matplotlib2DGridViewer
    module, 881
fipy.viewers.matplotlibViewer.matplotlib2DViewer
    module, 883
fipy.viewers.matplotlibViewer.matplotlibSparseMatrixViewer
    module, 886
fipy.viewers.matplotlibViewer.matplotlibStreamViewer
    module, 886
fipy.viewers.matplotlibViewer.matplotlibVectorViewer
    module, 891
fipy.viewers.matplotlibViewer.test
    module, 894
fipy.viewers.mayaviViewer
    module, 894
fipy.viewers.mayaviViewer.mayaviClient
    module, 898
```

fipy.viewers.mayaviViewer.mayaviDaemon
 module, 901
fipy.viewers.mayaviViewer.test
 module, 902
fipy.viewers.multiViewer
 module, 902
fipy.viewers.test
 module, 904
fipy.viewers.testinteractive
 module, 904
fipy.viewers.tsvViewer
 module, 904
fipy.viewers.tsvViewer.TSVViewer
 object, 965, 970
fipy.viewers.viewer
 module, 906
fipy.viewers.vtkViewer
 module, 908
fipy.viewers.vtkViewer.test
 module, 912
fipy.viewers.vtkViewer.vtkCellViewer
 module, 912
fipy.viewers.vtkViewer.vtkFaceViewer
 module, 914
fipy.viewers.vtkViewer.vtkViewer
 module, 916
FIPY_INCLUDE_NUMERIX_ALL, 1176
FIPY_LOG_CONFIG, 32, 35
FIPY_SOLVERS, 25, 34
firstChild (*fipy.tools.Vitals property*), 593
firstChild (*fipy.tools.vitals.Vitals property*), 631
FirstOrderAdvectionTerm (*class in fipy.terms.firstOrderAdvectionTerm*), 526
FixedFlux, 1167
FixedFlux (*class in fipy.boundaryConditions.fixedFlux*), 128
FixedValue, 1167, 1170
FixedValue (*class in fipy.boundaryConditions.fixedValue*), 128
floor() (*fipy.tools.dimensions.physicalField.PhysicalField method*), 608
floor() (*fipy.tools.PhysicalField method*), 586
fps (*fipy.viewers.mayaviViewer.MayaviClient property*), 896
fps (*fipy.viewers.mayaviViewer.mayaviClient.MayaviClient property*), 900

G

GammaNoiseVariable (*class in fipy.variables.gammaNoiseVariable*), 709
gaussGrad (*fipy.variables.betaNoiseVariable.BetaNoiseVariable property*), 643
gaussGrad (*fipy.variables.cellVariable.CellVariable property*), 658
gaussGrad (*fipy.variables.distanceVariable.DistanceVariable property*), 677
gaussGrad
(fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable property), 693
gaussGrad (*fipy.variables.gammaNoiseVariable.GammaNoiseVariable property*), 720
gaussGrad
(fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable property), 736
gaussGrad (*fipy.variables.histogramVariable.HistogramVariable property*), 751
gaussGrad (*fipy.variables.modularVariable.ModularVariable property*), 777
gaussGrad (*fipy.variables.noiseVariable.NoiseVariable property*), 792
gaussGrad (*fipy.variables.surfactantVariable.SurfactantVariable property*), 830

gaussGrad
(fipy.variables.uniformNoiseVariable.UniformNoiseVariable property), 846
GaussianNoiseVariable (*class in fipy.variables.gaussianNoiseVariable*), 725
GeneralSolver (*in module fipy.solvers*), 428
getSctype() (*fipy.tools.dimensions.physicalField.PhysicalField method*), 609
getSctype() (*fiPy.PhysicalField method*), 586
getSctype() (*fipy.variables.betanoiseVariable.BetaNoiseVariable method*), 643
getSctype() (*fipy.variables.cellVariable.CellVariable method*), 659
getSctype() (*fipy.variables.distanceVariable.DistanceVariable method*), 677
getSctype()
(fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable method), 693
getSctype() (*fipy.variables.faceVariable.FaceVariable method*), 706
getSctype()
(fipy.variables.gammaNoiseVariable.GammaNoiseVariable method), 720
getSctype()
(fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable method), 736
getSctype() (*fipy.variables.histogramVariable.HistogramVariable method*), 751
getSctype() (*fipy.variables.meshVariable.MeshVariable method*), 764
getSctype() (*fipy.variables.modularVariable.ModularVariable method*), 777
getSctype() (*fipy.variables.noiseVariable.NoiseVariable method*), 792
getSctype()
(fipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable method), 805
getSctype()
(fipy.variables.surfactantConvectionVariable.SurfactantConvectionVariable method), 817
getSctype() (*fipy.variables.surfactantVariable.SurfactantVariable method*), 830
getSctype()
(fipy.variables.uniformNoiseVariable.UniformNoiseVariable method), 846
getSctype() (*fipy.variables.variable.Variable method*), 858
getShape() (*in module fipy.tools.numerix*), 625
getUnit() (*in module fipy.tools.numerix*), 626
Gist1DViewer, 1171
GitHub Actions, 107
globalValue (*fipy.variables.betanoiseVariable.BetaNoiseVariable property*), 644
globalValue (*fipy.variables.cellVariable.CellVariable property*), 659
globalValue (*fipy.variables.distanceVariable.DistanceVariable property*), 677
globalValue
(fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable property), 693
globalValue
(fipy.variables.gammaNoiseVariable.GammaNoiseVariable property), 720
globalValue
(fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable property), 736
globalValue (*fipy.variables.histogramVariable.HistogramVariable property*), 751
globalValue (*fipy.variables.modularVariable.ModularVariable property*), 777
globalValue (*fipy.variables.noiseVariable.NoiseVariable property*), 792

```

globalValue (fipy.variables.surfactantVariable.SurfactantVariable
    property), 830
globalValue
    (fipy.variables.uniformNoiseVariable.UniformNoiseVariable
        property), 846
Gmsh, 107
gmsh
    module, 1066, 1074, 1085
Gmsh2D (class in fipy.meshes.gmshMesh), 175
Gmsh2DIn3DSpace (class in fipy.meshes.gmshMesh), 187
Gmsh3D (class in fipy.meshes.gmshMesh), 196
GmshException, 204
GmshFile (class in fipy.meshes.gmshMesh), 204
GmshGrid2D (class in fipy.meshes.gmshMesh), 205
GmshGrid3D (class in fipy.meshes.gmshMesh), 213
gmshVersion() (in module fipy.meshes.gmshMesh), 222
grad (fipy.variables.betaNoiseVariable.BetaNoiseVariable property),
    644
grad (fipy.variables.cellVariable.CellVariable property), 659
grad (fipy.variables.distanceVariable.DistanceVariable property), 678
grad
    (fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable
        property), 693
grad (fipy.variables.gammaNoiseVariable.GammaNoiseVariable
    property), 720
grad (fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable
    property), 736
grad (fipy.variables.histogramVariable.HistogramVariable property),
    751
grad (fipy.variables.modularVariable.ModularVariable property), 777
grad (fipy.variables.noiseVariable.NoiseVariable property), 792
grad (fipy.variables.surfactantVariable.SurfactantVariable property),
    830
grad (fipy.variables.uniformNoiseVariable.UniformNoiseVariable
    property), 846
Grid1D, 940, 943, 947, 950, 1010, 1057, 1100, 1109, 1123, 1140,
    1147, 1169
Grid1D() (in module fipy.meshes.factoryMeshes), 173
Grid2D, 930, 1003, 1006, 1050, 1060, 1062, 1069, 1097, 1119, 1167
Grid2D() (in module fipy.meshes.factoryMeshes), 173
Grid2DGistViewer, 1169
Grid3D() (in module fipy.meshes.factoryMeshes), 174

H
harmonicFaceValue
    (fipy.variables.betaNoiseVariable.BetaNoiseVariable
        property), 644
harmonicFaceValue (fipy.variables.cellVariable.CellVariable
    property), 659
harmonicFaceValue
    (fipy.variables.distanceVariable.DistanceVariable
        property), 678
harmonicFaceValue
    (fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable
        property), 693
harmonicFaceValue
    (fipy.variables.gammaNoiseVariable.GammaNoiseVariable
        property), 720
harmonicFaceValue
    (fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable
        property), 736
harmonicFaceValue
    (fipy.variables.histogramVariable.HistogramVariable
        property), 751
harmonicFaceValue
    (fipy.variables.modularVariable.ModularVariable
        property), 777
harmonicFaceValue (fipy.variables.noiseVariable.NoiseVariable
    property), 792
harmonicFaceValue (fipy.variables.surfactantVariable.SurfactantVariable
    property), 830
harmonicFaceValue (fipy.variables.uniformNoiseVariable.UniformNoiseVariable
    property), 846
harmonicFaceValue (fipy.variables.noiseVariable.NoiseVariable
    property), 792
harmonicFaceValue
    (fipy.variables.surfactantVariable.SurfactantVariable
        property), 831
harmonicFaceValue
    (fipy.variables.uniformNoiseVariable.UniformNoiseVariable
        property), 846
HistogramVariable (class in fipy.variables.histogramVariable), 742
HybridConvectionTerm (class in fipy.terms.hybridConvectionTerm),
    531

I
ICPreconditioner (class in
    fipy.solvers.trilinos.preconditioners.icPreconditioner), 464
id (exam-
    ples.levelSet.electroChem.matplotlibSurfactantViewer.MatplotlibSurfactantViewer
        property), 1080
id
    (fipy.viewers.matplotlibViewer.abstractMatplotlib2DViewer.AbstractMatplotlib2D
        property), 869
id
    (fipy.viewers.matplotlibViewer.abstractMatplotlibViewer.AbstractMatplotlibViewer
        property), 871
id
    (fipy.viewers.matplotlibViewer.matplotlib1DViewer.Matplotlib1DViewer
        property), 874
id
    (fipy.viewers.matplotlibViewer.matplotlib2DContourViewer.Matplotlib2DContour
        property), 876
id
    (fipy.viewers.matplotlibViewer.matplotlib2DGridContourViewer.Matplotlib2DGrid
        property), 879
id
    (fipy.viewers.matplotlibViewer.matplotlib2DGridViewer.Matplotlib2DGridViewer
        property), 882
id
    (fipy.viewers.matplotlibViewer.matplotlib2DViewer.Matplotlib2DViewer
        property), 885
id
    (fipy.viewers.matplotlibViewer.matplotlibStreamViewer.MatplotlibStreamViewer
        property), 889
id
    (fipy.viewers.matplotlibViewer.matplotlibVectorViewer.MatplotlibVectorViewer
        property), 893
IllegalConditionedPreconditionerWarning, 453
ImplicitDiffusionTerm (in module
    fipy.terms.implicitDiffusionTerm), 536
ImplicitSourceTerm, 1099, 1120, 1124, 1151
ImplicitSourceTerm (class in fipy.terms.implicitSourceTerm), 536
inBaseUnits() (fipy.tools.dimensions.physicalField.PhysicalField
    method), 609
inBaseUnits() (fipy.tools.PhysicalField method), 586
inBaseUnits() (fipy.variables.betaNoiseVariable.BetaNoiseVariable
    method), 644
inBaseUnits() (fipy.variables.cellVariable.CellVariable method), 659
inBaseUnits() (fipy.variables.distanceVariable.DistanceVariable
    method), 678
inBaseUnits()
    (fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable
        method), 694
inBaseUnits() (fipy.variables.faceVariable.FaceVariable method),
    706
inBaseUnits()
    (fipy.variables.gammaNoiseVariable.GammaNoiseVariable
        method), 721
inBaseUnits()
    (fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable
        method), 736

```

method), 737
inBaseUnits() (*ipy.variables.histogramVariable.HistogramVariable method*), 752
inBaseUnits() (*ipy.variables.meshVariable.MeshVariable method*), 764
inBaseUnits() (*ipy.variables.modularVariable.ModularVariable method*), 778
inBaseUnits() (*ipy.variables.noiseVariable.NoiseVariable method*), 793
inBaseUnits()
 (*ipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable method*), 806
inBaseUnits()
 (*ipy.variables.surfactantConvectionVariable.SurfactantConvectionVariable method*), 817
inBaseUnits() (*ipy.variables.surfactantVariable.SurfactantVariable method*), 831
inBaseUnits()
 (*ipy.variables.uniformNoiseVariable.UniformNoiseVariable method*), 847
inBaseUnits() (*ipy.variables.variable.Variable method*), 858
IncorrectSolutionVariable, 476
inDimensionless()
 (*ipy.tools.dimensions.physicalField.PhysicalField method*), 609
inDimensionless() (*ipy.tools.PhysicalField method*), 586
initialize_options() (*ipy.tests.test.test method*), 575
inRadians() (*ipy.tools.dimensions.physicalField.PhysicalField method*), 609
inRadians() (*ipy.tools.PhysicalField method*), 587
inSIUnits() (*ipy.tools.dimensions.physicalField.PhysicalField method*), 610
inSIUnits() (*ipy.tools.PhysicalField method*), 587
interfaceVar (*ipy.variables.surfactantVariable.SurfactantVariable property*), 832
inUnitsOf() (*ipy.tools.dimensions.physicalField.PhysicalField method*), 610
inUnitsOf() (*ipy.tools.PhysicalField method*), 587
inUnitsOf() (*ipy.variables.betanoiseVariable.BetaNoiseVariable method*), 644
inUnitsOf() (*ipy.variables.cellVariable.CellVariable method*), 660
inUnitsOf() (*ipy.variables.distanceVariable.DistanceVariable method*), 678
inUnitsOf()
 (*ipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable method*), 694
inUnitsOf() (*ipy.variables.faceVariable.FaceVariable method*), 706
inUnitsOf()
 (*ipy.variables.gammaNoiseVariable.GammaNoiseVariable method*), 721
inUnitsOf()
 (*ipy.variables.gaussianNoiseVariable.GaussianNoiseVariable method*), 737
inUnitsOf() (*ipy.variables.histogramVariable.HistogramVariable method*), 752
inUnitsOf() (*ipy.variables.meshVariable.MeshVariable method*), 764
inUnitsOf() (*ipy.variables.modularVariable.ModularVariable method*), 778
inUnitsOf() (*ipy.variables.noiseVariable.NoiseVariable method*), 793
inUnitsOf()
 (*ipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable method*), 806
inUnitsOf()
 (*ipy.variables.surfactantConvectionVariable.SurfactantConvectionVariable method*), 817
inUnitsOf() (*ipy.variables.surfactantVariable.SurfactantVariable method*), 831
inUnitsOf()
 (*ipy.variables.uniformNoiseVariable.UniformNoiseVariable method*), 847
inUnitsOf() (*ipy.variables.variable.Variable method*), 859
IPython, 107
isAngle() (*ipy.tools.dimensions.physicalField.PhysicalUnit method*), 620
isclose() (*in module ipy.tools.numerix*), 626
isDimensionless() (*ipy.tools.dimensions.physicalField.PhysicalUnit method*), 620
isDimensionlessOrAngle()
 (*ipy.tools.dimensions.physicalField.PhysicalUnit method*), 620
isInverseAngle() (*ipy.tools.dimensions.physicalField.PhysicalUnit method*), 621
itemset() (*ipy.tools.dimensions.physicalField.PhysicalField method*), 610
itemset() (*ipy.tools.PhysicalField method*), 588
Iterator, 1168

J

JacobiPreconditioner (*class in*
 ipy.solvers.pysparse.preconditioners.jacobiPreconditioner), 448
JacobiPreconditioner (*class in*
 ipy.solvers.trilinos.preconditioners.jacobiPreconditioner), 465
JSON, 107
justErrorVector() (*ipy.terms.advectionTerm.AdvectionTerm method*), 485
justErrorVector() (*ipy.terms.cellTerm.CellTerm method*), 489
justErrorVector()
 (*ipy.terms.centralDiffConvectionTerm.CentralDifferenceConvectionTerm method*), 494
justErrorVector() (*ipy.terms.diffusionTerm.DiffusionTerm method*), 498
justErrorVector()
 (*ipy.terms.diffusionTermCorrection.DiffusionTermCorrection method*), 501
justErrorVector()
 (*ipy.terms.diffusionTermNoCorrection.DiffusionTermNoCorrection method*), 505
justErrorVector()
 (*ipy.terms.explicitDiffusionTerm.ExplicitDiffusionTerm method*), 508
justErrorVector()
 (*ipy.terms.explicitUpwindConvectionTerm.ExplicitUpwindConvectionTerm method*), 514
justErrorVector()
 (*ipy.terms.exponentialConvectionTerm.ExponentialConvectionTerm method*), 519
justErrorVector() (*ipy.terms.faceTerm.FaceTerm method*), 523
justErrorVector()
 (*ipy.terms.firstOrderAdvectionTerm.FirstOrderAdvectionTerm method*), 528
justErrorVector()
 (*ipy.terms.hybridConvectionTerm.HybridConvectionTerm method*), 533
justErrorVector()
 (*ipy.terms.implicitSourceTerm.ImplicitSourceTerm method*), 538
justErrorVector()

```
(fipy.terms.powerLawConvectionTerm.PowerLawConvectionTerm
method), 543
justErrorVector() (fipy.terms.residualTerm.ResidualTerm method),
547
justErrorVector() (fipy.terms.sourceTerm.SourceTerm method),
551
justErrorVector() (fipy.terms.term.Term method), 555
justErrorVector() (fipy.terms.transientTerm.TransientTerm
method), 560
justErrorVector()
(fipy.terms.upwindConvectionTerm.UpwindConvectionTerm
method), 565
justErrorVector()
(fipy.terms.vanLeerConvectionTerm.VanLeerConvectionTerm
method), 570
justResidualVector() (fipy.terms.advectionTerm.AdvectionTerm
method), 485
justResidualVector() (fipy.terms.cellTerm.CellTerm method), 490
justResidualVector()
(fipy.terms.centralDiffConvectionTerm.CentralDifferenceConvectionTerm
method), 495
justResidualVector() (fipy.terms.diffusionTerm.DiffusionTerm
method), 499
justResidualVector()
(fipy.terms.diffusionTermCorrection.DiffusionTermCorrection
method), 502
justResidualVector()
(fipy.terms.diffusionTermNoCorrection.DiffusionTermNoCorrection
method), 505
justResidualVector()
(fipy.terms.explicitDiffusionTerm.ExplicitDiffusionTerm
method), 509
justResidualVector()
(fipy.terms.explicitUpwindConvectionTerm.ExplicitUpwindConvectionTerm
method), 514
justResidualVector()
(fipy.terms.exponentialConvectionTerm.ExponentialConvectionTerm
method), 519
justResidualVector() (fipy.terms.faceTerm.FaceTerm method), 524
justResidualVector()
(fipy.terms.firstOrderAdvectionTerm.FirstOrderAdvectionTerm
method), 529
justResidualVector()
(fipy.terms.hybridConvectionTerm.HybridConvectionTerm
method), 534
justResidualVector()
(fipy.terms.implicitSourceTerm.ImplicitSourceTerm
method), 538
justResidualVector()
(fipy.terms.powerLawConvectionTerm.PowerLawConvectionTerm
method), 543
justResidualVector() (fipy.terms.residualTerm.ResidualTerm
method), 547
justResidualVector() (fipy.terms.sourceTerm.SourceTerm method),
552
justResidualVector() (fipy.terms.term.Term method), 555
justResidualVector() (fipy.terms.transientTerm.TransientTerm
method), 560
justResidualVector()
(fipy.terms.upwindConvectionTerm.UpwindConvectionTerm
method), 566
justResidualVector()
(fipy.terms.vanLeerConvectionTerm.VanLeerConvectionTerm
method), 571
```

K

`kwargs`

```
(fipy.viewers.matplotlibViewer.matplotlibStreamViewer.MatplotlibStreamViewer
property), 889
```

L

```
L1error() (in module fipy.steppers), 471
L1norm() (in module fipy.tools.numerix), 624
L2error() (in module fipy.steppers), 471
L2norm() (in module fipy.tools.numerix), 624
lastChild (fipy.tools.Vitals property), 593
lastChild (fipy.tools.vitals.Vitals property), 631
leastSquaresGrad
(fipy.variables.betaNoiseVariable.BetaNoiseVariable
property), 645
leastSquaresGrad (fipy.variables.cellVariable.CellVariable
property), 660
leastSquaresGrad (fipy.variables.distanceVariable.DistanceVariable
property), 679
leastSquaresGrad
(fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable
property), 694
leastSquaresGrad
(fipy.variables.gammaNoiseVariable.GammaNoiseVariable
property), 721
leastSquaresGrad
(fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable
property), 738
leastSquaresGrad
(fipy.variables.histogramVariable.HistogramVariable
property), 753
leastSquaresGrad (fipy.variables.modularVariable.ModularVariable
property), 778
leastSquaresGrad (fipy.variables.noiseVariable.NoiseVariable
property), 794
leastSquaresGrad
(fipy.variables.surfactantVariable.SurfactantVariable
property), 832
leastSquaresGrad
(fipy.variables.uniformNoiseVariable.UniformNoiseVariable
property), 847
levels
(fipy.viewers.matplotlibViewer.matplotlib2DContourViewer.Matplotlib2DContour
property), 876
levels
(fipy.viewers.matplotlibViewer.matplotlib2DGridContourViewer.Matplotlib2DGrid
property), 879
LinearBicgSolver (class in fipy.solvers.petsc.linearBicgSolver), 431
LinearBiCGStabSolver (class in
fipy.solvers.pyamgx.linearBiCGStabSolver), 441
LinearBicgstabSolver (class in
fipy.solvers.scipy.linearBicgstabSolver), 450
LinearBicgstabSolver (class in
fipy.solvers.trilinos.linearBicgstabSolver), 461
LinearCGSolver (class in fipy.solvers.pyamgx.linearCGSolver), 441
LinearCGSSolver (class in fipy.solvers.petsc.linearCGSSolver), 432
LinearCGSSolver (class in fipy.solvers.pyAMG.linearCGSSolver),
436
LinearCGSSolver (class in fipy.solvers.pysparse.linearCGSSolver),
446
LinearCGSSolver (class in fipy.solvers.scipy.linearCGSSolver), 451
LinearCGSSolver (class in fipy.solvers.trilinos.linearCGSSolver), 461
LinearFGMRESSolver (class in
fipy.solvers.pyamgx.linearFGMRESSolver), 442
LinearGeneralSolver (class in
fipy.solvers.pyAMG.linearGeneralSolver), 437
LinearGMRESSolver (class in fipy.solvers.petsc.linearGMRESSolver),
432
```

`LinearGMRESSolver` (*class in*
`fipy.solvers.pyAMG.linearGMRESSolver`), 436
`LinearGMRESSolver` (*class in*
`fipy.solvers.pyamgx.linearGMRESSolver`), 443
`LinearGMRESSolver` (*class in*
`fipy.solvers.pysparse.linearGMRESSolver`), 446
`LinearGMRESSolver` (*class in*
`fipy.solvers.scipy.linearGMRESSolver`),
 451
`LinearGMRESSolver` (*class in*
`fipy.solvers.trilinos.linearGMRESSolver`), 462
`LinearJORSolver` (*class in*
`fipy.solvers.pysparse.linearJORSolver`),
 447
`LinearLUSolver`, 931, 1115, 1168
`LinearLUSolver` (*class in*
`fipy.solvers.petsc.linearLUSolver`), 433
`LinearLUSolver` (*class in*
`fipy.solvers.pyAMG.linearLUSolver`), 438
`LinearLUSolver` (*class in*
`fipy.solvers.pyamgx.linearLUSolver`), 443
`LinearLUSolver` (*class in*
`fipy.solvers.pysparse.linearLUSolver`), 447
`LinearLUSolver` (*class in*
`fipy.solvers.scipy.linearLUSolver`), 452
`LinearLUSolver` (*class in*
`fipy.solvers.trilinos.linearLUSolver`), 462
`LinearPCGSolver` (*class in*
`fipy.solvers.petsc.linearPCGSolver`), 433
`LinearPCGSolver` (*class in*
`fipy.solvers.pyAMG.linearPCGSolver`),
 438
`LinearPCGSolver` (*class in*
`fipy.solvers.pysparse.linearPCGSolver`),
 448
`LinearPCGSolver` (*class in*
`fipy.solvers.scipy.linearPCGSolver`), 452
`LinearPCGSolver` (*class in*
`fipy.solvers.trilinos.linearPCGSolver`),
 463
`LinearPCGSolver` (*in module*
`fipy.solvers.pyamgx.linearCGSolver`),
 442
`lines`
`(fipy.viewers.matplotlibViewer.matplotlib1DViewer.Matplotlib1DViewer`
`property)`, 874
`LINError()` (*in module*
`fipy.steppers`), 472
`LINFnorm()` (*in module*
`fipy.tools.numerix`), 624
`linux`, 108
`loadtxt`, 1073, 1100, 1121, 1125
`localName` (*fipy.tools.Vitals* *property*), 593
`localName` (*fipy.tools.vitals.Vitals* *property*), 631
`log`, 1105, 1114, 1143
`log` (*exam-*
`ples.levelSet.electroChem.matplotlibSurfactantViewer.MatplotlibSurfactantViewer`
`property`), 1080
`log`
`(fipy.viewers.matplotlibViewer.abstractMatplotlib2DViewer.AbstractMatplotlib2DViewer`
`property`), 869
`log`
`(fipy.viewers.matplotlibViewer.abstractMatplotlibViewer.AbstractMatplotlibViewer`
`property`), 871
`log`
`(fipy.viewers.matplotlibViewer.matplotlib1DViewer.Matplotlib1DViewer`
`property`), 874
`log`
`(fipy.viewers.matplotlibViewer.matplotlib2DContourViewer.Matplotlib2DContourViewer`
`property`), 876
`log`
`(fipy.viewers.matplotlibViewer.matplotlib2DGridContourViewer.Matplotlib2DGridContourViewer`
`property`), 879
`log`
`(fipy.viewers.matplotlibViewer.matplotlib2DGridViewer.Matplotlib2DGridViewer`
`property`), 882
`log`
`(fipy.viewers.matplotlibViewer.matplotlib2DViewer.Matplotlib2DViewer`
`property`), 885
`log`
`(fipy.viewers.matplotlibViewer.matplotlibStreamViewer.MatplotlibStreamViewer`
`property`), 889
`log`
`(fipy.viewers.matplotlibViewer.matplotlibVectorViewer.MatplotlibVectorViewer`
`property`), 891
`property`), 893
`log()` (*fipy.tools.dimensions.physicalField.PhysicalField* *method*), 611
`log()` (*fipy.tools.PhysicalField* *method*), 588
`log10()` (*fipy.tools.dimensions.physicalField.PhysicalField* *method*),
 611
`log10()` (*fipy.tools.PhysicalField* *method*), 588

M

`macOS`, 108
`mag` (*fipy.variables.betaNoiseVariable.BetaNoiseVariable* *property*), 645
`mag` (*fipy.variables.cellVariable.CellVariable* *property*), 661
`mag` (*fipy.variables.distanceVariable.DistanceVariable* *property*), 679
`mag` (*fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable*
property), 695
`mag` (*fipy.variables.faceVariable.FaceVariable* *property*), 707
`mag` (*fipy.variables.gammaNoiseVariable.GammaNoiseVariable*
property), 722
`mag` (*fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable*
property), 738
`mag` (*fipy.variables.histogramVariable.HistogramVariable* *property*),
 753
`mag` (*fipy.variables.meshVariable.MeshVariable* *property*), 765
`mag` (*fipy.variables.modularVariable.ModularVariable* *property*), 779
`mag` (*fipy.variables.noiseVariable.NoiseVariable* *property*), 794
`mag`
`(fipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable`
`property`), 806
`mag`
`(fipy.variables.surfactantConvectionVariable.SurfactantConvectionVariable`
`property`), 818
`mag` (*fipy.variables.surfactantVariable.SurfactantVariable* *property*),
 832
`mag` (*fipy.variables.uniformNoiseVariable.UniformNoiseVariable*
property), 848
`mag` (*fipy.variables.variable.Variable* *property*), 859
`main` (*in module*
`fipy.tests.testProgram`), 576
`main()` (*in module*
`fipy.viewers.mayaviViewer.mayaviDaemon`), 902
`makeMapVariables()` (*fipy.meshes.gmshMesh.MSHFile* *method*), 221
`Matplotlib`, 108
`Matplotlib1DViewer` (*class in*
`fipy.viewers.matplotlibViewer.matplotlib1DViewer`), 872
`Matplotlib2DContourViewer` (*class in*
`fipy.viewers.matplotlibViewer.matplotlib2DContourViewer`),
 875
`Matplotlib2DGridContourViewer` (*class in*
`fipy.viewers.matplotlibViewer.matplotlib2DGridContourViewer`),
 877
`Matplotlib2DGridViewer` (*class in*
`fipy.viewers.matplotlibViewer.matplotlib2DGridViewer`),
 881
`Matplotlib2DViewer` (*class in*
`fipy.viewers.matplotlibViewer.matplotlib2DViewer`), 883
`MatplotlibSparseMatrixViewer` (*class in*
`fipy.viewers.matplotlibViewer.matplotlibSparseMatrixViewer`),
 886
`MatplotlibStreamViewer` (*class in*
`fipy.viewers.matplotlibViewer.matplotlibStreamViewer`),
 886
`MatplotlibSurfactantViewer` (*class in*
`ples.levelSet.electroChem.matplotlibSurfactantViewer`),
 1077
`MatplotlibVectorViewer` (*class in*
`fipy.viewers.matplotlibViewer.matplotlibVectorViewer`),
 891
`MatplotlibViewer()` (*in module*
`fipy.viewers.matplotlibViewer`), 865
`matrix`, 1052
`matrix` (*fipy.terms.advectionTerm.AdvectionTerm* *property*), 486

```

matrix (fipy.terms.cellTerm.CellTerm property), 491
matrix
    (fipy.terms.centralDiffConvectionTerm.CentralDifferenceConvectionTerm
     property), 496
matrix (fipy.terms.diffusionTerm.DiffusionTerm property), 499
matrix (fipy.terms.diffusionTermCorrection.DiffusionTermCorrection
       property), 503
matrix
    (fipy.terms.diffusionTermNoCorrection.DiffusionTermNoCorrection
     property), 506
matrix (fipy.terms.explicitDiffusionTerm.ExplicitDiffusionTerm
       property), 510
matrix
    (fipy.terms.explicitUpwindConvectionTerm.ExplicitUpwindConvectionTerm
     property), 515
matrix
    (fipy.terms.exponentialConvectionTerm.ExponentialConvectionTerm
     property), 520
matrix (fipy.terms.faceTerm.FaceTerm property), 524
matrix (fipy.terms.firstOrderAdvectionTerm.FirstOrderAdvectionTerm
       property), 530
matrix (fipy.terms.hybridConvectionTerm.HybridConvectionTerm
       property), 535
matrix (fipy.terms.implicitSourceTerm.ImplicitSourceTerm property),
       539
matrix
    (fipy.terms.powerLawConvectionTerm.PowerLawConvectionTerm
     property), 544
matrix (fipy.terms.residualTerm.ResidualTerm property), 548
matrix (fipy.terms.sourceTerm.SourceTerm property), 552
matrix (fipy.terms.term.Term property), 556
matrix (fipy.terms.transientTerm.TransientTerm property), 561
matrix (fipy.terms.upwindConvectionTerm.UpwindConvectionTerm
       property), 566
matrix (fipy.terms.vanLeerConvectionTerm.VanLeerConvectionTerm
       property), 571
MatrixIllConditionedWarning, 454
max() (fipy.variables.betaNoiseVariable.BetaNoiseVariable method),
       645
max() (fipy.variables.cellVariable.CellVariable method), 661
max() (fipy.variables.distanceVariable.DistanceVariable method), 679
max()
    (fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable
     method), 695
max() (fipy.variables.faceVariable.FaceVariable method), 707
max() (fipy.variables.gammaNoiseVariable.GammaNoiseVariable
       method), 722
max() (fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable
       method), 738
max() (fipy.variables.histogramVariable.HistogramVariable method),
       753
max() (fipy.variables.meshVariable.MeshVariable method), 765
max() (fipy.variables.modularVariable.ModularVariable method), 779
max() (fipy.variables.noiseVariable.NoiseVariable method), 794
max()
    (fipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable
     method), 806
max()
    (fipy.variables.surfactantConvectionVariable.SurfactantConvectionVariable
     method), 818
max() (fipy.variables.surfactantVariable.SurfactantVariable method),
       832
max() (fipy.variables.uniformNoiseVariable.UniformNoiseVariable
       method), 848
max() (fipy.variables.variable.Variable method), 859
MaxAll()
    (fipy.solvers.trilinos.comms.parallelEpetraCommWrapper.ParallelEpetraCommWrapper
     method), 460
MaximumIterationWarning, 454
MayaVi, 108
MayaviClient (class in fipy.viewers.mayaviViewer), 894
MayaviClient (class in fipy.viewers.mayaviViewer.mayaviClient), 898
MayaviDaemon (class in fipy.viewers.mayaviViewer.mayaviDaemon),
       901
MayaviSurfactantViewer, 1072
MayaviSurfactantViewer (class in
examples.levelSet.electroChem.mayaviSurfactantViewer),
       1081
Mesh (class in fipy.meshes.mesh), 223
Mesh1D (class in fipy.meshes.mesh1D), 232
Mesh2D (class in fipy.meshes.mesh2D), 240
MeshAdditionError, 139, 231
MeshDimensionError, 863
MeshExportError, 221
MeshVariable (class in fipy.variables.meshVariable), 757
method1() (package.subpackage.base.Base method), 123
method1() (package.subpackage.object.Object method), 124
method2() (package.subpackage.base.Base method), 123
method2() (package.subpackage.object.Object method), 124
min() (fipy.variables.betaNoiseVariable.BetaNoiseVariable method),
       646
min() (fipy.variables.cellVariable.CellVariable method), 661
min() (fipy.variables.distanceVariable.DistanceVariable method), 679
min()
    (fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable
     method), 695
min() (fipy.variables.faceVariable.FaceVariable method), 707
min() (fipy.variables.gammaNoiseVariable.GammaNoiseVariable
       method), 722
min() (fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable
       method), 738
min() (fipy.variables.histogramVariable.HistogramVariable method),
       753
min() (fipy.variables.meshVariable.MeshVariable method), 765
min() (fipy.variables.modularVariable.ModularVariable method), 779
min() (fipy.variables.noiseVariable.NoiseVariable method), 794
min()
    (fipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable
     method), 806
min()
    (fipy.variables.surfactantConvectionVariable.SurfactantConvectionVariable
     method), 818
min() (fipy.variables.surfactantVariable.SurfactantVariable method),
       832
min() (fipy.variables.uniformNoiseVariable.UniformNoiseVariable
       method), 848
min() (fipy.variables.variable.Variable method), 859
MinAll()
    (fipy.solvers.trilinos.comms.parallelEpetraCommWrapper.ParallelEpetraCommWrapper
     method), 460
minmodFaceValue
    (fipy.variables.betaNoiseVariable.BetaNoiseVariable
     property), 646
minmodFaceValue (fipy.variables.cellVariable.CellVariable property),
       661
minmodFaceValue (fipy.variables.distanceVariable.DistanceVariable
       property), 679
minmodFaceValue
    (fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable
     property), 695
minmodFaceValue
    (fipy.variables.gammaNoiseVariable.GammaNoiseVariable
     property), 722
minmodFaceValue (fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable
       property), 722

```

```

    property), 738
minmodFaceValue
    (fipy.variables.histogramVariable.HistogramVariable
     property), 753
minmodFaceValue (fipy.variables.modularVariable.ModularVariable
     property), 779
minmodFaceValue (fipy.variables.noiseVariable.NoiseVariable
     property), 794
minmodFaceValue
    (fipy.variables.surfactantVariable.SurfactantVariable
     property), 832
minmodFaceValue
    (fipy.variables.uniformNoiseVariable.UniformNoiseVariable
     property), 848
ModularVariable, 1120
ModularVariable (class in fipy.variables.modularVariable), 767
module
    examples, 919
    examples.benchmarking, 920
    examples.benchmarking.benchmark, 920
    examples.benchmarking.size, 920
    examples.benchmarking.steps, 920
    examples.benchmarking.utils, 920
    examples.benchmarking.versions, 920
    examples.cahnHilliard, 920
    examples.cahnHilliard.mesh2D, 921
    examples.cahnHilliard.mesh2DCoupled, 923
    examples.cahnHilliard.mesh3D, 926
    examples.cahnHilliard.sphere, 928
    examples.cahnHilliard.sphereDaemon, 930
    examples.cahnHilliard.tanh1D, 930
    examples.cahnHilliard.test, 932
    examples.chemotaxis, 932
    examples.chemotaxis.input, 933
    examples.chemotaxis.input2D, 935
    examples.chemotaxis.parameters, 938
    examples.chemotaxis.test, 938
    examples.convection, 938
    examples.convection.advection, 938
    examples.convection.advection.explicitUpwind, 939
    examples.convection.advection.implicitUpwind, 939
    examples.convection.advection.vanLeerUpwind, 939
    examples.convection.exponential1D, 939
    examples.convection.exponential1D.cylindricalMesh1D,
        940
    examples.convection.exponential1D.cylindricalMesh1DNonUniform,
        941
    examples.convection.exponential1D.mesh1D, 943
    examples.convection.exponential1D.tri2D, 944
    examples.convection.exponential1DBack, 945
    examples.convection.exponential1DBack.mesh1D, 945
    examples.convection.exponential1DSource, 946
    examples.convection.exponential1DSource.mesh1D, 947
    examples.convection.exponential1DSource.tri2D, 948
    examples.convection.exponential2D, 949
    examples.convection.exponential2D.cylindricalMesh2D,
        949
    examples.convection.exponential2D.cylindricalMesh2DNonUniform,
        951
    examples.convection.exponential2D.mesh2D, 952
    examples.convection.exponential2D.tri2D, 953
    examples.convection.peclet, 954
    examples.convection.powerLaw1D, 955
    examples.convection.powerLaw1D.mesh1D, 956
    examples.convection.powerLaw1D.tri2D, 957
    examples.convection.robin, 958
    examples.convection.source, 960
    examples.convection.test, 961
examples.diffusion, 961
examples.diffusion.anisotropy, 961
examples.diffusion.circle, 963
examples.diffusion.circleQuad, 968
examples.diffusion.coupled, 973
examples.diffusion.electrostatics, 975
examples.diffusion.explicit, 979
examples.diffusion.explicit.mesh1D, 980
examples.diffusion.explicit.mixedelement, 981
examples.diffusion.explicit.test, 982
examples.diffusion.explicit.tri2D, 982
examples.diffusion.mesh1D, 983
examples.diffusion.mesh20x20, 1003
examples.diffusion.mesh20x20Coupled, 1006
examples.diffusion.nthOrder, 1009
examples.diffusion.nthOrder.input4thOrder1D, 1010
examples.diffusion.nthOrder.input4thOrder_line,
    1012
examples.diffusion.nthOrder.test, 1012
examples.diffusion.steadyState, 1012
examples.diffusion.steadyState.mesh1D, 1012
examples.diffusion.steadyState.mesh1D.inputPeriodic,
    1013
examples.diffusion.steadyState.mesh1D.tri2Dinput,
    1013
examples.diffusion.steadyState.mesh20x20, 1014
examples.diffusion.steadyState.mesh20x20.gmshinput,
    1014
examples.diffusion.steadyState.mesh20x20.isotropy,
    1014
examples.diffusion.steadyState.mesh20x20.modifiedMeshInput,
    1015
examples.diffusion.steadyState.mesh20x20.orthoerror,
    1016
examples.diffusion.steadyState.mesh20x20.tri2Dinput,
    1017
examples.diffusion.steadyState.mesh50x50, 1017
examples.diffusion.steadyState.mesh50x50.input,
    1017
examples.diffusion.steadyState.mesh50x50.tri2Dinput,
    1017
examples.diffusion.steadyState.otherMeshes, 1018
examples.diffusion.steadyState.otherMeshes.cubicalProblem,
    1018
examples.diffusion.steadyState.otherMeshes.grid3Dinput,
    1018
examples.diffusion.steadyState.otherMeshes.prism,
    1018
examples.diffusion.steadyState.test, 1019
examples.diffusion.test, 1019
examples.diffusion.variable, 1019
examples.elphf, 1020
examples.elphf.diffusion, 1021
examples.elphf.diffusion.mesh1D, 1021
examples.elphf.diffusion.mesh1Ddimensional, 1024
examples.elphf.diffusion.mesh2D, 1026
examples.elphf.input, 1029
examples.elphf.phase, 1035
examples.elphf.phaseDiffusion, 1038
examples.elphf.poisson, 1046
examples.elphf.test, 1049
examples.flow, 1049
examples.flow.stokesCavity, 1050
examples.flow.test, 1054
examples.levelSet, 1054
examples.levelSet.advection, 1055
examples.levelSet.advection.circle, 1055
examples.levelSet.advection.mesh1D, 1057

```

```
examples.levelSet.advection.test, 1058
examples.levelSet.advection.trench, 1058
examples.levelSet.distanceFunction, 1060
examples.levelSet.distanceFunction.circle, 1060
examples.levelSet.distanceFunction.interior, 1061
examples.levelSet.distanceFunction.mesh1D, 1062
examples.levelSet.distanceFunction.square, 1063
examples.levelSet.distanceFunction.test, 1064
examples.levelSet.electroChem, 1064
examples.levelSet.electroChem.adsorbingSurfactantEquationfipy.boundaryConditions, 126
    1064
examples.levelSet.electroChem.adsorption, 1064
examples.levelSet.electroChem.gapFillDistanceVariable,
    1065
examples.levelSet.electroChem.gapFillMesh, 1065
examples.levelSet.electroChem.gold, 1066
examples.levelSet.electroChem.howToWriteAScript,
    1067
examples.levelSet.electroChem.leveler, 1073
examples.levelSet.electroChem.lines, 1077
examples.levelSet.electroChem.matplotlibSurfactantViewer,
    1077
examples.levelSet.electroChem.mayaviSurfactantViewer,
    1081
examples.levelSet.electroChem.metalIonDiffusionEquation,
    1084
examples.levelSet.electroChem.simpleTrenchSystem,
    1084
examples.levelSet.electroChem.surfactantBulkDiffusionEqua
    1087
examples.levelSet.electroChem.test, 1087
examples.levelSet.electroChem.trenchMesh, 1087
examples.levelSet.surfactant, 1087
examples.levelSet.surfactant.circle, 1088
examples.levelSet.surfactant.expandingCircle, 1088
examples.levelSet.surfactant.square, 1089
examples.levelSet.surfactant.test, 1090
examples.levelSet.test, 1090
examples.meshing, 1090
examples.meshing.gmshRefinement, 1090
examples.meshing.inputGrid2D, 1090
examples.meshing.sphere, 1091
examples.meshing.test, 1092
examples.parallel, 1092
examples.phase, 1092
examples.phase.anisotropy, 1093
examples.phase.anisotropyOLD, 1097
examples.phase.binary, 1100
examples.phase.binaryCoupled, 1109
examples.phase.impingement, 1119
examples.phase.impingement.mesh20x20, 1119
examples.phase.impingement.mesh40x1, 1123
examples.phase.impingement.test, 1126
examples.phase.missOrientation, 1126
examples.phase.missOrientation.circle, 1126
examples.phase.missOrientation.mesh1D, 1127
examples.phase.missOrientation.modCircle, 1128
examples.phase.missOrientation.test, 1128
examples.phase.polyxtal, 1128
examples.phase.polyxtalCoupled, 1134
examples.phase.quaternary, 1140
examples.phase.simple, 1147
examples.phase.symmetry, 1155
examples.phase.test, 1157
examples.reactiveWetting, 1157
examples.reactiveWetting.liquidVapor1D, 1157
examples.reactiveWetting.liquidVapor2D, 1162
examples.reactiveWetting.test, 1166
examples.riemann, 1166
examples.riemann.acoustics, 1166
examples.riemann.test, 1167
examples.test, 1167
examples.updating, 1167
examples.updating.update0_1to1_0, 1167
examples.updating.update1_0to2_0, 1171
examples.updating.update2_0to3_0, 1175
fipy, 125
fipy.boundaryConditions.boundaryCondition, 127
fipy.boundaryConditions.constraint, 127
fipy.boundaryConditions.fixedFlux, 128
fipy.boundaryConditions.fixedValue, 128
fipy.boundaryConditions.nthOrderBoundaryCondition,
    129
fipy.boundaryConditions.test, 129
fipy.matrices, 130
fipy.matrices.offsetSparseMatrix, 130
fipy.matrices.petscMatrix, 130
fipy.matrices.pysparseMatrix, 130
fipy.matrices.scipyMatrix, 130
fipy.matrices.sparseMatrix, 130
fipy.matrices.test, 130
fipy.matrices.trilinosMatrix, 130
fipy.meshes, 130
fipy.meshes.abstractMesh, 132
fipy.meshes.builders, 139
fipy.meshes.builders.abstractGridBuilder, 140
fipy.meshes.builders.grid1DBuilder, 140
fipy.meshes.builders.grid2DBuilder, 140
fipy.meshes.builders.grid3DBuilder, 140
fipy.meshes.builders.periodicGrid1DBuilder, 140
fipy.meshes.builders.utilityClasses, 140
fipy.meshes.cylindricalGrid1D, 140
fipy.meshes.cylindricalGrid2D, 140
fipy.meshes.cylindricalNonUniformGrid1D, 140
fipy.meshes.cylindricalNonUniformGrid2D, 149
fipy.meshes.cylindricalUniformGrid1D, 158
fipy.meshes.cylindricalUniformGrid2D, 165
fipy.meshes.factoryMeshes, 172
fipy.meshes.gmshMesh, 175
fipy.meshes.grid1D, 223
fipy.meshes.grid2D, 223
fipy.meshes.grid3D, 223
fipy.meshes.mesh, 223
fipy.meshes.mesh1D, 232
fipy.meshes.mesh2D, 240
fipy.meshes.nonUniformGrid1D, 249
fipy.meshes.nonUniformGrid2D, 257
fipy.meshes.nonUniformGrid3D, 266
fipy.meshes.periodicGrid1D, 274
fipy.meshes.periodicGrid2D, 283
fipy.meshes.periodicGrid3D, 309
fipy.meshes.representations, 365
fipy.meshes.representations.abstractRepresentation,
    365
fipy.meshes.representations.gridRepresentation, 365
fipy.meshes.representations.meshRepresentation, 365
fipy.meshes.skewedGrid2D, 365
fipy.meshes.sphericalNonUniformGrid1D, 374
fipy.meshes.sphericalUniformGrid1D, 383
fipy.meshes.test, 390
fipy.meshes.topologies, 390
fipy.meshes.topologies.abstractTopology, 390
fipy.meshes.topologies.gridTopology, 390
fipy.meshes.topologies.meshTopology, 390
fipy.meshes.tri2D, 390
```

```

fipy.meshes.uniformGrid, 399
fipy.meshes.uniformGrid1D, 406
fipy.meshes.uniformGrid2D, 413
fipy.meshes.uniformGrid3D, 420
fipy.numerix, 1169
fipy.solvers, 427
fipy.solvers.petsc, 429
fipy.solvers.petsc.comms, 430
fipy.solvers.petsc.comms.parallelPETScCommWrapper,
    430
fipy.solvers.petsc.comms.petscCommWrapper, 430
fipy.solvers.petsc.comms.serialPETScCommWrapper,
    431
fipy.solvers.petsc.dummySolver, 431
fipy.solvers.petsc.linearBicgSolver, 431
fipy.solvers.petsc.linearCGSSolver, 432
fipy.solvers.petsc.linearGMRESSolver, 432
fipy.solvers.petsc.linearLUSolver, 433
fipy.solvers.petsc.linearPCGSolver, 433
fipy.solvers.petsc.petscKrylovSolver, 434
fipy.solvers.petsc.petscSolver, 435
fipy.solvers.pyAMG, 435
fipy.solvers.pyAMG.linearCGSSolver, 436
fipy.solvers.pyAMG.linearGeneralSolver, 437
fipy.solvers.pyAMG.linearGMRESSolver, 436
fipy.solvers.pyAMG.linearLUSolver, 438
fipy.solvers.pyAMG.linearPCGSolver, 438
fipy.solvers.pyAMG.preconditioners, 439
fipy.solvers.pyAMG.preconditioners.smoothedAggregationPreconditioners,
    439
fipy.solvers.pyamgx, 439
fipy.solvers.pyamgx.aggregationAMGSolver, 440
fipy.solvers.pyamgx.classicalIAMGSolver, 440
fipy.solvers.pyamgx.linearBicgstabSolver, 441
fipy.solvers.pyamgx.linearCGSolver, 441
fipy.solvers.pyamgx.linearFGMRESSolver, 442
fipy.solvers.pyamgx.linearGMRESSolver, 443
fipy.solvers.pyamgx.linearLUSolver, 443
fipy.solvers.pyamgx.preconditioners, 444
fipy.solvers.pyamgx.preconditioners.preconditioners,
    444
fipy.solvers.pyamgx.pyAMGSolver, 444
fipy.solvers.pyamgx.smoothers, 445
fipy.solvers.pyamgx.smoothers.smoothers, 445
fipy.solvers.pysparse, 445
fipy.solvers.pysparse.linearCGSSolver, 446
fipy.solvers.pysparse.linearGMRESSolver, 446
fipy.solvers.pysparse.linearJORSolver, 447
fipy.solvers.pysparse.linearLUSolver, 447
fipy.solvers.pysparse.linearPCGSolver, 448
fipy.solvers.pysparse.preconditioners, 448
fipy.solvers.pysparse.preconditioners.jacobiPreconditioners,
    448
fipy.solvers.pysparse.preconditioners.preconditioner,
    449
fipy.solvers.pysparse.preconditioners.ssorPreconditioner,
    449
fipy.solvers.pysparse.pysparseSolver, 449
fipy.solvers.pysparseMatrixSolver, 450
fipy.solvers.scipy, 450
fipy.solvers.scipy.linearBicgstabSolver, 450
fipy.solvers.scipy.linearCGSSolver, 451
fipy.solvers.scipy.linearGMRESSolver, 451
fipy.solvers.scipy.linearLUSolver, 452
fipy.solvers.scipy.linearPCGSolver, 452
fipy.solvers.scipy.scipyKrylovSolver, 453
fipy.solvers.scipy.scipySolver, 453
fipy.solvers.solver, 453

fipy.solvers.test, 458
fipy.solvers.trilinos, 458
fipy.solvers.trilinos.comms, 459
fipy.solvers.trilinos.comms.epetraCommWrapper, 459
fipy.solvers.trilinos.comms.parallelEpetraCommWrapper,
    460
fipy.solvers.trilinos.comms.serialEpetraCommWrapper,
    460
fipy.solvers.trilinos.linearBicgstabSolver, 461
fipy.solvers.trilinos.linearCGSSolver, 461
fipy.solvers.trilinos.linearGMRESSolver, 462
fipy.solvers.trilinos.linearLUSolver, 462
fipy.solvers.trilinos.linearPCGSolver, 463
fipy.solvers.trilinos.preconditioners, 464
fipy.solvers.trilinos.preconditioners.domDecompPreconditioner,
    464
fipy.solvers.trilinos.preconditioners.icPreconditioner,
    464
fipy.solvers.trilinos.preconditioners.jacobiPreconditioner,
    465
fipy.solvers.trilinos.preconditioners.multilevelDDMLPreconditioner,
    465
fipy.solvers.trilinos.preconditioners.multilevelDDPPreconditioner,
    465
fipy.solvers.trilinos.preconditioners.multilevelNSSAPreconditioner,
    466
fipy.solvers.trilinos.preconditioners.multilevelSAPreconditioner,
    466
fipy.solvers.trilinos.preconditioners.multilevelSGSPreconditioner,
    466
fipy.solvers.trilinos.preconditioners.multilevelSolverSmoothening,
    467
fipy.solvers.trilinos.preconditioners.preconditioner,
    467
fipy.solvers.trilinos.trilinosAztecOOsolver, 468
fipy.solvers.trilinos.trilinosMLTest, 469
fipy.solvers.trilinos.trilinosNonlinearSolver, 469
fipy.solvers.trilinos.trilinosSolver, 470
fipy.steppers, 471
fipy.steppers.pidStepper, 473
fipy.steppers.pseudoRKQSStepper, 474
fipy.steppers.stepper, 474
fipy.terms, 474
fipy.terms.abstractBinaryTerm, 481
fipy.terms.abstractConvectionTerm, 481
fipy.terms.abstractDiffusionTerm, 481
fipy.terms.abstractUpwindConvectionTerm, 481
fipy.terms.advectionTerm, 481
fipy.terms.asymmetricConvectionTerm, 488
fipy.terms.binaryTerm, 488
fipy.terms.cellTerm, 488
fipy.terms.centralDiffConvectionTerm, 492
fipy.terms.coupledBinaryTerm, 497
fipy.terms.diffusionTerm, 497
fipy.terms.diffusionTermCorrection, 501
fipy.terms.diffusionTermNoCorrection, 504
fipy.terms.explicitDiffusionTerm, 508
fipy.terms.explicitSourceTerm, 511
fipy.terms.explicitUpwindConvectionTerm, 511
fipy.terms.exponentialConvectionTerm, 516
fipy.terms.faceTerm, 522
fipy.terms.firstOrderAdvectionTerm, 526
fipy.terms.hybridConvectionTerm, 531
fipy.terms.implicitDiffusionTerm, 536
fipy.terms.implicitSourceTerm, 536
fipy.terms.nonDiffusionTerm, 540
fipy.terms.powerLawConvectionTerm, 540
fipy.terms.residualTerm, 546

```

```
fipy.terms.sourceTerm, 550
fipy.terms.term, 554
fipy.terms.test, 558
fipy.terms.transientTerm, 558
fipy.terms.unaryTerm, 563
fipy.terms.upwindConvectionTerm, 563
fipy.terms.vanLeerConvectionTerm, 568
fipy.tests.Fipy, 573
fipy.tests, 573
fipy.tests doctestPlus, 573
fipy.tests.lateImportTest, 575
fipy.tests.test, 575
fipy.tests.testProgram, 576
fipy.tools, 576
fipy.tools.comms, 594
fipy.tools.comms.commWrapper, 594
fipy.tools.comms.dummyComm, 595
fipy.tools.debug, 595
fipy.tools.decorators, 595
fipy.tools.dimensions, 596
fipy.tools.dimensions.DictWithDefault, 596
fipy.tools.dimensions.NumberDict, 596
fipy.tools.dimensions.physicalField, 596
fipy.tools.dump, 621, 1122
fipy.tools.inline, 622
fipy.tools.logging, 622
fipy.tools.numerix, 622
fipy.tools.parser, 628, 1068, 1119
fipy.tools.sharedtempfile, 629
fipy.tools.test, 630
fipy.tools.vector, 630
fipy.tools.version, 630
fipy.tools.vitals, 631
fipy.variables, 631
fipy.variables.addOverFacesVariable, 633
fipy.variables.arithmeticCellToFaceVariable, 633
fipy.variables.betaNoiseVariable, 633
fipy.variables.binaryOperatorVariable, 649
fipy.variables.cellToFaceVariable, 649
fipy.variables.cellVariable, 649
fipy.variables.constant, 664
fipy.variables.constraintMask, 664
fipy.variables.coupledCellVariable, 664
fipy.variables.distanceVariable, 664
fipy.variables.exponentialNoiseVariable, 683
fipy.variables.faceGradContributionsVariable, 698
fipy.variables.faceGradVariable, 698
fipy.variables.faceVariable, 698
fipy.variables.gammaNoiseVariable, 709
fipy.variables.gaussCellGradVariable, 725
fipy.variables.gaussianNoiseVariable, 725
fipy.variables.harmonicCellToFaceVariable, 742
fipy.variables.histogramVariable, 742
fipy.variables.interfaceAreaVariable, 756
fipy.variables.interfaceFlagVariable, 756
fipy.variables.leastSquaresCellGradVariable, 756
fipy.variables.levelSetDiffusionVariable, 756
fipy.variables.meshVariable, 756
fipy.variables.minmodCellToFaceVariable, 767
fipy.variables.modCellGradVariable, 767
fipy.variables.modCellToFaceVariable, 767
fipy.variables.modFaceGradVariable, 767
fipy.variables.modPhysicalField, 767
fipy.variables.modularVariable, 767
fipy.variables.noiseVariable, 782
fipy.variables.operatorVariable, 798
fipy.variables.scharfetterGummelFaceVariable, 798
fipy.variables.surfactantConvectionVariable, 809
fipy.variables.surfactantVariable, 820
fipy.variables.test, 836
fipy.variables.unaryOperatorVariable, 836
fipy.variables.uniformNoiseVariable, 836
fipy.variables.variable, 851
fipy.viewers, 861, 932, 941, 942, 944, 948, 951, 952, 985, 1004, 1007, 1011, 1052, 1099, 1106, 1115, 1121, 1125, 1147
fipy.viewers.matplotlibViewer, 865
fipy.viewers.matplotlibViewer.abstractMatplotlib2DViewer, 867
fipy.viewers.matplotlibViewer.abstractMatplotlibViewer, 870
fipy.viewers.matplotlibViewer.matplotlib1DViewer, 872
fipy.viewers.matplotlibViewer.matplotlib2DContourViewer, 875
fipy.viewers.matplotlibViewer.matplotlib2DGridContourViewer, 877
fipy.viewers.matplotlibViewer.matplotlib2DGridViewer, 881
fipy.viewers.matplotlibViewer.matplotlib2DViewer, 883
fipy.viewers.matplotlibViewer.matplotlibSparseMatrixViewer, 886
fipy.viewers.matplotlibViewer.matplotlibStreamViewer, 886
fipy.viewers.matplotlibViewer.matplotlibVectorViewer, 891
fipy.viewers.matplotlibViewer.test, 894
fipy.viewers.mayaviViewer, 894
fipy.viewers.mayaviViewer.mayaviClient, 898
fipy.viewers.mayaviViewer.mayaviDaemon, 901
fipy.viewers.mayaviViewer.test, 902
fipy.viewers.multiViewer, 902
fipy.viewers.testinteractive, 904
fipy.viewers.tsvViewer, 904
fipy.viewers.viewer, 906
fipy.viewers.vtkViewer, 908
fipy.viewers.vtkViewer.test, 912
fipy.viewers.vtkViewer.vtkCellViewer, 912
fipy.viewers.vtkViewer.vtkFaceViewer, 914
fipy.viewers.vtkViewer.vtkViewer, 916
gmsh, 1066, 1074, 1085
package, 121
package subpackage, 121
package subpackage base, 122
package subpackage object, 123
scipy, 966, 971, 1115, 1154
viewers, 1145
MPI, 108
mpi4py, 108
MSHFile (class in fipy.meshes.gmshMesh), 221
MultilevelDDMLPreconditioner (class in
    fipy.solvers.trilinos.preconditioners.multilevelDDMLPreconditioner), 465
MultilevelDDPReconditioner (class in
    fipy.solvers.trilinos.preconditioners.multilevelDDPReconditioner), 465
MultilevelNSSAPreconditioner (class in
    fipy.solvers.trilinos.preconditioners.multilevelNSSAPreconditioner), 466
MultilevelSAPreconditioner (class in
    fipy.solvers.trilinos.preconditioners.multilevelSAPreconditioner), 466
MultilevelSGSPreconditioner (class in
    fipy.solvers.trilinos.preconditioners.multilevelSGSPreconditioner),
```

466
MultilevelSolverSmoothenPreconditioner (*class in*
fipy.solvers.trilinos.preconditioners.multilevelSolverSmoothenPreconditioner),
467
multiply() (*fipy.tools.dimensions.physicalField.PhysicalField*
method), 611
multiply() (*fipy.tools.PhysicalField* *method*), 588
MultiViewer (*class in* *fipy.viewers.multiViewer*), 902

N

name() (*fipy.tools.dimensions.physicalField.PhysicalUnit* *method*), 621
nearest() (*in module* *fipy.tools.numerix*), 626
NoiseVariable (*class in* *fipy.variables.noiseVariable*), 783
NonUniformGrid1D (*class in* *fipy.meshes.nonUniformGrid1D*), 249
NonUniformGrid2D (*class in* *fipy.meshes.nonUniformGrid2D*), 257
NonUniformGrid3D (*class in* *fipy.meshes.nonUniformGrid3D*), 266
NthOrderBoundaryCondition, 931, 1010
NthOrderBoundaryCondition (*class in*
fipy.boundaryConditions.nthOrderBoundaryCondition),
129
numarray, 108
Numeric, 108
numericValue (*fipy.tools.dimensions.physicalField.PhysicalField*
property), 611
numericValue (*fipy.tools.PhysicalField* *property*), 589
NumPy, 108

O

object
fipy.terms.implicitDiffusionTerm.DiffusionTerm,
964, 969
fipy.terms.transientTerm.TransientTerm, 964, 969
fipy.variables.cellVariable.CellVariable, 963, 968
fipy.viewers.tsvViewer.TSVViewer, 965, 970
Object (*class in* *package.subpackage.object*), 123
OffsetSparseMatrix() (*in module*
fipy.matrices.offsetSparseMatrix), 130
old (*fipy.variables.betaNoiseVariable.BetaNoiseVariable* *property*), 646
old (*fipy.variables.cellVariable.CellVariable* *property*), 661
old (*fipy.variables.distanceVariable.DistanceVariable* *property*), 680
old (*fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable*
property), 695
old (*fipy.variables.gammaNoiseVariable.GammaNoiseVariable*
property), 722
old (*fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable*
property), 739
old (*fipy.variables.histogramVariable.HistogramVariable* *property*),
754
old (*fipy.variables.modularVariable.ModularVariable* *property*), 779
old (*fipy.variables.noiseVariable.NoiseVariable* *property*), 795
old (*fipy.variables.surfactantVariable.SurfactantVariable* *property*),
833
old (*fipy.variables.uniformNoiseVariable.UniformNoiseVariable*
property), 848
OpenMP, 108
openMSHFile() (*in module* *fipy.meshes.gmshMesh*), 222
openPOSFile() (*in module* *fipy.meshes.gmshMesh*), 223

P

package
module, 121
package.subpackage
module, 121
package.subpackage.base
module, 122
package.subpackage.object

module, 123
package_info() (*in module* *fipy.tools.logging*), 622
ParallelEpetraWrapper,
parallelComm (*in module* *fipy.tools*), 576
ParallelEpetraCommWrapper (*class in*
fipy.solvers.trilinos.comms.parallelEpetraCommWrapper),
460
ParallelPETScCommWrapper (*class in*
fipy.solvers.petsc.comms.parallelPETScCommWrapper),
430
parse() (*in module* *fipy.tools.parser*), 628
parse_command_line()
(fipy.viewers.mayaviViewer.mayaviDaemon.MayaviDaemon
method), 902
PeriodicGrid1D (*class in* *fipy.meshes.periodicGrid1D*), 274
PeriodicGrid2D (*class in* *fipy.meshes.periodicGrid2D*), 283
PeriodicGrid2DLeftRight (*class in* *fipy.meshes.periodicGrid2D*),
292
PeriodicGrid2DTopBottom (*class in* *fipy.meshes.periodicGrid2D*),
301
PeriodicGrid3D (*class in* *fipy.meshes.periodicGrid3D*), 309
PeriodicGrid3DFrontBack (*class in* *fipy.meshes.periodicGrid3D*),
318
PeriodicGrid3DLeftRight (*class in* *fipy.meshes.periodicGrid3D*),
326
PeriodicGrid3DLeftRightFrontBack (*class in*
fipy.meshes.periodicGrid3D), 334
PeriodicGrid3DLeftRightTopBottom (*class in*
fipy.meshes.periodicGrid3D), 342
PeriodicGrid3DTopBottom (*class in* *fipy.meshes.periodicGrid3D*),
349
PeriodicGrid3DTopBottomFrontBack (*class in*
fipy.meshes.periodicGrid3D), 357
PETSc, 108
petsc4py, 108
PETScCommWrapper (*class in*
fipy.solvers.petsc.comms.petscCommWrapper), 430
PETScKrylovSolver (*class in* *fipy.solvers.petsc.petscKrylovSolver*),
434
PETScSolver (*class in* *fipy.solvers.petsc.petscSolver*), 435
PhysicalField (*class in* *fipy.tools*), 576
PhysicalField (*class in* *fipy.tools.dimensions.physicalField*), 599
physicalShape (*fipy.meshes.skewedGrid2D.SkewedGrid2D*
property), 373
physicalShape (*fipy.meshes.tri2D.Tri2D* *property*), 398
PhysicalUnit (*class in* *fipy.tools.dimensions.physicalField*), 614
pi, 1094, 1099, 1120, 1125
PIDStepper (*class in* *fipy.steppers.pidStepper*), 473
pip, 108
plot() (*exam-*
ples.levelSet.electroChem.matplotlibSurfactantViewer.MatplotlibSurfactantViewer
method), 1080
plot() (*fipy.viewers.DummyViewer* *method*), 862
plot()
(fipy.viewers.matplotlibViewer.abstractMatplotlib2DViewer.AbstractMatplotlib2D
method), 869
plot()
(fipy.viewers.matplotlibViewer.abstractMatplotlibViewer.AbstractMatplotlibViewer
method), 871
plot()
(fipy.viewers.matplotlibViewer.matplotlib1DViewer.Matplotlib1DViewer
method), 874
plot()
(fipy.viewers.matplotlibViewer.matplotlib2DContourViewer.Matplotlib2DContour
method), 876
plot()
(fipy.viewers.matplotlibViewer.matplotlib2DGridContourViewer.Matplotlib2DGrid
method), 879

```

plot() (fipy.viewers.matplotlibViewer.matplotlib2DGridViewer(Matplotlib2DViewer
method), 882
plot() (fipy.viewers.matplotlibViewer.matplotlib2DViewer(Matplotlib2DViewer
method), 885
plot() (fipy.viewers.matplotlibViewer.matplotlibStreamViewer(MatplotlibStreamViewer
method), 889
plot() (fipy.viewers.matplotlibViewer.matplotlibVectorViewer(MatplotlibVectorViewer
method), 893
plot() (fipy.viewers.mayaviViewer.MayaviClient method), 896
plot() (fipy.viewers.mayaviViewer.mayaviClient.MayaviClient
method), 900
plot() (fipy.viewers.multiViewer.MultiViewer method), 902
plot() (fipy.viewers.tsvViewer.TSVViewer method), 905
plot() (fipy.viewers.viewer.AbstractViewer method), 907
plot() (fipy.viewers.vtkViewer.VTKCellViewer method), 909
plot() (fipy.viewers.vtkViewer.vtkCellViewer.VTKCellViewer method),
913
plot() (fipy.viewers.vtkViewer.VTKFaceViewer method), 910
plot() (fipy.viewers.vtkViewer.vtkFaceViewer.VTKFaceViewer
method), 915
plot() (fipy.viewers.vtkViewer.vtkViewer.VTKViewer method), 916
plotMesh() (exam-
ples.levelSet.electroChem.matplotlibSurfactantViewer(MatplotlibSurfactantViewer
method), 1080
plotMesh() (exam-
ples.levelSet.electroChem.mayaviSurfactantViewer.MayaviSur-
method), 1083
plotMesh() (fipy.viewers.DummyViewer method), 862
plotMesh() (fipy.viewers.matplotlibViewer.abstractMatplotlib2DViewer.Ab-
stractMatplotlib2DViewer
method), 869
plotMesh() (fipy.viewers.matplotlibViewer.abstractMatplotlibViewer.Ab-
stractMatplotlibViewer
method), 871
plotMesh() (fipy.viewers.matplotlibViewer.matplotlib1DViewer.Matplotlib1DViewer
method), 874
plotMesh() (fipy.viewers.matplotlibViewer.matplotlib2DContourViewer.Mat-
plotlib2DContourViewer
method), 876
plotMesh() (fipy.viewers.matplotlibViewer.matplotlib2DGridContourViewer.Mat-
plotlib2DGridContourViewer
method), 879
plotMesh() (fipy.viewers.matplotlibViewer.matplotlib2DGridViewer.Mat-
plotlib2DGridViewer
method), 882
plotMesh() (fipy.viewers.matplotlibViewer.matplotlib2DViewer.Mat-
plotlib2DViewer
method), 885
plotMesh() (fipy.viewers.matplotlibViewer.matplotlibStreamViewer.Mat-
plotlibStreamViewer
method), 890
plotMesh() (fipy.viewers.matplotlibViewer.matplotlibVectorViewer.Mat-
plotlibVectorViewer
method), 893
plotMesh() (fipy.viewers.mayaviViewer.MayaviClient method), 896
plotMesh() (fipy.viewers.mayaviViewer.mayaviClient.MayaviClient
method), 900
plotMesh() (fipy.viewers.multiViewer.MultiViewer method), 902
plotMesh() (fipy.viewers.tsvViewer.TSVViewer method), 905
plotMesh() (fipy.viewers.viewer.AbstractViewer method), 907
plotMesh() (fipy.viewers.vtkViewer.VTKCellViewer method), 909
plotMesh() (fipy.viewers.vtkViewer.vtkCellViewer.VTKCellViewer
method), 913
plotMesh() (fipy.viewers.vtkViewer.VTKFaceViewer method), 910
plotMesh() (fipy.viewers.vtkViewer.vtkFaceViewer.VTKFaceViewer
method), 915
plotMesh() (fipy.viewers.vtkViewer.vtkViewer.VTKViewer method),
916
plotMesh() (fipy.viewers.vtkViewer.vtkViewer.VTKViewer method),
916
plotMesh() (fipy.viewers.vtkViewer.vtkViewer.VTKViewer method),
916
Preconditioner (class in
fipy.solvers.pyamgx.preconditioners.preconditioners), 444
Preconditioner (class in
fipy.solvers.pysparse.preconditioners.preconditioner), 449
Preconditioner (class in
fipy.solvers.trilinos.preconditioners.preconditioner), 467
PreconditionerNotPositiveDefiniteWarning, 455
PreconditionerWarning, 456
PRINT() (in module fipy.tools.debug), 595
prune() (in module fipy.tools.vector), 630
PseudorKQSStepper (class in fipy.steppers.pseudoRKQSStepper), 474
put() (fipy.tools.dimensions.physicalField.PhysicalField method), 611
put() (fipy.tools.PhysicalField method), 589
put() (in module fipy.tools.numerix), 626
putAdd() (in module fipy.tools.vector), 630
PyAMG, 108
pyamgx, 109
PyAMGSolver (class in fipy.solvers.pyamgx.pyAMGSolver), 444
PyPI, 109
Pyrex, 109
PySparse, 109
PysparseSolver (class in fipy.solvers.pysparse.pysparseSolver), 449
Python, 109
Python 3, 109
Python Enhancement Proposals
PEP 3000, 109
PyTrilinos, 109
PyVTKpathlib109
R
rank() (in module fipy.tools.numerix), 627
rdot() (fipy.variables.betanoiseVariable.BetaNoiseVariable method),
646
rdot() (fipy.variables.cellVariable.CellVariable method), 662
rdot() (fipy.variables.distanceVariable.DistanceVariable method), 680
rdot() (fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable
method), 696
rdot() (fipy.variables.faceVariable.FaceVariable method), 707
rdot() (fipy.variables.gammaNoiseVariable.GammaNoiseVariable
method), 723
rdot() (fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable
method), 739
rdot() (fipy.variables.histogramVariable.HistogramVariable method),
754
rdot() (fipy.variables.meshVariable.MeshVariable method), 765
rdot() (fipy.variables.modularVariable.ModularVariable method),
780
rdot() (fipy.variables.noiseVariable.NoiseVariable method), 795
rdot() (fipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable
method), 806
rdot() (fipy.variables.surfactantConvectionVariable.SurfactantConvectionVariable
method), 818
rdot() (fipy.variables.surfactantVariable.SurfactantVariable method),
833

```

```

rdot() (fipy.variables.uniformNoiseVariable.UniformNoiseVariable
       method), 849
read() (fipy.meshes.gmshMesh.MSHFile method), 221
read() (in module fipy.tools.dump), 621
register_skipper() (in module fipy.tests.doctestPlus), 573
release() (fipy.variables.betaNoiseVariable.BetaNoiseVariable
           method), 647
release() (fipy.variables.cellVariable.CellVariable method), 662
release() (fipy.variables.distanceVariable.DistanceVariable method),
           680
release()
    (fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable
     method), 696
release() (fipy.variables.faceVariable.FaceVariable method), 707
release() (fipy.variables.gammaNoiseVariable.GammaNoiseVariable
           method), 723
release()
    (fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable
     method), 739
release() (fipy.variables.histogramVariable.HistogramVariable
           method), 754
release() (fipy.variables.meshVariable.MeshVariable method), 765
release() (fipy.variables.modularVariable.ModularVariable method),
           780
release() (fipy.variables.noiseVariable.NoiseVariable method), 795
release()
    (fipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable
     method), 807
release()
    (fipy.variables.surfactantConvectionVariable.SurfactantConvectionVariable
     method), 818
release() (fipy.variables.surfactantVariable.SurfactantVariable
           method), 833
release()
    (fipy.variables.uniformNoiseVariable.UniformNoiseVariable
     method), 849
release() (fipy.variables.variable.Variable method), 859
report_skips() (in module fipy.tests.doctestPlus), 573
reshape() (fipy.tools.dimensions.physicalField.PhysicalField
           method), 612
reshape() (fipy.tools.PhysicalField method), 589
reshape() (in module fipy.tools.numerix), 627
residual() (in module fipy.steppers), 472
ResidualTerm (class in fipy.terms.residualTerm), 546
residualVectorAndNorm()
    (fipy.terms.advectionTerm.AdvectionTerm method), 486
residualVectorAndNorm() (fipy.terms.cellTerm.CellTerm method),
           491
residualVectorAndNorm()
    (fipy.terms.centralDiffConvectionTerm.CentralDifferenceConvectionTerm
     method), 496
residualVectorAndNorm() (fipy.terms.diffusionTerm.DiffusionTerm
           method), 500
residualVectorAndNorm()
    (fipy.terms.diffusionTermCorrection.DiffusionTermCorrection
     method), 503
residualVectorAndNorm()
    (fipy.terms.diffusionTermNoCorrection.DiffusionTermNoCorrection
     method), 506
residualVectorAndNorm()
    (fipy.terms.explicitDiffusionTerm.ExplicitDiffusionTerm
     method), 510
residualVectorAndNorm()
    (fipy.terms.explicitUpwindConvectionTerm.ExplicitUpwindConvectionTerm
     method), 515
residualVectorAndNorm()
    (fipy.terms.exponentialConvectionTerm.ExponentialConvectionTerm
     method), 520
residualVectorAndNorm()
    (fipy.terms.hybridConvectionTerm.HybridConvectionTerm
     method), 525
residualVectorAndNorm()
    (fipy.terms.implicitSourceTerm.ImplicitSourceTerm
     method), 539
residualVectorAndNorm()
    (fipy.terms.powerLawConvectionTerm.PowerLawConvectionTerm
     method), 544
residualVectorAndNorm() (fipy.terms.residualTerm.ResidualTerm
           method), 548
residualVectorAndNorm() (fipy.terms.sourceTerm.SourceTerm
           method), 553
residualVectorAndNorm() (fipy.terms.term.Term method), 556
residualVectorAndNorm() (fipy.terms.transientTerm.TransientTerm
           method), 561
residualVectorAndNorm()
    (fipy.terms.upwindConvectionTerm.UpwindConvectionTerm
     method), 566
residualVectorAndNorm()
    (fipy.terms.vanLeerConvectionTerm.VanLeerConvectionTerm
     method), 571
RHSvector, 1052
RHSvector (fipy.terms.advectionTerm.AdvectionTerm property), 484
RHSvector (fipy.terms.cellTerm.CellTerm property), 488
RHSvector
    (fipy.terms.centralDiffConvectionTerm.CentralDifferenceConvectionTerm
     property), 493
RHSvector (fipy.terms.diffusionTerm.DiffusionTerm property), 498
RHSvector
    (fipy.terms.diffusionTermCorrection.DiffusionTermCorrection
     property), 501
RHSvector
    (fipy.terms.diffusionTermNoCorrection.DiffusionTermNoCorrection
     property), 504
RHSvector (fipy.terms.explicitDiffusionTerm.ExplicitDiffusionTerm
           property), 508
RHSvector
    (fipy.terms.explicitUpwindConvectionTerm.ExplicitUpwindConvectionTerm
     property), 513
RHSvector
    (fipy.terms.exponentialConvectionTerm.ExponentialConvectionTerm
     property), 518
RHSvector (fipy.terms.faceTerm.FaceTerm property), 522
RHSvector
    (fipy.terms.firstOrderAdvectionTerm.FirstOrderAdvectionTerm
     property), 527
RHSvector (fipy.terms.hybridConvectionTerm.HybridConvectionTerm
           property), 532
RHSvector (fipy.terms.implicitSourceTerm.ImplicitSourceTerm
           property), 537
RHSvector
    (fipy.terms.powerLawConvectionTerm.PowerLawConvectionTerm
     property), 542
RHSvector (fipy.terms.residualTerm.ResidualTerm property), 546
RHSvector (fipy.terms.sourceTerm.SourceTerm property), 550
RHSvector (fipy.terms.term.Term property), 555
RHSvector (fipy.terms.transientTerm.TransientTerm property), 559
RHSvector
    (fipy.terms.upwindConvectionTerm.UpwindConvectionTerm
     property), 564
RHSvector (fipy.terms.vanLeerConvectionTerm.VanLeerConvectionTerm
           property), 564

```

```

    property), 569
runGold, 1066
runLeveler, 1073
runSimpleTrenchSystem, 1084

S
ScalarQuantityOutOfRangeWarning, 456
ScharfetterGummelFaceVariable (class in
    fipy.variables.scharfetterGummelFaceVariable), 798
ScientificPython, 109
SciPy, 109, 1106
scipy
    module, 966, 971, 1115, 1154
scramble() (fipy.variables.betanoiseVariable.BetanoiseVariable
    method), 647
scramble()
    (fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable
    method), 696
scramble()
    (fipy.variables.gammaNoiseVariable.GammaNoiseVariable
    method), 723
scramble()
    (fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable
    method), 739
scramble() (fipy.variables.noiseVariable.NoiseVariable method), 795
scramble()
    (fipy.variables.uniformNoiseVariable.UniformNoiseVariable
    method), 849
serialComm (in module fipy.tools), 576
SerialEpetraCommWrapper (class in
    fipy.solvers.trilinos.comms.serialEpetraCommWrapper),
    460
SerialPETScCommWrapper (class in
    fipy.solvers.petsc.comms.serialPETScCommWrapper), 431
SerialSolverError, 428
setLimits() (exam-
    ples.levelSet.electroChem.matplotlibSurfactantViewer.MatplotlibSurfactantViewer
    method), 1080
setLimits() (exam-
    ples.levelSet.electroChem.mayaviSurfactantViewer.MayaviSurfactantViewer
    method), 1083
setLimits() (fipy.viewers.DummyViewer method), 862
setLimits()
    (fipy.viewers.matplotlibViewer.abstractMatplotlib2DViewer.AbstractMatplotlib2DViewer
    method), 869
setLimits()
    (fipy.viewers.matplotlibViewer.abstractMatplotlibViewer.AbstractMatplotlibViewer
    method), 871
setLimits()
    (fipy.viewers.matplotlibViewer.matplotlib1DViewer.Matplotlib1DViewer
    method), 874
setLimits()
    (fipy.viewers.matplotlibViewer.matplotlib2DContourViewer.Matplotlib2DContourViewer
    method), 876
setLimits()
    (fipy.viewers.matplotlibViewer.matplotlib2DGridContourViewer.Matplotlib2DGridContourViewer
    method), 880
setLimits()
    (fipy.viewers.matplotlibViewer.matplotlib2DGridViewer.Matplotlib2DGridViewer
    method), 882
setLimits()
    (fipy.viewers.matplotlibViewer.matplotlib2DViewer.Matplotlib2DViewer
    method), 885
setLimits()
    (fipy.viewers.matplotlibViewer.matplotlibStreamViewer.MatplotlibStreamViewer
    method), 890

setLimits()
    (fipy.viewers.matplotlibVectorViewer.MatplotlibVectorViewer
    method), 893
setLimits() (fipy.viewers.mayaviViewer.MayaviClient method), 897
setLimits() (fipy.viewers.mayaviViewer.mayaviClient.MayaviClient
    method), 900
setLimits() (fipy.viewers.multiViewer.MultiViewer method), 903
setLimits() (fipy.viewers.tsvViewer.TSVViewer method), 905
setLimits() (fipy.viewers.viewer.AbstractViewer method), 907
setLimits() (fipy.viewers.vtkViewer.VTKCellViewer method), 909
setLimits() (fipy.viewers.vtkViewer.vtkCellViewer.VTKCellViewer
    method), 913
setLimits() (fipy.viewers.vtkViewer.VTKFaceViewer method), 910
setLimits() (fipy.viewers.vtkViewer.vtkFaceViewer.VTKFaceViewer
    method), 915
setLimits() (fipy.viewers.vtkViewer.vtkViewer.VTKViewer method),
    916
setName() (fipy.tools.dimensions.physicalField.PhysicalUnit method),
    621
setup_source()
    (fipy.viewers.mayaviViewer.mayaviDaemon.MayaviDaemon
    method), 902
setValue() (fipy.variables.betanoiseVariable.BetanoiseVariable
    method), 647
setValue() (fipy.variables.cellVariable.CellVariable method), 662
setValue() (fipy.variables.distanceVariable.DistanceVariable
    method), 681
setValue()
    (fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable
    method), 696
setValue() (fipy.variables.faceVariable.FaceVariable method), 707
setValue()
    (fipy.variables.gammaNoiseVariable.GammaNoiseVariable
    method), 723
setValue()
    (fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable
    method), 740
setvalue() (fipy.variables.histogramVariable.HistogramVariable
    method), 754
setValue() (fipy.variables.meshVariable.MeshVariable method), 765
setvalue() (fipy.variables.modularVariable.ModularVariable
    method), 780
setValue() (fipy.variables.noiseVariable.NoiseVariable method), 796
setValue()
    (fipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable
    method), 807
setValue()
    (fipy.variables.surfactantConvectionVariable.SurfactantConvectionVariable
    method), 819
setValue() (fipy.variables.surfactantVariable.SurfactantVariable
    method), 834
setValue()
    (fipy.variables.uniformNoiseVariable.UniformNoiseVariable
    method), 849
setValue() (fipy.variables.variable.Variable method), 859
shape (fipy.tools.dimensions.physicalField.PhysicalField property),
    612
shape (fipy.tools.PhysicalField property), 589
shape (fipy.variables.betanoiseVariable.BetanoiseVariable property),
    663
shape (fipy.variables.cellVariable.CellVariable property), 663
shape (fipy.variables.distanceVariable.DistanceVariable property), 681
shape
    (fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable
    property), 697
shape (fipy.variables.faceVariable.FaceVariable property), 708
shape (fipy.variables.gammaNoiseVariable.GammaNoiseVariable
    property), 724

```

shape (*fiPy.variables.gaussianNoiseVariable.GaussianNoiseVariable property*), 740
 shape (*fiPy.variables.histogramVariable.HistogramVariable property*), 755
 shape (*fiPy.variables.meshVariable.MeshVariable property*), 766
 shape (*fiPy.variables.modularVariable.ModularVariable property*), 781
 shape (*fiPy.variables.noiseVariable.NoiseVariable property*), 796
 shape (*fiPy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable property*), 807
 shape (*fiPy.variables.surfactantConvectionVariable.SurfactantConvectionVariable property*), 819
 shape (*fiPy.variables.surfactantVariable.SurfactantVariable property*), 834
 shape (*fiPy.variables.uniformNoiseVariable.UniformNoiseVariable property*), 850
 shape (*fiPy.variables.variable.Variable property*), 860
 SharedTemporaryFile() (*in module fiPy.tools*), 592
 SharedTemporaryFile() (*in module fiPy.tools.sharedtempfile*), 629
 sign() (*fiPy.tools.dimensions.physicalField.PhysicalField method*), 612
 sign() (*fiPy.tools.PhysicalField method*), 589
 sin() (*fiPy.tools.dimensions.physicalField.PhysicalField method*), 612
 sin() (*fiPy.tools.PhysicalField method*), 590
 sinh() (*fiPy.tools.dimensions.physicalField.PhysicalField method*), 612
 sinh() (*fiPy.tools.PhysicalField method*), 590
 SkewedGrid2D (*class in fiPy.meshes.skewedGrid2D*), 365
 SmoothedAggregationPreconditioner (*class in fiPy.solvers.pyAMG.preconditioners.smoothedAggregationPreconditioner*), 439
 Smoother (*class in fiPy.solvers.pyamgx.smoothers.smoothers*), 445
 SolutionVariableNumberError, 477
 SolutionVariableRequiredError, 477
 solve, 1115
 solve() (*fiPy.terms.advectionTerm.AdvectionTerm method*), 487
 solve() (*fiPy.terms.cellTerm.CellTerm method*), 491
 solve()
 (*fiPy.terms.centralDiffConvectionTerm.CentralDifferenceConvectionTerm method*), 496
 solve() (*fiPy.terms.diffusionTerm.DiffusionTerm method*), 500
 solve() (*fiPy.terms.diffusionTermCorrection.DiffusionTermCorrection method*), 503
 solve()
 (*fiPy.terms.diffusionTermNoCorrection.DiffusionTermNoCorrection method*), 507
 solve() (*fiPy.terms.explicitDiffusionTerm.ExplicitDiffusionTerm method*), 510
 solve()
 (*fiPy.terms.explicitUpwindConvectionTerm.ExplicitUpwindConvectionTerm method*), 515
 solve()
 (*fiPy.terms.exponentialConvectionTerm.ExponentialConvectionTerm method*), 520
 solve() (*fiPy.terms.faceTerm.FaceTerm method*), 525
 solve()
 (*fiPy.terms.firstOrderAdvectionTerm.FirstOrderAdvectionTerm method*), 530
 solve() (*fiPy.terms.hybridConvectionTerm.HybridConvectionTerm method*), 535
 solve() (*fiPy.terms.implicitSourceTerm.ImplicitSourceTerm method*), 539
 solve()
 (*fiPy.terms.powerLawConvectionTerm.PowerLawConvectionTerm method*), 545
 solve() (*fiPy.terms.residualTerm.ResidualTerm method*), 549
 solve() (*fiPy.terms.sourceTerm.SourceTerm method*), 553
 solve() (*fiPy.terms.term.Term method*), 557
 solve() (*fiPy.terms.transientTerm.TransientTerm method*), 562
 solve() (*fiPy.terms.upwindConvectionTerm.UpwindConvectionTerm method*), 567
 solve() (*fiPy.terms.vanLeerConvectionTerm.VanLeerConvectionTerm method*), 572
 Solver (*class in fiPy.solvers.solver*), 457
 SolverConvergenceWarning, 457
 SourceTerm (class in *fiPy.terms.sourceTerm*), 550
 SphericalGrid1D() (*in module fiPy.meshes.factoryMeshes*), 174
 SphericalNonUniformGrid1D (*class in fiPy.meshes.sphericalNonUniformGrid1D*), 374
 SphericalUniformGrid1D (*class in fiPy.meshes.sphericalUniformGrid1D*), 383
 Sphinx, 109
 sqrt, 932, 1068, 1119, 1148
 arcsin; cos, 966, 971
 sqrt() (*fiPy.tools.dimensions.physicalField.PhysicalField method*), 613
 sqrt() (*fiPy.tools.PhysicalField method*), 590
 sqrtDot() (*in module fiPy.tools.numerix*), 627
 SsorPreconditioner (*class in fiPy.solvers.pysparse.preconditioners.ssorPreconditioner*), 449
 StagnatedSolverWarning, 458
 std() (*fiPy.variables.betaNoiseVariable.BetaNoiseVariable method*), 648
 std() (*fiPy.variables.cellVariable.CellVariable method*), 663
 std() (*fiPy.variables.distanceVariable.DistanceVariable method*), 682
 std()
 (*fiPy.variables.exponentialNoiseVariable.ExponentialNoiseVariable method*), 697
 std() (*fiPy.variables.faceVariable.FaceVariable method*), 708
 std() (*fiPy.variables.gammaNoiseVariable.GammaNoiseVariable method*), 724
 std() (*fiPy.variables.gaussianNoiseVariable.GaussianNoiseVariable method*), 741
 std() (*fiPy.variables.histogramVariable.HistogramVariable method*), 755
 std() (*fiPy.variables.meshVariable.MeshVariable method*), 766
 std() (*fiPy.variables.modularVariable.ModularVariable method*), 781
 std() (*fiPy.variables.noiseVariable.NoiseVariable method*), 797
 std()
 (*fiPy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable method*), 808
 std() (*fiPy.variables.surfactantConvectionVariable.SurfactantConvectionVariable method*), 820
 std() (*fiPy.variables.surfactantVariable.SurfactantVariable method*), 835
 std() (*fiPy.variables.uniformNoiseVariable.UniformNoiseVariable method*), 850
 std() (*fiPy.variables.variable.Variable method*), 860
 SteadyConvectionDiffusionSeEquation, 1168
 Stepper (*class in fiPy.steppers.stepper*), 474
 subtract() (*fiPy.tools.dimensions.physicalField.PhysicalField method*), 613
 subtract() (*fiPy.tools.PhysicalField method*), 590
 sum() (*fiPy.tools.dimensions.physicalField.PhysicalField method*), 613
 sum() (*fiPy.tools.PhysicalField method*), 591
 sum() (*in module fiPy.tools.numerix*), 627
 SurfactantConvectionVariable (*class in fiPy.variables.surfactantConvectionVariable*), 809
 SurfactantVariable, 1070
 SurfactantVariable (*class in fiPy.variables.surfactantVariable*), 820
 sweep, 1052, 1115, 1153
 sweep() (*fiPy.terms.advectionTerm.AdvectionTerm method*), 487

```

sweep() (fipy.terms.cellTerm.CellTerm method), 491
sweep()
    (fipy.terms.centralDiffConvectionTerm.CentralDifferenceConvectionTerm
     method), 496
sweep() (fipy.terms.diffusionTerm.DiffusionTerm method), 500
sweep() (fipy.terms.diffusionTermCorrection.DiffusionTermCorrection
     method), 504
sweep()
    (fipy.terms.diffusionTermNoCorrection.DiffusionTermNoCorrection
     method), 507
sweep() (fipy.terms.explicitDiffusionTerm.ExplicitDiffusionTerm
     method), 510
sweep()
    (fipy.terms.explicitUpwindConvectionTerm.ExplicitUpwindConvectionTerm
     method), 516
sweep()
    (fipy.terms.exponentialConvectionTerm.ExponentialConvectionTerm
     method), 521
sweep() (fipy.terms.faceTerm.FaceTerm method), 525
sweep()
    (fipy.terms.firstOrderAdvectionTerm.FirstOrderAdvectionTerm
     method), 530
sweep() (fipy.terms.hybridConvectionTerm.HybridConvectionTerm
     method), 535
sweep() (fipy.terms.implicitSourceTerm.ImplicitSourceTerm method),
     540
sweep()
    (fipy.terms.powerLawConvectionTerm.PowerLawConvectionTerm
     method), 545
sweep() (fipy.terms.residualTerm.ResidualTerm method), 549
sweep() (fipy.terms.sourceTerm.SourceTerm method), 553
sweep() (fipy.terms.term.Term method), 557
sweep() (fipy.terms.transientTerm.TransientTerm method), 562
sweep() (fipy.terms.upwindConvectionTerm.UpwindConvectionTerm
     method), 567
sweep() (fipy.terms.vanLeerConvectionTerm.VanLeerConvectionTerm
     method), 572
sweepMonotonic() (in module fipy.steppers), 472

T
take() (fipy.tools.dimensions.physicalField.PhysicalField method),
     613
take() (fipy.tools.PhysicalField method), 591
take() (in module fipy.tools.numerix), 627
tan, 1094, 1099
tan() (fipy.tools.dimensions.physicalField.PhysicalField method), 614
tan() (fipy.tools.PhysicalField method), 591
tanh, 1148
tanh() (fipy.tools.dimensions.physicalField.PhysicalField method),
     614
tanh() (fipy.tools.PhysicalField method), 591
Term (class in fipy.terms.term), 554
TermMultiplyError, 478
test (class in fipy.tests.test), 575
test() (in module fipy), 125
testmod() (in module fipy.tests.doctestPlus), 573
TestProgram (class in fipy.tests.testProgram), 576
title (exam-
    ples.levelSet.electroChem.matplotlibSurfactantViewer.Matplot-
    llib2DViewer property), 1081
title (exam-
    ples.levelSet.electroChem.mayaviSurfactantViewer.MayaviSurfac-
    tantViewer property), 1084
title (fipy.viewers.DummyViewer property), 863
title
    (fipy.viewers.matplotlibViewer.abstractMatplotlib2DViewer.Abst-
    ractMatplotlib2DViewer property), 870
title
    (fipy.viewers.matplotlibViewer.abstractMatplotlib2DViewer.Abst-
    ractMatplotlib2DViewer property), 872
title
    (fipy.viewers.matplotlib1DViewer.Matplotlib1DViewer
     property), 875
title
    (fipy.viewers.matplotlib2DContourViewer.Matplotlib2DContour
     property), 877
title
    (fipy.viewers.matplotlib2DGridContourViewer.Matplotlib2DGrid
     property), 880
title
    (fipy.viewers.matplotlib2DGridViewer.Matplotlib2DGridViewer
     property), 883
title
    (fipy.viewers.matplotlib2DViewer.Matplotlib2DViewer
     property), 886
title
    (fipy.viewers.matplotlibStreamViewer.MatplotlibStreamViewer
     property), 890
title
    (fipy.viewers.matplotlibVectorViewer.MatplotlibVectorViewer
     property), 894
title (fipy.viewers.mayaviViewer.MayaviClient property), 897
title (fipy.viewers.mayaviViewer.mayaviClient.MayaviClient
     property), 901
title (fipy.viewers.multiViewer.MultiViewer property), 903
title (fipy.viewers.tsvViewer.TSVViewer property), 906
title (fipy.viewers.viewer.AbstractViewer property), 908
title (fipy.viewers.vtkViewer.VTKCellViewer property), 909
title (fipy.viewers.vtkViewer.vtkCellViewer.VTKCellViewer property),
     914
title (fipy.viewers.vtkViewer.VTKFaceViewer property), 911
title (fipy.viewers.vtkViewer.vtkFaceViewer.VTKFaceViewer
     property), 915
title (fipy.viewers.vtkViewer.vtkViewer.VTKViewer property), 917
toString() (fipy.tools.dimensions.physicalField.PhysicalField
     method), 614
toString() (fipy.tools.PhysicalField method), 592
toString() (in module fipy.tools.numerix), 627
TransientTerm, 984, 1099, 1120, 1124, 1149
TransientTerm (class in fipy.terms.transientTerm), 558
TransientTermError, 478
TravisCI, 109
Tri2D (class in fipy.meshes.tri2D), 390
Trilinos, 109
TrilinosAztecOOsolver (class in
    fipy.solvers.trilinos.trilinosAztecOOsolver), 468
TrilinosMLTest (class in fipy.solvers.trilinos.trilinosMLTest), 469
TrilinosNonlinearSolver (class in
    fipy.solvers.trilinos.trilinosNonlinearSolver), 469
TrilinosSolver (class in fipy.solvers.trilinos.trilinosSolver), 470
TSVViewer (class in fipy.viewers.tsvViewer), 904

U
UniformGrid (class in fipy.meshes.uniformGrid), 399
UniformGrid1D (class in fipy.meshes.uniformGrid1D), 406
UniformGrid2D (class in fipy.meshes.uniformGrid2D), 413
UniformGrid3D (class in fipy.meshes.uniformGrid3D), 420
UniformNoiseVariable (class in
    fipy.variables.uniformNoiseVariable), 836
unit (fipy.tools.dimensions.physicalField.PhysicalField property), 614
unit (fipy.tools.PhysicalField property), 592
unit (fipy.variables.betanoiseVariable.BetaNoiseVariable property),
     836
unit (fipy.variables.cellVariable.CellVariable property), 663

```

u
unit (*fipy.variables.distanceVariable.DistanceVariable property*), 682
unit (*fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable property*), 698
unit (*fipy.variables.faceVariable.FaceVariable property*), 709
unit (*fipy.variables.gammaNoiseVariable.GammaNoiseVariable property*), 725
unit (*fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable property*), 741
unit (*fipy.variables.histogramVariable.HistogramVariable property*), 756
unit (*fipy.variables.meshVariable.MeshVariable property*), 767
unit (*fipy.variables.modularVariable.ModularVariable property*), 781
unit (*fipy.variables.noiseVariable.NoiseVariable property*), 797
unit (*fipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable property*), 808
unit (*fipy.variables.surfactantConvectionVariable.SurfactantConvectionVariable property*), 820
unit (*fipy.variables.surfactantVariable.SurfactantVariable property*), 835
unit (*fipy.variables.uniformNoiseVariable.UniformNoiseVariable property*), 851
unit (*fipy.variables.variable.Variable property*), 860
update_pipeline() (*fipy.viewers.mayaviViewer.mayaviDaemon.MayaviDaemon method*), 902
updateOld() (*fipy.variables.betaNoiseVariable.BetaNoiseVariable method*), 648
updateOld() (*fipy.variables.cellVariable.CellVariable method*), 663
updateOld() (*fipy.variables.distanceVariable.DistanceVariable method*), 682
updateOld() (*fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable method*), 698
updateOld() (*fipy.variables.gammaNoiseVariable.GammaNoiseVariable method*), 725
updateOld() (*fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable method*), 741
updateOld() (*fipy.variables.histogramVariable.HistogramVariable method*), 756
updateOld() (*fipy.variables.modularVariable.ModularVariable method*), 782
updateOld() (*fipy.variables.noiseVariable.NoiseVariable method*), 797
updateOld() (*fipy.variables.surfactantVariable.SurfactantVariable method*), 835
updateOld() (*fipy.variables.uniformNoiseVariable.UniformNoiseVariable method*), 851
UpwindConvectionTerm (*class in fipy.terms.upwindConvectionTerm*), 563

V

value (*fipy.variables.betaNoiseVariable.BetaNoiseVariable property*), 648
value (*fipy.variables.cellVariable.CellVariable property*), 664
value (*fipy.variables.distanceVariable.DistanceVariable property*), 682
value (*fipy.variables.exponentialNoiseVariable.ExponentialNoiseVariable property*), 698
value (*fipy.variables.faceVariable.FaceVariable property*), 709
value (*fipy.variables.gammaNoiseVariable.GammaNoiseVariable property*), 725
value (*fipy.variables.gaussianNoiseVariable.GaussianNoiseVariable property*), 741
value (*fipy.variables.histogramVariable.HistogramVariable property*), 756
value (*fipy.variables.meshVariable.MeshVariable property*), 767
value (*fipy.variables.modularVariable.ModularVariable property*), 782
value (*fipy.variables.noiseVariable.NoiseVariable property*), 797
value (*fipy.variables.scharfetterGummelFaceVariable.ScharfetterGummelFaceVariable property*), 808
value (*fipy.variables.surfactantConvectionVariable.SurfactantConvectionVariable property*), 820
value (*fipy.variables.surfactantVariable.SurfactantVariable property*), 835
value (*fipy.variables.uniformNoiseVariable.UniformNoiseVariable property*), 851
value (*fipy.variables.variable.Variable property*), 861
VanLeerConvectionTerm (*class in fipy.terms.vanLeerConvectionTerm*), 568

Variable, 1101, 1110, 1152
Variable (*class in fipy.variables.variable*), 851
vars (*exam-*
ples.levelSet.electroChem.matplotlibSurfactantViewer.MatplotlibSurfactantViewer property), 1081
vars (*exam-*
ples.levelSet.electroChem.mayaviSurfactantViewer.MayaviSurfactantViewer property), 1084
vars (*fipy.viewers.DummyViewer property*), 863
vars (*fipy.viewers.matplotlibViewer.abstractMatplotlib2DViewer.AbstractMatplotlib2D property*), 870
vars (*fipy.viewers.matplotlibViewer.abstractMatplotlibViewer.AbstractMatplotlibViewer property*), 872
vars (*fipy.viewers.matplotlibViewer.matplotlib1DViewer.Matplotlib1DViewer property*), 875
vars (*fipy.viewers.matplotlibViewer.matplotlib2DContourViewer.Matplotlib2DContour property*), 877
vars (*fipy.viewers.matplotlibViewer.matplotlib2DGridContourViewer.Matplotlib2DGrid property*), 880
vars (*fipy.viewers.matplotlibViewer.matplotlib2DGridViewer.Matplotlib2DGridViewer property*), 883
vars (*fipy.viewers.matplotlibViewer.matplotlib2DViewer.Matplotlib2DViewer property*), 886
vars (*fipy.viewers.matplotlibViewer.matplotlibStreamViewer.MatplotlibStreamViewer property*), 890
vars (*fipy.viewers.matplotlibViewer.matplotlibVectorViewer.MatplotlibVectorViewer property*), 894
vars (*fipy.viewers.mayaviViewer.MayaviClient property*), 897
vars (*fipy.viewers.mayaviViewer.mayaviClient.MayaviClient property*), 901
vars (*fipy.viewers.multiViewer.MultiViewer property*), 903
vars (*fipy.viewers.tsvViewer.TSVViewer property*), 906
vars (*fipy.viewers.viewer.AbstractViewer property*), 908
vars (*fipy.viewers.vtkViewer.VTKCellViewer property*), 909
vars (*fipy.viewers.vtkViewer.vtkCellViewer.VTKCellViewer property*), 914
vars (*fipy.viewers.vtkViewer.VTKFaceViewer property*), 911

```

vars (fipy.viewers.vtkViewer.vtkFaceViewer.VTKFaceViewer property), 915
vars (fipy.viewers.vtkViewer.vtkViewer.VTKViewer property), 917
VectorCoeffError, 479
view_data()
    (fipy.viewers.mayaviViewer.mayaviDaemon.MayaviDaemon
     method), 902
Viewer() (in module fipy.viewers), 863
viewers
    module, 1145
Vitals (class in fipy.tools), 593
Vitals (class in fipy.tools.vitals), 631
VTKCellDataSet (fipy.meshes.abstractMesh.AbstractMesh property),
    132
VTKCellDataSet
    (fipy.meshes.cylindricalNonUniformGrid1D.CylindricalNonUniformGrid1D
     property), 141
VTKCellDataSet
    (fipy.meshes.cylindricalNonUniformGrid2D.CylindricalNonUniformGrid2D
     property), 149
VTKCellDataSet
    (fipy.meshes.cylindricalUniformGrid1D.CylindricalUniformGrid1D
     property), 158
VTKCellDataSet
    (fipy.meshes.cylindricalUniformGrid2D.CylindricalUniformGrid2D
     property), 165
VTKCellDataSet (fipy.meshes.gmshMesh.Gmsh2D property), 179
VTKCellDataSet (fipy.meshes.gmshMesh.Gmsh2DIn3DSpace
    property), 188
VTKCellDataSet (fipy.meshes.gmshMesh.Gmsh3D property), 196
VTKCellDataSet (fipy.meshes.gmshMesh.GmshGrid2D property), 205
VTKCellDataSet (fipy.meshes.gmshMesh.GmshGrid3D property), 213
VTKCellDataSet (fipy.meshes.mesh.Mesh property), 223
VTKCellDataSet (fipy.meshes.mesh1D.Mesh1D property), 232
VTKCellDataSet (fipy.meshes.mesh2D.Mesh2D property), 240
VTKCellDataSet
    (fipy.meshes.nonUniformGrid1D.NonUniformGrid1D
     property), 249
VTKCellDataSet
    (fipy.meshes.nonUniformGrid2D.NonUniformGrid2D
     property), 257
VTKCellDataSet
    (fipy.meshes.nonUniformGrid3D.NonUniformGrid3D
     property), 266
VTKCellDataSet (fipy.meshes.periodicGrid1D.PeriodicGrid1D
    property), 274
VTKCellDataSet (fipy.meshes.periodicGrid2D.PeriodicGrid2D
    property), 284
VTKCellDataSet
    (fipy.meshes.periodicGrid2D.PeriodicGrid2DLeftRight
     property), 292
VTKCellDataSet
    (fipy.meshes.periodicGrid2D.PeriodicGrid2DTopBottom
     property), 301
VTKCellDataSet (fipy.meshes.periodicGrid3D.PeriodicGrid3D
    property), 311
VTKCellDataSet
    (fipy.meshes.periodicGrid3D.PeriodicGrid3DFrontBack
     property), 318
VTKCellDataSet
    (fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRight
     property), 326
VTKCellDataSet
    (fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightFrontBack
     property), 334
VTKCellDataSet
    (fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightTopBottom
     property), 342
VTKCellDataSet
    (fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottom
     property), 349
VTKCellDataSet
    (fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottomFrontBack
     property), 357
VTKCellDataSet (fipy.meshes.skewedGrid2D.SkewedGrid2D
    property), 366
VTKCellDataSet
    (fipy.meshes.sphericalNonUniformGrid1D.SphericalNonUniformGrid1D
     property), 375
VTKCellDataSet
    (fipy.meshes.sphericalUniformGrid1D.SphericalUniformGrid1D
     property), 383
VTKCellDataSet (fipy.meshes.tri2D.Tri2D property), 391
VTKCellDataSet (fipy.meshes.uniformGrid.UniformGrid property),
    399
VTKCellDataSet (fipy.meshes.uniformGrid1D.UniformGrid1D
    property), 406
VTKCellDataSet (fipy.meshes.uniformGrid2D.UniformGrid2D
    property), 413
VTKCellDataSet (fipy.meshes.uniformGrid3D.UniformGrid3D
    property), 420
VTKCellViewer (class in fipy.viewers.vtkViewer), 908
VTKCellViewer (class in fipy.viewers.vtkCellViewer), 912
VTKFaceDataSet (fipy.meshes.abstractMesh.AbstractMesh property),
    132
VTKFaceDataSet
    (fipy.meshes.cylindricalNonUniformGrid1D.CylindricalNonUniformGrid1D
     property), 141
VTKFaceDataSet
    (fipy.meshes.cylindricalNonUniformGrid2D.CylindricalNonUniformGrid2D
     property), 149
VTKFaceDataSet
    (fipy.meshes.cylindricalUniformGrid1D.CylindricalUniformGrid1D
     property), 158
VTKFaceDataSet
    (fipy.meshes.cylindricalUniformGrid2D.CylindricalUniformGrid2D
     property), 165
VTKFaceDataSet (fipy.meshes.gmshMesh.Gmsh2D property), 179
VTKFaceDataSet (fipy.meshes.gmshMesh.Gmsh2DIn3DSpace
    property), 188
VTKFaceDataSet (fipy.meshes.gmshMesh.Gmsh3D property), 196
VTKFaceDataSet (fipy.meshes.gmshMesh.GmshGrid2D property), 205
VTKFaceDataSet (fipy.meshes.gmshMesh.GmshGrid3D property), 213
VTKFaceDataSet (fipy.meshes.mesh.Mesh property), 223
VTKFaceDataSet (fipy.meshes.mesh1D.Mesh1D property), 232
VTKFaceDataSet (fipy.meshes.mesh2D.Mesh2D property), 240
VTKFaceDataSet
    (fipy.meshes.nonUniformGrid1D.NonUniformGrid1D
     property), 249
VTKFaceDataSet
    (fipy.meshes.nonUniformGrid2D.NonUniformGrid2D
     property), 257
VTKFaceDataSet
    (fipy.meshes.nonUniformGrid3D.NonUniformGrid3D
     property), 266
VTKFaceDataSet (fipy.meshes.periodicGrid1D.PeriodicGrid1D
    property), 275
VTKFaceDataSet (fipy.meshes.periodicGrid2D.PeriodicGrid2D
    property), 284
VTKFaceDataSet
    (fipy.meshes.periodicGrid2D.PeriodicGrid2DLeftRight
     property), 292
VTKFaceDataSet
    (fipy.meshes.periodicGrid2D.PeriodicGrid2DTopBottom
     property), 301

```

VTKFaceDataSet (*fipy.meshes.periodicGrid3D.PeriodicGrid3D property*), 311
 VTKFaceDataSet
 (*fipy.meshes.periodicGrid3D.PeriodicGrid3DFrontBack property*), 318
 VTKFaceDataSet
 (*fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRight property*), 326
 VTKFaceDataSet
 (*fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightFrontBack property*), 334
 VTKFaceDataSet
 (*fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightTopBottom property*), 342
 VTKFaceDataSet
 (*fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottom property*), 349
 VTKFaceDataSet
 (*fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottomFrontBack property*), 357
 VTKFaceDataSet (*fipy.meshes.skewedGrid2D.SkewedGrid2D property*), 366
 VTKFaceDataSet
 (*fipy.meshes.sphericalNonUniformGrid1D.SphericalNonUniformGrid1D property*), 375
 VTKFaceDataSet
 (*fipy.meshes.sphericalUniformGrid1D.SphericalUniformGrid1D property*), 383
 VTKFaceDataSet (*fipy.meshes.tri2D.Tri2D property*), 391
 VTKFaceDataSet (*fipy.meshes.uniformGrid.UniformGrid property*), 399
 VTKFaceDataSet (*fipy.meshes.uniformGrid1D.UniformGrid1D property*), 406
 VTKFaceDataSet (*fipy.meshes.uniformGrid2D.UniformGrid2D property*), 413
 VTKFaceDataSet (*fipy.meshes.uniformGrid3D.UniformGrid3D property*), 420
 VTKFaceViewer (*class in fipy.viewers.vtkViewer*), 910
 VTKFaceViewer (*class in fipy.viewers.vtkViewer.vtkFaceViewer*), 914
 VTKViewer (*class in fipy.viewers.vtkViewer.vtkViewer*), 916
 VTKViewer() (*in module fipy.viewers.vtkViewer*), 911

W

Weave, 109
 Windows, 109
 with_traceback() (*fipy.meshes.abstractMesh.MeshAdditionError method*), 139
 with_traceback() (*fipy.meshes.gmshMesh.GmshException method*), 204
 with_traceback() (*fipy.meshes.gmshMesh.MeshExportError method*), 222
 with_traceback() (*fipy.meshes.mesh.MeshAdditionError method*), 231
 with_traceback() (*fipy.solvers.SerialSolverError method*), 428
 with_traceback()
 (*fipy.solvers.solver.IllConditionedPreconditionerWarning method*), 454
 with_traceback() (*fipy.solvers.solver.MatrixIllConditionedWarning method*), 454
 with_traceback() (*fipy.solvers.solver.MaximumIterationWarning method*), 455
 with_traceback()
 (*fipy.solvers.solver.PreconditionerNotPositiveDefiniteWarning method*), 456
 with_traceback() (*fipy.solvers.solver.PreconditionerWarning method*), 456

with_traceback() (*fipy.solvers.solver.ScalarQuantityOutOfRangeWarning method*), 457
 with_traceback() (*fipy.solvers.solver.SolverConvergenceWarning method*), 458
 with_traceback() (*fipy.solvers.solver.StagnatedSolverWarning method*), 458
 with_traceback() (*fipy.terms.AbstractBaseClassError method*), 475
 with_traceback() (*fipy.terms.ExplicitVariableError method*), 476
 with_traceback() (*fipy.terms.IncorrectSolutionVariable method*), 477
 with_traceback() (*fipy.terms.SolutionVariableNumberError method*), 477
 with_traceback() (*fipy.terms.SolutionVariableRequiredError method*), 478
 with_traceback() (*fipy.terms.TermMultiplyError method*), 478
 with_traceback() (*fipy.terms.TransientTermError method*), 479
 with_traceback() (*fipy.terms.VectorCoeffError method*), 479
 with_traceback() (*fipy.viewers.MeshDimensionError method*), 863
 write() (*in module fipy.tools.dump*), 622

X

x (*fipy.meshes.abstractMesh.AbstractMesh property*), 138
 x (*fipy.meshes.cylindricalNonUniformGrid1D.CylindricalNonUniformGrid1D property*), 148
 x (*fipy.meshes.cylindricalNonUniformGrid2D.CylindricalNonUniformGrid2D property*), 157
 x (*fipy.meshes.cylindricalUniformGrid1D.CylindricalUniformGrid1D property*), 164
 x (*fipy.meshes.cylindricalUniformGrid2D.CylindricalUniformGrid2D property*), 171
 x (*fipy.meshes.gmshMesh.Gmsh2D property*), 187
 x (*fipy.meshes.gmshMesh.Gmsh2DIn3DSpace property*), 195
 x (*fipy.meshes.gmshMesh.Gmsh3D property*), 203
 x (*fipy.meshes.gmshMesh.GmshGrid2D property*), 212
 x (*fipy.meshes.gmshMesh.GmshGrid3D property*), 220
 x (*fipy.meshes.mesh.Mesh property*), 230
 x (*fipy.meshes.mesh1D.Mesh1D property*), 239
 x (*fipy.meshes.mesh2D.Mesh2D property*), 248
 x (*fipy.meshes.nonUniformGrid1D.NonUniformGrid1D property*), 256
 x (*fipy.meshes.nonUniformGrid2D.NonUniformGrid2D property*), 265
 x (*fipy.meshes.nonUniformGrid3D.NonUniformGrid3D property*), 273
 x (*fipy.meshes.periodicGrid1D.PeriodicGrid1D property*), 282
 x (*fipy.meshes.periodicGrid2D.PeriodicGrid2D property*), 292
 x (*fipy.meshes.periodicGrid2D.PeriodicGrid2DLeftRight property*), 300
 x (*fipy.meshes.periodicGrid2D.PeriodicGrid2DTopBottom property*), 308
 x (*fipy.meshes.periodicGrid3D.PeriodicGrid3D property*), 318
 x (*fipy.meshes.periodicGrid3D.PeriodicGrid3DFrontBack property*), 325
 x (*fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRight property*), 333
 x (*fipy.meshes.periodicGrid3D.PeriodicGrid3DFrontBack property*), 341
 x (*fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightTopBottom property*), 349
 x (*fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottom property*), 356
 x (*fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottomFrontBack property*), 364
 x (*fipy.meshes.skewedGrid2D.SkewedGrid2D property*), 373
 x (*fipy.meshes.sphericalNonUniformGrid1D.SphericalNonUniformGrid1D property*), 382

x (*fipy.meshes.sphericalUniformGrid1D.SphericalUniformGrid1D property*), 389
 x (*fipy.meshes.tri2D.Tri2D property*), 398
 x (*fipy.meshes.uniformGrid.UniformGrid property*), 405
 x (*fipy.meshes.uniformGrid1D.UniformGrid1D property*), 412
 x (*fipy.meshes.uniformGrid2D.UniformGrid2D property*), 419
 x (*fipy.meshes.uniformGrid3D.UniformGrid3D property*), 426

Y

y (*fipy.meshes.abstractMesh.AbstractMesh property*), 138
 y
 (*fipy.meshes.cylindricalNonUniformGrid1D.CylindricalNonUniformGrid1D property*), 148
 y
 (*fipy.meshes.cylindricalNonUniformGrid2D.CylindricalNonUniformGrid2D property*), 157
 y (*fipy.meshes.cylindricalUniformGrid1D.CylindricalUniformGrid1D property*), 164
 y (*fipy.meshes.cylindricalUniformGrid2D.CylindricalUniformGrid2D property*), 171
 y (*fipy.meshes.gmshMesh.Gmsh2D property*), 187
 y (*fipy.meshes.gmshMesh.Gmsh2DIn3DSpace property*), 195
 y (*fipy.meshes.gmshMesh.Gmsh3D property*), 203
 y (*fipy.meshes.gmshMesh.GmshGrid2D property*), 212
 y (*fipy.meshes.gmshMesh.GmshGrid3D property*), 220
 y (*fipy.meshes.mesh.Mesh property*), 230
 y (*fipy.meshes.mesh1D.Mesh1D property*), 239
 y (*fipy.meshes.mesh2D.Mesh2D property*), 248
 y (*fipy.meshes.nonUniformGrid1D.NonUniformGrid1D property*), 256
 y (*fipy.meshes.nonUniformGrid2D.NonUniformGrid2D property*), 265
 y (*fipy.meshes.nonUniformGrid3D.NonUniformGrid3D property*), 273
 y (*fipy.meshes.periodicGrid1D.PeriodicGrid1D property*), 282
 y (*fipy.meshes.periodicGrid2D.PeriodicGrid2D property*), 292
 y (*fipy.meshes.periodicGrid2D.PeriodicGrid2DLeftRight property*), 300
 y (*fipy.meshes.periodicGrid2D.PeriodicGrid2DTopBottom property*), 308
 y (*fipy.meshes.periodicGrid3D.PeriodicGrid3D property*), 318
 y (*fipy.meshes.periodicGrid3D.PeriodicGrid3DFrontBack property*), 326
 y (*fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRight property*), 333
 y (*fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightFrontBack property*), 341
 y (*fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightTopBottom property*), 349
 y (*fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottom property*), 357
 y (*fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottomFrontBack property*), 364
 y (*fipy.meshes.skewedGrid2D.SkewedGrid2D property*), 373
 y
 (*fipy.meshes.sphericalNonUniformGrid1D.SphericalNonUniformGrid1D property*), 382
 y (*fipy.meshes.sphericalUniformGrid1D.SphericalUniformGrid1D property*), 389
 y (*fipy.meshes.tri2D.Tri2D property*), 398
 y (*fipy.meshes.uniformGrid.UniformGrid property*), 405
 y (*fipy.meshes.uniformGrid1D.UniformGrid1D property*), 412
 y (*fipy.meshes.uniformGrid2D.UniformGrid2D property*), 419
 y (*fipy.meshes.uniformGrid3D.UniformGrid3D property*), 427

Z

z (*fipy.meshes.abstractMesh.AbstractMesh property*), 138
 z
 (*fipy.meshes.cylindricalNonUniformGrid1D.CylindricalNonUniformGrid1D property*), 148

z
 (*fipy.meshes.cylindricalNonUniformGrid2D.CylindricalNonUniformGrid2D property*), 157
 z (*fipy.meshes.cylindricalUniformGrid1D.CylindricalUniformGrid1D property*), 164
 z (*fipy.meshes.cylindricalUniformGrid2D.CylindricalUniformGrid2D property*), 171
 z (*fipy.meshes.gmshMesh.Gmsh2D property*), 187
 z (*fipy.meshes.gmshMesh.Gmsh2DIn3DSpace property*), 196
 z (*fipy.meshes.gmshMesh.Gmsh3D property*), 204
 z (*fipy.meshes.gmshMesh.GmshGrid2D property*), 213
 z (*fipy.meshes.gmshMesh.GmshGrid3D property*), 220
 z (*fipy.meshes.mesh.Mesh property*), 231
 z (*fipy.meshes.mesh1D.Mesh1D property*), 239
 z (*fipy.meshes.mesh2D.Mesh2D property*), 248
 z (*fipy.meshes.nonUniformGrid1D.NonUniformGrid1D property*), 257
 z (*fipy.meshes.nonUniformGrid2D.NonUniformGrid2D property*), 265
 z (*fipy.meshes.nonUniformGrid3D.NonUniformGrid3D property*), 273
 z (*fipy.meshes.periodicGrid1D.PeriodicGrid1D property*), 282
 z (*fipy.meshes.periodicGrid2D.PeriodicGrid2D property*), 292
 z (*fipy.meshes.periodicGrid2D.PeriodicGrid2DLeftRight property*), 300
 z (*fipy.meshes.periodicGrid2D.PeriodicGrid2DTopBottom property*), 309
 z (*fipy.meshes.periodicGrid3D.PeriodicGrid3D property*), 318
 z (*fipy.meshes.periodicGrid3D.PeriodicGrid3DFrontBack property*), 326
 z (*fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRight property*), 334
 z (*fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightFrontBack property*), 341
 z (*fipy.meshes.periodicGrid3D.PeriodicGrid3DLeftRightTopBottom property*), 349
 z (*fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottom property*), 357
 z (*fipy.meshes.periodicGrid3D.PeriodicGrid3DTopBottomFrontBack property*), 365
 z (*fipy.meshes.skewedGrid2D.SkewedGrid2D property*), 374
 z
 (*fipy.meshes.sphericalNonUniformGrid1D.SphericalNonUniformGrid1D property*), 382
 z (*fipy.meshes.sphericalUniformGrid1D.SphericalUniformGrid1D property*), 389
 z (*fipy.meshes.tri2D.Tri2D property*), 399
 z (*fipy.meshes.uniformGrid.UniformGrid property*), 406
 z (*fipy.meshes.uniformGrid1D.UniformGrid1D property*), 413
 z (*fipy.meshes.uniformGrid2D.UniformGrid2D property*), 420
 z (*fipy.meshes.uniformGrid3D.UniformGrid3D property*), 427