

Nykaa UI Automation Assessment

Git Repository Link:

[ust-sdet-training/SDET at saiteja 24JUN26](#)

Project Overview

This project automates basic UI functionality of the Nykaa website using Playwright with TypeScript.

Website:

<https://www.nykaa.com/>

Framework:

- Playwright
 - TypeScript
 - Page Object Model (POM)
-

Objective

To automate search functionality by implementing:

- One Positive Scenario
 - One Negative Scenario
-

Project Structure

Pages/

- HomePage.ts
- SearchResultsPage.ts

Tests/


- positiveSearch.spec.ts
- negativeSearch.spec.ts

playwright.config.ts

package.json

tsconfig.json

Screenshot of Project Structure:

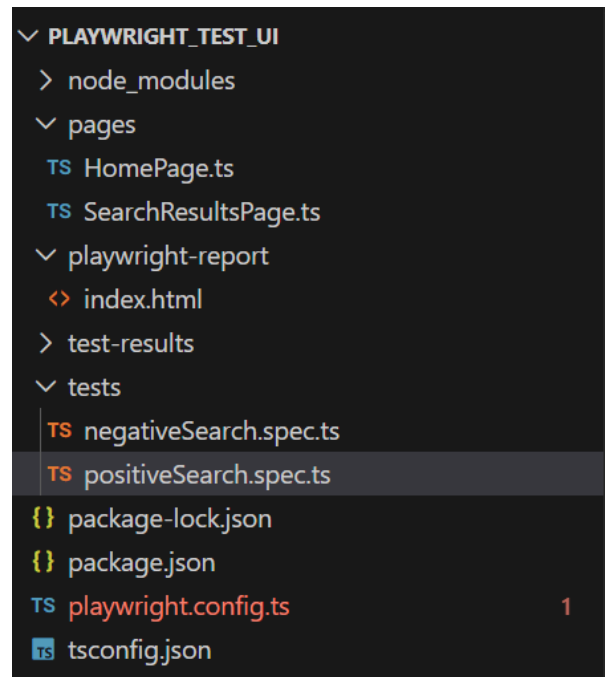

Test Scenarios

Positive Scenario

1. Launch Nykaa website.
2. Verify home page is loaded.
3. Enter a valid search keyword.
4. Perform search.
5. Verify search results are displayed.

Expected Result:

Relevant search results should be displayed successfully.

Negative Scenario

1. Launch Nykaa website.

2. Enter an invalid search keyword.
3. Perform search.
4. Verify no matching products are displayed.

Expected Result:

Appropriate no-results message should be displayed.

Automation Design

HomePage

Contains reusable methods for:

- Opening application
- Searching products
- Verifying homepage
- Verifying search results

Search Tests

Contains:

- Positive Search Test
 - Negative Search Test
-

Assertions Implemented

The following validations are performed:

- Page Title Validation
 - URL Validation
 - Search Result Validation
 - No Result Validation
-

Test Execution

Command Used:

`npx playwright test`

Screenshot of the Terminal:

A screenshot of a Visual Studio Code terminal window. The terminal title bar shows 'cmd' and standard window controls. The terminal content shows the command 'npx playwright test' being executed in the directory 'C:\Users\299172\Documents\Playwright_test_UI'. The output indicates that 2 tests were run using 2 workers, and all 2 tests passed in 31.1 seconds. It also provides a command to view the HTML report: 'npx playwright show-report'. The terminal status bar at the bottom shows 'Ln 18, Col 5', 'Spaces: 4', 'UTF-8', 'CRLF', and 'TypeScript'.

Result

The automated test cases were executed successfully using Playwright and TypeScript.

Implemented Features:

- Navigation using `page.goto()`
- Element identification using locators
- User interactions using `fill()` and `press()`
- Assertions using `expect()`
- Proper `async/await` implementation
- Page Object Model design

All planned test scenarios executed successfully.