

George Bibu Nykaa Playwright Test

GitHub Link: [ust-sdet-training/SDET at george_24jun26](https://github.com/ust-sdet-training/SDET/blob/master/George%20Bibu%20Nykaa%20Playwright%20Test)


Scenario: A user wants to navigate to <https://nykaa.com> and search for a product using the search-bar in the homepage.

Test Case Flow: The test first navigates to <https://nykaa.com> using “goto”. The URL of the page is asserted to be the same. The search-bar is located using placeholder text “Search on Nykaa” and the search-bar is asserted to be enabled. The search-bar is then filled with a text keyword “shampoo” and the “Enter” key on the keyboard is pressed. The results text of the results page is located and asserted to be visible and to also contain the number of products found using a regular expression.


Commands:

- 1) Run test case: `npx playwright test tests/nykaatest.spec.ts --headed`
- 2) Show report: `npx playwright show-report`


Screenshots of flow:

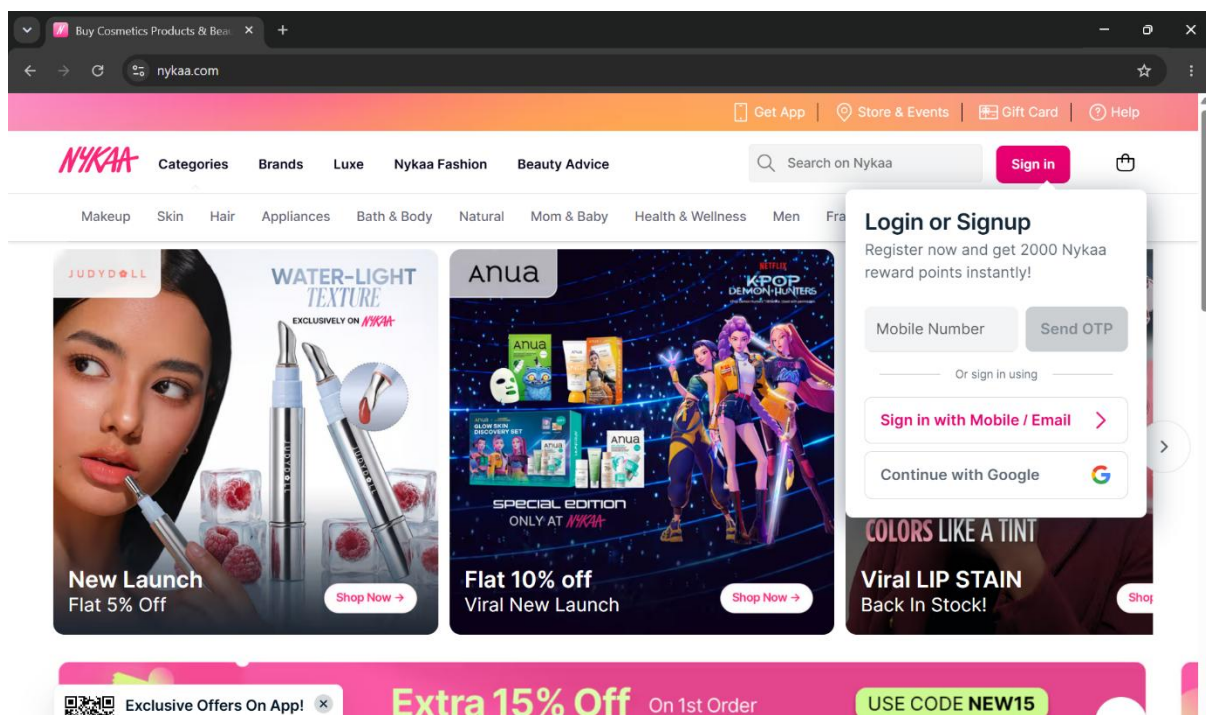

Navigate to Nykaa homepage

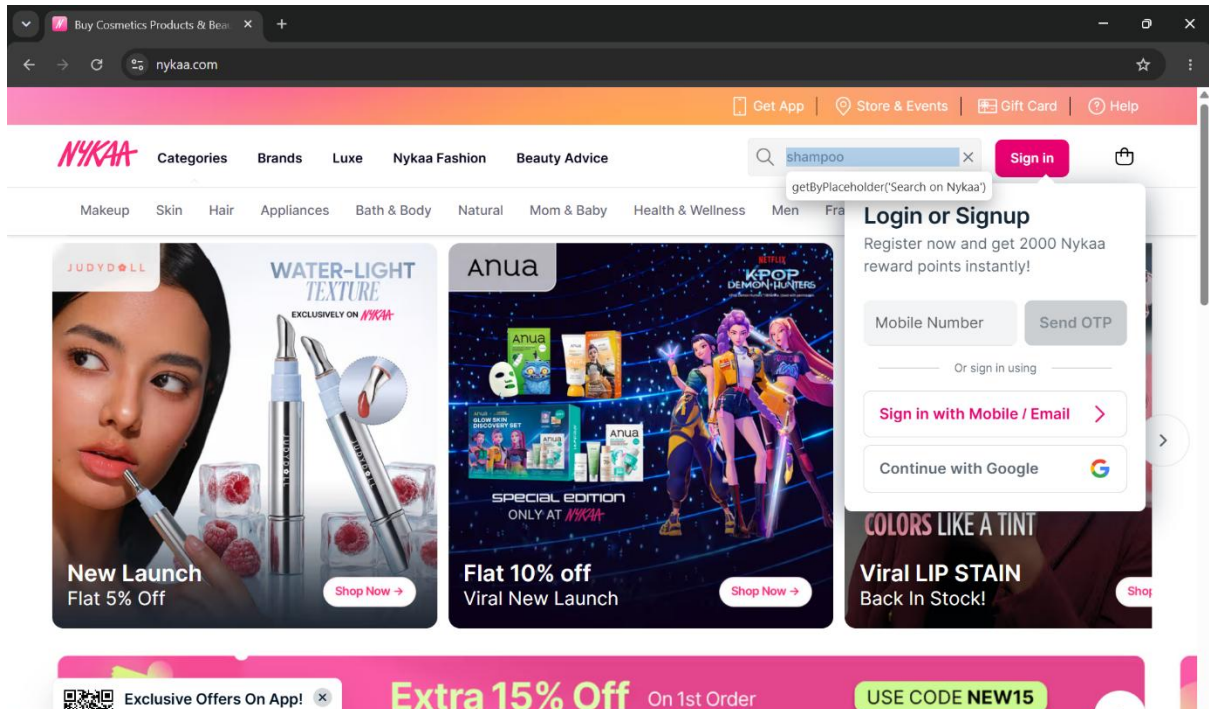


Enter keyword "shampoo" in search-bar and press "Enter"

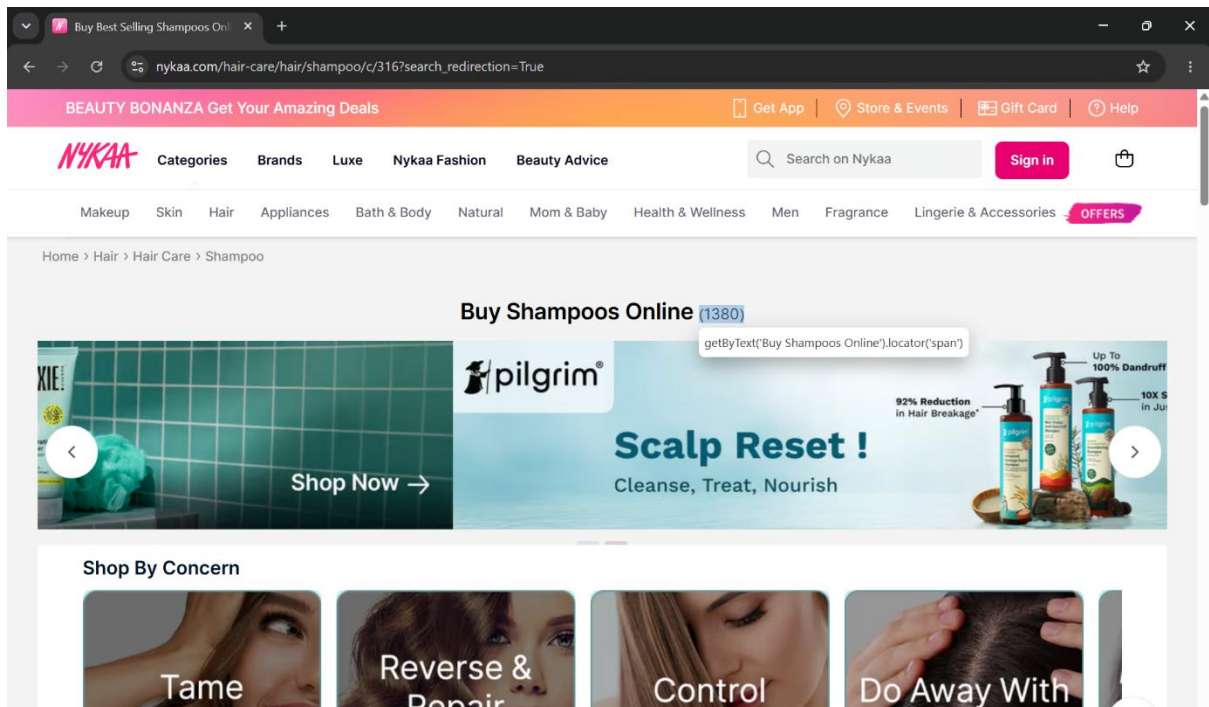

Results page is displayed and result text and count are displayed

Success Report:

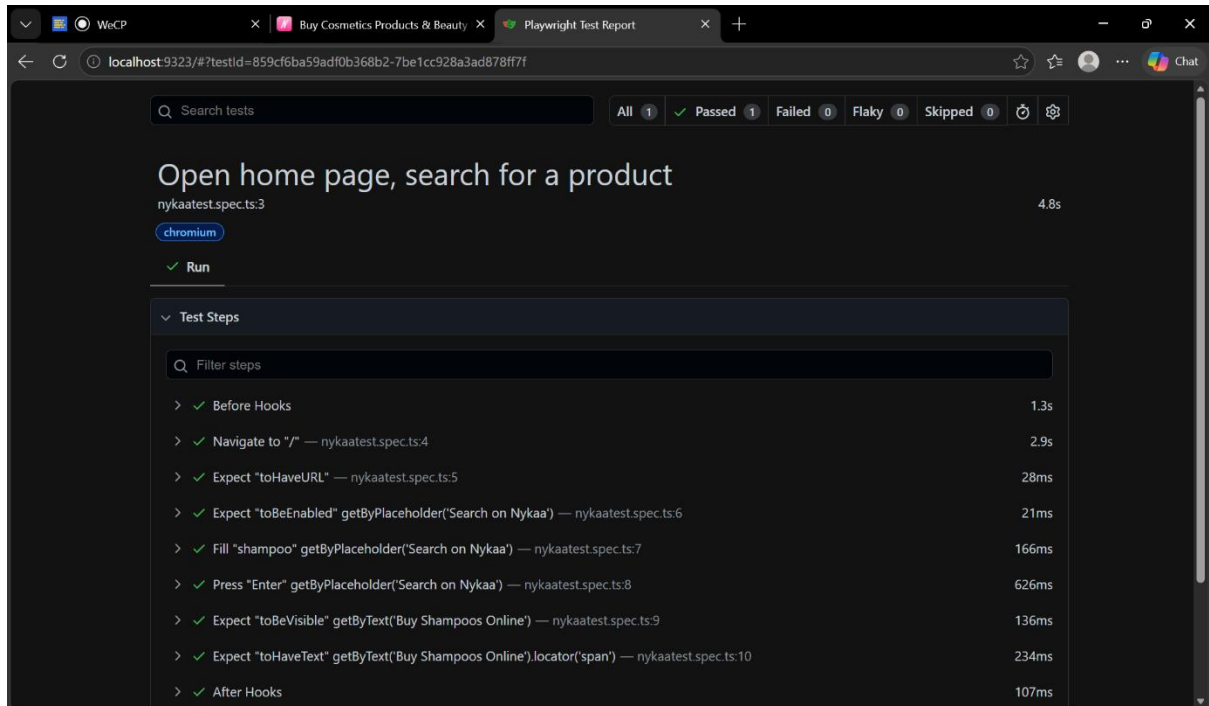

Search tests

All 1 ✓ Passed 1 Failed 0 Flaky 0 Skipped 0

Open home page, search for a product

nykaatest.spec.ts:3 4.8s

chromium

✓ Run

Test Steps

Filter steps

> ✓ Before Hooks	1.3s
> ✓ Navigate to "/" — nykaatest.spec.ts:4	2.9s
> ✓ Expect "toHaveURL" — nykaatest.spec.ts:5	28ms
> ✓ Expect "toBeEnabled" getByPlaceholder("Search on Nykaa") — nykaatest.spec.ts:6	21ms
> ✓ Fill "shampoo" getByPlaceholder("Search on Nykaa") — nykaatest.spec.ts:7	166ms
> ✓ Press "Enter" getByPlaceholder("Search on Nykaa") — nykaatest.spec.ts:8	626ms
> ✓ Expect "toBeVisible" getByText("Buy Shampoos Online") — nykaatest.spec.ts:9	136ms
> ✓ Expect "toHaveText" getByText("Buy Shampoos Online").locator("span") — nykaatest.spec.ts:10	234ms
> ✓ After Hooks	107ms

Test Case code snippet:

```
TS nykaatest.spec.ts U X
SDET > tests > TS nykaatest.spec.ts > test("Open home page, search for a product") callback
1 import { test, expect } from '@playwright/test';
2
3 test("Open home page, search for a product", async ({ page }) => {
4   await page.goto("https://www.nykaa.com/");
5   await expect(page).toHaveURL("https://www.nykaa.com/");
6   await expect(page.getByPlaceholder("Search on Nykaa")).toBeEnabled();
7   await page.getByPlaceholder("Search on Nykaa").fill("shampoo");
8   await page.getByPlaceholder("Search on Nykaa").press("Enter");
9   await expect(page.getByText("Buy Shampoos Online")).toBeVisible();
10  await expect(page.getByText("Buy Shampoos Online").locator("span")).toHaveText(/([0-9])/);
11 });
```