

Formal Languages and Abstract Machines

Take Home Exam 2

Name SURNAME

1234567

1 Context-Free Grammars

(10 pts)

a) Give the rules of the Context-Free Grammars to recognize strings in the given languages where $\Sigma = \{a, b\}$ and S is the start symbol.

$L(G) = \{w \mid w \in \Sigma^*; |w| \geq 3;$ (2/10 pts)
the first and the second from the last symbols of w are the same}

answer here ...

$L(G) = \{w \mid w \in \Sigma^*; \text{ the length of } w \text{ is odd}\}$ (2/10 pts)

answer here ...

$L(G) = \{w \mid w \in \Sigma^*; n(w, a) = 2 \cdot n(w, b)\}$ where $n(w, x)$ is the number of x symbols in w (3/10 pts)

answer here ...

b) Find the set of strings recognized by the CFG rules given below:

(3/10 pts)

$$S \rightarrow X \mid Y$$

$$X \rightarrow aXb \mid A \mid B$$

$$A \rightarrow aA \mid a$$

$$B \rightarrow Bb \mid b$$

$$Y \rightarrow CbaC$$

$$C \rightarrow CC \mid a \mid b \mid \varepsilon$$

answer here ...

2 Parse Trees and Derivations

(20 pts)

Given the CFG below, provide parse trees for given sentences in **a** and **b**.

```
S → NP VP
VP → V NP | V NP PP
PP → P NP
NP → N | D N | NP PP
V → wrote | built | constructed
D → a | an | the | my
N → John | Mary | Jane | man | book | automata | pen | class
P → in | on | by | with
```

a) Jane constructed automata with a pen

(4/20 pts)

answer here ...

b) my book in the man built a Jane by a pen

(4/20 pts)

answer here ...

Given the CFG below, answer **c**, **d** and **e**

```
S → E
E → E + T | E - T | T
T → T * I | T / I | I
I → 0 | 1 | 2 | 3 | 4 | 6 | 7 | 8 | 9
```

c) Provide the left-most derivation of $7 - 4 * 3$ step-by-step and plot the final parse tree matching that derivation (4/20 pts)

answer here ...

d) Provide the right-most derivation of $7 - 4 * 3$ step-by-step and plot the final parse tree matching that derivation (4/20 pts)

answer here ...

e) Are the derivations in **c** and **d** in the same similarity class? (4/20 pts)


answer here ...

3 Pushdown Automata


(30 pts)

a) Find the language recognized by the PDA given below

(5/30 pts)

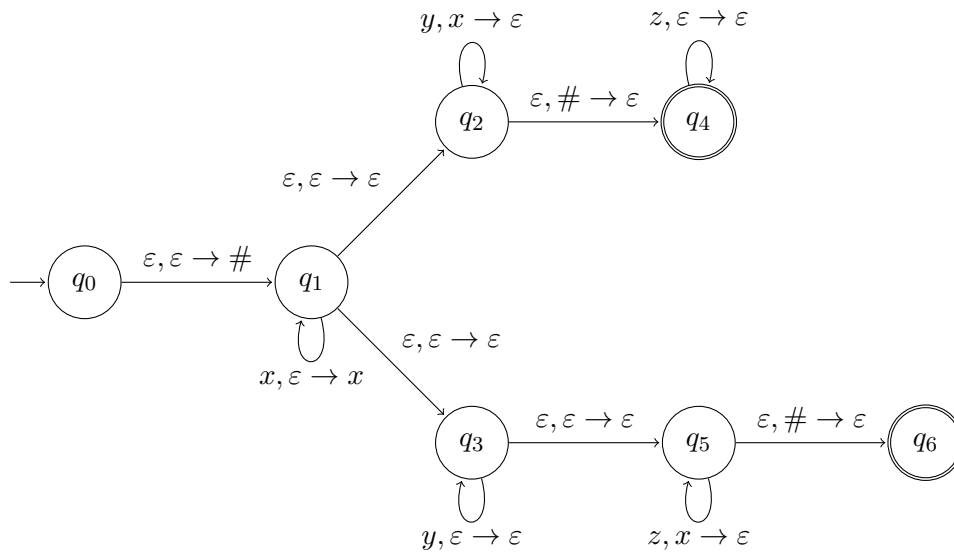

where the transition $((q_i, \alpha, \beta), (q_j, \gamma))$ is represented as:



answer here ...

b) Design a PDA to recognize language $L = \{x^n y^{m+n} x^m \mid n, m \geq 0; n, m \in \mathbb{N}\}$

(5/30 pts)

answer here ...

c) Design a PDA to recognize language $L = \{x^n y^m \mid n < m \leq 2n; n, m \in \mathbb{N}^+\}$ (10/30 pts)
Do not use multi-symbol push/pop operations in your transitions.
Simulate the PDA on strings xy (with only one rejecting derivation) and $xyyyy$ (accepting derivation) with transition tables.

answer here ...

d) Given two languages L' and L as $L' = \{w \mid w \in L; |w| = 4n + 2 \text{ for } n \in \mathbb{N}\}$ (10/30 pts)
If L is a CFL, show that L' is also a CFL by constructing an automaton for L' in terms of another automaton that recognizes L .

answer here ...

4 Closure Properties

(20 pts)

Let L_1 and L_2 be context-free languages which are not regular, and let L_3 be a regular language. Determine whether the following languages are necessarily CFLs or not. If they need to be context-free, explain your reasoning. If not, give one example where the language is a CFL and a counter example where the language is not a CFL.

a) $L_4 = L_1 \cap (L_2 \setminus L_3)$

(10/20 pts)

answer here ...

b) $L_5 = (L_1 \cap L_3)^*$

(10/20 pts)

answer here ...

5 Pumping Theorem

(20 pts)

a) Show that $L = \{a^n m^n t^i \mid n \leq i \leq 2n\}$ is not a Context Free Language using Pumping Theorem for CFLs.

(10/20 pts)

answer here ...

b) Show that $L = \{a^n b^{2n} a^n \mid n \in \mathbb{N}^+\}$ is not a Context Free Language using Pumping Theorem for CFLs.

(10/20 pts)

answer here ...

6 CNF and CYK

(not graded)

a) Convert the given context-free grammar to Chomsky Normal Form.

$$S \rightarrow XSX \mid xY$$

$$X \rightarrow Y \mid S$$

$$Y \rightarrow z \mid \varepsilon$$

answer here ...

b) Use the grammar below to parse the given sentence using Cocke–Younger–Kasami algorithm. Plot the parse trees.

S → NP VP	VP → book include prefer
S → X1 VP	VP → Verb NP
X1 → Aux NP	VP → X2 PP
S → book include prefer	X2 → Verb NP
S → Verb NP	VP → Verb PP
S → X2 PP	VP → VP PP
S → Verb PP	PP → Prep NP
S → VP PP	Det → that this the a
NP → I she me Houston	Noun → book flight meal money
NP → Det Nom	Verb → book include prefer
Nom → book flight meal money	Aux → does
Nom → Nom Noun	Prep → from to on near through
Nom → Nom PP	

book the flight through Houston

Empty parse table:

<div> <div>1:5 → 1:1 2:5 1:5 → 1:2 3:5 1:5 → 1:3 4:5 1:5 → 1:4 5:5</div> </div>				
<div> <div>1:4 → 1:1 2:4 1:4 → 1:2 3:4 1:4 → 1:3 4:4</div> </div>		<div> <div>2:5 → 2:2 3:5 2:5 → 2:3 4:5 2:5 → 2:4 5:5</div> </div>		
<div> <div>1:3 → 1:1 2:3 1:3 → 1:2 3:3</div> </div>		<div> <div>2:4 → 2:2 3:4 2:4 → 2:3 4:4</div> </div>	<div> <div>3:5 → 3:3 4:5 3:5 → 3:4 5:5</div> </div>	
<div>1:2 → 1:1 2:2</div>		<div>2:3 → 2:2 3:3</div>	<div>3:4 → 3:3 4:4</div>	<div>4:5 → 4:4 5:5</div>
1:1	2:2	3:3	4:4	5:5
book	the	flight	through	Houston

rest of the answer here ...

7 Deterministic Pushdown Automata

(not graded)

Provide a DPDA to recognize the given languages, the DPDA must read its entire input and finish with an empty stack.

a) $a^*bc \cup a^n b^n c$

answer here ...

b) $(aa)^*c \cup a^nb^nc$

answer here ...