





rstudio/gt



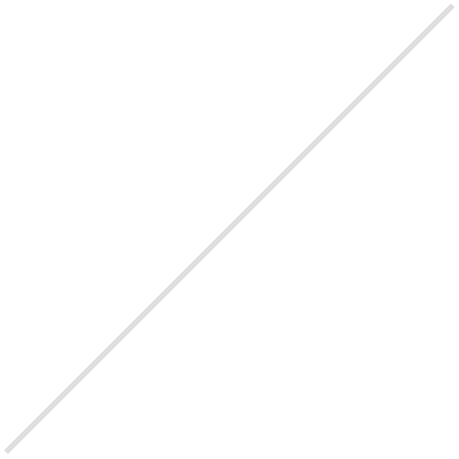

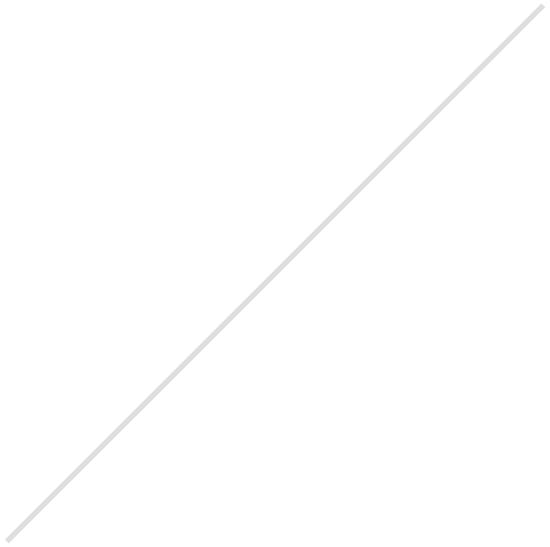







































































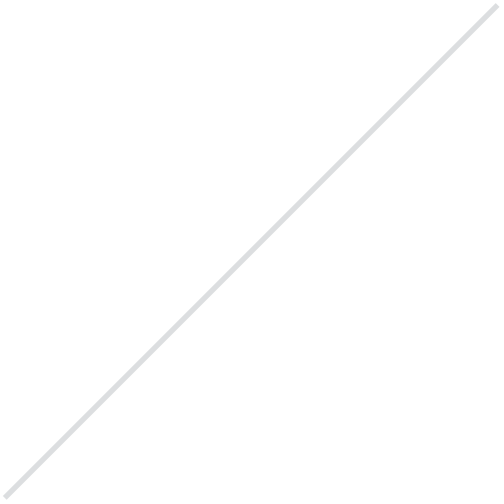

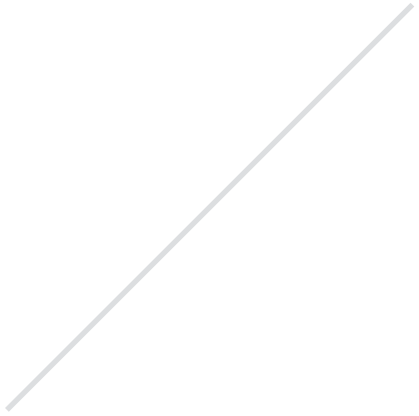



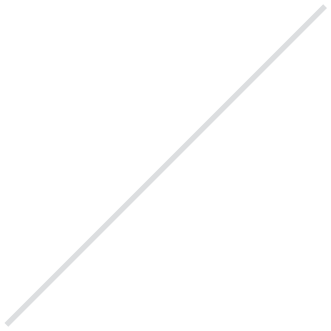

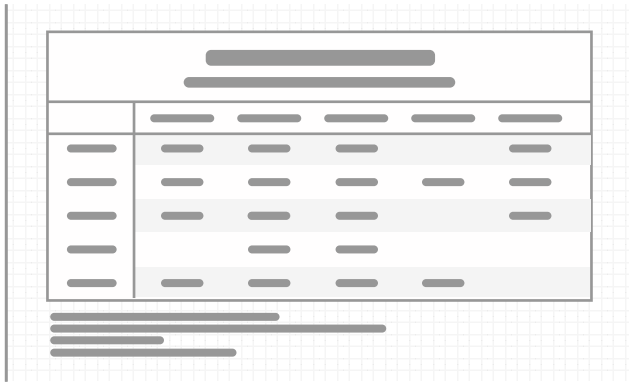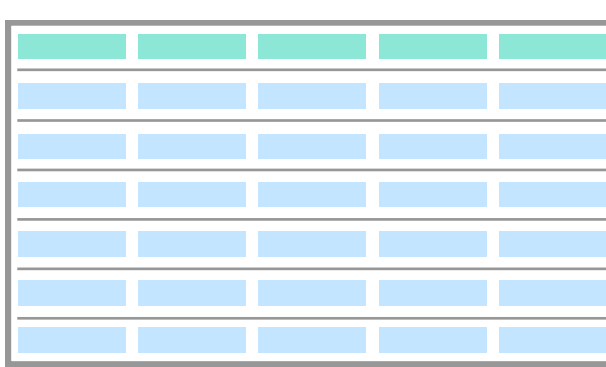


trashier odors


get object

outputtable

A Quick Introduction to the R package
called `{gt}`

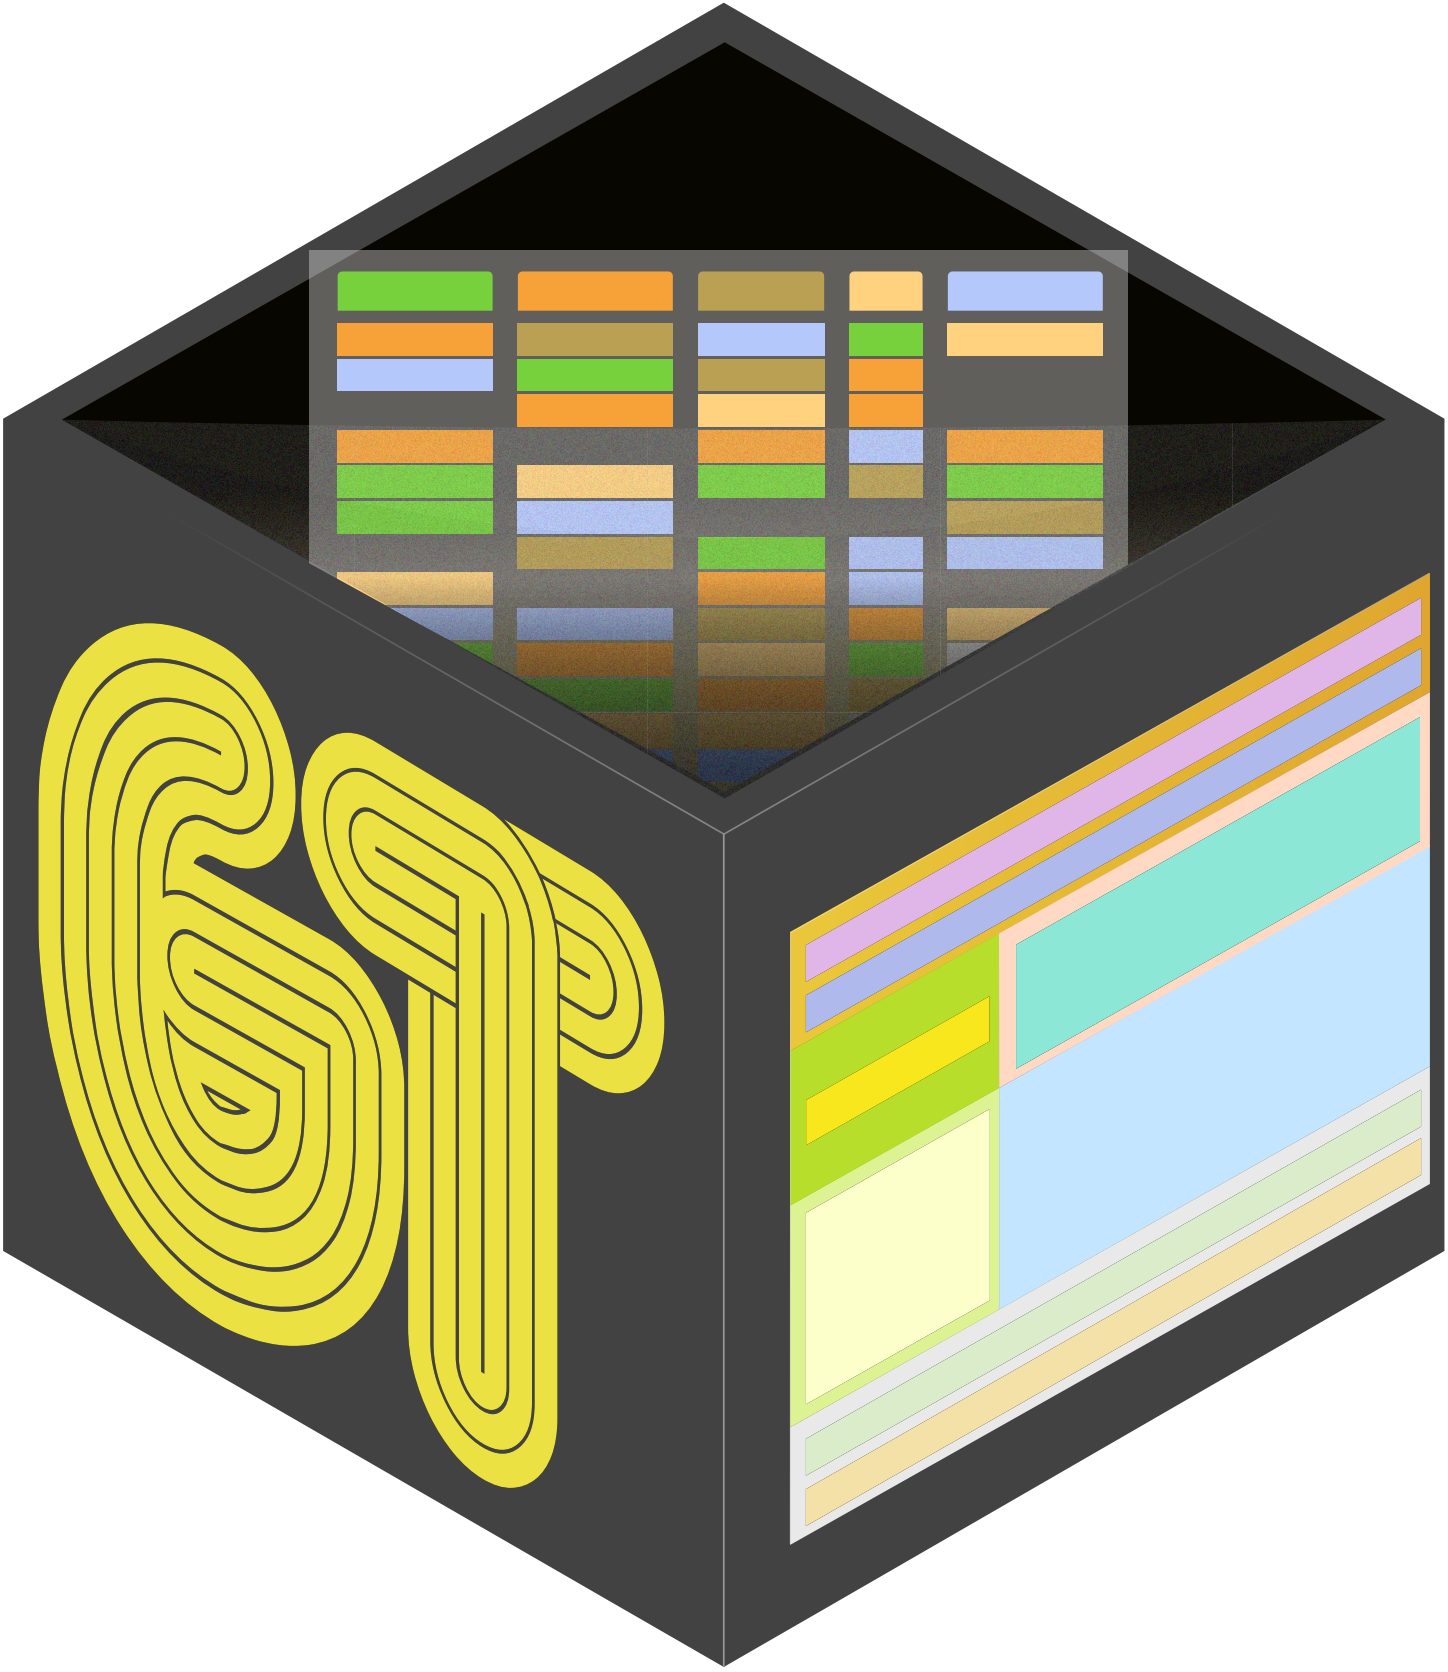




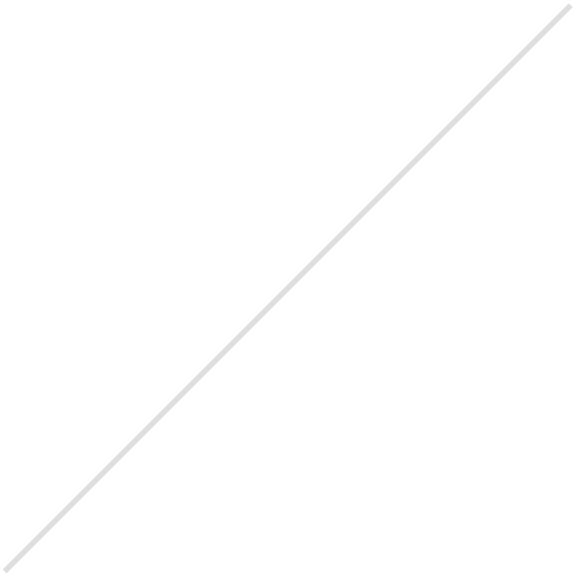





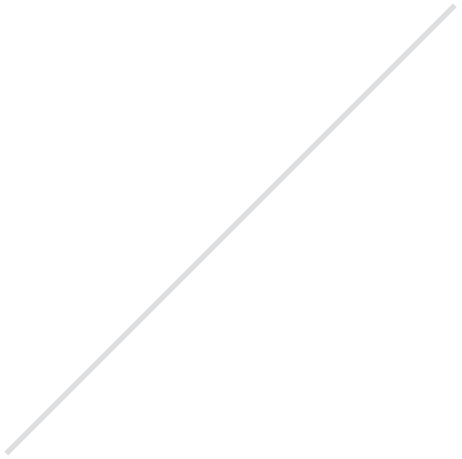












































































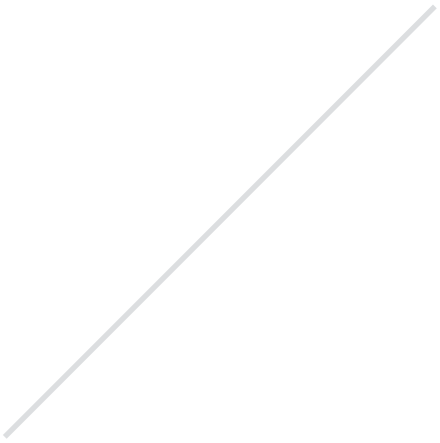

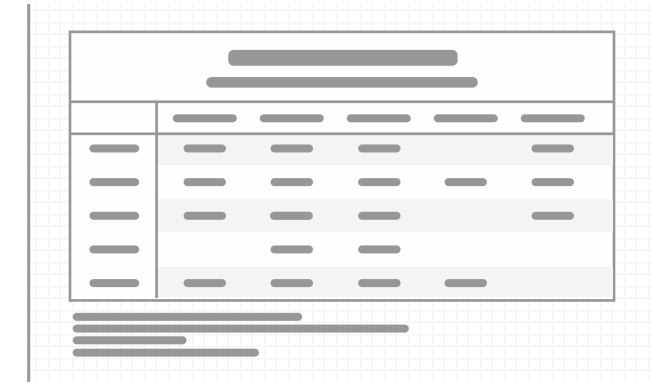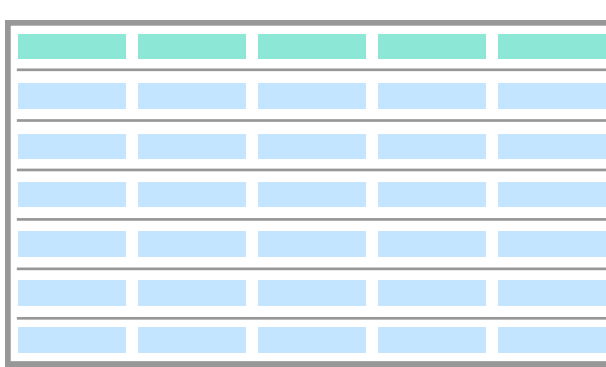

tablereoda

get object

outputtable

The `gt` package lets us create *tables for publication* with a declarative interface, allowing us to fine-tune the final appearance.

We can integrate the output tables into publishing workflows and shiny apps.

