
Introduction to HTML (Part 1)

NOR ANITA FAIROS BINTI ISMAIL
noranita@utm.my


Before we start...

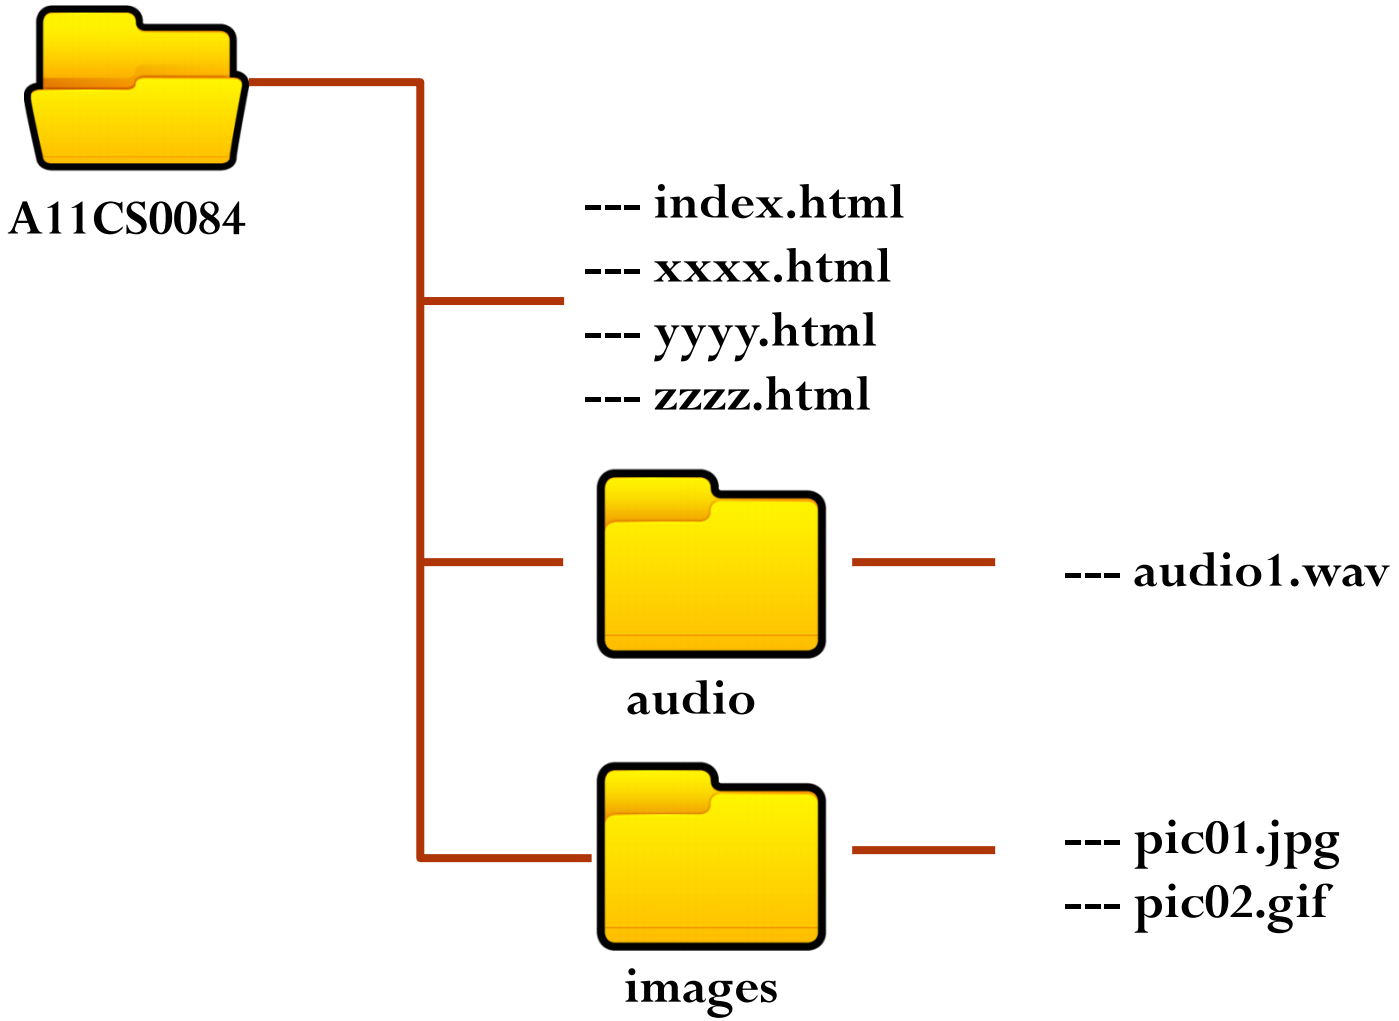

HTML Background

- November 1990, first HTML created by Tim Berners Lee, the father/inventor of WWW
- Knighted by Queen Victoria in 2004
- HTML stands for **H**yper **T**ext **M**arkup **L**anguage
- Hypertext is text which is not constrained to be linear.
  - HyperMedia is a term used for hypertext which is not constrained to be text: for example, it can include graphics, video and sound.

- How is hypertext non-linear?

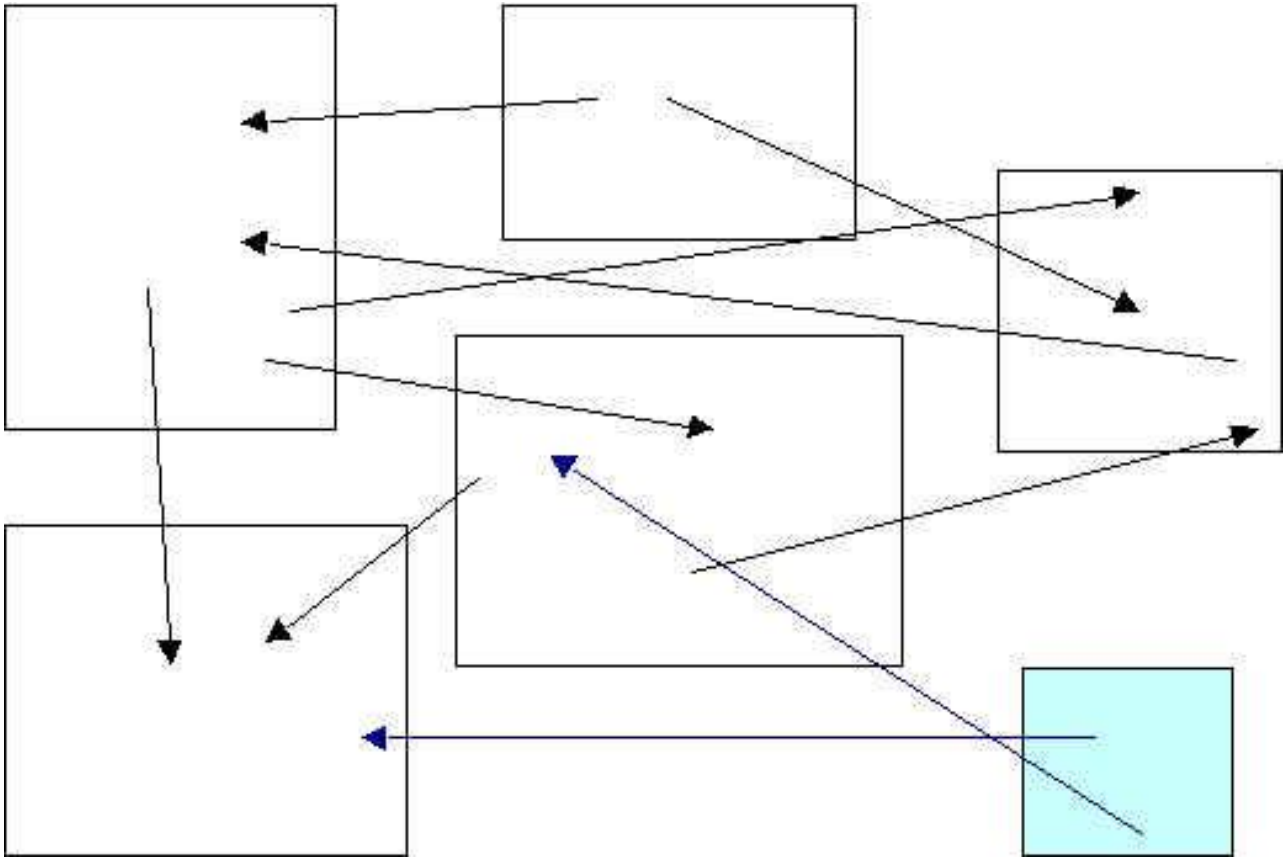

What is HTML?

- HTML is a **markup language** for **describing** the content and structure of a web documents (web pages).
- Web page is actually a **text file** written in HTML
- A markup language is a set of **markup tags**
- HTML documents are described by **HTML tags**
- Each HTML tag **describes** different document content.
  - E.g : paragraphs, figure captions, tables, heading etc.

Words To Know

- **Tag** - Used to specify ("mark-up") regions of HTML documents for the web browser to interpret. Tags look like this: <tag>

- **Element** - A complete tag, having an opening <tag> and a closing </tag>.

- **Attribute** - Used to modify the value of the HTML element. Elements will often have multiple attributes.

Tags

- HTML specifies a set of *tags* that identify structure of the document and the content type

  - **tags** are enclosed in **< >**

    `<img src="image.gif"/>` specifies an **image tags**

  - most tags come in **pairs**, marking a **beginning** and **ending**

    `<title>` and `</title>` enclose the title of a page

HTML Elements

- An HTML element usually consists of a **start** tag and **end** tag, with the content inserted in between:

```
<tagname>Content goes here...</tagname>
```

- Examples:

  `<title> My Home Page </title>` is a TITLE element

  `<b> This text appears bold. </b>` is a BOLD element

Start Tag	Element Content	End Tag
<title>	My Home Page	</title>
	This text appears bold.	
 		-

HTML elements with no content are called **empty elements**. Empty elements do not have an end tag, such as the **
** element (which indicates **a line break**).

Nested HTML Elements

- HTML elements can be **nested** (elements can **contain other** elements.
- All HTML documents consist of nested HTML elements.
- Example:

```
<p> Part of this text is <b>bold</b> </p>
```

The PARAGRAPH element that contains a BOLD element

```
<body>
<h1>My First Heading</h1>
<p>My first paragraph</p>
</body>
```

The BODY element content two other HTML elements (<h1> and <p>).

An HTML document is a collection of elements (text/media with context). HTML **element** is an object enclosed by a pair (in most cases) of tags

HTML Attributes

- All HTML elements can have **attributes**
- Attributes provide **additional information** about an element
- Attributes are always specified in the **start tag**
- Attributes usually come in name/value pairs like: **name="value"**

```
<html>
<body>

<h2>The title attribute</h2>

<p title="I'm a tooltip">
Mouse over this paragraph, to display the title attribute as a tooltip.
</p>

</body>
</html>
```

[ac-00]

Here, a **title** attribute is added to the **<p>** element. The value of the title attribute will be displayed as a tooltip when you mouse over the paragraph:

Simple Meaning

- For now just know that:
  - a ***tag*** is a command the web browser interpreter,
  - an ***element*** is a complete tag,
  - and an ***attribute*** customizes or modifies HTML elements.

Preparation for HTML

- To begin coding and using HTML you need only two things:
  - a ***simple-text*** editor (Notepad, Textpad, Subline, Atom etc) to write HTML code
  - A browser (IE, Chrome, Firefox etc)
- The HTML codes are written within angle brackets **<tag>**
- The files need to be saved as **.htm** or **.html files**.
- The saved files using any internet browsers.

- WYSIWYG (What You See Is What You Get)
  - GUI Tools for Creating HTML Document
    - Adobe Dreamweaver
    - Let you create pages quickly but you can only spicing up or polishing up HTML effects manually – can't do that if doesn't know HTML

Guide to HTML code

- Is not a programming language, it's a mark-up language
- HTML – Hypertext Mark-up Language
  - language to write **Web Pages**.
  - capability to **format the appearance** of text and images on a webpage.
- **Not** case sensitive
- Use <tag> for formatting output:
  - new line, paragraph, text size, color, font type, etc.
- Can be a single or coupled tag
- Tag general format:
  - Single: ***<tag_format>***
  - Double: ***<tag_format> . . . </ tag_format>***

[Activity 000]

Very simple HTML code

```
<html>
 <!-- Version information --
 -- File: Activity00.html --
 -- Author: Anita --
-- Description: introduction HTML code --
 -->


    <head>
        <title>Simple HTML</title>
    </head>

    <body>
        Hello World! All my content goes here!
    </body>



</html>
```

The Most Important Basic Structure Tags Elements

```
<html>
  <head>
    <title>Page title</title>
  </head>
  <body>
    <h1>This is a heading</h1>
    <p>This is a paragraph.</p>
    <p>This is another paragraph.</p>
  </body>
</html>
```

Note: Only the content inside the <body> section (the white area above) is displayed in a browser.

The Most Important Basic Structure Tags Elements

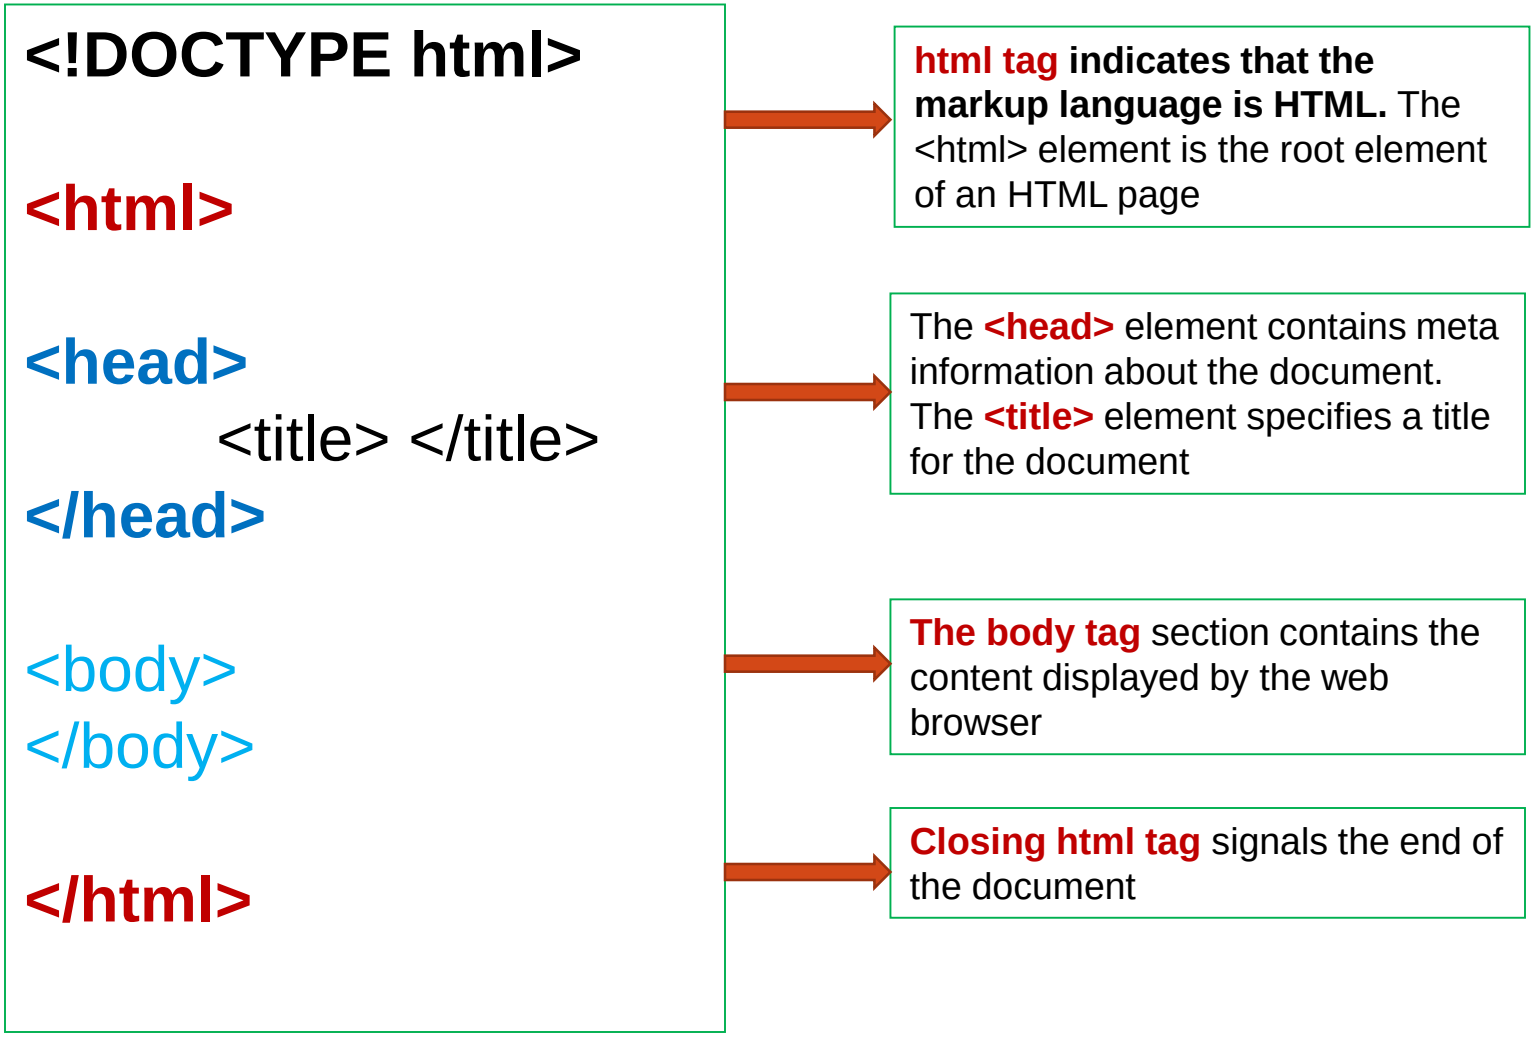

The Most Important Basic Structure Tags Elements

- **<html></html>**
  - begins and ends each and every web page

- **<head></head>**
  - The *head* functions "behind the scenes."
  - Tags placed within the *head* element are **not directly displayed** by web browsers
  - "Meta" data, such as who authored the page, the type of content, and clues that search engines may (or may not) use to help categorize your page
  - **JavaScript and CSS** elements or a link to an external style sheet (or several) is place here

- **<title></title>**
  - The words you write between the opening and closing <title></title> tags will be displayed at **the top of a viewer's browser**
  - default name for a **bookmark** in browsers such as IE and Netscape.
  - used by search engines that use its content to help index pages.

The Most Important Basic Structure Tags Elements

- **<body></body>**
  - The <body> element is where all content is placed.
    - Paragraphs
    - Tables and lists
    - Images
    - JavaScript code
    - PHP code can be included here too (if passed through a PHP parser before being served to the client's browser)
    - Other embedded objects (videos, etc)
  - contain the real content of the document that you see on your screen.

- **Comments** appear between **<!--** and **-->**

Text Layout

[Activity 01]

```
<html>
<!-- Activity01.html -->
<head>
  <title>Text Layout</title>
</head>

<body>
  <p>Here is a paragraph of text.</p>
  <p>Here is a second paragraph of text.</p>

  <p>
  This is a paragraph of text<br/>
  made up of two lines.
  </p>

  <p>
  This is another paragraph with a
    GAP   between
  some of the words.
  </p>

  <p>
     This paragraph is<br>
  indented on the first line<br>
  but not on subsequent lines.
  </p>
</body>

</html>
```

for the most part, layout of the text is left to the browser

- (almost) every sequence of whitespace is interpreted as a single space
- browser automatically wraps the text to fit the window size

can override some text layout

- can specify a new paragraph (starts on a new line, preceded by a blank line) using `<p>...</p>`
- can cause a line break using the `<br/>` tag ("self-closing" tag) or `<br>`
- can force a space character using the symbol for a "non-breaking space": ` `

Blocks of Text Headings

[Activity 02]

```
<html>
<!-- Activity02.html -->
<head>
  <title>Blocks of Text</title>
</head>

<body>
  <h1>This is Major heading 1</h1>
  <p>
  Here is some text.
  </p>

  <h2>This is Subheading with heading2
  </h2>
  <p>
  Here is some subtext.
  </p>

  <hr/>

  <h1> This is Major heading 1</h1>
  <p>
  Here is some more text.
  </p>
</body>

</html>
```

can specify headings for paragraphs or blocks of text

- `<h1>...</h1>` tags produce a large, bold heading
- `<h2>...</h2>` tags produce a slightly smaller heading

  .....
- `<h6>...</h6>` tags produce a tiny heading
- **Try yourself until heading 6**

can insert a horizontal rule to divide sections

- `<hr/> (or use <hr>)` draws line across window

Text Appearance

[Activity 03]

```
<html>
<!-- Activity03.html -->

<head>
   <title>Text Appearance</title>
</head>

<body>
   <h1>Text Variations</h1>
   This is a normal text<br><b>This is a text (bold)</b>
   <br>
   <i>This is a text (italic)</i>
   <p>The following word uses a <b>bold</b> typeface.</p>
```

```
<p>
  <font face="Arial" color="#FF0000" size=+3>
  This is a text with font = Arial, size = 3, color = Green
  </font>

  <p><b><i>
  <font face="Arial, Helvetica, sans-serif" color="blue" size="3">
  Please set me to bold, italic, font = Arial, size = 3, color = blue </font>
  </i></b><p>

  <h1>Preformatted text</h1>
  <pre>
        This is a
                        preformatted
                                                text
  </pre>
```

```
<h1>Text Variations</h1>

    <p>We can use <b>simple</b> tags to <i>change</i> the appearance
     of <strong>text</strong> within <tt>Web pages</tt>.
    Even super<sup>script</sup> and sub<sub>scripts</sub> are
     <em>supported</em>.</p>

</body>
</html>
```

Text Appearance

can specify styles for fonts

- `<b>...</b>` specify bold
- `<i>...</i>` specify italics
- `<tt>...</tt>` specify typewriter-like (fixed-width) font

- `<small>...</small>` decreases the size of the font
- `<em>...</em>` puts emphasis
- `<strong>...</strong>` puts even more emphasis

- `<sub>...</sub>` specify a subscript
- `<sup>...</sup>` a superscript

- `<pre>...</pre>` include ready-formatted text. Text follow the exact format of how it is written in the HTML document.

- *Find more info on text tags!*

[Activity 03]

HTML attributes

- **Attributes** are **properties** of tags.
- **For example**
  - *<font face="Arial" color="#FF0000" size=+3>*
  - **The tag is <font> and the properties are:**
    - **Face**
    - **Color**
    - **Size**
  - **use align attribute to align your paragraphs.**
    - This is for justify text alignment
    - This is for justify text alignment
    - This is for justify text alignment

Other Basic Tags

- **<H1>** To write text with a header size 1. Must be closed with </H1>. The header values range from <H1> to <H6>.
- **<B>** To bold the text. Need to closed with </B>
- **<I>** To italicize the text. Need to be closed with </I>.
- **<U>** To underline the text. Need to be closed with </U>.
- **
** To give a line break. Need not be closed.
- **<P>** To give a paragraph break. Need not be closed.
- **<HR>** To give a horizontal line. Has attributes like size, width and color.

Other Basic Tags

- **<FONT>** To format the font face, size and color of the text. Need to be closed with </FONT>.
- **<UL>** To define an Unordered List. The elements will be displayed as bulleted. Need to be closed with </UL>.
- **<LI>** To display each element within a list. Need not be closed.
- **<OL>** To define an Ordered List, where the elements will be displayed as ordered numbers. (e.g. 1,2,3…).
- **<DL>** To define a Description List. The other tags within this tag are <DT>, meaning Description Term, and <DD>, meaning Description Data. <DL> tag must be closed with a </DL>.
  - HTML definition lists (<dl>) are list elements that have a unique array of tags and elements; the resulting listings are similar to those you'd see in a dictionary

HTML Lists

Unordered HTML List

- Item
- Item
- Item
- Item

```
<!DOCTYPE html>
<html>
<body>

<h2>An Unordered HTML List</h2>

<ul>
  <li>Coffee</li>
  <li>Tea</li>
  <li>Milk</li>
</ul>

</body>
</html>
```

- An unordered list starts with the **<ul>** tag. Each list item starts with the **<li>** tag.
- The list items will be marked with bullets (small black circles) by default



HTML Lists

An Ordered List:

1. First item
2. Second item
3. Third item
4. Fourth item

- An ordered list starts with the **<ol>** tag. Each list item starts with the **<li>** tag.
- The list items will be marked with numbers by default:

```
<!DOCTYPE html>
<html>
<body>

<h2>An ordered HTML list</h2>

<ol>
  <li>Coffee</li>
  <li>Tea</li>
  <li>Milk</li>
</ol>

</body>
</html>
```

An ordered HTML list

1. Coffee
2. Tea
3. Milk

Sample code for Lists

Unordered List

[Activity 04]

```
<HTML>
 <HEAD> <TITLE> My Unordered List </TITLE>
 </HEAD>
<BODY>
<U>Unordered List</U> <P>
   <UL> My favourite subjects
     <LI> Maths
     <LI> English
     <LI> Science
   </UL>
```

<UL> To define an Unordered List. The elements will be displayed as bulleted.

<LI> To display each element within a list

Sample code for Lists

Ordered List

[Activity 04]

```
<U>Ordered List</U> <P>
    <OL> My favourite football clubs
      <LI> Manchester United FC
      <LI> Chelsea FC
      <LI> Liverpool FC
    </OL>
```

Sample code for Lists [Activity 04]

Description List

A description list is a list of terms, with a description of each term.

- The **<dl>** tag defines the description list,
- the **<dt>** tag defines the term (name), and
- the **<dd>** tag describes each data

```
<U>Description List</U> <P>

<DL>The top players in each club

  <DT> Manchester United

     <DD> Beckham, Giggs, Cole, Stam, Barthez,Yorke, Keane.

  <DT> Liverpool

      <DD> Owen, Heskey, Fowler.

  <DT> Arsenal

      <DD>Bergamp, Kanu, Henry, Seaman, Adams.

</DL>

</BODY>

</HTML>
```

[Do it]

Unordered HTML Lists Item Marker

HTML-CODE	EXPLANATION / EXAMPLE

`<ul>`
`<li>text</li>`
`<li>text</li>`
`<li>text</li>`
`</ul>`
	Makes a bulleted list using the default bullet type:
	• text
	• text
	• text

`<ul type="disc">`	Starts a bulleted list using discs as bullets: • This is one line • This is another line • And this is the final line
`<ul type="circle">`	Starts a bulleted list using circles as bullets: ◦ This is one line ◦ This is another line ◦ And this is the final line
`<ul type="square">`	Starts a bulleted list using squares as bullets: ▪ This is one line ▪ This is another line ▪ And this is the final line

You have the following bullet options:

- **Disc**
- **Circle**
- **square**

<U>Unordered List</U> <P>

<UL type="circle"> My favourite subjects

<LI> Maths

<LI> English

<LI> Science

</UL>

OR The CSS **list-style-type** property is used to define the style of the list item marker.

<UL **style="list-style-type:circle"**> My favourite subjects

Ordered HTML Lists

- You have the following number options:
- The **type** attribute of the <ol> tag, defines the type of the list item marker:

  - **Plain numbers ‘1’**
  - **Capital Letters ‘A’**
  - **Small Letters ‘a’**
  - **Capital Roman Numbers ‘I’**
  - **Small Roman Numbers ‘i’**

HTML Lists

HTML-CODE	EXPLANATION / EXAMPLE

`<ol>`
`<li>text</li>`
`<li>text</li>`
`<li>text</li>`
`</ol>`
	Makes a numbered list using the default number type:
	
	1. text
	2. text
	3. text

`<ol start="5">`	Starts a numbered list, first # being 5. 5. This is one line 6. This is another line 7. And this is the final line
`<ol type="A">`	Starts a numbered list, using capital letters. A. This is one line B. This is another line C. And this is the final line
`<ol type="a">`	Starts a numbered list, using small letters. a. This is one line b. This is another line c. And this is the final line

[Do it]

HTML Lists

`<ol type="I">`	Starts a numbered list, using capital roman numbers. I. This is one line II. This is another line III. And this is the final line
`<ol type="i">`	Starts a numbered list, using small roman numbers. i. This is one line ii. This is another line iii. And this is the final line
`<ol type="1">`	Starts a numbered list, using normal numbers. 1. This is one line 2. This is another line 3. And this is the final line
`<ol type="I" start="7">`	An example of how type and start can be combined. VII. This is one line VIII. This is another line IX. And this is the final line

```
<U>Ordered List</U> <P>
    <OL type="A" start="2">  My favourite football clubs
        <LI> Manchester United FC
        <LI> Chelsea FC
        <LI> Liverpool FC
    </OL>

OR

<OL style="list-style-type:lower-alpha" start="5"> My favourite football clubs
```

Images

[Activity 05a]

can include images using `img`

- by default, browsers can display GIF and JPEG files, more modern browsers can also typically support PNG files and SVG graphics (of course, use at your own risk)
- other image formats may require plug-in applications for display

```
<img src="URL (or filename)" height="n" width="n" alt="text"
title= "text" />
```

again, if file is to be accessed over the Web, must start with **http://** (if not, will assume local file)

* Find more info on `<img/>`

```
<html>
<!-- Activity05a.html -->
<head>
  <title>Image example</title>
</head>
<body>
<img
src="http://www.csc.liv.ac.uk/~martin/teaching/comp519/HTML/Cathedral.jpg"
title="Liverpool's Anglican cathedral"
alt="image of Liverpool's Anglican Cathedral" width="400" />

<p>The Anglican Cathedral of Liverpool</p> </body>

</html>
```

[Activity 05b]

Image

- <img src="*image file name*" . . . >
-

```
<img src="url" alt="some_text" style="width:width;height:height;">
```

URL Types:

Local Src	Location Description
src="sunset.gif"	picture file resides in same directory as .html file
src="../sunset.gif"	picture file resides in previous directory as .html file
src="../pics/sunset.gif"	picture file resides in the *pic* directory in a previous directory as .html file

The image in the same folder as the web page.

[Activity 05b]

```
<html>
<head>
 <title>Images</title>
</head>

<body>
      <h2>Web pages can contains an Image </h2>
         <img src="utmlogo.jpg"
                alt="This is UTM Logo"
              style="width:304px;height:228px;">

</body>
</html>
```

You can use the **style attribute** to specify the width and height of an image.

The image in the same folder as the web page.

[Activity 05b]

```
    <hr>
    <h1>If a browser cannot find an image, it will display the alternate
        text</h1>
        <img src="sunset.gif"
            width="96" height="63"
                alt="This is an image of sunset" />

</body>

</html>
```

You also can use **width and height attributes**.

Rename sunset.jpg to sunset-1.jpg. Save & Run & preview result.

Basic Tags for Images

<IMG SRC> Image Source specifies where the file is located.

<BORDER> Specifies the thickness of the border surrounding the image.

<HEIGHT> Specifies the height of the image in pixels.

<WIDTH> Specifies the width of the image in pixels.

style="width:304px;height:228px

width="96" height="63"

Basic Tags for Images

<ALT> Allows one to display the alternate text of some image. Useful when the browser has difficulties in displaying the image as then this alternate text will be displayed.

<Title> displayed when the mouse is "hovered" over the picture

<VSPACE> Specifies in pixels the size of the vertical space surrounding the image.

Basic Tags for Images

<HSPACE> Specifies in pixels the size of the horizontal space surrounding the image.

<VALIGN> Specifies how the text surrounding the image will be displayed. The different attributes are **Top**, **Bottom** and **Middle**.

[Activity 05b]

Sample code1 for image

```
<Body>
<img src="utmlogo.jpg" /> <br>
<img src="image/utmlogo2.jpg" />
</Body>
```

Images in same .html folder

Images in Another Folder

Note:

- A simple code to display an image store in a **subfolder**, and refer to the folder in the image name. The **full path** of the location must be keyed in if the image is in a different folder

[Activity 05b]

Sample code2 for image

```
<BODY>

<IMG SRC="utmlogo.jpg"
        BORDER=2
                ALT="This is UTM Logo">
</BODY>
```

Note:

A code to display an image with a **border thickness** of 2 and also specify the alternate text. The alternate text will be displayed if the image could not be displayed or the user brings his mouse over the image.

Image (cont.)

- **Alternative Attribute**
  - The ***alt* attribute** specifies alternate text to be displayed if for some reason the browser cannot find the image,
  - or if a user has image files disabled.
  - Text only browsers also depend on the alt attribute since they cannot display pictures.

```
<img src="sunset.gif"
     width="96" height="63"
     alt="This is an image of sunset" />
```

[Activity 05b]

Sample code3 for image

```
<BODY>
  <IMG SRC="utmlogo.jpg" HEIGHT=200 WIDTH=200>

  <IMG SRC="utmlogo.jpg" VALIGN="top"> This text will be
   displayed at the top level of the image.

</BODY>
```

Note:

Try to **change VALIGN="middle"** and **VALIGN="bottom"**

See This text will be displayed at the middle and bottom level of the image.

[Activity 05b]

Image (cont.)

- Wrap text around the image
- Add align="left" or align="right" to the <img> tag

HTML-CODE	EXAMPLE
<img src="rainbow.gif" align="left"> bla bla bla bla bla bla bla bla bla bla bla bla bla bla bla	 bla bla bla bla bla blabla bla bla bla b

[Activity 05b]

Sample code4 for image

```
<BODY>

<IMG SRC=" utmlogo.jpg " ALIGN="left">This text will
   be Wrap around the image at the left of the image. This text
   will be Wrap around the image at the left of the image.

</BODY>
```

Note:

Try to Change align = “right” and see …

[Activity 05b]

Sample code5 for image

<BODY>

<IMG SRC="utmlogo.jpg" **VSPACE=10 HSPACE=10**>

An image with a horizontal space of 10 pixels and a vertical space of 10 pixels.

</BODY>

Introduction to HTML (Part 1- continue) HYPERLINKS

NOR ANITA FAIROS BINTI ISMAIL
noranita@utm.my

HTML Links - Hyperlinks (ANCHORS)

- HTML links are hyperlinks or Anchor.
- A hyperlink is a text or an image you can **click on**, and **jump** to another document.
- HTML links method allows that one to link to: *another document, file, location or another section from anywhere.*
- In HTML, links are constructed using anchor tags **(<a>** and **).**

Example Hyperlinks

```
<html>

<head>
  <title>Hyperlinks</title>
</head>


<body>
  <p>
  <a href="http://www.liv.ac.uk">
  The University of Liverpool</a>
  <br/>
  <a href="ac01.html" target="_blank">
   Open in a new window</a>
  </p>
</body>

</html>
```

Hyperlinks Syntax

- written using **<A HREF>** and **</A>** tags.
- Hyperlink syntax:

linked object

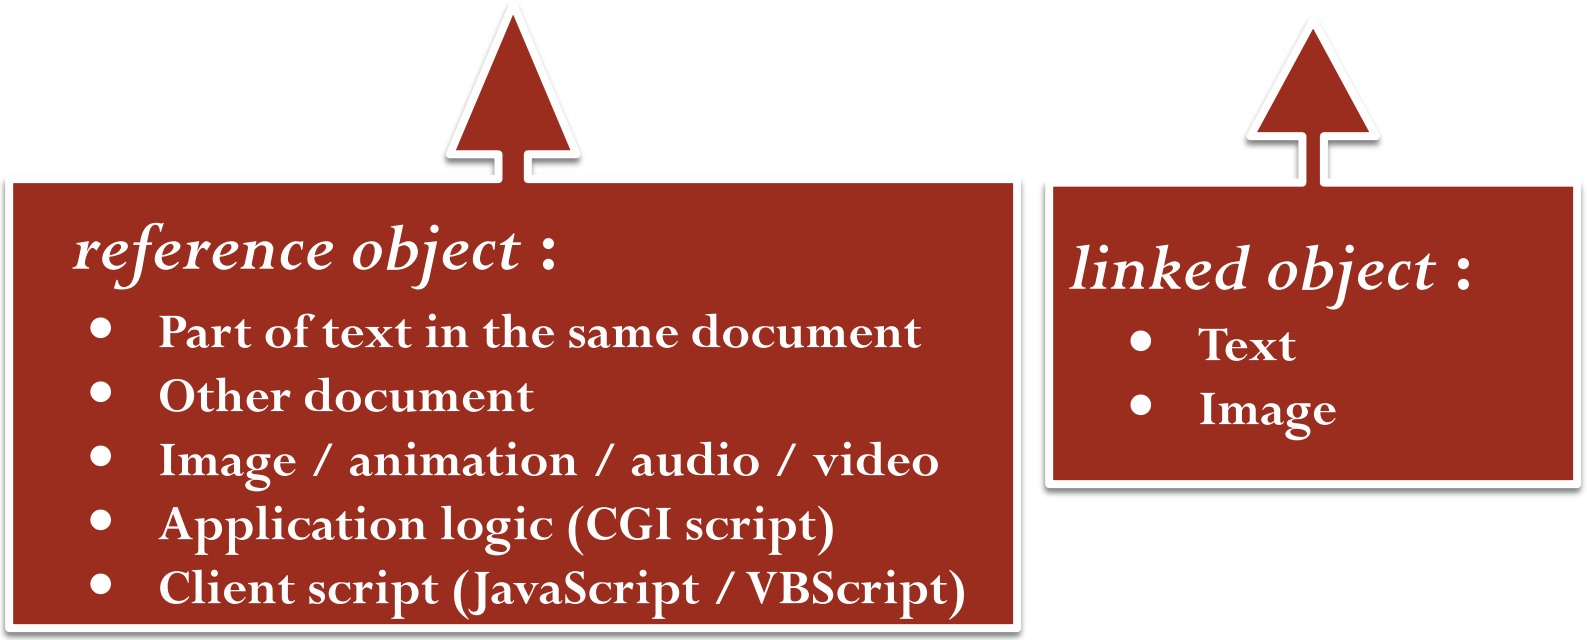

[Activity 6a]

Hyperlinks Example 1

```
<html>
<head><title> Activity 6a: Example of Links</title></head>
<body>
<p>
<a href="https://www.google.com.my">Visit Google</a>
</p>
</body>
</html>
```

The **href** attribute specifies the destination address (https://www.google.com.my)
The **linked object** is the visible part (Visit Google).

Hyperlinks Category

- **Links Outside document:**
  - **<A>** It informs that, the particular message is a hyperlink and an anchor (hand symbol) should be displayed. It should be closed with a **</A>** symbol.
  - **<HREF>** The Hyperlink Reference instruction. It informs whether the link is to another page, location or some document.
  - **<HTTP>** The protocol that must be used if one were to link to an external website.
  - **<MAILTO>** The protocol that must be used if one were to link to an email client.
  - **<FILE>** The protocol that must be used if were to open a document on a browser.

[Activity 6b]

Hyperlinks Example 2

(Local Links - To link to another page on same website)

```
<BODY>
  <A HREF="main_page.html"> Click here </A> to go to main page!
</BODY>
```

- This would work if the main_page.htm **is in the same folder** as this page. If not, then you will have to write the full path of the file name. e.g."**project/htmlfiles/main_page.htm**"
- The previous example used an **absolute** URL (A full web address).
- A local link (link to the same web site) is specified with a **relative** URL (without http://www.….).

[Activity 6c]

Hyperlinks Example 3

(To link to an external website)

```
<BODY>
 <A HREF="https://login.yahoo.com/">
     Click to go to Yahoo Mail Login!</A>
<br>
 <A HREF="https://www.facebook.com/">
    Click to go to facebook! </A>
</BODY>
```

[Activity 6d]

Hyperlinks Example 4

(To link to an email client)

```
<BODY>

<A HREF="mailto:my_email@email.com">

 Send me a mail </A>

</BODY>
```

Note:

- This code will actually allow the browser to launch an email client (for example Microsoft Outlook) on the system and place the above email address on the To bar.

Hyperlinks Example 4 (Cont.)

Hyperlinking to an E-Mail Address

- Anchors can link to an e-mail address using a mailto: URL
- When a user clicks this type of anchored link, most browsers launch the default e-mail program (e.g., Mozilla Thunderbird, Microsoft Outlook or Apple Mail) to **enable the user to write an e-mail message** to the linked address.

Sample

Linking to an e-mail address

```
1  <!DOCTYPE html>
2
3  <!-- Fig. 2.4: contact.html -->
4  <!-- Linking to an e-mail address. -->
5  <html>
6     <head>
7        <meta charset = "utf-8">
8        <title>Contact Page</title>
9     </head>
10
11    <body>
12       <p>
13          To write to <a href = "mailto:deitel@deitel.com">
14          Deitel & Associates, Inc.</a>, click the link and your default
15          email client will open an email message and address it to us.
16       </p>
17    </body>
18 </html>
```

This is contact.html file.

Sample

Linking to an e-mail address


When a user clicks the hyperlink text, browsers launch the default e-mail to enable the user to write an e-mail message to the linked address.



A browser viewing the contact.html file a figure above.

Sample

Linking to an e-mail address

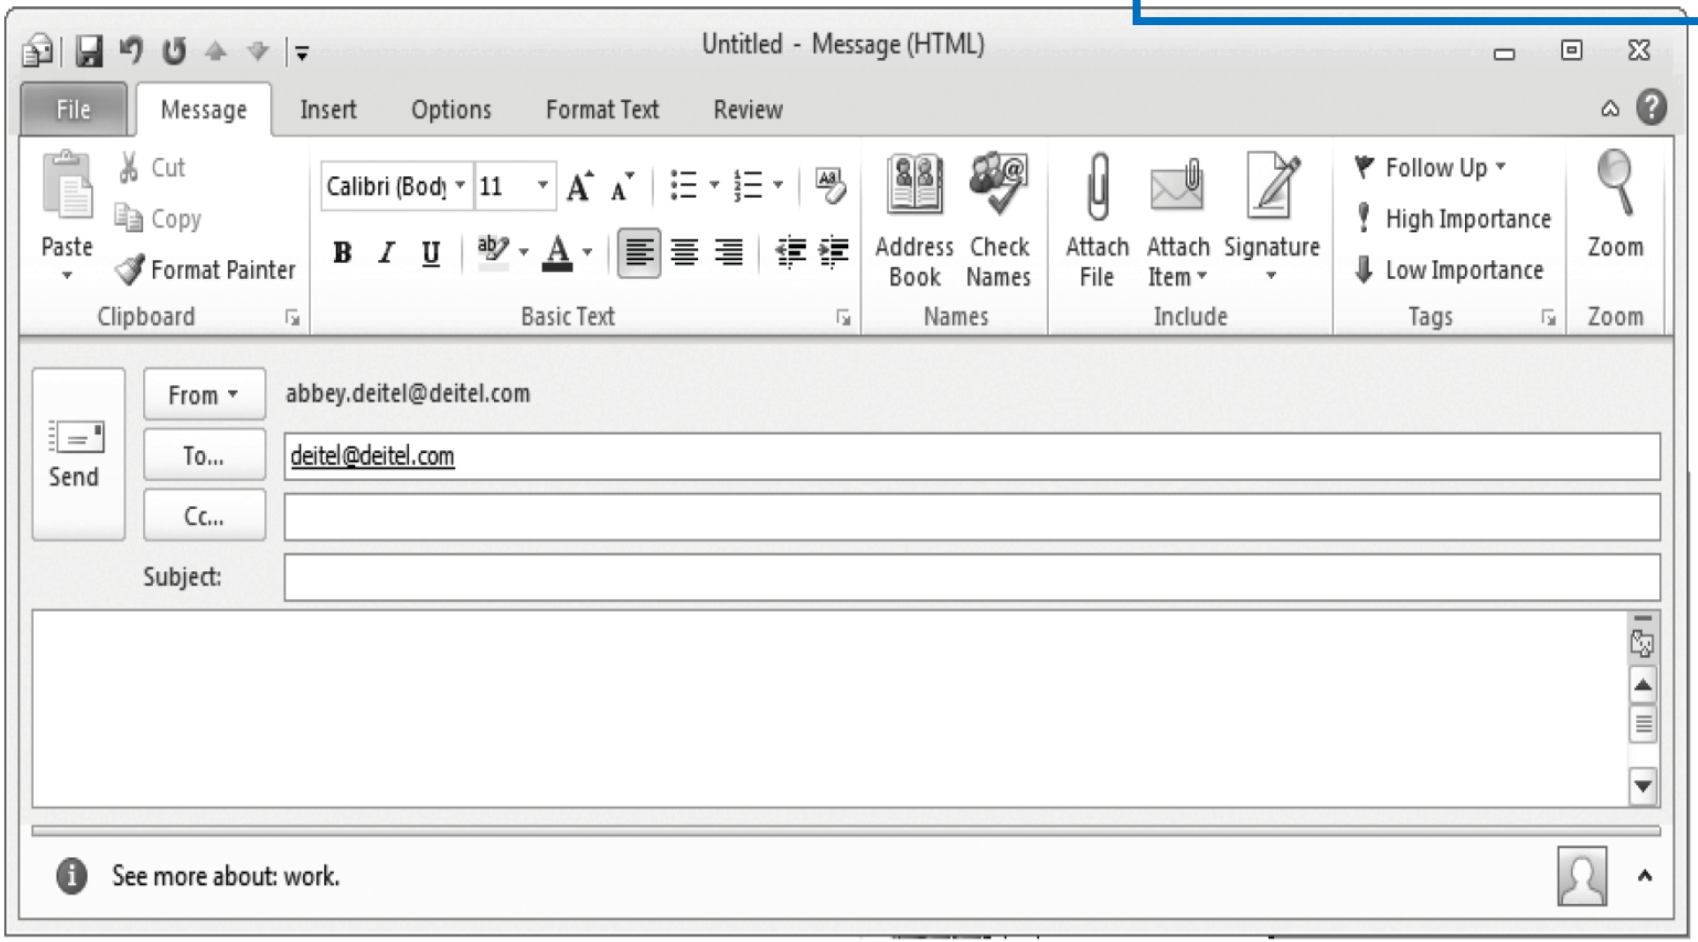

e-mail message

[Activity 6f]

Hyperlinks Example 6

(To place image as the link)

- It is common to **use images as links**:

```
<BODY>

<a href="http://www.utm.my"><img src="sunset.gif"
   width="50" height="50" border="0" /></a>

</BODY>
```

- **Example**

```
<a href="index.html"><img src="home.gif"
alt="Main Page" style="width:42px;height:
42px;border:0"></a>
```

[Activity 6g]

Hyperlinks Example 7

(Link Targets)

- The target attribute specifies where to open the linked document.

```
<a href="http://www.yahoo.com"  target="_blank">
```

- Predefined targets are:

_blank - loads the page into a new browser window.
_self - loads the page into the current window.
_parent - loads the page into the frame that is superior to the frame the hyperlink is in.(Opens the linked document in the parent frame)
_top - cancels all frames, and loads in full body of the browser window.

[Activity 6h]

Hyperlinks Example 8

(id Attribute)

- **Links Inside document**.
- The **id attribute** used to create a bookmark inside an HTML document.
  - **Tip:** Bookmarks are not displayed in any special way. They are invisible to the reader.
- Declare an anchor with an id inside an HTML document:
- Step 1- Add an id attribute to any **<a>** element:

```
<a id="C4">Chapter 4</a>
{… place other information here…}
```

- Step 2- **Create Link to anchor** to the "[See Chapter 4]" inside the same document:

```
<a href="#C4">[See Chapter 4]</a>
```

[Activity 6h]

Hyperlinks Example 8

(id Attribute)

```
<body>

<h2>Chapter 1</h2>
<p>This chapter explains ba bla bla</p>

<h2>Chapter 2</h2>
<p>This chapter explains ba bla bla</p>

……. Continue write until Chapter 17 ….

</body>
```

- Now let create link jump to Chapter 4.