Introduction to HTML (Part 3)

NOR ANITA FAIROS BINTI ISMAIL
noranita@utm.my

HTML Forms

- HTML forms are used to :
  - help web designers to receive input from users
  - pass data to a server.
  - Forms can also be used as sell products and carry out business transactions.

HTML Forms

- The HTML **<form>** element defines a form that is used to collect user input
- All HTML form contain **form elements (components)**.
- Form elements are different **types of input elements**:
  - text fields, checkboxes,
  - radio-buttons, submit buttons and more.
  - select lists, textarea, fieldset, legend, and label elements

The <form> Element

- Forms are specified by the **<FORM>** and **</FORM>** tags.

```
<form>
.
.
input elements
.
.
</form>
```

- Begin form
- **Form input elements or object components =**

  Textfiled, Password, Hidden, TextArea, List Box (single/multiple), Radio Button, Check Box, Submit Button, Reset Button, Buttons

- End form

Basic HTML Form Tags

<form Name =“? ” Method=“?” Action=“?” >

….. form object components ….

</form>

Basic Form Tags

- **<FORM>** the beginning tag of a form. Needs to be closed with **</FORM>**. The typical attributes of this tag are **NAME, METHOD** and **ACTION**.
- **<NAME>** Tag to give an identity to the form.
- **<METHOD>** The HTTP method : GET, POST or LINK
- **<ACTION>** Address or the URL (which usually points to a CGI program) to send data to

The **method** and **action** attributes

- The **method** attribute specifies the way that form data is sent to the server program
  - **GET** appends the data to the URL
  - **POST** sends the data separately

- The **action** attribute specifies a server program (e.g. a php program .php extension) that processes the form data

```
<body>
 <form method="POST" action="comments.php">
  <h2>Tell us what you think</h2>
  <!-- etc -->
 </form>
</body>
```

[Activity 10]


Form Example

```
<html>
<head><title>My Page</title> </head>
<body>
<!-- Here goes HTML -->
<form method="post"
action="http://gmm.fsksm.utm.my/~isrozaidi/welcome.php">
<!-- Here goes form fields and HTML -->
</form>
<!-- Here goes HTML -->
</body>
</html>
```

Form object components (Input types)

Input types

- **text**
- **checkbox**
- **radio** (buttons)
- **select** (options)
- **textarea**
- **password**
- **button**
- **Submit**
- **Reset**
- **hidden**
- **file**
- **image**

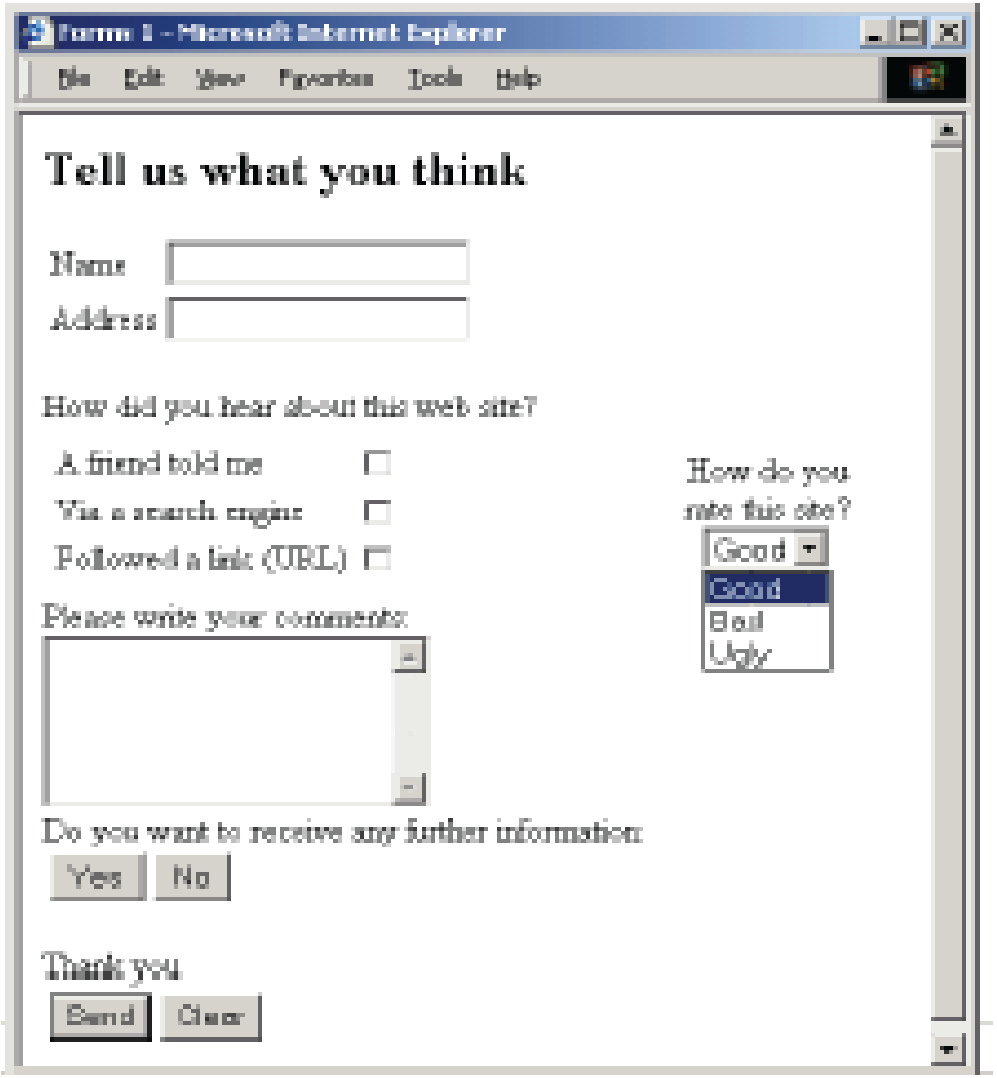

Form object components (Input Types) [Activity 11]

- **Text field Input**:
  - **<input type="text">** defines a one-line input field for **text input**:
  - <input type="text" name="???" size="???">

```
<form>
  First name: <input type="text" name="firstname"  size=" ">
  <br>
  Last name : <input type="text" name="lastname"  size="30">
 <br>
  <p>Also note that the default width of a text field is 20 characters.</p>
</form>
```

[Activity 11]

Form object components

- **Now let try this :**

Enter Your First name:

Enter Your Last name:

- **Add VALUE attributes:**
  - value="Nor Anita Fairos“
  - maxlength="10"

See the result…

```
<form>
  First name: <br>
  <input type="text" name="firstname“  size=“30”><br>
  Last name : <br>
  <input type="text" name="lastname“   size=“30”><br>
 <p>Also note that the default width of a text field is 20 characters.</p>
</form>
```

- The **type** attribute specifies the type of user input
- The **name** attribute gives an identifier to the input data
- • The **size** attribute specifies the length of the input field
- • The **value** attribute specifies an initial value for the text (optional)

First Name :

Last Name: Ismail

Also note that the default width of a text field is 20 characters.

[Activity 12]

Form object components

- **Password**
  - password fields designed to capture user input, but disguise each character with an **asterisk (*)** instead of displaying the entered digits.
  - offer a user on-screen privacy while he or she is entering a password.
  - <input **type="password"** name="???" size="???">

[Activity 12]

Form object components

```
<form>
   User name:<br>
   <input type="text" name="userid">
   <br>
   User password:<br>
   <input type="password" name="pswd“ size=“25”>
</form>

<p>The characters in a password field are masked (shown as
   asterisks or circles).</p>
```

[Activity 12]

Form object components

- **Hidden**
  - Window browser **not display it as GUI component**
  - similar to text input, but the value attribute is used to specify data that is to be sent to the server.
  - Nothing appears on the screen.
  - The data might be set by a server program to keep track of the details of a particular transaction.
    - *Hidden fields allow a coder to pass values to form elements in a subtle manner. An experienced web developer will utilize these fields to pass temporary, or session-based data, from one form to another or to store information that has already been entered in by the user.*
  - <input type="hidden" name="???" values="???">

<INPUT TYPE="hidden" NAME="login" SIZE="25">

[Activity 13]

Form object components

- **TextArea (Multiple textbox)**
  - Used for multi-line text input. The size of the input area is specified with the **cols** and **rows** attributes
  - Any text placed inside the element appears in the input area (this can be deleted).
  - <textarea **name="???" rows="???" cols="???"**>

    Default textarea value

    </textarea>

Enter Your Full Address:

default text area.
Type your text here

```
<body>
<form action="">
    <h4>Enter Your Full Address:</h4>
    <TEXTAREA NAME="address" ROWS="5" COLS="23">
    default text area.
    Type your text here
    </TEXTAREA>

</form>

</body>
```

[Activity 14]

Form object components


- **List Box (single)**

  Only one item selection permitted

```
<select name="???">
<option value="???"
  selected>Text 1
option value="???">Text 2
. . .
</select>
```

```
<form action="">
    <h4> select payment method </H4>
    <SELECT NAME="creditCardType">
    <OPTION  VALUE="mc">MasterCard
    <OPTION  VALUE="visa">VISA
    <OPTION  VALUE="amex">American Express
    </SELECT>

    <br><br>
    <input type="submit">
</form>
```

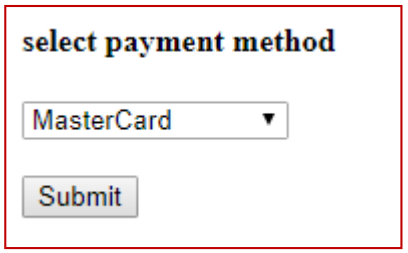

[Activity 14]

pre-selected option

- The **<option>** elements defines an option that can be selected.
- By default, the **first item** in the drop-down list is selected.
- To define a pre-selected option, **add the selected attribute** to the option

[Activity 15]

Form object components

- **List Box (multiple selection)**

  Multiple item selection permitted

<select name="???" multiple size="???">

<option value="???">Text 1

. . .

</select>

```
<body>
<form action="">

<h4> select your language</H4>
<SELECT NAME="language" MULTIPLE>
<OPTION SELECTED VALUE="c">C
<OPTION VALUE="c++">C++
<OPTION VALUE="java">Java
</SELECT>

</form>

</body>
```

[Activity 16]

Form object components

- **Radio Button**
  - Only one item selection permitted. To select a button by default, use the **checked** attribute (for one button only). All radio-buttons with equal name.

<input type="radio" name="r1" value="v1">Text 1

<input type="radio" name="r1" value="v2" checked>Text 2

<input type="radio" name="r1" value="v3">Text 3

```
<body>
<form action="">

<h4> select payment method </H4>
<INPUT  TYPE="RADIO" NAME="creditCard" VALUE="visa">VISA
<INPUT  TYPE="RADIO" NAME="creditCard" VALUE="amex">American Express
<INPUT  TYPE="RADIO" NAME="creditCard" VALUE="mc" checked>MasterCard

</form>

</body>
```

[Activity 17]

Form object components

- **Check Box**
  - Multiple item selection permitted. The **name** attribute is used to define a set of checkboxes. The **value** attribute identifies the individual checkbox
  - If the **checked** attribute is set the box is initially checked

<input type="checkbox" name="c1" value="v1">Text 1

<input type="checkbox" name="c2" value="v2" checked>Text 2

<input type="checkbox" name="c3" value="v3">Text 3

```
<body>
<form action="">

<h4> select your choice</H4>
<INPUT TYPE="CHECKBOX" NAME="chk1" value="c" CHECKED>Chicken
<INPUT TYPE="CHECKBOX" NAME="chk2" value="f" CHECKED>Frog
<INPUT TYPE="CHECKBOX" NAME="chk3" value="s" CHECKED>Snail

</form>
</body>
```

[Activity 18]

Form object components

- **Button, Submit, Reset**

  <input **type="button/submit/reset" value="???">**

  Submit Buttons

  - When this button is clicked, the form data input is sent to the URL indicated by ACTION.

  <INPUT NAME="submit" TYPE="submit" VALUE="Submit">

  Reset Buttons

  <INPUT NAME="reset" TYPE="reset" VALUE="Reset">

  - To clear all the fields entered on the form.

  Standard Buttons

  <INPUT NAME="Exit Me" TYPE="button" VALUE="Exit Me">

[Activity 18]

Example:

```
<body>
<form action="">
        First Name:
        <input type="text" name="firstname“ size="" value="" maxlenght="10">
        <br>
        Last Name:
        <input type="text" name="lastname“ size="30">
        <br>
        <p>
        <br>The server has processed your input and returned this answer.
        <br>This tutorial will not teach you how servers are processing input.
        <br>Processing input is explained in our PHP tutorial.
        </p>

        <br>
        <br>
        <INPUT NAME="submit" TYPE="submit" VALUE="Submit">
        <INPUT NAME="reset" TYPE="reset" VALUE="Reset">
        <INPUT NAME="Exit" TYPE="button" VALUE="Pandanglah Saya">

</form>
```

[Activity 19]

Form object components

- **Input Type: number**
  - The <input type="number"> is used for input fields that should contain a numeric value.
  - You can set restrictions on the numbers.
  - Depending on browser support, the restrictions can apply to the input field.
  - <input type="number" name="?" min="?" max="?" >

```
<form action="">
 Quantity (between 1 and 5):
 <input type="number" name="quantity" min="1" max="5">
 <input type="submit">
</form>

<p><b>Note:</b> type="number" is not supported in IE9 and earlier.</p>
```

[Activity 20]

Sample Button Form

```
<body>
    <form>
    <input type="button" onclick="alert('Hello World!')" value="Click Me!">
    </form>
</body>
```

