A PERFORMANCE ON RECENTLY PUBLISHED MODELS

Tables A.1 and A.2 combine the results from the main paper with runs of GPT-6 Luna and GPT-6.1 Sol on each of the 69 CSVStorm files. New model names are marked "(new)". Both models used default medium reasoning effort and fresh API requests without local response-cache reuse. The Hybrid+DuckDB variant was evaluated only with the new models. The GPT-6 Luna custom-parser-code row uses a separate, later 69-file pass that captured API usage; Table A.3 compares its two passes. Figure A.1 shows selected models across the hybrid, full-agentic, and custom-parser-code approaches. GPT-5.6 Luna was not evaluated with the full-agentic approach. Earlier custom-parser-code runs did not record API usage.

	System	SuT Success [%]	Pollock Score	Accuracy [%]
Hybrid	GPT-5.6 Sol	100.0	9.94	82.6
	GPT-5.6 Luna	100.0	9.71	73.9
	GPT-5.4 Mini	94.2	9.23	63.8
	Qwen3.5 0.8B	100.0	7.53	27.5
	GPT-6 Luna (new)	100.0	9.93	79.7
	GPT-6.1 Sol (new)	100.0	9.94	84.1
H+DB	GPT-6 Luna (new)	100.0	9.93	84.1
	GPT-6.1 Sol (new)	**100.0**	**9.94**	**85.5**
Full Agentic	GPT-5.6 Sol	98.6	9.57	73.9
	GPT-5.4 Mini	53.6	5.21	37.7
	GPT-6 Luna (new)	89.9	8.67	58.0
	GPT-6.1 Sol (new)	94.2	9.02	66.7
Custom Parser Code	GPT-5.6 Sol	68.1	6.71	44.9
	GPT-5.6 Luna	79.7	7.75	49.3
	GPT-5.4 Mini	95.7	8.46	34.8
	Qwen3.5 0.8B	0.0	0.00	0.0
	GPT-6 Luna (new)	92.8	9.12	60.9
	GPT-6.1 Sol (new)	97.1	9.56	62.3
Baselines	CleverCSV	100.0	8.67	55.1
	DuckDB Parse*	100.0	9.27	40.6
	DuckDB Auto	98.6	8.22	34.8
	PyCSV	94.2	8.73	10.1
	Pandas*	98.6	8.06	33.3

* denotes oracle-assisted parsing with access to file-format metadata such as the dialect.

Table A.1: CSVStorm results on 68 irregular and one control file, extending Table 1. SuT Success measures non-crashing runs. Accuracy measures exact reconstruction. H+DB adds DuckDB dialect sniffing to the hybrid parser. "(new)" identifies the new GPT-6 runs. The GPT-6 Luna custom-parser-code row uses the later independent pass.

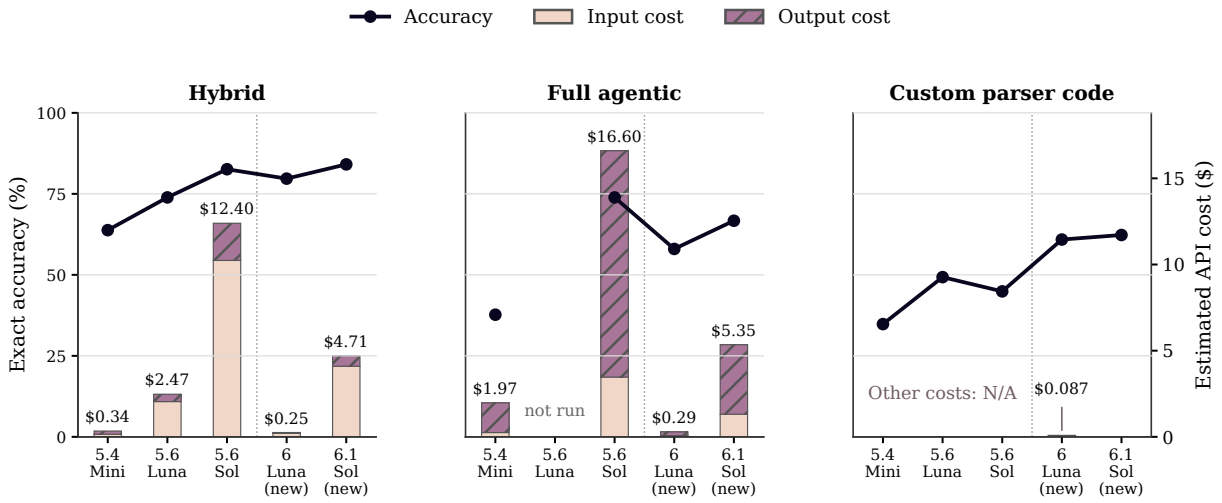


Figure A.1: Exact reconstruction accuracy (line, left axis) and estimated API cost (stacked bars, right axis) for 69-file CSVStorm passes with selected GPT-5.4, GPT-5.6, and GPT-6 models. Each panel is a parser method; bars separate input from output cost. Both axes use the same scale across panels. The later GPT-6 Luna custom-parser-code pass supplied its measured token usage and $0.087 cost, including cached input and cache writes; the small bar is annotated. Other custom-parser-code costs are unavailable, and GPT-5.6 Luna has no full-agentic run. Older hybrid bar totals match Table A.2, with component shares estimated from saved tokens. Costs are estimates based on recorded model rates, not invoice totals.

Model	Acc.	Time		Cost	
	(%)↑	Median (s/file)↓	Total (s)↓	Median ($/file)↓	Total ($)↓
GPT-5.6 Sol	82.6	5.57	1092.54	0.0177	12.3958
GPT-5.6 Luna	73.9	4.64	563.20	0.0049	2.4736
GPT-5.4 Mini	63.8	**2.34**	**269.22**	0.0024	0.3375
Qwen3.5 0.8B	27.5	12.08	1402.32	Local	Local
GPT-6 Luna (new)	79.7	5.74	886.38	**0.00046**	**0.2518**
GPT-6.1 Sol (new)	**84.1**	3.74	618.28	0.00627	4.7109

Table A.2: Performance, runtime, and cost of the hybrid repair approach, extending Table 2. "(new)" identifies the new GPT-6 runs. Local models incur no API charge. New-run costs use recorded token usage and standard API rates and are not invoice totals.

Pass	Acc.	Time		Cost	
	(%)↑	Median (s/file)↓	Total (s)↓	Median ($/file)↓	Total ($)↓
Nov. 1	63.8	19.98	1414.92	–	–
Nov. 4	60.9	17.21	1276.11	0.00107	0.08718

Table A.3: Two independent 69-file GPT-6 Luna custom-parser-code passes in November 2026. The earlier pass did not save API usage; the later pass recorded all 69 responses, including five parser execution failures. Its cost includes cache writes and reasoning tokens at standard model rates and is not an invoice total.

Timing includes network and provider latency. The earlier custom-parser-code pass lacked API usage records, so its exact cost remains unavailable. The later pass recorded 200,582 input tokens and 130,769 output tokens, including 93,708 reasoning tokens. Its 30-minute cache writes account for 170,533 input tokens.