Quality, reference duration, and search computation are separate outcomes

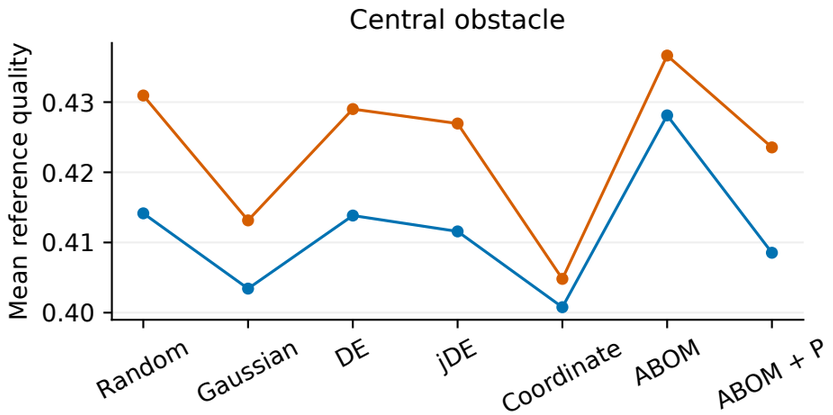

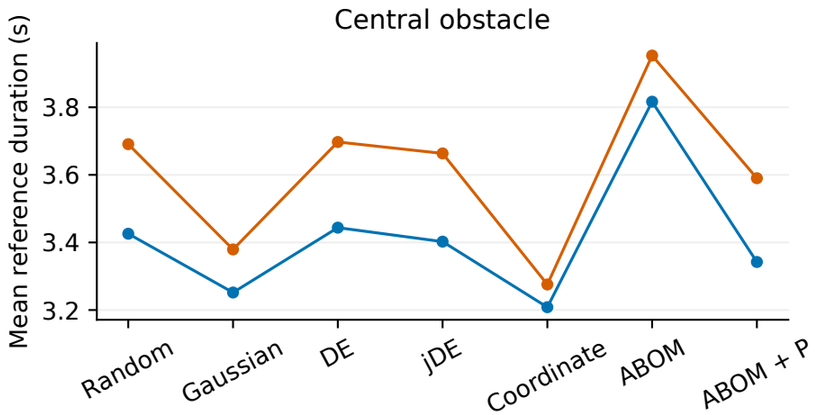

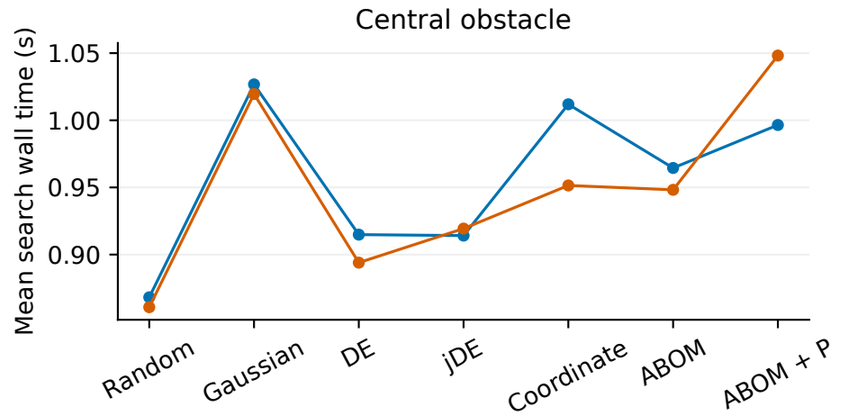

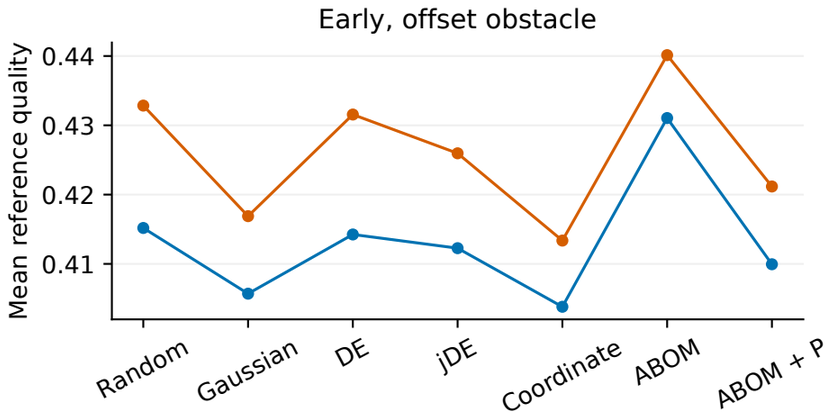

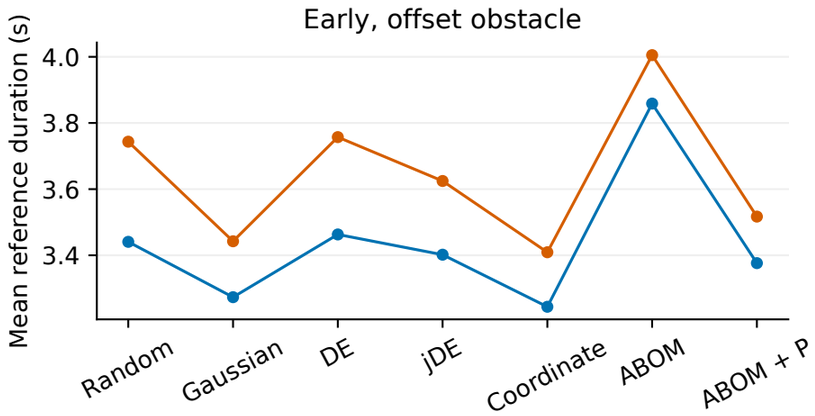

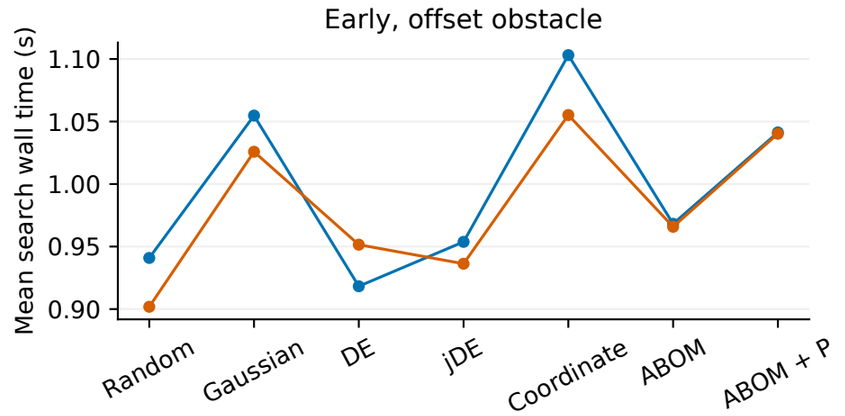

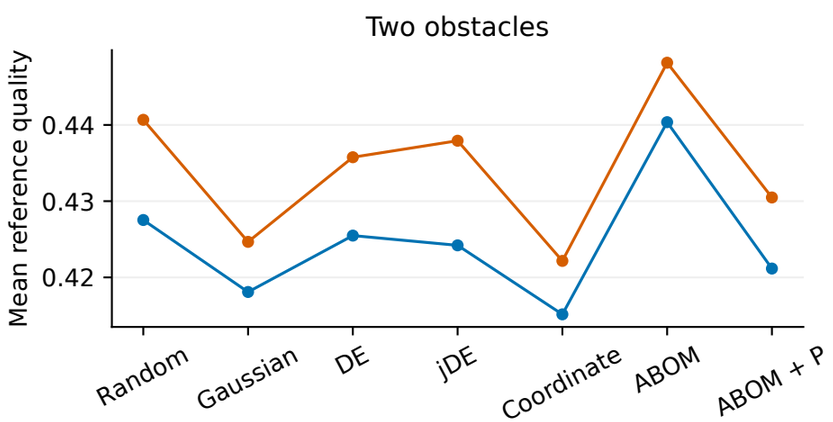

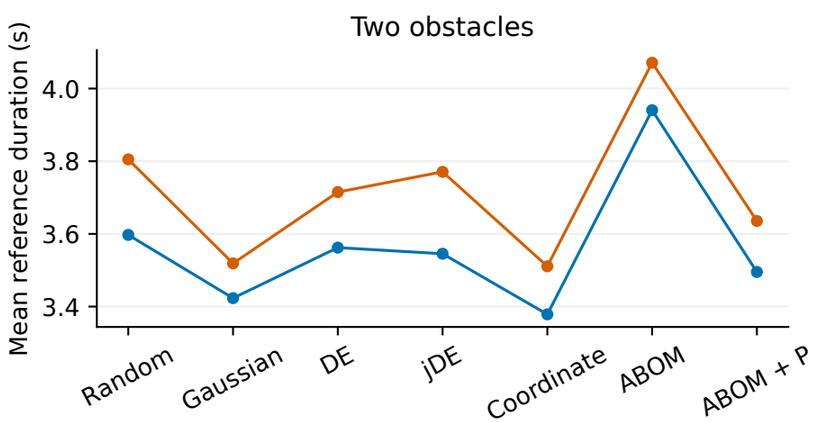

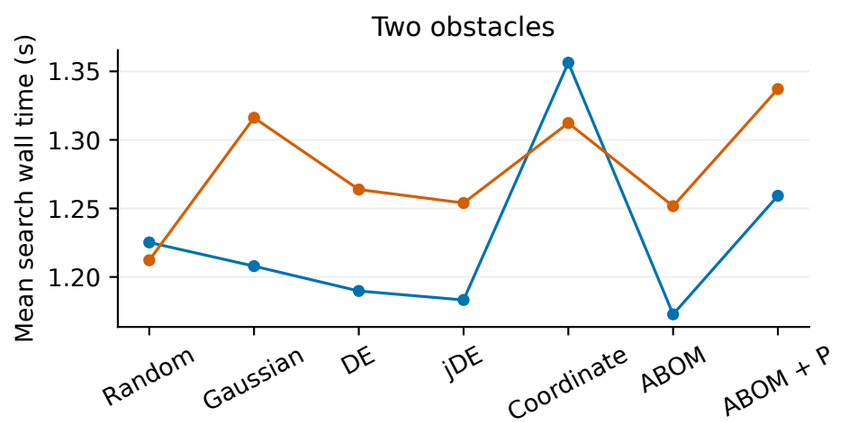

Single mode (4 variables) Paired modes (7 variables)

Search wall time is measured in this runtime; reference duration is a curve parameter, not an observed flight time.