

## Week 8: »Beyond Bag-of-Words« Friday

April 3, 2023

1

# Today

## From word counts to word vectors

## Training word embeddings

## Using word embeddings to improve models

## Document similarity

(Ab-)using word embeddings to detect biases

## AEM: An application from our own research

## Downstream tasks

# Neural Networks and Deep Learning

# Neural Networks in Keras

## Before we start: Questions from last session?

Today: Beyond BOW: word embeddings, neural networks, and deep learning

# Word vectors

---

## Our BOW approach until now

## Representing a document by word frequency counts

Result of preprocessing and vectorizing:

0. He took the dog for a walk to the dog playground

⇒ took dog walk dog playground

⇒ 'took':1, 'dog': 2, walk: 1, playground: 1

Consider these other sentences

## Our BOW approach until now

## Representing a document by word frequency counts

Result of preprocessing and vectorizing:

0. He took the dog for a walk to the dog playground

⇒ took dog walk dog playground

⇒ 'took':1, 'dog': 2, walk: 1, playground: 1

Consider these other sentences

1. He took the doberman for a walk to the dog playground
2. He took the cat for a walk to the dog playground
3. He killed the dog on his walk to the dog playground

## Our BOW approach until now

## Representing a document by word frequency counts

Result of preprocessing and vectorizing:

0. He took the dog for a walk to the dog playground

⇒ took dog walk dog playground

⇒ 'took':1, 'dog': 2, walk: 1, playground: 1

Consider these other sentences

1. He took the doberman for a walk to the dog playground
2. He took the cat for a walk to the dog playground
3. He killed the dog on his walk to the dog playground



## Our BOW approach until now

## Representing a document by word frequency counts

Result of preprocessing and vectorizing:

0. He took the dog for a walk to the dog playground

⇒ took dog walk dog playground

⇒ 'took':1, 'dog': 2, walk: 1, playground: 1

Consider these other sentences

1. He took the doberman for a walk to the dog playground
2. He took the cat for a walk to the dog playground
3. He killed the dog on his walk to the dog playground

## Our BOW approach until now

## Representing a document by word frequency counts

Result of preprocessing and vectorizing:

0. He took the dog for a walk to the dog playground

⇒ took dog walk dog playground

⇒ 'took':1, 'dog': 2, walk: 1, playground: 1

Consider these other sentences

1. He took the doberman for a walk to the dog playground
2. He took the cat for a walk to the dog playground
3. He killed the dog on his walk to the dog playground

The vectorized representations of these sentences have a “distance” (dissimilarity) of 1 each, but arguably, sentences 0 and 1 should be “closer” than others

- Our vectorizers gave a random ID to each word
- What if we instead would represent each word by another vector representing its meaning?
- For, instance, 'doberman' and 'dog' should be represented by vectors that are close to each other in space, while 'kill' and 'walk' should be far from each other.

- Our vectorizers gave a random ID to each word
- What if we instead would represent each word by another vector representing its meaning?
- For, instance, 'doberman' and 'dog' should be represented by vectors that are close to each other in space, while 'kill' and 'walk' should be far from each other.

⇒ That's the idea behind word embeddings!

- Our vectorizers gave a random ID to each word
- What if we instead would represent each word by another vector representing its meaning?
- For, instance, 'doberman' and 'dog' should be represented by vectors that are close to each other in space, while 'kill' and 'walk' should be far from each other.

⇒ That's the idea behind word embeddings!

Or, more broadly: Can computers “understand” meanings, semantic relationships, different types of contexts?

# Word vectors

---

Training word embeddings

# GloVe vs Word2Vec

There are two popular approaches to training word embeddings:  
GloVe and word2vec.

- GloVe is count-based: dimensionality reduction on the co-occurrence count matrix.
- Word2Vec is a predictive model: neural network to predict words/contexts
- That means that GloVe takes *global* context into account, word2vec *local* context
- Some technical implications for how training can be implemented
- **However, often only subtle differences in final result.**

# GloVe

Example sentence: "the cat sat on the mat"

	the	cat	sat	on	mat
the	0	1	0	1	1
cat	1	0	1	0	0
sat	0	1	0	1	0
on	0	0	1	0	0
mat	1	0	0	0	0

Apply dimensionality reduction (such as Singular Value Decomposition) to obtain dense vectors



## Word2Vec: Continuous Bag of Words (CBOW) vs skipgram

Example sentence: "the cat sat on the mat" Let's assume window size 2

## CBOW: Predict a word given its context

```
"The" => (["cat", "sat"], "The")
```

```
"cat" => (["The", "sat", "on"], "cat")
```

```
"sat" => (["The", "cat", "on", "the"], "sat")
```

"on" => ("cat", "sat", "the", "mat", "on")

```
"the" => ("sat", "on", "mat", "the")
```

```
"mat" => ("on", "the", "mat")
```

# Word2Vec: Continuous Bag of Words (CBOW) vs skipgram

Example sentence: "the cat sat on the mat"

**skipgram: Predict the context given the word**

"The" => [("The", "cat"), ("The", "sat")]

"cat" => [("cat", "The"), ("cat", "sat"), ("cat", "on")]

"sat" => [("sat", "The"), ("sat", "cat"), ("sat", "on"), ("sat", "the")]

"on" => [("on", "cat"), ("on", "sat"), ("on", "the"), ("on", "mat")]

"the" => [("the", "sat"), ("the", "on"), ("the", "mat")]

"mat" => [("mat", "on"), ("mat", "the")]

- CBOW is faster
- skipgram works better for infrequent words
- corpus size: smaller corpus CBOW is better
- Both are often used
- Usually, we use larger window sizes (e.g, 5; (smaller: precise syntactic relationships; larger: broader semantic relationships))
- We need to specify the number of dimensions (typically 100–300)

## Continuous Bag of Words (CBOW) vs skipgram

- CBOW is faster
- skipgram works better for infrequent words
- corpus size: smaller corpus CBOW is better
- Both are often used
- Usually, we use larger window sizes (e.g, 5; (smaller: precise syntactic relationships; larger: broader semantic relationships))
- We need to specify the number of dimensions (typically 100–300)

*In any event, as a result of the prediction task, we end up with a {100/200/300}-dimensional vector representation of each word.\**

\* If that makes you think of PCA/SVD, that's not completely crazy, see Levy et al., 2018



“...a word is characterized by the company it keeps...” (Firth, 1957)

## Word embeddings ...

- help capturing the meaning of text
- are low-dimensional vector representations that capture semantic meaning
- are very common in NLP...

# You can literally calculate with words!

And answer questions such as “Man is to woman as king is to \_\_\_\_\_?”

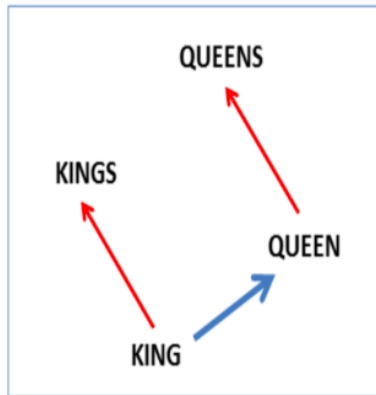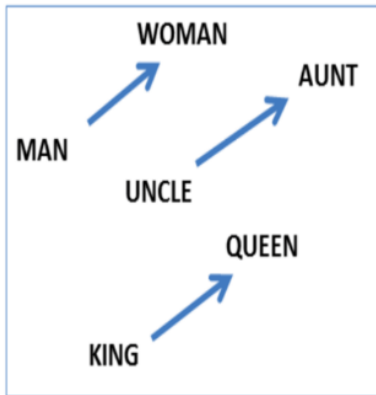

semantic relationships vs. syntactic relationships

# Word vectors

---

Improving models



*What can we use word embeddings  
for?*



## In supervised machine learning

- For instance, we could modify our vectorizer such that for each term, you do not only count how often it occurs, but also multiply with its embedding vector
- Aggregate these embeddings (e.g., sum or mean) and represent document with 300 instead of 10,000 dimensions!
- Often, pre-trained embeddings (e.g., trained on the whole wikipedia) are used
- Thus, our supervised model will be able to deal with synonyms and related words!

## In supervised machine learning

- For instance, we could modify our vectorizer such that for each term, you do not only count how often it occurs, but also multiply with its embedding vector
- Aggregate these embeddings (e.g., sum or mean) and represent document with 300 instead of 10,000 dimensions!
- Often, pre-trained embeddings (e.g., trained on the whole wikipedia) are used
- Thus, our supervised model will be able to deal with synonyms and related words!

## In supervised machine learning

- For instance, we could modify our vectorizer such that for each term, you do not only count how often it occurs, but also multiply with its embedding vector
- Aggregate these embeddings (e.g., sum or mean) and represent document with 300 instead of 10,000 dimensions!
- Often, pre-trained embeddings (e.g., trained on the whole wikipedia) are used
- Thus, our supervised model will be able to deal with synonyms and related words!

## In supervised machine learning

- For instance, we could modify our vectorizer such that for each term, you do not only count how often it occurs, but also multiply with its embedding vector
- Aggregate these embeddings (e.g., sum or mean) and represent document with 300 instead of 10,000 dimensions!
- Often, pre-trained embeddings (e.g., trained on the whole wikipedia) are used
- Thus, our supervised model will be able to deal with synonyms and related words!

## In supervised machine learning

- For instance, we could modify our vectorizer such that for each term, you do not only count how often it occurs, but also multiply with its embedding vector
- Aggregate these embeddings (e.g., sum or mean) and represent document with 300 instead of 10,000 dimensions!
- Often, pre-trained embeddings (e.g., trained on the whole wikipedia) are used
- Thus, our supervised model will be able to deal with synonyms and related words!

## In supervised machine learning

- For instance, we could modify our vectorizer such that for each term, you do not only count how often it occurs, but also multiply with its embedding vector
- Aggregate these embeddings (e.g., sum or mean) and represent document with 300 instead of 10,000 dimensions!
- Often, pre-trained embeddings (e.g., trained on the whole wikipedia) are used
- Thus, our supervised model will be able to deal with synonyms and related words!

Let's look at an example for using supervised sentiment analysis (i.e., what we did with IMDB-data before).

In classical SML:

- we represent each document by a vector of word frequencies (or tf· idf scores)
- use these vectors to predict the label

- we represent each document by a vector of word frequencies (or tf· idf scores)
- use these vectors to predict the label



	ability	about	above	...	zippered	zealotry	→	topic
text1	■	■	■	...	■	■	→	■
text2	■	■	■	...	■	■	→	■
text3	■	■	■	...	■	■	→	■
text4	■	■	■	...	■	■	→	■
new case	■	■	■	...	■	■	→	?

For instance, topic can be ["sports", "economy", "politics"] and the other entries are word frequencies

- for each word in the document, we look up its embedding
- we then aggregate these embeddings (e.g., mean, max, or sum)
- For each document, we now have a 300-dimensional instead of a 10,000-dimensional vector<sup>1</sup>

- for each word in the document, we look up its embedding
- we then aggregate these embeddings (e.g., mean, max, or sum)
- For each document, we now have a 300-dimensional instead of a 10,000-dimensional vector<sup>1</sup>

[illegible]

- for each word in the document, we look up its embedding
- we then aggregate these embeddings (e.g., mean, max, or sum)
- For each document, we now have a 300-dimensional instead of a 10,000-dimensional vector<sup>1</sup>

1,113,700,000

<sup>1</sup>in the case of a 300-dimensional embedding model and a vocabulary size of 10,000 of the traditional CountVectorizer)

- Our model is smaller
- We can use words in the prediction dataset *even if it's not in the training dataset*<sup>2</sup>
- We can learn from similar training samples even if they do not use the same words
- But we also may lose some nuance

- Our model is smaller
- We can use words in the prediction dataset *even if it's not in the training dataset*<sup>2</sup>
- We can learn from similar training samples even if they do not use the same words
- But we also may lose some nuance

<sup>2</sup>as long as it's in the embedding model, of course

- Our model is smaller
- We can use words in the prediction dataset *even if it's not in the training dataset*<sup>2</sup>
- We can learn from similar training samples even if they do not use the same words
- But we also may lose some nuance

<sup>2</sup>as long as it's in the embedding model, of course

- Our model is smaller
- We can use words in the prediction dataset *even if it's not in the training dataset*<sup>2</sup>
- We can learn from similar training samples even if they do not use the same words
- But we also may lose some nuance

<sup>2</sup>as long as it's in the embedding model, of course




## Let's look at an example

As we see, not *all* embedding models are improving downstream tasks – but good ones can:

<https://github.com/annekroon/amsterdam-embedding-model>

[explain results in README.md]

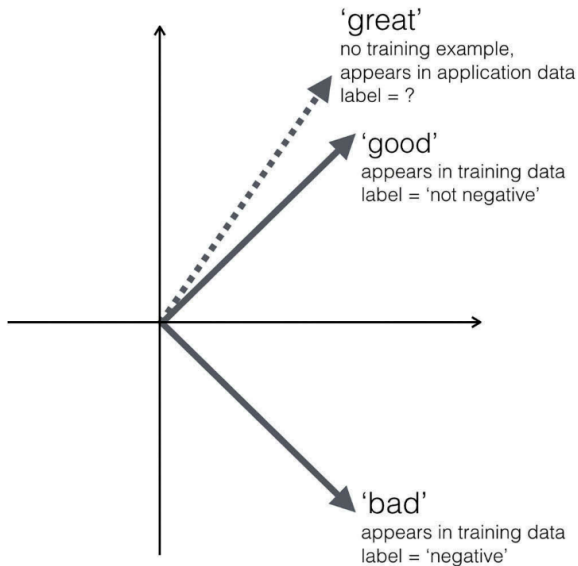

## It's not always black/white...

Sometimes, BOW may be just fine (for very negative sentences, it doesn't matter). But especially in less clear cases ('slightly negative'), embeddings increased performance.

**Table 1.** Precision, recall, and F1 score for the bag of words approach.

	Actual	Predicted	Precision	Recall	F1 Score
not/slightly negative	524.3	205.6	0.33	0.83	0.47
negative	805.7	1188.7	0.71	0.48	0.57
very negative	730	665.7	0.53	0.58	0.56

**Table 2.** Precision, recall, and F1 score for the Word Embeddings approach.

	Actual	Predicted	Precision	Recall	F1 Score
not/slightly negative	522.4	575	0.65	0.59	0.61
negative	799.2	771.6	0.52	0.53	0.53
very negative	739.4	714.4	0.55	0.57	0.56

Rudkowsky et al., 2018

# Word vectors

---

Document similarity

## In document similarity calculation

## Use cases

- plagiarism detection
- Are press releases/news agency copy/... taken over?
- Event detection

## In document similarity calculation

## Use cases

- plagiarism detection
- Are press releases/news agency copy/... taken over?
- Event detection

## Traditional measures

- Levenshtein distance (How many characters|words do I need to change to transform string A into string B?)
- Cosine similarity (“correlation” between the BOW-representations of string A and string B)

BUT: This only works for literal overlap. What if the writer chooses synonyms?

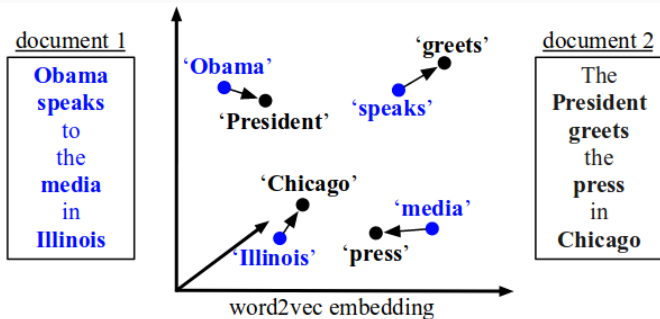


Figure 1. An illustration of the *word mover's distance*. All non-stop words (**bold**) of both documents are embedded into a *word2vec* space. The distance between the two documents is the minimum cumulative distance that all words in document 1 need to travel to exactly match document 2. (Best viewed in color.)

- word mover's distance
- soft cosine similarity

In common: we use pre-trained embeddings to replace words (that otherwise would just have a random identifier and be unrelated) with vectors representing their meaning, when calculating our measure of interest



# Word vectors

---

Detecting biases

## Biased embeddings Bolukbasi et al., 2016

- word embeddings are trained on large corpora
- As the task is to learn how to predict a word from its context (CBOW) or vice versa (skip-gram), biased texts produce biased embeddings
- If in the training corpus, the words “man” and “computer programmer” are used in the same context, then we will learn such a gender bias








An example from communication science research (Kroon et al., 2021)

They trained word embeddings on 3.3 million Dutch news articles.

Are vector representations of outgroups (Maroccans, Muslims) closer to representations of negative stereotype words than ingroups?

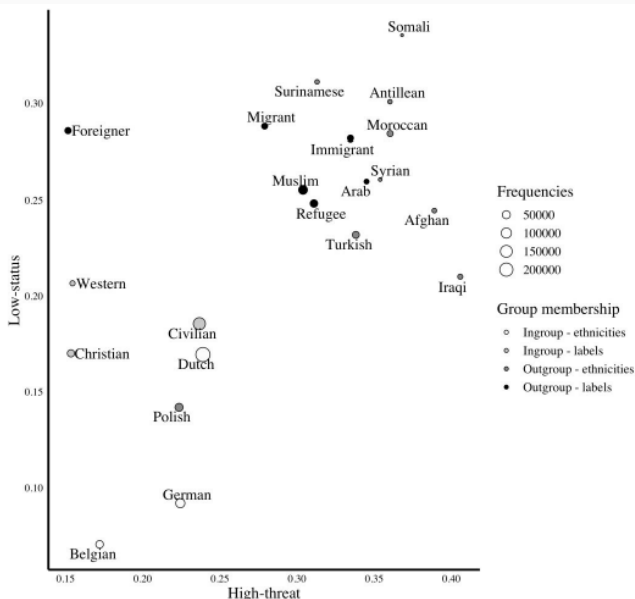

# Word vectors

---

AEM



We can use pre-trained embeddings – but can we make even better ones? **The Amsterdam Embedding Model (AEM)**

Anne Kroon, Antske Fokkens, Damian Trilling, Felicia Loecherbach, Judith Moeller, Mariken A. C. G. van der Velden, Wouter van Atteveldt

## Why do this?

- Embedding models are of great interest to communication scholars
- yet... Most publicly available models represent **English** language
- The preparation of good-performing embedding models require a significant amount of **time** and **access to a large amount of data sets**
- Few Dutch embedding models are available, but trained on ordinary human language from the World Wide Web.
- These models do not capture the specifics of news article data and are therefore less suitable to study and understand dynamics of this domain
- $\Rightarrow$  No model is available trained on Dutch news data

## Project's Aim

## Aim of the Amsterdam Embedding Model project

1. Develop and evaluate a high-quality embedding model
2. Assess performance in downstream tasks of interest to Communication Science (such as topic classification of newspaper data).
3. Facilitate distribution and use of the model
4. Offer clear methodological recommendations for researchers interested using our Dutch embedding model

# Training data

## Training data set

- Dataset: diverse print and online news sources
- Preprocessing: duplicate sentences were removed
- Telegraaf (print & online), NRC Handelsblad (print & online), Volkskrant (print & online), Algemeen Dabldad (print & online), Trouw (print & online), nu.nl , nos.nl
- # words: 1.18b (1181701742)
- # sentences: 77.1M (77151321)

# Training model

## Training model

- We trained the model using Gensim's Word2Vec package in Python
- Skip-gram with negative sampling, window size of 5, 300-dimensional word vectors

# Evaluation

## Evaluation of the Amsterdam Embedding Model


- To evaluate the model, we compare it to two other publicly available embedding models
  - $\Rightarrow$  **'Wiki'**: Embedding model trained on Wikipedia data (FastText)
  - $\Rightarrow$  **'Cow'**: Embedding model trained on diverse .nl and .be sites (Schafer & Bildhauer, 2012; Tulkens et al., 2016)
  - $\Rightarrow$  **'AEM'**: Amsterdam Embedding Model


## Evaluation data


## Evaluation data

1. 'relationship' / analogy-task (Tulkens et al., 2016)
  - **syntactic relationships**: dans dansen loop [*lopen*]
  - **semantic relationships**: denemarken kopenhagen noorwegen [*oslo*]
2. 5806 relationship tasks



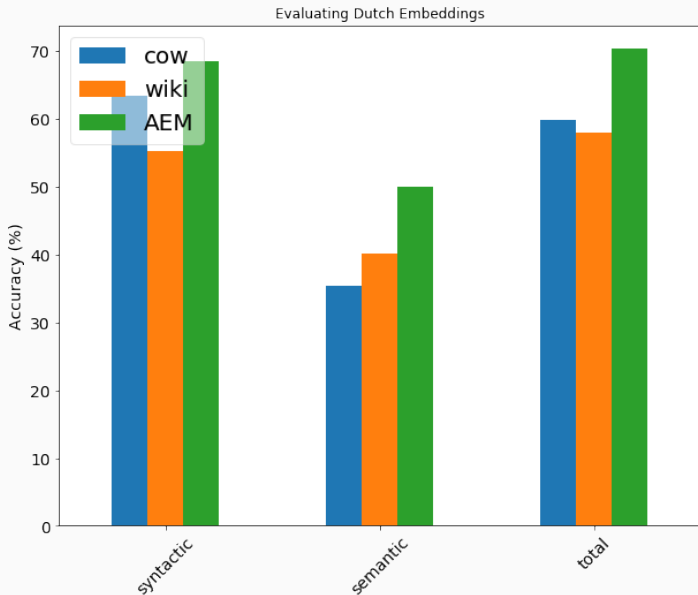











# Re-usability

Re-usability of the Amsterdam Embedding Model

1. See <https://github.com/annekroon/amsterdam-embedding-model>
2. Open access to all the code



# Word vectors

---

Downstream tasks

## Document comparison: An example (Trilling & van Hoof, 2020)

Let's say we have a large corpus of news articles and what to find those that are about the same events.

# Data

- 45K articles
- 6 months
- volkskrant.nl, ad.nl, nu.nl

[illegible]

- computationally infeasible
- theoretical nonsensical

## Their solution

- Three-day moving window (but “chaining” possible)
- Saturday/Sunday merged into one day

## Step 2: Get similarity scores

## How to determine similarity between articles?

## Their solution

## Compare combinations of

- different measures (in particular,  $tf \cdot idf$  cosine similarity vs. softcosine similarity)
- different thresholds (to get rid of the overwhelming majority of close-to-zero edges)

## Step 3: Network clustering

## How to determine events?

After experimenting *a lot*:

## Their final solution

- One network for all (instead of one per window)
- Articles are nodes, similarity scores = edge weights
- all edges with weight  $<$  threshold removed
- Leiden algorithm (Traag et al., 2019) with Surprise method (Traag et al., 2015) (very suitable for smaller, but more clusters)

# Number of articles per event

**Table 1:** Descriptives for different threshold/similarity combinations

	cosine					softcosine				
	0.2	0.3	0.4	0.5	0.6	0.2	0.3	0.4	0.5	0.6
mean	2.03	1.58	1.35	1.21	1.12	6.78	2.89	1.88	1.51	1.27
std	3.48	2.00	1.22	0.71	0.45	30.41	10.04	4.27	2.27	1.07
max	88	53	41	21	15	551	367	161	70	30
single-art. events	15626	21854	27135	32232	36348	4262	11043	18305	24337	30700
multi-art. events	6685	6777	6241	5165	3899	2460	4736	5961	5940	5257

- Use a high threshold!
- Soft-cosine finds some more events, leaves less articles unassigned (good), but that comes at the expense of slightly lower precision
- Example from their data: Because soft-cosine “understands” that Nike and Puma are both sports brands, it incorrectly assigned economic coverage about the two to one event.



## How correct are the events?

They manually checked  $6 \times 100$  events, qualitatively (not shown) and quantitatively:

Similarity	Threshold	Prec. 1 (%)	Prec. 2 (%)	TP/max. TP
cosine	0.4	74	88.52	223/268
cosine	0.5	78	89.02	217/253
cosine	0.6	89	94.39	204/225
softcosine	0.4	56	76.20	234/521
softcosine	0.5	65	81.77	236/379
softcosine	0.6	75	86.92	222/289

*Note. Precision 1:* The percentage of news events that are entirely clustered correctly. *Precision 2:* The percentage of news articles that are correctly clustered. *max. TP* is the number of articles that are assigned to an event in the sample; hence, the maximum number of true positives that can be achieved.

- the document needs to be converted into embeddings
- but once that is done, our document vectors only have 300 instead of thousands of dimensions!

# Neural Networks and Deep Learning

---

# Neural Networks and Deep Learning

---

Neural networks

# Neural Networks

- In “classical” machine learning, we predict an outcome directly based on the input features
- In neural networks, we can have “hidden layers” that we predict
- These layers are not necessarily interpretable
- “Neurons” that “fire” based on an “activation function”

Note that in our earlier example with our EmbeddingVectorizer, we essentially added a “layer” between the input and the output. Now, we generalize this idea.



# Why neural networks?

- learn hidden structures (e.g., embeddings (!))
- go beyond the idea that there is a direct relationship between occurrence of word X and label (or occurrence of pixel [R,G,B] and a label)
- images, machine translation — and more and more general NLP, sentiment analysis, etc.

Example of a comparatively easy introduction:

<https://towardsdatascience.com/>

neural-network-embeddings-explained-4d028e6f0526



# Simple feed forward network

```
1 model.add(Dense(300, input_dim=input_dim, activation='relu'))
2 model.add(Dense(1, activation='sigmoid'))
```

- Our first layer reduces the input features (e.g., the 10,000 features our CountVectorizer creates) to 300 neurons
- It does so using the relu function  $f(x) = \max(0, x)$  (as our counts cannot be negative, just a linear function)
- The second layer reduces the 300 neurons to 1 output neuron using the sigmoid function (the S curve you know from logistic regression)
- Of course, we can add multiple layers in between if we want to

# Simple feed forward network

```
1 model.add(Dense(300, input_dim=input_dim, activation='relu'))
2 model.add(Dense(1, activation='sigmoid'))
```

- Our first layer reduces the input features (e.g., the 10,000 features our CountVectorizer creates) to 300 neurons
- It does so using the relu function  $f(x) = \max(0, x)$  (as our counts cannot be negative, just a linear function)
- The second layer reduces the 300 neurons to 1 output neuron using the sigmoid function (the S curve you know from logistic regression)
- Of course, we can add multiple layers in between if we want to

# Simple feed forward network

```
1 model.add(Dense(300, input_dim=input_dim, activation='relu'))
2 model.add(Dense(1, activation='sigmoid'))
```

- Our first layer reduces the input features (e.g., the 10,000 features our CountVectorizer creates) to 300 neurons
- It does so using the relu function  $f(x) = \max(0, x)$  (as our counts cannot be negative, just a linear function)
- The second layer reduces the 300 neurons to 1 output neuron using the sigmoid function (the S curve you know from logistic regression)
- Of course, we can add multiple layers in between if we want to

# Simple feed forward network

```
1 model.add(Dense(300, input_dim=input_dim, activation='relu'))
2 model.add(Dense(1, activation='sigmoid'))
```


- Our first layer reduces the input features (e.g., the 10,000 features our CountVectorizer creates) to 300 neurons
- It does so using the relu function  $f(x) = \max(0, x)$  (as our counts cannot be negative, just a linear function)
- The second layer reduces the 300 neurons to 1 output neuron using the sigmoid function (the S curve you know from logistic regression)
- Of course, we can add multiple layers in between if we want to

The problem with such a basic networks: just as with classic SML, we still loose all information about order (the “not good” problem). Therefore,


- We concatenate the vectors of neighboring words
- We apply some filter (essentially, we detect patterns)
- and then pool the results (e.g., taking the maximum)

This means that we now explicitly take into account *the temporal structure* of a sentence.

# Convolutional networks

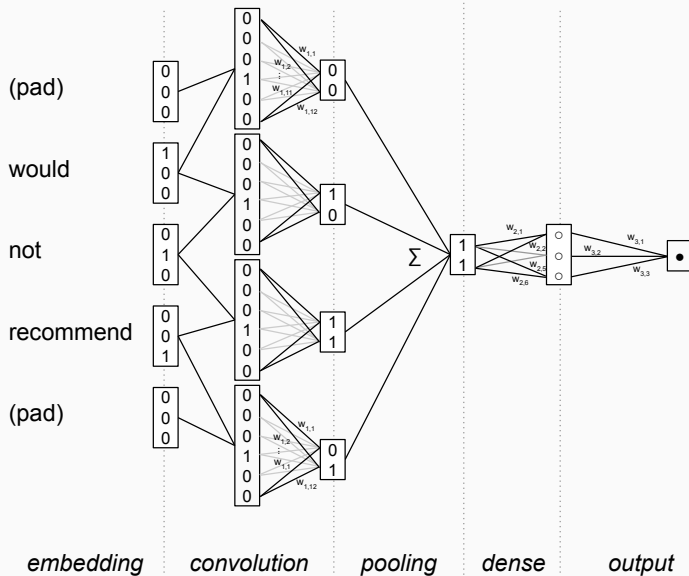

# Convolutional networks

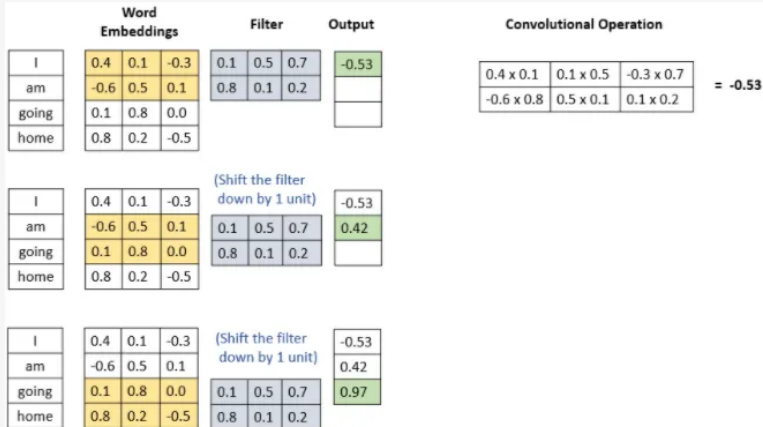

# Convolutional networks

```
1 model.add(Embedding(input_dim=vocab_size, output_dim=embedding_dim,
2                       input_length=maxlen))
3 model.add(Conv1D(embedding_dim, 5, activation='relu'))
4 model.add(GlobalMaxPooling1D())
5 model.add(Dense(300, activation='relu'))
6 model.add(Dense(1, activation='sigmoid'))
```

The layers:

1. train an embedding model
2. apply the convolution with 5 "timestamps"
3. pool using the maximum
4. another layer with 300 dimensions
5. the final layer with 1 output neuron



```
1 model.add(Embedding(input_dim=vocab_size, output_dim=embedding_dim,
2                       input_length=maxlen))
3 model.add(Conv1D(embedding_dim, 5, activation='relu'))
4 model.add(GlobalMaxPooling1D())
5 model.add(Dense(300, activation='relu'))
6 model.add(Dense(1, activation='sigmoid'))
```

The layers:

1. train an embedding model
2. apply the convolution with 5 “timestamps”
3. pool using the maximum
4. another layer with 300 dimensions
5. the final layer with 1 output neuron

# Convolutional networks

```
1 model.add(Embedding(input_dim=vocab_size, output_dim=embedding_dim,
2                     input_length=maxlen))
3 model.add(Conv1D(embedding_dim, 5, activation='relu'))
4 model.add(GlobalMaxPooling1D())
5 model.add(Dense(300, activation='relu'))
6 model.add(Dense(1, activation='sigmoid'))
```

The layers:

1. train an embedding model
2. apply the convolution with 5 “timestamps”
3. pool using the maximum
4. another layer with 300 dimensions
5. the final layer with 1 output neuron

# Convolutional networks

```
1 model.add(Embedding(input_dim=vocab_size, output_dim=embedding_dim,
    input_length=maxlen))
2 model.add(Conv1D(embedding_dim, 5, activation='relu'))
3 model.add(GlobalMaxPooling1D())
4 model.add(Dense(300, activation='relu'))
5 model.add(Dense(1, activation='sigmoid'))
```

The layers:

1. train an embedding model
2. apply the convolution with 5 “timestamps”
3. pool using the maximum
4. another layer with 300 dimensions
5. the final layer with 1 output neuron

# Convolutional networks

```
1 model.add(Embedding(input_dim=vocab_size, output_dim=embedding_dim,
2                     input_length=maxlen))
3 model.add(Conv1D(embedding_dim, 5, activation='relu'))
4 model.add(GlobalMaxPooling1D())
5 model.add(Dense(300, activation='relu'))
6 model.add(Dense(1, activation='sigmoid'))
```

The layers:

1. train an embedding model
2. apply the convolution with 5 “timestamps”
3. pool using the maximum
4. another layer with 300 dimensions
5. the final layer with 1 output neuron

Note that the preprocessing differs!

- We do not take a word vector per document as input any more, but *a sequence of words*
- For concatenating, these sequences need to have equal length, which is why we *pad* then

## LSTM (long short-term memory)

- Unlike “feed forward” neural networks, this is a “recurrent neural network” (RNN) – the training works in two directions
- Heavy in computation, very useful for predicting *sequences*
- Won't cover today

# The embedding layer

- Often, the first layer is creating word embeddings
- Good embeddings need a lot of training data
- Training good embeddings needs time
- Therefore, we can replace that layer with a pre-trained embedding layer (!)
- We can even use a hybrid approach and allow the pre-trained embedding layer to be re-trained!

There are example notebooks on github!



# References

---



Bolukbasi, T., Chang, K.-W., Zou, J. Y., Saligrama, V., & Kalai, A. T. (2016). **Man is to computer programmer as woman is to homemaker? debiasing word embeddings.** *Advances in neural information processing systems*, 29, 4349–4357.



Firth, J. R. (1957). **A synopsis of linguistic theory, 1930-1955.** *Studies in linguistic analysis*.



Kroon, A. C., Trilling, D., & Raats, T. (2021). **Guilty by association: Using word embeddings to measure ethnic stereotypes in news coverage.** *Journalism & Mass Communication Quarterly*, 98, 451–477.  
<https://doi.org/10.1177/1077699020932304>



Kusner, M. J., Sun, Y., Kolkin, N. I., & Weinberger, K. Q. (2015). **From Word Embeddings To Document Distances.** *Proceedings of The 32nd International Conference on Machine Learning*, 37, 957–966.



Levy, O., Goldberg, Y., & Dagan, I. (2018). **Improving Distributional Similarity with Lessons Learned from Word Embeddings.** *Transactions of the Association for Computational Linguistics*, 3, 211–225.  
[https://doi.org/10.1162/tacl\\_a\\_00134](https://doi.org/10.1162/tacl_a_00134)



Rudkowsky, E., Haselmayer, M., Wastian, M., Jenny, M., Emrich, Š., & Sedlmair, M. (2018). **More than Bags of Words: Sentiment Analysis with Word Embeddings.** *Communication Methods and Measures*, 12(2-3), 140–157.  
<https://doi.org/10.1080/19312458.2018.1455817>



Traag, V. A., Aldecoa, R., & Delvenne, J.-C. (2015). **Detecting communities using asymptotical surprise.** *Physical Review E*, 92(2). <https://doi.org/10.1103/physreve.92.022816>



Traag, V. A., Waltman, L., & van Eck, N. J. (2019). **From Louvain to Leiden: guaranteeing well-connected communities.** *Scientific Reports*, 9(1), 1–12.  
<https://doi.org/10.1038/s41598-019-41695-z>



Trilling, D., & van Hoof, M. (2020). **Between article and topic: News events as level of analysis and their computational identification.** *Digital Journalism*, 8, 1317–1337. <https://doi.org/10.1080/21670811.2020.1839352>