



VMEC/Boozer state-to-solver quasilinear-gradient gate: open

AD/FD gradient agreement

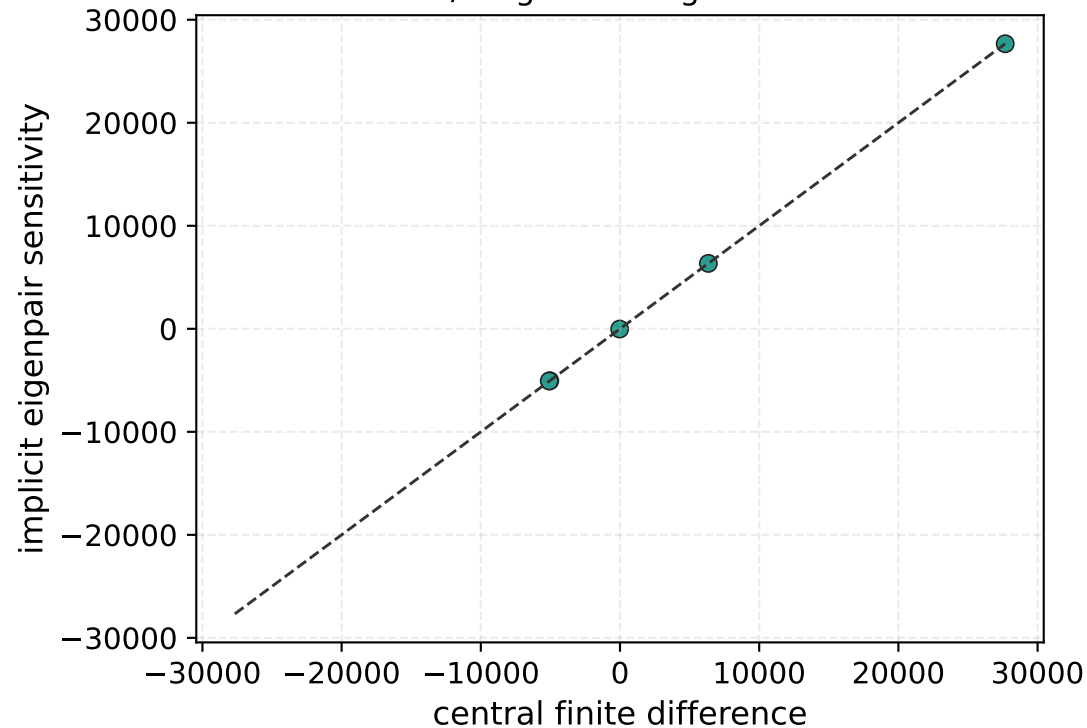

$\log_{10}$ relative error by observable

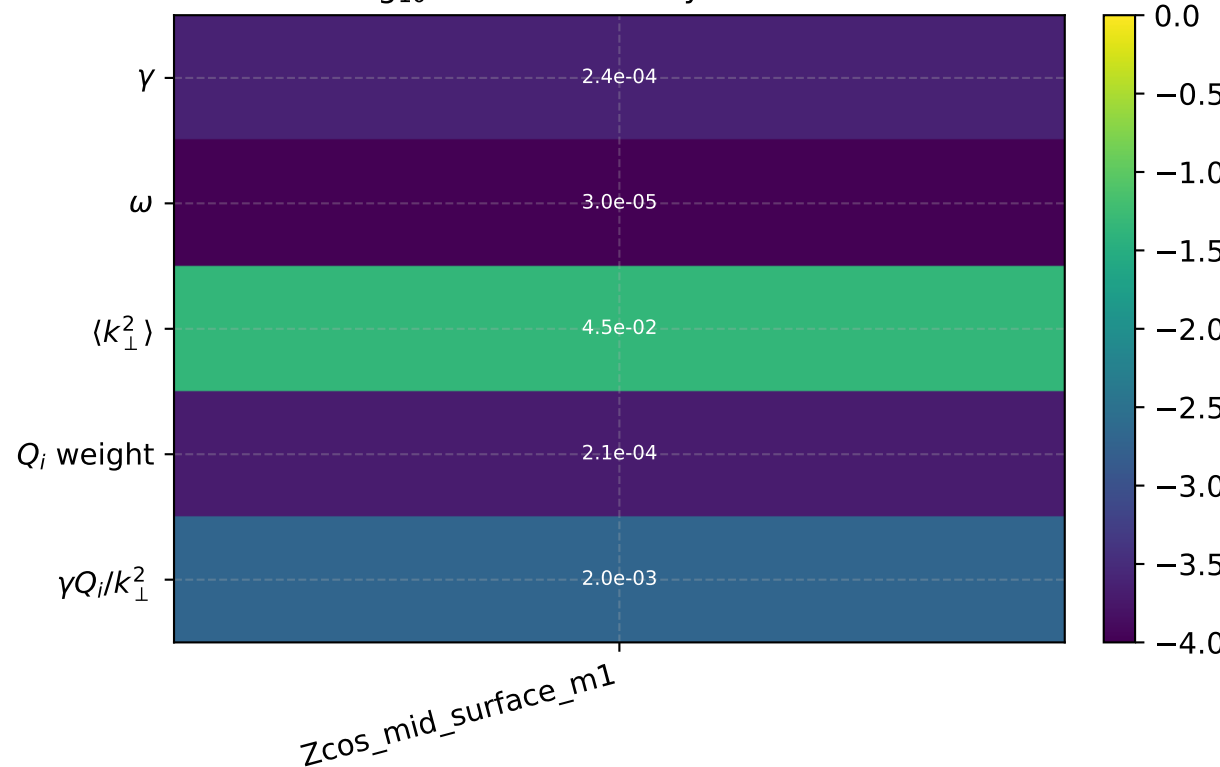

Actual linear-RHS quasilinear observables are differentiated through vmec_jax state coefficients, booz_xform_jax mode-21 Boozer geometry, and the solver cache.