

# ECOLAB.IOT.EventHubReceiver

## Instructions

- 如何监听EventHub.


1. 请输入被监听EventHub的相关信息.

Parameter Description:

Connection string: EventHub的连接字符串


Name: EventHub的名称.

Consumer group: EventHub的Consumer group

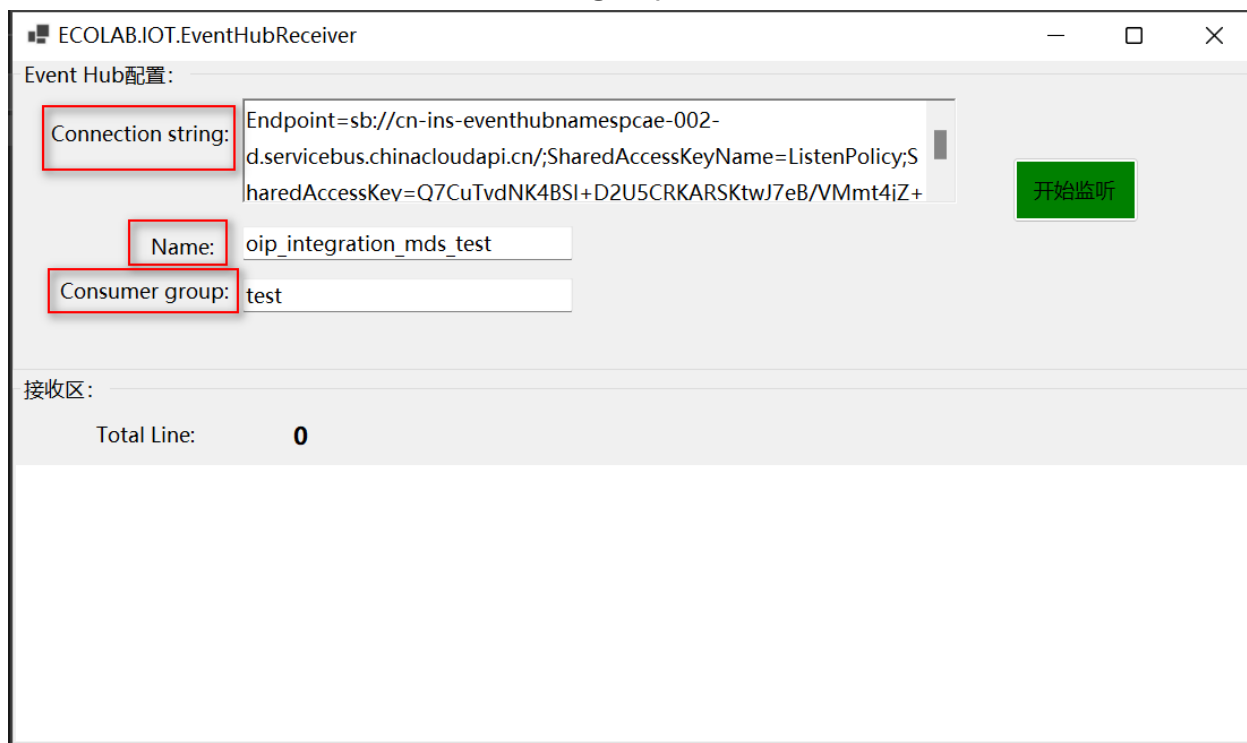

The screenshot shows a window titled "ECOLAB.IOT.EventHubReceiver". Inside, there is a section labeled "Event Hub配置:". It contains three input fields, each with a red box highlighting its label: "Connection string:" with a text area containing "Endpoint=sb://cn-ins-eventhubnamespcae-002-d.servicebus.chinacloudapi.cn;/SharedAccessKeyName=ListenPolicy;SharedAccessKey=Q7CuTvdNK4BSI+D2U5CRKARSKtwJ7eB/VMmt4iZ+", "Name:" with a text box containing "oip\_integration\_mds\_test", and "Consumer group:" with a text box containing "test". To the right of these fields is a green button labeled "开始监听". Below the configuration section is a section labeled "接收区:" which contains a label "Total Line:" followed by the number "0".


2. 点击开始监听.

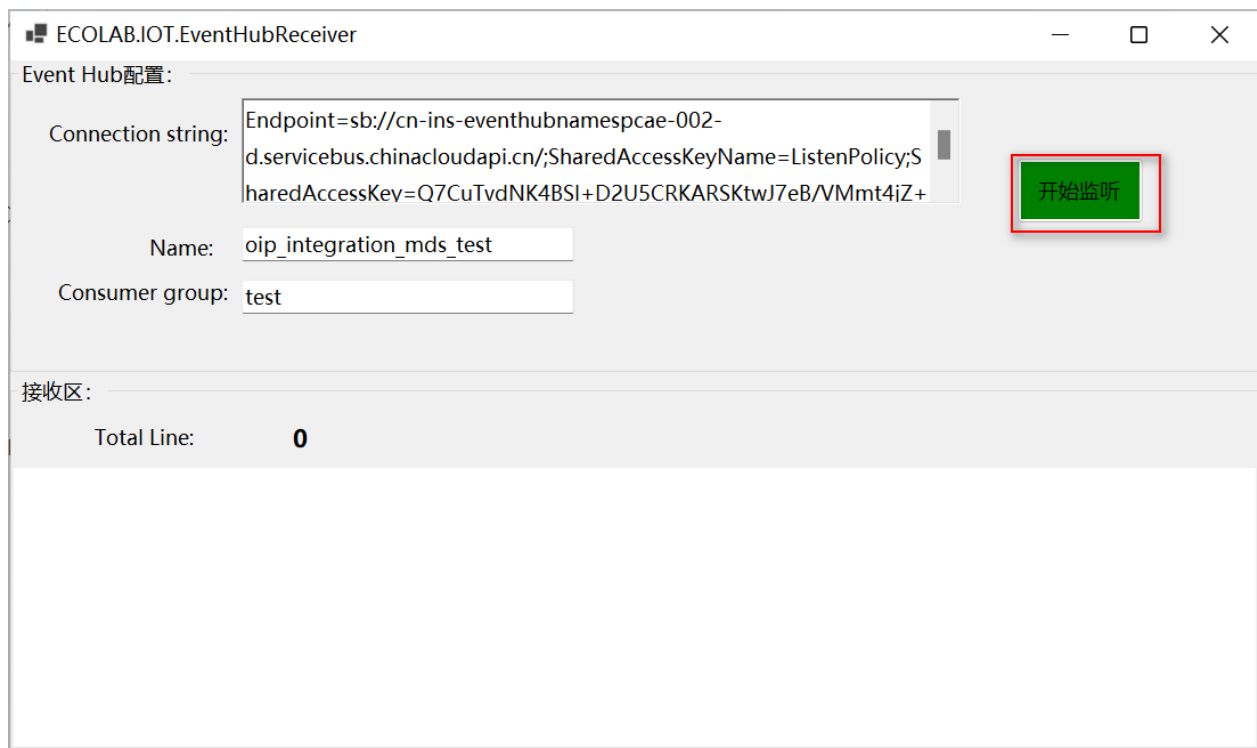

3. 如何有数据会在接收区域输出.



4. 点击停止，将会停止数据的接收

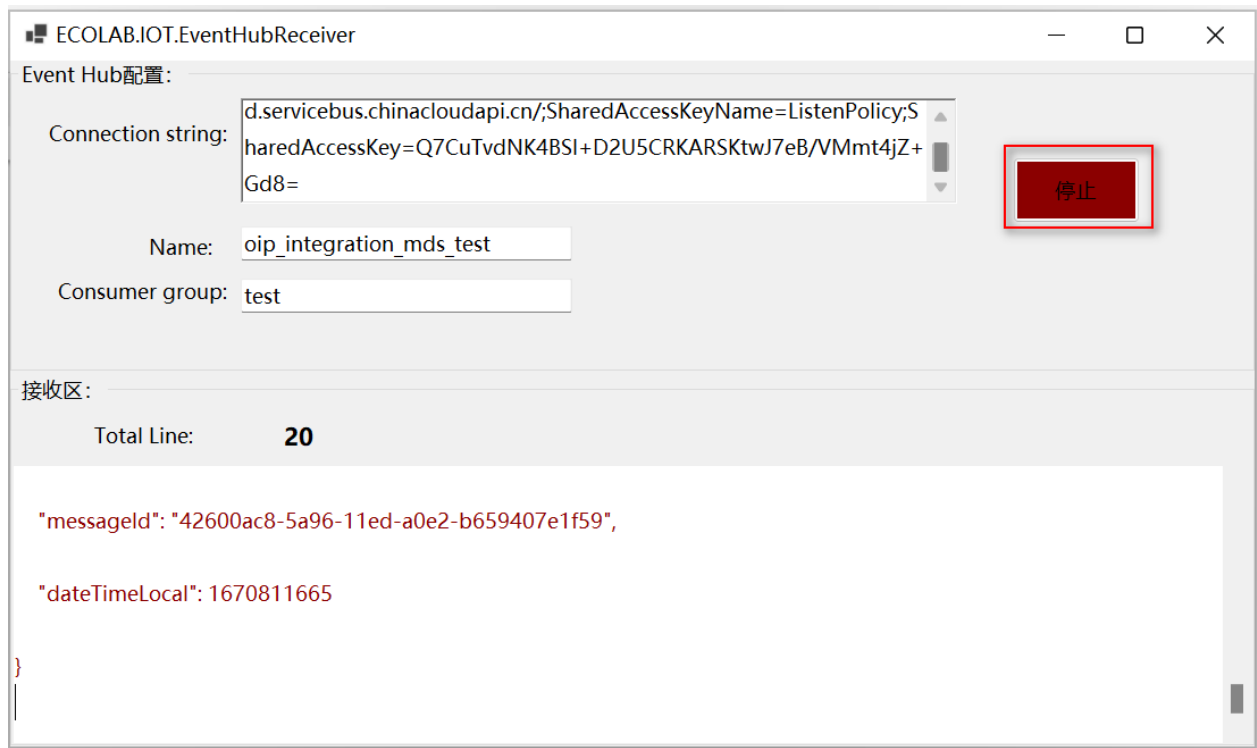

## High order operation

Logging enabled

1. 如想修改EventHub监听过程中，使用的storage account(用来记录监听的checkpoint).

enable: true enable

enable: false disable

1.1 Configuration file 'logsetting'



1.2 logsetting and track.txt path

