
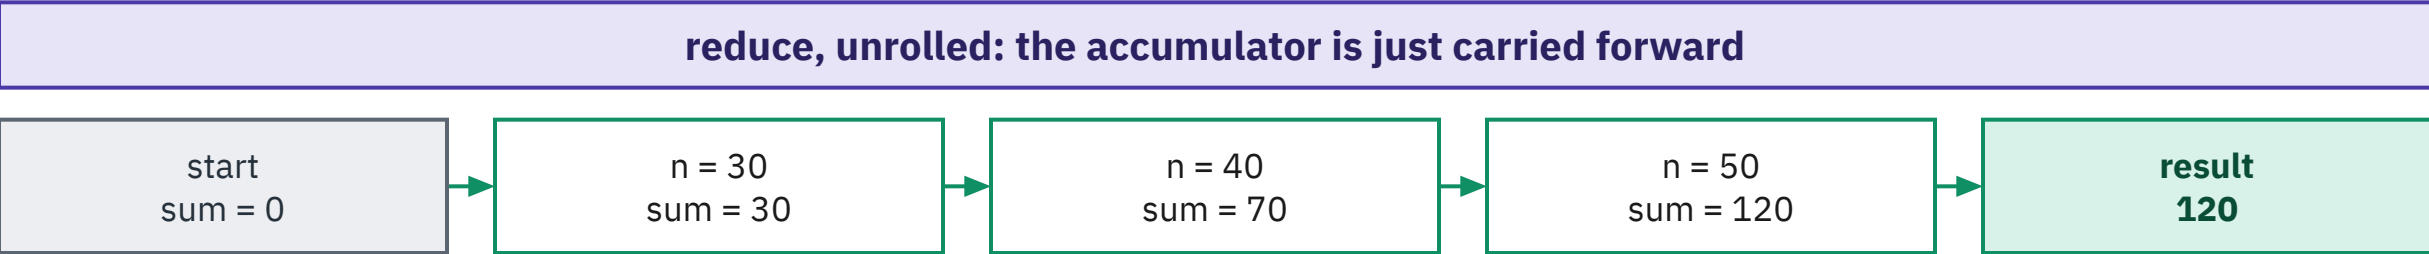


map, filter, reduce

Three stages, one data flow. None of them changes the original array; each returns a new value.

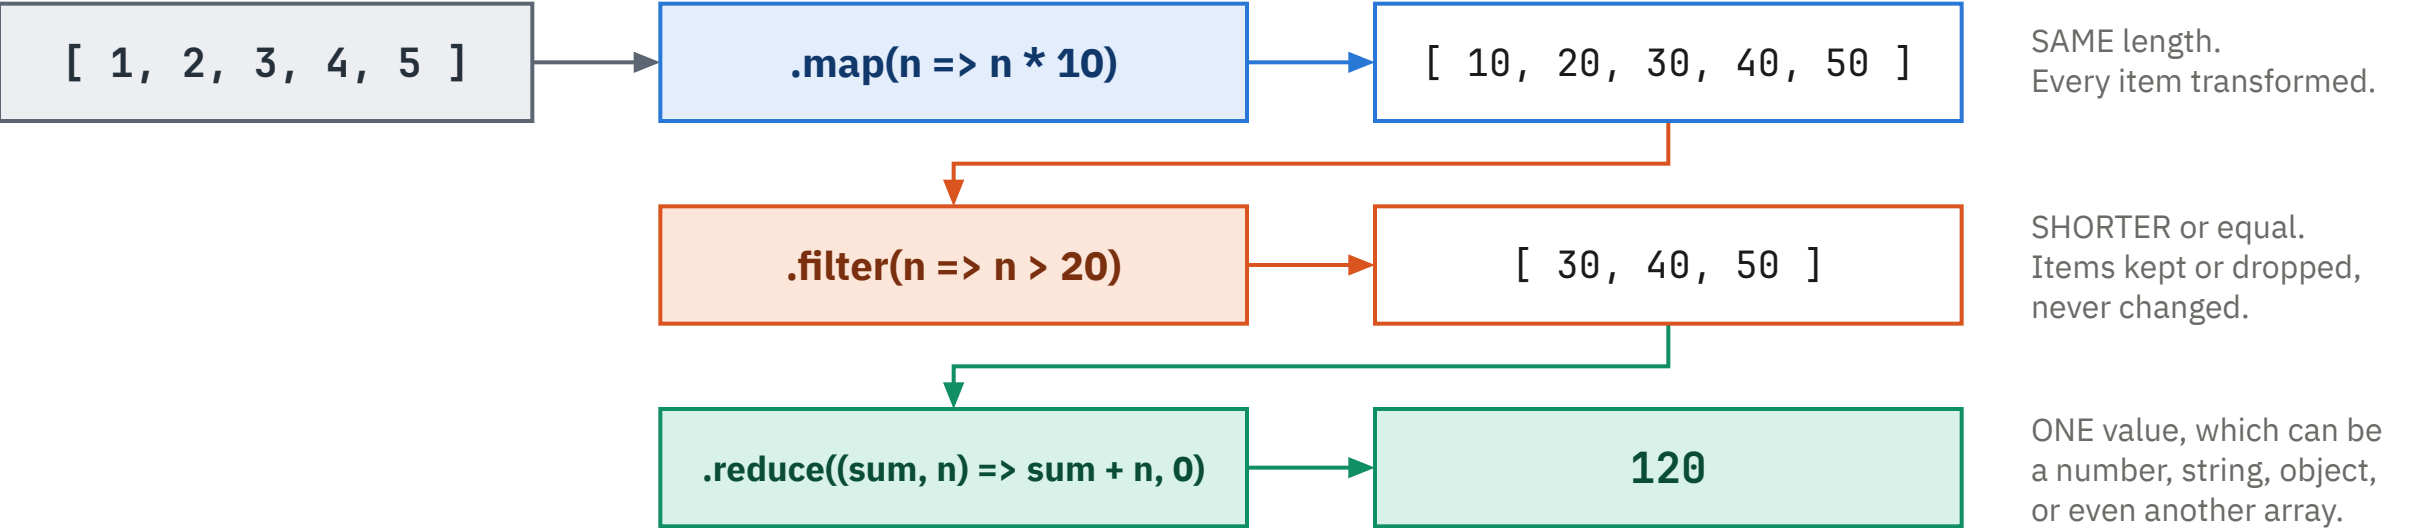

Always pass reduce a starting value. Without it, reduce uses the first element as the seed, and throws on an empty array. These return new values, so they chain. `forEach` does not: it returns undefined and exists only for side effects.