


The Event Loop

One thread. The stack must be empty before anything queued can run.

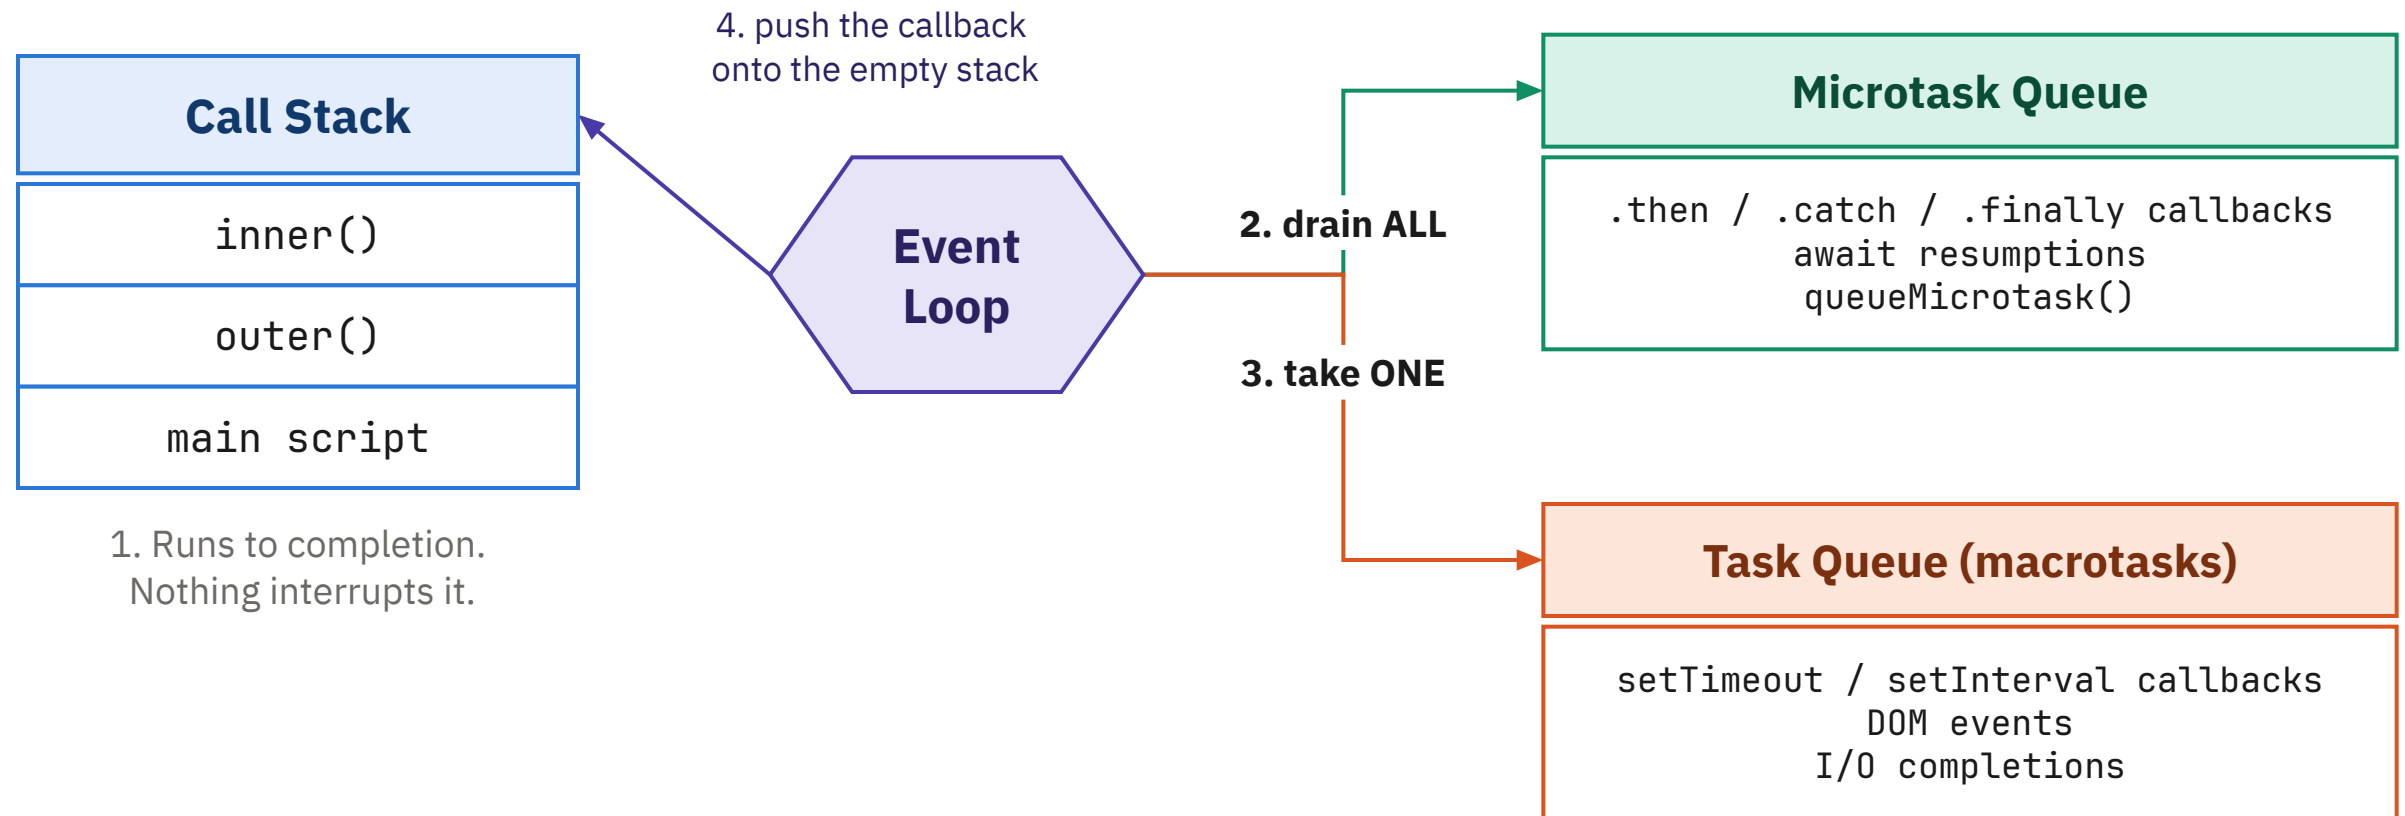

Every task is followed by the ENTIRE microtask queue, so a `.then()` always runs before the next `setTimeout` callback, even one that was queued earlier with a delay of 0.