


Sequential vs Concurrent

Awaiting in a loop is a queue. Promise.all is a starting gun for tasks that do not depend on each other.

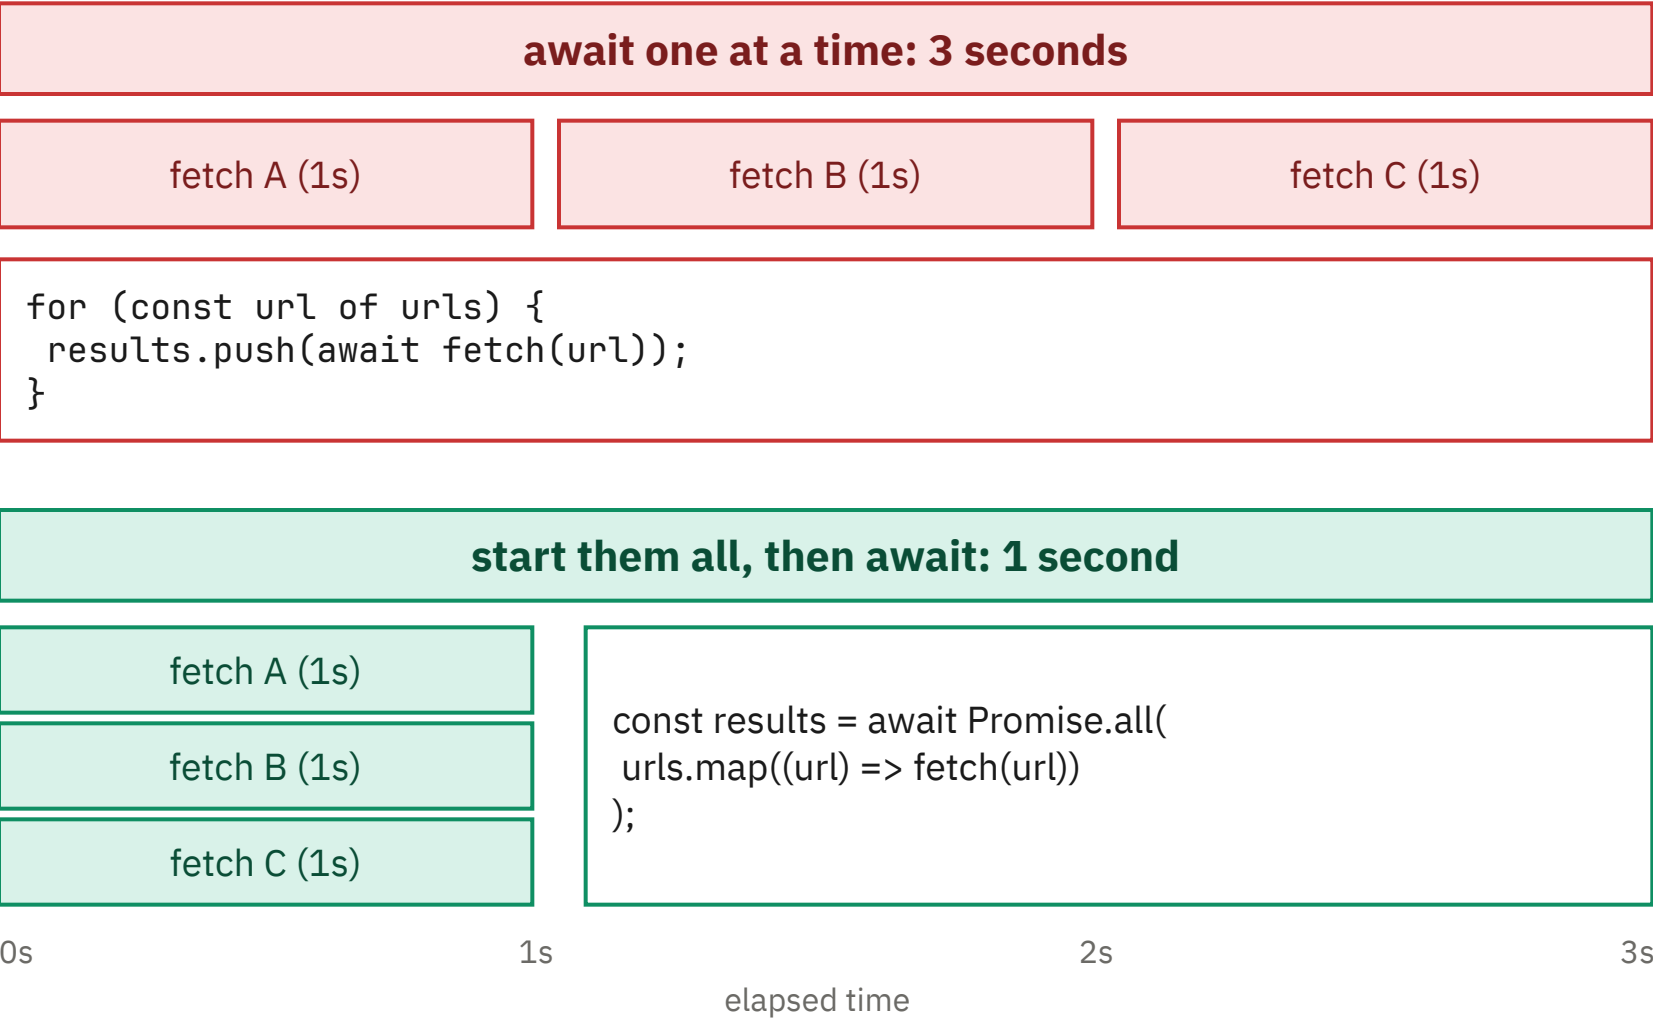

Which combinator?

Promise.all
All must succeed. Rejects as soon as any one rejects.

Promise.allSettled
Never rejects. Gives you a status for every one.

Promise.race
First to SETTLE wins, even if that one rejected. Timeouts.

Promise.any
First to SUCCEED wins. Rejects only if all reject.

Only fan out when the tasks are INDEPENDENT. If step B needs step A's result, awaiting in sequence is not a bug; it is the requirement. And Promise.all does not create threads: the waiting overlaps, the JavaScript still runs on one thread.