


# Miniature stuck light V5M4-B series



- Highlights
- Maintenance-free LED technology
- Adjustable colors through RGB LEDs
- 1 to 3 signal levels
- Intense light colors thanks to innovative light guide technology
- Variants with IO link communication system
- Versions with acoustic signal generator
- Robust aluminium housing
- Prevents accumulation of dirt
- Direct connection to machine voltage

## Dimension

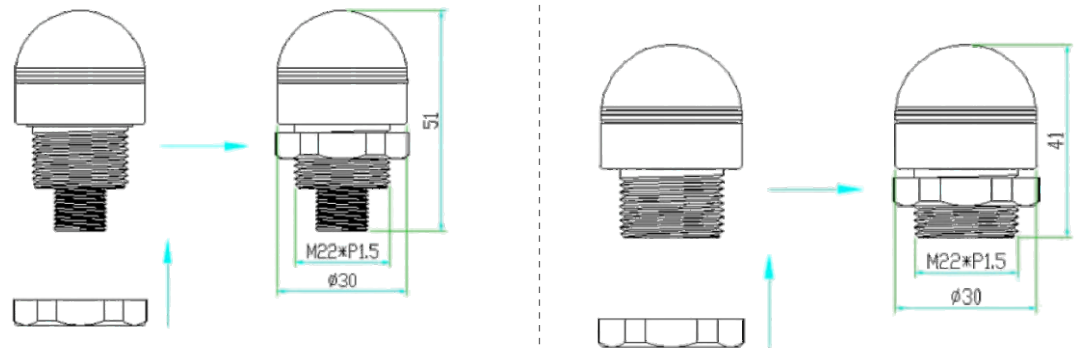

## Applications



Gas detection panel warning light



Wall mount M30 size

## Product parameters

### TECHNICAL PARAMETERS AND DRAWING

Current	Red: 31mA Green: 45mA	Yellow: 42mA
Flash frequency	63-65 times/min	
Buzzer volume	N/A	
IP rating	IP67	
Working temperature	- 20 ~ 45° C	
Lifetime	50,000H	
Housing color	Black	
Installation	For M22 standard hall, fixed by screw	
Material	Aluminum anodized body with PC bulb cover	



V5M4-B	1	A	D	B	T	RYG	30mm	45cm	IP65
1	2	3	4	5	6	7	8	9	10
1	Model	V5M4-B							
2	Layer	1 - One layer bulb ( 3 Colors LEDs )							
3	Mounting	A: Fixed by thread							
4	Voltage	D. DC12V ~ DC24V							
5	Function	B. Steady S. Red flash D. All flash							
6	Connect type	T. PNP&NPN							
7	Color	R. Red Y. Yellow G. Green							
8	Diameter	30. Ø30mm							
9	Connection	M12 (note: 4 pin male connector) / 45cm (note: Short wire connection)							
10	Protection	IP65 (note: note: without buzzer model)							

## Input/Output circuit

